


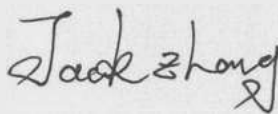

Test report No:
2130900R-RF-US-P06V01

FCC&ISED TEST REPORT

Product Name	Connected Sleep & Wake-up Light
Trademark	PHILIPS
Model and /or type reference	HF3670, HF3671, HF3672, HF3673, HF3674
HVIN	HF3670A, HF3671A, HF3672A, HF3673A, HF3674A
FCC ID	2APFC-HF367XA
IC	23842-HF367XA
Applicant's name / address	Philips Consumer Lifestyle B.V. Building TC, Tussendiepen 4, 9206 AD Drachten, The Netherlands
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB558074 D01v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Scott Shen/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2021-10-26
Report Version	V1.1
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees.....	4
General conditions.....	4
Environmental conditions.....	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments	6
Used Equipment	7
Uncertainty.....	9
1 General Information.....	10
1.1 General Description of the Item(s).....	10
1.2 Antenna Information.....	11
1.3 Data Rate	12
1.4 Channel List	14
2 Description of Test Setup	15
2.1 Operating mode(s) used for tests.....	15
2.2 Support / Auxiliary equipment / unit / Test software for the EUT	15
2.3 Power Index	15
2.4 Test Configuration / Block diagram used for tests	16
2.5 Testing process.....	17
3 Verdict summary section	18
3.1 Standards	18
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	18
3.3 Overview of results.....	19
3.4 Test Facility	20
4 Test Results.....	21
4.1 AC Power Line Conducted Emission	21
4.1.1 Limit.....	21
4.1.2 Test Setup.....	21
4.1.3 Test Procedure	21
4.1.4 Test Data.....	22
4.2 Emissions in restricted frequency bands	24
4.2.1 Limit.....	24
4.2.2 Test Setup.....	26

4.2.3	Test Procedure	27
4.2.4	Test Data.....	28
4.3	Emissions in non-restricted frequency band	54
4.3.1	Limit.....	54
4.3.2	Test Setup.....	54
4.3.3	Test Procedure	54
4.3.4	Test Data.....	55
4.4	Radiated Emission Band Edge	56
4.4.1	Limit.....	56
4.4.2	Test Setup.....	56
4.4.3	Test Procedure	57
4.4.4	Test Data.....	58
4.5	DTS Bandwidth	91
4.5.1	Limit.....	91
4.5.2	Test Setup.....	91
4.5.3	Test Procedure	91
4.5.4	Test Data.....	92
4.6	Fundamental emission output power	94
4.6.1	Limit.....	94
4.6.2	Test Setup.....	94
4.6.3	Test Procedure	95
4.6.4	Test Data.....	96
4.7	Power Density	97
4.7.1	Limit.....	97
4.7.2	Test Setup.....	97
4.7.3	Test Procedure	97
4.7.4	Test Data.....	98
4.8	Antenna Requirement	99
4.8.1	Limit.....	99
4.8.2	Antenna Connector Construction:.....	99
5	Test setup photo and EUT Photo	100

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Mar. 23, 2021
Date (start test)	Mar. 24, 2021
Date (finish test)	Apr. 07, 2021

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2130900R-RF-US-P06V01	V1.0	Initial issue of report.	2021-10-26

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Data Rate;
 - Chapter 1.4 Channel List.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2020.04.18	2021.04.17
Two-Line V-Network	R&S	ENV216	101044	2020.04.18	2021.04.17
50ohm Termination	SHX	TF2	7081402	2020.09.23	2021.09.22
50ohm Termination	SHX	TF2	7081403	2020.09.23	2021.09.22
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2020.08.23	2021.08.22
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2020.08.15	2021.08.14
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2020.08.15	2021.08.14
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2021.02.11	2022.02.10
Coaxial Cable	Woken	SFL402	F02-150410-044	2021.01.01	2021.12.31
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2020.08.13	2021.08.12

Radiated Emission(30MHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2020.12.06	2021.12.05
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2020.09.22	2021.09.21
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2021.04.05	2022.04.04
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Amplifier	Keleto	LNPA	SK20190225	2020.09.25	2021.09.24
Preamplifier	EMCI	EMC184045SE	980263	2020.05.24	2021.05.23
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2020.08.06	2021.08.05
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2021.03.23	2023.03.22
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.04.05	2022.04.04
Coaxial Cable	ROSENBERPHILIPSR	LA1-C011- 2000/3000	AC5-40G	2021.03.20	2022.03.19
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2020.08.13	2021.08.12
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name/PMN.....:	Connected Sleep & Wake-up Light
Model No.....:	HF3670, HF3671, HF3672, HF3673, HF3674
HVIN.....:	HF3670A, HF3671A, HF3672A, HF3673A, HF3674A
Trademark.....:	PHILIPS
FCC ID.....:	2APFC-HF367XA
IC.....:	23842-HF367XA
Manufacturer.....:	Philips Consumer Lifestyle B.V.
Manufacturer address.....:	Building TC, Tussendiepen 4, 9206 AD Drachten, The Netherlands
EUT identification.....:	2130900R-1 is used for radiated test items 2130900R-2 is used for conducted test items

Note: Model HF3672 is chosen to perform test.

Wireless specification.....:	WIFI
Operating frequency range(s).....:	2400~2483.5MHz
Type of modulation.....:	DSSS: BPSK,QPSK,CCK OFDM: BPSK, QPSK, 16QAM, 64QAM
Number of channel.....:	802.11b/g/n(20MHz): 11 802.11n(40MHz): 7

Rated power supply.....:	Voltage and Frequency	
	<input type="checkbox"/>	AC: 220 - 240 V, 50/60 Hz
	<input checked="" type="checkbox"/>	100 - 240 Vac, 50/60 Hz for adapter 24 Vdc for Connected Sleep & Wake-up Light
	<input type="checkbox"/>	DC: 12 - 24 Vdc
	<input type="checkbox"/>	Battery:
	<input type="checkbox"/>	Battery: 3.7 V

1.2 Antenna Information

Antenna model / type number.....:	N/A		
Antenna serial number.....:	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> Basic
			<input type="checkbox"/> CDD
			<input type="checkbox"/> Sectorized
			<input type="checkbox"/> Beam-forming
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole
			<input type="checkbox"/> Sectorized
			<input checked="" type="checkbox"/>
	<input type="checkbox"/>	PCB	
	<input type="checkbox"/>	Metal Antenna	
	Antenna Gain	3.3 dBi	

1.3 Data Rate

IEEE 802.11b

Modulation	Data Rate(Mb/s)
DSSS	1
DSSS	2
CCK	5.5
CCK	11

IEEE 802.11g

Modulation	Coding rate	Data Rate(Mb/s)
BPSK	1/2	6
BPSK	3/4	9
QPSK	1/2	12
QPSK	3/4	18
16-QAM	1/2	24
16-QAM	3/4	36
64-QAM	2/3	48
64-QAM	3/4	54

IEEE 802.11n

Spatial streames	MCS Index	Modulation	Coding rate	Data Rate(Mb/s)			
				20MHz		40MHz	
				800ns GI	400ns GI	800ns GI	400ns GI
1	0	BPSK	1/2	6.5	7.2	13.5	15.0
1	1	QPSK	1/2	13.0	14.4	27.0	30.0
1	2	QPSK	3/4	19.5	21.7	40.5	45.0
1	3	16-QAM	1/2	26.0	28.9	54.0	60.0
1	4	16-QAM	3/4	39.0	43.3	81.0	90.0
1	5	64-QAM	2/3	52.0	57.8	108.0	120.0
1	6	64-QAM	3/4	58.5	65.0	121.5	135.0
1	7	64-QAM	5/6	65.0	72.2	135.0	150.0

Note 1: Support of 400ns GI is optional on transmit and receive.

1.4 Channel List

IEEE 802.11b/g & IEEE 802.11n(20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
001	2412 MHz	002	2417 MHz	003	2422 MHz	004	2427 MHz
005	2432 MHz	006	2437 MHz	007	2442 MHz	008	2447 MHz
009	2452 MHz	010	2457 MHz	011	2462 MHz	-	-

IEEE 802.11n(40MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
003	2422 MHz	004	2427 MHz	005	2432 MHz	006	2437 MHz
007	2442 MHz	008	2447 MHz	009	2452 MHz	-	-

Note: The General Description of the Item(s), antenna information, Data Rate and Channel List in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n(20MHz)
	Mode 4: Transmit by 802.11n(40MHz)

2.2 Support / Auxiliary equipment / unit / Test software for the EUT

The EUT has been tested with the following auxiliary equipment / unit / software:


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
Software	Type / Version	Manufacturer	Supplied by
EspRFtestTool	N/A	N/A	N/A

2.3 Power Index

Due to applicant have fixed the power setting in there software, for testing, we just used the default power.

2.4 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:

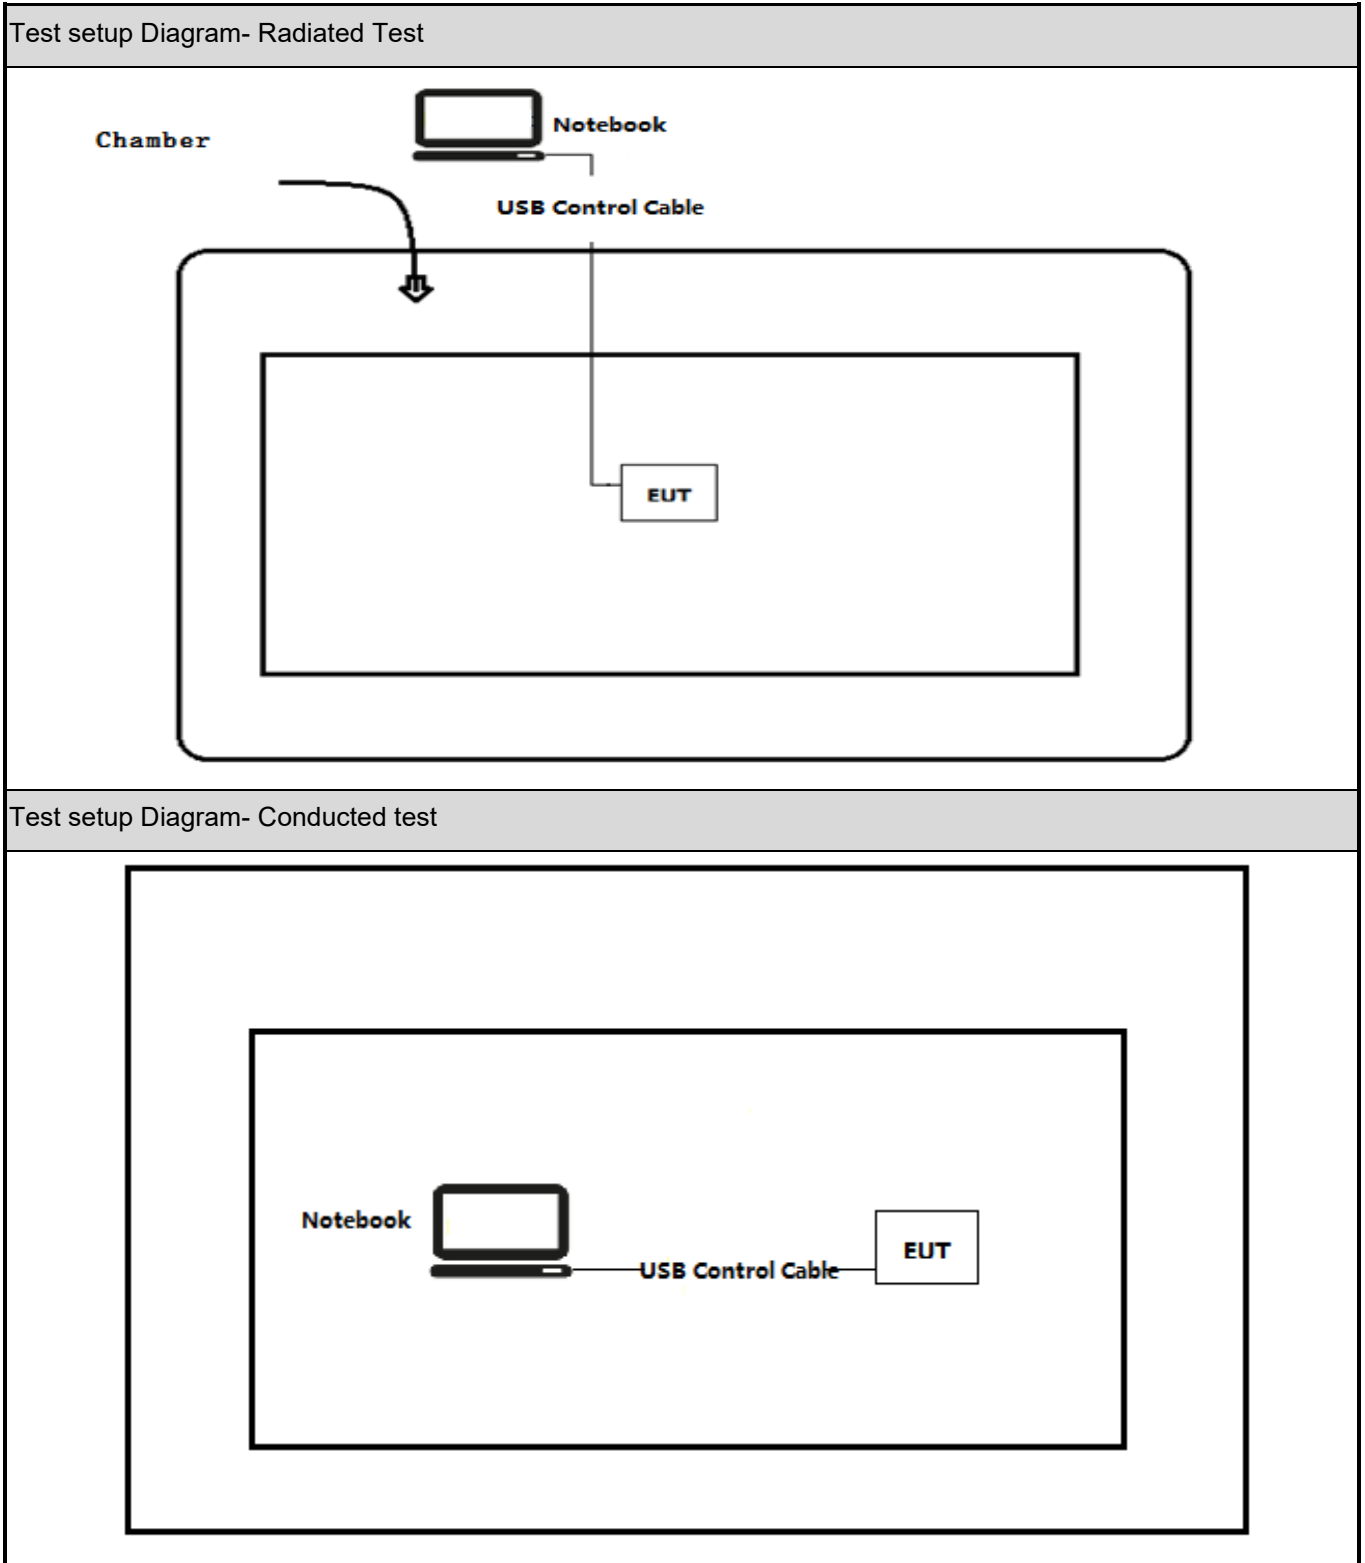

2.5 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the EspRFtestTool on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2021	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(d), 15.209	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d)	PASS	---
Radiated Emission Band Edge	FCC 15.247(d), 15.209	PASS	---
Fundamental emission output power	FCC 15.247(b)(3)	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section A5.5	PASS	---
Radiated Emission Band Edge	RSS-247 Issue 2 Section A5.5	PASS	---
Occupied Bandwidth	RSS-Gen Issue 5 Section 6.6 RSS-247 Issue 2 Section A5.2(1)	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section A5.4(4)	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section A5.2(2)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 8.3	PASS	---


3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission	VERDICT: PASS
---	----------------------


4.1.1 Limit		
Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹]	Limit: AV [dB(μV) ¹]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50
¹⁾ At the transition frequency, the lower limit applies. ²⁾ The limit decreases linearly with the logarithm of the frequency.		

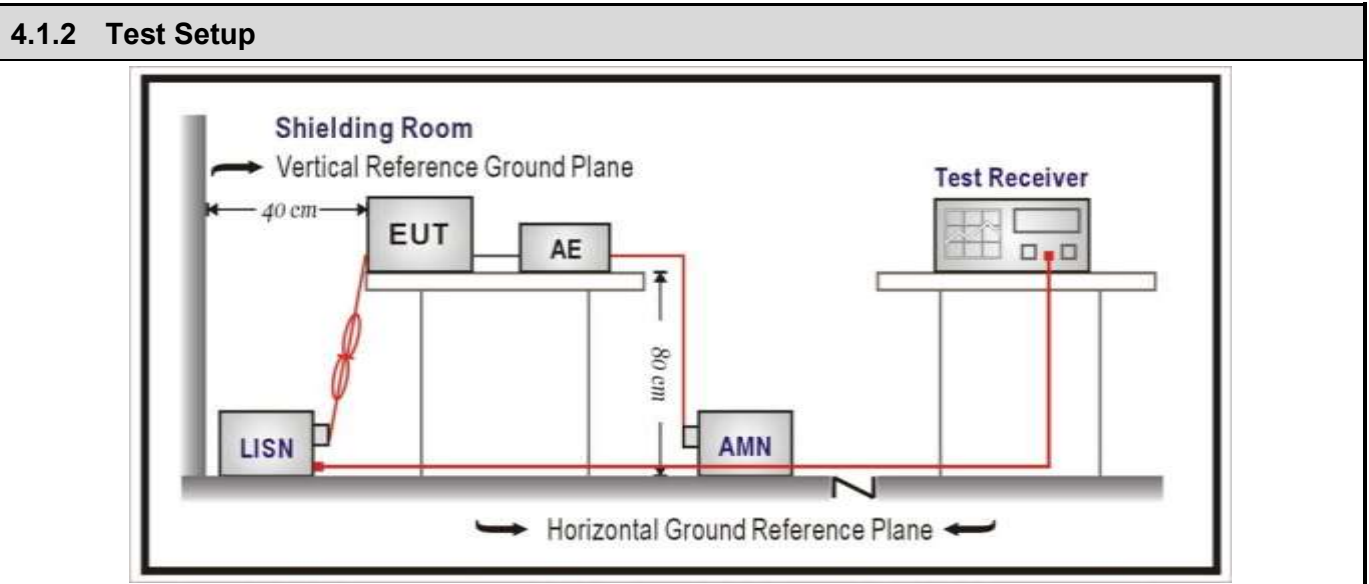

4.1.3 Test Procedure			
	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 2130900R	Page No.: 3
Engineer: Julius Zhou	
Site: TR1	Time: 2021/03/29 - 18:30
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1	

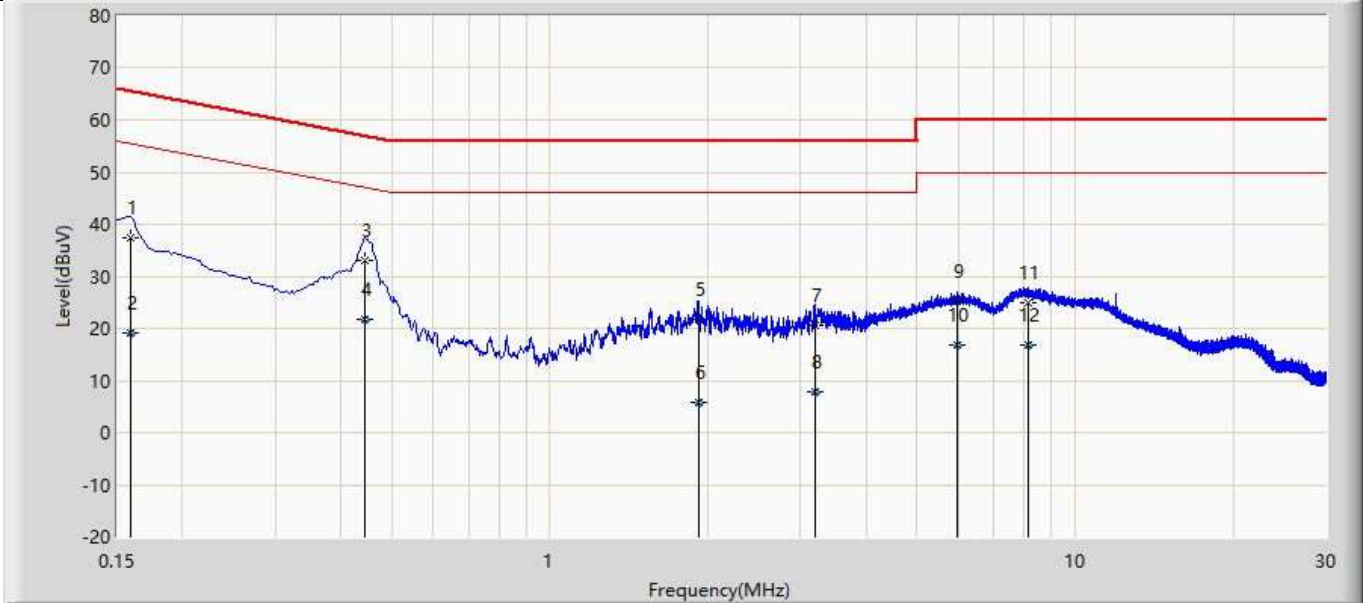

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.159	37.515	27.855	-28.002	65.518	9.660	QP
2		0.159	19.215	9.555	-36.303	55.518	9.660	AV
3	*	0.445	33.031	23.225	-23.941	56.973	9.806	QP
4		0.445	21.848	12.043	-25.124	46.973	9.806	AV
5		1.916	21.726	11.697	-34.274	56.000	10.029	QP
6		1.916	5.656	-4.373	-40.344	46.000	10.029	AV
7		3.190	20.567	10.484	-35.433	56.000	10.083	QP
8		3.190	7.908	-2.175	-38.092	46.000	10.083	AV
9		5.960	25.231	15.048	-34.769	60.000	10.183	QP
10		5.960	16.843	6.659	-33.157	50.000	10.183	AV
11		8.155	25.032	14.755	-34.968	60.000	10.277	QP
12		8.155	16.711	6.435	-33.289	50.000	10.277	AV

Profile: 2130900R	Page No.: 4
Engineer: Julius Zhou	
Site: TR1	Time: 2021/03/29 - 18:31
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1	

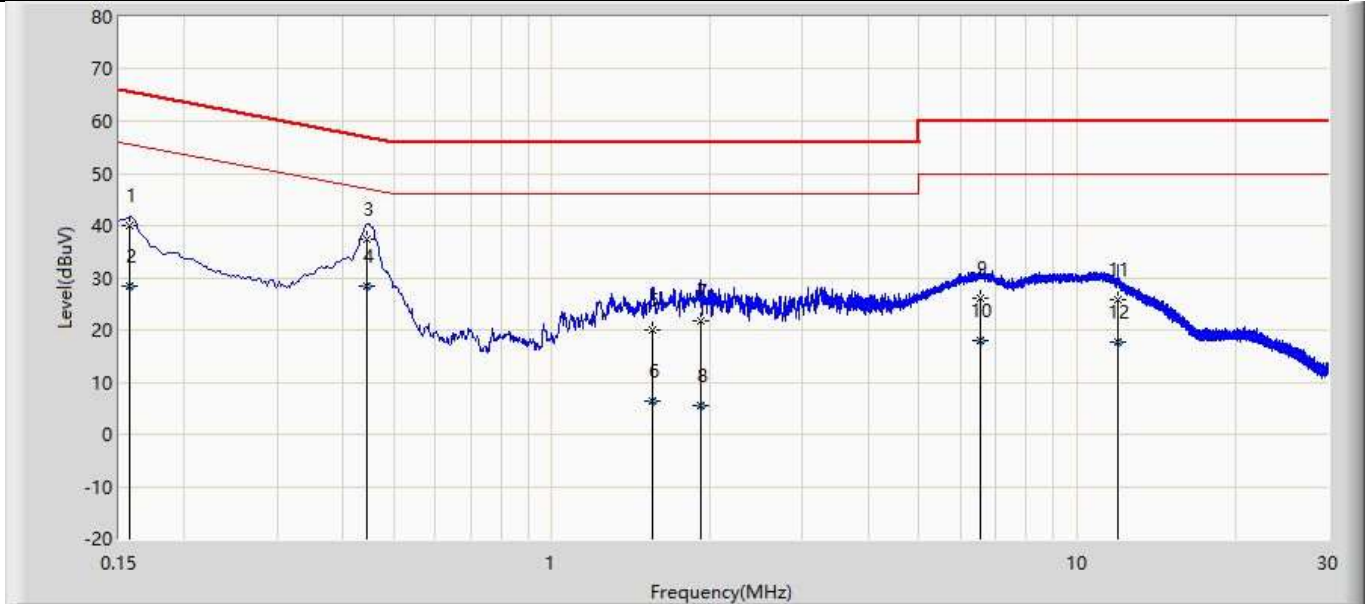

.	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.157	39.931	30.192	-25.703	65.634	9.739	QP
2		0.157	28.406	18.668	-27.228	55.634	9.739	AV
3		0.444	37.417	27.588	-19.561	56.978	9.829	QP
4	*	0.444	28.486	18.657	-18.492	46.978	9.829	AV
5		1.550	19.972	10.026	-36.028	56.000	9.946	QP
6		1.550	6.271	-3.674	-39.729	46.000	9.946	AV
7		1.916	21.787	11.842	-34.213	56.000	9.944	QP
8		1.916	5.523	-4.422	-40.477	46.000	9.944	AV
9		6.558	25.964	15.844	-34.036	60.000	10.120	QP
10		6.558	17.946	7.826	-32.054	50.000	10.120	AV
11		11.963	25.905	15.586	-34.095	60.000	10.319	QP
12		11.963	17.584	7.265	-32.416	50.000	10.319	AV

4.2 Emissions in restricted frequency bands	VERDICT: PASS
--	----------------------

4.2.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.205; 15.209		
Restricted Bands of operation for FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6
13.36 – 13.41	--	--	--
Restricted Bands of operation for ISCED			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	--
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	--
8.41425 - 8.41475	240 - 285	5350 - 5460	--
12.29 - 12.293	322 - 335.4	7250 - 7750	--
12.51975 - 12.52025	399.9 - 410	8025 - 8500	--
12.57675 - 12.57725	608 - 614	--	--


Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

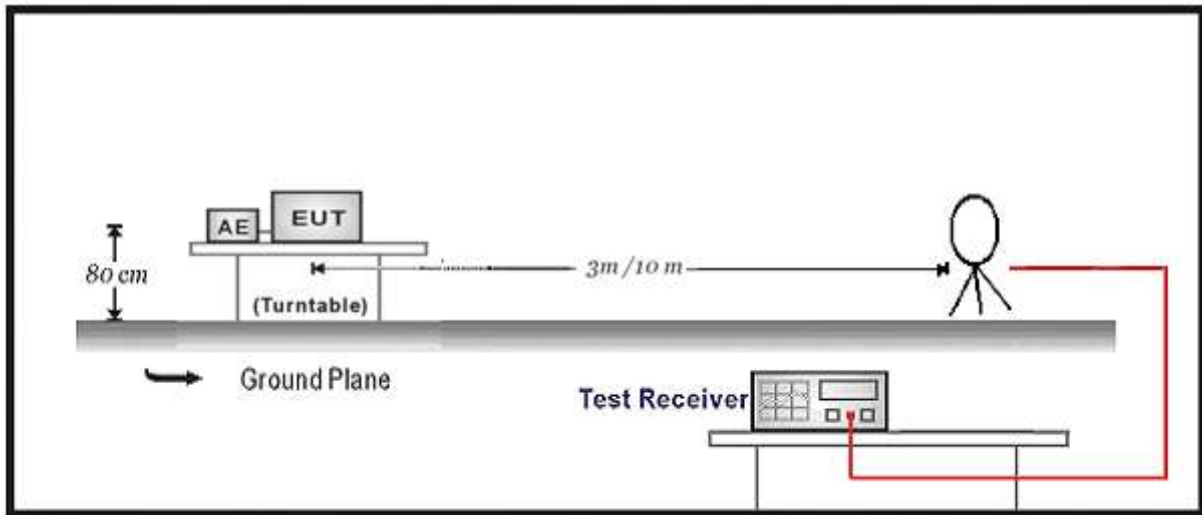

30MHz-1GHz Test Setup:

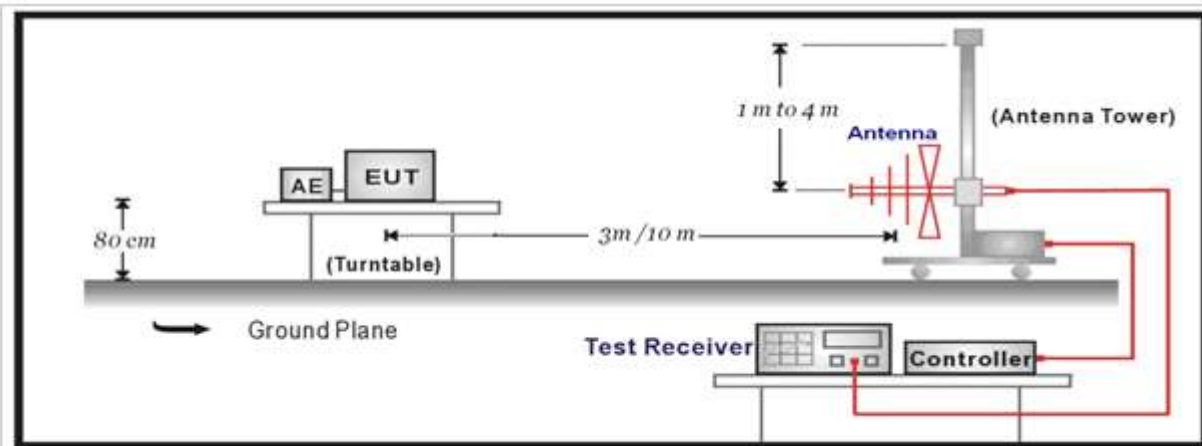


Above 1GHz Test Setup:

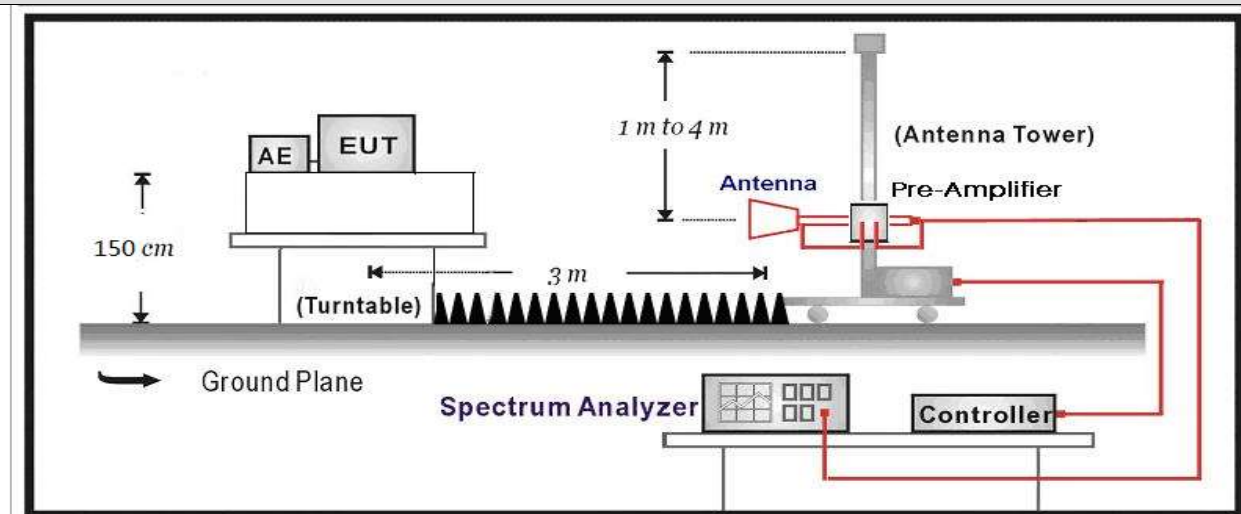

4.2.3 Test Procedure			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	6.3	Radiated spurious emission test
	<input checked="" type="checkbox"/> ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	<input type="checkbox"/> ANSI C63.10	11.12.2	Antenna-port conducted measurements
	<input type="checkbox"/> ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	<input type="checkbox"/> ANSI C63.10	11.12.2.4	Peak power measurement procedure
	<input type="checkbox"/> ANSI C63.10	11.12.2.5	Average power measurement procedures
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


4.2.4 Test Data

Profile: 2130900R	Page No.: 25
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

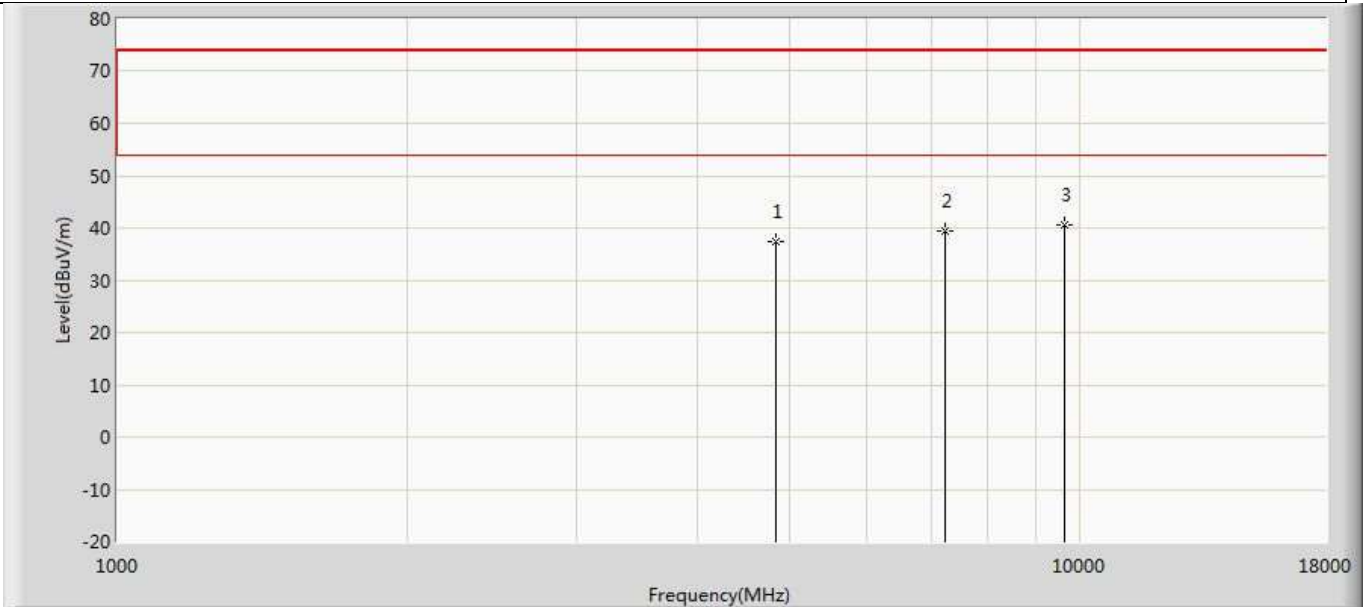


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	37.344	44.448	-36.656	74.000	-7.104	PK
2		7236.000	39.307	42.131	-34.693	74.000	-2.824	PK
3	*	9648.000	40.438	40.495	-33.562	74.000	-0.057	PK

Profile: 2130900R	Page No.: 26
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 11b	

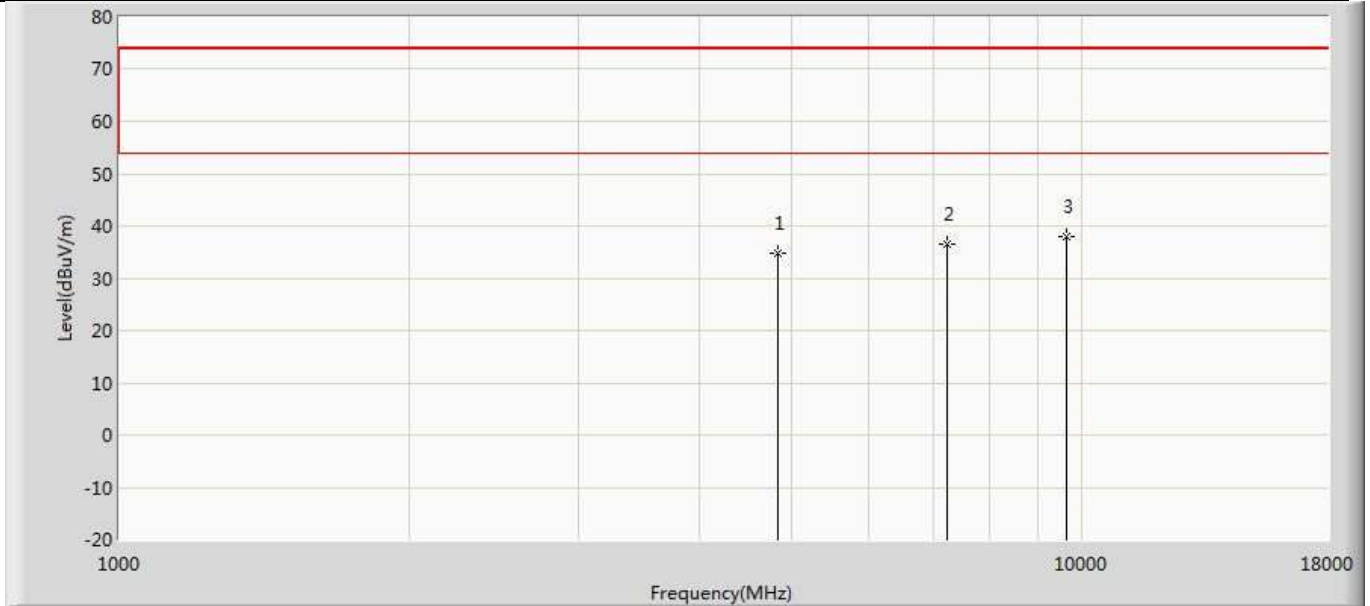


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.868	41.972	-39.132	74.000	-7.104	PK
2		7236.000	36.386	39.210	-37.614	74.000	-2.824	PK
3	*	9648.000	38.051	38.108	-35.949	74.000	-0.057	PK

Profile: 2130900R	Page No.: 27
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

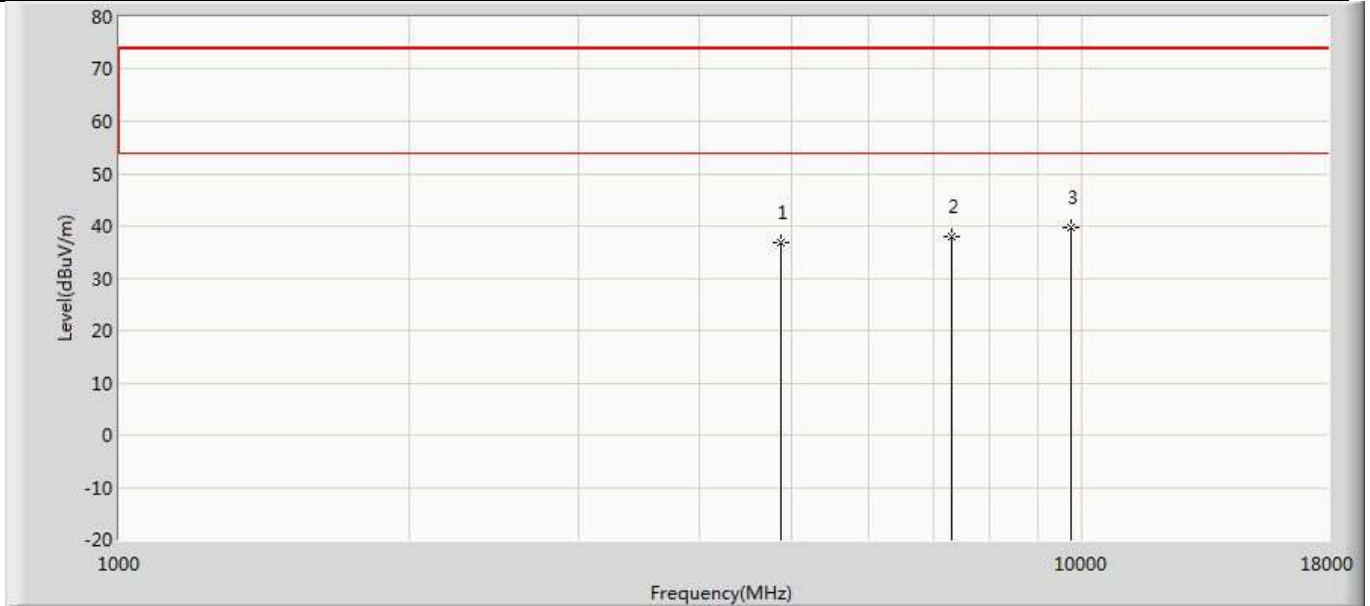


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.719	43.650	-37.281	74.000	-6.931	PK
2		7331.000	37.999	40.811	-36.001	74.000	-2.811	PK
3	*	9748.000	39.706	39.517	-34.294	74.000	0.189	PK

Profile: 2130900R	Page No.: 28
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2437MHz by 11b	

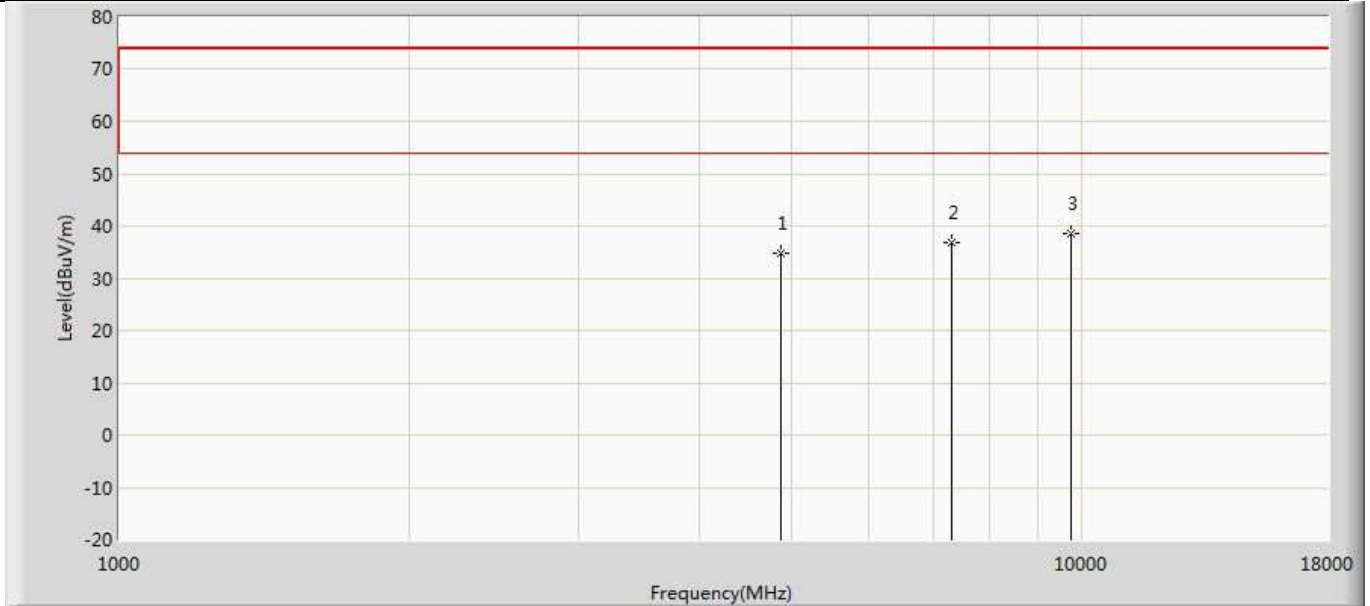


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.682	41.613	-39.318	74.000	-6.931	PK
2		7311.000	36.740	39.592	-37.260	74.000	-2.853	PK
3	*	9748.000	38.599	38.410	-35.401	74.000	0.189	PK

Profile: 2130900R	Page No.: 29
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

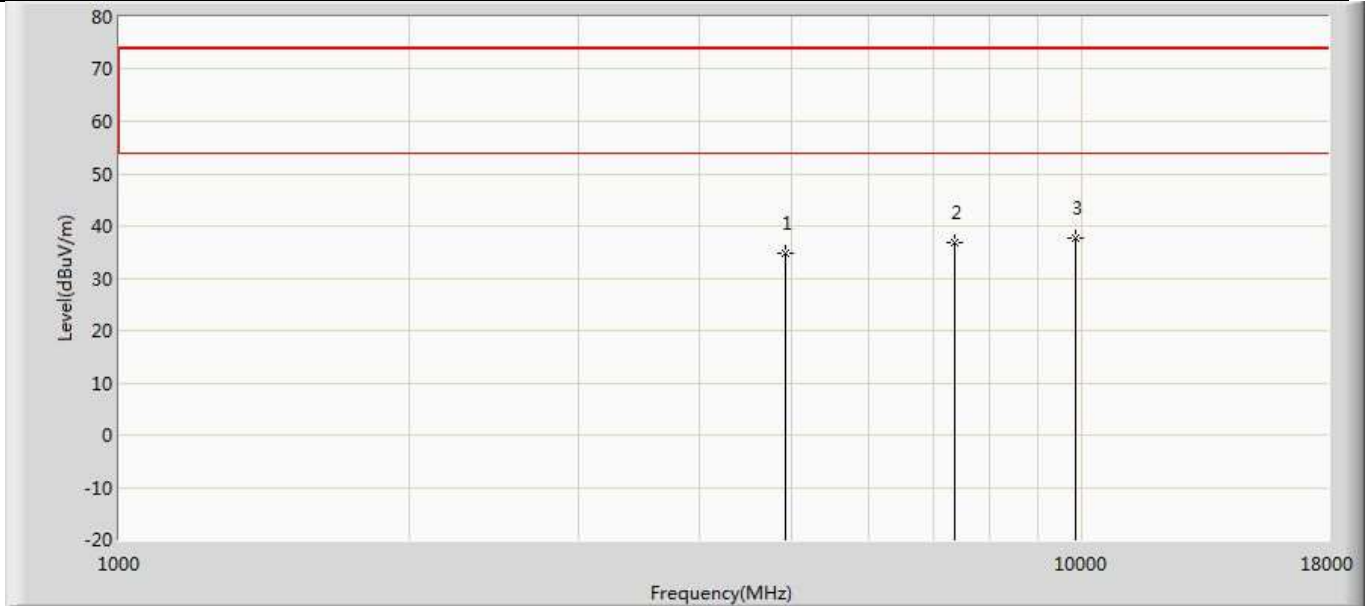


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.796	41.676	-39.204	74.000	-6.881	PK
2		7386.000	36.687	39.423	-37.313	74.000	-2.737	PK
3	*	9848.000	37.583	37.964	-36.417	74.000	-0.380	PK

Profile: 2130900R	Page No.: 30
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 11b	

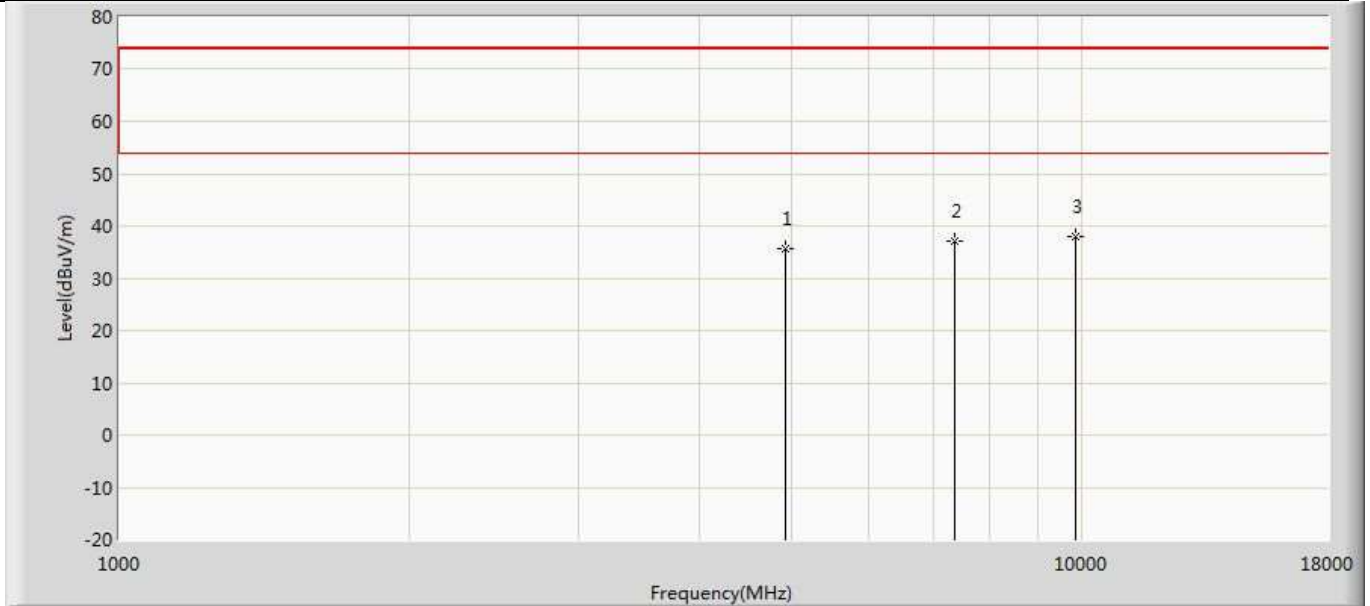


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.565	42.445	-38.435	74.000	-6.881	PK
2		7386.000	37.229	39.965	-36.771	74.000	-2.737	PK
3	*	9848.000	37.970	38.351	-36.030	74.000	-0.380	PK

Profile: 2130900R	Page No.: 31
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

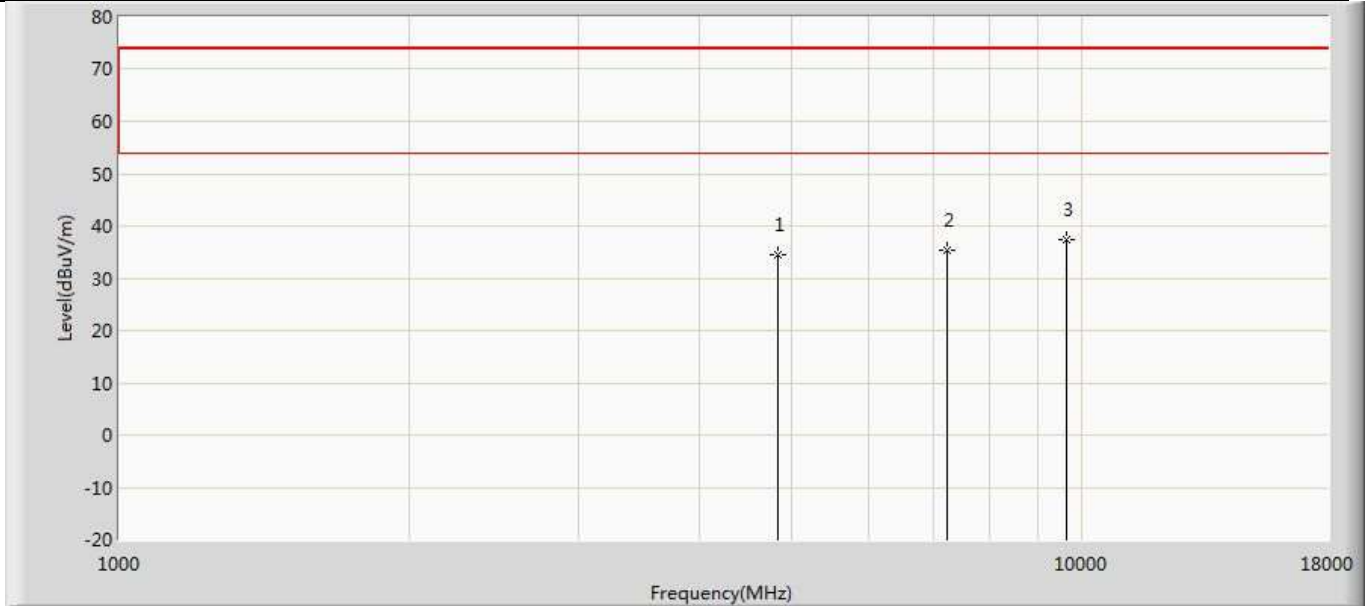


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	34.510	41.614	-39.490	74.000	-7.104	PK
2		7236.000	35.227	38.051	-38.773	74.000	-2.824	PK
3	*	9648.000	37.289	37.346	-36.711	74.000	-0.057	PK

Profile: 2130900R	Page No.: 32
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 11g	

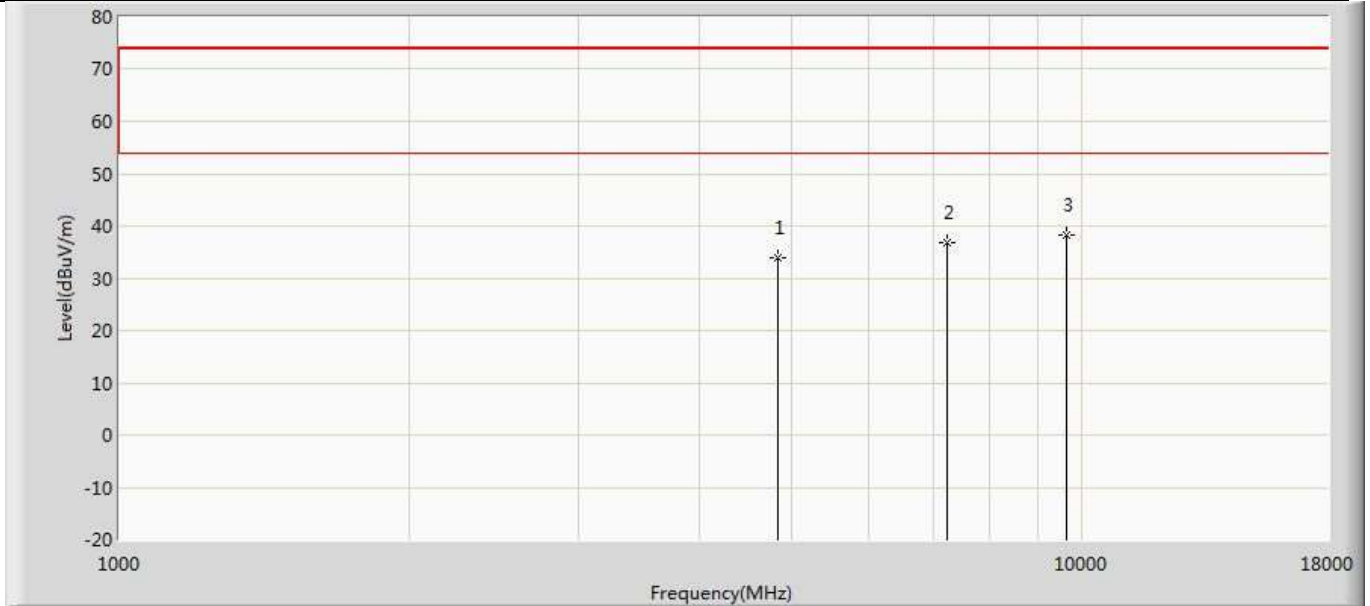


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.853	40.957	-40.147	74.000	-7.104	PK
2		7236.000	36.780	39.604	-37.220	74.000	-2.824	PK
3	*	9648.000	38.287	38.344	-35.713	74.000	-0.057	PK

Profile: 2130900R	Page No.: 33
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

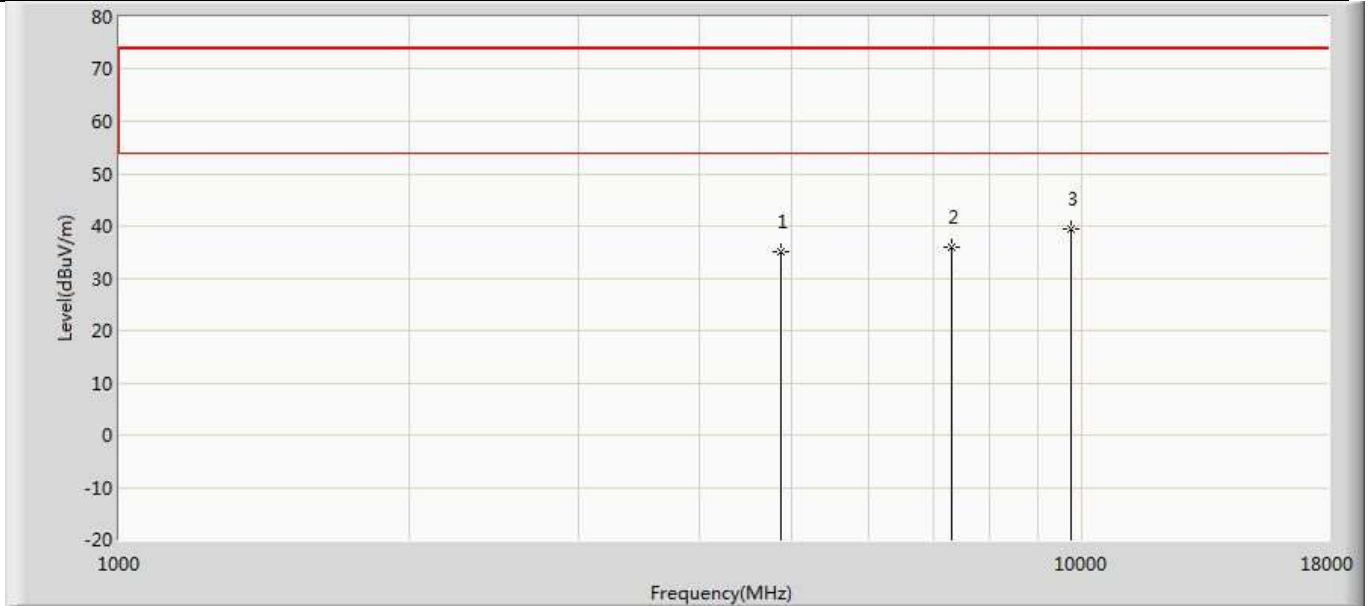


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	35.027	41.958	-38.973	74.000	-6.931	PK
2		7311.000	35.880	38.732	-38.120	74.000	-2.853	PK
3	*	9748.000	39.279	39.090	-34.721	74.000	0.189	PK

Profile: 2130900R	Page No.: 34
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2437MHz by 11g	

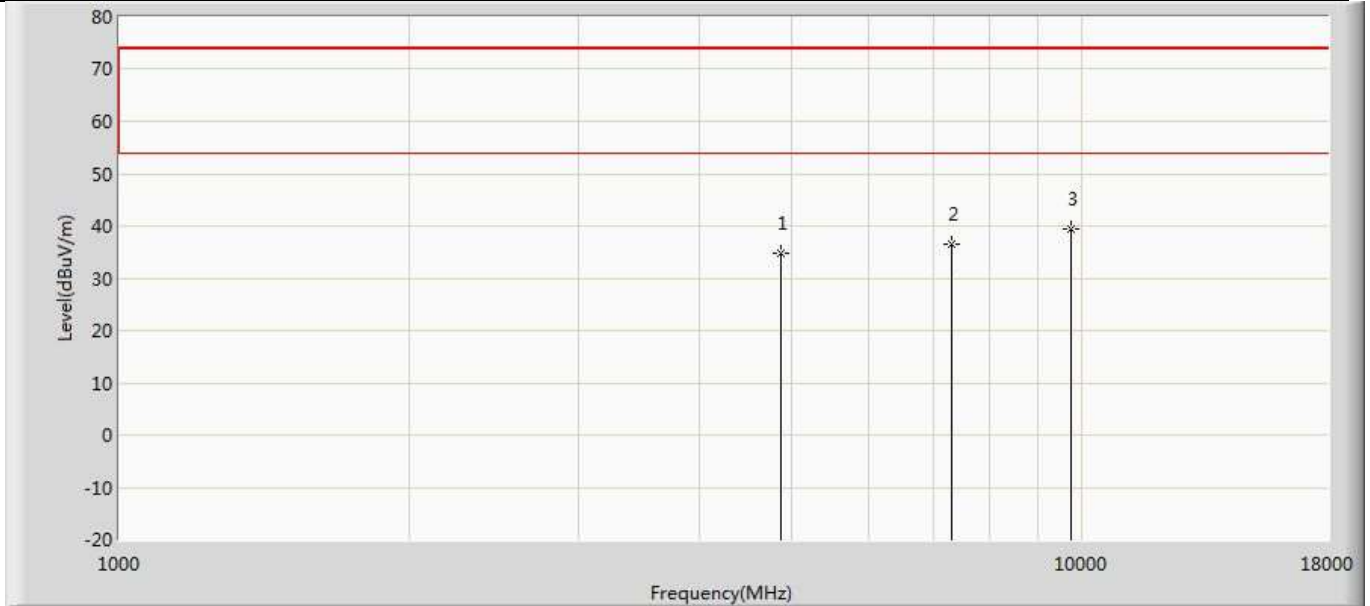


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.736	41.667	-39.264	74.000	-6.931	PK
2		7311.000	36.484	39.336	-37.516	74.000	-2.853	PK
3	*	9748.000	39.317	39.128	-34.683	74.000	0.189	PK

Profile: 2130900R	Page No.: 35
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

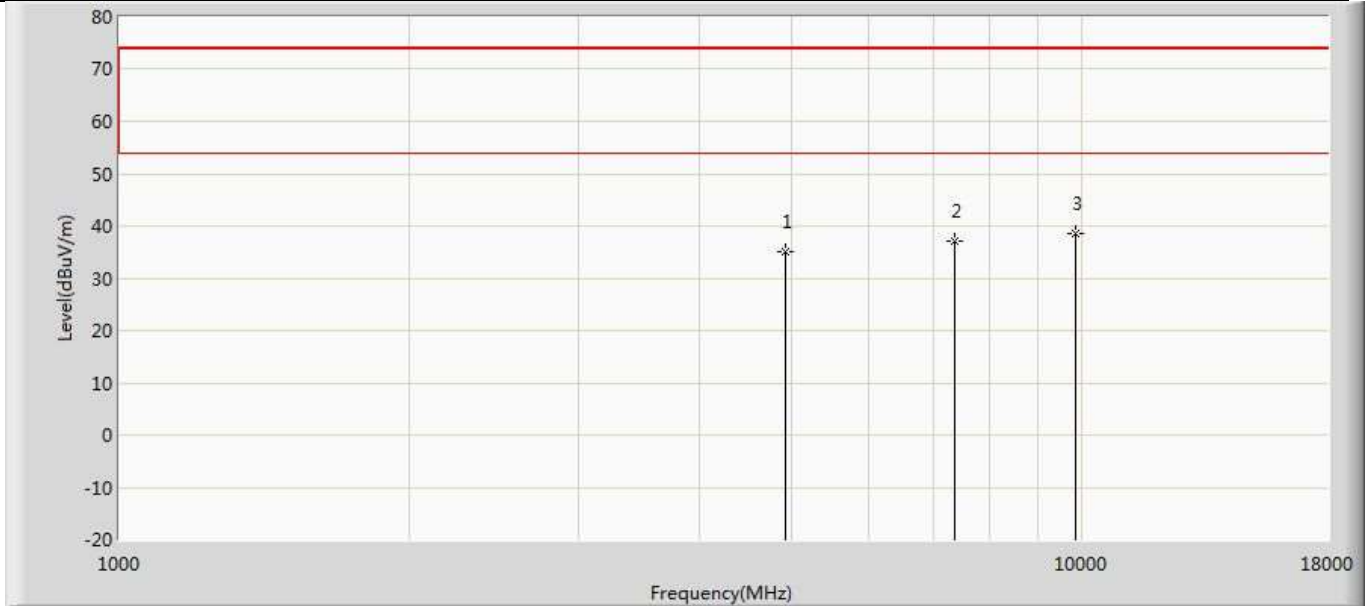


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.101	41.981	-38.899	74.000	-6.881	PK
2		7386.000	37.241	39.977	-36.759	74.000	-2.737	PK
3	*	9848.000	38.648	39.029	-35.352	74.000	-0.380	PK

Profile: 2130900R	Page No.: 36
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 11g	

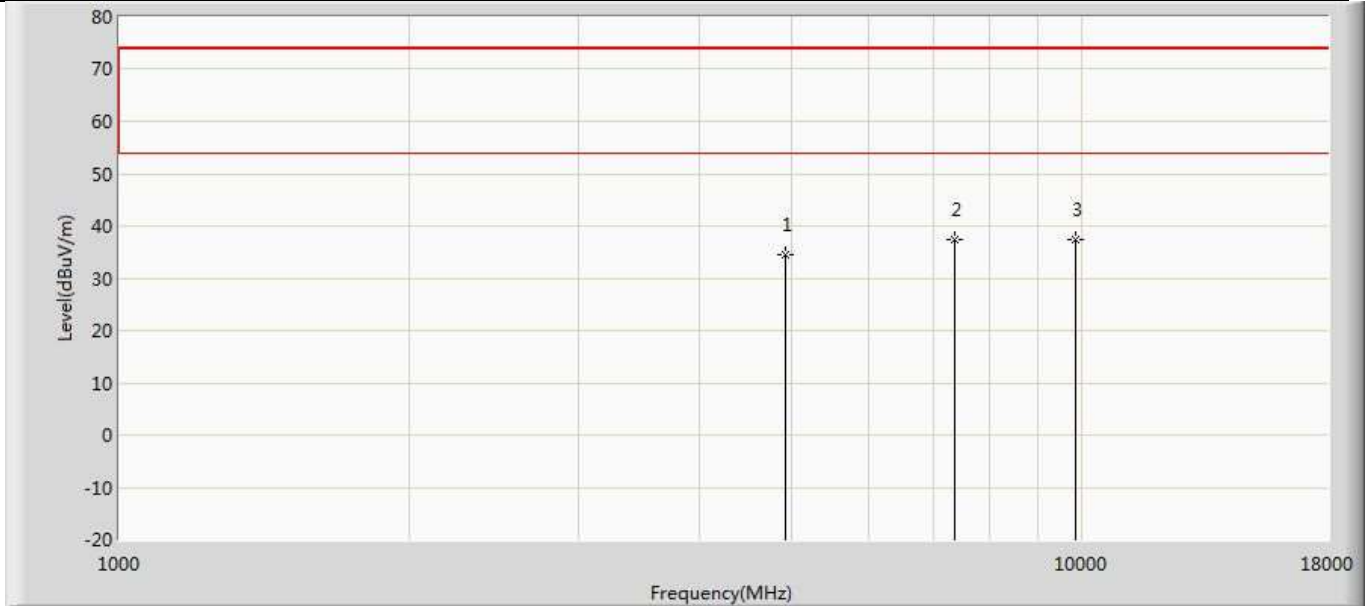


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.581	41.461	-39.419	74.000	-6.881	PK
2		7386.000	37.372	40.108	-36.628	74.000	-2.737	PK
3	*	9848.000	37.520	37.901	-36.480	74.000	-0.380	PK

Profile: 2130900R	Page No.: 37
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n(20MHz)	

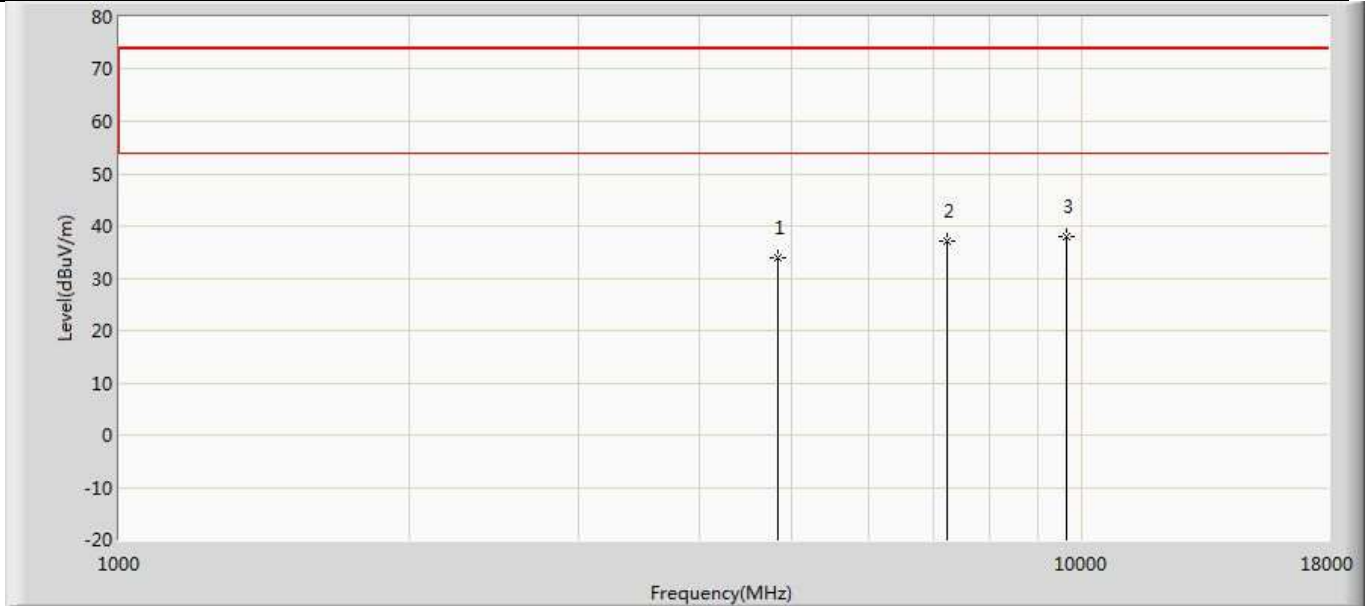


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.864	40.968	-40.136	74.000	-7.104	PK
2		7236.000	37.169	39.993	-36.831	74.000	-2.824	PK
3	*	9648.000	37.955	38.012	-36.045	74.000	-0.057	PK

Profile: 2130900R	Page No.: 38
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 11n(20MHz)	

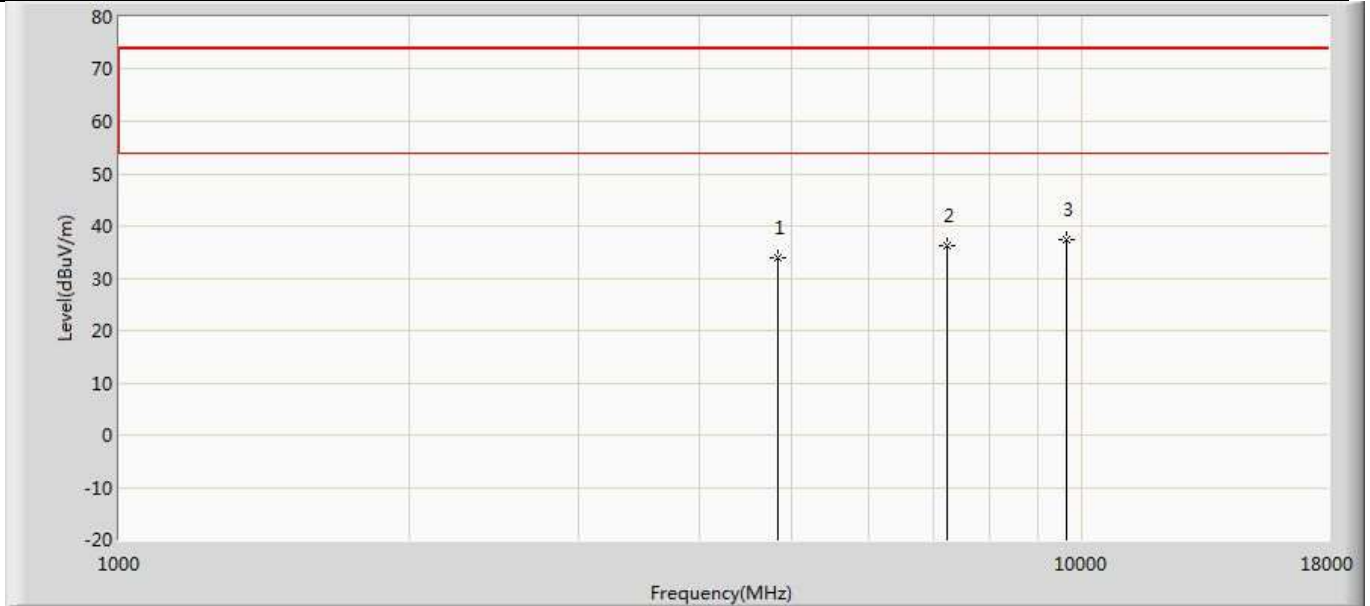


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	33.924	41.028	-40.076	74.000	-7.104	PK
2		7236.000	36.294	39.118	-37.706	74.000	-2.824	PK
3	*	9648.000	37.330	37.387	-36.670	74.000	-0.057	PK

Profile: 2130900R	Page No.: 39
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n(20MHz)	

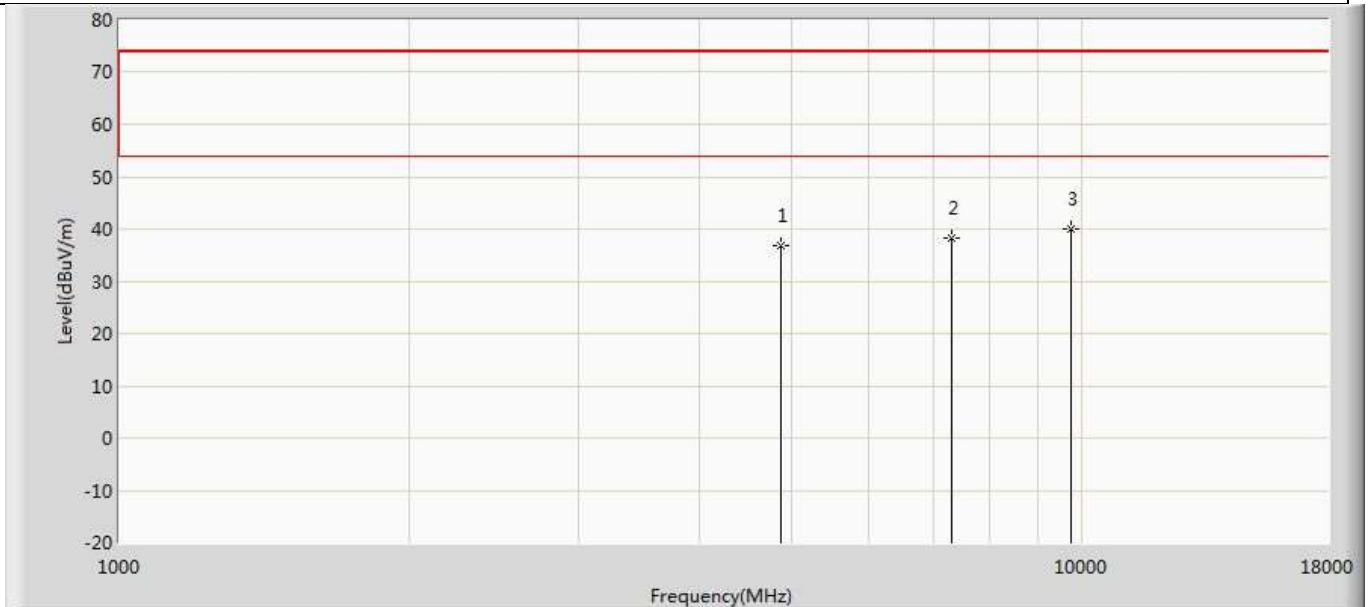


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	36.949	43.880	-37.051	74.000	-6.931	PK
2		7311.000	38.370	41.222	-35.630	74.000	-2.853	PK
3	*	9748.000	40.082	39.893	-33.918	74.000	0.189	PK

Profile: 2130900R	Page No.: 40
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2437MHz by 11n(20MHz)	

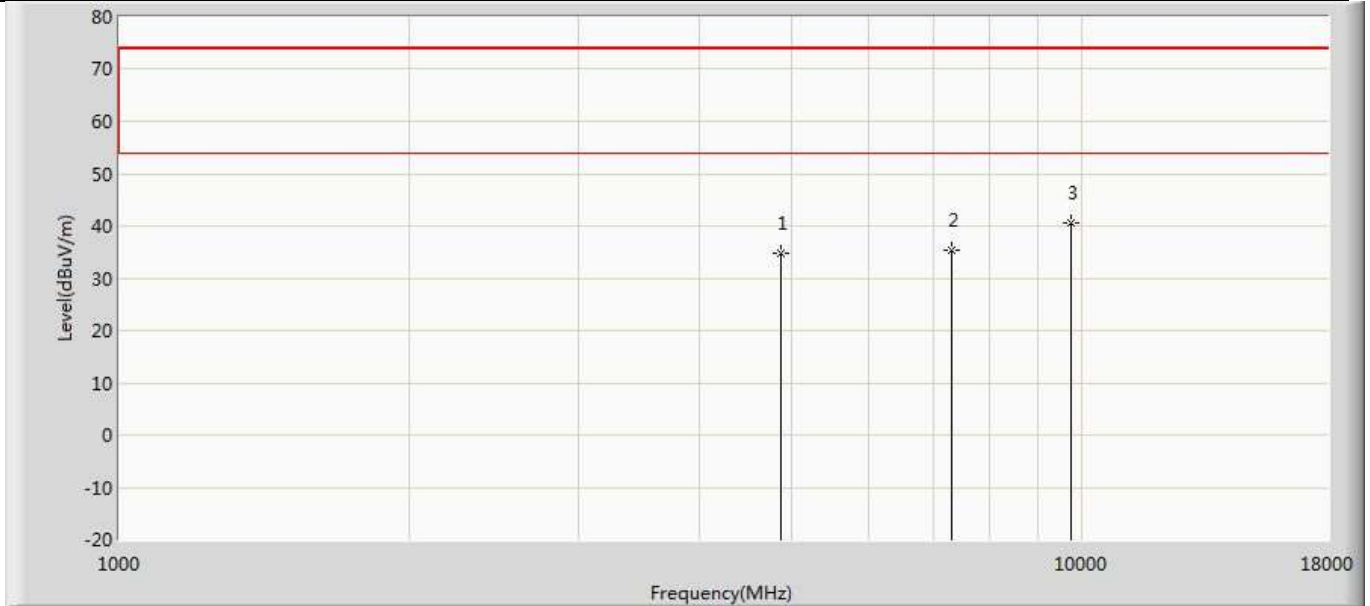


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.856	41.787	-39.144	74.000	-6.931	PK
2		7311.000	35.483	38.335	-38.517	74.000	-2.853	PK
3	*	9748.000	40.445	40.256	-33.555	74.000	0.189	PK

Profile: 2130900R	Page No.: 41
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n(20MHz)	

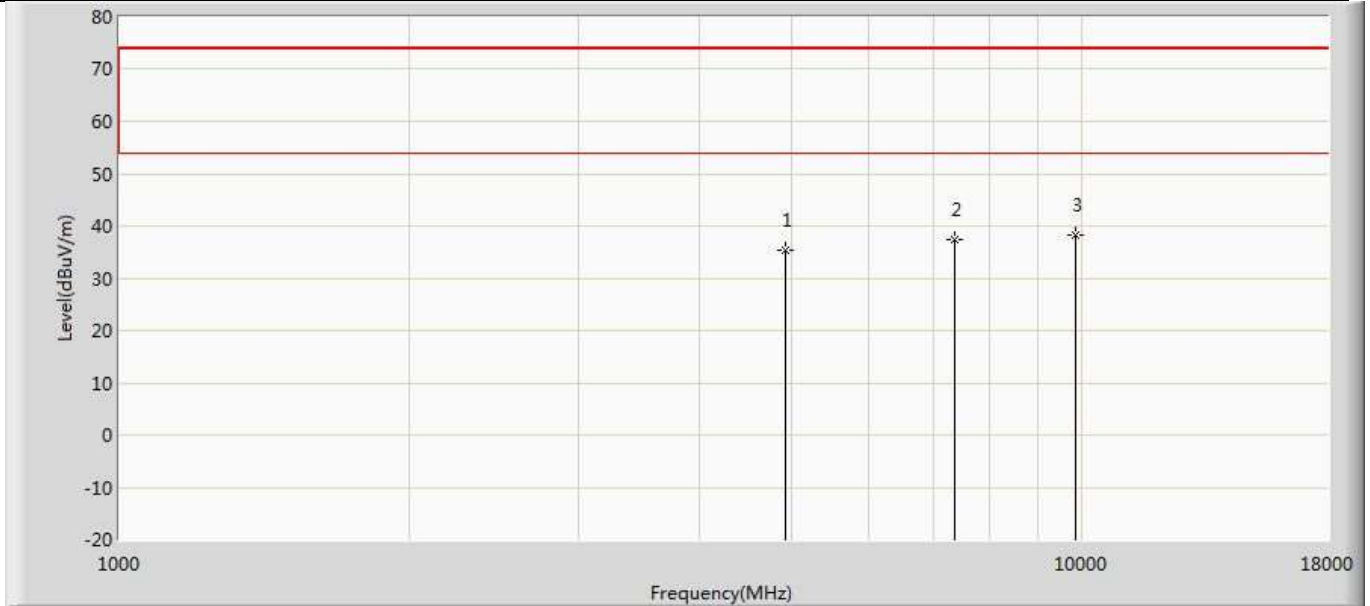


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.260	42.140	-38.740	74.000	-6.881	PK
2		7386.000	37.334	40.070	-36.666	74.000	-2.737	PK
3	*	9848.000	38.364	38.745	-35.636	74.000	-0.380	PK

Profile: 2130900R	Page No.: 42
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 11n(20MHz)	

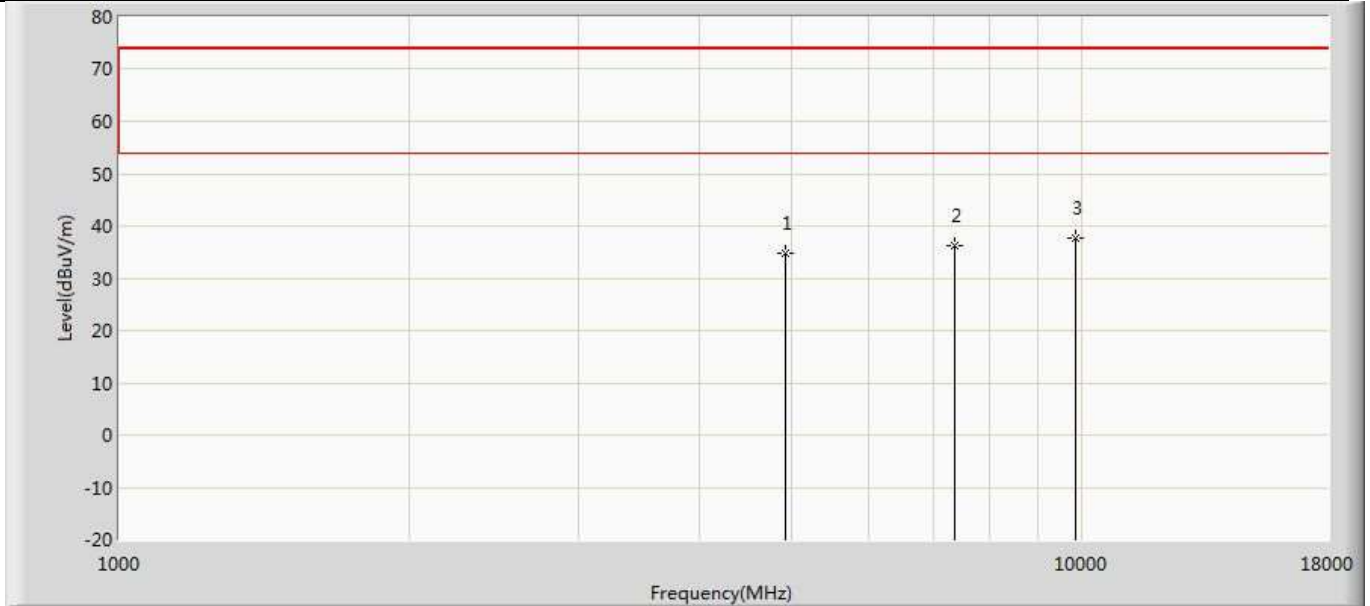


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	34.764	41.644	-39.236	74.000	-6.881	PK
2		7386.000	36.359	39.095	-37.641	74.000	-2.737	PK
3	*	9848.000	37.587	37.968	-36.413	74.000	-0.380	PK

Profile: 2130900R	Page No.: 43
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n(40MHz)	

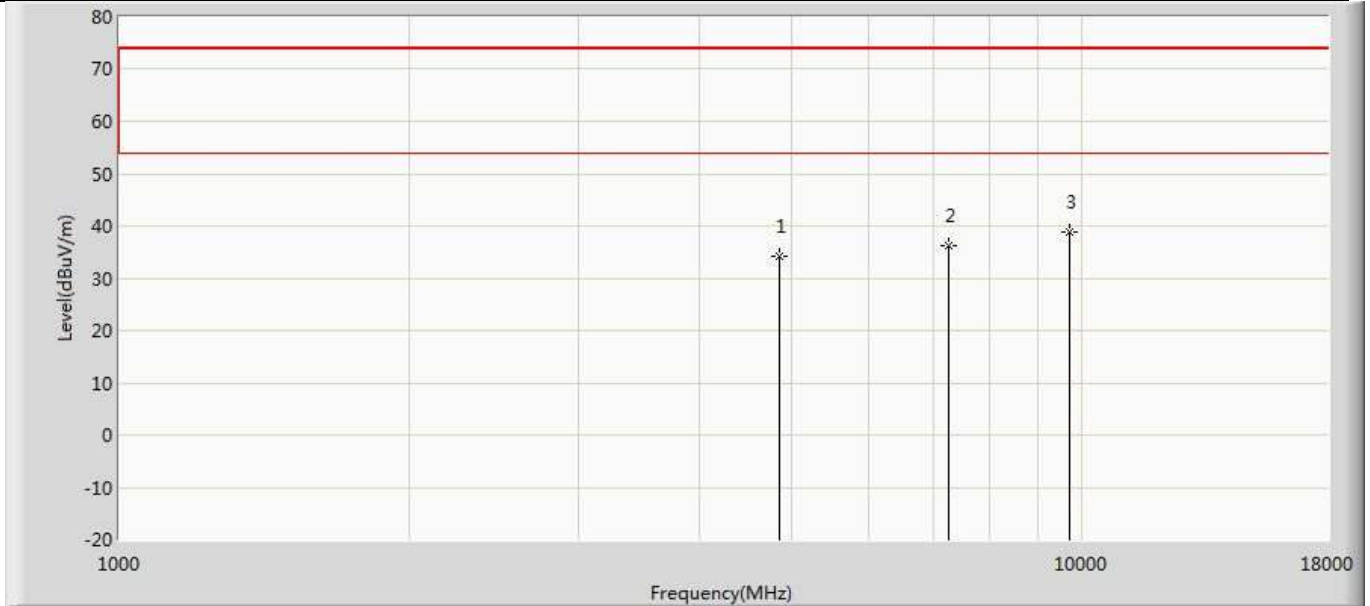


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	34.321	41.445	-39.679	74.000	-7.124	PK
2		7266.000	36.330	39.210	-37.670	74.000	-2.879	PK
3	*	9688.000	38.921	38.222	-35.079	74.000	0.700	PK

Profile: 2130900R	Page No.: 44
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 11n(40MHz)	

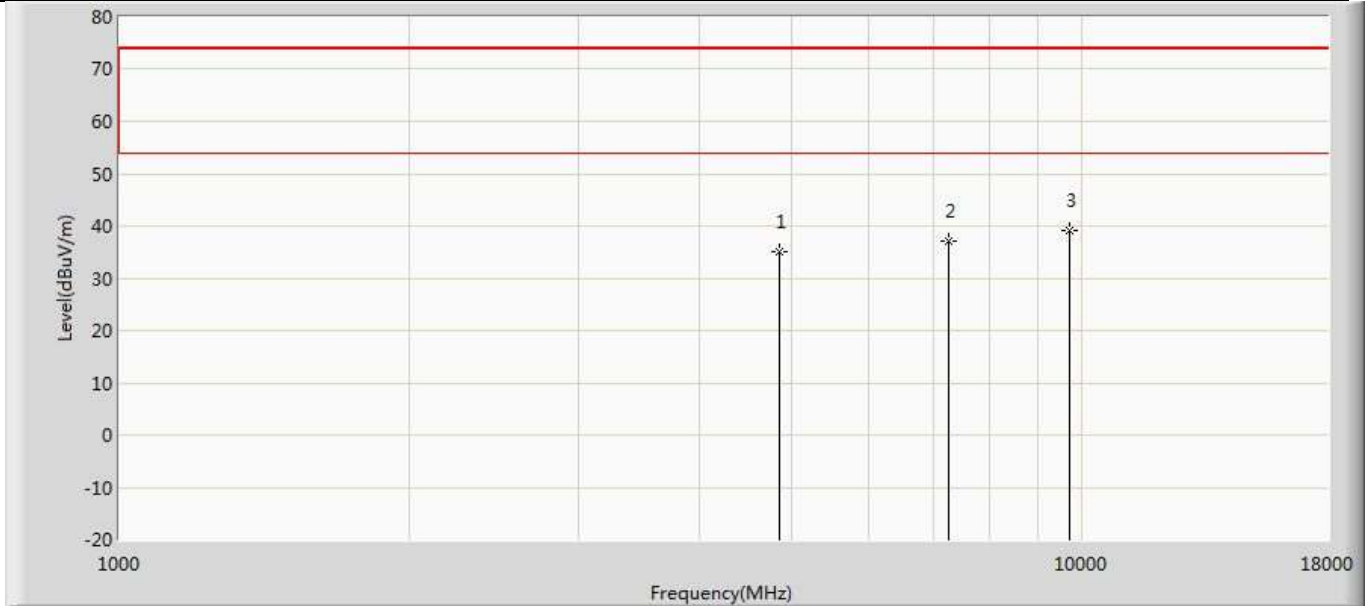


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4844.000	35.207	42.331	-38.793	74.000	-7.124	PK
2		7266.000	37.138	40.018	-36.862	74.000	-2.879	PK
3	*	9688.000	39.136	38.437	-34.864	74.000	0.700	PK

Profile: 2130900R	Page No.: 45
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n(40MHz)	

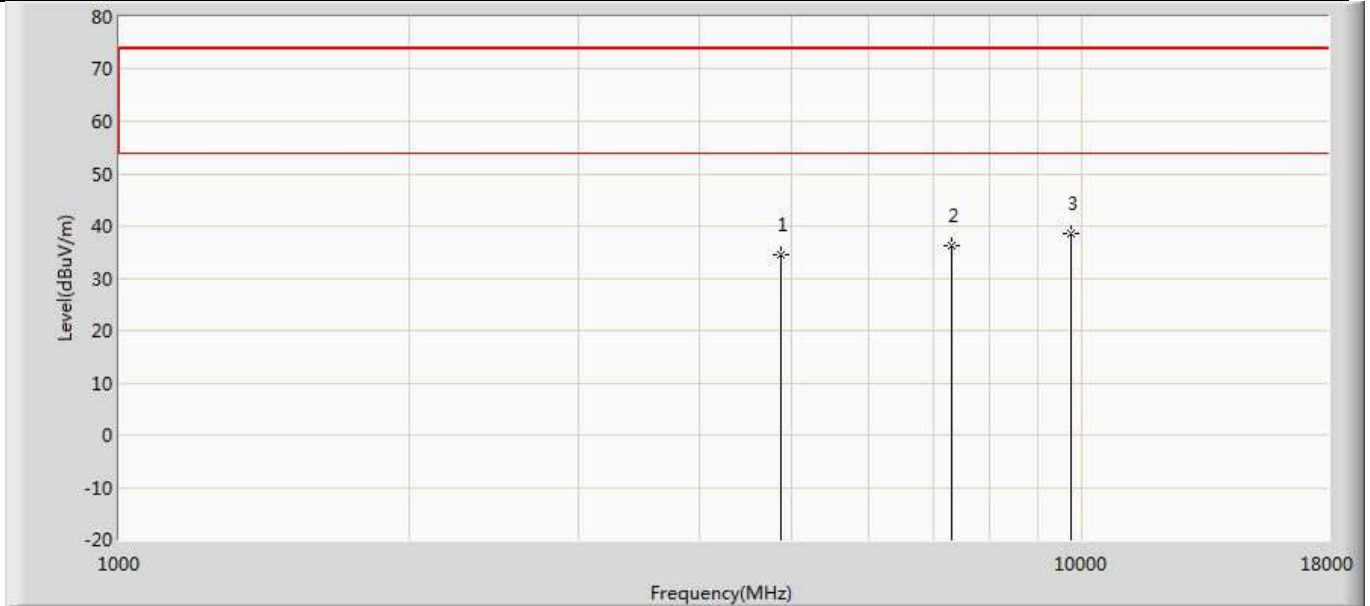


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	34.586	41.517	-39.414	74.000	-6.931	PK
2		7311.000	36.212	39.064	-37.788	74.000	-2.853	PK
3	*	9748.000	38.593	38.404	-35.407	74.000	0.189	PK

Profile: 2130900R	Page No.: 46
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2437MHz by 11n(40MHz)	

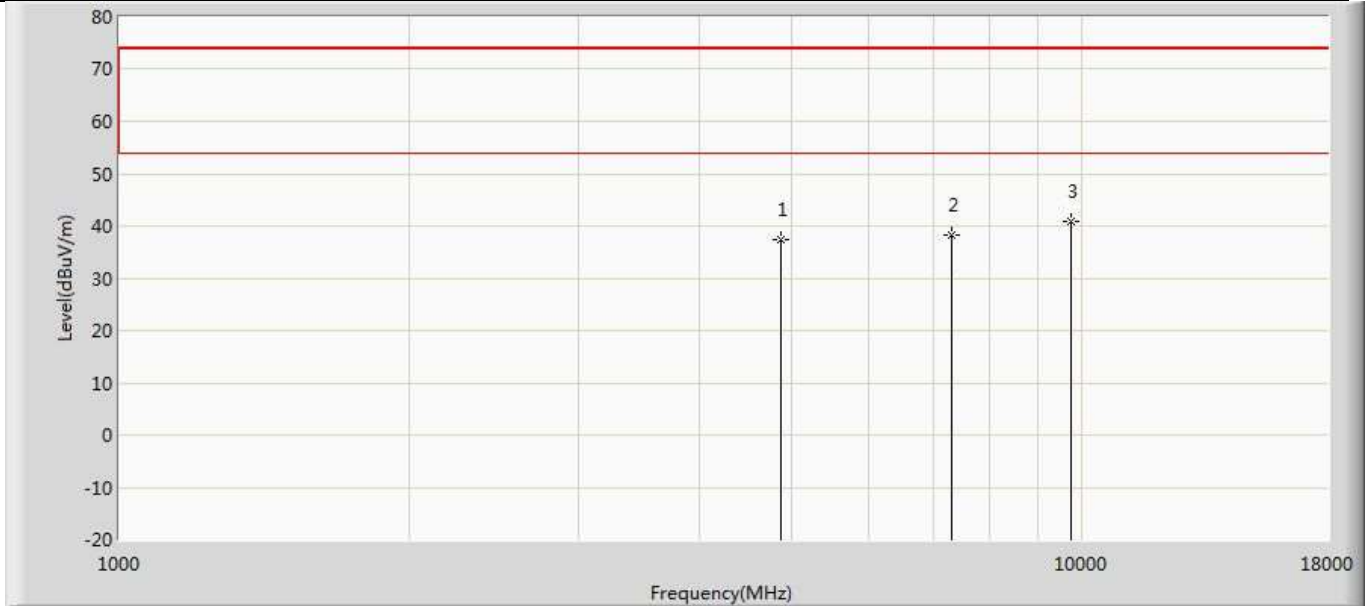


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	37.396	44.327	-36.604	74.000	-6.931	PK
2		7311.000	38.321	41.173	-35.679	74.000	-2.853	PK
3	*	9748.000	40.898	40.709	-33.102	74.000	0.189	PK

Profile: 2130900R	Page No.: 47
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n(40MHz)	

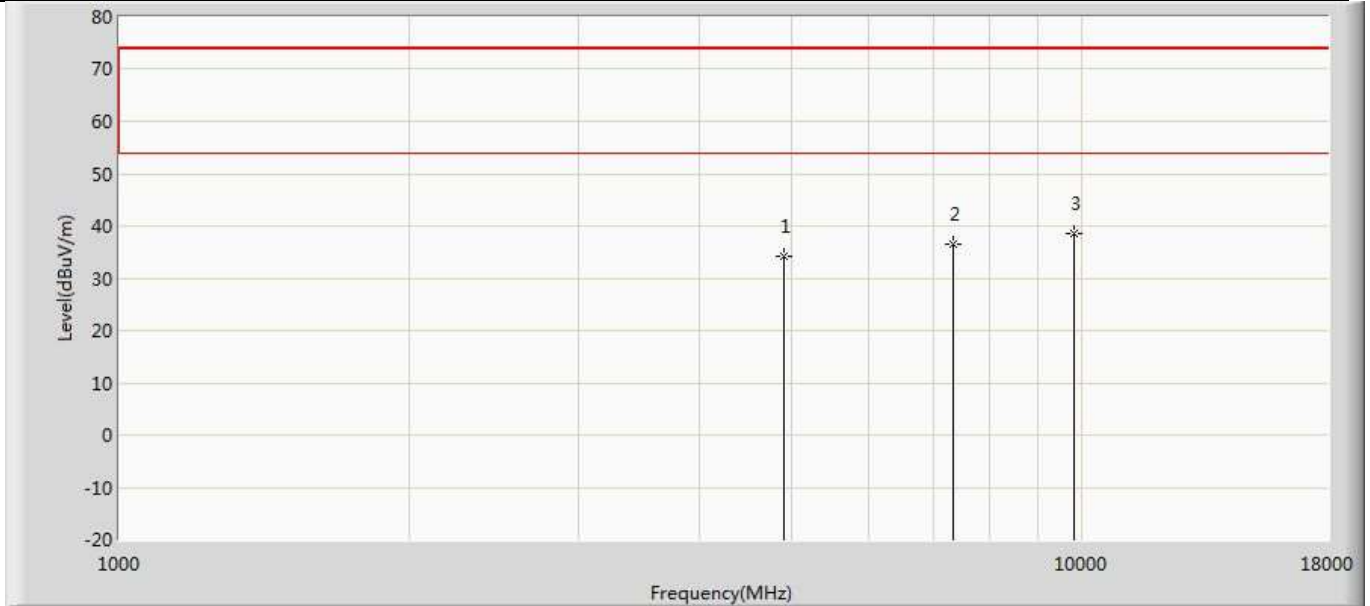

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	34.301	41.113	-39.699	74.000	-6.812	PK
2		7356.000	36.526	39.500	-37.474	74.000	-2.974	PK
3	*	9808.000	38.656	38.445	-35.344	74.000	0.211	PK

Profile: 2130900R	Page No.: 48
Engineer: Julius Zhou	
Site: AC5	Time: 2021/03/27 - 15:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 11n(40MHz)	

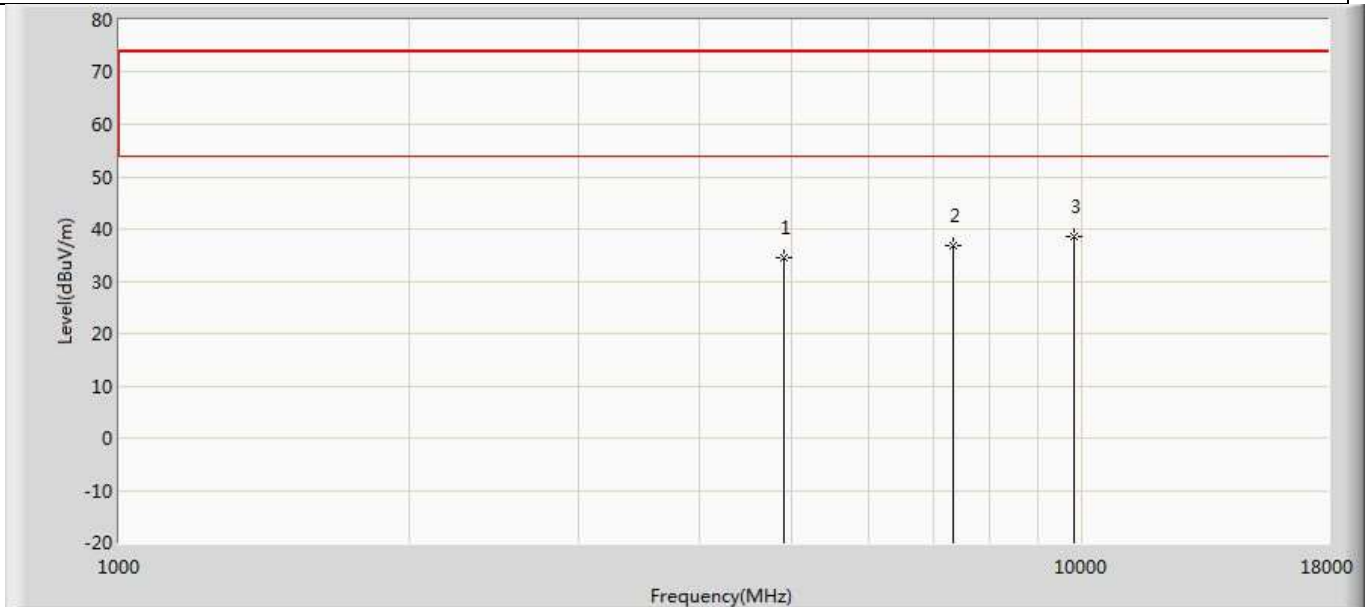


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4904.000	34.447	41.259	-39.553	74.000	-6.812	PK
2		7356.000	36.735	39.709	-37.265	74.000	-2.974	PK
3	*	9808.000	38.624	38.413	-35.376	74.000	0.211	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).
3. The test frequency range, 9kHz~30MHz and Above 18GHz worst case are at least 6dB below the limits, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result of peak is lower than average limit, then average measurement needn't be performed.


The worst case of Radiated Emission below 1GHz:

Profile: 2130900R	Page No.: 1
Engineer: Julius Zhou	
Site: AC3	Time: 2021/03/27 - 13:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1	

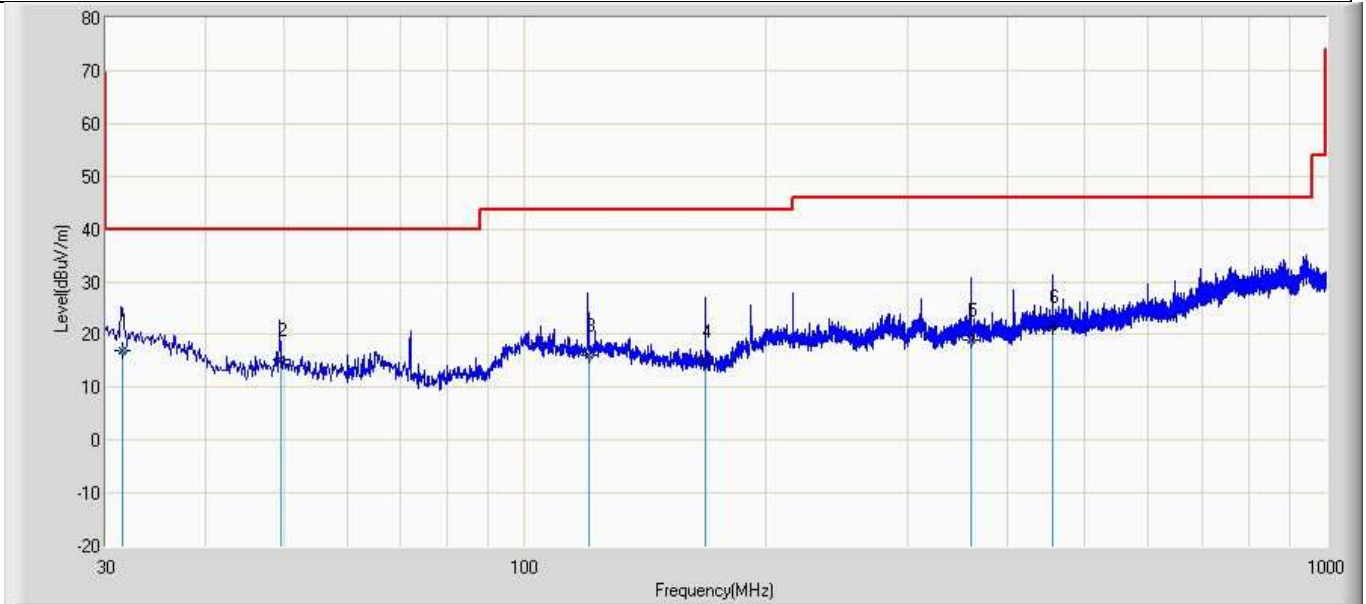

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	31.522	16.971	-6.520	-23.029	40.000	23.491	150	12	QP
2		49.555	15.321	-2.633	-24.679	40.000	17.954	150	44	QP
3		120.522	15.962	-5.500	-27.538	43.500	21.462	150	125	QP
4		168.000	14.954	-3.300	-28.546	43.500	18.254	150	41	QP
5		360.142	19.021	-5.000	-26.979	46.000	24.021	150	23	QP
6		455.638	21.619	-3.520	-24.381	46.000	25.139	150	4	QP

Profile: 2130900R	Page No.: 2
Engineer: Julius Zhou	
Site: AC3	Time: 2021/03/27 - 16:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1	

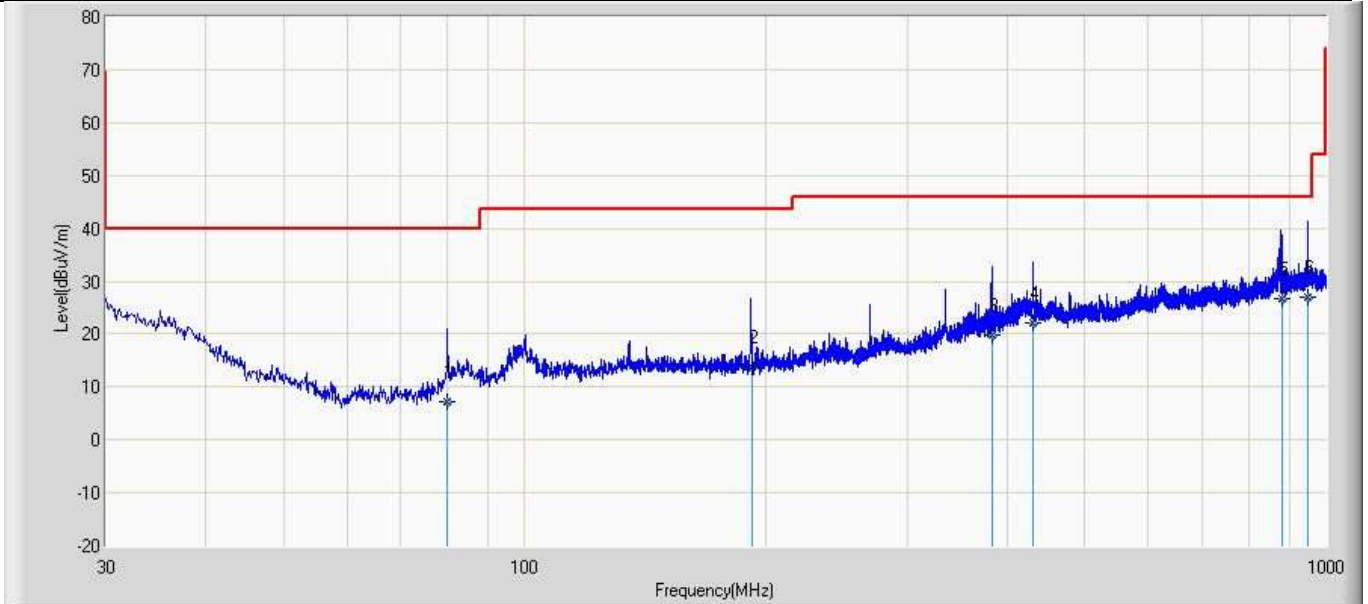


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		80.120	7.349	-5.630	-32.651	40.000	12.979	150	25	QP
2		192.125	13.689	-3.520	-29.811	43.500	17.208	150	126	QP
3		383.524	19.952	-4.520	-26.048	46.000	24.472	150	321	QP
4		431.105	21.984	-4.520	-24.016	46.000	26.504	150	44	QP
5		880.150	26.632	-4.520	-19.368	46.000	31.151	150	89	QP
6	*	948.510	27.084	-5.520	-18.916	46.000	32.604	150	74	QP

4.3 Emissions in non-restricted frequency band	VERDICT: PASS
---	----------------------

4.3.1 Limit	
Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

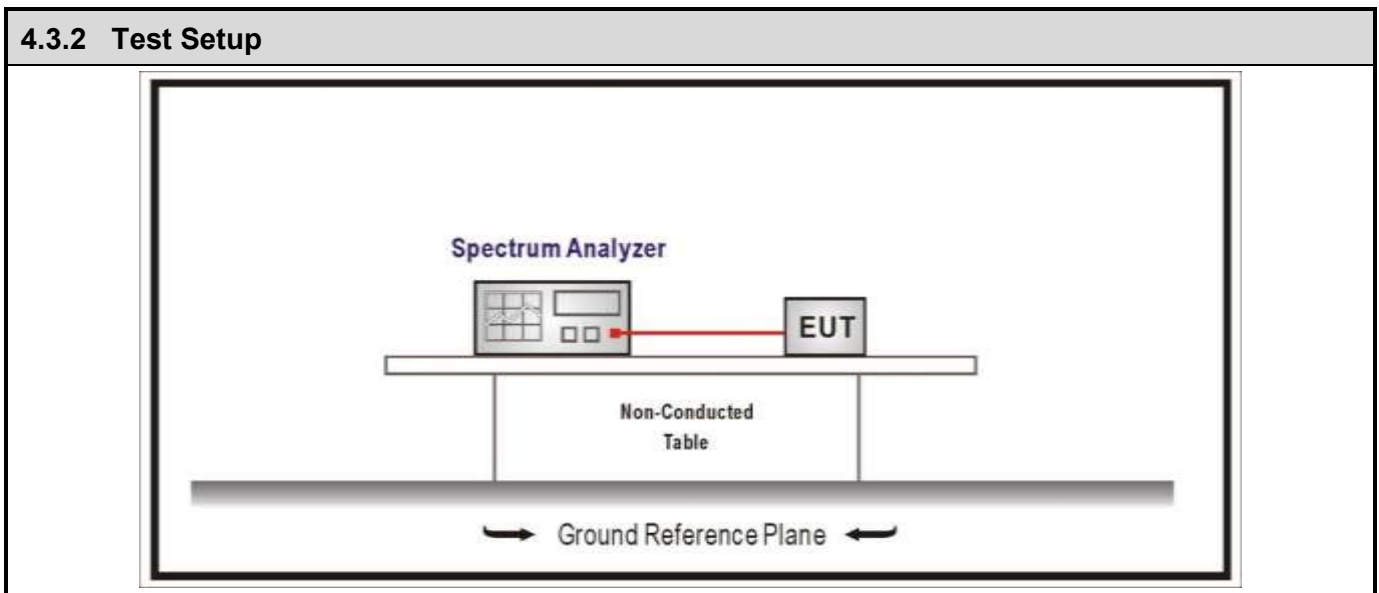

4.3.3 Test Procedure			
References Rule	Chapter	Description	
<input checked="" type="checkbox"/> ANSI C63.10	11.11	Emissions in non-restricted frequency bands	
<input checked="" type="checkbox"/> ANSI C63.10	11.11.1	General	
<input checked="" type="checkbox"/> ANSI C63.10	11.11.2	Reference level measurement	
<input checked="" type="checkbox"/> ANSI C63.10	11.11.3	Emission level measurement	

4.3.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	1	2412	10.425	2400.000	-38.33	48.755	≥20	Pass
	11	2462	9.6	2500.000	-51.569	61.169	≥20	Pass
2	1	2412	2.498	2400.000	-35.975	38.473	≥20	Pass
	11	2462	1.769	2500.000	-51.87	53.639	≥20	Pass
3	1	2412	2.608	2400.000	-35.975	38.583	≥20	Pass
	11	2462	1.793	2500.000	-53.438	55.231	≥20	Pass
4	3	2422	2.048	2400.000	-30.748	32.796	≥20	Pass
	9	2452	-3.256	2500.000	-48.666	45.41	≥20	Pass

Note: The worst case of emissions in non-restricted frequency bands as below:

Mode 4 CH03(2422MHz)



4.4 Radiated Emission Band Edge	VERDICT: PASS
--	----------------------

4.4.1 Limit


Standard FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209

Frequency bands (MHz)	Detector	Limit (dBµV/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.4.2 Test Setup

Above 1GHz Test Setup:

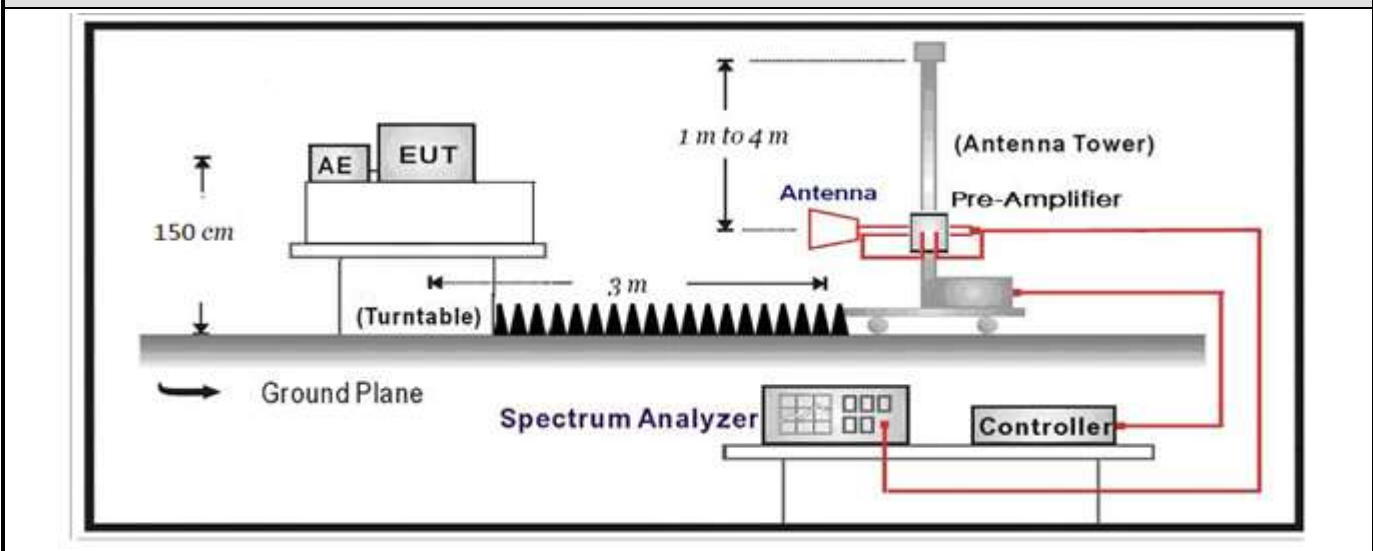

4.4.3 Test Procedure			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	6.3	Radiated spurious emission test
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	<input type="checkbox"/> ANSI C63.10	11.12.2	Antenna-port conducted measurements
	<input type="checkbox"/> ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	<input type="checkbox"/> ANSI C63.10	11.12.2.4	Peak power measurement procedure
	<input type="checkbox"/> ANSI C63.10	11.12.2.5	Average power measurement procedures
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
	<input type="checkbox"/> ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


4.4.4 Test Data

Test Mode	Tx On (ms)	VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle (%)
1	--	10	--	100
2	--	10	--	100
3	--	10	--	100
4	--	10	--	100


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.


802.11b

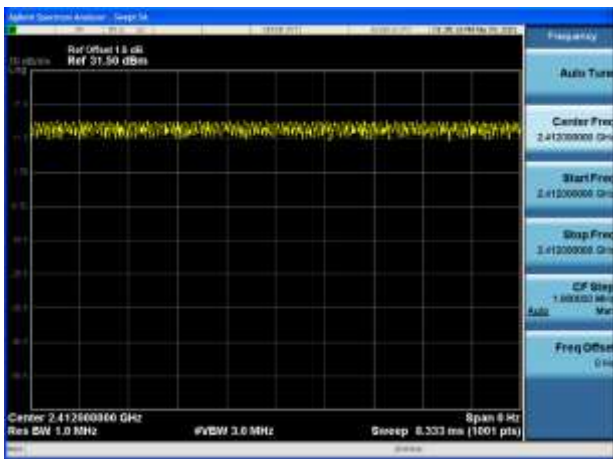


802.11g

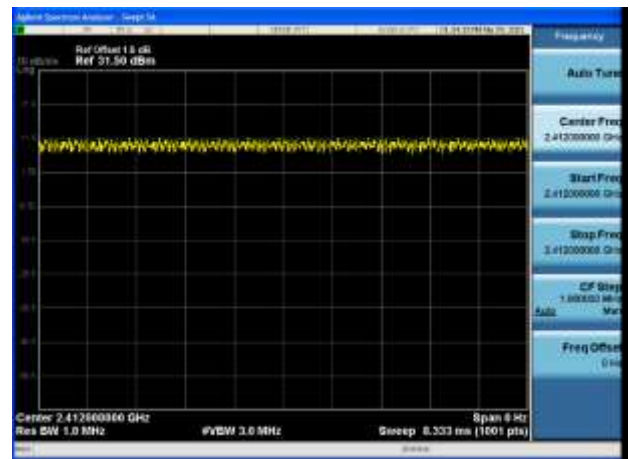


802.11n(20MHz)

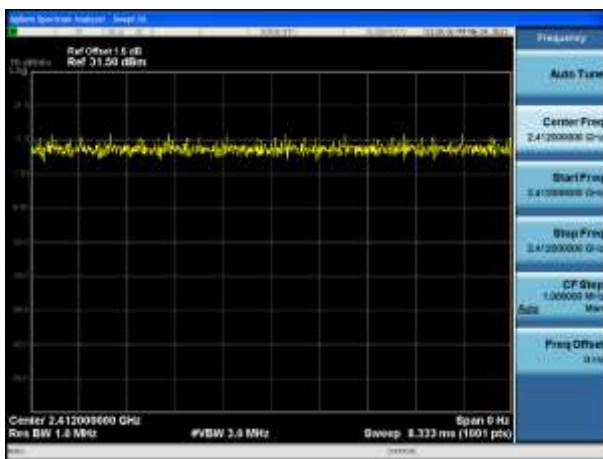

802.11n(40MHz)

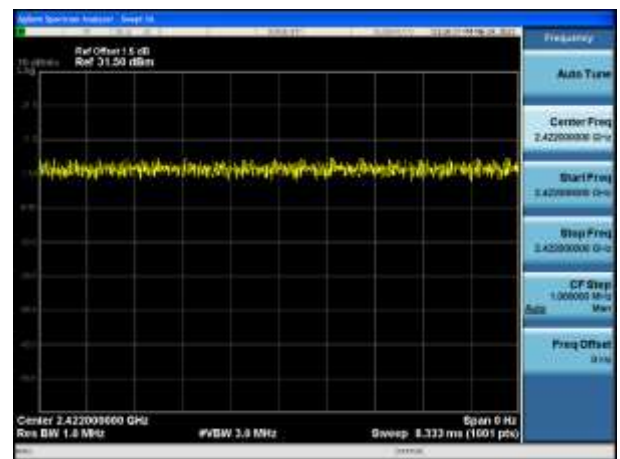


Profile: 2130900R	Page No.: 3
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

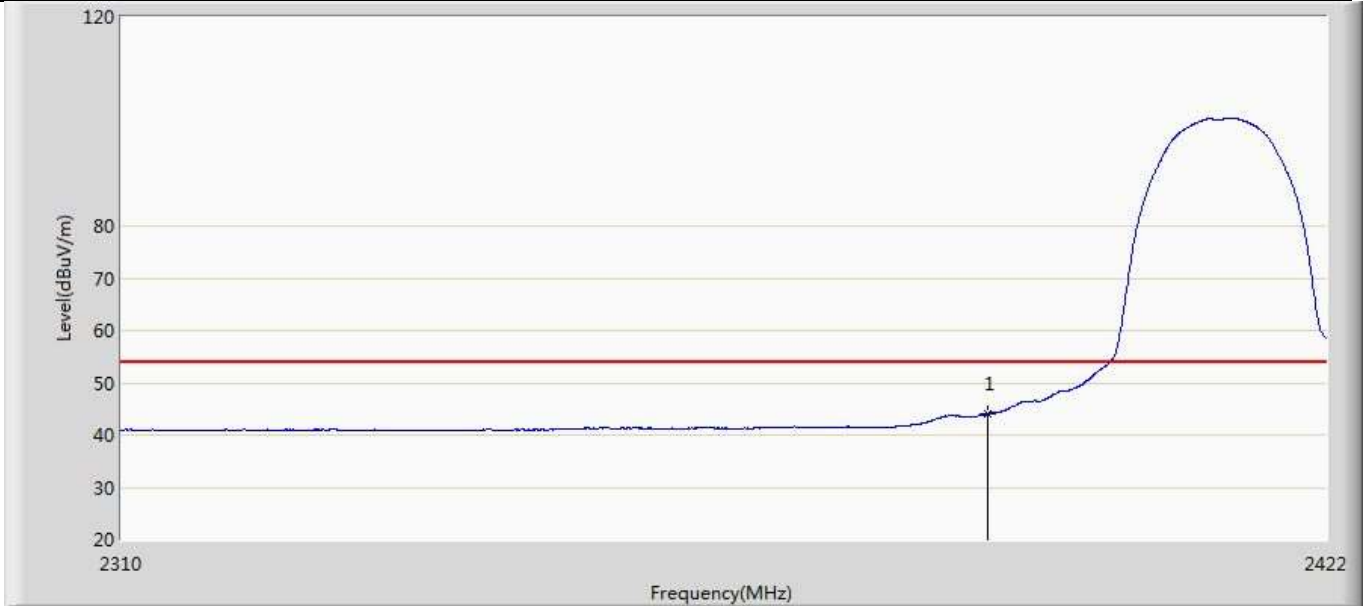

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	44.092	8.635	-9.908	54.000	35.458	AV


Profile: 2130900R	Page No.: 4
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

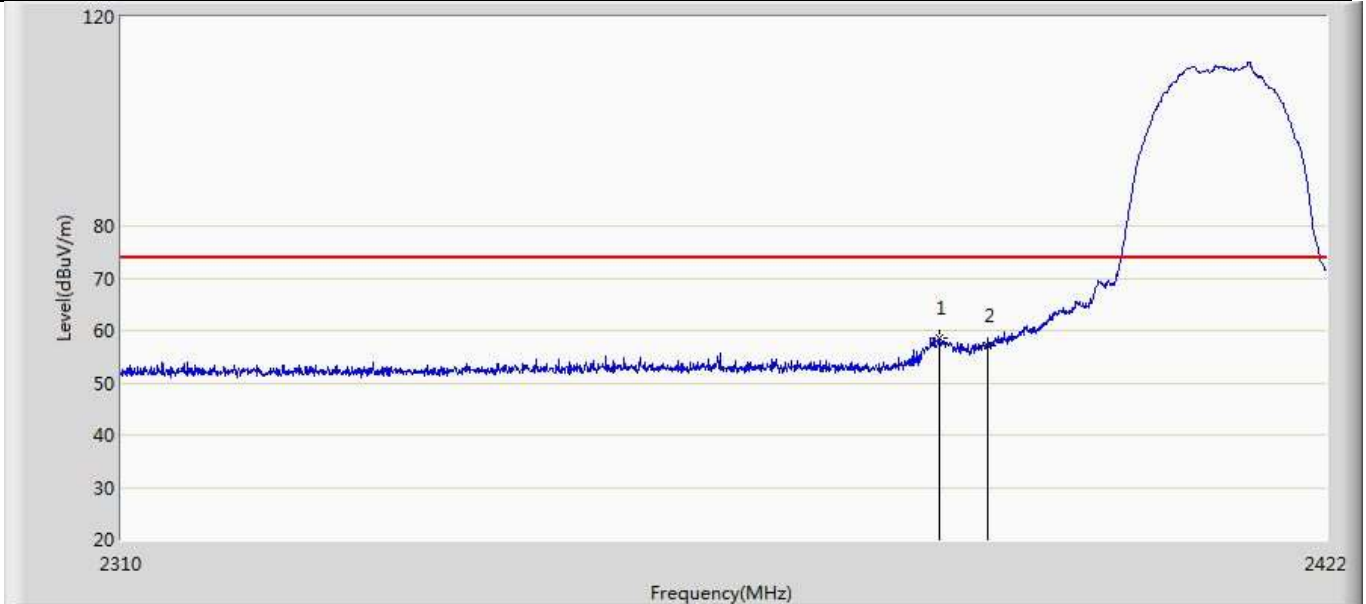

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2385.544	58.469	23.014	-15.531	74.000	35.454	PK
2		2390.000	57.133	21.676	-16.867	74.000	35.458	PK


Profile: 2130900R	Page No.: 1
Engineer: YULIU	
Site: AC5	Time: 2019/11/13 - 23:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0

Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

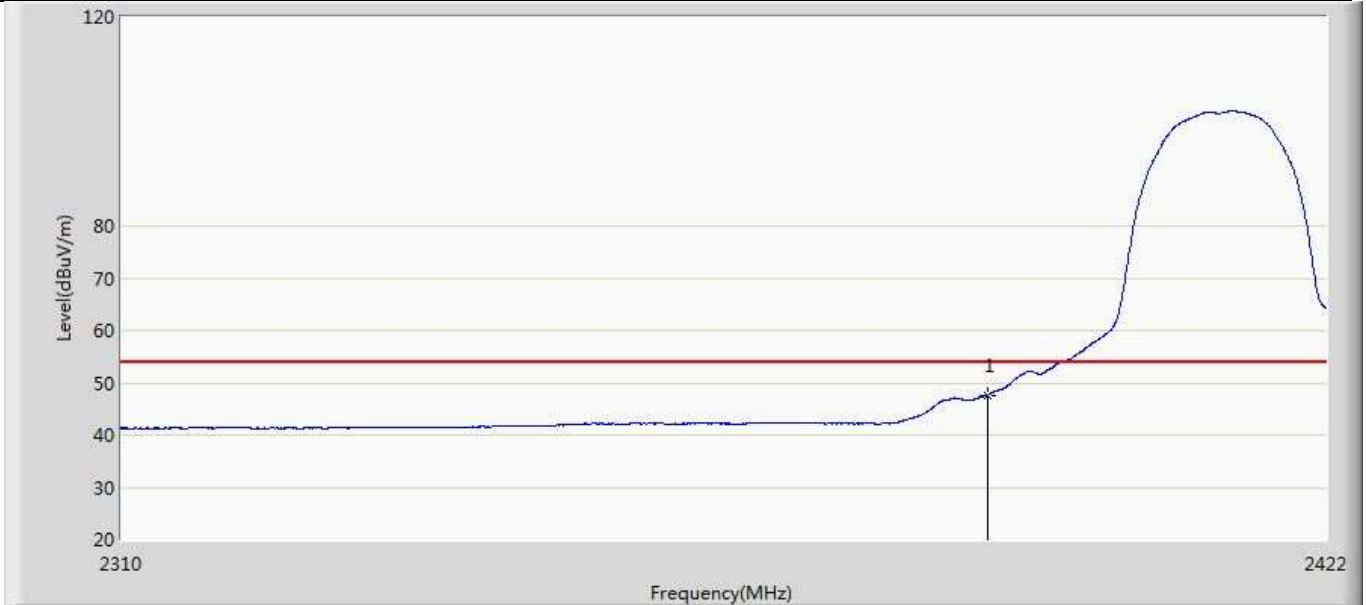


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	47.550	12.093	-6.450	54.000	35.458	AV

Profile: 2130900R	Page No.: 2
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2412MHz by 802.11b	

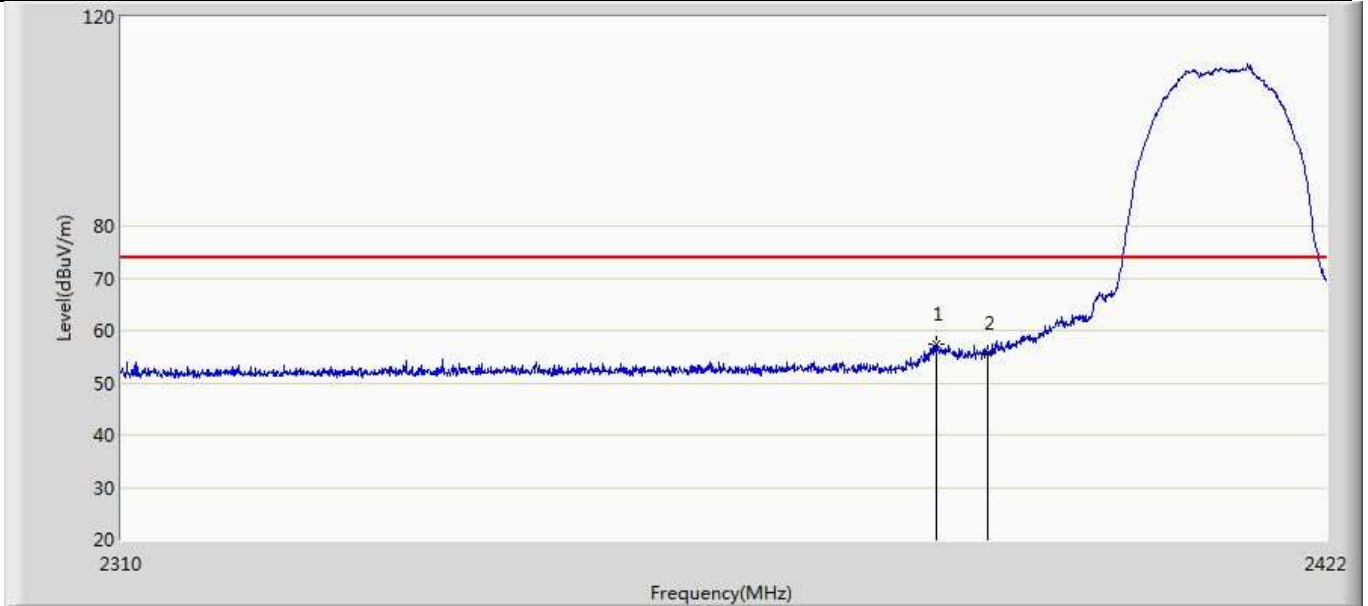


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2385.152	57.300	21.845	-16.700	74.000	35.455	PK
2		2390.000	55.774	20.317	-18.226	74.000	35.458	PK

Profile: 2130900R	Page No.: 5
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

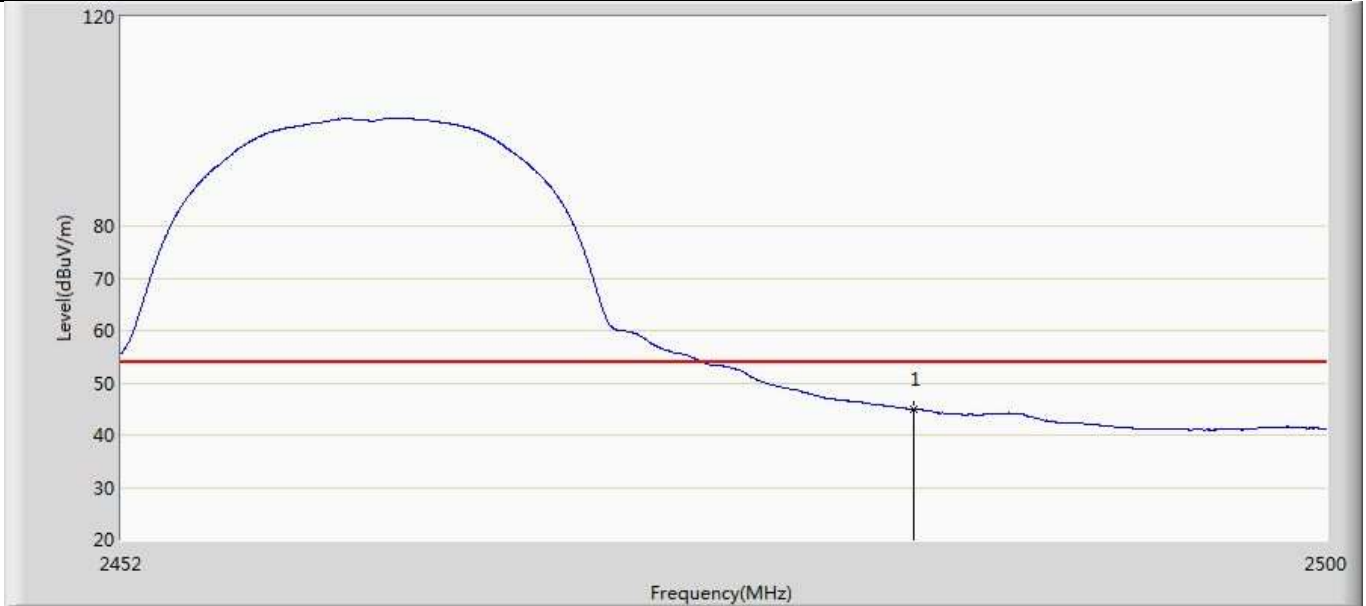


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.945	9.427	-9.055	54.000	35.517	AV

Profile: 2130900R	Page No.: 6
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

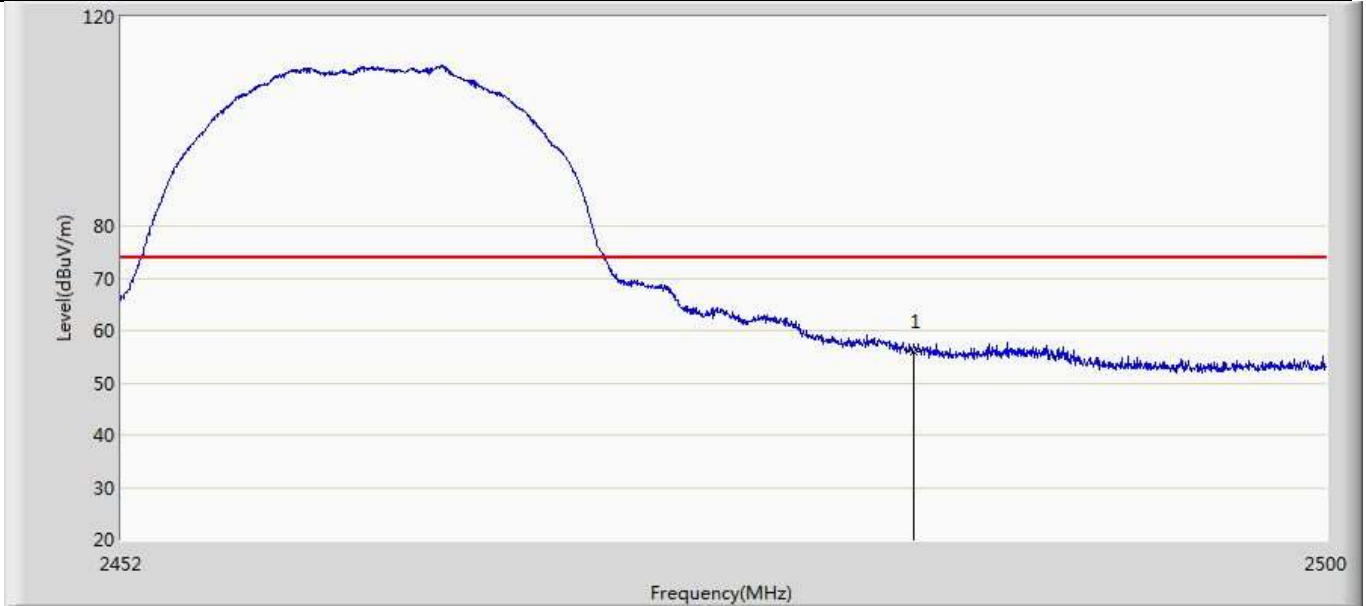


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	55.967	20.449	-18.033	74.000	35.517	PK

Profile: 2130900R	Page No.: 7
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

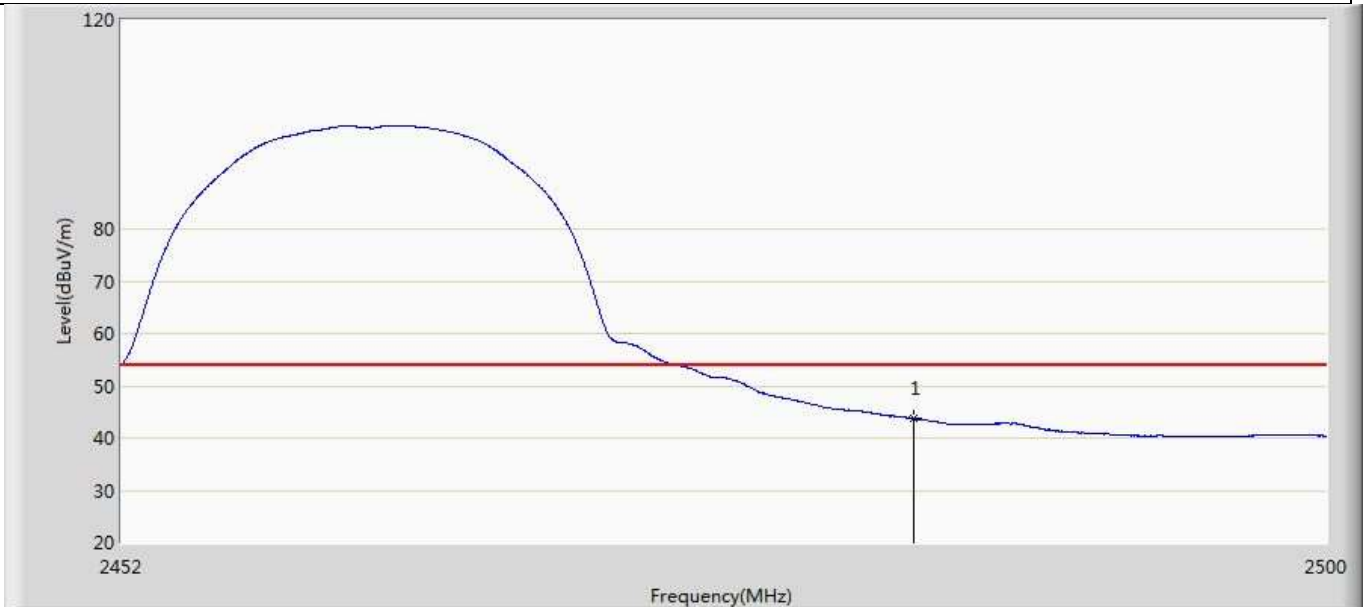


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	43.667	8.149	-10.333	54.000	35.517	AV

Profile: 2130900R	Page No.: 8
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 14:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2462MHz by 802.11b	

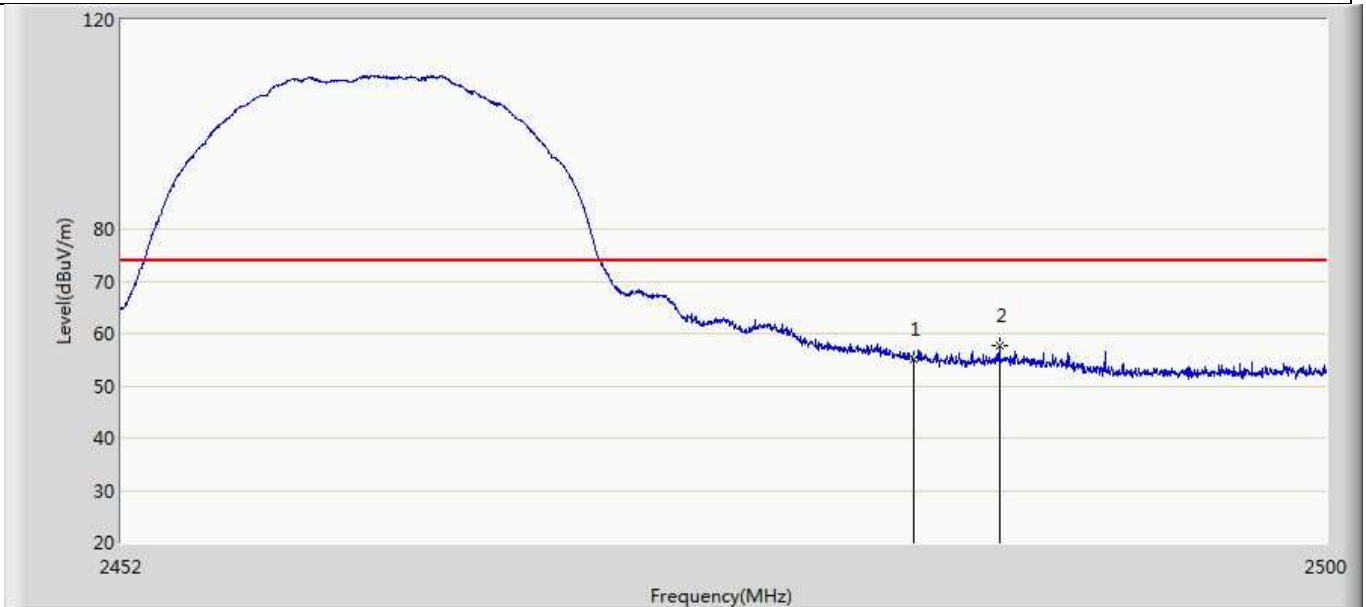


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	55.112	19.594	-18.888	74.000	35.517	PK
2	*	2486.896	57.709	22.172	-16.291	74.000	35.537	PK

Profile: 2130900R	Page No.: 9
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

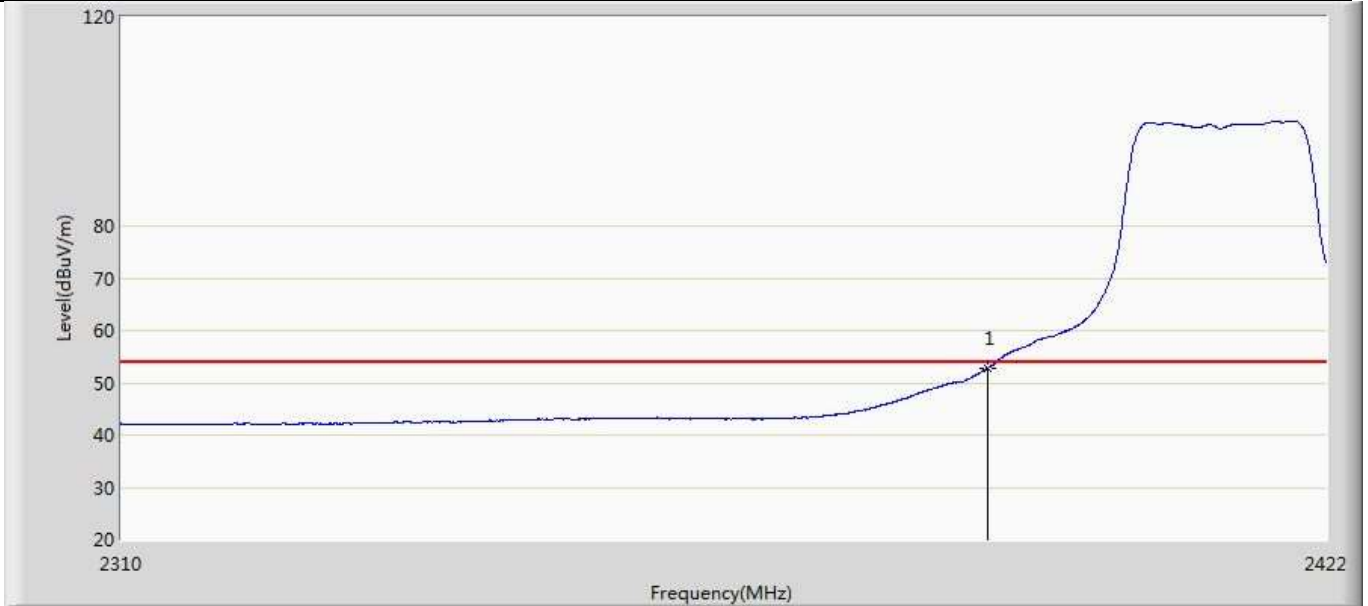


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.754	17.297	-1.246	54.000	35.458	AV

Profile: 2130900R	Page No.: 10
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

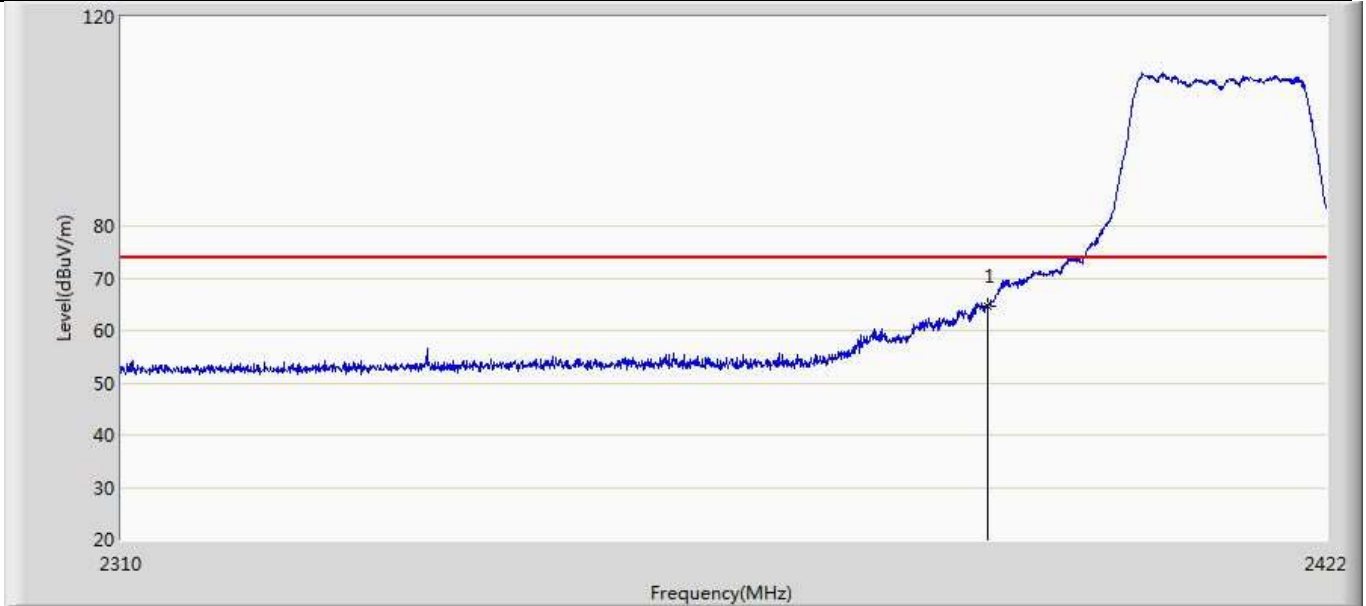


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	64.644	29.187	-9.356	74.000	35.458	PK

Profile: 2130900R	Page No.: 11
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

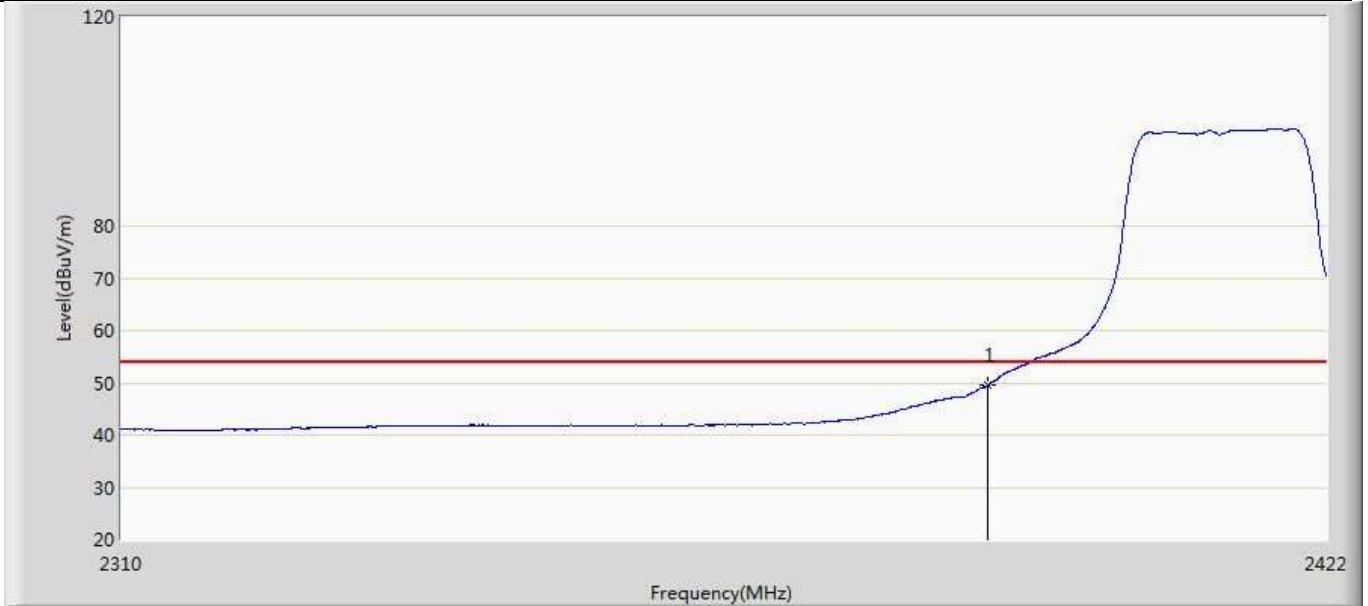


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	49.497	14.040	-4.503	54.000	35.458	AV

Profile: 2130900R	Page No.: 12
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2412MHz by 802.11g	

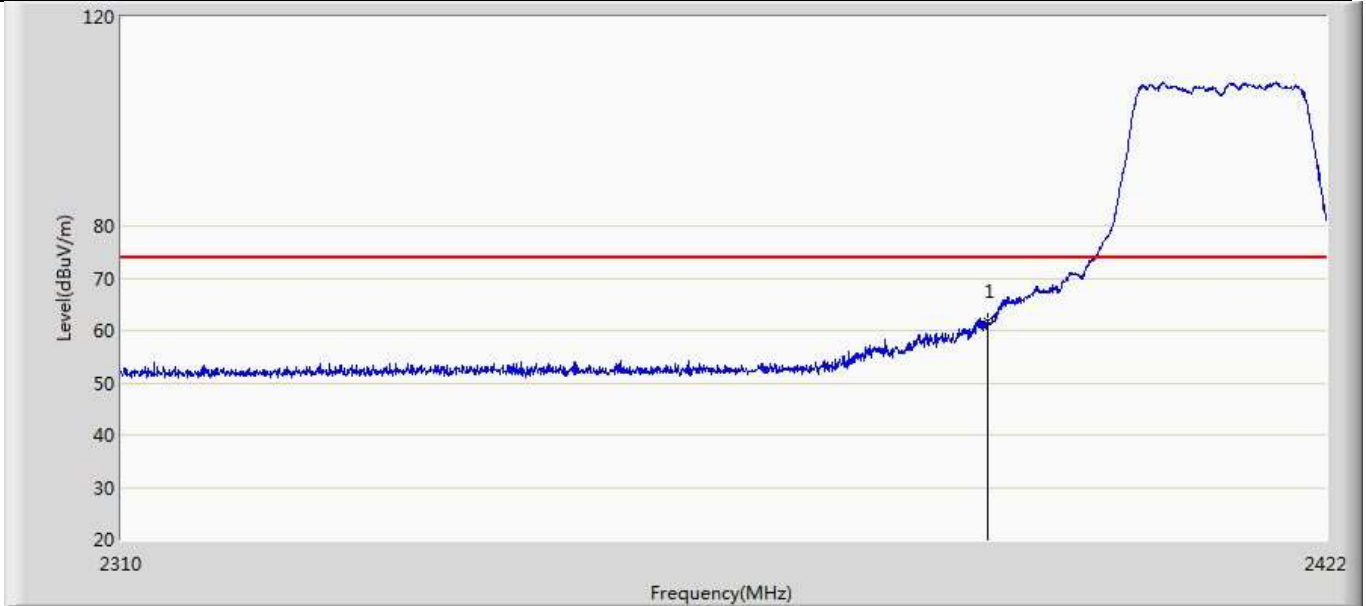


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	61.744	26.287	-12.256	74.000	35.458	PK

Profile: 2130900R	Page No.: 13
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

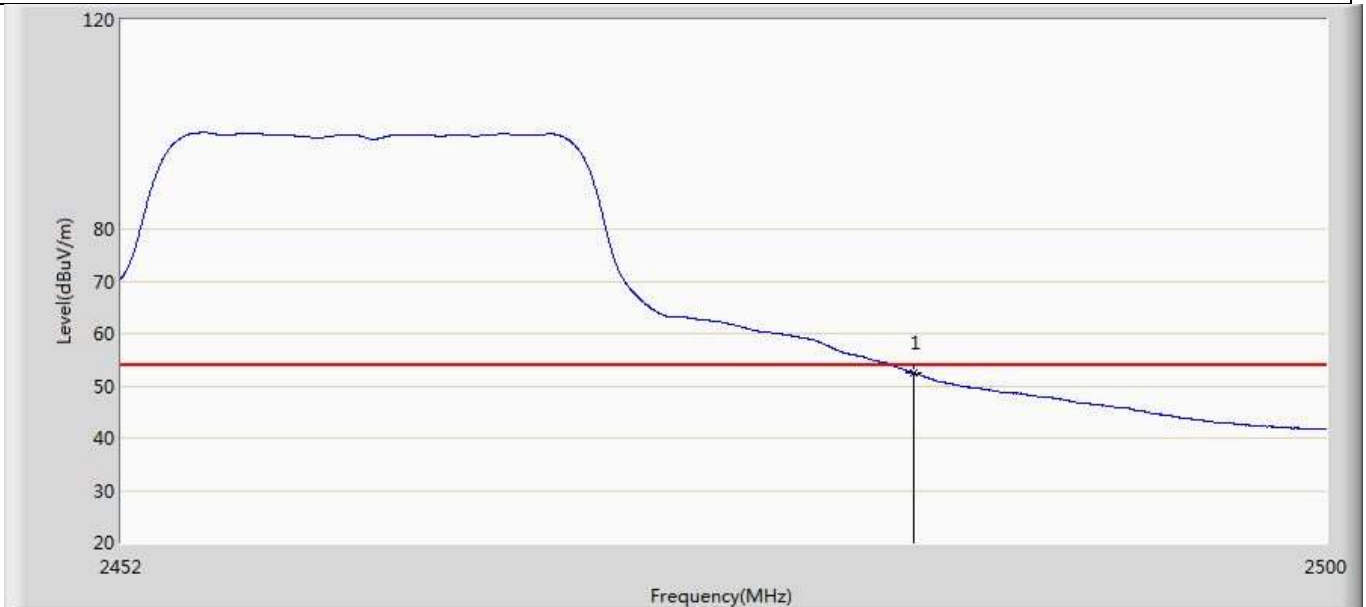


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.392	16.874	-1.608	54.000	35.517	AV

Profile: 2130900R	Page No.: 14
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

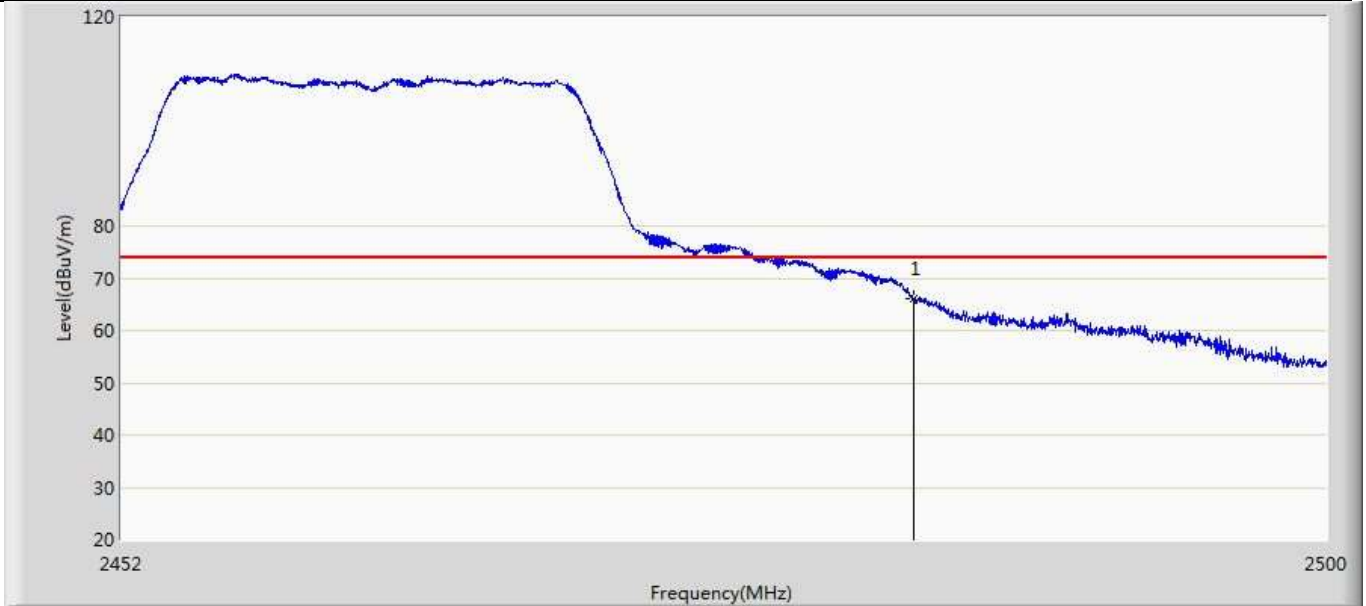


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	65.964	30.446	-8.036	74.000	35.517	PK

Profile: 2130900R	Page No.: 15
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

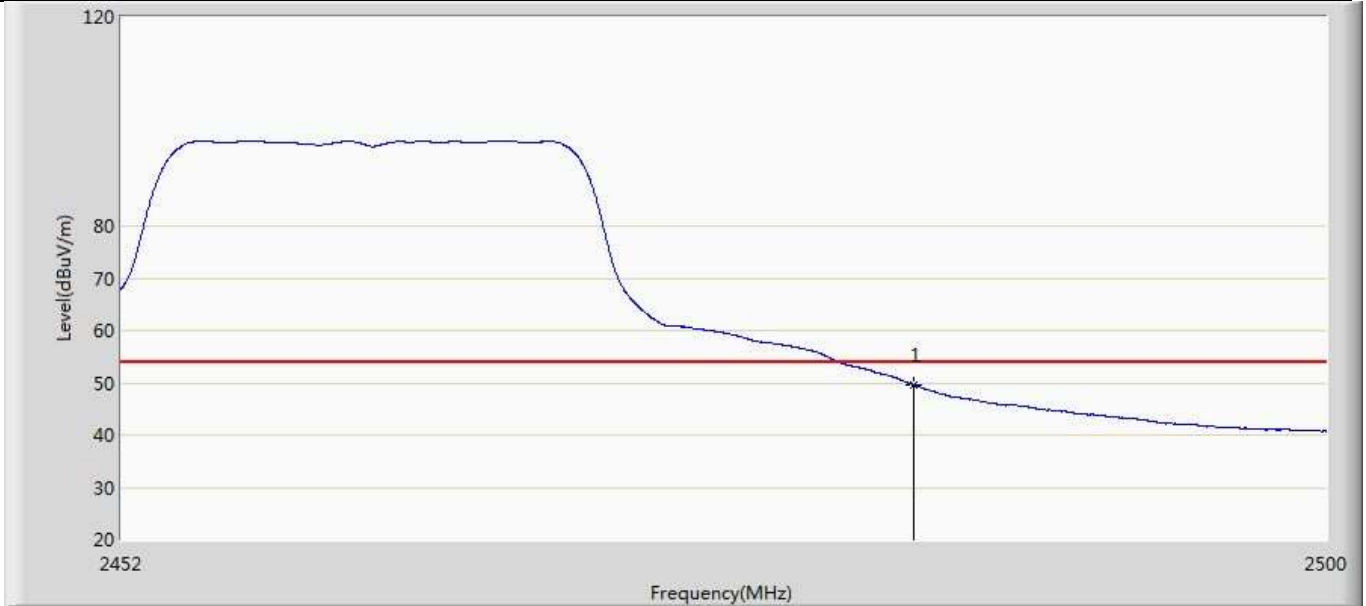


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.604	14.086	-4.396	54.000	35.517	AV

Profile: 2130900R	Page No.: 16
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2462MHz by 802.11g	

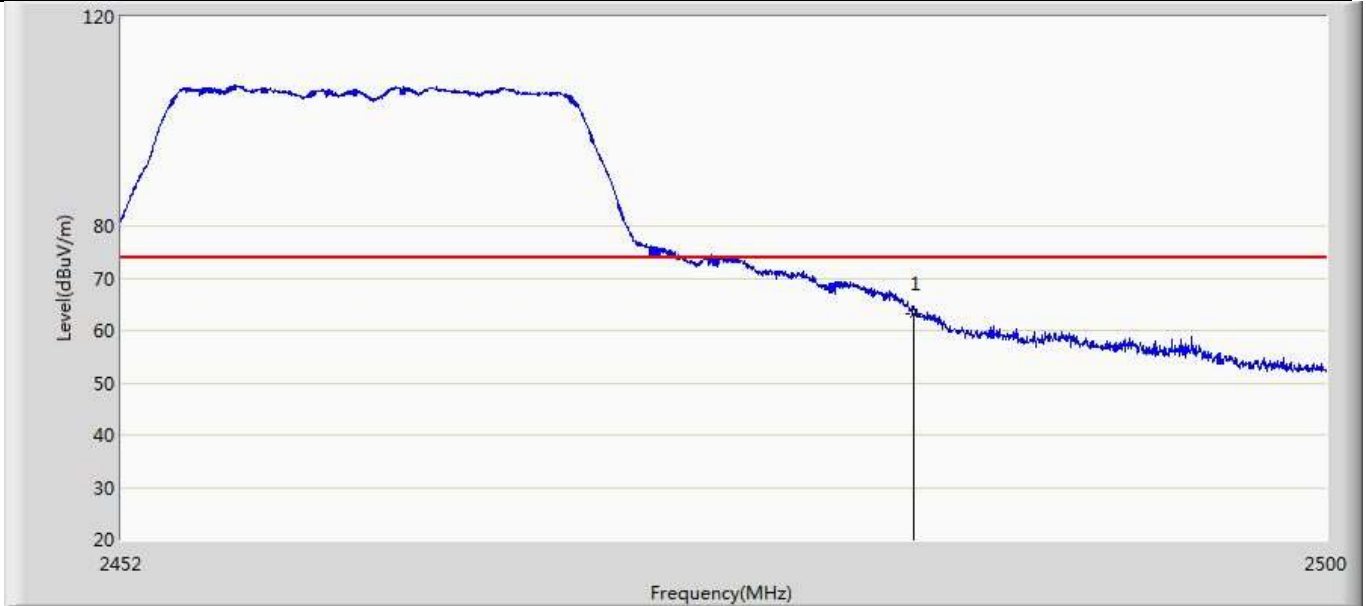


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	63.098	27.580	-10.902	74.000	35.517	PK

Profile: 2130900R	Page No.: 17
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

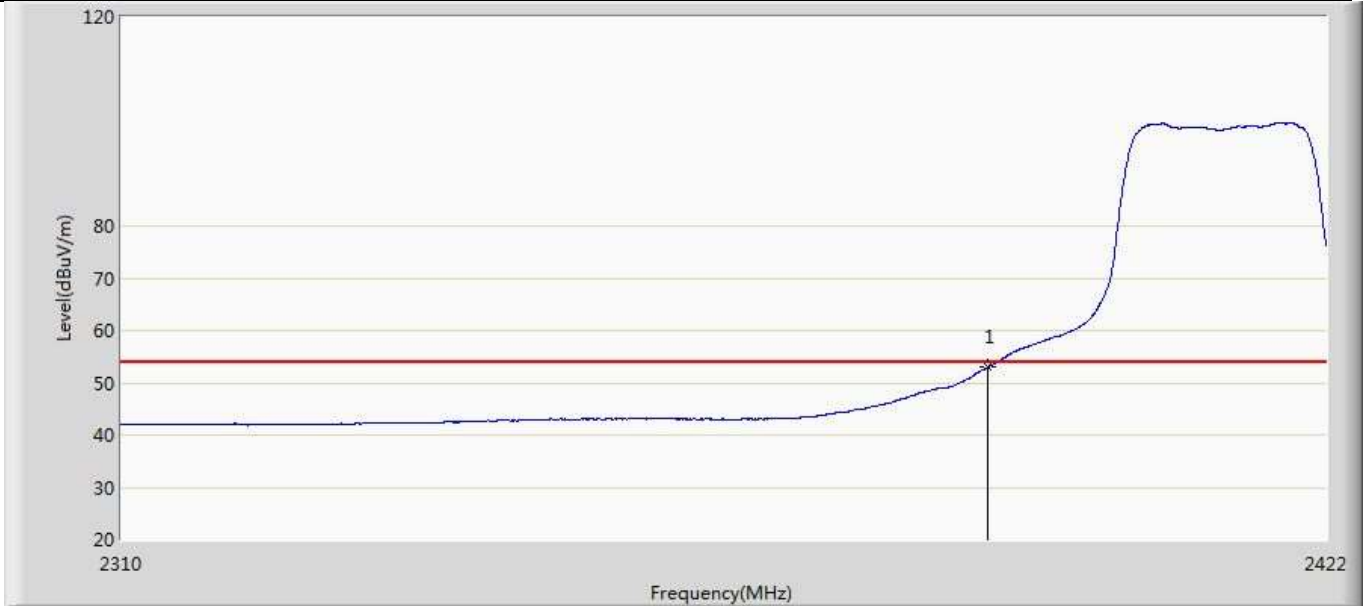


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.901	17.444	-1.099	54.000	35.458	AV

Profile: 2130900R	Page No.: 18
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

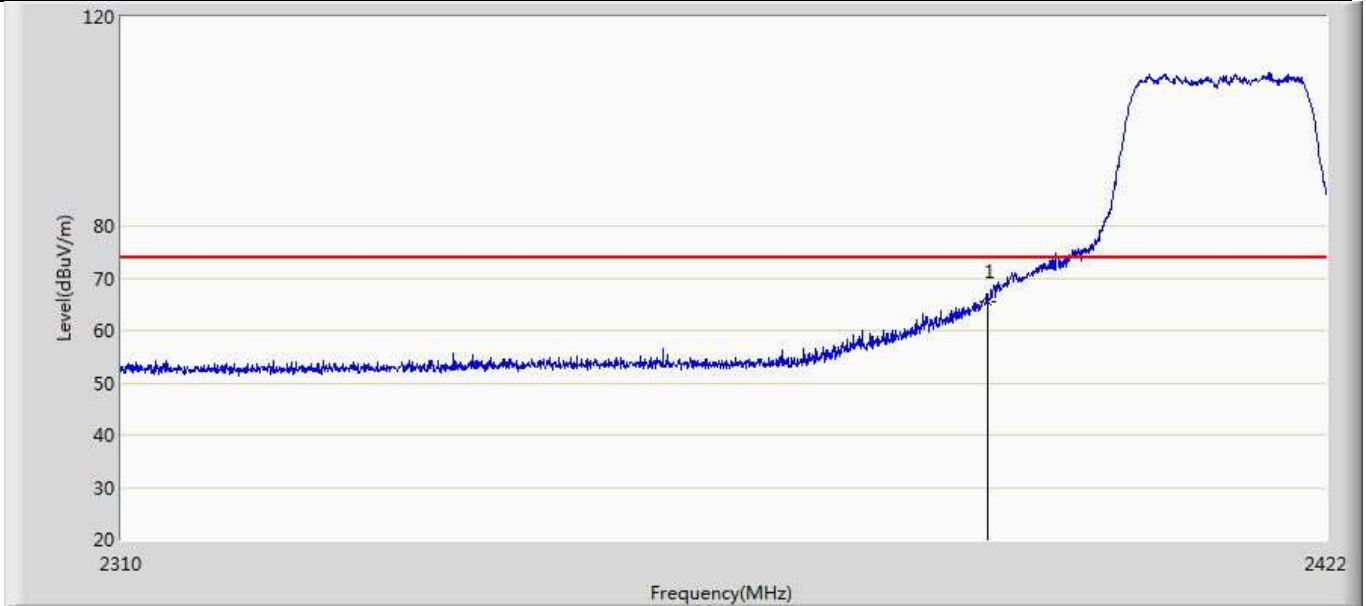


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	65.587	30.130	-8.413	74.000	35.458	PK

Profile: 2130900R	Page No.: 19
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

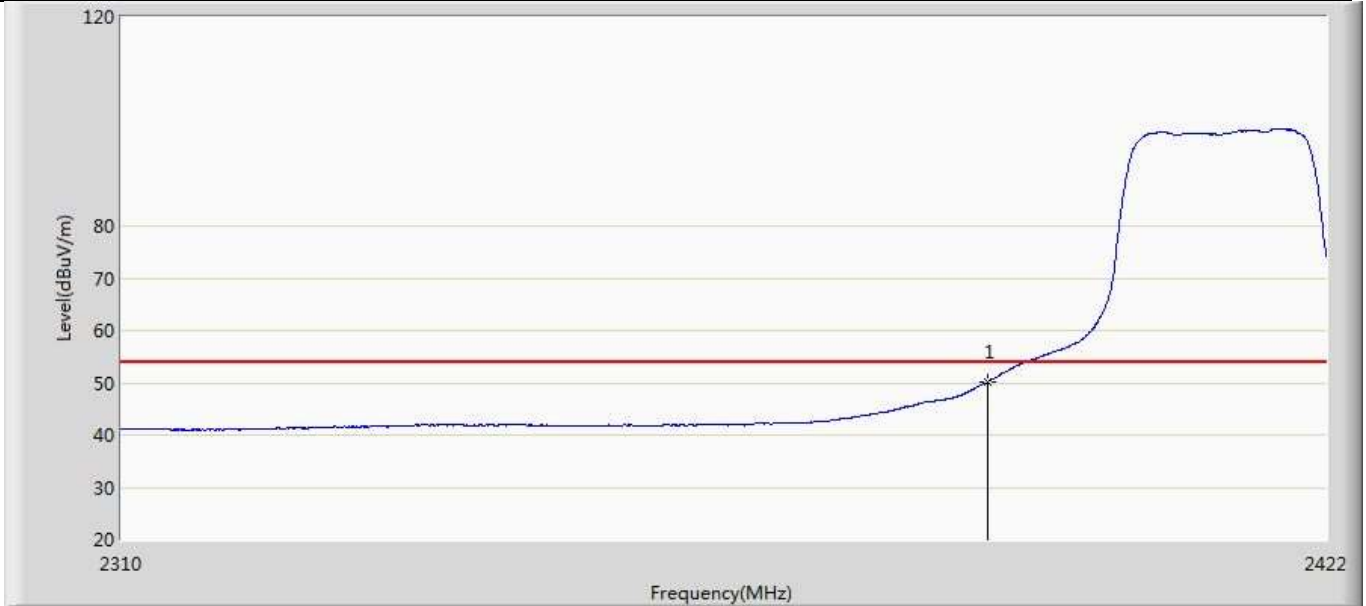


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.110	14.653	-3.890	54.000	35.458	AV

Profile: 2130900R	Page No.: 20
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

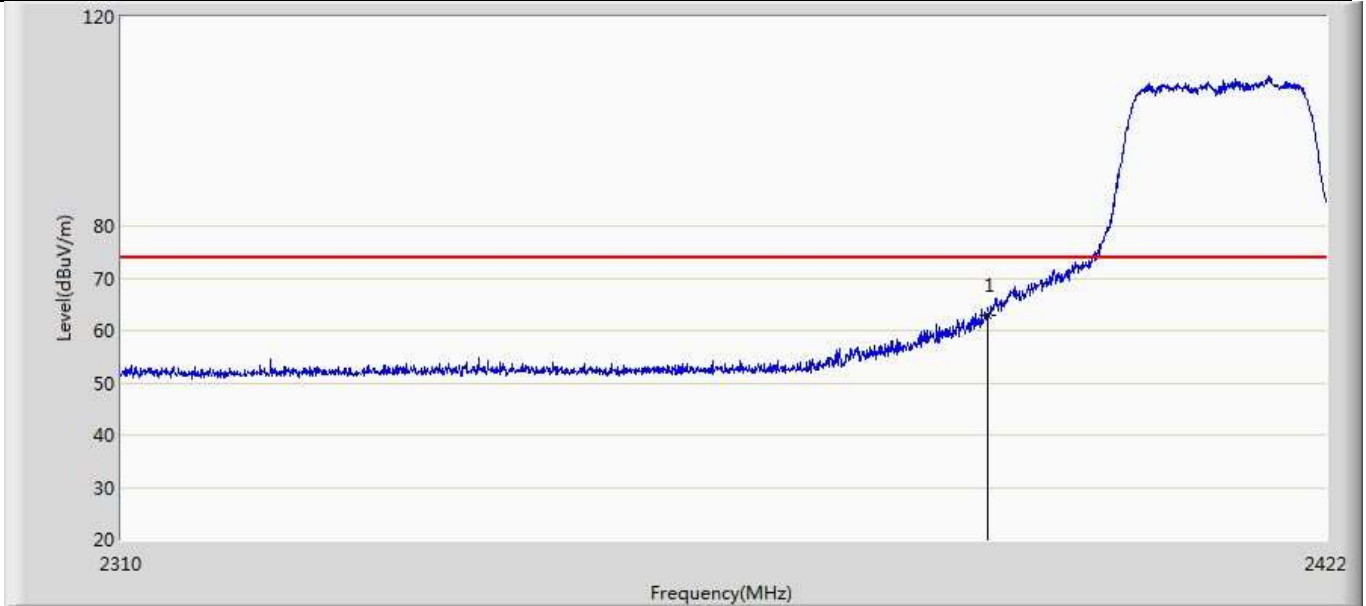


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	62.798	27.341	-11.202	74.000	35.458	PK

Profile: 2130900R	Page No.: 21
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

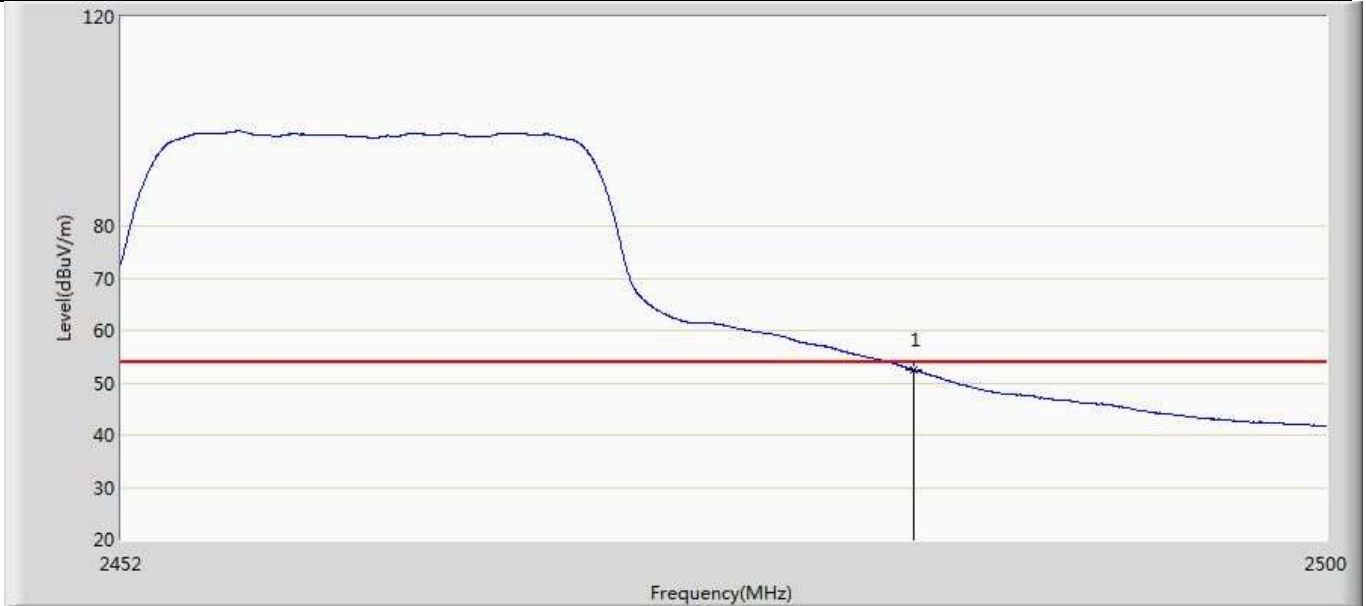


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	52.394	16.876	-1.606	54.000	35.517	AV

Profile: 2130900R	Page No.: 22
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

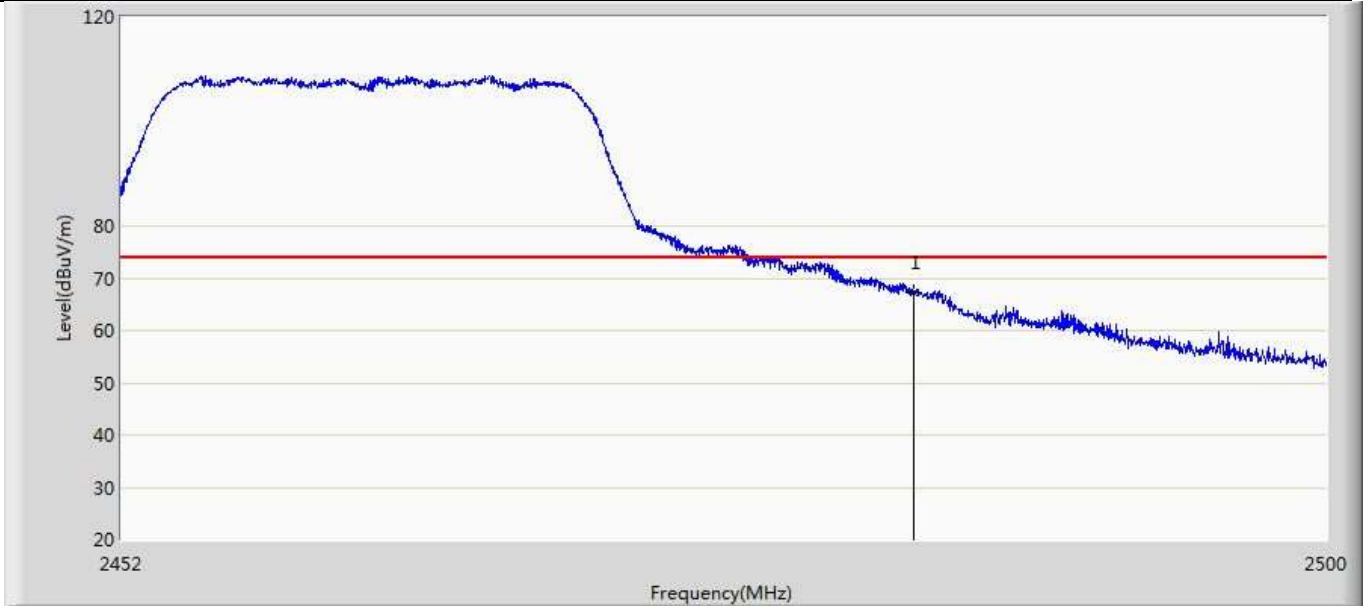


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	67.187	31.669	-6.813	74.000	35.517	PK

Profile: 2130900R	Page No.: 23
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

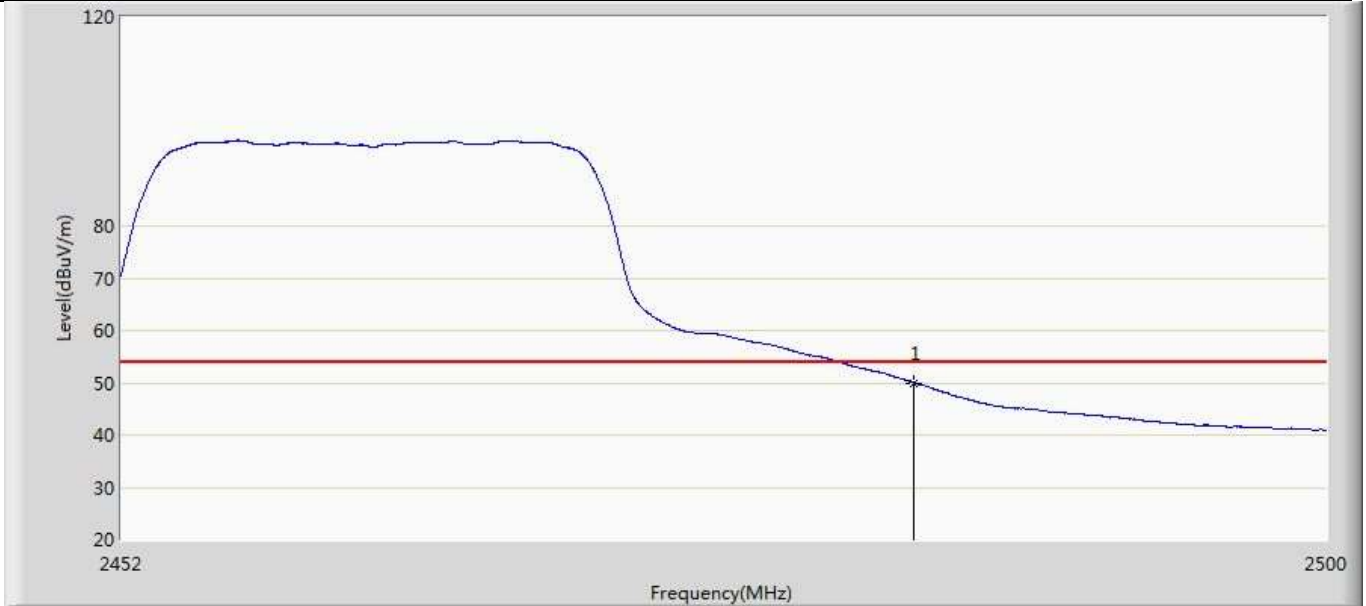


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.000	14.482	-4.000	54.000	35.517	AV

Profile: 2130900R	Page No.: 24
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

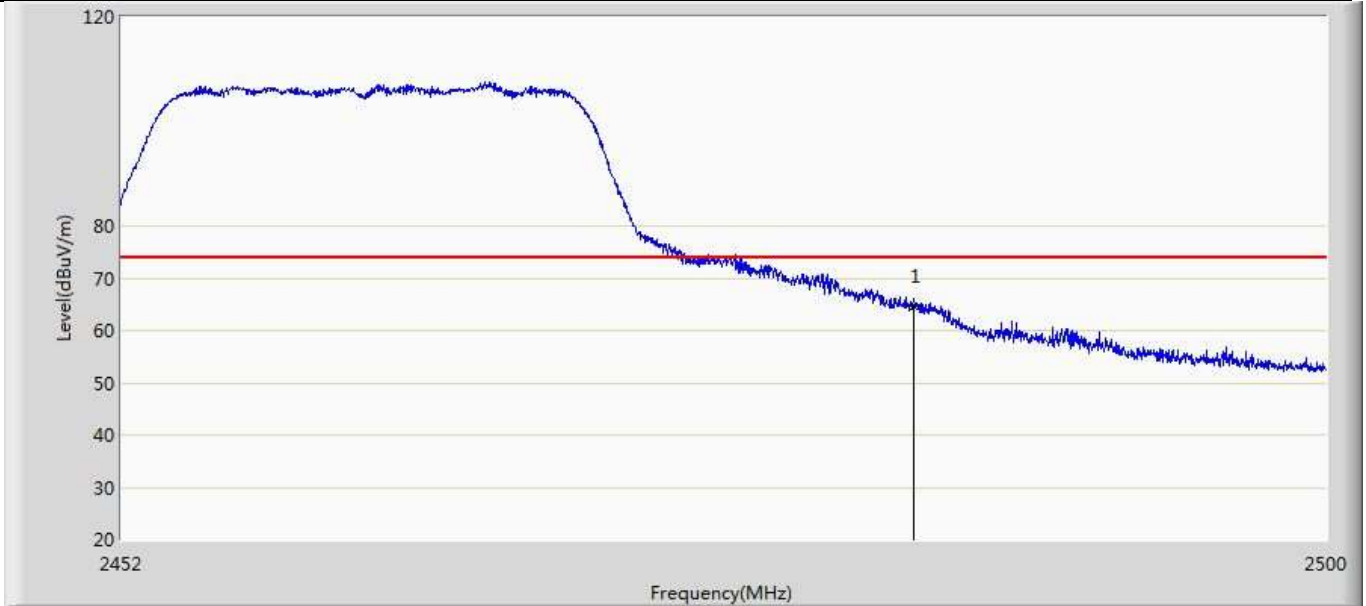


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	64.779	29.261	-9.221	74.000	35.517	PK

Profile: 2130900R	Page No.: 25
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n(40MHz)	

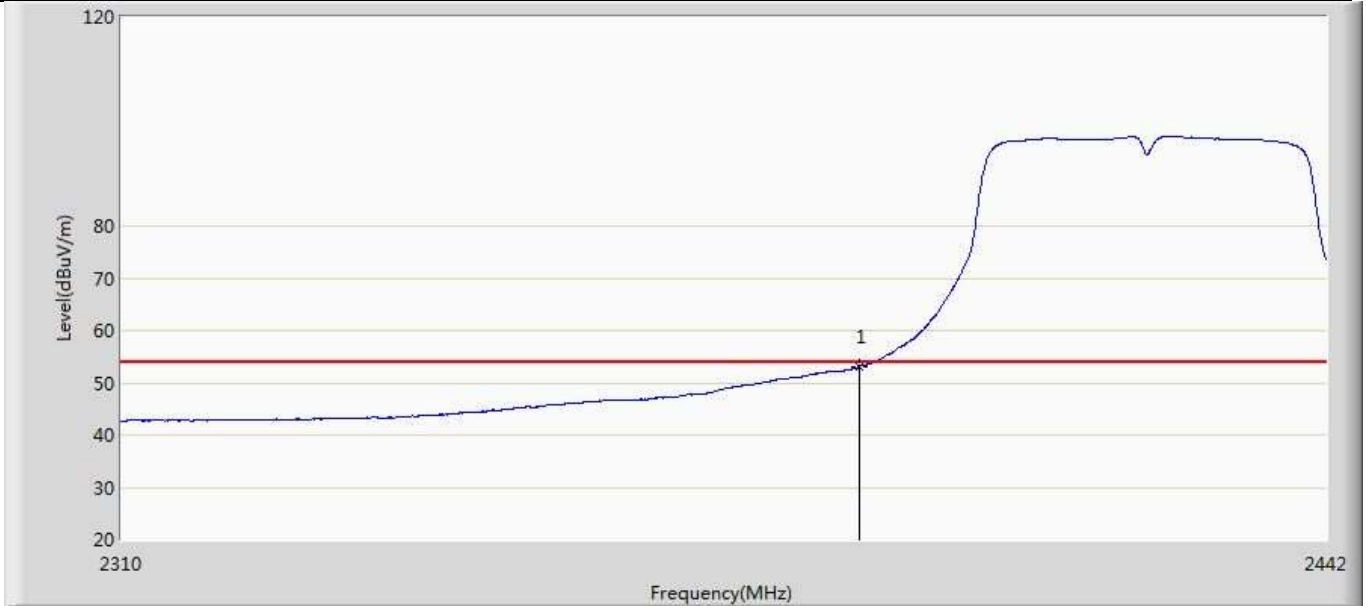


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.139	17.682	-0.861	54.000	35.458	AV

Profile: 2130900R	Page No.: 26
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n(40MHz)	

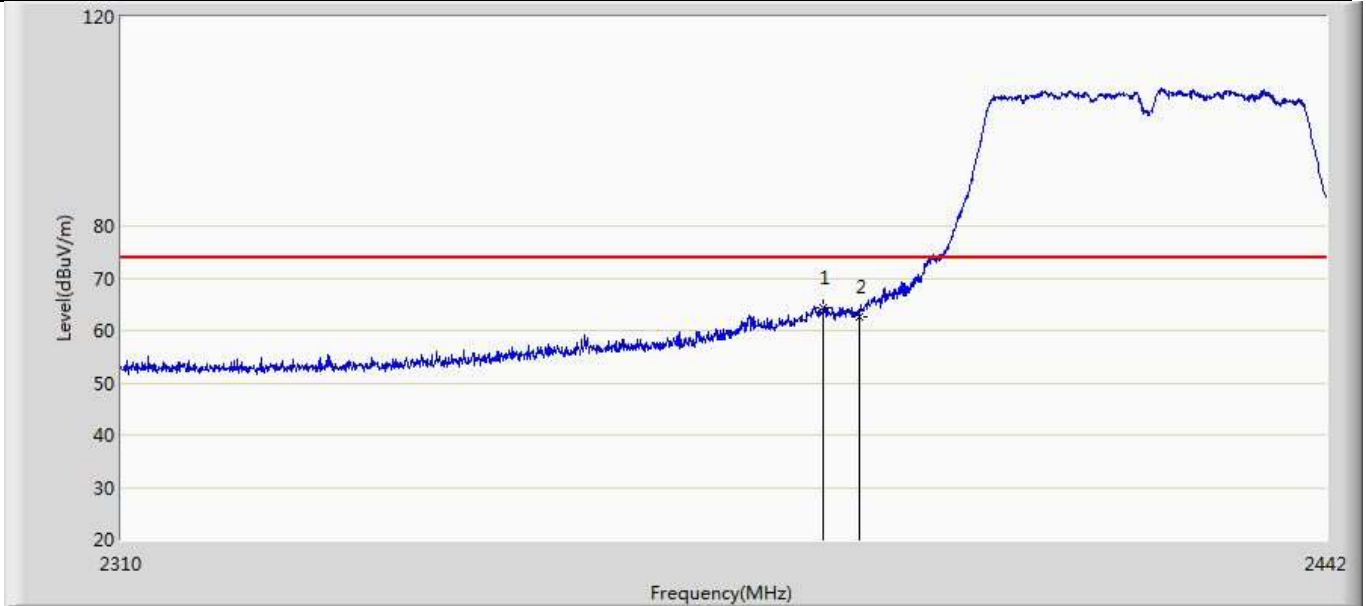


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.098	64.417	28.962	-9.583	74.000	35.455	PK
2		2390.000	62.737	27.280	-11.263	74.000	35.458	PK

Profile: 2130900R	Page No.: 27
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n(40MHz)	

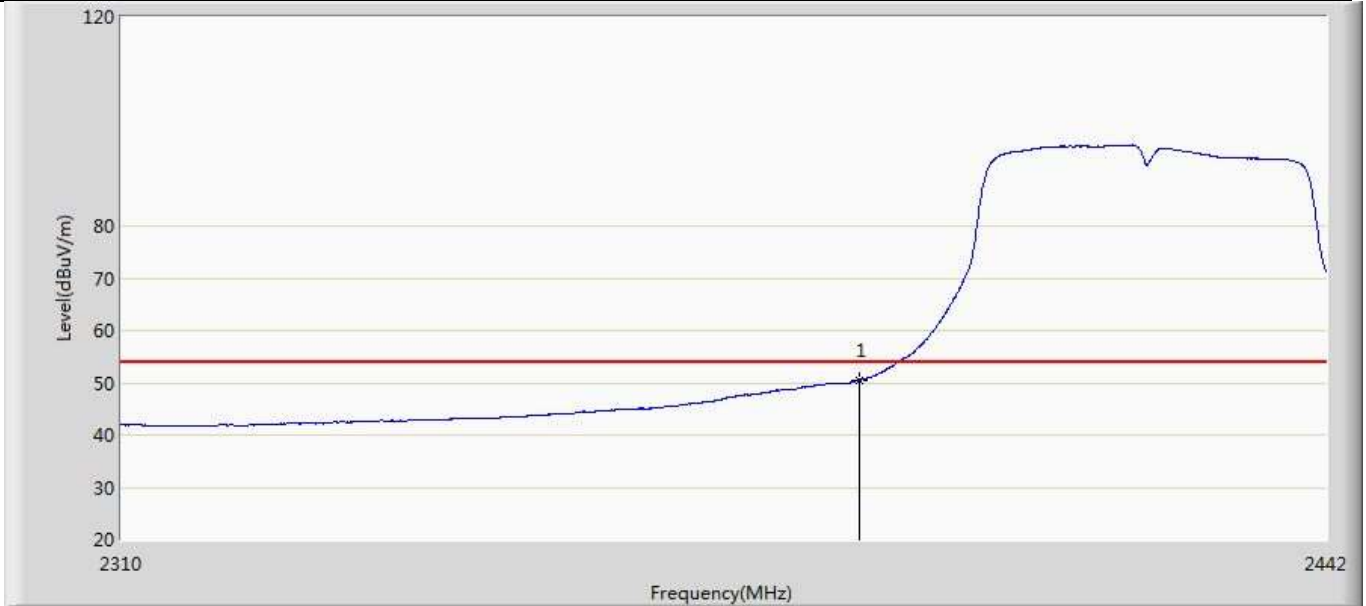


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.571	15.114	-3.429	54.000	35.458	AV

Profile: 2130900R	Page No.: 28
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2422MHz by 802.11n(40MHz)	

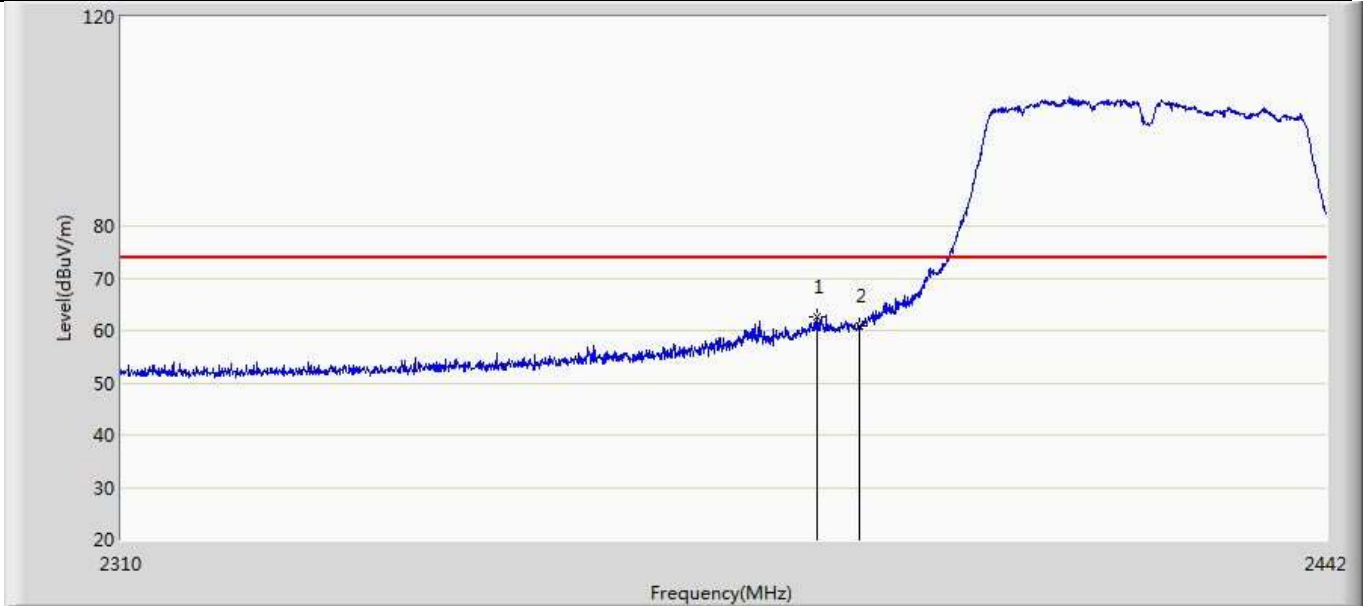


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2385.372	62.747	27.292	-11.253	74.000	35.455	PK
2		2390.000	60.778	25.321	-13.222	74.000	35.458	PK

Profile: 2130900R	Page No.: 29
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n(40MHz)	

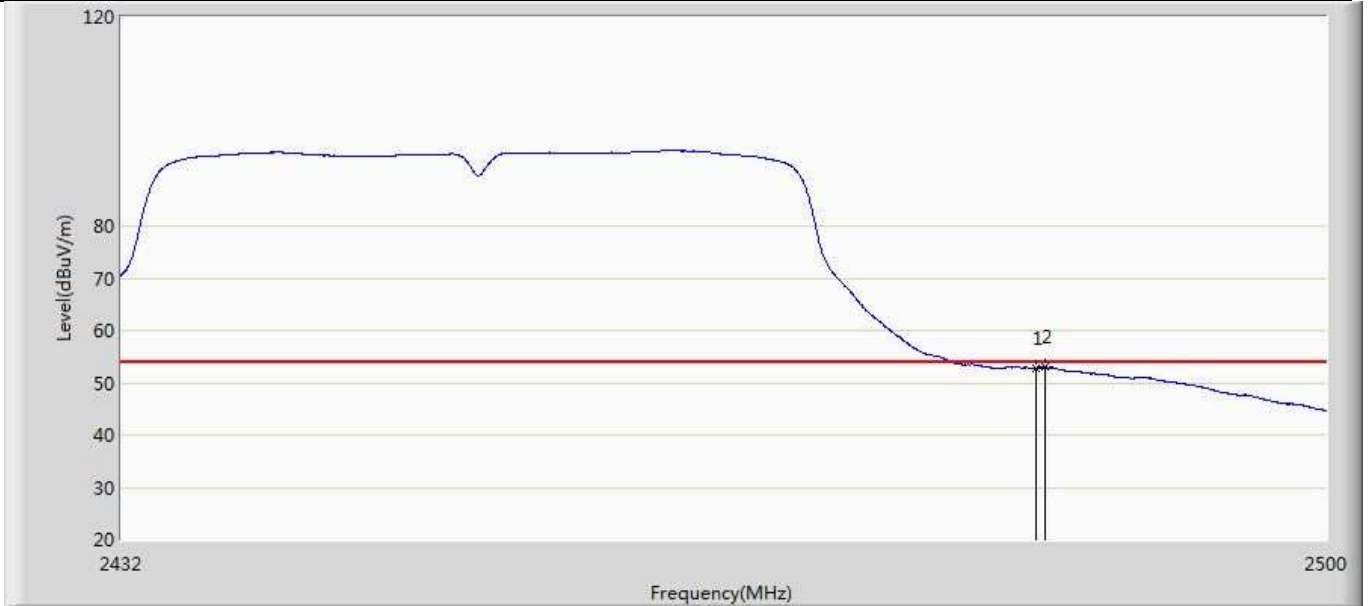


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	52.863	17.345	-1.137	54.000	35.517	AV
2	*	2483.952	52.975	17.455	-1.025	54.000	35.520	AV

Profile: 2130900R	Page No.: 30
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n(40MHz)	

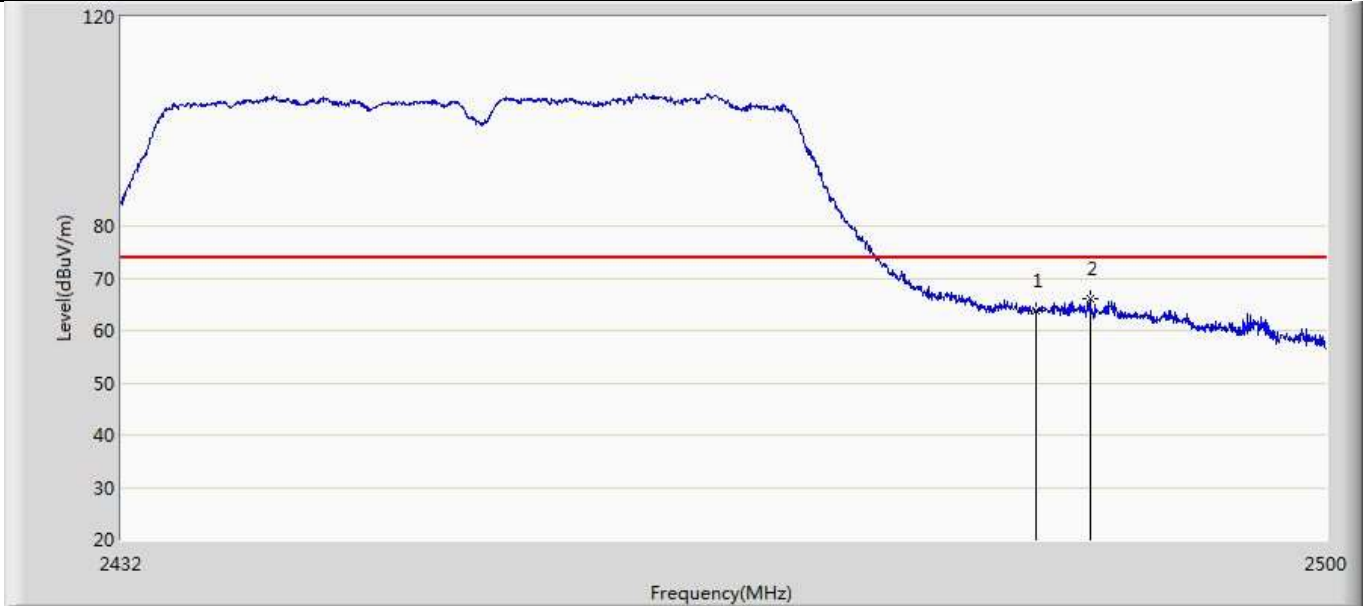


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	63.703	28.185	-10.297	74.000	35.517	PK
2	*	2486.536	66.004	30.469	-7.996	74.000	35.535	PK

Profile: 2130900R	Page No.: 31
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 15:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n(40MHz)	

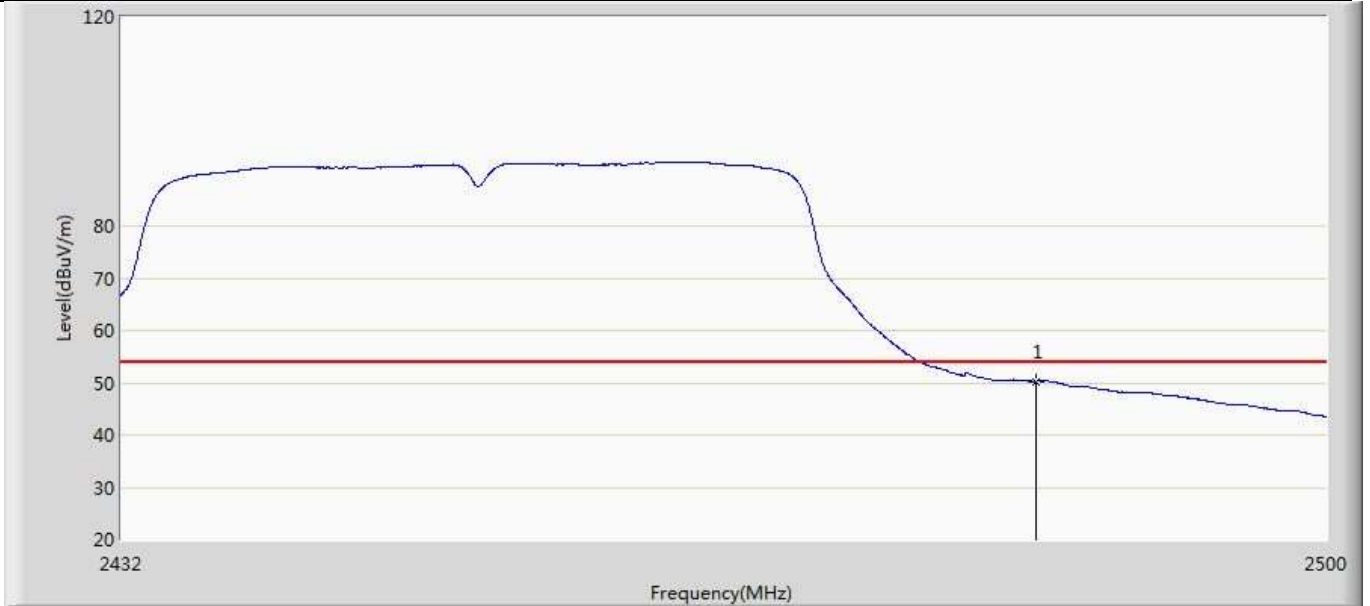

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.282	14.764	-3.718	54.000	35.517	AV


Profile: 2130900R	Page No.: 32
Engineer: YULIU	
Site: AC5	Time: 2021/04/07 - 16:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Connected Sleep & Wake-up Light	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2452MHz by 802.11n(40MHz)	

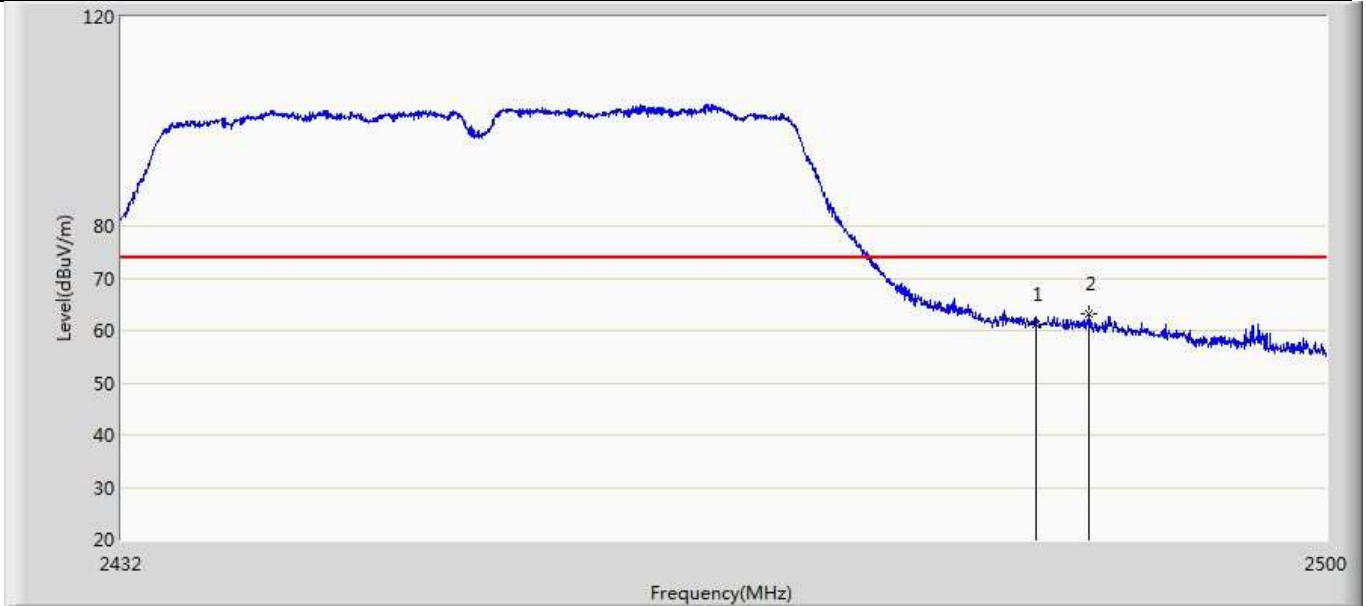

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	61.258	25.740	-12.742	74.000	35.517	PK
2	*	2486.502	63.241	27.706	-10.759	74.000	35.535	PK

4.5 DTS Bandwidth	VERDICT: PASS
--------------------------	----------------------

4.5.1 Limit	
Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz	
Standard	ANSI C63.10 Paragraph 6.7
The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. The occupied bandwidth should be within the required frequency range.	

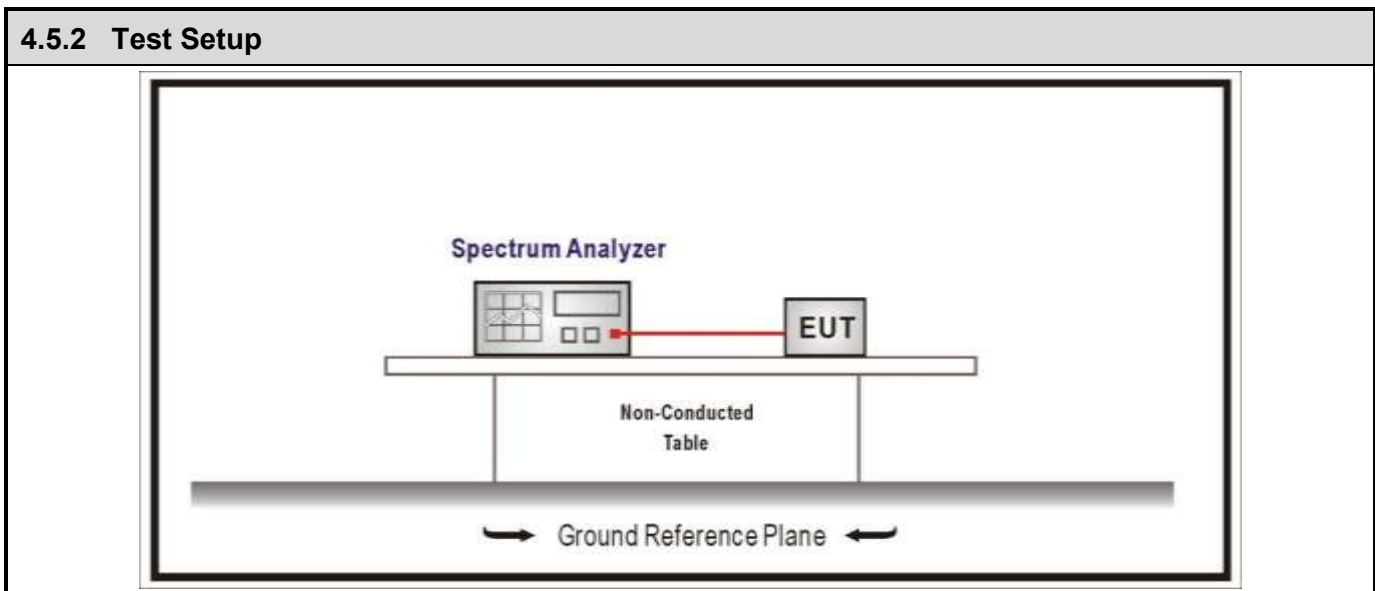

4.5.3 Test Procedure			
	Reference Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.8	DTS bandwidth
<input type="checkbox"/>	ANSI C63.10	11.8.1	Option 1
<input checked="" type="checkbox"/>	ANSI C63.10	11.8.2	Option 2
<input checked="" type="checkbox"/>	ANSI C63.10	6.9	Occupied bandwidth
<input type="checkbox"/>	ANSI C63.10	6.9.2	relative measurement procedure
<input checked="" type="checkbox"/>	ANSI C63.10	6.9.3	power bandwidth (99%) measurement procedure


4.5.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	1	2412	10.11	≥500	Pass
	6	2437	10.11	≥500	Pass
	11	2462	10.10	≥500	Pass
2	1	2412	16.44	≥500	Pass
	6	2437	16.43	≥500	Pass
	11	2462	16.42	≥500	Pass
3	1	2412	17.34	≥500	Pass
	6	2437	17.12	≥500	Pass
	11	2462	17.35	≥500	Pass
4	3	2422	36.44	≥500	Pass
	6	2437	36.44	≥500	Pass
	9	2452	35.64	≥500	Pass

Note: The worst case of Occupied Bandwidth as below:

6dB Occupied Bandwidth

Mode 1 CH11 (2462MHz)

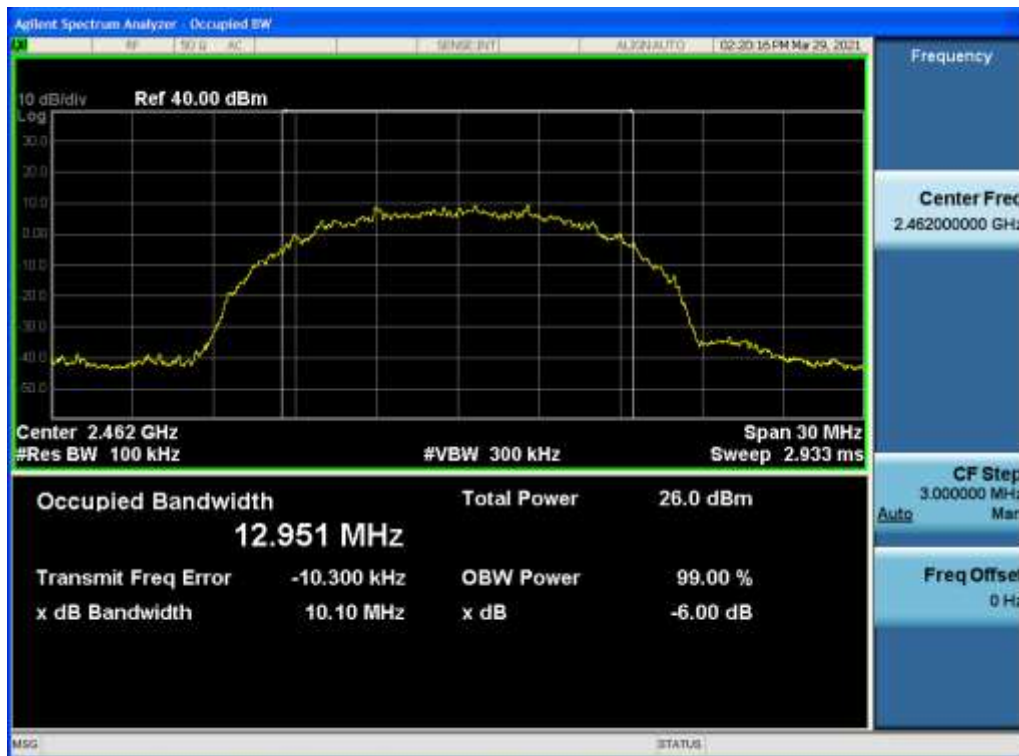


Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
1	1	2412	13.054	Within frequency range	Pass
	6	2437	13.038	Within frequency range	Pass
	11	2462	13.016	Within frequency range	Pass
2	1	2412	16.489	Within frequency range	Pass
	6	2437	16.472	Within frequency range	Pass
	11	2462	16.476	Within frequency range	Pass
3	1	2412	17.322	Within frequency range	Pass
	6	2437	17.313	Within frequency range	Pass
	11	2462	17.313	Within frequency range	Pass
4	3	2422	36.378	Within frequency range	Pass
	6	2437	36.377	Within frequency range	Pass
	9	2452	36.397	Within frequency range	Pass

Note: The worst case of Occupied Bandwidth as below:

99% Occupied Bandwidth

Mode 3 CH01 (2412MHz)

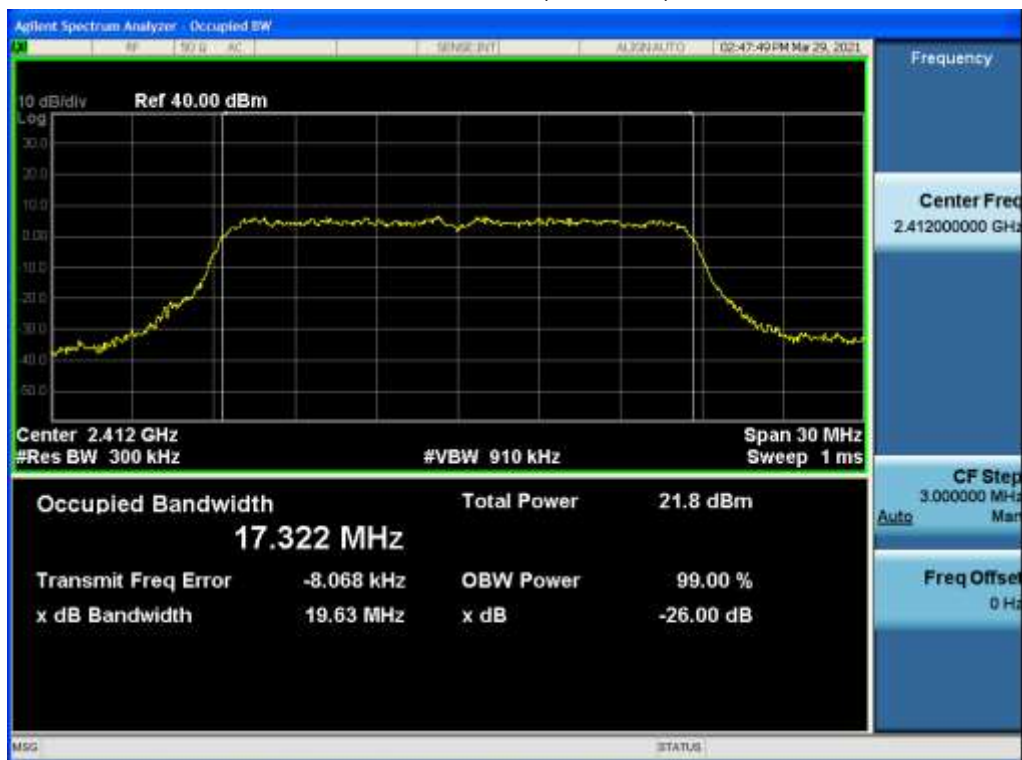


4.6 Fundamental emission output power	VERDICT: PASS
--	----------------------

4.6.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)	
<input checked="" type="checkbox"/>	GTX <6dBi	Pout≤30dBm
<input type="checkbox"/>	GTX >6dBi	
<input type="checkbox"/>	Non-Fix point-point	Pout≤30-(GTX -6)
<input type="checkbox"/>	Fix point-point	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Point-to-multipoint	Pout≤30-(GTX-6)
<input type="checkbox"/>	Overlap Beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	single directional beam	Pout≤30-[(GTX-6)]/3+8dB

Note 1 : GTX directional gain of transmitting antennas.
 Note 2 : Pout is maximum peak conducted output power .

4.6.2 Test Setup

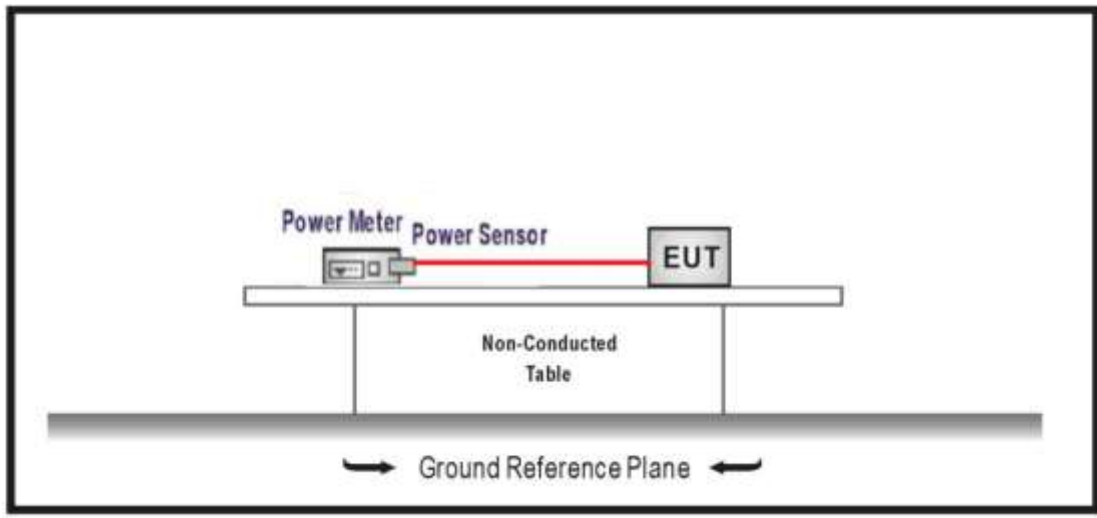


4.6.3 Test Procedure					
	References Rule		Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1	Maximum peak conducted output power	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW \geq DTS bandwidth	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method	
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	<input type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle \geq 98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle \geq 98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle \leq 98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle \leq 98%)	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A	
	<input type="checkbox"/>	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM	
<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G		

4.6.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	1	2412	25.48	28.78	≤30	≤36	Pass
	6	2437	25.12	28.42	≤30	≤36	Pass
	11	2462	24.87	28.17	≤30	≤36	Pass
Mode 2	1	2412	23.83	27.13	≤30	≤36	Pass
	6	2437	24.98	28.28	≤30	≤36	Pass
	11	2462	23.68	26.98	≤30	≤36	Pass
Mode 3	1	2412	23.89	27.19	≤30	≤36	Pass
	6	2437	25.08	28.38	≤30	≤36	Pass
	11	2462	23.65	26.95	≤30	≤36	Pass
Mode 4	3	2422	23.16	26.46	≤30	≤36	Pass
	6	2437	25.13	28.43	≤30	≤36	Pass
	9	2452	22.23	25.53	≤30	≤36	Pass

4.7 Power Density	VERDICT: PASS
--------------------------	----------------------

4.7.1 Limit:	
Standard	FCC Part 15 Subpart C Paragraph 15.247 (e)
Power Spectral Density ≤ 8dBm/3kHz	

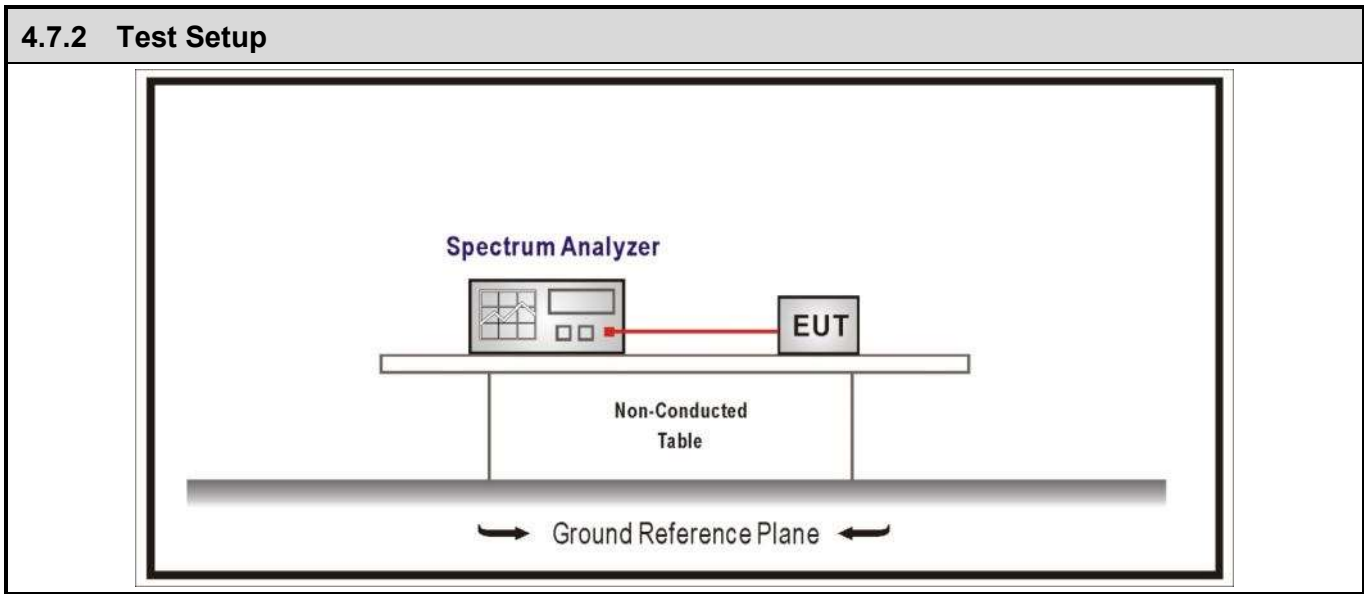

4.7.3 Test Procedure


	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
<input checked="" type="checkbox"/>	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
<input type="checkbox"/>	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle ≥ 98%)
<input type="checkbox"/>	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle ≥ 98%)
<input type="checkbox"/>	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle < 98%)
<input type="checkbox"/>	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle < 98%)
<input type="checkbox"/>	ANSI C63.10	11.10.7	Method AVGPSD-3
<input type="checkbox"/>	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	1	2412	-5.976	≤8	Pass
	6	2437	-5.396	≤8	Pass
	11	2462	-5.927	≤8	Pass
2	1	2412	-12.887	≤8	Pass
	6	2437	-12.635	≤8	Pass
	11	2462	-13.177	≤8	Pass
3	1	2412	-12.597	≤8	Pass
	6	2437	-12.545	≤8	Pass
	11	2462	-13.156	≤8	Pass
4	3	2422	-14.997	≤8	Pass
	6	2437	-15.511	≤8	Pass
	9	2452	-15.862	≤8	Pass

Note: The worst case of PSD as below:

Mode 1 / CH06 / 2437MHz

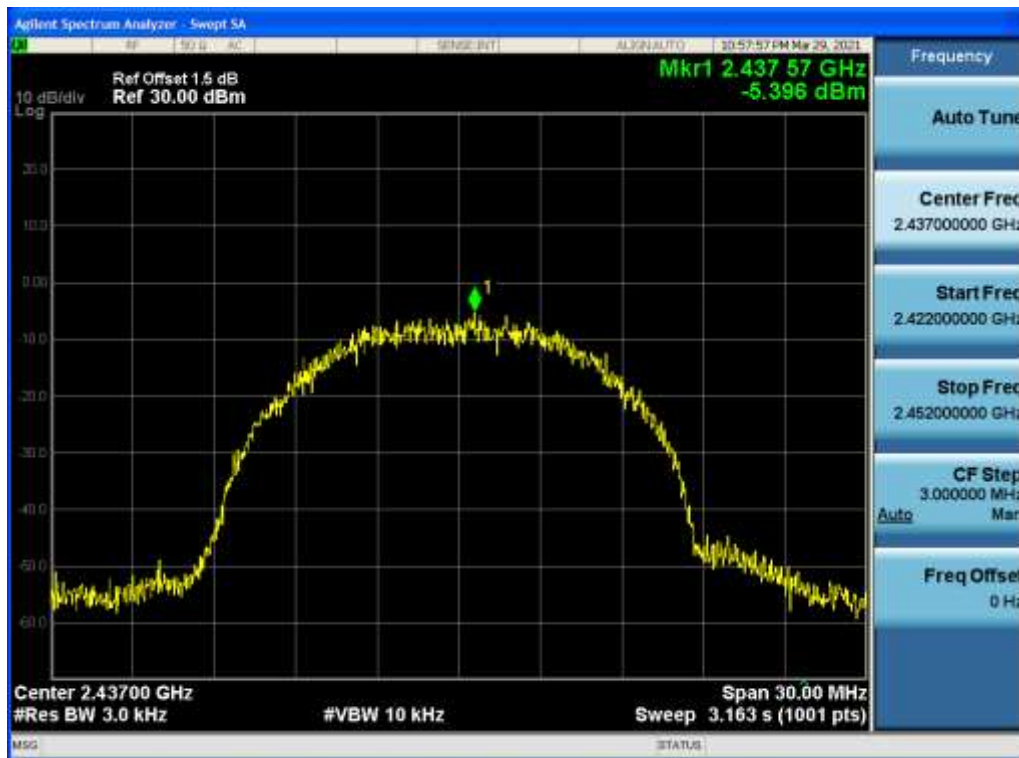

4.8 Antenna Requirement	VERDICT: PASS
--------------------------------	----------------------

4.8.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.203
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>	

4.8.2 Antenna Connector Construction:

<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____