
Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
	Horizontal			Vertical		
Center Frequency	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
Trequency	-1.26	-0.76	-0.58	-5.25	-2.46	-1.86
MAX. Gain	-0.58dB					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					

Antenna manufacturer:Shenzhen Tianyiyuan Elec&Technology Co.,Ltd Address:6th Floor, Building A, Xinlong Science and Technology Park, No. 50 Fengtang Avenue, Fuhai Street, Bao'an District, Shenzhen


Antenna Photo & Length (mm)

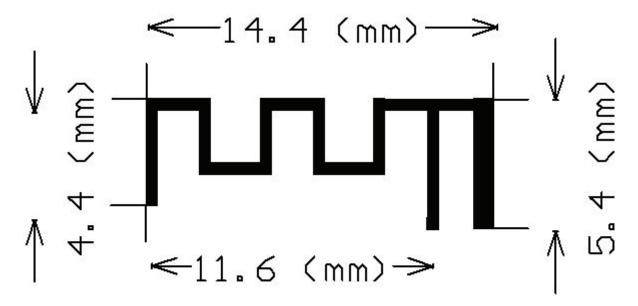

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

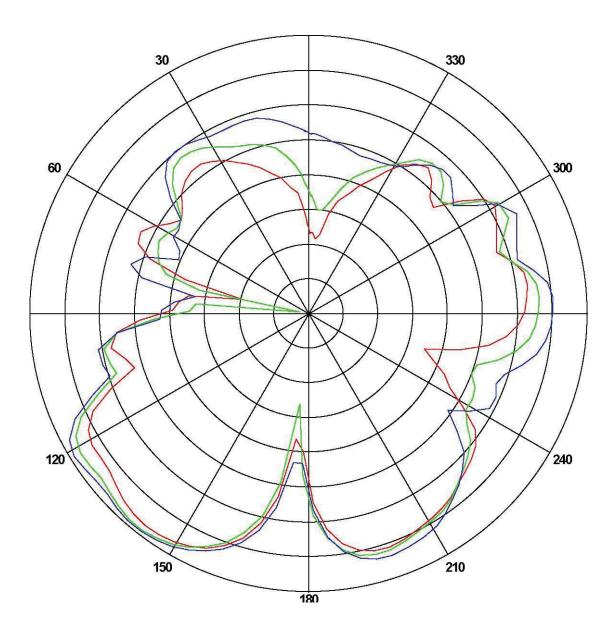


Frequency	Gain(dB)				
(MHz)	Max	Min	Avg		
2400	-1.26174	-30.0801	-7.18716		
2450	-0.765802	-36.5604	-7.48023		
2500	-0.585582	-22.0315	-6.59127		

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

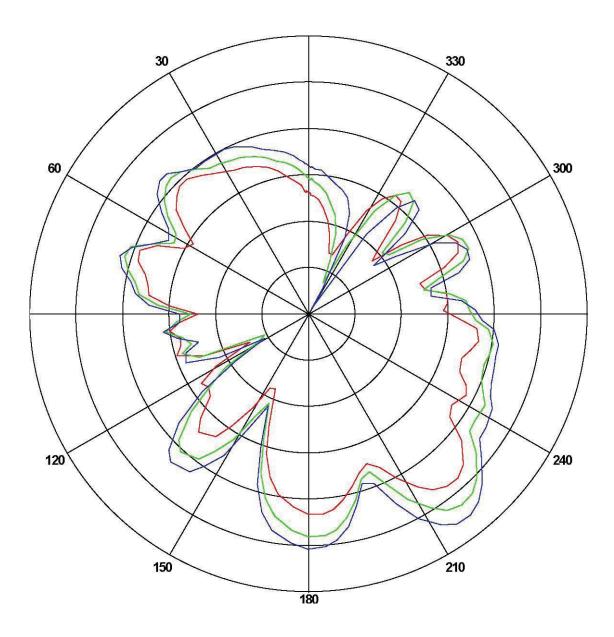

Frequency	Gain(dB)				
(MHz)	Max	Min	Avg		
2400	-5.2537	-22.1424	-12.4294		
2450	-2.4652	-24.5837	-10.4702		
2500	-1.86120	-29.5214	-9.20432		

ANT Test Labs: Attestation of Global Compliance Co., Ltd.