


RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 2400 – 2483.5 MHz band	
Report Reference No	G0M-1802-7258-TFC247BL-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2
Applicant	spaceti s.r.o.
Address	Palace Adria Jungmannova 36/31 110 00 PRAGUE CZECH REPUBLIC
Test Specification	According to FCC/ISED rules
Standard	47 CFR Part 15C RSS-247, Issue 2, 2017-02
Non-Standard Test Method	None
Test Scope	Full compliance test
Equipment under Test (EUT):	
Product Description	Spaceti Stone
Model(s)	Spaceti Stone CO2
Additional Model(s)	None
Brand Name(s)	None
Hardware Version(s)	018
Software Version(s)	1.1.6
FCC-ID	2APJ3-SC20L1V100
IC	23792-SC20L1V100
Test Result	PASSED

Possible test case verdicts:		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2018-03-26	
Report:		
Compiled by	Wilfried Treffke	
Tested by (+ signature) (Responsible for Test)	Wilfried Treffke	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2018-07-24	
Total number of pages	91	
General Remarks:		
The test results presented in this report relate only to the object tested. The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.		

Additional Comments:

The applicant has declared additional models of the series. These models were neither tested nor assessed nor evaluated.

#1.

HVIN: Spaceti Stone LOCATION

PMN: Spaceti Stone LOCATION

FVIN: -/-

HMN: -/-

#2.

HVIN: Spaceti Stone STANDARD

PMN: Spaceti Stone STANDARD

FVIN: -/-

HMN: -/-

#3.

HVIN: Spaceti Stone CHAIR

PMN: Spaceti Stone CHAIR

FVIN: -/-

HMN: -/-

#4.

HVIN: Spaceti Stone PARKING

PMN: Spaceti Stone PARKING

FVIN: -/-

HMN: -/-

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-07-24	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage


REPORT INDEX

1	Equipment (Test Item) Under Test.....	7
1.1	Photos – Equipment External	8
1.2	Photos – Equipment Internal	9
1.3	Photos – Test Setup.....	12
1.4	Support Equipment.....	13
1.5	Test Modes	14
1.6	Test Frequencies.....	15
1.7	Sample emission level calculation.....	16
2	Result Summary.....	17
3	Test Conditions and Results.....	18
3.1	Test Conditions and Results - Occupied bandwidth.....	18
3.2	Test Conditions and Results - 6 dB bandwidth.....	23
3.3	Test Conditions and Results - Maximum peak conducted output power	28
3.4	Test Conditions and Results - Power spectral density	30
3.5	Test Conditions and Results - Band-edge compliance.....	35
3.6	Test Conditions and Results - Conducted spurious emissions.....	39
3.7	Test Conditions and Results - Transmitter radiated emissions	44
3.8	Test Conditions and Results - Receiver radiated emissions	47
ANNEX A	Transmitter spurious emissions	50
ANNEX B	Receiver spurious emissions	82



1 Equipment (Test Item) Under Test

Description	Spaceti Stone	
Model	Spaceti Stone CO2	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	None	
Hardware Version(s)	018	
Software Version(s)	1.1.6	
PMN	Spaceti Stone CO2	
HVIN	Spaceti Stone CO2	
FVIN	None	
HMN	None	
FCC-ID	2APJ3-SC20L1V100	
IC	23792-SC20L1V100	
Equipment type	End Product	
Radio type 1	Transmitter only	
Radio type 2	Receiver only	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	Integral antenna
	Model	PCB antenna
	Manufacturer	unspecified
	Gain	3.3 dBi (customer declaration)
Supply Voltage	V _{NOM}	3.6 VDC
Operating Temperature	T _{NOM}	25 °C
AC/DC-Adaptor	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A
Manufacturer	spaceti s.r.o. Palace Adria Jungmannova 36/31 110 00 PRAGUE CZECH REPUBLIC	


1.1 Photos – Equipment External

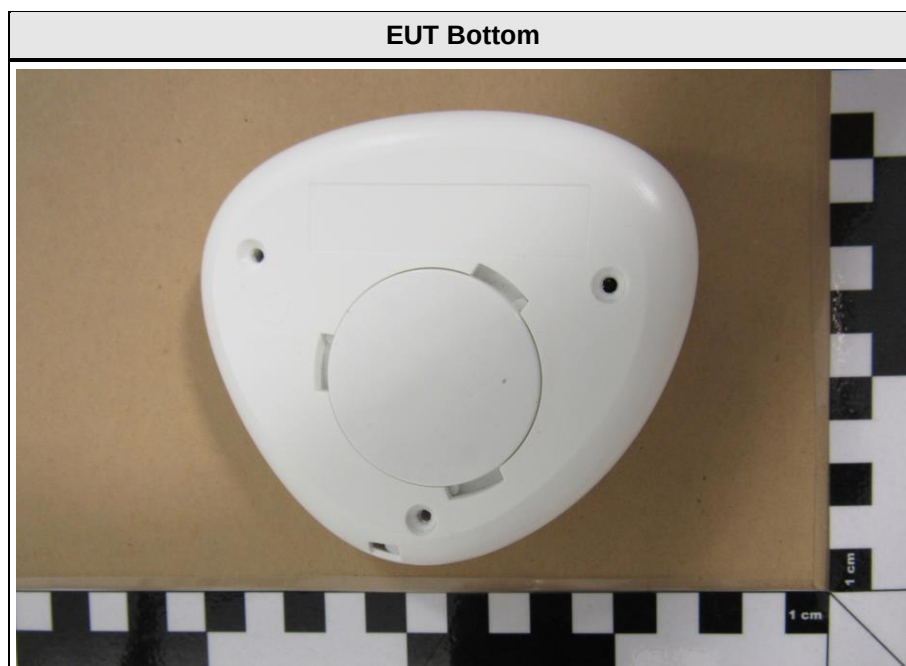


1.2 Photos – Equipment Internal

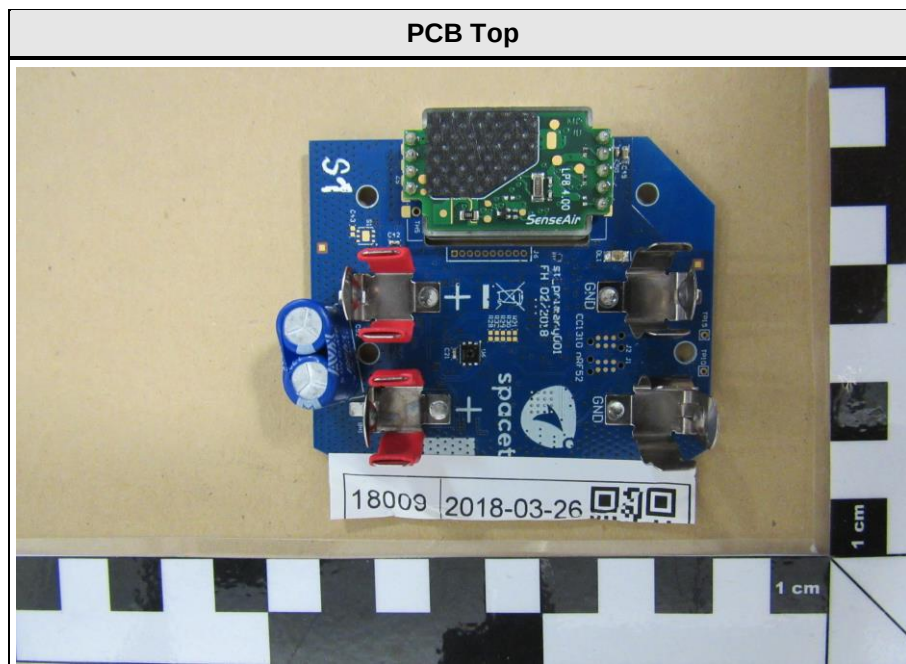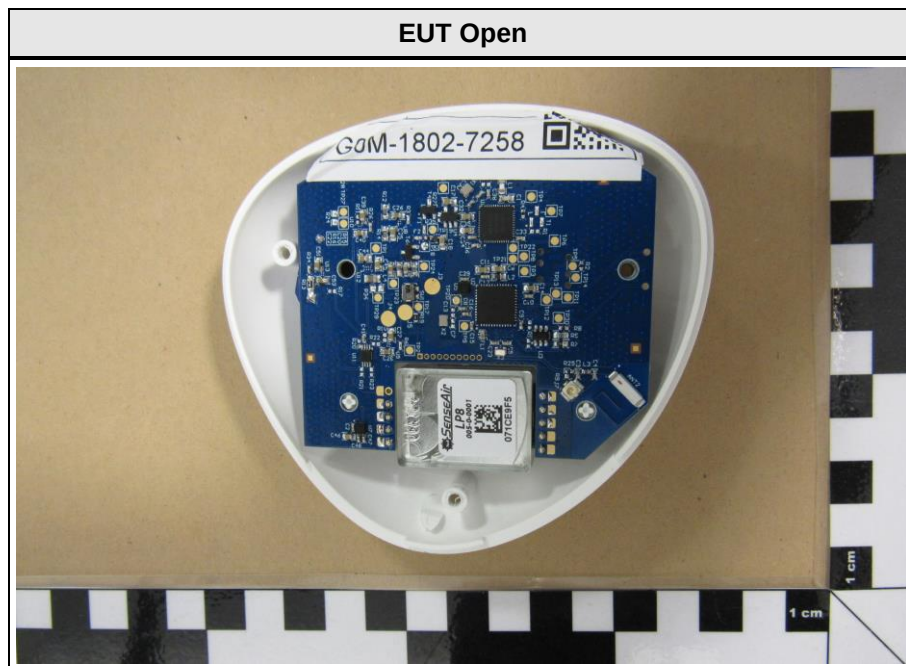


PCB Bottom

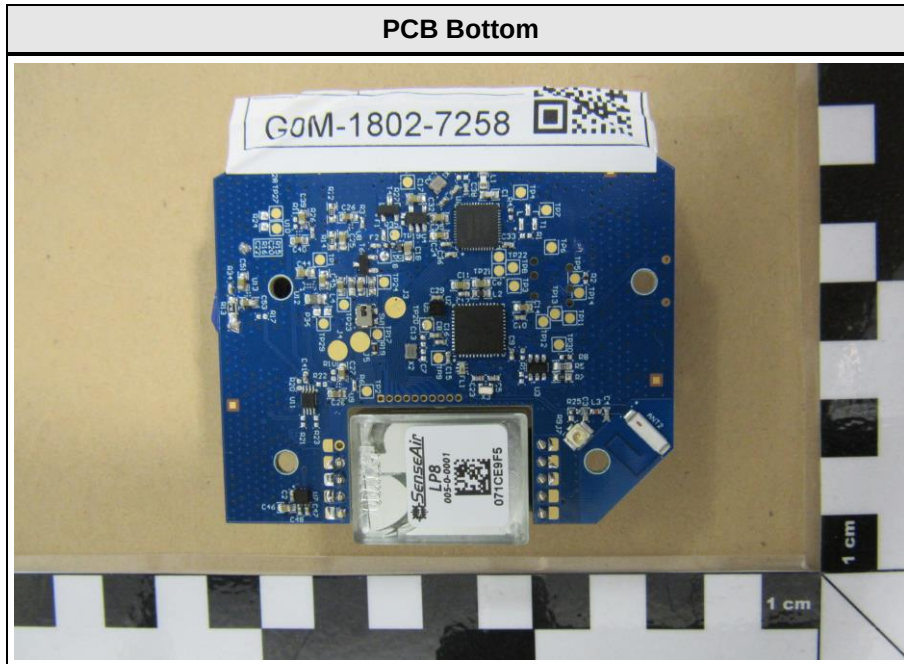


Conducted Sample Top

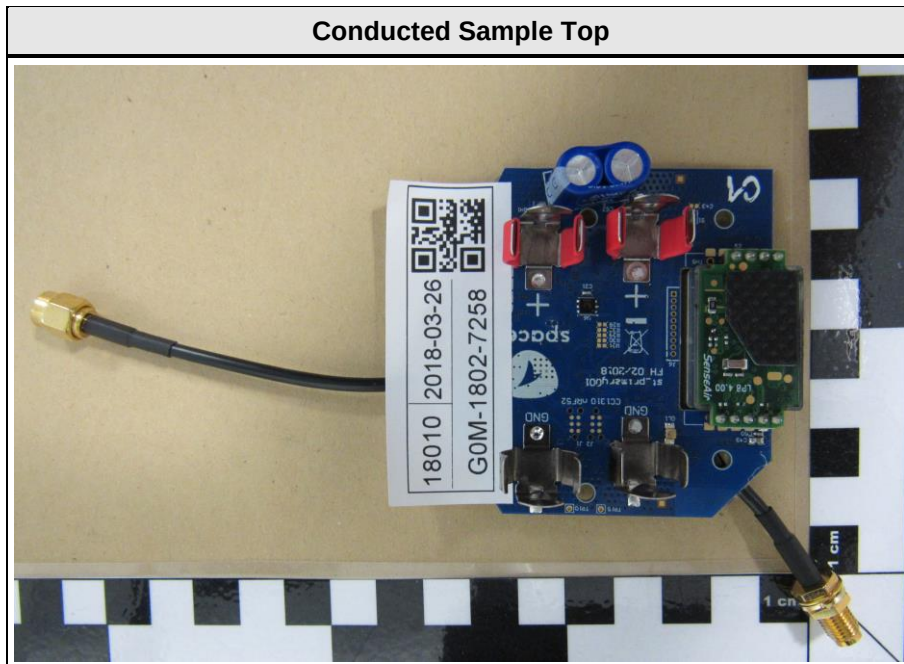

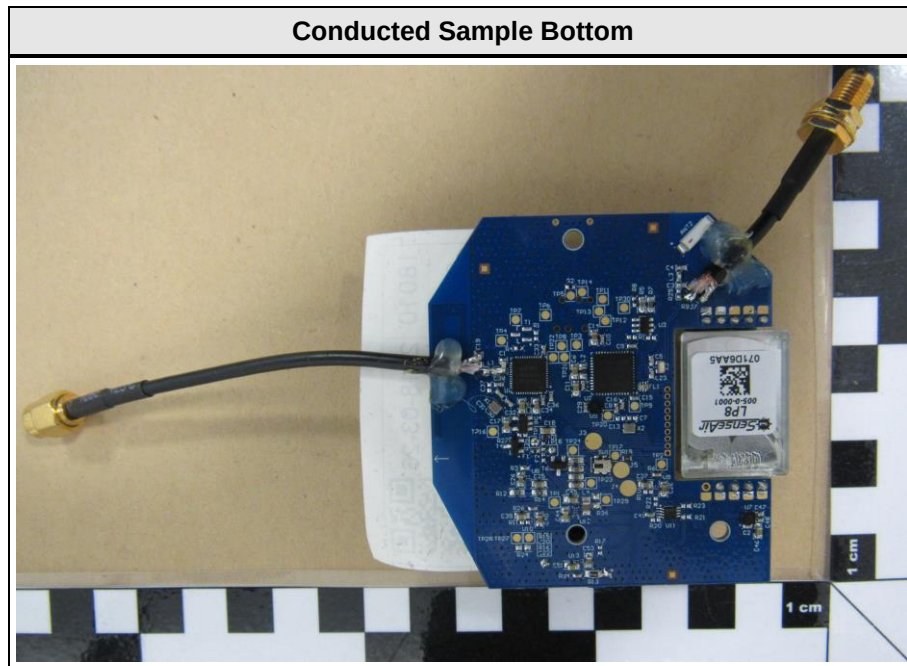

1.3 Photos – Test Setup

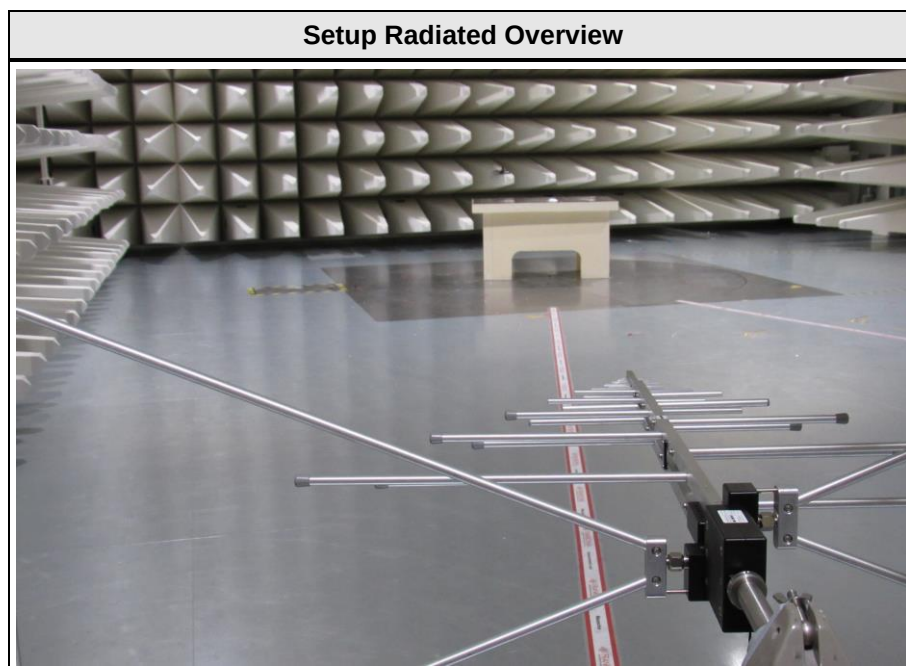

1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
AE	NRF52 Eval Board	Nordic Semi Conductor	-	
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 64%
Receive	Mode = Receive
Comment:	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	37	2402
F2	Tx / Rx	38	2426
F3	Tx / Rx	39	2480

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBμV	+ 26 dB = 47.5 dBμV/m	:	47.5 dBμV/m	- 57.0 dBμV/m	= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6 Issue 4	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2 Issue 2	6 dB Bandwidth	ANSI C63.10-2013	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4 Issue 2	Maximum peak conducted power	ANSI C63.10-2013	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2 Issue 2	Power spectral density	ANSI C63.10-2013	PASS	
FCC § 15.207 ISED RSS-247 § 3.1 Issue 2	AC power line conducted emissions	ANSI C63.10-2013	N/R	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Band edge compliance	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5 Issue 2	Conducted spurious emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9 Issue 4	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247 § 3.1 Issue 2	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - Occupied bandwidth


3.1.1 Information

Test Information	
Reference	ISED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Wilfried Treffke
Date	2018-03-27

3.1.2 Limits

Limits
None (Informational only)

3.1.3 Setup

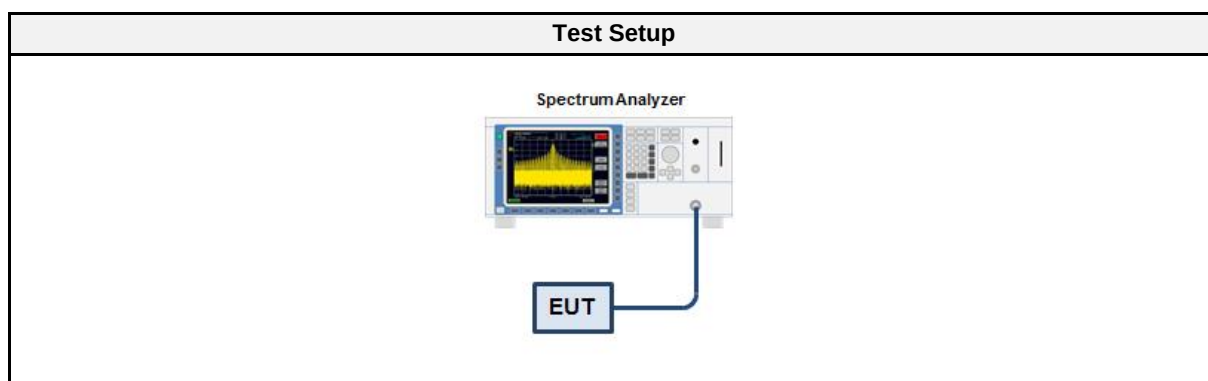

3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.1.5 Procedure


Test Procedure
1. EUT transmitter is activated in test mode under normal conditions 2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum 3. The resolution bandwidth is set to 1 % of the bandwidth 4. The occupied bandwidth is measured with the build-in analyzer function

3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.060
GFSK	2426	1.080
GFSK	2480	1.045

Occupied Bandwidth


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 37, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Occupied Bandwidth [MHz]: 1.060

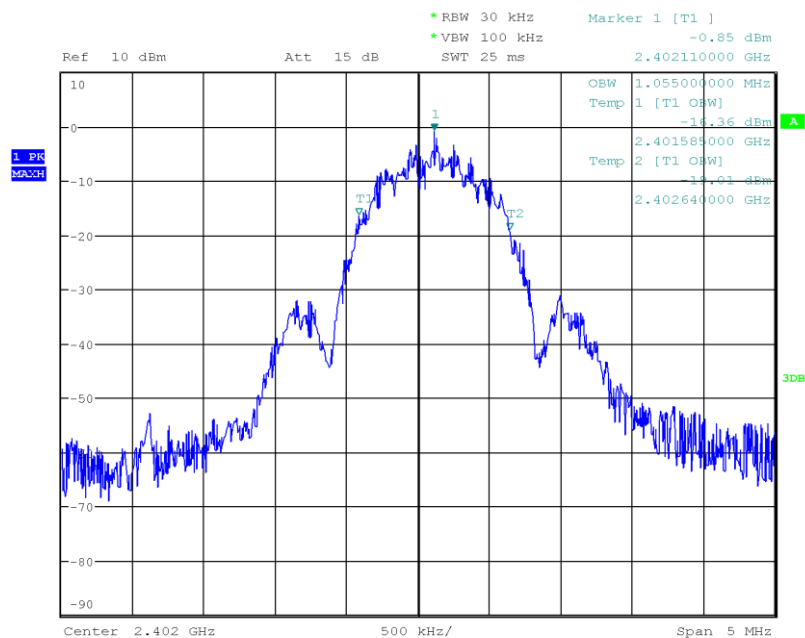

Date: 27.MAR.2018 09:36:44

Occupied Bandwidth


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 38, 2426 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Occupied Bandwidth [MHz]: 1.080

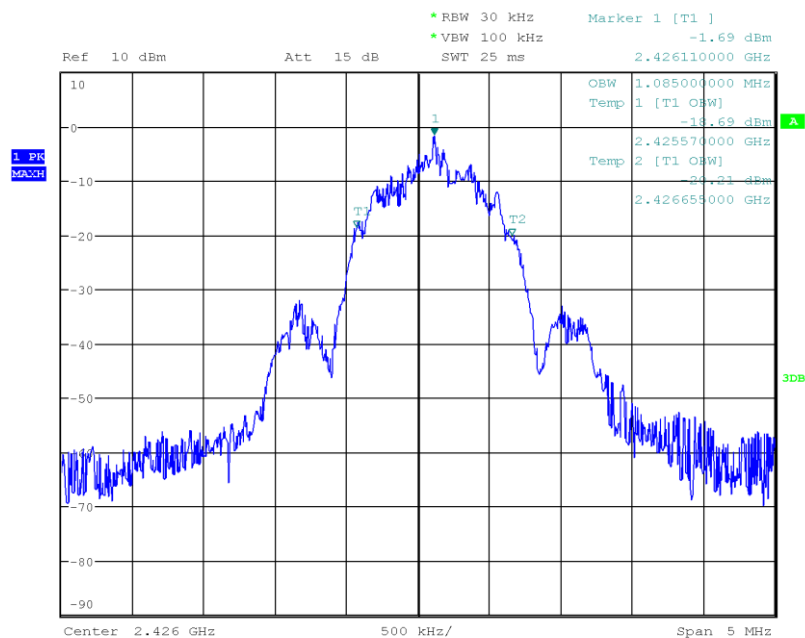

Date: 27.MAR.2018 09:42:29

Occupied Bandwidth

Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 6.9.3
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Occupied Bandwidth [MHz]: 1.045

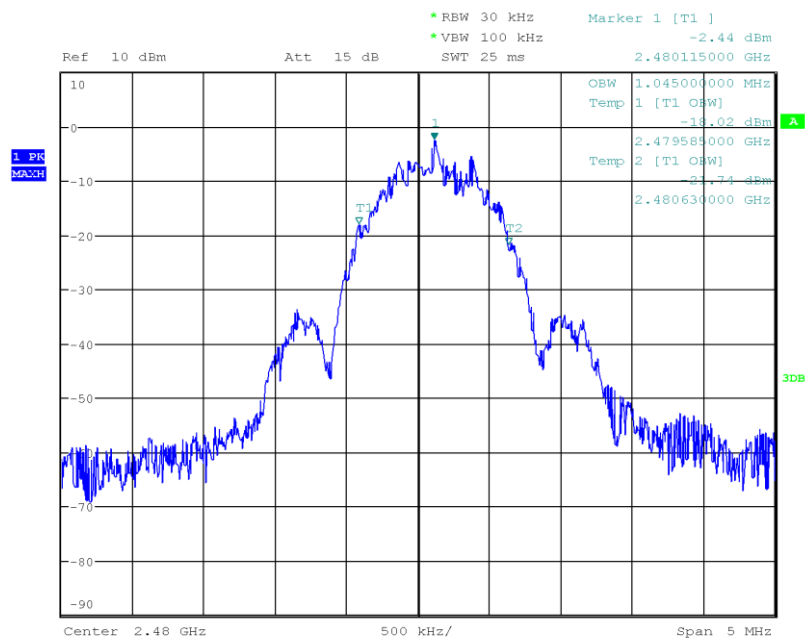

Date: 27.MAR.2018 09:47:21

3.2 Test Conditions and Results - 6 dB bandwidth


3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISSED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Wilfried Treffke
Date	2018-03-27

3.2.2 Limits

Limits
$\geq 500\text{kHz}$

3.2.3 Setup

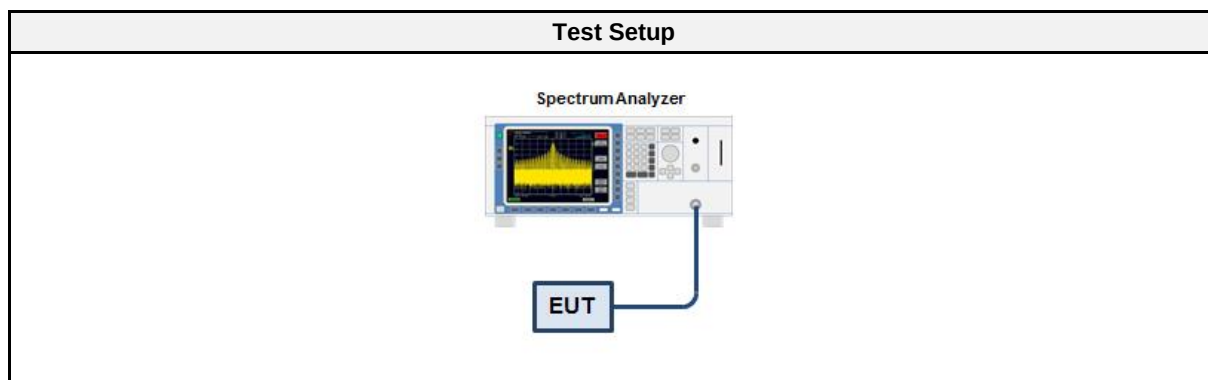

3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.2.5 Procedure


Test Procedure
1. EUT set to test mode 2. Span set to at least twice the emission spectrum 3. Detector set to peak and max hold and RBW is set to 100 kHz 4. Envelope peak value of emission spectrum is selected 5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak 6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak 7. 6 dB Bandwidth is determined by marker frequency separation

3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	655	500	PASS
GFSK	2426	725	500	PASS
GFSK	2480	690	500	PASS

DTS (6 dB) Bandwidth


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 37, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Lower Frequency [MHz]: 2401.780
 Upper Frequency [MHz]: 2402.435
 6 dB Bandwidth [kHz]: 655

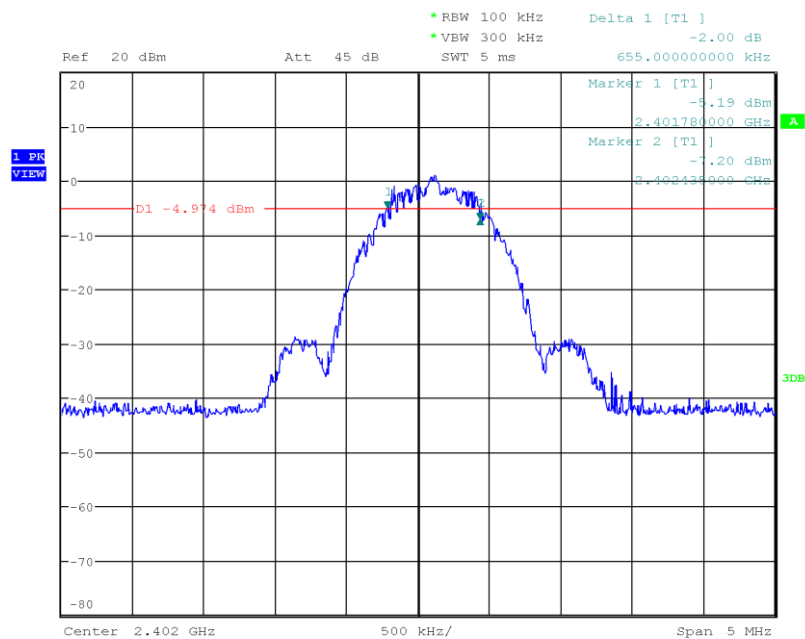

Date: 27.MAR.2018 10:04:33

DTS (6 dB) Bandwidth


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 38, 2426 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Lower Frequency [MHz]: 2425.755
 Upper Frequency [MHz]: 2426.480
 6 dB Bandwidth [kHz]: 725

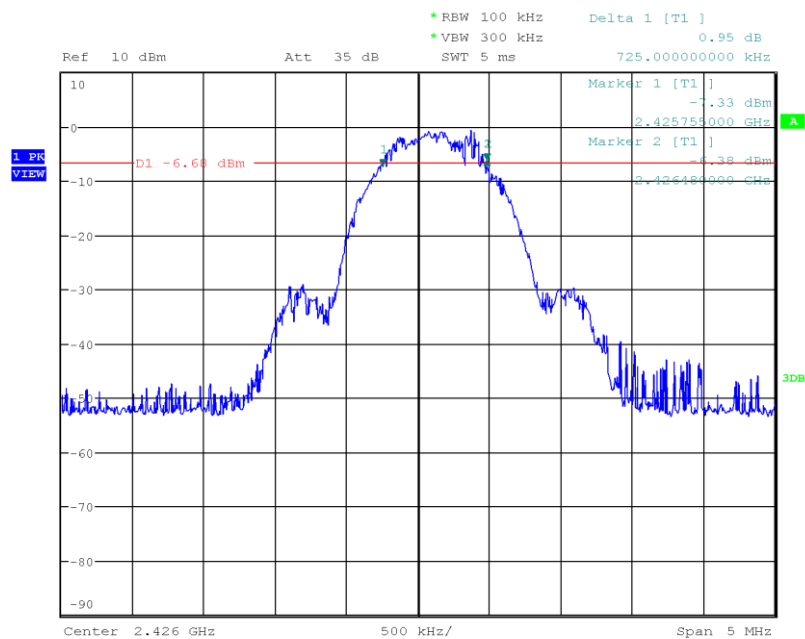

Date: 27.MAR.2018 10:00:04

DTS (6 dB) Bandwidth

Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Lower Frequency [MHz]: 2479.760
 Upper Frequency [MHz]: 2480.450
 6 dB Bandwidth [kHz]: 690

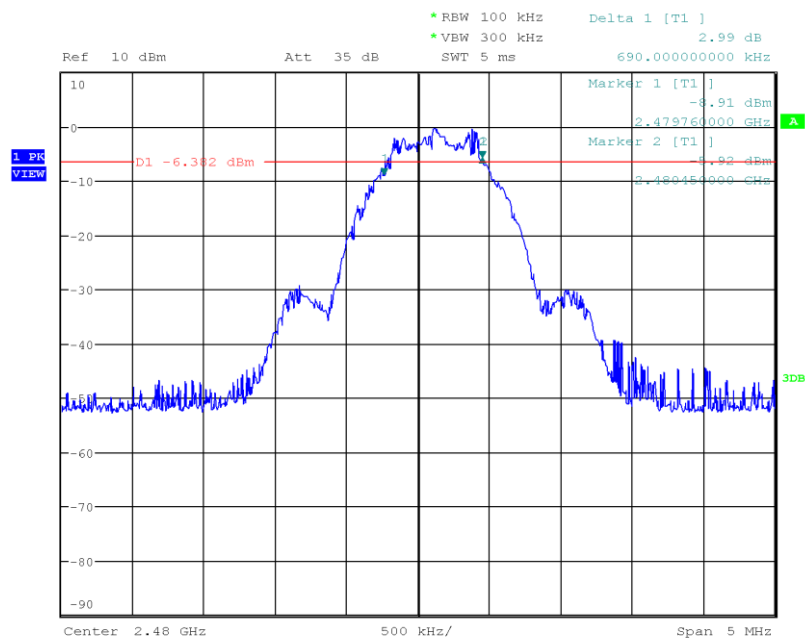

Date: 27.MAR.2018 09:55:53

3.3 Test Conditions and Results - Maximum peak conducted output power


3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISSED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.1
Operator	Wilfried Treffke
Date	2018-03-27

3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.3 Setup

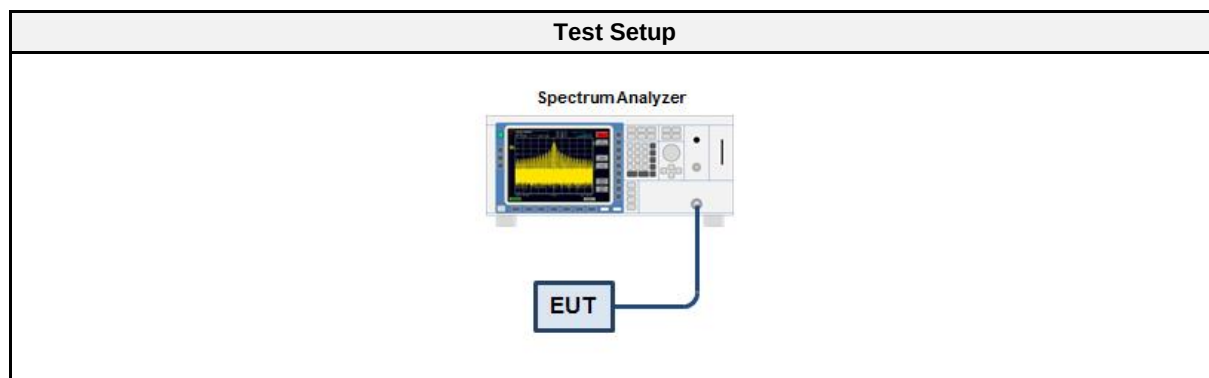

3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.3.5 Procedure

Test Procedure
1. EUT set to test hopping mode (Communication tester is used if needed) 2. Analyzer resolution bandwidth is set $\geq$ DTS bandwidth 3. Detector set to peak and max hold 4. Sweep time is set to auto 5. After the trace has stabilized a marker is set to peak of envelope

3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	2.500	0.0018	1.0	PASS
2426	1.758	0.0015	1.0	PASS
2480	1.202	0.0013	1.0	PASS

3.4 Test Conditions and Results - Power spectral density


3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Wilfried Treffke
Date	2018-03-27

3.4.2 Limits

Limits
8 dBm / 3 kHz

3.4.3 Setup

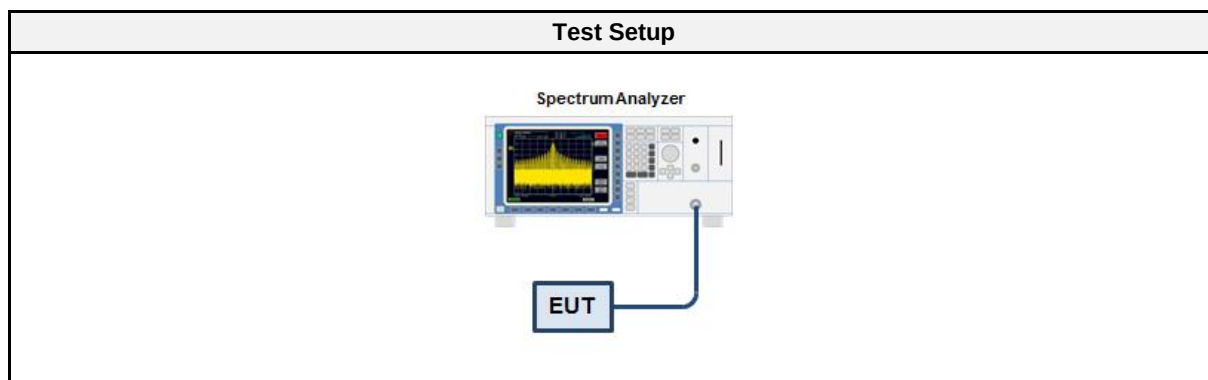

3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.4.5 Procedure


Test Procedure
1. EUT set to test mode 2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth 3. The RBW is set to 100 kHz with VBW $\geq$ RBW and the detector is set to peak with max hold 4. After the trace has stabilized a marker is set to the envelope maximum 5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated 6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain

3.4.6 Results

Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	1.999	8.0	PASS
2426	1.261	8.0	PASS
2480	0.681	8.0	PASS
RBW = 100 kHz			

Peak Power Spectral Density


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 37, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Peak Frequency [MHz]: 2402.111
 Spectral Density [dBm/RBW]: 1.999
 Resolution Bandwidth [kHz]: 100 kHz

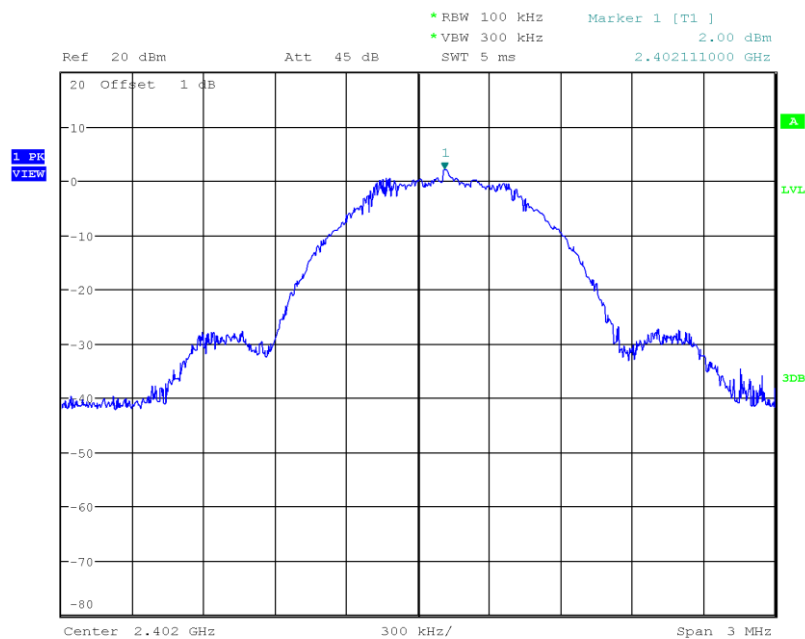

Date: 27.MAR.2018 10:35:19

Peak Power Spectral Density


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 37, 2426 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Peak Frequency [MHz]: 2426.099
 Spectral Density [dBm/RBW]: 1.261
 Resolution Bandwidth [kHz]: 100 kHz

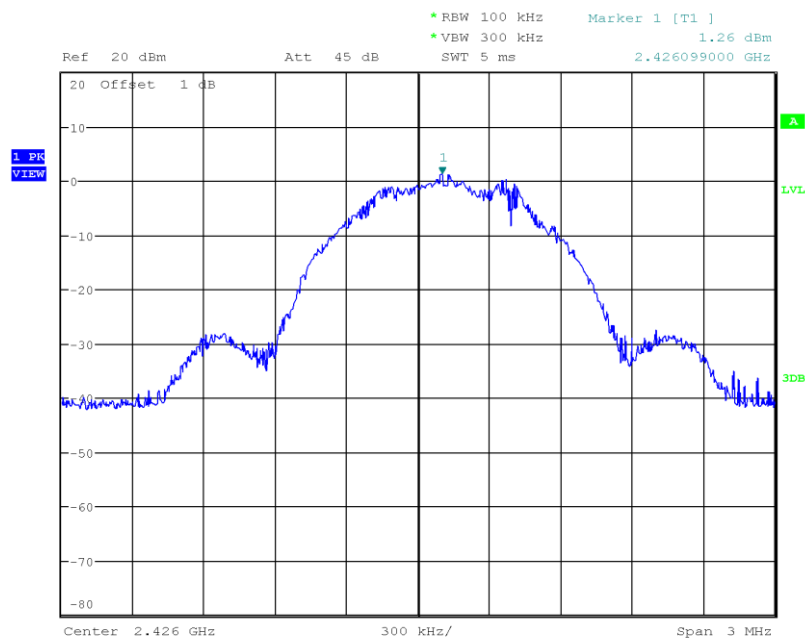

Date: 27.MAR.2018 10:28:35

Peak Power Spectral Density

Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.10.2
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Peak Frequency [MHz]: 2480.117
 Spectral Density [dBm/RBW]: 0.681
 Resolution Bandwidth [kHz]: 100 kHz

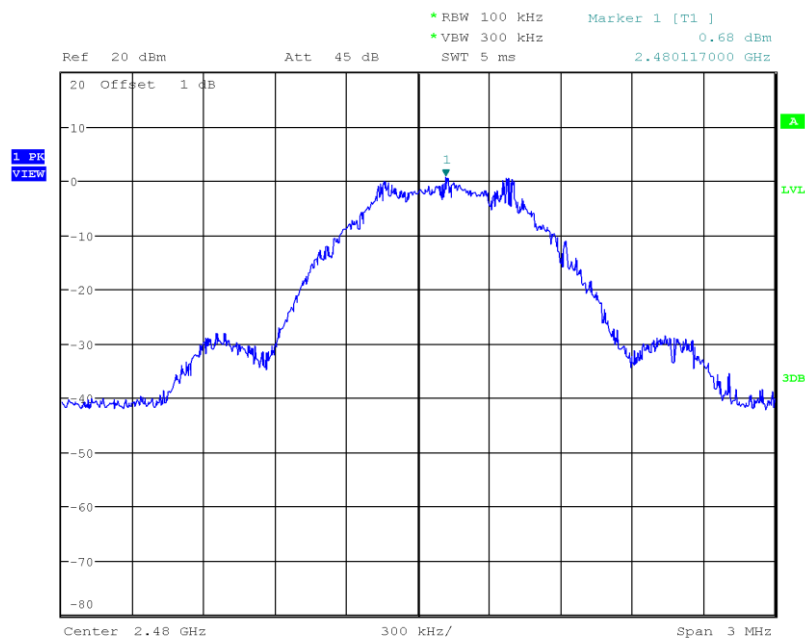

Date: 27.MAR.2018 10:23:50

3.5 Test Conditions and Results - Band-edge compliance


3.5.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Wilfried Treffke
Date	2018-03-27

3.5.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.5.3 Setup

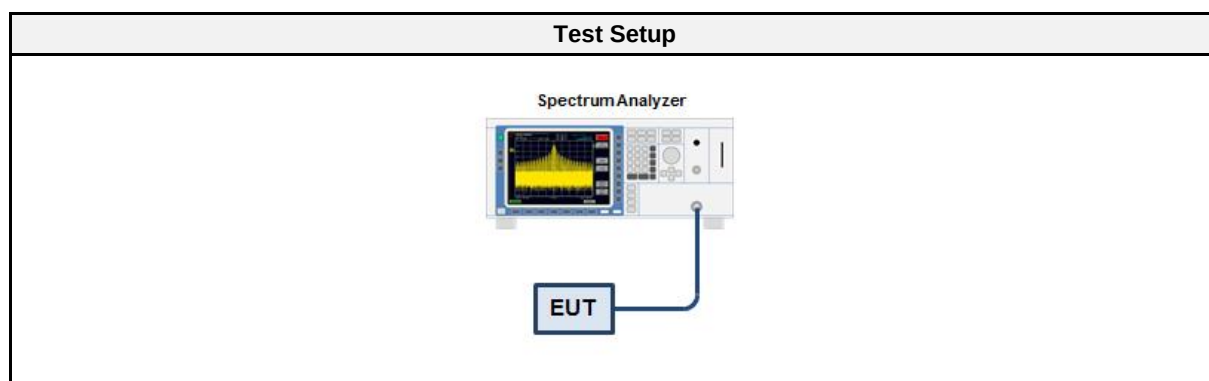

3.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.5.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.5.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-39.19	-20	PASS
GFSK	2480	-39.14	-20	PASS

Band-edge Compliance


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Band-edge: Lower
 In-band Frequency [MHz]: 2402.112
 Max. in-band Level [dBm/100 kHz]: 0.553
 Out-of-band Frequency [MHz]: 2380.928
 Max. out-of-band Level [dBm/100 kHz]: -38.636
 Attenuation [dB]: -39.19

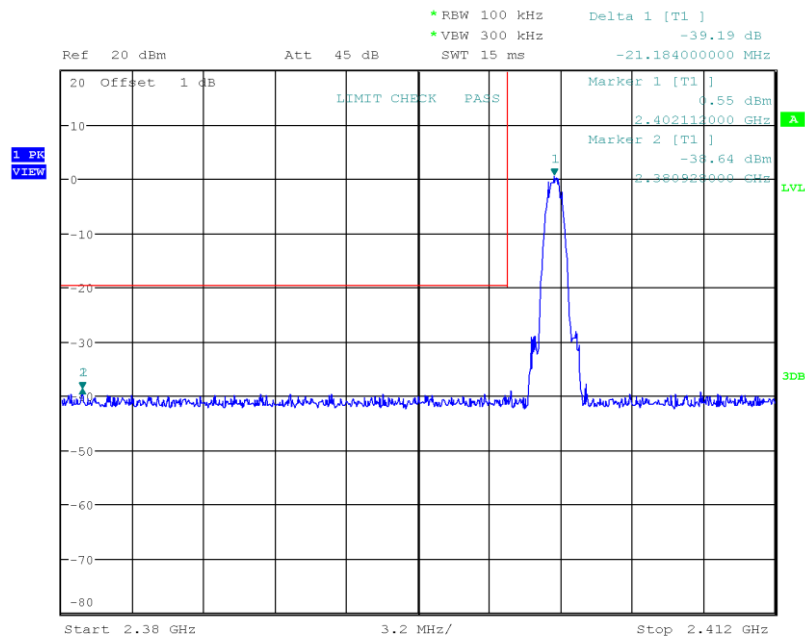

Date: 27.MAR.2018 10:42:58

Band-edge Compliance

Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Band-edge: Upper
 In-band Frequency [MHz]: 2480.08
 Max. in-band Level [dBm/100 kHz]: 0.291
 Out-of-band Frequency [MHz]: 2492.085
 Max. out-of-band Level [dBm/100 kHz]: -38.847
 Attenuation [dB]: -39.14

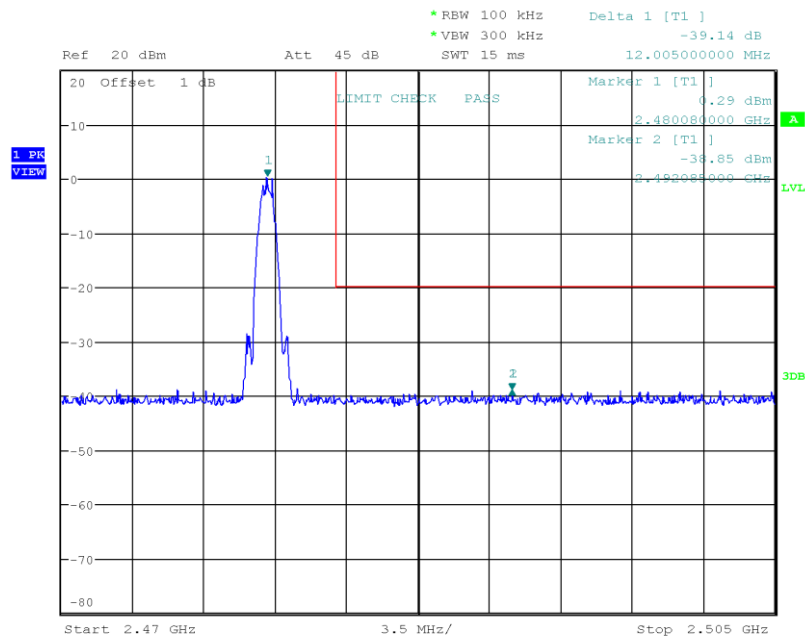

Date: 27.MAR.2018 10:51:24

3.6 Test Conditions and Results - Conducted spurious emissions


3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Wilfried Treffke
Date	2018-03-27

3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

3.6.3 Setup

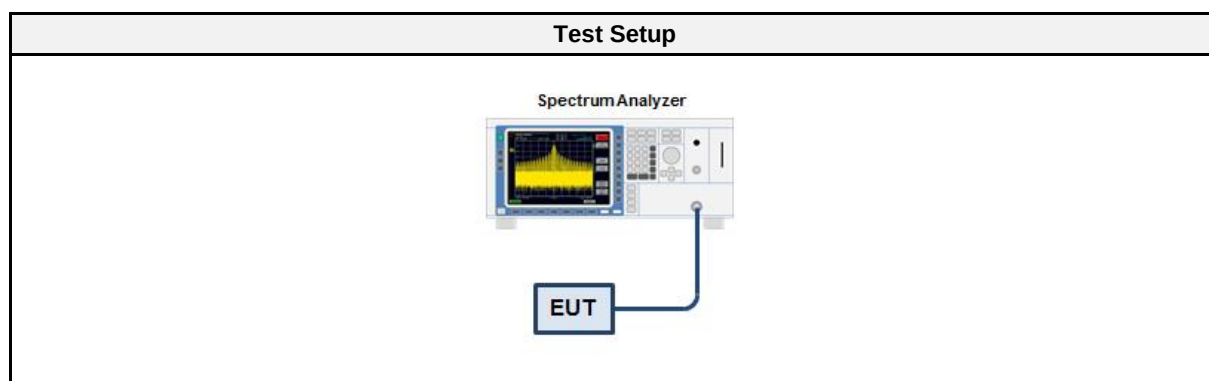

3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

3.6.5 Procedure


Test Procedure
1. EUT set to test mode (Communication tester is used if needed) 2. Span set around lower band edge and detector is set to peak and max hold 3. Resolution bandwidth is set to 100 kHz 4. Markers are set to peak emission levels within frequency band and outside frequency band 5. Band edge attenuation is determined from level difference

3.6.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2426	PASS
GFSK	2480	PASS

Conducted Spurious Emissions


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 37, 2402 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Max. in-band Frequency [MHz]: 2402.1
 Max. in-band Level [dBm/100 kHz]: 1.9
 Out-of-band Limit [dBm/100 kHz]: -18.1

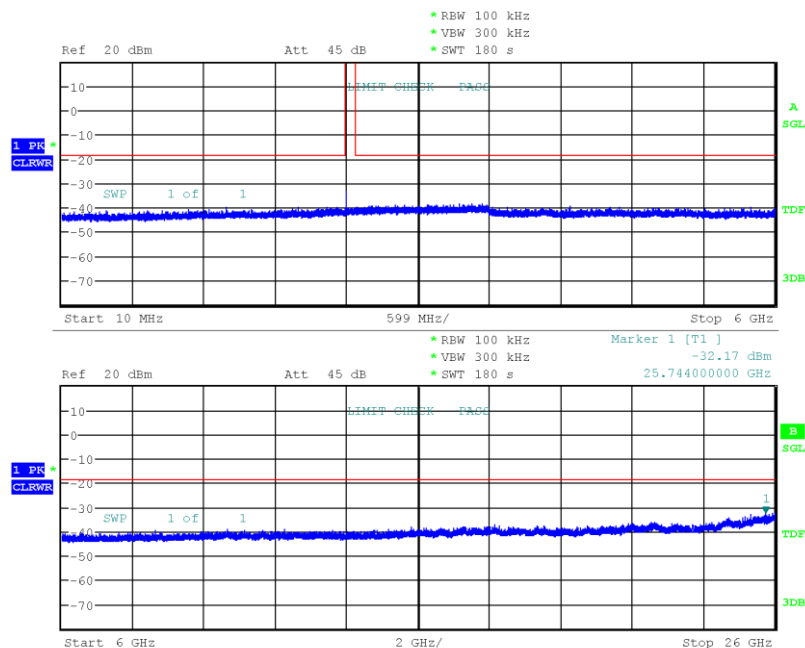

Date: 27.MAR.2018 11:24:10

Conducted Spurious Emissions


Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 38, 2426 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Max. in-band Frequency [MHz]: 2426.1
 Max. in-band Level [dBm/100 kHz]: -0.4
 Out-of-band Limit [dBm/100 kHz]: -20.4

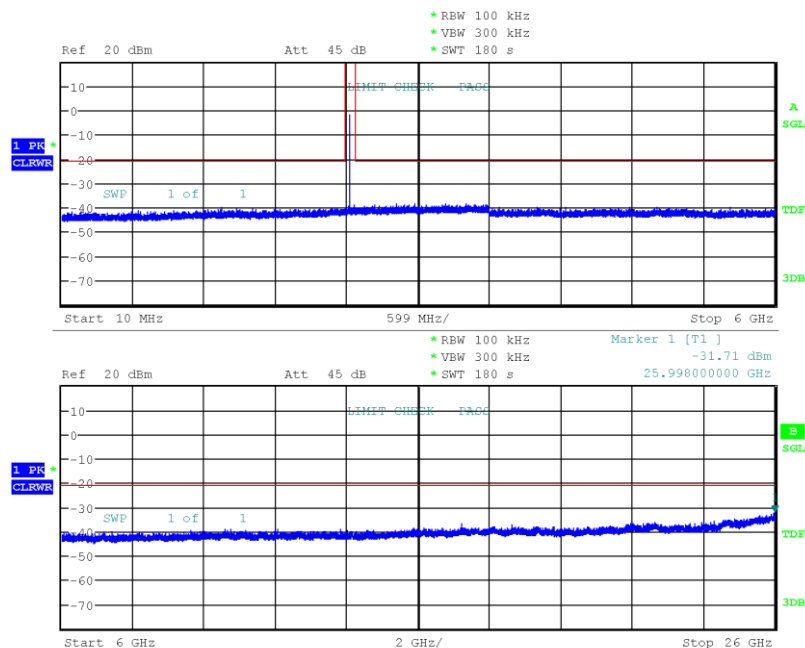

Date: 27.MAR.2018 11:14:04

Conducted Spurious Emissions

Project Number: G0M-1802-7258
 Applicant: spaceti
 Model Description: Spaceti stone
 Model: Spaceti stone CO2
 Test Sample ID: 18010
 Reference Standards: FCC 15.247, RSS-247
 Reference Method: ANSI C63.10:2013, Section 11.11
 Operational Mode: GFSK, Channel: 39, 2480 MHz
 Operating Conditions: Tnom/Vnom
 Operator: Wilfried Treffke
 Test Site: Eurofins Product Service GmbH
 Test Date: 2018-03-27
 Max. in-band Frequency [MHz]: 2480.4
 Max. in-band Level [dBm/100 kHz]: 0.2
 Out-of-band Limit [dBm/100 kHz]: -19.8

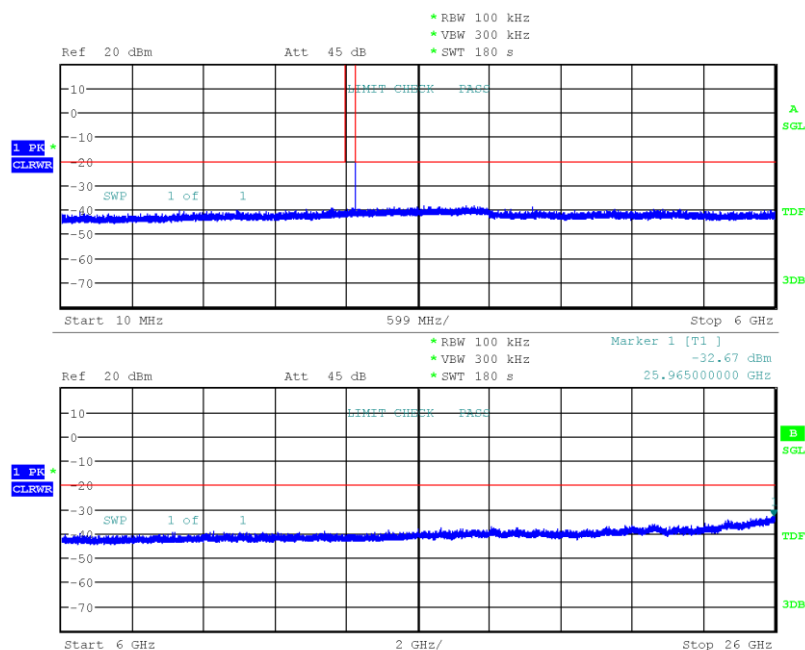

Date: 27.MAR.2018 11:04:31

3.7 Test Conditions and Results - Transmitter radiated emissions



3.7.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-03-26

3.7.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [μ V/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.7.3 Setup

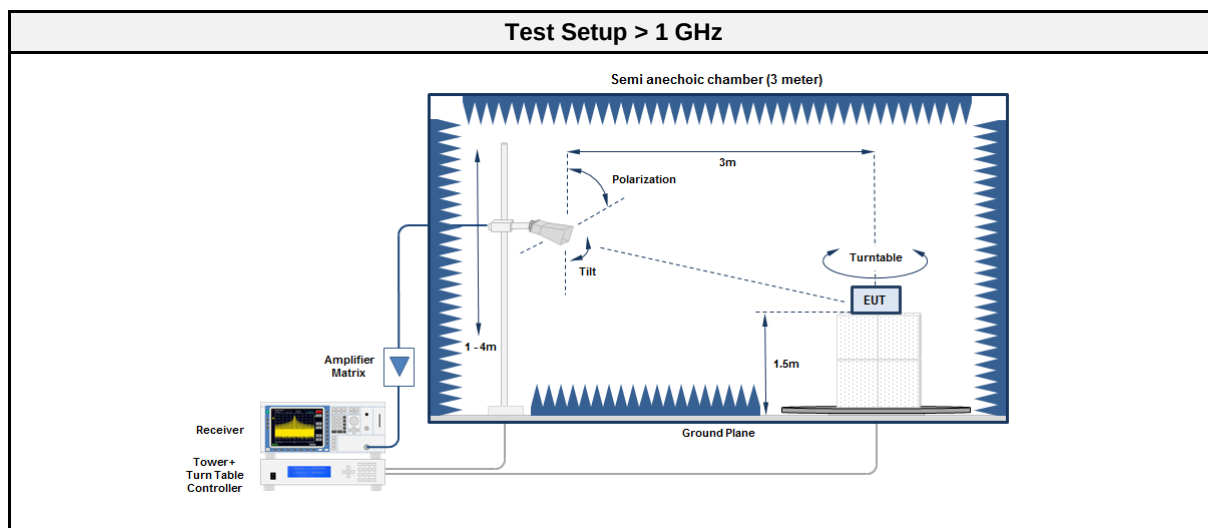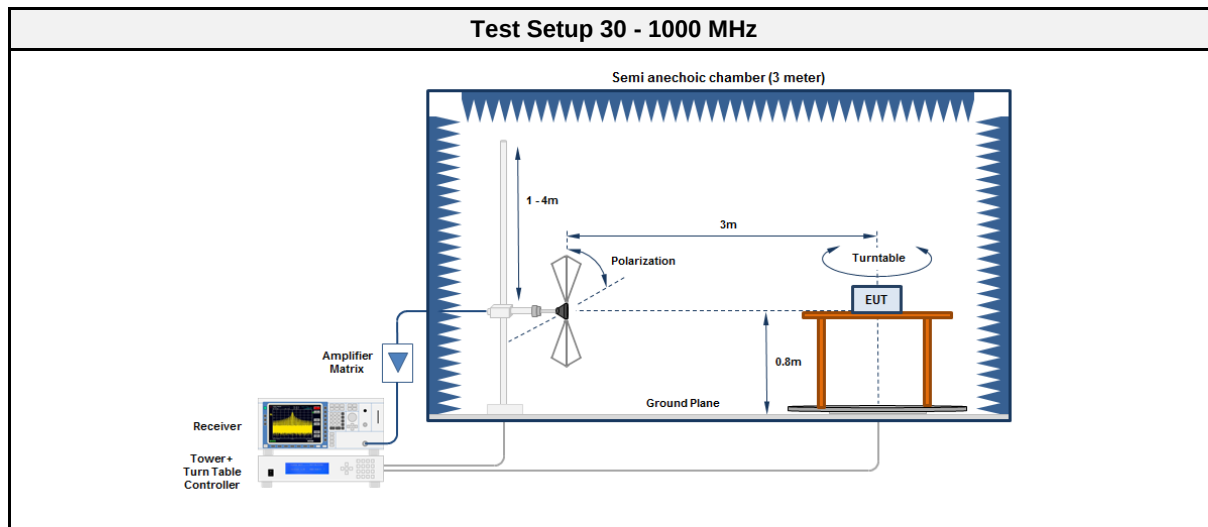

3.7.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.7.5 Procedure

Test Procedure < 30 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The EUT is rotated through 360°
4.	The emissions are measured with peak detector and max hold
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

3.7.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2402	2263.6	45.15	pk	hor	74.00	-28.85
2402	2284.4	45.53	pk	hor	74.00	-28.47
2402	2379	50.91	pk	hor	74.00	-23.09
2402	2379	38.30	RMS	hor	54.00	-15.70
2402	2387.8	52.03	pk	ver	74.00	-21.97
2402	2387.8	38.96	RMS	ver	54.00	-15.04
2402	2489.6	41.77	pk	hor	74.00	-32.23
2426	2296.4	39.24	pk	ver	74.00	-34.76
2426	2383.2	39.50	pk	hor	74.00	-34.50
2480	2483.5	67.17	pk	hor	74.00	-06.83
2480	2483.5	41.24	RMS	hor	54.00	-12.76
2480	2484.2	60.59	pk	ver	74.00	-13.41
2480	2484.2	39.31	RMS	ver	54.00	-14.69
2480	2743	42.57	pk	hor	74.00	-31.43
2480	2743	44.19	pk	ver	74.00	-29.81
2480	4568	44.57	pk	ver	74.00	-29.43
2480	7432	48.76	pk	hor	74.00	-25.24
2480	11888	43.71	pk	hor	74.00	-30.29
2480	11888	35.36	RMS	hor	54.00	-18.64

3.8 Test Conditions and Results - Receiver radiated emissions


3.8.1 Information


Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Wilfried Treffke
Date	2018-03-26

3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB μ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.8.3 Setup

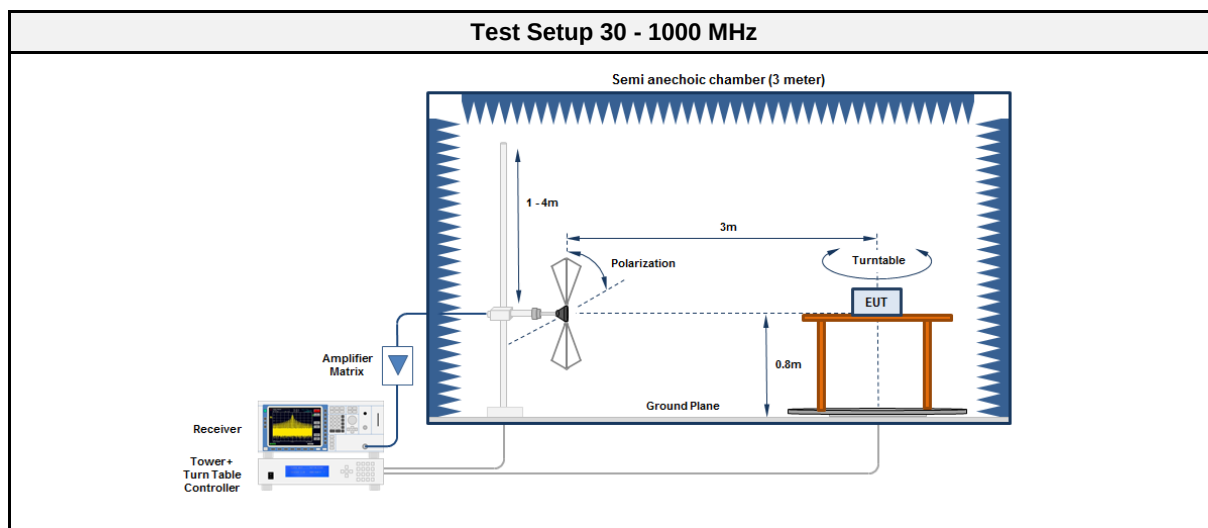

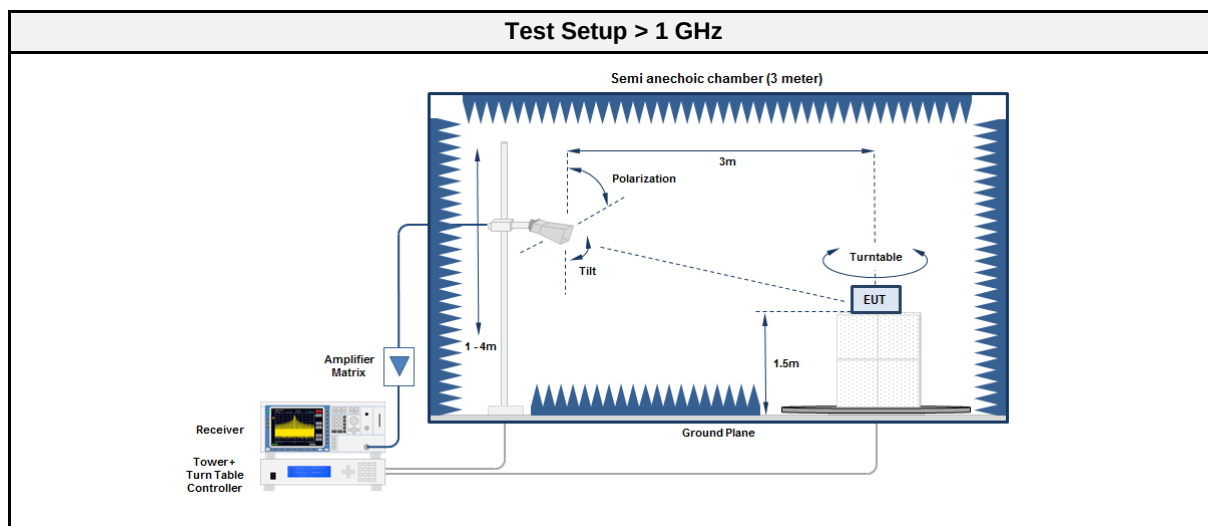

3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	VULB 9162	EF00978	2016-11	2019-11

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC6	EF00910	2017-03	2020-03
Measurement Receiver	R&S	ESU 26	EF00887	2017-07	2018-07
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

3.8.5 Procedure

Test Procedure 30 - 1000 MHz	
1. EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

Test Procedure > 1 GHz	
1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground 2. EUT set to test mode 3. The receiver is set to peak detection with max hold 4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m 5. All significant emissions are measured again using the corresponding final detector	

3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBμV/m]	Det.	Pol.	Limit [dBμV/m]	Margin [dB]
2426	915.2	33.03	pk	hor	46.00	-12.97
2426	1828	45.32	pk	ver	53.98	-08.66
2426	2740	40.57	pk	hor	53.98	-13.41
2426	2745	51.23	pk	ver	53.98	-02.75
2426	3658	42.55	pk	hor	53.98	-11.43
2426	4574	46.85	pk	hor	53.98	-07.13
2426	4574	41.16	avg	hor	53.98	-12.82
2426	8234	49.76	pk	ver	53.98	-04.22
2426	11888	49.80	pk	ver	53.98	-04.18


ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:


Index 18

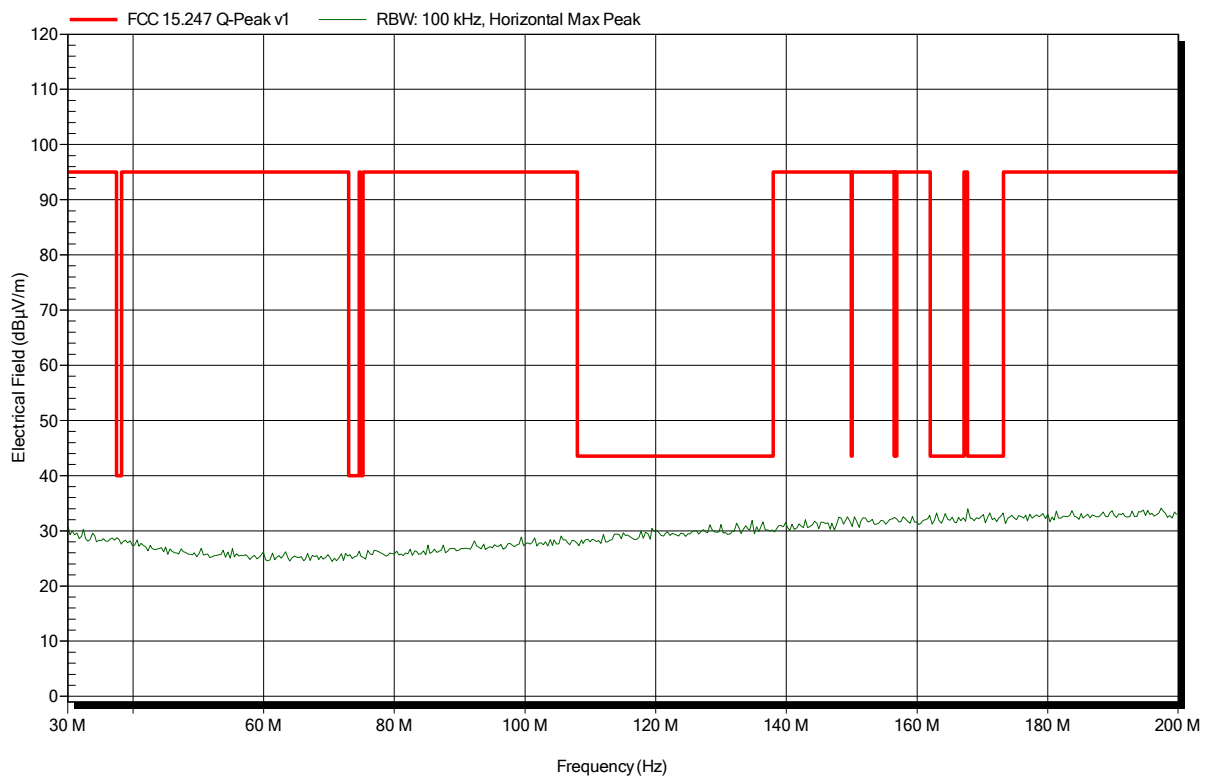

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258
 Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 19

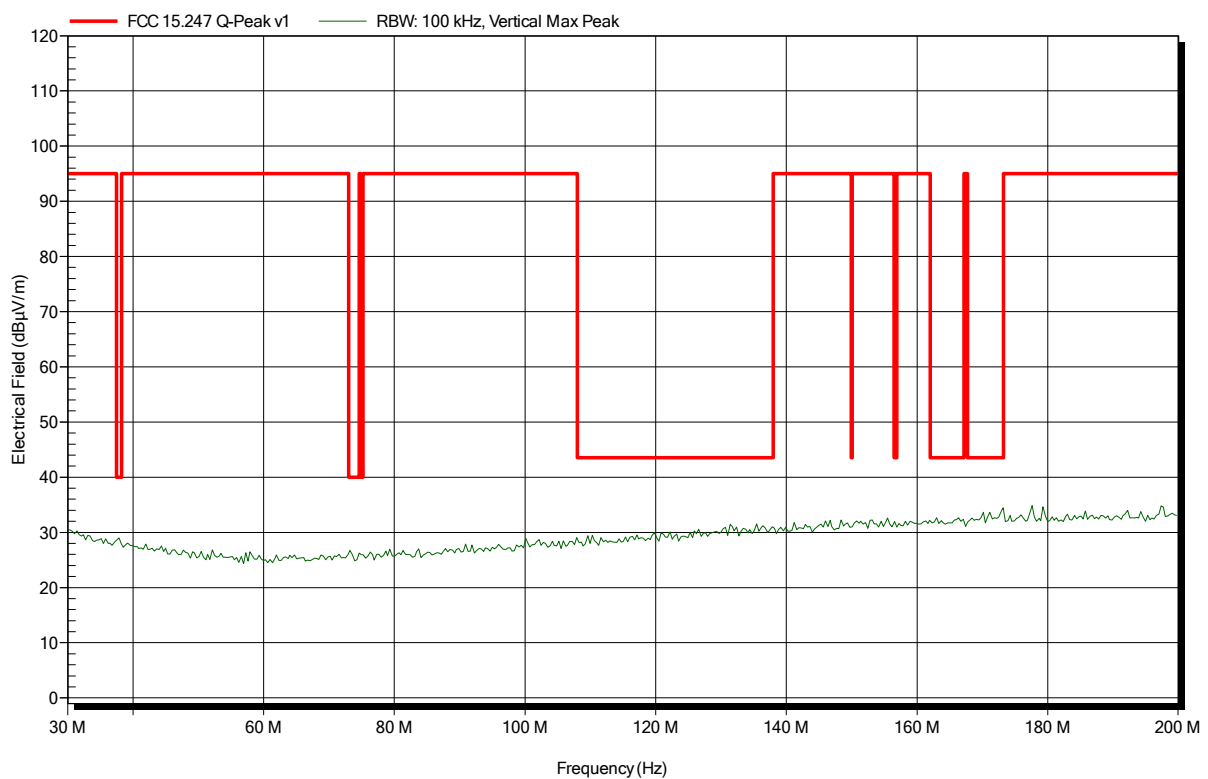


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:

Index 20

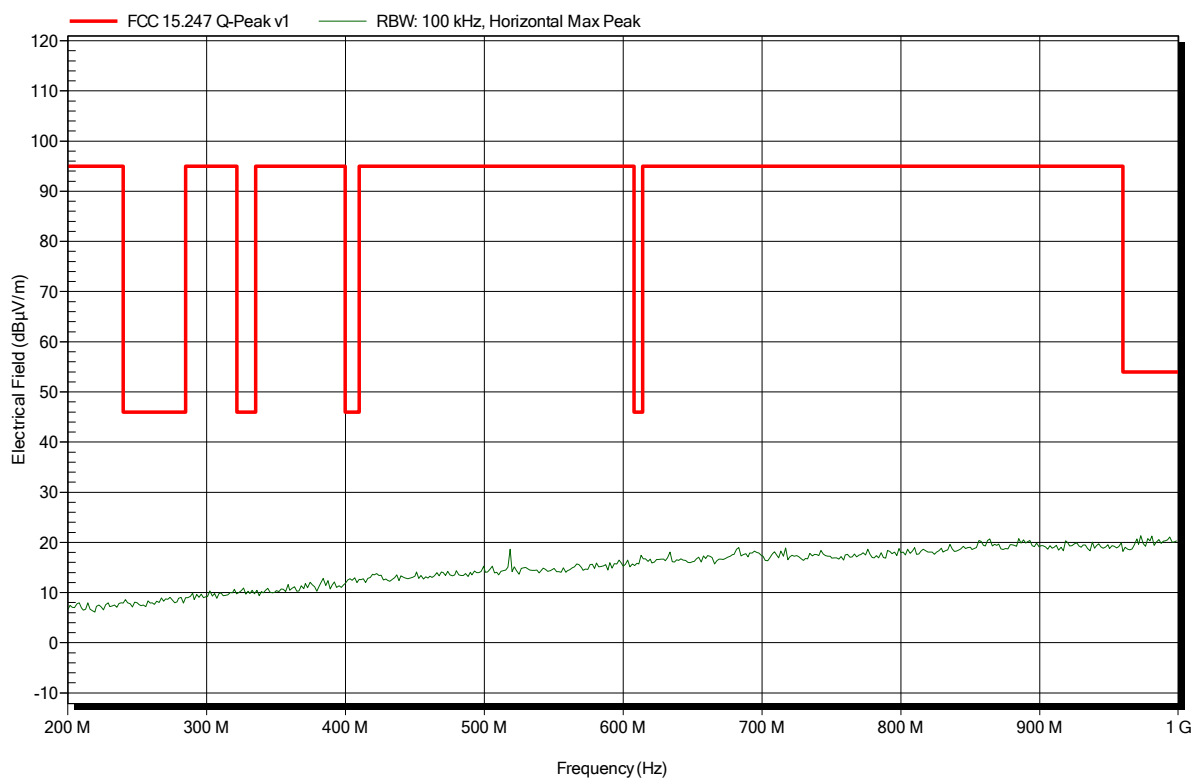


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3 m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:

Index 21

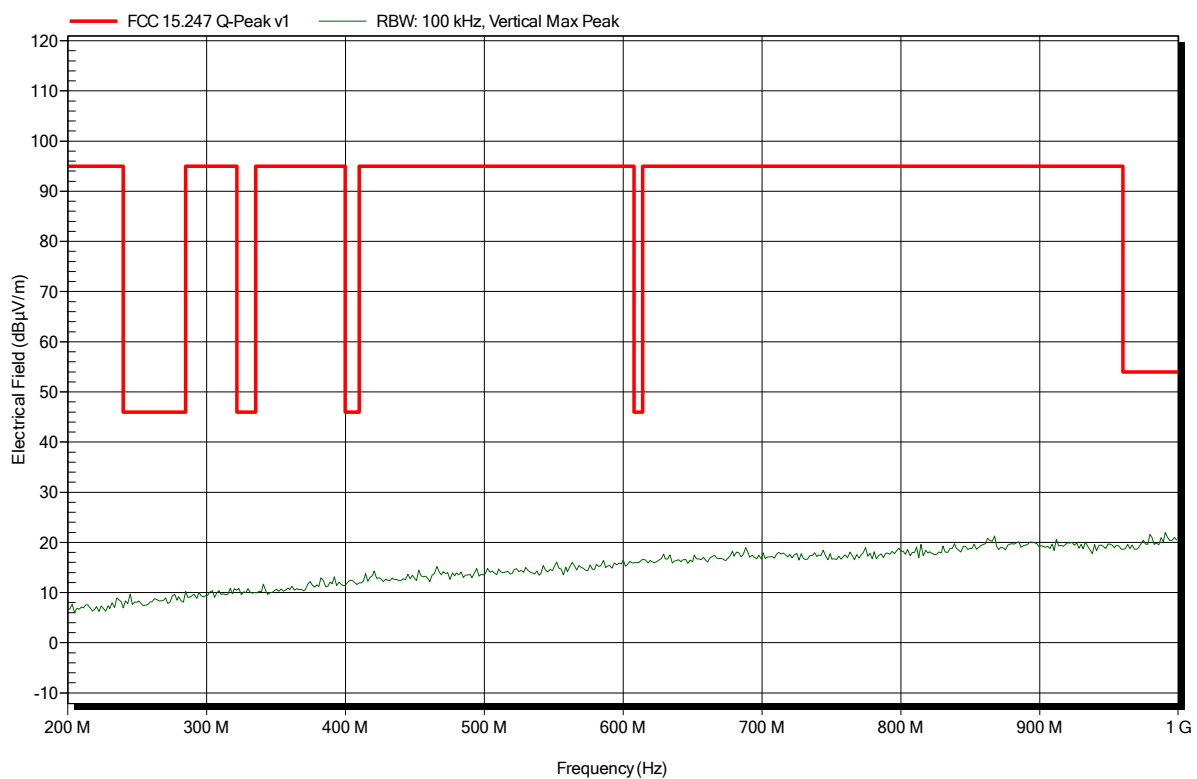


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 5

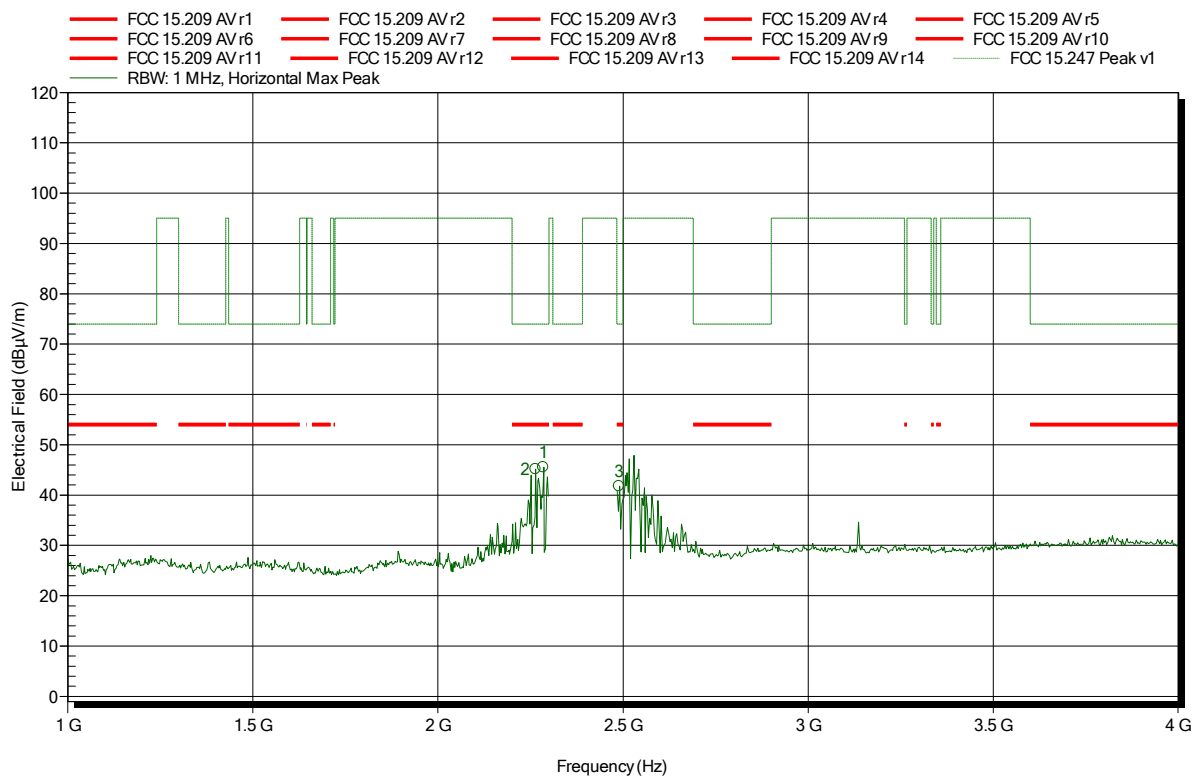


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.2636 GHz	45.15 dBµV/m	74 dBµV/m	-28.85 dB	Pass
2.2844 GHz	45.53 dBµV/m	74 dBµV/m	-28.47 dB	Pass
2.4896 GHz	41.77 dBµV/m	74 dBµV/m	-32.23 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:

Index 13

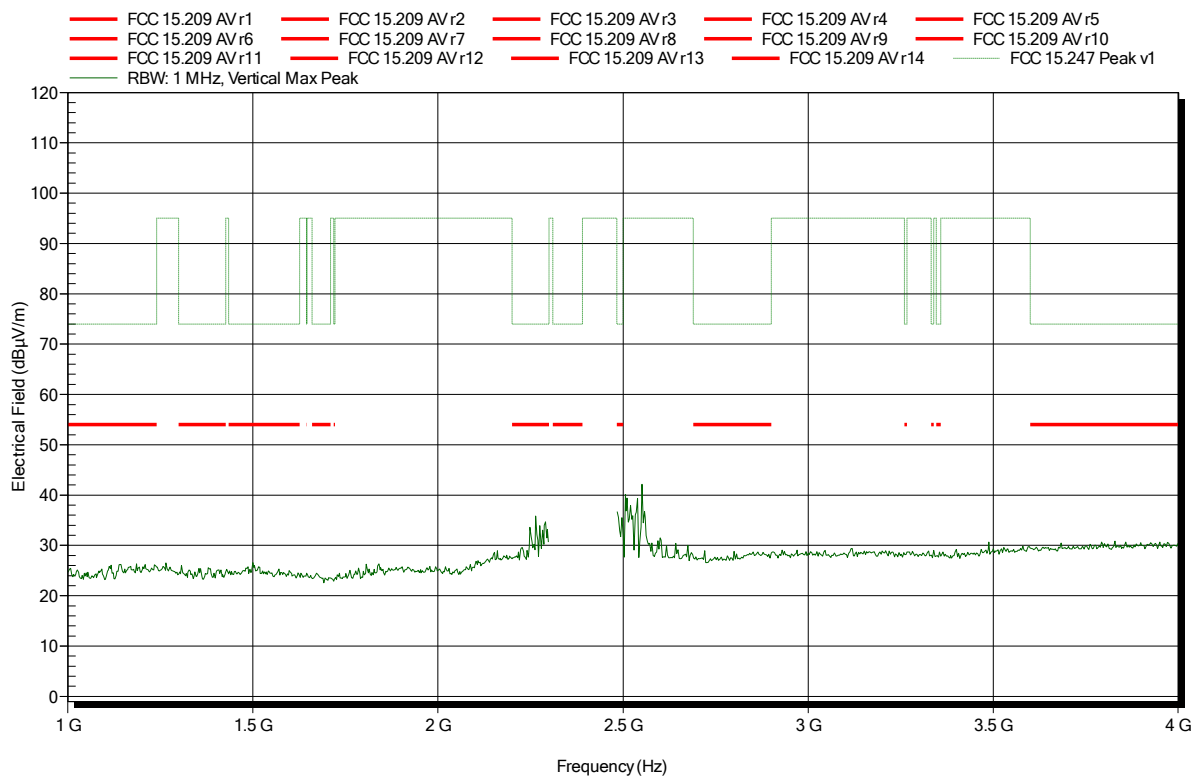


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note: lower bandedge

Index 12

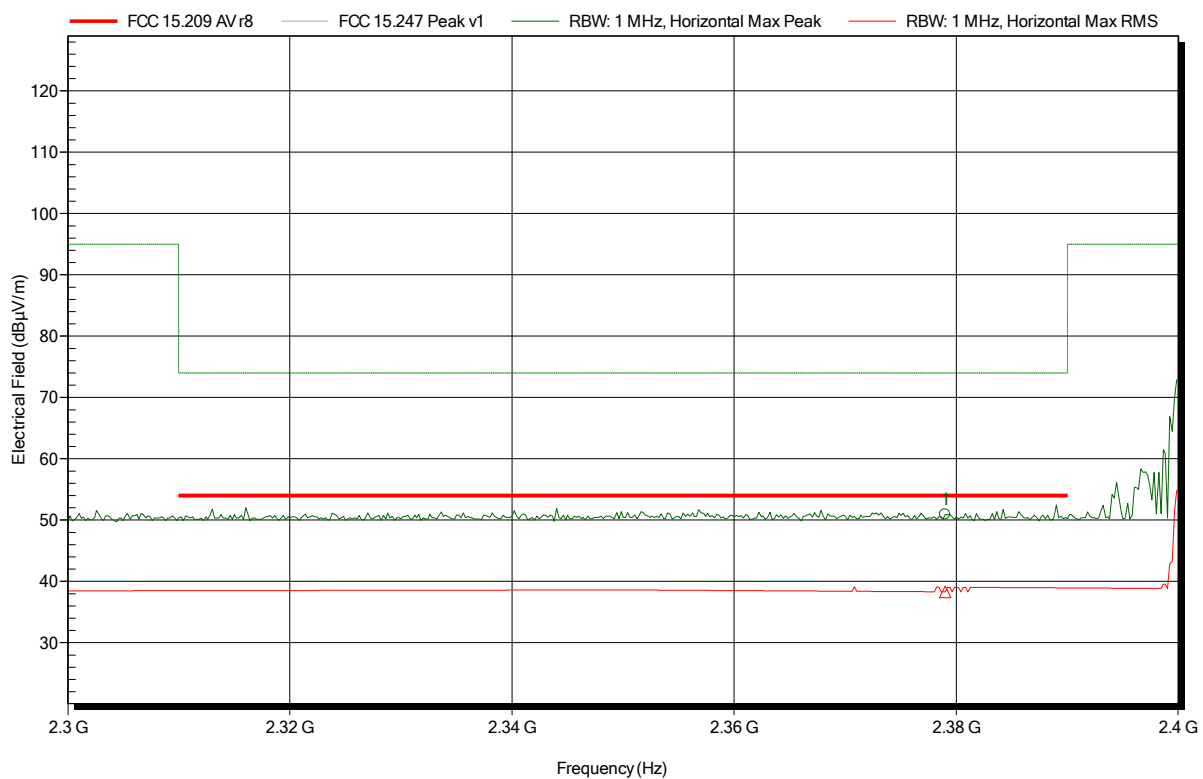


Frequency 2.379 GHz	Peak 50.91 dBμV/m	Peak Limit 74 dBμV/m	Peak Difference -23.09 dB	Peak Status Pass
Frequency 2.379 GHz	RMS 38.3 dBμV/m	RMS Limit 54 dBμV/m	RMS Difference -15.7 dB	RMS Status Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note: lower bandedge

Index 14

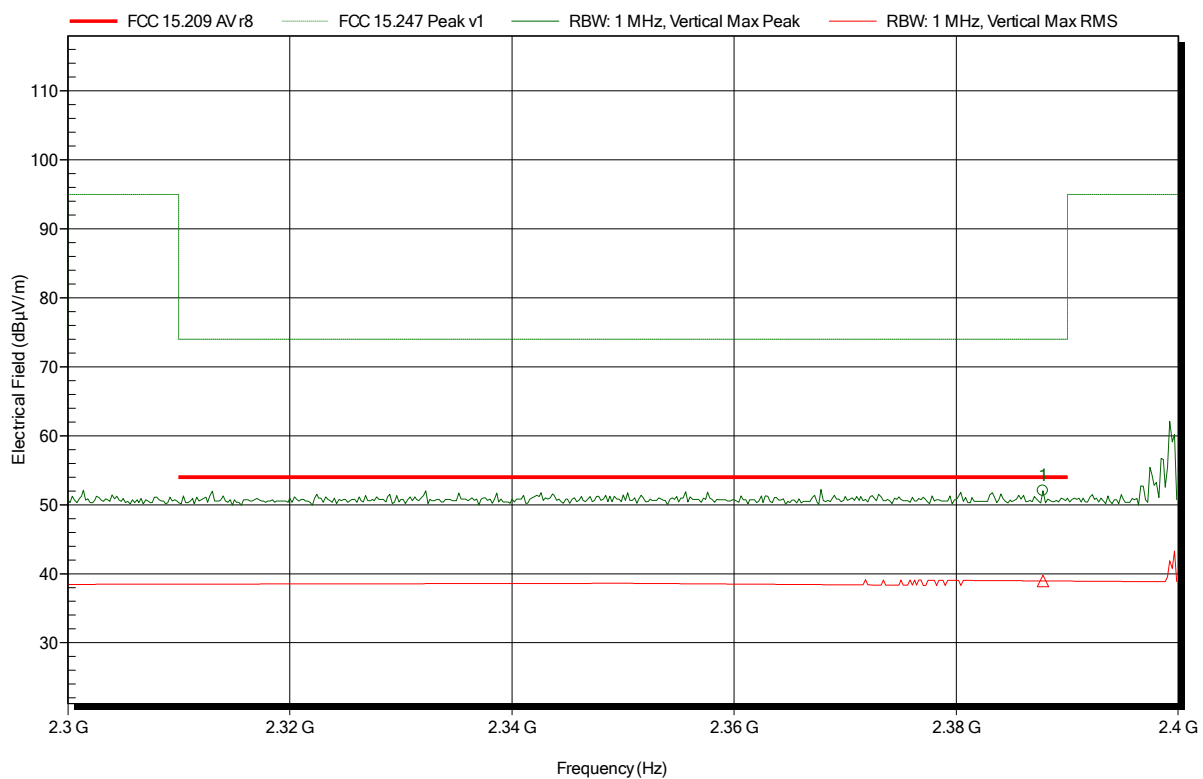


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3878 GHz	52.03 dBµV/m	74 dBµV/m	-21.97 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.3878 GHz	38.96 dBµV/m	54 dBµV/m	-15.04 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 8

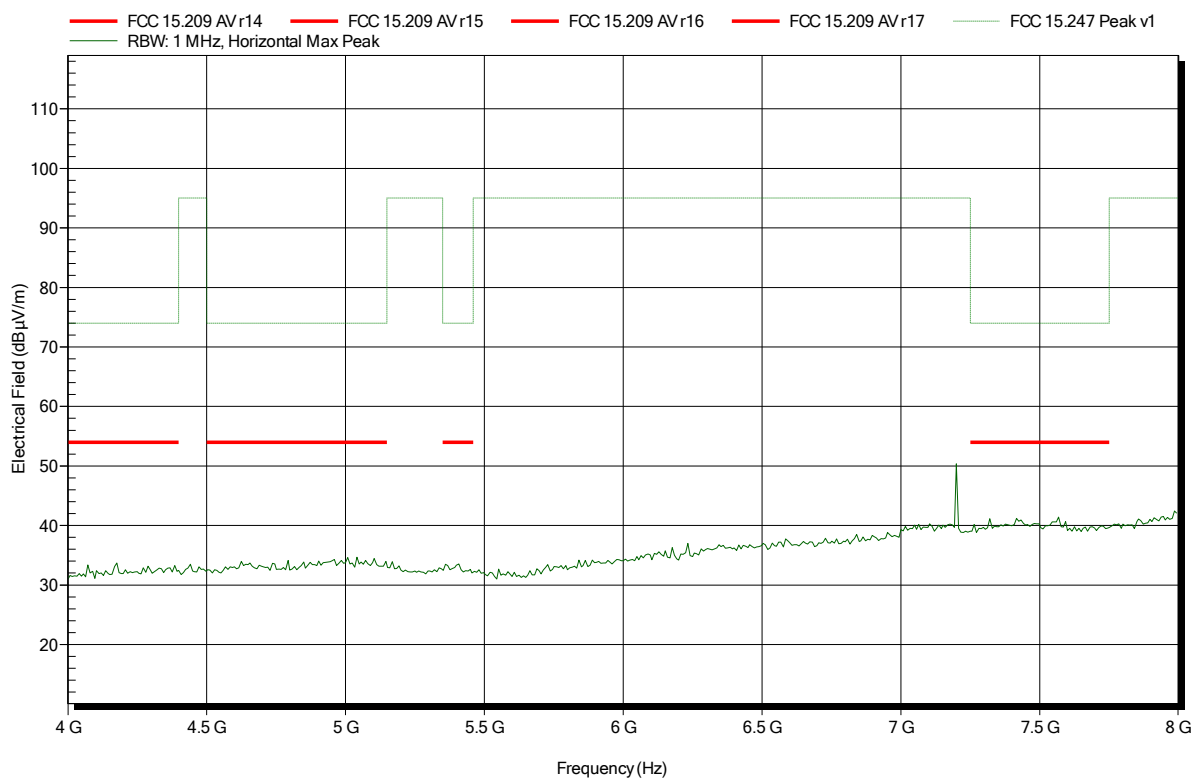


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 15

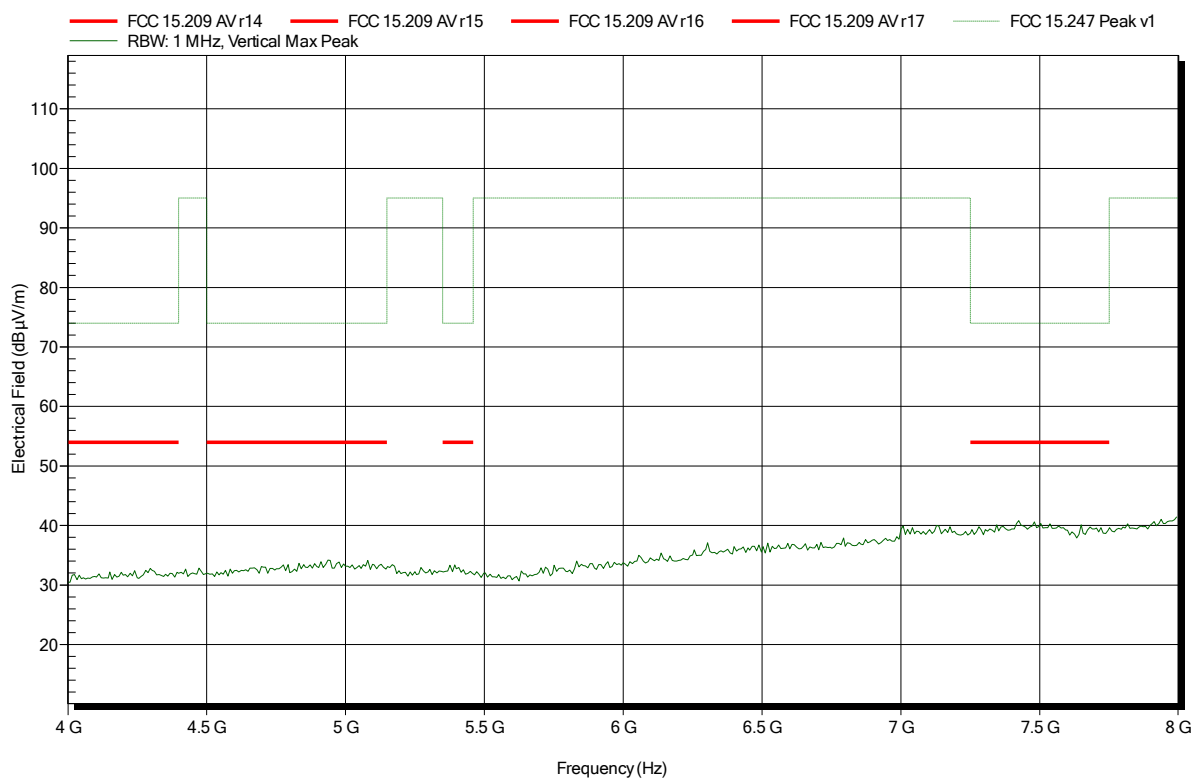


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:

Index 9

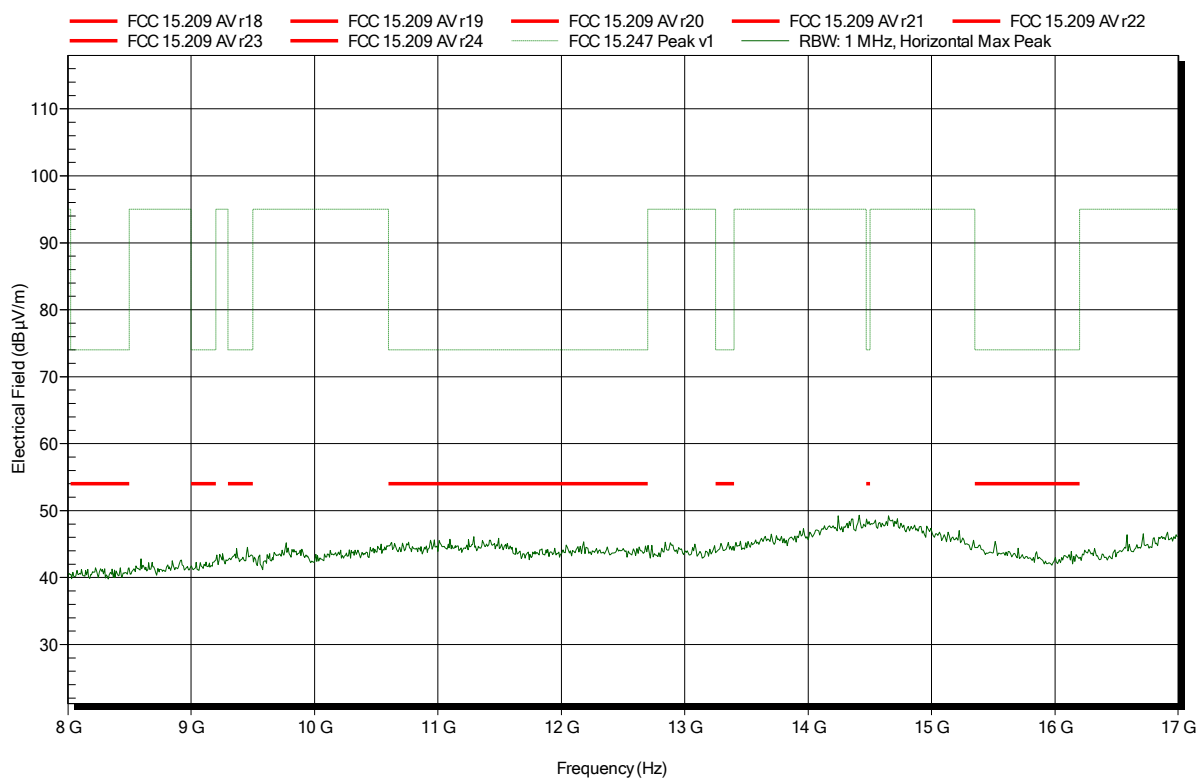


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2402 MHz
Test Date: 2018-03-26
Note:

Index 16

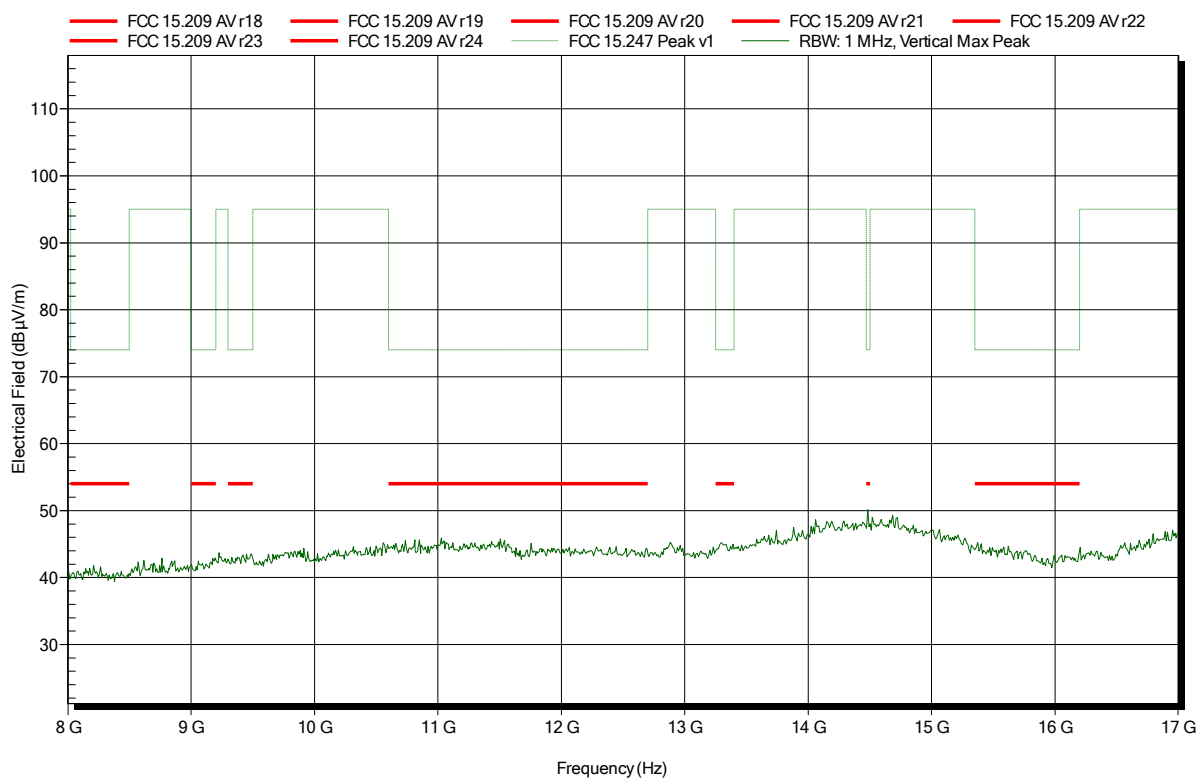


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 10

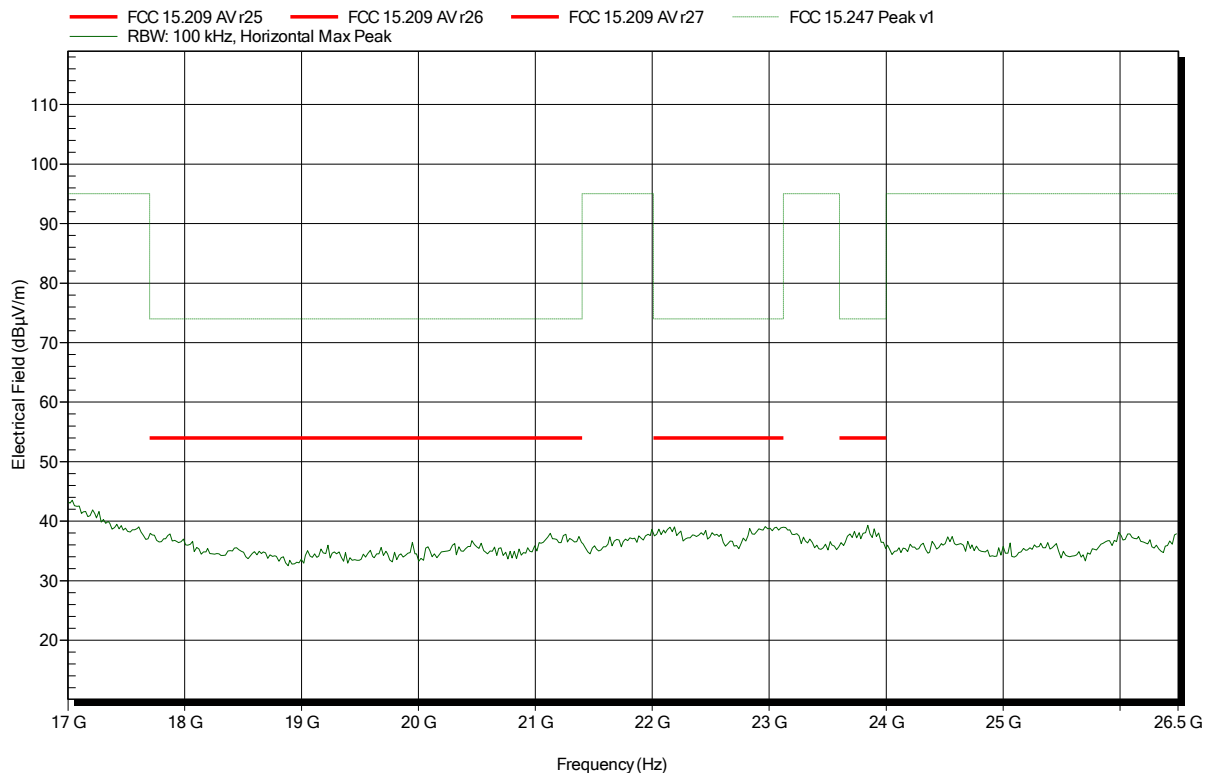


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2402 MHz
 Test Date: 2018-03-26
 Note:

Index 17

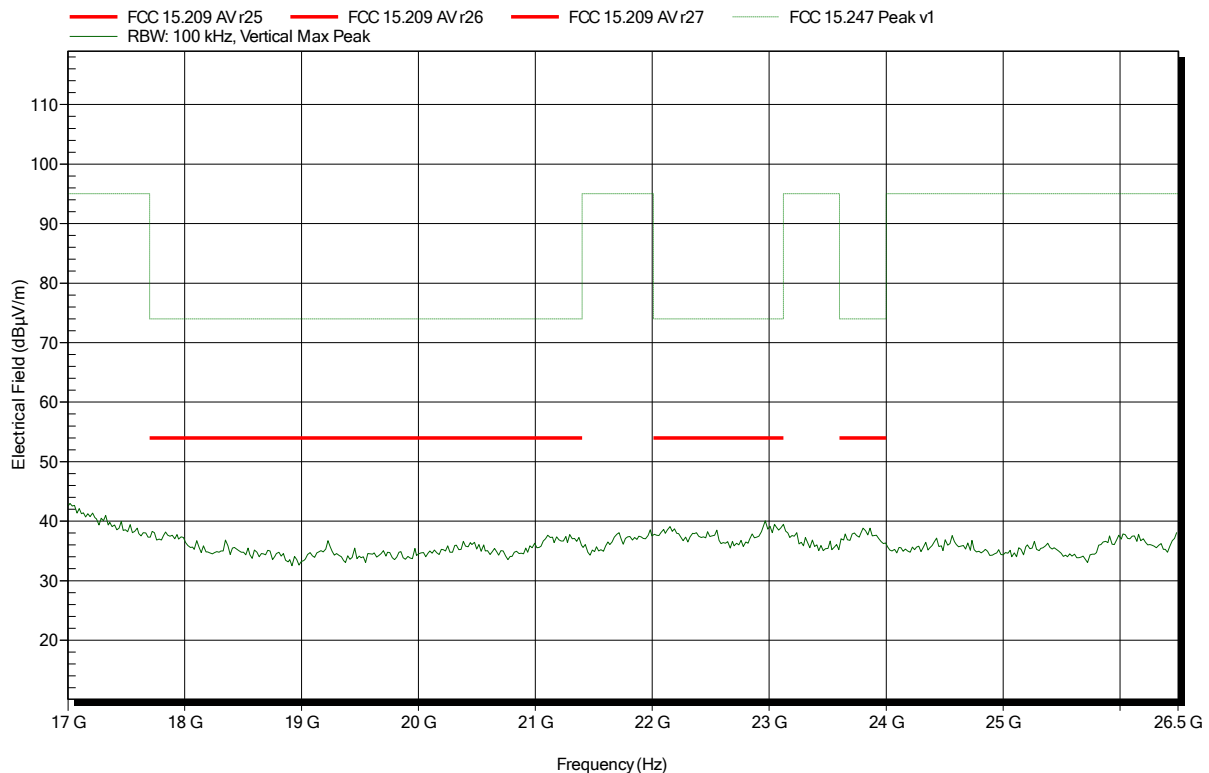


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 22

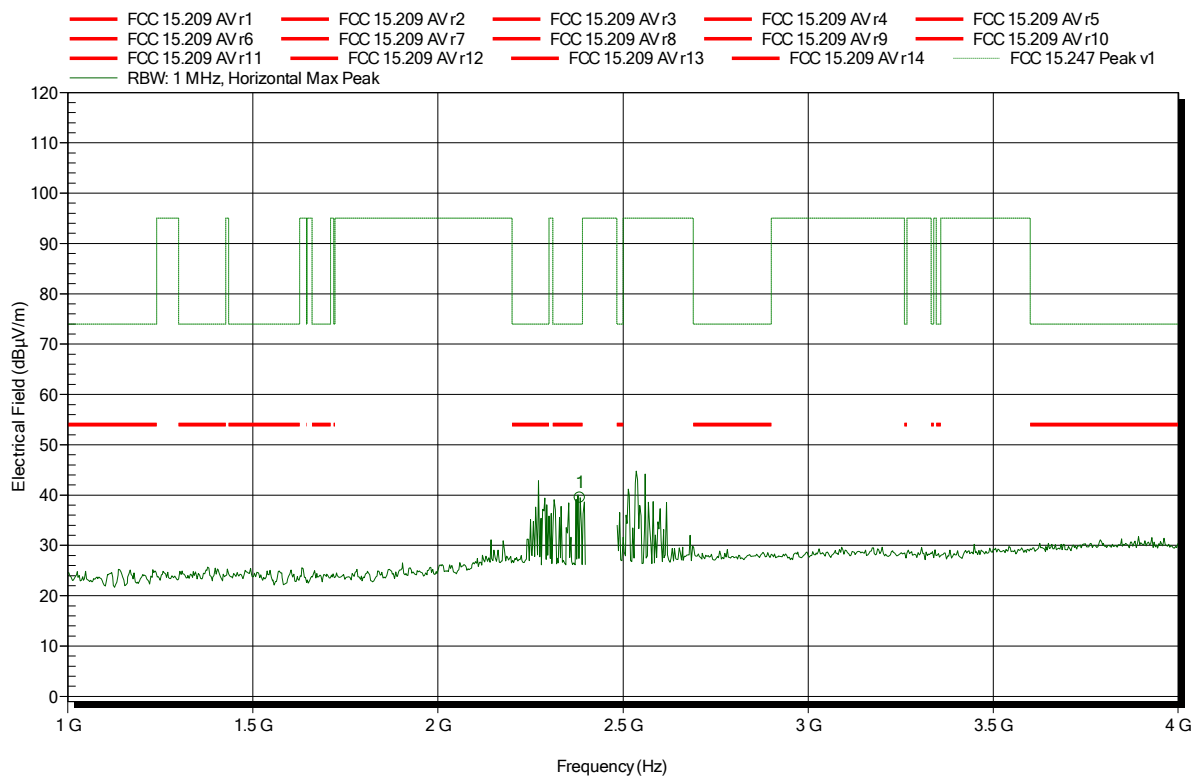


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3832 GHz	39.5 dBµV/m	74 dBµV/m	-34.5 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 26

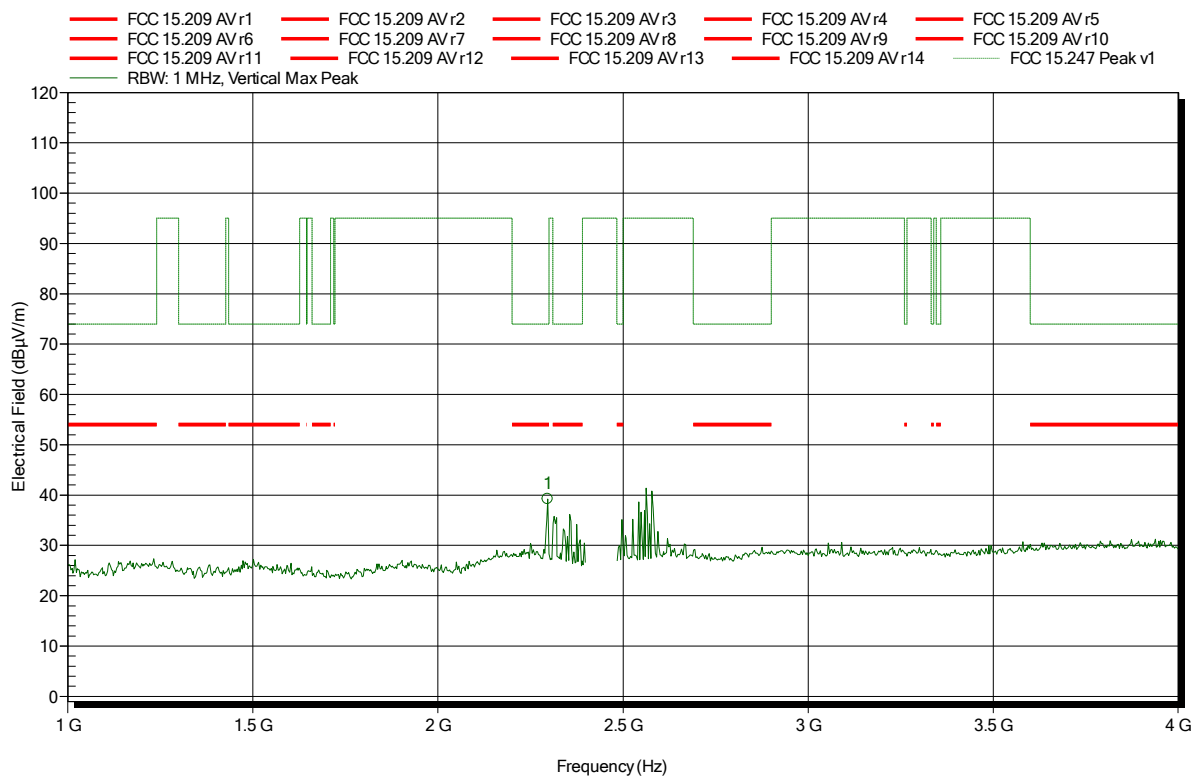


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.2964 GHz	39.24 dBµV/m	74 dBµV/m	-34.76 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 23

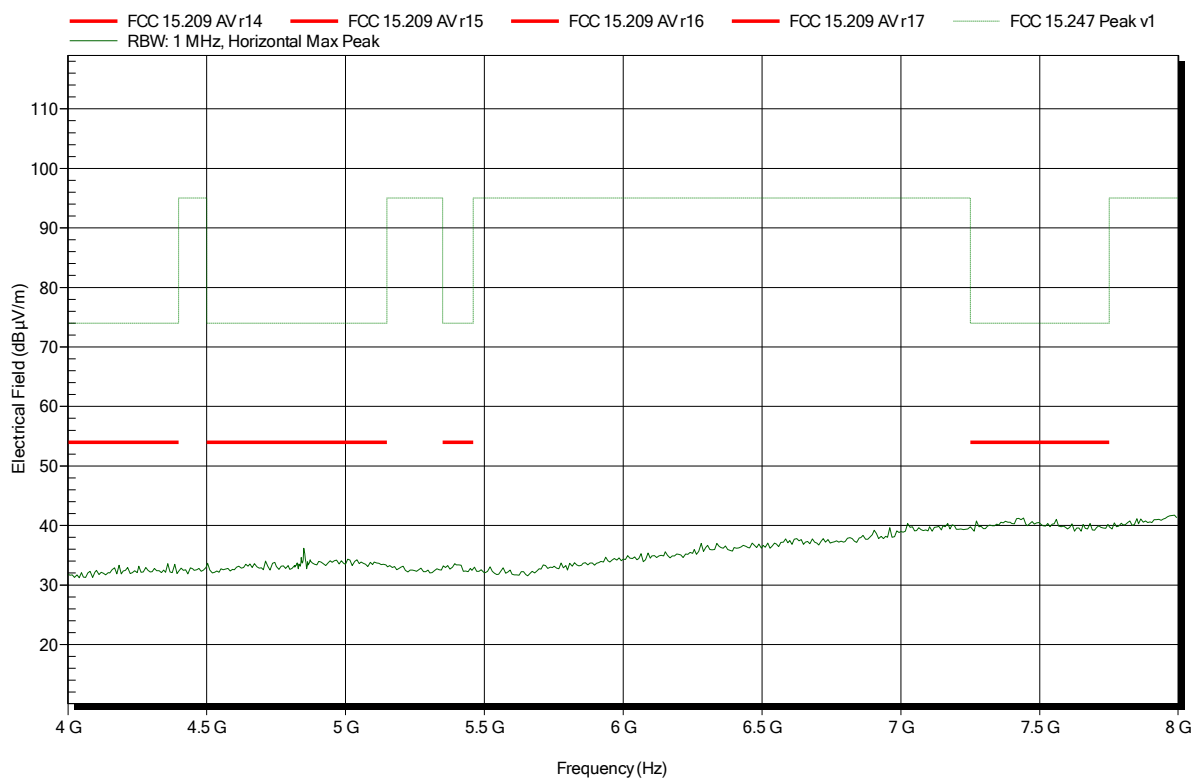


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 27

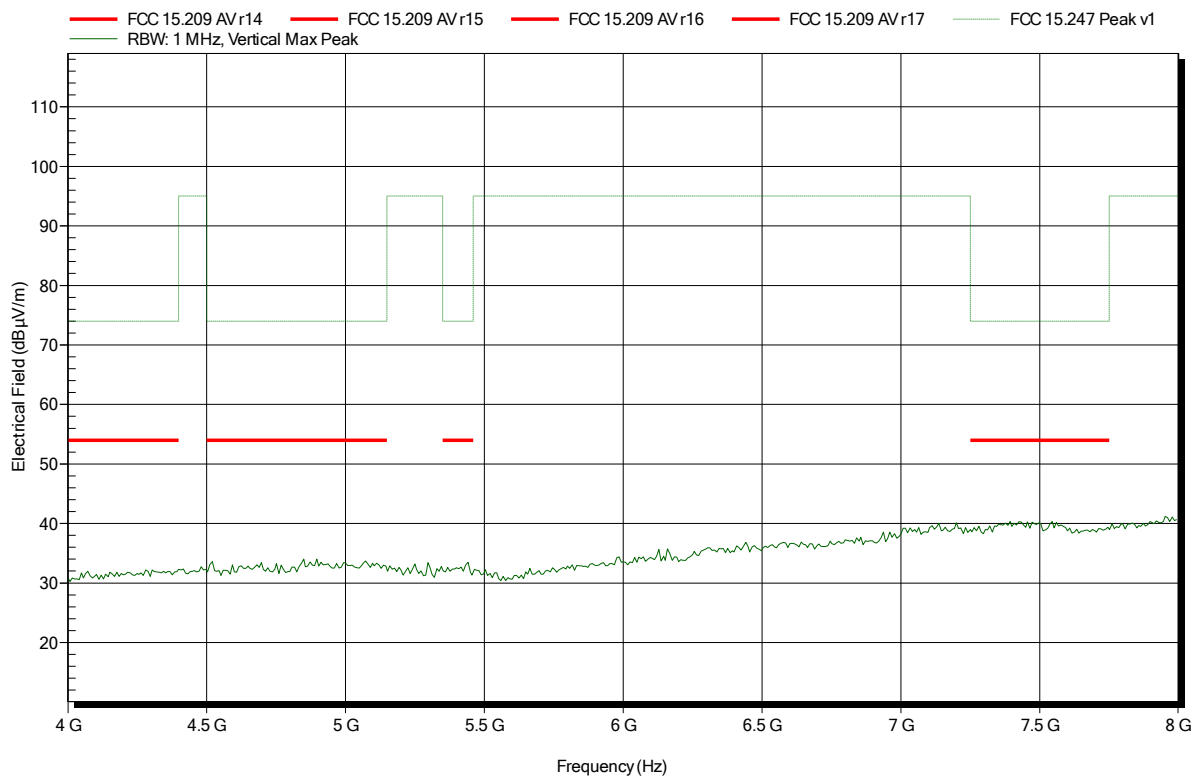


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 24

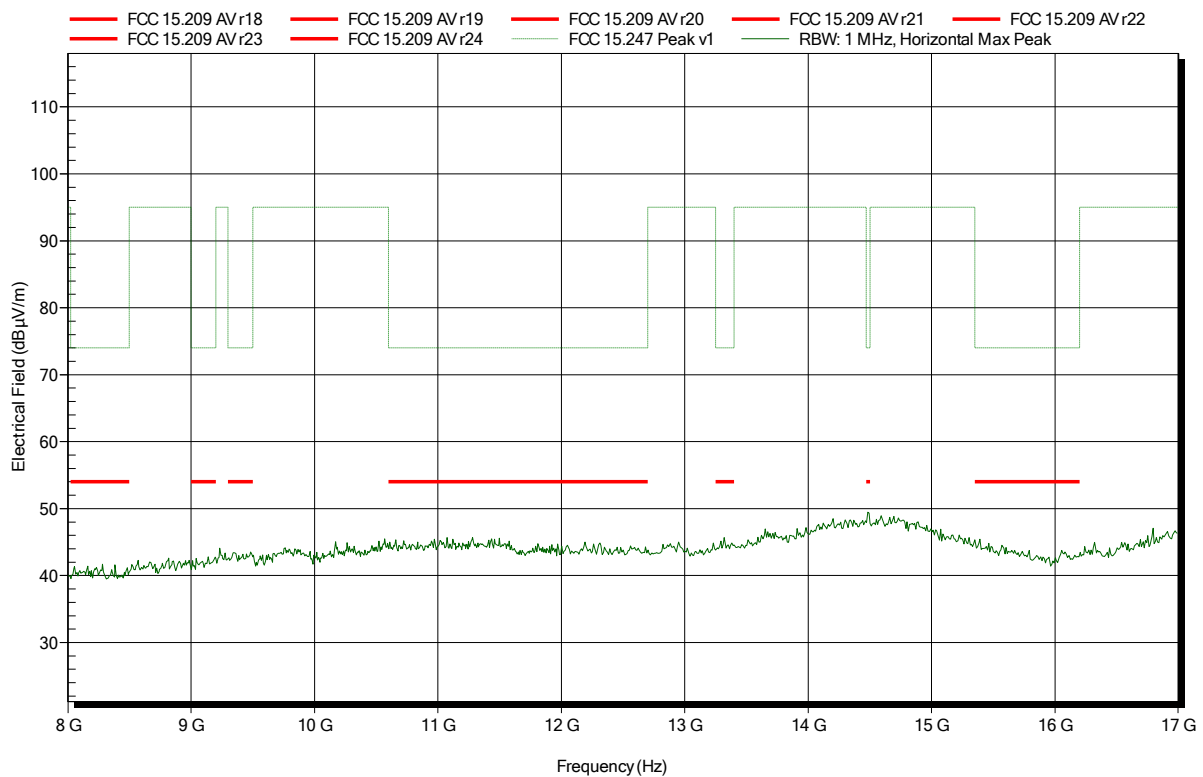


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 28

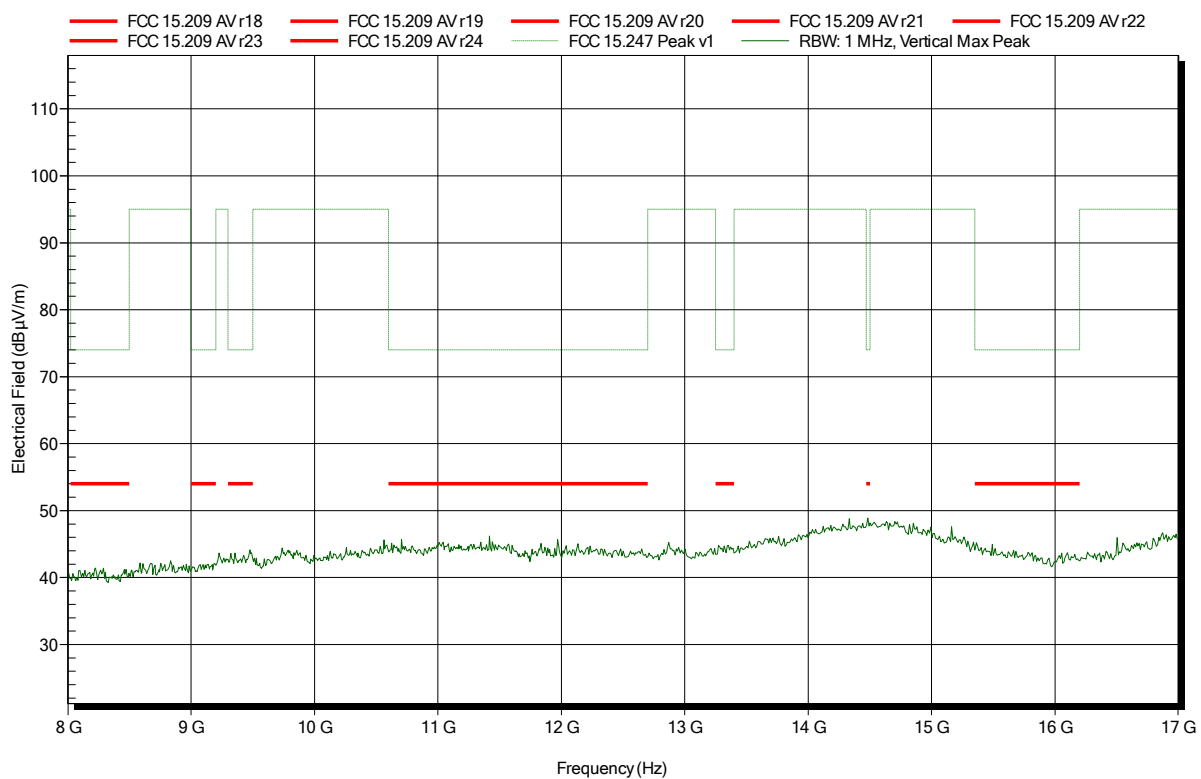


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
 Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 25

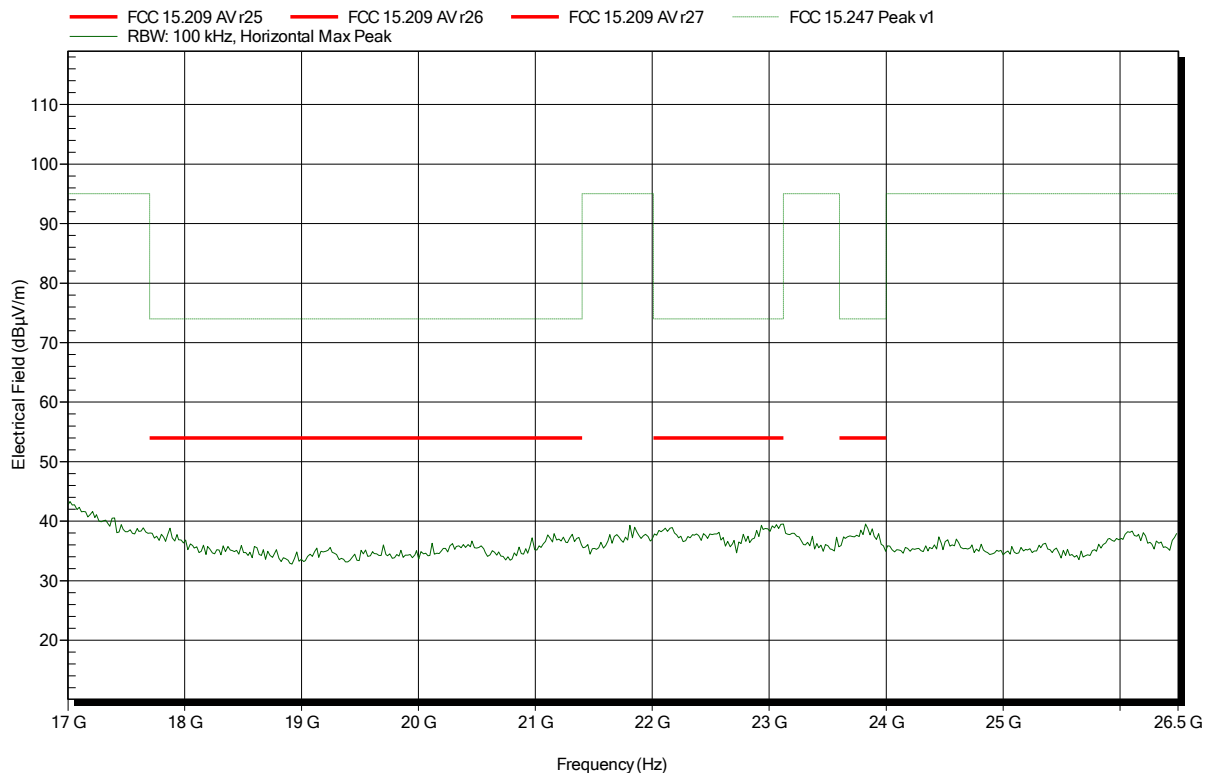


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Amplifier Research AT 4560 (old name) / ATH18G40 (new name),
Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 29

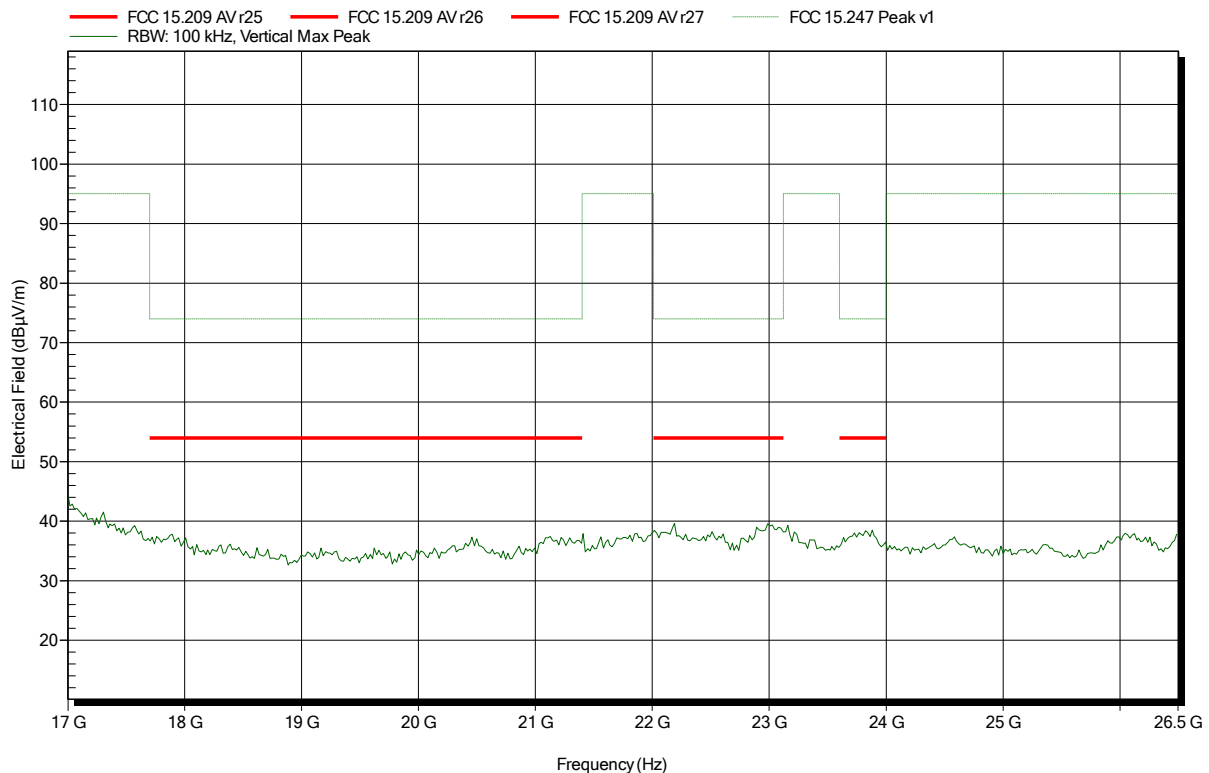


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2018-03-26
 Note:

Index 30

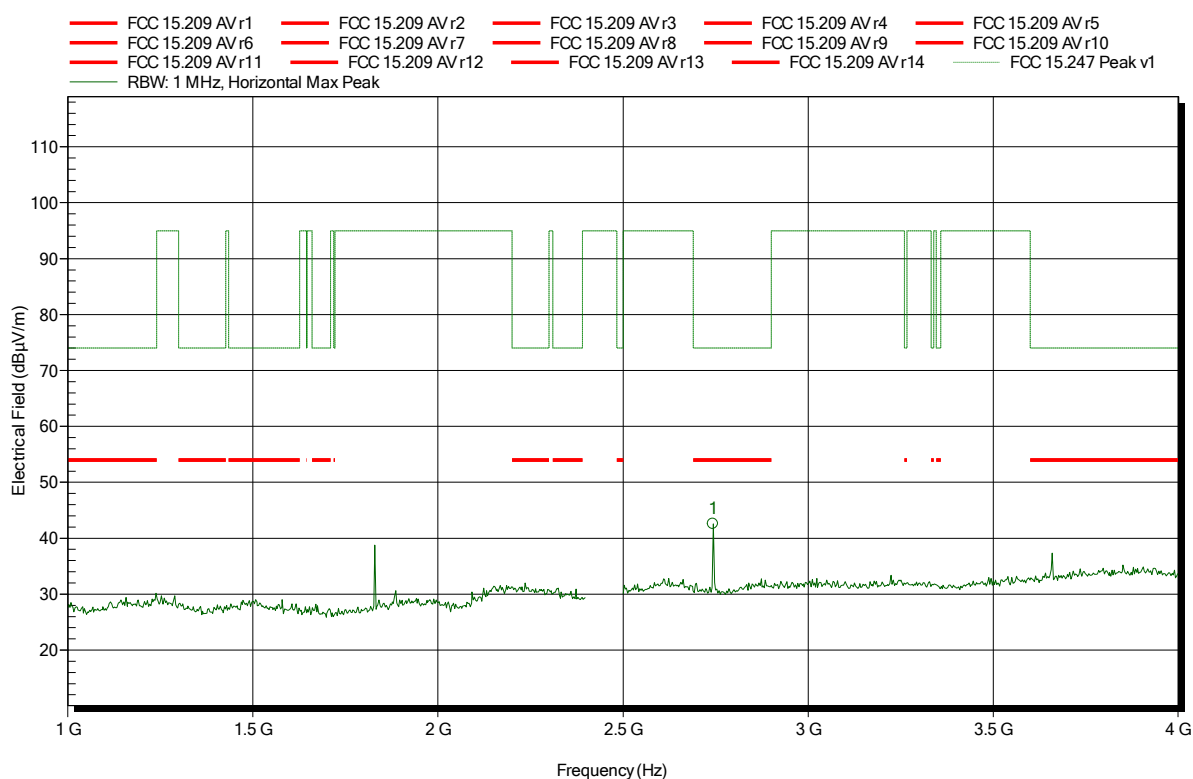


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.743 GHz	42.57 dBµV/m	74 dBµV/m	-31.43 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2018-03-26
Note:

Index 37

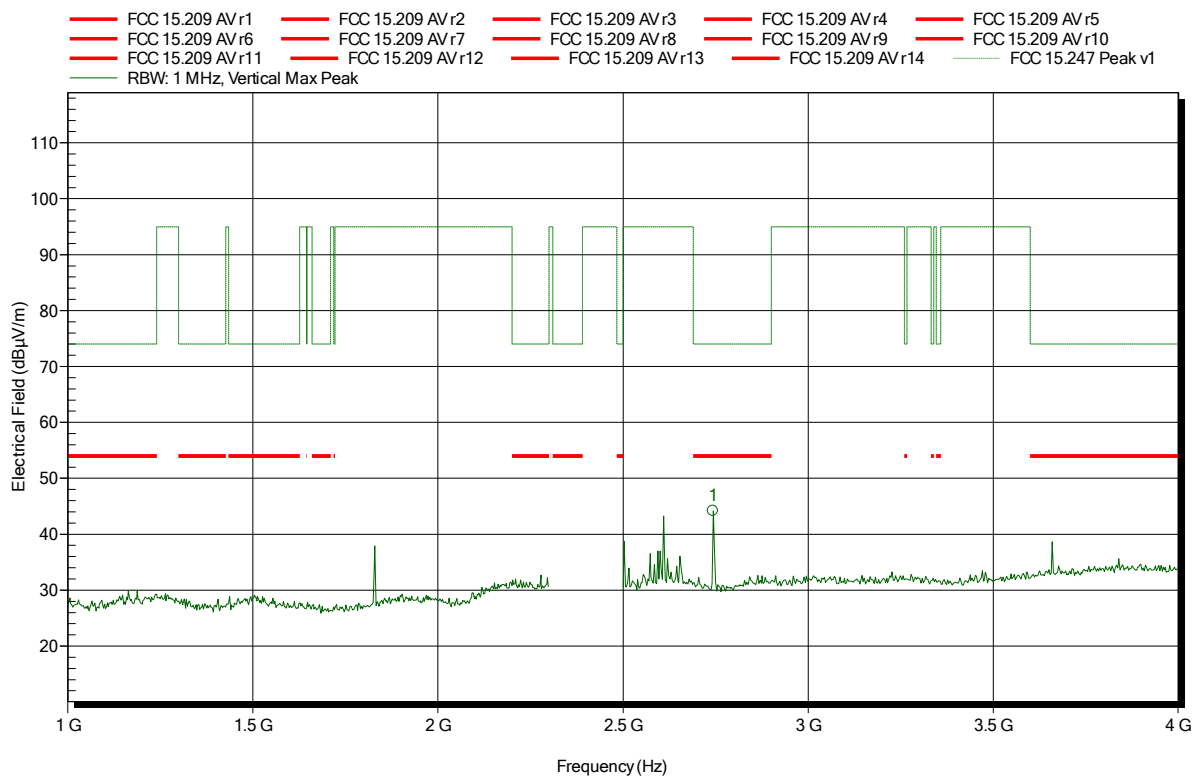


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.743 GHz	44.19 dBμV/m	74 dBμV/m	-29.81 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2018-03-26
 Note: upper bandedge

Index 32

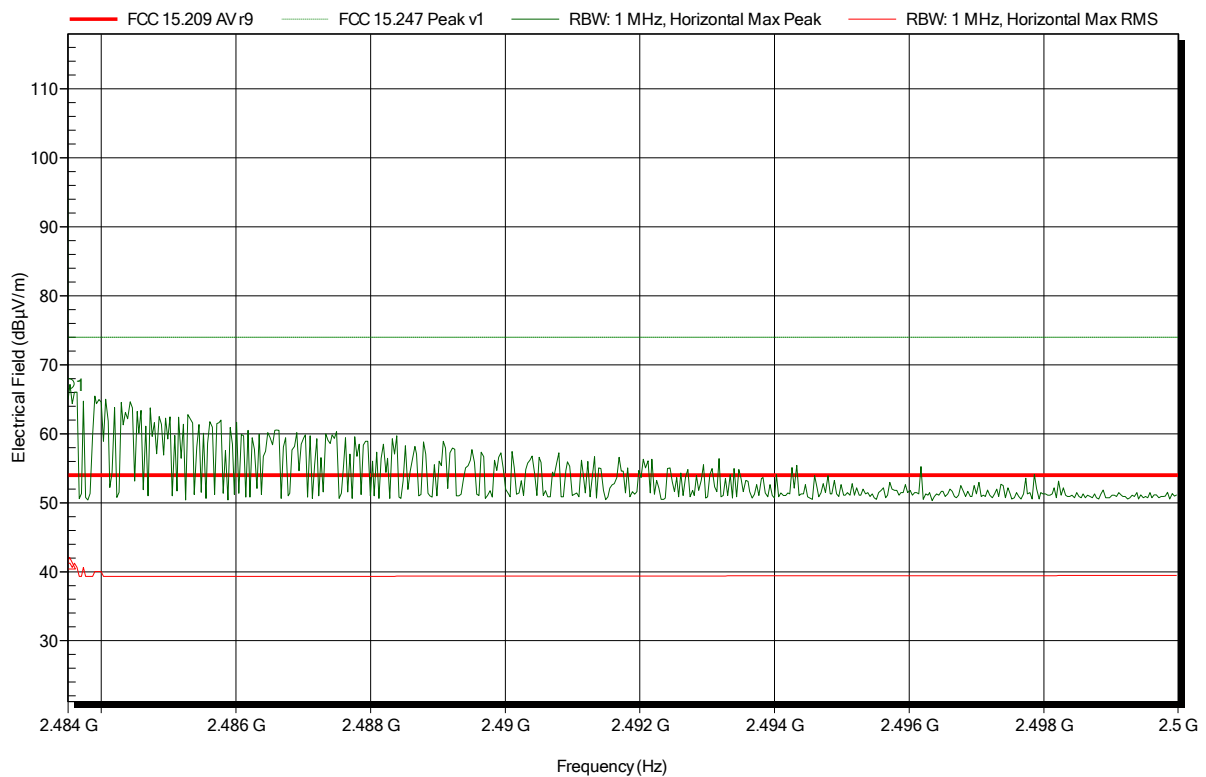


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	67.17 dBµV/m	74 dBµV/m	-6.83 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	41.24 dBµV/m	54 dBµV/m	-12.76 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2018-03-26
 Note: upper bandedge

Index 38

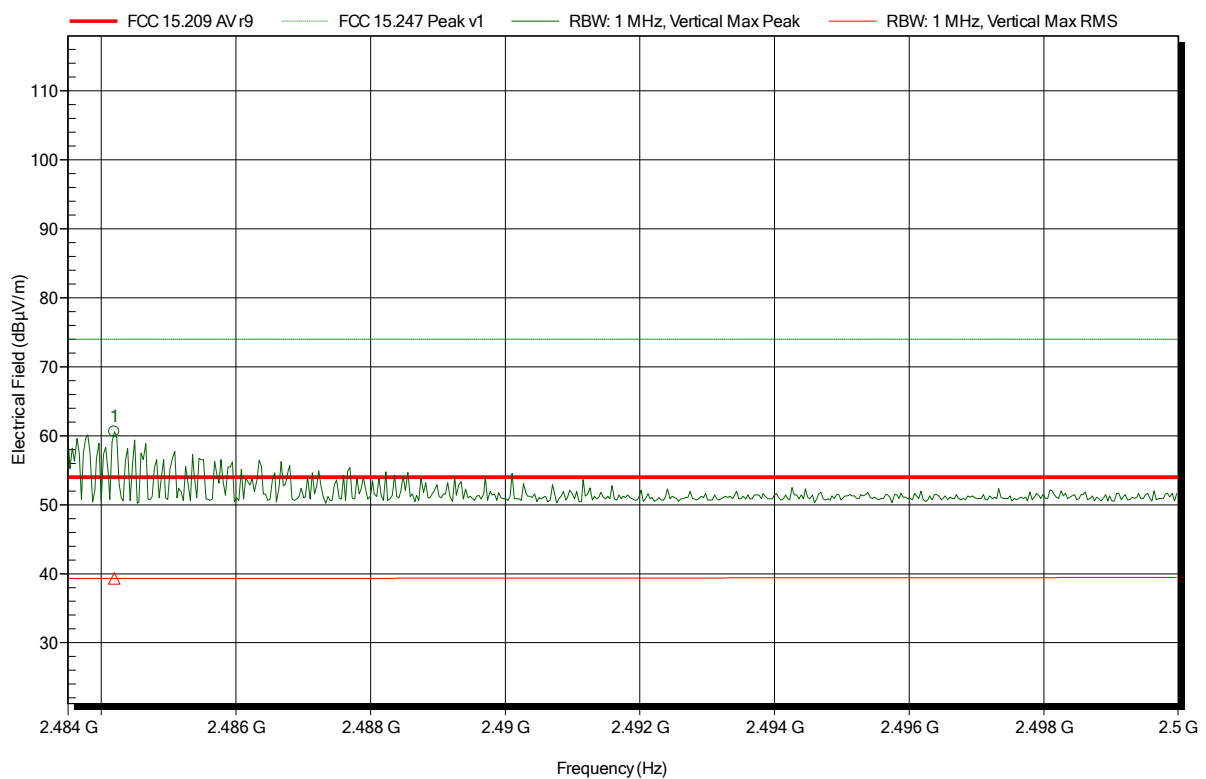


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4842 GHz	60.59 dBµV/m	74 dBµV/m	-13.41 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4842 GHz	39.31 dBµV/m	54 dBµV/m	-14.69 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2018-03-26
Note:

Index 33

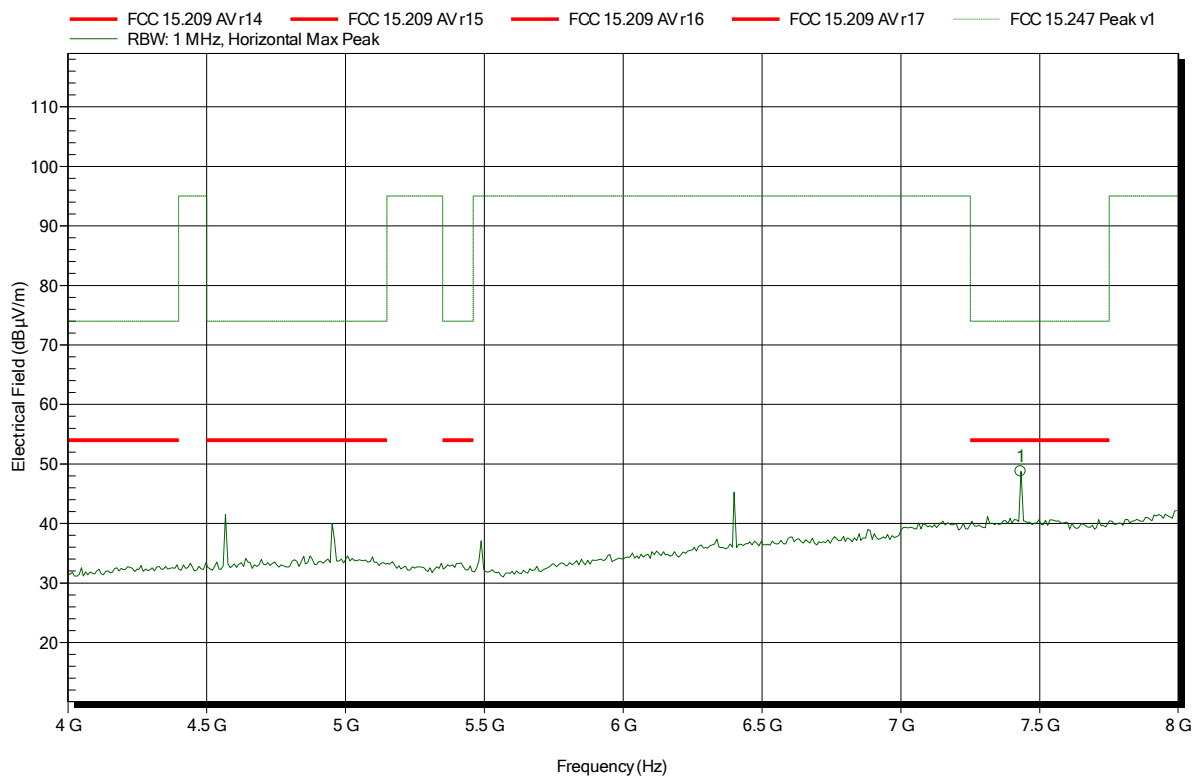


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
7.432 GHz	48.76 dBµV/m	74 dBµV/m	-25.24 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2018-03-26
Note:

Index 40

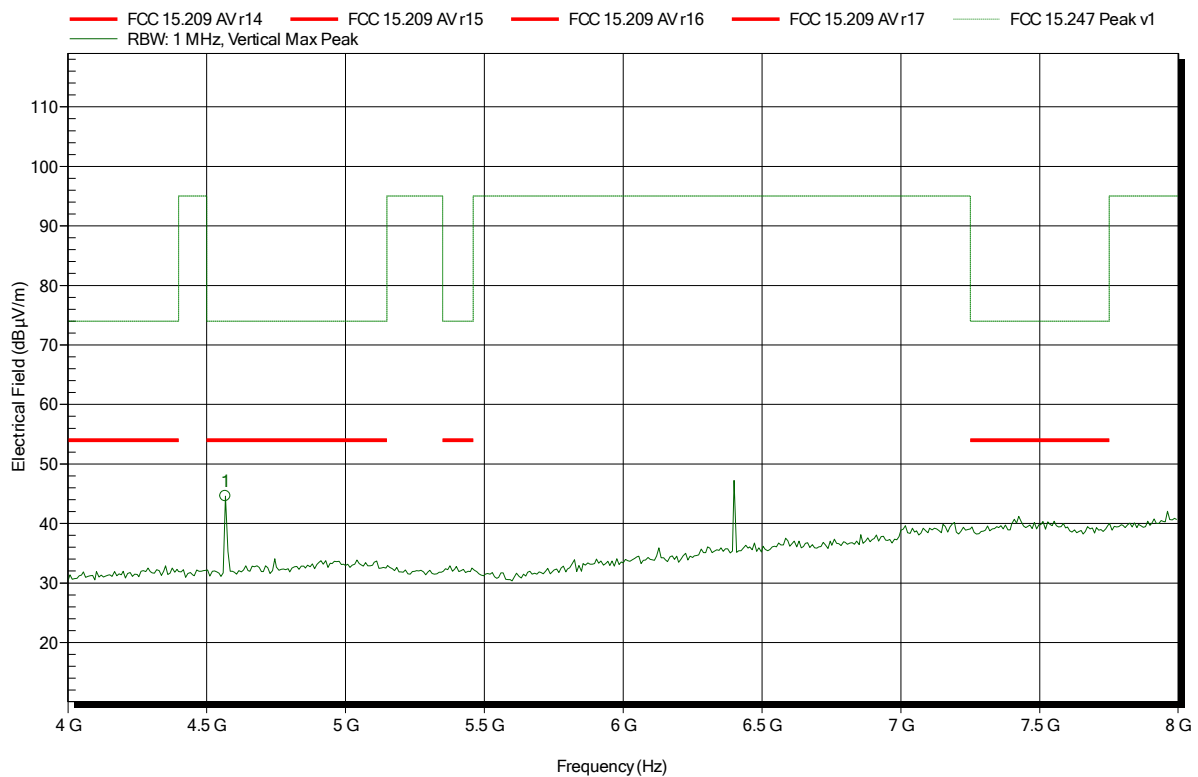


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.568 GHz	44.57 dBµV/m	74 dBµV/m	-29.43 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2018-03-26
 Note:

Index 34

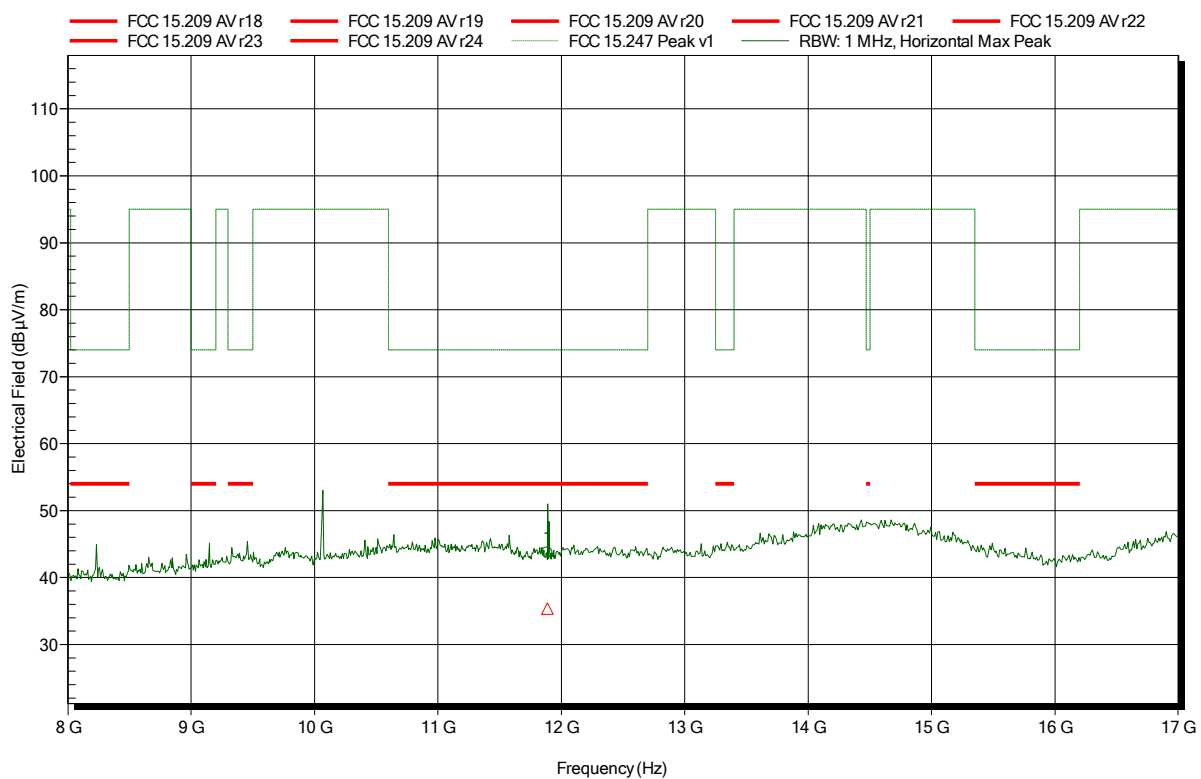


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
11.888 GHz	43.71 dBµV/m	74 dBµV/m	-30.29 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
11.888 GHz	35.36 dBµV/m	54 dBµV/m	-18.64 dB	Pass

Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2018-03-26
Note:

Index 39

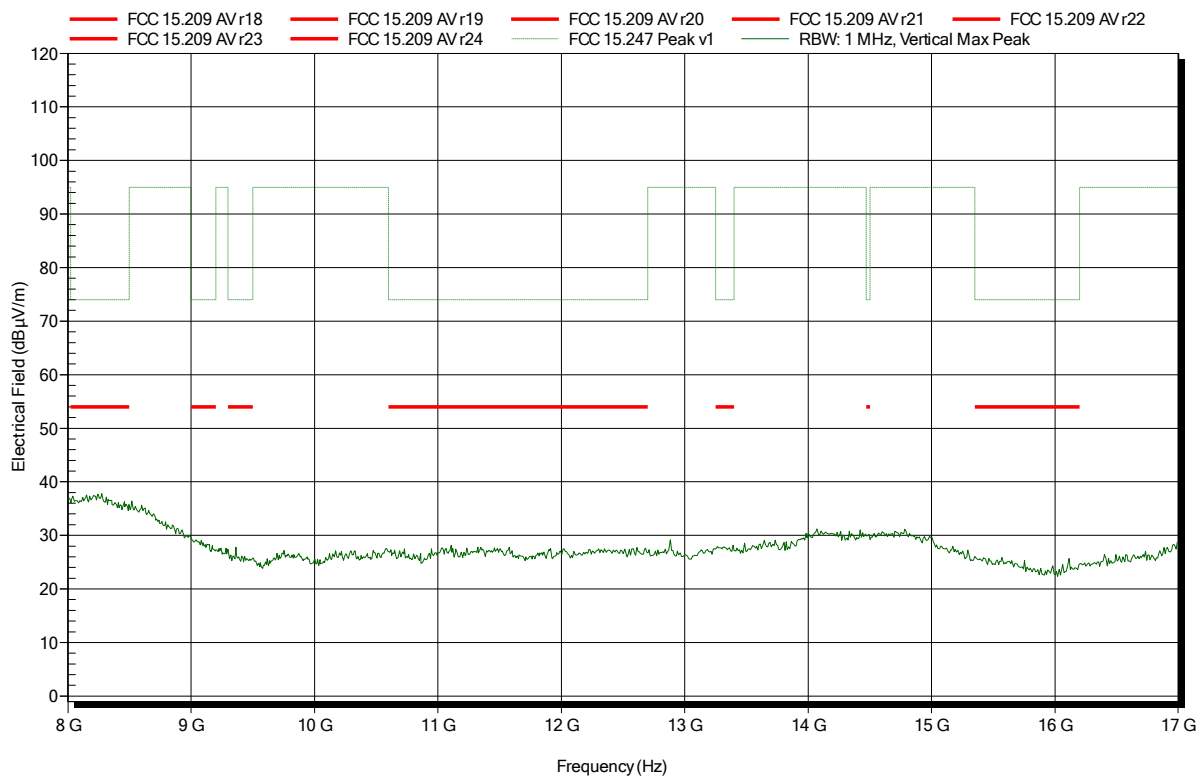


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Amplifier Research AT 4560, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; BLE; 2480 MHz
 Test Date: 2018-03-26
 Note:

Index 35

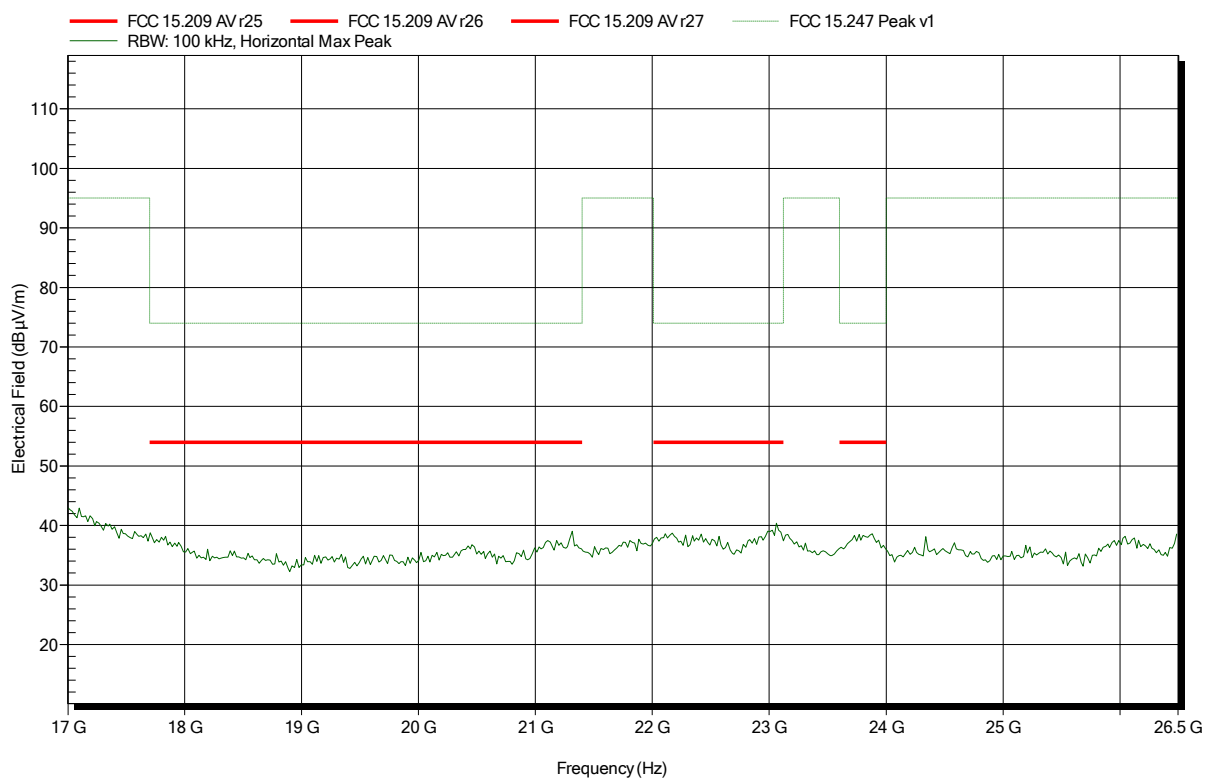


Spurious emissions according to FCC 15.247

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Amplifier Research AT 4560, Vertical
Measurement distance: 1 m converted to 3m
Mode: TX; BLE; 2480 MHz
Test Date: 2018-03-26
Note:

Index 41

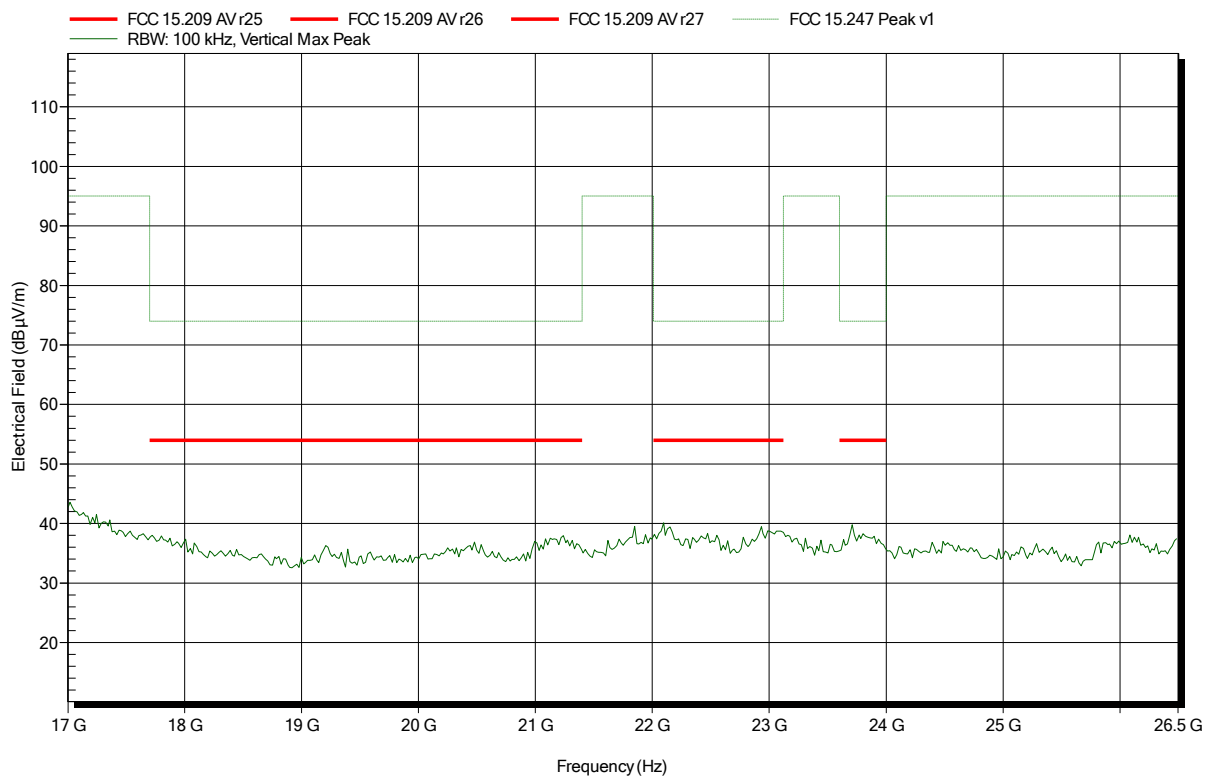


ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 48

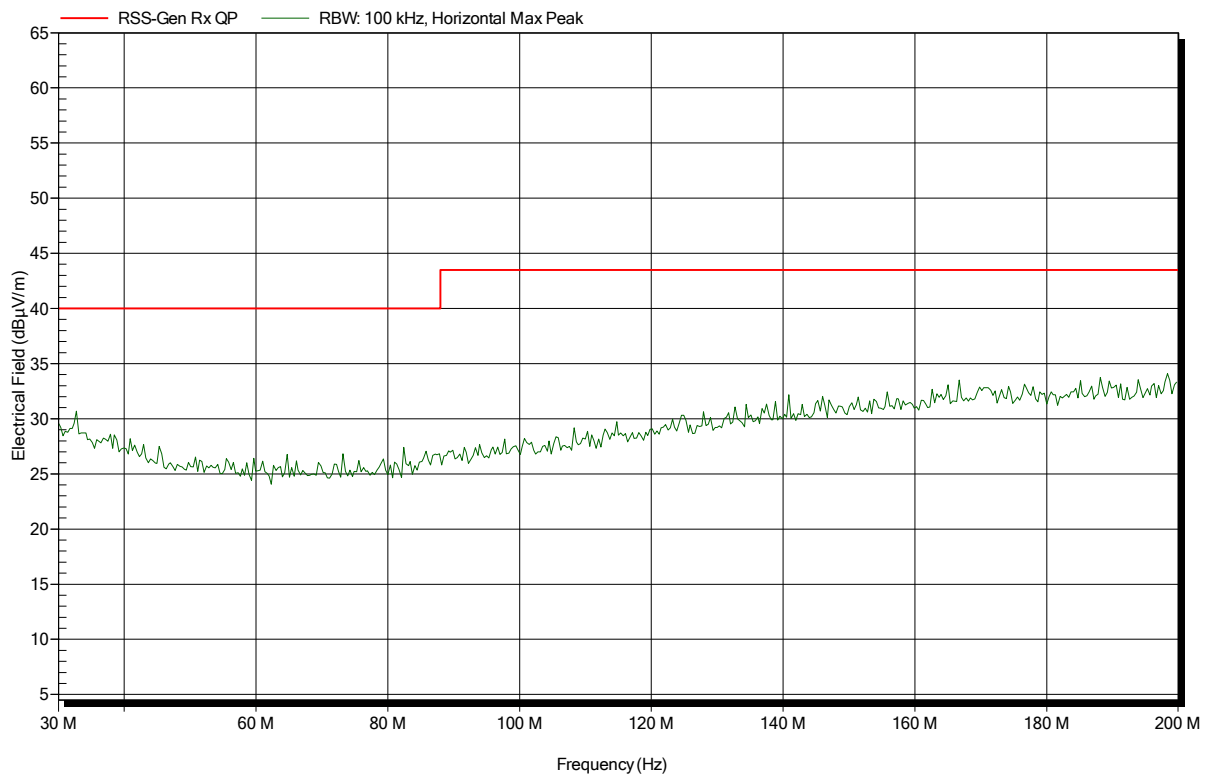


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3 m
Mode: RX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 49

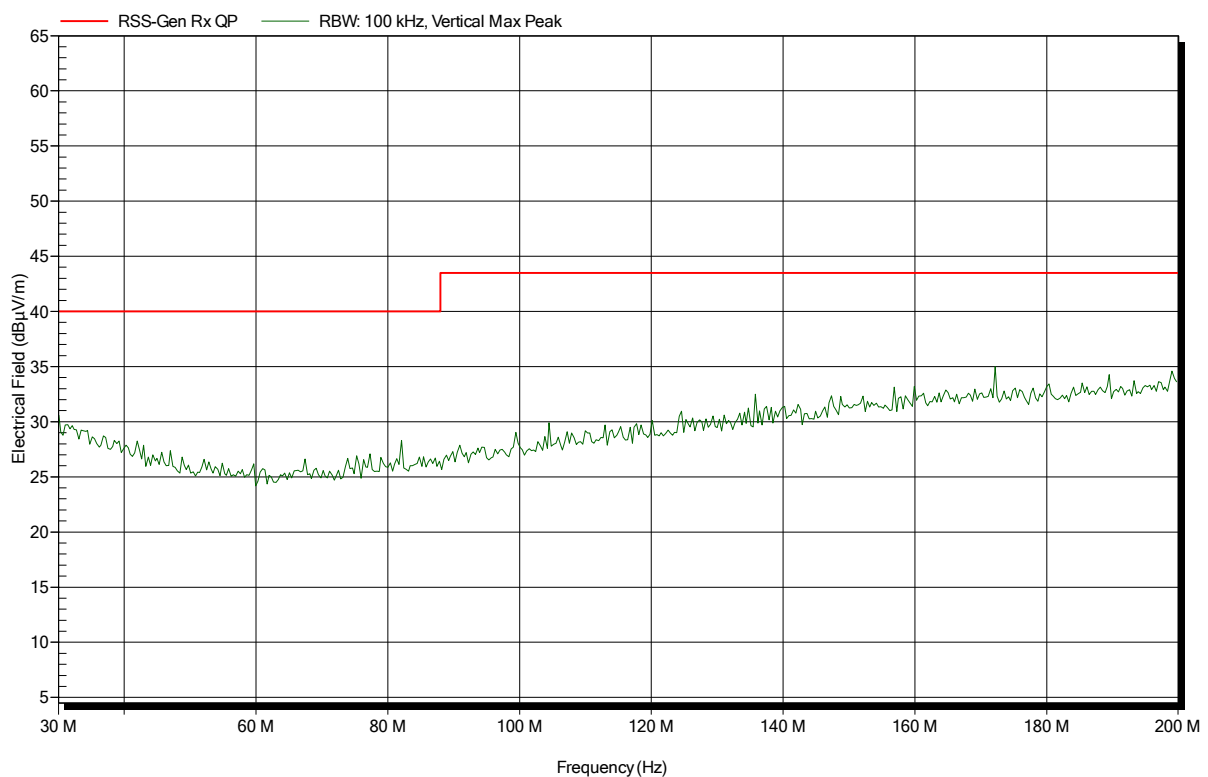


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3 m
Mode: RX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 50

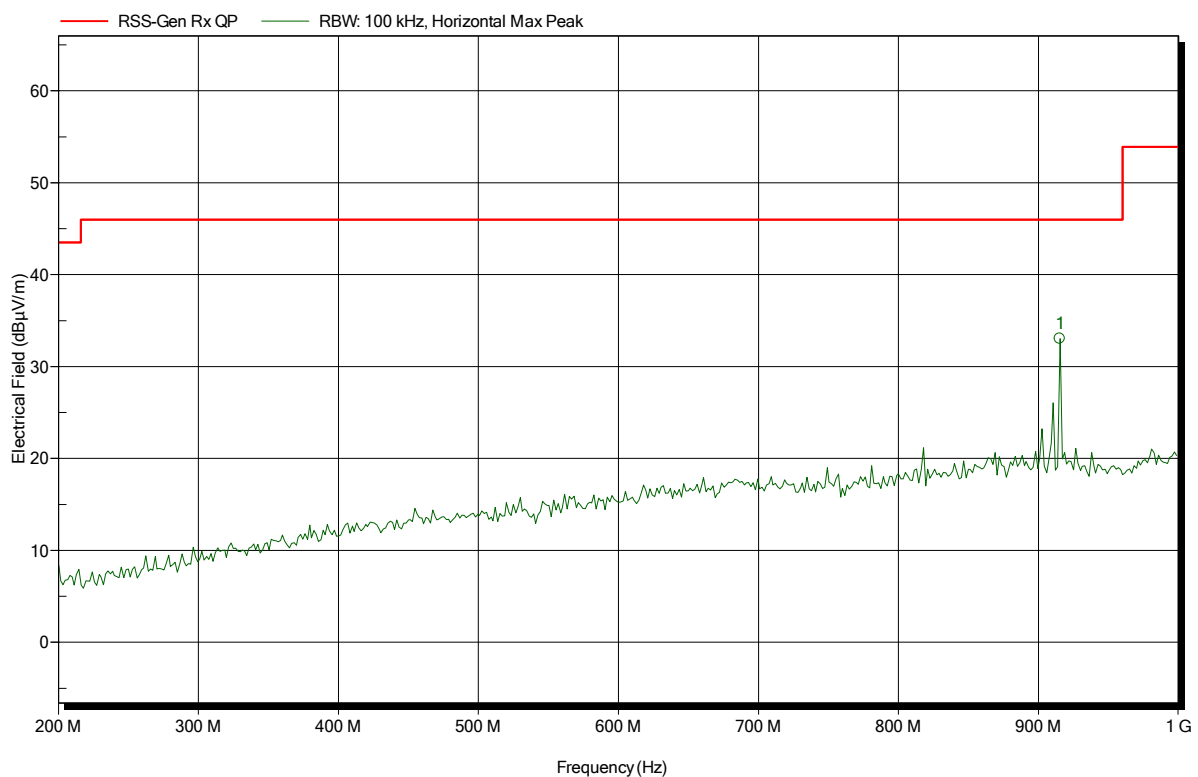


Frequency	Peak	Peak Limit	Peak Difference	Status
915.2 MHz	33.03 dBµV/m	46 dBµV/m	-12.97 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258
 Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 51

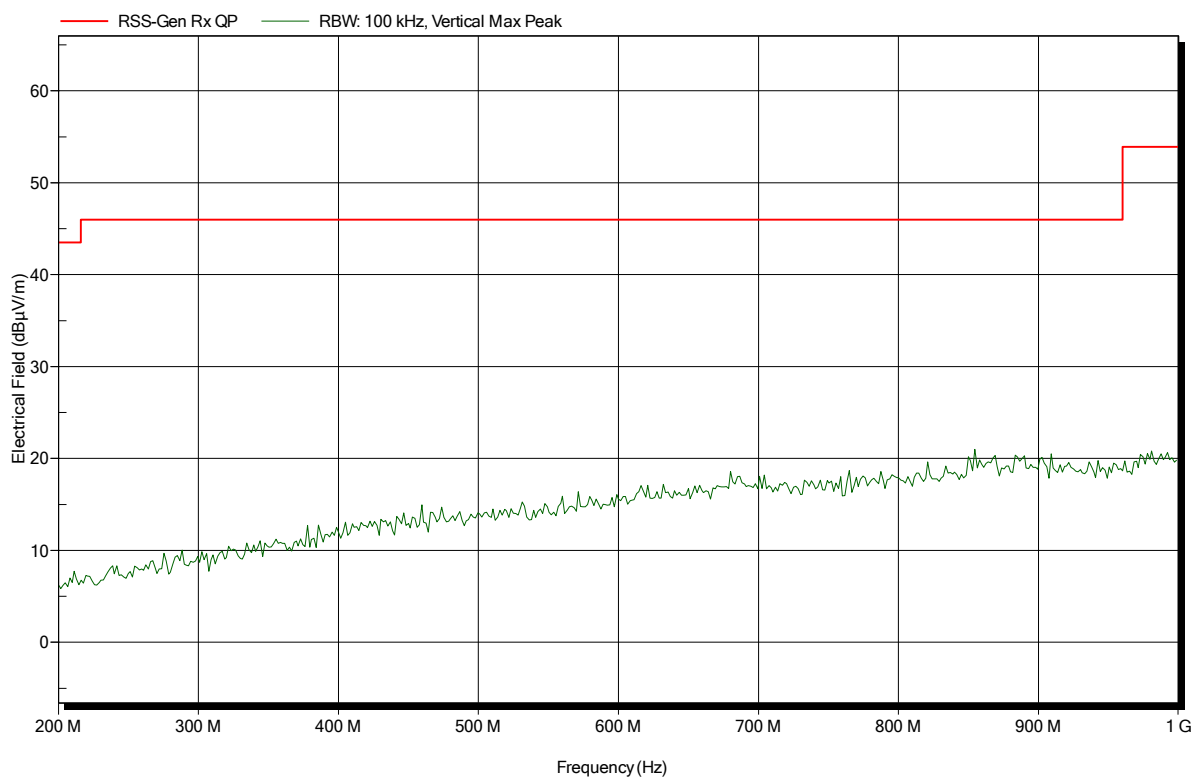


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3 m
Mode: RX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 42

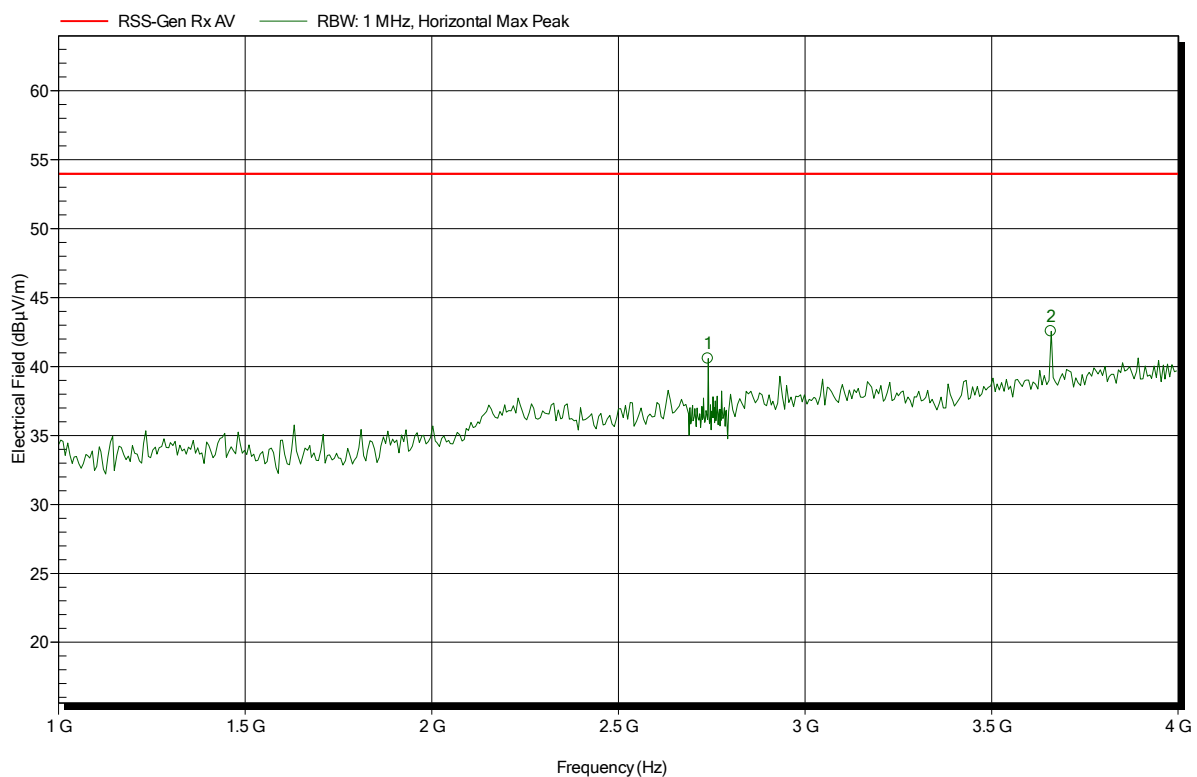


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.74 GHz	40.57 dBµV/m	53.98 dBµV/m	-13.41 dB	Pass
3.658 GHz	42.55 dBµV/m	53.98 dBµV/m	-11.43 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258
 Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 45

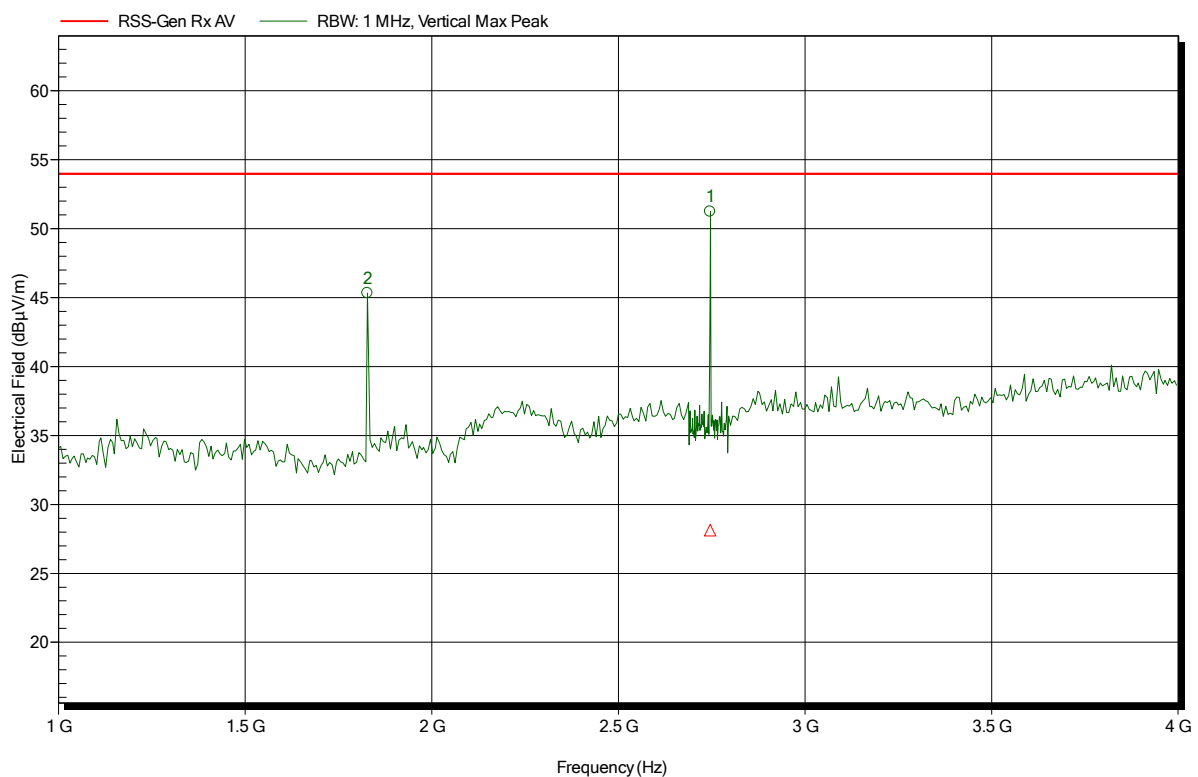


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.828 GHz	45.32 dBµV/m	53.98 dBµV/m	-8.66 dB	Pass
2.745 GHz	51.23 dBµV/m	53.98 dBµV/m	-2.75 dB	Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
EUT Name: Spaceti stone
Model: Spaceti stone CO2
Test Site: Eurofins Product Service GmbH
Operator: Wilfried Treffke
Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3 m
Mode: RX; BLE; 2426 MHz
Test Date: 2018-03-26
Note:

Index 43

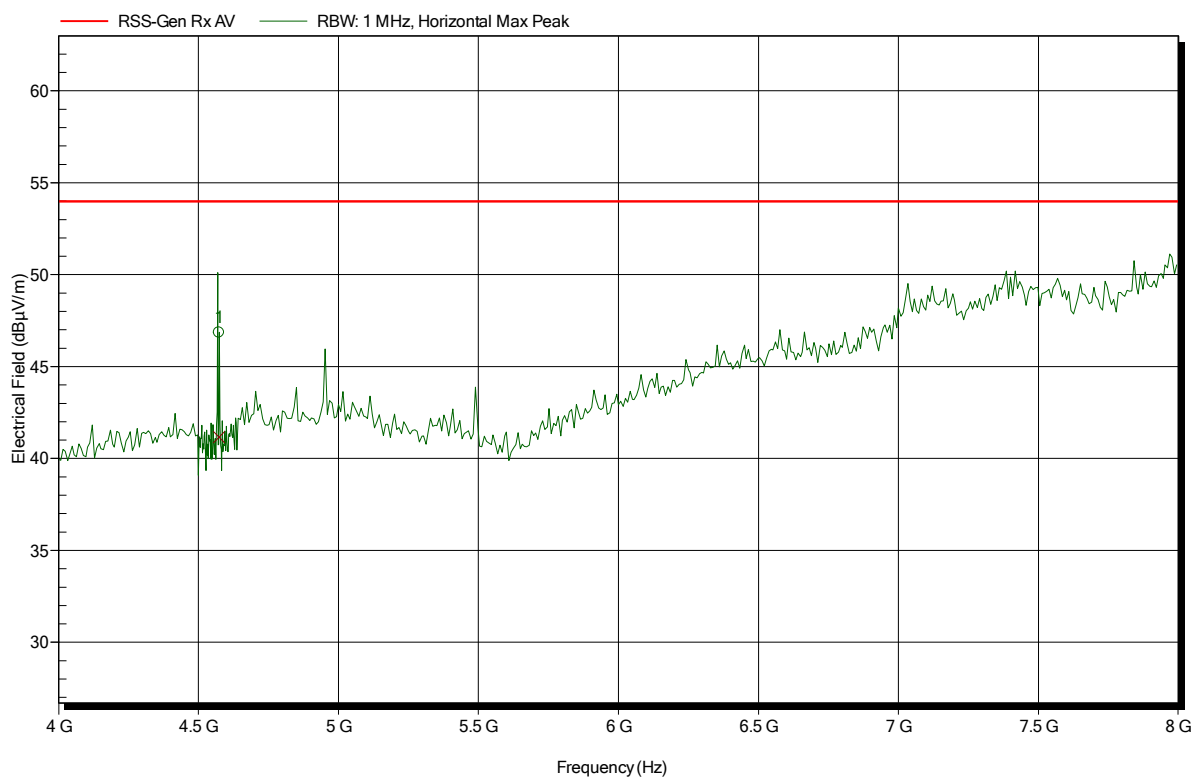


Frequency 4.574 GHz	Peak 46.85 dBµV/m	Peak Limit 53.98 dBµV/m	Peak Difference -7.13 dB	Peak Status Pass
Frequency 4.574 GHz	Average 41.16 dBµV/m	Average Limit 53.98 dBµV/m	Average Difference -12.82 dB	Average Status Pass

Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbek BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 46

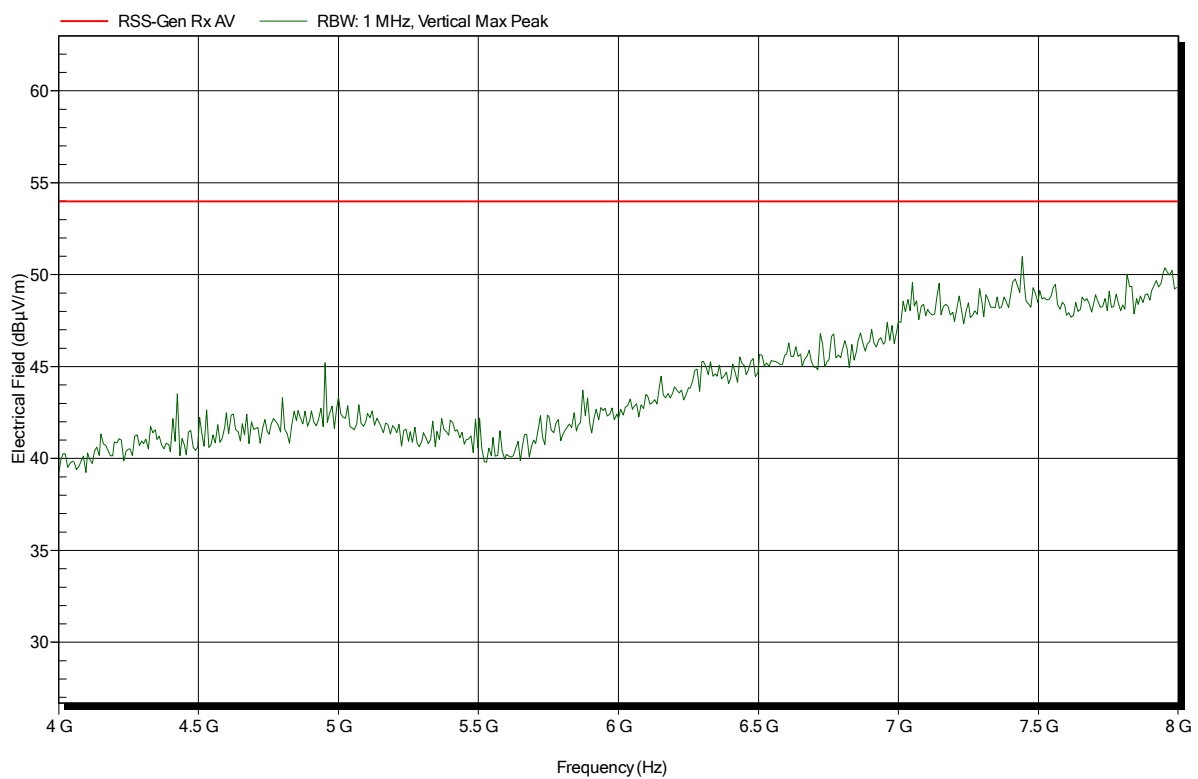


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 44

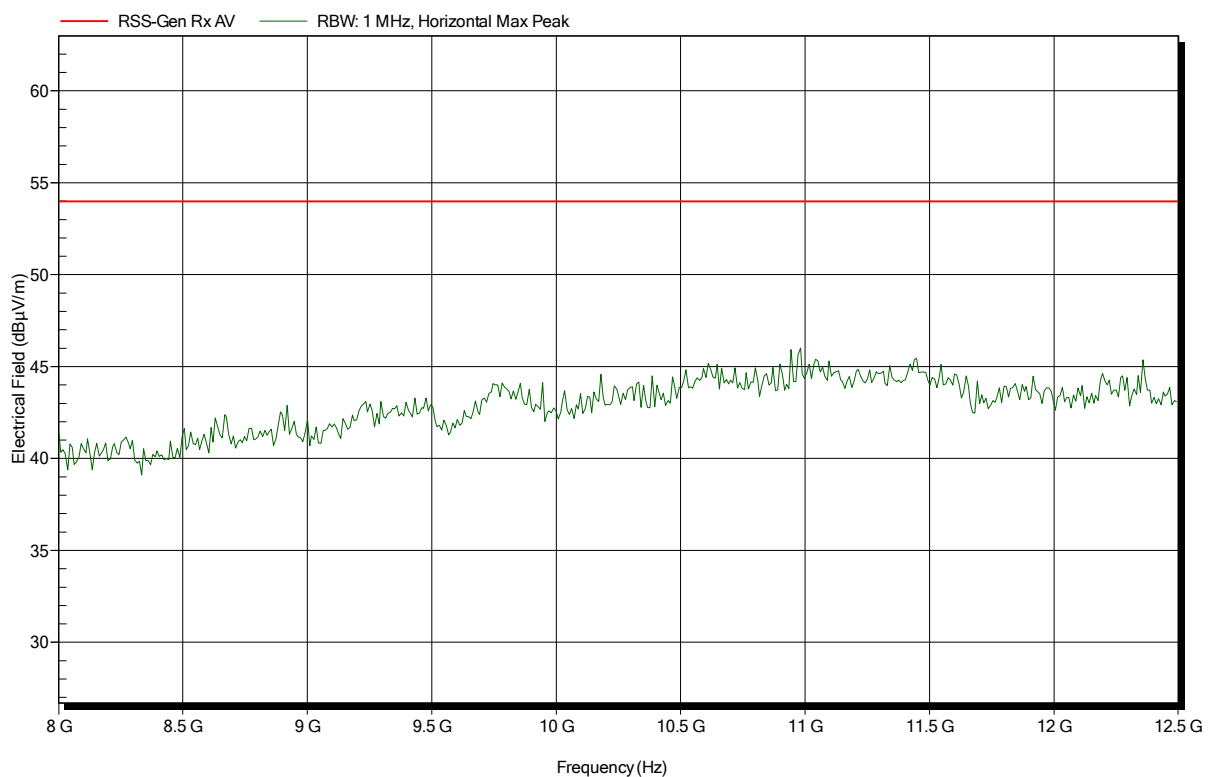


Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1802-7258

Applicant: spaceti
 EUT Name: Spaceti stone
 Model: Spaceti stone CO2
 Test Site: Eurofins Product Service GmbH
 Operator: Wilfried Treffke
 Test Conditions: Tnom: 22°C, Vnom: 3.6 VDC (lithium battery)
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; BLE; 2426 MHz
 Test Date: 2018-03-26
 Note:

Index 47

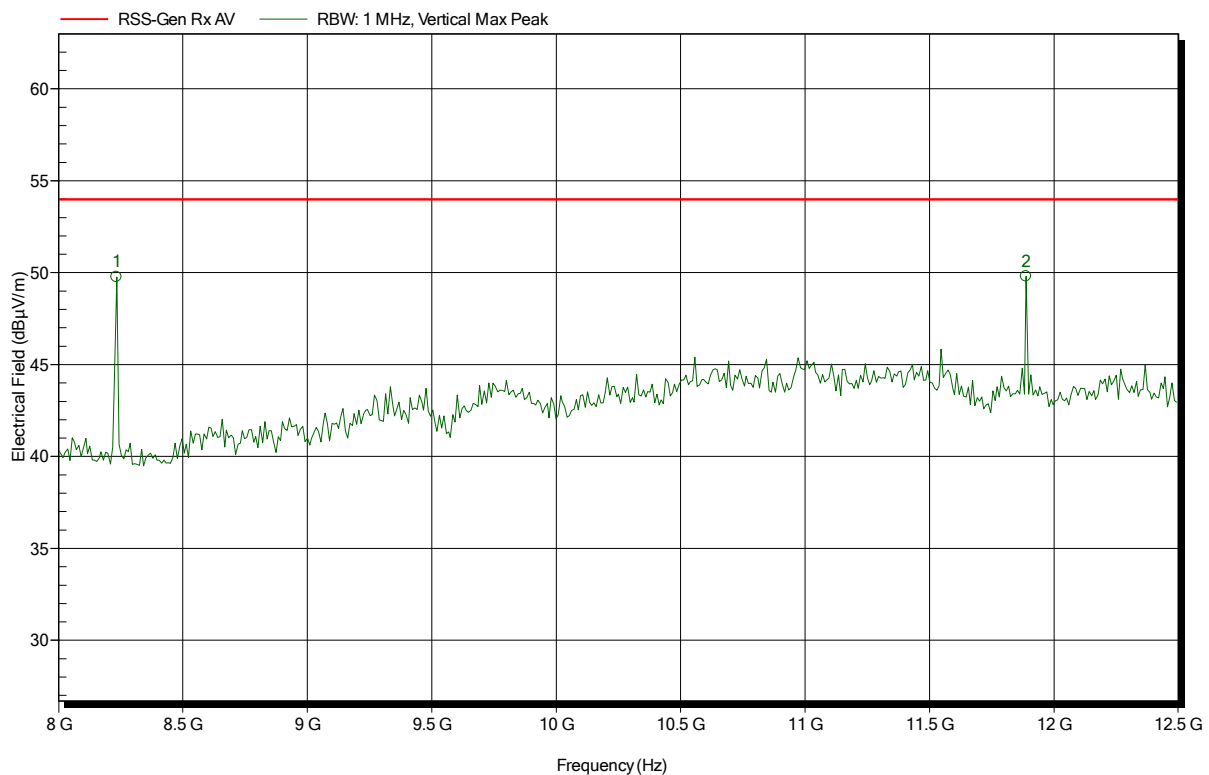

Frequency	Peak	Peak Limit	Peak Difference	Status
11.888 GHz	49.8 dBµV/m	53.98 dBµV/m	-4.18 dB	Pass
8.234 GHz	49.76 dBµV/m	53.98 dBµV/m	-4.22 dB	Pass