

RF MEASUREMENT REPORT

FCC ID: 2APJ4-SLM156
Application: MeiG Smart Technology Co., Ltd
Product: CAT-M Module
Model No.: SLM156
Brand Name: MEIGLink
FCC Rule Part(s): Part 90 Subpart S
Test Procedure(s): ANSI C63.26: 2015
Result: Complies
Test Date: 2022-05-23 ~ 2022-11-02

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2205RSU044-U4	Rev. 01	Initial Report	2023-04-17	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification	6
1.6. Description of Available Antennas	7
1.7. Test Methodology	7
2. Test Configuration	8
2.1. Test System Connection Diagram	8
2.2. Test Environment Condition	8
3. Measuring Instrument	9
4. Decision Rules and Measurement Uncertainty	10
4.1. Decision Rules	10
4.2. Measurement Uncertainty	10
5. Test Result	11
5.1. Summary	11
5.2. Occupied Bandwidth Measurement	12
5.2.1. Test Limit	12
5.2.2. Test Procedure	12
5.2.3. Test Setting	12
5.2.4. Test Setup	12
5.2.5. Test Result	13
5.3. Frequency Stability Measurement	14
5.3.1. Test Limit	14
5.3.2. Test Procedure	14
5.3.3. Test Setting	14
5.3.4. Test Setup	15
5.3.5. Test Result	15
5.4. Conducted Output Power Measurement	16
5.4.1. Test Limit	16
5.4.2. Test Procedure	16
5.4.3. Test Setting	16
5.4.4. Test Setup	16

5.4.5.	Test Result	16
5.5.	Band Edge Measurement	17
5.5.1.	Test Limit	17
5.5.2.	Test Procedure	17
5.5.3.	Test Setting	18
5.5.4.	Test Setup	19
5.5.5.	Test Result	19
5.6.	Conducted Spurious Emissions Measurement.....	20
5.6.1.	Test Limit	20
5.6.2.	Test Procedure	20
5.6.3.	Test Setting	20
5.6.4.	Test Setup	21
5.6.5.	Test Result	21
5.7.	Radiated Spurious Emissions Measurement.....	22
5.7.1.	Test Limit	22
5.7.2.	Test Procedure	22
5.7.3.	Test Setting	22
5.7.4.	Test Setup	23
5.7.5.	Test Result	24
Appendix A - Test Result		25
A.1	Occupied Bandwidth Test Result.....	25
A.2	Frequency Stability Test Result	28
A.3	Conducted Output Power Test Result	29
A.4	Band Edge Test Result	35
A.5	Conducted Spurious Emissions Test Result	39
A.6	Radiated Spurious Emissions Test Result	43
Appendix B - Test Setup Photograph		44
Appendix C - EUT Photograph		45

1. General Information

1.1. Applicant

MeiG Smart Technology Co., Ltd
 2nd Floor, Office Building, No.5 Lingxia Road, Fenghuang, Fuyong Street, Bao 'an District, Shenzhen, China

1.2. Manufacturer

MeiG Smart Technology Co., Ltd
 2nd Floor, Office Building, No.5 Lingxia Road, Fenghuang, Fuyong Street, Bao 'an District, Shenzhen, China

1.3. Testing Facility

<input checked="" type="checkbox"/>	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166 VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020 <input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104 CNAS: L10551 ISED: CN0001
<input type="checkbox"/>	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284 CNAS: L10551 ISED: CN0105
<input type="checkbox"/>	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	CAT-M Module
Model No.	SLM156
IMEI	Conducted Measurement: 868510050004513 Radiated Measurement: 868510050007318
Operating Temperature	-35 ~ 75 °C
Hardware Version	SLM156_V1.01_PCB
Software Version	SLM156_5.0.12_EQ100
Power Type	3.3 ~ 4.2Vdc, typical 3.8Vdc
GSM Specification	
Band	GSM850, PCS1900
Modulation	GMSK, 8PSK
E-UTRA Specification	
Single Band	Cat M Band 2, 4, 5, 12, 13, 14, 25, 26, 66 NB-IoT Band 2, 4, 5, 12, 13, 25, 26, 66, 71
Modulation	Cat M: Uplink up to 16QAM, Downlink up to 16QAM NB-IoT: Uplink BPSK, QPSK; Downlink QPSK
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

FDD Tx Frequency Range	Cat M Band 26: 814 ~ 824 MHz
FDD Rx Frequency Range	Cat M Band 26: 859 ~ 869 MHz

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 3: Band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

1.6. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
Band 2	1850 ~ 1910	PCB Antenna	0.78
Band 4	1710 ~ 1755		-0.10
Band 5	824 ~ 849		0.44
Band 12	699 ~ 716		1.72
Band 13	777 ~ 787		1.59
Band 14	788 ~ 798		0.66
Band 25	1850 ~ 1915		0.71
Band 26	814 ~ 849		0.49
Band 66	1710 ~ 1780		-0.10
Band 71	663 ~ 698		-2.38

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.


1.7. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

2. Test Configuration

2.1. Test System Connection Diagram

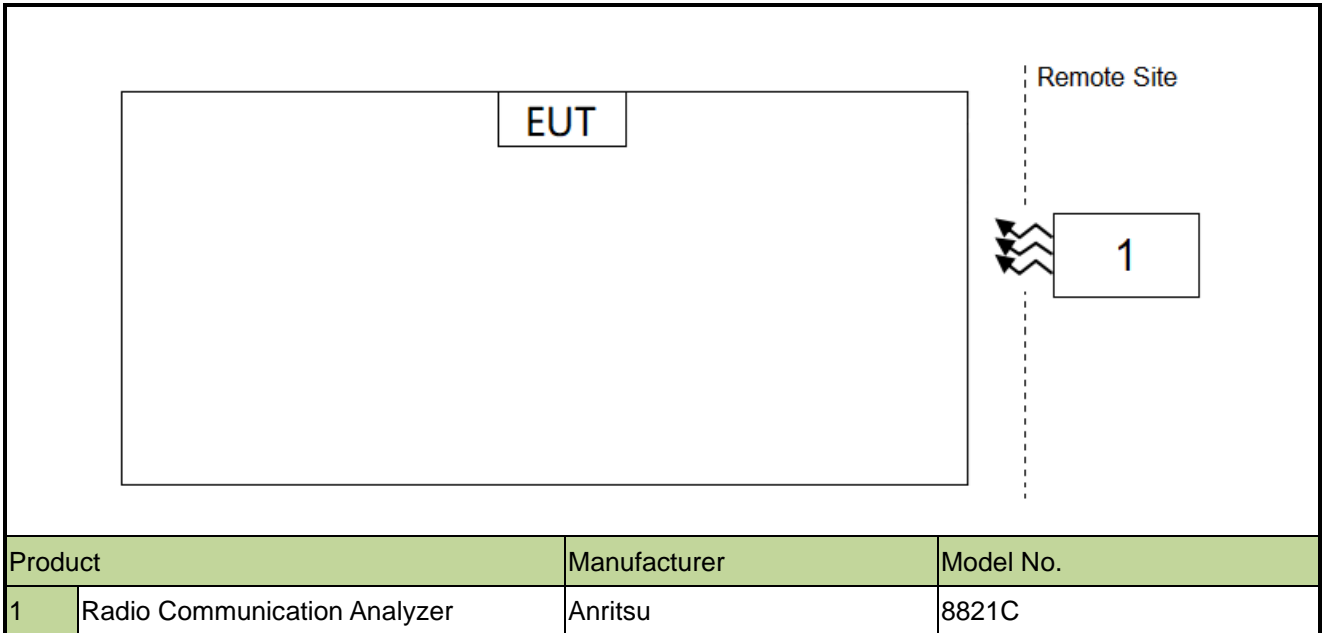

2.2. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

3. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Last Cali. Date	Cali. Due Date	Test Site
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2023-05-20	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2022-06-24	WZ-AC2
				1 year	2023-06-04	
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022-12-01	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2022-10-21	WZ-AC2
				1 year	2023-10-13	
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2022-11-12	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2023-04-21	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11038	1 year	2022-11-11	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE06362	1 year	2023-02-15	WZ-SR6
Shielding Room	HUAMING	WZ-SR6	MRTSUE06443	N/A	N/A	WZ-SR6
Signal Analyzer	Keysight	N9020B	MRTSUE06583	1 year	2022-10-10	WZ-SR6/WZ-TR3
				1 year	2023-10-08	
Radio Communication Analyzer	Anritsu	MT8821C	MRTSUE06960	1 year	2022-07-01	WZ-SR6/WZ-TR3
				1 year	2023-07-08	
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022-10-10	WZ-SR6/WZ-TR3
				1 year	2023-10-08	
Vibration Test System	DongLing	ES-1-150	MRTSUE06206	1 year	2022-08-08	WZ-SR6/WZ-TR3
				1 year	2023-07-07	
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022-06-28	WZ-SR6/WZ-TR3
				1 year	2023-06-06	
Directional Coupler	Agilent	778D	MRTSUE06083	1 year	2023-03-17	WZ-SR6/WZ-TR3
Directional Coupler	narda	4226-10	MRTSUE06562	1 year	2022-10-28	WZ-SR6/WZ-TR3
				1 year	2023-10-27	
Attenuator	MVE	MVE2213	MRTSUE11087	1 year	2022-06-10	WZ-SR6/WZ-TR3
				1 year	2023-06-09	
Attenuator	MVE	MVE2213	MRTSUE11088	1 year	2022-06-10	WZ-SR6/WZ-TR3
				1 year	2023-06-09	

Software	Version	Function
EMI V3	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 76.2Hz

5. Test Result

5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section 5.2
2.1055, 90.213	Frequency Stability	< 2.5 ppm		Pass	Section 5.3
90.635	Conducted Output Power	< 100W		Pass	Section 5.4
2.1051, 90.691(a)	Band Edge	< 50 + 10log ₁₀ (P _[Watts]) within 37.5kHz of Block Edge		Pass	Section 5.5, 5.6
2.1051, 90.691(a)	Spurious Emission	< 43 + 10log ₁₀ (P _[Watts])			
2.1053, 90.691(a)	Spurious Emissions	< 43 + 10log ₁₀ (P _[Watts])	Radiated	Pass	Section 5.7

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

5.2. Occupied Bandwidth Measurement

5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

5.2.4. Test Setup

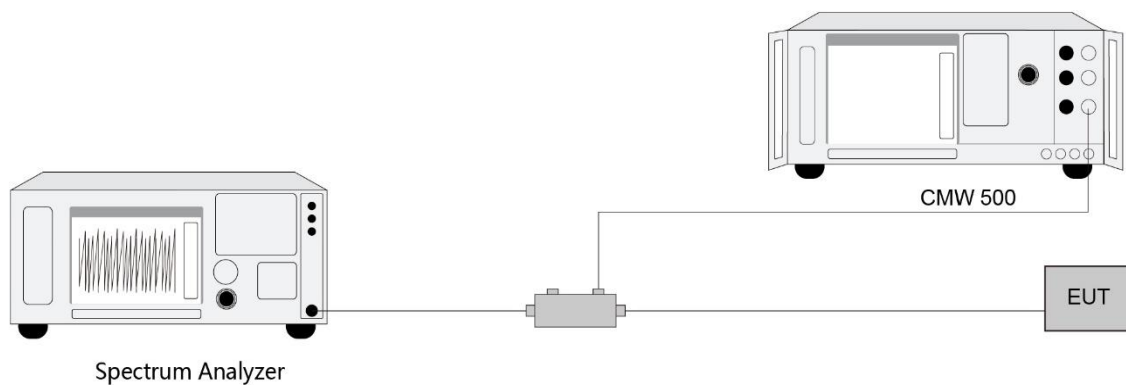

5.2.5. Test Result

Refer to Appendix A.1.

5.3. Frequency Stability Measurement

5.3.1. Test Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

5.3.2. Test Procedure

ANSI C63.26-2015 - Section 5.6

5.3.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

5.3.4. Test Setup

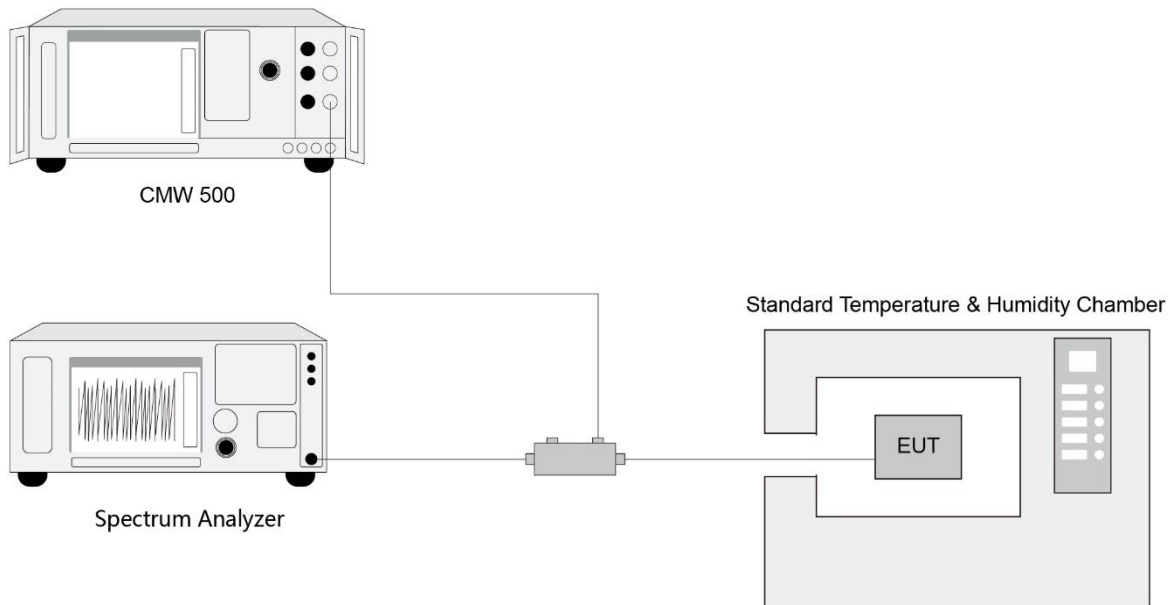

5.3.5. Test Result

Refer to Appendix A.2.

5.4. Conducted Output Power Measurement

5.4.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).


5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2

5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

5.4.4. Test Setup

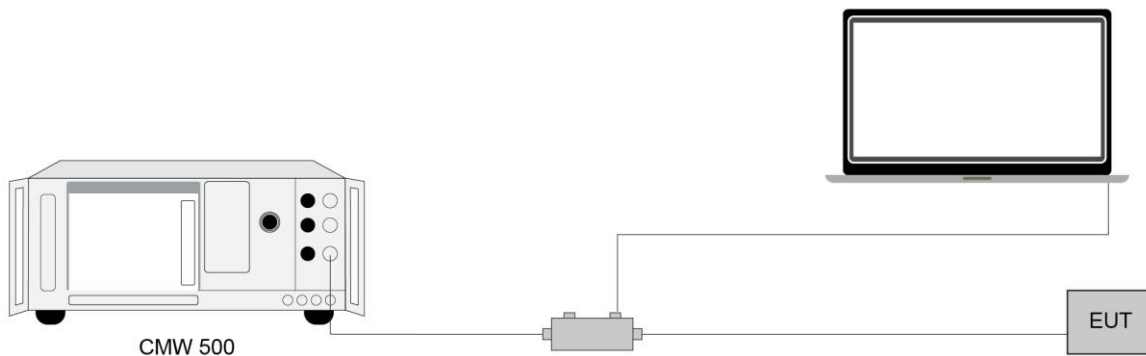

5.4.5. Test Result

Refer to Appendix A.3.

5.5. Band Edge Measurement

5.5.1. Test Limit

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}(f/6.1)$ decibels or $50 + 10 \text{ Log}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2. $RBW \geq$ The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. $VBW \geq 3 * RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.5.4. Test Setup

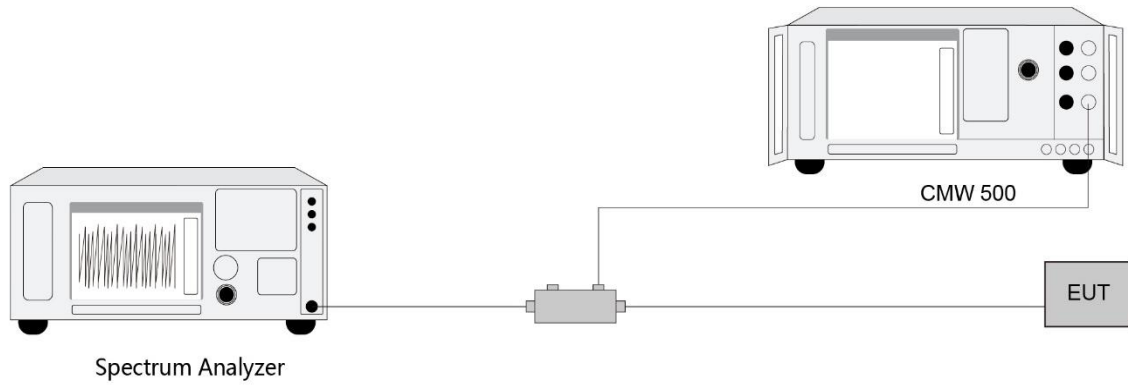

5.5.5. Test Result

Refer to Appendix A.4.

5.6. Conducted Spurious Emissions Measurement

5.6.1. Test Limit

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

5.6.3. Test Setting

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW \geq 3*RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

5.6.4. Test Setup

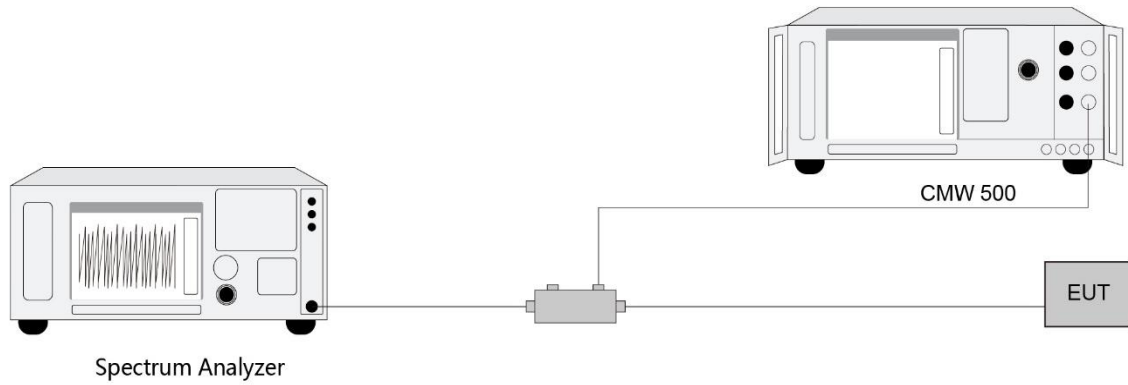

5.6.5. Test Result

Refer to Appendix A.5.

5.7. Radiated Spurious Emissions Measurement

5.7.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

E (dB μ V/m) = EIRP (dBm) - $20 \log D$ + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB μ V/m.

5.7.2. Test Procedure


ANSI C63.26-2015 - Section 5.2.7 & 5.5

5.7.3. Test Setting


1. RBW = 1MHz
2. VBW \geq 3*RBW
3. Sweep time \geq 10 \times (number of points in sweep) \times (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

5.7.4. Test Setup

Below 1GHz Test Setup:

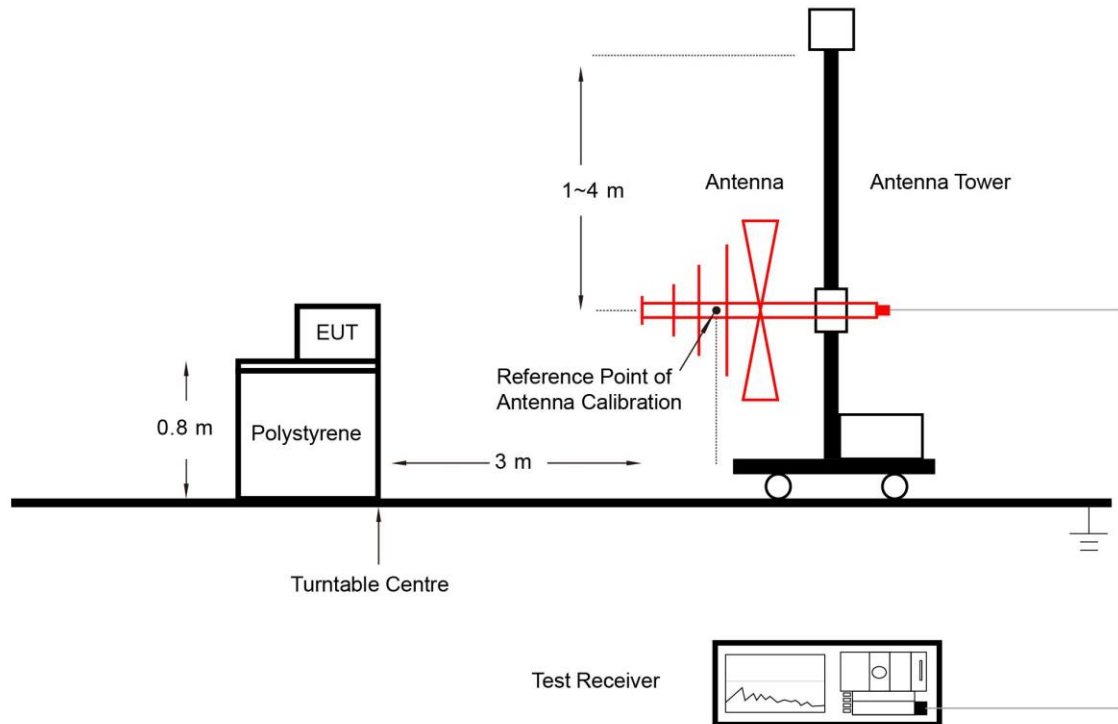

Above 1GHz Test Setup:

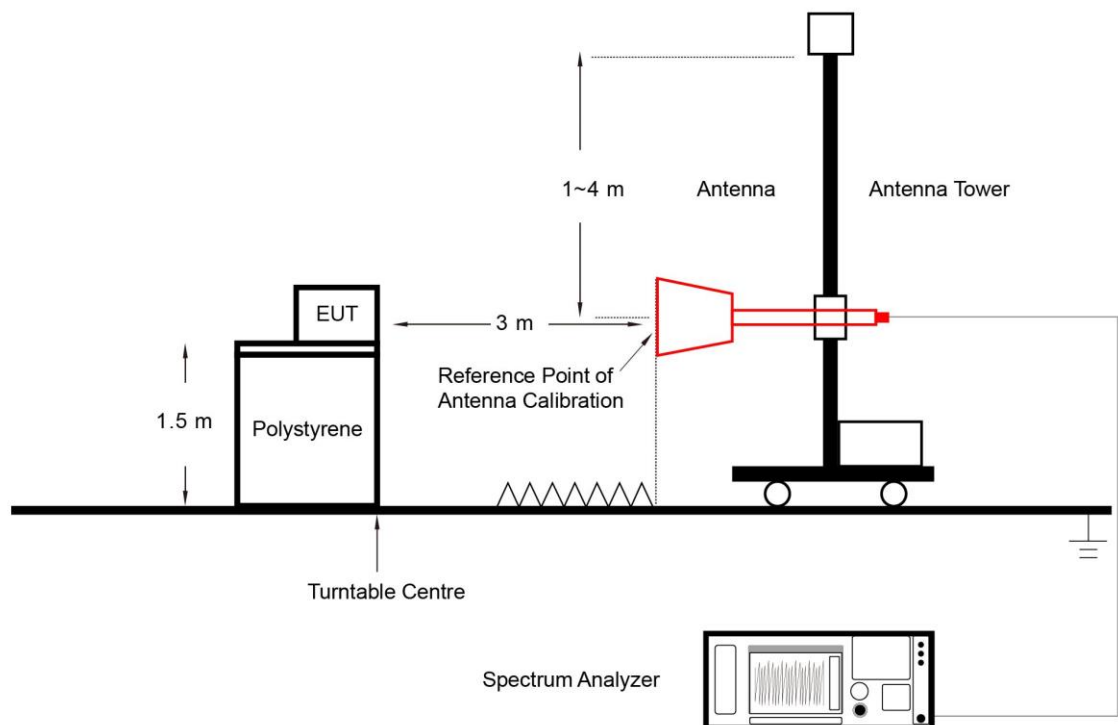

5.7.5. Test Result

Refer to Appendix A.6.

Appendix A - Test Result


A.1 Occupied Bandwidth Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/05/28 ~ 2022/07/29	Test Band	Band 26


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	819.0	1.4	1.09
		3	1.10
		5	1.13
		10	1.21
16QAM	819.0	1.4	0.91
		3	0.93
		5	0.97
		10	1.06
QPSK	821.5	15	1.10
16QAM			0.93

99% Bandwidth - QPSK


1.4MHz Channel Bandwidth

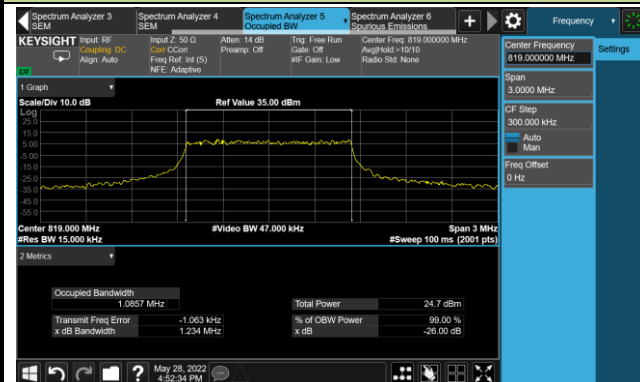


3MHz Channel Bandwidth

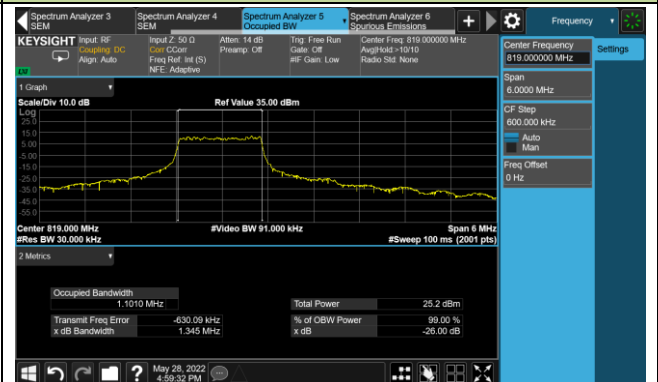


5MHz Channel Bandwidth

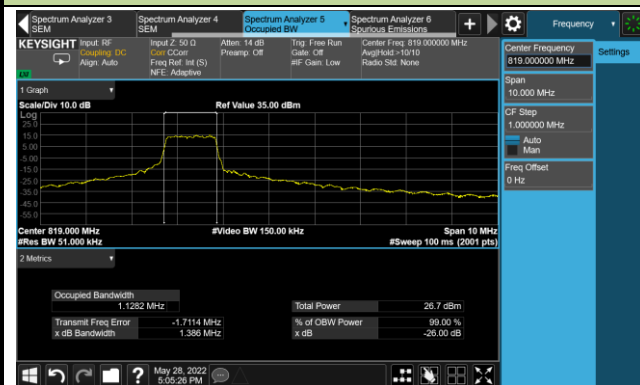

10MHz Channel Bandwidth

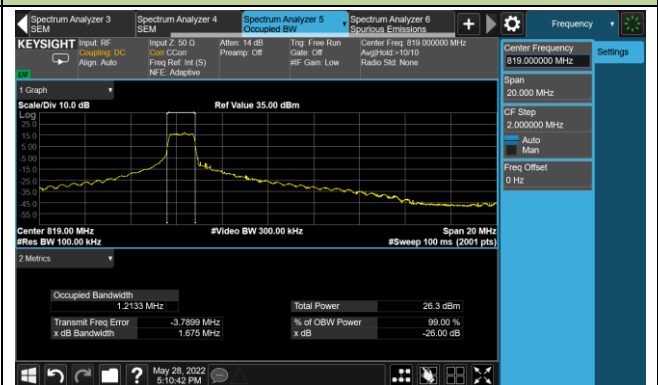


15MHz Channel Bandwidth

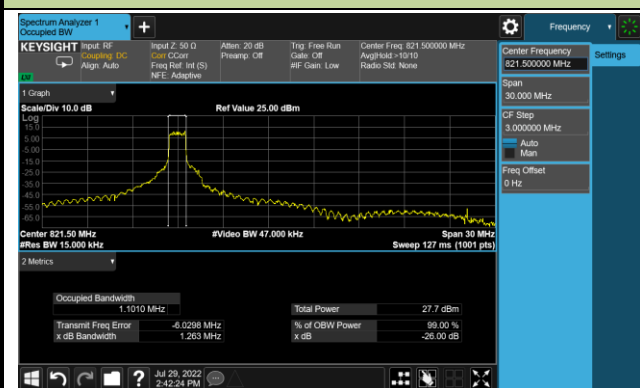


99% Bandwidth - 16QAM


1.4MHz Channel Bandwidth

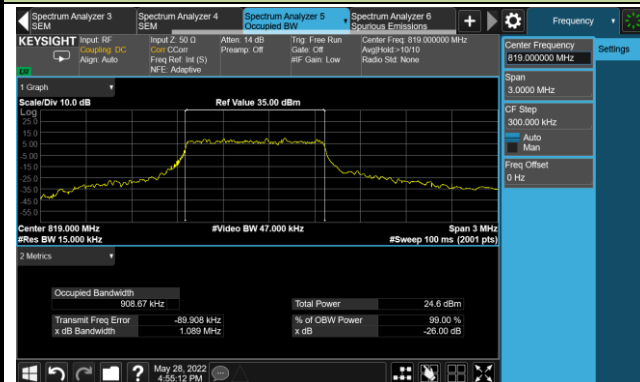


3MHz Channel Bandwidth

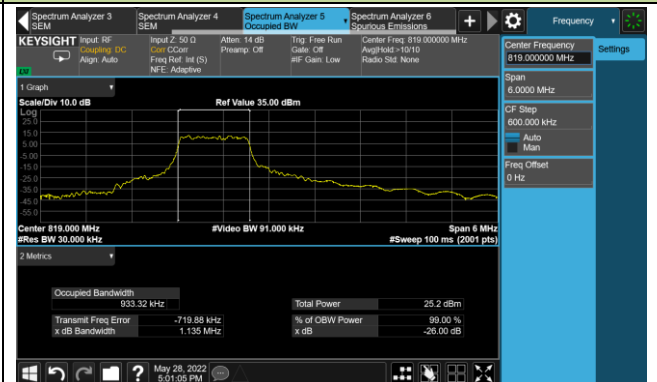


5MHz Channel Bandwidth

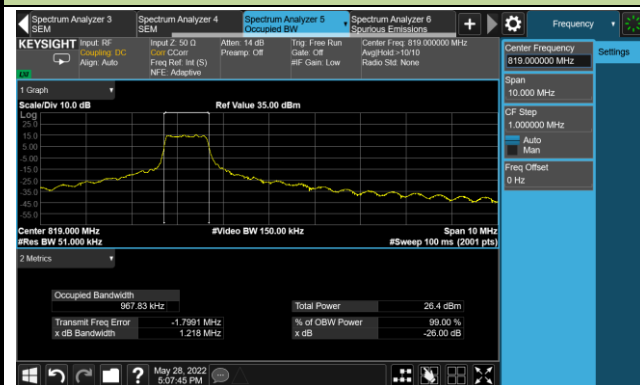

10MHz Channel Bandwidth

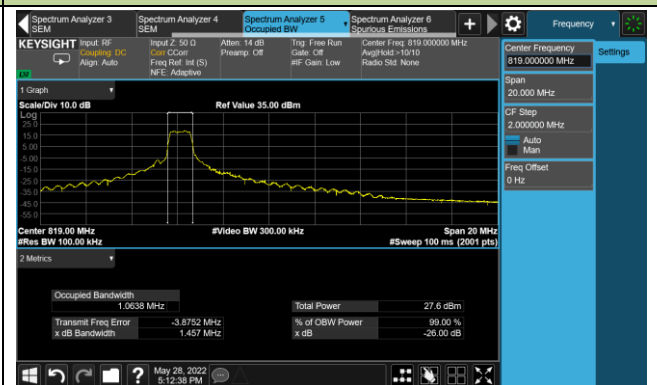

15MHz Channel Bandwidth

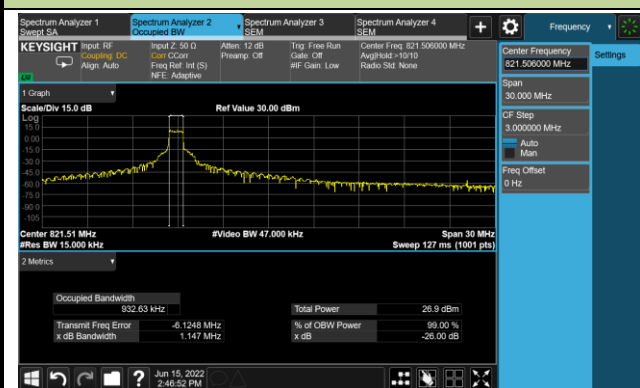

A.2 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Cloud Guo
Test Date	2022/07/22~2022/07/24	Test Band	Band 26

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0065
	- 20	-0.0046
	- 10	-0.0125
	0	-0.0067
	+ 10	-0.0084
	+ 20 (Ref)	-0.0068
	+ 30	-0.0078
	+ 40	-0.0071
	+ 50	-0.0107
4.2	+ 20	-0.0083
3.3	+ 20	-0.0107

A.3 Conducted Output Power Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/10/19	Test Band	Band 26

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
QPSK										
26697	814.7	1.4	0	1	0	21.37	0.1371	< 100		
				1	2	21.26	0.1337	< 100		
				1	5	21.03	0.1268	< 100		
				6	0	19.06	0.0805	< 100		
26740	819.0		1.4	0	1	0	21.40	0.1380	< 100	
					1	2	21.28	0.1343	< 100	
					1	5	21.09	0.1285	< 100	
					6	0	19.07	0.0807	< 100	
26783	823.3			1.4	0	1	0	21.36	0.1368	< 100
						1	2	21.36	0.1368	< 100
						1	5	21.20	0.1318	< 100
						6	0	19.15	0.0822	< 100
26705	815.5	3			0	1	0	21.25	0.1334	< 100
						1	2	21.23	0.1327	< 100
						1	5	21.03	0.1268	< 100
						6	0	19.10	0.0813	< 100
26740	819.0		3		0	1	0	21.24	0.1330	< 100
						1	2	21.29	0.1346	< 100
						1	5	21.16	0.1306	< 100
						6	0	19.08	0.0809	< 100
26775	822.5			3	1	1	0	21.36	0.1368	< 100
						1	2	21.34	0.1361	< 100
						1	5	21.12	0.1294	< 100
						6	0	19.18	0.0828	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
QPSK										
26715	816.5	5	0	1	0	21.10	0.1288	< 100		
				1	2	21.10	0.1288	< 100		
				1	5	21.04	0.1271	< 100		
				6	0	20.14	0.1033	< 100		
26740	819.0		5	0	1	0	21.24	0.1330	< 100	
					1	2	21.37	0.1371	< 100	
					1	5	20.27	0.1064	< 100	
					6	0	20.21	0.1050	< 100	
26765	821.5			5	0	1	0	21.33	0.1358	< 100
						1	2	21.25	0.1334	< 100
						1	5	21.25	0.1334	< 100
						6	0	21.10	0.1288	< 100
26740	819.0	10			0	1	0	21.30	0.1349	< 100
						1	2	21.13	0.1297	< 100
						1	5	20.95	0.1245	< 100
						6	0	19.91	0.0979	< 100
26740	819.0		10		0	1	0	21.21	0.1321	< 100
						1	2	21.17	0.1309	< 100
						1	5	21.01	0.1262	< 100
						6	0	20.25	0.1059	< 100
26740	819.0			10	1	1	0	21.34	0.1361	< 100
						1	2	21.23	0.1327	< 100
						1	5	21.11	0.1291	< 100
						6	0	20.32	0.1076	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
QPSK										
26765	821.5	15	0	1	0	21.17	0.1309	< 100		
				1	2	21.14	0.1300	< 100		
				1	5	20.94	0.1242	< 100		
				6	0	21.23	0.1327	< 100		
26765	821.5		15	0	1	0	21.22	0.1324	< 100	
					1	2	21.22	0.1324	< 100	
					1	5	21.01	0.1262	< 100	
					6	0	21.30	0.1349	< 100	
26765	821.5			15	0	1	0	21.44	0.1393	< 100
						1	2	21.27	0.1340	< 100
						1	5	21.10	0.1288	< 100
						6	0	21.36	0.1368	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
16QAM										
26697	814.7	1.4	0	1	0	20.09	0.1021	< 100		
				1	2	20.00	0.1000	< 100		
				1	5	20.16	0.1038	< 100		
				5	0	19.08	0.0809	< 100		
26740	819.0		1.4	0	1	0	20.43	0.1104	< 100	
					1	2	20.33	0.1079	< 100	
					1	5	20.15	0.1035	< 100	
					5	0	19.09	0.0811	< 100	
26783	823.3			1.4	0	1	0	20.48	0.1117	< 100
						1	2	20.05	0.1012	< 100
						1	5	20.19	0.1045	< 100
						5	1	19.13	0.0818	< 100
26705	815.5	3			0	1	0	20.22	0.1052	< 100
						1	2	20.25	0.1059	< 100
						1	5	20.12	0.1028	< 100
						5	0	18.92	0.0780	< 100
26740	819.0		3		0	1	0	20.32	0.1076	< 100
						1	2	20.26	0.1062	< 100
						1	5	20.05	0.1012	< 100
						5	0	19.03	0.0800	< 100
26775	822.5			3	1	1	0	20.40	0.1096	< 100
						1	2	20.31	0.1074	< 100
						1	5	20.16	0.1038	< 100
						5	1	19.14	0.0820	< 100


Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
16QAM										
26715	816.5	5	0	1	0	20.86	0.1219	< 100		
				1	2	20.92	0.1236	< 100		
				1	5	20.74	0.1186	< 100		
				5	0	20.36	0.1086	< 100		
26740	819.0		5	1	1	0	21.38	0.1374	< 100	
					1	2	20.97	0.1250	< 100	
					1	5	21.18	0.1312	< 100	
					5	0	20.43	0.1104	< 100	
26765	821.5			5	3	1	0	21.04	0.1271	< 100
						1	2	21.03	0.1268	< 100
						1	5	20.83	0.1211	< 100
						5	1	20.42	0.1102	< 100
26740	819.0	10			0	1	0	20.84	0.1213	< 100
						1	2	20.83	0.1211	< 100
						1	5	20.80	0.1202	< 100
						5	0	21.32	0.1355	< 100
26740	819.0		10		3	1	0	20.95	0.1245	< 100
						1	2	20.92	0.1236	< 100
						1	5	20.73	0.1183	< 100
						5	0	21.42	0.1387	< 100
26740	819.0			10	7	1	0	21.18	0.1312	< 100
						1	2	21.16	0.1306	< 100
						1	5	21.04	0.1271	< 100
						5	1	21.35	0.1365	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	Index	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)		
16QAM										
26765	821.5	15	0	1	0	20.88	0.1225	< 100		
				1	2	20.79	0.1199	< 100		
				1	5	20.73	0.1183	< 100		
				5	0	21.30	0.1349	< 100		
26765	821.5		15	5	1	0	20.88	0.1225	< 100	
					1	2	20.86	0.1219	< 100	
					1	5	20.74	0.1186	< 100	
					5	0	21.28	0.1343	< 100	
26765	821.5			15	11	1	0	21.10	0.1288	< 100
						1	2	21.09	0.1285	< 100
						1	5	20.99	0.1256	< 100
						5	1	21.29	0.1346	< 100


A.4 Band Edge Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/05/26~2022/11/02	Test Band	Band 26


1.4MHz Channel Bandwidth - 1RB

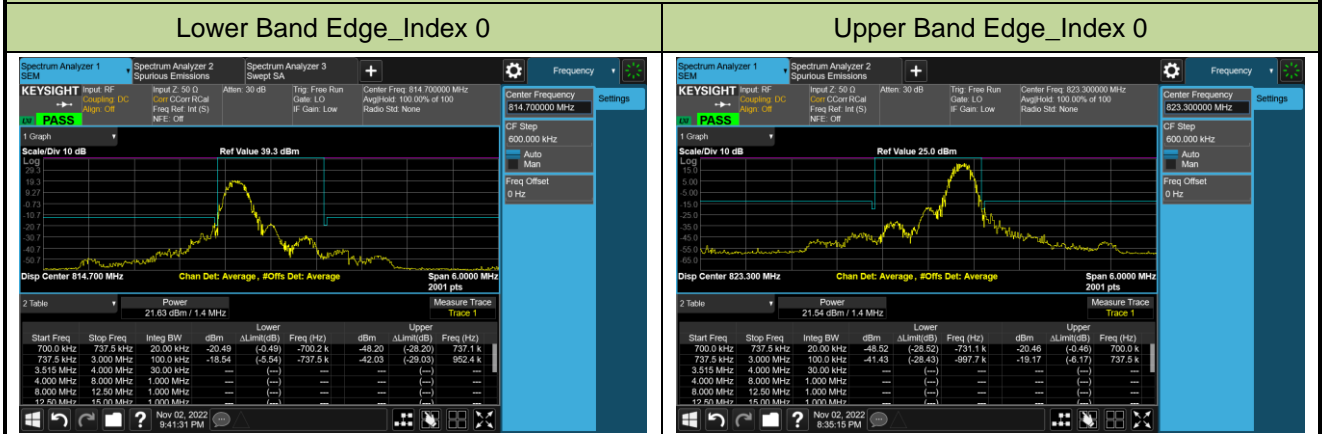

3MHz Channel Bandwidth - 1RB

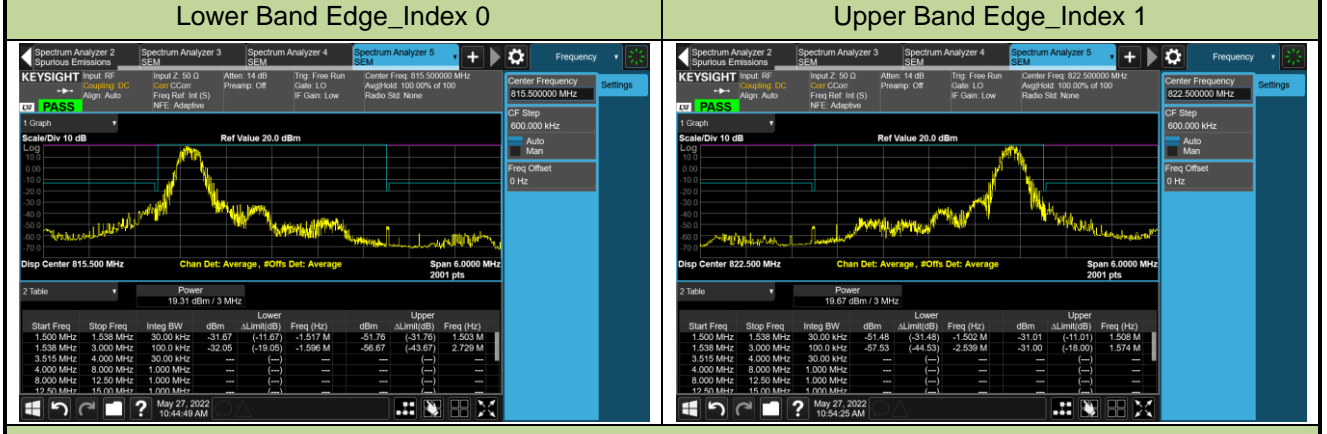


5MHz Channel Bandwidth - 1RB

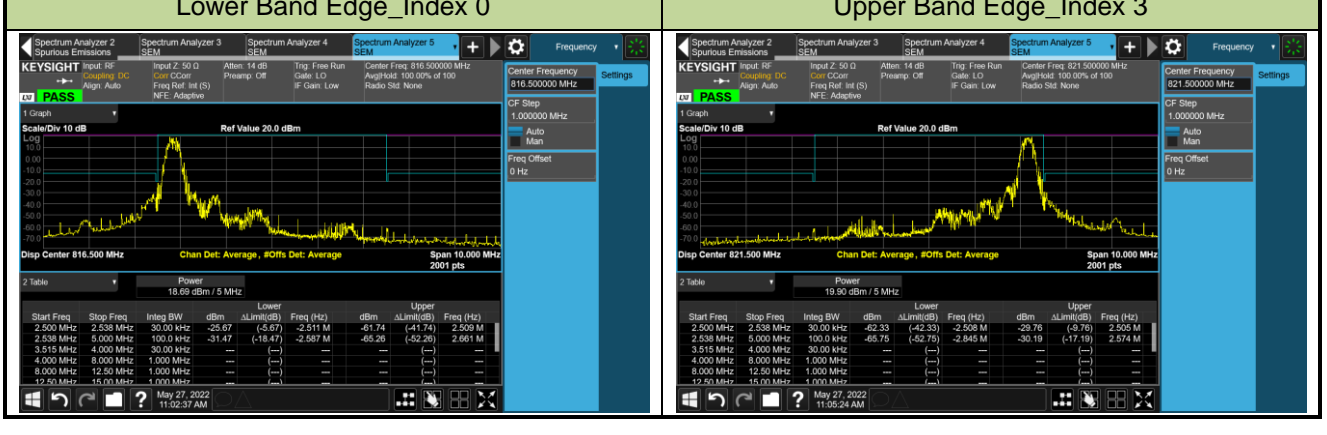


10MHz Channel Bandwidth - 1RB

Lower Band Edge_Index 0

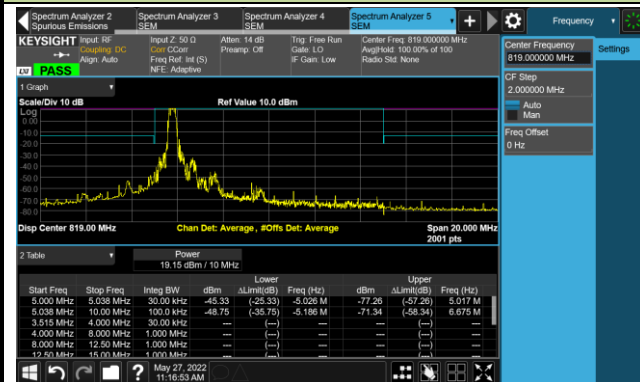


Upper Band Edge_Index 7

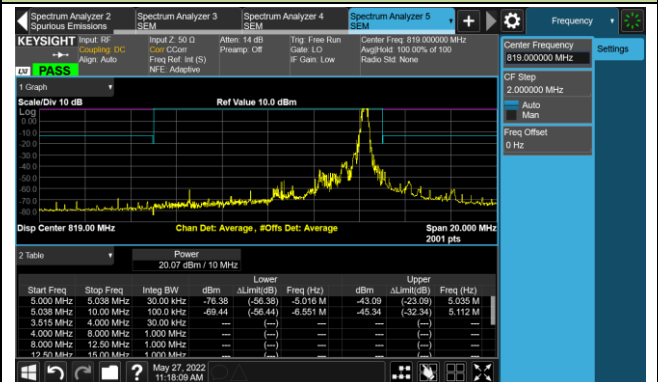


15MHz Channel Bandwidth - 1RB

Lower Band Edge_Index 0

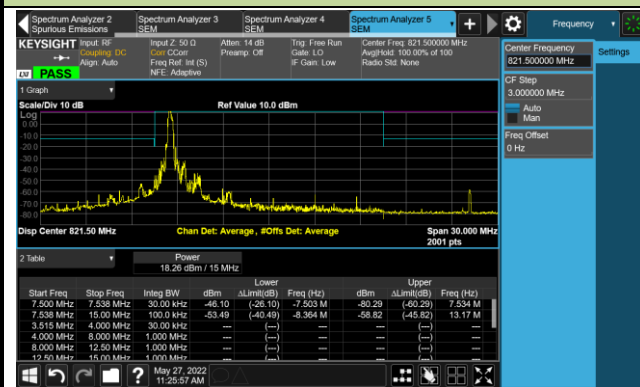


Upper Band Edge_Index 11

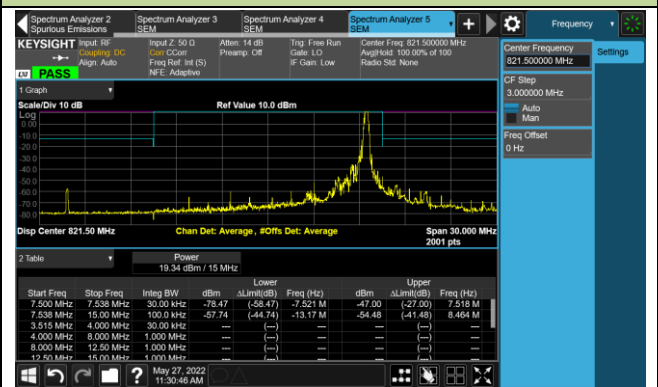


1.4MHz Channel Bandwidth - Full RB

Lower Band Edge_Index 0

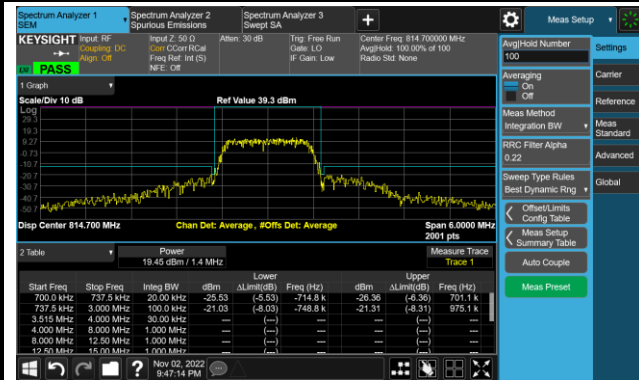


Upper Band Edge_Index 0

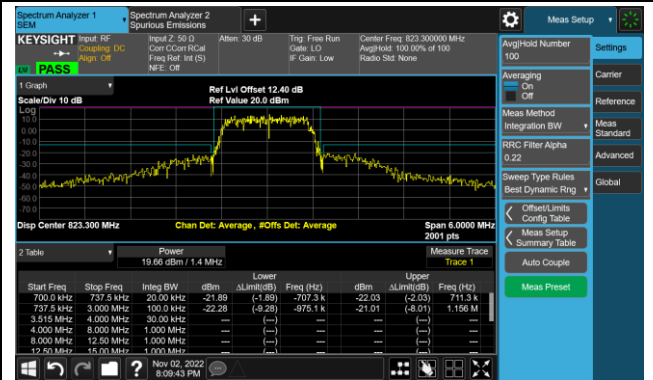


3MHz Channel Bandwidth - Full RB

Lower Band Edge_Index 0

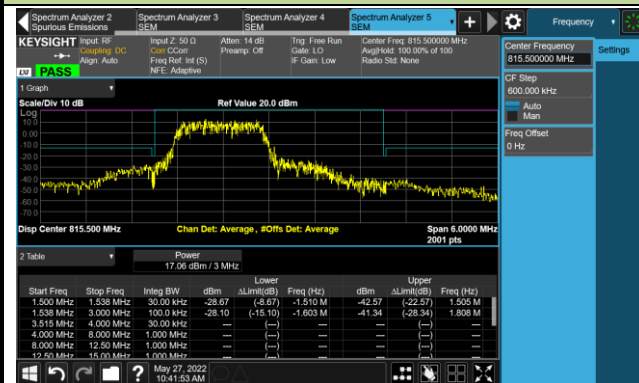


Upper Band Edge_Index 1

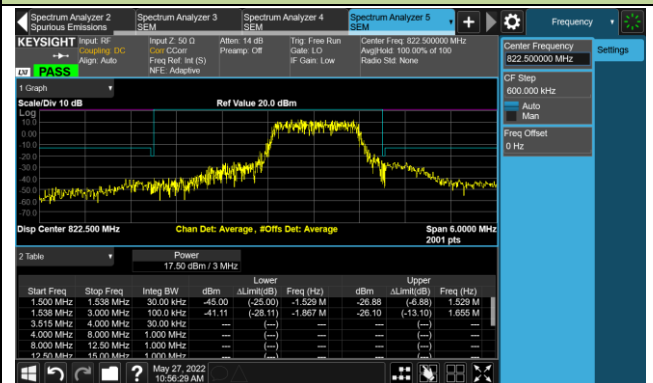


5MHz Channel Bandwidth - Full RB

Lower Band Edge_Index 0

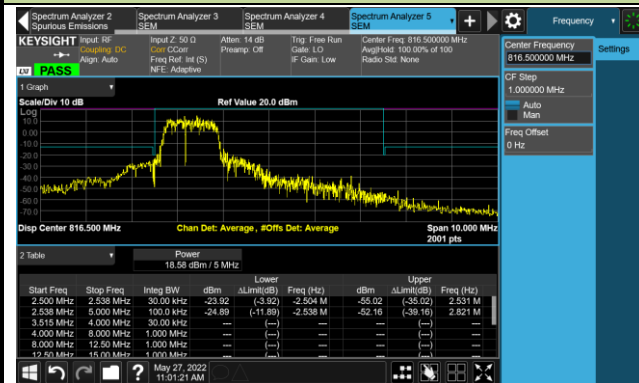


Upper Band Edge_Index 3

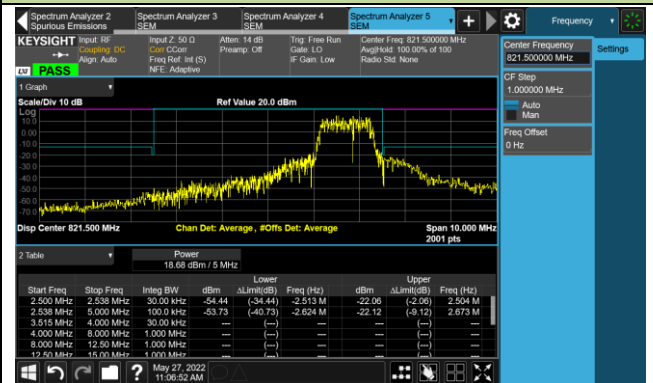


10MHz Channel Bandwidth - Full RB

Lower Band Edge_Index 0

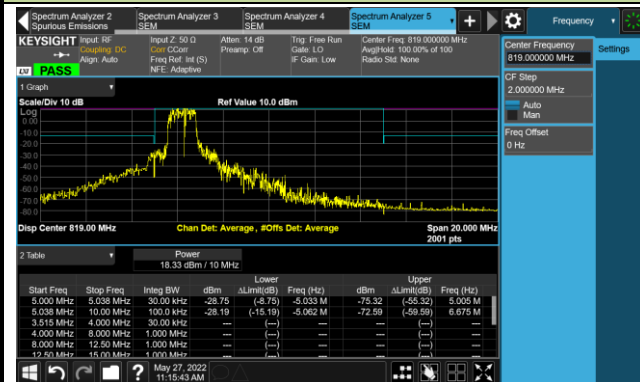


Upper Band Edge_Index 7

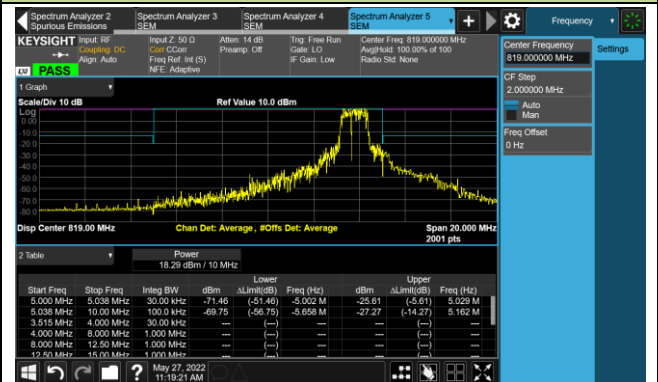


15MHz Channel Bandwidth - Full RB

Lower Band Edge_Index 0

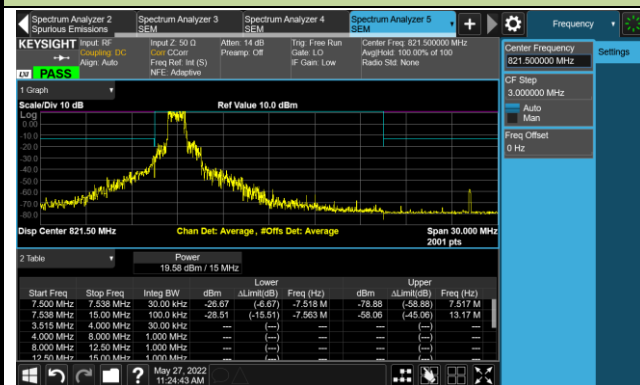

Upper Band Edge_Index 11

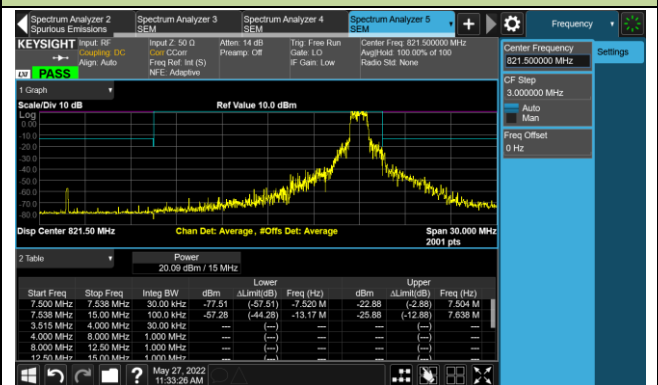


A.5 Conducted Spurious Emissions Test Result

Test Site	WZ-SR6	Test Engineer	Cloud Guo
Test Date	2022/05/27~2022/05/28	Test Band	Band 26


Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
QPSK					
814.7	1.4	30 ~ 9000	-41.08	≤ -13.00	Pass
819.0	1.4	30 ~ 9000	-37.62	≤ -13.00	Pass
823.3	1.4	30 ~ 9000	-33.25	≤ -13.00	Pass
815.5	3	30 ~ 9000	-36.54	≤ -13.00	Pass
819.0	3	30 ~ 9000	-38.29	≤ -13.00	Pass
822.5	3	30 ~ 9000	-35.77	≤ -13.00	Pass
816.5	5	30 ~ 9000	-40.73	≤ -13.00	Pass
819.0	5	30 ~ 9000	-38.20	≤ -13.00	Pass
821.5	5	30 ~ 9000	-32.55	≤ -13.00	Pass
819.0	10	30 ~ 9000	-41.49	≤ -13.00	Pass
821.5	15	30 ~ 9000	-42.06	≤ -13.00	Pass

1.4MHz Channel Bandwidth


Low Channel

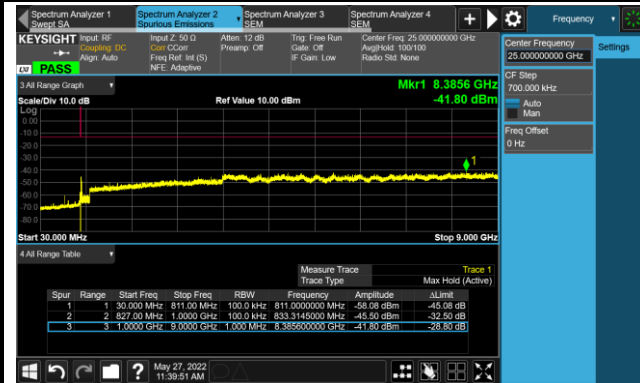

Middle Channel

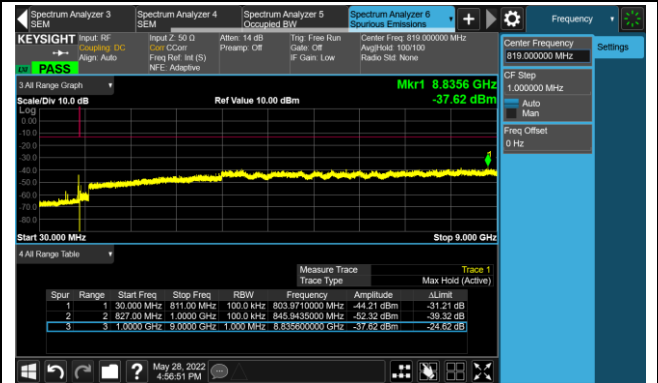


High Channel

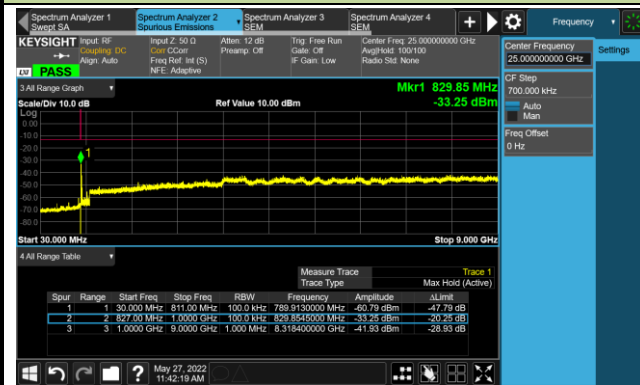


3MHz Channel Bandwidth


Low Channel

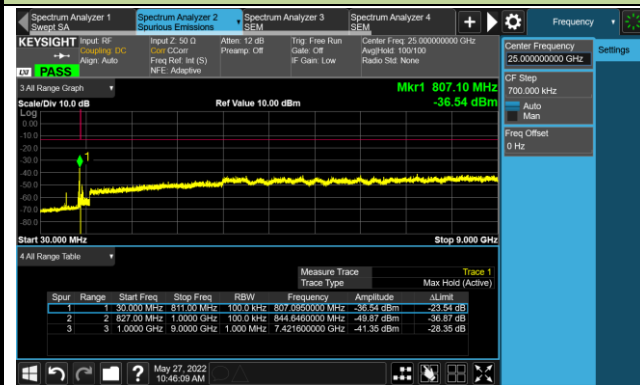


Middle Channel

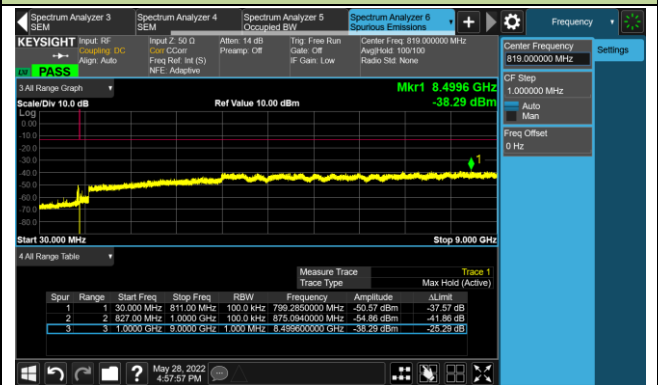

High Channel

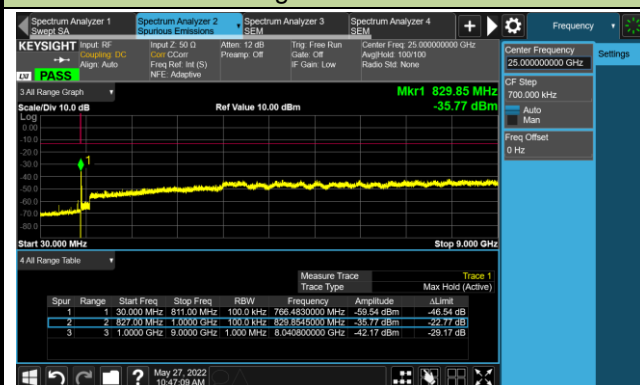



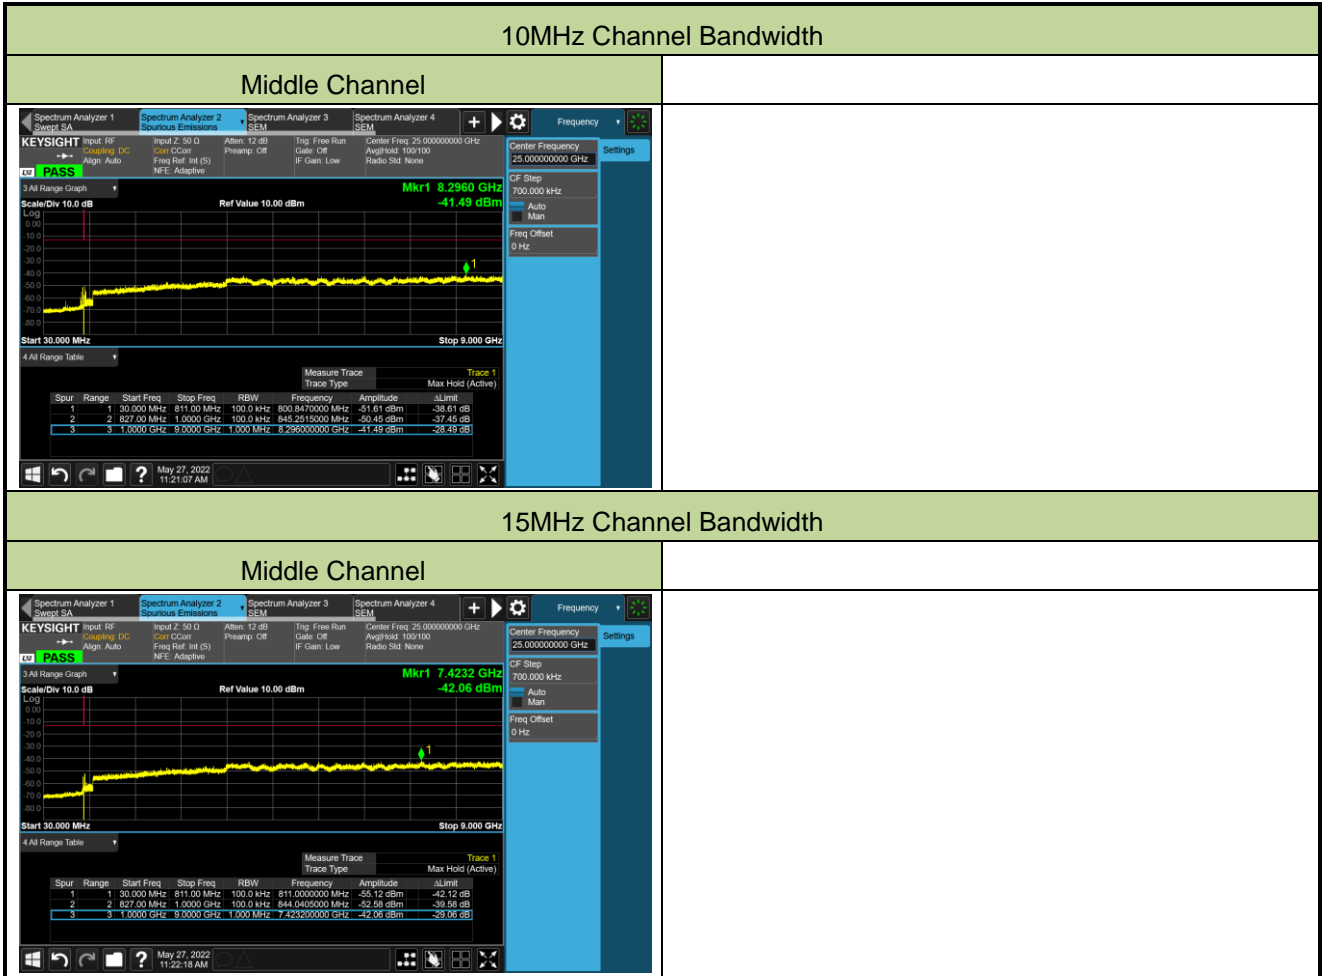

A.6 Radiated Suprious Emissions Test Result

Test Site	WZ-AC2	Test Engineer	Bob Zhang
Test Date	2022/06/12~2022/06/23	Test Band	Band 26

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level(dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
545.6	20.2	25.9	46.1	82.3	-36.2	Peak	Horizontal
967.0	13.1	31.4	44.5	82.3	-37.8	Peak	Horizontal
545.6	17.4	25.9	43.3	82.3	-39.0	Peak	Vertical
919.5	13.9	31.4	45.3	82.3	-37.0	Peak	Vertical
7281.5	32.4	11.4	43.8	82.3	-38.5	Peak	Horizontal
14107.0	28.3	19.9	48.2	82.3	-34.1	Peak	Horizontal
8250.5	34.6	11.6	46.2	82.3	-36.1	Peak	Vertical
14404.5	31.7	19.6	51.3	82.3	-31.0	Peak	Vertical
Middle Channel							
766.7	13.8	29.4	43.2	82.3	-39.1	Peak	Horizontal
923.4	13.4	31.3	44.7	82.3	-37.6	Peak	Horizontal
626.1	13.9	27.2	41.1	82.3	-41.2	Peak	Vertical
935.5	13.7	31.1	44.8	82.3	-37.5	Peak	Vertical
7519.5	32.7	11.5	44.2	82.3	-38.1	Peak	Horizontal
14829.5	31.0	20.1	51.1	82.3	-31.2	Peak	Horizontal
8786.0	32.4	13.3	45.7	82.3	-36.6	Peak	Vertical
14515.0	31.8	19.2	51.0	82.3	-31.3	Peak	Vertical
High Channel							
767.2	13.8	29.4	43.2	82.3	-39.1	Peak	Horizontal
974.3	13.1	31.6	44.7	82.3	-37.6	Peak	Horizontal
755.1	13.6	29.6	43.2	82.3	-39.1	Peak	Vertical
904.9	13.5	31.2	44.7	82.3	-37.6	Peak	Vertical
9695.5	33.6	13.7	47.3	82.3	-35.0	Peak	Horizontal
14846.5	32.1	20.3	52.4	82.3	-29.9	Peak	Horizontal
9695.5	33.3	13.7	47.0	82.3	-35.3	Peak	Vertical
767.2	13.8	29.4	43.2	82.3	-39.1	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2205RSU044-UT" file.

Appendix C - EUT Photograph

Refer to "2205RSU044-UE" file.