



FCC Test Report

APPLICANT : MeiG Smart Technology Co., Ltd
EQUIPMENT : LTE Cat 1 Module
BRAND NAME : MEIGLink
MODEL NAME : SLM310
FCC ID : 2APJ4-SLM310
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Aug. 23, 2023 ~ Aug. 26, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 6

 1.6. Test Location 7

 1.7. Test Software 7

 1.8. Applicable Standards 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 9

 2.3. Support Unit used in test configuration and system 9

 2.4. EUT Operation Test Setup 9

3. TEST RESULT 10

 3.1. Test of AC Conducted Emission Measurement 10

 3.2. Test of Radiated Emission Measurement 14

4. LIST OF MEASURING EQUIPMENT 19

5. MEASUREMENT UNCERTAINTY 20

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC373101	Rev. 01	Initial issue of report	Nov. 15, 2023
FC373101	Rev. 02	Revise LTE Band 26 frequency range.	Nov. 16, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 10.02 dB at 0.150 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 9.47 dB at 71.71 MHz

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

1.2. Manufacturer

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Cat 1 Module
Brand Name	MEIGLink
Model Name	SLM310
FCC ID	2APJ4-SLM310
EUT supports Radios application	GPRS / LTE / GNSS
IMEI Code	Conduction: 860662055722256 Radiation: 860662055723494
HW Version	V1.00
SW Version	V61_U03
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850MHz ~ 1910MHz LTE Band 2 : 1850 MHz ~ 1910 MHz LTE Band 4 : 1710 MHz ~ 1755 MHz LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 7 : 2500 MHz ~ 2570 MHz LTE Band 25 : 1850 MHz ~ 1915 MHz LTE Band 26 : 824 MHz ~ 849 MHz LTE Band 38 : 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz
Rx Frequency	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz LTE Band 2 : 1930 MHz ~ 1990 MHz LTE Band 4 : 2110 MHz ~ 2155 MHz LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 7 : 2620 MHz ~ 2690 MHz LTE Band 25 : 1930 MHz ~ 1995 MHz LTE Band 26 : 869 MHz ~ 894 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41 : 2496 MHz ~ 2690 MHz GNSS : 1559 MHz ~ 1610 MHz
Antenna Type	WWAN: Glue Stick Antenna GNSS: Glue Stick Antenna
Type of Modulation	GPRS: GMSK LTE: QPSK / 16QAM GNSS : BPSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH04-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + GNSS RX + Powered from Test Jig Mode 2: LTE Band 26 Rx(Low) + GNSS RX + Powered from Test Jig Mode 3: LTE Band 5 Rx(High) + GNSS RX + Powered from Test Jig
Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + GNSS RX + Powered from Test Jig Mode 2: LTE Band 26 Rx(Low) + GNSS RX + Powered from Test Jig Mode 3: LTE Band 5 Rx(High) + GNSS RX + Powered from Test Jig
Remark: <ol style="list-style-type: none"> 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 3; only the test data of this mode is reported. 3. Pre-scanned Low/Middle/High channel for GSM 850 and LTE Band 5 / 26, the worst channel was recorded in this report. 	

2.2. Connection Diagram of Test System

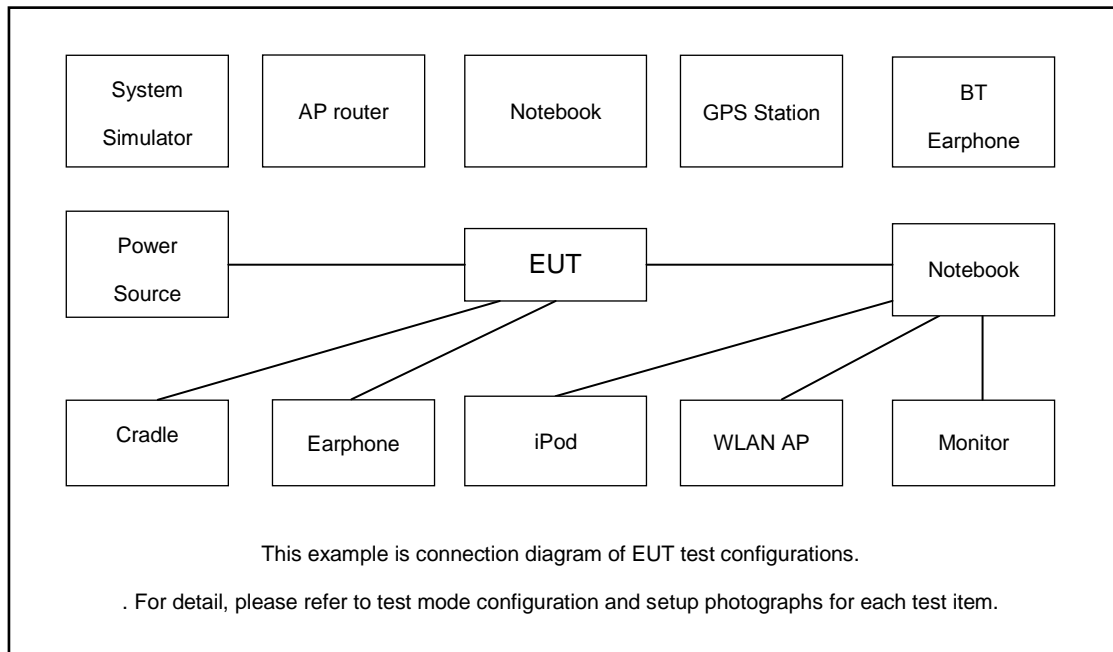

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8820C	N/A	N/A	N/A
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
3.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
5.	Test Jig	N/A	N/A	N/A	N/A	N/A
6.	Antenna	N/A	N/A	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was idle with GSM/LTE Base station during the test.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

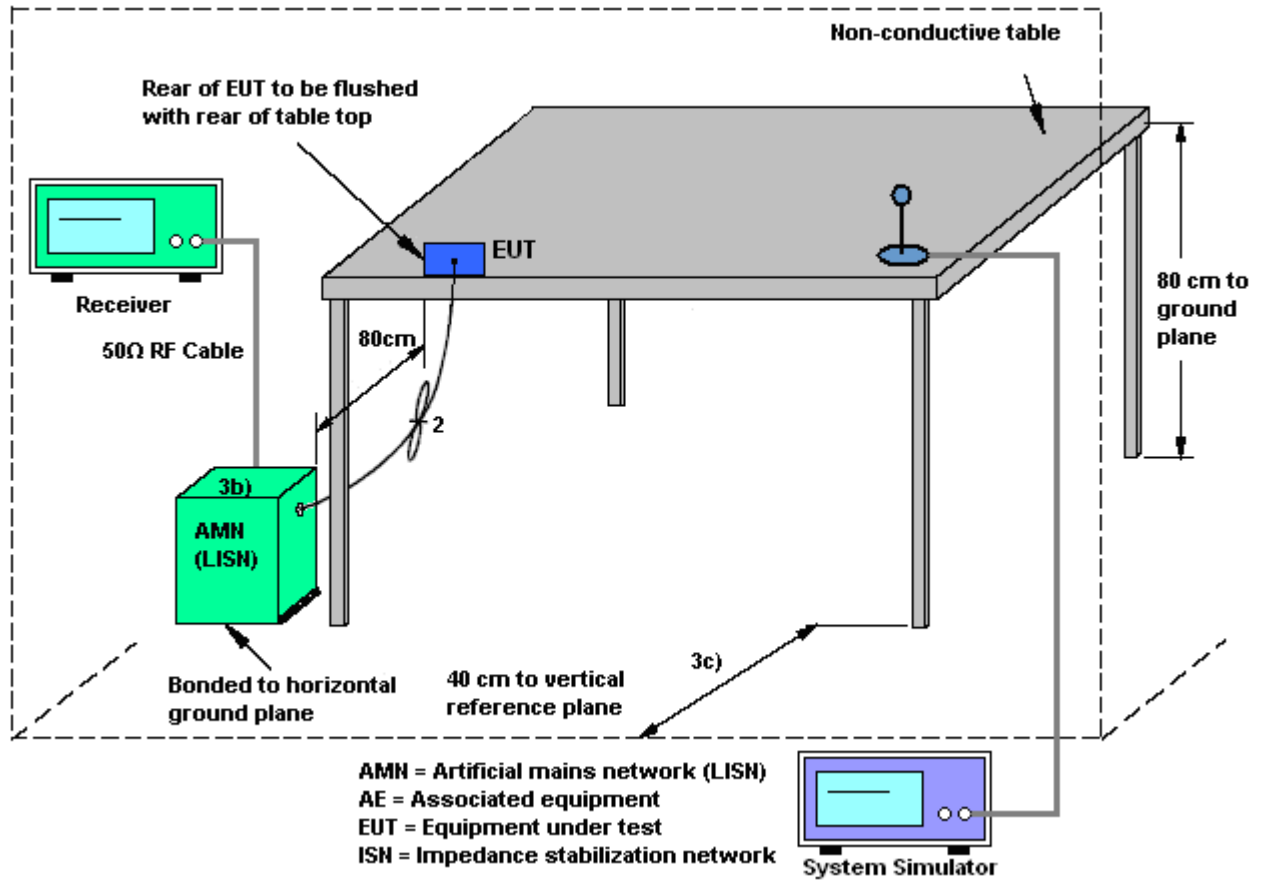



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

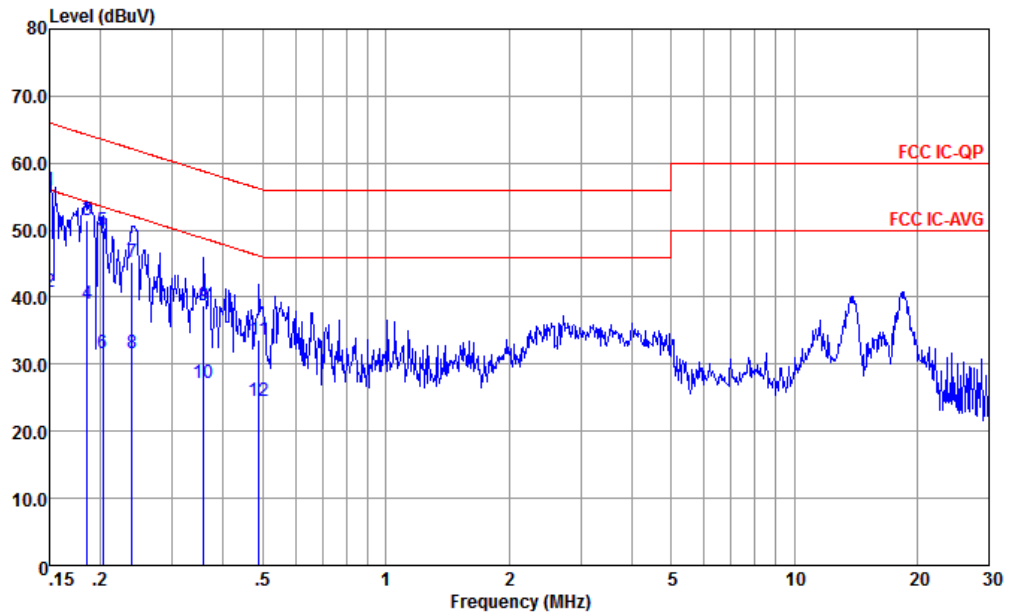


Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	55.98	-10.02	66.00	45.50	0.05	10.43	QP
2	0.150	40.68	-15.32	56.00	30.20	0.05	10.43	Average
3	0.185	51.49	-12.75	64.24	41.03	0.04	10.42	QP
4	0.185	38.99	-15.25	54.24	28.53	0.04	10.42	Average
5	0.203	49.86	-13.63	63.49	39.41	0.03	10.42	QP
6	0.203	31.56	-21.93	53.49	21.11	0.03	10.42	Average
7	0.239	45.14	-16.99	62.13	34.72	0.03	10.39	QP
8	0.239	31.54	-20.59	52.13	21.12	0.03	10.39	Average
9	0.358	38.78	-20.00	58.78	28.44	0.02	10.32	QP
10	0.358	27.18	-21.60	48.78	16.84	0.02	10.32	Average
11	0.489	33.74	-22.45	56.19	23.55	-0.03	10.22	QP
12	0.489	24.44	-21.75	46.19	14.25	-0.03	10.22	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

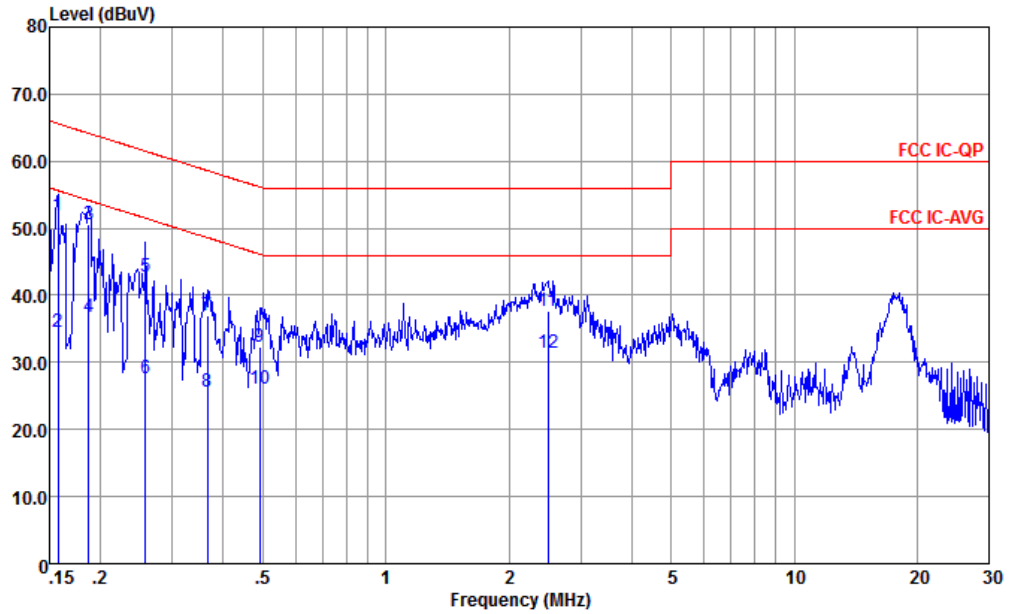

Site : CO01-KS
 Condition : FCC IC-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.157	51.99	-13.61	65.60	41.52	0.04	10.43	QP
2	0.157	34.59	-21.01	55.60	24.12	0.04	10.43	Average
3 *	0.187	50.64	-13.51	64.15	40.17	0.05	10.42	QP
4	0.187	36.74	-17.41	54.15	26.27	0.05	10.42	Average
5	0.258	42.82	-18.69	61.51	32.45	-0.01	10.38	QP
6	0.258	27.62	-23.89	51.51	17.25	-0.01	10.38	Average
7	0.365	37.02	-21.59	58.61	26.75	-0.05	10.32	QP
8	0.365	25.72	-22.89	48.61	15.45	-0.05	10.32	Average
9	0.491	32.36	-23.78	56.14	22.21	-0.07	10.22	QP
10	0.491	26.06	-20.08	46.14	15.91	-0.07	10.22	Average
11	2.500	37.61	-18.39	56.00	27.68	-0.13	10.06	QP
12	2.500	31.41	-14.59	46.00	21.48	-0.13	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

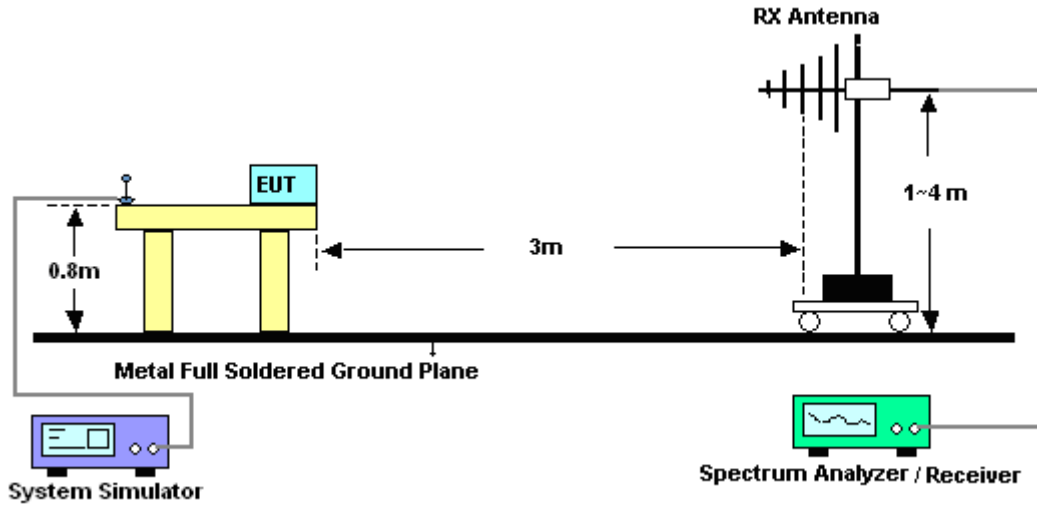


For radiated emissions above 1GHz

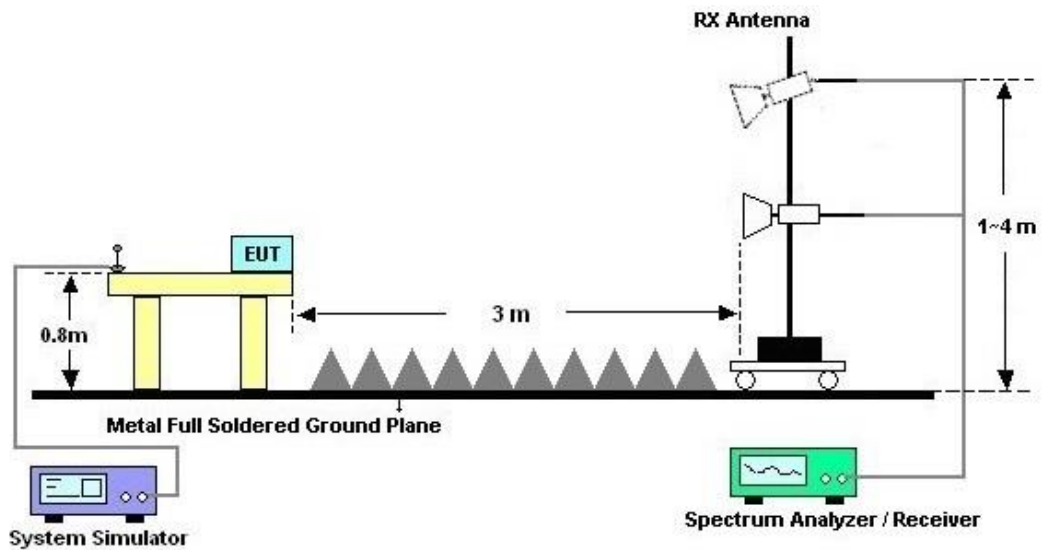



3.2.5. Test Result of Radiated Emission

Test Engineer :	chen hui	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

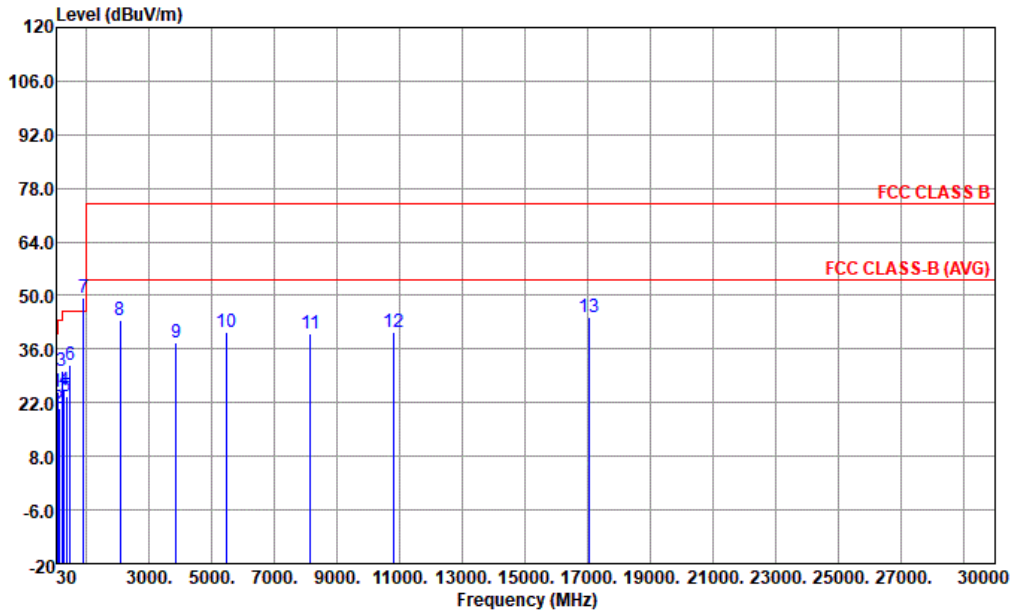


Site : 03CH04-KS
 Condition : FCC CLASS B 3m 3117 SN00240132 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	61.04	24.66	-15.34	40.00	44.18	11.83	1.11	32.46	---	---	Peak
2	108.57	20.37	-23.13	43.50	35.24	15.78	1.52	32.17	---	---	Peak
3	199.75	30.13	-13.37	43.50	45.26	14.97	2.07	32.17	---	---	Peak
4	274.44	25.08	-20.92	46.00	36.56	18.26	2.43	32.17	---	---	Peak
5	352.04	23.69	-22.31	46.00	32.59	20.56	2.75	32.21	---	---	Peak
6	480.08	31.92	-14.08	46.00	37.62	23.73	3.22	32.65	---	---	Peak
7 *	889.42	49.42			47.45	29.18	4.36	31.57	---	---	Peak
8	2071.00	43.71	-30.29	74.00	69.03	31.43	6.65	63.40	---	---	Peak
9	3856.00	37.79	-36.21	74.00	59.26	33.38	9.14	63.99	---	---	Peak
10	5454.00	40.63	-33.37	74.00	59.18	34.54	11.08	64.17	---	---	Peak
11	8140.00	40.02	-33.98	74.00	54.21	35.90	13.55	63.64	---	---	Peak
12	10792.00	40.63	-33.37	74.00	49.28	37.99	15.76	62.40	---	---	Peak
13	17031.00	44.48	-29.52	74.00	48.21	41.89	19.82	65.44	---	---	Peak



Test Engineer :	chen hui	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

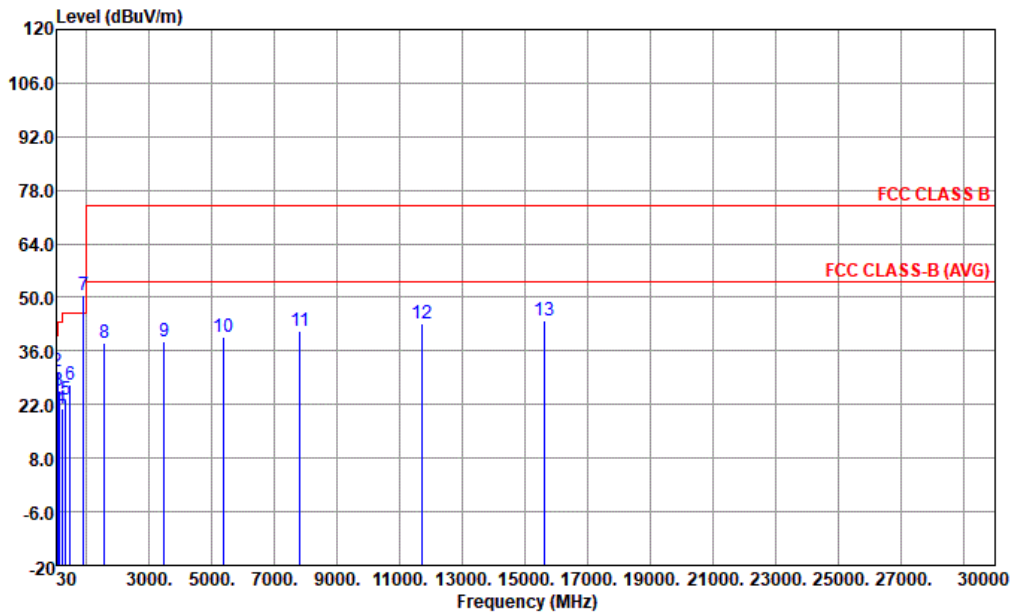

Site : 03CH04-KS
 Condition : FCC CLASS B 3m 3117 SN00240132 VERTICAL

: X											
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	56.19	25.55	-14.45	40.00	44.25	12.73	1.07	32.50	---	---	Peak
2	71.71	30.53	-9.47	40.00	49.21	12.49	1.21	32.38	---	---	Peak
3	108.57	25.55	-17.95	43.50	40.42	15.78	1.52	32.17	---	---	Peak
4	199.75	21.06	-22.44	43.50	36.19	14.97	2.07	32.17	---	---	Peak
5	333.61	23.24	-22.76	46.00	32.63	20.13	2.68	32.20	---	---	Peak
6	480.08	27.31	-18.69	46.00	33.01	23.73	3.22	32.65	---	---	Peak
7 *	889.42	50.75			48.78	29.18	4.36	31.57	---	---	Peak
8	1578.00	38.18	-35.82	74.00	67.21	28.43	5.81	63.27	---	---	Peak
9	3482.00	38.56	-35.44	74.00	61.02	32.90	8.68	64.04	---	---	Peak
10	5386.00	39.85	-34.15	74.00	58.50	34.46	11.04	64.15	---	---	Peak
11	7800.00	41.11	-32.89	74.00	55.89	35.86	13.16	63.80	---	---	Peak
12	11693.00	43.37	-30.63	74.00	50.35	38.53	16.34	61.85	---	---	Peak
13	15603.00	44.12	-29.88	74.00	49.76	40.46	18.83	64.93	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Aug. 23, 2023	Oct. 12, 2023	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 12, 2022	Aug. 23, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Aug. 23, 2023	Apr. 08, 2024	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Aug. 23, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Aug. 23, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul 06, 2023	Aug. 23, 2023	Jul 05, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Aug. 23, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Aug. 23, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 23, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 23, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 23, 2023	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 16, 2023	Aug. 26, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Aug. 26, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Aug. 26, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Aug. 26, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.28 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.26 dB
---	---------