



# FCC Test Report

APPLICANT : MeiG Smart Technology Co., Ltd  
EQUIPMENT : SNM758  
BRAND NAME : MEIGLink  
MODEL NAME : SNM758  
FCC ID : 2APJ4-SNM758  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Nov. 21, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1. GENERAL DESCRIPTION.....5**

    1.1. Applicant.....5

    1.2. Manufacturer .....5

    1.3. Product Feature of Equipment Under Test .....5

    1.4. Product Specification of Equipment Under Test .....6

    1.5. Modification of EUT.....6

    1.6. Test Location.....7

    1.7. Test Software .....7

    1.8. Applicable Standards .....7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8**

    2.1. Test Mode .....8

    2.2. Connection Diagram of Test System .....8

    2.3. Support Unit used in test configuration and system.....9

    2.4. EUT Operation Test Setup.....9

**3. TEST RESULT.....10**

    3.1. Test of AC Conducted Emission Measurement .....10

    3.2. Test of Radiated Emission Measurement .....14

**4. LIST OF MEASURING EQUIPMENT.....19**

**5. MEASUREMENT UNCERTAINTY .....20**

**APPENDIX A. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC970101-01	Rev. 01	Initial issue of report	Jan. 18, 2024



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 9.75 dB at 0.552 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.77 dB at 457.770 MHz for Quasi-Peak

**Conformity Assessment Condition:**  
 The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**  
 The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1. Applicant

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

## 1.2. Manufacturer

MeiG Smart Technology Co., Ltd

2nd Floor,Office Building,No.5 Lingxia Road,Fenghuang,Fuyong Street,Bao'an District,Shenzhen City.

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	SNM758
Brand Name	MEIGLink
Model Name	SNM758
FCC ID	2APJ4-SNM758
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
SN	Radiation: 758W016DYC122100138 Conduction: 758W016DYC122100193
HW Version	V1.02
SW Version	SNM758EQ_EQ000_2774.51ABD20.4041C02_231026_100_V01_T12
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Rx Frequency</b>	802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Antenna Type</b>	WLAN : Glue Stick Antenna Bluetooth : Glue Stick Antenna
<b>Type of Modulation</b>	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH02-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: Adapter With Jig Board + Bluetooth Idle + WLAN Idle(2.4G) Mode 2: Adapter With Jig Board + Bluetooth Idle + WLAN Idle(5G)
Radiated Emissions	Mode 1: Adapter With Jig Board + Bluetooth Idle + WLAN Idle(2.4G) Mode 2: Adapter With Jig Board + Bluetooth Idle + WLAN Idle(5G)
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. The worst case of AC is mode 1; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 1; only the test data of this mode is reported.</li> </ol>	

### 2.2.Connection Diagram of Test System

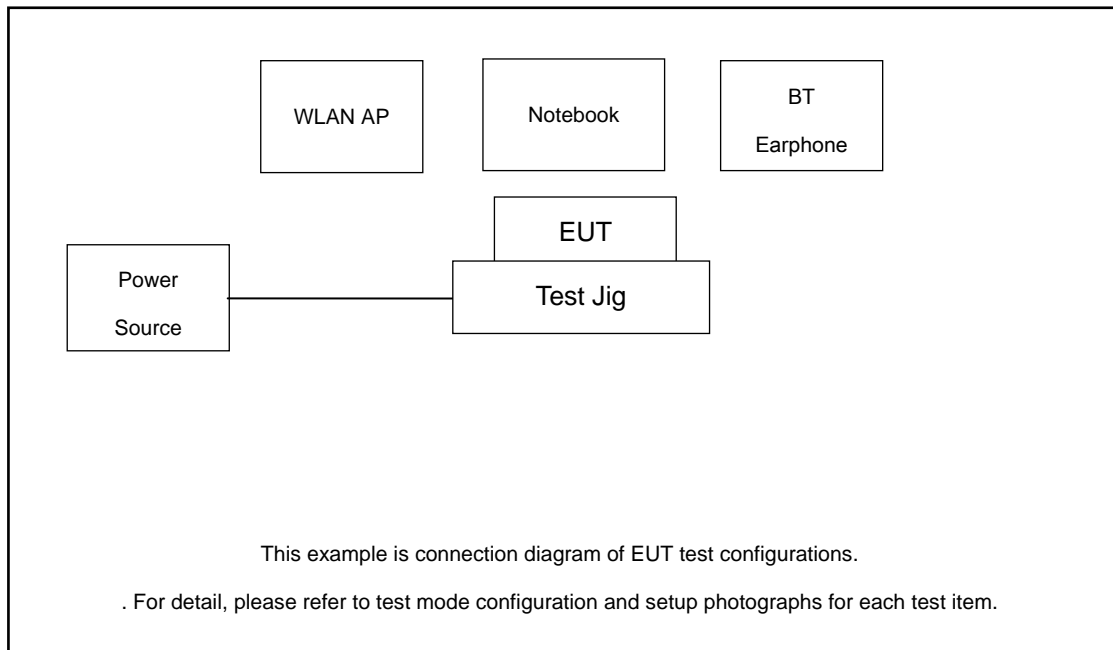

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	Antenna	N/A	N/A	N/A	N/A	N/A

### 2.4. EUT Operation Test Setup

The EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

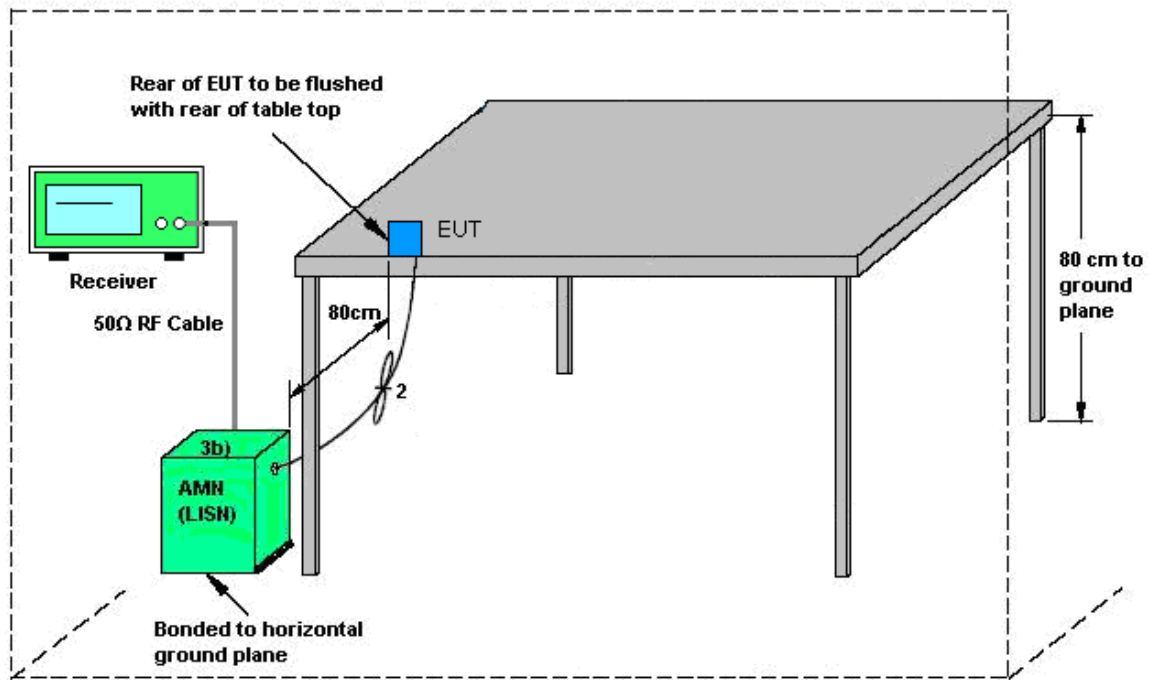


AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

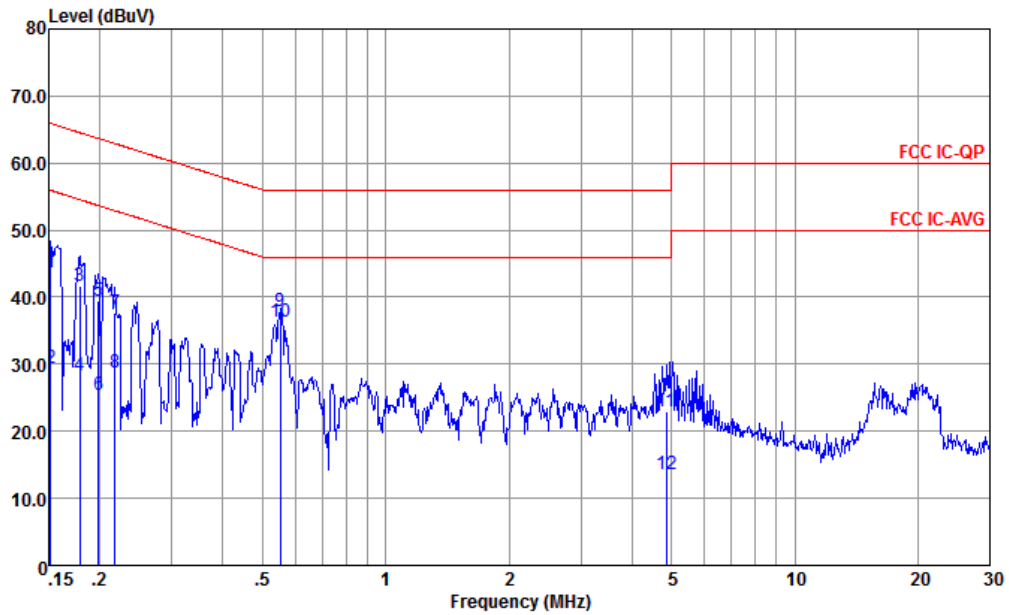


Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.152	43.57	-22.34	65.91	33.10	0.05	10.42	QP
2	0.152	29.37	-26.54	55.91	18.90	0.05	10.42	Average
3	0.179	41.65	-22.90	64.55	31.20	0.04	10.41	QP
4	0.179	28.35	-26.20	54.55	17.90	0.04	10.41	Average
5	0.199	39.54	-24.13	63.67	29.10	0.03	10.41	QP
6	0.199	25.34	-28.33	53.67	14.90	0.03	10.41	Average
7	0.217	37.73	-25.19	62.92	27.31	0.03	10.39	QP
8	0.217	28.73	-24.19	52.92	18.31	0.03	10.39	Average
9	0.552	37.95	-18.05	56.00	27.79	-0.04	10.20	QP
10 *	0.552	36.25	-9.75	46.00	26.09	-0.04	10.20	Average
11	4.848	23.02	-32.98	56.00	13.10	-0.14	10.06	QP
12	4.848	13.52	-32.48	46.00	3.60	-0.14	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

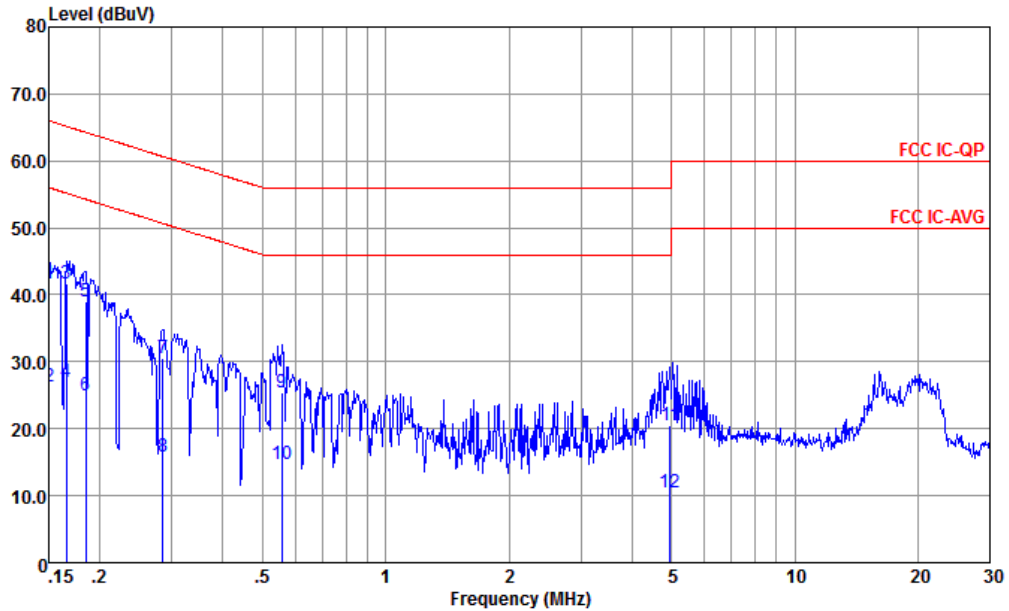

Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	41.66	-24.34	66.00	31.20	0.04	10.42	QP
2	0.150	26.36	-29.64	56.00	15.90	0.04	10.42	Average
3 *	0.166	41.76	-23.40	65.16	31.30	0.04	10.42	QP
4	0.166	26.96	-28.20	55.16	16.50	0.04	10.42	Average
5	0.184	39.06	-25.22	64.28	28.60	0.05	10.41	QP
6	0.184	25.06	-29.22	54.28	14.60	0.05	10.41	Average
7	0.285	30.61	-30.07	60.68	20.30	-0.03	10.34	QP
8	0.285	15.91	-34.77	50.68	5.60	-0.03	10.34	Average
9	0.558	25.32	-30.68	56.00	15.20	-0.07	10.19	QP
10	0.558	14.72	-31.28	46.00	4.60	-0.07	10.19	Average
11	4.952	20.53	-35.47	56.00	10.60	-0.13	10.06	QP
12	4.952	10.53	-35.47	46.00	0.60	-0.13	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

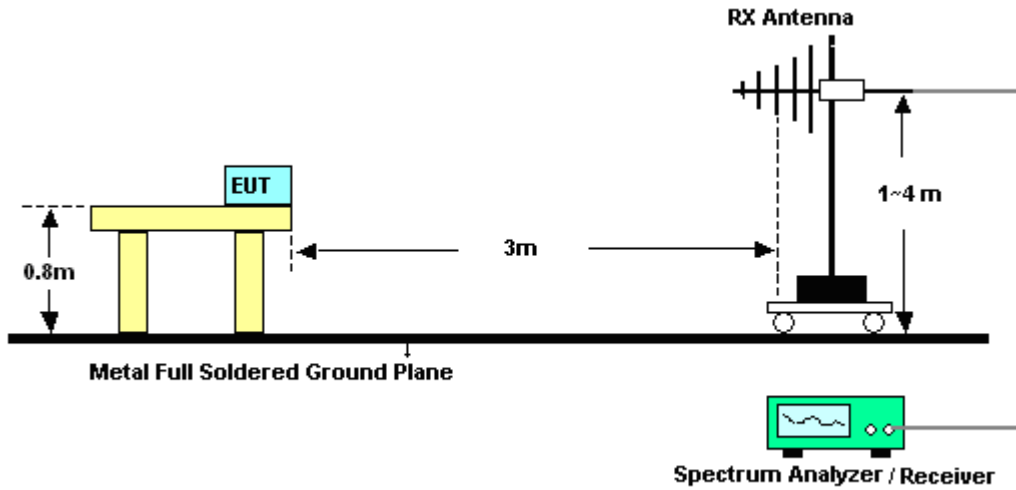

For radiated emissions above 1GHz

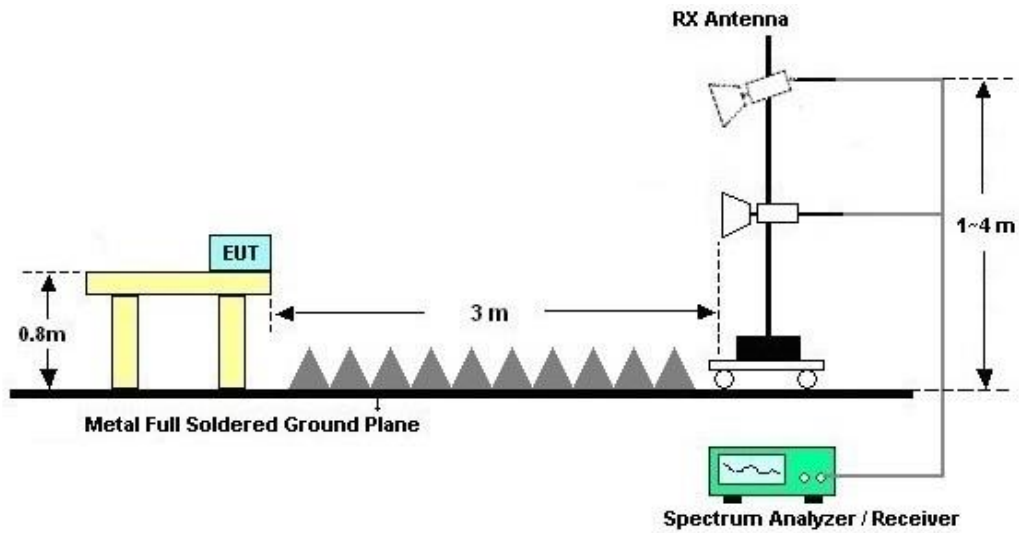






3.2.5. Test Result of Radiated Emission

Test Engineer :	Feng Wang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

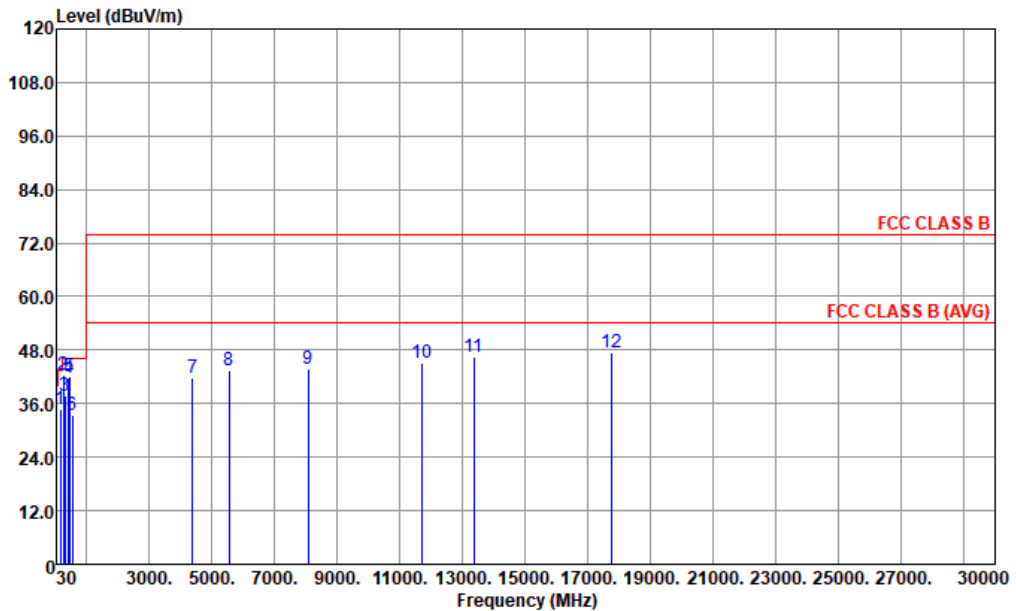


Site : 03CH02-KS  
 Condition : FCC CLASS B 3m 59913 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	152.22	34.60	-8.90	43.50	48.51	16.92	1.81	32.64	---	---	Peak
2	247.28	42.32	-3.68	46.00	55.35	17.95	2.09	33.07	---	---	Peak
3	314.21	37.61	-8.39	46.00	48.60	19.27	2.61	32.87	---	---	Peak
4	413.15	41.71	-4.29	46.00	49.70	22.24	3.03	33.26	100	117	QP
5	457.77	42.23	-3.77	46.00	49.25	23.00	3.14	33.16	100	172	QP
6	537.31	33.35	-12.65	46.00	39.41	24.27	3.18	33.51	---	---	Peak
7	4366.00	41.75	-32.25	74.00	61.47	34.00	10.19	63.91	---	---	Peak
8	5539.00	43.46	-30.54	74.00	61.97	34.40	11.46	64.37	---	---	Peak
9	8072.00	43.95	-30.05	74.00	58.10	35.77	13.68	63.60	---	---	Peak
10	11693.00	45.10	-28.90	74.00	50.54	38.50	17.29	61.23	---	---	Peak
11	13359.00	46.61	-27.39	74.00	51.47	38.94	18.47	62.27	---	---	Peak
12	17762.00	47.48	-26.52	74.00	47.75	41.27	21.27	62.81	---	---	Peak



Test Engineer :	Feng Wang	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

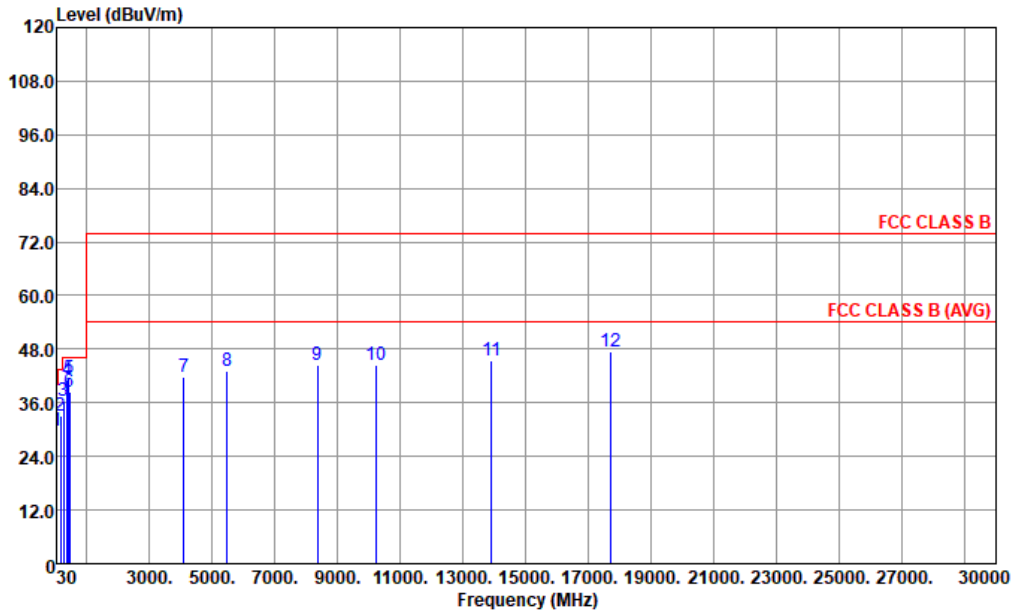

Site : 03CH02-KS  
Condition : FCC CLASS B 3m 59913 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	49.40	29.80	-10.20	40.00	46.97	14.76	0.99	32.92	---	---	Peak
2	152.22	33.25	-10.25	43.50	47.16	16.92	1.81	32.64	---	---	Peak
3	249.22	36.57	-9.43	46.00	49.37	18.19	2.09	33.08	---	---	Peak
4	365.62	41.25	-4.75	46.00	50.93	20.59	2.83	33.10	200	307	QP
5	q 413.15	41.53	-4.47	46.00	49.52	22.24	3.03	33.26	200	109	QP
6	p 458.74	38.58	-7.42	46.00	45.58	23.02	3.14	33.16	---	---	Peak
7	4094.00	41.68	-32.32	74.00	61.89	33.80	9.83	63.84	---	---	Peak
8	5471.00	43.23	-30.77	74.00	61.73	34.40	11.49	64.39	---	---	Peak
9	8361.00	44.43	-29.57	74.00	57.61	35.77	14.52	63.47	---	---	Peak
10	10248.00	44.56	-29.44	74.00	53.18	37.35	16.13	62.10	---	---	Peak
11	13903.00	45.46	-28.54	74.00	49.81	38.70	18.95	62.00	---	---	Peak
12	17694.00	47.59	-26.41	74.00	47.94	41.20	21.25	62.80	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 10, 2023	Nov. 21, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 10, 2023	Nov. 21, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 23, 2022	Nov. 21, 2023	Dec. 22, 2023	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Nov. 21, 2023	Oct. 22, 2024	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Nov. 21, 2023	Jan. 07, 2024	Radiation (03CH02-KS)
Amplifier	EM	EM18G40GGA	060852	18~40GHz	Jan. 05, 2023	Nov. 21, 2023	Jan. 04, 2024	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 06, 2023	Nov. 21, 2023	Jul. 05, 2024	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060806	1GHz~18GHz	Oct. 10, 2023	Nov. 21, 2023	Oct. 09, 2024	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 21, 2023	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Nov. 21, 2023	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Nov. 21, 2023	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Nov. 21, 2023	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Nov. 21, 2023	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Nov. 21, 2023	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Nov. 21, 2023	Oct. 10, 2024	Conduction (CO01-KS)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.04dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.16dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.96dB
---	--------