



Mode	27																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.47-5.725_802.11ac VHT80_CH58_5290MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-26</p>	<p>Date: 2024-06-26</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>47.62</td> <td>68.30</td> <td>-20.68</td> <td>57.97</td> <td>37.52</td> <td>10.89</td> <td>58.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>48.56</td> <td>74.00</td> <td>-25.44</td> <td>55.92</td> <td>39.20</td> <td>12.71</td> <td>59.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10580.00	47.62	68.30	-20.68	57.97	37.52	10.89	58.76	--	--	Peak	2	15870.00	48.56	74.00	-25.44	55.92	39.20	12.71	59.27	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>47.05</td> <td>68.30</td> <td>-21.25</td> <td>57.40</td> <td>37.52</td> <td>10.89</td> <td>58.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>50.06</td> <td>74.00</td> <td>-23.94</td> <td>57.42</td> <td>39.20</td> <td>12.71</td> <td>59.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10580.00	47.05	68.30	-21.25	57.40	37.52	10.89	58.76	--	--	Peak	2	15870.00	50.06	74.00	-23.94	57.42	39.20	12.71	59.27	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	10580.00	47.62	68.30	-20.68	57.97	37.52	10.89	58.76	--	--	Peak																																																																																						
2	15870.00	48.56	74.00	-25.44	55.92	39.20	12.71	59.27	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	10580.00	47.05	68.30	-21.25	57.40	37.52	10.89	58.76	--	--	Peak																																																																																						
2	15870.00	50.06	74.00	-23.94	57.42	39.20	12.71	59.27	--	--	Peak																																																																																						



		28																																																																																									
Mode	Band Edge - L																																																																																										
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																										
Pol.	Horizontal		Fundamental																																																																																								
Peak	<p style="text-align: right;">Date: 2024-06-26</p>		<p style="text-align: right;">Date: 2024-06-26</p>																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.46</td> <td>51.49</td> <td>74.00</td> <td>-22.51</td> <td>40.73</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>394</td> <td>69 PEAK</td> </tr> <tr> <td>2</td> <td>5467.72</td> <td>50.50</td> <td>68.30</td> <td>-17.80</td> <td>39.74</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>394</td> <td>69 PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.46	51.49	74.00	-22.51	40.73	34.86	8.41	32.51	394	69 PEAK	2	5467.72	50.50	68.30	-17.80	39.74	34.87	8.40	32.51	394	69 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>93.65</td> <td>-----</td> <td>-----</td> <td>82.92</td> <td>34.92</td> <td>8.31</td> <td>32.50</td> <td>394</td> <td>69 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	93.65	-----	-----	82.92	34.92	8.31	32.50	394
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5457.46	51.49	74.00	-22.51	40.73	34.86	8.41	32.51	394	69 PEAK																																																																																	
2	5467.72	50.50	68.30	-17.80	39.74	34.87	8.40	32.51	394	69 PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5530.00	93.65	-----	-----	82.92	34.92	8.31	32.50	394	69 PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2024-06-26</p>		<p style="text-align: right;">Date: 2024-06-26</p>																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.62</td> <td>42.41</td> <td>54.00</td> <td>-11.59</td> <td>31.65</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>394</td> <td>69 AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.62	42.41	54.00	-11.59	31.65	34.86	8.41	32.51	394	69 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>87.16</td> <td>-----</td> <td>-----</td> <td>76.42</td> <td>34.92</td> <td>8.32</td> <td>32.50</td> <td>394</td> <td>69 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	87.16	-----	-----	76.42	34.92	8.32	32.50	394	69 AVERAGE										
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5459.62	42.41	54.00	-11.59	31.65	34.86	8.41	32.51	394	69 AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5530.00	87.16	-----	-----	76.42	34.92	8.32	32.50	394	69 AVERAGE																																																																																	



Mode	28																																																	
	Band Edge - R																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																	
Pol.	Horizontal	Fundamental																																																
Peak	<p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5764.53</td> <td>50.29</td> <td>68.30</td> <td>-18.01</td> <td>38.91</td> <td>35.06</td> <td>8.82</td> <td>32.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>cm</td> <td>deg</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>394</td> <td>69 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5764.53	50.29	68.30	-18.01	38.91	35.06	8.82	32.50							cm	deg							394	69 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1 5764.53	50.29	68.30	-18.01	38.91	35.06	8.82	32.50																																											
						cm	deg																																											
						394	69 PEAK																																											



		28																																																																																						
Mode	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.28</td> <td>49.80</td> <td>74.00</td> <td>-24.20</td> <td>39.04</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>389</td> <td>196</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.44</td> <td>51.42</td> <td>68.30</td> <td>-16.88</td> <td>40.66</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>389</td> <td>196</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.28	49.80	74.00	-24.20	39.04	34.86	8.41	32.51	389	196	PEAK	2	5468.44	51.42	68.30	-16.88	40.66	34.87	8.40	32.51	389	196	PEAK	<p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>93.03</td> <td>-----</td> <td>-----</td> <td>82.30</td> <td>34.91</td> <td>8.32</td> <td>32.50</td> <td>389</td> <td>196</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	93.03	-----	-----	82.30	34.91	8.32	32.50	389	196	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5457.28	49.80	74.00	-24.20	39.04	34.86	8.41	32.51	389	196	PEAK																																																																													
2	5468.44	51.42	68.30	-16.88	40.66	34.87	8.40	32.51	389	196	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5530.00	93.03	-----	-----	82.30	34.91	8.32	32.50	389	196	PEAK																																																																													
Avg	<p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.98</td> <td>41.99</td> <td>54.00</td> <td>-12.01</td> <td>31.23</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>389</td> <td>196</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.98	41.99	54.00	-12.01	31.23	34.86	8.41	32.51	389	196	AVERAGE	<p style="text-align: right;">Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>86.57</td> <td>-----</td> <td>-----</td> <td>75.84</td> <td>34.92</td> <td>8.31</td> <td>32.50</td> <td>389</td> <td>196</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	86.57	-----	-----	75.84	34.92	8.31	32.50	389	196	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.98	41.99	54.00	-12.01	31.23	34.86	8.41	32.51	389	196	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5530.00	86.57	-----	-----	75.84	34.92	8.31	32.50	389	196	AVERAGE																																																																													



Mode	28																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-06-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5741.74</td> <td>50.28</td> <td>68.30</td> <td>-18.02</td> <td>39.00</td> <td>35.04</td> <td>8.74</td> <td>32.50</td> <td>389</td> <td>196</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5741.74	50.28	68.30	-18.02	39.00	35.04	8.74	32.50	389	196	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5741.74	50.28	68.30	-18.02	39.00	35.04	8.74	32.50	389	196	PEAK																											



Mode	28																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH106_5530MHz																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>46.98</td> <td>74.00</td> <td>-27.02</td> <td>56.34</td> <td>37.63</td> <td>11.24</td> <td>58.23</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>48.92</td> <td>68.30</td> <td>-19.38</td> <td>55.15</td> <td>39.57</td> <td>12.95</td> <td>58.75</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11060.00	46.98	74.00	-27.02	56.34	37.63	11.24	58.23	--	Peak	2	16590.00	48.92	68.30	-19.38	55.15	39.57	12.95	58.75	--	Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>47.94</td> <td>74.00</td> <td>-26.06</td> <td>57.30</td> <td>37.63</td> <td>11.24</td> <td>58.23</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>47.47</td> <td>68.30</td> <td>-20.83</td> <td>53.70</td> <td>39.57</td> <td>12.95</td> <td>58.75</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11060.00	47.94	74.00	-26.06	57.30	37.63	11.24	58.23	--	Peak	2	16590.00	47.47	68.30	-20.83	53.70	39.57	12.95	58.75	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11060.00	46.98	74.00	-27.02	56.34	37.63	11.24	58.23	--	Peak																																																																																						
2	16590.00	48.92	68.30	-19.38	55.15	39.57	12.95	58.75	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11060.00	47.94	74.00	-26.06	57.30	37.63	11.24	58.23	--	Peak																																																																																						
2	16590.00	47.47	68.30	-20.83	53.70	39.57	12.95	58.75	--	Peak																																																																																						



Mode		29																																																																																				
		Band Edge - L																																																																																				
		U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																				
Pol.	Horizontal		Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5423.58</td> <td>49.00</td> <td>74.00</td> <td>-25.00</td> <td>38.23</td> <td>34.84</td> <td>8.46</td> <td>32.53</td> <td>365</td> <td>136</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5467.52</td> <td>48.36</td> <td>68.30</td> <td>-19.94</td> <td>37.60</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>365</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5423.58	49.00	74.00	-25.00	38.23	34.84	8.46	32.53	365	136	PEAK	2	5467.52	48.36	68.30	-19.94	37.60	34.87	8.40	32.51	365	136	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>84.60</td> <td>-----</td> <td>-----</td> <td>73.87</td> <td>34.97</td> <td>8.26</td> <td>32.50</td> <td>365</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	84.60	-----	-----	73.87	34.97	8.26	32.50	365	136	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5423.58	49.00	74.00	-25.00	38.23	34.84	8.46	32.53	365	136	PEAK																																																																											
2	5467.52	48.36	68.30	-19.94	37.60	34.87	8.40	32.51	365	136	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	84.60	-----	-----	73.87	34.97	8.26	32.50	365	136	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>40.45</td> <td>54.00</td> <td>-13.55</td> <td>29.69</td> <td>34.86</td> <td>8.41</td> <td>32.51</td> <td>365</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.20	40.45	54.00	-13.55	29.69	34.86	8.41	32.51	365	136	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>78.60</td> <td>-----</td> <td>-----</td> <td>67.87</td> <td>34.97</td> <td>8.26</td> <td>32.50</td> <td>365</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5610.00	78.60	-----	-----	67.87	34.97	8.26	32.50	365	136	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5459.20	40.45	54.00	-13.55	29.69	34.86	8.41	32.51	365	136	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5610.00	78.60	-----	-----	67.87	34.97	8.26	32.50	365	136	AVERAGE																																																																											



Mode	29																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5741.13</td> <td>50.04</td> <td>68.30</td> <td>-18.26</td> <td>38.77</td> <td>35.04</td> <td>8.73</td> <td>32.50</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>365</td> <td>136 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5741.13	50.04	68.30	-18.26	38.77	35.04	8.73	32.50							365	136 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5741.13	50.04	68.30	-18.26	38.77	35.04	8.73	32.50																																			
						365	136 PEAK																																			



		29																																																																						
Mode	Band Edge - L																																																																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5447.76</td> <td>50.18</td> <td>74.00</td> <td>-23.82</td> <td>39.41</td> <td>34.86</td> <td>8.43</td> <td>32.52</td> <td>212</td> <td>180</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.74</td> <td>49.67</td> <td>68.30</td> <td>-18.63</td> <td>38.91</td> <td>34.87</td> <td>8.40</td> <td>32.51</td> <td>212</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5447.76	50.18	74.00	-23.82	39.41	34.86	8.43	32.52	212	180	PEAK	2	5466.74	49.67	68.30	-18.63	38.91	34.87	8.40	32.51	212	180	PEAK	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>93.19</td> <td>-----</td> <td>-----</td> <td>82.51</td> <td>34.96</td> <td>8.22</td> <td>32.50</td> <td>212</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5610.00	93.19	-----	-----	82.51	34.96	8.22	32.50	212	180	PEAK
	Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																															
1	5447.76	50.18	74.00	-23.82	39.41	34.86	8.43	32.52	212	180	PEAK																																																													
2	5466.74	49.67	68.30	-18.63	38.91	34.87	8.40	32.51	212	180	PEAK																																																													
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																															
1	5610.00	93.19	-----	-----	82.51	34.96	8.22	32.50	212	180	PEAK																																																													
Avg	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5414.48</td> <td>41.15</td> <td>54.00</td> <td>-12.85</td> <td>30.38</td> <td>34.83</td> <td>8.47</td> <td>32.53</td> <td>212</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5414.48	41.15	54.00	-12.85	30.38	34.83	8.47	32.53	212	180	AVERAGE	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>86.73</td> <td>-----</td> <td>-----</td> <td>76.00</td> <td>34.97</td> <td>8.26</td> <td>32.50</td> <td>212</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5610.00	86.73	-----	-----	76.00	34.97	8.26	32.50	212	180	AVERAGE												
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																															
1	5414.48	41.15	54.00	-12.85	30.38	34.83	8.47	32.53	212	180	AVERAGE																																																													
Limit	Read	Ant	Cable	Apos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																															
1	5610.00	86.73	-----	-----	76.00	34.97	8.26	32.50	212	180	AVERAGE																																																													



Mode	29																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5763.61</td> <td>50.51</td> <td>68.30</td> <td>-17.79</td> <td>39.13</td> <td>35.06</td> <td>8.82</td> <td>32.50</td> <td>212</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5763.61	50.51	68.30	-17.79	39.13	35.06	8.82	32.50	212	180	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5763.61	50.51	68.30	-17.79	39.13	35.06	8.82	32.50	212	180	PEAK																											



Mode	29																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11ac_VHT80_CH122_5610MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>48.05</td> <td>74.00</td> <td>-25.95</td> <td>57.09</td> <td>37.69</td> <td>11.32</td> <td>58.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16830.00</td> <td>47.33</td> <td>68.30</td> <td>-20.97</td> <td>53.00</td> <td>39.76</td> <td>13.05</td> <td>58.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11220.00	48.05	74.00	-25.95	57.09	37.69	11.32	58.05	--	--	Peak	2	16830.00	47.33	68.30	-20.97	53.00	39.76	13.05	58.48	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11220.00</td> <td>47.69</td> <td>74.00</td> <td>-26.31</td> <td>56.73</td> <td>37.69</td> <td>11.32</td> <td>58.05</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16830.00</td> <td>47.72</td> <td>68.30</td> <td>-20.58</td> <td>53.39</td> <td>39.76</td> <td>13.05</td> <td>58.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11220.00	47.69	74.00	-26.31	56.73	37.69	11.32	58.05	--	--	Peak	2	16830.00	47.72	68.30	-20.58	53.39	39.76	13.05	58.48	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11220.00	48.05	74.00	-25.95	57.09	37.69	11.32	58.05	--	--	Peak																																																																																						
2	16830.00	47.33	68.30	-20.97	53.00	39.76	13.05	58.48	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11220.00	47.69	74.00	-26.31	56.73	37.69	11.32	58.05	--	--	Peak																																																																																						
2	16830.00	47.72	68.30	-20.58	53.39	39.76	13.05	58.48	--	--	Peak																																																																																						



		30																																																																																																														
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5630.02</td> <td>49.48</td> <td>68.30</td> <td>-18.82</td> <td>38.68</td> <td>34.98</td> <td>8.32</td> <td>32.50</td> <td>365</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.61</td> <td>48.51</td> <td>68.75</td> <td>-20.24</td> <td>37.62</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>365</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5701.36</td> <td>49.78</td> <td>105.58</td> <td>-55.80</td> <td>38.67</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>365</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.21</td> <td>49.57</td> <td>111.27</td> <td>-61.70</td> <td>38.38</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>365</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5630.02	49.48	68.30	-18.82	38.68	34.98	8.32	32.50	365	133	PEAK	2	5650.61	48.51	68.75	-20.24	37.62	34.99	8.40	32.50	365	133	PEAK	3	5701.36	49.78	105.58	-55.80	38.67	35.02	8.59	32.50	365	133	PEAK	4	5720.21	49.57	111.27	-61.70	38.38	35.03	8.66	32.50	365	133	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>100.02</td> <td>-----</td> <td>-----</td> <td>88.72</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>365</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	100.02	-----	-----	88.72	35.05	8.75	32.50	365	133	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5630.02	49.48	68.30	-18.82	38.68	34.98	8.32	32.50	365	133	PEAK																																																																																																					
2	5650.61	48.51	68.75	-20.24	37.62	34.99	8.40	32.50	365	133	PEAK																																																																																																					
3	5701.36	49.78	105.58	-55.80	38.67	35.02	8.59	32.50	365	133	PEAK																																																																																																					
4	5720.21	49.57	111.27	-61.70	38.38	35.03	8.66	32.50	365	133	PEAK																																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	100.02	-----	-----	88.72	35.05	8.75	32.50	365	133	PEAK																																																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>94.27</td> <td>-----</td> <td>-----</td> <td>82.97</td> <td>35.05</td> <td>8.75</td> <td>32.50</td> <td>365</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5745.00	94.27	-----	-----	82.97	35.05	8.75	32.50	365	133	AVERAGE																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																								
1	5745.00	94.27	-----	-----	82.97	35.05	8.75	32.50	365	133	AVERAGE																																																																																																					



		30																																																																																							
Mode	Band Edge																																																																																								
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																								
Pol.	Vertical	Fundamental																																																																																							
Peak	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5648.14</td> <td>49.85</td> <td>68.30</td> <td>-18.45</td> <td>38.97</td> <td>34.99</td> <td>8.39 32.50 288 181 PEAK</td> </tr> <tr> <td>2</td> <td>5650.32</td> <td>48.69</td> <td>68.53</td> <td>-19.84</td> <td>37.80</td> <td>34.99</td> <td>8.40 32.50 288 181 PEAK</td> </tr> <tr> <td>3</td> <td>5716.44</td> <td>56.95</td> <td>109.80</td> <td>-52.85</td> <td>45.78</td> <td>35.03</td> <td>8.64 32.50 288 181 PEAK</td> </tr> <tr> <td>4</td> <td>5722.09</td> <td>57.91</td> <td>115.57</td> <td>-57.66</td> <td>46.72</td> <td>35.03</td> <td>8.66 32.50 288 181 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5648.14	49.85	68.30	-18.45	38.97	34.99	8.39 32.50 288 181 PEAK	2	5650.32	48.69	68.53	-19.84	37.80	34.99	8.40 32.50 288 181 PEAK	3	5716.44	56.95	109.80	-52.85	45.78	35.03	8.64 32.50 288 181 PEAK	4	5722.09	57.91	115.57	-57.66	46.72	35.03	8.66 32.50 288 181 PEAK	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.69</td> <td>-----</td> <td>-----</td> <td>93.39</td> <td>35.05 8.75 32.50 288 181 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5745.00	104.69	-----	-----	93.39	35.05 8.75 32.50 288 181 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																		
1	5648.14	49.85	68.30	-18.45	38.97	34.99	8.39 32.50 288 181 PEAK																																																																																		
2	5650.32	48.69	68.53	-19.84	37.80	34.99	8.40 32.50 288 181 PEAK																																																																																		
3	5716.44	56.95	109.80	-52.85	45.78	35.03	8.64 32.50 288 181 PEAK																																																																																		
4	5722.09	57.91	115.57	-57.66	46.72	35.03	8.66 32.50 288 181 PEAK																																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																		
1	5745.00	104.69	-----	-----	93.39	35.05 8.75 32.50 288 181 PEAK																																																																																			
Avg	Blank	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>97.90</td> <td>-----</td> <td>-----</td> <td>86.60</td> <td>35.05 8.75 32.50 288 181 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5745.00	97.90	-----	-----	86.60	35.05 8.75 32.50 288 181 AVERAGE																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																																		
1	5745.00	97.90	-----	-----	86.60	35.05 8.75 32.50 288 181 AVERAGE																																																																																			



Mode	30																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>55.82</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.11</td> <td>68.30</td> <td>-20.19</td> <td>52.64</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	47.30	74.00	-26.70	55.82	37.79	11.45	57.76	--	--	Peak	2	17235.00	48.11	68.30	-20.19	52.64	40.27	13.17	57.97	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>55.18</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.10</td> <td>68.30</td> <td>-20.20</td> <td>52.63</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11490.00	46.66	74.00	-27.34	55.18	37.79	11.45	57.76	--	--	Peak	2	17235.00	48.10	68.30	-20.20	52.63	40.27	13.17	57.97	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11490.00	47.30	74.00	-26.70	55.82	37.79	11.45	57.76	--	--	Peak																																																																																						
2	17235.00	48.11	68.30	-20.19	52.64	40.27	13.17	57.97	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11490.00	46.66	74.00	-27.34	55.18	37.79	11.45	57.76	--	--	Peak																																																																																						
2	17235.00	48.10	68.30	-20.20	52.63	40.27	13.17	57.97	--	--	Peak																																																																																						



Mode	31																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>55.86</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>54.46</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	47.53	74.00	-26.47	55.86	37.85	11.49	57.67	--	--	Peak	2	17355.00	50.32	68.30	-17.98	54.46	40.46	13.20	57.80	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>48.30</td> <td>74.00</td> <td>-25.70</td> <td>56.63</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.56</td> <td>68.30</td> <td>-19.74</td> <td>52.70</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11570.00	48.30	74.00	-25.70	56.63	37.85	11.49	57.67	--	--	Peak	2	17355.00	48.56	68.30	-19.74	52.70	40.46	13.20	57.80	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11570.00	47.53	74.00	-26.47	55.86	37.85	11.49	57.67	--	--	Peak																																																																																						
2	17355.00	50.32	68.30	-17.98	54.46	40.46	13.20	57.80	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11570.00	48.30	74.00	-25.70	56.63	37.85	11.49	57.67	--	--	Peak																																																																																						
2	17355.00	48.56	68.30	-19.74	52.70	40.46	13.20	57.80	--	--	Peak																																																																																						



		32																																																																																																												
Mode	Band Edge																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																													
Pol.	Horizontal	Fundamental																																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>56.11</td> <td>111.65</td> <td>-55.54</td> <td>44.63</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>368</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.00</td> <td>51.26</td> <td>105.48</td> <td>-54.22</td> <td>39.79</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>368</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>49.91</td> <td>68.48</td> <td>-18.57</td> <td>38.46</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>368</td> <td>133</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5933.75</td> <td>50.62</td> <td>68.30</td> <td>-17.68</td> <td>39.18</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>368</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.63	56.11	111.65	-55.54	44.63	35.11	8.87	32.50	368	133	PEAK	2	5874.00	51.26	105.48	-54.22	39.79	35.12	8.85	32.50	368	133	PEAK	3	5924.63	49.91	68.48	-18.57	38.46	35.16	8.79	32.50	368	133	PEAK	4	5933.75	50.62	68.30	-17.68	39.18	35.16	8.78	32.50	368	133	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.21</td> <td>-----</td> <td>-----</td> <td>89.71</td> <td>35.10</td> <td>8.90</td> <td>32.50</td> <td>368</td> <td>133</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	101.21	-----	-----	89.71	35.10	8.90	32.50	368	133	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5854.63	56.11	111.65	-55.54	44.63	35.11	8.87	32.50	368	133	PEAK																																																																																																			
2	5874.00	51.26	105.48	-54.22	39.79	35.12	8.85	32.50	368	133	PEAK																																																																																																			
3	5924.63	49.91	68.48	-18.57	38.46	35.16	8.79	32.50	368	133	PEAK																																																																																																			
4	5933.75	50.62	68.30	-17.68	39.18	35.16	8.78	32.50	368	133	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	101.21	-----	-----	89.71	35.10	8.90	32.50	368	133	PEAK																																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>94.90</td> <td>-----</td> <td>-----</td> <td>83.40</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>368</td> <td>133</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5825.00	94.90	-----	-----	83.40	35.09	8.91	32.50	368	133	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5825.00	94.90	-----	-----	83.40	35.09	8.91	32.50	368	133	AVERAGE																																																																																																			



		32																																																																																																																				
Mode	Band Edge																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5851.63</td> <td>56.83</td> <td>118.49</td> <td>-61.66</td> <td>45.34</td> <td>35.11</td> <td>8.88</td> <td>32.50</td> <td>288</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5855.13</td> <td>55.87</td> <td>110.76</td> <td>-54.89</td> <td>44.39</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>288</td> <td>181</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>49.73</td> <td>68.20</td> <td>-18.47</td> <td>38.28</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>288</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5926.00</td> <td>50.58</td> <td>68.30</td> <td>-17.72</td> <td>39.13</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>288</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5851.63	56.83	118.49	-61.66	45.34	35.11	8.88	32.50	288	181	Peak	2	5855.13	55.87	110.76	-54.89	44.39	35.11	8.87	32.50	288	181	Peak	3	5925.00	49.73	68.20	-18.47	38.28	35.16	8.79	32.50	288	181	PEAK	4	5926.00	50.58	68.30	-17.72	39.13	35.16	8.79	32.50	288	181	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.54</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>288</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	103.54	-----	-----	92.04	35.09	8.91	32.50	288	181	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5851.63	56.83	118.49	-61.66	45.34	35.11	8.88	32.50	288	181	Peak																																																																																																											
2	5855.13	55.87	110.76	-54.89	44.39	35.11	8.87	32.50	288	181	Peak																																																																																																											
3	5925.00	49.73	68.20	-18.47	38.28	35.16	8.79	32.50	288	181	PEAK																																																																																																											
4	5926.00	50.58	68.30	-17.72	39.13	35.16	8.79	32.50	288	181	PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	103.54	-----	-----	92.04	35.09	8.91	32.50	288	181	PEAK																																																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.04</td> <td>-----</td> <td>-----</td> <td>85.54</td> <td>35.09</td> <td>8.91</td> <td>32.50</td> <td>288</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.04	-----	-----	85.54	35.09	8.91	32.50	288	181	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5825.00	97.04	-----	-----	85.54	35.09	8.91	32.50	288	181	AVERAGE																																																																																																											



Mode	32																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>48.37</td> <td>74.00</td> <td>-25.63</td> <td>56.50</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.75</td> <td>68.30</td> <td>-18.55</td> <td>53.50</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	48.37	74.00	-25.63	56.50	37.92	11.53	57.58	--	--	Peak	2	17475.00	49.75	68.30	-18.55	53.50	40.65	13.23	57.63	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>56.04</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>48.48</td> <td>68.30</td> <td>-19.82</td> <td>52.23</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.91	74.00	-26.09	56.04	37.92	11.53	57.58	--	--	Peak	2	17475.00	48.48	68.30	-19.82	52.23	40.65	13.23	57.63	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11650.00	48.37	74.00	-25.63	56.50	37.92	11.53	57.58	--	--	Peak																																																																																						
2	17475.00	49.75	68.30	-18.55	53.50	40.65	13.23	57.63	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11650.00	47.91	74.00	-26.09	56.04	37.92	11.53	57.58	--	--	Peak																																																																																						
2	17475.00	48.48	68.30	-19.82	52.23	40.65	13.23	57.63	--	--	Peak																																																																																						



		33																																																																																																																			
Mode		Band Edge																																																																																																																			
		U-NII-3_5.725-5.85_802.11ac_VHT20_CH149_5745MHz																																																																																																																			
Pol.		Horizontal	Fundamental																																																																																																																		
Peak	Horizontal	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5634.08</td> <td>53.98</td> <td>68.30</td> <td>-14.32</td> <td>40.71</td> <td>36.09</td> <td>9.83</td> <td>32.65</td> <td>400</td> <td>335</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>52.78</td> <td>68.43</td> <td>-15.65</td> <td>39.47</td> <td>36.11</td> <td>9.86</td> <td>32.66</td> <td>400</td> <td>335</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.20</td> <td>51.32</td> <td>105.25</td> <td>-53.93</td> <td>37.85</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>400</td> <td>335</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.79</td> <td>54.08</td> <td>112.59</td> <td>-58.51</td> <td>40.55</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>400</td> <td>335</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5634.08	53.98	68.30	-14.32	40.71	36.09	9.83	32.65	400	335	PEAK	2	5650.17	52.78	68.43	-15.65	39.47	36.11	9.86	32.66	400	335	PEAK	3	5700.20	51.32	105.25	-53.93	37.85	36.18	9.97	32.68	400	335	PEAK	4	5720.79	54.08	112.59	-58.51	40.55	36.21	10.01	32.69	400	335	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.17</td> <td>-----</td> <td>-----</td> <td>88.57</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>400</td> <td>335</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.17	-----	-----	88.57	36.24	10.06	32.70	400	335	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5634.08	53.98	68.30	-14.32	40.71	36.09	9.83	32.65	400	335	PEAK																																																																																																										
2	5650.17	52.78	68.43	-15.65	39.47	36.11	9.86	32.66	400	335	PEAK																																																																																																										
3	5700.20	51.32	105.25	-53.93	37.85	36.18	9.97	32.68	400	335	PEAK																																																																																																										
4	5720.79	54.08	112.59	-58.51	40.55	36.21	10.01	32.69	400	335	PEAK																																																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	102.17	-----	-----	88.57	36.24	10.06	32.70	400	335	PEAK																																																																																																										
Avg	Blank		<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>95.09</td> <td>-----</td> <td>-----</td> <td>81.49</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>400</td> <td>335</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	95.09	-----	-----	81.49	36.24	10.06	32.70	400	335	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5745.00	95.09	-----	-----	81.49	36.24	10.06	32.70	400	335	AVERAGE																																																																																																										



		33																																																																																												
Mode	Band Edge																																																																																													
	U-NII-3_5.725-5.85_802.11ac_VHT20_CH149_5745MHz																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5642.34</td> <td>53.66</td> <td>68.30</td> <td>-14.64</td> <td>40.38</td> <td>36.10</td> <td>9.84</td> <td>32.66</td> <td>236</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.19</td> <td>52.89</td> <td>69.18</td> <td>-16.29</td> <td>39.58</td> <td>36.11</td> <td>9.86</td> <td>32.66</td> <td>236</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.68</td> <td>58.65</td> <td>106.23</td> <td>-47.58</td> <td>45.17</td> <td>36.19</td> <td>9.97</td> <td>32.68</td> <td>236</td> <td>292</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.79</td> <td>60.70</td> <td>112.59</td> <td>-51.89</td> <td>47.17</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>236</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5642.34	53.66	68.30	-14.64	40.38	36.10	9.84	32.66	236	292	PEAK	2	5651.19	52.89	69.18	-16.29	39.58	36.11	9.86	32.66	236	292	PEAK	3	5703.68	58.65	106.23	-47.58	45.17	36.19	9.97	32.68	236	292	PEAK	4	5720.79	60.70	112.59	-51.89	47.17	36.21	10.01	32.69	236	292	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.99</td> <td>-----</td> <td>-----</td> <td>92.39</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>236</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5745.00	105.99	-----	-----	92.39	36.24	10.06	32.70	236	292	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5642.34	53.66	68.30	-14.64	40.38	36.10	9.84	32.66	236	292	PEAK																																																																																			
2	5651.19	52.89	69.18	-16.29	39.58	36.11	9.86	32.66	236	292	PEAK																																																																																			
3	5703.68	58.65	106.23	-47.58	45.17	36.19	9.97	32.68	236	292	PEAK																																																																																			
4	5720.79	60.70	112.59	-51.89	47.17	36.21	10.01	32.69	236	292	PEAK																																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5745.00	105.99	-----	-----	92.39	36.24	10.06	32.70	236	292	PEAK																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>98.91</td> <td>-----</td> <td>-----</td> <td>85.31</td> <td>36.24</td> <td>10.06</td> <td>32.70</td> <td>236</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5745.00	98.91	-----	-----	85.31	36.24	10.06	32.70	236	292	AVERAGE																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5745.00	98.91	-----	-----	85.31	36.24	10.06	32.70	236	292	AVERAGE																																																																																			



Mode	33																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac_VHT20_CH149_5745MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>47.55</td> <td>74.00</td> <td>-26.45</td> <td>56.07</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>47.56</td> <td>68.30</td> <td>-20.74</td> <td>52.09</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11490.00	47.55	74.00	-26.45	56.07	37.79	11.45	57.76	--	--	Peak	2	17235.00	47.56	68.30	-20.74	52.09	40.27	13.17	57.97	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>54.98</td> <td>37.79</td> <td>11.45</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17235.00</td> <td>48.60</td> <td>68.30</td> <td>-19.70</td> <td>53.13</td> <td>40.27</td> <td>13.17</td> <td>57.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	11490.00	46.46	74.00	-27.54	54.98	37.79	11.45	57.76	--	--	Peak	2	17235.00	48.60	68.30	-19.70	53.13	40.27	13.17	57.97	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11490.00	47.55	74.00	-26.45	56.07	37.79	11.45	57.76	--	--	Peak																																																																																						
2	17235.00	47.56	68.30	-20.74	52.09	40.27	13.17	57.97	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																										
1	11490.00	46.46	74.00	-27.54	54.98	37.79	11.45	57.76	--	--	Peak																																																																																						
2	17235.00	48.60	68.30	-19.70	53.13	40.27	13.17	57.97	--	--	Peak																																																																																						



Mode	34																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac_VHT20_CH157_5785MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2024-06-27</p>	<p style="text-align: right;">Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>47.53</td> <td>74.00</td> <td>-26.47</td> <td>55.86</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>49.32</td> <td>68.30</td> <td>-18.98</td> <td>53.46</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	47.53	74.00	-26.47	55.86	37.85	11.49	57.67	-- -- Peak	2	17355.00	49.32	68.30	-18.98	53.46	40.46	13.20	57.80	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>49.50</td> <td>74.00</td> <td>-24.50</td> <td>57.83</td> <td>37.85</td> <td>11.49</td> <td>57.67</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>17355.00</td> <td>48.56</td> <td>68.30</td> <td>-19.74</td> <td>52.70</td> <td>40.46</td> <td>13.20</td> <td>57.80</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11570.00	49.50	74.00	-24.50	57.83	37.85	11.49	57.67	-- -- Peak	2	17355.00	48.56	68.30	-19.74	52.70	40.46	13.20	57.80
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11570.00	47.53	74.00	-26.47	55.86	37.85	11.49	57.67	-- -- Peak																																																																																								
2	17355.00	49.32	68.30	-18.98	53.46	40.46	13.20	57.80	-- -- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11570.00	49.50	74.00	-24.50	57.83	37.85	11.49	57.67	-- -- Peak																																																																																								
2	17355.00	48.56	68.30	-19.74	52.70	40.46	13.20	57.80	-- -- Peak																																																																																								



35																																																																												
Band Edge																																																																												
U-NII-3_5.725-5.85_802.11ac_VHT20_CH165_5825MHz																																																																												
Pol.	Horizontal																																																																											
Peak	<div style="display: flex; justify-content: space-between;"> <div> </div> <div> <p>Date: 2024-06-25</p> </div> </div> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.88</td> <td>51.03</td> <td>111.08</td> <td>-60.05</td> <td>37.08</td> <td>36.40</td> <td>10.29</td> <td>32.74</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.88</td> <td>52.32</td> <td>105.23</td> <td>-52.91</td> <td>38.32</td> <td>36.42</td> <td>10.33</td> <td>32.75</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.50</td> <td>52.68</td> <td>69.40</td> <td>-16.72</td> <td>38.52</td> <td>36.49</td> <td>10.44</td> <td>32.77</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.50</td> <td>52.53</td> <td>68.30</td> <td>-15.77</td> <td>38.34</td> <td>36.51</td> <td>10.45</td> <td>32.77</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.88	51.03	111.08	-60.05	37.08	36.40	10.29	32.74	400	0	PEAK	2	5874.88	52.32	105.23	-52.91	38.32	36.42	10.33	32.75	400	0	PEAK	3	5923.50	52.68	69.40	-16.72	38.52	36.49	10.44	32.77	400	0	PEAK	4	5932.50	52.53	68.30	-15.77	38.34	36.51	10.45	32.77	400	0	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5854.88	51.03	111.08	-60.05	37.08	36.40	10.29	32.74	400	0	PEAK																																																																	
2	5874.88	52.32	105.23	-52.91	38.32	36.42	10.33	32.75	400	0	PEAK																																																																	
3	5923.50	52.68	69.40	-16.72	38.52	36.49	10.44	32.77	400	0	PEAK																																																																	
4	5932.50	52.53	68.30	-15.77	38.34	36.51	10.45	32.77	400	0	PEAK																																																																	
Fundamental	<div style="display: flex; justify-content: space-between;"> <div> </div> <div> <p>Date: 2024-06-25</p> </div> </div> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.22</td> <td>-----</td> <td>-----</td> <td>83.37</td> <td>36.35</td> <td>10.23</td> <td>32.73</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	97.22	-----	-----	83.37	36.35	10.23	32.73	400	0	PEAK																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5825.00	97.22	-----	-----	83.37	36.35	10.23	32.73	400	0	PEAK																																																																	
Avg	Blank																																																																											
	<div style="display: flex; justify-content: space-between;"> <div> </div> <div> <p>Date: 2024-06-25</p> </div> </div> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>90.45</td> <td>-----</td> <td>-----</td> <td>76.60</td> <td>36.35</td> <td>10.23</td> <td>32.73</td> <td>400</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5825.00	90.45	-----	-----	76.60	36.35	10.23	32.73	400	0	AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Level	Factor	Loss Factor																																																																							
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	5825.00	90.45	-----	-----	76.60	36.35	10.23	32.73	400	0	AVERAGE																																																																	



		35																																																																																												
Mode	Band Edge																																																																																													
	U-NII-3_5.725-5.85_802.11ac_VHT20_CH165_5825MHz																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.63</td> <td>52.16</td> <td>111.65</td> <td>-59.49</td> <td>38.21</td> <td>36.40</td> <td>10.29</td> <td>32.74</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.13</td> <td>51.17</td> <td>105.44</td> <td>-54.27</td> <td>37.17</td> <td>36.42</td> <td>10.33</td> <td>32.75</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>51.27</td> <td>68.30</td> <td>-17.03</td> <td>37.11</td> <td>36.49</td> <td>10.44</td> <td>32.77</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5943.38</td> <td>53.54</td> <td>68.30</td> <td>-14.76</td> <td>39.32</td> <td>36.52</td> <td>10.48</td> <td>32.78</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5854.63	52.16	111.65	-59.49	38.21	36.40	10.29	32.74	300	325	PEAK	2	5874.13	51.17	105.44	-54.27	37.17	36.42	10.33	32.75	300	325	PEAK	3	5925.00	51.27	68.30	-17.03	37.11	36.49	10.44	32.77	300	325	PEAK	4	5943.38	53.54	68.30	-14.76	39.32	36.52	10.48	32.78	300	325	PEAK	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>91.86</td> <td>-----</td> <td>-----</td> <td>77.99</td> <td>36.36</td> <td>10.24</td> <td>32.73</td> <td>300</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5825.00	91.86	-----	-----	77.99	36.36	10.24	32.73	300	325	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5854.63	52.16	111.65	-59.49	38.21	36.40	10.29	32.74	300	325	PEAK																																																																																			
2	5874.13	51.17	105.44	-54.27	37.17	36.42	10.33	32.75	300	325	PEAK																																																																																			
3	5925.00	51.27	68.30	-17.03	37.11	36.49	10.44	32.77	300	325	PEAK																																																																																			
4	5943.38	53.54	68.30	-14.76	39.32	36.52	10.48	32.78	300	325	PEAK																																																																																			
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5825.00	91.86	-----	-----	77.99	36.36	10.24	32.73	300	325	PEAK																																																																																			
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>85.19</td> <td>-----</td> <td>-----</td> <td>71.34</td> <td>36.35</td> <td>10.23</td> <td>32.73</td> <td>300</td> <td>325</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg		1	5825.00	85.19	-----	-----	71.34	36.35	10.23	32.73	300	325	AVERAGE																																																															
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq Level Line (dB)	Level	Factor	Loss Factor		cm	deg																																																																																								
1	5825.00	85.19	-----	-----	71.34	36.35	10.23	32.73	300	325	AVERAGE																																																																																			



Mode	35																																																																																																	
	Harmonic																																																																																																	
	U-NII-3_5.725-5.85_802.11ac_VHT20_CH165_5825MHz																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>47.84</td> <td>74.00</td> <td>-26.16</td> <td>55.97</td> <td>37.92</td> <td>11.53</td> <td>57.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>49.75</td> <td>68.30</td> <td>-18.55</td> <td>53.50</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11650.00	47.84	74.00	-26.16	55.97	37.92	11.53	57.58	--	--	Peak	2	17475.00	49.75	68.30	-18.55	53.50	40.65	13.23	57.63	--	--	Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>17475.00</td> <td>47.96</td> <td>68.30</td> <td>-20.34</td> <td>51.71</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17475.00</td> <td>47.96</td> <td>68.30</td> <td>-20.34</td> <td>51.71</td> <td>40.65</td> <td>13.23</td> <td>57.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	17475.00	47.96	68.30	-20.34	51.71	40.65	13.23	57.63	--	--	Peak	2	17475.00	47.96	68.30	-20.34	51.71	40.65	13.23	57.63	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11650.00	47.84	74.00	-26.16	55.97	37.92	11.53	57.58	--	--	Peak																																																																																							
2	17475.00	49.75	68.30	-18.55	53.50	40.65	13.23	57.63	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	17475.00	47.96	68.30	-20.34	51.71	40.65	13.23	57.63	--	--	Peak																																																																																							
2	17475.00	47.96	68.30	-20.34	51.71	40.65	13.23	57.63	--	--	Peak																																																																																							



Mode		36																																																																																																																			
		Band Edge - L																																																																																																																			
		U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																			
Pol.	Horizontal		Fundamental																																																																																																																		
Peak																																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.11</td> <td>51.67</td> <td>68.30</td> <td>-16.63</td> <td>38.38</td> <td>36.10</td> <td>9.85</td> <td>32.66</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.07</td> <td>51.18</td> <td>68.35</td> <td>-17.17</td> <td>37.87</td> <td>36.11</td> <td>9.86</td> <td>32.66</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.13</td> <td>51.00</td> <td>105.24</td> <td>-54.24</td> <td>37.53</td> <td>36.18</td> <td>9.97</td> <td>32.68</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.28</td> <td>51.54</td> <td>111.44</td> <td>-59.90</td> <td>38.01</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5645.11	51.67	68.30	-16.63	38.38	36.10	9.85	32.66	300	215	PEAK	2	5650.07	51.18	68.35	-17.17	37.87	36.11	9.86	32.66	300	215	PEAK	3	5700.13	51.00	105.24	-54.24	37.53	36.18	9.97	32.68	300	215	PEAK	4	5720.28	51.54	111.44	-59.90	38.01	36.21	10.01	32.69	300	215	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>91.34</td> <td>-----</td> <td>-----</td> <td>77.68</td> <td>36.27</td> <td>10.10</td> <td>32.71</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	91.34	-----	-----	77.68	36.27	10.10	32.71	300	215
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5645.11	51.67	68.30	-16.63	38.38	36.10	9.85	32.66	300	215	PEAK																																																																																																										
2	5650.07	51.18	68.35	-17.17	37.87	36.11	9.86	32.66	300	215	PEAK																																																																																																										
3	5700.13	51.00	105.24	-54.24	37.53	36.18	9.97	32.68	300	215	PEAK																																																																																																										
4	5720.28	51.54	111.44	-59.90	38.01	36.21	10.01	32.69	300	215	PEAK																																																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5755.00	91.34	-----	-----	77.68	36.27	10.10	32.71	300	215	PEAK																																																																																																										
Avg	Blank																																																																																																																				
				<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>84.36</td> <td>-----</td> <td>-----</td> <td>70.68</td> <td>36.28</td> <td>10.11</td> <td>32.71</td> <td>300</td> <td>215</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	84.36	-----	-----	70.68	36.28	10.11	32.71	300	215	AVERAGE																																																																										
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5755.00	84.36	-----	-----	70.68	36.28	10.11	32.71	300	215	AVERAGE																																																																																																										



Mode	36																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5755 to 5950 MHz. A red line represents the limit, starting at 140 dBuV/m and dropping to 70.0 dBuV/m at 5911 MHz. A blue trace shows the signal level, which is consistently below the limit. Four peaks are marked with vertical lines and numbered 1 through 4.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.65</td> <td>51.27</td> <td>111.61</td> <td>-60.34</td> <td>37.32</td> <td>36.40</td> <td>10.29</td> <td>32.74</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.03</td> <td>51.80</td> <td>106.31</td> <td>-54.51</td> <td>37.80</td> <td>36.42</td> <td>10.33</td> <td>32.75</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>50.90</td> <td>68.41</td> <td>-17.51</td> <td>36.74</td> <td>36.49</td> <td>10.44</td> <td>32.77</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5941.81</td> <td>52.47</td> <td>68.30</td> <td>-15.83</td> <td>38.26</td> <td>36.52</td> <td>10.47</td> <td>32.78</td> <td>300</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5854.65	51.27	111.61	-60.34	37.32	36.40	10.29	32.74	300	215	PEAK	2	5871.03	51.80	106.31	-54.51	37.80	36.42	10.33	32.75	300	215	PEAK	3	5924.85	50.90	68.41	-17.51	36.74	36.49	10.44	32.77	300	215	PEAK	4	5941.81	52.47	68.30	-15.83	38.26	36.52	10.47	32.78	300	215	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.65	51.27	111.61	-60.34	37.32	36.40	10.29	32.74	300	215	PEAK																																																																		
2	5871.03	51.80	106.31	-54.51	37.80	36.42	10.33	32.75	300	215	PEAK																																																																		
3	5924.85	50.90	68.41	-17.51	36.74	36.49	10.44	32.77	300	215	PEAK																																																																		
4	5941.81	52.47	68.30	-15.83	38.26	36.52	10.47	32.78	300	215	PEAK																																																																		



Mode		36																																																																																																																		
		Band Edge - L																																																																																																																		
		U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.61</td> <td>52.14</td> <td>68.30</td> <td>-16.16</td> <td>38.89</td> <td>36.08</td> <td>9.82</td> <td>32.65</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.84</td> <td>52.12</td> <td>68.92</td> <td>-16.80</td> <td>38.81</td> <td>36.11</td> <td>9.86</td> <td>32.66</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5707.11</td> <td>55.50</td> <td>107.19</td> <td>-51.69</td> <td>42.01</td> <td>36.19</td> <td>9.98</td> <td>32.68</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>56.76</td> <td>111.79</td> <td>-55.03</td> <td>43.23</td> <td>36.21</td> <td>10.01</td> <td>32.69</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5629.61	52.14	68.30	-16.16	38.89	36.08	9.82	32.65	400	0	PEAK	2	5650.84	52.12	68.92	-16.80	38.81	36.11	9.86	32.66	400	0	PEAK	3	5707.11	55.50	107.19	-51.69	42.01	36.19	9.98	32.68	400	0	PEAK	4	5720.44	56.76	111.79	-55.03	43.23	36.21	10.01	32.69	400	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>98.41</td> <td>-----</td> <td>-----</td> <td>84.78</td> <td>36.25</td> <td>10.08</td> <td>32.70</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	98.41	-----	-----	84.78	36.25	10.08	32.70	400	0	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5629.61	52.14	68.30	-16.16	38.89	36.08	9.82	32.65	400	0	PEAK																																																																																																									
2	5650.84	52.12	68.92	-16.80	38.81	36.11	9.86	32.66	400	0	PEAK																																																																																																									
3	5707.11	55.50	107.19	-51.69	42.01	36.19	9.98	32.68	400	0	PEAK																																																																																																									
4	5720.44	56.76	111.79	-55.03	43.23	36.21	10.01	32.69	400	0	PEAK																																																																																																									
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	98.41	-----	-----	84.78	36.25	10.08	32.70	400	0	PEAK																																																																																																									
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>91.74</td> <td>-----</td> <td>-----</td> <td>78.11</td> <td>36.25</td> <td>10.08</td> <td>32.70</td> <td>400</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	91.74	-----	-----	78.11	36.25	10.08	32.70	400	0	AVERAGE																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5755.00	91.74	-----	-----	78.11	36.25	10.08	32.70	400	0	AVERAGE																																																																																																									



Mode	36																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5755 to 5950 MHz. A red line represents the limit, and a blue line represents the signal. The signal is consistently below the limit. A peak is labeled 'PEAK_BE(B4)_16-24'.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>51.67</td> <td>112.05</td> <td>-60.38</td> <td>37.72</td> <td>36.40</td> <td>10.29</td> <td>32.74</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5869.08</td> <td>53.28</td> <td>106.86</td> <td>-53.58</td> <td>39.29</td> <td>36.42</td> <td>10.32</td> <td>32.75</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.85</td> <td>51.17</td> <td>68.41</td> <td>-17.24</td> <td>37.01</td> <td>36.49</td> <td>10.44</td> <td>32.77</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5944.54</td> <td>52.90</td> <td>68.30</td> <td>-15.40</td> <td>38.68</td> <td>36.52</td> <td>10.48</td> <td>32.78</td> <td>400</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5854.45	51.67	112.05	-60.38	37.72	36.40	10.29	32.74	400	0	PEAK	2	5869.08	53.28	106.86	-53.58	39.29	36.42	10.32	32.75	400	0	PEAK	3	5924.85	51.17	68.41	-17.24	37.01	36.49	10.44	32.77	400	0	PEAK	4	5944.54	52.90	68.30	-15.40	38.68	36.52	10.48	32.78	400	0	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	5854.45	51.67	112.05	-60.38	37.72	36.40	10.29	32.74	400	0	PEAK																																																															
2	5869.08	53.28	106.86	-53.58	39.29	36.42	10.32	32.75	400	0	PEAK																																																															
3	5924.85	51.17	68.41	-17.24	37.01	36.49	10.44	32.77	400	0	PEAK																																																															
4	5944.54	52.90	68.30	-15.40	38.68	36.52	10.48	32.78	400	0	PEAK																																																															



Mode	36																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT40_CH151_5755MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>48.00</td> <td>74.00</td> <td>-26.00</td> <td>56.48</td> <td>37.80</td> <td>11.46</td> <td>57.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>47.92</td> <td>68.30</td> <td>-20.38</td> <td>52.35</td> <td>40.32</td> <td>13.18</td> <td>57.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11510.00	48.00	74.00	-26.00	56.48	37.80	11.46	57.74	--	--	Peak	2	17265.00	47.92	68.30	-20.38	52.35	40.32	13.18	57.93	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>48.79</td> <td>74.00</td> <td>-25.21</td> <td>57.27</td> <td>37.80</td> <td>11.46</td> <td>57.74</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17265.00</td> <td>47.06</td> <td>68.30</td> <td>-21.24</td> <td>51.49</td> <td>40.32</td> <td>13.18</td> <td>57.93</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11510.00	48.79	74.00	-25.21	57.27	37.80	11.46	57.74	--	--	Peak	2	17265.00	47.06	68.30	-21.24	51.49	40.32	13.18	57.93	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11510.00	48.00	74.00	-26.00	56.48	37.80	11.46	57.74	--	--	Peak																																																																																						
2	17265.00	47.92	68.30	-20.38	52.35	40.32	13.18	57.93	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11510.00	48.79	74.00	-25.21	57.27	37.80	11.46	57.74	--	--	Peak																																																																																						
2	17265.00	47.06	68.30	-21.24	51.49	40.32	13.18	57.93	--	--	Peak																																																																																						



37																																																																												
Band Edge - L																																																																												
U-NII-3_5.725-5.85_802.11ac_VHT40_CH159_5795MHz																																																																												
Pol.	Horizontal																																																																											
Peak	<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2024-06-27</div> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5647.19</td> <td>49.50</td> <td>68.30</td> <td>-18.80</td> <td>38.62</td> <td>34.99</td> <td>8.39</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.12</td> <td>47.03</td> <td>68.39</td> <td>-21.36</td> <td>36.14</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.04</td> <td>49.04</td> <td>105.21</td> <td>-56.17</td> <td>37.94</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>49.07</td> <td>111.07</td> <td>-62.00</td> <td>37.88</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5647.19	49.50	68.30	-18.80	38.62	34.99	8.39	32.50	377	135	PEAK	2	5650.12	47.03	68.39	-21.36	36.14	34.99	8.40	32.50	377	135	PEAK	3	5700.04	49.04	105.21	-56.17	37.94	35.02	8.58	32.50	377	135	PEAK	4	5720.12	49.07	111.07	-62.00	37.88	35.03	8.66	32.50	377	135	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																				
1	5647.19	49.50	68.30	-18.80	38.62	34.99	8.39	32.50	377	135	PEAK																																																																	
2	5650.12	47.03	68.39	-21.36	36.14	34.99	8.40	32.50	377	135	PEAK																																																																	
3	5700.04	49.04	105.21	-56.17	37.94	35.02	8.58	32.50	377	135	PEAK																																																																	
4	5720.12	49.07	111.07	-62.00	37.88	35.03	8.66	32.50	377	135	PEAK																																																																	
Fundamental	<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2024-06-27</div> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>97.07</td> <td>-----</td> <td>-----</td> <td>85.55</td> <td>35.08</td> <td>8.94</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5795.00	97.07	-----	-----	85.55	35.08	8.94	32.50	377	135	PEAK																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																				
1	5795.00	97.07	-----	-----	85.55	35.08	8.94	32.50	377	135	PEAK																																																																	
Avg	Blank																																																																											
	<div style="display: flex; justify-content: space-between;"> <div> </div> <div style="text-align: right;">Date: 2024-06-27</div> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>90.82</td> <td>-----</td> <td>-----</td> <td>79.30</td> <td>35.08</td> <td>8.94</td> <td>32.50</td> <td>377</td> <td>135</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5795.00	90.82	-----	-----	79.30	35.08	8.94	32.50	377	135	AVERAGE																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																				
1	5795.00	90.82	-----	-----	79.30	35.08	8.94	32.50	377	135	AVERAGE																																																																	



Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.52</td> <td>50.07</td> <td>111.89</td> <td>-61.82</td> <td>38.59</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.83</td> <td>50.44</td> <td>105.25</td> <td>-54.81</td> <td>38.96</td> <td>35.13</td> <td>8.85</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5923.96</td> <td>49.57</td> <td>68.97</td> <td>-19.40</td> <td>38.13</td> <td>35.15</td> <td>8.79</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5927.53</td> <td>50.88</td> <td>68.30</td> <td>-17.42</td> <td>39.43</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>377</td> <td>135</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.52	50.07	111.89	-61.82	38.59	35.11	8.87	32.50	377	135	PEAK	2	5874.83	50.44	105.25	-54.81	38.96	35.13	8.85	32.50	377	135	PEAK	3	5923.96	49.57	68.97	-19.40	38.13	35.15	8.79	32.50	377	135	PEAK	4	5927.53	50.88	68.30	-17.42	39.43	35.16	8.79	32.50	377	135	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.52	50.07	111.89	-61.82	38.59	35.11	8.87	32.50	377	135	PEAK																																																															
2	5874.83	50.44	105.25	-54.81	38.96	35.13	8.85	32.50	377	135	PEAK																																																															
3	5923.96	49.57	68.97	-19.40	38.13	35.15	8.79	32.50	377	135	PEAK																																																															
4	5927.53	50.88	68.30	-17.42	39.43	35.16	8.79	32.50	377	135	PEAK																																																															



		37																																																																																																																				
Mode	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac_VHT40_CH159_5795MHz																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5608.78</td> <td>49.95</td> <td>68.30</td> <td>-18.35</td> <td>39.24</td> <td>34.96</td> <td>8.25</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>48.95</td> <td>68.67</td> <td>-19.72</td> <td>38.06</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.57</td> <td>50.18</td> <td>105.92</td> <td>-55.74</td> <td>39.07</td> <td>35.02</td> <td>8.59</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>49.55</td> <td>111.07</td> <td>-61.52</td> <td>38.36</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5608.78	49.95	68.30	-18.35	39.24	34.96	8.25	32.50	287	181	PEAK	2	5650.51	48.95	68.67	-19.72	38.06	34.99	8.40	32.50	287	181	PEAK	3	5702.57	50.18	105.92	-55.74	39.07	35.02	8.59	32.50	287	181	PEAK	4	5720.12	49.55	111.07	-61.52	38.36	35.03	8.66	32.50	287	181	PEAK	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>99.74</td> <td>-----</td> <td>-----</td> <td>88.23</td> <td>35.08</td> <td>8.93</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	99.74	-----	-----	88.23	35.08	8.93	32.50	287	181	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5608.78	49.95	68.30	-18.35	39.24	34.96	8.25	32.50	287	181	PEAK																																																																																																											
2	5650.51	48.95	68.67	-19.72	38.06	34.99	8.40	32.50	287	181	PEAK																																																																																																											
3	5702.57	50.18	105.92	-55.74	39.07	35.02	8.59	32.50	287	181	PEAK																																																																																																											
4	5720.12	49.55	111.07	-61.52	38.36	35.03	8.66	32.50	287	181	PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5795.00	99.74	-----	-----	88.23	35.08	8.93	32.50	287	181	PEAK																																																																																																											
Avg	Blank	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>93.08</td> <td>-----</td> <td>-----</td> <td>81.56</td> <td>35.08</td> <td>8.94</td> <td>32.50</td> <td>287</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5795.00	93.08	-----	-----	81.56	35.08	8.94	32.50	287	181	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5795.00	93.08	-----	-----	81.56	35.08	8.94	32.50	287	181	AVERAGE																																																																																																											



Mode	37																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT40_CH159_5795MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.83</td> <td>50.44</td> <td>111.19</td> <td>-60.75</td> <td>38.96</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.57</td> <td>50.50</td> <td>106.16</td> <td>-55.66</td> <td>39.03</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.74</td> <td>49.11</td> <td>68.40</td> <td>-19.29</td> <td>37.66</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5946.44</td> <td>51.92</td> <td>68.30</td> <td>-16.38</td> <td>40.49</td> <td>35.17</td> <td>8.76</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.83	50.44	111.19	-60.75	38.96	35.11	8.87	32.50	287	181	PEAK	2	5871.57	50.50	106.16	-55.66	39.03	35.12	8.85	32.50	287	181	PEAK	3	5924.74	49.11	68.40	-19.29	37.66	35.16	8.79	32.50	287	181	PEAK	4	5946.44	51.92	68.30	-16.38	40.49	35.17	8.76	32.50	287	181	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.83	50.44	111.19	-60.75	38.96	35.11	8.87	32.50	287	181	PEAK																																																															
2	5871.57	50.50	106.16	-55.66	39.03	35.12	8.85	32.50	287	181	PEAK																																																															
3	5924.74	49.11	68.40	-19.29	37.66	35.16	8.79	32.50	287	181	PEAK																																																															
4	5946.44	51.92	68.30	-16.38	40.49	35.17	8.76	32.50	287	181	PEAK																																																															



Mode	37																																																																																																
	Harmonic																																																																																																
	U-NII-3_5.725-5.85_802.11ac_VHT40_CH159_5795MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>47.42</td> <td>74.00</td> <td>-26.58</td> <td>55.70</td> <td>37.87</td> <td>11.50</td> <td>57.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>49.47</td> <td>68.30</td> <td>-18.83</td> <td>53.51</td> <td>40.51</td> <td>13.21</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11590.00	47.42	74.00	-26.58	55.70	37.87	11.50	57.65	--	--	Peak	2	17385.00	49.47	68.30	-18.83	53.51	40.51	13.21	57.76	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>49.59</td> <td>74.00</td> <td>-24.41</td> <td>57.87</td> <td>37.87</td> <td>11.50</td> <td>57.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17385.00</td> <td>48.62</td> <td>68.30</td> <td>-19.68</td> <td>52.66</td> <td>40.51</td> <td>13.21</td> <td>57.76</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11590.00	49.59	74.00	-24.41	57.87	37.87	11.50	57.65	--	--	Peak	2	17385.00	48.62	68.30	-19.68	52.66	40.51	13.21	57.76	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11590.00	47.42	74.00	-26.58	55.70	37.87	11.50	57.65	--	--	Peak																																																																																						
2	17385.00	49.47	68.30	-18.83	53.51	40.51	13.21	57.76	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11590.00	49.59	74.00	-24.41	57.87	37.87	11.50	57.65	--	--	Peak																																																																																						
2	17385.00	48.62	68.30	-19.68	52.66	40.51	13.21	57.76	--	--	Peak																																																																																						



Mode		38																																																																																																				
		Band Edge - L																																																																																																				
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																				
Pol.	Horizontal					Fundamental																																																																																																
Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.93</td> <td>49.38</td> <td>68.30</td> <td>-18.92</td> <td>38.61</td> <td>34.97</td> <td>8.30</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>47.86</td> <td>68.34</td> <td>-20.48</td> <td>36.97</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.95</td> <td>49.33</td> <td>106.31</td> <td>-56.98</td> <td>38.21</td> <td>35.02</td> <td>8.60</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>47.92</td> <td>110.91</td> <td>-62.99</td> <td>36.73</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	5622.93	49.38	68.30	-18.92	38.61	34.97	8.30	32.50	280	0	PEAK	2	5650.05	47.86	68.34	-20.48	36.97	34.99	8.40	32.50	280	0	PEAK	3	5703.95	49.33	106.31	-56.98	38.21	35.02	8.60	32.50	280	0	PEAK	4	5720.05	47.92	110.91	-62.99	36.73	35.03	8.66	32.50	280	0	PEAK	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>79.22</td> <td>-----</td> <td>-----</td> <td>67.82</td> <td>35.06</td> <td>8.84</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	5775.00	79.22	-----	-----	67.82	35.06	8.84	32.50	280	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
1	5622.93	49.38	68.30	-18.92	38.61	34.97	8.30	32.50	280	0	PEAK																																																																																											
2	5650.05	47.86	68.34	-20.48	36.97	34.99	8.40	32.50	280	0	PEAK																																																																																											
3	5703.95	49.33	106.31	-56.98	38.21	35.02	8.60	32.50	280	0	PEAK																																																																																											
4	5720.05	47.92	110.91	-62.99	36.73	35.03	8.66	32.50	280	0	PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
1	5775.00	79.22	-----	-----	67.82	35.06	8.84	32.50	280	0	PEAK																																																																																											
Avg	Blank					<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>73.47</td> <td>-----</td> <td>-----</td> <td>62.07</td> <td>35.06</td> <td>8.84</td> <td>32.50</td> <td>280</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	5775.00	73.47	-----	-----	62.07	35.06	8.84	32.50	280	0	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
1	5775.00	73.47	-----	-----	62.07	35.06	8.84	32.50	280	0	AVERAGE																																																																																											



Mode	38																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>48.59</td> <td>111.26</td> <td>-62.67</td> <td>37.11</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5871.60</td> <td>50.34</td> <td>106.15</td> <td>-55.81</td> <td>38.87</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5922.88</td> <td>50.39</td> <td>69.77</td> <td>-19.38</td> <td>38.95</td> <td>35.15</td> <td>8.79</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5932.15</td> <td>50.41</td> <td>68.30</td> <td>-17.89</td> <td>38.97</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>280</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5854.80	48.59	111.26	-62.67	37.11	35.11	8.87	32.50	280	0	PEAK	2	5871.60	50.34	106.15	-55.81	38.87	35.12	8.85	32.50	280	0	PEAK	3	5922.88	50.39	69.77	-19.38	38.95	35.15	8.79	32.50	280	0	PEAK	4	5932.15	50.41	68.30	-17.89	38.97	35.16	8.78	32.50	280	0	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5854.80	48.59	111.26	-62.67	37.11	35.11	8.87	32.50	280	0	PEAK																																																									
2	5871.60	50.34	106.15	-55.81	38.87	35.12	8.85	32.50	280	0	PEAK																																																									
3	5922.88	50.39	69.77	-19.38	38.95	35.15	8.79	32.50	280	0	PEAK																																																									
4	5932.15	50.41	68.30	-17.89	38.97	35.16	8.78	32.50	280	0	PEAK																																																									



		38																																																																																																												
Mode		Band Edge - L																																																																																																												
		U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																												
Pol.	Vertical	Fundamental																																																																																																												
Peak	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5629.05</td> <td>49.93</td> <td>68.30</td> <td>-18.37</td> <td>39.13</td> <td>34.98</td> <td>8.32</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>48.04</td> <td>68.47</td> <td>-20.43</td> <td>37.15</td> <td>34.99</td> <td>8.40</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.10</td> <td>51.24</td> <td>105.23</td> <td>-53.99</td> <td>40.14</td> <td>35.02</td> <td>8.58</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.23</td> <td>54.06</td> <td>111.31</td> <td>-57.25</td> <td>42.87</td> <td>35.03</td> <td>8.66</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5629.05	49.93	68.30	-18.37	39.13	34.98	8.32	32.50	287	181	PEAK	2	5650.23	48.04	68.47	-20.43	37.15	34.99	8.40	32.50	287	181	PEAK	3	5700.10	51.24	105.23	-53.99	40.14	35.02	8.58	32.50	287	181	PEAK	4	5720.23	54.06	111.31	-57.25	42.87	35.03	8.66	32.50	287	181	PEAK	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>94.34</td> <td>-----</td> <td>-----</td> <td>82.92</td> <td>35.06</td> <td>8.86</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	94.34	-----	-----	82.92	35.06	8.86	32.50	287	181	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5629.05	49.93	68.30	-18.37	39.13	34.98	8.32	32.50	287	181	PEAK																																																																																																			
2	5650.23	48.04	68.47	-20.43	37.15	34.99	8.40	32.50	287	181	PEAK																																																																																																			
3	5700.10	51.24	105.23	-53.99	40.14	35.02	8.58	32.50	287	181	PEAK																																																																																																			
4	5720.23	54.06	111.31	-57.25	42.87	35.03	8.66	32.50	287	181	PEAK																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	94.34	-----	-----	82.92	35.06	8.86	32.50	287	181	PEAK																																																																																																			
Avg	Blank	<p style="text-align: right;">Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>87.57</td> <td>-----</td> <td>-----</td> <td>76.15</td> <td>35.06</td> <td>8.86</td> <td>32.50</td> <td>287</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5775.00	87.57	-----	-----	76.15	35.06	8.86	32.50	287	181	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																							
1	5775.00	87.57	-----	-----	76.15	35.06	8.86	32.50	287	181	AVERAGE																																																																																																			



Mode	38																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2024-06-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>50.23</td> <td>110.86</td> <td>-60.63</td> <td>38.75</td> <td>35.11</td> <td>8.87</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.05</td> <td>50.02</td> <td>105.47</td> <td>-55.45</td> <td>38.55</td> <td>35.12</td> <td>8.85</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.98</td> <td>49.40</td> <td>68.22</td> <td>-18.82</td> <td>37.95</td> <td>35.16</td> <td>8.79</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5929.88</td> <td>50.98</td> <td>68.30</td> <td>-17.32</td> <td>39.54</td> <td>35.16</td> <td>8.78</td> <td>32.50</td> <td>287</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.98	50.23	110.86	-60.63	38.75	35.11	8.87	32.50	287	181	PEAK	2	5874.05	50.02	105.47	-55.45	38.55	35.12	8.85	32.50	287	181	PEAK	3	5924.98	49.40	68.22	-18.82	37.95	35.16	8.79	32.50	287	181	PEAK	4	5929.88	50.98	68.30	-17.32	39.54	35.16	8.78	32.50	287	181	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5854.98	50.23	110.86	-60.63	38.75	35.11	8.87	32.50	287	181	PEAK																																																															
2	5874.05	50.02	105.47	-55.45	38.55	35.12	8.85	32.50	287	181	PEAK																																																															
3	5924.98	49.40	68.22	-18.82	37.95	35.16	8.79	32.50	287	181	PEAK																																																															
4	5929.88	50.98	68.30	-17.32	39.54	35.16	8.78	32.50	287	181	PEAK																																																															



Mode	38																																																																																																				
	Harmonic																																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.49</td> <td>74.00</td> <td>-26.51</td> <td>55.86</td> <td>37.84</td> <td>11.48</td> <td>57.69</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>47.98</td> <td>68.30</td> <td>-20.32</td> <td>52.22</td> <td>40.41</td> <td>13.19</td> <td>57.84</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	47.49	74.00	-26.51	55.86	37.84	11.48	57.69	--	Peak	2	17325.00	47.98	68.30	-20.32	52.22	40.41	13.19	57.84	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>47.93</td> <td>74.00</td> <td>-26.07</td> <td>56.30</td> <td>37.84</td> <td>11.48</td> <td>57.69</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17325.00</td> <td>47.44</td> <td>68.30</td> <td>-20.86</td> <td>51.68</td> <td>40.41</td> <td>13.19</td> <td>57.84</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	47.93	74.00	-26.07	56.30	37.84	11.48	57.69	--	Peak	2	17325.00	47.44	68.30	-20.86	51.68	40.41	13.19	57.84	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	11550.00	47.49	74.00	-26.51	55.86	37.84	11.48	57.69	--	Peak																																																																																											
2	17325.00	47.98	68.30	-20.32	52.22	40.41	13.19	57.84	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	11550.00	47.93	74.00	-26.07	56.30	37.84	11.48	57.69	--	Peak																																																																																											
2	17325.00	47.44	68.30	-20.86	51.68	40.41	13.19	57.84	--	Peak																																																																																											



Mode	39																																																																																																
	Harmonic																																																																																																
	U-NII-2C-3_5.47-5.725_802.11a_CH144_5720MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.24</td> <td>74.00</td> <td>-25.76</td> <td>56.86</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.61</td> <td>68.30</td> <td>-20.69</td> <td>52.36</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	48.24	74.00	-25.76	56.86	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.61	68.30	-20.69	52.36	40.16	13.16	58.07	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>56.45</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.87</td> <td>68.30</td> <td>-20.43</td> <td>52.62</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	47.83	74.00	-26.17	56.45	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.87	68.30	-20.43	52.62	40.16	13.16	58.07	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11440.00	48.24	74.00	-25.76	56.86	37.77	11.42	57.81	--	--	Peak																																																																																						
2	17160.00	47.61	68.30	-20.69	52.36	40.16	13.16	58.07	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11440.00	47.83	74.00	-26.17	56.45	37.77	11.42	57.81	--	--	Peak																																																																																						
2	17160.00	47.87	68.30	-20.43	52.62	40.16	13.16	58.07	--	--	Peak																																																																																						



Mode	40																																																																																																
	Harmonic																																																																																																
	U-NII-2C-3_5.47-5.725_802.11ac VHT20_CH144_5720MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>48.01</td> <td>74.00</td> <td>-25.99</td> <td>56.63</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.37</td> <td>68.30</td> <td>-20.93</td> <td>52.12</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	48.01	74.00	-25.99	56.63	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.37	68.30	-20.93	52.12	40.16	13.16	58.07	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11440.00</td> <td>47.48</td> <td>74.00</td> <td>-26.52</td> <td>56.10</td> <td>37.77</td> <td>11.42</td> <td>57.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17160.00</td> <td>47.30</td> <td>68.30</td> <td>-21.00</td> <td>52.05</td> <td>40.16</td> <td>13.16</td> <td>58.07</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11440.00	47.48	74.00	-26.52	56.10	37.77	11.42	57.81	--	--	Peak	2	17160.00	47.30	68.30	-21.00	52.05	40.16	13.16	58.07	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11440.00	48.01	74.00	-25.99	56.63	37.77	11.42	57.81	--	--	Peak																																																																																						
2	17160.00	47.37	68.30	-20.93	52.12	40.16	13.16	58.07	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11440.00	47.48	74.00	-26.52	56.10	37.77	11.42	57.81	--	--	Peak																																																																																						
2	17160.00	47.30	68.30	-21.00	52.05	40.16	13.16	58.07	--	--	Peak																																																																																						



Mode	41																																																																																																								
	Harmonic																																																																																																								
	U-NII-2C-3_5.47-5.725_802.11ac VHT40_CH142_5710MHz																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																																							
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>11420.00</td> <td>47.76</td> <td>74.00</td> <td>-26.24</td> <td>56.41</td> <td>37.77</td> <td>11.41</td> <td>57.83</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17130.00</td> <td>47.23</td> <td>68.30</td> <td>-21.07</td> <td>52.08</td> <td>40.11</td> <td>13.15</td> <td>58.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11420.00	47.76	74.00	-26.24	56.41	37.77	11.41	57.83	--	--	Peak	2	17130.00	47.23	68.30	-21.07	52.08	40.11	13.15	58.11	--	--	Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th rowspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td></td> <td>MHz</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> <tr> <td>1</td> <td>11420.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>56.63</td> <td>37.77</td> <td>11.41</td> <td>57.83</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17130.00</td> <td>47.04</td> <td>68.30</td> <td>-21.26</td> <td>51.89</td> <td>40.11</td> <td>13.15</td> <td>58.11</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11420.00	47.98	74.00	-26.02	56.63	37.77	11.41	57.83	--	--	Peak	2	17130.00	47.04	68.30	-21.26	51.89	40.11	13.15	58.11	--	--
Limit	Read									Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
		Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	11420.00	47.76	74.00	-26.24	56.41	37.77	11.41	57.83	--	--	Peak																																																																																														
2	17130.00	47.23	68.30	-21.07	52.08	40.11	13.15	58.11	--	--	Peak																																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
								Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	11420.00	47.98	74.00	-26.02	56.63	37.77	11.41	57.83	--	--	Peak																																																																																														
2	17130.00	47.04	68.30	-21.26	51.89	40.11	13.15	58.11	--	--	Peak																																																																																														



Mode	42																																																																																																
	Harmonic																																																																																																
	U-NII-2C-3_5.47-5.725_802.11ac VHT80_CH138_5690MHz																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-06-27</p>	<p>Date: 2024-06-27</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>56.98</td> <td>37.75</td> <td>11.40</td> <td>57.88</td> <td>157</td> <td>285</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17070.00</td> <td>47.76</td> <td>68.30</td> <td>-20.54</td> <td>52.81</td> <td>40.01</td> <td>13.14</td> <td>58.20</td> <td>165</td> <td>246</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11380.00	48.25	74.00	-25.75	56.98	37.75	11.40	57.88	157	285	Peak	2	17070.00	47.76	68.30	-20.54	52.81	40.01	13.14	58.20	165	246	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11380.00</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>55.89</td> <td>37.75</td> <td>11.40</td> <td>57.88</td> <td>122</td> <td>291</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17070.00</td> <td>47.62</td> <td>68.30</td> <td>-20.68</td> <td>52.67</td> <td>40.01</td> <td>13.14</td> <td>58.20</td> <td>153</td> <td>102</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11380.00	47.16	74.00	-26.84	55.89	37.75	11.40	57.88	122	291	Peak	2	17070.00	47.62	68.30	-20.68	52.67	40.01	13.14	58.20	153	102
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11380.00	48.25	74.00	-25.75	56.98	37.75	11.40	57.88	157	285	Peak																																																																																						
2	17070.00	47.76	68.30	-20.54	52.81	40.01	13.14	58.20	165	246	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11380.00	47.16	74.00	-26.84	55.89	37.75	11.40	57.88	122	291	Peak																																																																																						
2	17070.00	47.62	68.30	-20.68	52.67	40.01	13.14	58.20	153	102	Peak																																																																																						



43																																																																														
U-NII-1 ~ U-NII-2C LF																																																																														
U-NII-1_5.47-5.725_802.11ac VHT40_CH38_LF																																																																														
Pol.	Horizontal																																																																													
Peak	<p>Data: 1</p> <p>Date: 2024-06-24</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>23.79</td><td>-16.21</td><td>40.00</td><td>30.09</td><td>24.78</td><td>0.54</td><td>31.62</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>274.44</td><td>33.74</td><td>-12.26</td><td>46.00</td><td>44.45</td><td>19.12</td><td>1.72</td><td>31.55</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>311.30</td><td>37.02</td><td>-8.98</td><td>46.00</td><td>46.93</td><td>19.73</td><td>1.84</td><td>31.48</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>369.50</td><td>40.53</td><td>-5.47</td><td>46.00</td><td>48.67</td><td>21.27</td><td>2.03</td><td>31.44</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>425.76</td><td>41.05</td><td>-4.95</td><td>46.00</td><td>47.74</td><td>22.66</td><td>2.15</td><td>31.50</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>466.50</td><td>39.34</td><td>-6.66</td><td>46.00</td><td>45.00</td><td>23.57</td><td>2.24</td><td>31.47</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	30.97	23.79	-16.21	40.00	30.09	24.78	0.54	31.62	---	Peak	2	274.44	33.74	-12.26	46.00	44.45	19.12	1.72	31.55	---	Peak	3	311.30	37.02	-8.98	46.00	46.93	19.73	1.84	31.48	---	Peak	4	369.50	40.53	-5.47	46.00	48.67	21.27	2.03	31.44	---	Peak	5	425.76	41.05	-4.95	46.00	47.74	22.66	2.15	31.50	---	Peak	6	466.50	39.34	-6.66	46.00	45.00	23.57	2.24	31.47	---	Peak
	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																			
1	30.97	23.79	-16.21	40.00	30.09	24.78	0.54	31.62	---	Peak																																																																				
2	274.44	33.74	-12.26	46.00	44.45	19.12	1.72	31.55	---	Peak																																																																				
3	311.30	37.02	-8.98	46.00	46.93	19.73	1.84	31.48	---	Peak																																																																				
4	369.50	40.53	-5.47	46.00	48.67	21.27	2.03	31.44	---	Peak																																																																				
5	425.76	41.05	-4.95	46.00	47.74	22.66	2.15	31.50	---	Peak																																																																				
6	466.50	39.34	-6.66	46.00	45.00	23.57	2.24	31.47	---	Peak																																																																				
	<p>Data: 2</p> <p>Date: 2024-06-24</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Over Limit (dB)</th> <th>Limit (dBuV/m)</th> <th>ReadAntenna Level (dBuV)</th> <th>Cable Loss (dB/m)</th> <th>Preamp Loss (dB)</th> <th>A/Pos (cm)</th> <th>T/Pos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>31.34</td><td>-8.66</td><td>40.00</td><td>37.64</td><td>24.78</td><td>0.54</td><td>31.62</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>368.53</td><td>32.47</td><td>-13.53</td><td>46.00</td><td>40.65</td><td>21.24</td><td>2.02</td><td>31.44</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>394.72</td><td>32.68</td><td>-13.32</td><td>46.00</td><td>40.14</td><td>21.94</td><td>2.09</td><td>31.49</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>426.73</td><td>36.71</td><td>-9.29</td><td>46.00</td><td>43.38</td><td>22.68</td><td>2.15</td><td>31.50</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>469.41</td><td>31.67</td><td>-14.13</td><td>46.00</td><td>37.44</td><td>23.64</td><td>2.25</td><td>31.46</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>862.26</td><td>30.49</td><td>-15.51</td><td>46.00</td><td>29.31</td><td>29.15</td><td>3.08</td><td>31.05</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark	1	30.97	31.34	-8.66	40.00	37.64	24.78	0.54	31.62	---	Peak	2	368.53	32.47	-13.53	46.00	40.65	21.24	2.02	31.44	---	Peak	3	394.72	32.68	-13.32	46.00	40.14	21.94	2.09	31.49	---	Peak	4	426.73	36.71	-9.29	46.00	43.38	22.68	2.15	31.50	---	Peak	5	469.41	31.67	-14.13	46.00	37.44	23.64	2.25	31.46	---	Peak	6	862.26	30.49	-15.51	46.00	29.31	29.15	3.08	31.05	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	ReadAntenna Level (dBuV)	Cable Loss (dB/m)	Preamp Loss (dB)	A/Pos (cm)	T/Pos (deg)	Remark																																																																				
1	30.97	31.34	-8.66	40.00	37.64	24.78	0.54	31.62	---	Peak																																																																				
2	368.53	32.47	-13.53	46.00	40.65	21.24	2.02	31.44	---	Peak																																																																				
3	394.72	32.68	-13.32	46.00	40.14	21.94	2.09	31.49	---	Peak																																																																				
4	426.73	36.71	-9.29	46.00	43.38	22.68	2.15	31.50	---	Peak																																																																				
5	469.41	31.67	-14.13	46.00	37.44	23.64	2.25	31.46	---	Peak																																																																				
6	862.26	30.49	-15.51	46.00	29.31	29.15	3.08	31.05	---	Peak																																																																				




		44																																																																																																																																																																																												
Mode	U-NII-3 LF																																																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT20_CH149_LF																																																																																																																																																																																													
Pol.	Horizontal		Vertical																																																																																																																																																																																											
Peak	<p>Data: 1</p> <p style="text-align: right;">Date: 2024-06-24</p>		<p>Data: 2</p> <p style="text-align: right;">Date: 2024-06-24</p>																																																																																																																																																																																											
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>23.78</td><td>-16.22</td><td>40.00</td><td>30.08</td><td>24.78</td><td>0.54</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>127.97</td><td>22.58</td><td>-20.92</td><td>43.50</td><td>35.66</td><td>17.55</td><td>1.16</td><td>31.79</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>302.57</td><td>33.84</td><td>-12.16</td><td>46.00</td><td>44.02</td><td>19.50</td><td>1.81</td><td>31.49</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>371.44</td><td>41.17</td><td>-4.83</td><td>46.00</td><td>49.26</td><td>21.32</td><td>2.03</td><td>31.44</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>411.21</td><td>42.31</td><td>-3.69</td><td>46.00</td><td>49.36</td><td>22.33</td><td>2.12</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>468.44</td><td>40.88</td><td>-5.12</td><td>46.00</td><td>46.47</td><td>23.62</td><td>2.25</td><td>31.46</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>		Peak	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.97	23.78	-16.22	40.00	30.08	24.78	0.54	31.62	---	---	Peak	2	127.97	22.58	-20.92	43.50	35.66	17.55	1.16	31.79	---	---	Peak	3	302.57	33.84	-12.16	46.00	44.02	19.50	1.81	31.49	---	---	Peak	4	371.44	41.17	-4.83	46.00	49.26	21.32	2.03	31.44	---	---	Peak	5	411.21	42.31	-3.69	46.00	49.36	22.33	2.12	31.50	---	---	Peak	6	468.44	40.88	-5.12	46.00	46.47	23.62	2.25	31.46	---	---	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>30.50</td><td>-9.50</td><td>40.00</td><td>36.00</td><td>24.78</td><td>0.54</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>371.44</td><td>37.14</td><td>-8.86</td><td>46.00</td><td>45.23</td><td>21.32</td><td>2.03</td><td>31.44</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>424.79</td><td>35.48</td><td>-10.52</td><td>46.00</td><td>42.19</td><td>22.64</td><td>2.15</td><td>31.50</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>461.65</td><td>32.31</td><td>-13.69</td><td>46.00</td><td>38.10</td><td>23.46</td><td>2.23</td><td>31.48</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>527.61</td><td>30.35</td><td>-15.65</td><td>46.00</td><td>33.77</td><td>25.47</td><td>2.40</td><td>31.29</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>913.67</td><td>31.40</td><td>-14.60</td><td>46.00</td><td>28.91</td><td>30.18</td><td>3.18</td><td>30.87</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.97	30.50	-9.50	40.00	36.00	24.78	0.54	31.62	---	---	Peak	2	371.44	37.14	-8.86	46.00	45.23	21.32	2.03	31.44	---	---	Peak	3	424.79	35.48	-10.52	46.00	42.19	22.64	2.15	31.50	---	---	Peak	4	461.65	32.31	-13.69	46.00	38.10	23.46	2.23	31.48	---	---	Peak	5	527.61	30.35	-15.65	46.00	33.77	25.47	2.40	31.29	---	---	Peak	6	913.67	31.40	-14.60	46.00	28.91	30.18	3.18	30.87	---	---
Peak	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	30.97	23.78	-16.22	40.00	30.08	24.78	0.54	31.62	---	---	Peak																																																																																																																																																																																			
2	127.97	22.58	-20.92	43.50	35.66	17.55	1.16	31.79	---	---	Peak																																																																																																																																																																																			
3	302.57	33.84	-12.16	46.00	44.02	19.50	1.81	31.49	---	---	Peak																																																																																																																																																																																			
4	371.44	41.17	-4.83	46.00	49.26	21.32	2.03	31.44	---	---	Peak																																																																																																																																																																																			
5	411.21	42.31	-3.69	46.00	49.36	22.33	2.12	31.50	---	---	Peak																																																																																																																																																																																			
6	468.44	40.88	-5.12	46.00	46.47	23.62	2.25	31.46	---	---	Peak																																																																																																																																																																																			
Peak	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	30.97	30.50	-9.50	40.00	36.00	24.78	0.54	31.62	---	---	Peak																																																																																																																																																																																			
2	371.44	37.14	-8.86	46.00	45.23	21.32	2.03	31.44	---	---	Peak																																																																																																																																																																																			
3	424.79	35.48	-10.52	46.00	42.19	22.64	2.15	31.50	---	---	Peak																																																																																																																																																																																			
4	461.65	32.31	-13.69	46.00	38.10	23.46	2.23	31.48	---	---	Peak																																																																																																																																																																																			
5	527.61	30.35	-15.65	46.00	33.77	25.47	2.40	31.29	---	---	Peak																																																																																																																																																																																			
6	913.67	31.40	-14.60	46.00	28.91	30.18	3.18	30.87	---	---	Peak																																																																																																																																																																																			



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.57	-	-	10Hz
802.11ac VHT20	98.48	-	-	10Hz
802.11ac VHT40	95.92	0.940	1.064	3KHz
802.11ac VHT80	84	0.420	2.381	3KHz

802.11a

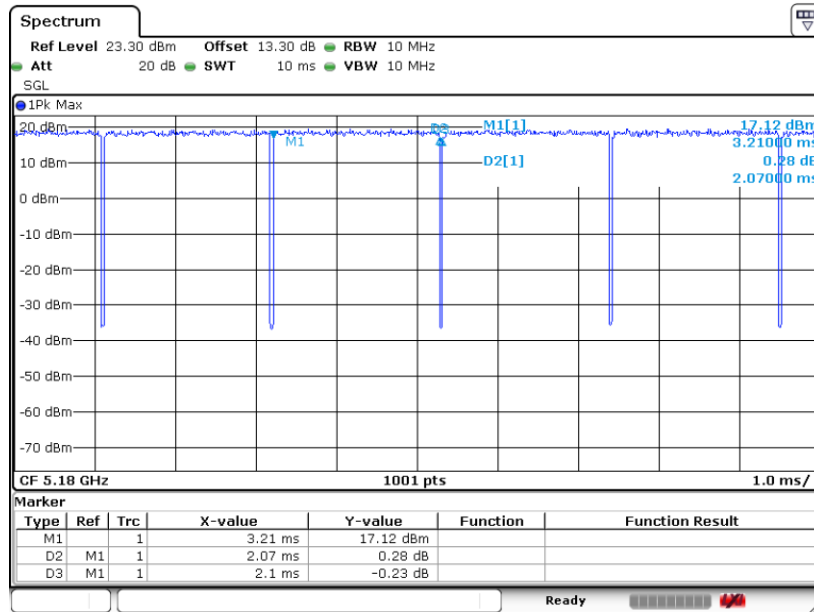




802.11ac VHT20

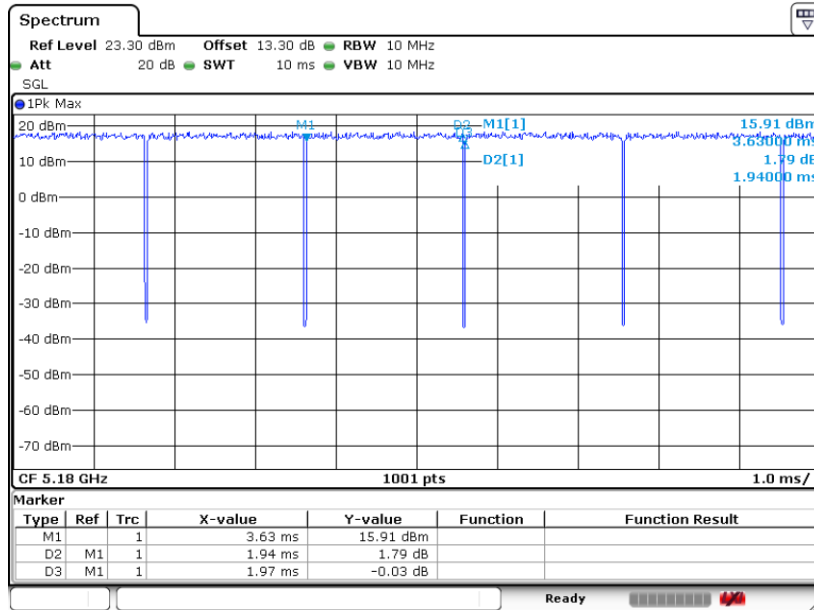

802.11ac VHT40

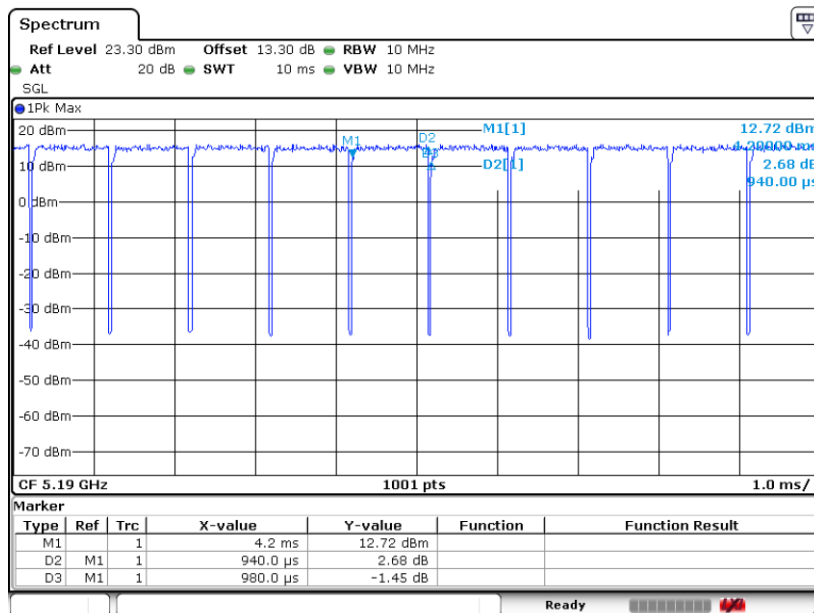



802.11ac VHT80

