

Appendix B for KSCR230900155101

The plots of worse case are showing as followings.

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

GSM 850, GPRS-FDD (TDMA, GMSK, TN 0), Channel 190**Measurement Report for SRM955**

Communication System: GSM 850; Frequency: 836.600, CHEEK

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

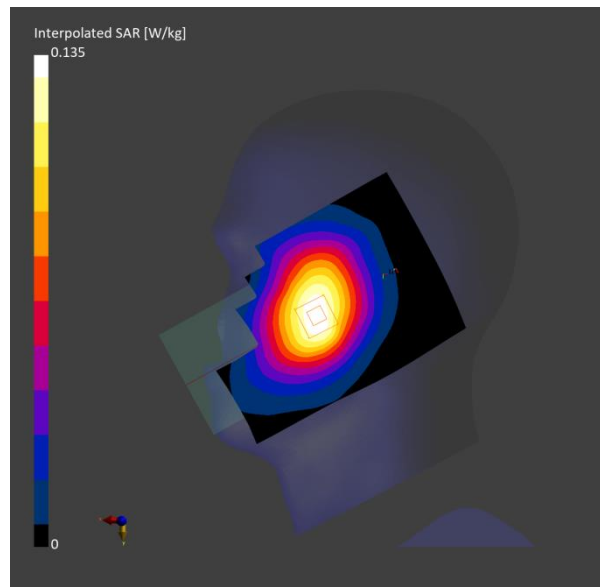
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.081 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.087 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

GSM 850, GPRS-FDD (TDMA, GMSK, TN 0), Channel 190**Measurement Report for SRM955**

Communication System: GSM 850; Frequency: 836.600, BACK

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

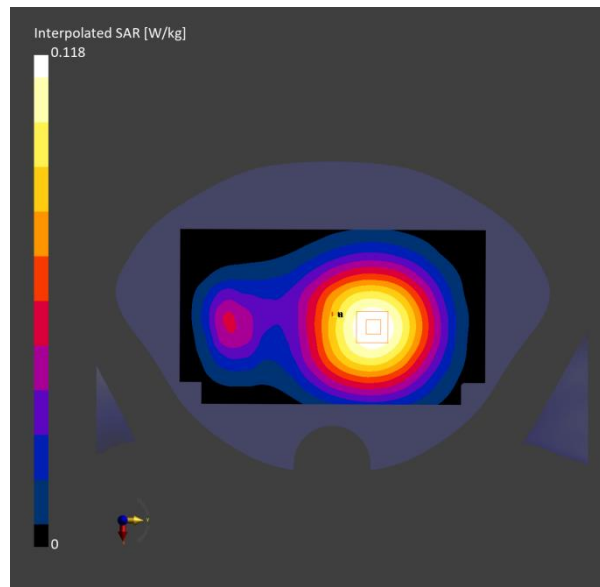
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.104 W/kg; SAR (10g) = 0.073 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.108 W/kg; SAR (10g) = 0.081 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

GSM 850, GPRS-FDD (TDMA, GMSK, TN 0), Channel 190**Measurement Report for SRM955**

Communication System: GSM 850; Frequency: 836.600, BACK

Medium: HSL. Medium parameters used: $f = 836.600$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

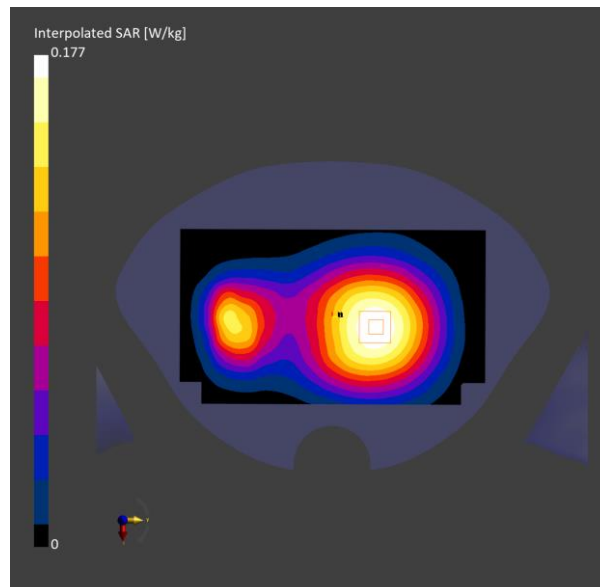
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.156 W/kg; SAR (10g) = 0.109 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.159 W/kg; SAR (10g) = 0.119 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0), Channel 661**Measurement Report for SRM955**

Communication System: PCS 1900; Frequency: 1880.000, CHEEK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

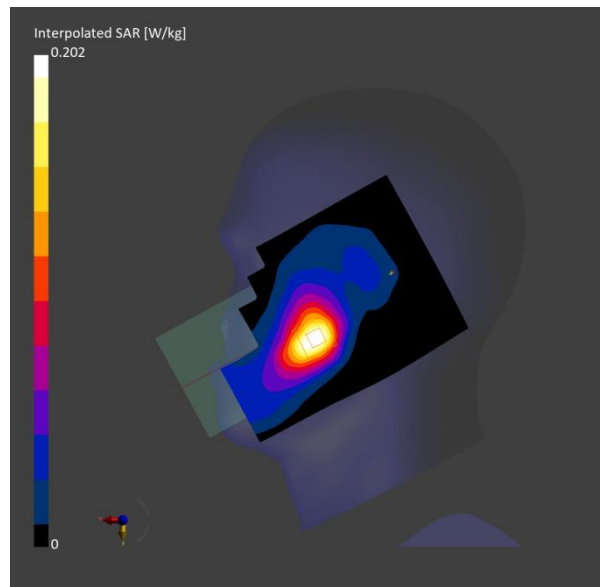
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.163 W/kg; SAR (10g) = 0.092 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.169 W/kg; SAR (10g) = 0.101 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0), Channel 661**Measurement Report for SRM955**

Communication System: PCS 1900; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

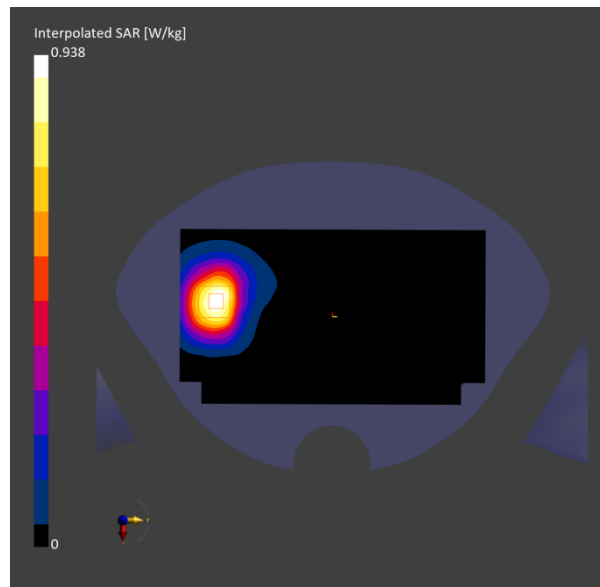
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.453 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.479 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0), Channel 661**Measurement Report for SRM955**

Communication System: PCS 1900; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

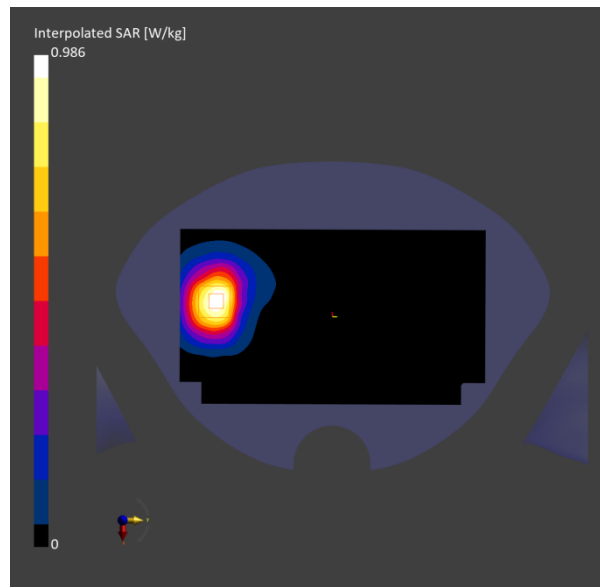
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.826 W/kg; SAR (10g) = 0.475 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.806 W/kg; SAR (10g) = 0.454 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0), Channel 661**Measurement Report for SRM955**

Communication System: PCS 1900; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

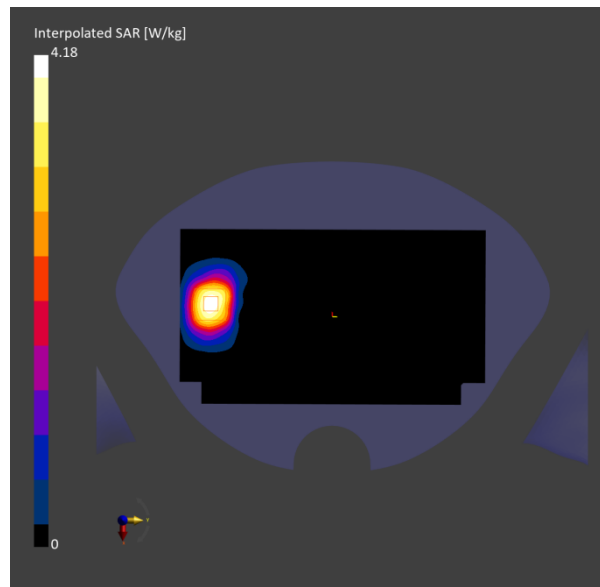
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.52 W/kg; SAR (10g) = 1.95 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 4.59 W/kg; SAR (10g) = 2.13 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, UMTS-FDD (DC-HSDPA), Channel 9400**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, CHEEK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

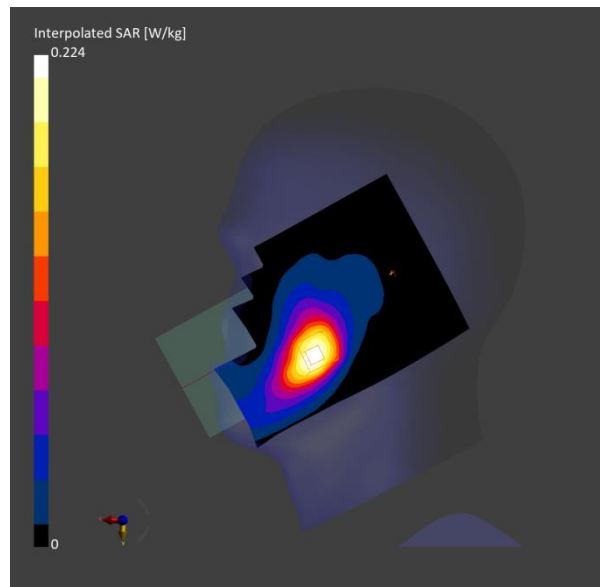
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.182 W/kg; SAR (10g) = 0.105 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.191 W/kg; SAR (10g) = 0.117 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, UMTS-FDD (DC-HSDPA), Channel 9400**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

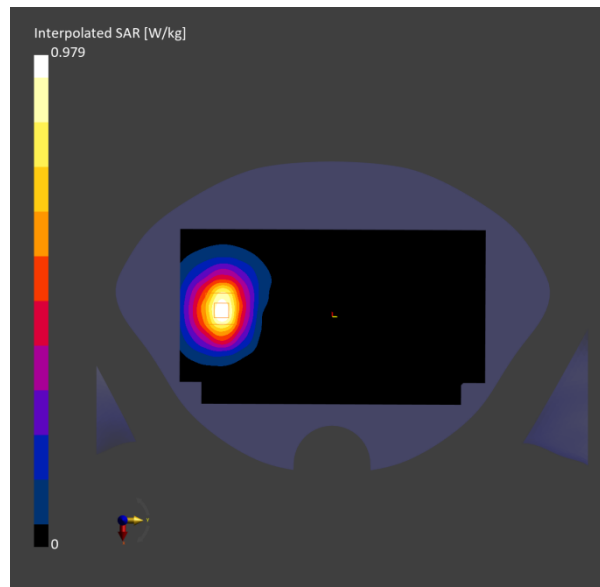
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.326 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.337 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, UMTS-FDD (DC-HSDPA), Channel 9400**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

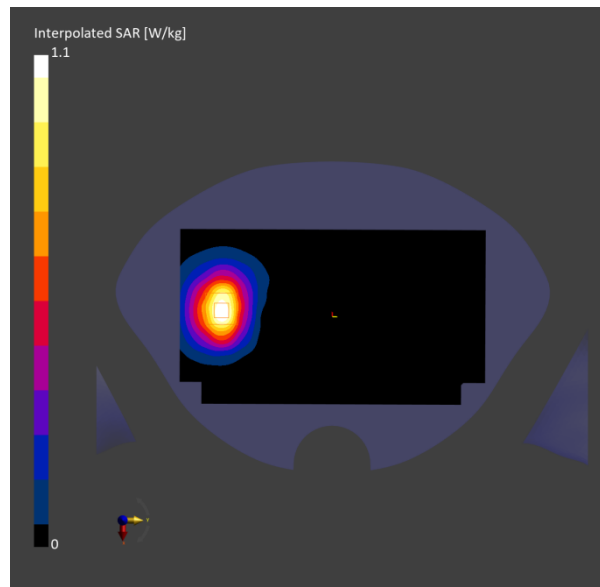
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.311 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.315 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, UMTS-FDD (DC-HSDPA), Channel 9262**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1852.400, BACK

Medium: HSL. Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 41.8$

DASY8 Configuration:

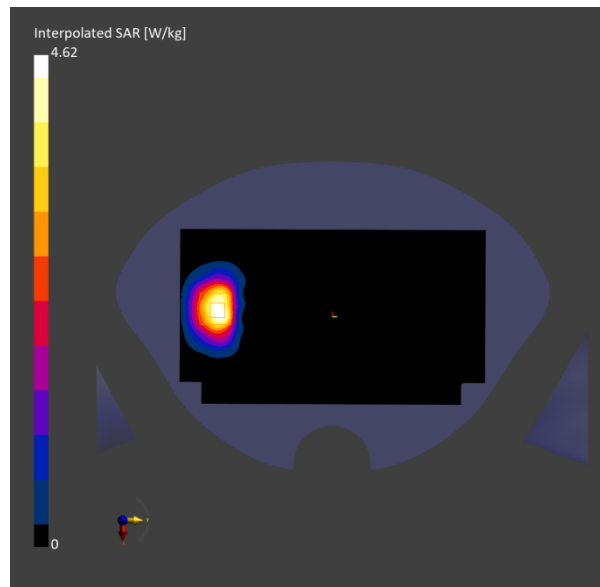
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.79 W/kg; SAR (10g) = 2.03 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 4.46 W/kg; SAR (10g) = 2.24 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 4, UMTS-FDD (DC-HSDPA), Channel 1412**Measurement Report for SRM955**

Communication System: Band 4; Frequency: 1732.400, CHEEK

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 42.0$

DASY8 Configuration:

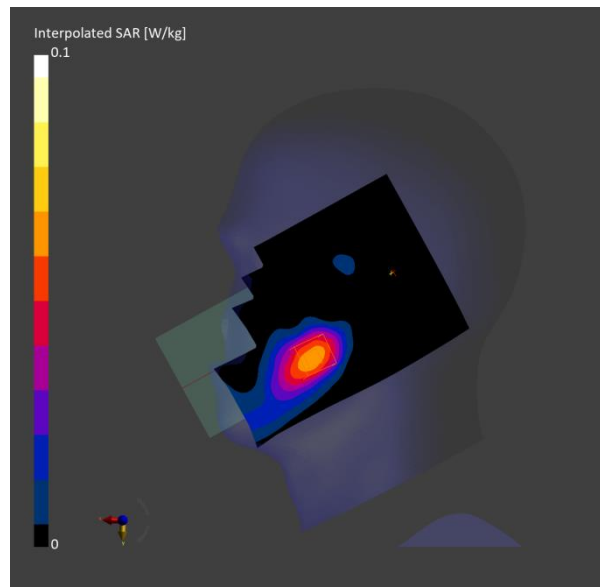
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.054 W/kg; SAR (10g) = 0.032 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.056 W/kg; SAR (10g) = 0.035 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 4, UMTS-FDD (DC-HSDPA), Channel 1412**Measurement Report for SRM955**

Communication System: Band 4; Frequency: 1732.400, BACK

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 42.0$

DASY8 Configuration:

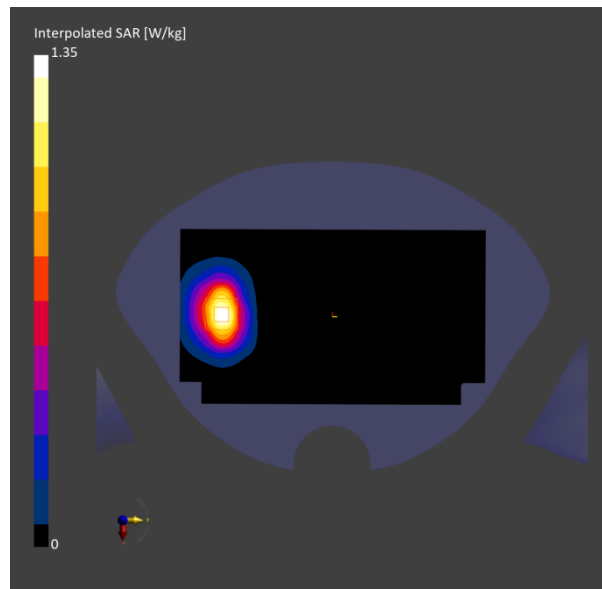
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.421 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.427 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 4, UMTS-FDD (DC-HSDPA), Channel 1412**Measurement Report for SRM955**

Communication System: Band 4; Frequency: 1732.400, BACK

Medium: HSL. Medium parameters used: $f = 1732.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 42.0$

DASY8 Configuration:

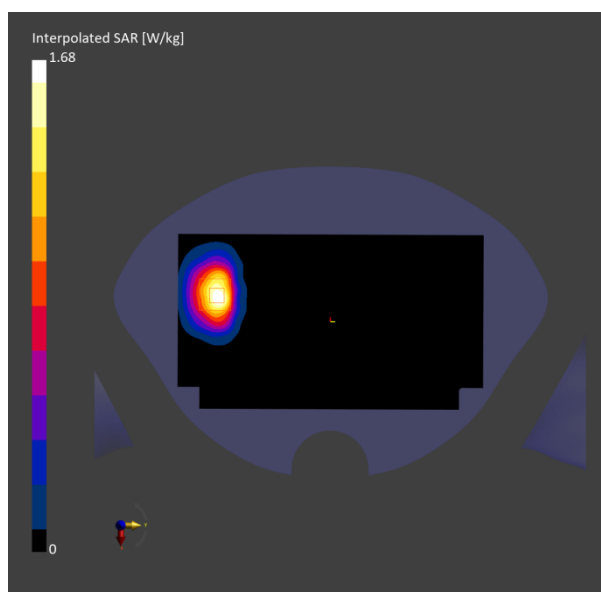
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.558 W/kg; SAR (10g) = 0.296 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.19 dB

SAR (1g) = 0.543 W/kg; SAR (10g) = 0.298 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, UMTS-FDD (DC-HSDPA), Channel 4182**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.400, CHEEK

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

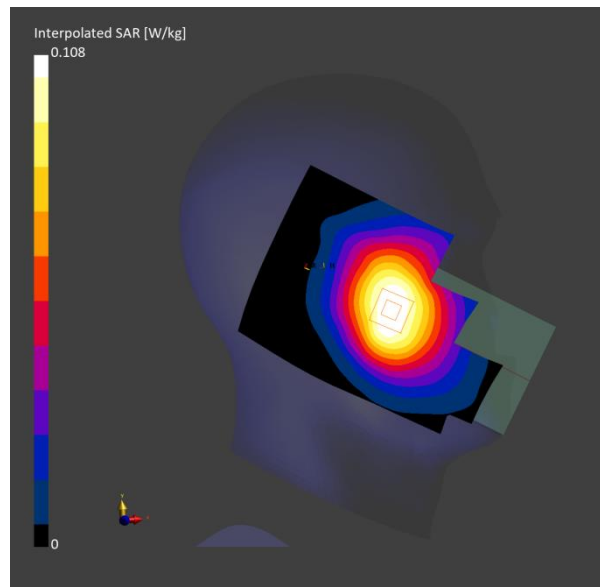
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.095 W/kg; SAR (10g) = 0.066 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.105 W/kg; SAR (10g) = 0.082 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, UMTS-FDD (DC-HSDPA), Channel 4182**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.400, BACK

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

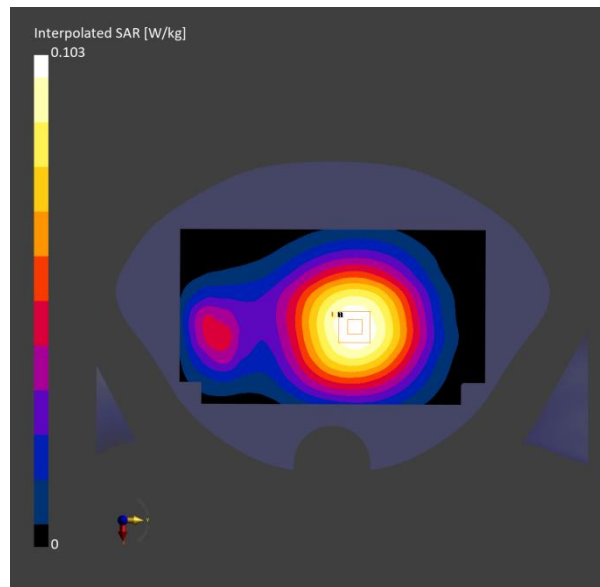
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.090 W/kg; SAR (10g) = 0.064 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.095 W/kg; SAR (10g) = 0.073 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, UMTS-FDD (DC-HSDPA), Channel 4182**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.400, BACK

Medium: HSL. Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

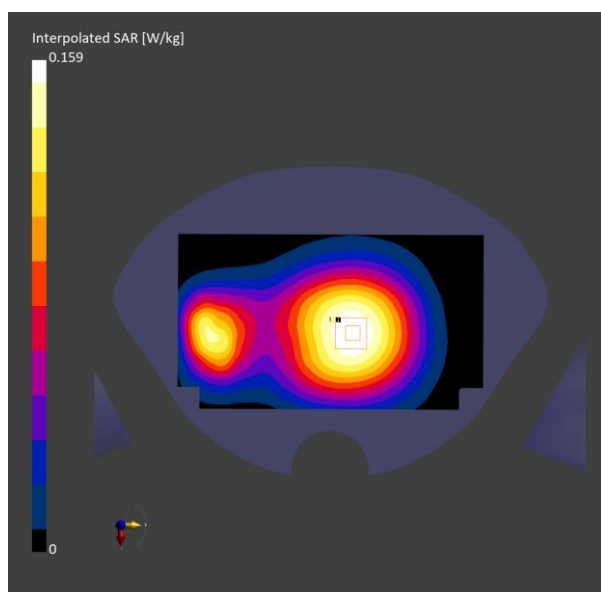
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.140 W/kg; SAR (10g) = 0.099 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.149 W/kg; SAR (10g) = 0.114 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, CHEEK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

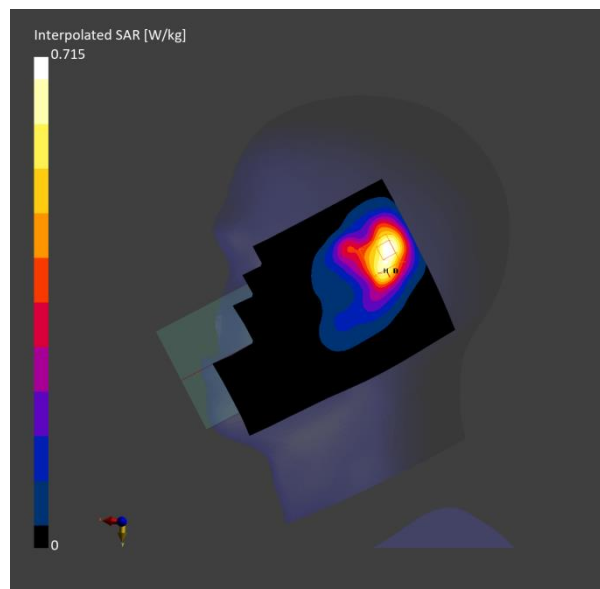
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.321 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.339 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

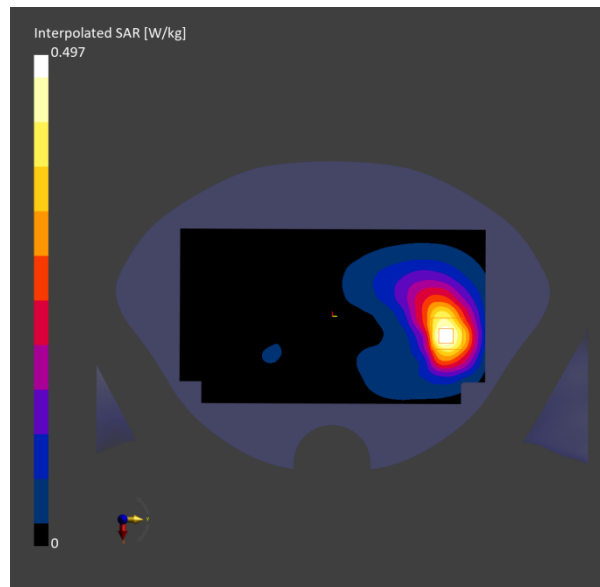
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.408 W/kg; SAR (10g) = 0.232 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.248 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900**Measurement Report for SRM955**

Communication System: Band 2; Frequency: 1880.000, BACK

Medium: HSL. Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

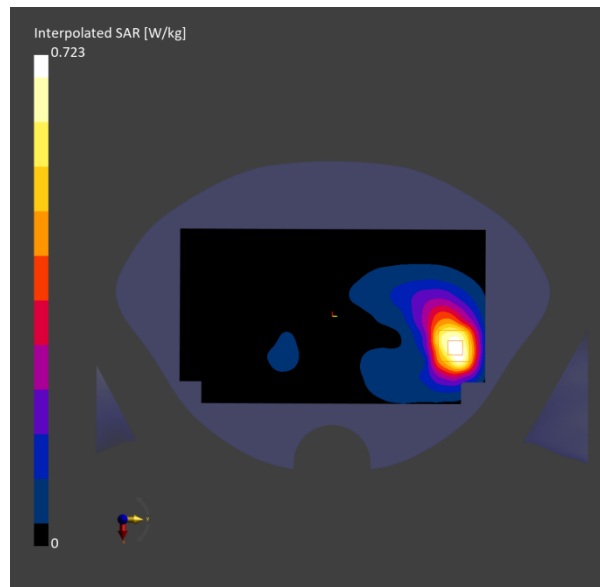
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.308 W/kg; SAR (10g) = 0.167 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.175 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 20525**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.500, CHEEK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

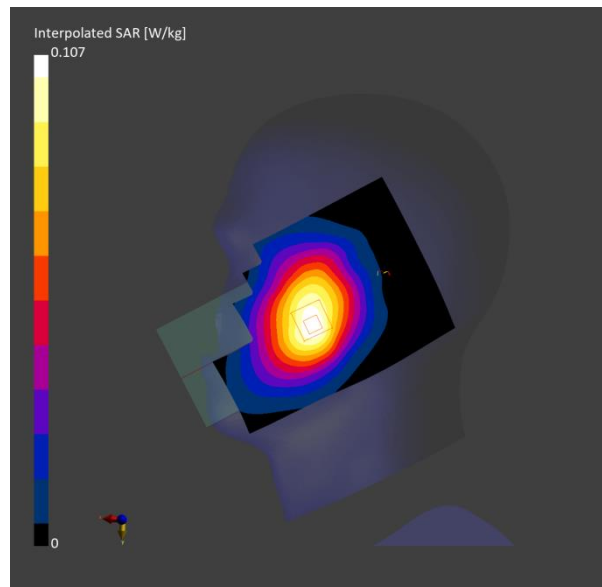
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.093 W/kg; SAR (10g) = 0.063 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.096 W/kg; SAR (10g) = 0.074 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 20525**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.500, BACK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

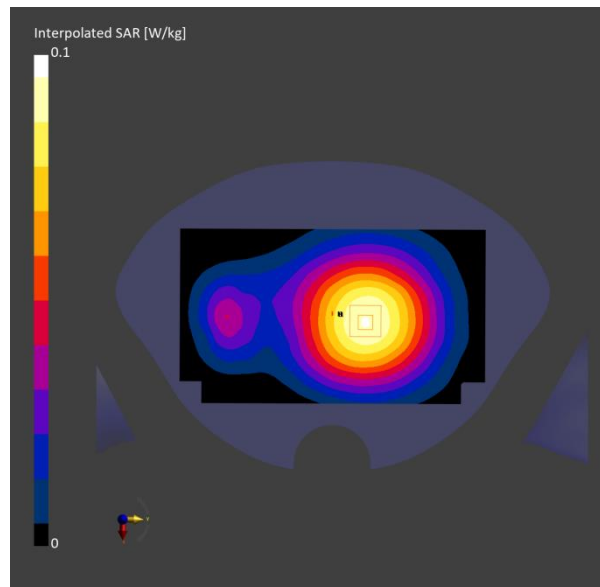
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.081 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.085 W/kg; SAR (10g) = 0.065 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 20525**Measurement Report for SRM955**

Communication System: Band 5; Frequency: 836.500, BACK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

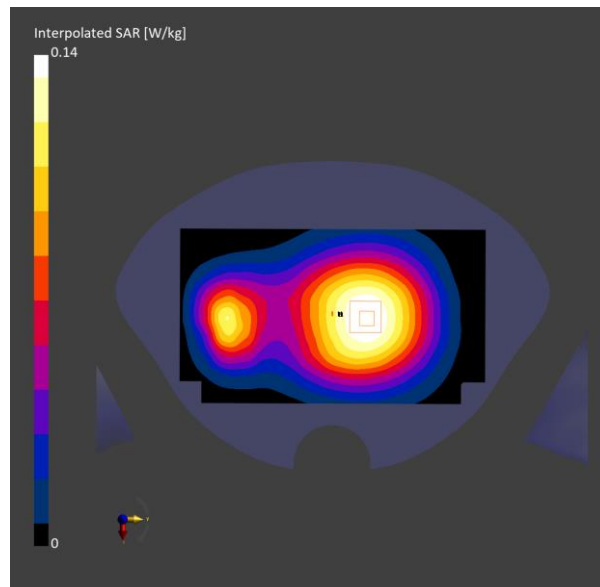
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.123 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.129 W/kg; SAR (10g) = 0.098 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 7, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 21100**Measurement Report for SRM955**

Communication System: Band 7; Frequency: 2535.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

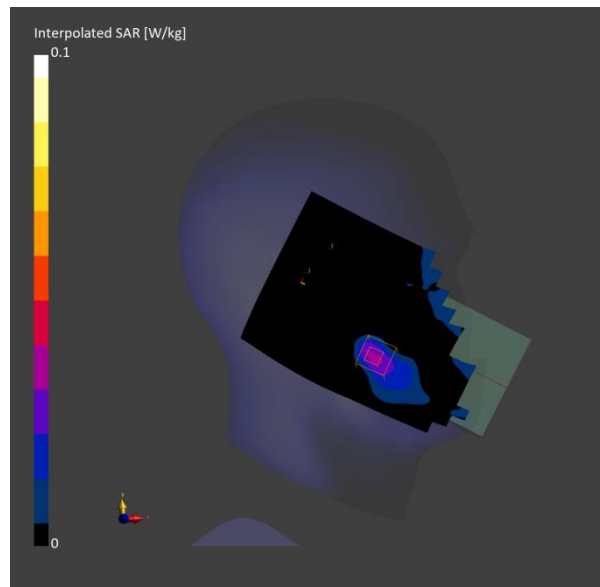
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.028 W/kg; SAR (10g) = 0.013 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.026 W/kg; SAR (10g) = 0.012 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 7, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 21100**Measurement Report for SRM955**

Communication System: Band 7; Frequency: 2535.000, BACK

Medium: HSL. Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

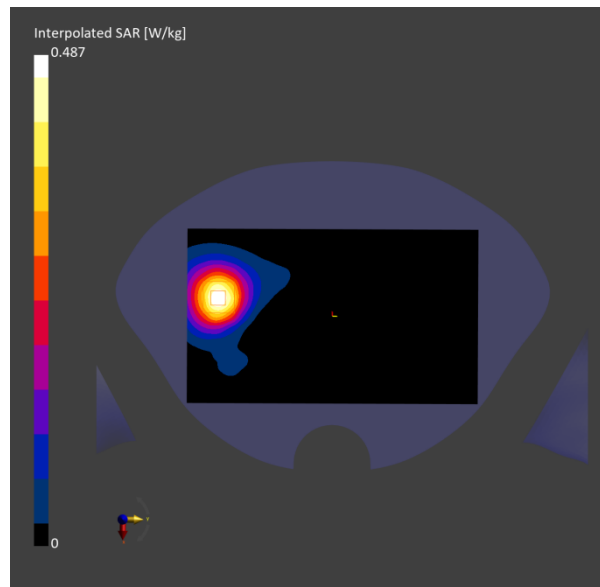
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.388 W/kg; SAR (10g) = 0.203 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.388 W/kg; SAR (10g) = 0.205 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 7, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 21350**Measurement Report for SRM955**

Communication System: Band 7; Frequency: 2560.000, BACK

Medium: HSL. Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

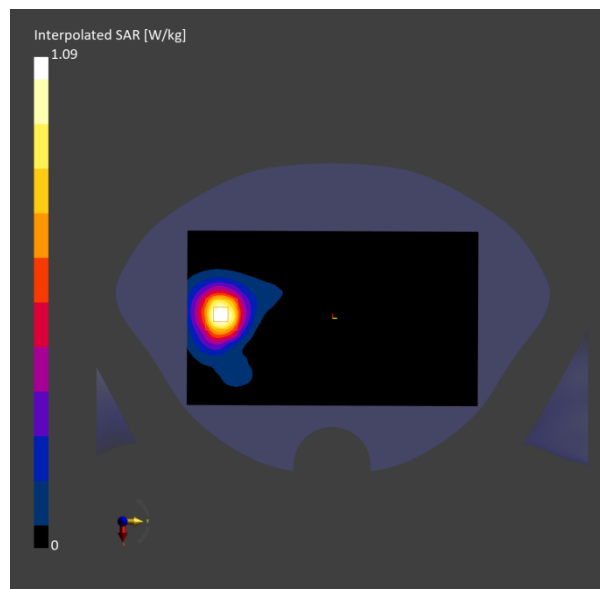
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.803 W/kg; SAR (10g) = 0.399 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.398 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23095****Measurement Report for SRM955**

Communication System: Band 12; Frequency: 707.500, CHEEK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

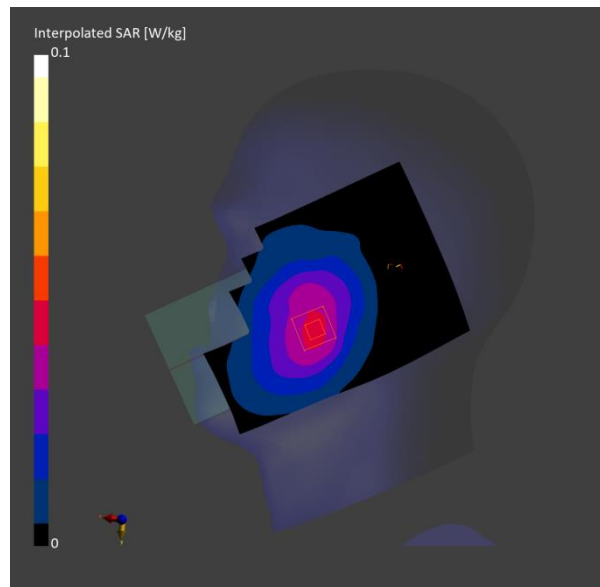
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.027 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.042 W/kg; SAR (10g) = 0.033 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 23095**Measurement Report for SRM955**

Communication System: Band 12; Frequency: 707.500, BACK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

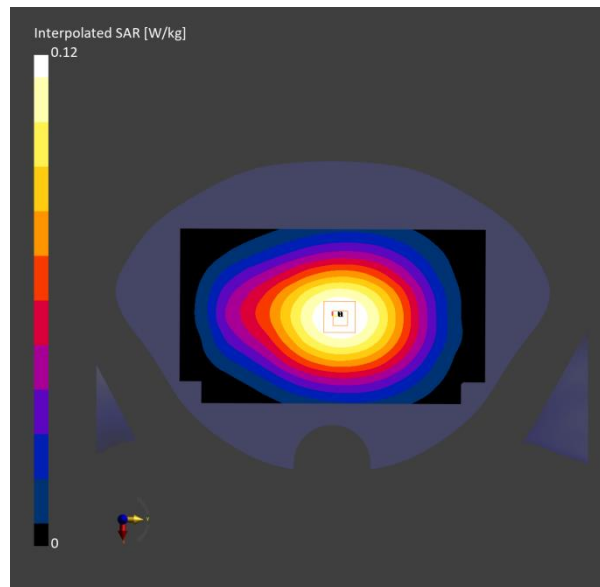
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.106 W/kg; SAR (10g) = 0.076 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.112 W/kg; SAR (10g) = 0.087 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 23095**Measurement Report for SRM955**

Communication System: Band 12; Frequency: 707.500, BACK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

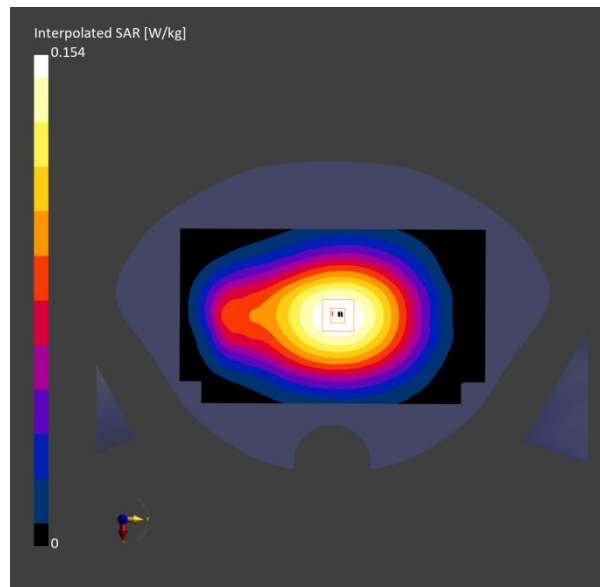
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.136 W/kg; SAR (10g) = 0.097 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.143 W/kg; SAR (10g) = 0.110 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23230****Measurement Report for SRM955**

Communication System: Band 13; Frequency: 782.000, CHEEK

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.8$

DASY8 Configuration:

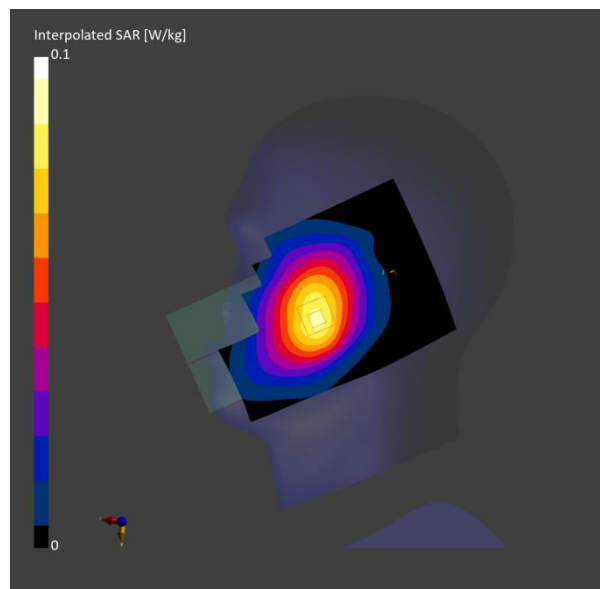
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.076 W/kg; SAR (10g) = 0.052 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.079 W/kg; SAR (10g) = 0.061 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23230****Measurement Report for SRM955**

Communication System: Band 13; Frequency: 782.000, BACK

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.8$

DASY8 Configuration:

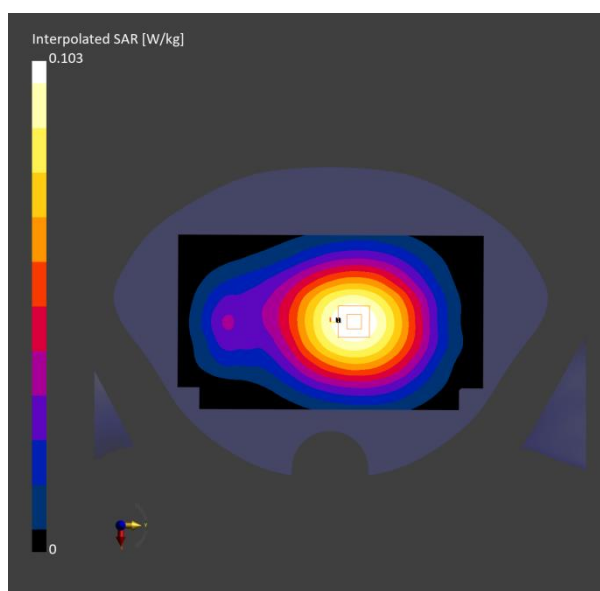
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.091 W/kg; SAR (10g) = 0.064 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.095 W/kg; SAR (10g) = 0.073 W/kg;

Date: 2024/22/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23230****Measurement Report for SRM955**

Communication System: Band 13; Frequency: 782.000, BACK

Medium: HSL. Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 43.8$

DASY8 Configuration:

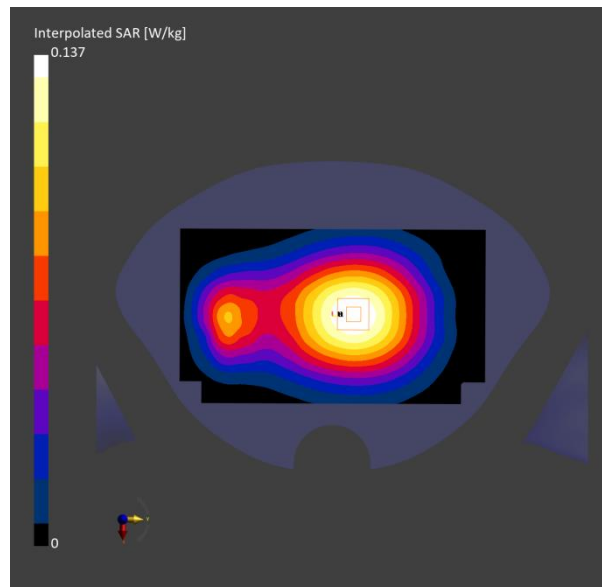
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.121 W/kg; SAR (10g) = 0.086 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.128 W/kg; SAR (10g) = 0.098 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 14, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23330****Measurement Report for SRM955**

Communication System: Band 14; Frequency: 793.000, CHEEK

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 43.7$

DASY8 Configuration:

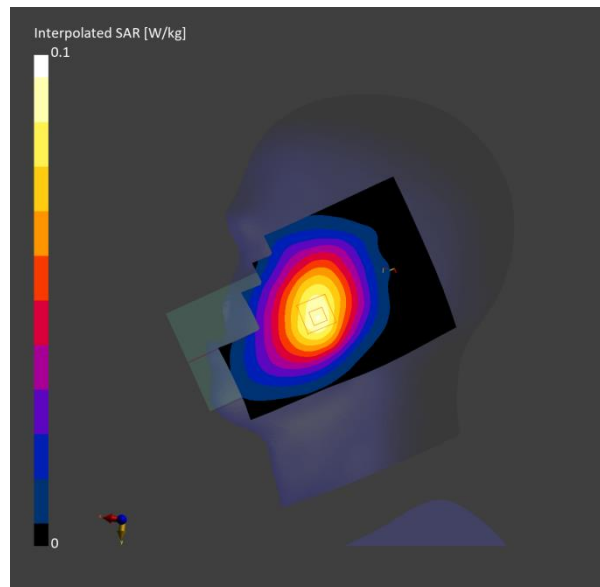
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.080 W/kg; SAR (10g) = 0.055 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.084 W/kg; SAR (10g) = 0.066 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 14, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23330****Measurement Report for SRM955**

Communication System: Band 14; Frequency: 793.000, BACK

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 43.7$

DASY8 Configuration:

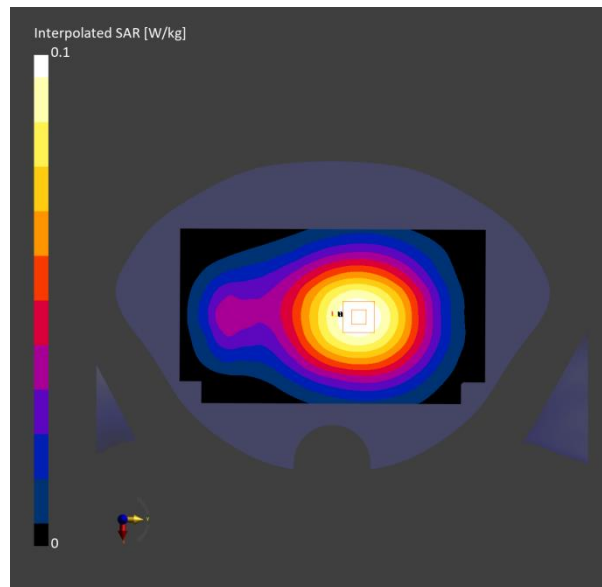
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.088 W/kg; SAR (10g) = 0.062 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.093 W/kg; SAR (10g) = 0.071 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 14, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 23330****Measurement Report for SRM955**

Communication System: Band 14; Frequency: 793.000, BACK

Medium: HSL. Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 43.7$

DASY8 Configuration:

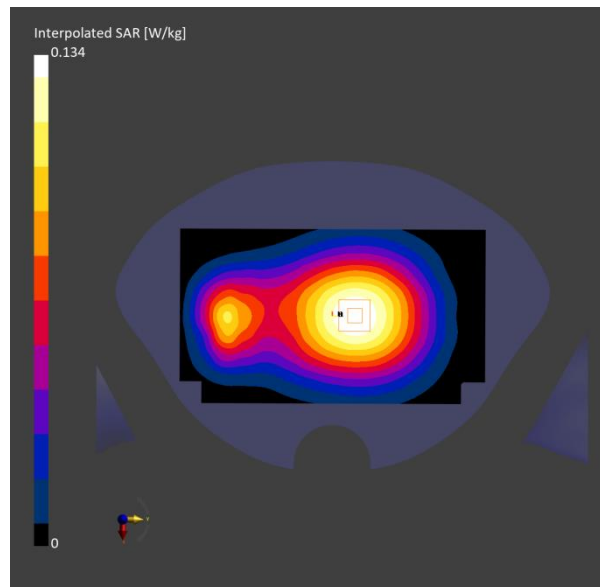
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.084 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.096 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 25, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 26365****Measurement Report for SRM955**

Communication System: Band 25; Frequency: 1882.500, CHEEK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

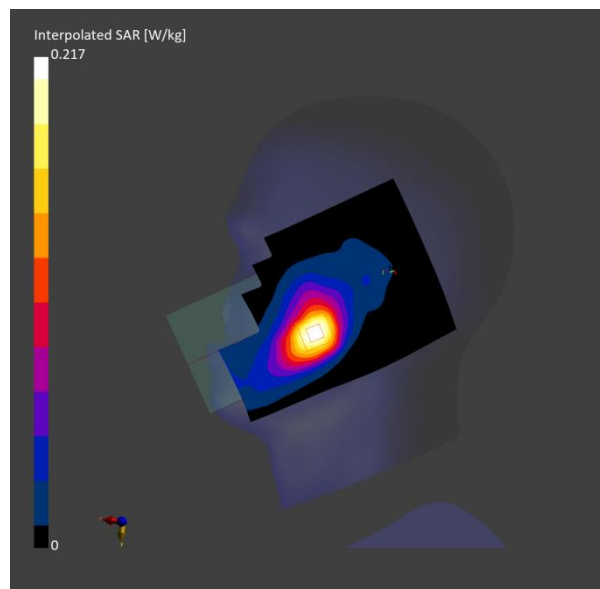
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.177 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.114 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 25, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 26365****Measurement Report for SRM955**

Communication System: Band 25; Frequency: 1882.500, BACK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

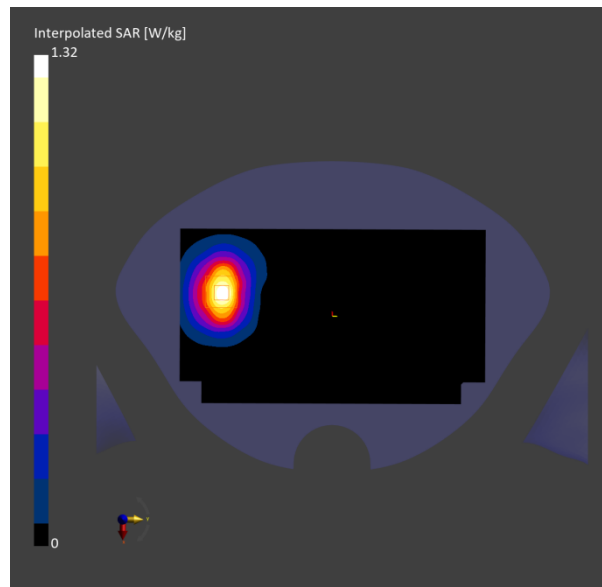
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.684 W/kg; SAR (10g) = 0.402 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.711 W/kg; SAR (10g) = 0.412 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 25, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 26365****Measurement Report for SRM955**

Communication System: Band 25; Frequency: 1882.500, BACK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

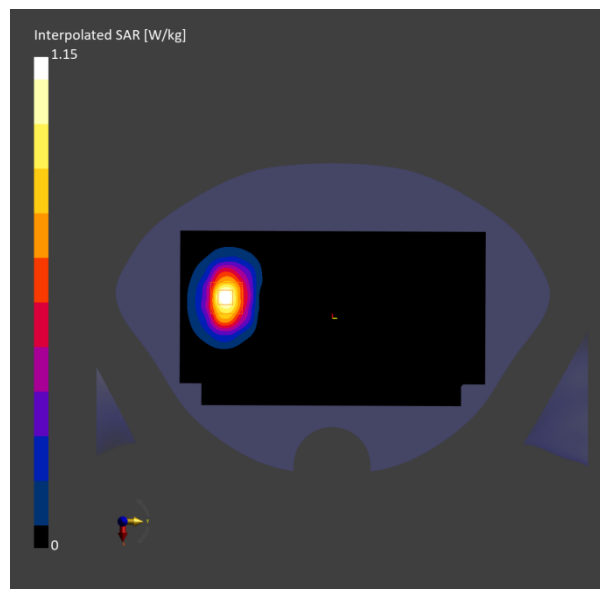
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.423 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.780 W/kg; SAR (10g) = 0.392 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 25, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 26140****Measurement Report for SRM955**

Communication System: Band 25; Frequency: 1860.000, BACK

Medium: HSL. Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 41.8$

DASY8 Configuration:

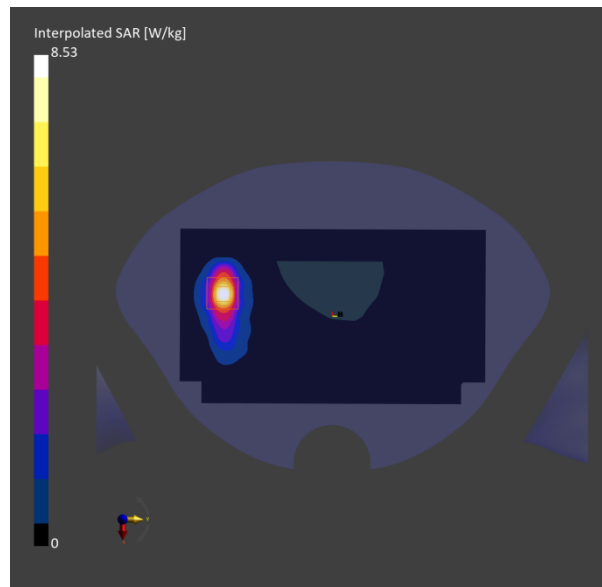
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.87 W/kg; SAR (10g) = 2.18 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 5.01 W/kg; SAR (10g) = 2.25 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 30, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 27710****Measurement Report for SRM955**

Communication System: Band 30; Frequency: 2310.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

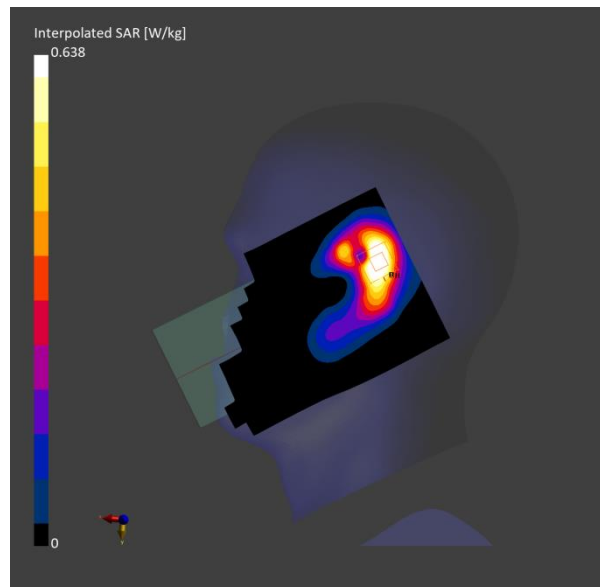
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.376 W/kg; SAR (10g) = 0.204 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.392 W/kg; SAR (10g) = 0.229 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 30, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 27710****Measurement Report for SRM955**

Communication System: Band 30; Frequency: 2310.000, BACK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

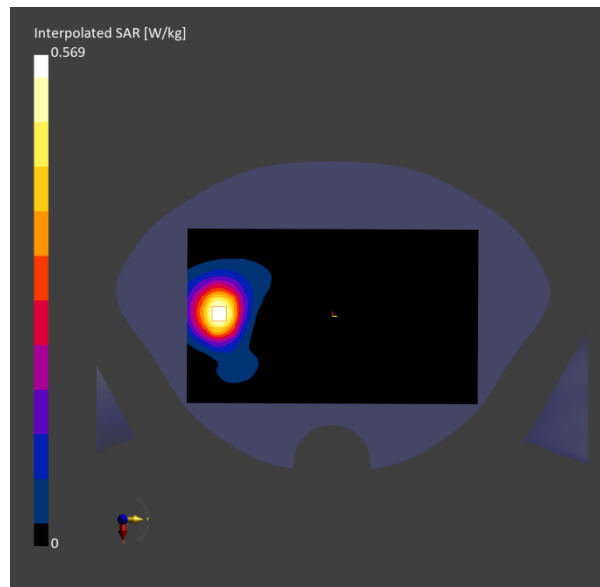
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.255 W/kg; SAR (10g) = 0.139 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.283 W/kg; SAR (10g) = 0.151 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 30, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 27710****Measurement Report for SRM955**

Communication System: Band 30; Frequency: 2310.000, BACK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

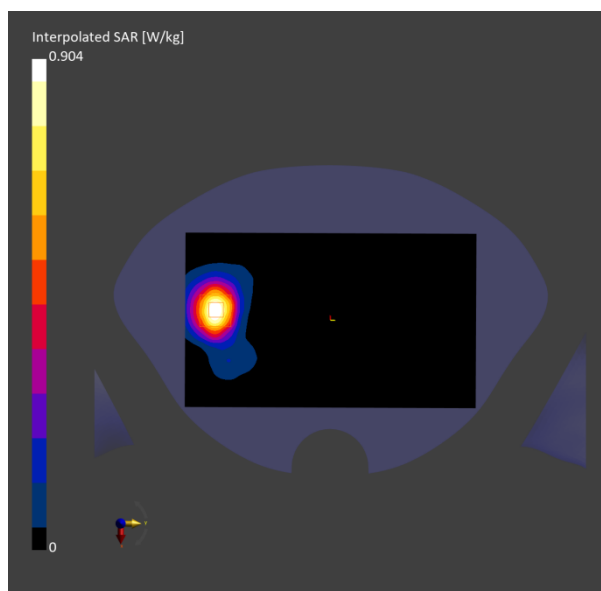
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.472 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.17 dB

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.227 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 40620****Measurement Report for SRM955**

Communication System: Band 41; Frequency: 2593.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

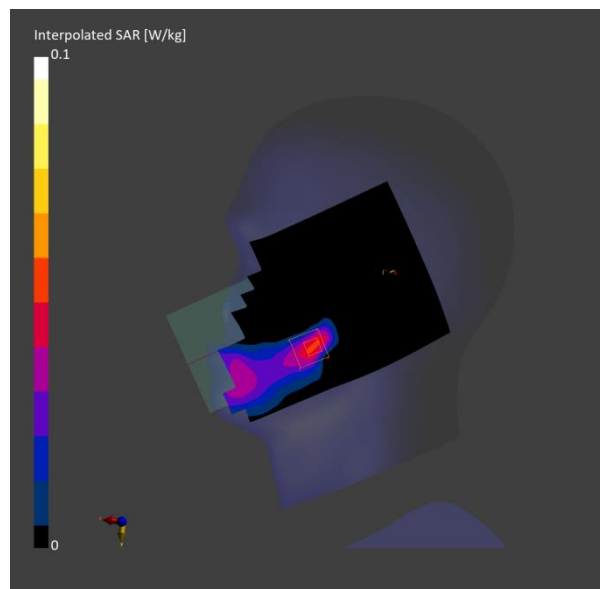
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.040 W/kg; SAR (10g) = 0.019 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.037 W/kg; SAR (10g) = 0.018 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 40620****Measurement Report for SRM955**

Communication System: Band 41; Frequency: 2593.000, BACK

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

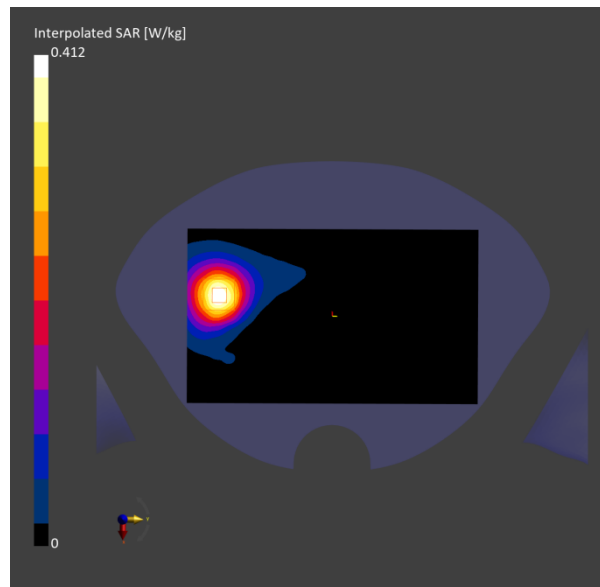
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.329 W/kg; SAR (10g) = 0.171 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.328 W/kg; SAR (10g) = 0.170 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 41055****Measurement Report for SRM955**

Communication System: Band 41; Frequency: 2636.500, BACK

Medium: HSL. Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 40.7$

DASY8 Configuration:

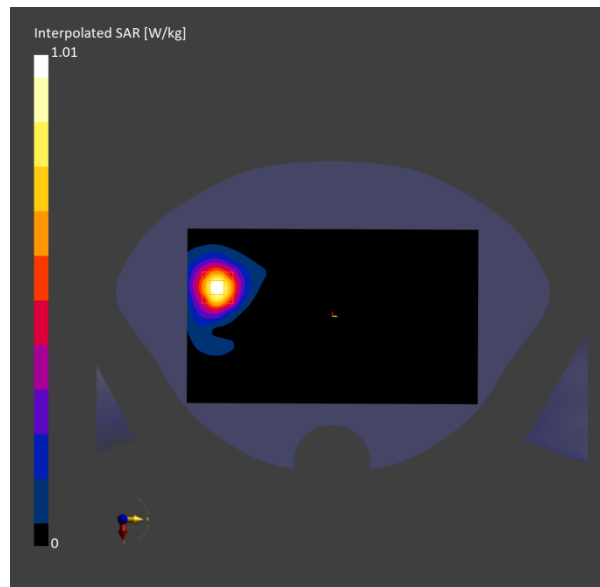
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.289 W/kg;

Date: 2024/03/12

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 42, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 42840****Measurement Report for SRM955**

Communication System: Band 42; Frequency: 3525.000, CHEEK

Medium: HSL. Medium parameters used: $f = 3525.000$ MHz; $\sigma = 2.74$ S/m; $\epsilon_r = 39.1$

DASY8 Configuration:

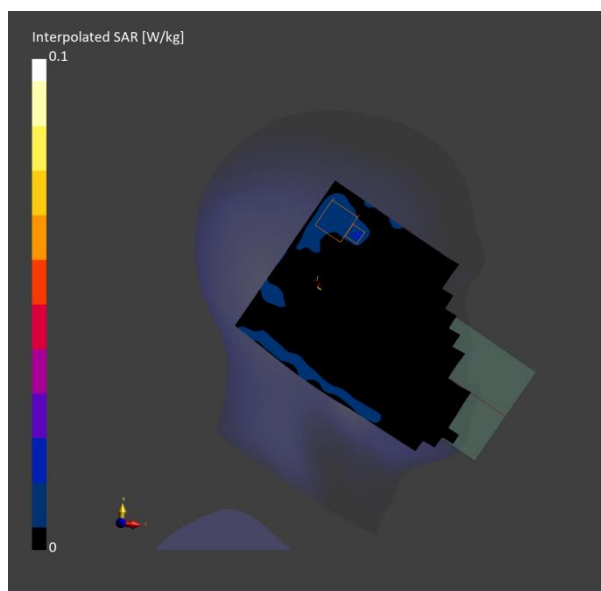
- Probe: EX3DV4 - SN7833; ConvF(5.61, 6.4, 6.07); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.012 W/kg; SAR (10g) = 0.006 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.03 dB

SAR (1g) = 0.007 W/kg; SAR (10g) = 0.003 W/kg;

Date: 2024/03/12

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 42, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 42840****Measurement Report for SRM955**

Communication System: Band 42; Frequency: 3525.000, BACK

Medium: HSL. Medium parameters used: $f = 3525.000$ MHz; $\sigma = 2.74$ S/m; $\epsilon_r = 39.1$

DASY8 Configuration:

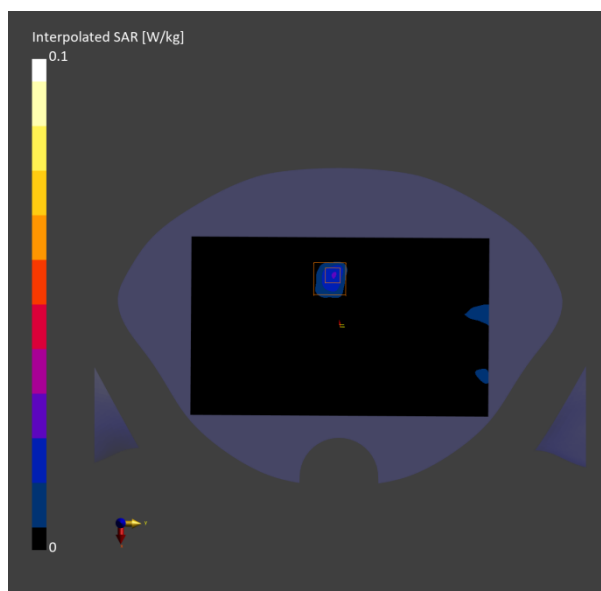
- Probe: EX3DV4 - SN7833; ConvF(5.61, 6.4, 6.07); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.019 W/kg; SAR (10g) = 0.007 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.011 W/kg; SAR (10g) = 0.002 W/kg;

Date: 2024/03/12

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 42, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 42840****Measurement Report for SRM955**

Communication System: Band 42; Frequency: 3525.000, BACK

Medium: HSL. Medium parameters used: $f = 3525.000$ MHz; $\sigma = 2.74$ S/m; $\epsilon_r = 39.1$

DASY8 Configuration:

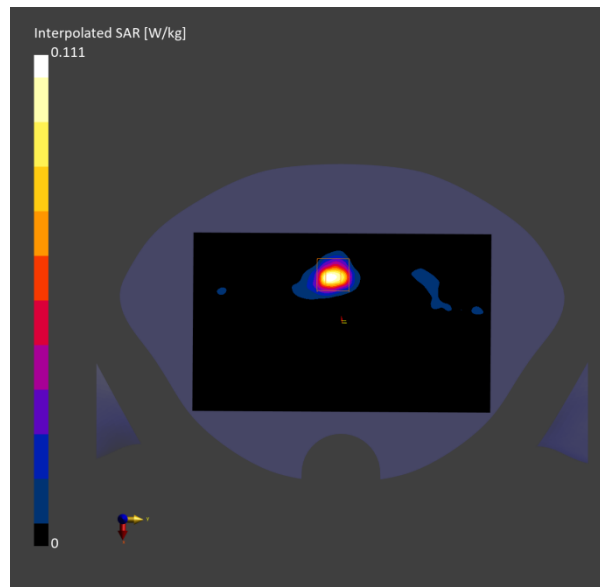
- Probe: EX3DV4 - SN7833; ConvF(5.61, 6.4, 6.07); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.077 W/kg; SAR (10g) = 0.026 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.078 W/kg; SAR (10g) = 0.025 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 43, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 44340****Measurement Report for SRM955**

Communication System: Band 43; Frequency: 3675.000, CHEEK

Medium: HSL. Medium parameters used: $f = 3675.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.9$

DASY8 Configuration:

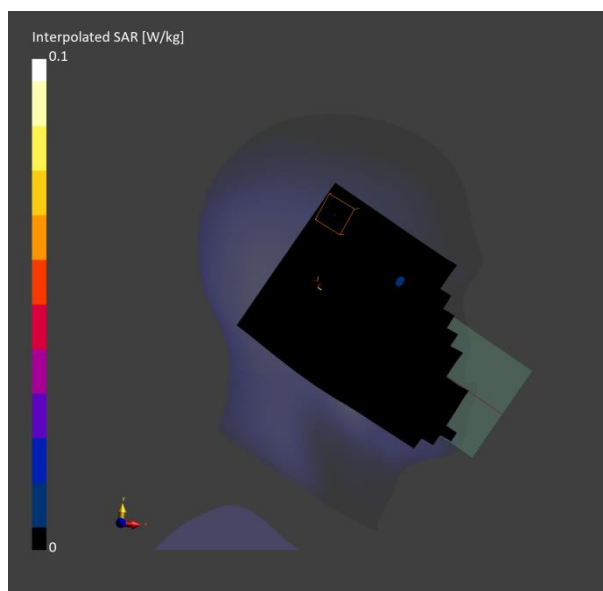
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.006 W/kg; SAR (10g) = 0.002 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = -0.09 dB

SAR (1g) = 0.006 W/kg; SAR (10g) = 0.002 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 43, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 44340****Measurement Report for SRM955**

Communication System: Band 43; Frequency: 3675.000, BACK

Medium: HSL. Medium parameters used: $f = 3675.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.9$

DASY8 Configuration:

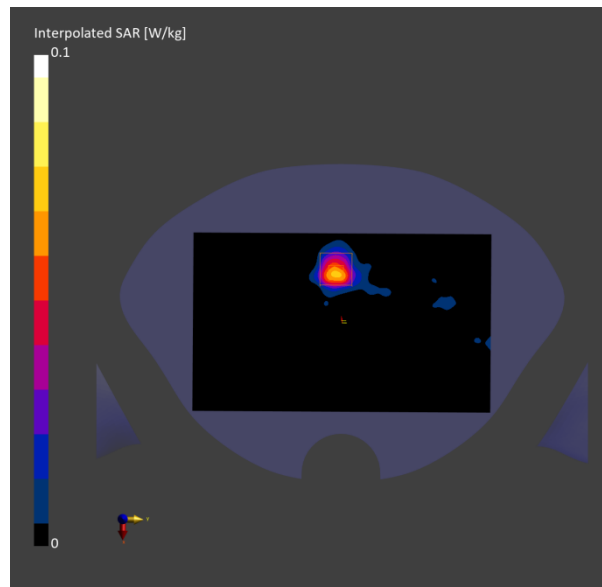
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.051 W/kg; SAR (10g) = 0.019 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.045 W/kg; SAR (10g) = 0.015 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 43, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 44340****Measurement Report for SRM955**

Communication System: Band 43; Frequency: 3675.000, BACK

Medium: HSL. Medium parameters used: $f = 3675.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 38.9$

DASY8 Configuration:

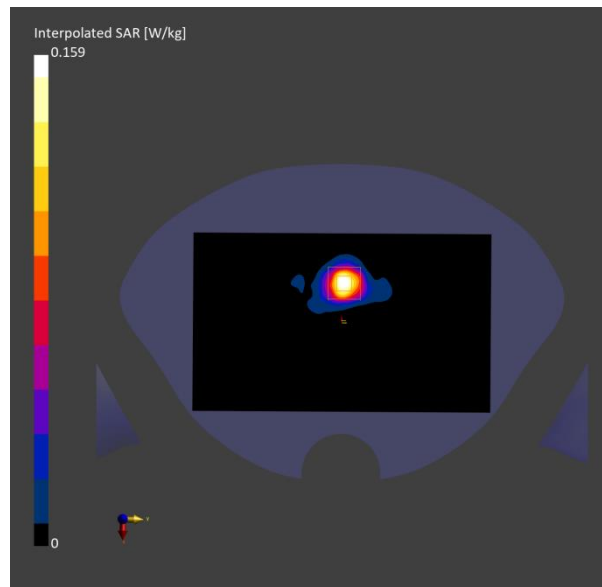
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.116 W/kg; SAR (10g) = 0.044 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.040 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 48, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 55990****Measurement Report for SRM955**

Communication System: Band 48; Frequency: 3625.000, CHEEK

Medium: HSL. Medium parameters used: $f = 3625.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

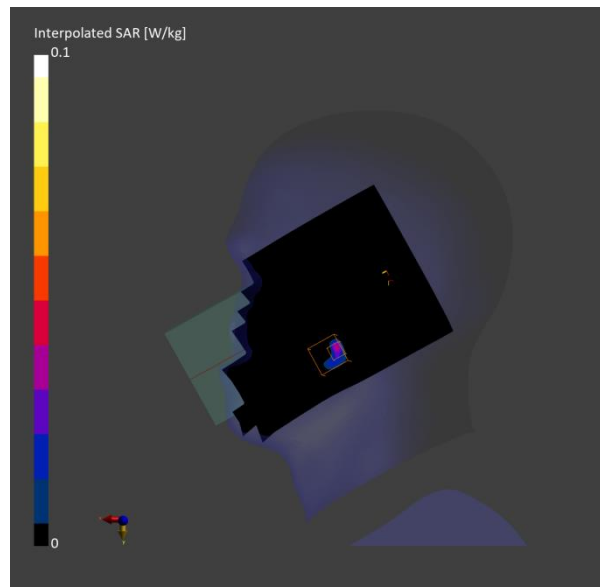
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.004 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 3.7 mm x 3.7 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.019 W/kg; SAR (10g) = 0.003 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 48, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 55990****Measurement Report for SRM955**

Communication System: Band 48; Frequency: 3625.000, BACK

Medium: HSL. Medium parameters used: $f = 3625.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

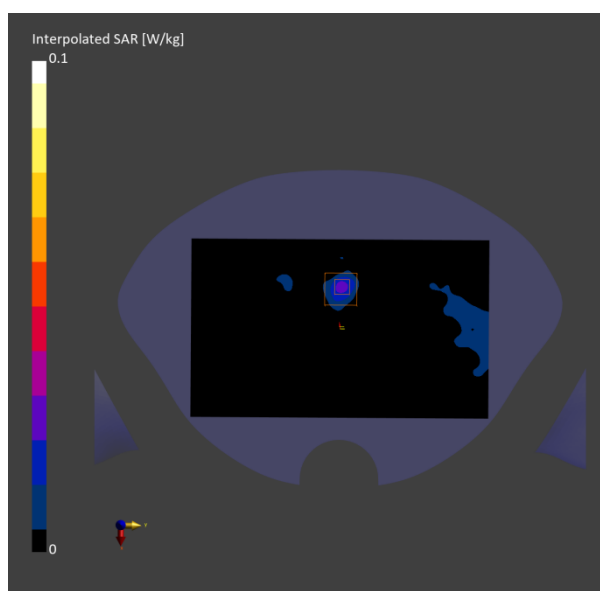
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.021 W/kg; SAR (10g) = 0.007 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.015 W/kg; SAR (10g) = 0.004 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 48, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 55990****Measurement Report for SRM955**

Communication System: Band 48; Frequency: 3625.000, BACK

Medium: HSL. Medium parameters used: $f = 3625.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

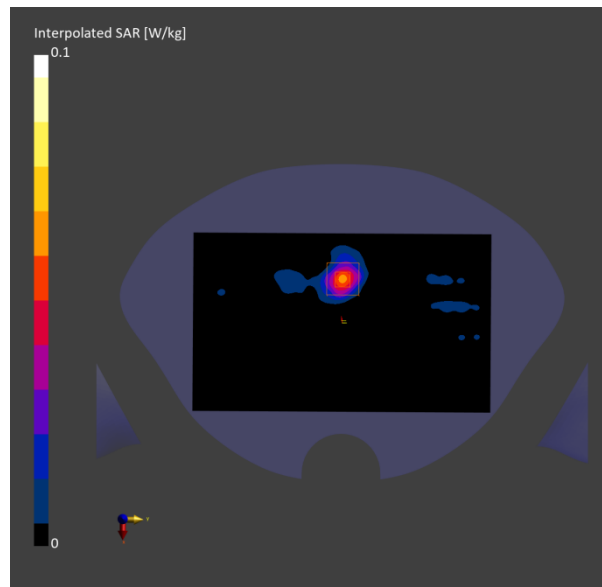
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.044 W/kg; SAR (10g) = 0.016 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.033 W/kg; SAR (10g) = 0.009 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 132322****Measurement Report for SRM955**

Communication System: Band 66; Frequency: 1745.000, CHEEK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

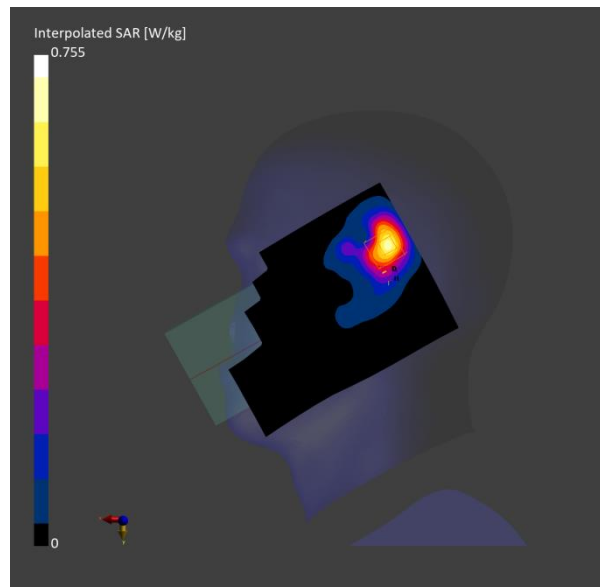
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.8 mm x 5.8 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.773 W/kg; SAR (10g) = 0.372 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 132322****Measurement Report for SRM955**

Communication System: Band 66; Frequency: 1745.000, BACK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

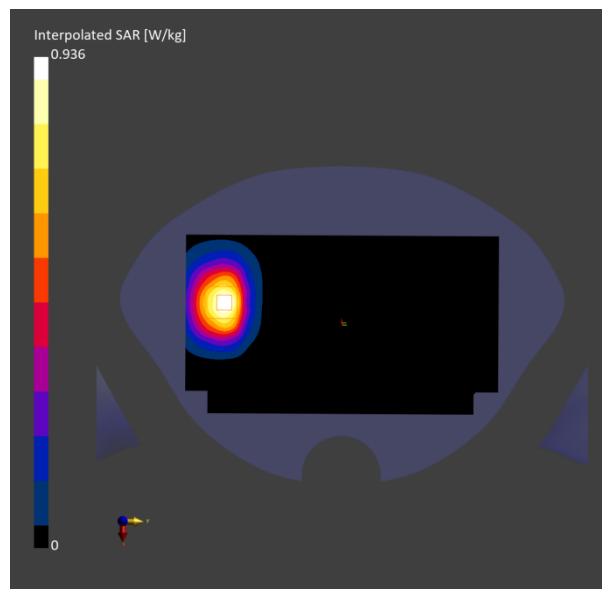
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.357 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.362 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 132322****Measurement Report for SRM955**

Communication System: Band 66; Frequency: 1745.000, BACK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

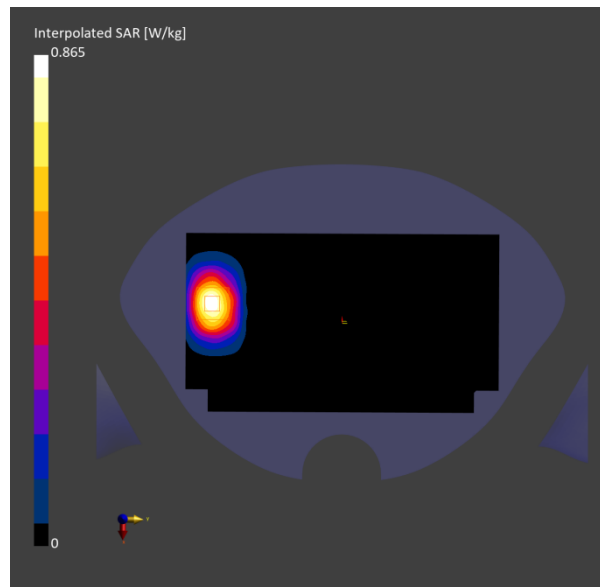
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.572 W/kg; SAR (10g) = 0.303 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.583 W/kg; SAR (10g) = 0.315 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 132572****Measurement Report for SRM955**

Communication System: Band 66; Frequency: 1770.000, BACK

Medium: HSL. Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

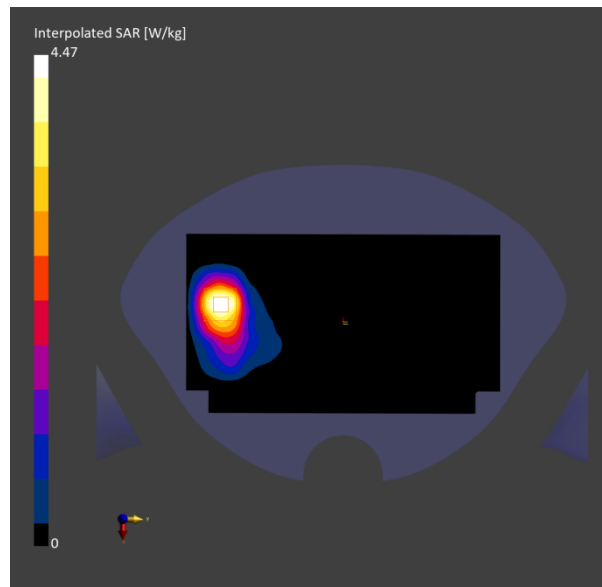
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.76 W/kg; SAR (10g) = 2.08 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 4.86 W/kg; SAR (10g) = 2.29 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 71, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 133322****Measurement Report for SRM955**

Communication System: Band 71; Frequency: 683.000, CHEEK

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

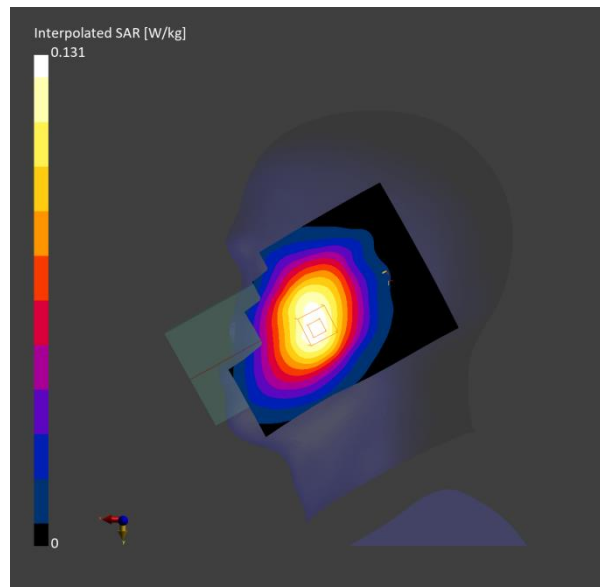
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.081 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.113 W/kg; SAR (10g) = 0.091 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 71, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 133322****Measurement Report for SRM955**

Communication System: Band 71; Frequency: 683.000, BACK

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

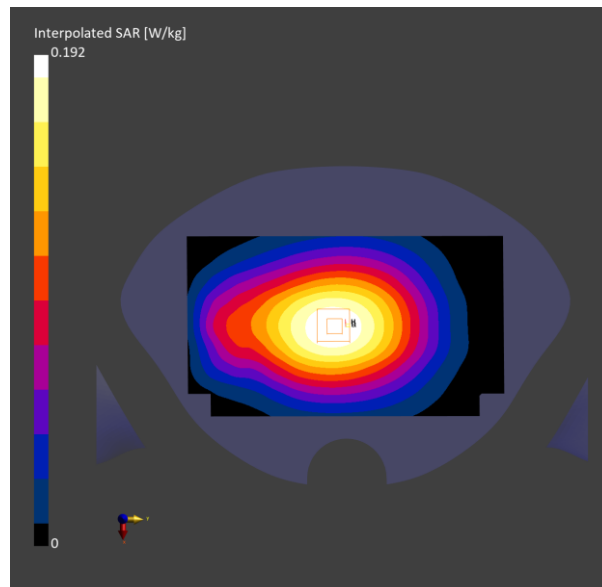
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.171 W/kg; SAR (10g) = 0.122 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.137 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**Band 71, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO,
Channel 133322****Measurement Report for SRM955**

Communication System: Band 71; Frequency: 683.000, BACK

Medium: HSL. Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

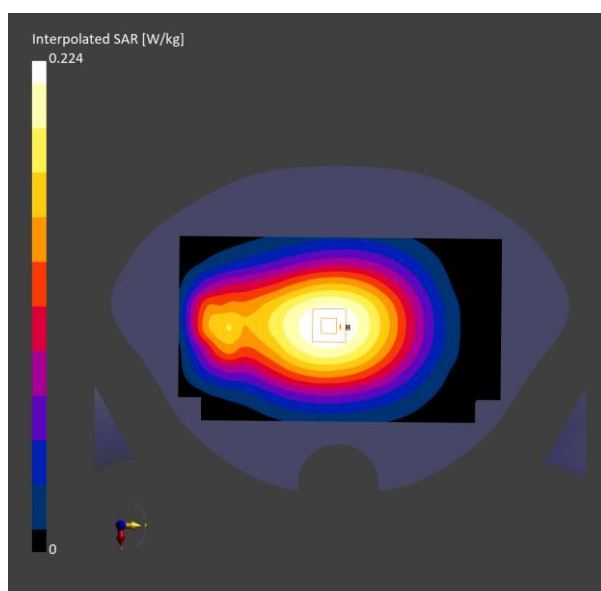
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.142 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.197 W/kg; SAR (10g) = 0.153 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n5, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 167300**Measurement Report for SRM955**

Communication System: Band n5; Frequency: 836.500, CHEEK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

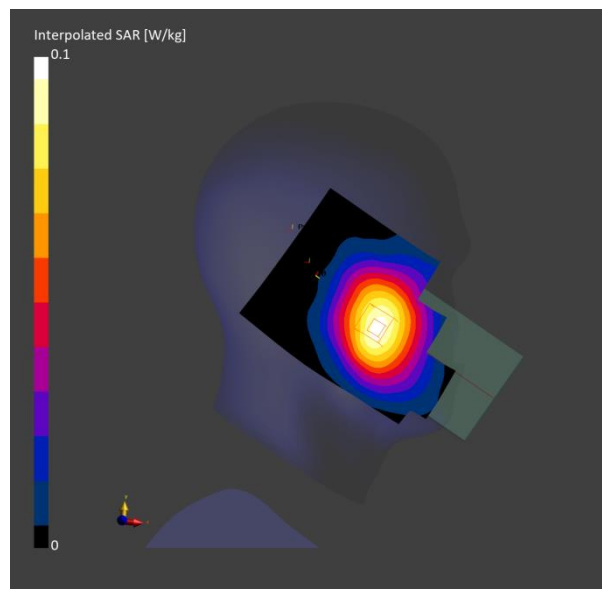
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.084 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.089 W/kg; SAR (10g) = 0.070 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n5, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 167300**Measurement Report for SRM955**

Communication System: Band n5; Frequency: 836.500, BACK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

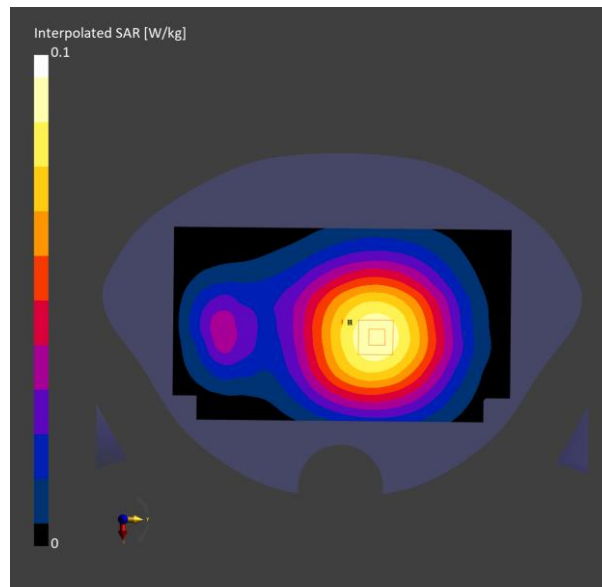
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.080 W/kg; SAR (10g) = 0.056 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.084 W/kg; SAR (10g) = 0.064 W/kg;

Date: 2024/02/24

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n5, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 167300**Measurement Report for SRM955**

Communication System: Band n5; Frequency: 836.500, BACK

Medium: HSL. Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.6$

DASY8 Configuration:

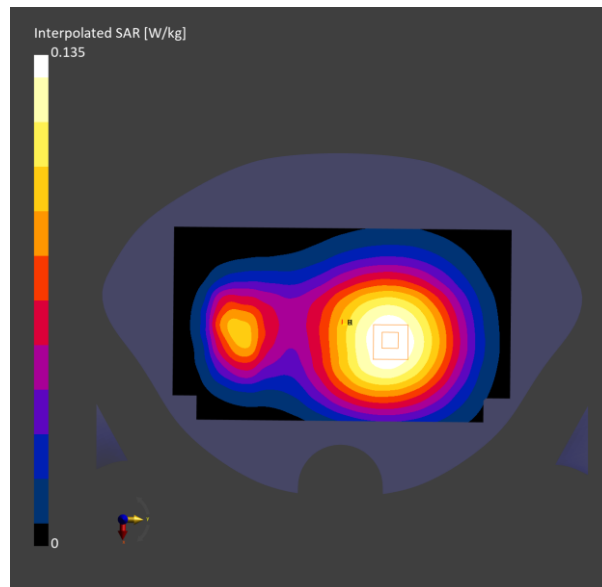
- Probe: EX3DV4 - SN7833; ConvF(7.57, 8.62, 8.04); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.119 W/kg; SAR (10g) = 0.084 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.126 W/kg; SAR (10g) = 0.096 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n12, 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 141500**Measurement Report for SRM955**

Communication System: Band n12; Frequency: 707.500, CHEEK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

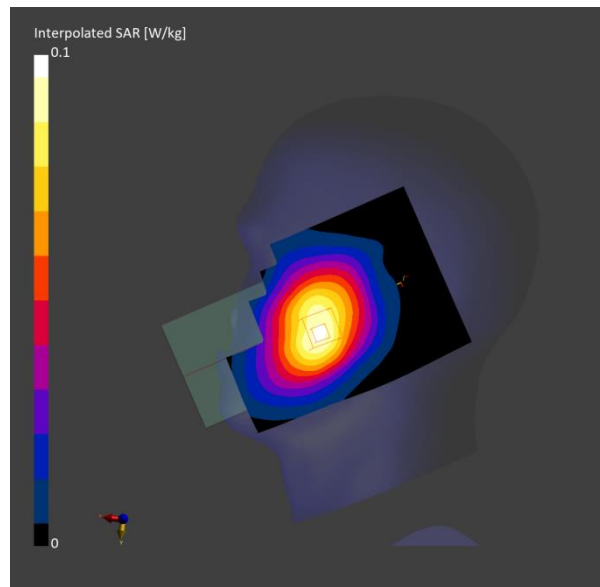
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.083 W/kg; SAR (10g) = 0.058 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.086 W/kg; SAR (10g) = 0.068 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n12, 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 141500**Measurement Report for SRM955**

Communication System: Band n12; Frequency: 707.500, BACK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

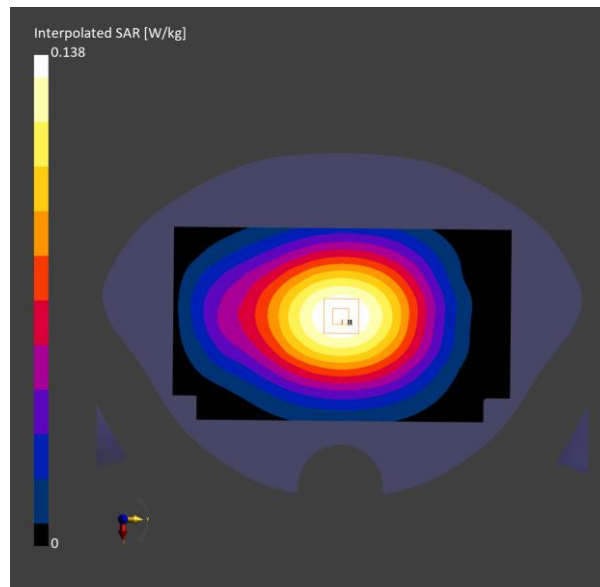
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.122 W/kg; SAR (10g) = 0.087 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.128 W/kg; SAR (10g) = 0.098 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n12, 5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 141500**Measurement Report for SRM955**

Communication System: Band n12; Frequency: 707.500, BACK

Medium: HSL. Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 44.0$

DASY8 Configuration:

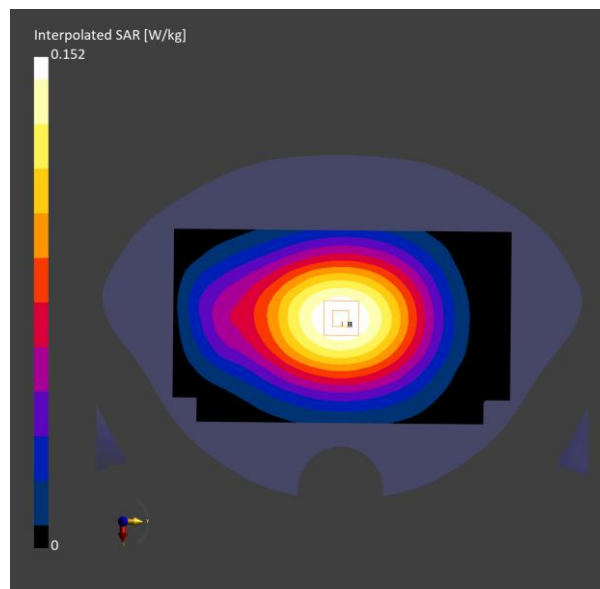
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.135 W/kg; SAR (10g) = 0.096 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.138 W/kg; SAR (10g) = 0.105 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n25, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 376500****Measurement Report for SRM955**

Communication System: Band n25; Frequency: 1882.500, CHEEK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

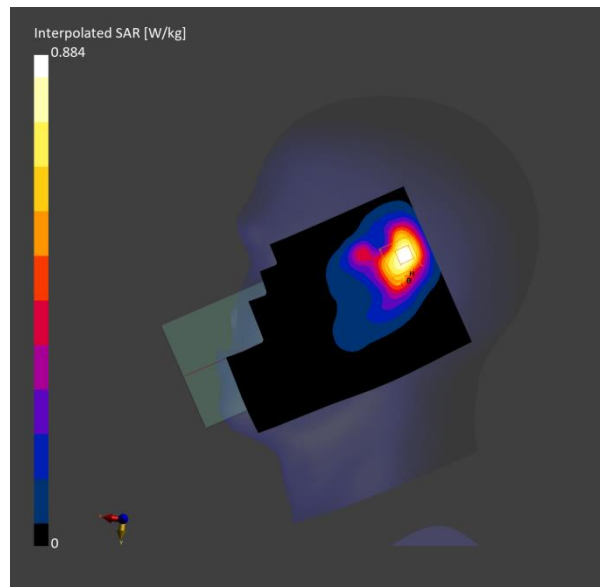
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.378 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.407 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n25, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 376500**Measurement Report for SRM955**

Communication System: Band n25; Frequency: 1882.500, BACK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

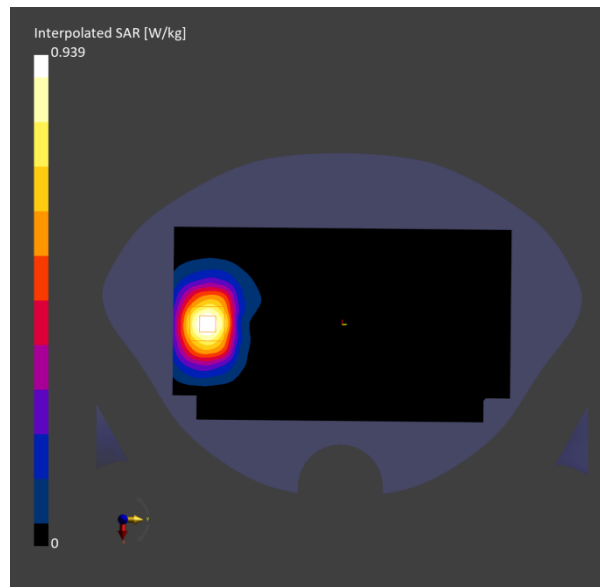
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.787 W/kg; SAR (10g) = 0.453 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.872 W/kg; SAR (10g) = 0.492 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n25, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 376500**Measurement Report for SRM955**

Communication System: Band n25; Frequency: 1882.500, BACK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

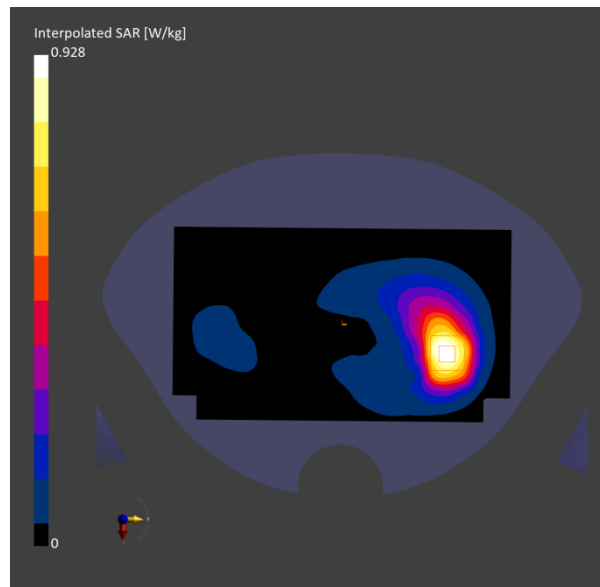
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.683 W/kg; SAR (10g) = 0.364 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.388 W/kg;

Date: 2024/02/29

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n25, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 376500**Measurement Report for Device**

Communication System: Band n25; Frequency: 1882.500, BACK

Medium: HSL. Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

DASY8 Configuration:

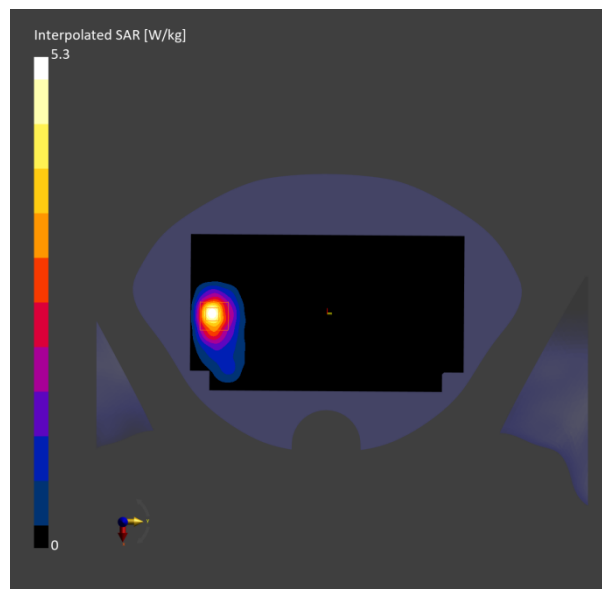
- Probe: EX3DV4 - SN7833; ConvF(6.39, 7.28, 6.93); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.95 W/kg; SAR (10g) = 1.96 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.3 mm x 5.3 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 5.05 W/kg; SAR (10g) = 2.21 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n30, 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 462000****Measurement Report for SRM955**

Communication System: Band n30; Frequency: 2310.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

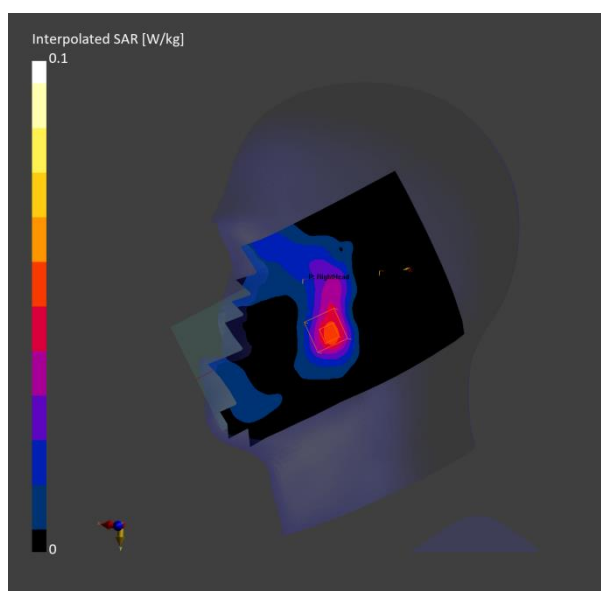
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.044 W/kg; SAR (10g) = 0.023 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.049 W/kg; SAR (10g) = 0.027 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n30, 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 462000**Measurement Report for SRM955**

Communication System: Band n30; Frequency: 2310.000, BACK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

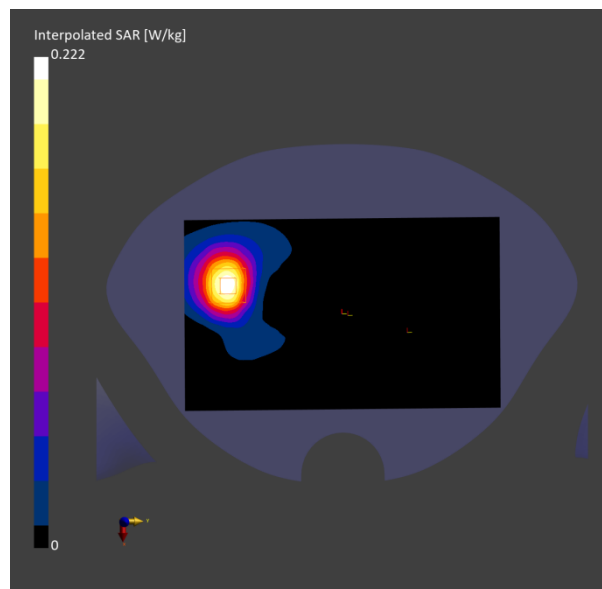
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.094 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.097 W/kg;

Date: 2024/03/05

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n30, 5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 462000**Measurement Report for SRM955**

Communication System: Band n30; Frequency: 2310.000, BACK

Medium: HSL. Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.2$

DASY8 Configuration:

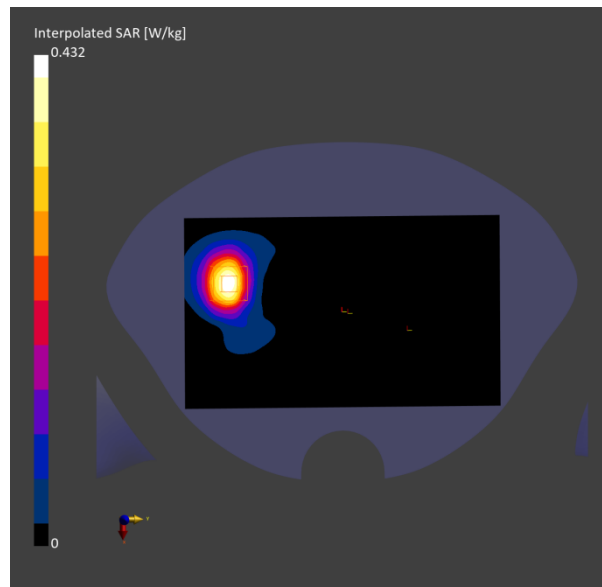
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.92, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.342 W/kg; SAR (10g) = 0.174 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.338 W/kg; SAR (10g) = 0.175 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 518598****Measurement Report for SRM955**

Communication System: Band n41; Frequency: 2592.990, CHEEK

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

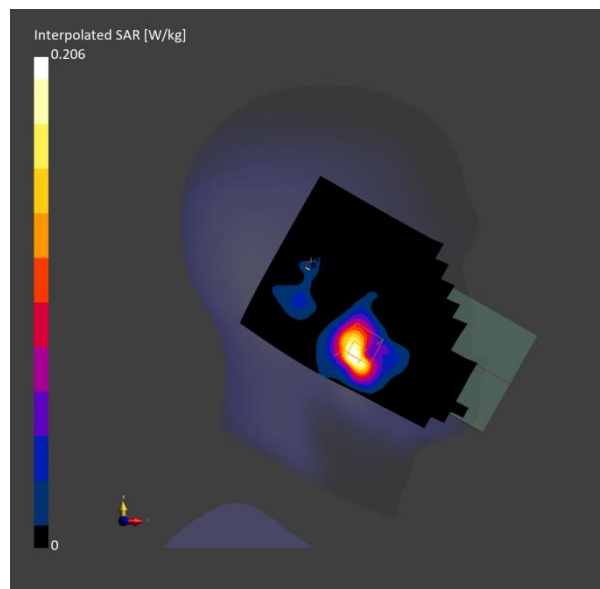
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.153 W/kg; SAR (10g) = 0.073 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.069 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 518598****Measurement Report for SRM955**

Communication System: Band n41; Frequency: 2592.990, BACK

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

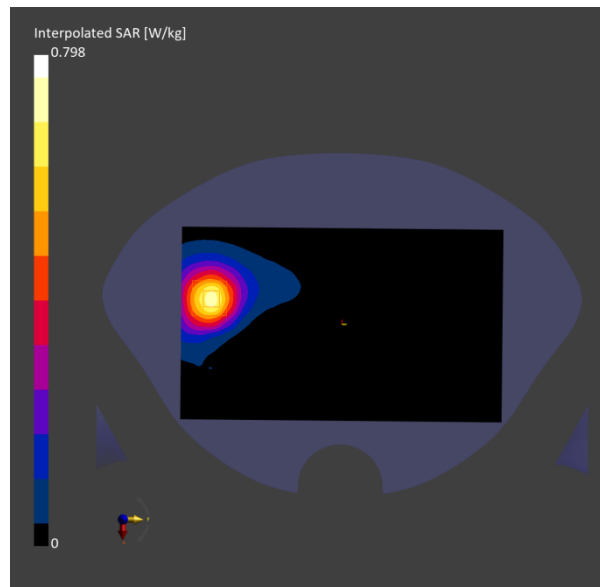
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.556 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.543 W/kg; SAR (10g) = 0.280 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 518598****Measurement Report for SRM955**

Communication System: Band n41; Frequency: 2592.990, EDGE BOTTOM

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

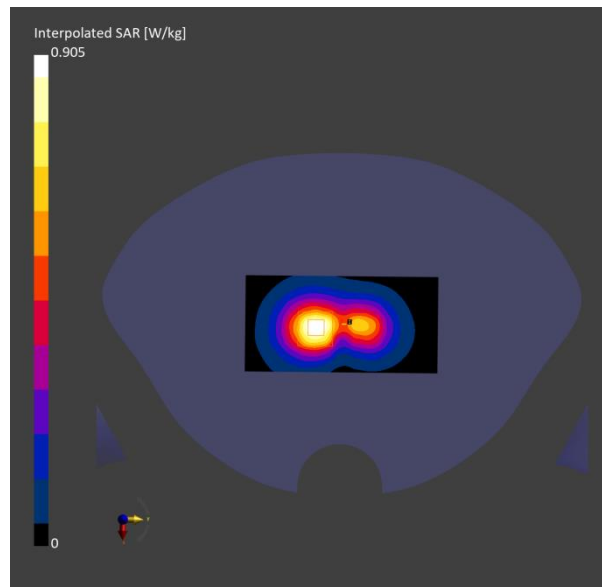
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.248 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.520 W/kg; SAR (10g) = 0.257 W/kg;

Date: 2024/03/09

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n41, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 518598****Measurement Report for SRM955**

Communication System: Band n41; Frequency: 2592.990, BACK

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.8$

DASY8 Configuration:

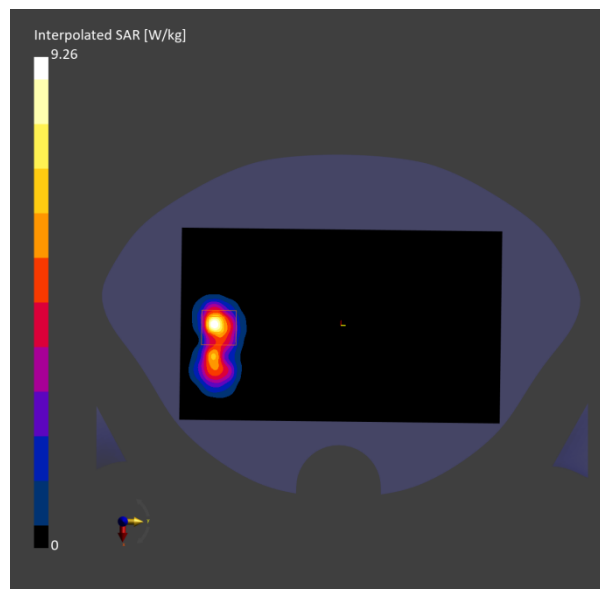
- Probe: EX3DV4 - SN7833; ConvF(6.11, 6.91, 6.58); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.28 W/kg; SAR (10g) = 2.48 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 6.67 W/kg; SAR (10g) = 2.43 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n66, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 349000**Measurement Report for SRM955**

Communication System: Band n66; Frequency: 1745.000, CHEEK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

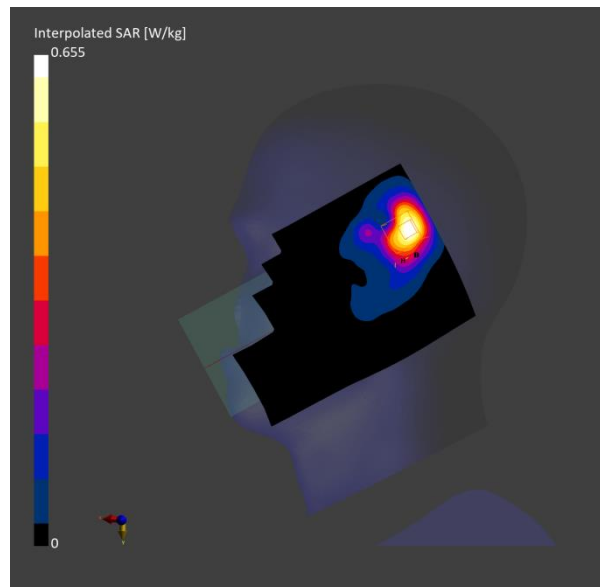
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.518 W/kg; SAR (10g) = 0.277 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.8 mm x 5.8 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.289 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n66, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 349000**Measurement Report for SRM955**

Communication System: Band n66; Frequency: 1745.000, BACK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

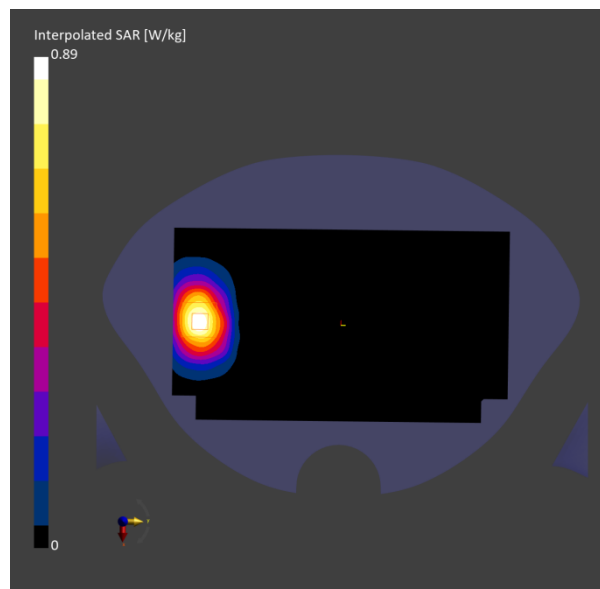
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.624 W/kg; SAR (10g) = 0.358 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.596 W/kg; SAR (10g) = 0.365 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n66, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 349000**Measurement Report for SRM955**

Communication System: Band n66; Frequency: 1745.000, BACK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

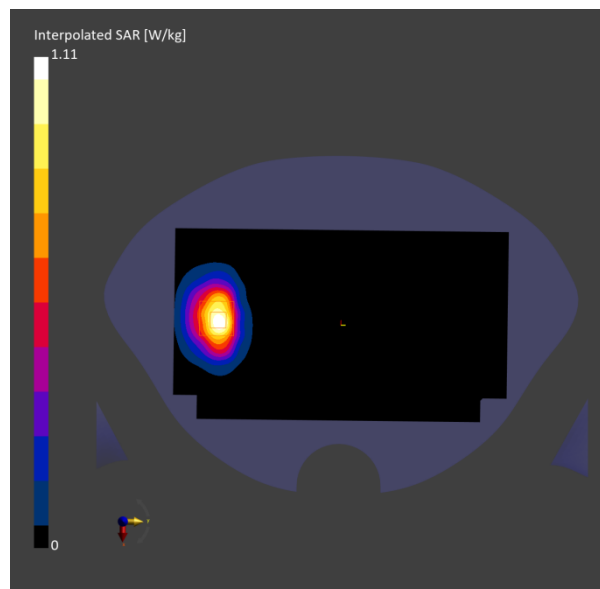
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.442 W/kg; SAR (10g) = 0.236 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.446 W/kg; SAR (10g) = 0.239 W/kg;

Date: 2024/02/26

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n66, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 349000**Measurement Report for SRM955**

Communication System: Band n66; Frequency: 1745.000, BACK

Medium: HSL. Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

DASY8 Configuration:

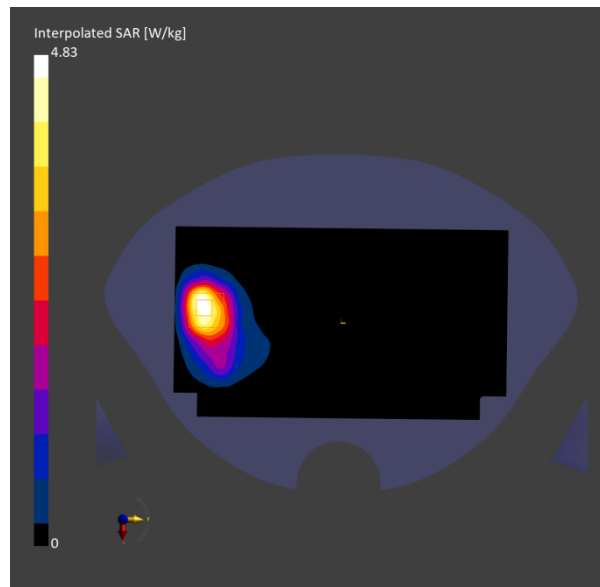
- Probe: EX3DV4 - SN7833; ConvF(7.08, 8.09, 7.65); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.92 W/kg; SAR (10g) = 2.16 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 5.17 W/kg; SAR (10g) = 2.41 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n71, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 136100**Measurement Report for SRM955**

Communication System: Band n71; Frequency: 680.500, CHEEK

Medium: HSL. Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

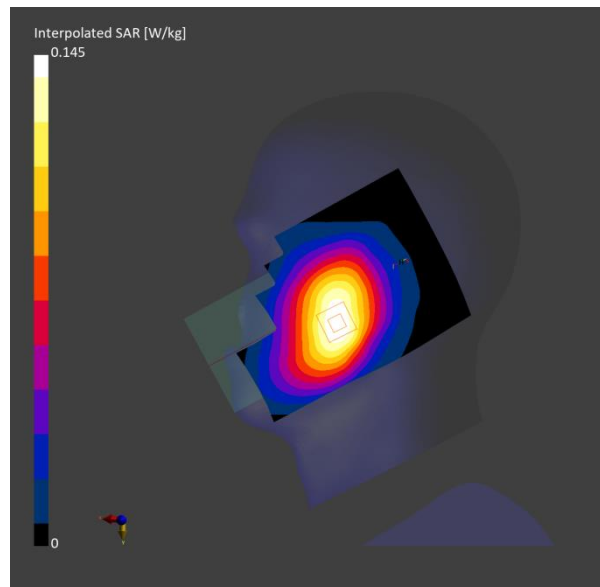
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.129 W/kg; SAR (10g) = 0.090 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.135 W/kg; SAR (10g) = 0.106 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n71, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 136100**Measurement Report for SRM955**

Communication System: Band n71; Frequency: 680.500, BACK

Medium: HSL. Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

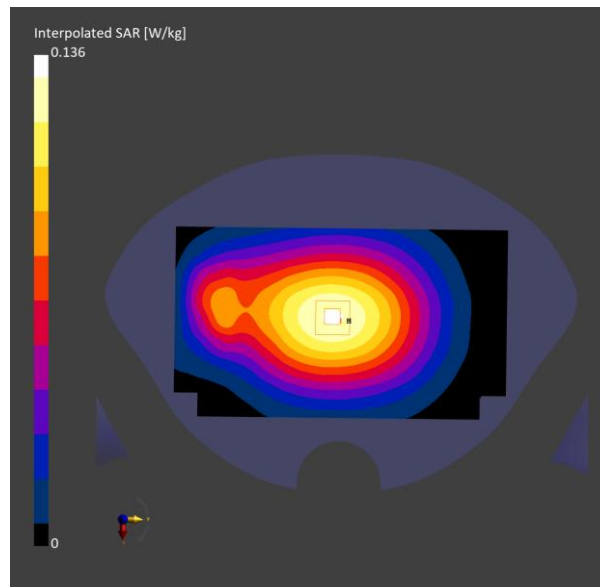
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.112 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.117 W/kg; SAR (10g) = 0.090 W/kg;

Date: 2024/02/22

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n71, 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO, Channel 136100**Measurement Report for SRM955**

Communication System: Band n71; Frequency: 680.500, BACK

Medium: HSL. Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 44.1$

DASY8 Configuration:

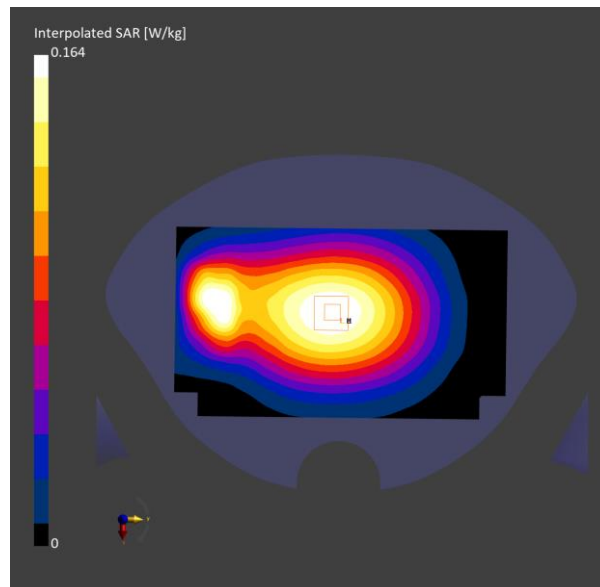
- Probe: EX3DV4 - SN7833; ConvF(7.83, 8.96, 8.55); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.104 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.153 W/kg; SAR (10g) = 0.118 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n48, 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 641666**Measurement Report for SRM955**

Communication System: Band n48; Frequency: 3624.985, CHEEK

Medium: HSL. Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

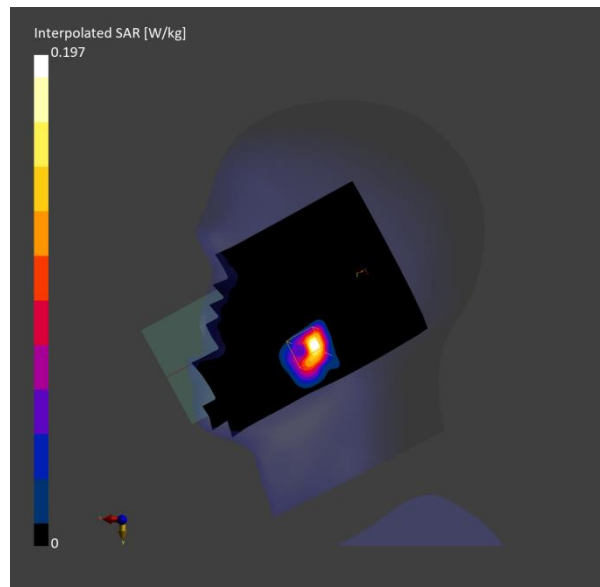
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.050 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.135 W/kg; SAR (10g) = 0.054 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n48, 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 641666**Measurement Report for SRM955**

Communication System: Band n48; Frequency: 3624.985, BACK

Medium: HSL. Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

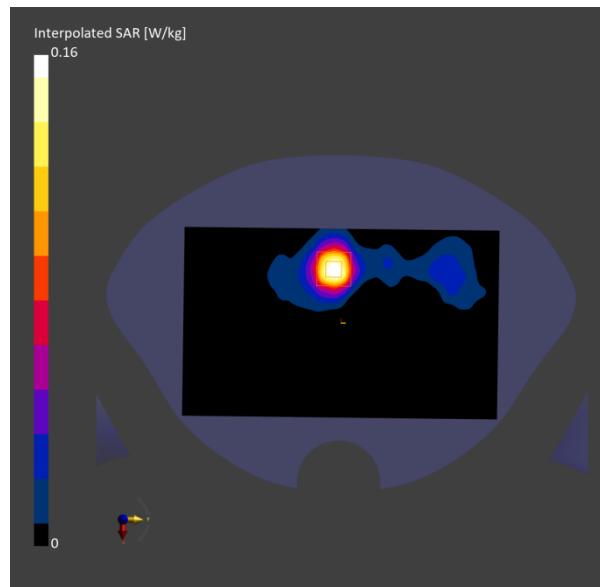
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.121 W/kg; SAR (10g) = 0.051 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.045 W/kg;

Date: 2024/03/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n48, 5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz) RBPosition:Mid AntennaCfg:SISO, Channel 641666**Measurement Report for SRM955**

Communication System: Band n48; Frequency: 3624.985, BACK

Medium: HSL. Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.0$

DASY8 Configuration:

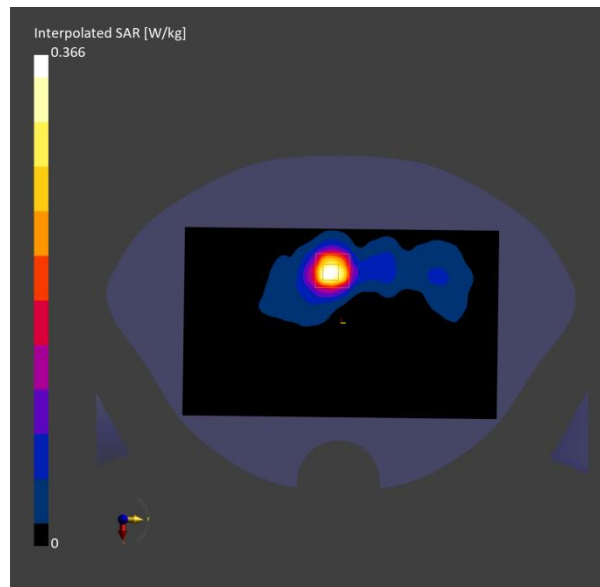
- Probe: EX3DV4 - SN7833; ConvF(5.65, 6.46, 6.15); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.272 W/kg; SAR (10g) = 0.108 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.258 W/kg; SAR (10g) = 0.097 W/kg;

Date: 2024/03/12

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 633334****Measurement Report for SRM955**

Communication System: Band n77; Frequency: 3500.010, CHEEK

Medium: HSL. Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

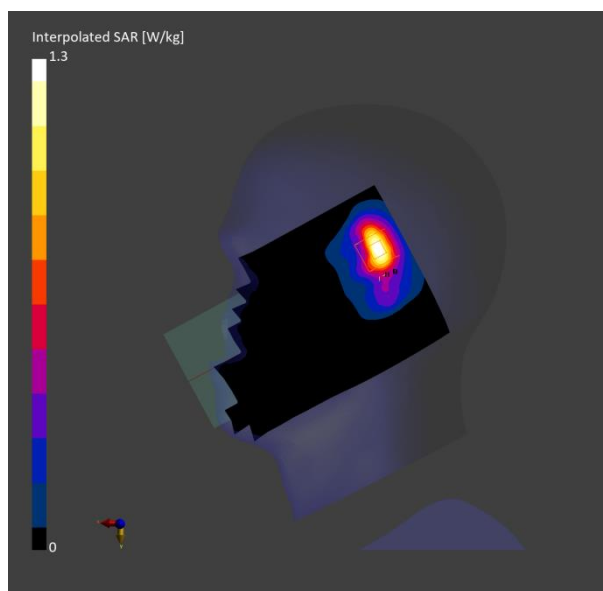
- Probe: EX3DV4 - SN7833; ConvF(5.61, 6.4, 6.07); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.387 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.813 W/kg; SAR (10g) = 0.361 W/kg;

Date: 2024/03/18

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 656000****Measurement Report for SRM955**

Communication System: Band n77; Frequency: 3840.000, BACK

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 38.7$

DASY8 Configuration:

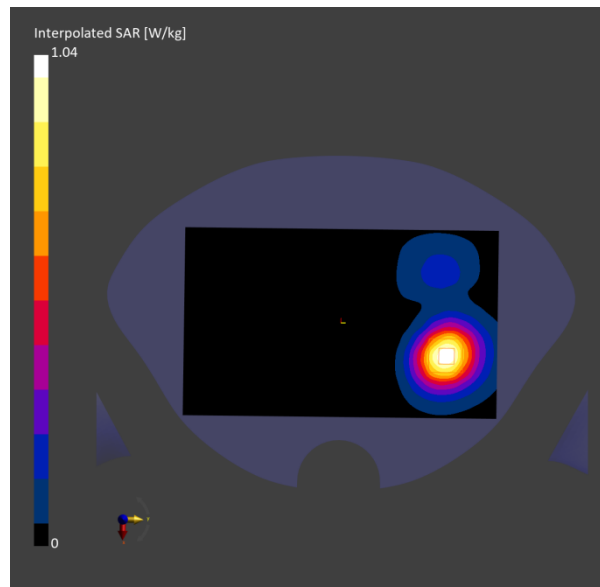
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.91, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.791 W/kg; SAR (10g) = 0.361 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.372 W/kg;

Date: 2024/03/18

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 656000****Measurement Report for SRM955**

Communication System: Band n77; Frequency: 3840.000, BACK

Medium: HSL. Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 38.7$

DASY8 Configuration:

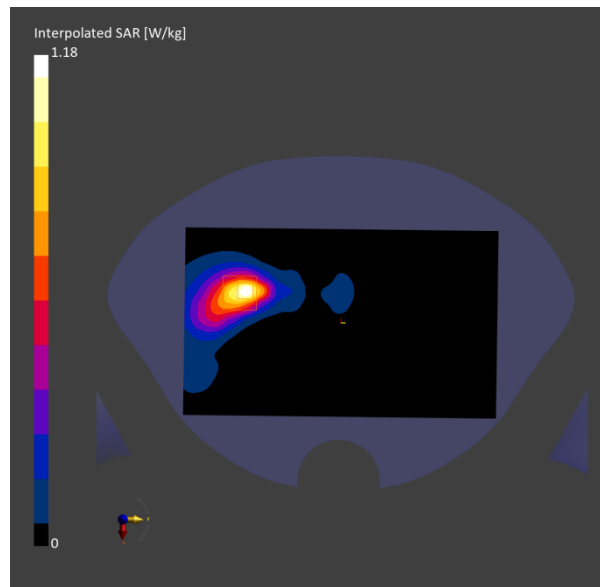
- Probe: EX3DV4 - SN7833; ConvF(6.07, 6.91, 6.56); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.341 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.847 W/kg; SAR (10g) = 0.350 W/kg;

Date: 2024/03/12

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:Mid**AntennaCfg:SISO, Channel 633334****Measurement Report for SRM955**

Communication System: Band n77; Frequency: 3500.010, BACK

Medium: HSL. Medium parameters used: $f = 3500.010$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 39.2$

DASY8 Configuration:

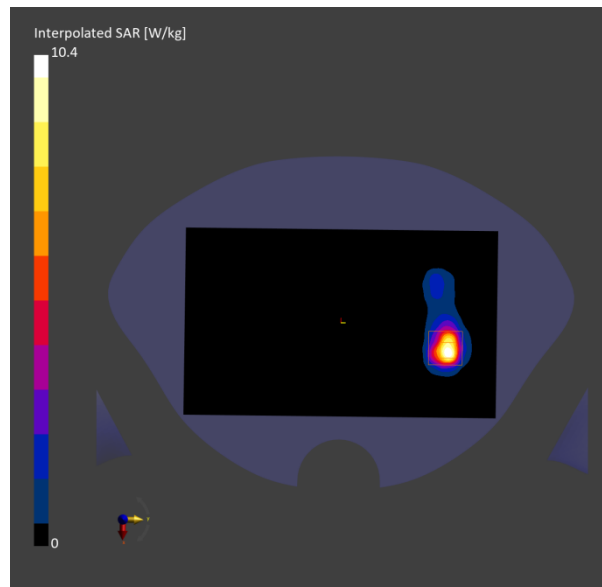
- Probe: EX3DV4 - SN7833; ConvF(5.61, 6.4, 6.07); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.18 W/kg; SAR (10g) = 2.51 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 7.58 W/kg; SAR (10g) = 2.43 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 1
Measurement Report for SRM955**

Communication System: WLAN 2.4GHz; Frequency: 2412.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

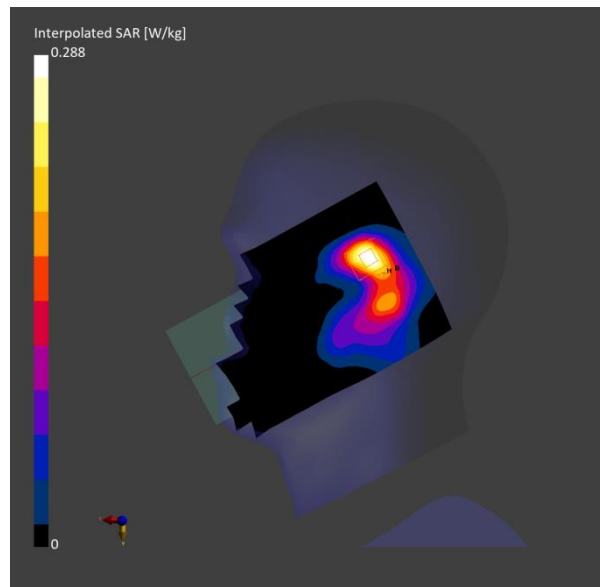
- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.226 W/kg; SAR (10g) = 0.114 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.230 W/kg; SAR (10g) = 0.120 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 1
Measurement Report for SRM955**

Communication System: WLAN 2.4GHz; Frequency: 2412.000, BACK

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 41.0$ **DASY8 Configuration:**

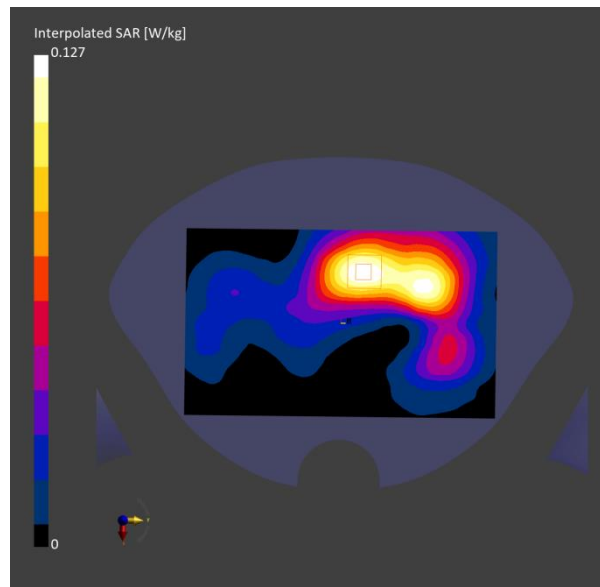
- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.103 W/kg; SAR (10g) = 0.059 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.107 W/kg; SAR (10g) = 0.061 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 1
Measurement Report for SRM955**

Communication System: WLAN 2.4GHz; Frequency: 2412.000, BACK

Medium: HSL. Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 41.0$

DASY8 Configuration:

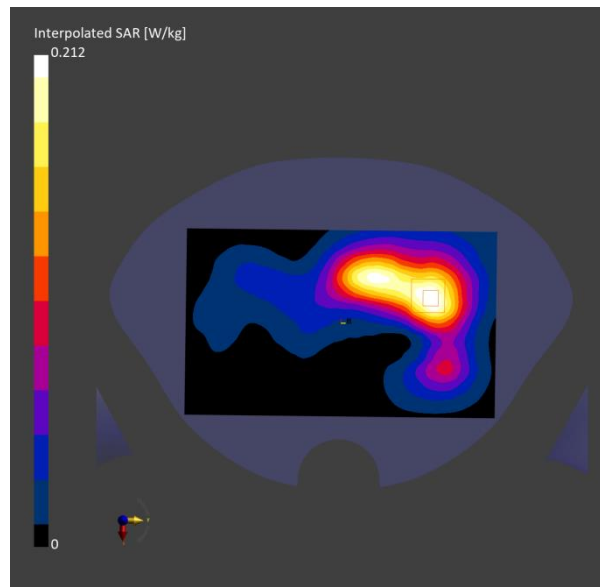
- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-08-07
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.173 W/kg; SAR (10g) = 0.097 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.175 W/kg; SAR (10g) = 0.096 W/kg;

Date: 2024/03/20

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 60
Measurement Report for SRM955**

Communication System: WLAN 5GHz; Frequency: 5300.000, CHEEK

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$

DASY8 Configuration:

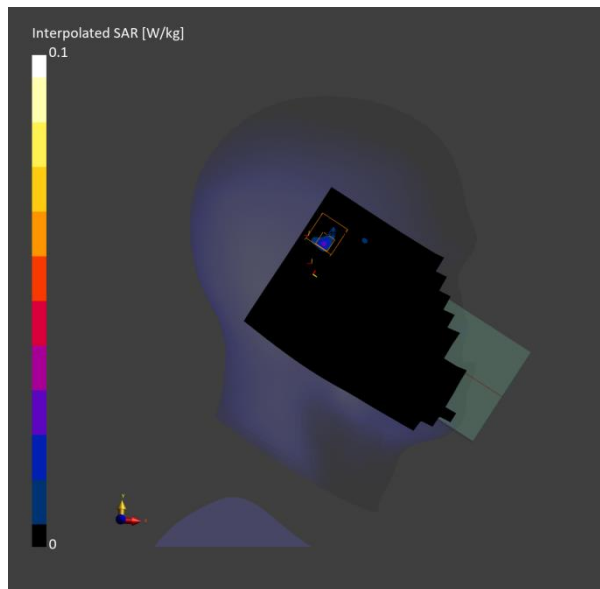
- Probe: EX3DV4 - SN7833; ConvF(5.02, 5.7, 5.39); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.012 W/kg; SAR (10g) = 0.002 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm

Power Drift = -0.06 dB

SAR (1g) = 0.015 W/kg; SAR (10g) = 0.04 W/kg;

Date: 2024/03/20

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 60
Measurement Report for SRM955**

Communication System: WLAN 5GHz; Frequency: 5300.000, BACK

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$ **DASY8 Configuration:**

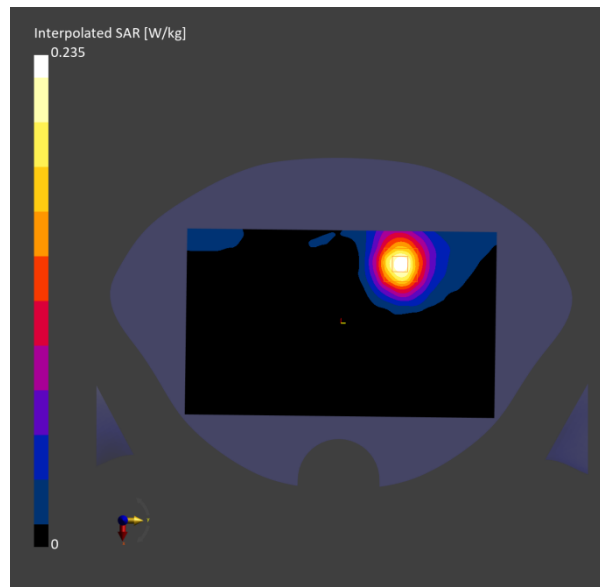
- Probe: EX3DV4 - SN7833; ConvF(5.02, 5.7, 5.39); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.070 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.176 W/kg; SAR (10g) = 0.070 W/kg;

Date: 2024/03/20

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 40**Measurement Report for SRM955**

Communication System: WLAN 5GHz; Frequency: 5200.000, BACK

Medium: HSL. Medium parameters used: $f = 5200.000$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 36.3$

DASY8 Configuration:

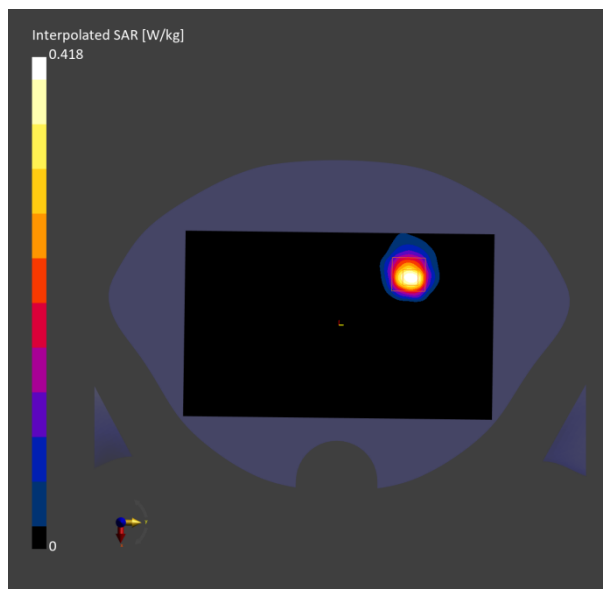
- Probe: EX3DV4 - SN7833; ConvF(5.16, 5.87, 5.61); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.297 W/kg; SAR (10g) = 0.102 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.328 W/kg; SAR (10g) = 0.104 W/kg;

Date: 2024/03/20

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**WLAN 5GHz, IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps), Channel 60
Measurement Report for SRM955**

Communication System: WLAN 5GHz; Frequency: 5300.000, BACK

Medium: HSL. Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$

DASY8 Configuration:

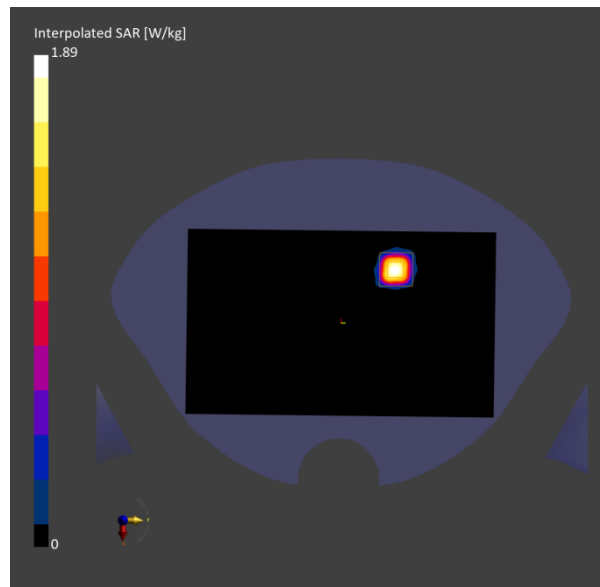
- Probe: EX3DV4 - SN7833; ConvF(5.02, 5.7, 5.39); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.38 W/kg; SAR (10g) = 0.399 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 2.20 W/kg; SAR (10g) = 0.469 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 39
Measurement Report for SRM955**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000, CHEEK

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$ **DASY8 Configuration:**

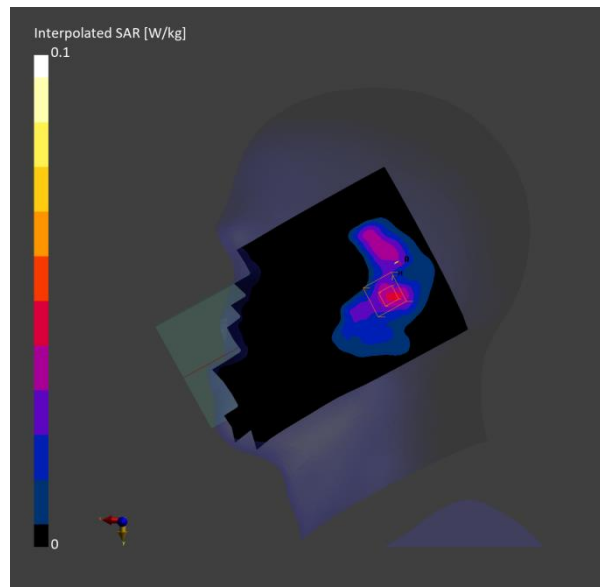
- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.034 W/kg; SAR (10g) = 0.017 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.034 W/kg; SAR (10g) = 0.016 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 39
Measurement Report for SRM955**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000, BACK

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$ **DASY8 Configuration:**

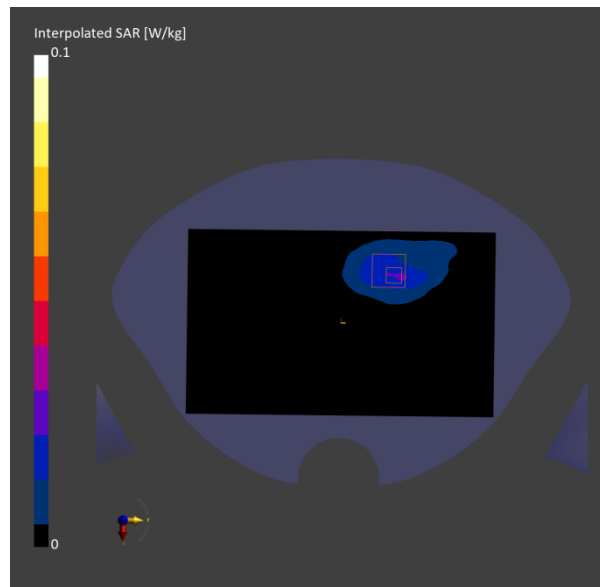
- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.011 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.01 W/kg;

Date: 2024/03/07

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

**ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 39
Measurement Report for SRM955**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000, BACK

Medium: HSL. Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$ **DASY8 Configuration:**

- Probe: EX3DV4 - SN7833; ConvF(5.96, 6.77, 6.44); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.4.2524

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.033 W/kg; SAR (10g) = 0.018 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.032 W/kg; SAR (10g) = 0.017 W/kg;