

FCC/ISED TEST REPORT

For

APPCON WIRELESS TECHNOLOGY LIMITED

LoRa module

Test Model: RF1276T

Prepared for : APPCON WIRELESS TECHNOLOGY LIMITED
Address : 28#, Longjin road, Xili zone, Nanshan District, Shenzhen, China
518000

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 15, 2018
Number of tested samples : 1
Serial number : Prototype
Date of Test : March 15, 2018~April 19, 2018
Date of Report : April 23, 2018

FCC/ISED TEST REPORT
FCC CFR 47 PART 15 C(15.249); RSS-210 Issue 9; RSS-Gen Issue 4

Report Reference No. : **LCS180301006AE**

Date of Issue : April 23, 2018

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing method

Applicant's Name : **APPCON WIRELESS TECHNOLOGY LIMITED**

Address : 28#, Longjin road, Xili zone, Nanshan District, Shenzhen, China
518000

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249) / ANSI C63.10: 2013
 RSS-210 Issue 9 / RSS-Gen Issue 4

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **LoRa module**

Trade Mark : Appconwireless

Test Model..... : RF1276T

Ratings : DC 3.3~5.5V

Result : **Positive**

Compiled by:

Leo Lee

Supervised by:

Dick Su

Approved by:

Gavin Liang

Leo Lee/ File administrators

Dick Su/ Technique principal

Gavin Liang/ Manager

Revision History

Revision	Issue Date	Revisions	Revised By
000	April 23, 2018	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS	6
1.3. EXTERNAL I/O CABLE	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
1.6. MEASUREMENT UNCERTAINTY	7
1.7. DESCRIPTION OF TEST MODES	7
2. TEST METHODOLOGY	8
2.1. EUT CONFIGURATION	8
2.2. EUT EXERCISE	8
2.3. GENERAL TEST PROCEDURES	8
3. SYSTEM TEST CONFIGURATION.....	9
3.1. JUSTIFICATION	9
3.2. EUT EXERCISE SOFTWARE	9
3.3. SPECIAL ACCESSORIES	9
3.4. BLOCK DIAGRAM/SCHEMATICS.....	9
3.5. EQUIPMENT MODIFICATIONS	9
3.6. TEST SETUP	9
4. SUMMARY OF TEST RESULTS.....	10
5. TEST RESULT.....	11
5.1. RADIATED EMISSION MEASUREMENT.....	11
5.2. 20 DB BANDWIDTH MEASUREMENT	26
5.3. AC POWER LINE CONDUCTED EMISSIONS	29
5.4. ANTENNA REQUIREMENTS.....	31
6. LIST OF MEASURING EQUIPMENTS.....	32
7. TEST SETUP PHOTOGRAPHS OF EUT.....	33
8. EXTERIOR PHOTOGRAPHS OF THE EUT.....	33
9. INTERIOR PHOTOGRAPHS OF THE EUT	33

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: LoRa module
Test Model	: RF1276T
Hardware version	: V2.0
Software version	: V2.9
Power Supply	: DC 3.3~5.5V
Frequency Range	: 902.5MHz~927.5MHz
Modulation Type	: LoRa
Channel Spacing	: 1MHz
Channel Number	: 26
Antenna Description	: Integral antenna, 3.0dBi(Max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
APPCON WIRELESS TECHNOLOGY LIMITED	Debug Board	/	/	VOC
ShenZhen SOY Technology Co., Ltd	SWITCHING ADAPTER	SUN-1200500	/	VOC

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
--	--	--

1.4. Description of Test Facility

FCC Registration Number. is 254912.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001
 NVLAP Registration Code is 600167-0

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel mode.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel mode.

***Note: Using a temporary antenna connector for the EUT when conducted measurements are performed.

Channel List & Frequency			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	902.5	14	915.5
2	903.5	15	916.5
3	904.5	16	917.5
4	905.5	17	918.5
5	906.5	18	919.5
6	907.5	19	920.5
7	908.5	20	921.5
8	909.5	21	922.5
9	910.5	22	923.5
10	911.5	23	924.5
11	912.5	24	925.5
12	913.5	25	926.5
13	914.5	26	927.5

Mode of Operations	Transmitting Frequency (MHz)
LoRa	902.5
	914.5
	927.5
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C and RSS-210 Issue 9, RSS-Gen Issue 4.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition by software (YL_800T.exe) provided by application.

3.3. Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	PC	Lenovo	Ideapad	A131101550	/	/	DOC
2	Power adapter	Lenovo	CPA-A090	36200414	1.00m	unshielded	DOC

3.4. Block Diagram/Schematics

Please refer to the related document.

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C; RSS-210 Issue 9; RSS-Gen Issue 4			
ISED Rules	FCC Rules	Description of Test	Result
RSS-210 (B.10) RSS-Gen	§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
RSS-210 (B.10)	§15.205, §15.249(d)	Emissions at Restricted Band	Compliant
RSS-Gen	§15.215	20dB Bandwidth & 99% Occupied Bandwidth	Compliant
RSS-Gen	§15.207(a)	AC Line Conducted Emissions	Compliant
RSS-Gen	§15.203	Antenna Requirements	Compliant

5. TEST RESULT

5.1. Radiated Emission Measurement

5.1.1. Standard Applicable

- 1). According to §15.249 (d) and RSS-210 B.10 (b): Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

- 2). According to §15.249 (a) and RSS-210 B.10 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	millivolts/meter	dBuV/m	microvolts/meter	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth

5.1.2. Measuring Instruments and Setting

Please refer to equipment's list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.1.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

Premeasurement:


--- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:


--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.1.4. Test Setup Layout

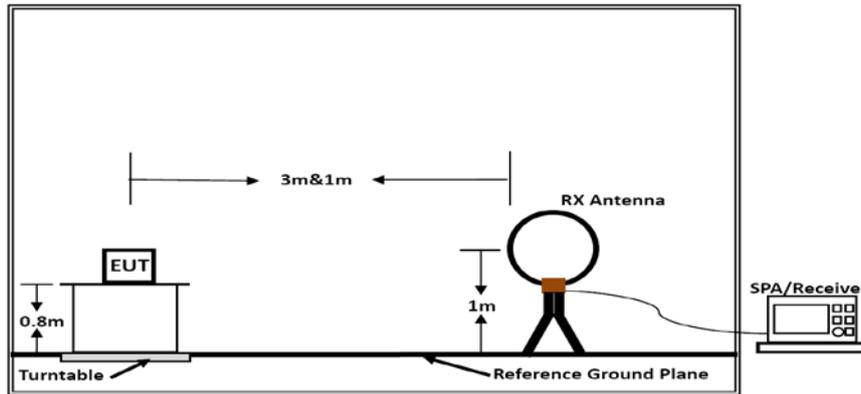

Below 30MHz

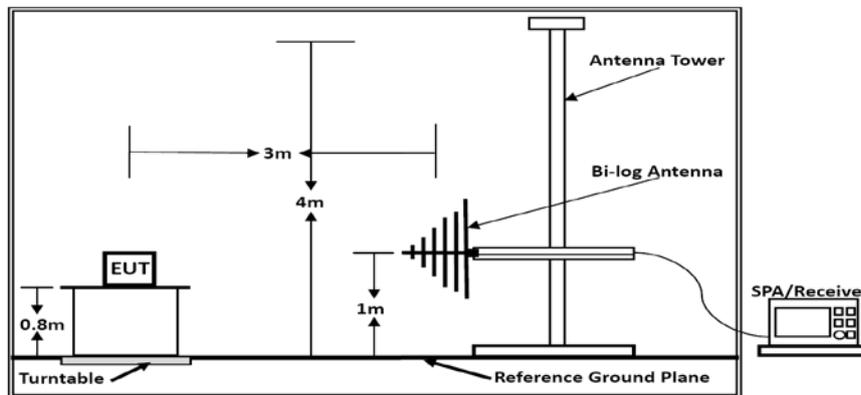

Below 1GHz

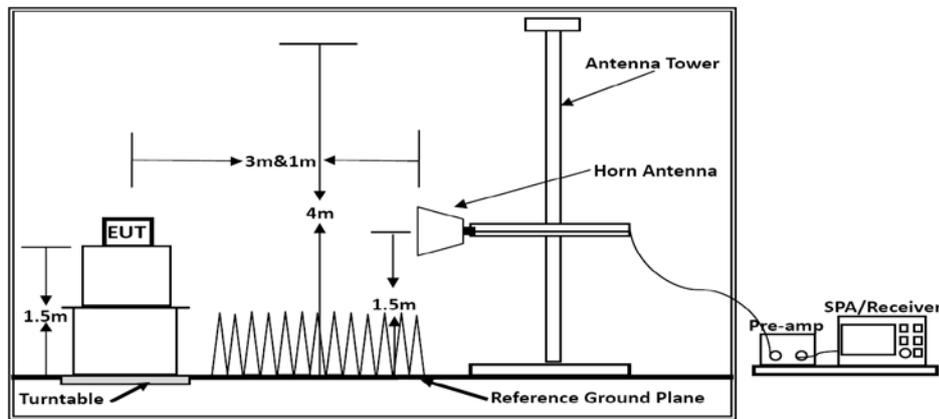

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.1.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX

Horizontal

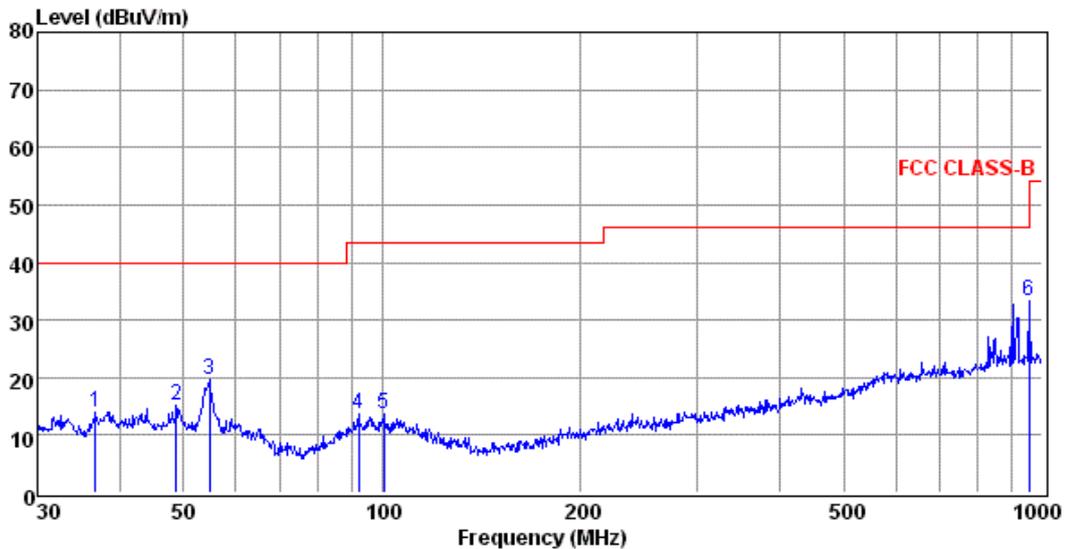

```


pol:                                HORIZONTAL

```

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	36.77	0.82	0.41	12.75	13.98	40.00	-26.02	QP
2	48.67	1.45	0.35	13.33	15.13	40.00	-24.87	QP
3	54.64	6.21	0.46	13.04	19.71	40.00	-20.29	QP
4	92.14	0.88	0.56	12.30	13.74	43.50	-29.76	QP
5	100.58	-0.03	0.60	13.11	13.68	43.50	-29.82	QP
6	955.44	9.94	1.89	21.45	33.28	46.00	-12.72	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Vertical

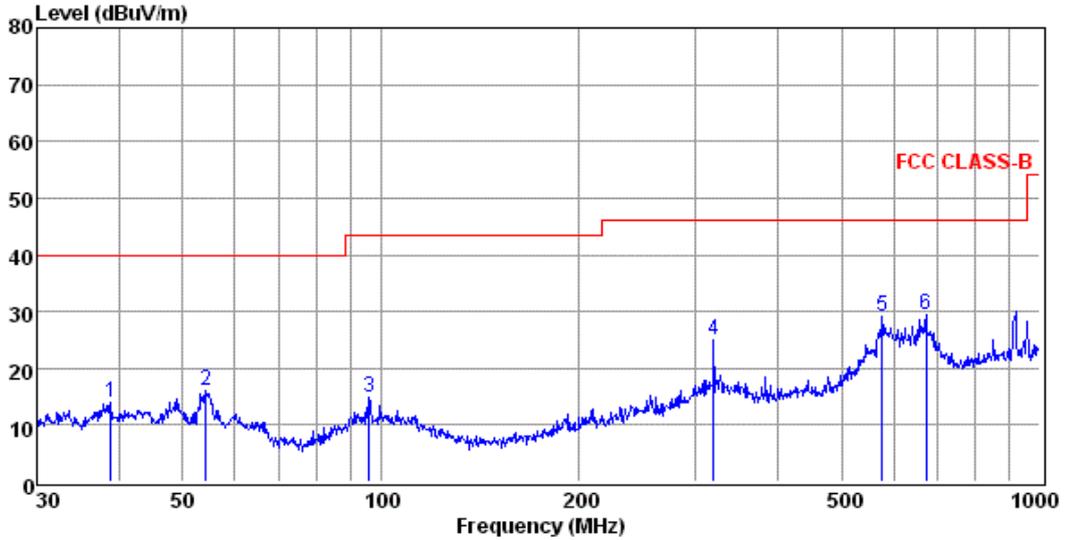

pol:

VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	38.89	0.35	0.38	13.30	14.03	40.00	-25.97	QP
2	54.26	2.52	0.46	13.05	16.03	40.00	-23.97	QP
3	95.76	1.36	0.58	12.89	14.83	43.50	-28.67	QP
4	319.94	10.34	1.16	13.33	24.83	46.00	-21.17	QP
5	576.64	9.54	1.49	18.01	29.04	46.00	-16.96	QP
6	672.84	9.12	1.65	18.71	29.48	46.00	-16.52	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported


Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (TX-Low Channel). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.
- 3). For the fundamental emission limit at 915MHz, please refer to following page.

5.1.8. Results of the Fundamental Frequency (915MHz)

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX-Low Channel

Horizontal:

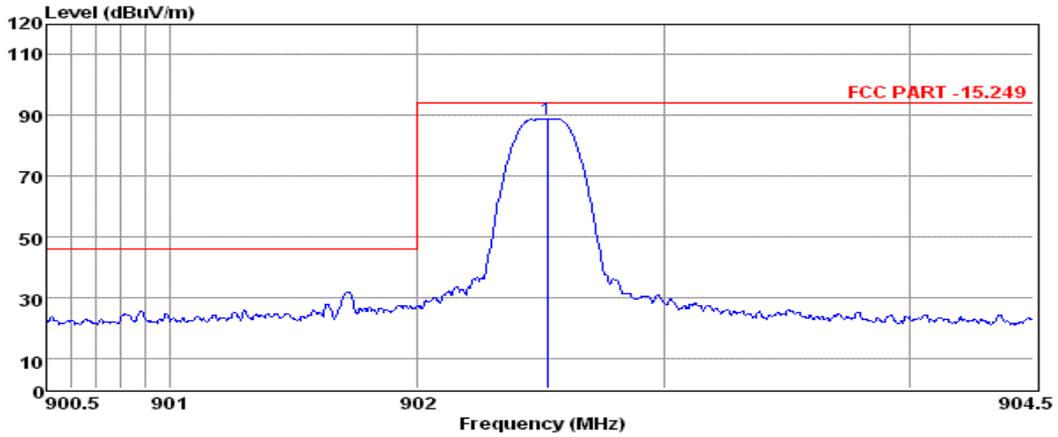


```

pol:                HORIZONTAL
      Freq  Reading  CabLos  Antfac  Measured  Limit  Over  Remark
      MHz   dBuV    dB     dB/m   dBuV/m   dBuV/m  dB
-----
1     902.50  65.76    1.87   21.11   88.74   94.00  -5.26  QP
    
```

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db below the official limit are not reported

Vertical:

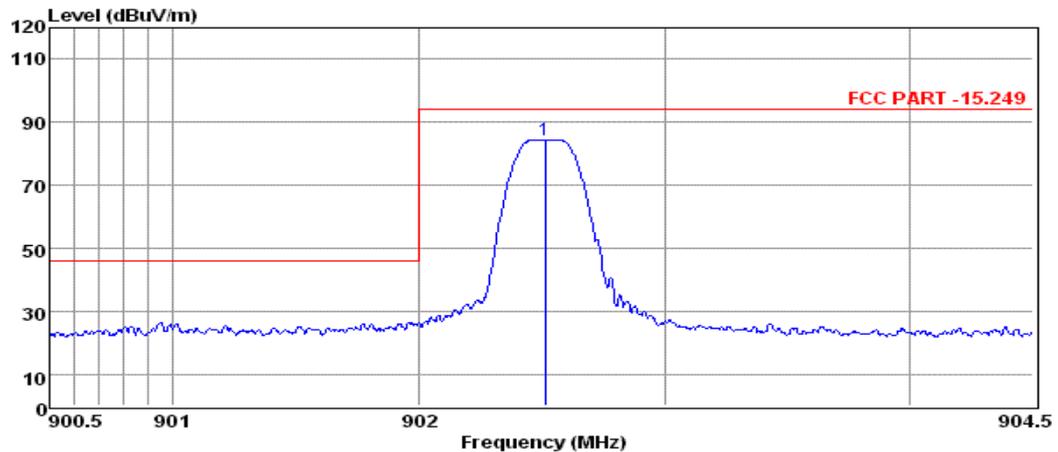


```

pol:                VERTICAL
      Freq  Reading  CabLos  Antfac  Measured  Limit  Over  Remark
      MHz   dBuV    dB     dB/m   dBuV/m   dBuV/m  dB
-----
1     902.50  61.26    1.87   21.11   84.24   94.00  -9.76  QP
    
```

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db below the official limit are not reported

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX-Middle Channel

Horizontal

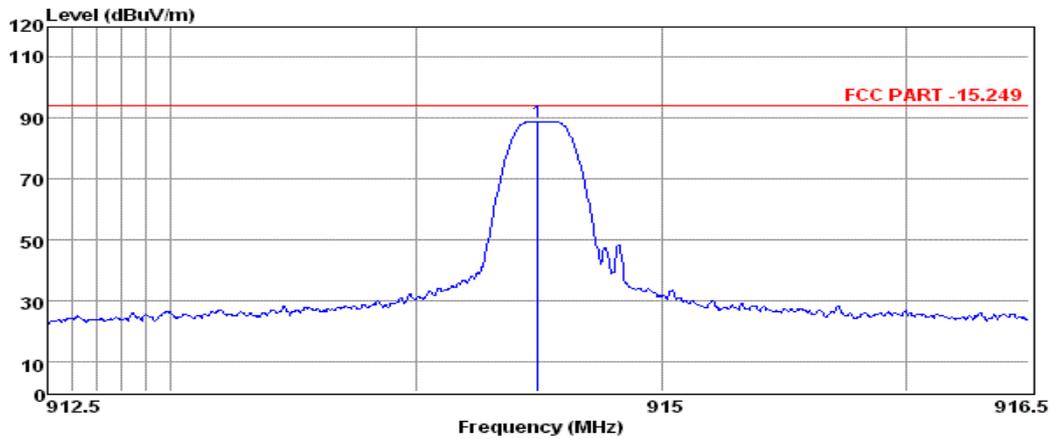


pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	914.50	65.44	2.04	21.18	88.66	94.00	-5.34	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Vertical

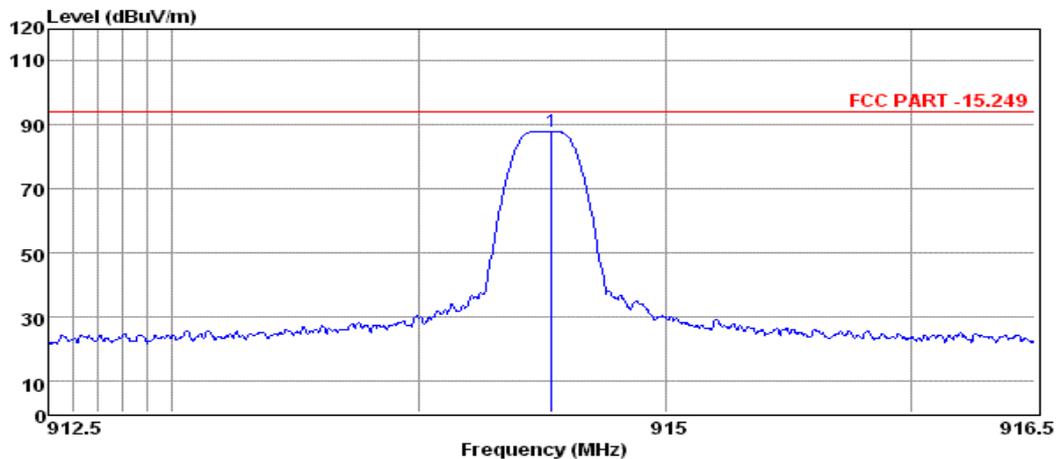


pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	914.50	64.46	2.04	21.18	87.68	94.00	-6.32	QP

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX-High Channel

Horizontal:

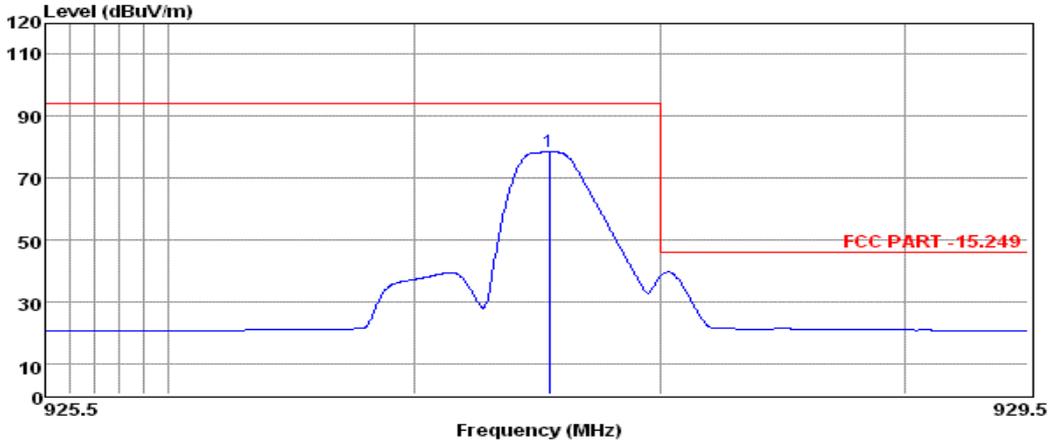


```

pol:                HORIZONTAL
  Freq  Reading  CabLos  Antfac  Measured  Limit  Over  Remark
  MHz   dBuV    dB     dB/m   dBuV/m   dBuV/m  dB
-----
  1    927.50   55.14   1.90   21.27   78.31   94.00  -15.69  QP
  
```

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Vertical:

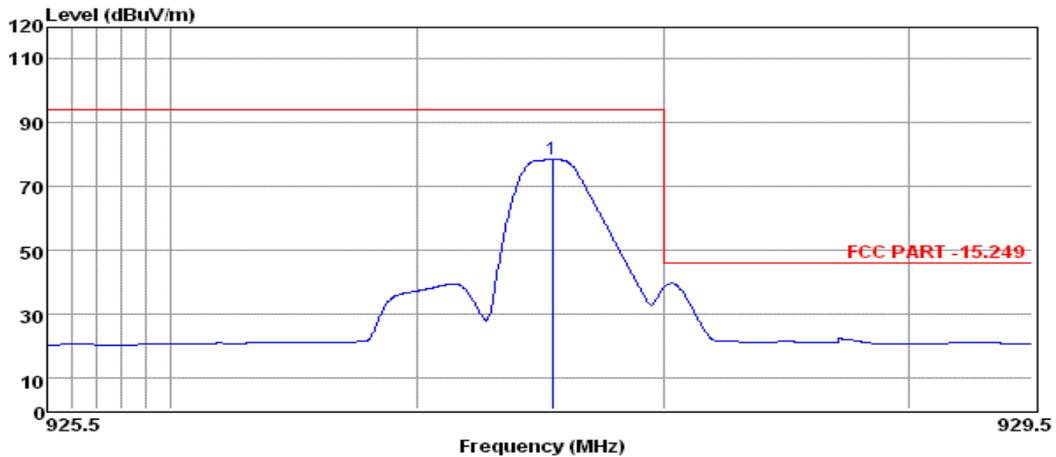

```

pol:                VERTICAL
  Freq  Reading  CabLos  Antfac  Measured  Limit  Over  Remark
  MHz   dBuV    dB     dB/m   dBuV/m   dBuV/m  dB
-----
  1    927.50   54.27   1.90   21.27   77.44   94.00  -16.56  QP
  
```

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

5.1.9. Results of Radiated Emissions (Above 1GHz)

Temperature	21.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
TX-Low Channel									
1805.00	51.34	33.06	35.04	2.10	51.46	74.00	-22.54	Peak	Horizontal
1805.00	45.18	33.06	35.04	2.10	45.30	54.00	-8.70	Average	Horizontal
1805.00	52.44	33.06	35.04	2.10	52.56	74.00	-21.44	Peak	Vertical
1805.00	47.45	33.06	35.04	2.10	47.57	54.00	-6.43	Average	Vertical
2707.50	56.47	33.11	35.09	2.68	57.17	74.00	-16.83	Peak	Horizontal
2707.50	42.59	33.11	35.09	2.68	43.29	54.00	-10.71	Average	Horizontal
2707.50	61.25	33.11	35.09	2.68	61.95	74.00	-12.05	Peak	Vertical
2707.50	44.54	33.11	35.09	2.68	45.24	54.00	-8.76	Average	Vertical
3610.00	57.89	33.03	35.07	3.10	58.95	74.00	-15.05	Peak	Horizontal
3610.00	42.57	33.03	35.07	3.10	43.63	54.00	-10.37	Average	Horizontal
3610.00	60.55	33.03	35.07	3.10	61.61	74.00	-12.39	Peak	Vertical
3610.00	43.99	33.03	35.07	3.10	45.05	54.00	-8.95	Average	Vertical
9025.00	52.50	33.26	35.14	3.94	54.56	74.00	-19.44	Peak	Horizontal
9025.00	45.14	33.26	35.14	3.94	47.20	54.00	-6.80	Average	Horizontal
9025.00	56.95	33.26	35.14	3.94	59.01	74.00	-14.99	Peak	Vertical
9025.00	47.81	33.26	35.14	3.94	49.87	54.00	-4.13	Average	Vertical
TX-Middle Channel									
1829.00	47.91	33.06	35.04	2.14	48.07	74.00	-25.93	Peak	Horizontal
1829.00	43.25	33.06	35.04	2.14	43.41	54.00	-10.59	Average	Horizontal
1829.00	52.10	33.06	35.04	2.14	52.26	74.00	-21.74	Peak	Vertical
1829.00	46.48	33.06	35.04	2.14	46.64	54.00	-7.36	Average	Vertical
2743.50	55.32	33.11	35.09	2.72	56.06	74.00	-17.94	Peak	Horizontal
2743.50	40.89	33.11	35.09	2.72	41.63	54.00	-12.37	Average	Horizontal
2743.50	59.76	33.11	35.09	2.72	60.50	74.00	-13.50	Peak	Vertical
2743.50	43.71	33.11	35.09	2.72	44.45	54.00	-9.55	Average	Vertical
3658.00	55.55	33.03	35.07	3.12	56.63	74.00	-17.37	Peak	Horizontal
3658.00	40.95	33.03	35.07	3.12	42.03	54.00	-11.97	Average	Horizontal
3658.00	60.76	33.03	35.07	3.12	61.84	74.00	-12.16	Peak	Vertical
3658.00	43.01	33.03	35.07	3.12	44.09	54.00	-9.91	Average	Vertical
9145.00	49.01	33.26	35.14	3.98	51.11	74.00	-22.89	Peak	Horizontal
9145.00	44.54	33.26	35.14	3.98	46.64	54.00	-7.36	Average	Horizontal
9145.00	55.14	33.26	35.14	3.98	57.24	74.00	-16.76	Peak	Vertical
9145.00	46.61	33.26	35.14	3.98	48.71	54.00	-5.29	Average	Vertical

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
TX-High Channel									
1855.00	49.27	33.06	35.04	2.16	49.45	74.00	-24.55	Peak	Horizontal
1855.00	42.39	33.06	35.04	2.16	42.57	54.00	-11.43	Average	Horizontal
1855.00	51.97	33.06	35.04	2.16	52.15	74.00	-21.85	Peak	Vertical
1855.00	44.19	33.06	35.04	2.16	44.37	54.00	-9.63	Average	Vertical
2782.50	53.99	33.11	35.09	2.74	54.75	74.00	-19.25	Peak	Horizontal
2782.50	39.55	33.11	35.09	2.74	40.31	54.00	-13.69	Average	Horizontal
2782.50	58.29	33.11	35.09	2.74	59.05	74.00	-14.95	Peak	Vertical
2782.50	42.68	33.11	35.09	2.74	43.44	54.00	-10.56	Average	Vertical
3710.00	53.80	33.03	35.07	3.14	54.90	74.00	-19.10	Peak	Horizontal
3710.00	41.53	33.03	35.07	3.14	42.63	54.00	-11.37	Average	Horizontal
3710.00	59.39	33.03	35.07	3.14	60.49	74.00	-13.51	Peak	Vertical
3710.00	42.02	33.03	35.07	3.14	43.12	54.00	-10.88	Average	Vertical
9275.00	50.07	33.26	35.14	4.00	52.19	74.00	-21.81	Peak	Horizontal
9275.00	42.94	33.26	35.14	4.00	45.06	54.00	-8.94	Average	Horizontal
9275.00	54.14	33.26	35.14	4.00	56.26	74.00	-17.74	Peak	Vertical
9275.00	45.02	33.26	35.14	4.00	47.14	54.00	-6.86	Average	Vertical

Notes:


- 1). Measuring frequencies from 9 KHz~10th harmonic (ex. 10GHz), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.
- 3). No emission was be recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.1.10. Results for Restricted Band Edge Testing

Temperature	23.5°C	Humidity	51.3%
Test Engineer	Tom Liu	Configurations	TX

Test Frequency Range: 900MHz-916MHz

Horizontal:

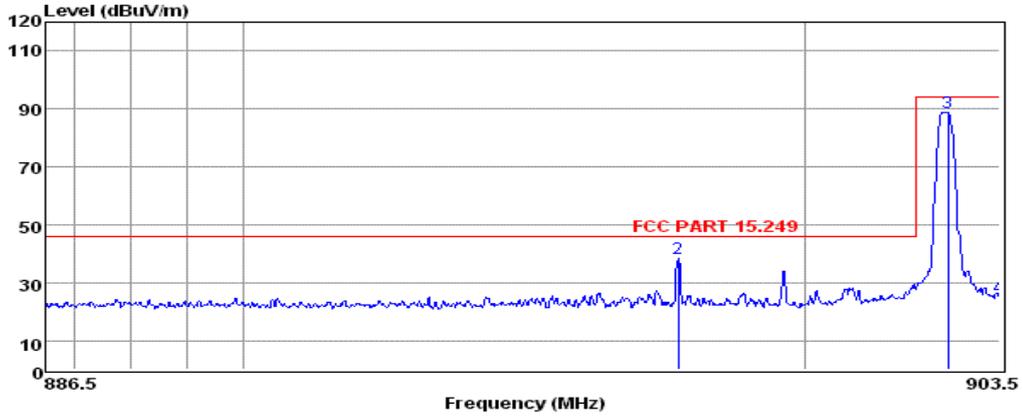


pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	886.50	-0.02	1.87	20.95	22.80	46.00	-23.20	QP
2	897.73	15.46	1.97	21.07	38.50	46.00	-7.50	QP
3	902.50	65.86	1.87	21.11	88.84	94.00	-5.16	QP
4	903.50	2.10	1.87	21.11	25.08	94.00	-68.92	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Vertical:

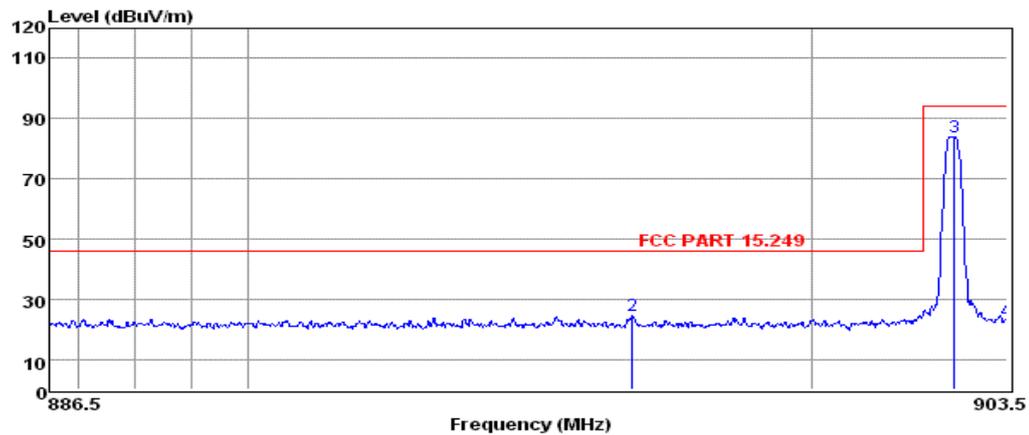


pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	886.50	-0.97	1.87	20.95	21.85	46.00	-24.15	QP
2	896.81	1.53	1.97	21.06	24.56	46.00	-21.44	QP
3	902.50	60.87	1.87	21.11	83.85	94.00	-10.15	QP
4	903.50	-0.07	1.87	21.11	22.91	94.00	-71.09	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Test Frequency Range: 914MHz-960MHz

Horizontal:

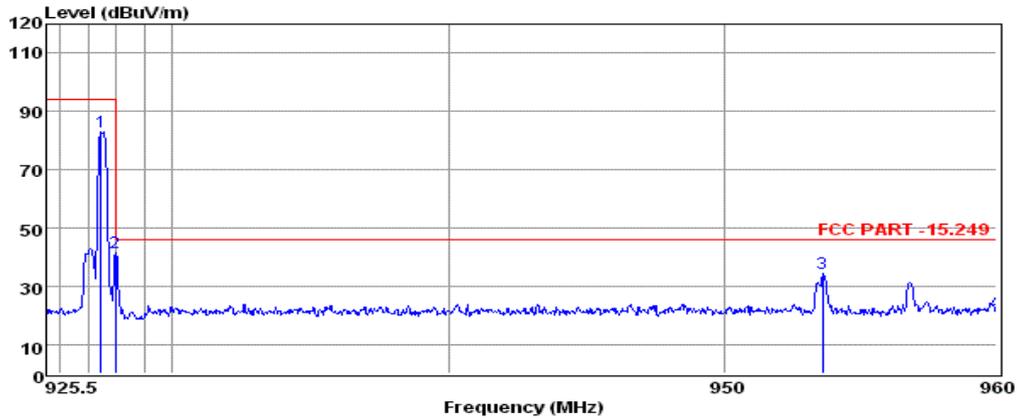


pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	927.50	59.92	1.90	21.27	83.09	94.00	-10.91	QP
2	927.98	18.38	1.90	21.27	41.55	94.00	-52.45	QP
3	953.59	10.87	2.03	21.44	34.34	46.00	-11.66	QP
4	960.00	-2.20	1.90	21.48	21.18	46.00	-24.82	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db below the official limit are not reported

Vertical:

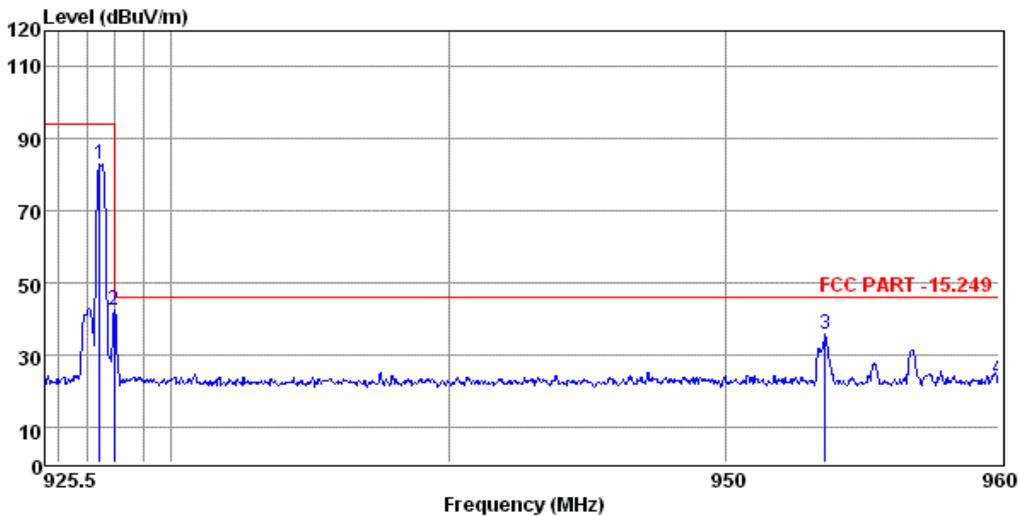

pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	927.50	59.92	1.90	21.27	83.09	94.00	-10.91	QP
2	927.98	19.38	1.90	21.27	42.55	94.00	-51.45	QP
3	953.63	12.21	2.03	21.44	35.68	46.00	-10.32	QP
4	960.00	-0.16	1.90	21.48	23.22	46.00	-22.78	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db below the official limit are not reported

5.2. 20 DB BANDWIDTH MEASUREMENT

5.2.1. Limit

No Limit

5.2.2. Test Procedures

A. Place the EUT on the table and set it in transmitting mode.


B. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

C. Set to the maximum power setting and enable the EUT transmit continuously.

D. For 20dB bandwidth measurement, use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
 RBW/VBW=10 KHz/ 30KHz; Sweep = auto; Detector function = peak; Trace = max hold.

5.2.3. Test Setup Layout

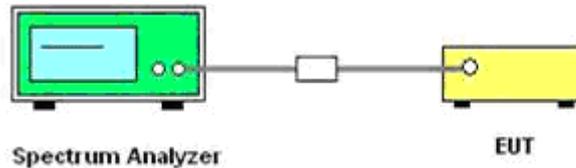

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Result of 20 dB Bandwidth Measurement


Temperature	22.6°C	Humidity	53.2%
Test Engineer	Tom Liu	Configurations	TX

Test Mode	Frequency (MHz)	20dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limits	Verdict
LoRa	902.5	168.50	142.84	Non-specified	PASS
	914.5	164.40	142.91	Non-specified	PASS
	927.5	161.20	141.91	Non-specified	PASS


Remark:

1. Test results including cable loss;
2. Please refer to following plots;

99% and 20 dB Bandwidth Measurement

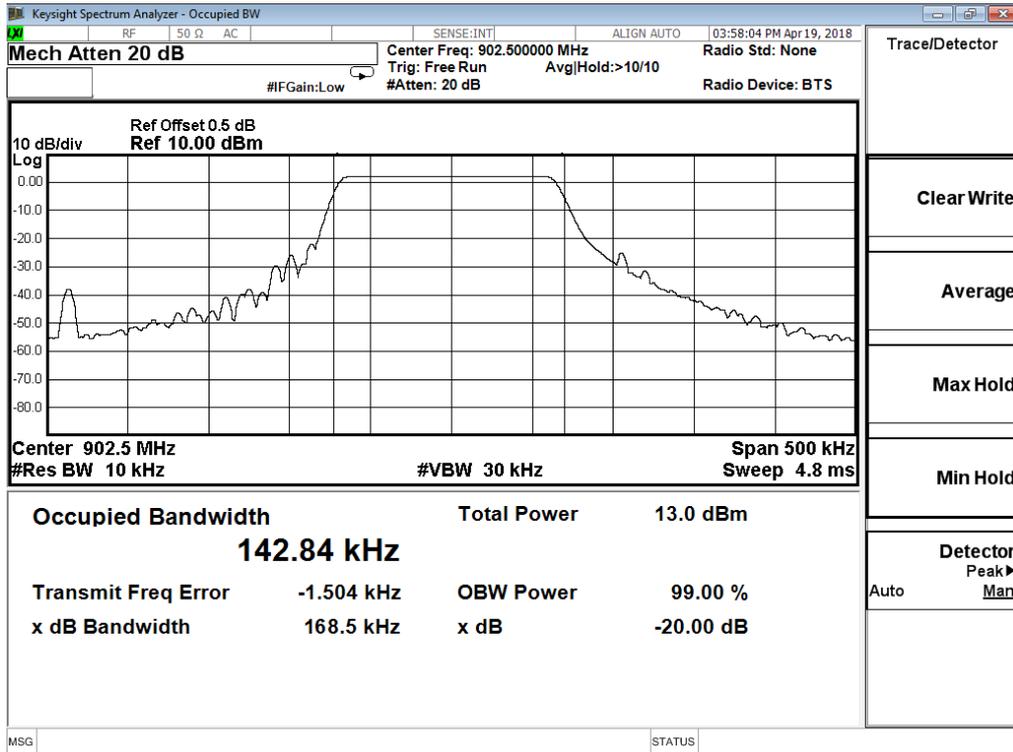


Test Plot for Low Channel

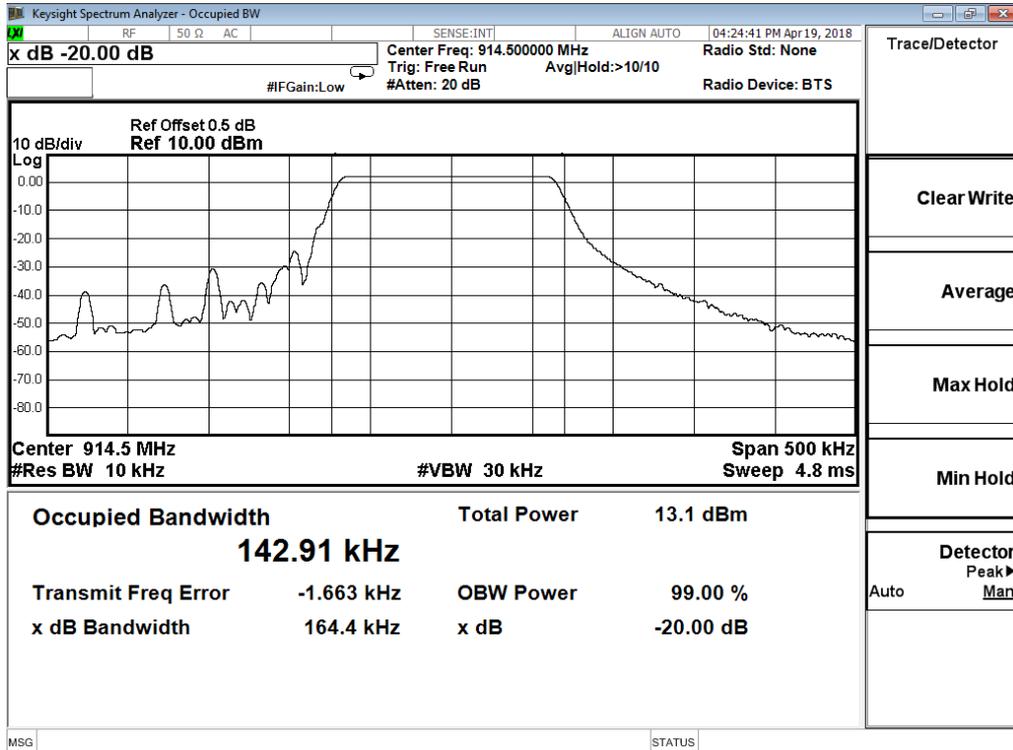

Test Plot for Middle Channel

20 dB Bandwidth Measurement

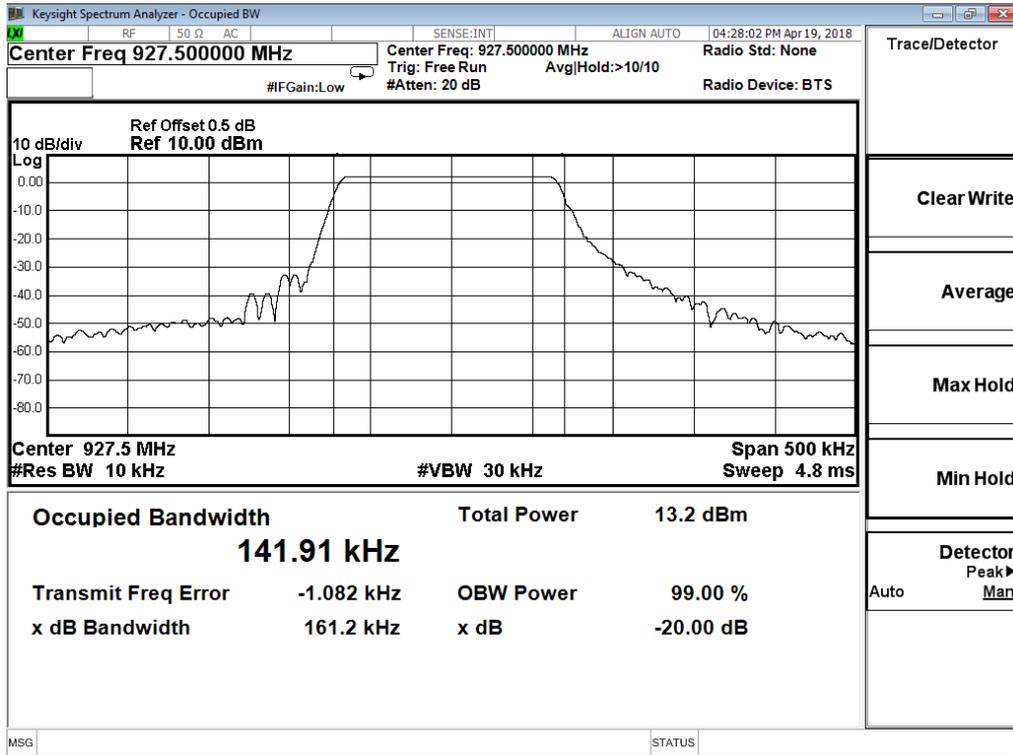

Test Plot for High Channel

5.3. AC Power line conducted emissions


5.3.1 Standard Applicable

According to §15.207 (a) or RSS GEN § 8.8: For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.3.2 Block Diagram of Test Setup

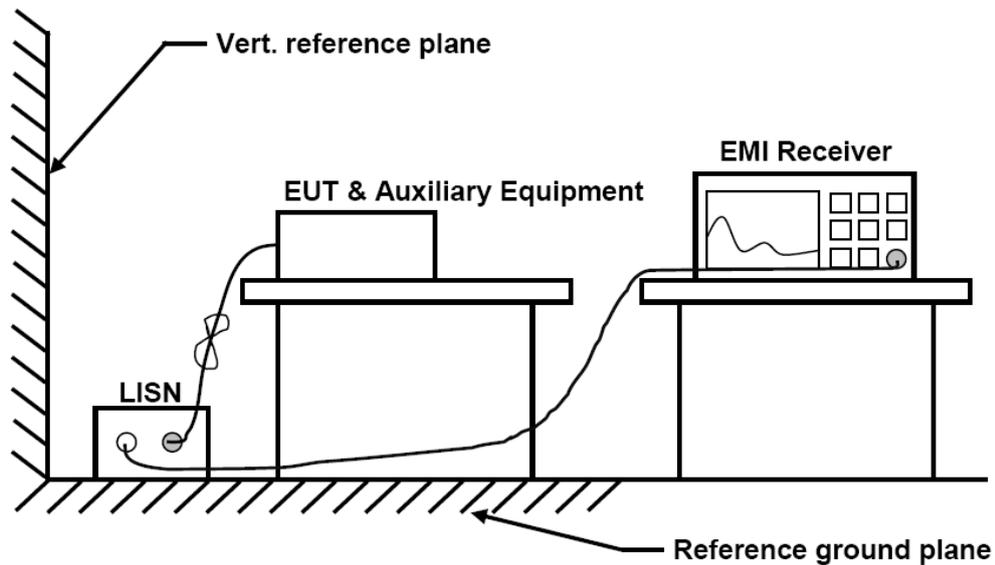


5.3.3 Test Results

PASS.

The test data please refer to following page.

AC Power Line Conducted Emission @ AC 120V/60Hz @ TX-Low Channel (worst case)

Line:

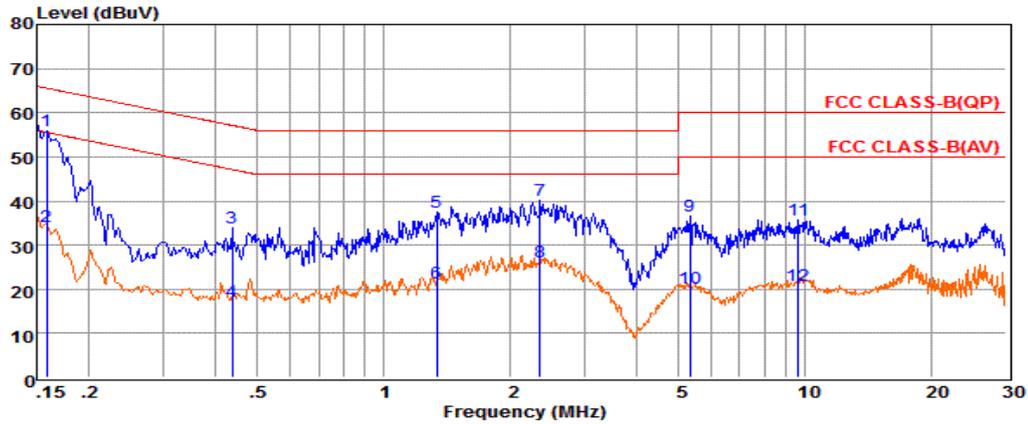


Pol: LINE

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.16	36.42	9.58	0.02	10.00	56.02	65.56	-9.54	QP
2	0.16	14.60	9.58	0.02	10.00	34.20	55.55	-21.35	Average
3	0.44	14.21	9.62	0.04	10.00	33.87	57.11	-23.24	QP
4	0.44	-2.35	9.62	0.04	10.00	17.31	47.11	-29.80	Average
5	1.34	17.74	9.63	0.05	10.00	37.42	56.00	-18.58	QP
6	1.34	1.61	9.63	0.05	10.00	21.29	46.00	-24.71	Average
7	2.35	20.43	9.64	0.05	10.00	40.12	56.00	-15.88	QP
8	2.35	6.57	9.64	0.05	10.00	26.26	46.00	-19.74	Average
9	5.33	16.97	9.66	0.06	10.00	36.69	60.00	-23.31	QP
10	5.33	0.62	9.66	0.06	10.00	20.34	50.00	-29.66	Average
11	9.65	15.84	9.69	0.08	10.00	35.61	60.00	-24.39	QP
12	9.65	1.06	9.69	0.08	10.00	20.83	50.00	-29.17	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

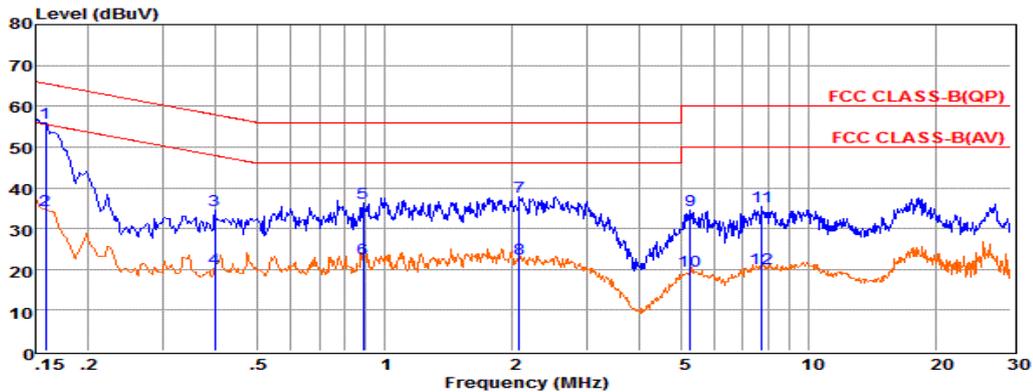

Pol: NEUTRAL

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.16	36.27	9.68	0.02	10.00	55.97	65.56	-9.59	QP
2	0.16	14.77	9.68	0.02	10.00	34.47	55.55	-21.08	Average
3	0.40	14.81	9.61	0.04	10.00	34.46	57.90	-23.44	QP
4	0.40	0.52	9.61	0.04	10.00	20.17	47.90	-27.73	Average
5	0.89	16.51	9.63	0.05	10.00	36.19	56.00	-19.81	QP
6	0.89	2.93	9.63	0.05	10.00	22.61	46.00	-23.39	Average
7	2.08	18.03	9.63	0.05	10.00	37.71	56.00	-18.29	QP
8	2.08	3.00	9.63	0.05	10.00	22.68	46.00	-23.32	Average
9	5.25	14.84	9.66	0.06	10.00	34.56	60.00	-25.44	QP
10	5.25	-0.15	9.66	0.06	10.00	19.57	50.00	-30.43	Average
11	7.77	15.62	9.70	0.07	10.00	35.39	60.00	-24.61	QP
12	7.77	0.50	9.70	0.07	10.00	20.27	50.00	-29.73	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report (TX-Low Channel).

5.4. Antenna Requirements

5.4.1 Standard Applicable

According to antenna requirement of §15.203 or RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1) or RSS-Gen, system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.4.2 Antenna Connected Construction

5.4.2.1. Standard Applicable

According to § 15.203 or RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.4.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 3.0dBi (Max.), and the antenna is an integral antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.4.2.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2017-06-17	2018-06-16
2	Power Sensor	R&S	NRV-Z81	100458	2017-06-17	2018-06-16
3	Power Sensor	R&S	NRV-Z32	10057	2017-06-17	2018-06-16
4	ESA-E SERIES SPECTRUM ANALYZER	Agilent	E4407B	MY41440754	2017-11-17	2018-11-16
5	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2017-06-17	2018-06-16
6	SPECTRUM ANALYZER	R&S	FSP	100503	2017-06-17	2018-06-16
7	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17	2018-06-16
8	Positioning Controller	MF	MF-7082	/	2017-06-17	2018-06-16
9	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
10	EMI Test Receiver	R&S	ESR 7	101181	2017-06-17	2018-06-16
11	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2017-11-17	2018-11-16
12	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2017-06-23	2018-06-22
13	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2017-05-02	2018-05-01
14	Horn Antenna	EMCO	3115	6741	2017-06-23	2018-06-22
15	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2017-09-21	2018-09-20
16	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2017-09-21	2018-09-20
17	RF Cable-R03m	Jye Bao	RG142	CB021	2017-06-17	2018-06-16
18	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2017-06-17	2018-06-16
19	TEST RECEIVER	R&S	ESCI	101142	2017-06-17	2018-06-16
20	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	2017-06-17	2018-06-16
21	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-00 32	2017-06-17	2018-06-16
22	Artificial Mains	R&S	ENV216	101288	2017-06-17	2018-06-16
23	RF Control Unit	Tonscend	JS0806-2	178060073	2017-10-28	2018-10-27
24	BT/WIFI Test Software	Tonscend	JS1120-3	/	N/A	N/A

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----