



Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

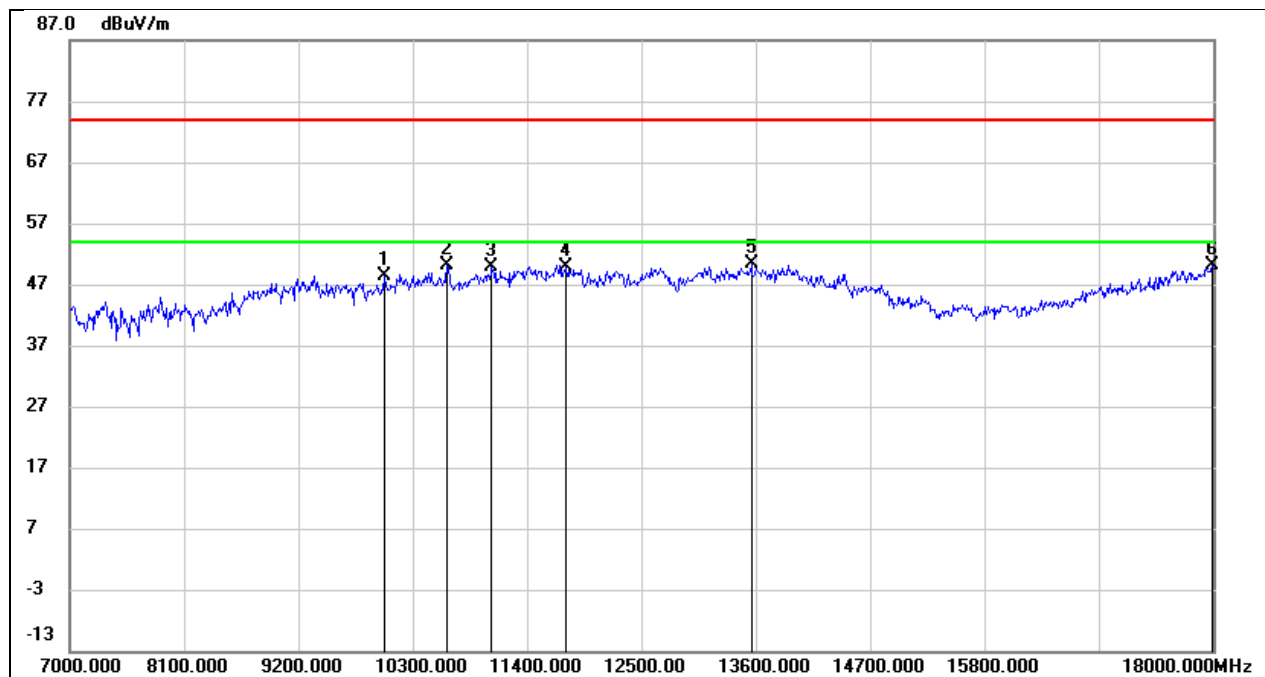


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10025.000	36.60	11.82	48.42	74.00	-25.58	peak
2	10630.000	36.91	13.31	50.22	74.00	-23.78	peak
3	11059.000	35.03	14.96	49.99	74.00	-24.01	peak
4	11774.000	32.59	17.28	49.87	74.00	-24.13	peak
5	13556.000	29.60	20.78	50.38	74.00	-23.62	peak
6	17989.000	24.07	26.04	50.11	74.00	-23.89	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

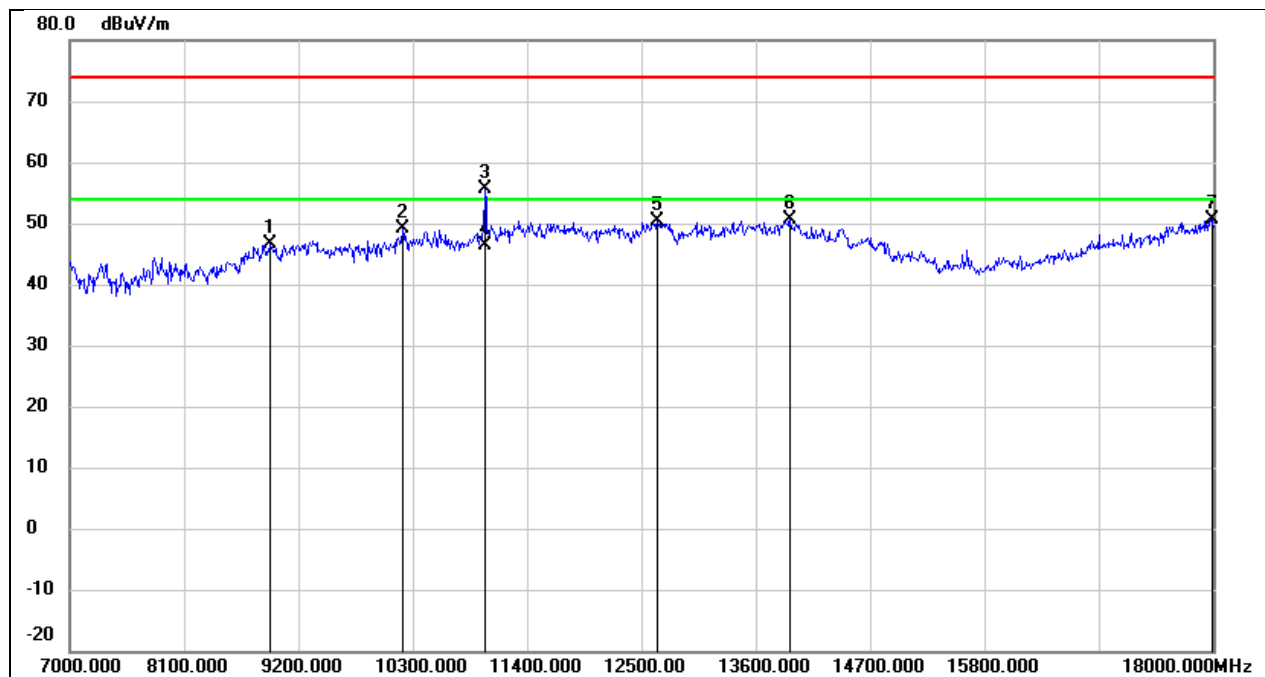


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8925.000	36.88	9.82	46.70	74.00	-27.30	peak
2	10201.000	36.97	12.19	49.16	74.00	-24.84	peak
3	10993.000	40.88	14.70	55.58	74.00	-18.42	peak
4	10993.000	31.60	14.70	46.30	54.00	-7.70	AVG
5	12654.000	32.26	18.01	50.27	74.00	-23.73	peak
6	13930.000	28.96	21.71	50.67	74.00	-23.33	peak
7	17989.000	24.68	26.04	50.72	74.00	-23.28	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

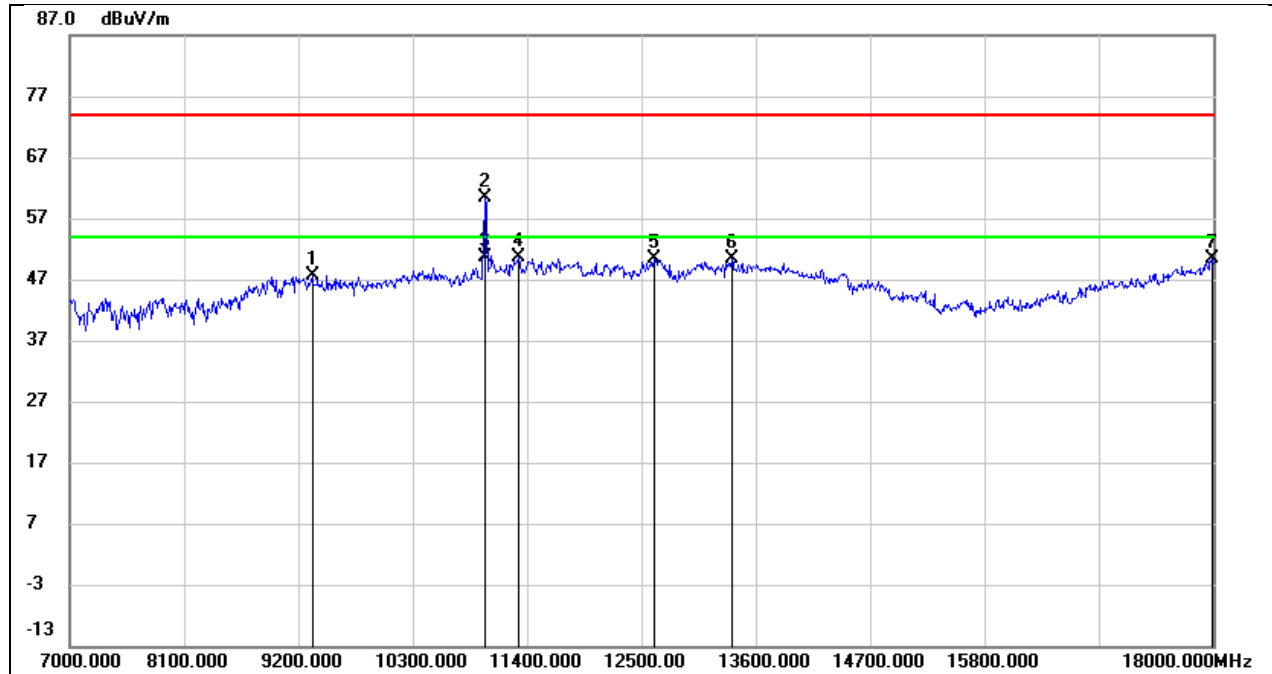


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.09	10.54	47.63	74.00	-26.37	peak
2	10993.000	45.57	14.70	60.27	74.00	-13.73	peak
3	10993.000	35.92	14.70	50.62	54.00	-3.38	AVG
4	11323.000	34.47	16.05	50.52	74.00	-23.48	peak
5	12621.000	32.43	17.98	50.41	74.00	-23.59	peak
6	13369.000	30.30	20.06	50.36	74.00	-23.64	peak
7	17989.000	24.24	26.04	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

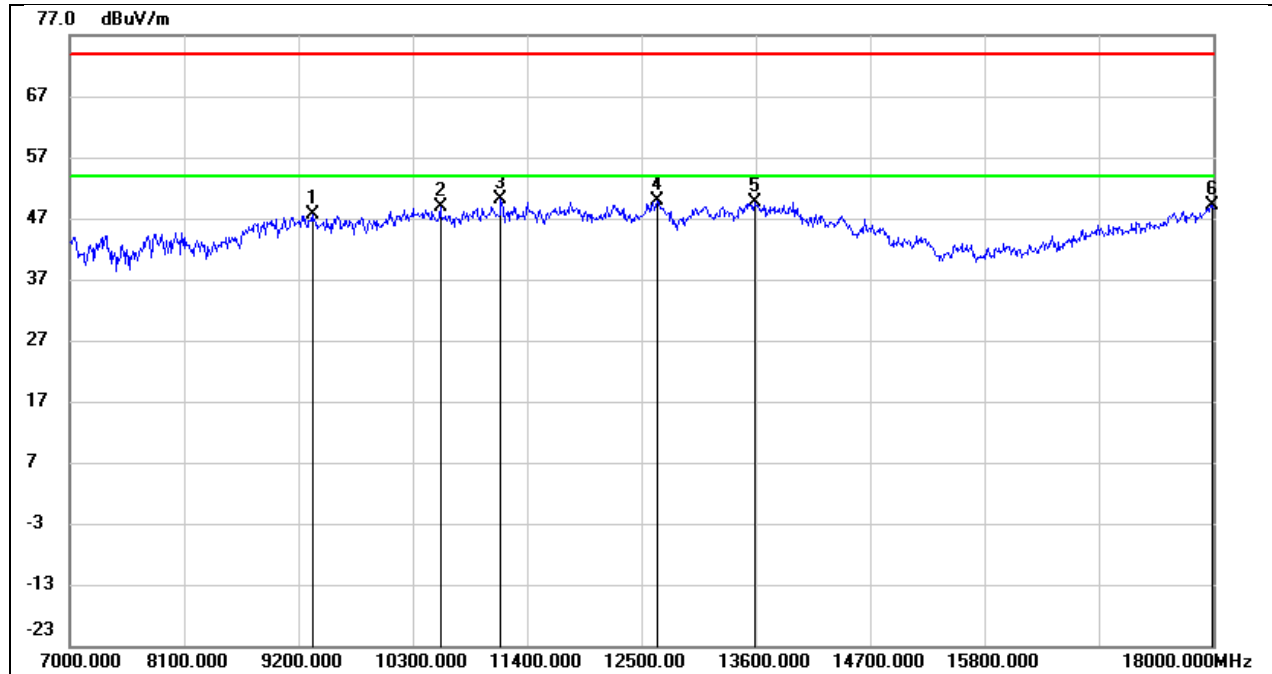


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.02	10.54	47.56	74.00	-26.44	peak
2	10564.000	35.86	13.06	48.92	74.00	-25.08	peak
3	11147.000	34.76	15.32	50.08	74.00	-23.92	peak
4	12654.000	31.95	18.01	49.96	74.00	-24.04	peak
5	13589.000	28.89	20.86	49.75	74.00	-24.25	peak
6	17989.000	23.21	26.04	49.25	74.00	-24.75	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

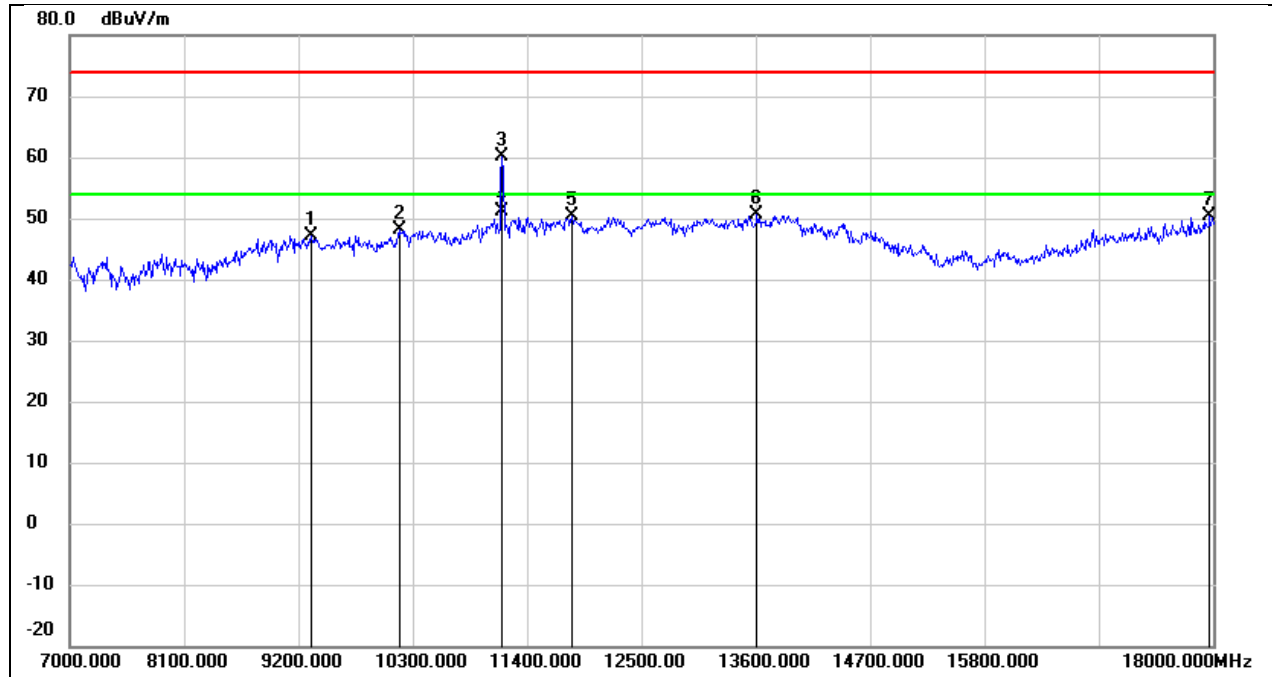


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	36.60	10.53	47.13	74.00	-26.87	peak
2	10168.000	36.00	12.13	48.13	74.00	-25.87	peak
3	11158.000	44.70	15.37	60.07	74.00	-13.93	peak
4	11158.000	35.69	15.37	51.06	54.00	-2.94	AVG
5	11829.000	32.95	17.38	50.33	74.00	-23.67	peak
6	13611.000	29.61	20.92	50.53	74.00	-23.47	peak
7	17967.000	24.47	25.89	50.36	74.00	-23.64	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

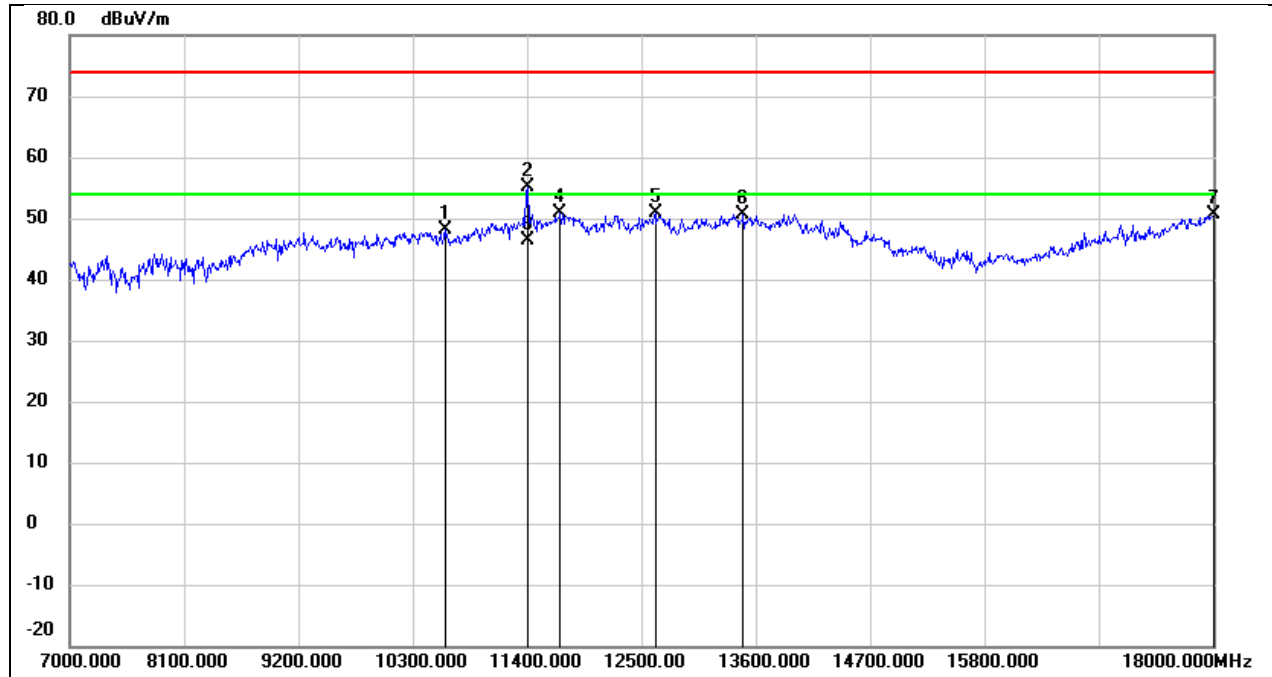


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10608.000	34.82	13.23	48.05	74.00	-25.95	peak
2	11411.000	38.82	16.41	55.23	74.00	-18.77	peak
3	11411.000	29.90	16.41	46.31	54.00	-7.69	AVG
4	11719.000	33.59	17.18	50.77	74.00	-23.23	peak
5	12632.000	32.92	17.99	50.91	74.00	-23.09	peak
6	13479.000	30.11	20.55	50.66	74.00	-23.34	peak
7	18000.000	24.40	26.12	50.52	74.00	-23.48	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

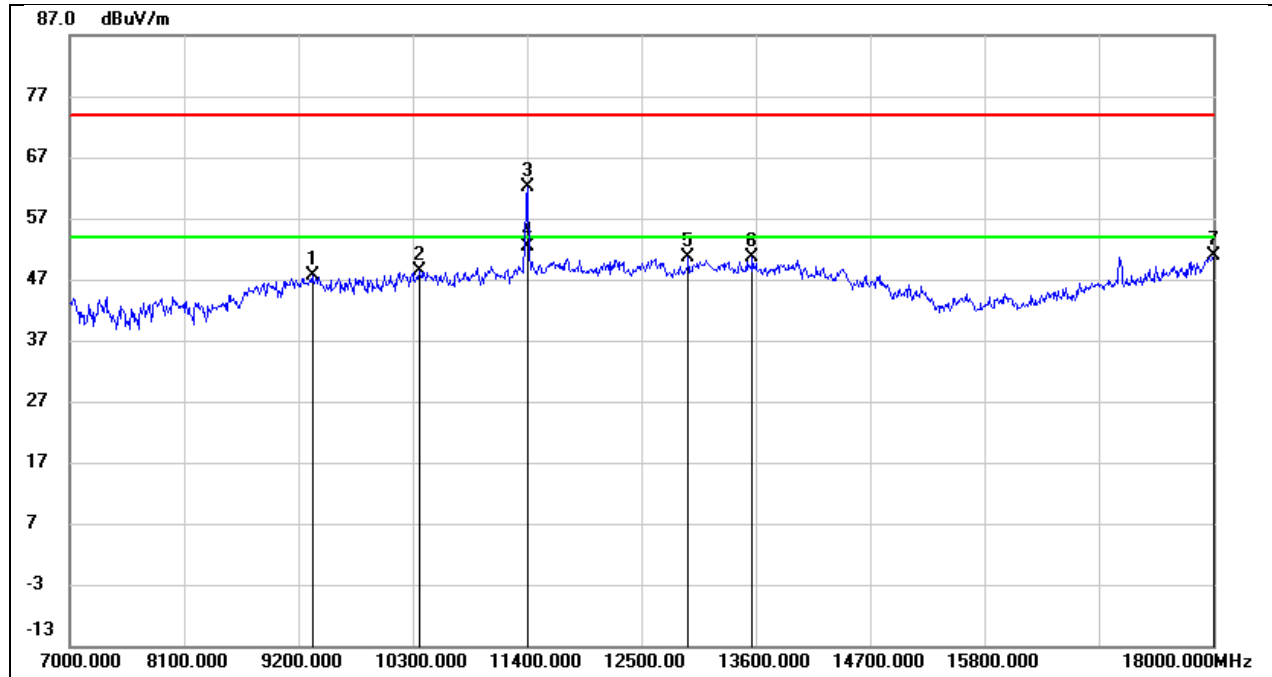


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.18	10.54	47.72	74.00	-26.28	peak
2	10366.000	35.80	12.54	48.34	74.00	-25.66	peak
3	11400.000	45.72	16.36	62.08	74.00	-11.92	peak
4	11400.000	36.02	16.36	52.38	54.00	-1.62	AVG
5	12951.000	32.27	18.38	50.65	74.00	-23.35	peak
6	13567.000	29.89	20.80	50.69	74.00	-23.31	peak
7	18000.000	24.84	26.12	50.96	74.00	-23.04	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

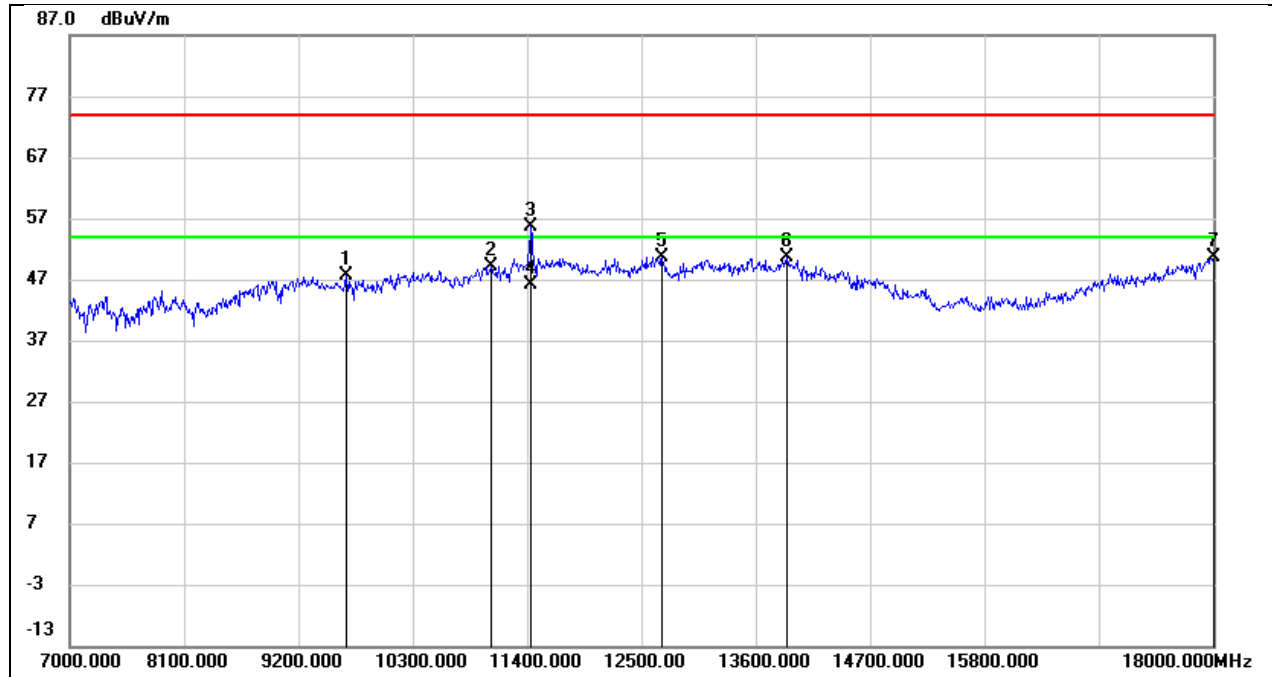


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	36.60	11.01	47.61	74.00	-26.39	peak
2	11059.000	34.29	14.96	49.25	74.00	-24.75	peak
3	11433.000	39.09	16.50	55.59	74.00	-18.41	peak
4	11433.000	29.60	16.50	46.10	54.00	-7.90	AVG
5	12698.000	32.56	18.08	50.64	74.00	-23.36	peak
6	13897.000	28.93	21.62	50.55	74.00	-23.45	peak
7	18000.000	24.48	26.12	50.60	74.00	-23.40	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

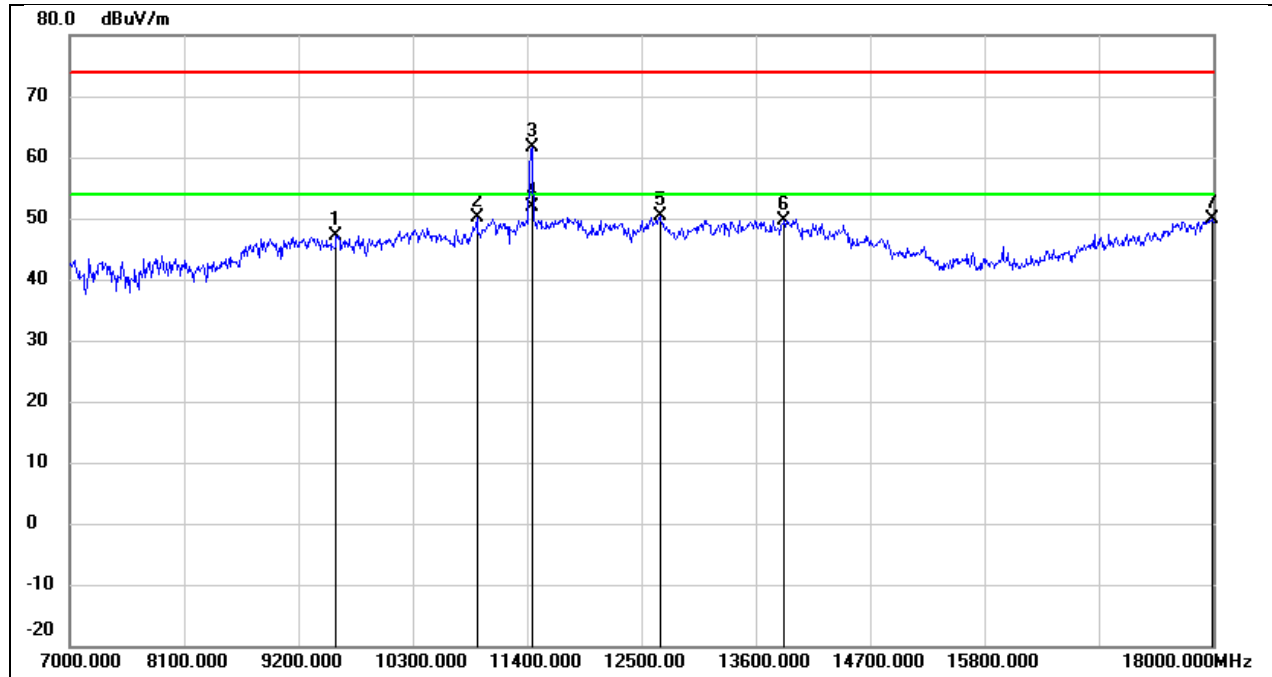


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	36.44	10.79	47.23	74.00	-26.77	peak
2	10916.000	35.64	14.39	50.03	74.00	-23.97	peak
3	11444.000	44.98	16.53	61.51	74.00	-12.49	peak
4	11444.000	35.33	16.53	51.86	54.00	-2.14	AVG
5	12676.000	32.29	18.05	50.34	74.00	-23.66	peak
6	13875.000	28.05	21.57	49.62	74.00	-24.38	peak
7	17989.000	23.82	26.04	49.86	74.00	-24.14	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

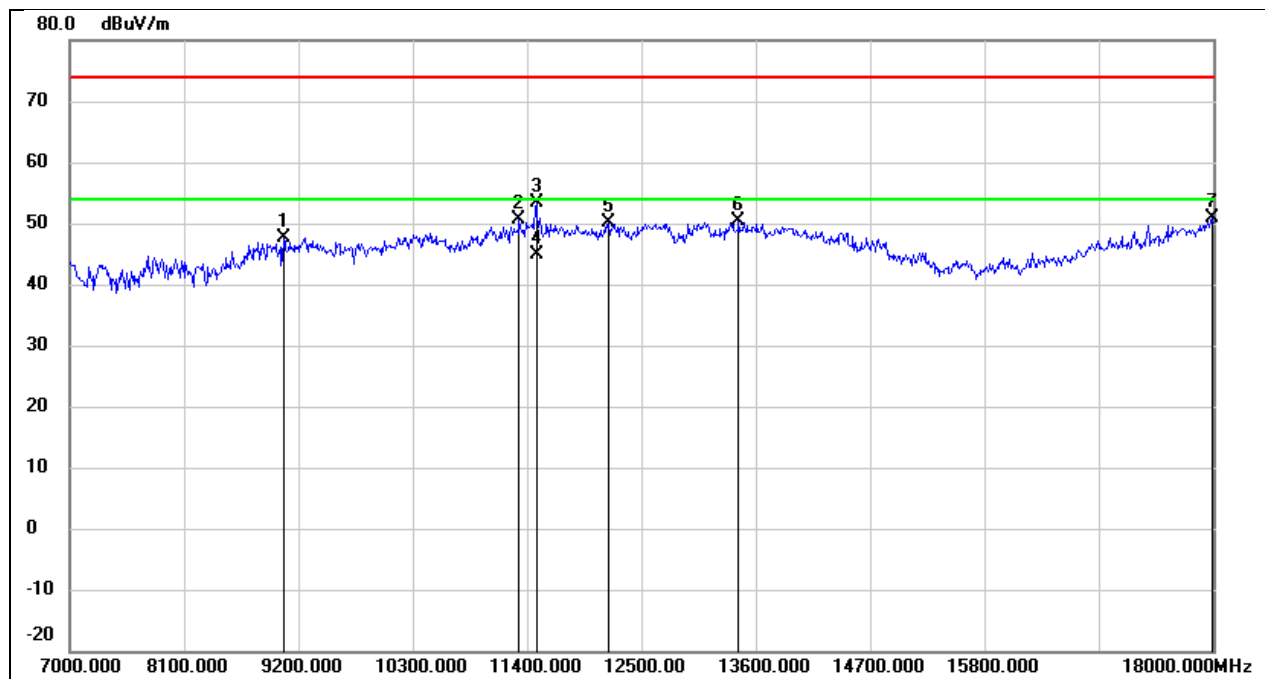


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	37.30	10.38	47.68	74.00	-26.32	peak
2	11323.000	34.61	16.05	50.66	74.00	-23.34	peak
3	11488.000	36.61	16.72	53.33	74.00	-20.67	peak
4	11488.000	28.09	16.72	44.81	54.00	-9.19	AVG
5	12181.000	32.43	17.75	50.18	74.00	-23.82	peak
6	13435.000	30.05	20.35	50.40	74.00	-23.60	peak
7	17989.000	24.75	26.04	50.79	74.00	-23.21	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

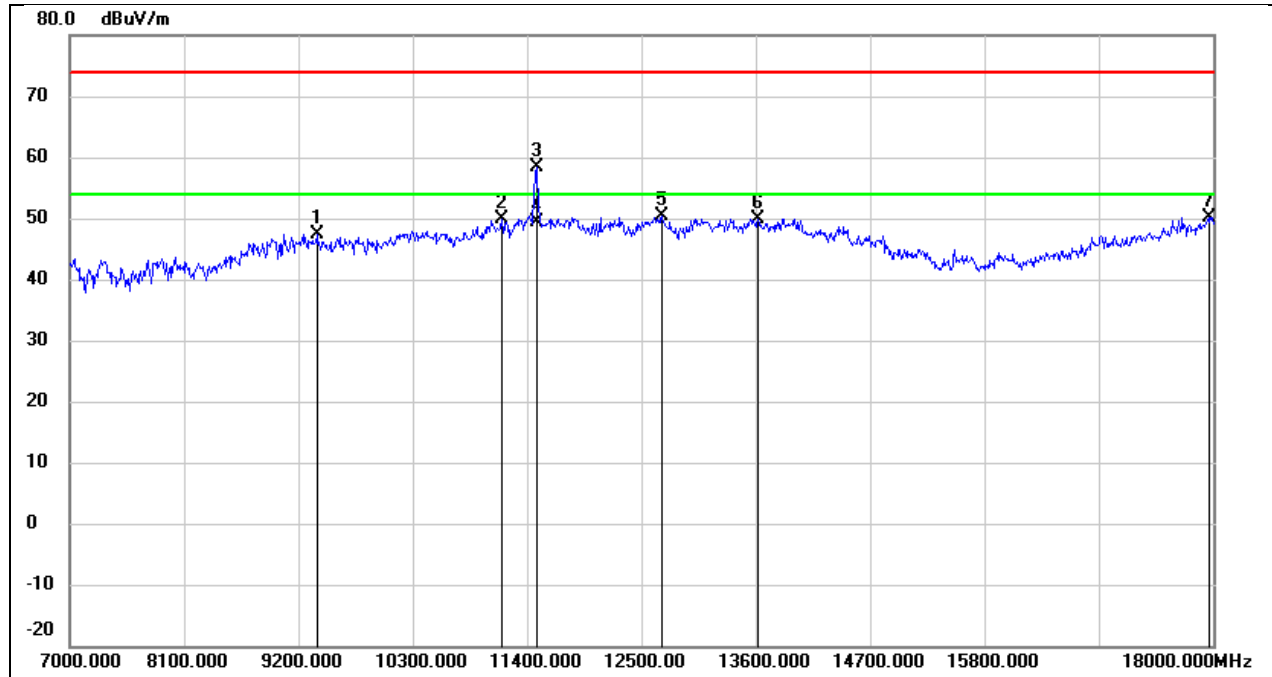


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	36.89	10.58	47.47	74.00	-26.53	peak
2	11158.000	34.56	15.37	49.93	74.00	-24.07	peak
3	11488.000	41.66	16.72	58.38	74.00	-15.62	peak
4	11488.000	32.73	16.72	49.45	54.00	-4.55	AVG
5	12698.000	32.34	18.08	50.42	74.00	-23.58	peak
6	13622.000	29.01	20.95	49.96	74.00	-24.04	peak
7	17956.000	24.40	25.82	50.22	74.00	-23.78	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

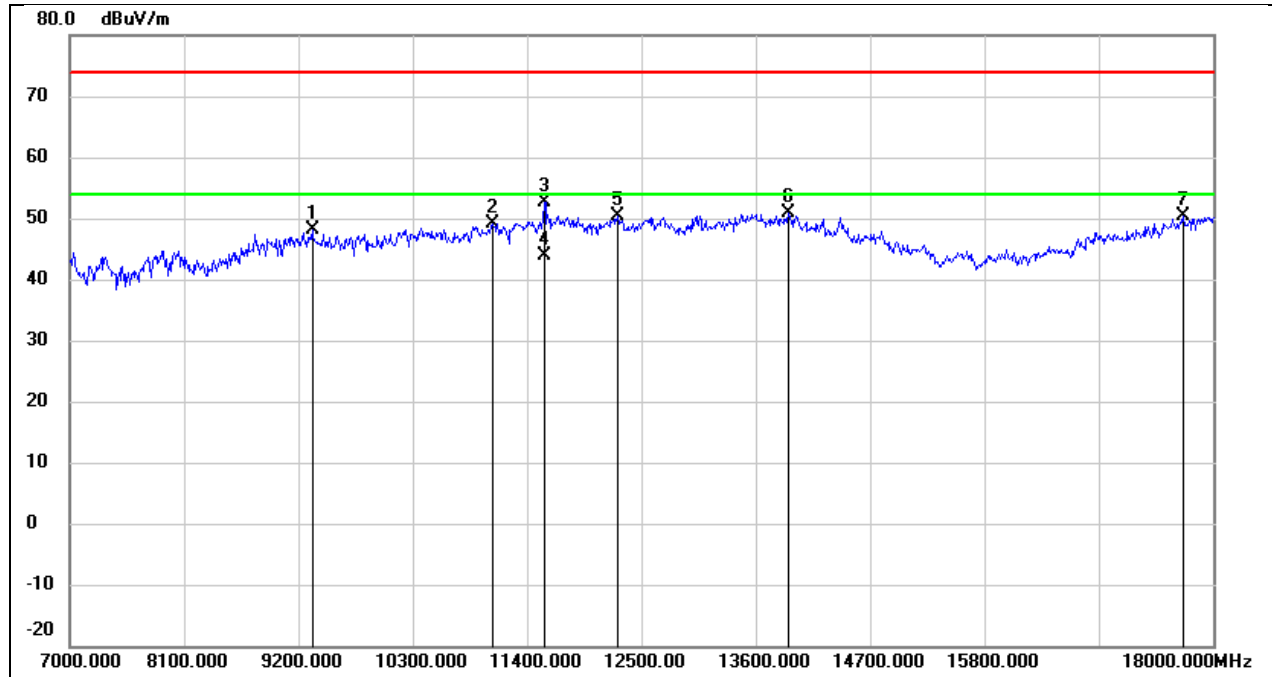


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.71	10.54	48.25	74.00	-25.75	peak
2	11070.000	34.13	15.01	49.14	74.00	-24.86	peak
3	11565.000	35.78	16.89	52.67	74.00	-21.33	peak
4	11565.000	27.00	16.89	43.89	54.00	-10.11	AVG
5	12269.000	32.72	17.77	50.49	74.00	-23.51	peak
6	13908.000	29.16	21.66	50.82	74.00	-23.18	peak
7	17714.000	26.13	24.16	50.29	74.00	-23.71	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

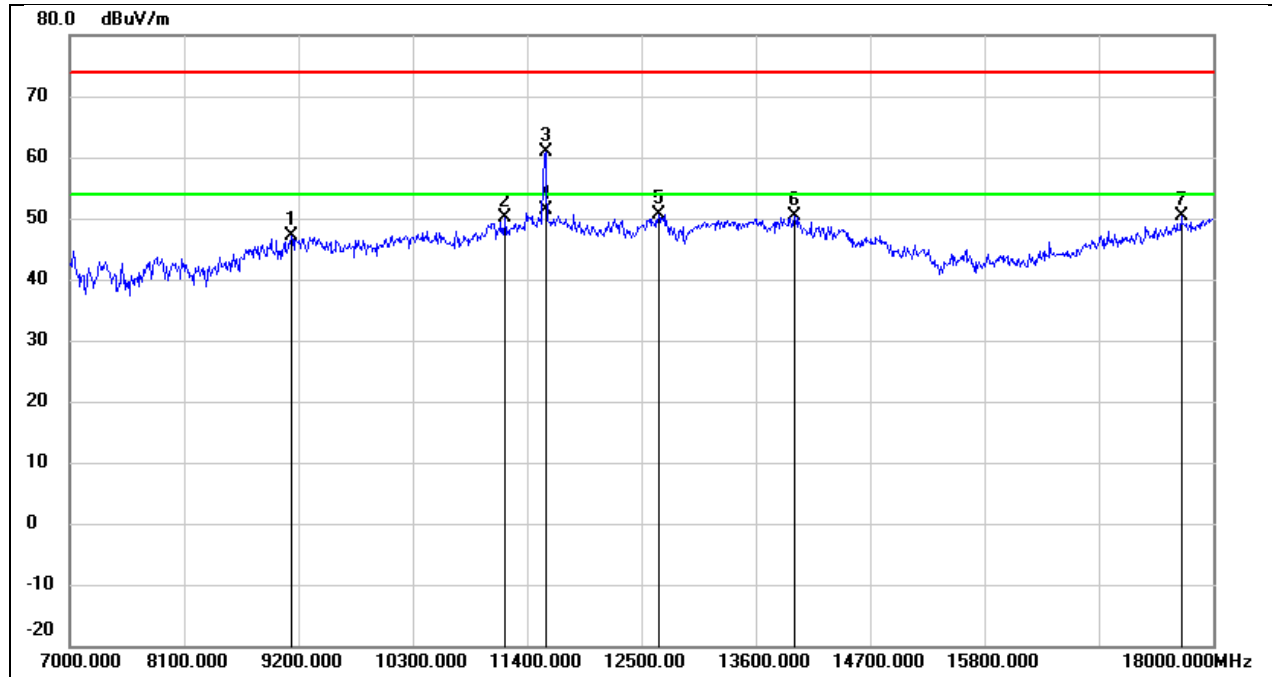


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	36.83	10.41	47.24	74.00	-26.76	peak
2	11191.000	34.64	15.50	50.14	74.00	-23.86	peak
3	11576.000	44.05	16.91	60.96	74.00	-13.04	peak
4	11576.000	34.41	16.91	51.32	54.00	-2.68	AVG
5	12665.000	32.66	18.04	50.70	74.00	-23.30	peak
6	13974.000	28.46	21.82	50.28	74.00	-23.72	peak
7	17692.000	26.26	24.01	50.27	74.00	-23.73	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

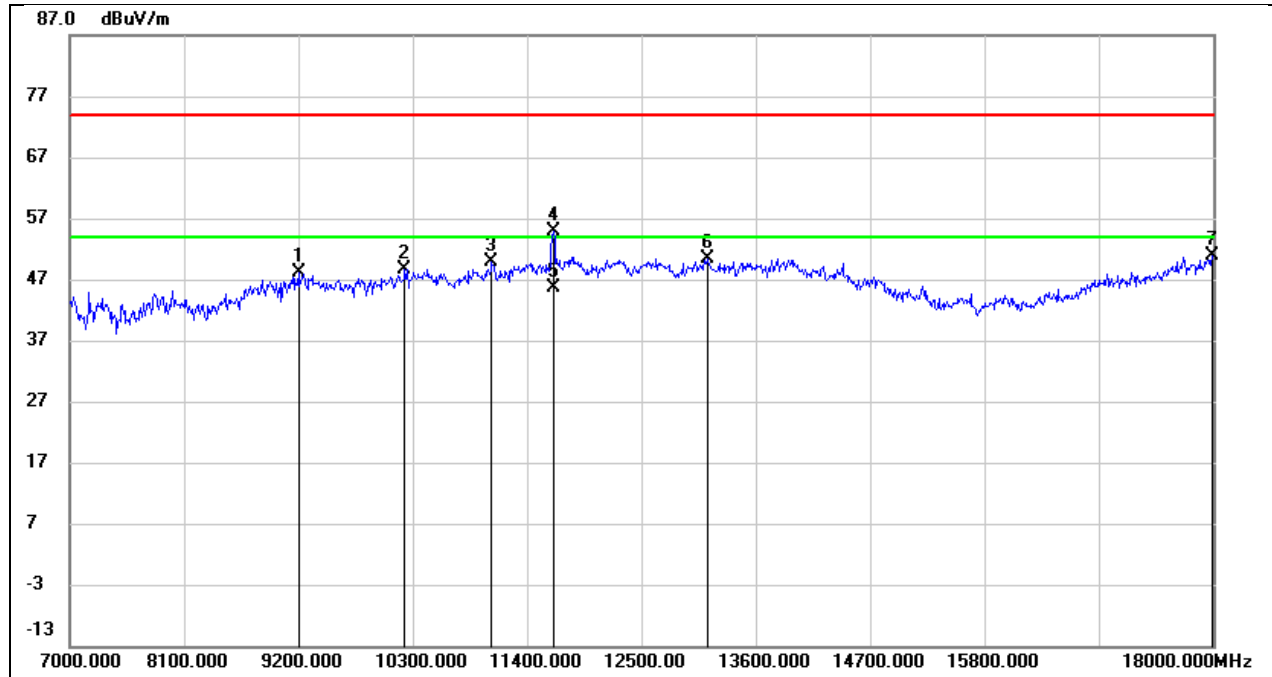


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	37.57	10.46	48.03	74.00	-25.97	peak
2	10223.000	36.34	12.24	48.58	74.00	-25.42	peak
3	11059.000	35.00	14.96	49.96	74.00	-24.04	peak
4	11653.000	37.88	17.05	54.93	74.00	-19.07	peak
5	11653.000	28.64	17.05	45.69	54.00	-8.31	AVG
6	13138.000	31.42	19.05	50.47	74.00	-23.53	peak
7	17989.000	24.81	26.04	50.85	74.00	-23.15	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

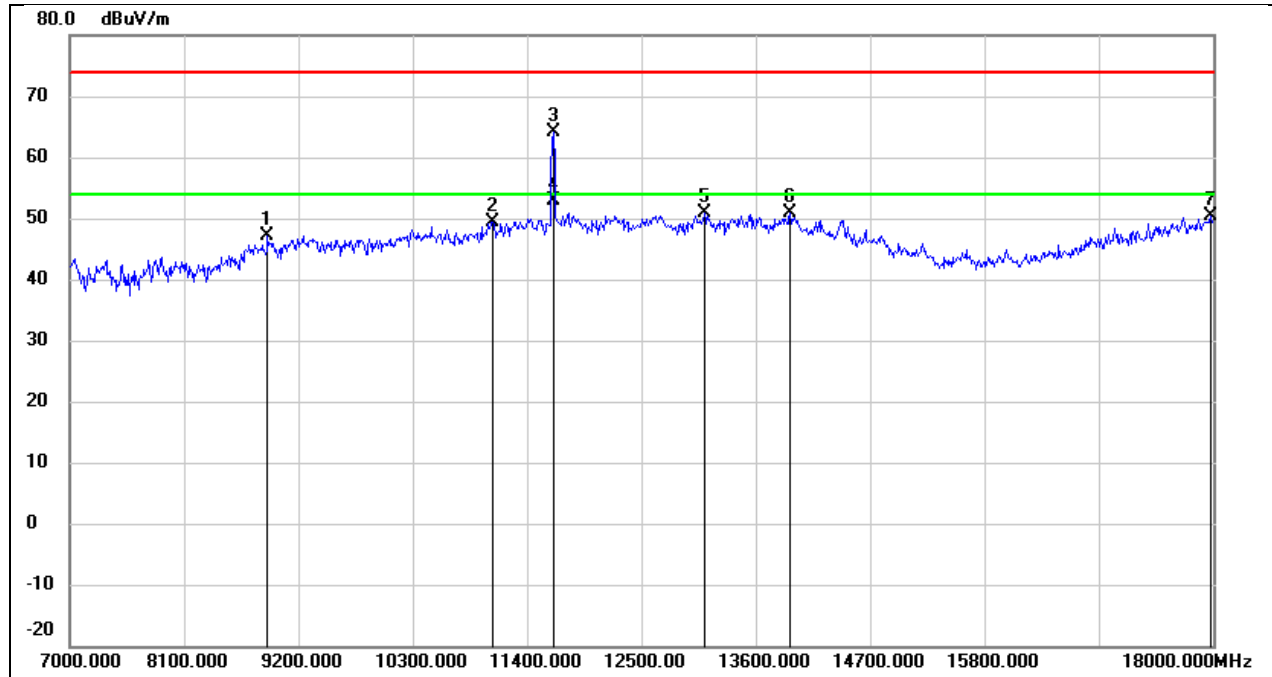


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8903.000	37.52	9.66	47.18	74.00	-26.82	peak
2	11070.000	34.36	15.01	49.37	74.00	-24.63	peak
3	11653.000	47.19	17.05	64.24	74.00	-9.76	peak
4	11653.000	35.92	17.05	52.97	54.00	-1.03	AVG
5	13105.000	32.03	18.91	50.94	74.00	-23.06	peak
6	13930.000	29.18	21.71	50.89	74.00	-23.11	peak
7	17978.000	24.30	25.97	50.27	74.00	-23.73	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

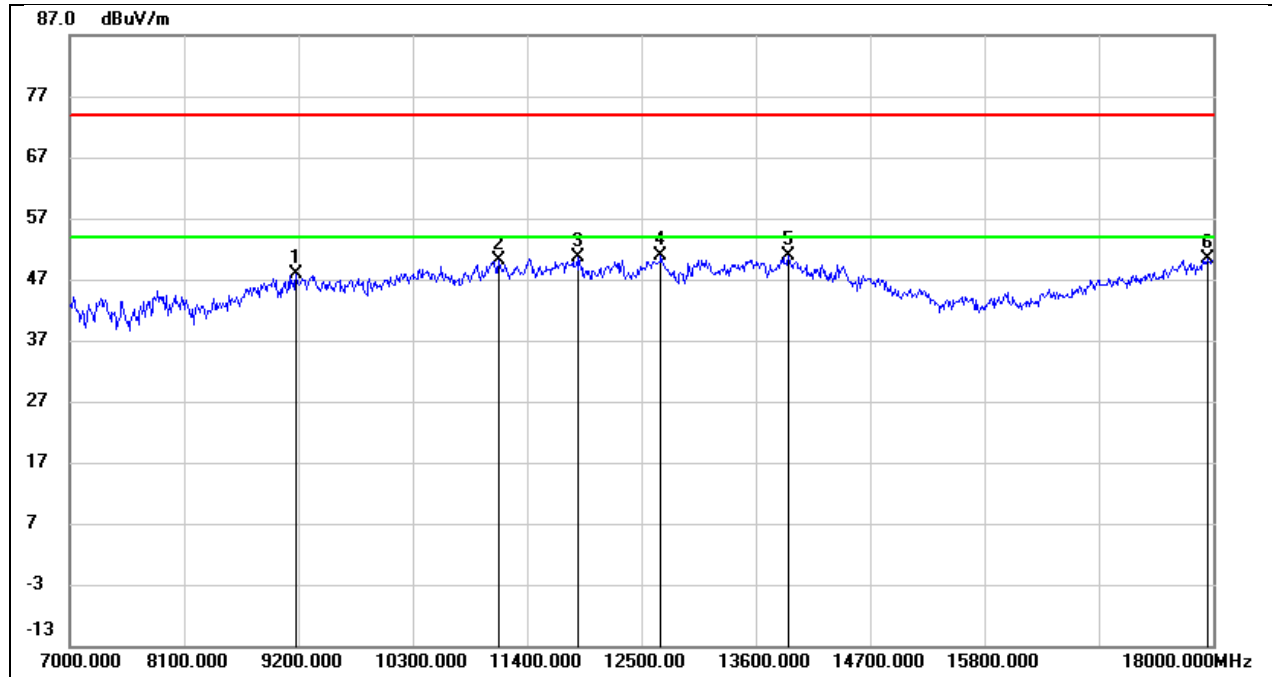


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.39	10.45	47.84	74.00	-26.16	peak
2	11125.000	34.94	15.22	50.16	74.00	-23.84	peak
3	11884.000	33.13	17.48	50.61	74.00	-23.39	peak
4	12687.000	32.80	18.05	50.85	74.00	-23.15	peak
5	13908.000	29.33	21.66	50.99	74.00	-23.01	peak
6	17945.000	24.71	25.75	50.46	74.00	-23.54	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

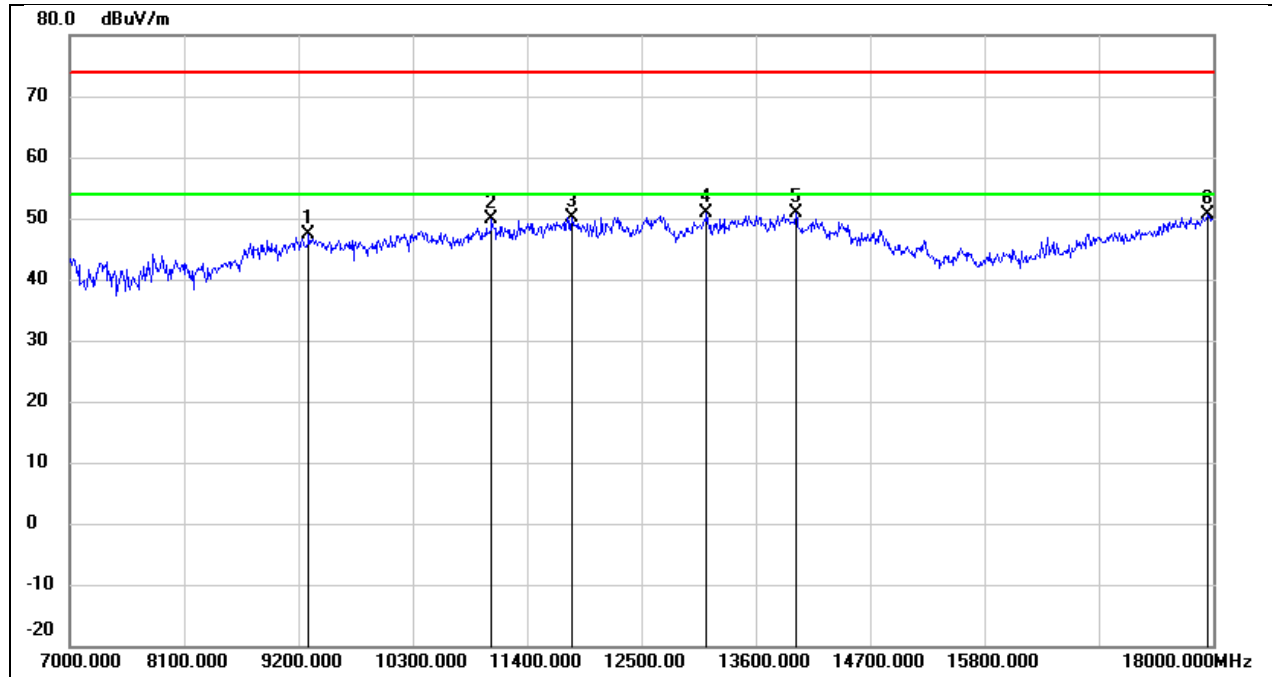


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9299.000	36.76	10.53	47.29	74.00	-26.71	peak
2	11059.000	34.84	14.96	49.80	74.00	-24.20	peak
3	11829.000	32.86	17.38	50.24	74.00	-23.76	peak
4	13127.000	31.79	19.01	50.80	74.00	-23.20	peak
5	13985.000	29.06	21.85	50.91	74.00	-23.09	peak
6	17945.000	24.86	25.75	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

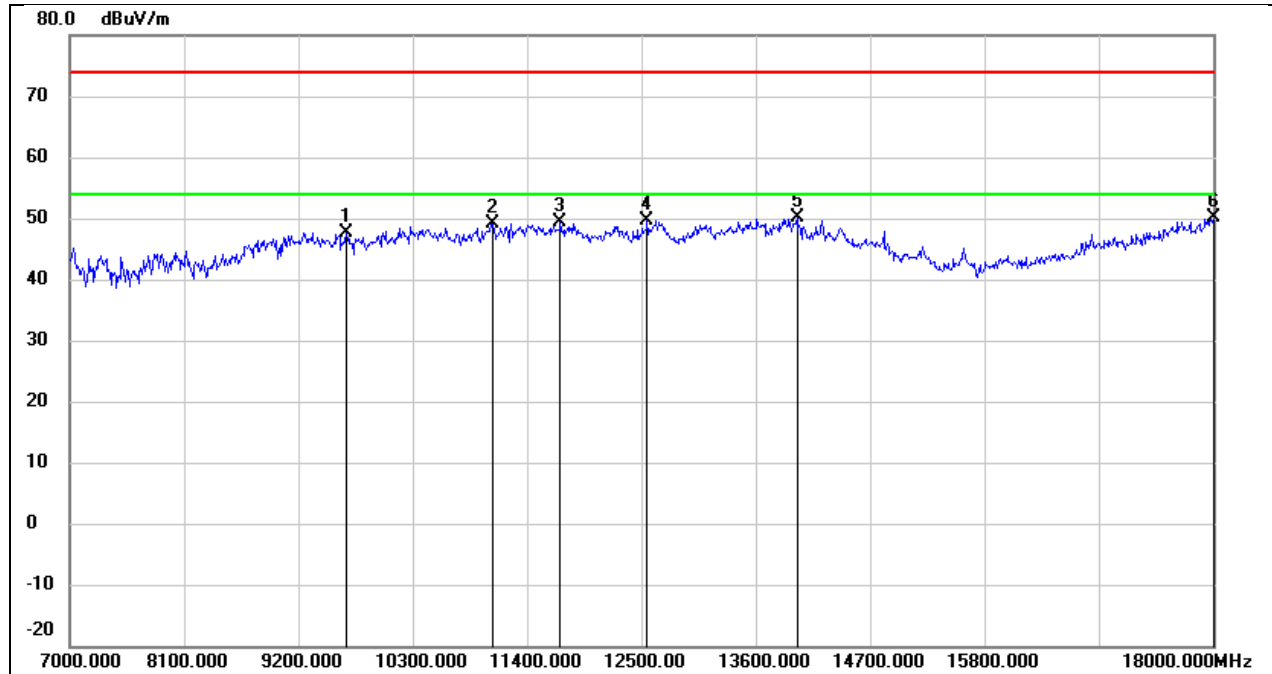


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	36.65	11.01	47.66	74.00	-26.34	peak
2	11070.000	34.15	15.01	49.16	74.00	-24.84	peak
3	11719.000	32.16	17.18	49.34	74.00	-24.66	peak
4	12555.000	31.69	17.90	49.59	74.00	-24.41	peak
5	13996.000	28.23	21.87	50.10	74.00	-23.90	peak
6	18000.000	24.01	26.12	50.13	74.00	-23.87	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

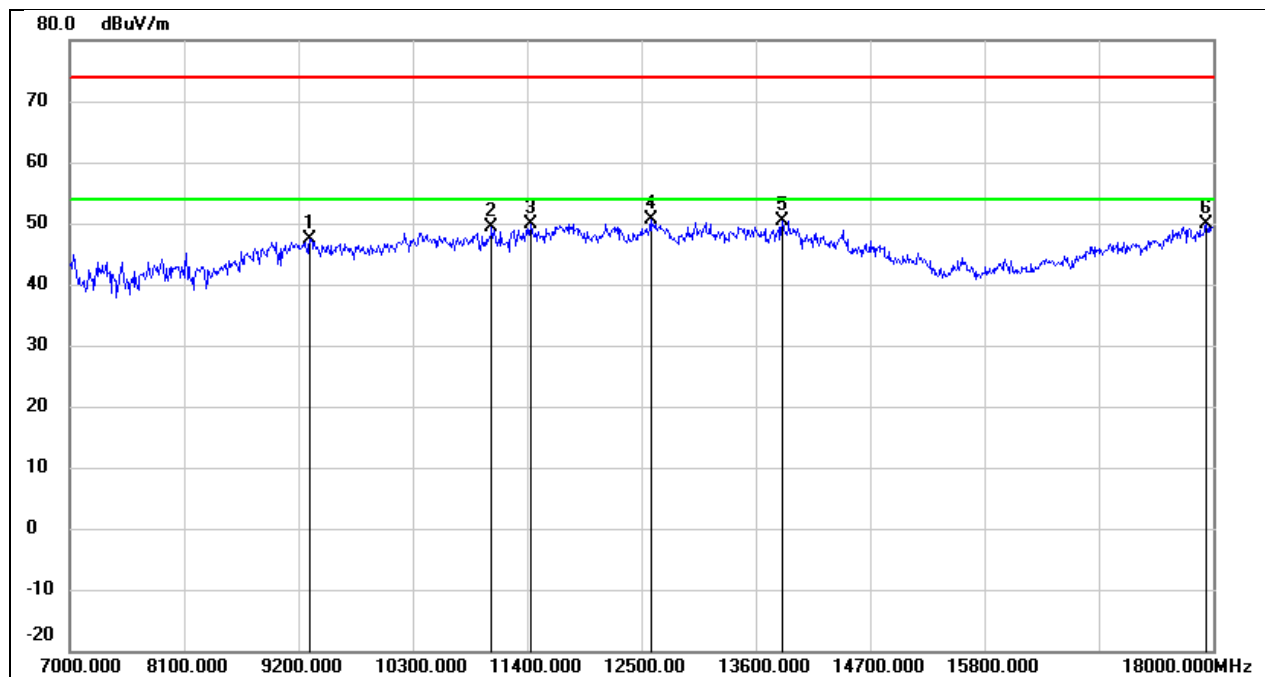


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	36.84	10.54	47.38	74.00	-26.62	peak
2	11059.000	34.32	14.96	49.28	74.00	-24.72	peak
3	11433.000	33.42	16.50	49.92	74.00	-24.08	peak
4	12588.000	32.73	17.94	50.67	74.00	-23.33	peak
5	13853.000	28.95	21.52	50.47	74.00	-23.53	peak
6	17934.000	24.11	25.67	49.78	74.00	-24.22	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

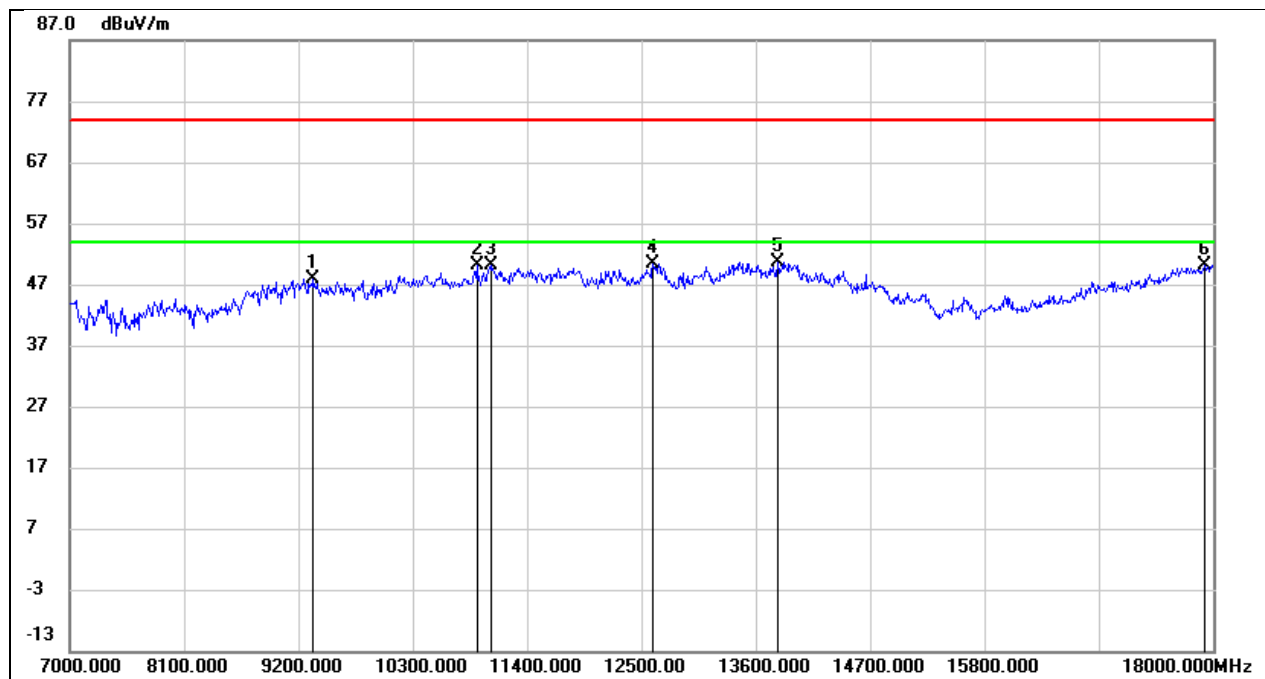


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	37.26	10.55	47.81	74.00	-26.19	peak
2	10916.000	35.62	14.39	50.01	74.00	-23.99	peak
3	11059.000	35.24	14.96	50.20	74.00	-23.80	peak
4	12610.000	32.40	17.97	50.37	74.00	-23.63	peak
5	13809.000	29.15	21.41	50.56	74.00	-23.44	peak
6	17923.000	24.64	25.60	50.24	74.00	-23.76	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

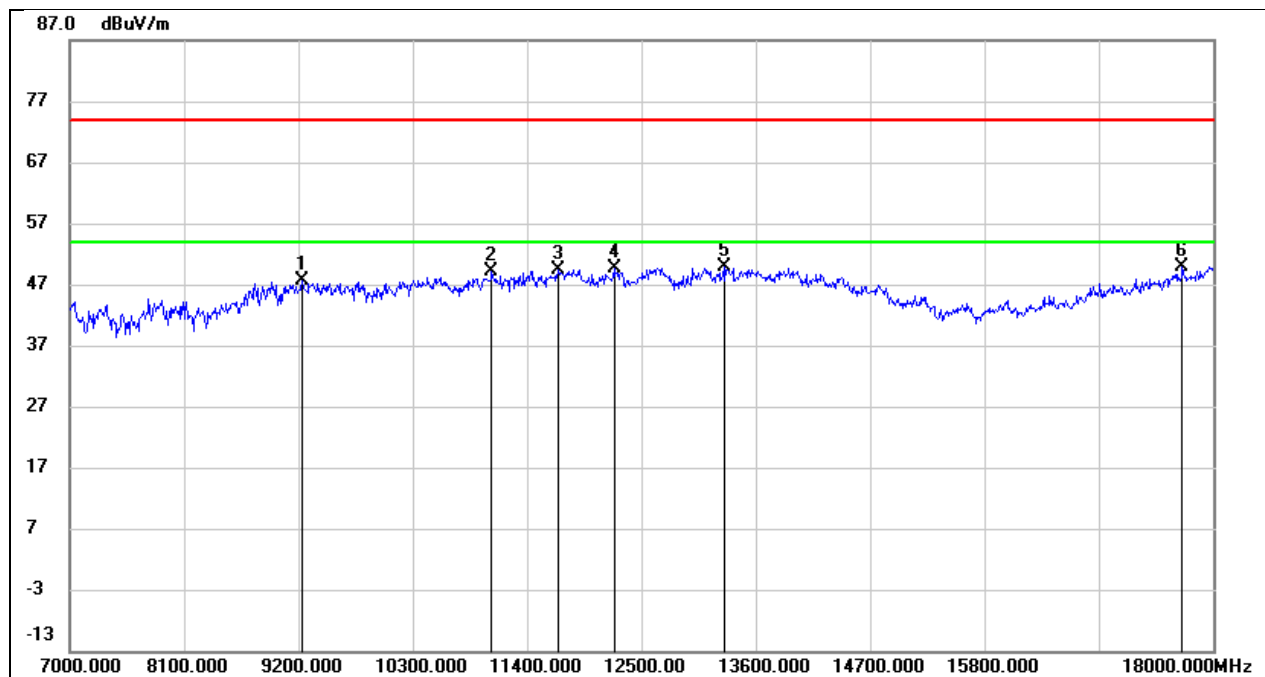


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.11	10.48	47.59	74.00	-26.41	peak
2	11059.000	34.05	14.96	49.01	74.00	-24.99	peak
3	11697.000	32.28	17.13	49.41	74.00	-24.59	peak
4	12236.000	31.88	17.76	49.64	74.00	-24.36	peak
5	13292.000	30.12	19.72	49.84	74.00	-24.16	peak
6	17703.000	25.75	24.09	49.84	74.00	-24.16	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

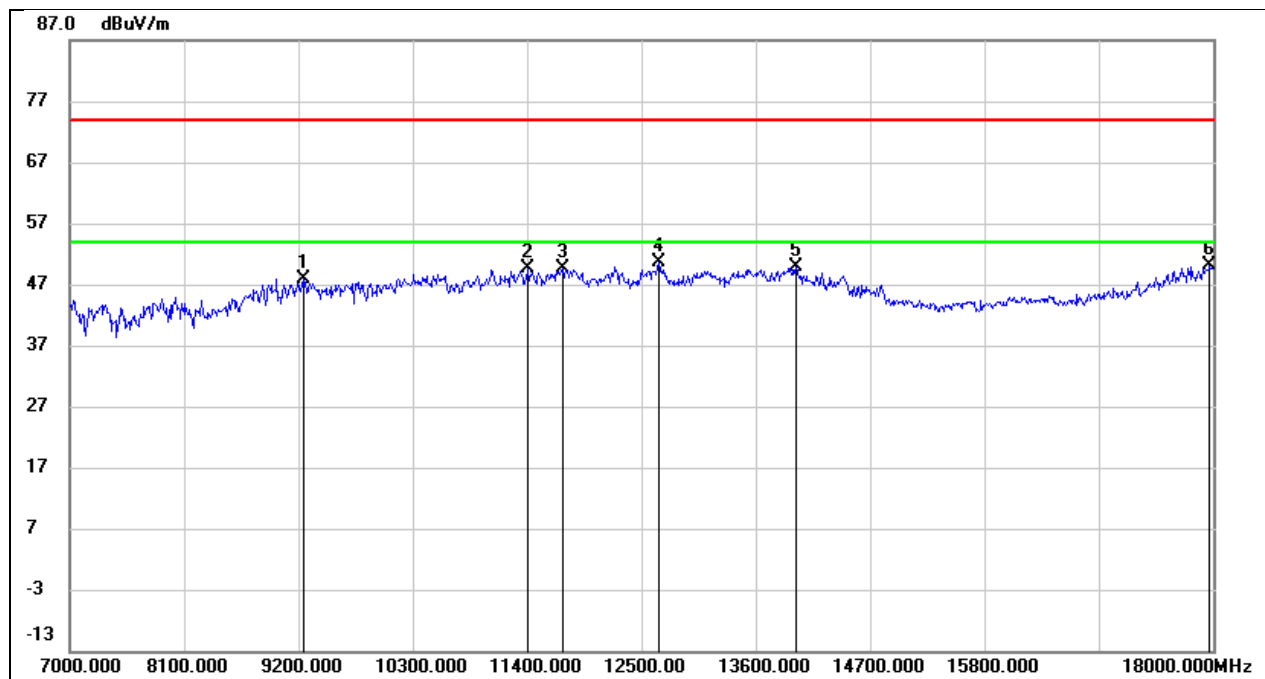


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.39	10.49	47.88	74.00	-26.12	peak
2	11411.000	33.12	16.41	49.53	74.00	-24.47	peak
3	11741.000	32.32	17.22	49.54	74.00	-24.46	peak
4	12665.000	32.55	18.04	50.59	74.00	-23.41	peak
5	13985.000	27.97	21.85	49.82	74.00	-24.18	peak
6	17967.000	24.13	25.89	50.02	74.00	-23.98	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

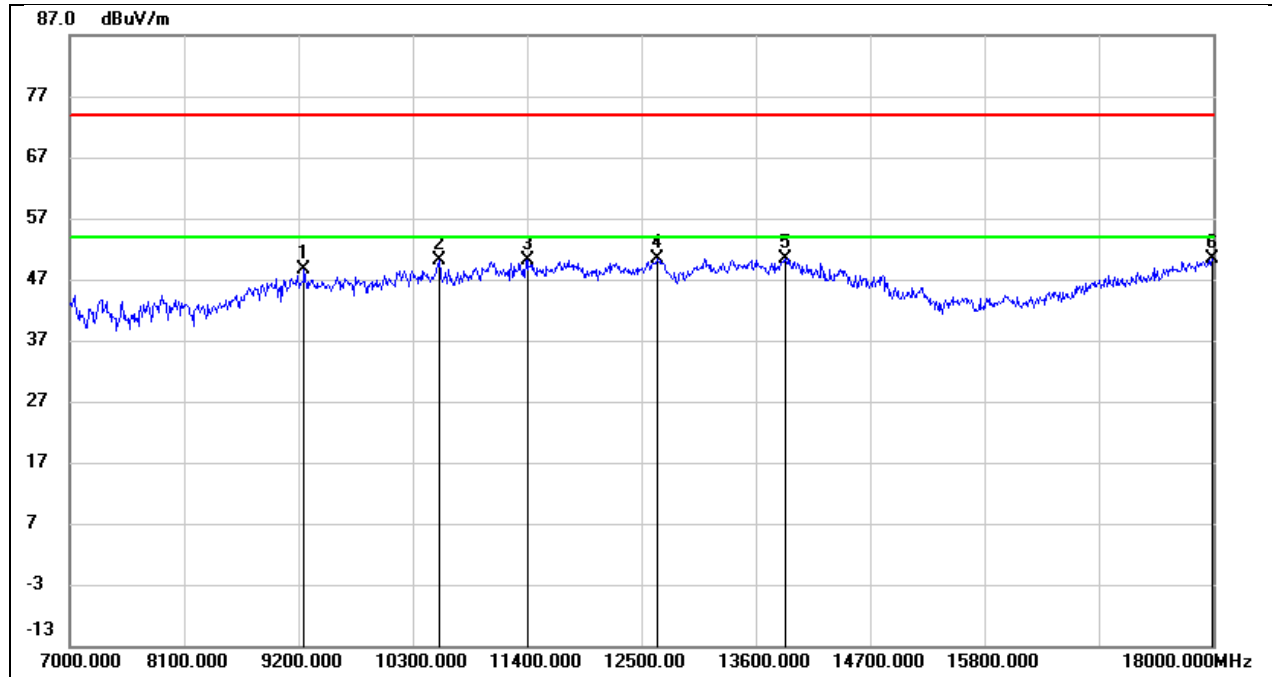


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.00	10.51	48.51	74.00	-25.49	peak
2	10553.000	37.09	13.02	50.11	74.00	-23.89	peak
3	11400.000	33.89	16.36	50.25	74.00	-23.75	peak
4	12654.000	32.45	18.01	50.46	74.00	-23.54	peak
5	13886.000	28.80	21.60	50.40	74.00	-23.60	peak
6	17989.000	24.33	26.04	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

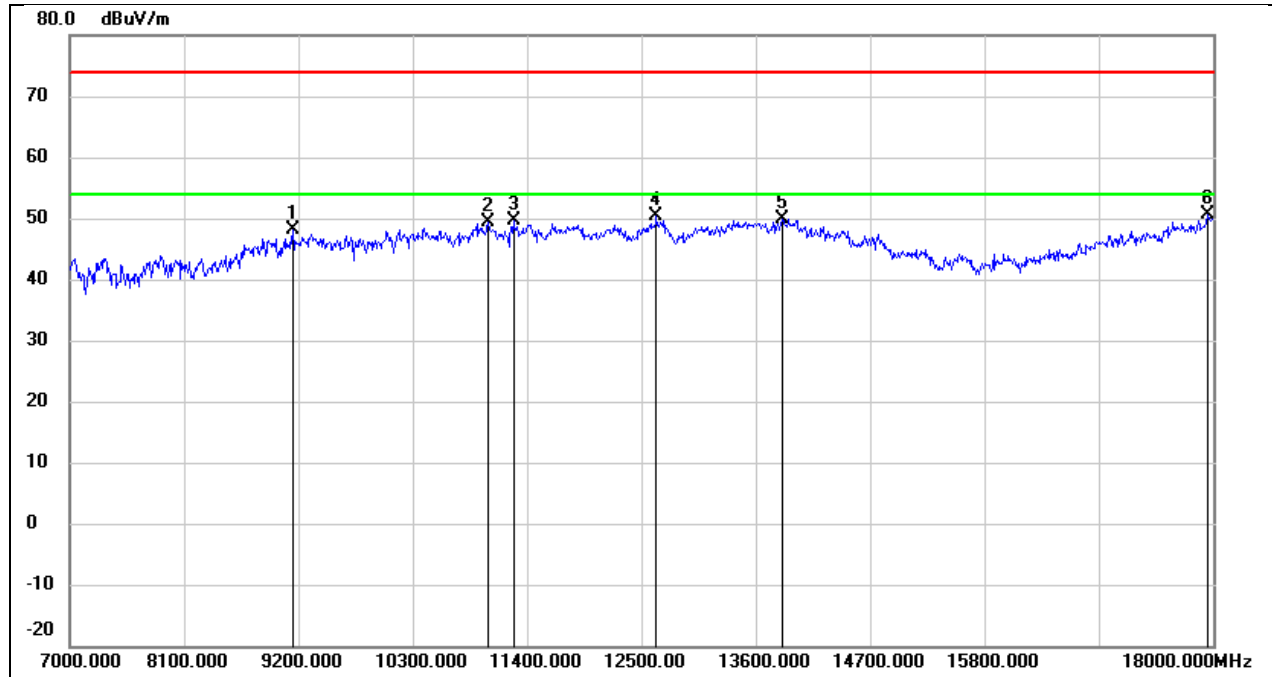


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.73	10.43	48.16	74.00	-25.84	peak
2	11026.000	34.58	14.82	49.40	74.00	-24.60	peak
3	11268.000	33.87	15.83	49.70	74.00	-24.30	peak
4	12643.000	32.46	18.01	50.47	74.00	-23.53	peak
5	13853.000	28.48	21.52	50.00	74.00	-24.00	peak
6	17945.000	24.88	25.75	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

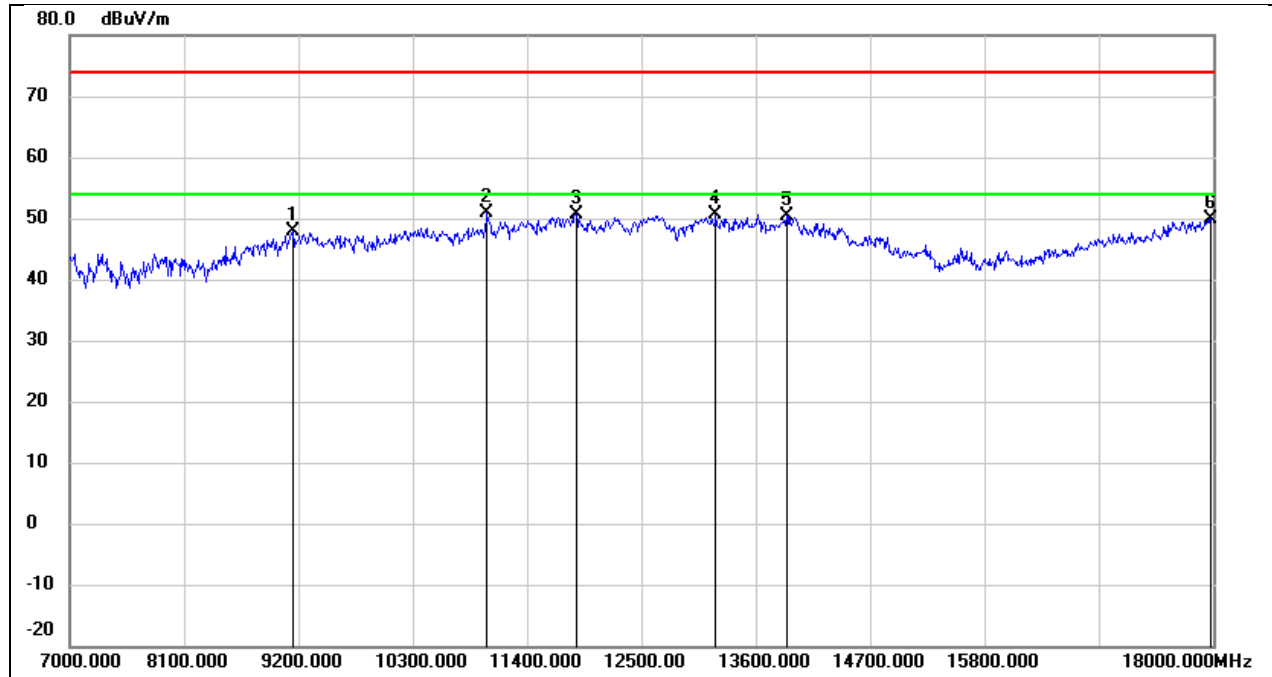


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	37.50	10.43	47.93	74.00	-26.07	peak
2	11015.000	36.21	14.79	51.00	74.00	-23.00	peak
3	11873.000	33.13	17.46	50.59	74.00	-23.41	peak
4	13215.000	31.24	19.39	50.63	74.00	-23.37	peak
5	13897.000	28.76	21.62	50.38	74.00	-23.62	peak
6	17978.000	23.92	25.97	49.89	74.00	-24.11	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

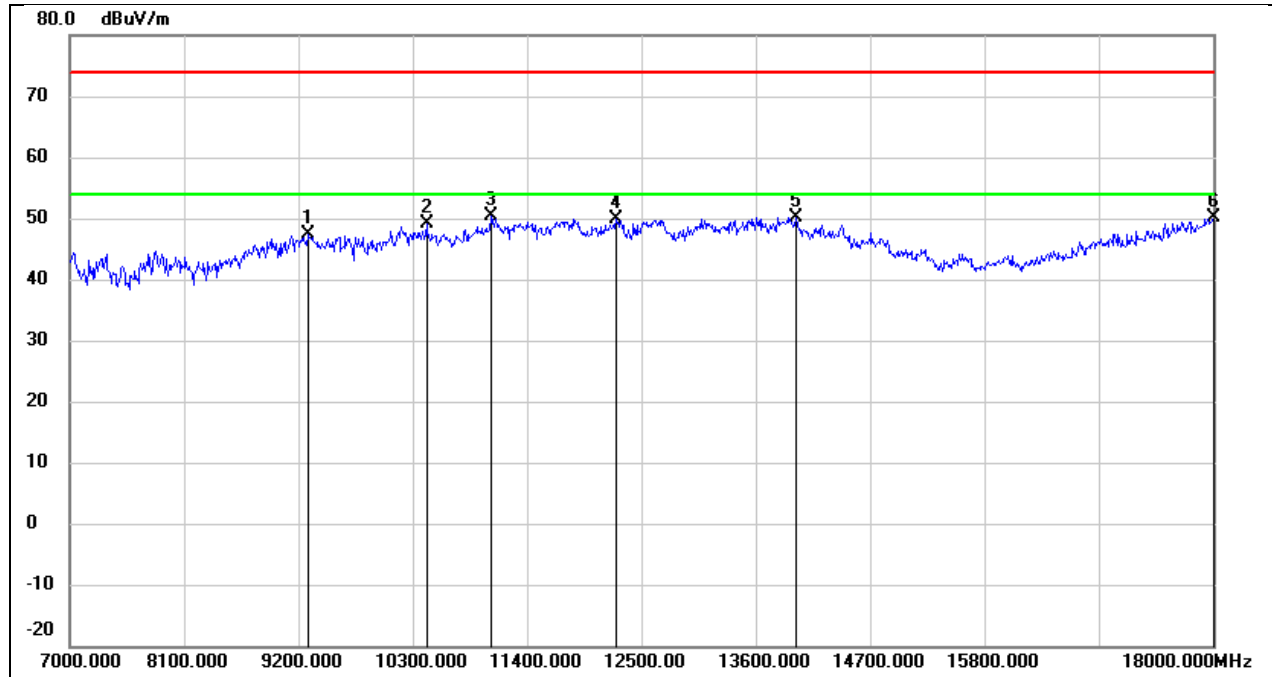


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9288.000	36.78	10.52	47.30	74.00	-26.70	peak
2	10432.000	36.58	12.67	49.25	74.00	-24.75	peak
3	11059.000	35.34	14.96	50.30	74.00	-23.70	peak
4	12258.000	32.17	17.77	49.94	74.00	-24.06	peak
5	13985.000	28.36	21.85	50.21	74.00	-23.79	peak
6	18000.000	24.02	26.12	50.14	74.00	-23.86	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

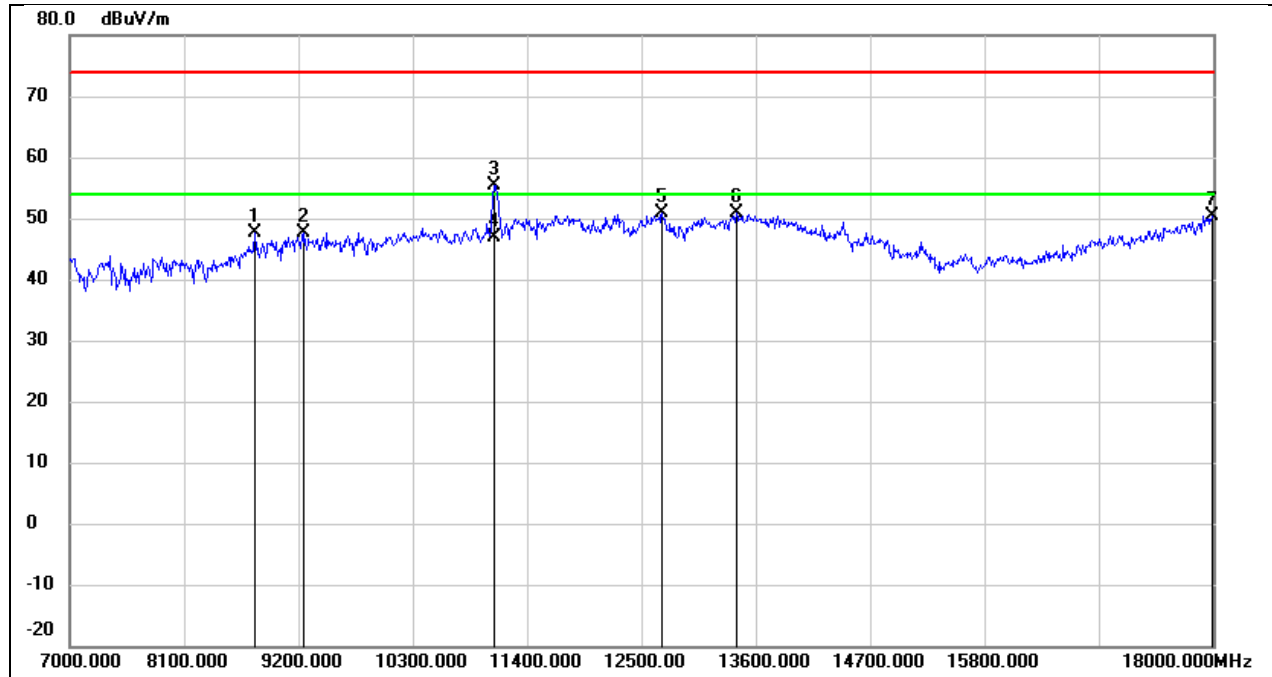


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8782.000	38.75	8.84	47.59	74.00	-26.41	peak
2	9255.000	37.10	10.51	47.61	74.00	-26.39	peak
3	11081.000	40.45	15.05	55.50	74.00	-18.50	peak
4	11081.000	31.82	15.05	46.87	54.00	-7.13	AVG
5	12698.000	32.82	18.08	50.90	74.00	-23.10	peak
6	13413.000	30.51	20.26	50.77	74.00	-23.23	peak
7	17989.000	24.33	26.04	50.37	74.00	-23.63	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

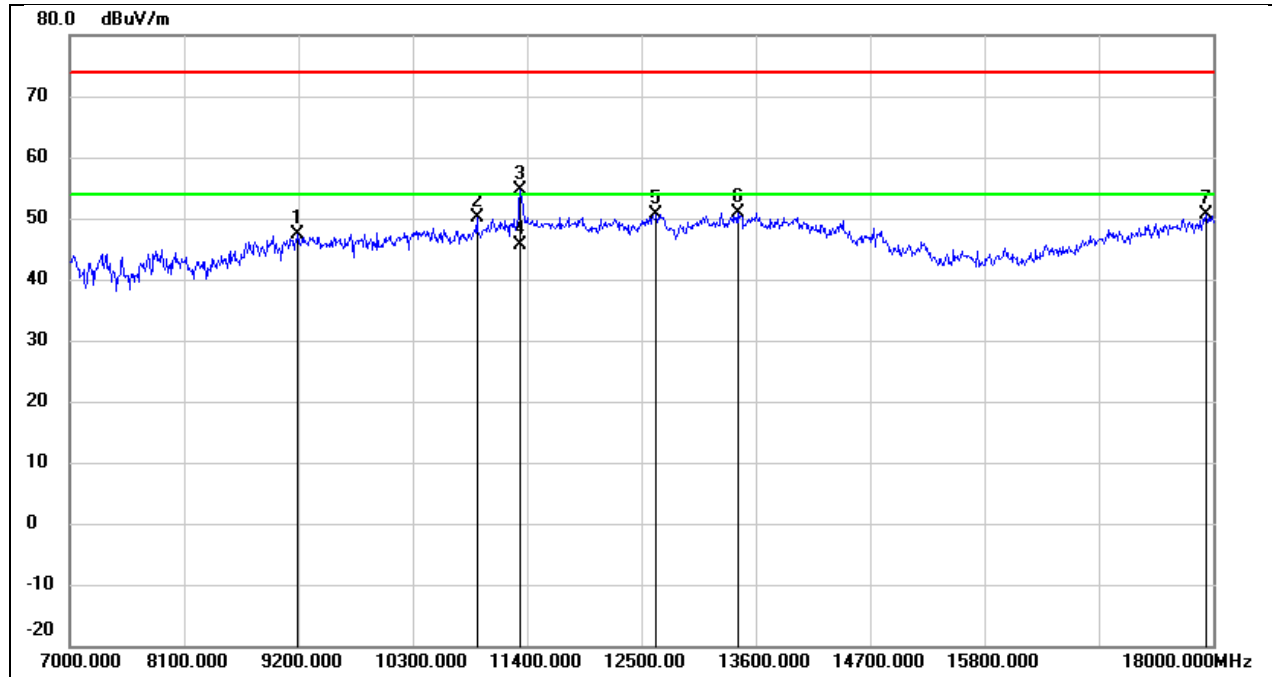


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.92	10.46	47.38	74.00	-26.62	peak
2	10916.000	35.63	14.39	50.02	74.00	-23.98	peak
3	11334.000	38.60	16.09	54.69	74.00	-19.31	peak
4	11334.000	29.43	16.09	45.52	54.00	-8.48	AVG
5	12643.000	32.65	18.01	50.66	74.00	-23.34	peak
6	13424.000	30.70	20.30	51.00	74.00	-23.00	peak
7	17934.000	24.91	25.67	50.58	74.00	-23.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

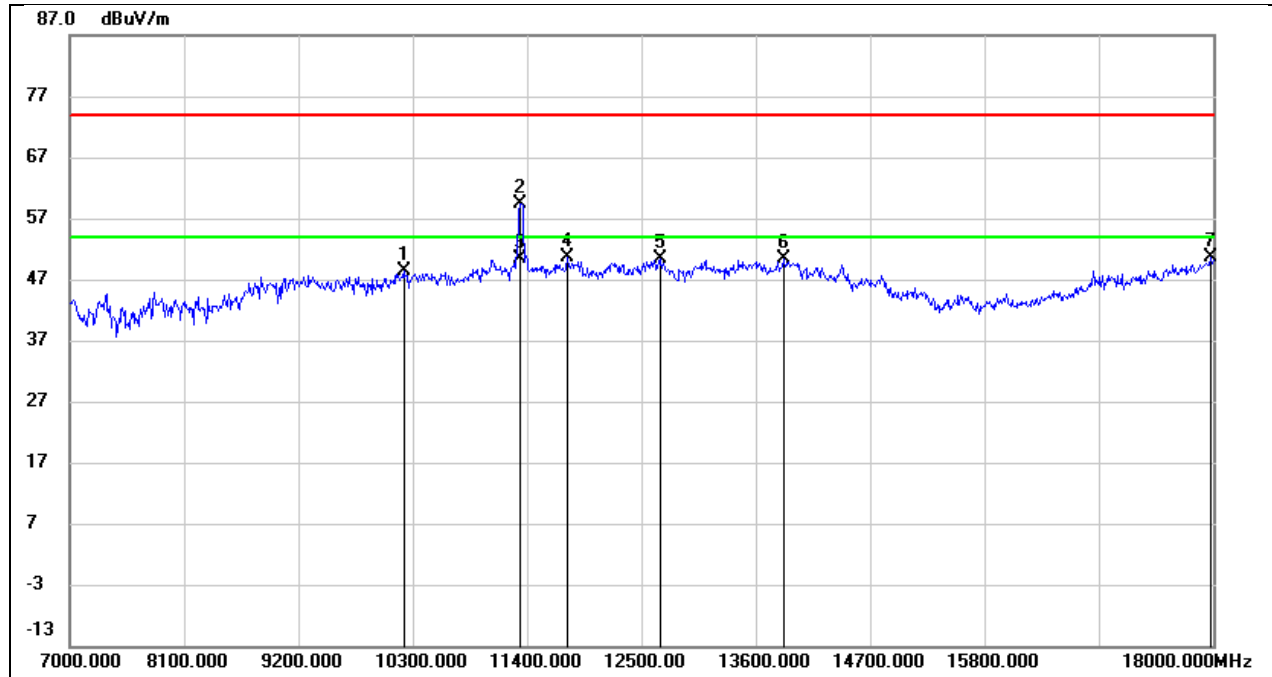


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10212.000	36.07	12.21	48.28	74.00	-25.72	peak
2	11334.000	43.28	16.09	59.37	74.00	-14.63	peak
3	11334.000	34.24	16.09	50.33	54.00	-3.67	AVG
4	11785.000	33.36	17.30	50.66	74.00	-23.34	peak
5	12687.000	32.26	18.05	50.31	74.00	-23.69	peak
6	13864.000	28.89	21.53	50.42	74.00	-23.58	peak
7	17978.000	24.66	25.97	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

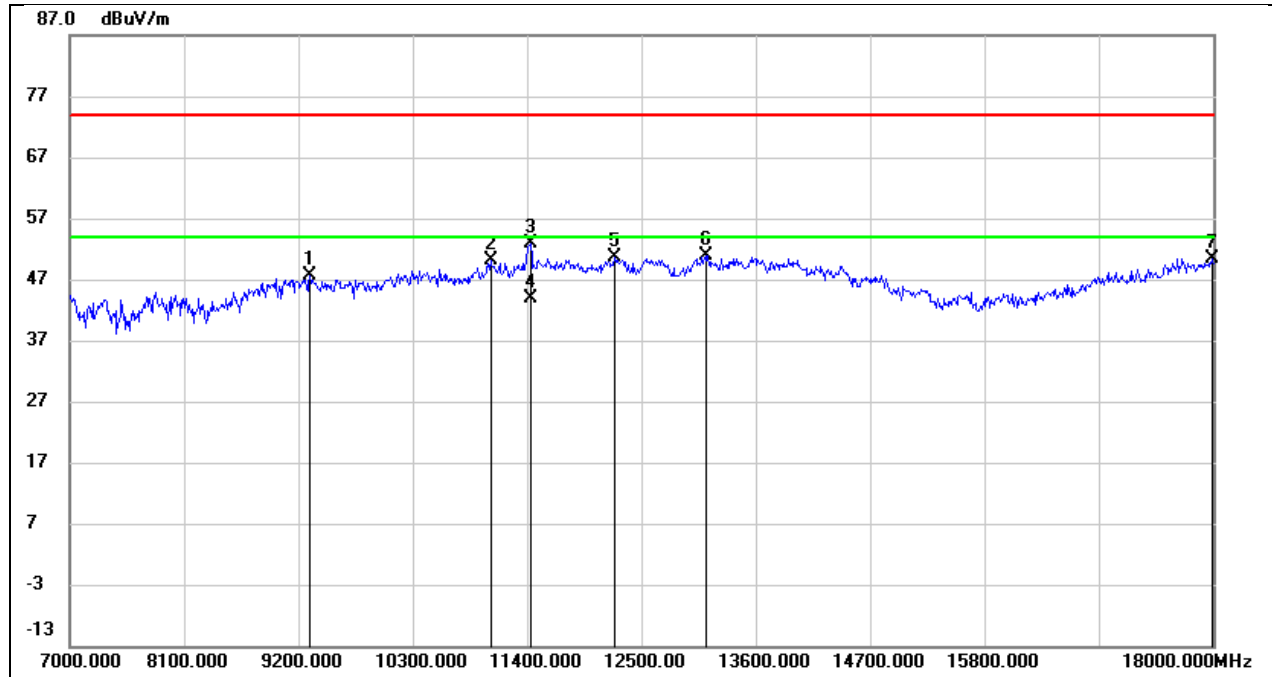


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	36.98	10.54	47.52	74.00	-26.48	peak
2	11048.000	35.21	14.91	50.12	74.00	-23.88	peak
3	11433.000	36.26	16.50	52.76	74.00	-21.24	peak
4	11433.000	27.36	16.50	43.86	54.00	-10.14	AVG
5	12247.000	32.76	17.77	50.53	74.00	-23.47	peak
6	13116.000	31.95	18.96	50.91	74.00	-23.09	peak
7	17989.000	24.38	26.04	50.42	74.00	-23.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

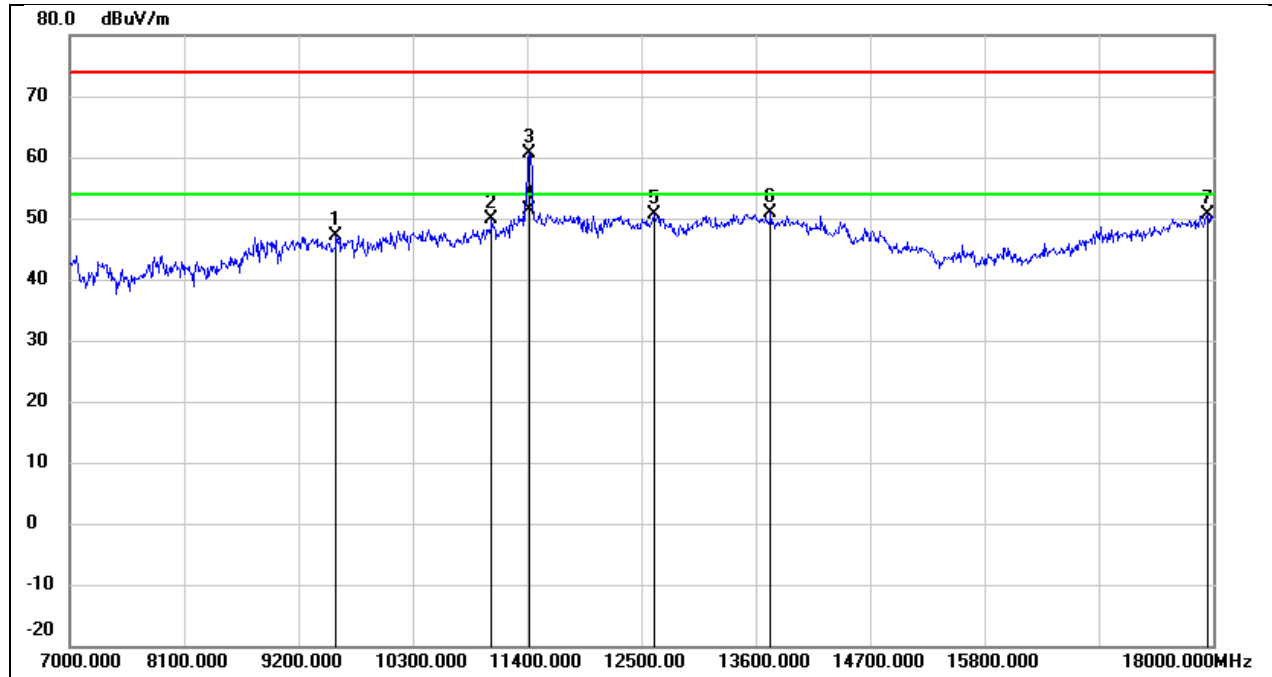


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	36.33	10.79	47.12	74.00	-26.88	peak
2	11059.000	34.86	14.96	49.82	74.00	-24.18	peak
3	11422.000	44.11	16.46	60.57	74.00	-13.43	peak
4	11422.000	35.02	16.46	51.48	54.00	-2.52	AVG
5	12621.000	32.72	17.98	50.70	74.00	-23.30	peak
6	13743.000	29.63	21.24	50.87	74.00	-23.13	peak
7	17945.000	24.88	25.75	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

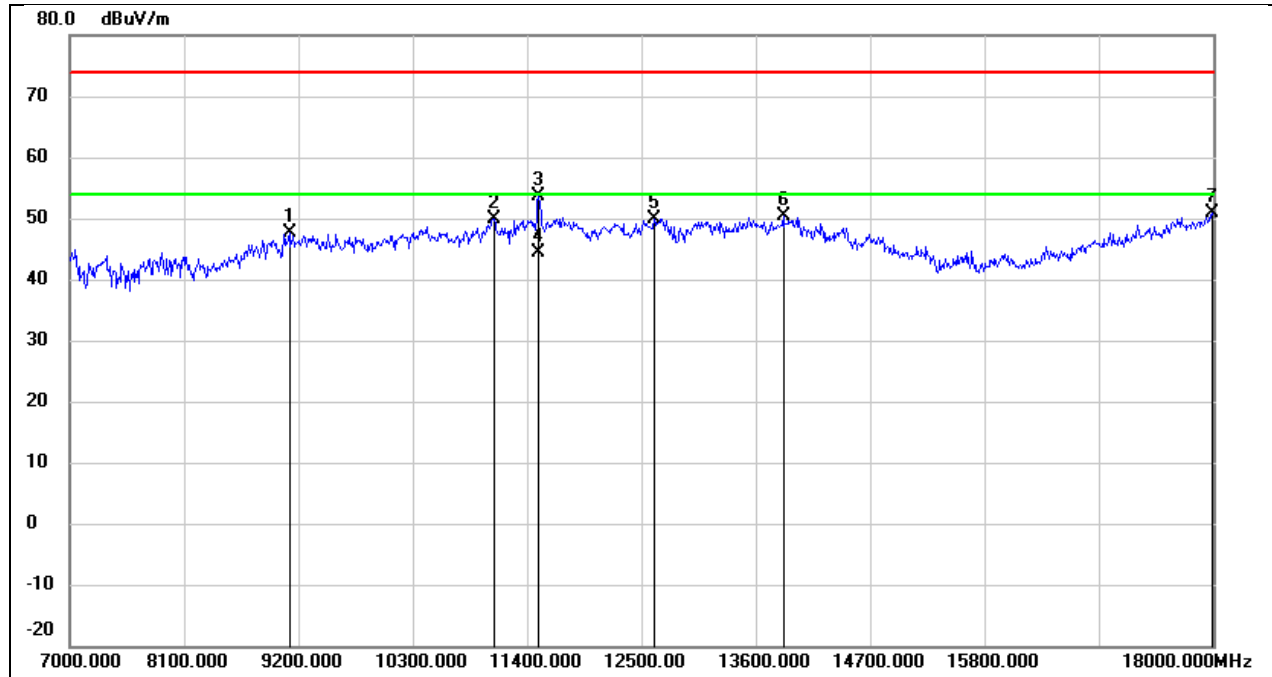


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	37.20	10.41	47.61	74.00	-26.39	peak
2	11081.000	34.93	15.05	49.98	74.00	-24.02	peak
3	11510.000	36.79	16.79	53.58	74.00	-20.42	peak
4	11510.000	27.47	16.79	44.26	54.00	-9.74	AVG
5	12621.000	32.02	17.98	50.00	74.00	-24.00	peak
6	13864.000	28.77	21.53	50.30	74.00	-23.70	peak
7	17989.000	24.88	26.04	50.92	74.00	-23.08	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

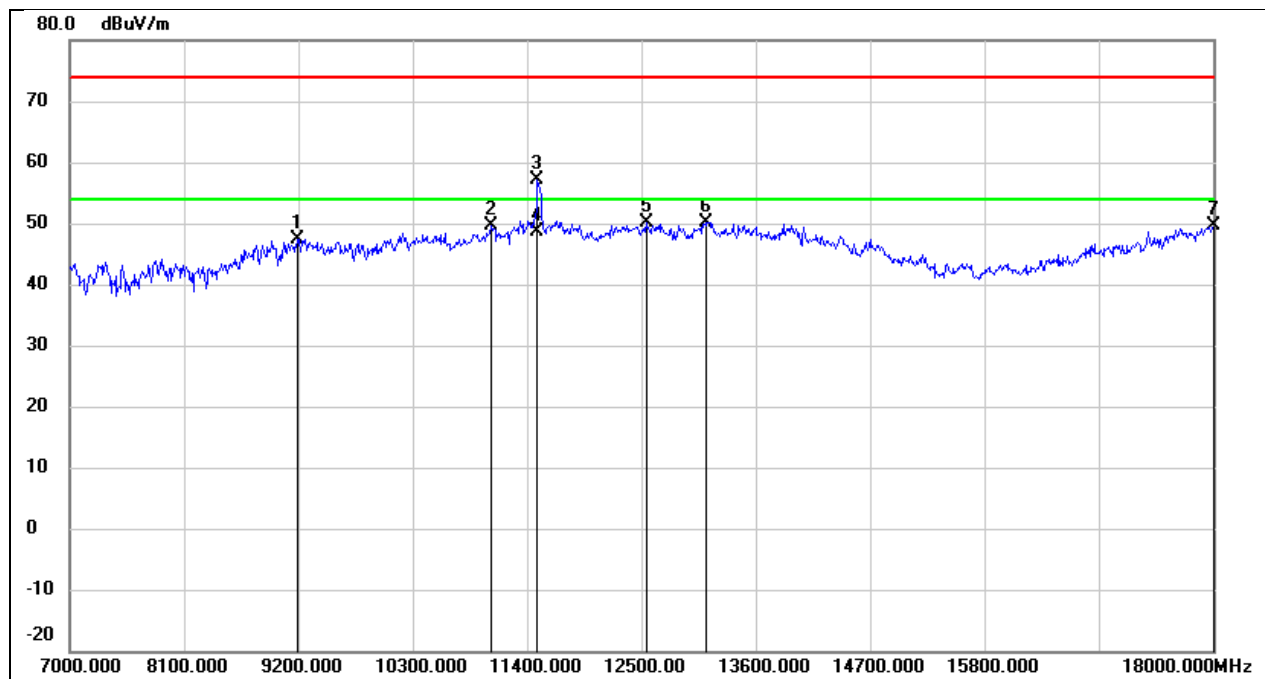


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	36.98	10.46	47.44	74.00	-26.56	peak
2	11048.000	34.77	14.91	49.68	74.00	-24.32	peak
3	11499.000	40.32	16.77	57.09	74.00	-16.91	peak
4	11499.000	31.85	16.77	48.62	54.00	-5.38	AVG
5	12544.000	32.37	17.88	50.25	74.00	-23.75	peak
6	13127.000	31.20	19.01	50.21	74.00	-23.79	peak
7	18000.000	23.60	26.12	49.72	74.00	-24.28	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

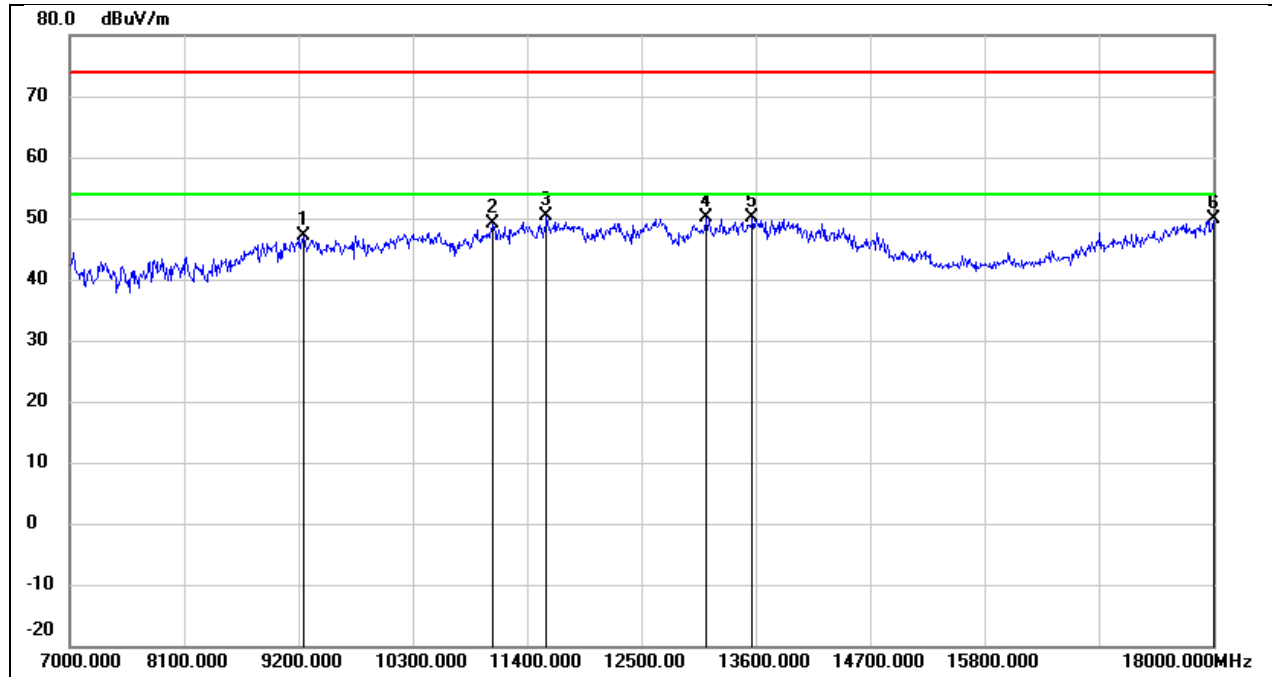


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.73	10.51	47.24	74.00	-26.76	peak
2	11070.000	34.08	15.01	49.09	74.00	-24.91	peak
3	11587.000	33.51	16.93	50.44	74.00	-23.56	peak
4	13127.000	31.00	19.01	50.01	74.00	-23.99	peak
5	13567.000	29.26	20.80	50.06	74.00	-23.94	peak
6	18000.000	23.73	26.12	49.85	74.00	-24.15	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

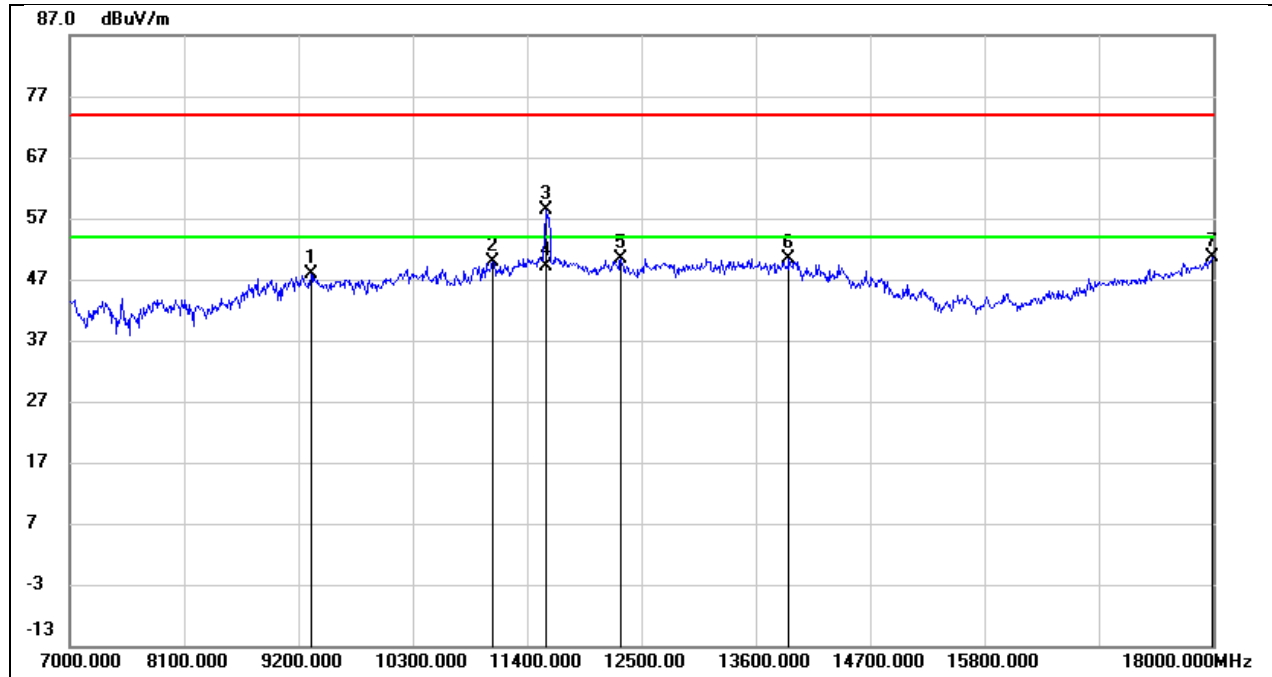


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	37.30	10.53	47.83	74.00	-26.17	peak
2	11070.000	34.87	15.01	49.88	74.00	-24.12	peak
3	11587.000	41.41	16.93	58.34	74.00	-15.66	peak
4	11587.000	32.27	16.93	49.20	54.00	-4.80	AVG
5	12302.000	32.56	17.78	50.34	74.00	-23.66	peak
6	13919.000	28.71	21.68	50.39	74.00	-23.61	peak
7	17989.000	24.54	26.04	50.58	74.00	-23.42	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

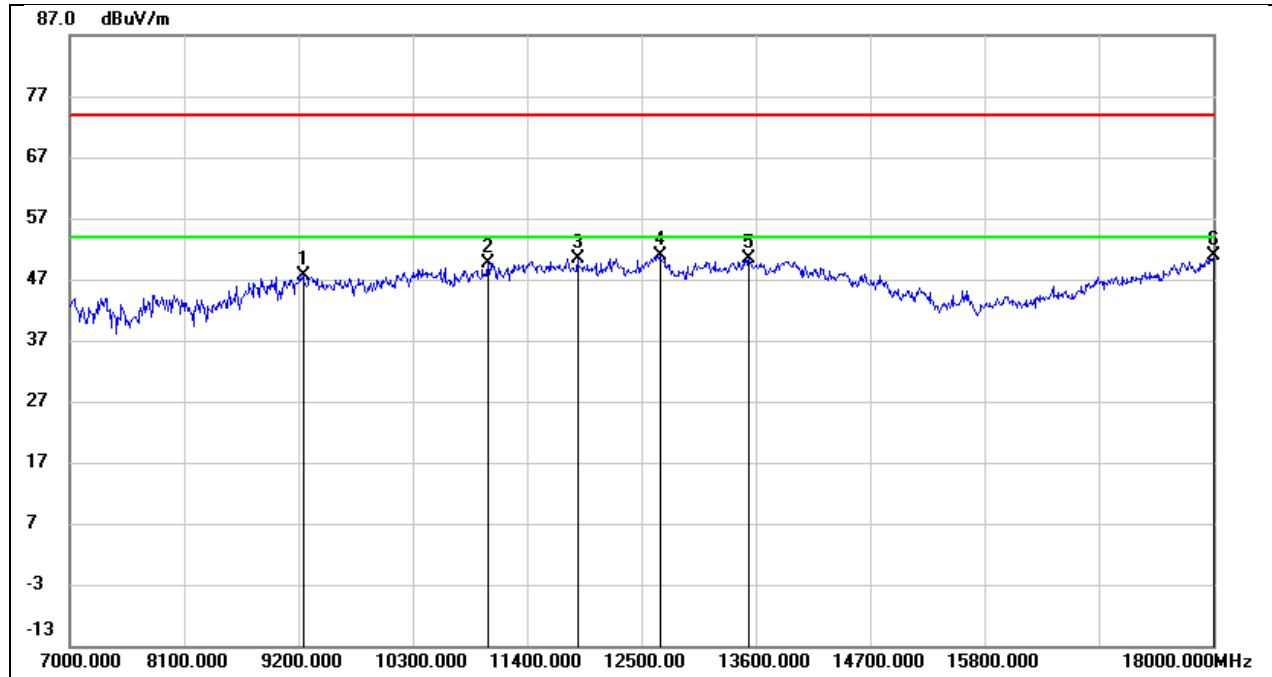


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	37.21	10.49	47.70	74.00	-26.30	peak
2	11026.000	34.81	14.82	49.63	74.00	-24.37	peak
3	11884.000	32.85	17.48	50.33	74.00	-23.67	peak
4	12676.000	32.71	18.05	50.76	74.00	-23.24	peak
5	13534.000	29.57	20.73	50.30	74.00	-23.70	peak
6	18000.000	24.66	26.12	50.78	74.00	-23.22	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

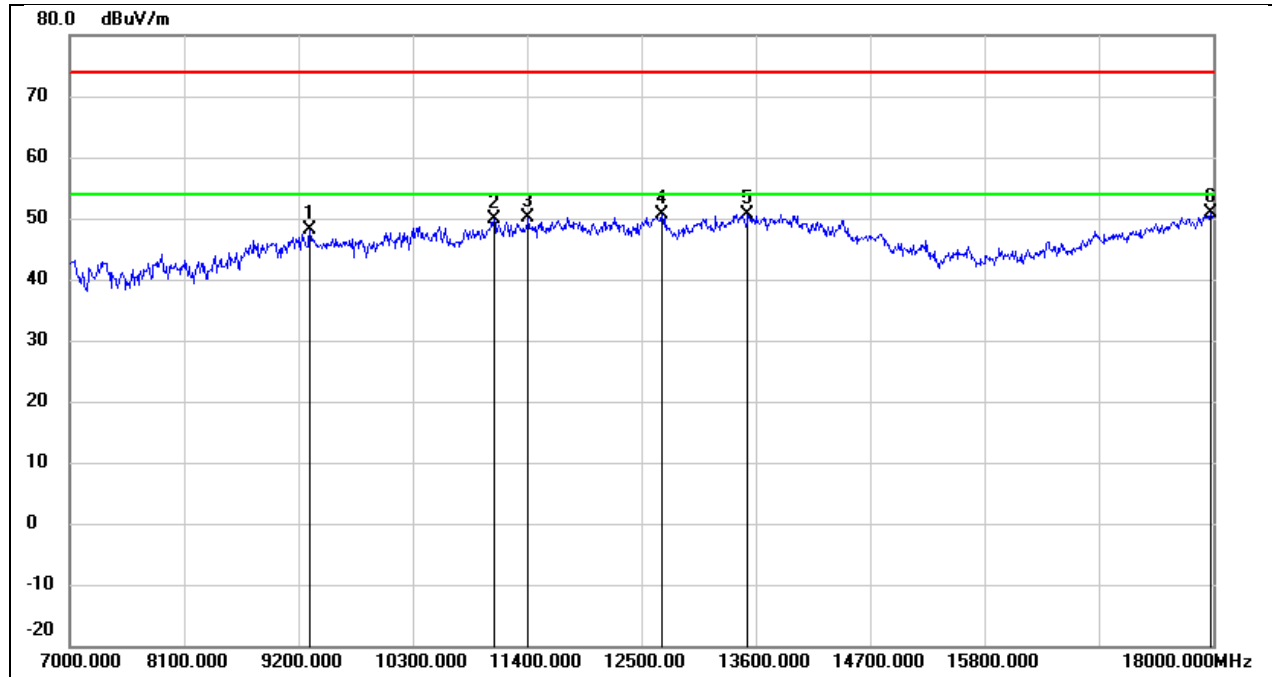


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.49	10.54	48.03	74.00	-25.97	peak
2	11081.000	34.91	15.05	49.96	74.00	-24.04	peak
3	11411.000	33.69	16.41	50.10	74.00	-23.90	peak
4	12698.000	32.44	18.08	50.52	74.00	-23.48	peak
5	13523.000	29.88	20.70	50.58	74.00	-23.42	peak
6	17978.000	24.99	25.97	50.96	74.00	-23.04	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 5 V

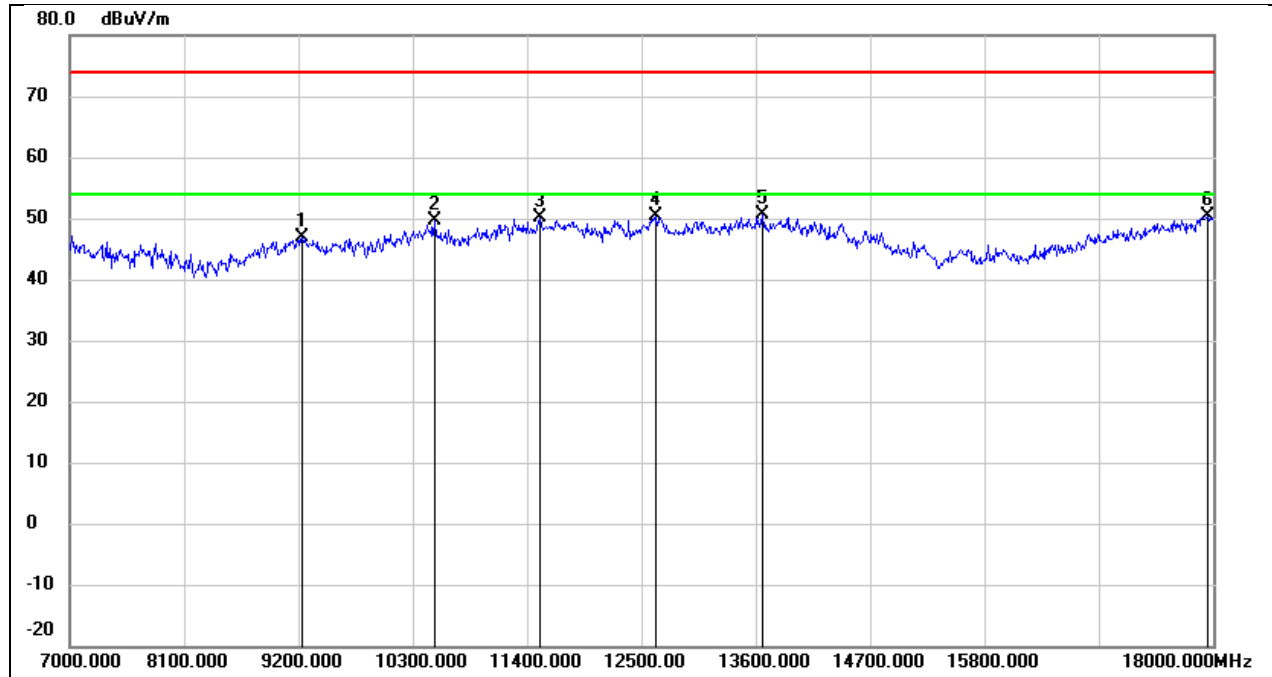


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.47	10.48	46.95	74.00	-27.05	peak
2	10509.000	36.73	12.85	49.58	74.00	-24.42	peak
3	11521.000	33.39	16.82	50.21	74.00	-23.79	peak
4	12643.000	32.47	18.01	50.48	74.00	-23.52	peak
5	13666.000	29.47	21.05	50.52	74.00	-23.48	peak
6	17945.000	24.60	25.75	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 5 V

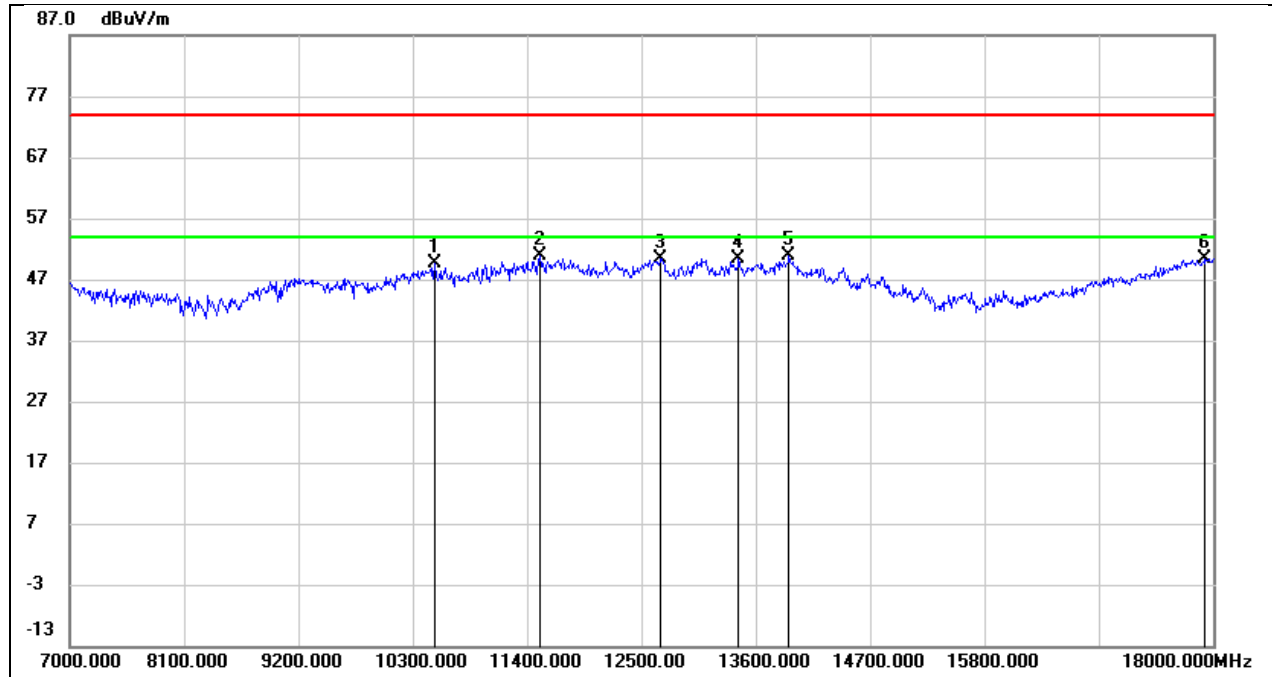


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10509.000	36.75	12.85	49.60	74.00	-24.40	peak
2	11521.000	34.13	16.82	50.95	74.00	-23.05	peak
3	12687.000	32.36	18.05	50.41	74.00	-23.59	peak
4	13435.000	30.15	20.35	50.50	74.00	-23.50	peak
5	13919.000	29.09	21.68	50.77	74.00	-23.23	peak
6	17923.000	24.71	25.60	50.31	74.00	-23.69	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 5 V

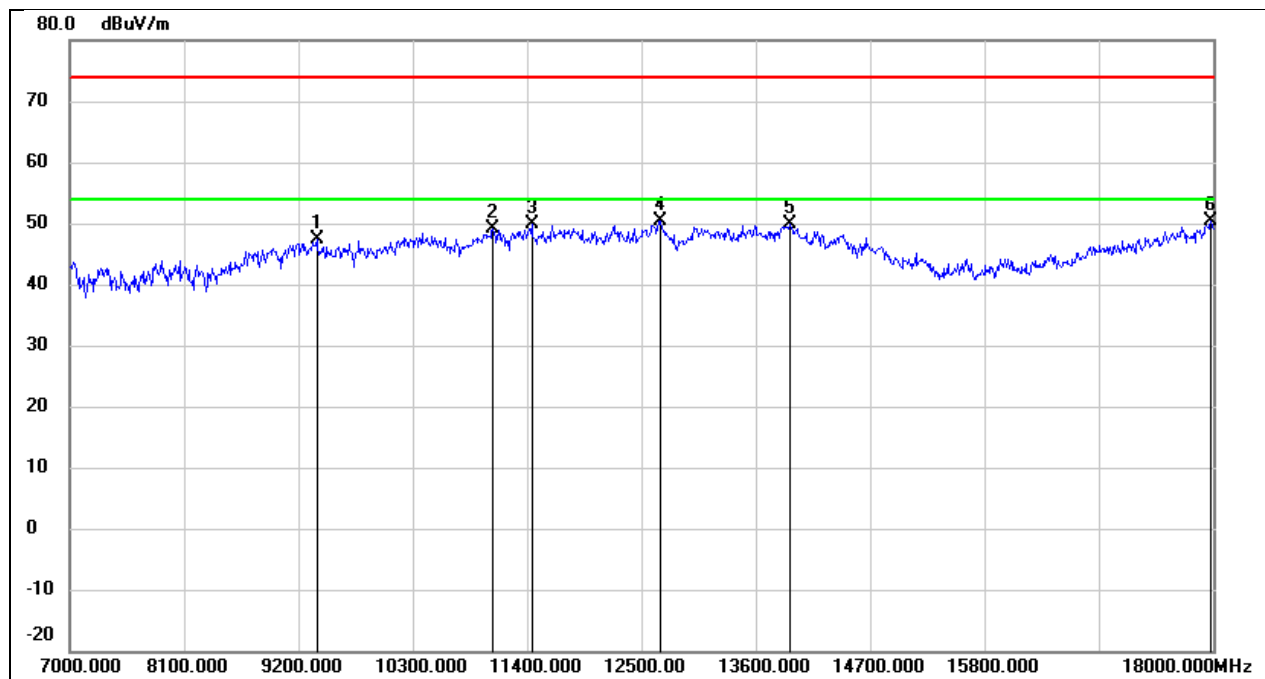


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	36.89	10.58	47.47	74.00	-26.53	peak
2	11070.000	34.06	15.01	49.07	74.00	-24.93	peak
3	11444.000	33.27	16.53	49.80	74.00	-24.20	peak
4	12676.000	32.36	18.05	50.41	74.00	-23.59	peak
5	13930.000	28.28	21.71	49.99	74.00	-24.01	peak
6	17978.000	24.29	25.97	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 5 V

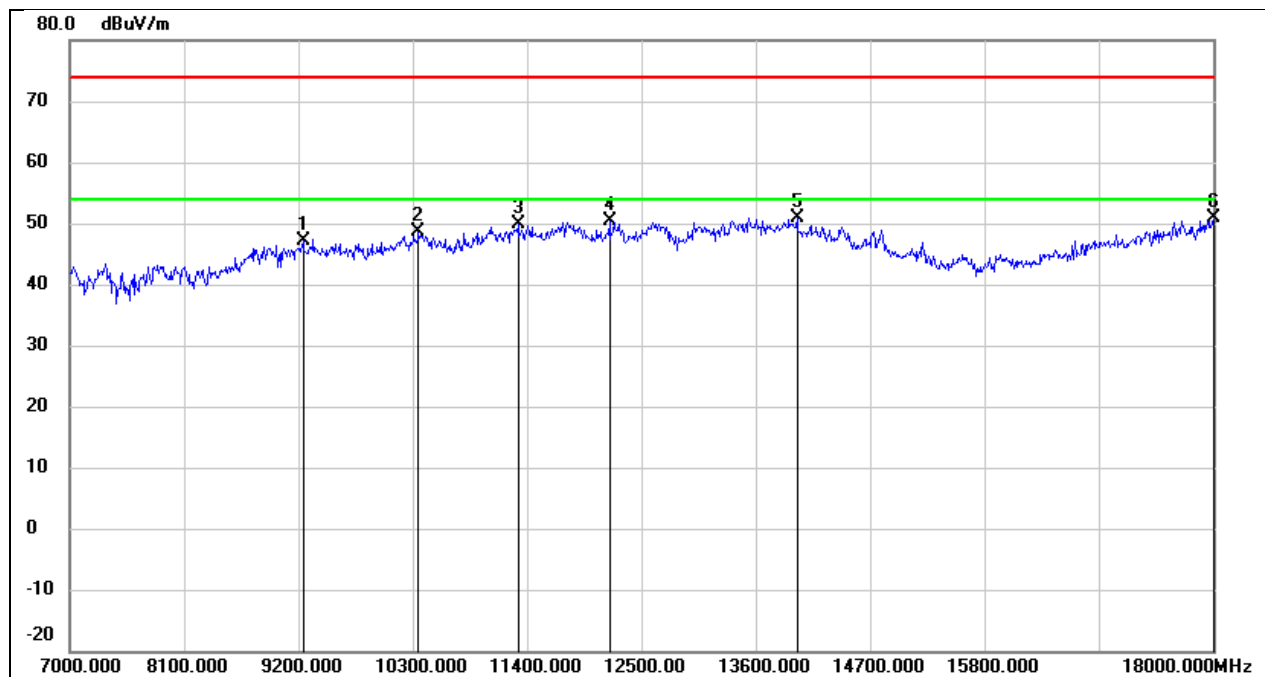


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	36.65	10.49	47.14	74.00	-26.86	peak
2	10355.000	36.09	12.52	48.61	74.00	-25.39	peak
3	11312.000	34.00	16.00	50.00	74.00	-24.00	peak
4	12192.000	32.52	17.74	50.26	74.00	-23.74	peak
5	13996.000	28.96	21.87	50.83	74.00	-23.17	peak
6	18000.000	24.75	26.12	50.87	74.00	-23.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 5 V

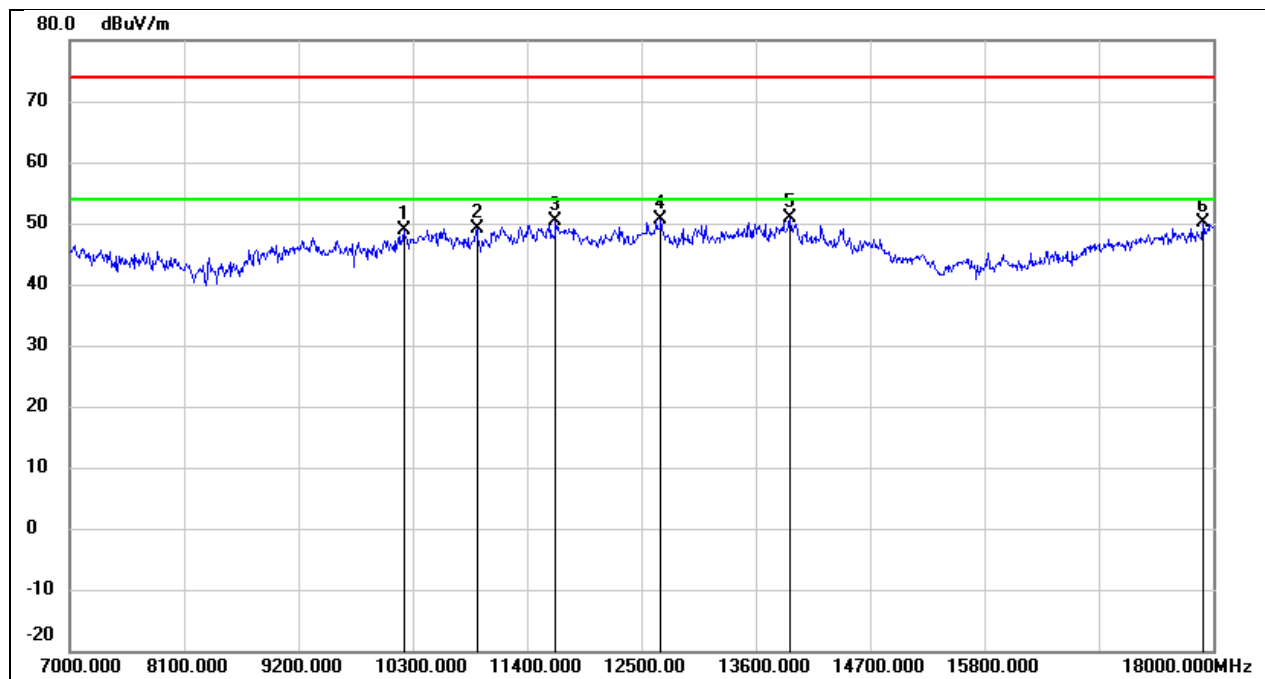


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10212.000	36.60	12.21	48.81	74.00	-25.19	peak
2	10916.000	34.86	14.39	49.25	74.00	-24.75	peak
3	11675.000	33.28	17.10	50.38	74.00	-23.62	peak
4	12687.000	32.54	18.05	50.59	74.00	-23.41	peak
5	13930.000	29.21	21.71	50.92	74.00	-23.08	peak
6	17901.000	24.70	25.45	50.15	74.00	-23.85	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 5 V

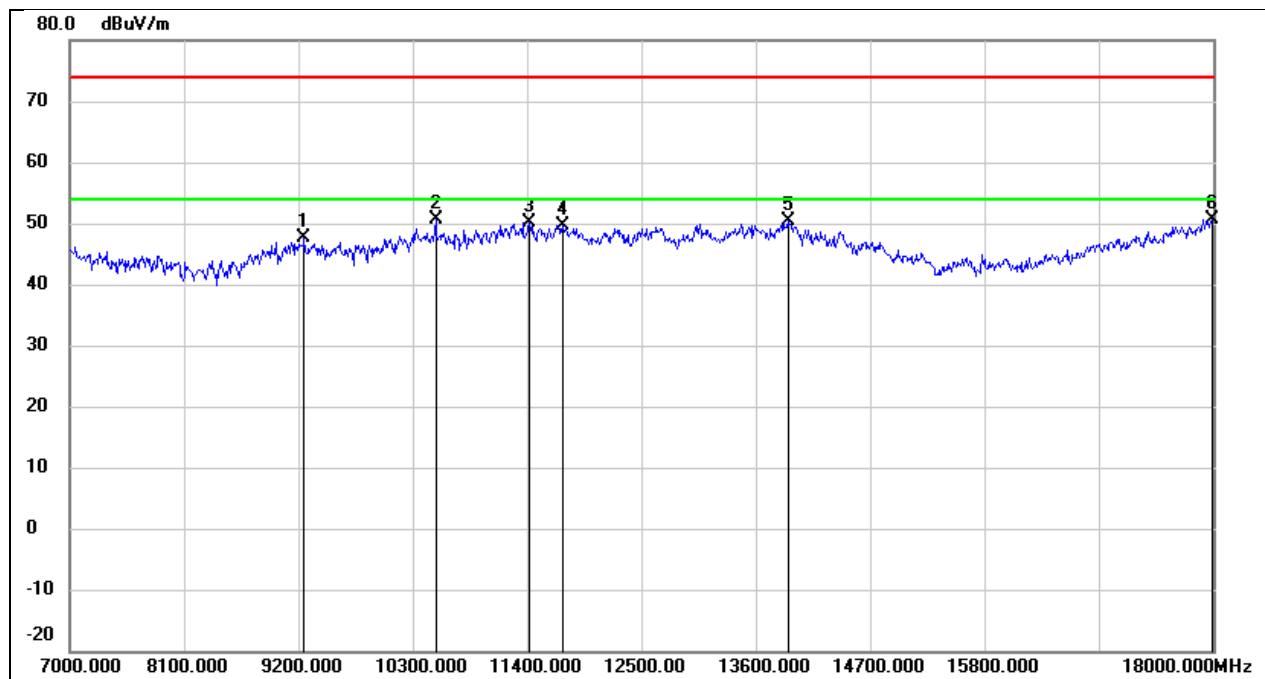


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.08	10.51	47.59	74.00	-26.41	peak
2	10520.000	37.66	12.90	50.56	74.00	-23.44	peak
3	11422.000	33.70	16.46	50.16	74.00	-23.84	peak
4	11741.000	32.39	17.22	49.61	74.00	-24.39	peak
5	13908.000	28.72	21.66	50.38	74.00	-23.62	peak
6	17989.000	24.66	26.04	50.70	74.00	-23.30	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 5 V

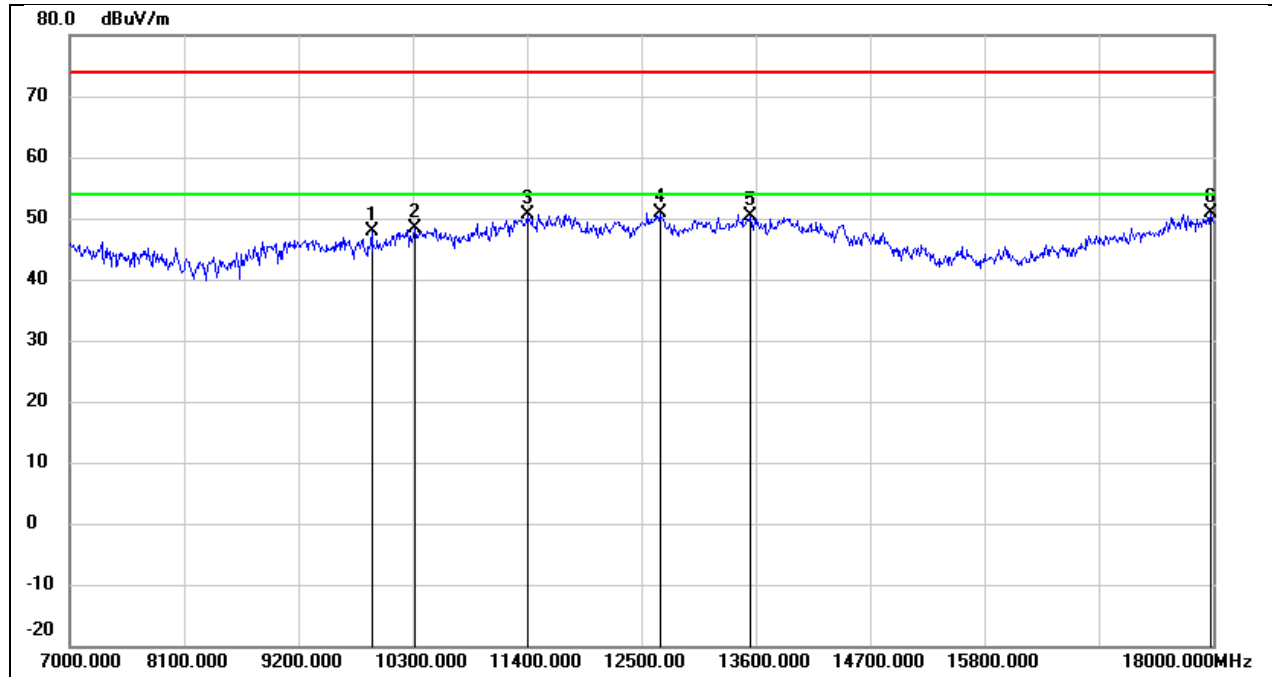


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9904.000	36.40	11.55	47.95	74.00	-26.05	peak
2	10322.000	35.92	12.45	48.37	74.00	-25.63	peak
3	11400.000	34.38	16.36	50.74	74.00	-23.26	peak
4	12676.000	32.93	18.05	50.98	74.00	-23.02	peak
5	13545.000	29.74	20.75	50.49	74.00	-23.51	peak
6	17978.000	24.96	25.97	50.93	74.00	-23.07	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 5 V

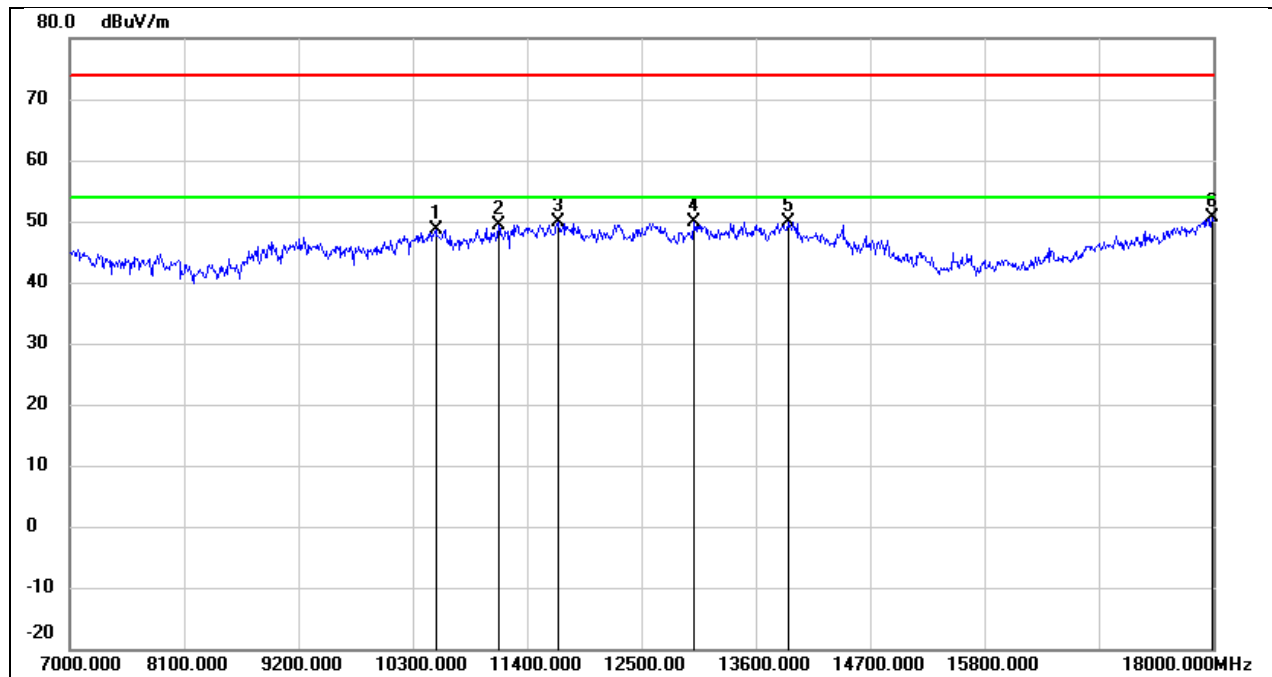


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.79	12.90	48.69	74.00	-25.31	peak
2	11125.000	34.20	15.22	49.42	74.00	-24.58	peak
3	11697.000	32.74	17.13	49.87	74.00	-24.13	peak
4	13006.000	31.43	18.47	49.90	74.00	-24.10	peak
5	13908.000	28.32	21.66	49.98	74.00	-24.02	peak
6	17989.000	24.59	26.04	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 5 V

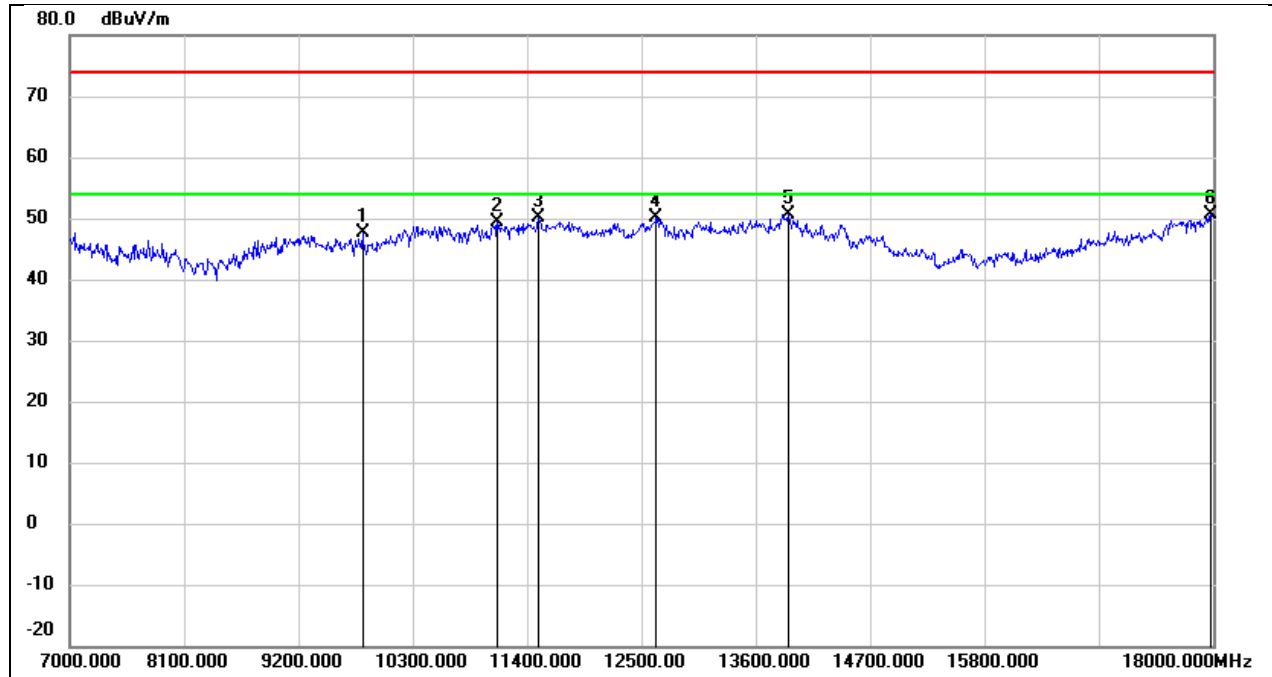


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9816.000	36.21	11.37	47.58	74.00	-26.42	peak
2	11114.000	34.09	15.19	49.28	74.00	-24.72	peak
3	11510.000	33.37	16.79	50.16	74.00	-23.84	peak
4	12643.000	32.24	18.01	50.25	74.00	-23.75	peak
5	13908.000	28.99	21.66	50.65	74.00	-23.35	peak
6	17978.000	24.66	25.97	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 5 V

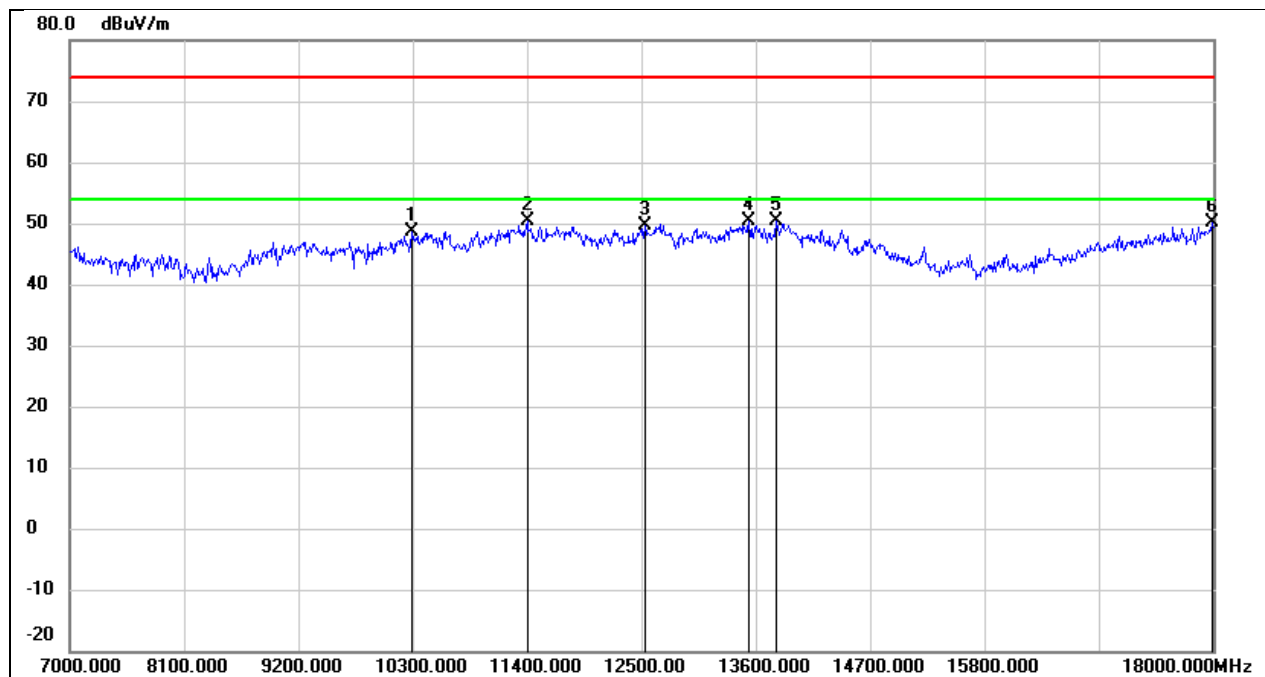


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10289.000	36.35	12.38	48.73	74.00	-25.27	peak
2	11400.000	34.03	16.36	50.39	74.00	-23.61	peak
3	12533.000	31.78	17.87	49.65	74.00	-24.35	peak
4	13534.000	29.71	20.73	50.44	74.00	-23.56	peak
5	13798.000	28.92	21.38	50.30	74.00	-23.70	peak
6	17989.000	24.15	26.04	50.19	74.00	-23.81	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 5 V

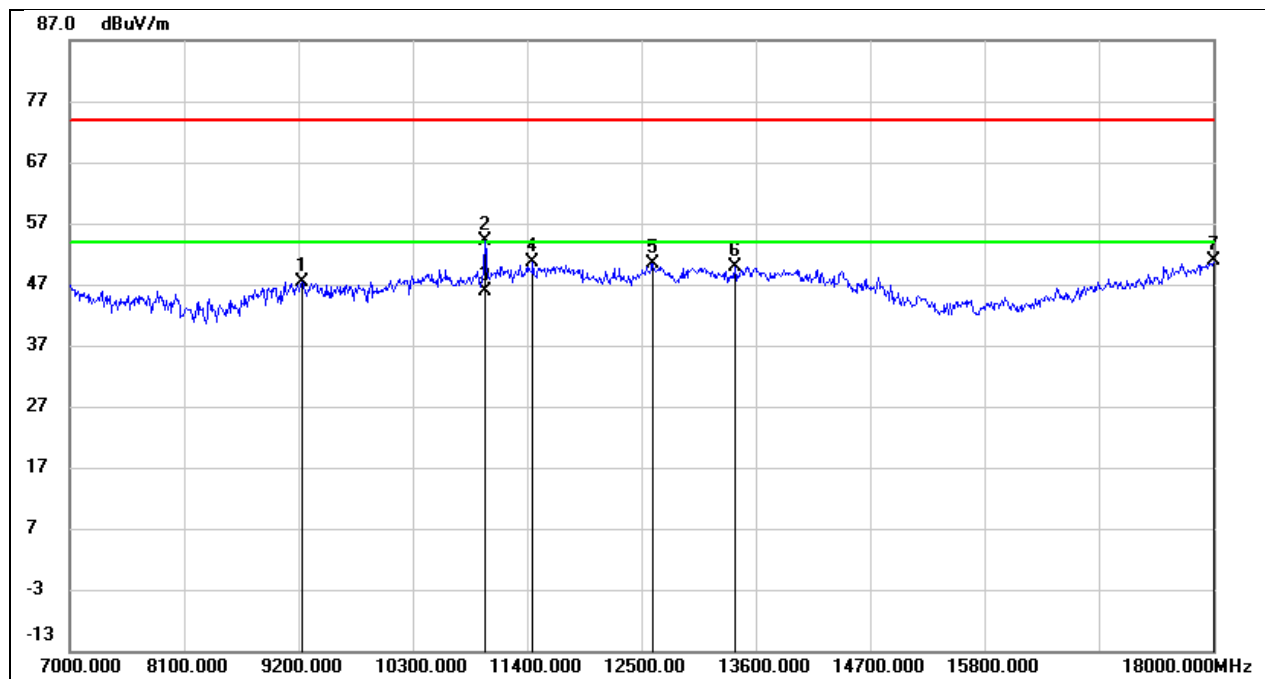


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.97	10.48	47.45	74.00	-26.55	peak
2	10993.000	39.45	14.70	54.15	74.00	-19.85	peak
3	10993.000	31.15	14.70	45.85	54.00	-8.15	AVG
4	11455.000	34.07	16.58	50.65	74.00	-23.35	peak
5	12610.000	32.41	17.97	50.38	74.00	-23.62	peak
6	13402.000	29.74	20.20	49.94	74.00	-24.06	peak
7	18000.000	24.65	26.12	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 5 V

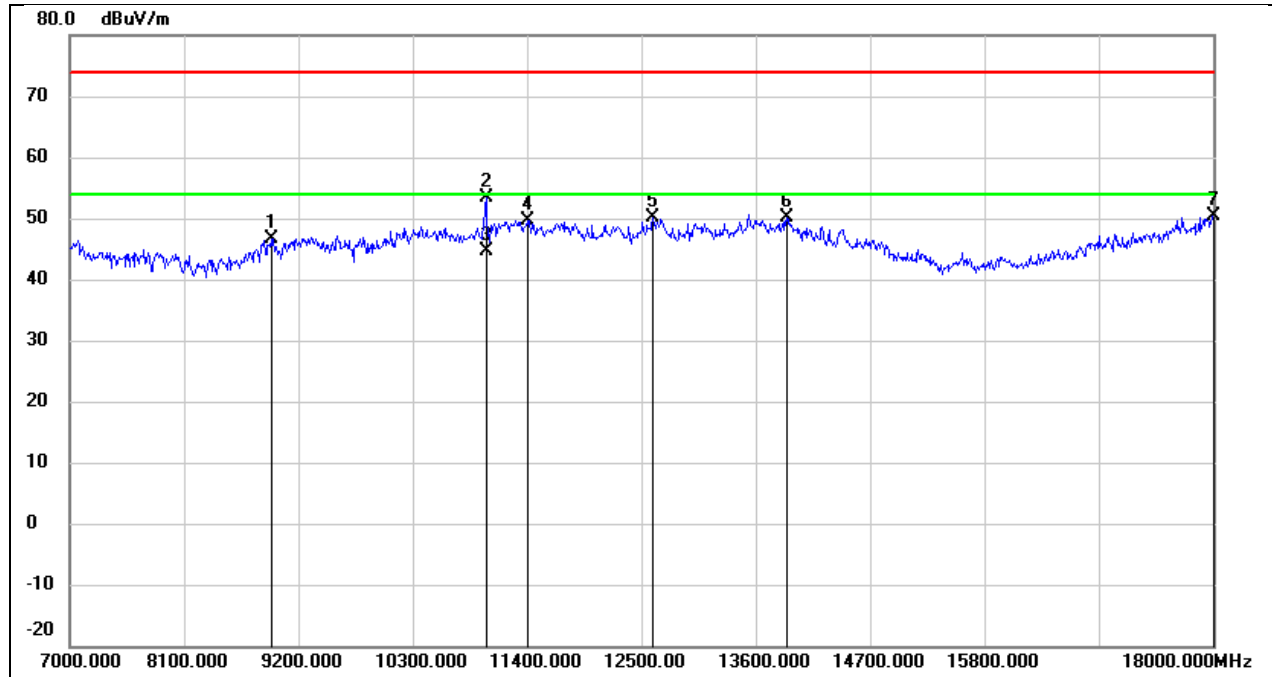


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	36.83	9.90	46.73	74.00	-27.27	peak
2	11004.000	38.53	14.74	53.27	74.00	-20.73	peak
3	11004.000	29.77	14.74	44.51	54.00	-9.49	AVG
4	11400.000	33.24	16.36	49.60	74.00	-24.40	peak
5	12610.000	32.04	17.97	50.01	74.00	-23.99	peak
6	13897.000	28.50	21.62	50.12	74.00	-23.88	peak
7	18000.000	24.25	26.12	50.37	74.00	-23.63	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 5 V

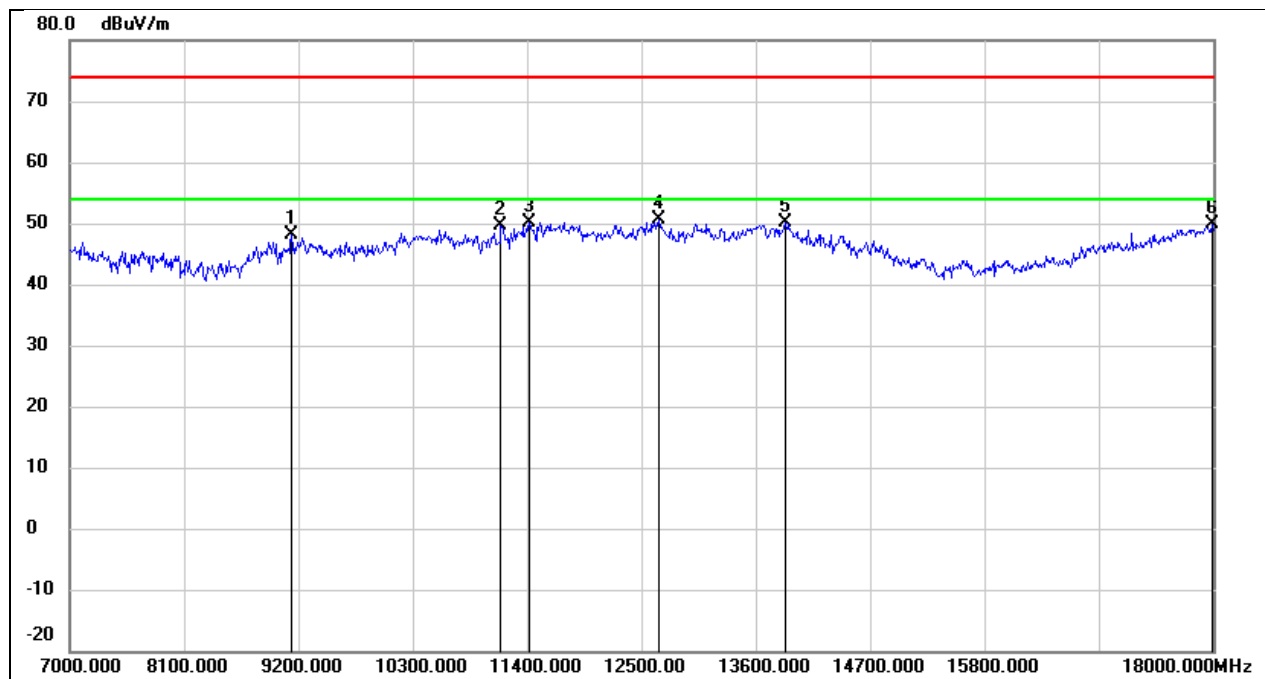


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	37.61	10.41	48.02	74.00	-25.98	peak
2	11147.000	34.38	15.32	49.70	74.00	-24.30	peak
3	11422.000	33.70	16.46	50.16	74.00	-23.84	peak
4	12665.000	32.54	18.04	50.58	74.00	-23.42	peak
5	13886.000	28.47	21.60	50.07	74.00	-23.93	peak
6	17989.000	23.94	26.04	49.98	74.00	-24.02	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 5 V

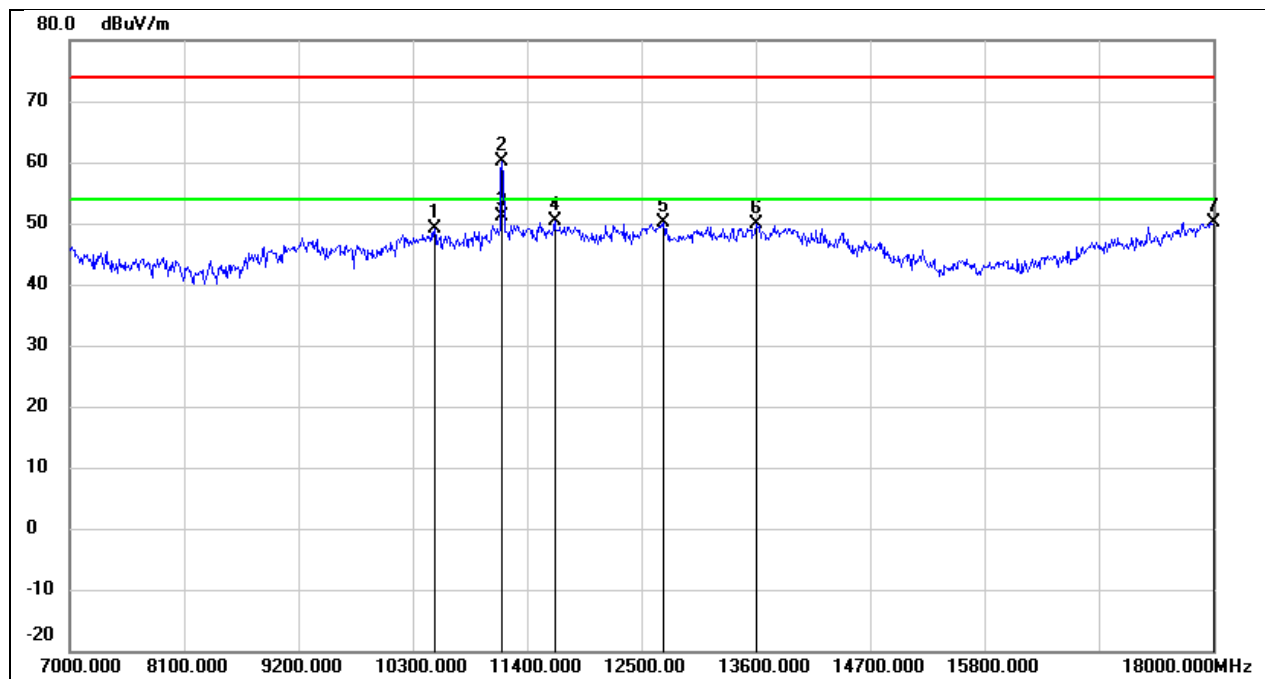


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10509.000	36.24	12.85	49.09	74.00	-24.91	peak
2	11158.000	44.68	15.37	60.05	74.00	-13.95	peak
3	11158.000	35.86	15.37	51.23	54.00	-2.77	AVG
4	11664.000	33.37	17.08	50.45	74.00	-23.55	peak
5	12709.000	32.06	18.09	50.15	74.00	-23.85	peak
6	13611.000	29.00	20.92	49.92	74.00	-24.08	peak
7	18000.000	24.09	26.12	50.21	74.00	-23.79	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 5 V

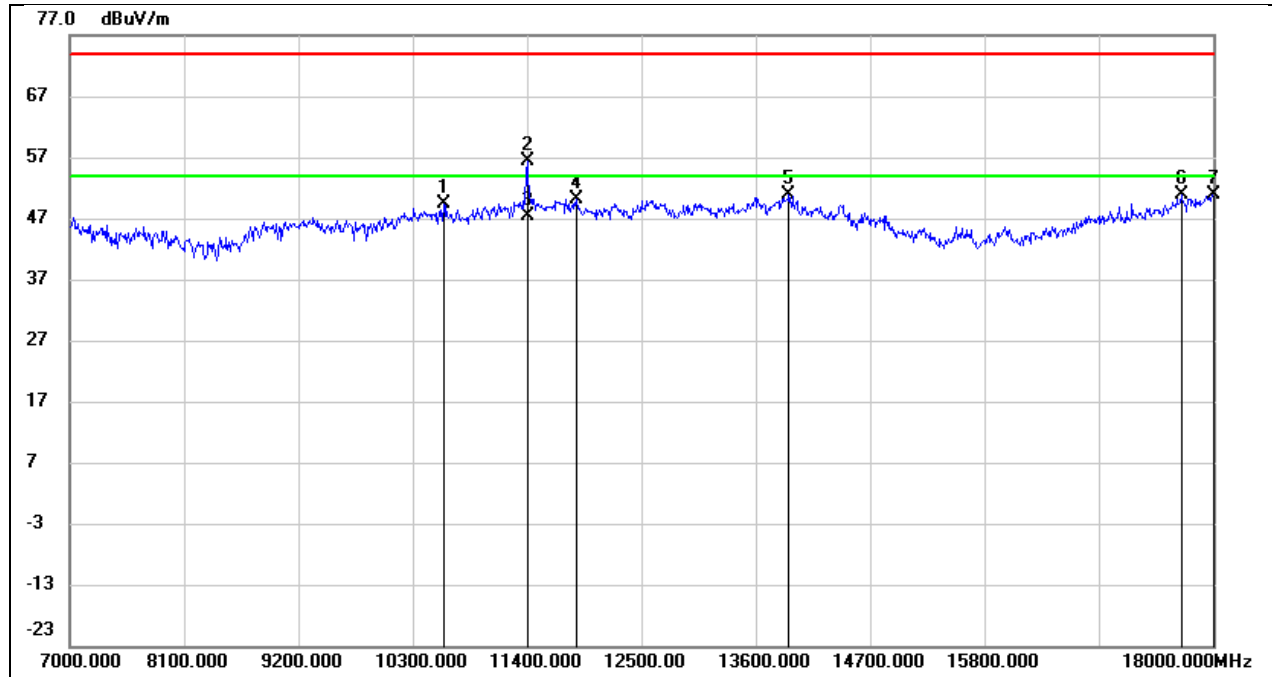


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10597.000	36.21	13.19	49.40	74.00	-24.60	peak
2	11400.000	39.93	16.36	56.29	74.00	-17.71	peak
3	11400.000	31.01	16.36	47.37	54.00	-6.63	AVG
4	11873.000	32.67	17.46	50.13	74.00	-23.87	peak
5	13919.000	29.17	21.68	50.85	74.00	-23.15	peak
6	17692.000	26.79	24.01	50.80	74.00	-23.20	peak
7	18000.000	24.76	26.12	50.88	74.00	-23.12	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 5 V

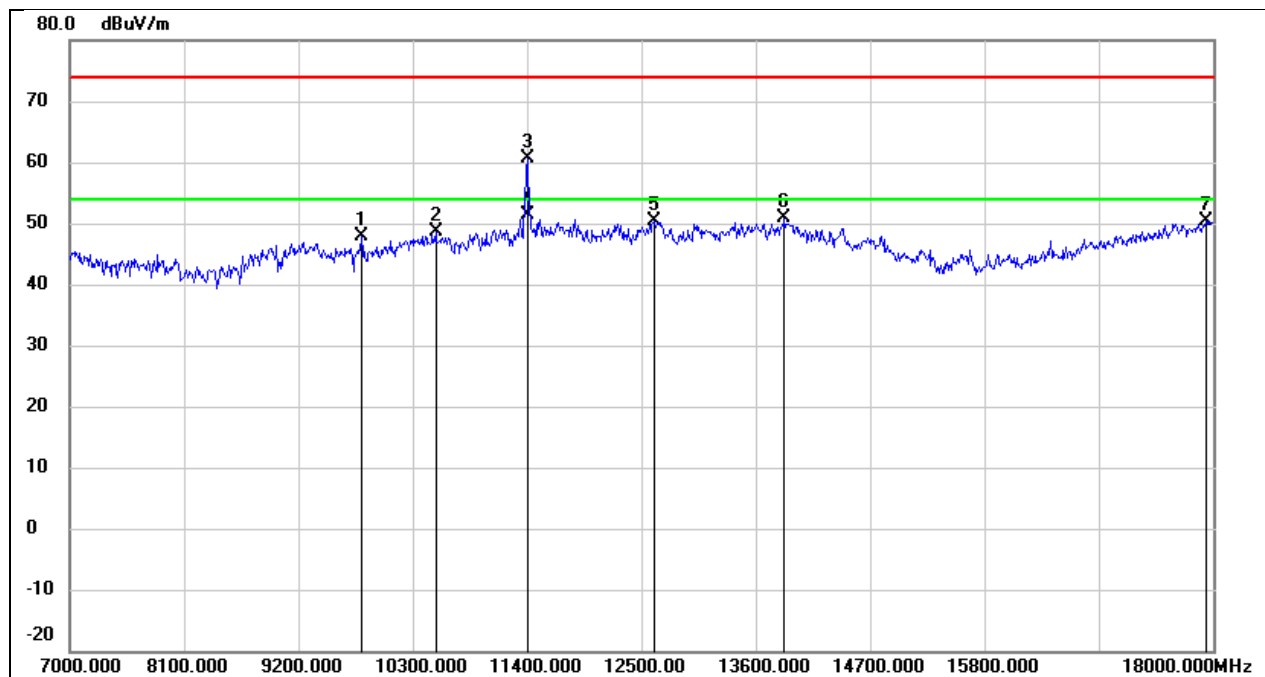


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9805.000	36.54	11.34	47.88	74.00	-26.12	peak
2	10520.000	35.82	12.90	48.72	74.00	-25.28	peak
3	11400.000	44.39	16.36	60.75	74.00	-13.25	peak
4	11400.000	35.10	16.36	51.46	54.00	-2.54	AVG
5	12621.000	32.35	17.98	50.33	74.00	-23.67	peak
6	13875.000	29.33	21.57	50.90	74.00	-23.10	peak
7	17934.000	24.81	25.67	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 5 V

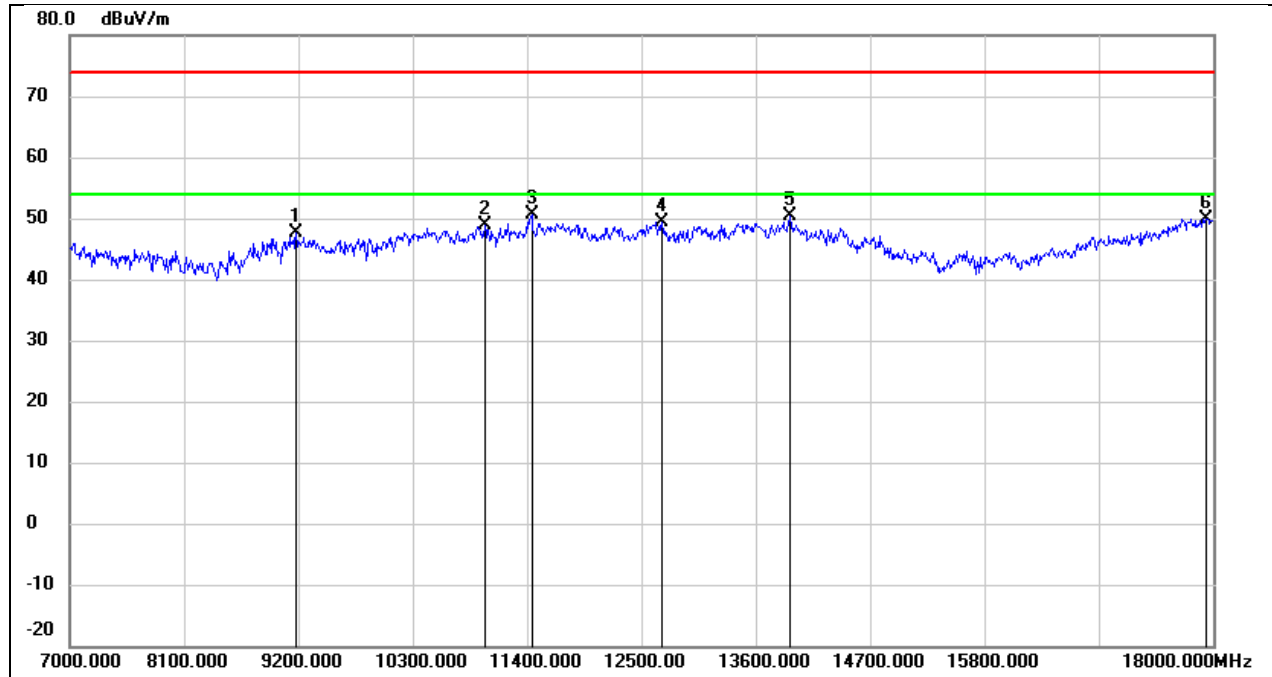


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	37.11	10.45	47.56	74.00	-26.44	peak
2	10993.000	34.06	14.70	48.76	74.00	-25.24	peak
3	11444.000	34.14	16.53	50.67	74.00	-23.33	peak
4	12698.000	31.27	18.08	49.35	74.00	-24.65	peak
5	13930.000	28.56	21.71	50.27	74.00	-23.73	peak
6	17934.000	24.16	25.67	49.83	74.00	-24.17	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 5 V

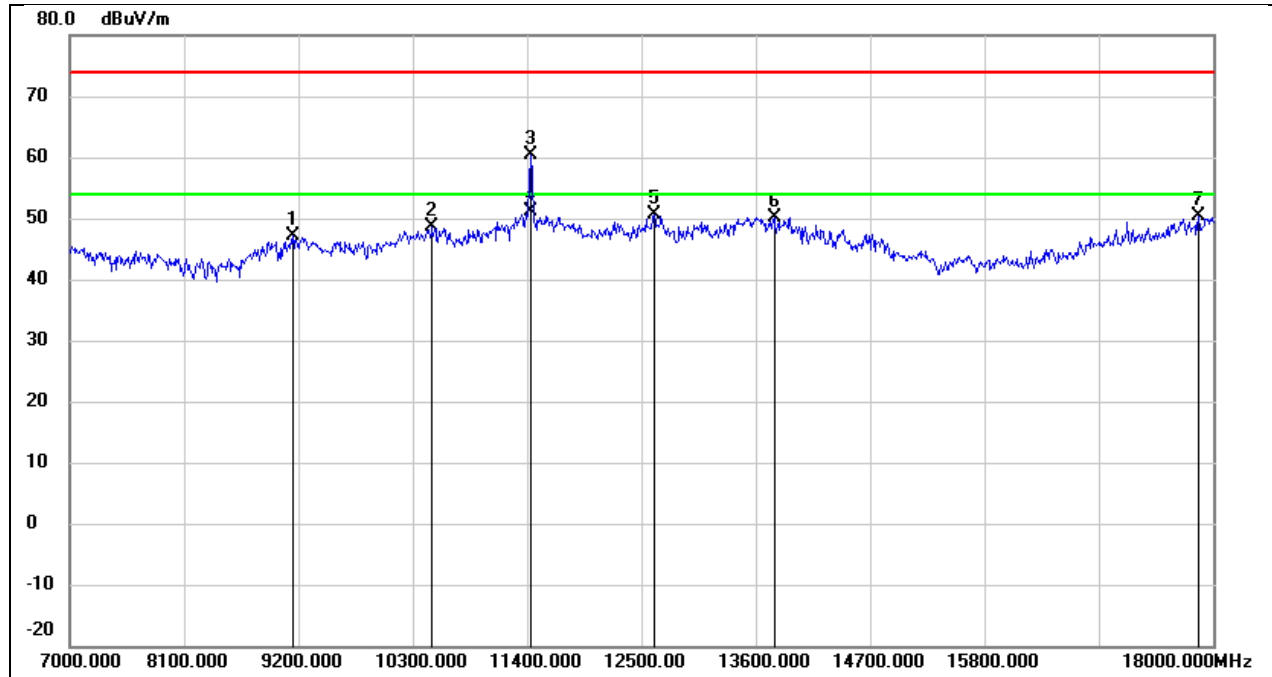


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	36.75	10.43	47.18	74.00	-26.82	peak
2	10487.000	35.75	12.79	48.54	74.00	-25.46	peak
3	11433.000	43.91	16.50	60.41	74.00	-13.59	peak
4	11433.000	34.64	16.50	51.14	54.00	-2.86	AVG
5	12621.000	32.77	17.98	50.75	74.00	-23.25	peak
6	13776.000	28.89	21.33	50.22	74.00	-23.78	peak
7	17857.000	25.19	25.14	50.33	74.00	-23.67	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 5 V

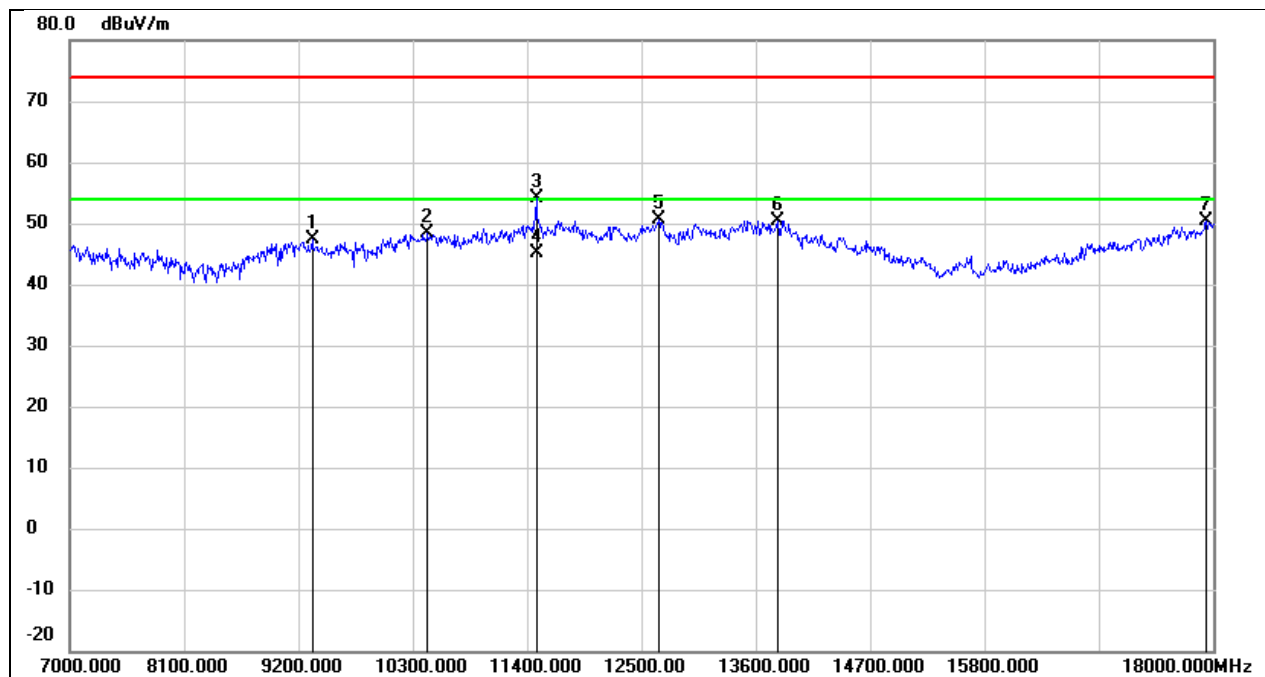


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	36.94	10.54	47.48	74.00	-26.52	peak
2	10443.000	35.78	12.70	48.48	74.00	-25.52	peak
3	11488.000	37.34	16.72	54.06	74.00	-19.94	peak
4	11488.000	28.34	16.72	45.06	54.00	-8.94	AVG
5	12665.000	32.54	18.04	50.58	74.00	-23.42	peak
6	13809.000	29.06	21.41	50.47	74.00	-23.53	peak
7	17934.000	24.73	25.67	50.40	74.00	-23.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 5 V

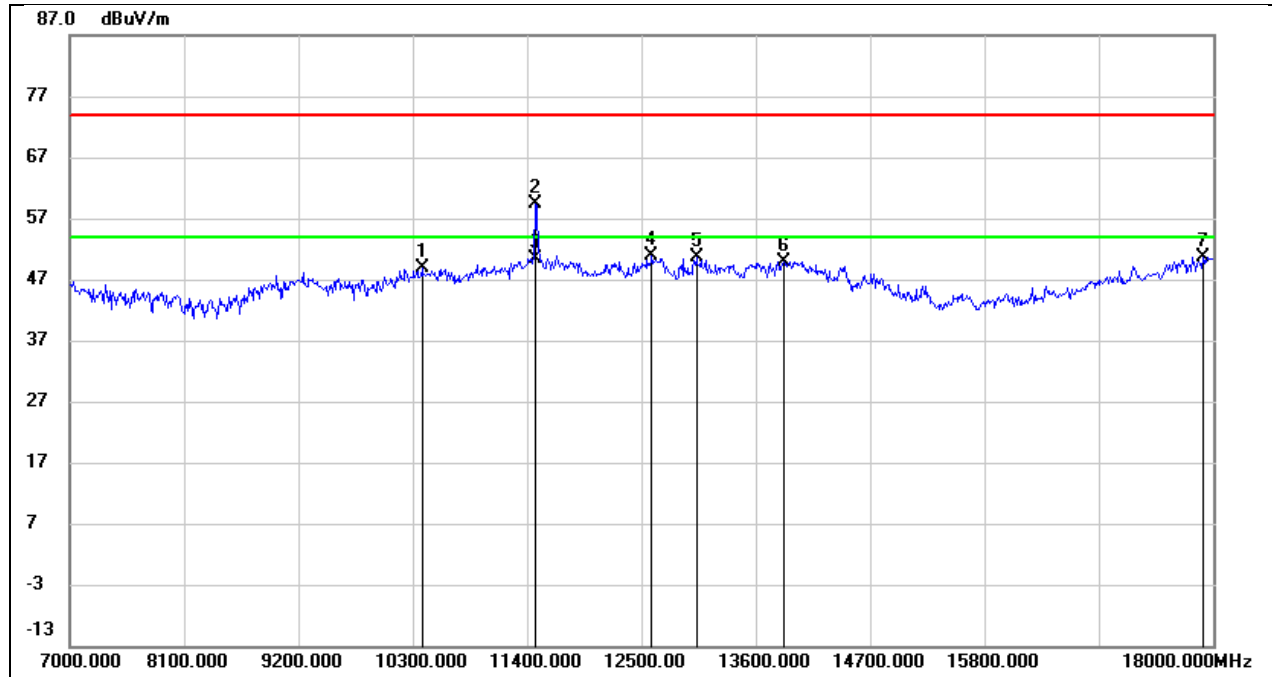


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10388.000	36.40	12.59	48.99	74.00	-25.01	peak
2	11477.000	42.82	16.67	59.49	74.00	-14.51	peak
3	11477.000	33.69	16.67	50.36	54.00	-3.64	AVG
4	12599.000	32.83	17.95	50.78	74.00	-23.22	peak
5	13028.000	32.04	18.57	50.61	74.00	-23.39	peak
6	13864.000	28.41	21.53	49.94	74.00	-24.06	peak
7	17901.000	25.23	25.45	50.68	74.00	-23.32	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 5 V

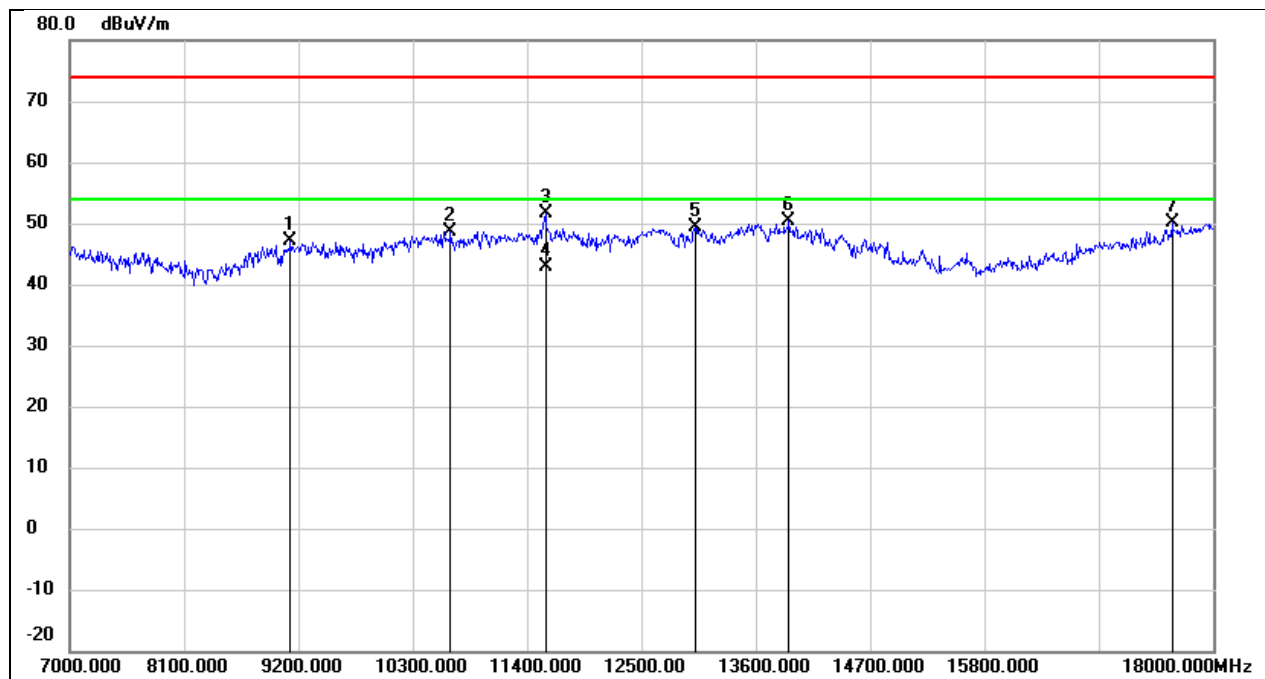


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	36.59	10.42	47.01	74.00	-26.99	peak
2	10663.000	35.18	13.44	48.62	74.00	-25.38	peak
3	11576.000	34.72	16.91	51.63	74.00	-22.37	peak
4	11576.000	25.94	16.91	42.85	54.00	-11.15	AVG
5	13017.000	30.80	18.53	49.33	74.00	-24.67	peak
6	13919.000	28.67	21.68	50.35	74.00	-23.65	peak
7	17604.000	26.64	23.41	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 5 V

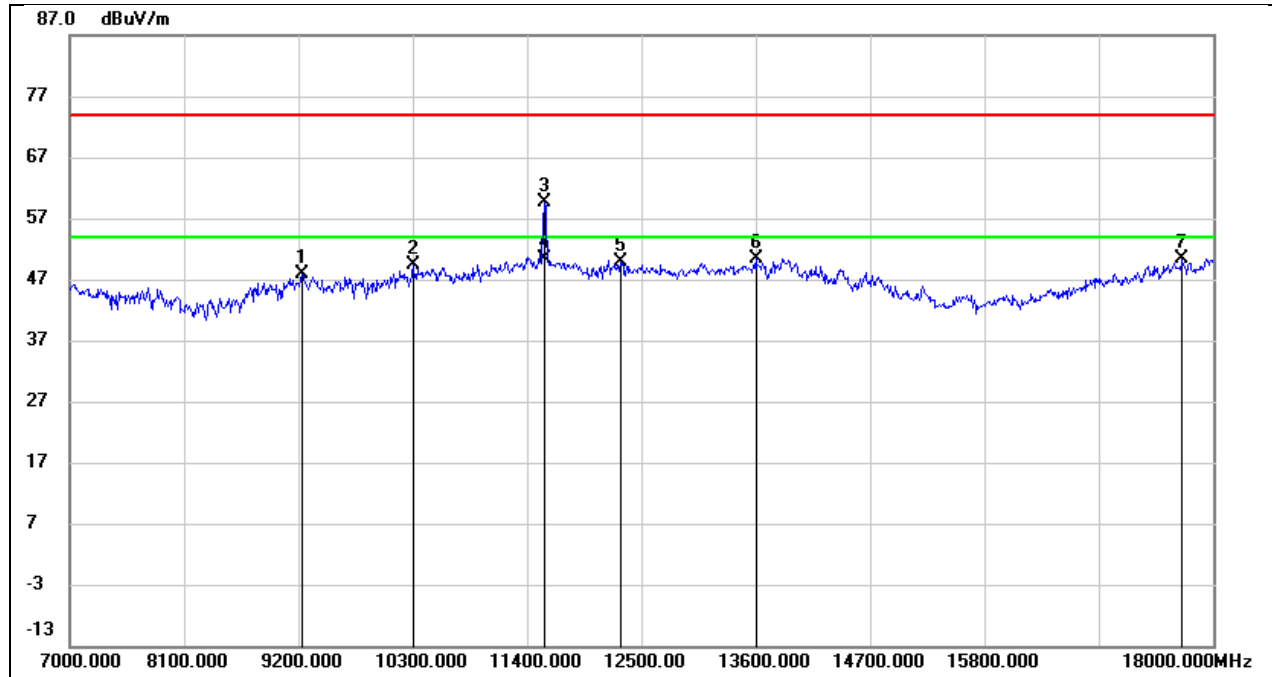


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.28	10.48	47.76	74.00	-26.24	peak
2	10300.000	37.07	12.40	49.47	74.00	-24.53	peak
3	11565.000	42.73	16.89	59.62	74.00	-14.38	peak
4	11565.000	33.49	16.89	50.38	54.00	-3.62	AVG
5	12302.000	32.21	17.78	49.99	74.00	-24.01	peak
6	13600.000	29.46	20.89	50.35	74.00	-23.65	peak
7	17703.000	26.34	24.09	50.43	74.00	-23.57	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 5 V

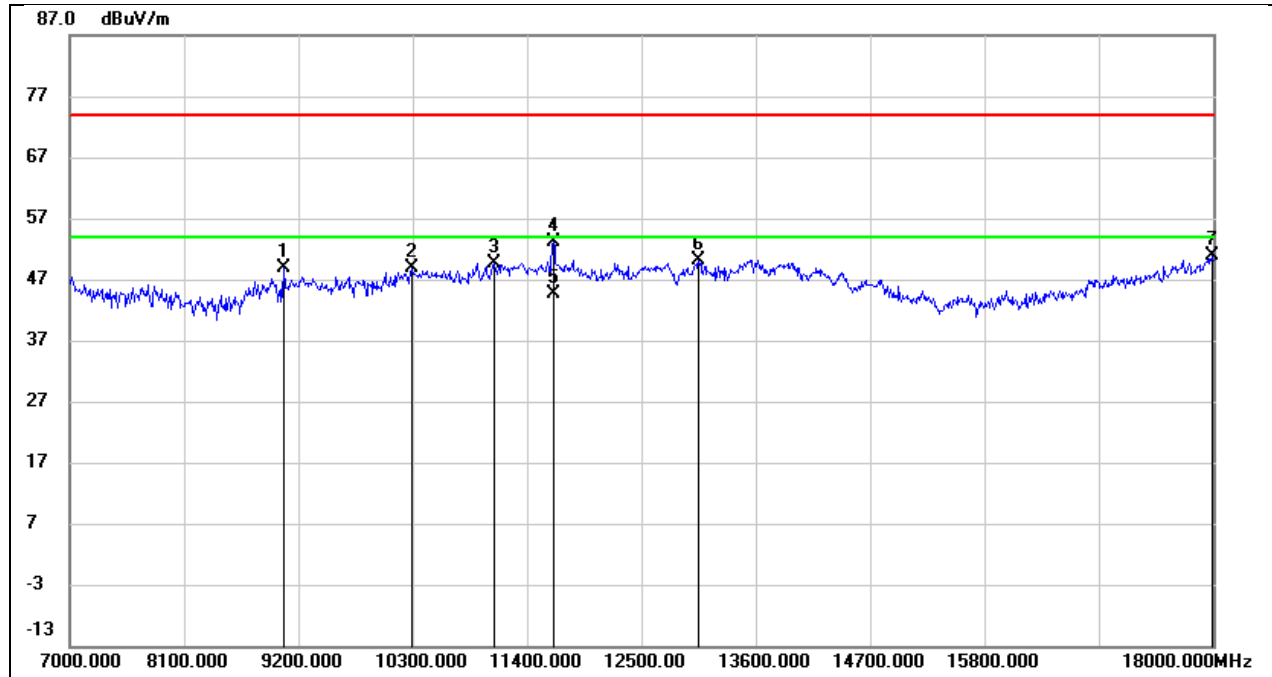


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.60	10.38	48.98	74.00	-25.02	peak
2	10289.000	36.62	12.38	49.00	74.00	-25.00	peak
3	11081.000	34.51	15.05	49.56	74.00	-24.44	peak
4	11653.000	36.15	17.05	53.20	74.00	-20.80	peak
5	11653.000	27.55	17.05	44.60	54.00	-9.40	AVG
6	13050.000	31.54	18.66	50.20	74.00	-23.80	peak
7	17989.000	24.85	26.04	50.89	74.00	-23.11	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 5 V

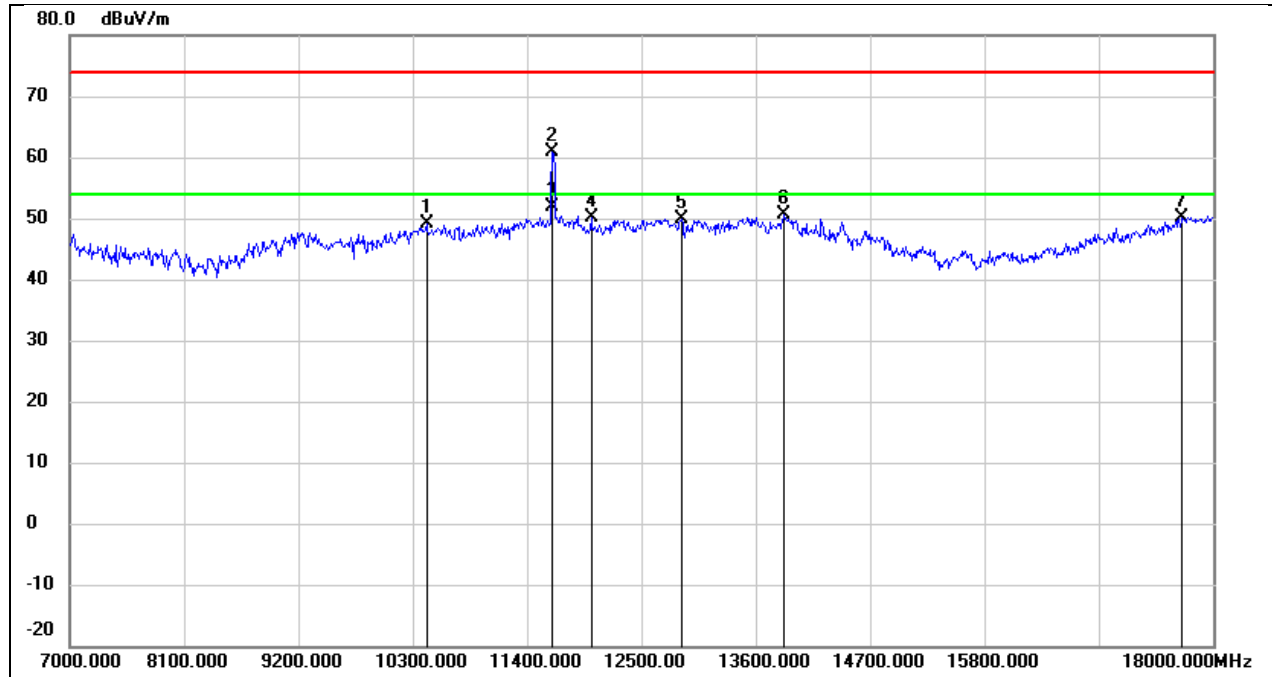


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10432.000	36.41	12.67	49.08	74.00	-24.92	peak
2	11642.000	43.78	17.03	60.81	74.00	-13.19	peak
3	11642.000	34.73	17.03	51.76	54.00	-2.24	AVG
4	12016.000	32.47	17.71	50.18	74.00	-23.82	peak
5	12885.000	31.55	18.30	49.85	74.00	-24.15	peak
6	13875.000	29.05	21.57	50.62	74.00	-23.38	peak
7	17703.000	26.04	24.09	50.13	74.00	-23.87	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 5 V

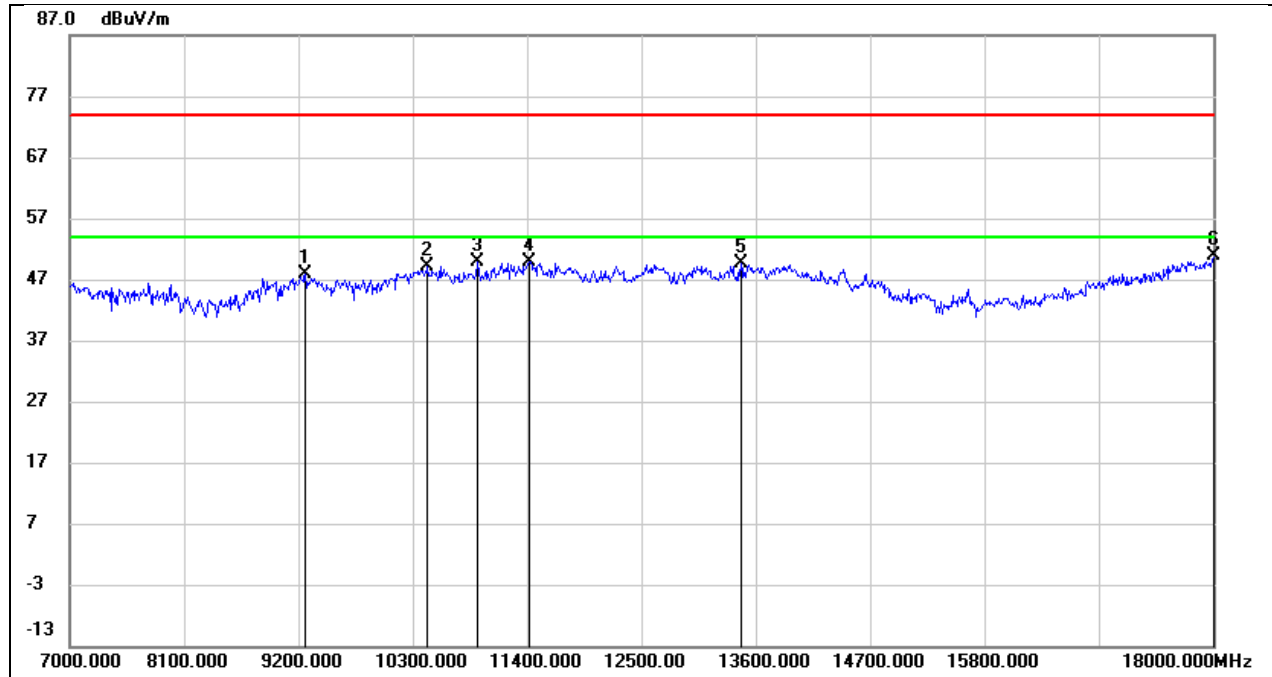


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.45	10.51	47.96	74.00	-26.04	peak
2	10443.000	36.32	12.70	49.02	74.00	-24.98	peak
3	10927.000	35.40	14.45	49.85	74.00	-24.15	peak
4	11422.000	33.48	16.46	49.94	74.00	-24.06	peak
5	13457.000	29.08	20.46	49.54	74.00	-24.46	peak
6	18000.000	24.80	26.12	50.92	74.00	-23.08	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 5 V

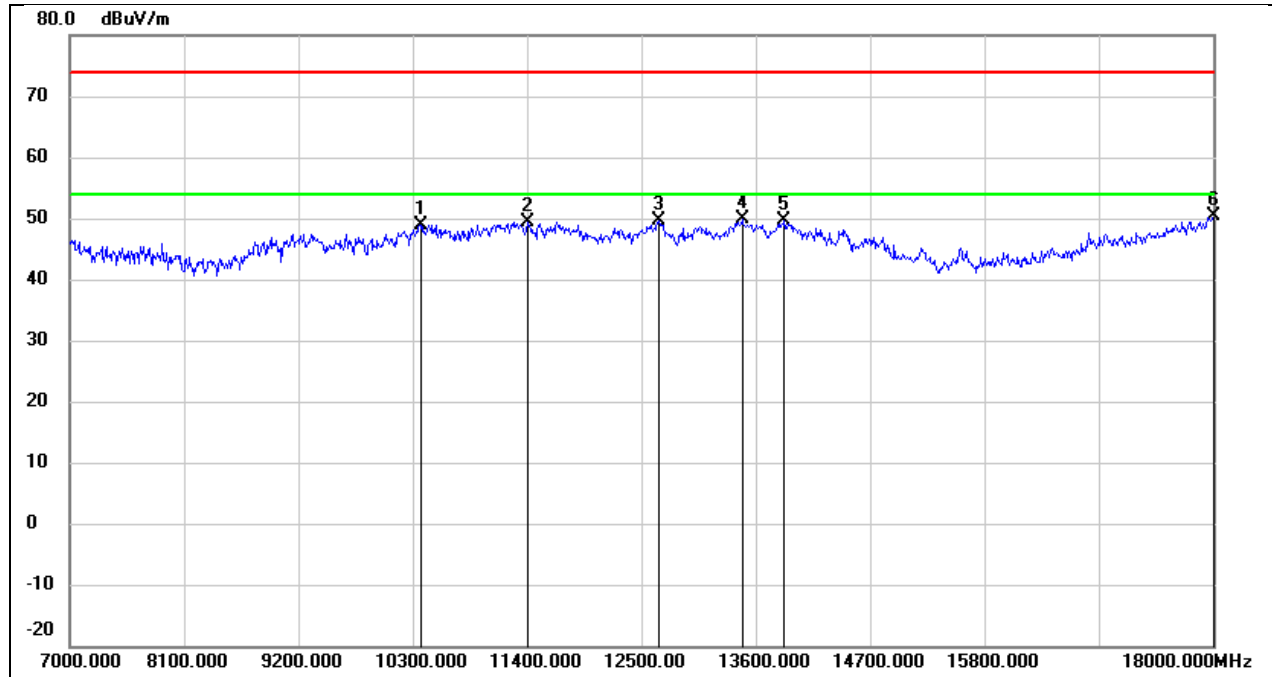


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10377.000	36.43	12.56	48.99	74.00	-25.01	peak
2	11400.000	33.05	16.36	49.41	74.00	-24.59	peak
3	12665.000	31.68	18.04	49.72	74.00	-24.28	peak
4	13468.000	29.31	20.50	49.81	74.00	-24.19	peak
5	13875.000	28.08	21.57	49.65	74.00	-24.35	peak
6	18000.000	24.20	26.12	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 5 V

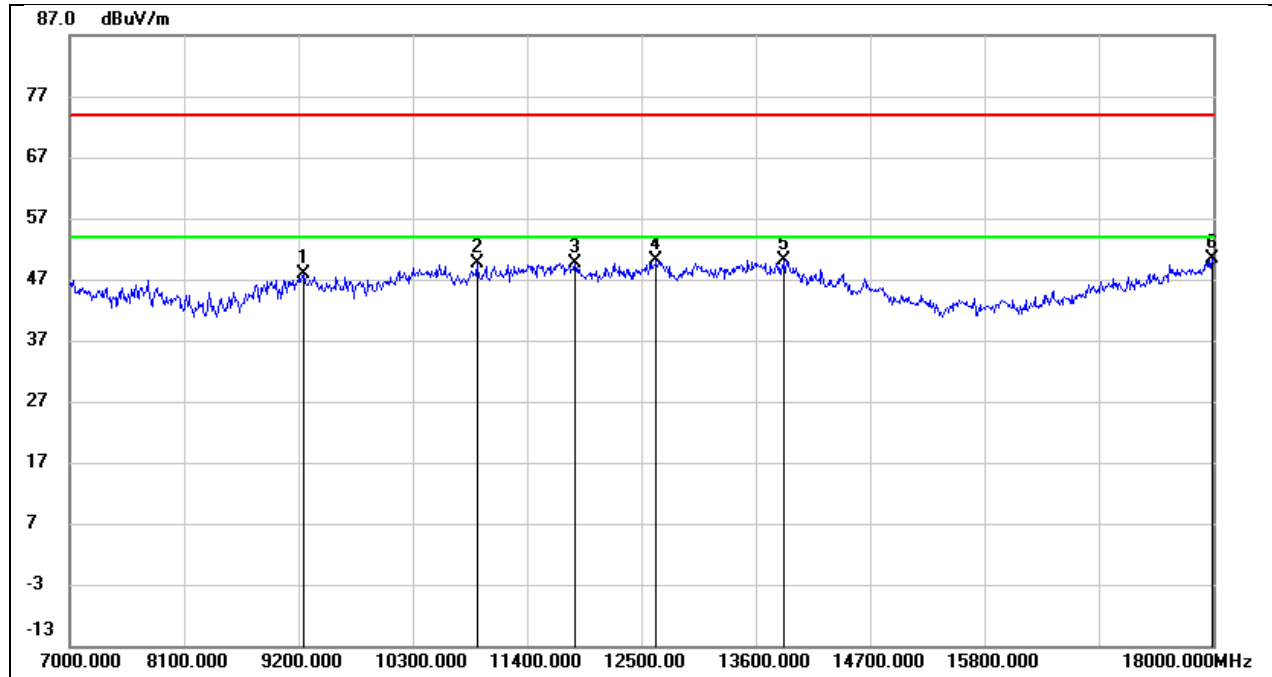


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	37.30	10.51	47.81	74.00	-26.19	peak
2	10916.000	35.12	14.39	49.51	74.00	-24.49	peak
3	11862.000	32.25	17.45	49.70	74.00	-24.30	peak
4	12643.000	32.06	18.01	50.07	74.00	-23.93	peak
5	13875.000	28.60	21.57	50.17	74.00	-23.83	peak
6	17989.000	24.26	26.04	50.30	74.00	-23.70	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 5 V

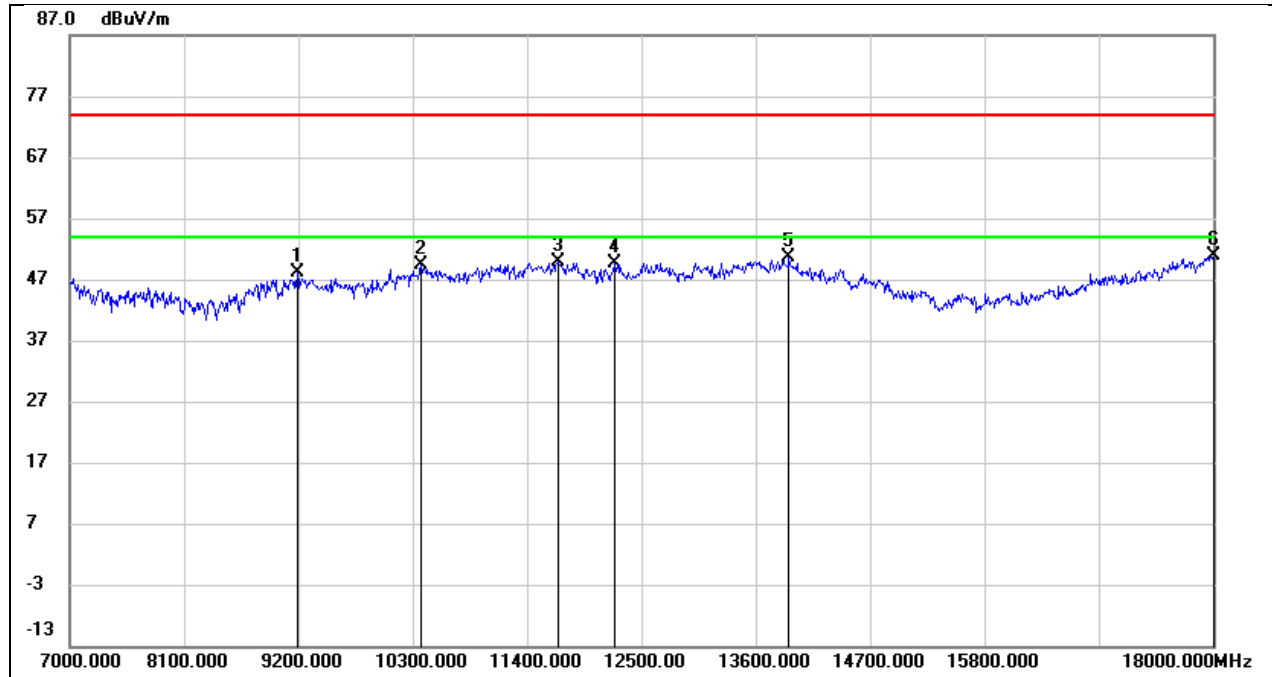


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.58	10.46	48.04	74.00	-25.96	peak
2	10377.000	36.79	12.56	49.35	74.00	-24.65	peak
3	11697.000	32.67	17.13	49.80	74.00	-24.20	peak
4	12236.000	31.93	17.76	49.69	74.00	-24.31	peak
5	13919.000	28.94	21.68	50.62	74.00	-23.38	peak
6	18000.000	24.72	26.12	50.84	74.00	-23.16	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 5 V

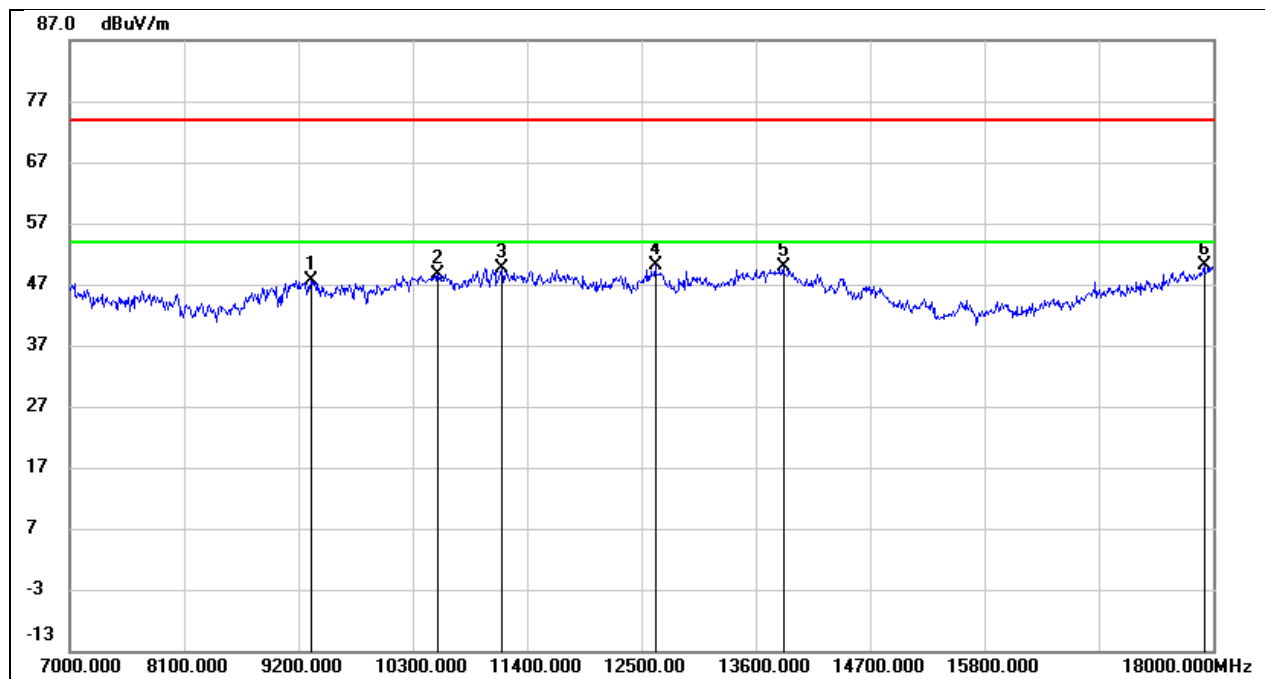


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	37.21	10.53	47.74	74.00	-26.26	peak
2	10542.000	35.73	12.98	48.71	74.00	-25.29	peak
3	11158.000	34.31	15.37	49.68	74.00	-24.32	peak
4	12632.000	32.12	17.99	50.11	74.00	-23.89	peak
5	13864.000	28.24	21.53	49.77	74.00	-24.23	peak
6	17912.000	24.62	25.52	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 5 V

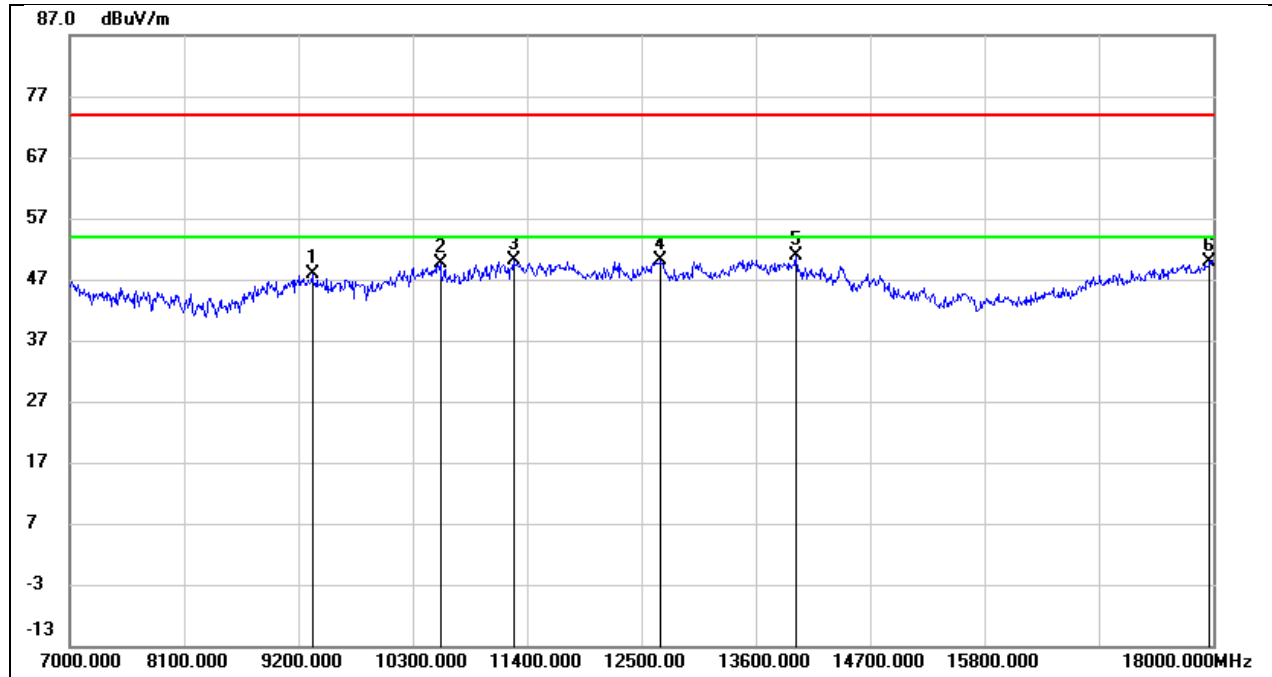


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.28	10.54	47.82	74.00	-26.18	peak
2	10564.000	36.58	13.06	49.64	74.00	-24.36	peak
3	11268.000	34.41	15.83	50.24	74.00	-23.76	peak
4	12687.000	32.06	18.05	50.11	74.00	-23.89	peak
5	13985.000	28.96	21.85	50.81	74.00	-23.19	peak
6	17967.000	23.95	25.89	49.84	74.00	-24.16	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 5 V

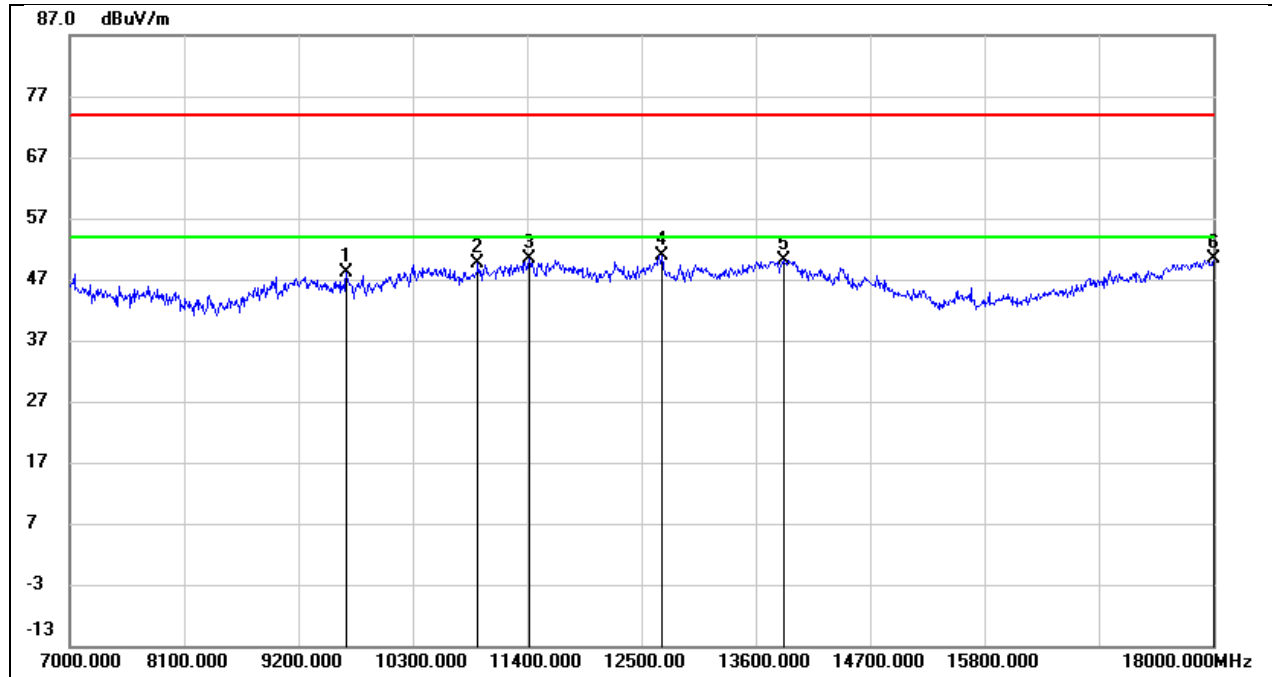


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	37.24	11.01	48.25	74.00	-25.75	peak
2	10927.000	35.10	14.45	49.55	74.00	-24.45	peak
3	11422.000	33.82	16.46	50.28	74.00	-23.72	peak
4	12698.000	32.84	18.08	50.92	74.00	-23.08	peak
5	13864.000	28.63	21.53	50.16	74.00	-23.84	peak
6	18000.000	24.27	26.12	50.39	74.00	-23.61	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 5 V

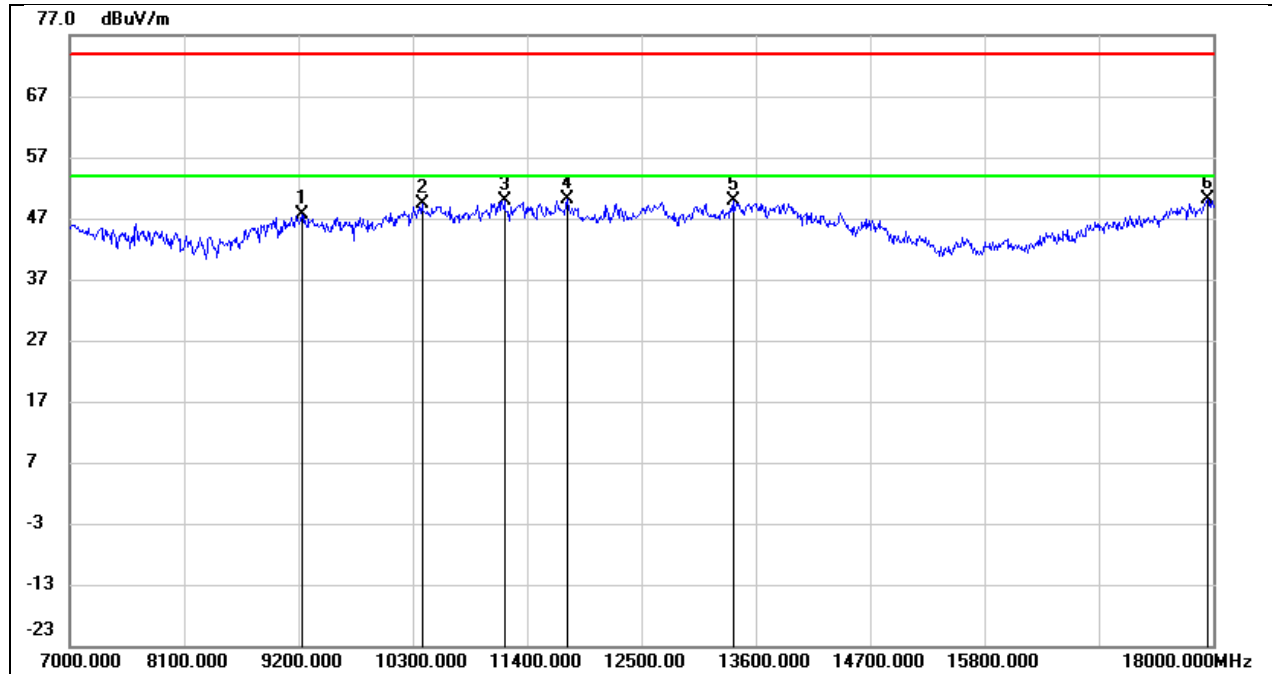


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	37.08	10.48	47.56	74.00	-26.44	peak
2	10388.000	36.68	12.59	49.27	74.00	-24.73	peak
3	11180.000	34.52	15.46	49.98	74.00	-24.02	peak
4	11785.000	32.95	17.30	50.25	74.00	-23.75	peak
5	13380.000	29.67	20.12	49.79	74.00	-24.21	peak
6	17945.000	24.45	25.75	50.20	74.00	-23.80	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 5 V

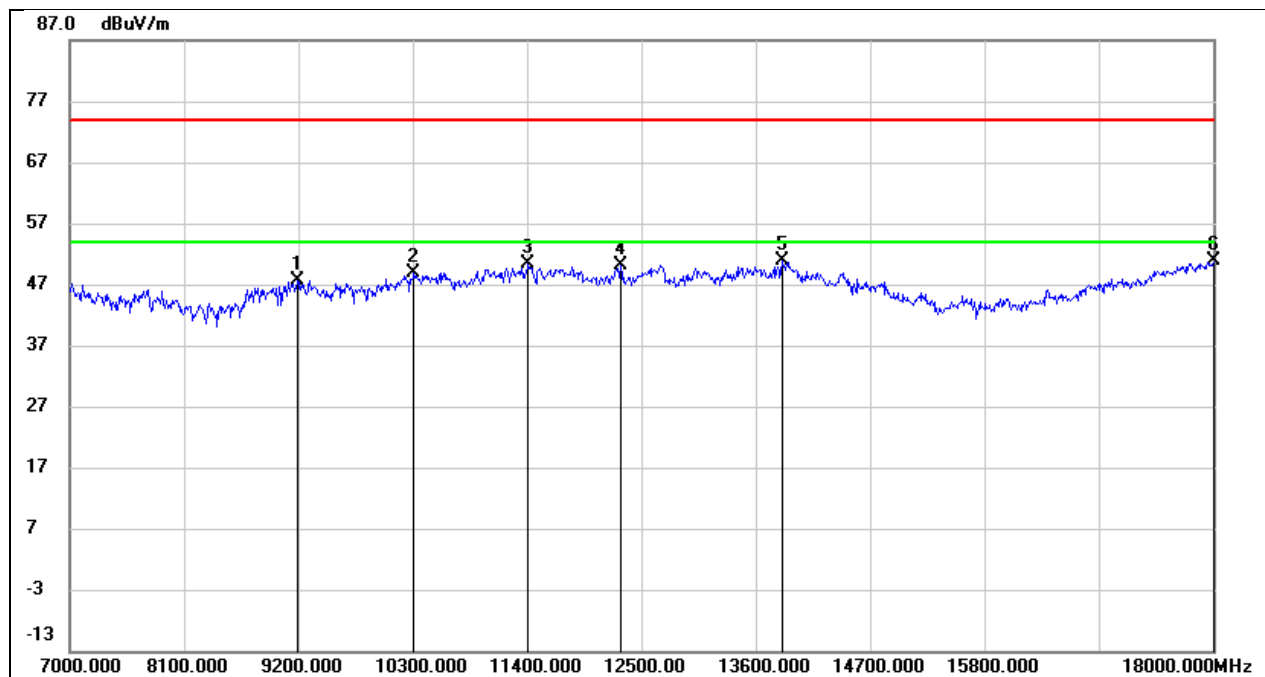


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.13	10.46	47.59	74.00	-26.41	peak
2	10311.000	36.55	12.42	48.97	74.00	-25.03	peak
3	11411.000	34.08	16.41	50.49	74.00	-23.51	peak
4	12302.000	32.38	17.78	50.16	74.00	-23.84	peak
5	13853.000	29.38	21.52	50.90	74.00	-23.10	peak
6	18000.000	24.87	26.12	50.99	74.00	-23.01	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 5 V

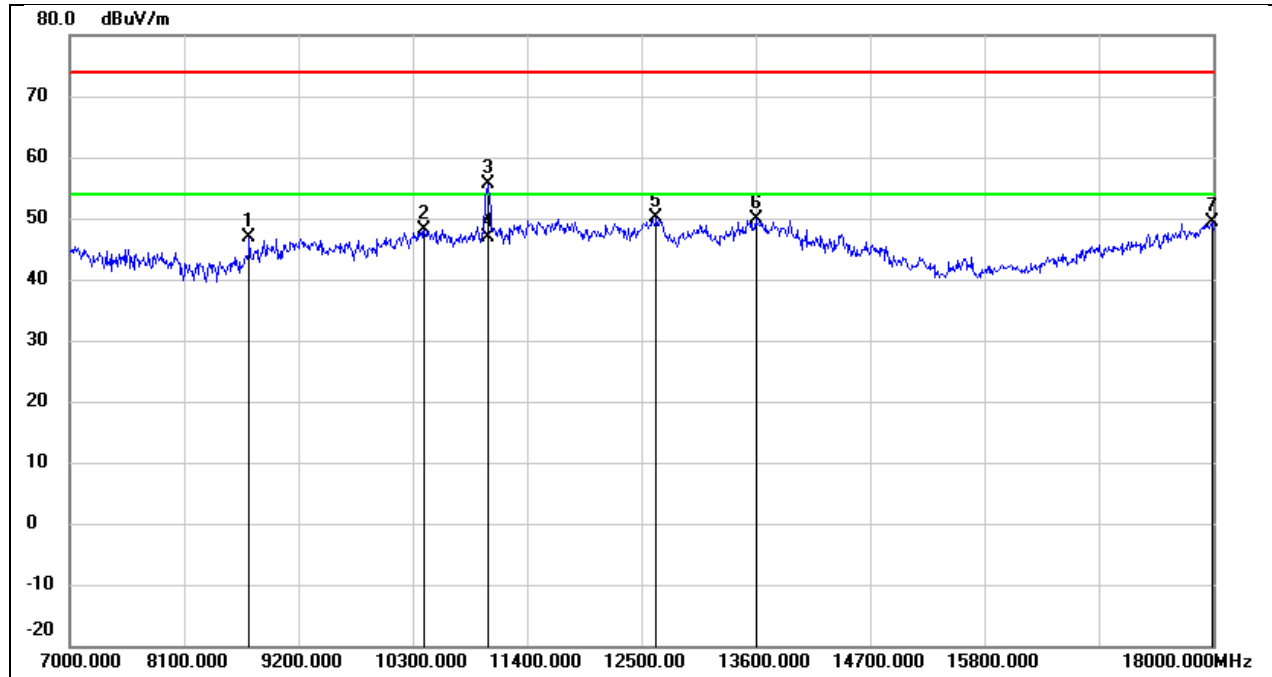


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8727.000	38.32	8.45	46.77	74.00	-27.23	peak
2	10410.000	35.41	12.62	48.03	74.00	-25.97	peak
3	11026.000	40.91	14.82	55.73	74.00	-18.27	peak
4	11026.000	32.07	14.82	46.89	54.00	-7.11	AVG
5	12643.000	32.13	18.01	50.14	74.00	-23.86	peak
6	13600.000	28.91	20.89	49.80	74.00	-24.20	peak
7	17989.000	23.23	26.04	49.27	74.00	-24.73	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 5 V

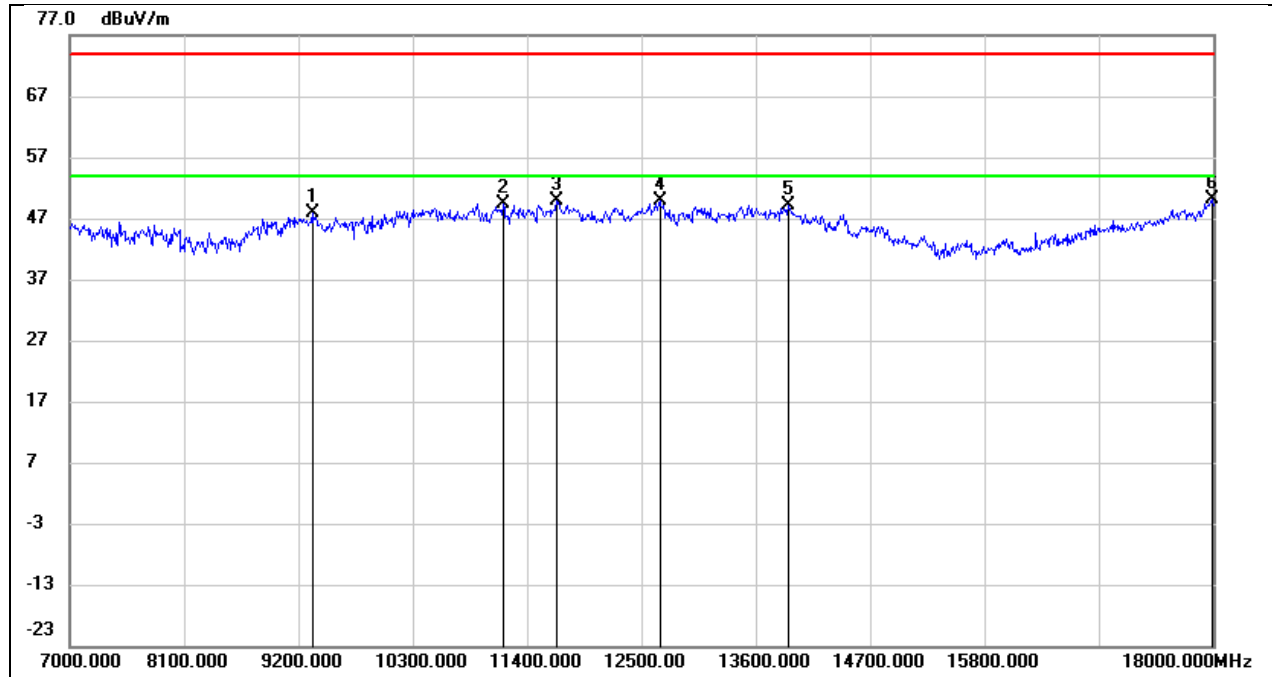


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.35	10.54	47.89	74.00	-26.11	peak
2	11169.000	33.97	15.42	49.39	74.00	-24.61	peak
3	11686.000	32.83	17.12	49.95	74.00	-24.05	peak
4	12676.000	31.92	18.05	49.97	74.00	-24.03	peak
5	13919.000	27.51	21.68	49.19	74.00	-24.81	peak
6	17989.000	24.12	26.04	50.16	74.00	-23.84	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 5 V

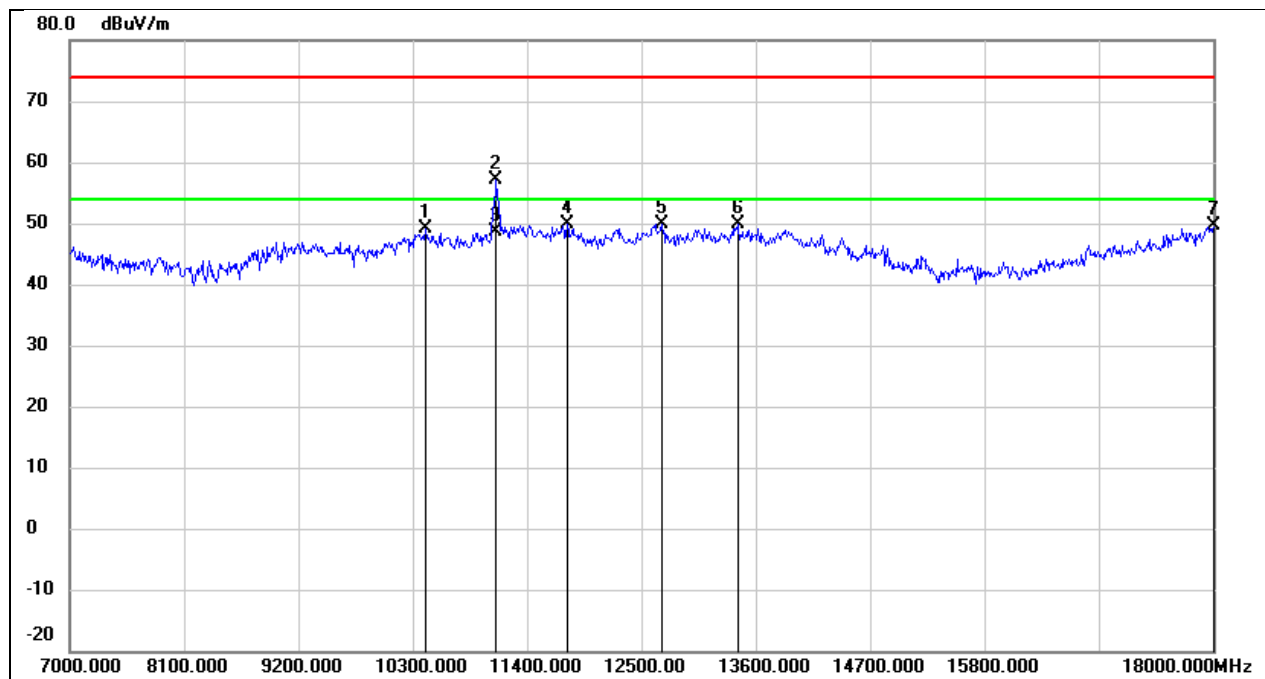


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10421.000	36.35	12.66	49.01	74.00	-24.99	peak
2	11103.000	42.02	15.15	57.17	74.00	-16.83	peak
3	11103.000	33.57	15.15	48.72	54.00	-5.28	AVG
4	11785.000	32.51	17.30	49.81	74.00	-24.19	peak
5	12698.000	31.88	18.08	49.96	74.00	-24.04	peak
6	13424.000	29.55	20.30	49.85	74.00	-24.15	peak
7	18000.000	23.47	26.12	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 5 V

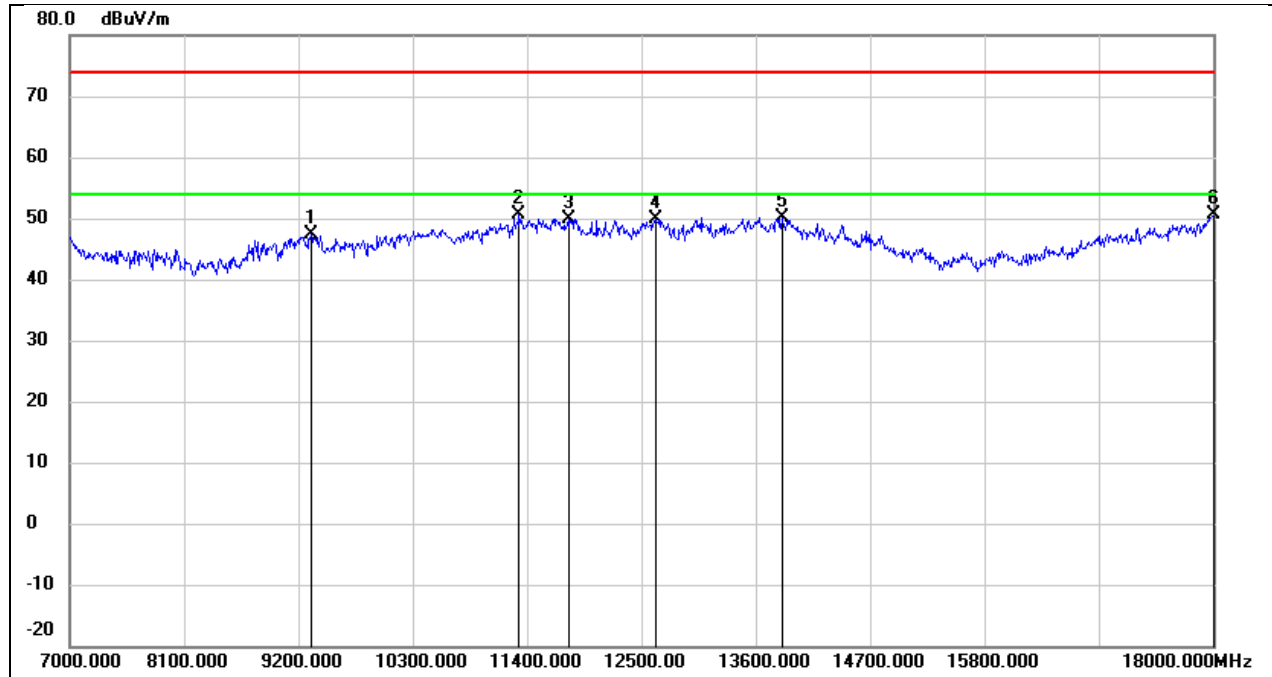


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	36.95	10.53	47.48	74.00	-26.52	peak
2	11323.000	34.49	16.05	50.54	74.00	-23.46	peak
3	11796.000	32.67	17.32	49.99	74.00	-24.01	peak
4	12643.000	31.78	18.01	49.79	74.00	-24.21	peak
5	13853.000	28.70	21.52	50.22	74.00	-23.78	peak
6	18000.000	24.40	26.12	50.52	74.00	-23.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 5 V

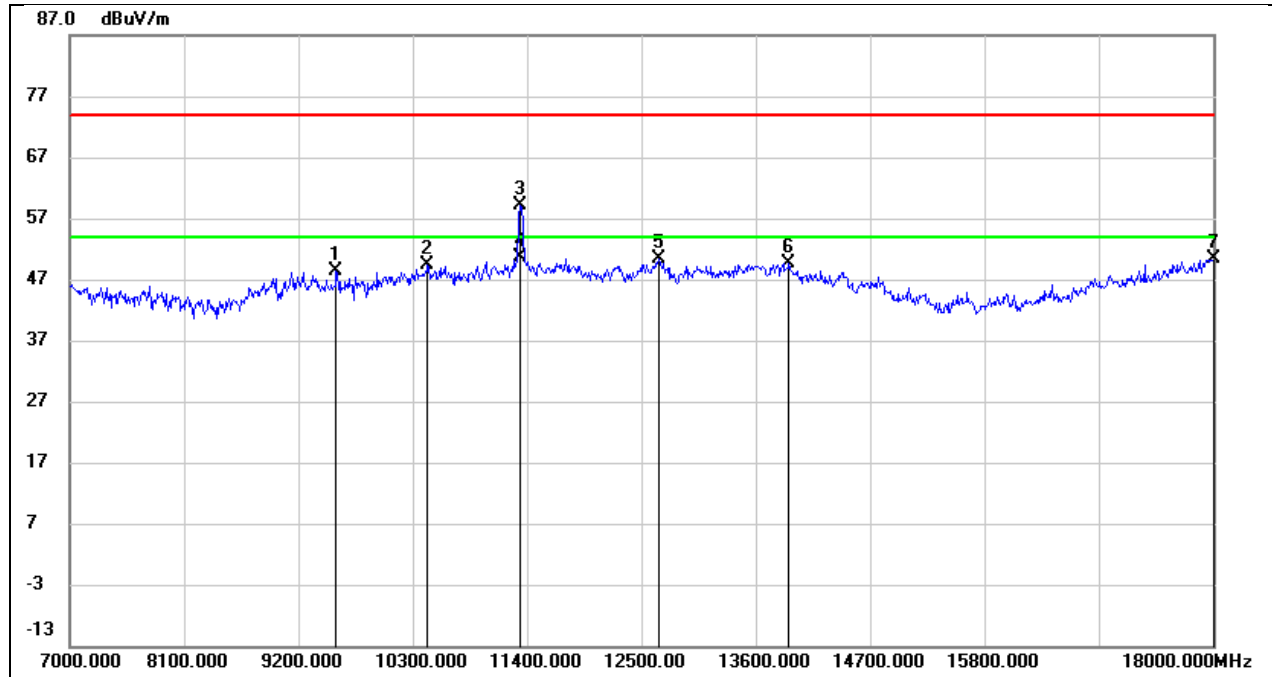


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.53	10.79	48.32	74.00	-25.68	peak
2	10443.000	36.62	12.70	49.32	74.00	-24.68	peak
3	11334.000	43.14	16.09	59.23	74.00	-14.77	peak
4	11334.000	34.53	16.09	50.62	54.00	-3.38	AVG
5	12665.000	32.31	18.04	50.35	74.00	-23.65	peak
6	13919.000	28.04	21.68	49.72	74.00	-24.28	peak
7	18000.000	24.21	26.12	50.33	74.00	-23.67	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 5 V

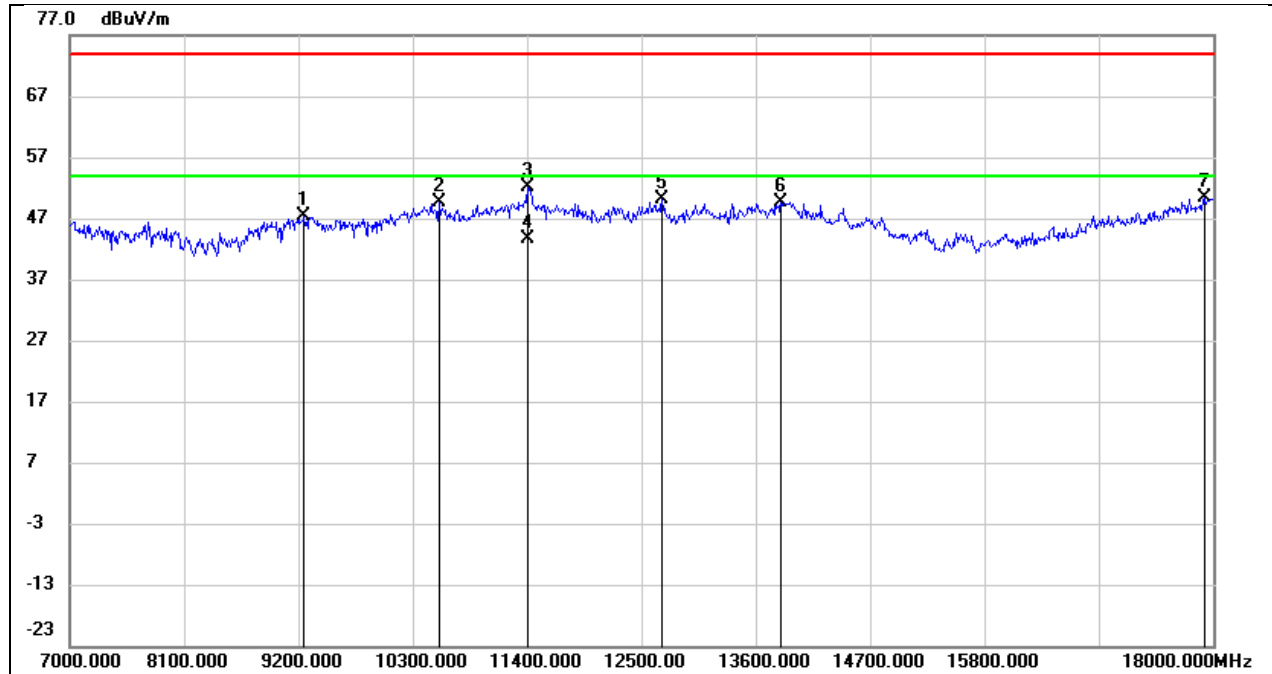


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	36.90	10.50	47.40	74.00	-26.60	peak
2	10553.000	36.49	13.02	49.51	74.00	-24.49	peak
3	11400.000	35.66	16.36	52.02	74.00	-21.98	peak
4	11400.000	27.38	16.36	43.74	54.00	-10.26	AVG
5	12698.000	31.97	18.08	50.05	74.00	-23.95	peak
6	13842.000	28.24	21.49	49.73	74.00	-24.27	peak
7	17912.000	24.84	25.52	50.36	74.00	-23.64	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 5 V

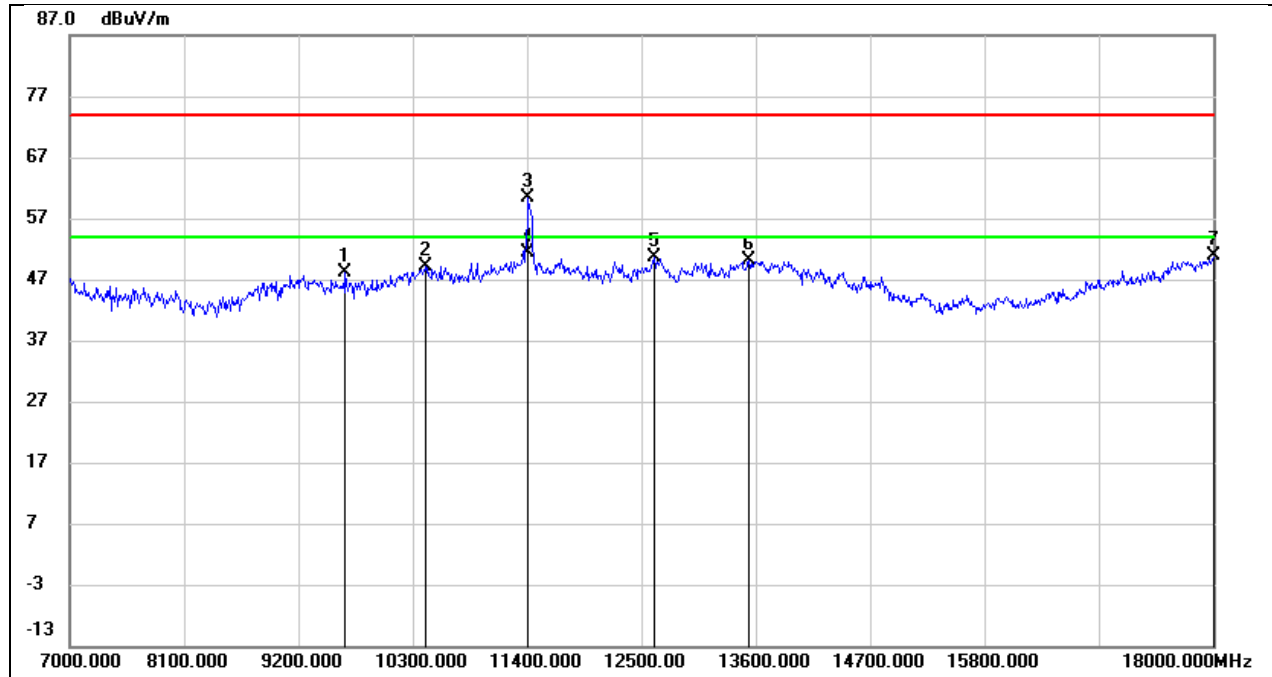


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9651.000	37.04	10.99	48.03	74.00	-25.97	peak
2	10421.000	36.39	12.66	49.05	74.00	-24.95	peak
3	11411.000	43.93	16.41	60.34	74.00	-13.66	peak
4	11411.000	35.01	16.41	51.42	54.00	-2.58	AVG
5	12621.000	32.64	17.98	50.62	74.00	-23.38	peak
6	13534.000	29.31	20.73	50.04	74.00	-23.96	peak
7	18000.000	24.64	26.12	50.76	74.00	-23.24	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 5 V

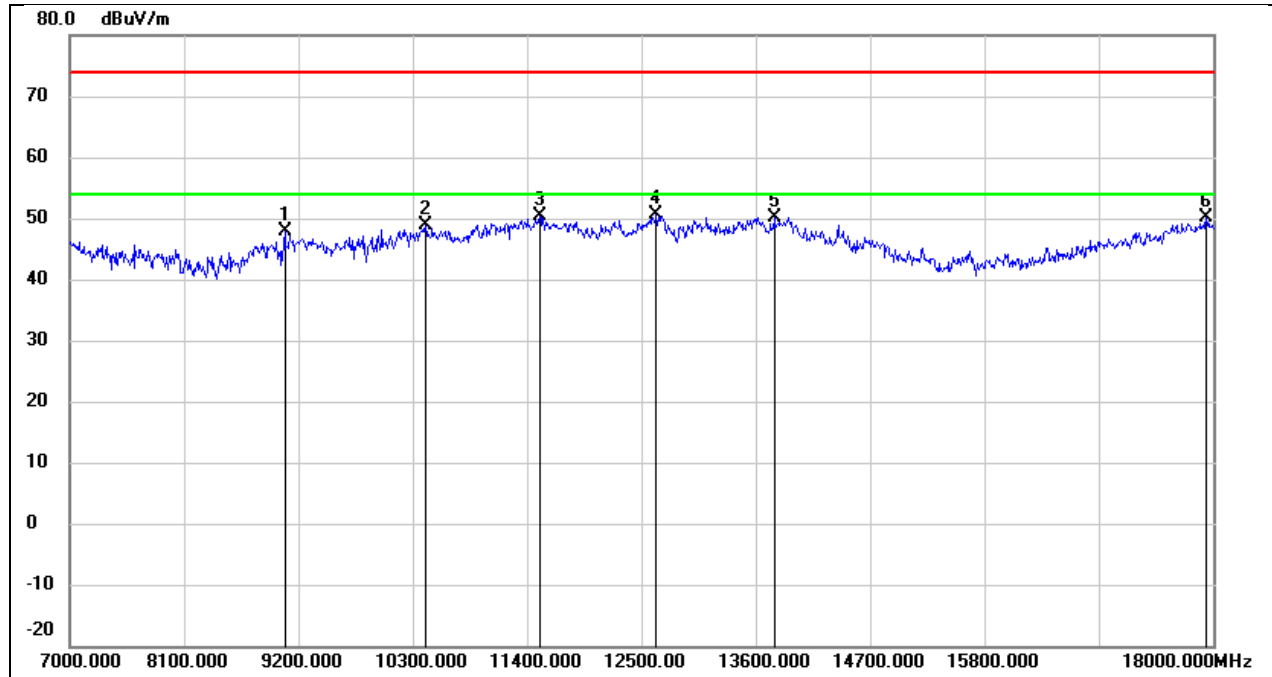


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	37.49	10.39	47.88	74.00	-26.12	peak
2	10421.000	36.32	12.66	48.98	74.00	-25.02	peak
3	11521.000	33.49	16.82	50.31	74.00	-23.69	peak
4	12643.000	32.71	18.01	50.72	74.00	-23.28	peak
5	13776.000	28.92	21.33	50.25	74.00	-23.75	peak
6	17934.000	24.43	25.67	50.10	74.00	-23.90	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 5 V

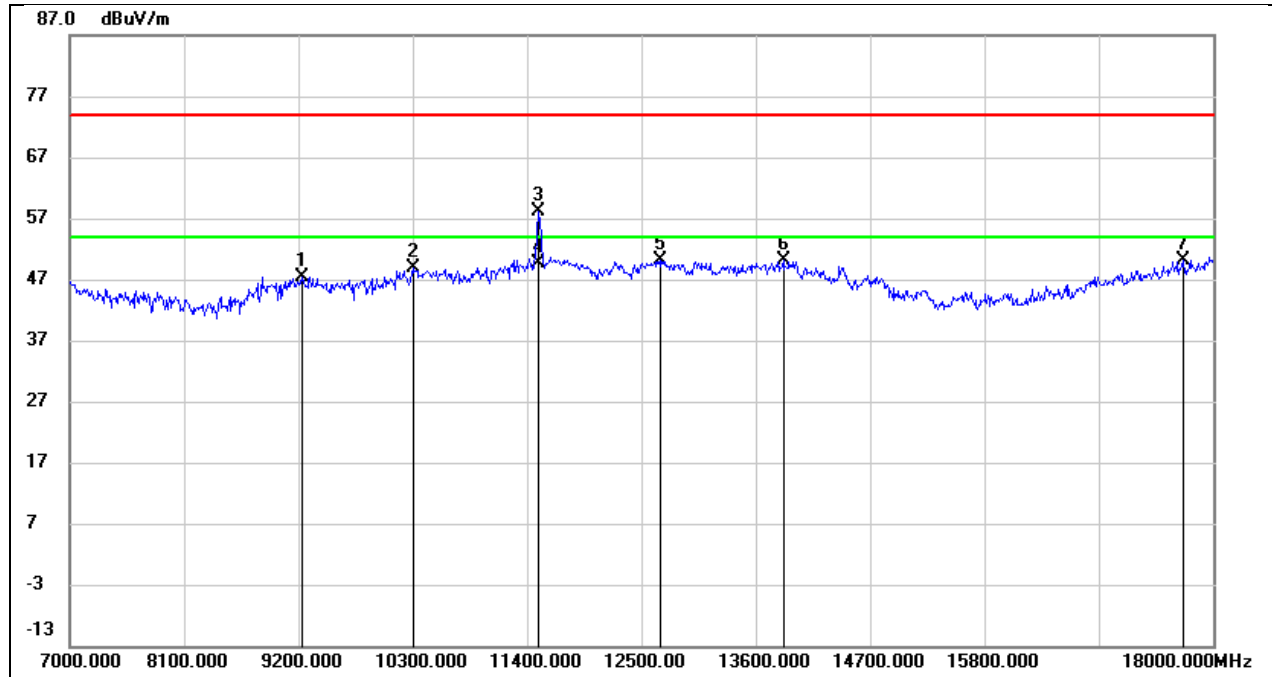


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	36.98	10.48	47.46	74.00	-26.54	peak
2	10300.000	36.47	12.40	48.87	74.00	-25.13	peak
3	11510.000	41.31	16.79	58.10	74.00	-15.90	peak
4	11510.000	32.88	16.79	49.67	54.00	-4.33	AVG
5	12676.000	31.96	18.05	50.01	74.00	-23.99	peak
6	13864.000	28.54	21.53	50.07	74.00	-23.93	peak
7	17714.000	26.07	24.16	50.23	74.00	-23.77	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 5 V

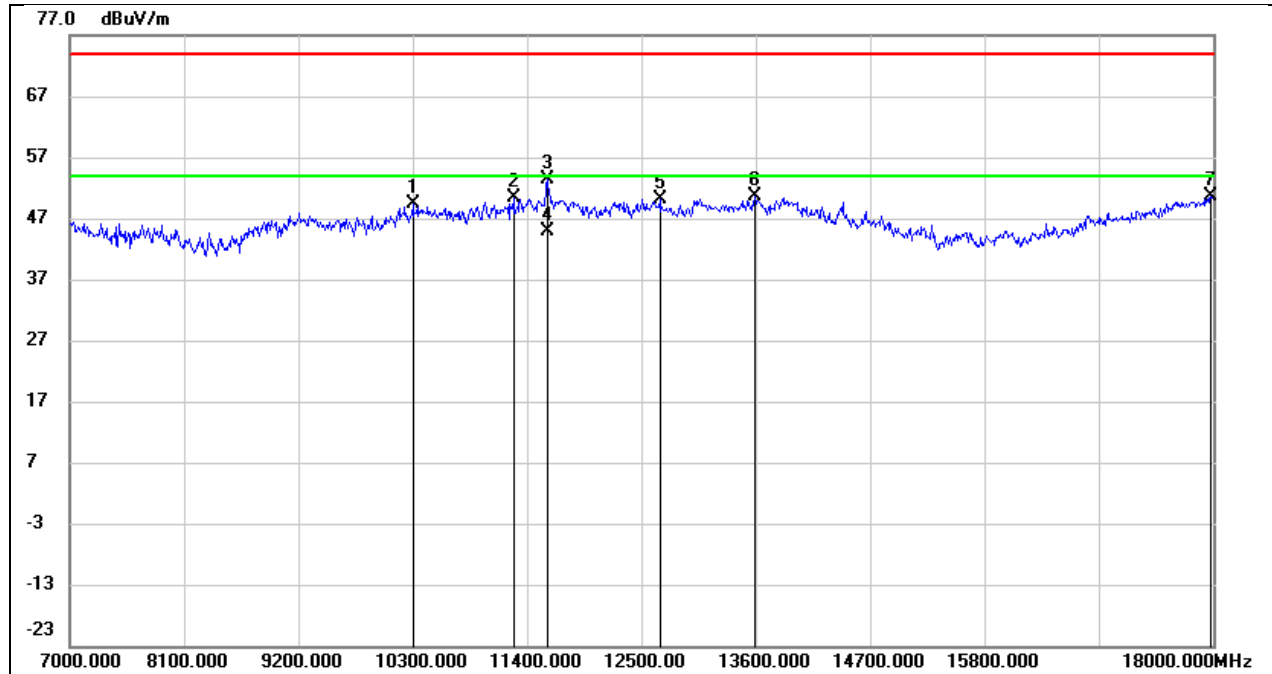

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10300.000	36.89	12.40	49.29	74.00	-24.71	peak
2	11268.000	34.58	15.83	50.41	74.00	-23.59	peak
3	11598.000	36.48	16.96	53.44	74.00	-20.56	peak
4	11598.000	27.99	16.96	44.95	54.00	-9.05	AVG
5	12676.000	32.15	18.05	50.20	74.00	-23.80	peak
6	13589.000	29.78	20.86	50.64	74.00	-23.36	peak
7	17978.000	24.78	25.97	50.75	74.00	-23.25	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 5 V

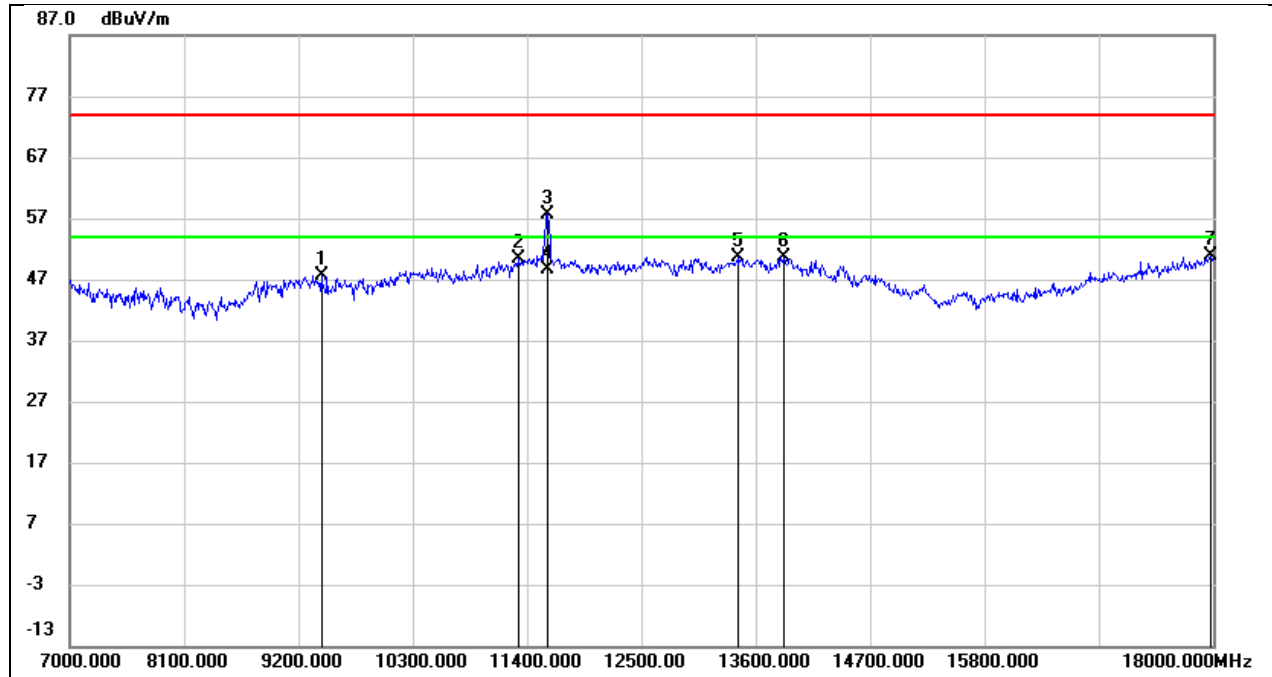

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9420.000	37.12	10.60	47.72	74.00	-26.28	peak
2	11312.000	34.28	16.00	50.28	74.00	-23.72	peak
3	11598.000	40.65	16.96	57.61	74.00	-16.39	peak
4	11598.000	31.67	16.96	48.63	54.00	-5.37	AVG
5	13424.000	30.34	20.30	50.64	74.00	-23.36	peak
6	13875.000	29.04	21.57	50.61	74.00	-23.39	peak
7	17978.000	24.97	25.97	50.94	74.00	-23.06	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

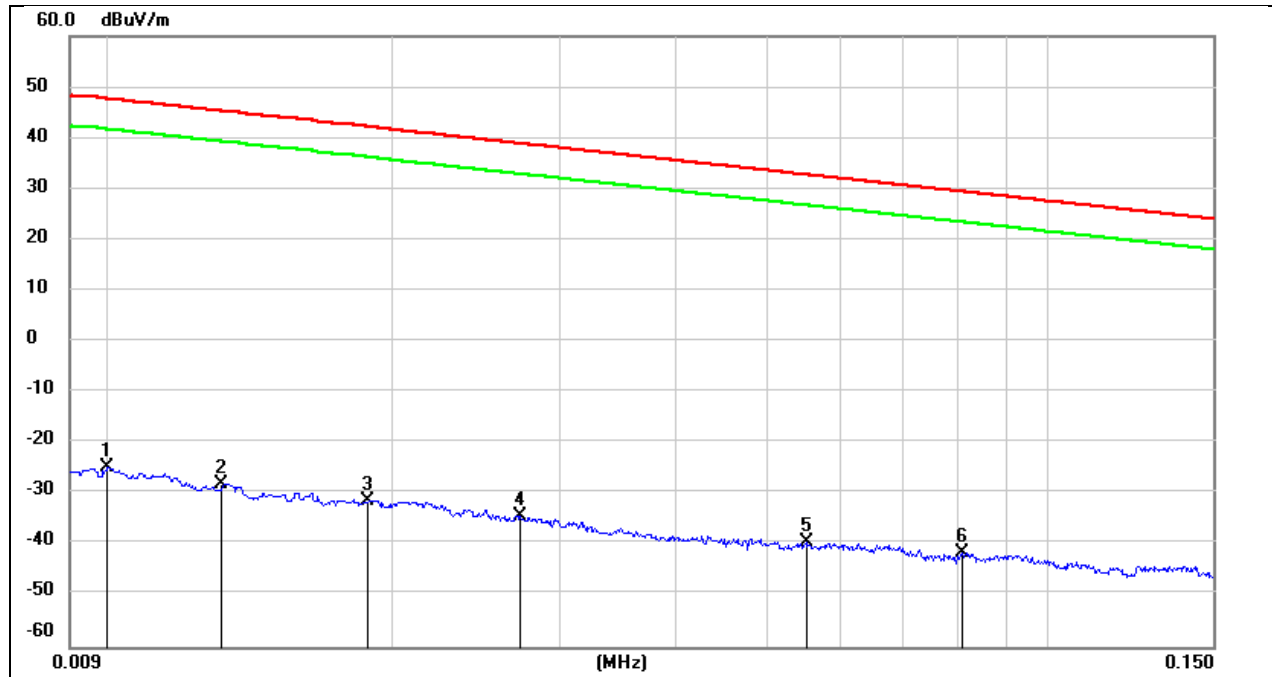


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	76.72	-101.40	-24.68	47.60	-76.18	-3.90	-72.28	peak
2	0.0131	73.47	-101.38	-27.91	45.25	-79.41	-6.25	-73.16	peak
3	0.0188	70.14	-101.35	-31.21	42.12	-82.71	-9.38	-73.33	peak
4	0.0273	66.99	-101.38	-34.39	38.88	-85.89	-12.62	-73.27	peak
5	0.0551	61.95	-101.50	-39.55	32.78	-91.05	-18.72	-72.33	peak
6	0.0806	60.18	-101.63	-41.45	29.47	-92.95	-22.03	-70.92	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

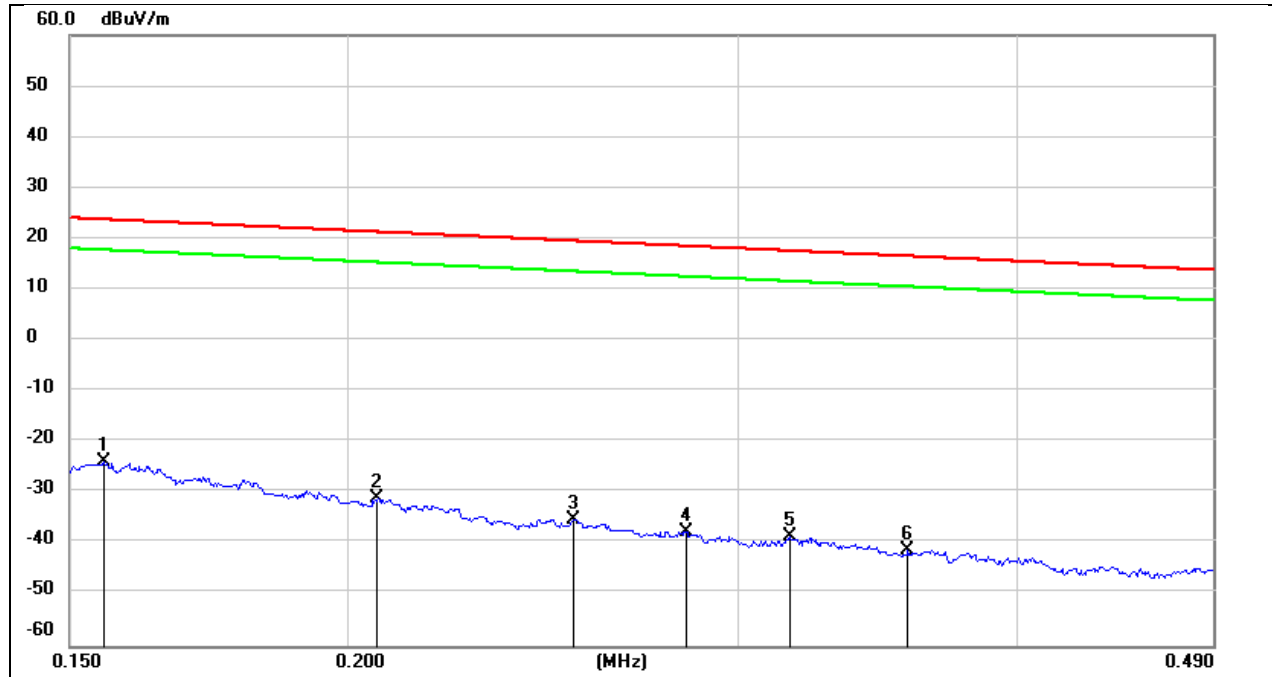

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	77.77	-101.65	-23.88	23.77	-75.38	-27.73	-47.65	peak
2	0.2064	70.54	-101.73	-31.19	21.31	-82.69	-30.19	-52.50	peak
3	0.2530	66.64	-101.80	-35.16	19.54	-86.66	-31.96	-54.70	peak
4	0.2837	64.22	-101.83	-37.61	18.54	-89.11	-32.96	-56.15	peak
5	0.3163	63.20	-101.87	-38.67	17.60	-90.17	-33.90	-56.27	peak
6	0.3573	60.58	-101.91	-41.33	16.54	-92.83	-34.96	-57.87	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

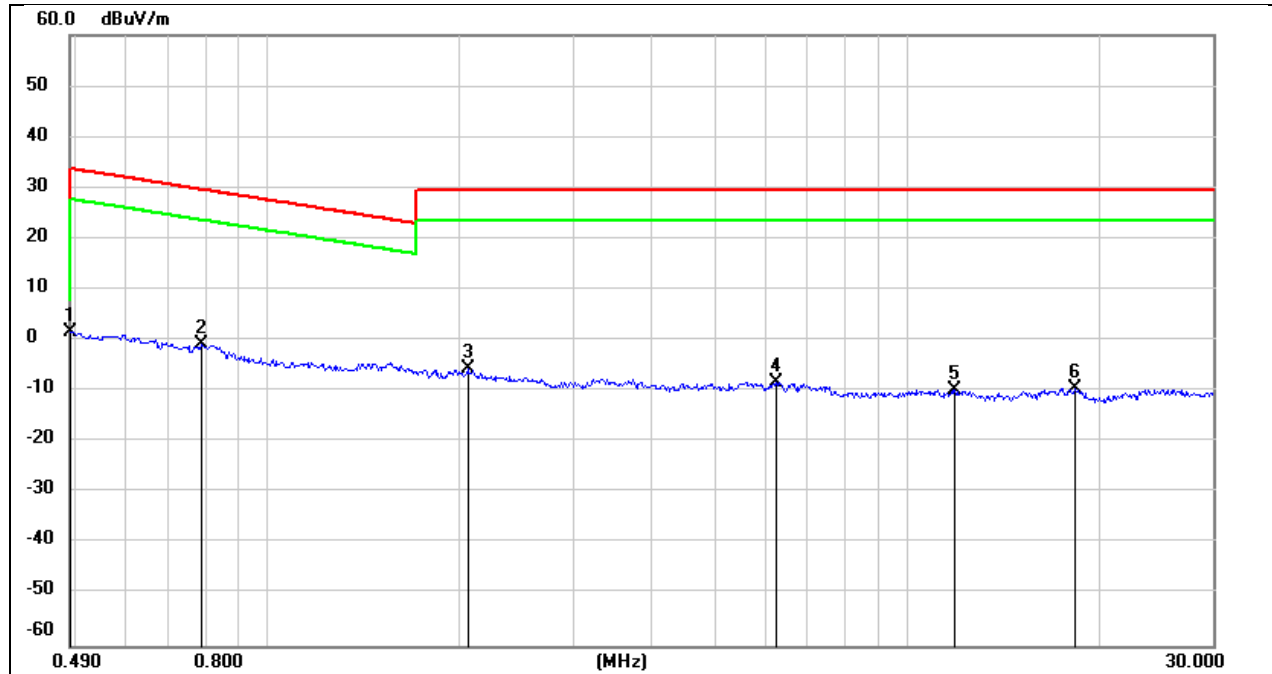

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.4900	63.72	-62.06	1.66	13.80	-49.84	-37.70	-12.14	peak
2	0.7861	61.33	-62.14	-0.81	29.69	-52.31	-21.81	-30.50	peak
3	2.0539	56.20	-61.81	-5.61	29.54	-57.11	-21.96	-35.15	peak
4	6.2445	53.13	-61.32	-8.19	29.54	-59.69	-21.96	-37.73	peak
5	11.8513	51.06	-60.88	-9.82	29.54	-61.32	-21.96	-39.36	peak
6	18.2545	51.43	-60.90	-9.47	29.54	-60.97	-21.96	-39.01	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

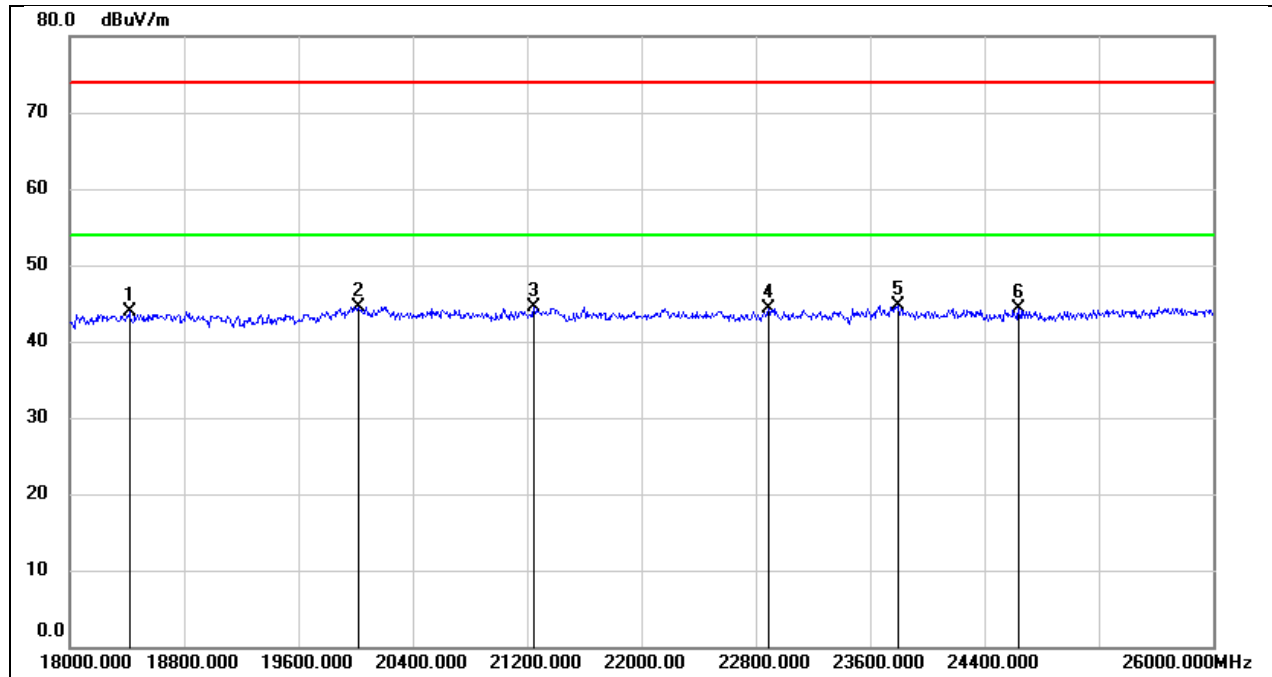

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18416.000	49.23	-5.35	43.88	74.00	-30.12	peak
2	20016.000	50.06	-5.47	44.59	74.00	-29.41	peak
3	21248.000	49.29	-4.77	44.52	74.00	-29.48	peak
4	22888.000	47.82	-3.55	44.27	74.00	-29.73	peak
5	23800.000	47.91	-3.11	44.80	74.00	-29.20	peak
6	24640.000	46.53	-2.32	44.21	74.00	-29.79	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

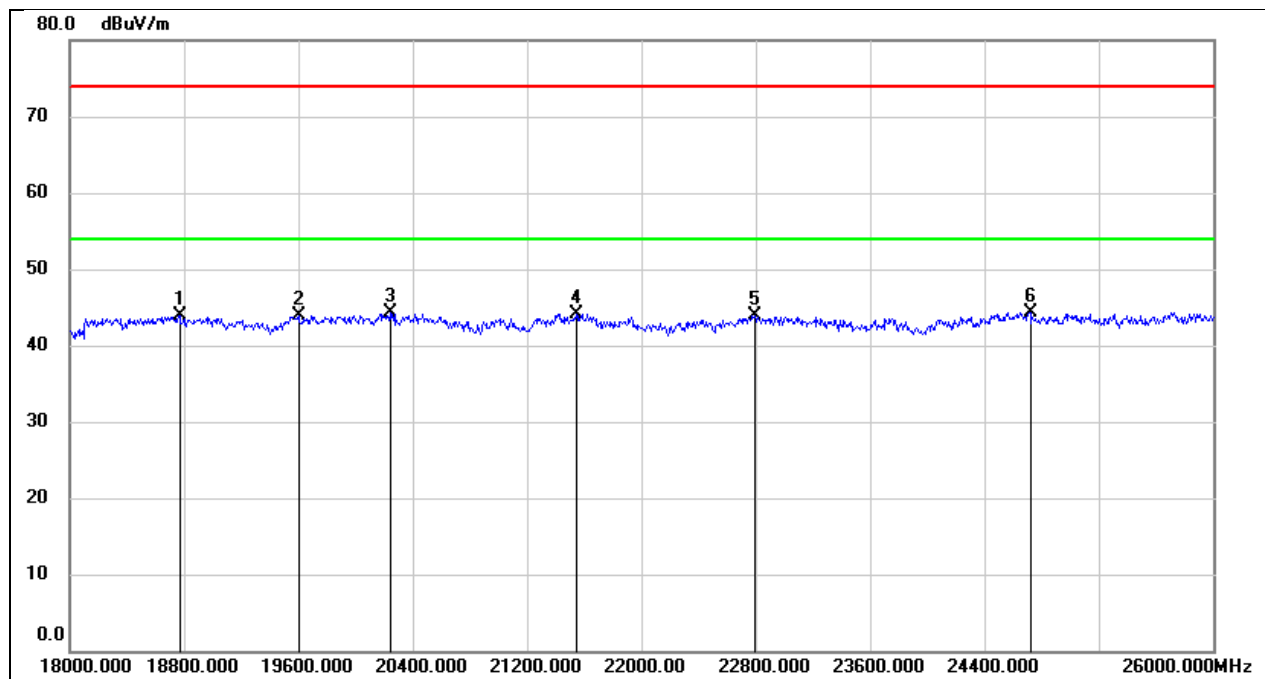

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18768.000	49.31	-5.41	43.90	74.00	-30.10	peak
2	19600.000	49.29	-5.43	43.86	74.00	-30.14	peak
3	20240.000	49.82	-5.61	44.21	74.00	-29.79	peak
4	21544.000	48.76	-4.63	44.13	74.00	-29.87	peak
5	22792.000	47.61	-3.65	43.96	74.00	-30.04	peak
6	24720.000	46.72	-2.33	44.39	74.00	-29.61	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5V

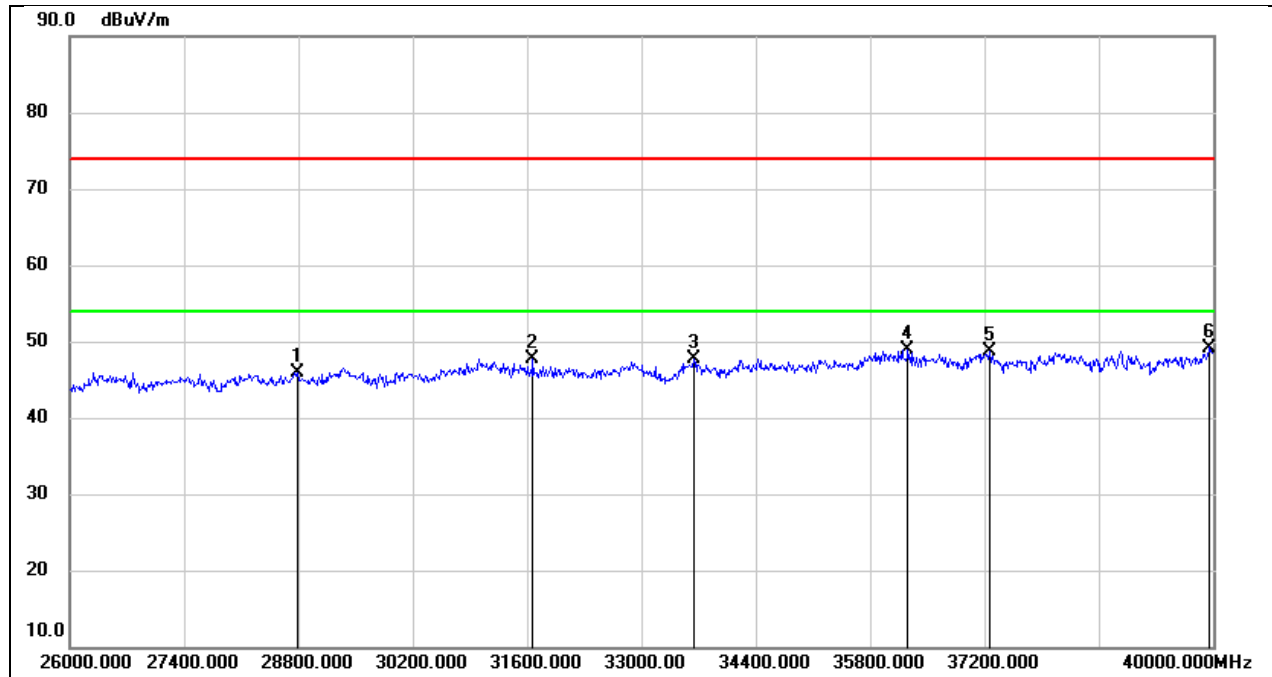

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28786.000	46.49	-0.64	45.85	74.00	-28.15	peak
2	31670.000	48.86	-1.21	47.65	74.00	-26.35	peak
3	33644.000	47.31	0.42	47.73	74.00	-26.27	peak
4	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
5	37256.000	45.51	3.14	48.65	74.00	-25.35	peak
6	39958.000	44.08	5.12	49.20	74.00	-24.80	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5V

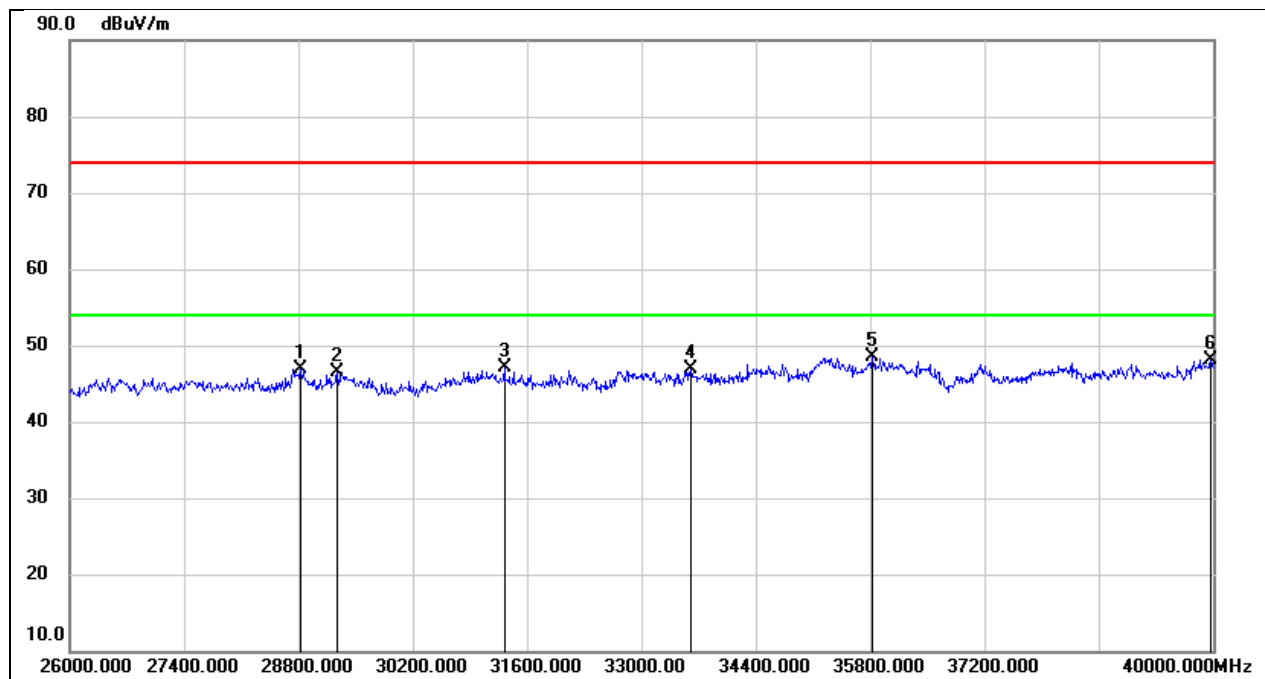

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28828.000	47.63	-0.79	46.84	74.00	-27.16	peak
2	29276.000	47.51	-1.01	46.50	74.00	-27.50	peak
3	31320.000	48.11	-0.93	47.18	74.00	-26.82	peak
4	33602.000	46.51	0.46	46.97	74.00	-27.03	peak
5	35828.000	44.75	3.67	48.42	74.00	-25.58	peak
6	39972.000	42.95	5.13	48.08	74.00	-25.92	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 5 V

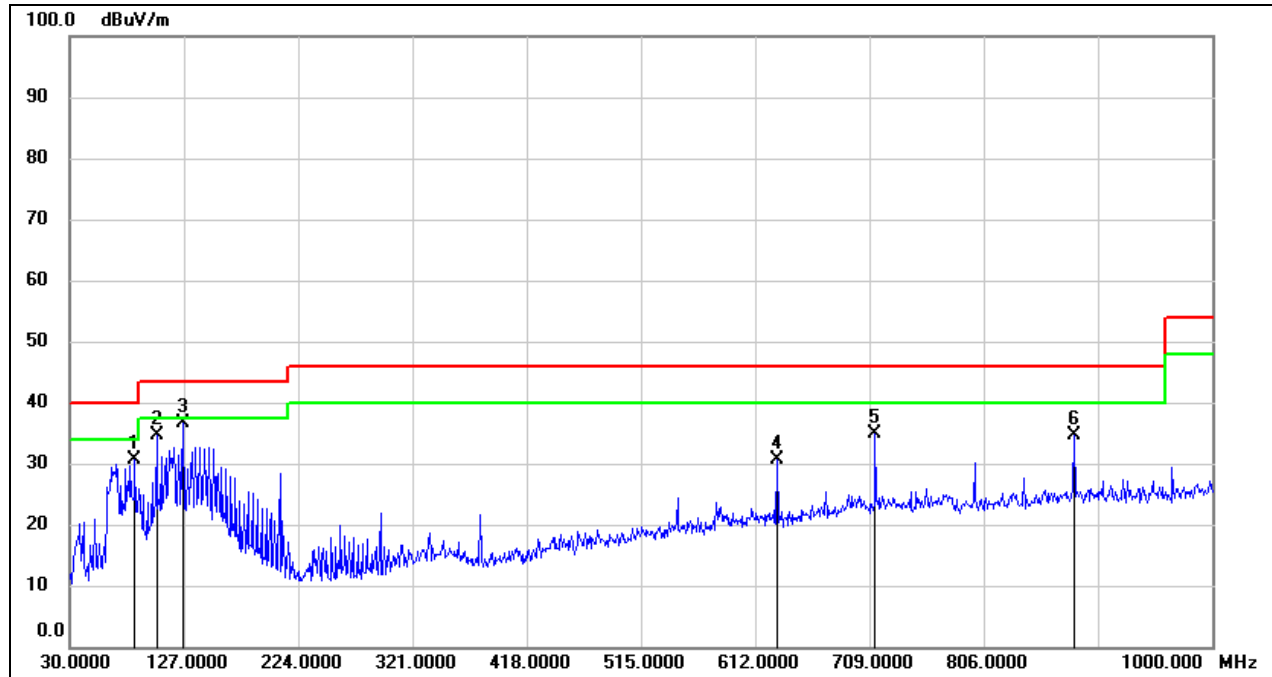

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	85.2900	64.84	-34.20	30.64	40.00	-9.36	QP
2	103.7200	67.37	-32.71	34.66	43.50	-8.84	QP
3	126.0300	67.94	-31.42	36.52	43.50	-6.98	QP
4	630.4300	51.14	-20.60	30.54	46.00	-15.46	QP
5	713.8500	53.73	-18.95	34.78	46.00	-11.22	QP
6	882.6300	51.09	-16.46	34.63	46.00	-11.37	QP

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 5 V

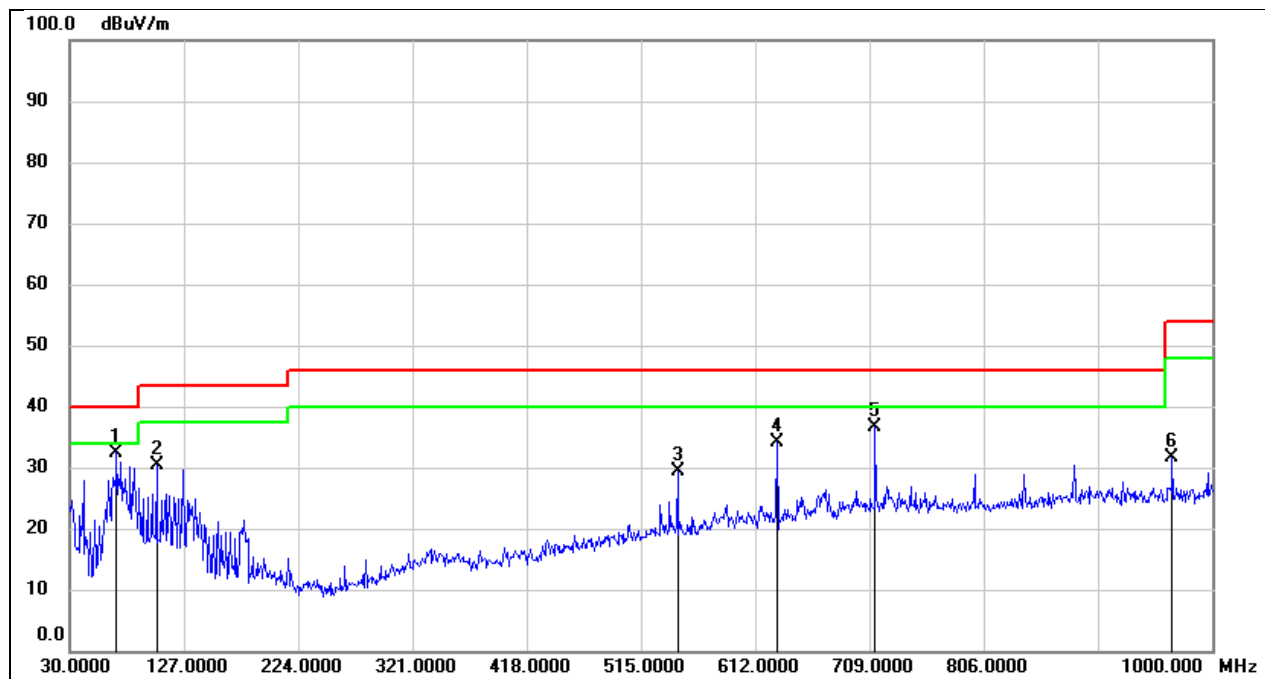


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	69.7699	65.32	-32.82	32.50	40.00	-7.50	QP
2	103.7200	63.03	-32.71	30.32	43.50	-13.18	QP
3	546.0400	50.99	-21.71	29.28	46.00	-16.72	QP
4	630.4300	54.61	-20.60	34.01	46.00	-11.99	QP
5	713.8500	55.64	-18.95	36.69	46.00	-9.31	QP
6	966.0500	47.40	-15.75	31.65	54.00	-22.35	QP

8.8. SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION

SPURIOUS EMISSIONS (BT GFSK HIGH CHANNEL and 802.11ax HE40 UNII-2C BAND MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)


1-7 GHz

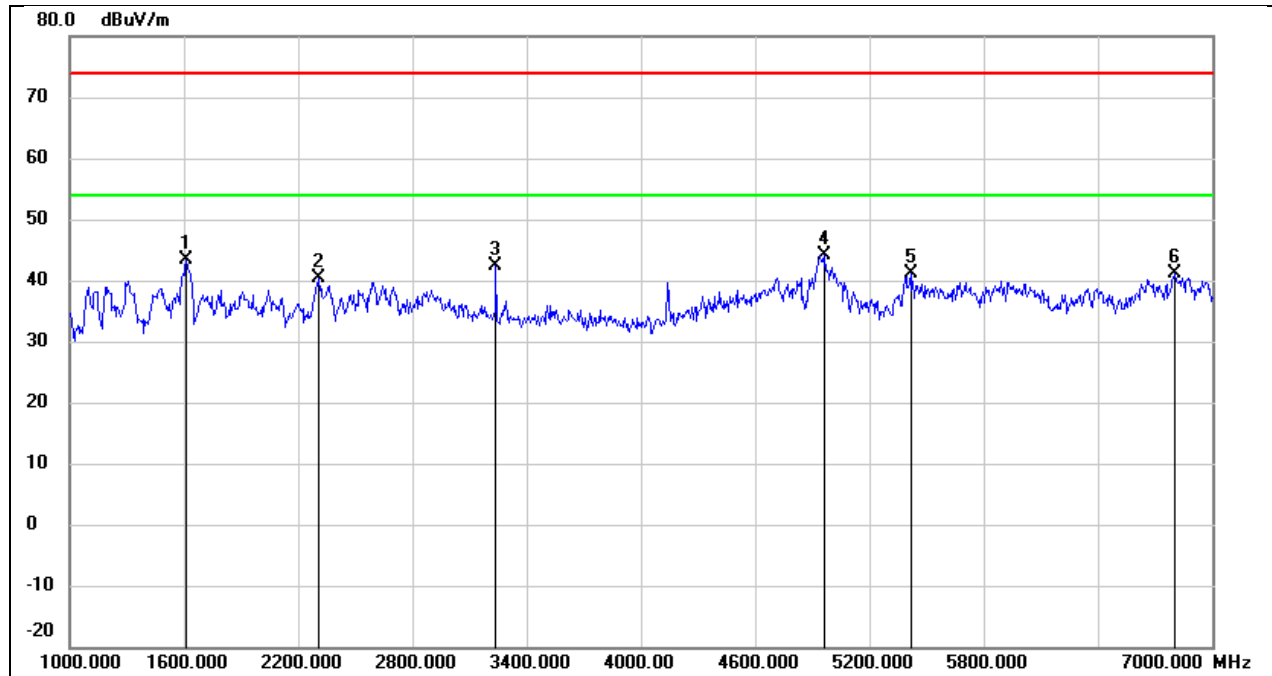

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1612.000	55.71	-12.34	43.37	74.00	-30.63	peak
2	2308.000	49.85	-9.47	40.38	74.00	-33.62	peak
3	3238.000	48.35	-5.92	42.43	74.00	-31.57	peak
4	4966.000	44.39	-0.28	44.11	74.00	-29.89	peak
5	5416.000	40.87	0.32	41.19	74.00	-32.81	peak
6	6802.000	35.83	5.21	41.04	74.00	-32.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18 GHz

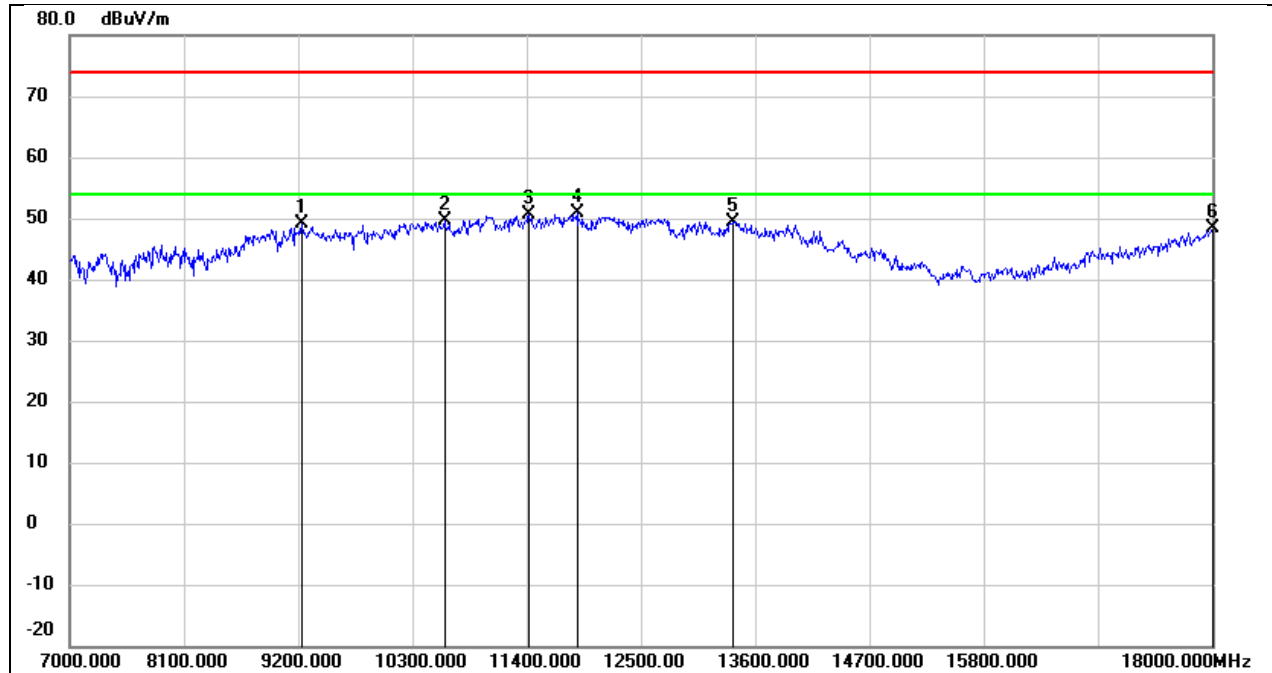


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.72	10.48	49.20	74.00	-24.80	peak
2	10608.000	36.47	13.23	49.70	74.00	-24.30	peak
3	11422.000	34.20	16.46	50.66	74.00	-23.34	peak
4	11884.000	33.40	17.48	50.88	74.00	-23.12	peak
5	13380.000	29.36	20.12	49.48	74.00	-24.52	peak
6	18000.000	22.22	26.12	48.34	74.00	-25.66	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

SPURIOUS EMISSIONS (BT GFSK HIGH CHANNEL and 802.11ax HE40 UNII-2C BAND MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)


1-7 GHz

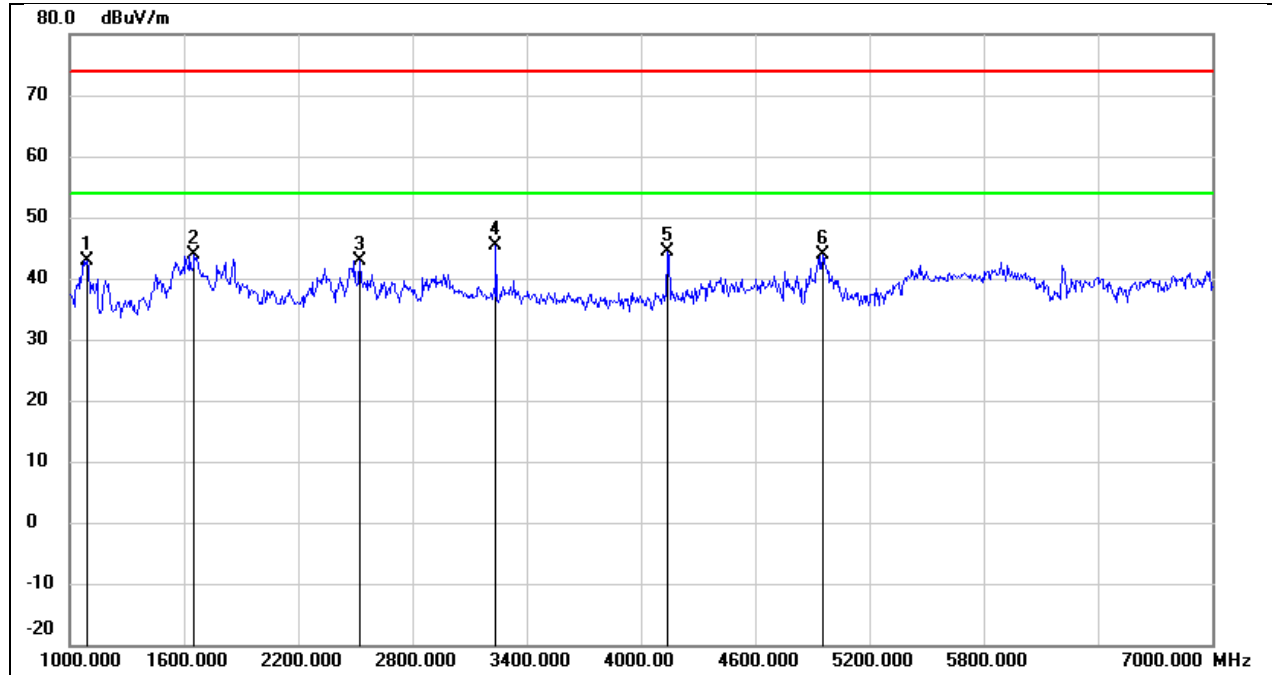

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1090.000	57.54	-14.61	42.93	74.00	-31.07	peak
2	1654.000	56.05	-12.20	43.85	74.00	-30.15	peak
3	2524.000	51.29	-8.37	42.92	74.00	-31.08	peak
4	3238.000	51.39	-5.92	45.47	74.00	-28.53	peak
5	4138.000	48.27	-3.83	44.44	74.00	-29.56	peak
6	4954.000	44.15	-0.33	43.82	74.00	-30.18	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18 GHz

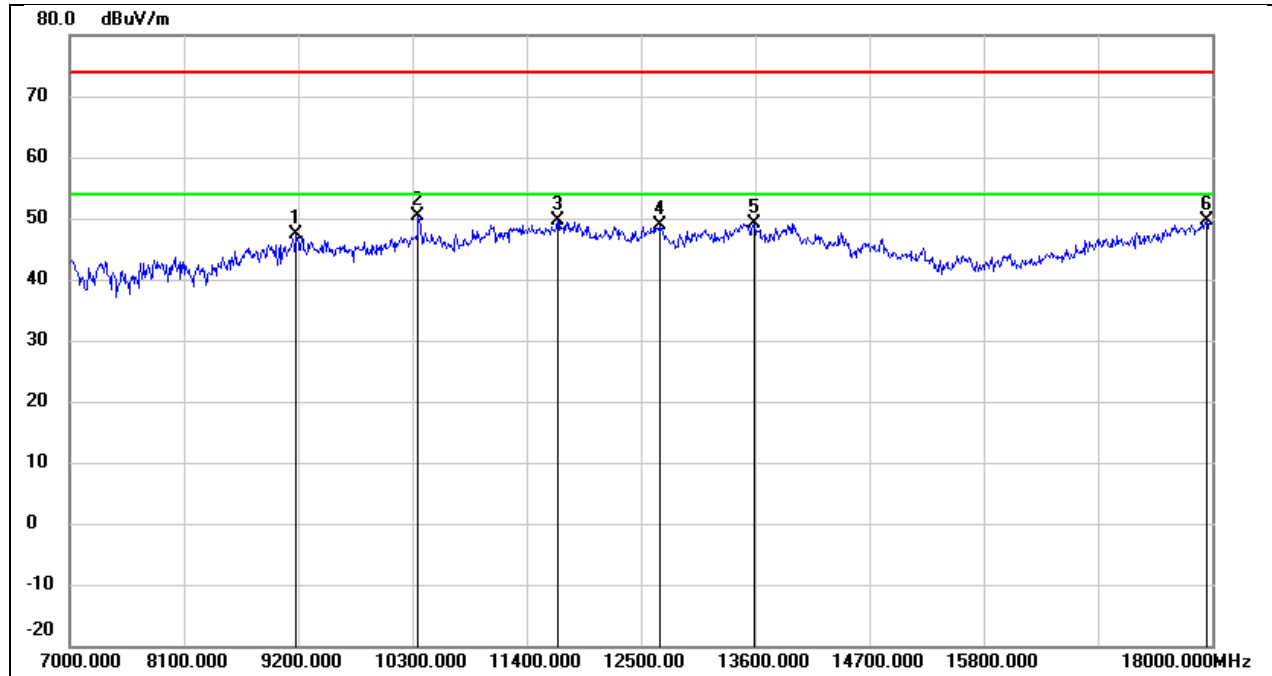

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	36.89	10.45	47.34	74.00	-26.66	peak
2	10355.000	37.96	12.52	50.48	74.00	-23.52	peak
3	11697.000	32.50	17.13	49.63	74.00	-24.37	peak
4	12687.000	30.91	18.05	48.96	74.00	-25.04	peak
5	13589.000	28.33	20.86	49.19	74.00	-24.81	peak
6	17945.000	23.80	25.75	49.55	74.00	-24.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

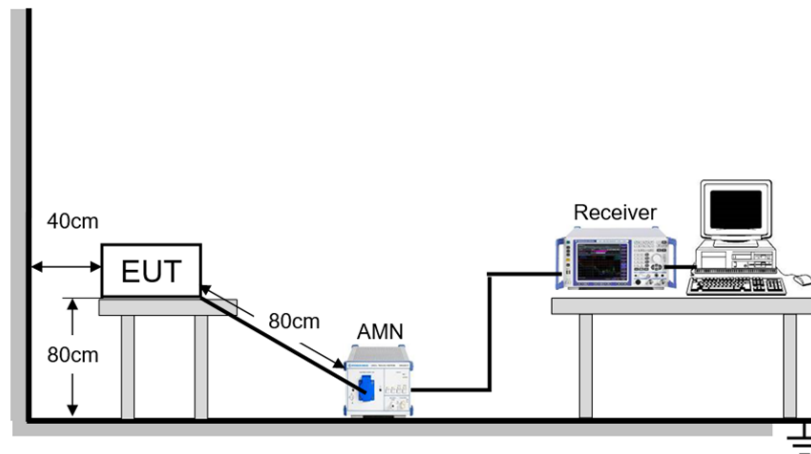

TEST ENVIRONMENT


Temperature	25.2°C	Relative Humidity	59.5%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 14, 2024	Test By	Wite Chen
-----------	----------------	---------	-----------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

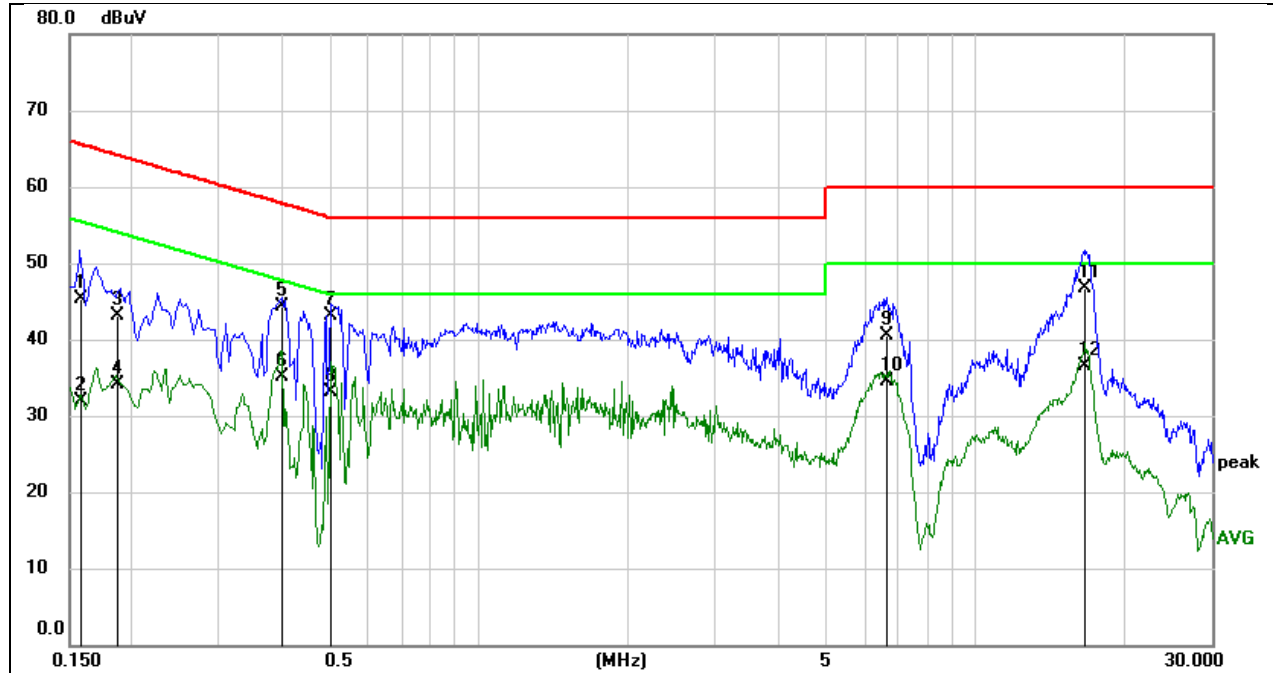


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1583	35.03	10.22	45.25	65.55	-20.30	QP
2	0.1583	21.62	10.22	31.84	55.55	-23.71	AVG
3	0.1873	33.03	10.17	43.20	64.16	-20.96	QP
4	0.1873	23.86	10.17	34.03	54.16	-20.13	AVG
5	0.4014	34.28	10.07	44.35	57.82	-13.47	QP
6	0.4014	25.09	10.07	35.16	47.82	-12.66	AVG
7	0.5017	33.16	10.04	43.20	56.00	-12.80	QP
8	0.5017	23.01	10.04	33.05	46.00	-12.95	AVG
9	6.6349	30.09	10.42	40.51	60.00	-19.49	QP
10	6.6349	24.09	10.42	34.51	50.00	-15.49	AVG
11	16.6358	35.93	10.74	46.67	60.00	-13.33	QP
12	16.6358	25.86	10.74	36.60	50.00	-13.40	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

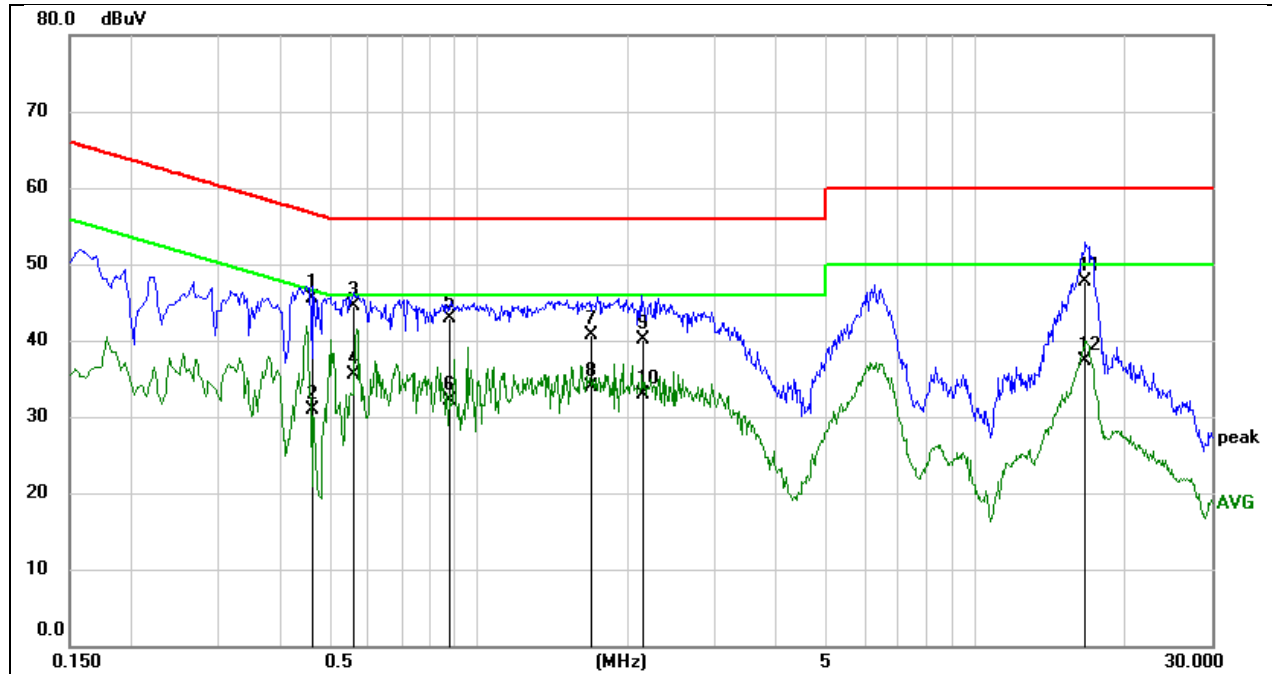

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4625	35.44	10.05	45.49	56.65	-11.16	QP
2	0.4625	20.90	10.05	30.95	46.65	-15.70	AVG
3	0.5604	34.47	10.04	44.51	56.00	-11.49	QP
4	0.5604	25.38	10.04	35.42	46.00	-10.58	AVG
5	0.8758	33.01	9.91	42.92	56.00	-13.08	QP
6	0.8758	22.27	9.91	32.18	46.00	-13.82	AVG
7	1.7044	30.70	9.98	40.68	56.00	-15.32	QP
8	1.7044	23.91	9.98	33.89	46.00	-12.11	AVG
9	2.1452	30.09	10.06	40.15	56.00	-15.85	QP
10	2.1452	22.93	10.06	32.99	46.00	-13.01	AVG
11	16.7518	36.87	10.75	47.62	60.00	-12.38	QP
12	16.7518	26.65	10.75	37.40	50.00	-12.60	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant1	5180	19.520	5170.160	5189.680	PASS
		5200	19.480	5190.520	5210.000	PASS
		5240	19.560	5229.800	5249.360	PASS
		5260	19.480	5249.800	5269.280	PASS
		5280	20.120	5269.880	5290.000	PASS
		5320	19.000	5310.640	5329.640	PASS
		5500	19.560	5490.040	5509.600	PASS
		5580	20.680	5569.800	5590.480	PASS
		5700	19.840	5690.200	5710.040	PASS
		5720	19.000	5710.240	5729.240	PASS
		5720 UNII-2C	14.76	5710.240	5725	PASS
		5720 UNII-3	4.24	5725	5729.240	PASS
		5745	19.680	5735.080	5754.760	PASS
		5785	19.480	5775.040	5794.520	PASS
		5825	19.840	5814.920	5834.760	PASS
11N20SISO	Ant1	5180	20.520	5169.960	5190.480	PASS
		5200	19.800	5190.000	5209.800	PASS
		5240	20.320	5229.920	5250.240	PASS
		5260	19.640	5250.240	5269.880	PASS
		5280	20.360	5269.600	5289.960	PASS
		5320	21.120	5309.160	5330.280	PASS
		5500	19.680	5490.320	5510.000	PASS
		5580	19.880	5570.200	5590.080	PASS
		5700	20.120	5690.000	5710.120	PASS
		5720	19.800	5710.000	5729.800	PASS
		5720 UNII-2C	15	5710.000	5725	PASS
		5720 UNII-3	4.8	5725	5729.800	PASS
		5745	20.000	5735.000	5755.000	PASS
		5785	20.320	5774.880	5795.200	PASS
		5825	20.480	5814.360	5834.840	PASS
11N40SISO	Ant1	5190	41.120	5169.360	5210.480	PASS
		5230	40.880	5209.360	5250.240	PASS
		5270	41.040	5249.920	5290.960	PASS
		5310	40.480	5289.920	5330.400	PASS
		5510	41.360	5489.520	5530.880	PASS
		5550	41.280	5529.120	5570.400	PASS
		5670	41.200	5649.360	5690.560	PASS
		5710	40.160	5690.080	5730.240	PASS
		5710 UNII-2C	34.92	5690.080	5725	PASS
		5710 UNII-3	5.24	5725	5730.240	PASS
		5755	41.280	5734.360	5775.640	PASS
		5795	40.240	5774.600	5814.840	PASS
11AX20SISO	Ant1	5180	20.800	5169.520	5190.320	PASS
		5200	20.480	5189.880	5210.360	PASS
		5240	20.400	5229.840	5250.240	PASS
		5260	20.480	5249.920	5270.400	PASS
		5280	21.160	5269.560	5290.720	PASS
		5320	20.320	5310.080	5330.400	PASS
		5500	20.040	5490.040	5510.080	PASS
		5580	20.800	5569.520	5590.320	PASS
		5700	20.480	5689.960	5710.440	PASS
		5720	20.120	5710.120	5730.240	PASS
		5720 UNII-2C	14.88	5710.120	5725	PASS
		5720 UNII-3	5.24	5725	5730.240	PASS
		5745	20.040	5735.200	5755.240	PASS

		5785	20.760	5774.840	5795.600	PASS
		5825	20.280	5814.760	5835.040	PASS
11AX40SISO	Ant1	5190	39.840	5170.080	5209.920	PASS
		5230	39.600	5210.240	5249.840	PASS
		5270	41.040	5248.960	5290.000	PASS
		5310	40.560	5289.120	5329.680	PASS
		5510	40.080	5490.240	5530.320	PASS
		5550	40.480	5529.120	5569.600	PASS
		5670	40.880	5649.920	5690.800	PASS
		5710	40.320	5689.440	5729.760	PASS
		5710 UNII-2C	35.56	5689.440	5725	PASS
		5710 UNII-3	4.76	5725	5729.760	PASS
		5755	40.240	5735.000	5775.240	PASS
		5795	40.560	5774.920	5815.480	PASS

11.1.2. Test Graphs

