

SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std. 1528-2013**

For

CleverCast

MODEL NUMBER: Clevershare 4th Generation

REPORT NUMBER: 4791185009-1-SAR-1

ISSUE DATE: April 29, 2024

FCC ID: 2APKO-CLEVERCAST

Prepared for

**Sahara Presentation Systems Ltd
Unit 4, Blueprint Erith, Church Manorway, Erith, DA8 1DG United Kingdom**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech
Development Zone Dongguan, People's Republic of China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	April 29, 2024	Initial Issue	\



Note:

- 1) This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
- 2) The measurement result for the sample received is <Pass> according to < IEEE Std. 1528>when <Simple Acceptance> decision rule is applied.

Table of Contents

1.	Attestation of Test Results	4
2.	Test Specification, Methods and Procedures	5
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment.....	7
4.1.	SAR Measurement System	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technology	12
7.	Conducted Output Power Measurement and tune-up tolerance.....	13
7.1.	Test Results of BT/BLE	13
7.2.	Test Results of 5 GHz WiFi	14
7.3.	Duty Cycle	16
8.	Wi-Fi Test Configuration	18
8.1.1.	Initial Test Position Procedure	18
8.1.2.	Initial Test Configuration Procedure	18
8.1.3.	Sub Test Configuration Procedure	18
8.1.4.	2.4GHz Wi-Fi SAR Test Procedures.....	18
8.1.5.	2.4GHz BT/BLE SAR Test Requirements.....	19
9.	Antenna location diagram	20
10.	RF Exposure Conditions	21
11.	Dielectric Property Measurements & System Check.....	22
11.1.	Dielectric Property Measurements.....	22
11.2.	System Check.....	23
12.	Measured and Reported (Scaled) SAR Results	24
12.1.	SAR Test Results of 5GHz WiFi	25
13.	Simultaneous Transmission SAR Analysis.....	26
	Appendixes	27
	4791185009-1-SAR-1_App A Photo	27
	4791185009-1-SAR-1_App B System Check Plots	27
	4791185009-1-SAR-1_App C Highest Test Plots.....	27
	4791185009-1-SAR-1_App D Cal. Certificates.....	27

1. Attestation of Test Results

Applicant Name	Sahara Presentation Systems Ltd		
Address	Unit 4, Blueprint Erith, Church Manorway, Erith, DA8 1DG United Kingdom		
Manufacturer	Sahara Presentation Systems Ltd		
Address	Unit 4, Blueprint Erith, Church Manorway, Erith, DA8 1DG United Kingdom		
EUT Name	CleverCast		
Brand	CLEVERTOUCH		
Model	Clevershare 4th Generation		
Sample Received Date	January 31, 2024		
Sample Status	Normal		
Sample ID	6888098		
Date of Tested	April 22, 2024		
Applicable Standards	FCC 47 CFR § 2.1093 IEEE Std. 1528-2013 KDB publication		
SAR Limits (W/Kg)			
Exposure Category	Peak spatial-average (1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6	4	
The Highest Reported SAR (W/kg)			
RF Exposure Conditions	Equipment Class		
	U-NII	DSS	DTS
Body 1-g (5 mm)	0.363	\	\
Simultaneous Transmission	0.393		
Test Results	Pass		
Prepared By:  James Qin Project Engineer	Reviewed By:  Denny Huang Senior Project Engineer	Approved By:  Stephen Guo Laboratory Manager	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with IEEE Std.1528-2013 and the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v06
- 447498 D02 SAR procedure for USB dongle transmitter v02r01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02


3. Facilities and Accreditation

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
Description	All measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY8 system used for performing compliance tests consists of the following items:

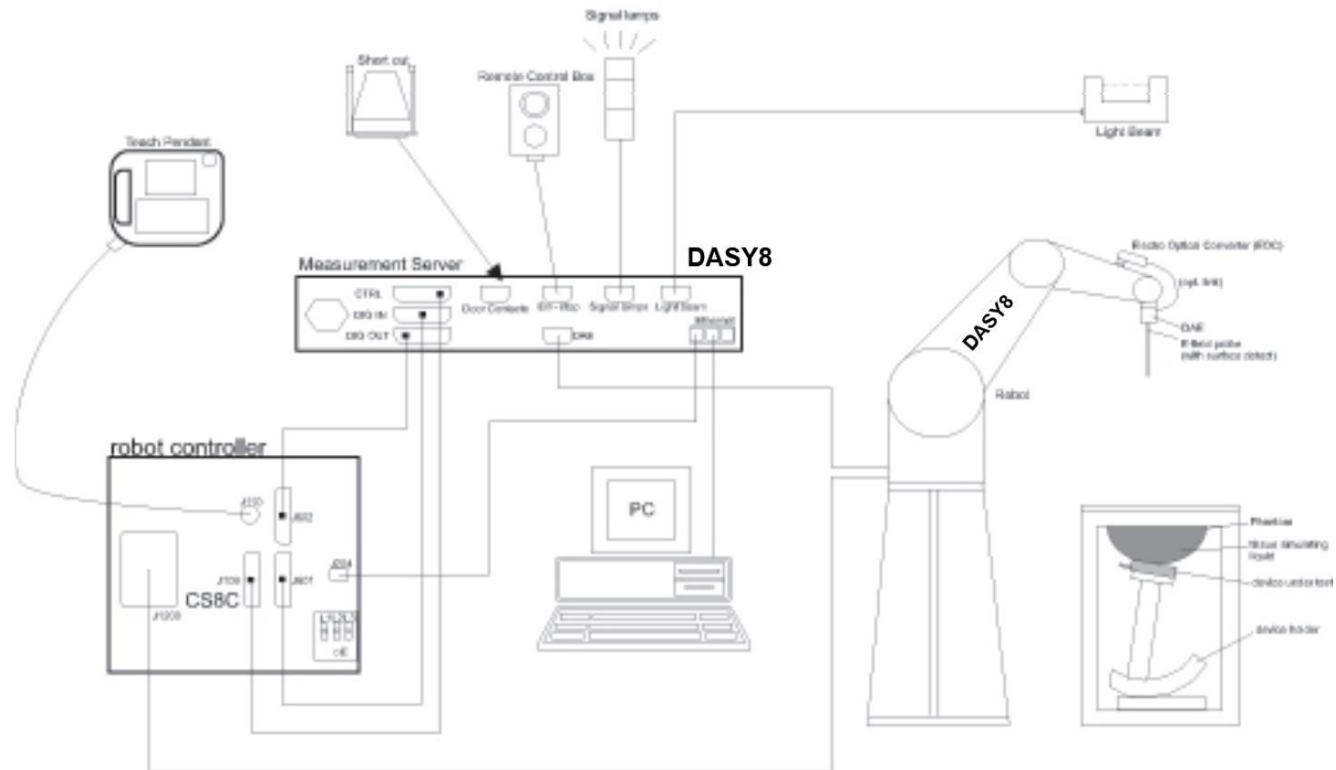

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in Db) is specified in the standards for compliance testing. For example, a 2 Db range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 Db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in Db from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be greater than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Name of equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ENA Network Analyzer	Keysight	E5080A	MY55100583	2024.10.11
Dielectric Probe kit	SPEAG	SM DAK 040 SA	1155	2025.02.27
DC power supply	Keysight	E36103A	MY55350020	2024.10.11
Signal Generator	Rohde & Schwarz	SME06	837633\001	2024.08.06
BI-Directional Coupler	KRYTAR	1850	54733	2024.10.11
Peak and Average Power Sensor	Keysight	E9325A	MY62220002	2024.10.11
Peak and Average Power Sensor	Keysight	E9325A	MY62220003	2024.10.11
Dual Channel PK Power Meter	Keysight	N1912A	MY55416024	2024.10.11
Amplifier	CORAD TECHNOLOGY LTD	AMF-4D-00400600-50-30P	1983561	NCR
Dosimetric E-Field Probe	SPEAG	EX3DV4	7383	2024.06.04
Data Acquisition Electronic	SPEAG	DAE3	427	2024.05.16
Dipole Kit 2450 MHz	SPEAG	D2450V2	977	2024.12.16
Dipole Kit 5 GHz	SPEAG	D5GHzV2	1231	2024.12.15
Software	SPEAG	DASY8	N/A	NCR
Twin Phantom	SPEAG	SAM 8.0	2100	NCR
Thermometer	/	GX-138	150709653	2024.10.18
Thermometer	VICTOR	ITHX-SD-5	18470005	2024.10.18

Note:

1) Per KDB865664D01 v01r04 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;

b) System check with specific dipole is within 10% of calibrated value;

c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.

d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std. 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

EUT is a screen projection dongle that supports 5.8 GHz WiFi and BT/BLE wireless technology.

EUT Dimension	Overall (Length x Width x Height): 170mm x 78mm x 20mm
---------------	--

6.2. Wireless Technology

Wireless technology	Frequency band
BT/BLE	2.4 GHz
WiFi	5 GHz

7. Conducted Output Power Measurement and tune-up tolerance

7.1. Test Results of BT/BLE

Mode	Freq.(MHz)	Conducted power (dBm)	Tune-up Limit (dBm)
DH5	2402	Not required	3.5
	2441	Not required	3.5
	2480	Not required	3.5
3DH5	2402	Not required	1.0
	2441	Not required	1.0
	2480	Not required	1.0
1M	2402	Not required	3
	2440	Not required	3
	2480	Not required	3
2M	2402	Not required	3
	2440	Not required	3
	2480	Not required	3

Note: depended on section 4.3.1 (a) of 447498 D01 General RF Exposure Guidance v06, BT/BLE qualified for SAR exemption, so average out power measurement is not required.

Frequency (MHz)	Power (dBm)	Power (mW)	Separation Distance (mm)	Calculation Result	Threshold	SAR Test
2480	3.50	3	5	0.9	3.0	Excluded

7.2. Test Results of 5 GHz WiFi


Mode	Freq(MHz)	Av.Power (dBm)	Tune-up Limit (dBm)
			Total
802.11a	5180	13.24	13.5
	5200	12.81	13.5
	5240	11.80	13.5
	5260	11.02	11.5
	5280	10.50	11.5
	5320	9.64	11.5
	5500	12.34	13.0
	5580	12.77	13.0
	5700	11.45	13.0
	5745	11.90	12.0
	5785	11.13	12.0
802.11n 20M	5825	10.56	12.0
	5180	12.48	12.5
	5200	11.83	12.5
	5240	11.00	12.5
	5260	10.63	11.0
	5280	10.26	11.0
	5320	9.40	11.0
	5500	11.52	12.0
	5580	11.98	12.0
	5700	10.30	12.0
	5745	11.88	12.0
802.11n 40M	5785	11.22	12.0
	5825	10.61	12.0
	5190	12.27	12.5
	5230	11.17	12.5
	5270	10.42	10.5
	5310	9.71	10.5
	5510	13.36	13.5
	5550	13.44	13.5
802.11ac 20M	5670	12.21	13.5
	5755	11.73	12.0
	5795	10.95	12.0
	5180	12.48	12.5
	5200	11.78	12.5
	5240	11.12	12.5
	5260	10.73	11.0
	5280	10.28	11.0
	5320	9.53	11.0
	5500	11.52	12.0
	5580	11.89	12.0
802.11ac 40M	5700	10.4	12.0
	5745	11.73	12.0
	5785	11.25	12.0
	5825	10.57	12.0
	5190	12.33	12.5
	5230	11.02	12.5
	5270	10.56	10.5
	5310	9.73	10.5
	5510	13.45	13.5

	5590	13.38	13.5
	5670	12.35	13.5
	5755	11.74	12.0
	5795	10.99	12.0
802.11ax 20M	5180	12.62	13.0
	5200	12.00	13.0
	5240	11.18	13.0
	5260	10.77	11.0
	5280	10.37	11.0
	5320	9.49	11.0
	5500	11.04	12.0
	5580	11.66	12.0
	5700	10.00	12.0
	5745	11.62	12.0
	5785	10.84	12.0
	5825	10.26	12.0
	5190	12.97	13.0
	5230	12.26	13.0
802.11ax 40M	5270	10.87	11.0
	5310	10.11	11.0
	5510	13.72	14.0
	5550	13.70	14.0
	5670	12.47	14.0
	5755	11.67	12.0
	5795	10.95	12.0

7.3. Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)
802.11a	1.37	1.4	0.9786	97.86
802.11ax HE40	0.52	0.55	0.9455	94.55
802.11n HT40	0.64	0.67	0.9552	95.52

802.11a

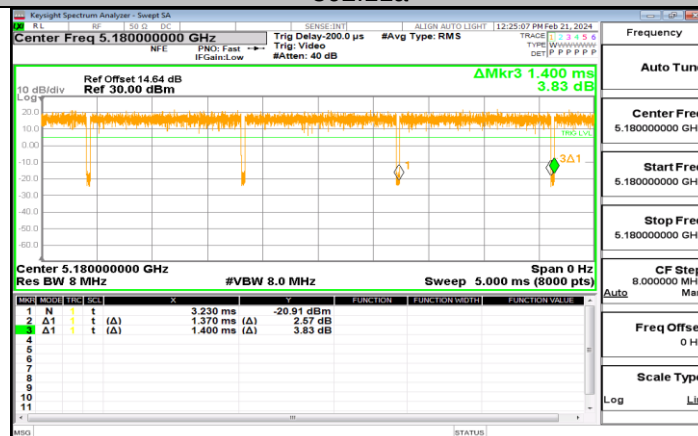

802.11ax HE40



802.11n HT40



8. Wi-Fi Test Configuration

For Wi-Fi SAR testing, a communication link is set up with the testing software for Wi-Fi mode test. During the test, at each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

8.1.1. Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8\text{W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

8.1.2. Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the reported SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

8.1.3. Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, SAR is not required for that subsequent test configuration.

8.1.4. 2.4GHz Wi-Fi SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel (section 3.1 of KDB 248227D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

8.1.5. 2.4GHz BT/BLE SAR Test Requirements

2.4GHz BT operating modes are tested independently according to the service requirements in each frequency band for each antenna. DH5 / 3DH5 / 1M SISO modes are tested on the maximum average output power mode.

9. Antenna location diagram

Referred to appendix A.

10.RF Exposure Conditions

For the specific details of the antenna-to-edges distances, please refer to appendix A for antenna location diagram. As per KDB 941225 D07, when the antenna to-edge-distance is greater than 2.5 cm, SAR evaluation is not required for the corresponding position.

Test Position	antenna to-edge-distance	Test required
Front Surface	<25 mm	Yes
Back Surface	<25 mm	Yes
Left side	<25 mm	Yes
Right side	<25 mm	Yes
Top side	<25 mm	Yes

11. Dielectric Property Measurements & System Check

11.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series. Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 v01r04 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013 Dielectric Property Measurements Results:

Liquid	Freq.	Liquid Parameters				Deviation(%)		Limit (%)	Temp. (°C)	Test Date
		Measured		Target						
		ϵ _r	σ	ϵ _r	σ	ϵ _r	σ			
Head 5250	5160	35.10	4.45	36.03	4.61	-2.58	-3.47	±5	22.3	April 22, 2024
	5250	35.00	4.54	35.93	4.71	-2.59	-3.61			
	5340	34.90	4.62	35.83	4.80	-2.60	-3.75			
Head 5600	5500	36.40	5.07	35.64	4.96	2.13	2.22	±5	22.6	April 22, 2024
	5600	36.40	5.19	35.53	5.07	2.45	2.37			
	5700	36.40	5.28	35.41	5.17	2.80	2.13			
Head 5750	5660	36.10	5.16	35.46	5.13	1.80	0.58	±5	22.1	April 22, 2024
	5750	36.00	5.23	35.36	5.22	1.81	0.19			
	5840	35.90	5.34	35.27	5.30	1.79	0.75			

11.2.System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1GHz) and 15 mm (below 1GHz) from dipole center to the simulating liquid surface.
- For area scan, standard grid spacing for head measurements is 15 mm in x- and y- dimension (≤ 2 GHz), 12 mm in x- and y-dimension (2-4 GHz) and 10 mm in x- and y- dimension (4-6GHz).
- For zoom scan, $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2$ GHz - ≤ 8 mm, 2-4 GHz - ≤ 5 mm and 4-6 GHz- ≤ 4 mm; $\Delta z_{\text{zoom}} \leq 3$ GHz - ≤ 5 mm, 3-4 GHz- ≤ 4 mm and 4-6 GHz- ≤ 2 mm.
- Distance between probe sensors and phantom surface was set to 3 mm except for 5 GHz band. For 5 GHz band, Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was set to 100 mW or 250 mW depend on the certificate of the dipoles.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

T.S. Liquid		Measured Results		Target (Ref. value)	Delta (%)	Limit (%)	Temp. (°C)	Test Date
		Zoom Scan (W/Kg)	Normalize to 1W (W/Kg)					
Head 5250	1-g	7.200	72.00	77.90	-7.57	±10	22.3	April 22, 2024
	10-g	2.080	20.80	22.60	-7.96			
Head 5600	1-g	7.910	79.10	80.90	-2.22	±10	22.6	April 22, 2024
	10-g	2.270	22.70	23.30	-2.58			
Head 5750	1-g	7.650	76.50	78.30	-2.30	±10	22.1	April 22, 2024
	10-g	2.270	22.70	22.40	1.34			

12.Measured and Reported (Scaled) SAR Results

- Reported SAR(W/kg) = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

A) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.

B) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.

Per KDB865664 D01 v01r04:

For each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

12.1.SAR Test Results of 5GHz WiFi

Test Position (Body 5mm)	Test Mode	Channel	Power (dBm)		Measured SAR Value	Power Drift	Duty Factor (%)	Scaled (W/Kg)
			Tune-up	Meas.	1-g (W/Kg)			
5.3G								
Front Surface	802.11a	36	13.5	13.24	0.031	-0.07	97.86	0.034
Back Surface	802.11a	36	13.5	13.24	0.022	0.02	97.86	0.026
Left Edge	802.11a	36	13.5	13.24	0.007	-0.01	97.86	0.011
Right Edge	802.11a	36	13.5	13.24	0.000	-0.08	97.86	0.000
Top Edge	802.11a	36	13.5	13.24	0.072	-0.02	97.86	0.070
5.6G								
Front Surface	802.11ax HE40	102	14.0	13.72	0.123	0.05	94.50	0.139
Back Surface	802.11ax HE40	102	14.0	13.72	0.025	-0.18	94.50	0.028
Left Edge	802.11ax HE40	102	14.0	13.72	0.078	0.00	94.50	0.088
Right Edge	802.11ax HE40	102	14.0	13.72	0.117	-0.04	94.50	0.132
Top Edge	802.11ax HE40	102	14.0	13.72	0.322	-0.19	94.50	0.363
5.8G								
Front Surface	802.11n HT40	151	12.0	11.73	0.258	0.08	95.52	0.287
Back Surface	802.11n HT40	151	12.0	11.73	0.062	0.02	95.52	0.069
Left Edge	802.11n HT40	151	12.0	11.73	0.100	0.18	95.52	0.111
Right Edge	802.11n HT40	151	12.0	11.73	0.194	-0.04	95.52	0.216
Top Edge	802.11n HT40	151	12.0	11.73	0.227	-0.11	95.52	0.253

Note:

1)When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.

2)When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

13.Simultaneous Transmission SAR Analysis

The EUT supports simultaneous transmission of BT/BLE and 5GHz WiFi, depend on the tune-up of BT/BLE, the estimated SAR of BT/BLE is as below:

Frequency (GHz)	Power (dBm)	Power (mW)	Separation Distance (mm)	Estimated 1g SAR (W/Kg)
2.48	3.50	2.24	5	0.030

Position	U-NII-1	U-NII-2C	U-NII-3	BT/BLE	Max. sum SAR
Front Surface	0.034	0.139	0.287	0.030	0.317
Back Surface	0.026	0.028	0.069	0.030	0.099
Left Edge	0.011	0.088	0.111	0.030	0.141
Right Edge	0.000	0.132	0.216	0.030	0.246
Top Edge	0.070	0.363	0.253	0.030	0.393

Note: SAR routine test is exempted for U-NII-2A, SAR result of U-NII-2A is covered by U-NII-1.

Appendixes

Refer to separated files for the following appendixes.

4791185009-1-SAR-1_App A Photo

4791185009-1-SAR-1_App B System Check Plots

4791185009-1-SAR-1_App C Highest Test Plots

4791185009-1-SAR-1_App D Cal. Certificates

-----End of Report-----