

# FCC REPORT

**Applicant:** Aduro Technologies LLC  
**Address of Applicant:** 700 N Valley St, Suite B, Anaheim, California 92801, United States  
**Manufacturer/Factory:** Shenzhen Adurolight Technology Co., Ltd.  
**Address of Manufacturer/Factory:** A3 Building, Fangxing Technology Park Longnan Industrial zone Longgang District, Shenzhen China  
**Equipment Under Test (EUT)**

Product Name: Zigbee Bulbs  
Model No.: 81812, 81814  
Trade mark:

ADUROS**SMART**,



**FCC ID:** 2APKV-81812  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
**Date of sample receipt:** March 20, 2018  
**Date of Test:** March 21, 2018-April 11, 2018  
**Date of report issued:** April 12, 2018  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature in black ink, appearing to read "Robinson Lo", written over a circular stamp.

**Robinson Lo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	April 12, 2018	Original

**Prepared By:**




**Date:**

April 12, 2018

**Project Engineer**

**Check By:**



**Date:**

April 12, 2018

**Reviewer**

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 TEST FACILITY .....	7
5.5 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	9
7.1 ANTENNA REQUIREMENT .....	9
7.2 CONDUCTED EMISSIONS .....	10
7.3 CONDUCTED PEAK OUTPUT POWER .....	15
7.4 CHANNEL BANDWIDTH .....	17
7.5 POWER SPECTRAL DENSITY .....	19
7.6 BAND EDGES .....	21
7.6.1 Conducted Emission Method .....	21
7.6.2 Radiated Emission Method .....	23
7.7 SPURIOUS EMISSION .....	26
7.7.1 Conducted Emission Method .....	26
7.7.2 Radiated Emission Method .....	28
8 TEST SETUP PHOTO .....	41
9 EUT CONSTRUCTIONAL DETAILS .....	45

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013*

*N/A means not applicable.*

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Zigbee Bulbs
Model No.:	81812, 81814
Test Model No:	81812, 81814
<i>Remark: Only the model 81812 was tested fully, and the model 81814 was performed the AC Power Line Conducted Emission and Spurious Emission for discrepancy, since the electrical circuit design, PCB layout, functions, components used and internal wiring were identical for the above models, with only differences are appearance, LED PCB and model name.</i>	
Serial No.:	15031800003 , 15031800007
Test sample(s) ID:	GTS201804000040-1
Sample(s) Status	Engineer sample
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	Integral Antenna
Antenna gain:	2.15 dBi(declare by Applicant)
Power supply:	AC 120V 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

## 5.3 Description of Support Units

None
------

## 5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018</li><li>● <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</li></ul>
--

## 5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	June 28 2017	June 27 2018


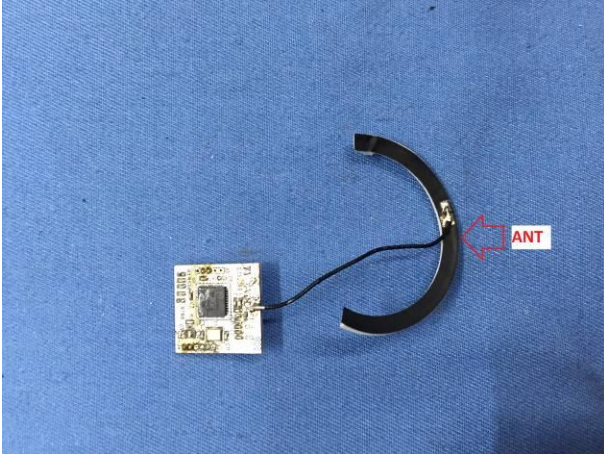
Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 16 2014	May 15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	June 28 2017	June 27 2018
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
6	Coaxial Cable	GTS	N/A	GTS227	June 28 2017	June 27 2018
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018



## 7 Test results and Measurement Data


### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>EUT Antenna:</b>	
<p><i>The antenna is Integral Antenna, the best case gain of the antenna is 2.15dBi</i></p> <p><i>Model number: 81812</i></p>  <p><i>Model number: 81814</i></p> 	

## 7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p>Remark  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

Measurement data  
 Model number: 81812  
 Line:

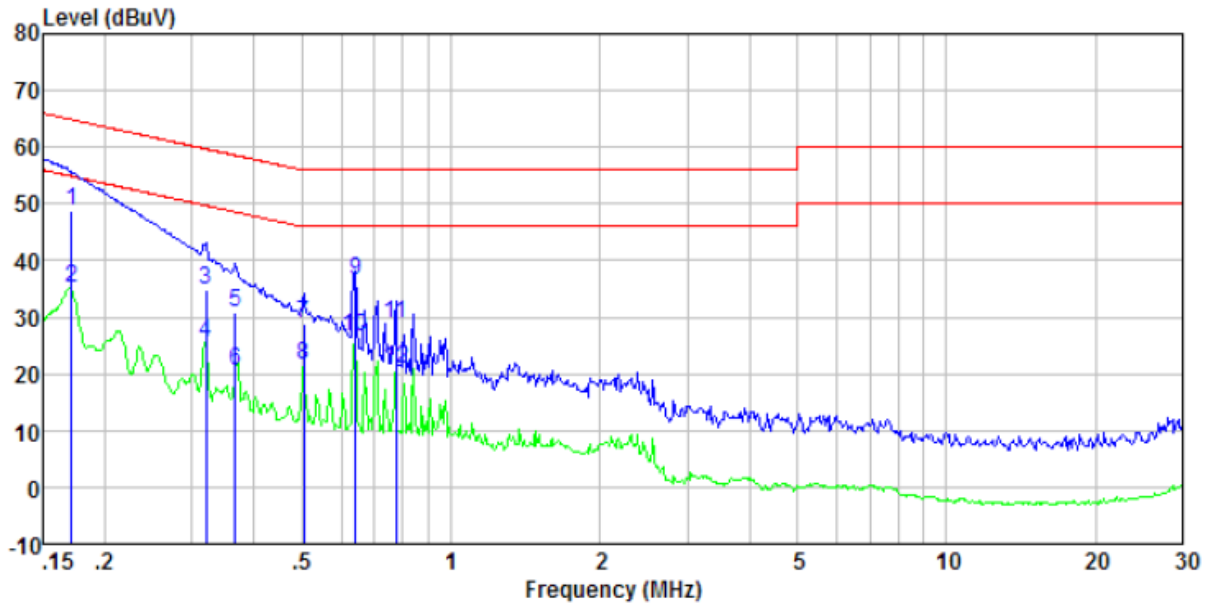

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.171	48.28	0.40	0.09	48.77	64.90	-16.13	QP
0.171	34.53	0.40	0.09	35.02	54.90	-19.88	Average
0.320	34.50	0.39	0.10	34.99	59.71	-24.72	QP
0.320	25.11	0.39	0.10	25.60	49.71	-24.11	Average
0.367	30.48	0.37	0.10	30.95	58.56	-27.61	QP
0.367	20.20	0.37	0.10	20.67	48.56	-27.89	Average
0.505	28.46	0.31	0.11	28.88	56.00	-27.12	QP
0.505	21.16	0.31	0.11	21.58	46.00	-24.42	Average
0.641	36.02	0.27	0.12	36.41	56.00	-19.59	QP
0.641	26.00	0.27	0.12	26.39	46.00	-19.61	Average
0.775	28.62	0.24	0.14	29.00	56.00	-27.00	QP
0.775	20.52	0.24	0.14	20.90	46.00	-25.10	Average


Neutral:

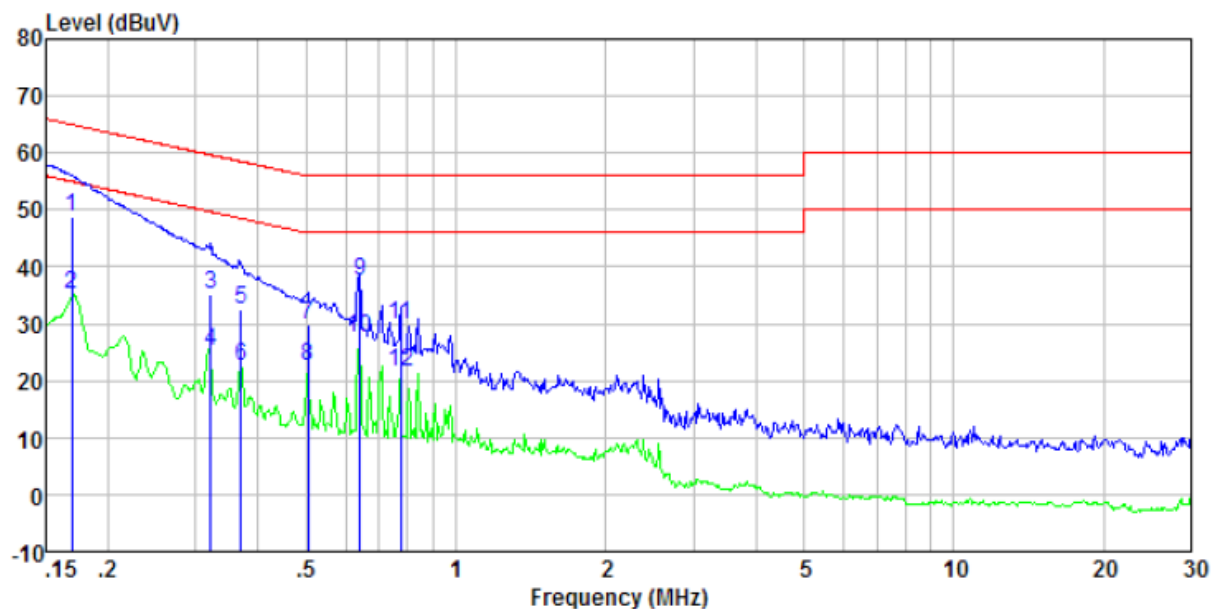

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.169	48.43	0.40	0.09	48.92	64.99	-16.07	QP
0.169	34.81	0.40	0.09	35.30	54.99	-19.69	Average
0.322	34.82	0.39	0.10	35.31	59.66	-24.35	QP
0.322	24.68	0.39	0.10	25.17	49.66	-24.49	Average
0.369	32.07	0.37	0.10	32.54	58.52	-25.98	QP
0.369	22.24	0.37	0.10	22.71	48.52	-25.81	Average
0.505	29.46	0.31	0.11	29.88	56.00	-26.12	QP
0.505	21.97	0.31	0.11	22.39	46.00	-23.61	Average
0.641	37.16	0.27	0.12	37.55	56.00	-18.45	QP
0.641	27.06	0.27	0.12	27.45	46.00	-18.55	Average
0.775	29.45	0.24	0.14	29.83	56.00	-26.17	QP
0.775	21.21	0.24	0.14	21.59	46.00	-24.41	Average


Model number: 81814

Line:

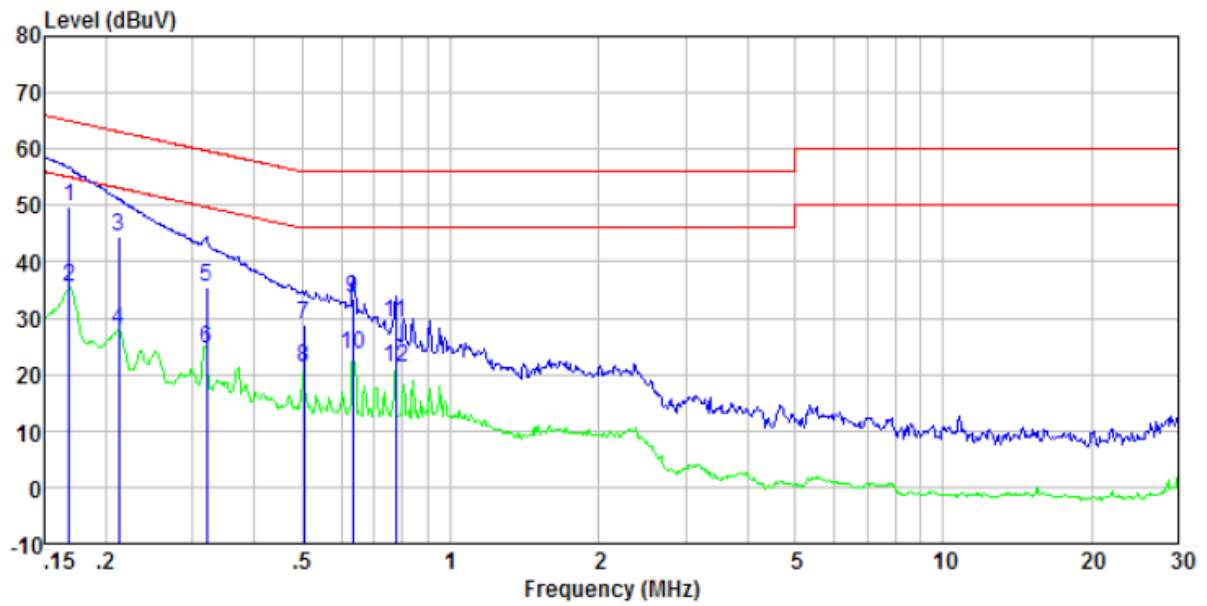

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.169	49.42	0.40	0.09	49.91	65.03	-15.12	QP
0.169	35.05	0.40	0.09	35.54	55.03	-19.49	Average
0.213	44.09	0.40	0.11	44.60	63.10	-18.50	QP
0.213	27.39	0.40	0.11	27.90	53.10	-25.20	Average
0.320	35.00	0.39	0.10	35.49	59.71	-24.22	QP
0.320	23.90	0.39	0.10	24.39	49.71	-25.32	Average
0.505	28.38	0.31	0.11	28.80	56.00	-27.20	QP
0.505	20.75	0.31	0.11	21.17	46.00	-24.83	Average
0.634	33.07	0.28	0.12	33.47	56.00	-22.53	QP
0.634	23.22	0.28	0.12	23.62	46.00	-22.38	Average
0.775	28.86	0.24	0.14	29.24	56.00	-26.76	QP
0.775	20.99	0.24	0.14	21.37	46.00	-24.63	Average

Neutral:

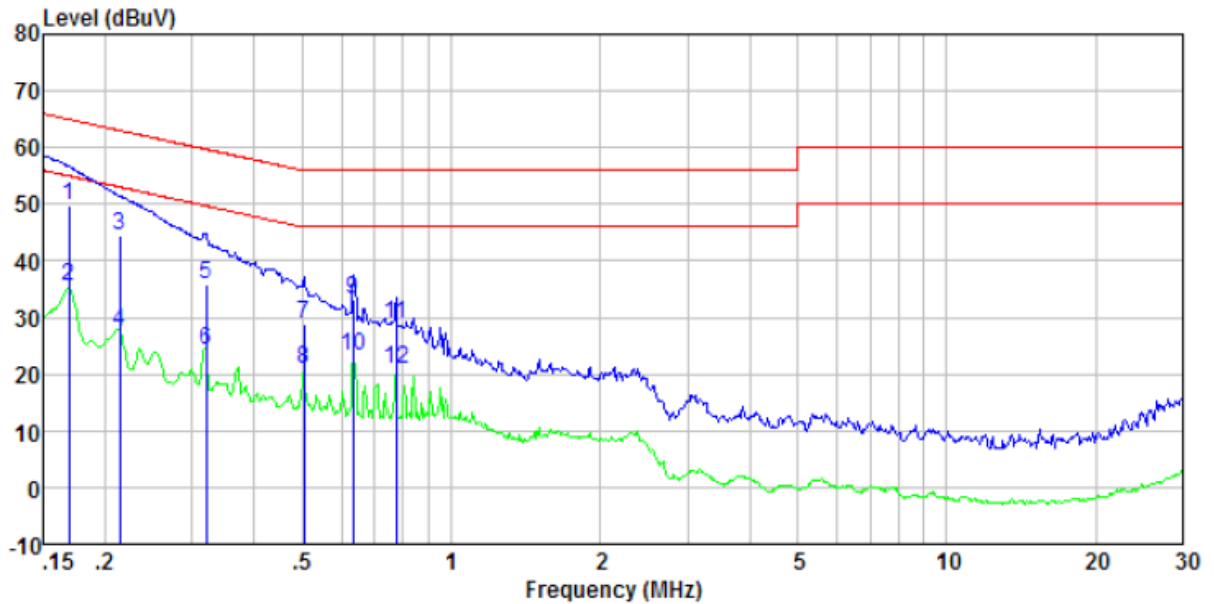


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.169	49.32	0.40	0.09	49.81	64.99	-15.18	QP
0.169	34.93	0.40	0.09	35.42	54.99	-19.57	Average
0.214	44.05	0.40	0.11	44.56	63.05	-18.49	QP
0.214	27.16	0.40	0.11	27.67	53.05	-25.38	Average
0.320	35.21	0.39	0.10	35.70	59.71	-24.01	QP
0.320	23.61	0.39	0.10	24.10	49.71	-25.61	Average
0.505	28.44	0.31	0.11	28.86	56.00	-27.14	QP
0.505	20.55	0.31	0.11	20.97	46.00	-25.03	Average
0.634	32.90	0.28	0.12	33.30	56.00	-22.70	QP
0.634	22.92	0.28	0.12	23.32	46.00	-22.68	Average
0.775	28.48	0.24	0.14	28.86	56.00	-27.14	QP
0.775	20.40	0.24	0.14	20.78	46.00	-25.22	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


### 7.3 Conducted Peak Output Power

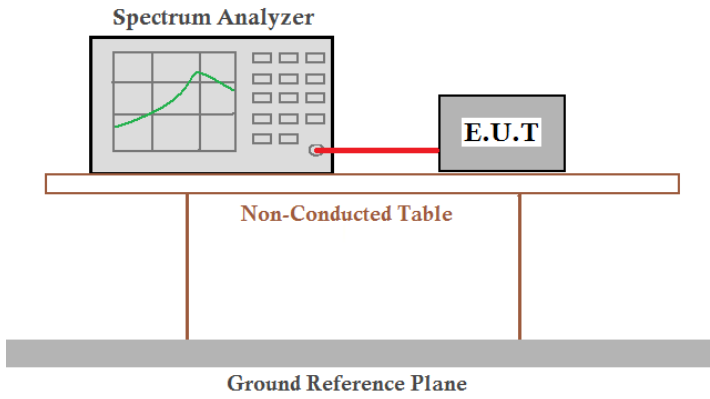Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


#### Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	7.48	30	PASS
2440	6.94		
2480	6.58		


**Test plot as follows:**

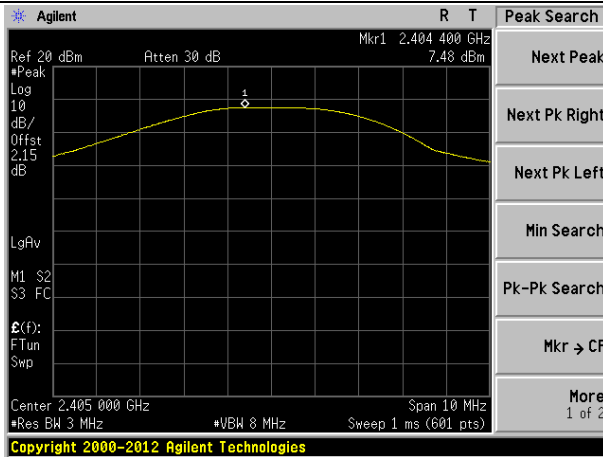

Lowest channel

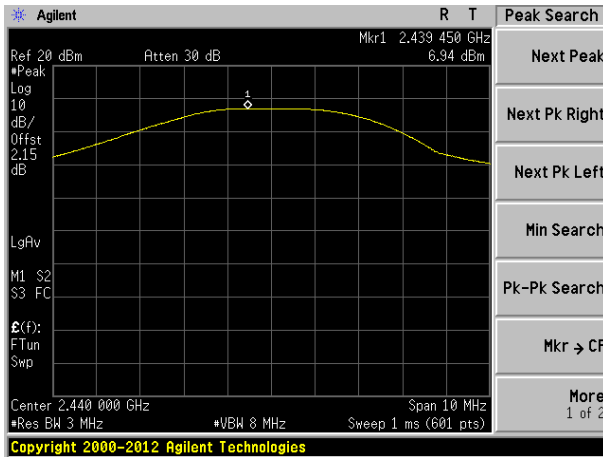


Middle channel

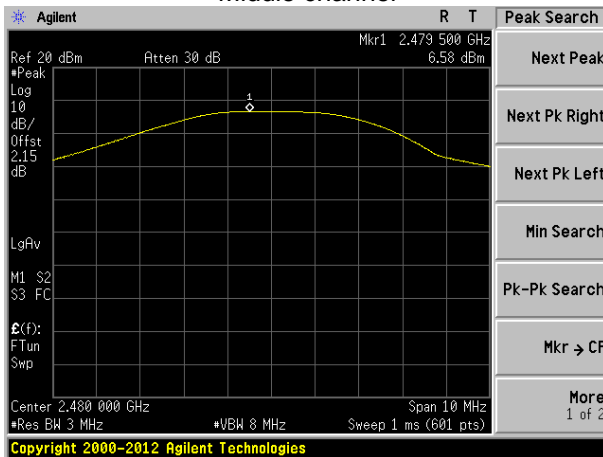

Highest channel




## 7.4 Channel Bandwidth

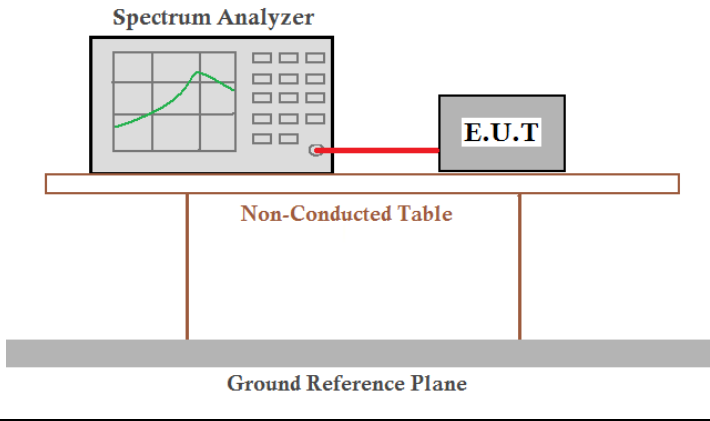Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.588	>500	Pass
2440	1.599		
2480	1.624		


Test plot as follows:

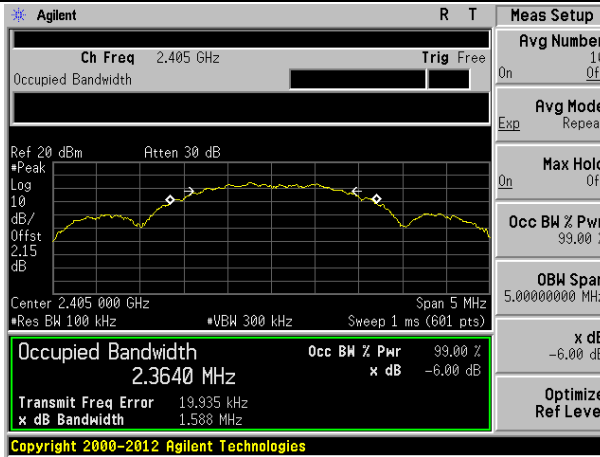

Lowest channel

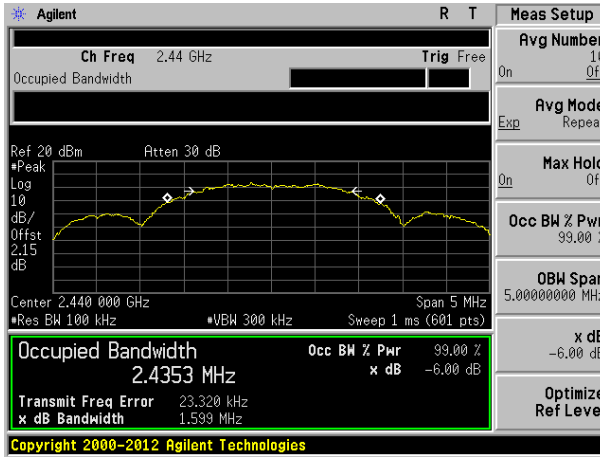


Middle channel

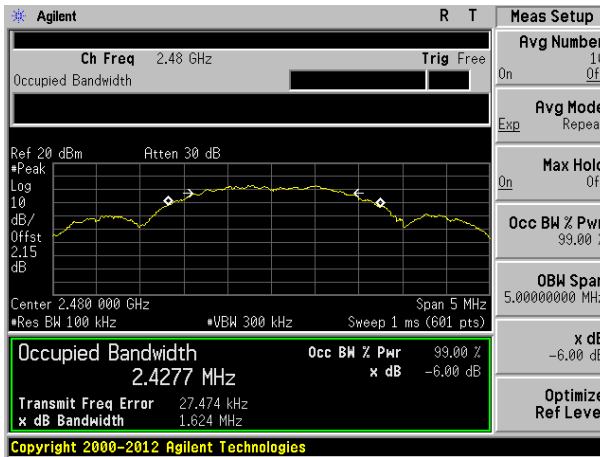

Highest channel


## 7.5 Power Spectral Density

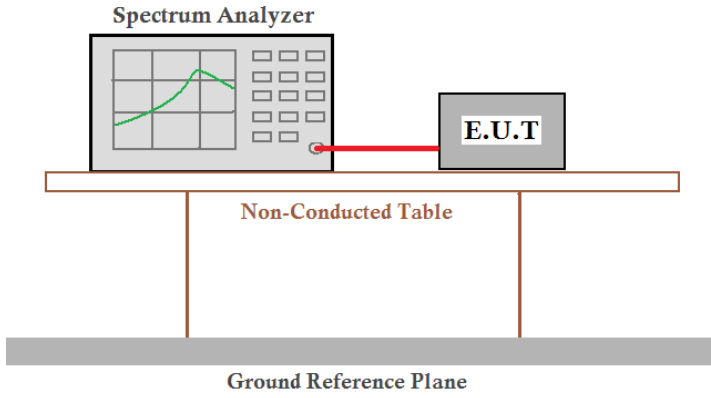Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	-4.56	8.00	Pass
2440	-5.21		
2480	-4.91		


**Test plot as follows:**

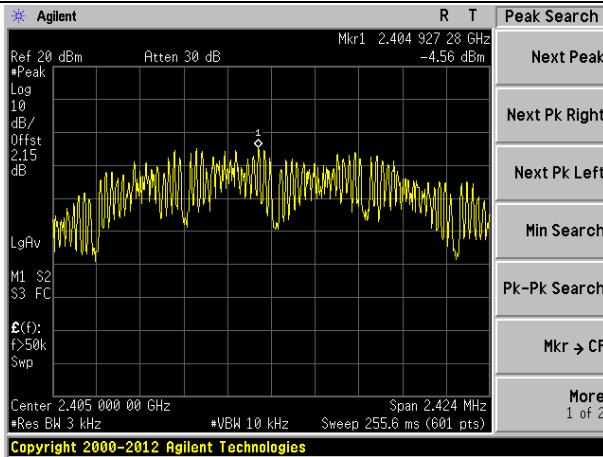

Lowest channel

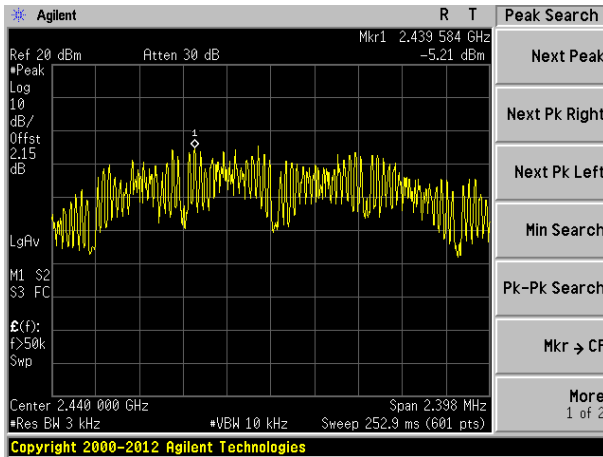


Middle channel

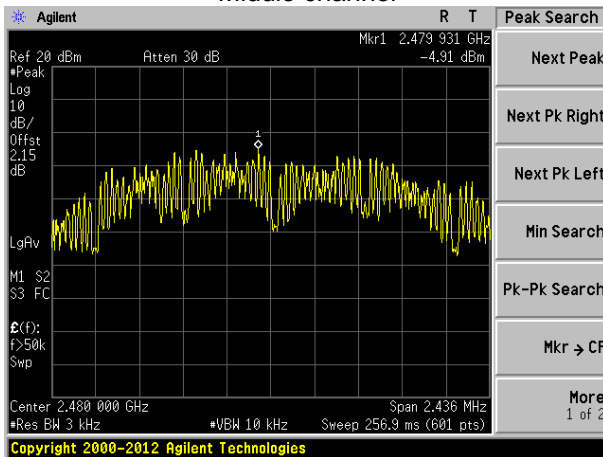


Highest channel

## 7.6 Band edges


### 7.6.1 Conducted Emission Method

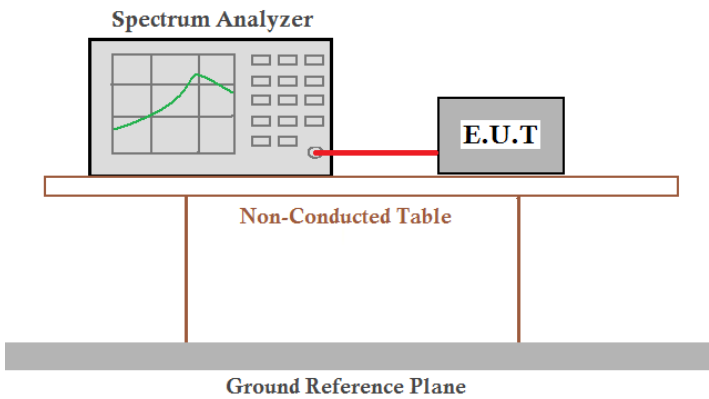Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Test plot as follows:**

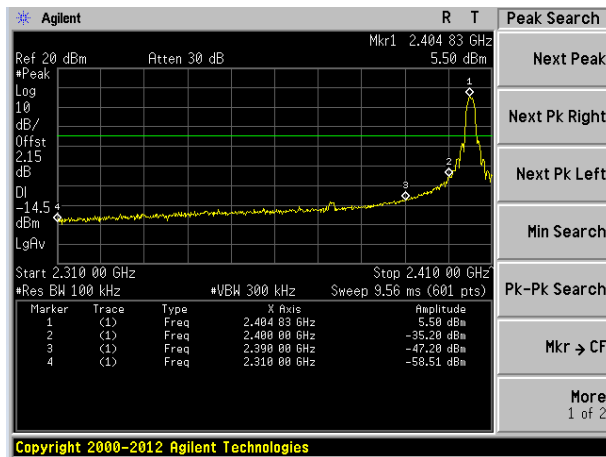


Lowest channel

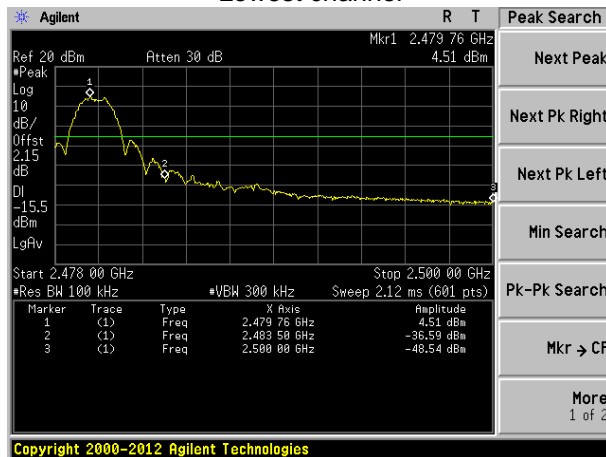

Highest channel

## 7.6.2 Radiated Emission Method

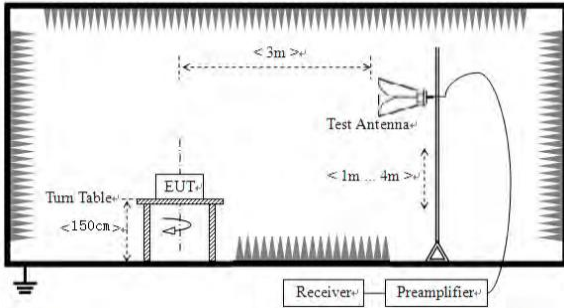Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

**Measurement data:**

*Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's was showed.*

**Model number: 81812**

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	39.24	27.91	5.30	24.64	47.81	74.00	-26.19	Vertical
2390.00	35.97	27.59	5.38	24.71	44.23	74.00	-29.77	Vertical
2400.00	39.99	27.58	5.39	24.72	48.24	74.00	-25.76	Vertical
2310.00	37.27	27.91	5.30	24.64	45.84	74.00	-28.16	Horizontal
2390.00	35.66	27.59	5.38	24.71	43.92	74.00	-30.08	Horizontal
2400.00	39.34	27.58	5.39	24.72	47.59	74.00	-26.41	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	30.01	27.91	5.30	24.64	38.58	54.00	-15.42	Vertical
2390.00	26.44	27.59	5.38	24.71	34.70	54.00	-19.30	Vertical
2400.00	30.77	27.58	5.39	24.72	39.02	54.00	-14.98	Vertical
2310.00	27.69	27.91	5.30	24.64	36.26	54.00	-17.74	Horizontal
2390.00	26.88	27.59	5.38	24.71	35.14	54.00	-18.86	Horizontal
2400.00	29.11	27.58	5.39	24.72	37.36	54.00	-16.64	Horizontal



Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.70	27.53	5.47	24.80	51.90	74.00	-22.10	Vertical
2500.00	34.48	27.55	5.49	24.86	42.66	74.00	-31.34	Vertical
2483.50	36.71	27.53	5.47	24.80	44.91	74.00	-29.09	Horizontal
2500.00	27.75	27.55	5.49	24.86	35.93	74.00	-38.07	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.38	27.53	5.47	24.80	42.58	54.00	-11.42	Vertical
2500.00	24.38	27.55	5.49	24.86	32.56	54.00	-21.44	Vertical
2483.50	24.91	27.53	5.47	24.80	33.11	54.00	-20.89	Horizontal
2500.00	18.38	27.55	5.49	24.86	26.56	54.00	-27.44	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

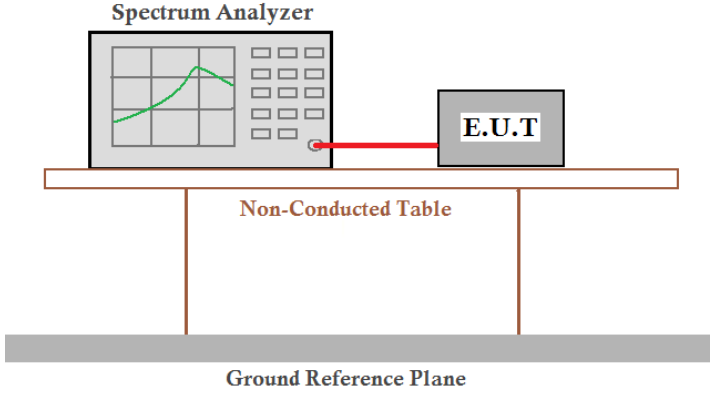Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


**Test plot as follows:**

Lowest channel

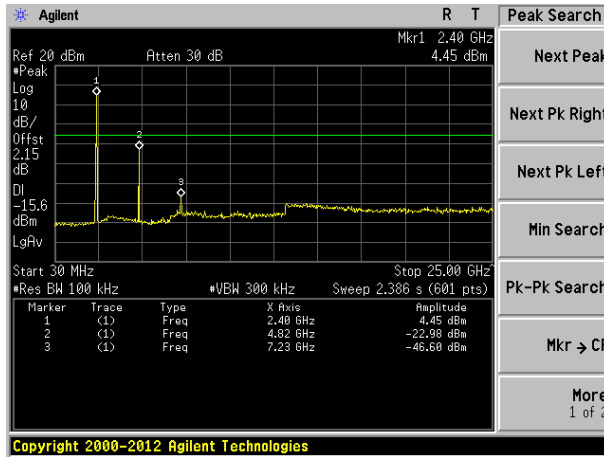


30MHz~25GHz

Middle channel

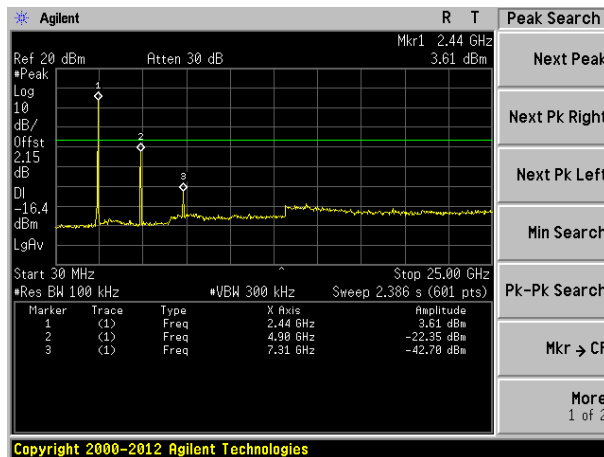

30MHz~25GHz

Highest channel

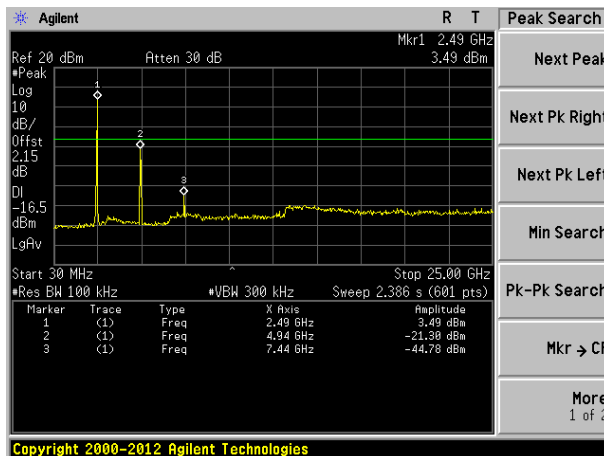


30MHz~25GHz

## 7.7.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				

Test setup:


Below 30MHz

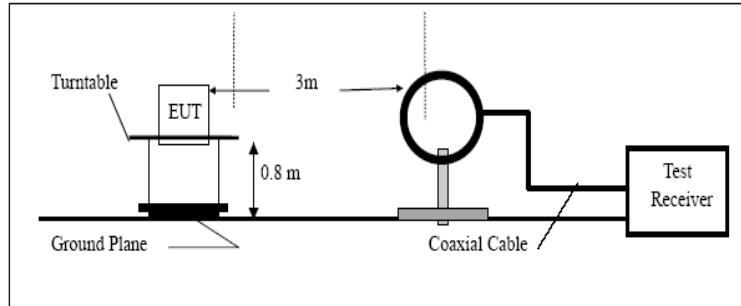

Below 1GHz

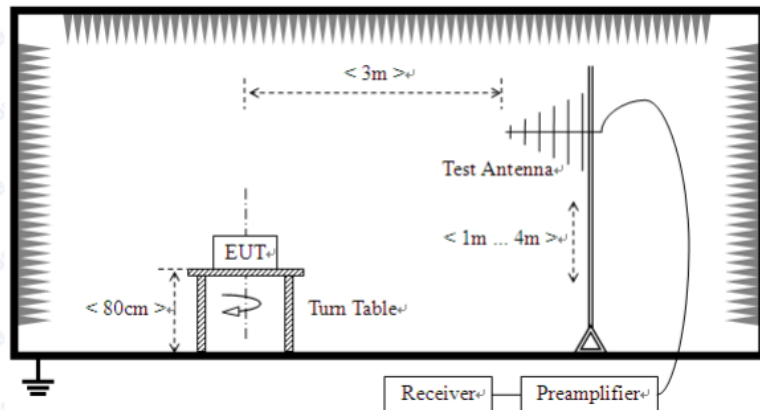

Above 1GHz

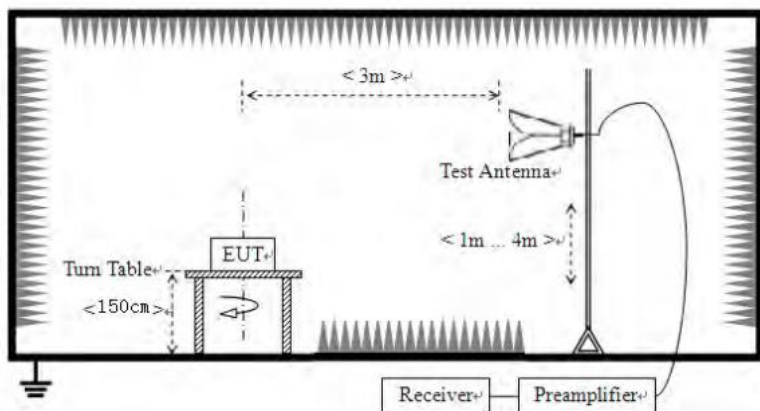

<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Measurement data:**

**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ Below 1GHz


Model number: 81812

Horizontal:

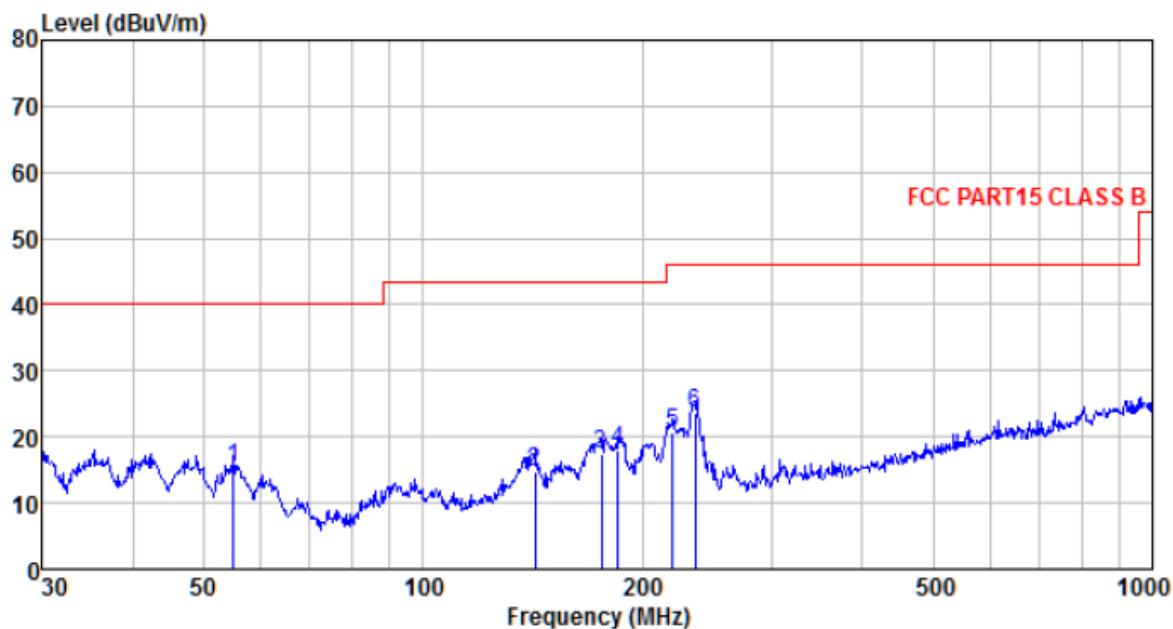

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
55.027	38.89	11.78	0.82	36.25	15.24	40.00	-24.76	QP
142.324	42.97	7.44	1.52	37.03	14.90	43.50	-28.60	QP
175.652	44.19	8.73	1.72	37.22	17.42	43.50	-26.08	QP
185.138	44.02	9.40	1.77	37.26	17.93	43.50	-25.57	QP
219.845	44.90	11.13	1.96	37.35	20.64	46.00	-25.36	QP
235.816	47.11	11.71	2.05	37.37	23.50	46.00	-22.50	QP

Vertical:

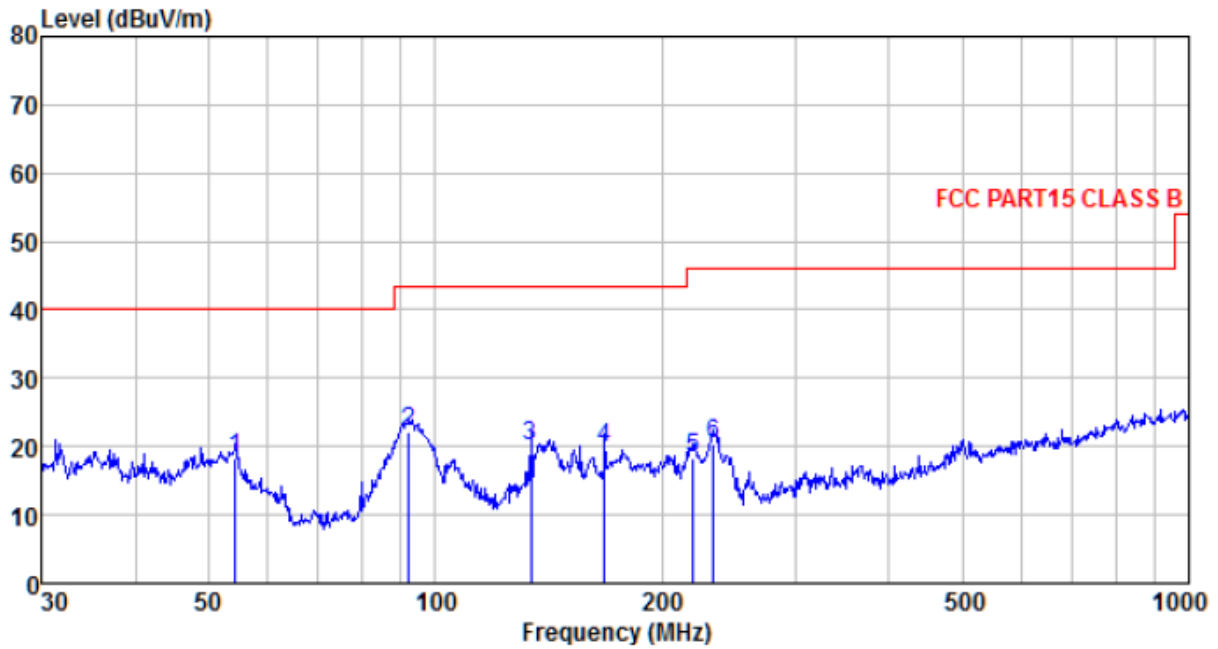


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
54.261	41.93	11.85	0.81	36.24	18.35	40.00	-21.65	QP
92.139	46.75	11.04	1.13	36.66	22.26	43.50	-21.24	QP
134.088	47.68	7.87	1.47	36.98	20.04	43.50	-23.46	QP
167.824	46.78	8.46	1.67	37.18	19.73	43.50	-23.77	QP
219.845	42.64	11.13	1.96	37.35	18.38	46.00	-27.62	QP
234.168	44.00	11.64	2.04	37.37	20.31	46.00	-25.69	QP




Model number: 81814

Horizontal:

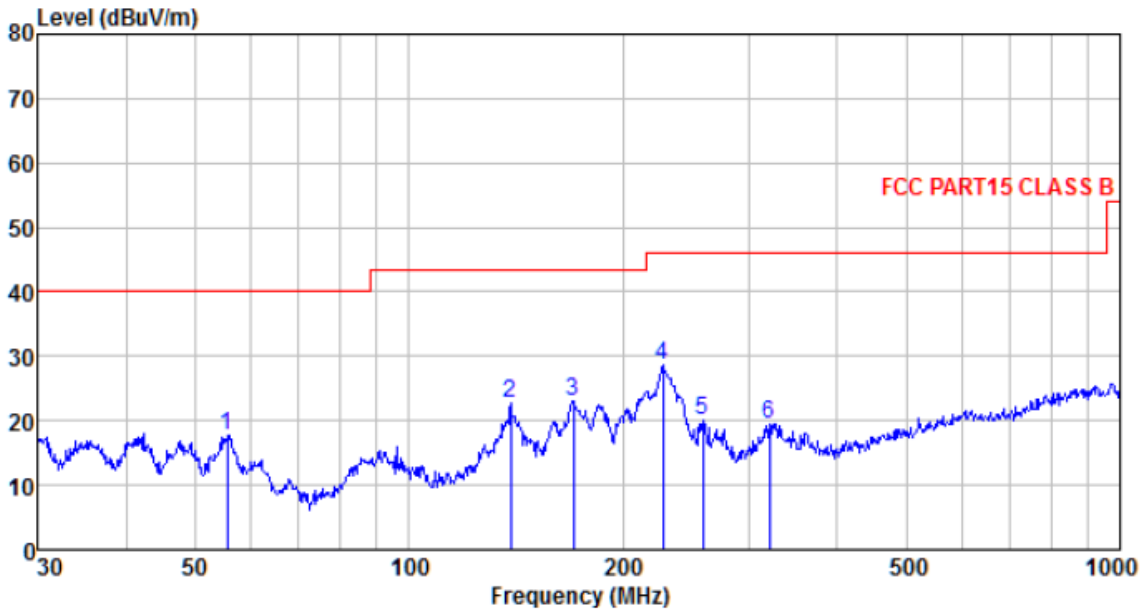

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
55.415	41.42	11.75	0.82	36.26	17.73	40.00	-22.27	QP
138.874	50.77	7.49	1.50	37.01	22.75	43.50	-20.75	QP
170.195	50.07	8.50	1.69	37.19	23.07	43.50	-20.43	QP
227.691	52.58	11.42	2.01	37.36	28.65	46.00	-17.35	QP
259.234	42.85	12.44	2.17	37.39	20.07	46.00	-25.93	QP
321.061	40.46	14.01	2.47	37.44	19.50	46.00	-26.50	QP

Vertical:

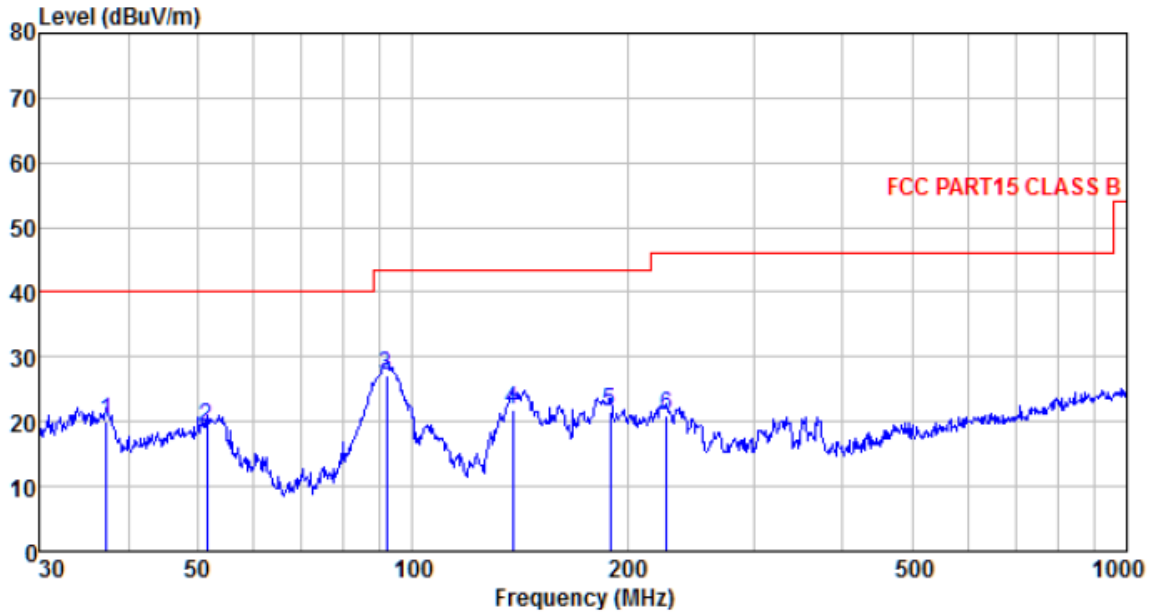

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
37.285	43.20	11.73	0.63	35.50	20.06	40.00	-19.94	QP
51.481	42.34	12.15	0.79	36.20	19.08	40.00	-20.92	QP
91.816	51.68	10.97	1.12	36.65	27.12	43.50	-16.38	QP
137.903	49.68	7.59	1.49	37.00	21.76	43.50	-21.74	QP
189.074	47.36	9.82	1.78	37.28	21.68	43.50	-21.82	QP
226.894	44.83	11.38	2.00	37.36	20.85	46.00	-25.15	QP

■ Above 1GHz

Model number: 81812

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	50.71	31.17	8.60	37.66	52.82	74.00	-21.18	Vertical
7215.00	39.68	36.09	11.66	35.69	51.74	74.00	-22.26	Vertical
9620.00	31.34	37.84	14.14	34.91	48.41	74.00	-25.59	Vertical
12025.00	27.64	38.61	15.03	36.13	45.15	74.00	-28.85	Vertical
4810.00	49.77	31.17	8.60	37.66	51.88	74.00	-22.12	Horizontal
7215.00	42.05	36.09	11.66	35.69	54.11	74.00	-19.89	Horizontal
9620.00	28.55	37.84	14.14	34.91	45.62	74.00	-28.38	Horizontal
12025.00	27.86	38.61	15.03	36.13	45.37	74.00	-28.63	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	44.86	31.17	8.60	37.66	46.97	54.00	-7.03	Vertical
7215.00	30.87	36.09	11.66	35.69	42.93	54.00	-11.07	Vertical
9620.00	20.53	37.84	14.14	34.91	37.60	54.00	-16.40	Vertical
12025.00	17.85	38.61	15.03	36.13	35.36	54.00	-18.64	Vertical
4810.00	43.89	31.17	8.60	37.66	46.00	54.00	-8.00	Horizontal
7215.00	31.74	36.09	11.66	35.69	43.80	54.00	-10.20	Horizontal
9620.00	18.73	37.84	14.14	34.91	35.80	54.00	-18.20	Horizontal
12025.00	18.06	38.61	15.03	36.13	35.57	54.00	-18.43	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	50.32	31.26	8.66	37.68	52.56	74.00	-21.44	Vertical
7335.00	40.60	36.32	11.72	35.64	53.00	74.00	-21.00	Vertical
9780.00	29.80	38.01	14.25	34.98	47.08	74.00	-26.92	Vertical
12225.00	26.16	38.64	15.14	36.26	43.68	74.00	-30.32	Vertical
4890.00	49.02	31.26	8.66	37.68	51.26	74.00	-22.74	Horizontal
7335.00	39.97	36.32	11.72	35.64	52.37	74.00	-21.63	Horizontal
9780.00	28.94	38.01	14.25	34.98	46.22	74.00	-27.78	Horizontal
12225.00	27.57	38.64	15.14	36.26	45.09	74.00	-28.91	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	42.77	31.26	8.66	37.68	45.01	54.00	-8.99	Vertical
7335.00	32.89	36.32	11.72	35.64	45.29	54.00	-8.71	Vertical
9780.00	22.82	38.01	14.25	34.98	40.10	54.00	-13.90	Vertical
12225.00	15.93	38.64	15.14	36.26	33.45	54.00	-20.55	Vertical
4890.00	40.14	31.26	8.66	37.68	42.38	54.00	-11.62	Horizontal
7335.00	22.71	36.32	11.72	35.64	35.11	54.00	-18.89	Horizontal
9780.00	21.73	38.01	14.25	34.98	39.01	54.00	-14.99	Horizontal
12225.00	17.96	38.64	15.14	36.26	35.48	54.00	-18.52	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	50.63	31.36	8.73	37.69	53.03	74.00	-20.97	Vertical
7440.00	39.92	36.59	11.79	35.58	52.72	74.00	-21.28	Vertical
9920.00	29.34	38.22	14.38	35.07	46.87	74.00	-27.13	Vertical
12400.00	26.99	38.68	15.27	36.43	44.51	74.00	-29.49	Vertical
4960.00	48.93	31.36	8.73	37.69	51.33	74.00	-22.67	Horizontal
7440.00	39.73	36.59	11.79	35.58	52.53	74.00	-21.47	Horizontal
9920.00	28.99	38.22	14.38	35.07	46.52	74.00	-27.48	Horizontal
12400.00	28.31	38.68	15.27	36.43	45.83	74.00	-28.17	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.78	31.36	8.73	37.69	45.18	54.00	-8.82	Vertical
7440.00	31.85	36.59	11.79	35.58	44.65	54.00	-9.35	Vertical
9920.00	20.87	38.22	14.38	35.07	38.40	54.00	-15.60	Vertical
12400.00	17.23	38.68	15.27	36.43	34.75	54.00	-19.25	Vertical
4960.00	40.53	31.36	8.73	37.69	42.93	54.00	-11.07	Horizontal
7440.00	32.03	36.59	11.79	35.58	44.83	54.00	-9.17	Horizontal
9920.00	20.65	38.22	14.38	35.07	38.18	54.00	-15.82	Horizontal
12400.00	18.62	38.68	15.27	36.43	36.14	54.00	-17.86	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*\*”, means this data is the too weak instrument of signal is unable to test.

**Model number: 81814**

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	50.44	31.17	8.60	37.66	52.55	74.00	-21.45	Vertical
7215.00	39.41	36.09	11.66	35.69	51.47	74.00	-22.53	Vertical
9620.00	30.93	37.84	14.14	34.91	48.00	74.00	-26.00	Vertical
12025.00	27.47	38.61	15.03	36.13	44.98	74.00	-29.02	Vertical
4810.00	49.50	31.17	8.60	37.66	51.61	74.00	-22.39	Horizontal
7215.00	41.95	36.09	11.66	35.69	54.01	74.00	-19.99	Horizontal
9620.00	28.31	37.84	14.14	34.91	45.38	74.00	-28.62	Horizontal
12025.00	27.68	38.61	15.03	36.13	45.19	74.00	-28.81	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	44.59	31.17	8.60	37.66	46.70	54.00	-7.30	Vertical
7215.00	30.68	36.09	11.66	35.69	42.74	54.00	-11.26	Vertical
9620.00	20.31	37.84	14.14	34.91	37.38	54.00	-16.62	Vertical
12025.00	17.66	38.61	15.03	36.13	35.17	54.00	-18.83	Vertical
4810.00	43.72	31.17	8.60	37.66	45.83	54.00	-8.17	Horizontal
7215.00	31.52	36.09	11.66	35.69	43.58	54.00	-10.42	Horizontal
9620.00	18.51	37.84	14.14	34.91	35.58	54.00	-18.42	Horizontal
12025.00	17.89	38.61	15.03	36.13	35.40	54.00	-18.60	Horizontal

**Remark:**

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“\*\*”, means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	50.19	31.26	8.66	37.68	52.43	74.00	-21.57	Vertical
7335.00	40.48	36.32	11.72	35.64	52.88	74.00	-21.12	Vertical
9780.00	29.60	38.01	14.25	34.98	46.88	74.00	-27.12	Vertical
12225.00	26.08	38.64	15.14	36.26	43.60	74.00	-30.40	Vertical
4890.00	48.90	31.26	8.66	37.68	51.14	74.00	-22.86	Horizontal
7335.00	39.92	36.32	11.72	35.64	52.32	74.00	-21.68	Horizontal
9780.00	28.82	38.01	14.25	34.98	46.10	74.00	-27.90	Horizontal
12225.00	27.49	38.64	15.14	36.26	45.01	74.00	-28.99	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	42.58	31.26	8.66	37.68	44.82	54.00	-9.18	Vertical
7335.00	32.75	36.32	11.72	35.64	45.15	54.00	-8.85	Vertical
9780.00	22.66	38.01	14.25	34.98	39.94	54.00	-14.06	Vertical
12225.00	15.79	38.64	15.14	36.26	33.31	54.00	-20.69	Vertical
4890.00	40.01	31.26	8.66	37.68	42.25	54.00	-11.75	Horizontal
7335.00	22.54	36.32	11.72	35.64	34.94	54.00	-19.06	Horizontal
9780.00	21.57	38.01	14.25	34.98	38.85	54.00	-15.15	Horizontal
12225.00	17.83	38.64	15.14	36.26	35.35	54.00	-18.65	Horizontal

**Remark:**

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“\*\*”, means this data is the too weak instrument of signal is unable to test.*

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	50.51	31.36	8.73	37.69	52.91	74.00	-21.09	Vertical
7440.00	39.81	36.59	11.79	35.58	52.61	74.00	-21.39	Vertical
9920.00	29.17	38.22	14.38	35.07	46.70	74.00	-27.30	Vertical
12400.00	26.92	38.68	15.27	36.43	44.44	74.00	-29.56	Vertical
4960.00	48.82	31.36	8.73	37.69	51.22	74.00	-22.78	Horizontal
7440.00	39.69	36.59	11.79	35.58	52.49	74.00	-21.51	Horizontal
9920.00	28.89	38.22	14.38	35.07	46.42	74.00	-27.58	Horizontal
12400.00	28.24	38.68	15.27	36.43	45.76	74.00	-28.24	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	42.59	31.36	8.73	37.69	44.99	54.00	-9.01	Vertical
7440.00	31.72	36.59	11.79	35.58	44.52	54.00	-9.48	Vertical
9920.00	20.72	38.22	14.38	35.07	38.25	54.00	-15.75	Vertical
12400.00	17.10	38.68	15.27	36.43	34.62	54.00	-19.38	Vertical
4960.00	40.41	31.36	8.73	37.69	42.81	54.00	-11.19	Horizontal
7440.00	31.87	36.59	11.79	35.58	44.67	54.00	-9.33	Horizontal
9920.00	20.50	38.22	14.38	35.07	38.03	54.00	-15.97	Horizontal
12400.00	18.50	38.68	15.27	36.43	36.02	54.00	-17.98	Horizontal

**Remark:**

4. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
5. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
6. *“\*\*”, means this data is the too weak instrument of signal is unable to test.*



## 8 Test Setup Photo


Model number: 81812  
Radiated Emission



## Conducted Emission



**Model number: 81814**  
Radiated Emission

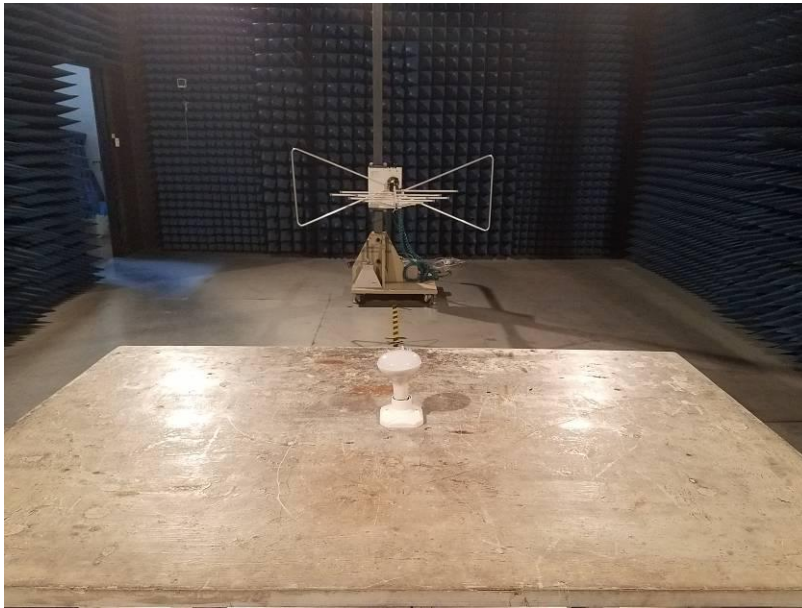

## Conducted Emission



## 9 EUT Constructional Details



Model number: 81812

















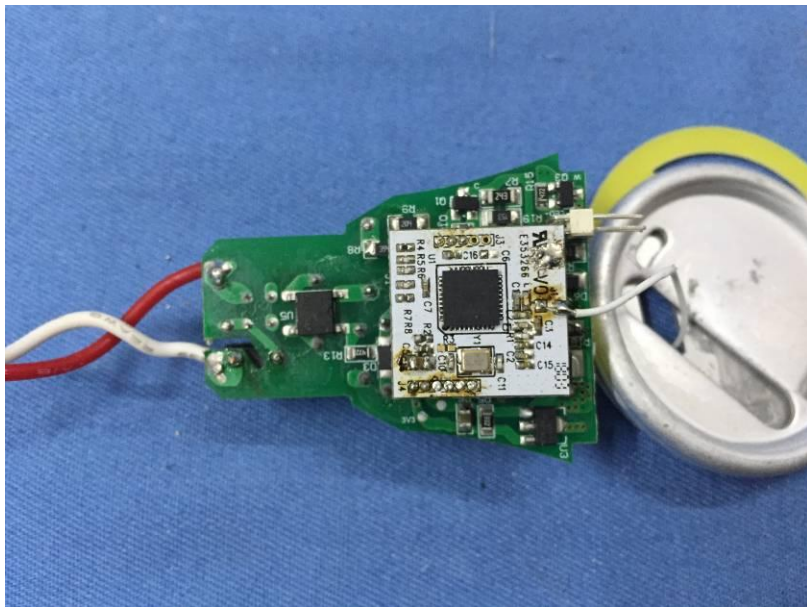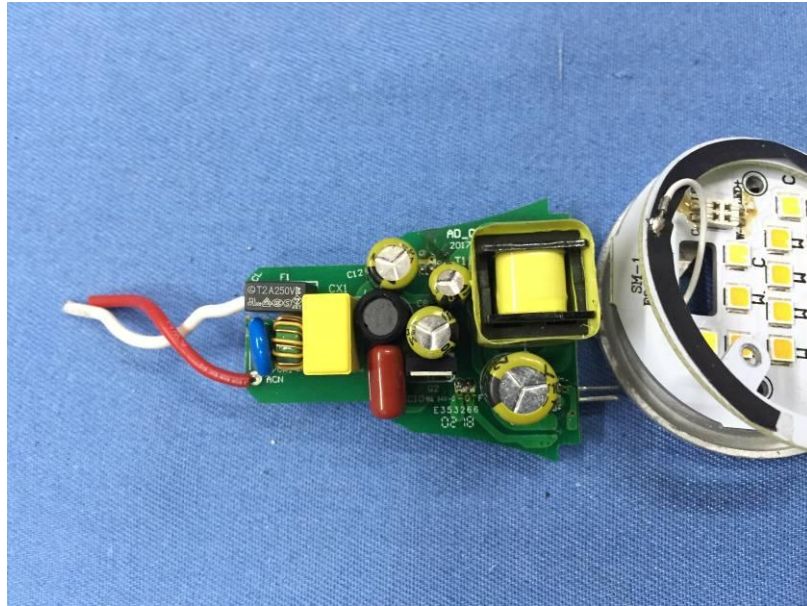

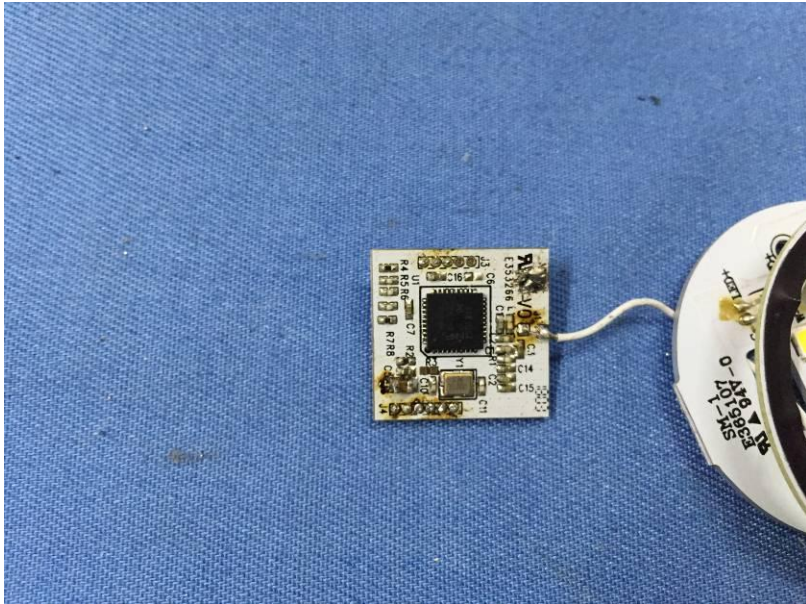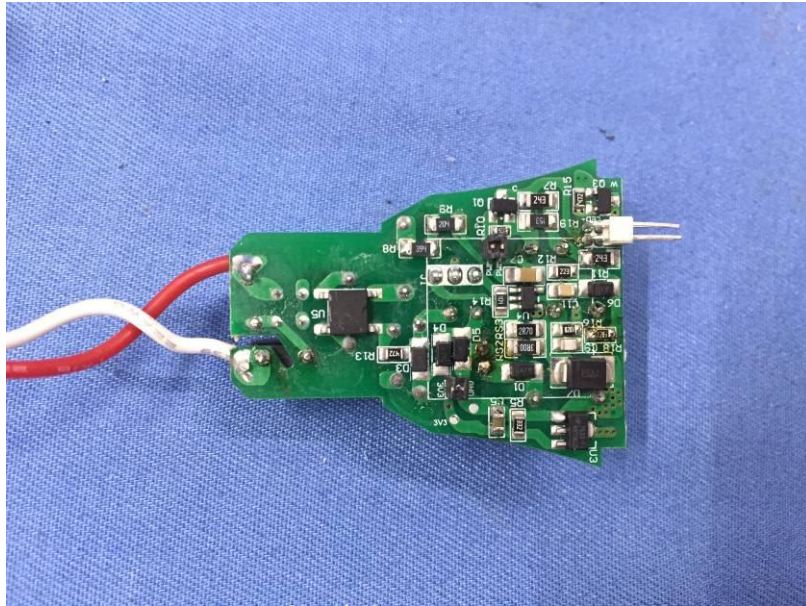

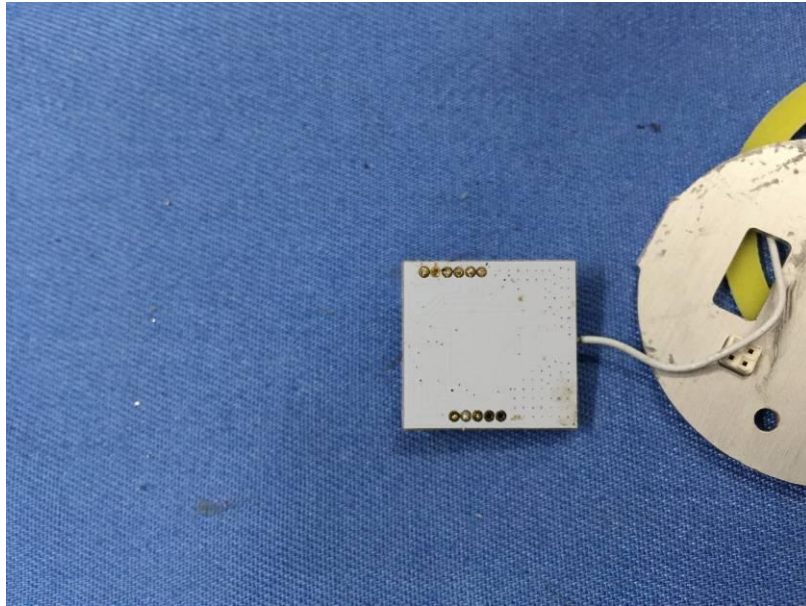



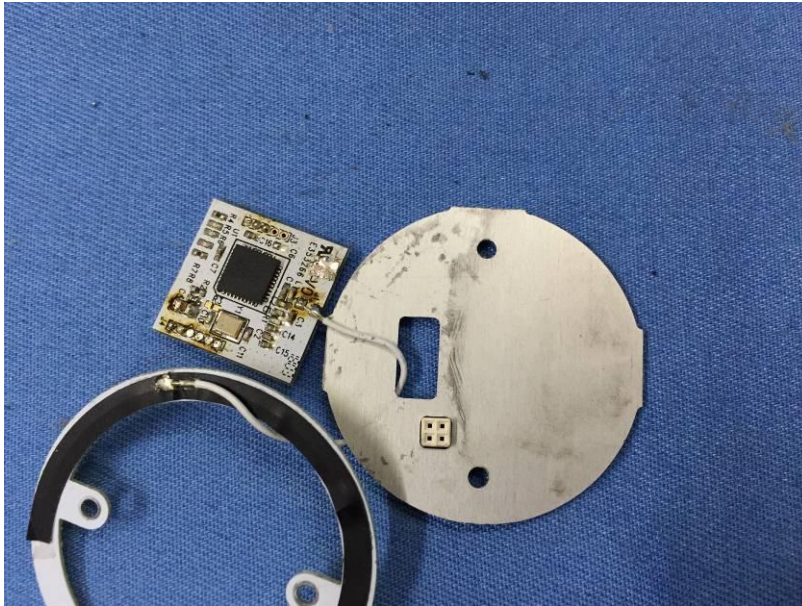


Model number: 81814








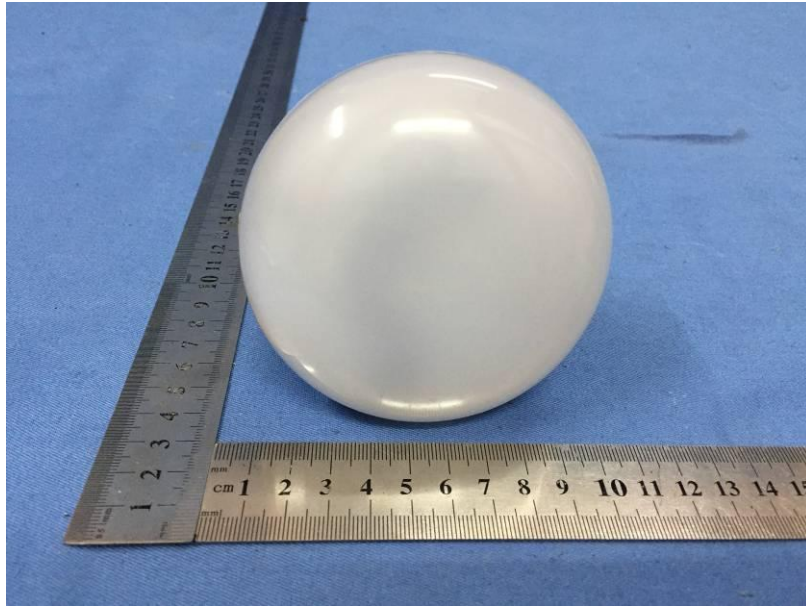


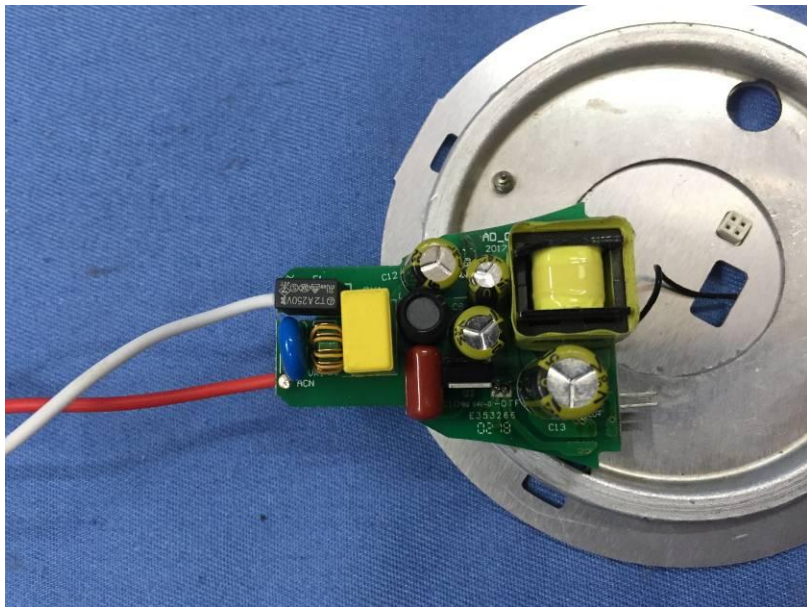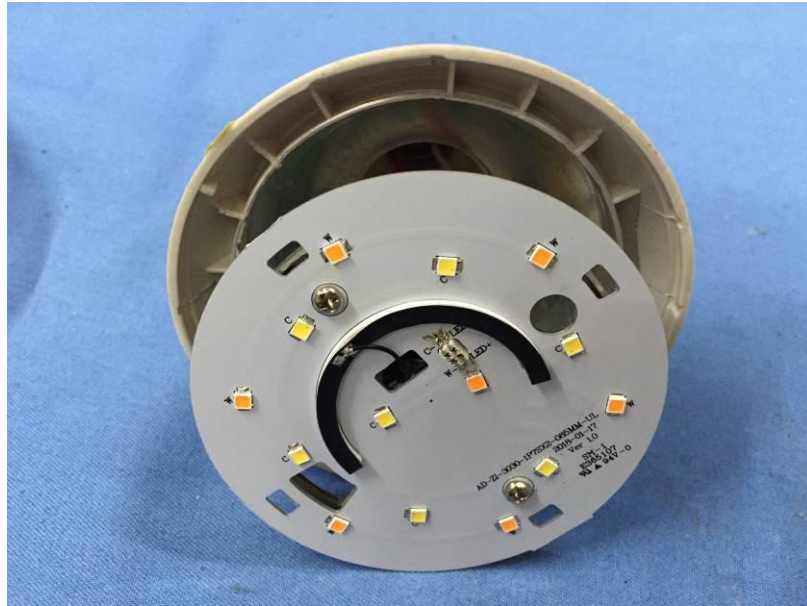




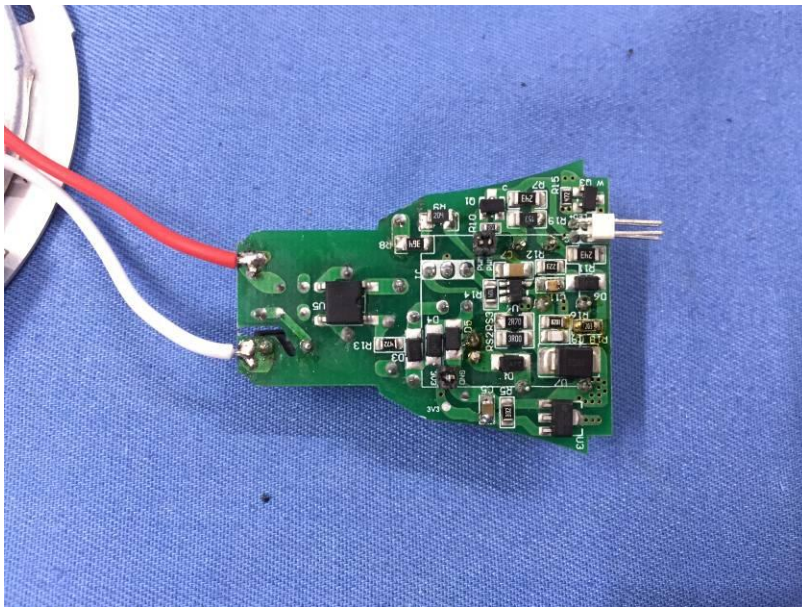

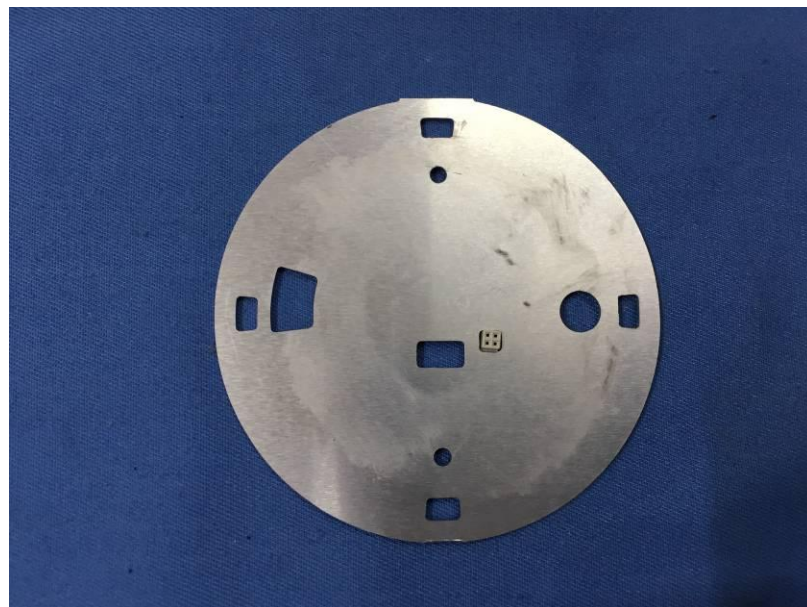

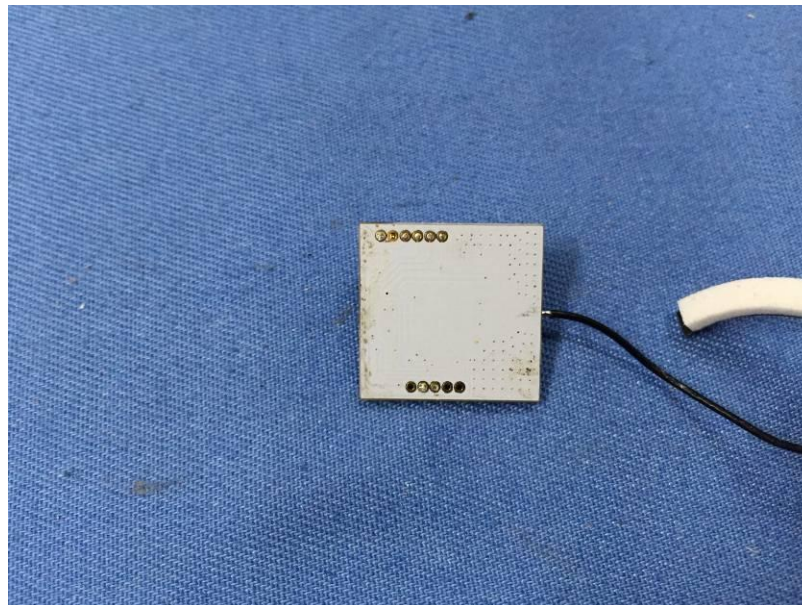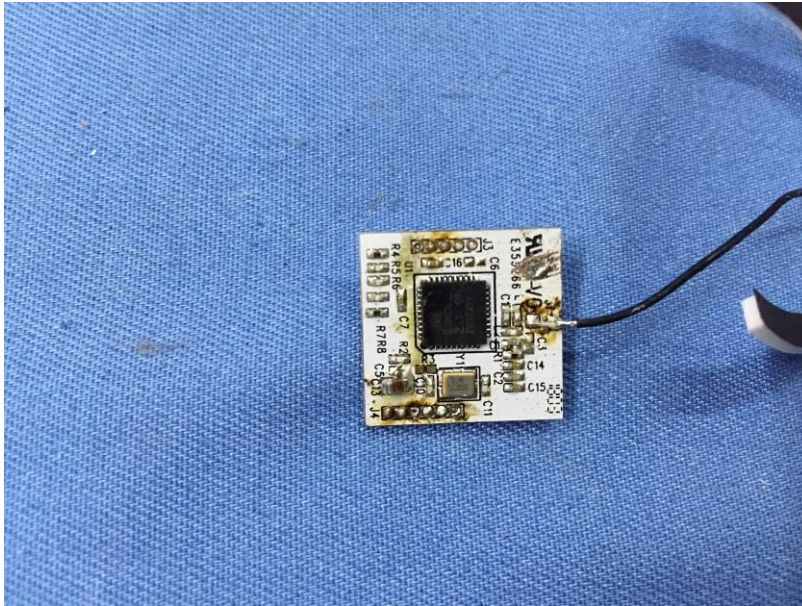

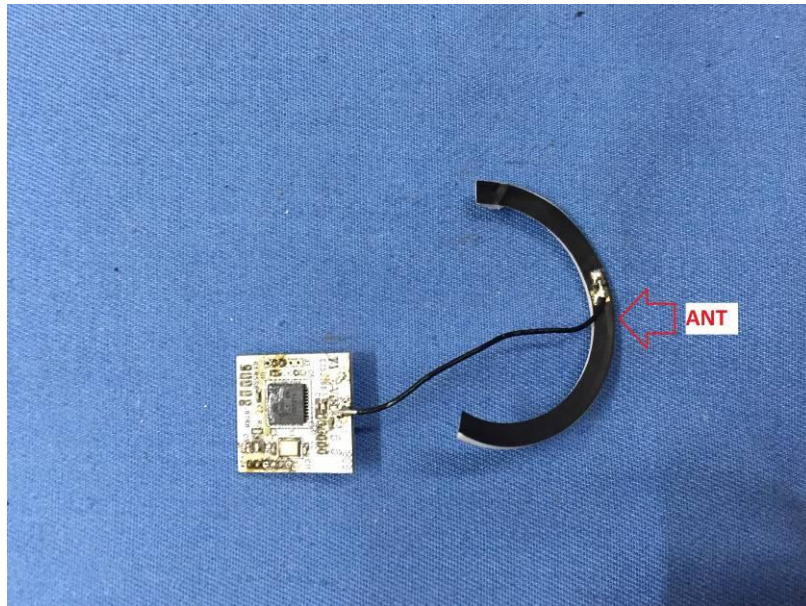

-----End-----