

RADIO TEST REPORT

Product : Wire-Free Keypad
Model Name : KB1001
FCC ID : 2APLE18300419
Test Regulation : FCC 47 CFR Part 15 Subpart C (Section 15.225)
Received Date : 2023/4/27
Test Date : 2023/5/29 ~ 2023/6/7
Issued Date : 2023/6/16

Applicant : Arlo Technologies Inc
2200 Faraday Avenue, Suite 150, Carlsbad, CA 92008, USA

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building B and Building E, No. 372-7, Sec. 4, Zhongxing
Rd., Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Table of Contents

1. Attestation of Test Results	4
2. Summary of Test Results	5
3. Test Methodology and Reference Procedures	6
4. Facilities and Accreditation	6
5. Measurement Uncertainty	7
6. Equipment under Test	8
6.1. Description of EUT	8
6.2. Test Condition	9
6.3. Channel List.....	10
6.4. Description of Available Antennas.....	10
6.5. Test Mode Applicability and Tested Channel Detail	11
7. Test Equipment	12
8. Description of Test Setup	13
9. Test Result	15
9.1. Radiated Spurious Emission	15
9.2. AC Power Line Conducted Emission	26
9.3. 20dB Bandwidth	30
9.4. Frequency Stability	33

1. Attestation of Test Results

APPLICANT: Arlo Technologies Inc
2200 Faraday Avenue, Suite 150, Carlsbad, CA 92008, USA

MANUFACTURER: Funing Precision Component co., Ltd
Lot B, Que vo Industrial Zone.Nam Son Ward, Bac Ninh city, Bac Ninh province, Viet Nam

EUT DESCRIPTION: Wire-Free Keypad

BRAND: Arlo

MODEL: KB1001

SAMPLE STAGE: Engineering Verification Test sample


DATE of TESTED: 2023/5/29 ~ 2023/6/7

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart C (Section 15.225)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:



Cindy Hsin
Project Handler

Date : 2023/6/16

Approved and Authorized By:



Eric Lee
Senior Laboratory Engineer

Date : 2023/6/16

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

2. Summary of Test Results

FCC Clause	Test Item	Result
15.203	Antenna requirement	PASS
15.207	AC Power Conducted Emission	PASS
15.215 (c)	20dB Bandwidth	PASS
15.225 (a)	The field strength of any emissions within the band 13.553-13.567 MHz	PASS
15.225 (b)	The field strength of any emissions within the bands 13.410-13.553 MHz and 13.567-13.710 MHz	PASS
15.225 (c)	The field strength of any emissions within the bands 13.110-13.410 MHz and 13.710-14.010 MHz	PASS
15.225 (d)	The field strength of any emissions appearing outside of the 13.110-14.010 MHz band	PASS
15.225 (e)	The frequency tolerance	PASS

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB174176 D01 Line Conducted FAQ v01r01, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013.

4. Facilities and Accreditation

Test Location	Underwriters Laboratories Taiwan Co., Ltd.
Address	Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

5. Measurement Uncertainty

For statement of conformity, Simple acceptance (Section 4.3.4 of ISO Guide 115) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Determining compliance based on the results of the compliance measurement, not considering measurement instrumentation uncertainty.

Measurement	Frequency	Uncertainty
Conducted disturbance at mains terminals ports	150kHz ~ 30MHz	± 3.1 dB
RF Conducted	9 kHz - 40GHz	± 2.3 dB
Radiated disturbance below 30MHz	9 kHz - 30 MHz	± 3.2 dB
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	± 6.1 dB
Radiated disturbance above 1 GHz	1GHz ~ 40GHz	± 5.1 dB

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

6. Equipment under Test

6.1. Description of EUT

Product	Wire-Free Keypad
Brand Name	Arlo
Model Name	KB1001
Operating Frequency	13.56 MHz
Modulation	ASK
Normal Voltage	5Vac from adapter 6Vdc from battery
Sample ID	Conducted Test: 6092730 Radiated Test: 6092730
Maximum Field Strength (dBuV/m)	24.88 dBuV/m

Note:

1. The EUT contains following accessory devices:

Product	Brand	Model	Description
Battery	Duracell	MX1500	1.5Vdc x 4
USB cable	Nienyi	322-50018-01	Length: 2.5 m

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual, the laboratory shall not be held responsible.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

6.2. Test Condition

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Radiated Spurious Emission	966-2	21~28°C/ 52~69%RH	5Vdc	2023/05/29~ 2023/06/07	Rex Chen
AC power Line Conducted Emission	SR1	21~28°C/ 52~69%RH	5Vdc	2023/05/29~ 2023/06/07	Rex Chen

FCC Test Firm Registration Number: 498077

Sample Calculation:

Radiated Spurious Emission:

- Where relevant, the follow sample calculation is provided:
Result Value (dBuV/m) = Reading Value (dBuV) + Correction Factor (dB/m).
Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Preamp Factor (dB).
Example: Result Value (34.5dBuV/m) = Reading Value (40.1dBm) + Antenna Factor (18.7dB/m) + Cable Loss (4.2dB) - Preamp Factor (28.5dB).

AC power Line Conducted Emission:

- Where relevant, the follow sample calculation is provided:
Result Value (dBuV) = Reading Value (dBuV) + Correction Factor (dB).
Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).
Example: Result Value (53.7dBuV) = Reading Value (35.1dBuV) + Insertion loss(18.1dB) + Cable loss(0.5dB).

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

6.3. Channel List

1 channel is provided to this EUT:

Channel	Frequency (MHz)
1	13.56

6.4. Description of Available Antennas

Ant. No.	Transmitter Circuit	Brand Name	Model Name	Ant. Type	Maximum Gain (dBi)
1	Chain (0)	N/A	N/A	Coil	-

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual, the laboratory shall not be held responsible..

6.5. Test Mode Applicability and Tested Channel Detail

- The fundamental of the EUT was investigated in three orthogonal axes X-Y/Y-Z/X-Z, it was determined that X-Y plane was worst-case. Therefore, all final radiated testing was performed with the EUT in X-Y plane.
- The EUT has two power source types: 6Vdc from battery and 5Vdc from adapter, above two types was pre-tested, the worst case was found in the 5Vdc from adapter. Therefore only the test data of the 5Vdc from adapter was recorded in this report.
- Type V has the same modulation and characteristics as Type B and F. Type V was evaluated to have poorer characteristics, so only mode Type V was evaluated and the test results were recorded in the report.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- For below 1 GHz radiated emission and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Item	Modulation Type	Available Channel	Test Channel	Data Rate
Radiated Emissions	NFC Type A	13.56MHz	13.56MHz	106 kbit/s
	NFC Type V	13.56MHz	13.56MHz	26.5 kbit/s
AC Power Line Conducted Emission	NFC Type V	13.56MHz	13.56MHz	26.5 kbit/s

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Expired date
Spectrum Analyzer	Keysight	N9010A	MY56070827	2023/4/7	2024/4/6
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	2022/12/13	2023/12/12
Loop Antenna	ETS lindgren	6502	00213440	2023/1/4	2024/1/3
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	2023/2/13	2024/2/12
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980404	2023/5/24	2024/5/23
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	2022/12/1	2023/11/30
Temperature & Humidity Test Chamber	GIANT FORCE	GTH-150- 40-CP-AR	MAA1701-010	2023/3/8	2024/3/7
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	2022/11/10	2023/11/9
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	2022/8/29	2023/8/28
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	2022/8/30	2023/8/29
Cables	TITAN	CFD200	T0732ACFD20020A300-2	2022/4/9	2023/4/8

UL Software		
Description	Name	Version
Radiated measurement	e3	6.191211 (V6)
AC power Line Conducted Emission	EZ_EMG	UL-3A1.2

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

8. Description of Test Setup

Support Equipment

ID	Equipment	Brand Name	Model Name	S/N	Remark
A	USB Adapter	Arlo	AD2158	NA	Supplied by client
B	Test Tool	NA	NA	NA	Supplied by client
C	Laptop	Lenovo	T460	PC0FWU5Y	Provided by Lab
D	Battery*4	Duracell	MX1500	NA	Provided by Lab

I/O Cables

ID	Equipment	Brand Name	Model Name	Length (m)	Remark
1	FPC cable	NA	NA	0.2	Supplied by client
2	Micro USB Cable	Nienyi	322-50018-01	1.99	Supplied by client
3	Micro USB Cable	Nienyi	322-50018-01	1.99	Supplied by client


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Setup

Controlled using a bespoke application (Typing RF command by terminal tool (V4.75)) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Setup Diagram for Test

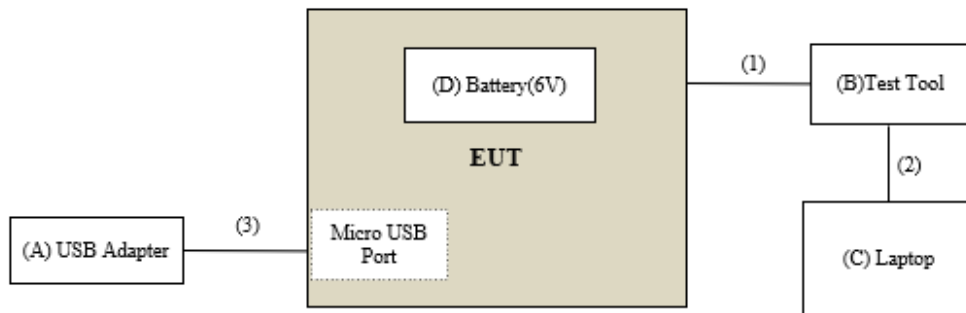

Under Table

Remote Site

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004736 (DCS:17-EM-F0875) / 5.1

9. Test Result

9.1. Radiated Spurious Emission

Requirements

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209 as below table:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004736 (DCS:17-EM-F0875) / 5.1

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

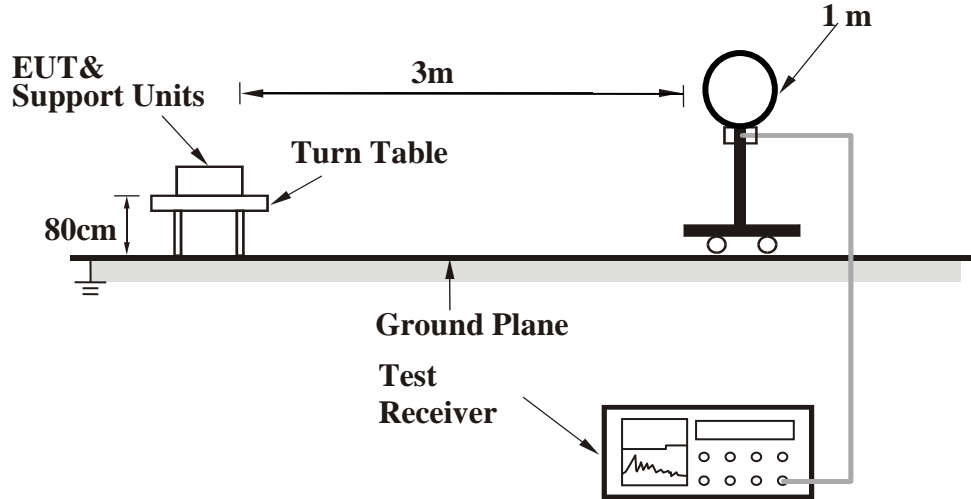

<Frequency Range 30 MHz ~ 1 GHz >

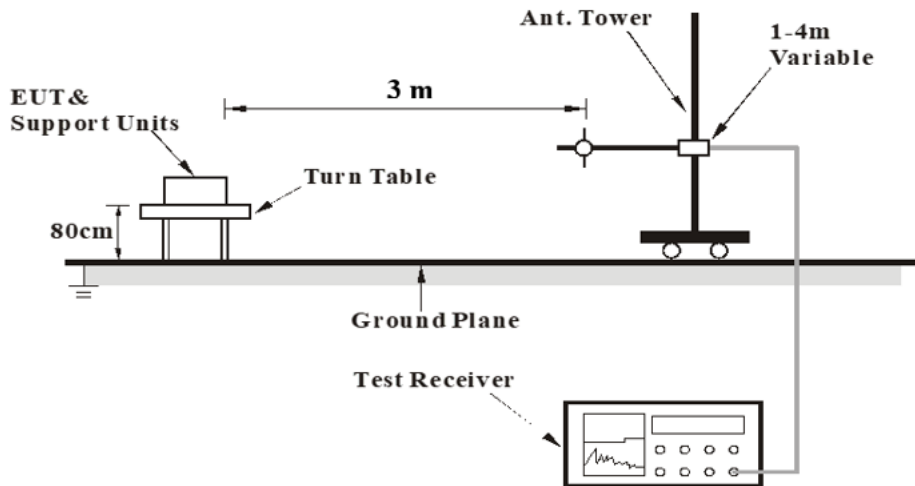

For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Data

Below 1 GHz

Mode	NFC-Type A	Channel	1
------	------------	---------	---

Polarization	Notation	Frequency (MHz)	Reading (dBUV)	Correct (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Remark
Horizontal		66.86	47.51	-22.03	25.48	40	-14.52	PK
		104.69	53.52	-24.17	29.35	43.5	-14.15	PK
		118.27	58.99	-23.05	35.94	43.5	-7.56	PK
		181.32	54.02	-21.89	32.13	43.5	-11.37	PK
		191.99	51.79	-23.12	28.67	43.5	-14.83	PK
		295.78	39.35	-19.33	20.02	46	-25.98	PK
Vertical		66.86	47.21	-22.03	25.18	40	-14.82	PK
		104.69	50.57	-24.17	26.4	43.5	-17.1	PK
		119.24	58.43	-23.14	35.29	43.5	-8.21	PK
		161.92	46.96	-20.51	26.45	43.5	-17.05	PK
		180.35	46.32	-21.64	24.68	43.5	-18.82	PK
		296.75	40.93	-19.33	21.6	46	-24.4	PK

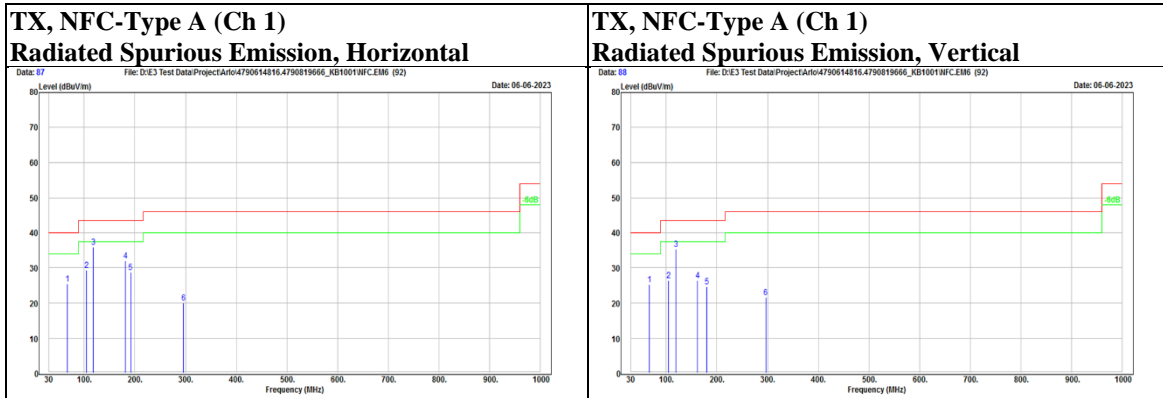


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

Mode	NFC-Type V	Channel	1
------	------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal		65.89	47.56	-22.08	25.48	40	-14.52	PK
		104.69	53.26	-24.17	29.09	43.5	-14.41	PK
		119.24	58.08	-23.14	34.94	43.5	-8.56	PK
		169.68	49.69	-20.71	28.98	43.5	-14.52	PK
		180.35	53.45	-21.64	31.81	43.5	-11.69	PK
		211.39	47.96	-23.23	24.73	43.5	-18.77	PK
Vertical		64.92	47.32	-21.62	25.7	40	-14.3	PK
		102.75	51.81	-24.85	26.96	43.5	-16.54	PK
		119.24	58.68	-23.14	35.54	43.5	-7.96	PK
		160.95	43.78	-20.43	23.35	43.5	-20.15	PK
		185.2	46.15	-22.32	23.83	43.5	-19.67	PK
		296.75	41.14	-19.33	21.81	46	-24.19	PK

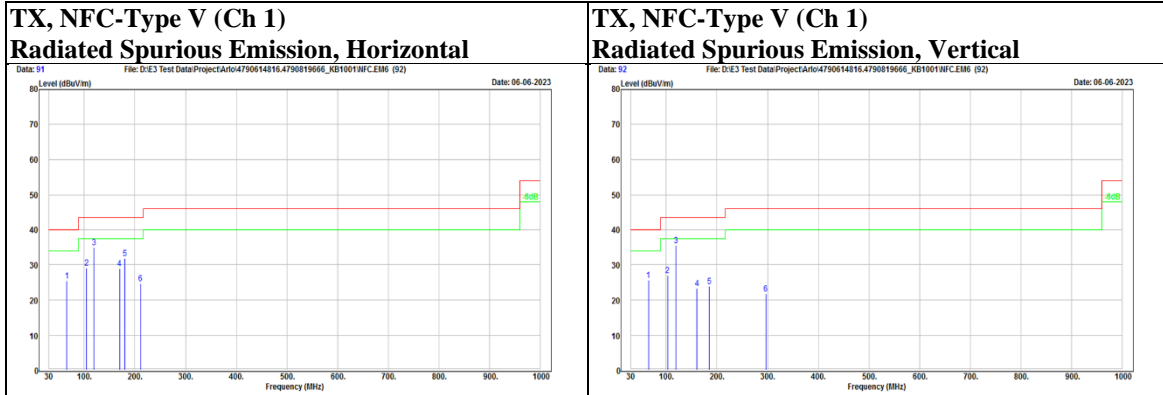


Below 30MHz


Mode	Fundamental NFC-Type A	Channel	1
------	------------------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Parallel		12.924	18.96	-27.12	-8.16	29.54	-37.7	PK
		13.348	22.17	-27.17	-5	40.51	-45.51	PK
		13.553	43.31	-27.2	16.11	50.47	-34.36	PK
		13.561	48.29	-27.19	21.1	84	-62.9	PK
		13.567	45.9	-27.19	18.71	50.47	-31.76	PK
		13.718	20.08	-27.21	-7.13	40.51	-47.64	PK
Perpendicular		14.082	20.43	-27.26	-6.83	29.54	-36.37	PK
		12.958	21.99	-27.13	-5.14	29.54	-34.68	PK
		13.399	25.54	-27.18	-1.64	40.51	-42.15	PK
		13.553	46.25	-27.2	19.05	50.47	-31.42	PK
		13.561	51.21	-27.19	24.02	84	-59.98	PK
		13.567	48.9	-27.19	21.71	50.47	-28.76	PK
	13.718	24.2	-27.21	-3.01	40.51	-43.52	PK	
	14.439	22.53	-27.3	-4.77	29.54	-34.31	PK	

**TX, Fundamental NFC-Type A (Ch 1)
Radiated Spurious Emission, Parallel**

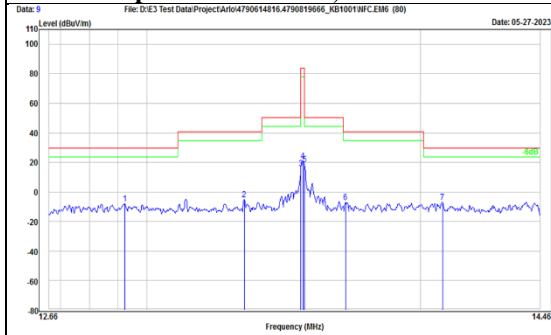

**TX, Fundamental NFC-Type A (Ch 1)
Radiated Spurious Emission, Perpendicular**

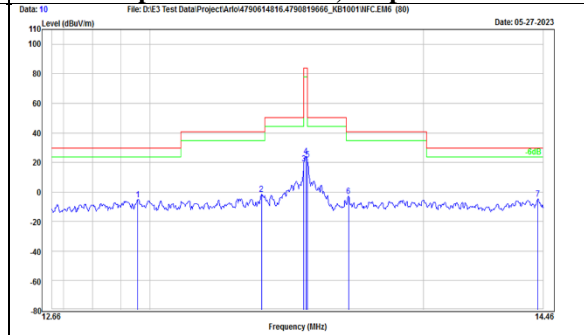

Underwriters Laboratories Taiwan Co., Ltd.


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

Mode	NFC-Type A	Channel	1
------	------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Parallel		0.01237	45.12	-63.33	-18.21	45.76	-63.97	PK
		0.01468	44.12	-63.86	-19.74	44.27	-64.01	PK
		0.0229	42.91	-65.3	-22.39	40.41	-62.8	PK
		0.03444	40.97	-66.45	-25.48	36.86	-62.34	PK
		0.05297	38.53	-67.2	-28.67	33.12	-61.79	PK
		0.06728	37.48	-67.53	-30.05	31.04	-61.09	PK
		0.19969	42.81	-67.97	-25.16	21.6	-46.76	PK
		0.2391	42.17	-67.91	-25.74	20.03	-45.77	PK
		0.30509	39.08	-67.83	-28.75	17.91	-46.66	PK
		0.70096	34.03	-27.78	6.25	30.69	-24.44	PK
		2.409	28.07	-27.74	0.33	29.54	-29.21	PK
		9.451	30.32	-26.82	3.5	29.54	-26.04	PK
Perpendicular		0.01276	42.94	-63.43	-20.49	45.49	-65.98	PK
		0.01962	43.95	-64.79	-20.84	41.75	-62.59	PK
		0.02828	41.15	-65.99	-24.84	38.57	-63.41	PK
		0.04032	39.59	-66.74	-27.15	35.49	-62.64	PK
		0.05603	37.24	-67.27	-30.03	32.63	-62.66	PK
		0.06728	39.15	-67.53	-28.38	31.04	-59.42	PK
		0.21506	44.32	-67.94	-23.62	20.95	-44.57	PK
		0.28478	40.82	-67.85	-27.03	18.51	-45.54	PK
		0.43281	39.72	-67.82	-28.1	14.88	-42.98	PK
		0.50737	36.72	-27.81	8.91	33.5	-24.59	PK
		2.461	33.22	-27.73	5.49	29.54	-24.05	PK
		10.019	30.77	-26.7	4.07	29.54	-25.47	PK

Underwriters Laboratories Taiwan Co., Ltd.


Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

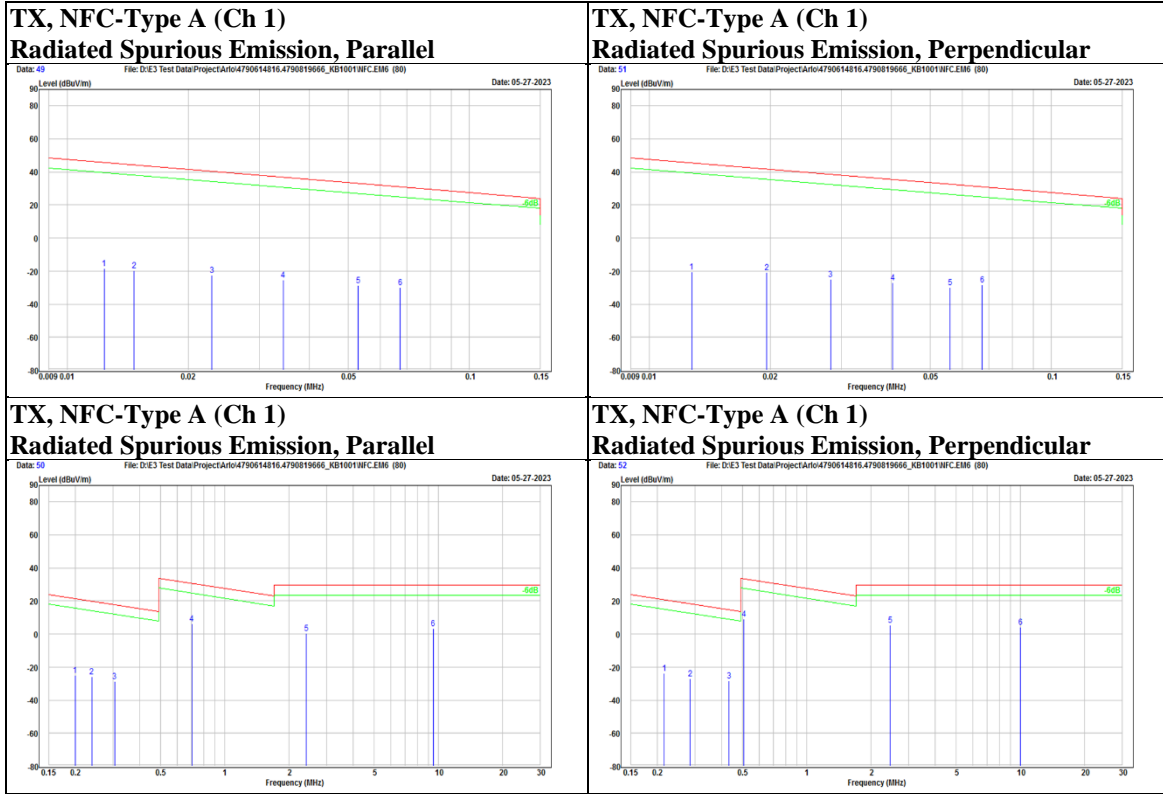


Mode	Fundamental NFC-Type V	Channel	1
------	------------------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBUV)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	
Parallel		12.961	19.42	-27.13	-7.71	29.54	-37.25	PK
		13.399	19.51	-27.18	-7.67	40.51	-48.18	PK
		13.553	44.36	-27.2	17.16	50.47	-33.31	PK
		13.561	49.19	-27.19	22	84	-62	PK
		13.567	46.85	-27.19	19.66	50.47	-30.81	PK
		13.72	21.55	-27.21	-5.66	40.51	-46.17	PK
		14.383	20.31	-27.29	-6.98	29.54	-36.52	PK
Perpendicular		12.965	21.22	-27.13	-5.91	29.54	-35.45	PK
		13.407	25.24	-27.18	-1.94	40.51	-42.45	PK
		13.553	47.2	-27.2	20	50.47	-30.47	PK
		13.561	52.07	-27.19	24.88	84	-59.12	PK
		13.567	49.7	-27.19	22.51	50.47	-27.96	PK
		13.984	23.71	-27.25	-3.54	40.51	-44.05	PK
		14.439	22.63	-27.3	-4.67	29.54	-34.21	PK

TX, Fundamental NFC-Type V (Ch 1)
Radiated Spurious Emission, Parallel

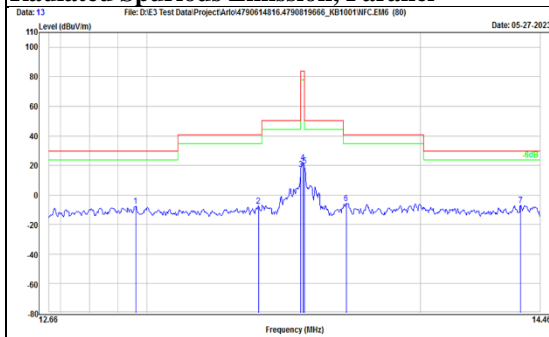

TX, Fundamental NFC-Type V (Ch 1)
Radiated Spurious Emission, Perpendicular

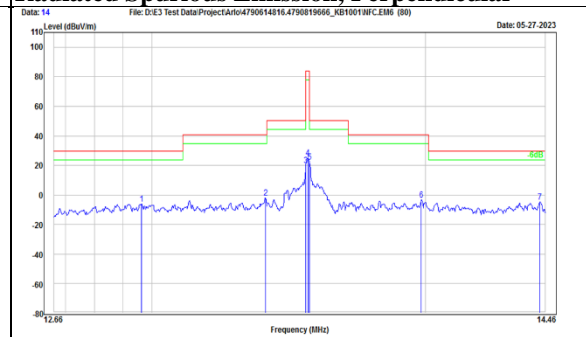


Mode	NFC-Type V	Channel	1
------	------------	---------	---

Polarization	Notation	Frequency	Reading	Correct	Result	Limit	Margin	Remark
		(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
Parallel		0.0138	43.97	-63.68	-19.71	44.8	-64.51	PK
		0.02265	43.53	-65.26	-21.73	40.5	-62.23	PK
		0.03463	39.71	-66.46	-26.75	36.81	-63.56	PK
		0.04525	39.66	-66.94	-27.28	34.49	-61.77	PK
		0.06728	38.61	-67.53	-28.92	31.04	-59.96	PK
		0.08864	34.64	-67.99	-33.35	28.65	-62	PK
		0.22437	44.91	-67.93	-23.02	20.58	-43.6	PK
		0.25888	42.03	-67.88	-25.85	19.34	-45.19	PK
		0.3392	39.86	-67.83	-27.97	16.99	-44.96	PK
		0.66832	35.76	-27.78	7.98	31.1	-23.12	PK
		2.201	30.17	-27.74	2.43	29.54	-27.11	PK
		7.935	31.35	-27.21	4.14	29.54	-25.4	PK
Perpendicular		0.01186	44.13	-63.19	-19.06	46.12	-65.18	PK
		0.01571	42.86	-64.08	-21.22	43.68	-64.9	PK
		0.02303	41.72	-65.32	-23.6	40.36	-63.96	PK
		0.03603	40.07	-66.53	-26.46	36.47	-62.93	PK
		0.05796	36.62	-67.32	-30.7	32.34	-63.04	PK
		0.08691	34.36	-67.97	-33.61	28.82	-62.43	PK
		0.17961	44.91	-68	-23.09	22.52	-45.61	PK
		0.28935	40.06	-67.85	-27.79	18.37	-46.16	PK
		0.39344	37.47	-67.82	-30.35	15.71	-46.06	PK
		0.56709	34.06	-27.8	6.26	32.53	-26.27	PK
		2.213	30.62	-27.74	2.88	29.54	-26.66	PK
		10.125	30.95	-26.72	4.23	29.54	-25.31	PK

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

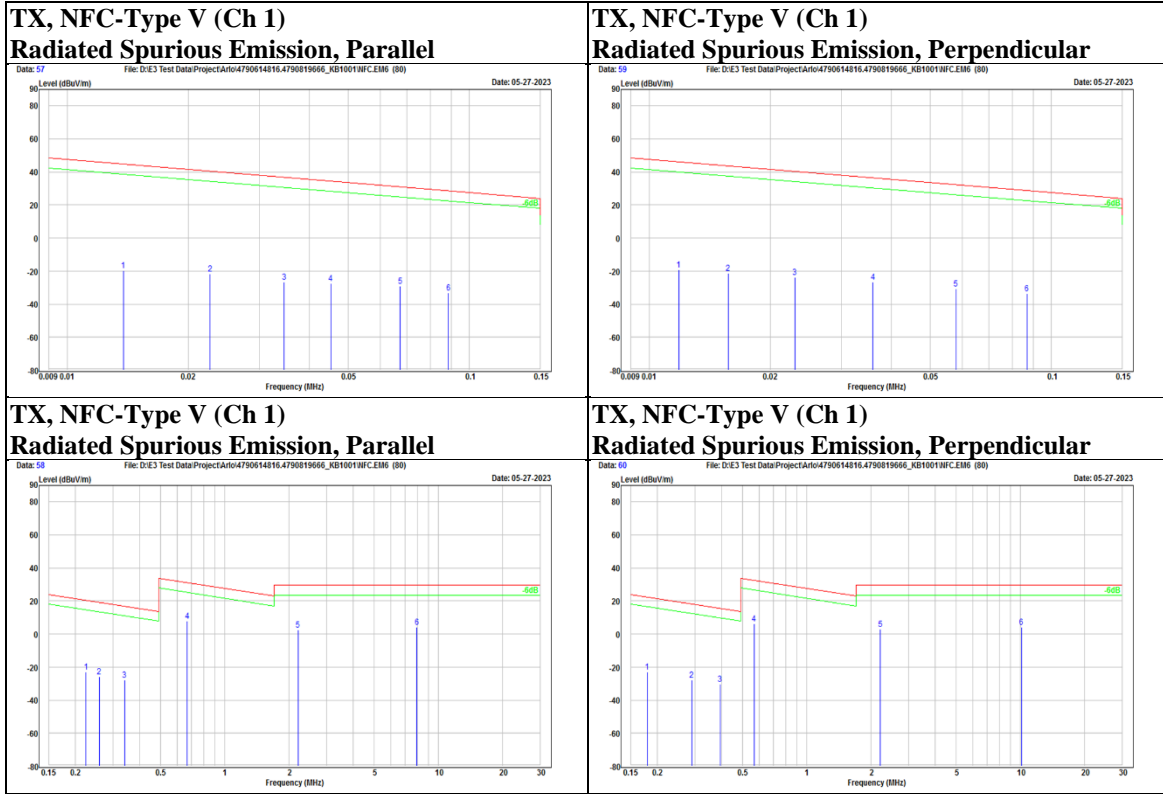

9.2. AC Power Line Conducted Emission

Requirements

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
2. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
3. Test data of Result value (dBuV) = Reading value (dBuV) + Correction Factor (dB).
4. Test data of Margin(dB) = Result value (dBuV) - Limit value (dBuV).
5. Test data of Correction Factor (dB) = Insertion loss(dB) + Cable loss(dB).

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004736 (DCS:17-EM-F0875) / 5.1

Test Setup

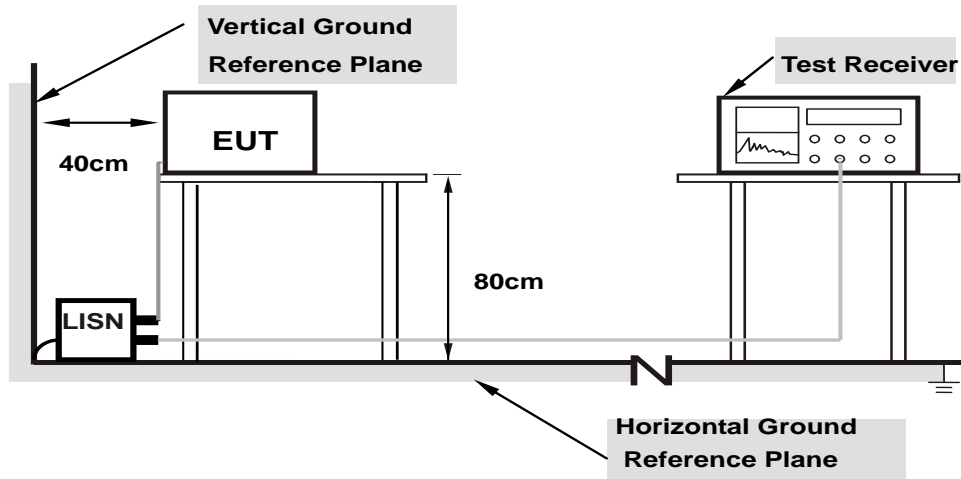

Note: 1.Support units were connected to second LISN.


For the actual test configuration, please refer to the Setup Configurations.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Data

Mode	NFC_TX13.56_Type V	Channel	1
------	--------------------	---------	---

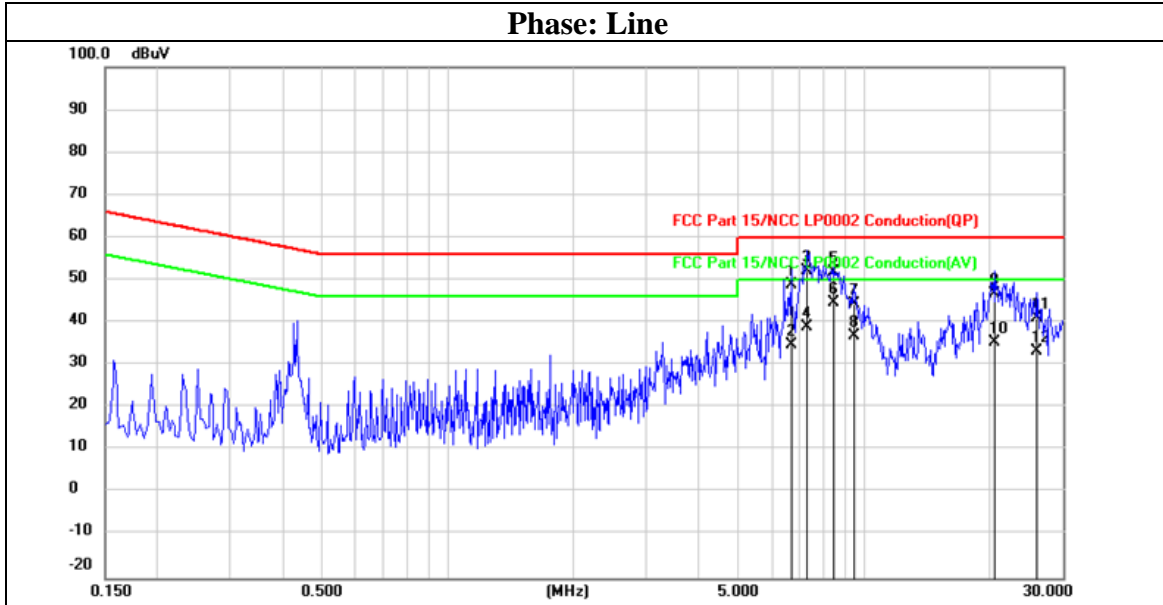


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	6.6894	38.53	10.20	48.73	60.00	-11.27	QP
2	6.6894	24.61	10.20	34.81	50.00	-15.19	AVG
3	7.2763	41.88	10.23	52.11	60.00	-7.89	QP
4	7.2763	28.73	10.23	38.96	50.00	-11.04	AVG
5	8.4491	41.67	10.26	51.93	60.00	-8.07	QP
6	8.4491	34.35	10.26	44.61	50.00	-5.39	AVG
7	9.5051	34.09	10.30	44.39	60.00	-15.61	QP
8	9.5051	26.63	10.30	36.93	50.00	-13.07	AVG
9	20.6421	36.08	10.53	46.61	60.00	-13.39	QP
10	20.6421	24.82	10.53	35.35	50.00	-14.65	AVG
11	26.0194	30.38	10.64	41.02	60.00	-18.98	QP
12	26.0194	22.52	10.64	33.16	50.00	-16.84	AVG

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

Mode	NFC_TX13.56_Type V	Channel	1
------	--------------------	---------	---

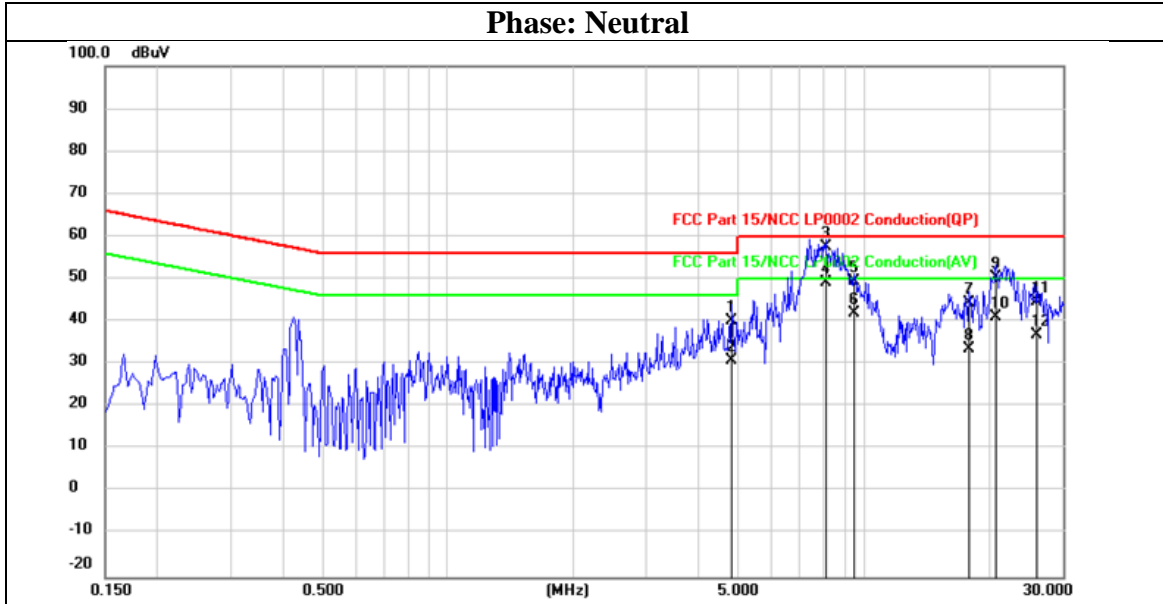

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	4.8118	30.02	10.15	40.17	56.00	-15.83	QP
2	4.8118	20.63	10.15	30.78	46.00	-15.22	AVG
3	8.0966	47.29	10.24	57.53	60.00	-2.47	QP
4	8.0966	38.80	10.24	49.04	50.00	-0.96	AVG
5	9.5049	39.12	10.30	49.42	60.00	-10.58	QP
6	9.5049	31.54	10.30	41.84	50.00	-8.16	AVG
7	17.9440	33.90	10.53	44.43	60.00	-15.57	QP
8	17.9440	23.09	10.53	33.62	50.00	-16.38	AVG
9	20.7538	39.80	10.57	50.37	60.00	-9.63	QP
10	20.7538	30.48	10.57	41.05	50.00	-8.95	AVG
11	26.0330	34.00	10.69	44.69	60.00	-15.31	QP
12	26.0330	26.16	10.69	36.85	50.00	-13.15	AVG

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

9.3. 20dB Bandwidth


Requirements

The 20 dB bandwidth shall be specified in operating frequency band.

Test Procedures

- The testing follows the guidelines in ANSI C63.10-2013.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW and 3kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Setup

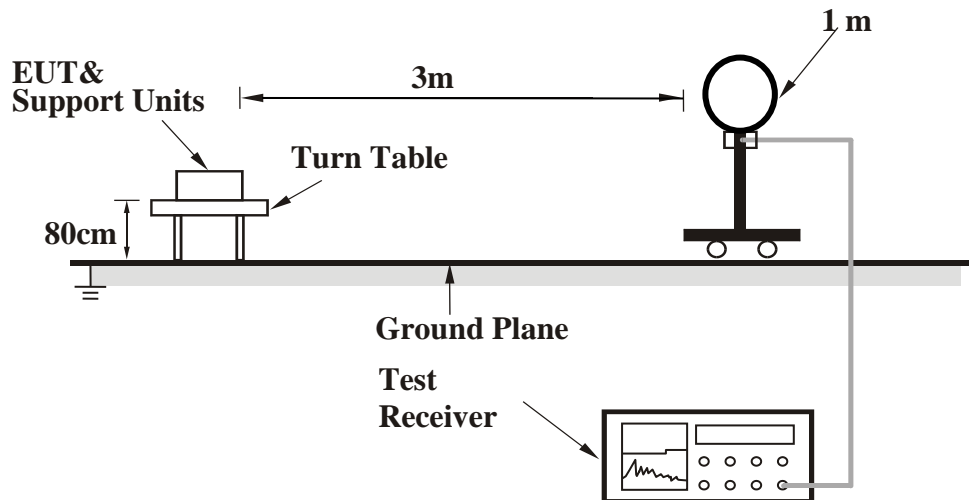

For the actual test configuration, please refer to the Setup Configurations.


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Data

Type A

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	13.56	0.0269

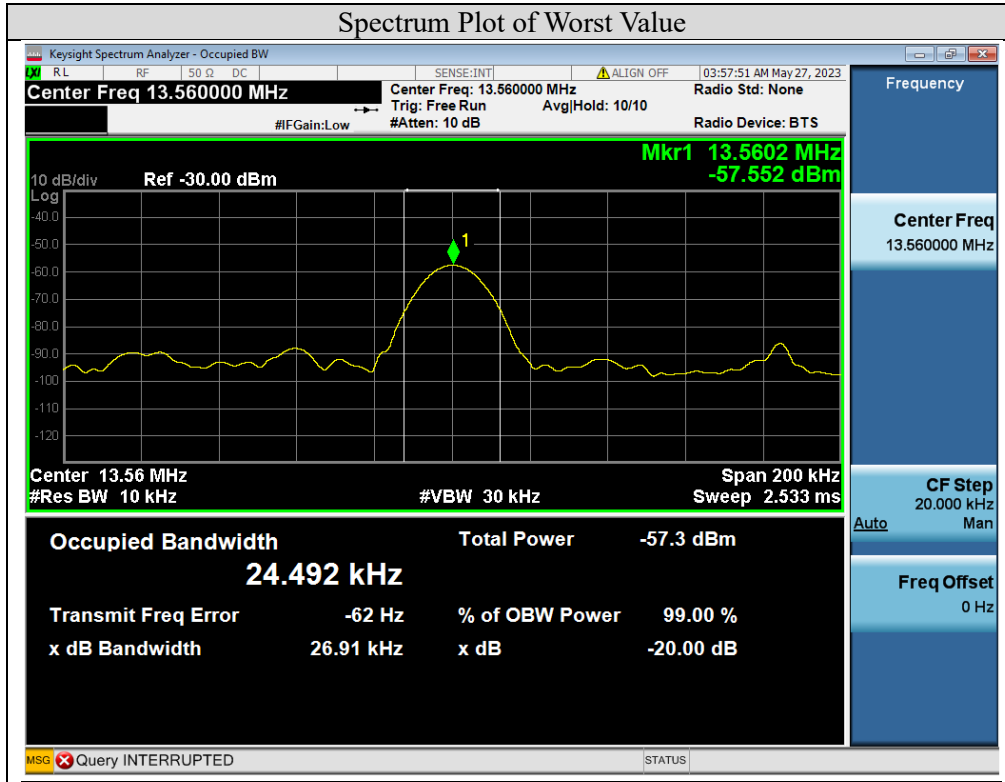


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

Type V

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
1	13.56	0.0267

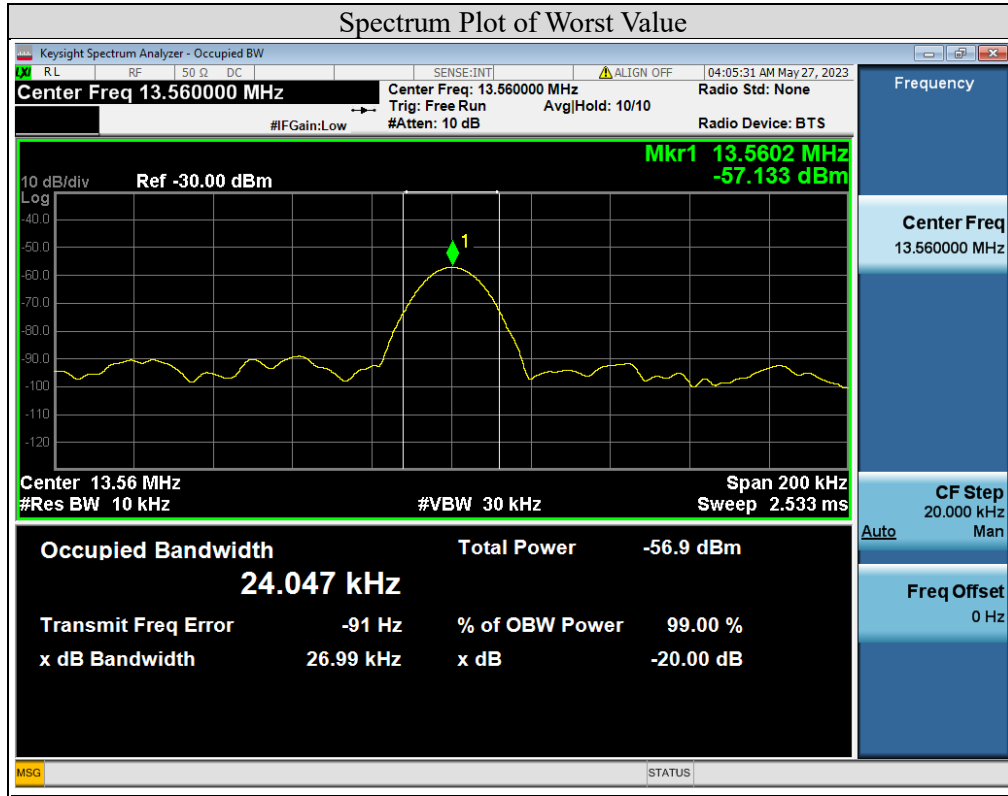

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone : +886-2-7737-3000
 Facsimile (FAX) : +886-3-583-7948

9.4. Frequency Stability


Requirements

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Procedures

- a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- b. Turned the EUT on and coupled its output to a spectrum analyzer.
- c. Turned the EUT off and set the chamber to the highest temperature specified.
- d. Allowed sufficient time (approximately 30 min) for the temperature of the chamber to stabilize then turned the EUT on and measured the operating frequency after 2, 5, and 10 minutes.
- e. Repeated step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Test Setup

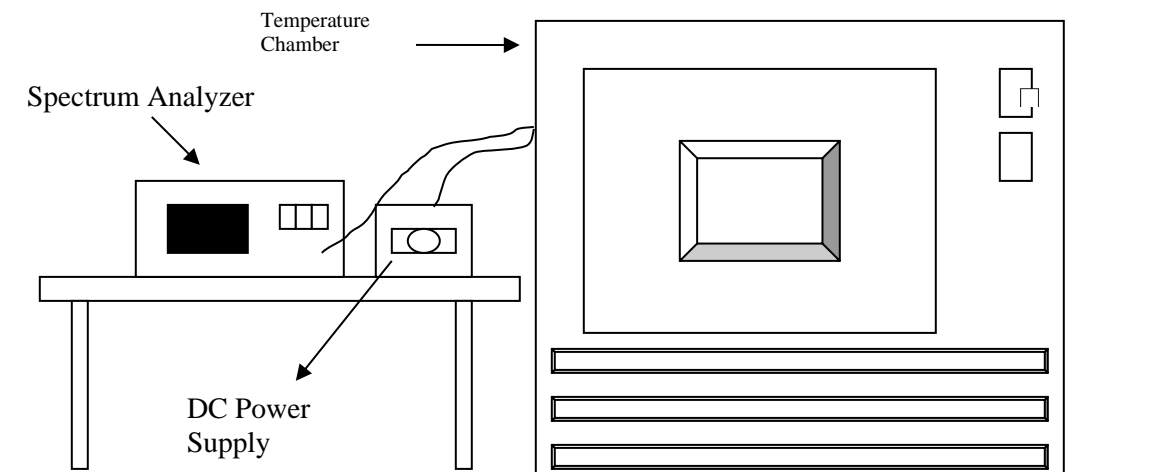

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone : +886-2-7737-3000
Facsimile (FAX) : +886-3-583-7948

Test Data

Frequency Stability Versus Temp.									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)
45	5	13.56002	1.47	13.56002	1.47	13.56003	2.21	13.56002	1.47
40	5	13.55997	-2.21	13.55998	-1.47	13.55998	-1.47	13.55998	-1.47
30	5	13.55998	-1.47	13.55998	-1.47	13.55998	-1.47	13.55997	-2.21
20	5	13.55998	-1.47	13.55997	-2.21	13.55997	-2.21	13.55998	-1.47
10	5	13.56001	0.74	13.56002	1.47	13.56002	1.47	13.56002	1.47
0	5	13.56003	2.21	13.56004	2.95	13.56003	2.21	13.56003	2.21
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)
20	5.75	13.55998	-1.47	13.55997	-2.21	13.55997	-2.21	13.55998	-1.47
20	5	13.55998	-1.47	13.55997	-2.21	13.55997	-2.21	13.55998	-1.47
20	4.25	13.55998	-1.47	13.55997	-2.21	13.55997	-2.21	13.55998	-1.47

END OF REPORT

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004736 (DCS:17-EM-F0875) / 5.1