



FCC TEST REPORT

FCC ID: 2APMCMJ-109

On Behalf of

Pretty Art(Shenzhen)Co.,Ltd

MINI PHONOGRAPH

Model No.: MJ-1XY (XY=00-99)

Prepared for : Pretty Art(Shenzhen)Co.,Ltd
Address : The 3rd floor, No.122, Ditang Road, Shajing Town,
Bao'an District, Shenzhen City, Guangdong, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an
District, 518103, Shenzhen, Guangdong, China

Report Number : T1880525 06
Date of Receipt : April 09, 2018
Date of Test : April 09, 2018-June 22, 2018
Date of Report : June 22, 2018
Version Number : REV0

Contents

Page

CONTENTS	2
1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 TEST MODE	8
2.3 TEST FACILITY	8
2.4 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.5 DESCRIPTION OF SUPPORT UNITS	8
2.6 ADDITIONAL INSTRUCTIONS	9
3 TEST INSTRUMENTS LIST	10
TEST EQUIPMENT LIST	10
4 TEST RESULTS AND MEASUREMENT DATA	11
4.1 ANTENNA REQUIREMENT	11
4.2 CONDUCTED EMISSIONS	12
4.3 CONDUCTED PEAK OUTPUT POWER	15
4.4 20DB EMISSION BANDWIDTH	20
4.5 CARRIER FREQUENCIES SEPARATION	23
4.6 HOPPING CHANNEL NUMBER	26
4.7 DWELL TIME	28
4.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	31
4.9 BAND EDGE	32
4.9.1 <i>Conducted Emission Method</i>	32
4.9.2 <i>Radiated Emission Method</i>	35
4.10 SPURIOUS EMISSION	37
4.10.1 <i>Conducted Emission Method</i>	37
4.10.2 <i>Radiated Emission Method</i>	39
5 TEST SETUP PHOTO	46
6 EUT CONSTRUCTIONAL DETAILS	48

TEST REPORT DECLARATION

Applicant : Pretty Art(Shenzhen)Co.,Ltd
 Address : The 3rd floor, No.122, Ditang Road, Shajing Town, Bao'an District, Shenzhen City, Guangdong, China
 Manufacturer : Pretty Art(Shenzhen)Co.,Ltd
 Address : The 3rd floor, No.122, Ditang Road, Shajing Town, Bao'an District, Shenzhen City, Guangdong, China
 EUT Description : MINI PHONOGRAPH
 (A) Model No. : MJ-1XY (XY=00-99)
 (B) Trademark : MEA  EAL


Measurement Standard Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016,
ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Reak Yang 
 Project Engineer

Approved by (name + signature).....: Simple Guan 
 Project Manager

Date of issue.....: June 22, 2018

Revision History

Revision	Issue Date	Revisions	Revised By
00	June 22, 2018	Initial released Issue	Simple Guan

1 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10:2013

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2 General Information

2.1 General Description of EUT

Product Name:	MINI PHONOGRAPH
Model No.:	MJ-1XY (XY=00-99)
Test Model No:	MJ-109
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are colour and model name for commercial purpose.</i>	
Quantity of tested samples	1
Serial No.:	N/A
Tested Sample(s) ID:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402MHz~2480MHz
Radio Technology	Bluetooth V4.2
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4 QPSK
Antenna Type:	PIFA antenna
Antenna gain:	0dBi
Power supply:	DC 15V by AC Adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

2.2 Test mode

Transmitting mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

2.3 Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 25, 2017 Certificated by IC
Registration Number: 12135A

2.4 Other Information Requested by the Customer

None.

2.5 Description of Support Units

Accessories1	:	SWITCHING ADAPTOR
Manufacturer	:	SHENZHEN FUJIA APPLIANCE CO., LTD
Model	:	FJ-SW1501000E
Power supply	:	INPUT:100-240V~, 50/60Hz, 0.A Max Output: DC 15V, 1000mA


2.6 Additional instructions

Software (Used for test) from client

Mode	Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Name	FCCAssist		
Test Software Version	V1.6		
Support Units (Software installation media)	Description	Manufacturer	Model
	Laptop	Apple	A1278
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4 QPSK	CH1	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH40	2441	
	CH79	2480	

Run Software

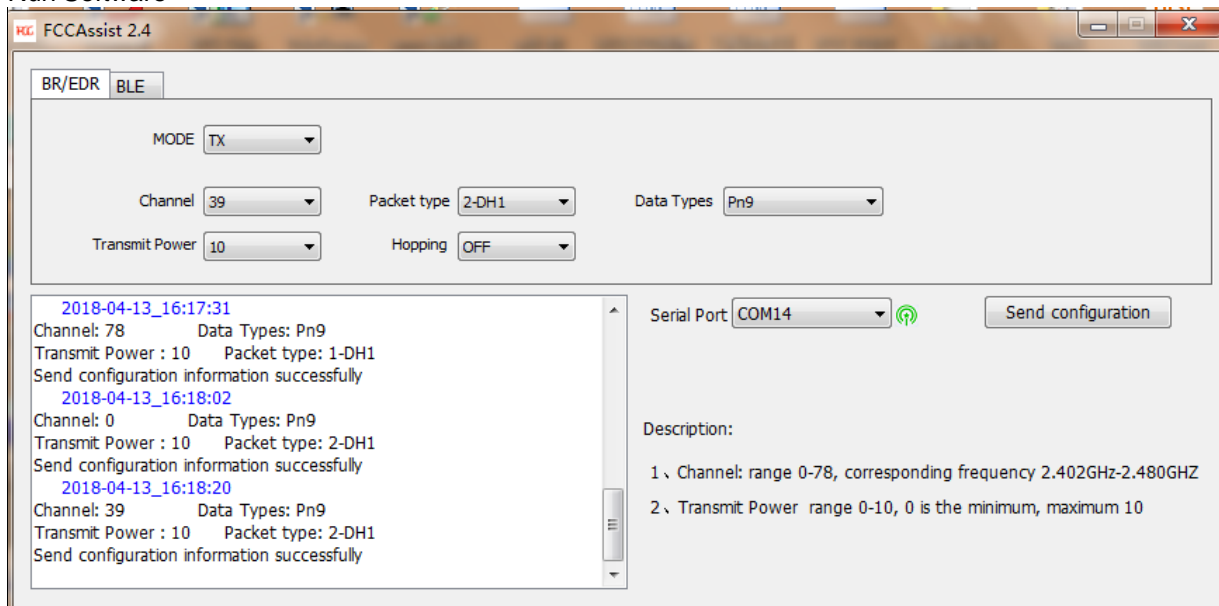


3 Test Instruments list

Test Equipment List


Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2017.09.22	1Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2017.09.22	1Year
Receiver	R&S	ESCI	1166.5950K03-1011	2017.09.22	1Year
Receiver	R&S	ESCI	101202	2017.09.22	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2016.09.30	2Year
Horn Antenna	EMCO	3115	640201028-06	2016.09.30	2Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2016.09.30	2Year
Cable	Resenberger	N/A	No.1	2017.09.22	1Year
Cable	SCHWARZECK	N/A	No.2	2017.09.22	1Year
Cable	SCHWARZECK	N/A	No.3	2017.09.22	1Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2017.09.22	1Year
Pre-amplifier	R&S	AFS33-18002650-30-8P-44	SEL0080	2017.09.22	1Year
Base station	Agilent	E5515C	GB44300243	2017.09.22	1 Year
Temperature controller	Terchy	MHQ	120	2017.09.22	1Year
Power divider	Anritsu	K240C	020346	2017.09.22	1 Year
Signal Generator	HP	83732B	VS3449051	2017.09.22	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2017.09.22	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2017.09.22	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2017.09.22	1 Year
18-40 Horn Antenna	18-40G antenna	Sas-574	571	2018-3-15	2021-03-18

4 Test results and Measurement Data

4.1 Antenna requirement

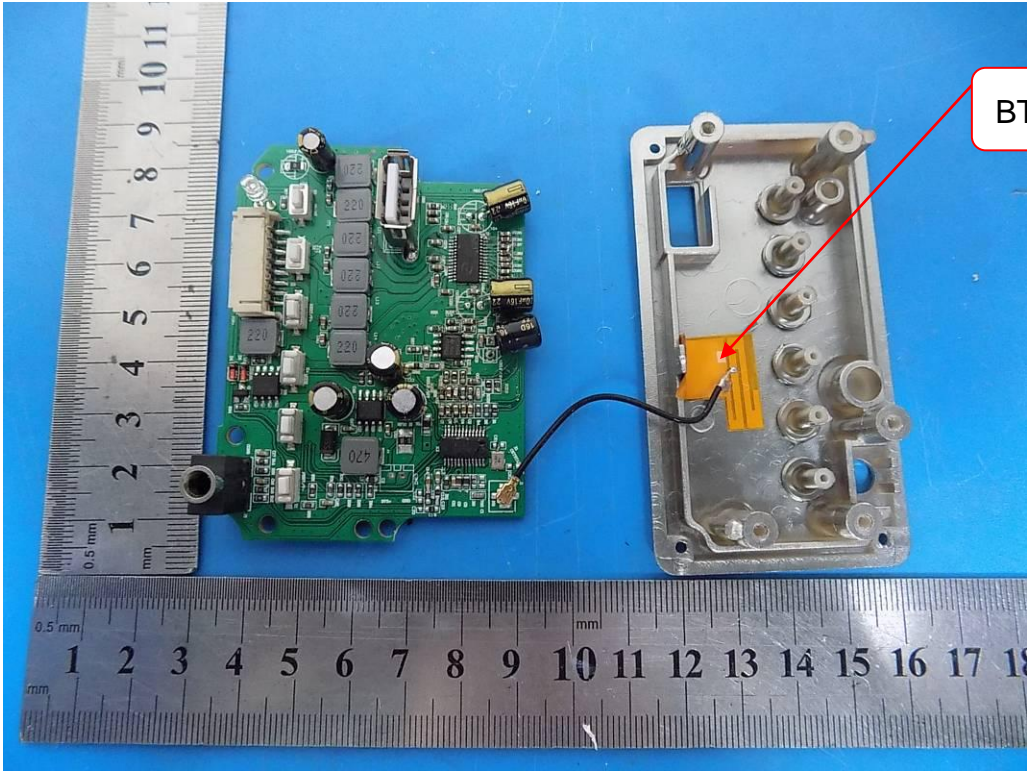Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
E.U.T Antenna:	
<p><i>The antenna is Internal antenna, the best case gain of the antenna is 0dBi</i></p> 	

4.2 Conducted Emissions

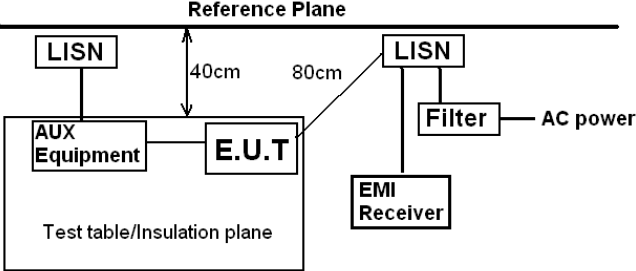
Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	 <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														

Measurement data:

Test result for BT4.2 (Channel 2480MHz), AC 120V/ 60Hz

Line:

Conducted Emission Measurement

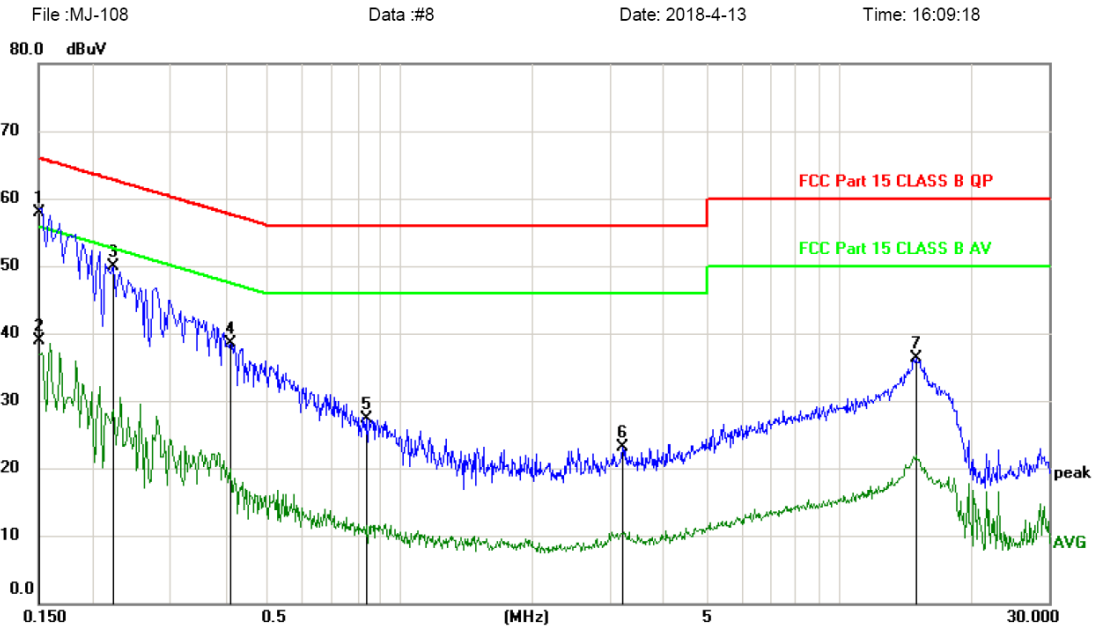

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	48.20	9.73	57.93	66.00	-8.07	QP	
2		0.1500	29.20	9.73	38.93	56.00	-17.07	AVG	
3		0.2220	40.16	9.75	49.91	62.74	-12.83	peak	
4		0.4110	28.77	9.78	38.55	57.63	-19.08	peak	
5		0.8370	17.41	9.82	27.23	56.00	-28.77	peak	
6		3.2070	13.12	10.06	23.18	56.00	-32.82	peak	
7		14.9460	25.95	10.40	36.35	60.00	-23.65	peak	


*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Test result for BT4.2 (Channel 2480MHz), AC 120V/ 60Hz

Neutral:

Conducted Emission Measurement

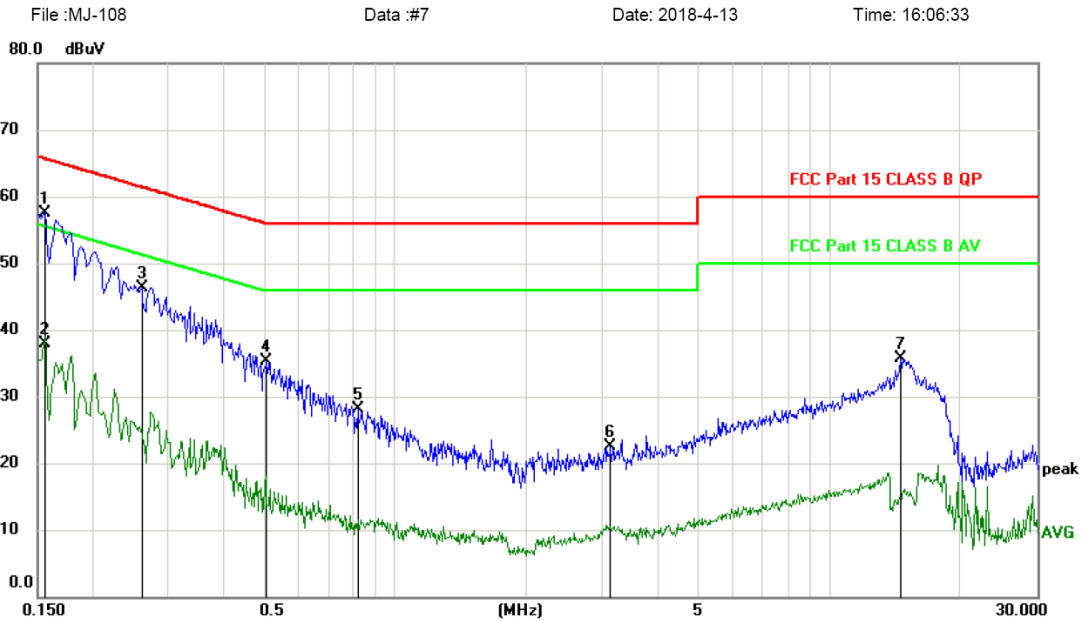

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1559	47.87	9.73	57.60	65.68	-8.08	QP	
2		0.1560	28.10	9.73	37.83	55.67	-17.84	AVG	
3		0.2610	36.61	9.76	46.37	61.40	-15.03	peak	
4		0.5070	25.57	9.78	35.35	56.00	-20.65	peak	
5		0.8190	18.22	9.81	28.03	56.00	-27.97	peak	
6		3.1380	12.39	10.05	22.44	56.00	-33.56	peak	
7		14.5440	25.27	10.37	35.64	60.00	-24.36	peak	


*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. This Report only show the test plots of the worst case.

4.3 Conducted Peak Output Power

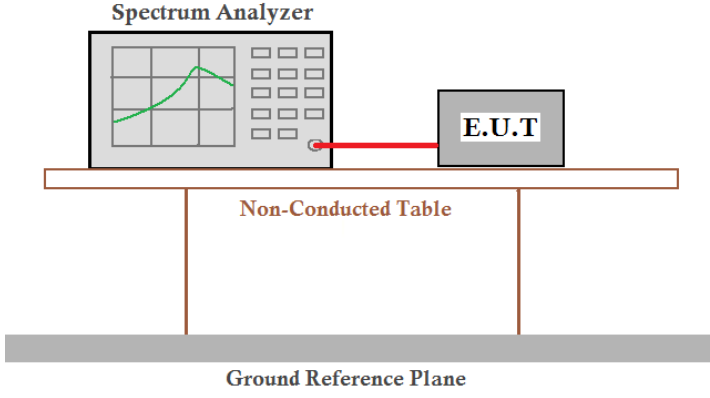
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	30dBm(for GFSK),20.97dBm(for EDR)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	-5.499	30.00	Pass
	Middle	-4.986		
	Highest	-4.232		
Pi/4QPSK	Lowest	-4.762	20.97	Pass
	Middle	-4.020		
	Highest	-3.307		

Test plot as follows:


Test mode: GFSK mode

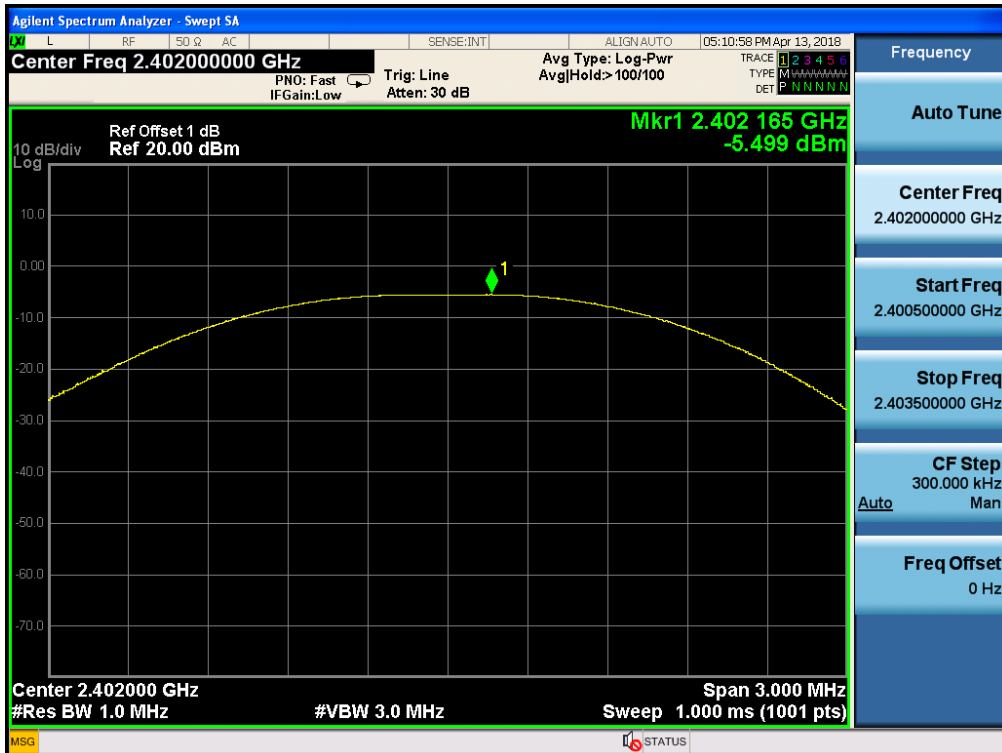

Lowest channel

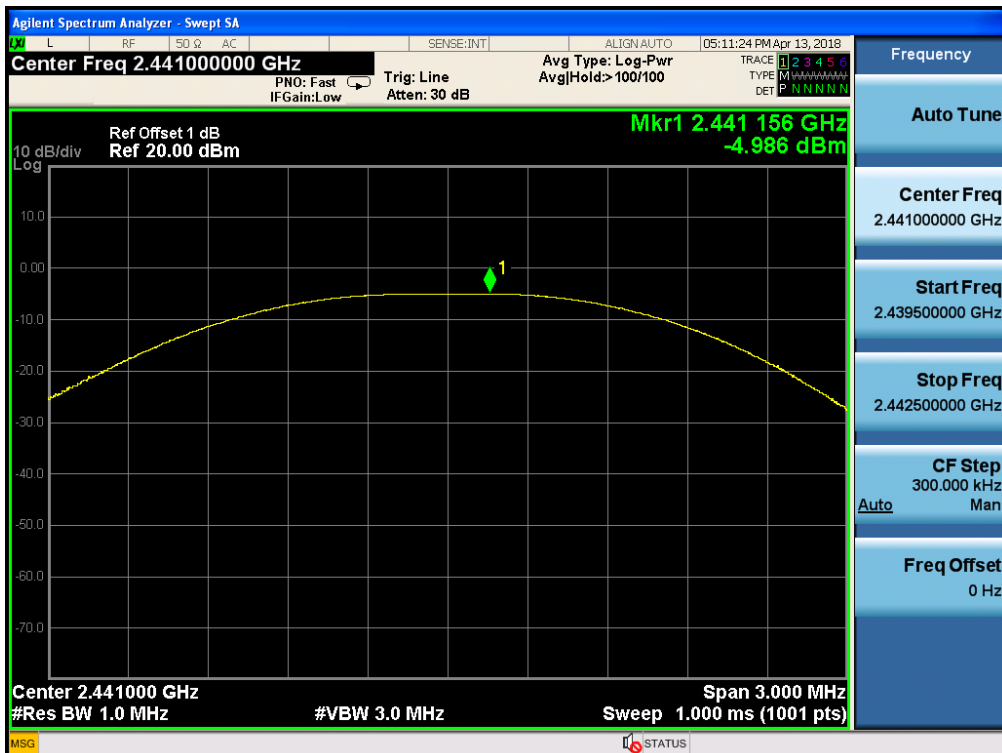


Middle channel

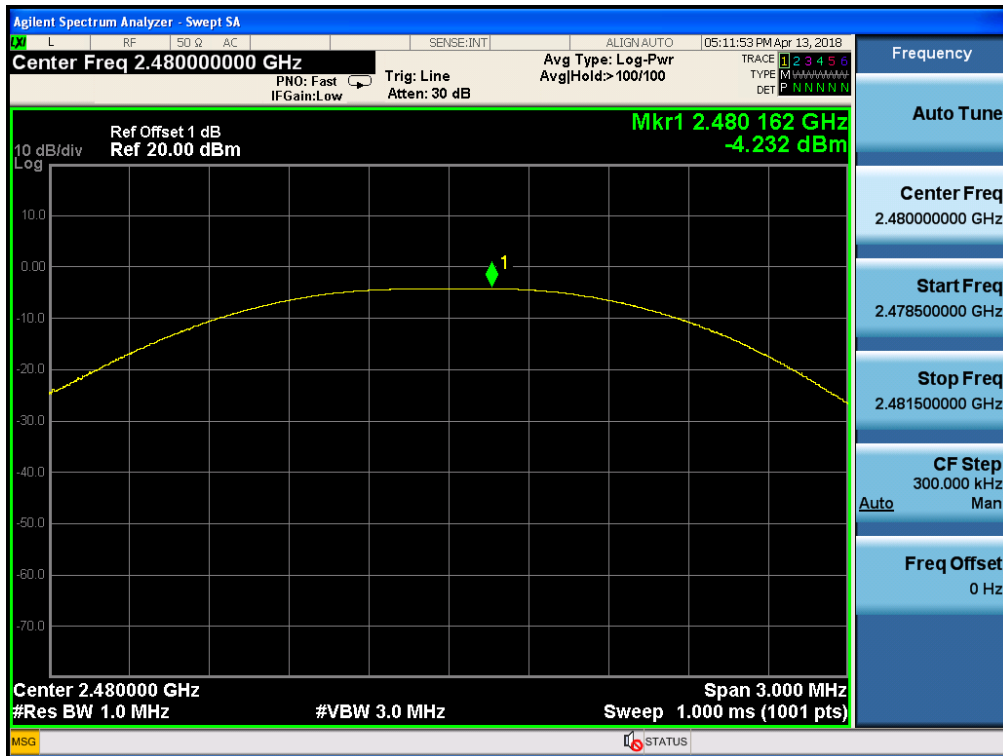


Highest channel


Test mode: Pi/4QPSK mode

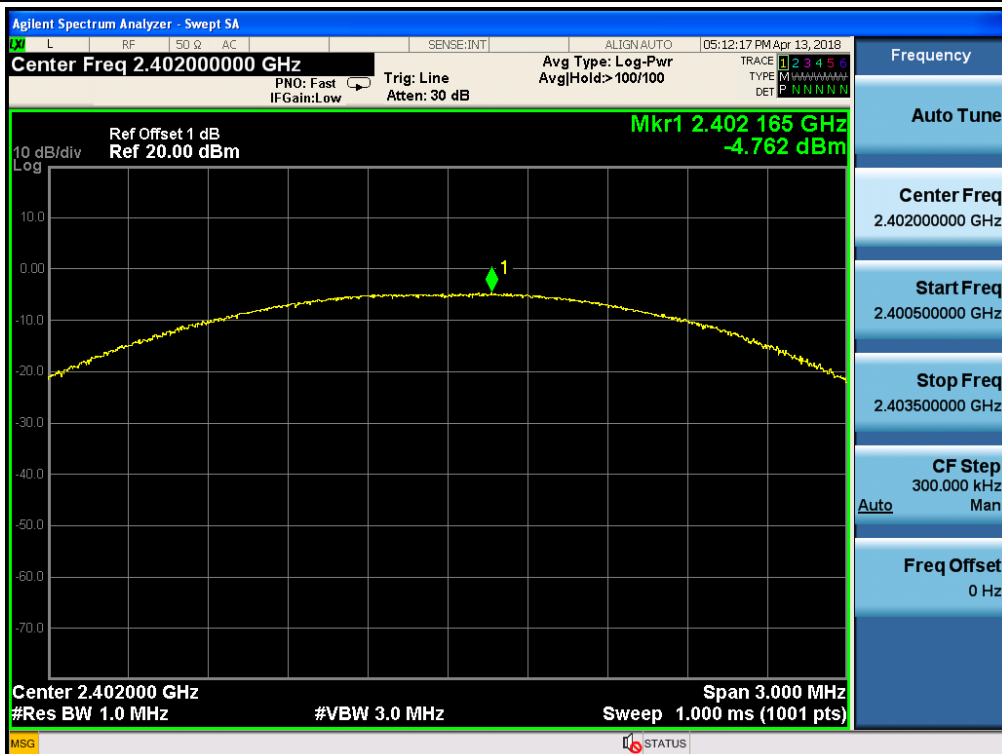

Lowest channel

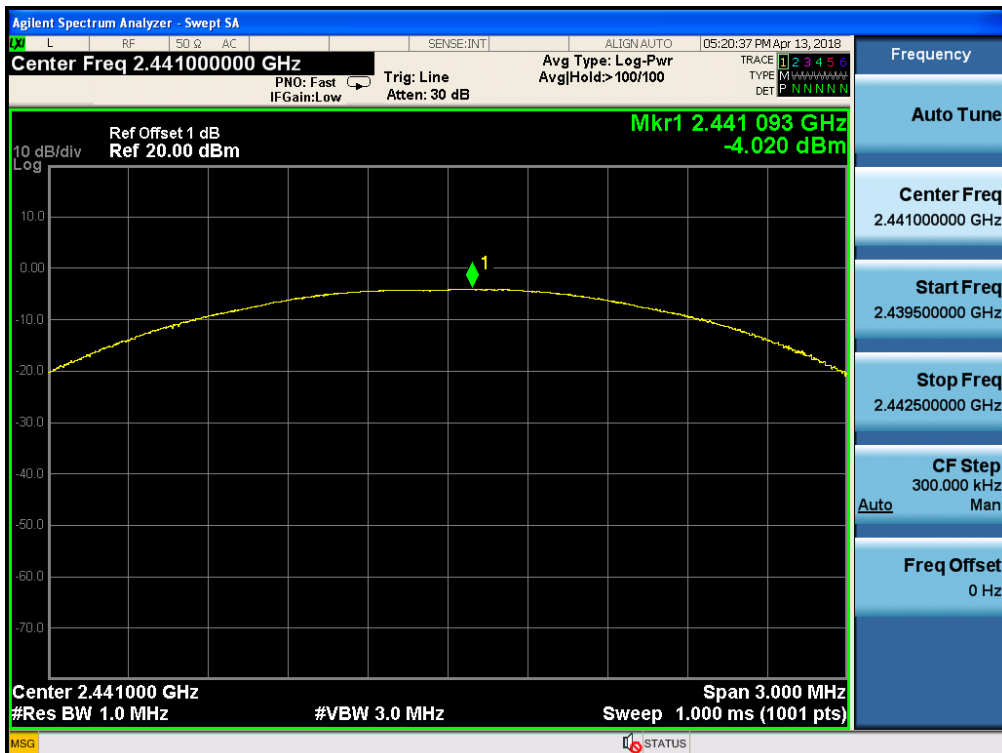


Middle channel

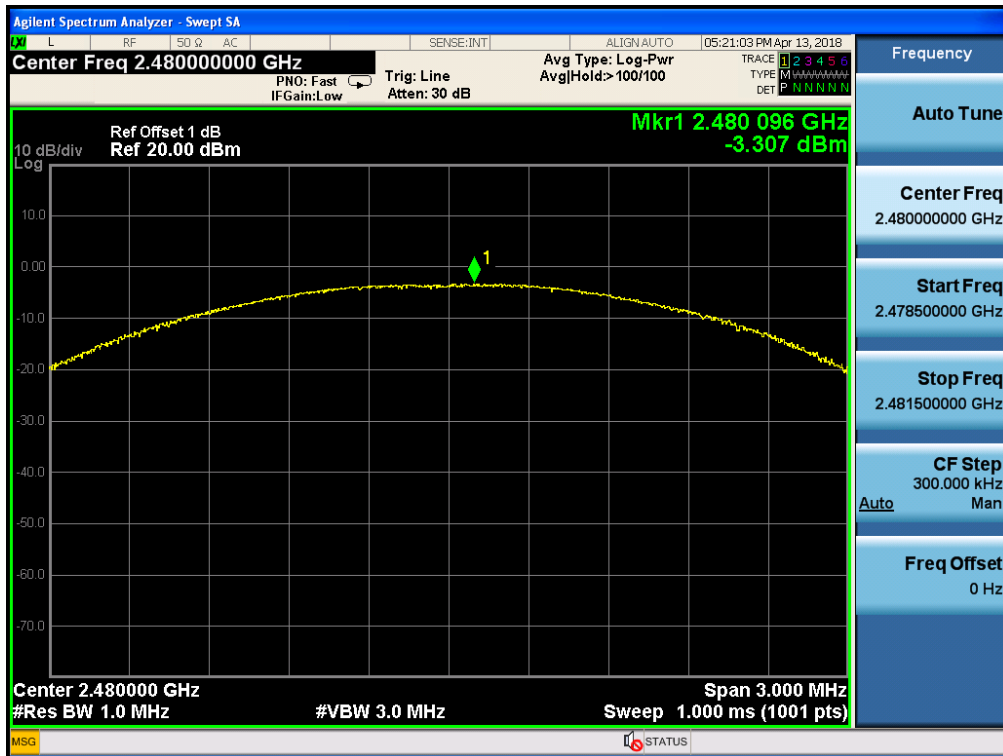

Highest channel

4.4 20dB Emission Bandwidth

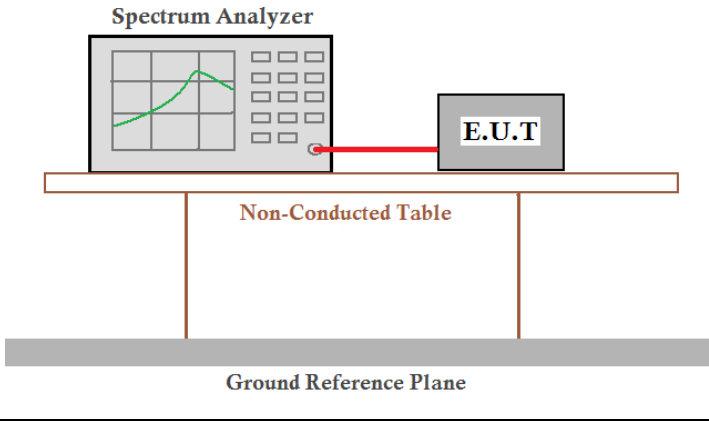
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.072	Pass
	Middle	1.073	
	Highest	1.068	
Pi/4QPSK	Lowest	1.358	Pass
	Middle	1.353	
	Highest	1.365	

Test plot as follows:

Test mode: GFSK mode

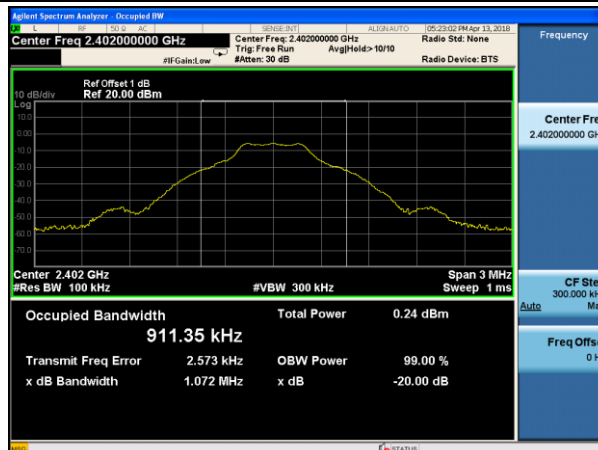

Lowest channel

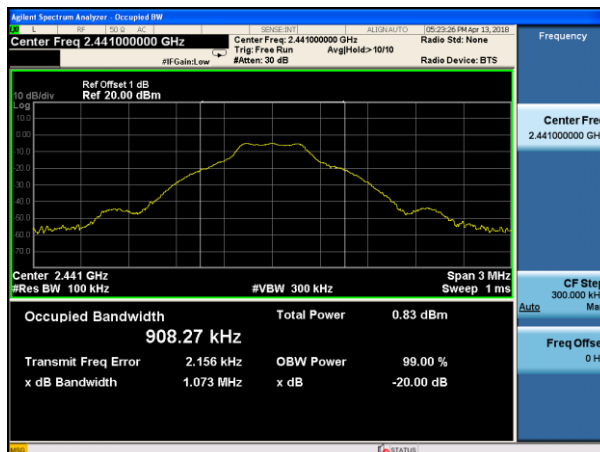


Middle channel




Highest channel


Test mode: Pi/4QPSK mode

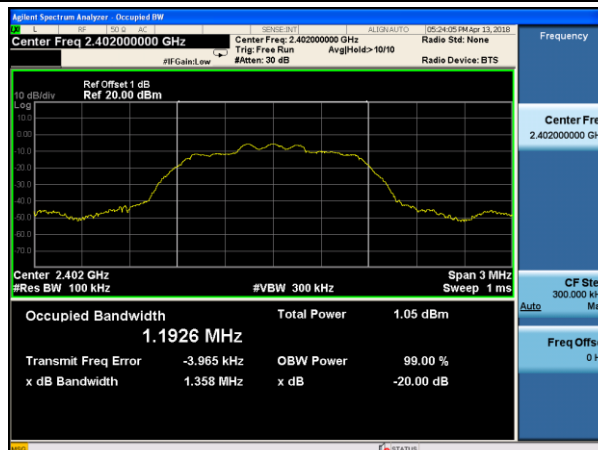

Lowest channel

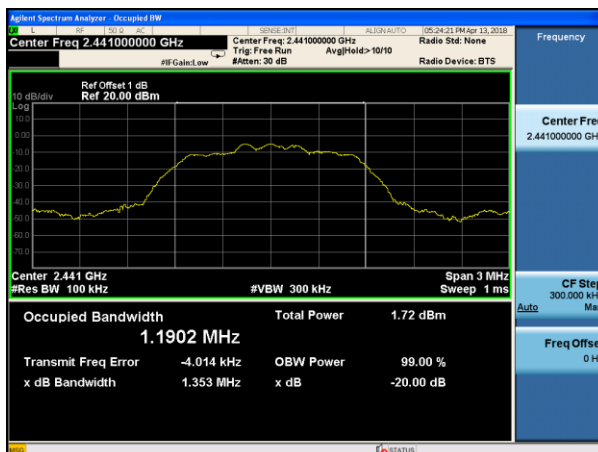


Middle channel

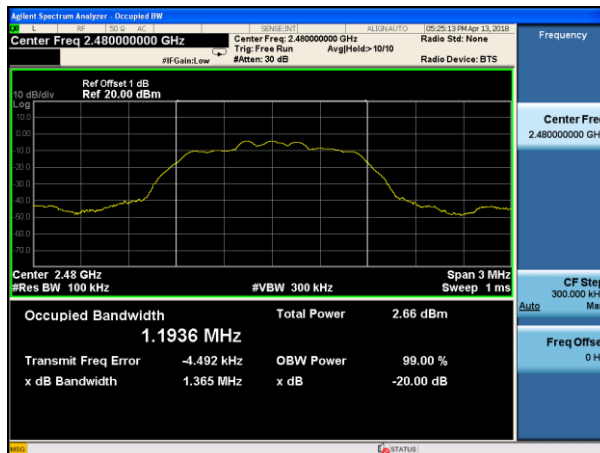

Highest channel

4.5 Carrier Frequencies Separation

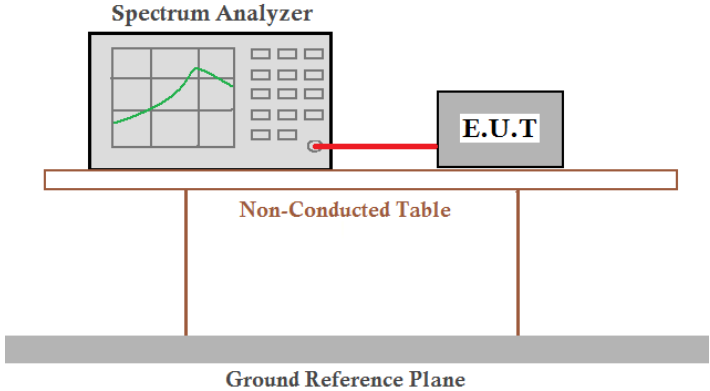Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=20KHz, VBW=62KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1000	715	Pass
	Middle	1000	715	Pass
	Highest	1000	715	Pass
Pi/4QPSK	Lowest	1000	910	Pass
	Middle	1000	910	Pass
	Highest	1000	910	Pass

Note: According to section 7.4


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1073.00	715
Pi/4QPSK	1365.00	910

Test plot as follows:


Modulation mode: **GFSK**

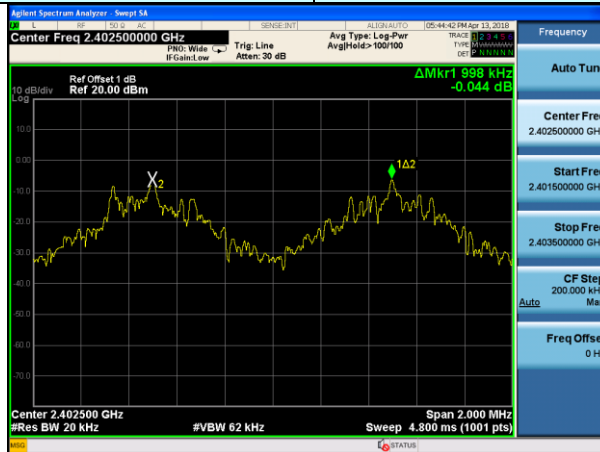

Lowest channel

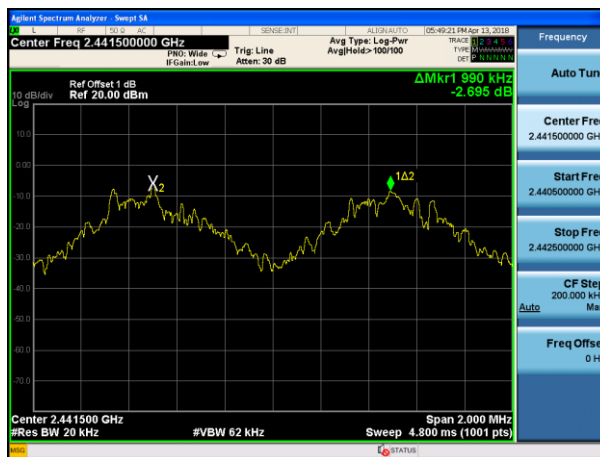


Middle channel

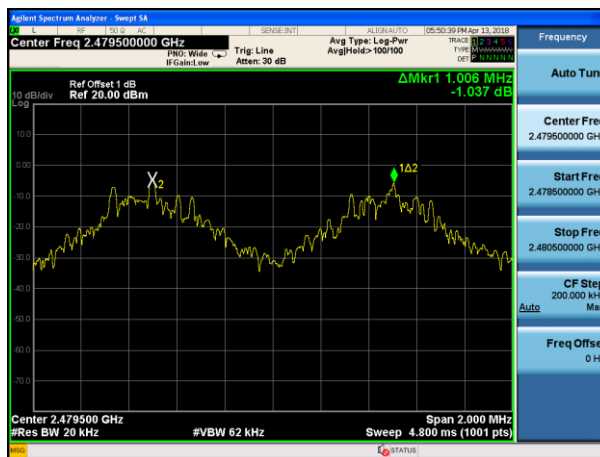


Highest channel


Test mode: Pi/4QPSK mode

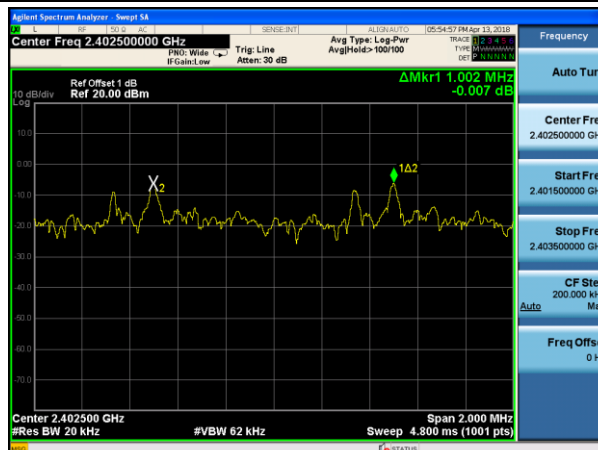

Lowest channel

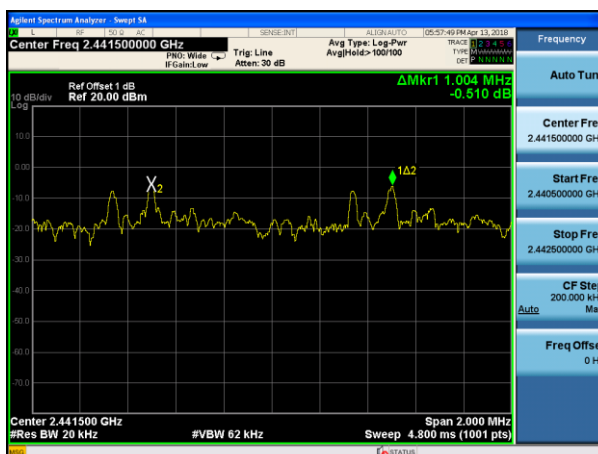


Middle channel

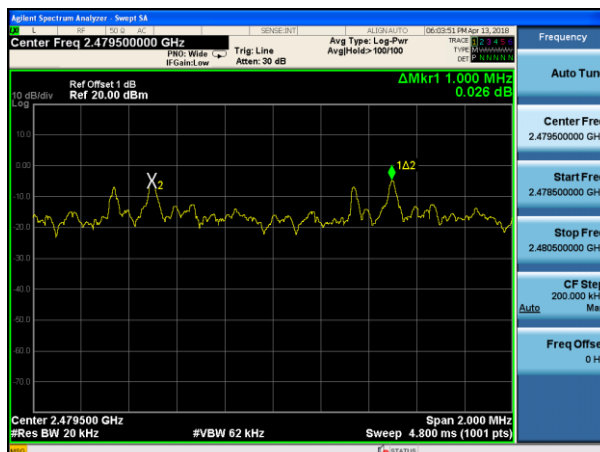

Highest channel


4.6 Hopping Channel Number

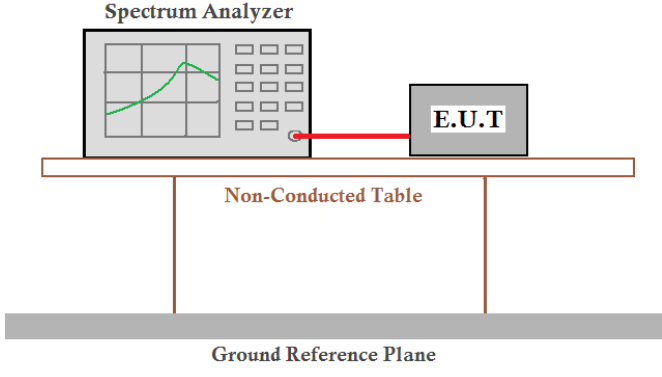Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass


GFSK:

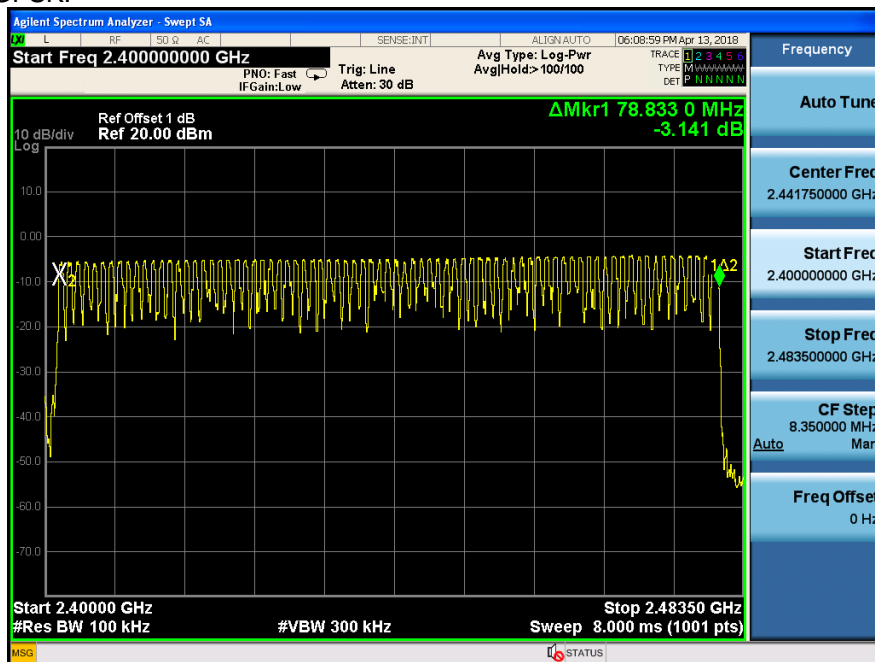

Pi/4QPSK:

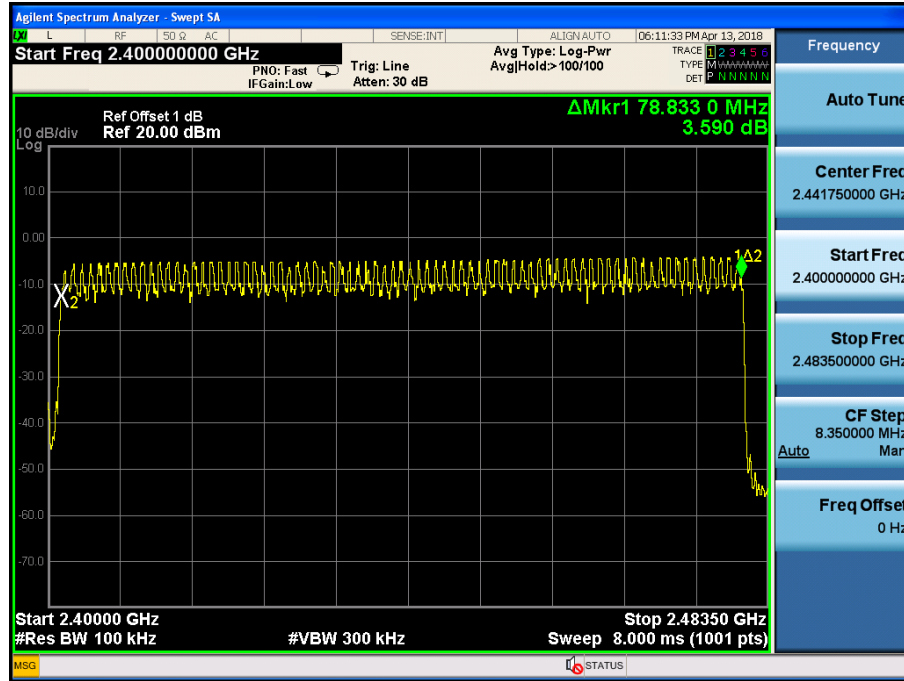

4.7 Dwell Time

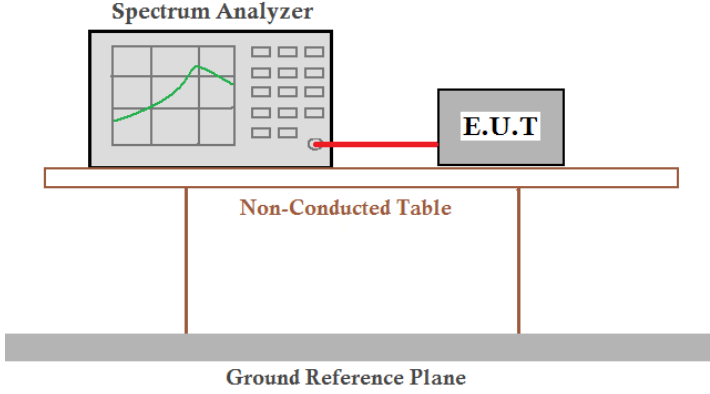Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram shows a Spectrum Analyzer and an E.U.T. connected by a red cable. They are positioned on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	2441	DH1	0.405	129.60	400	PASS
		DH3	1.650	264.00		
		DH5	2.910	310.40		
π/4-DQPSK	2441	DH1	0.410	131.20	400	PASS
		DH3	1.655	264.80		
		DH5	2.905	309.87		

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz/2441MHz/2480MHz as blow


DH1/2-DH1/3-DH1 time slot= Pulse time (ms)*(1600/ (2*79))*31.6=113.92ms

DH3/2-DH3/3-DH3 time slot= Pulse time (ms)*(1600/ (4*79))*31.6=257.44ms


DH5/2-DH5/3-DH5 time slot= Pulse time (ms)*(1600/ (6*79))*31.6=305.28ms

Test plot as follows:


Test channel:	2402MHz/2441MHz/2480MHz
---------------	-------------------------

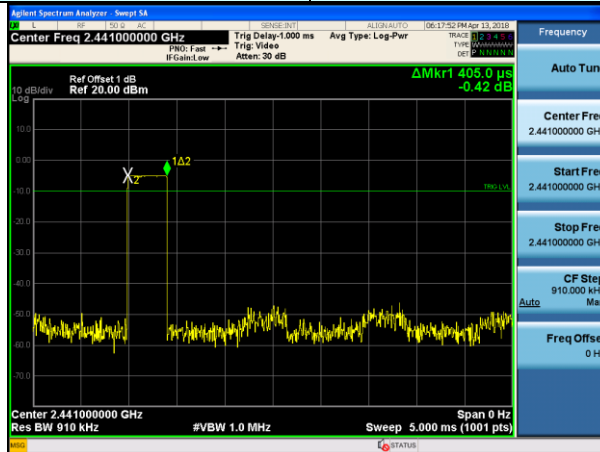

DH1/2-DH1/3-DH1

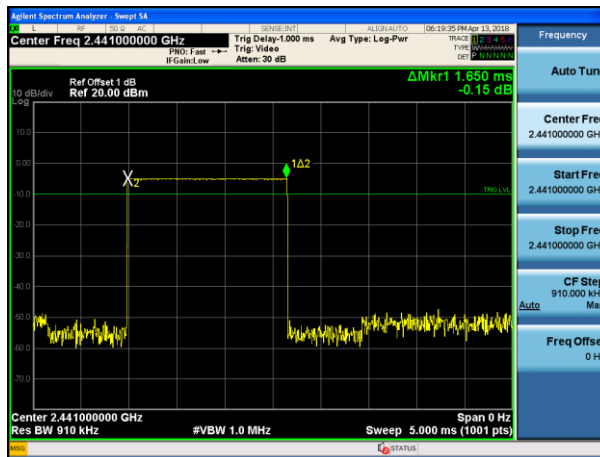


DH3/2-DH3/3-DH3

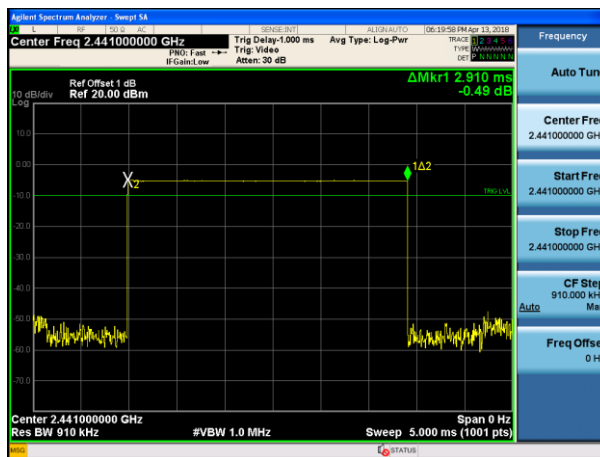


DH5/2-DH5/3-DH5


Test channel: 2402MHz/2441MHz/2480MHz

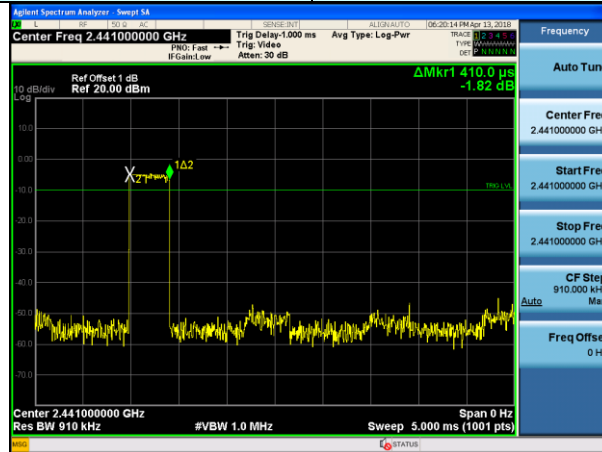

DH1/2-DH1/3-DH1


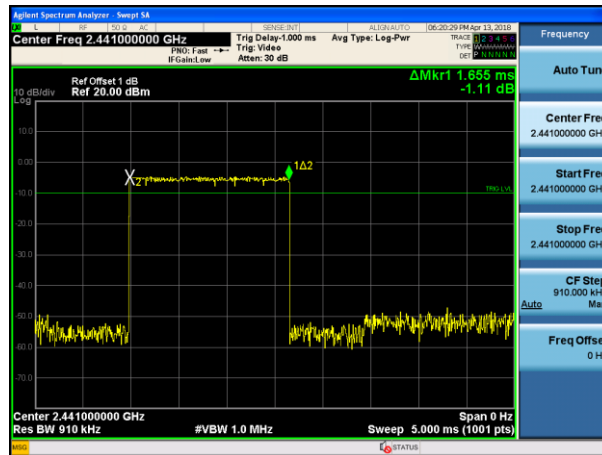


DH3/2-DH3/3-DH3

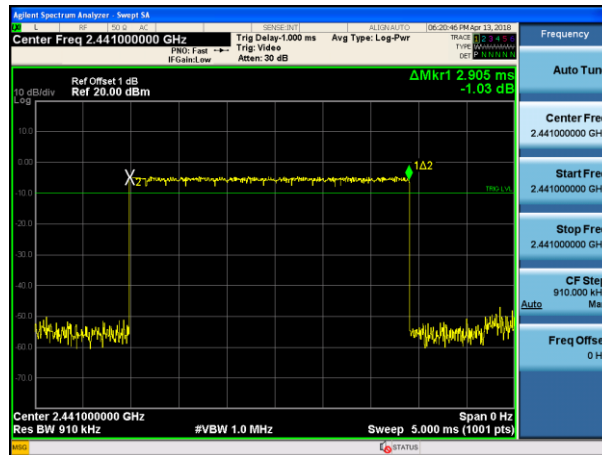


DH5/2-DH5/3-DH5

4.8 Pseudorandom Frequency Hopping Sequence

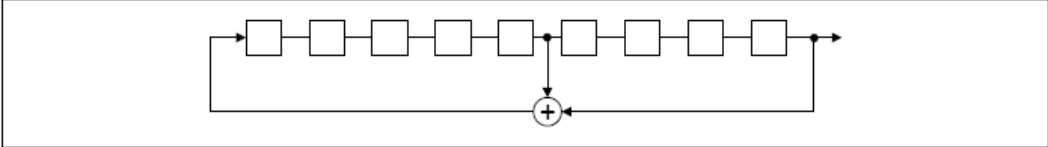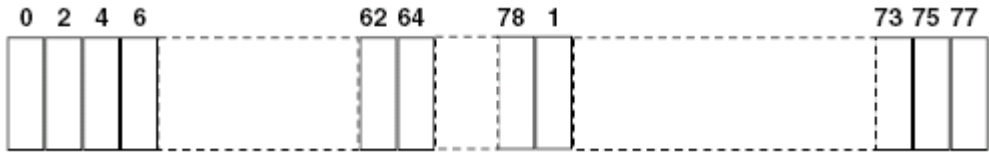Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p>	
	
<p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>	

4.9 Band Edge


4.9.1 Conducted Emission Method

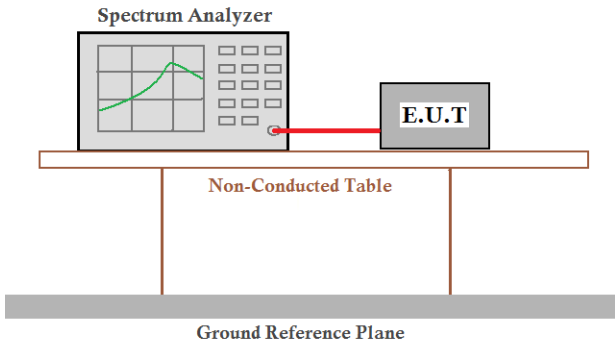Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

GFSK Mode:

Test channel: Lowest channel

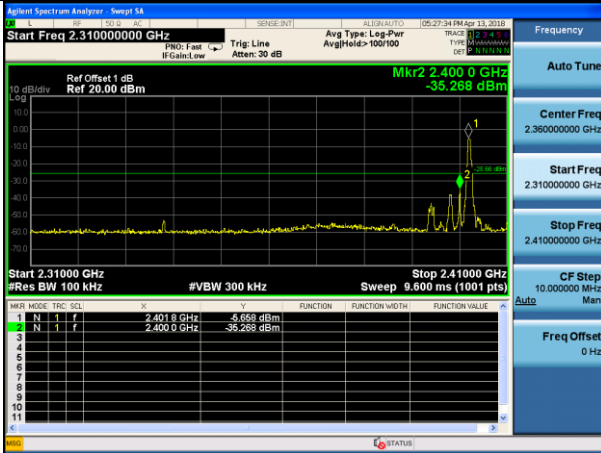


No-hopping mode

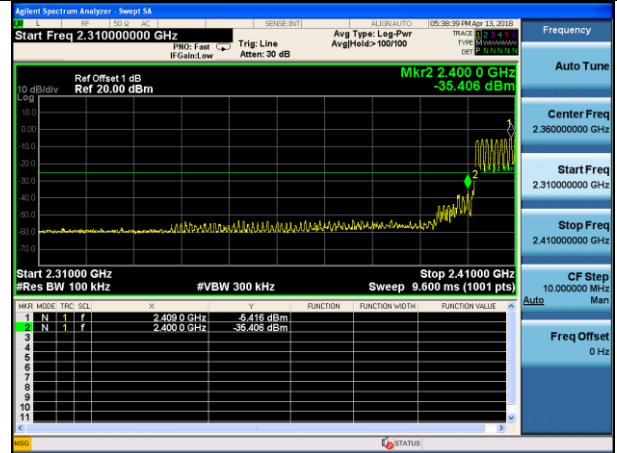


Hopping mode

Test channel: Highest channel

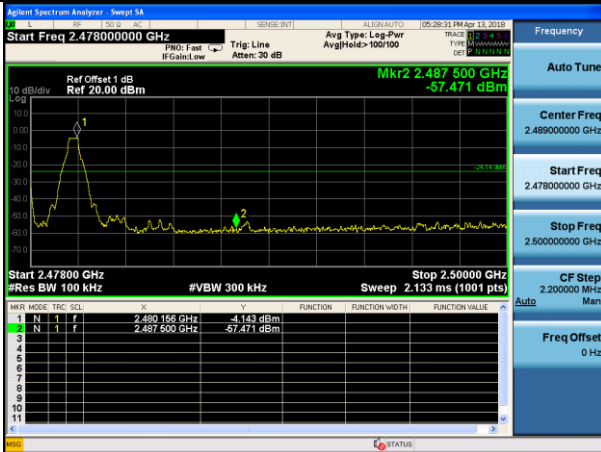


No-hopping mode

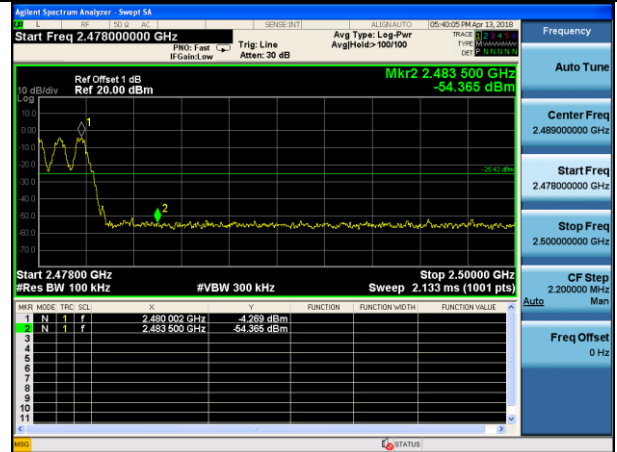


Hopping mode

Pi/4QPSK Mode:

Test channel: Lowest channel

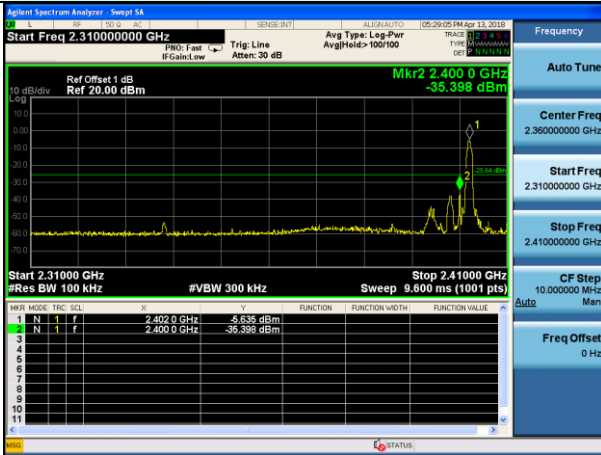


No-hopping mode

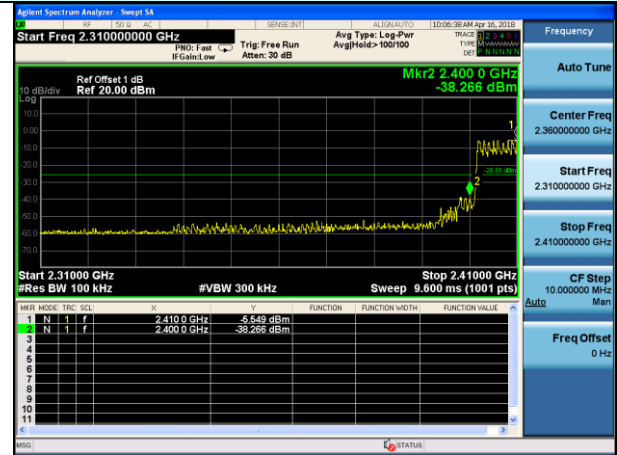


Hopping mode

Test channel: Highest channel

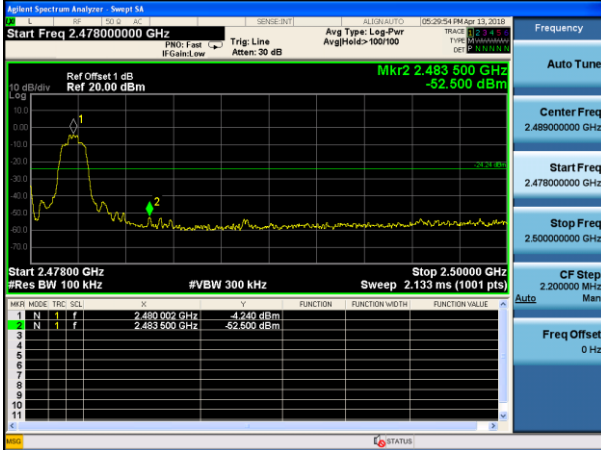


No-hopping mode

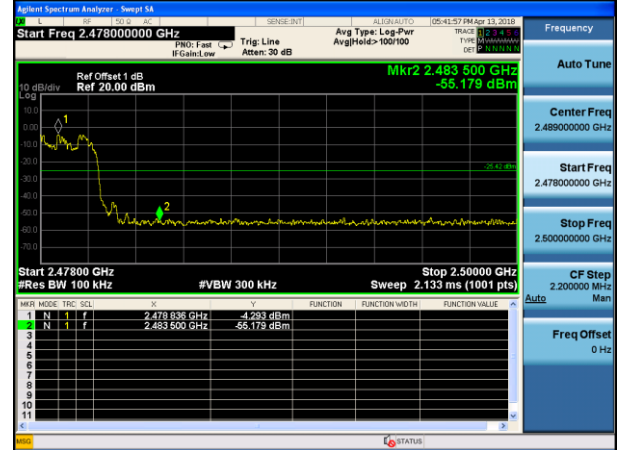

Hopping mode

4.9.2 Radiated Emission Method

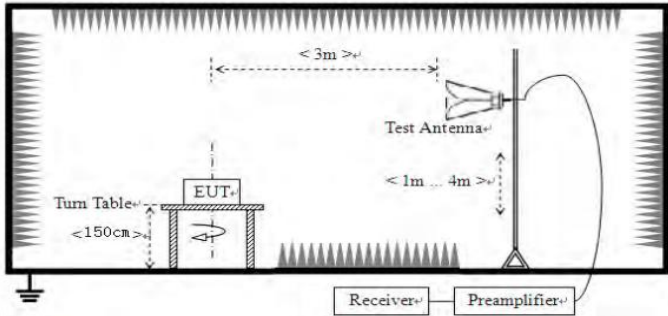Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
Test setup:			74.00	Peak Value	
					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the GFSK modulation which it is worse case.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.84	27.59	5.38	30.18	48.63	74	-25.37	Horizontal
2400.00	50.91	27.58	5.39	30.18	53.70	74	-20.30	Horizontal
2390.00	46.80	27.59	5.38	30.18	49.59	74	-24.41	Vertical
2400.00	50.10	27.58	5.39	30.18	52.89	74	-21.11	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.94	27.59	5.38	30.18	38.73	54	-15.27	Horizontal
2400.00	37.42	27.58	5.39	30.18	40.21	54	-13.79	Horizontal
2390.00	36.13	27.59	5.38	30.18	38.92	54	-15.08	Vertical
2400.00	38.14	27.58	5.39	30.18	40.93	54	-13.07	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.14	27.53	5.47	29.93	51.21	74	-22.79	Horizontal
2500.00	46.84	27.55	5.49	29.93	49.95	74	-24.05	Horizontal
2483.50	49.38	27.53	5.47	29.93	52.45	74	-21.55	Vertical
2500.00	47.77	27.55	5.49	29.93	50.88	74	-23.12	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.32	27.53	5.47	29.93	41.39	54	-12.61	Horizontal
2500.00	36.02	27.55	5.49	29.93	39.13	54	-14.87	Horizontal
2483.50	39.94	27.53	5.47	29.93	43.01	54	-10.99	Vertical
2500.00	36.34	27.55	5.49	29.93	39.45	54	-14.55	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

4.10 Spurious Emission


4.10.1 Conducted Emission Method

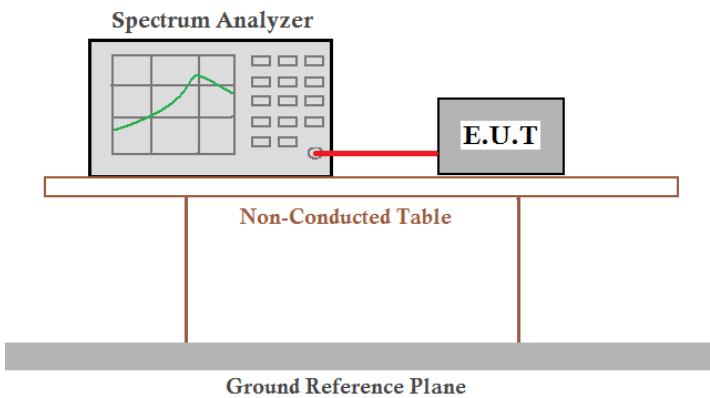Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the GFSK modulation which it is worse case.

Test channel: Lowest channel

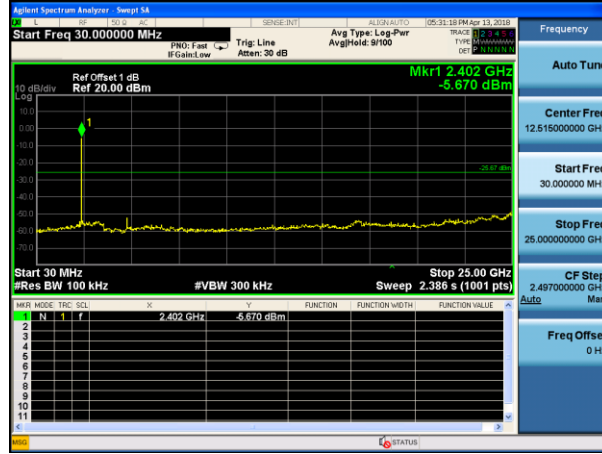


30MHz~25GHz

Test channel: Middle channel

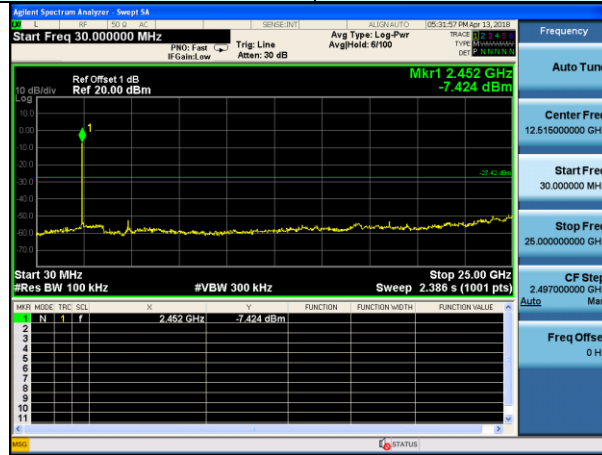

30MHz~25GHz


Test channel: Highest channel

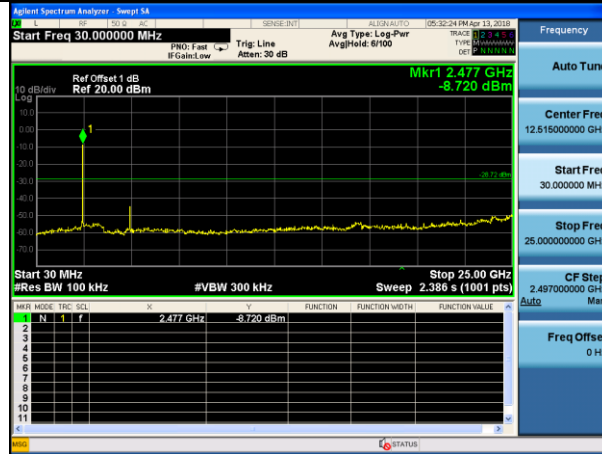

30MHz~25GHz

4.10.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	0.009-0.490 MHz	2400/F(KHz)		300	
	0.490-1.705 MHz	24000/F(KHz)		30	
	1.705-30 MHz	30		30	
	30-88MHz	100		Quasi-peak Value	
	88-216MHz	150		Quasi-peak Value	
	216-960MHz	200		Quasi-peak Value	
	960-1GHz	500		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	
Test setup:	Below 1GHz				
Above 1GHz					

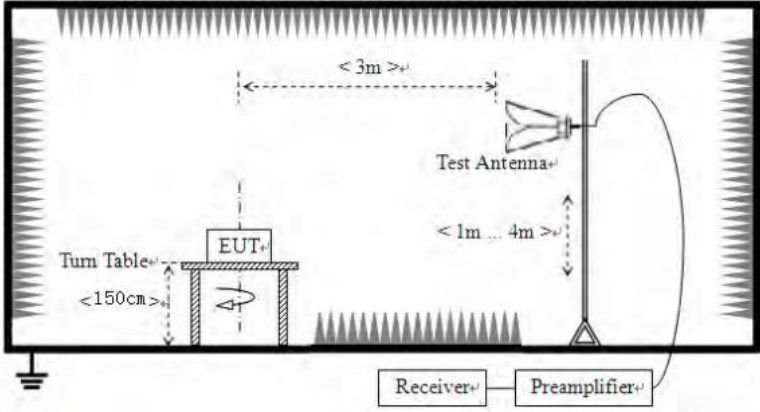	
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

Remark:


1. During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the GFSK modulation which it is worse case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
3. The test data below 30MHz is too lower than the limit, so not show in this report.
4. This Report only show the test plots of the worst case.

Measurement data:

Test result for BT4.2 (Channel 2480MHz), AC 120V/ 60Hz

Vertical:

Radiated Emission Measurement

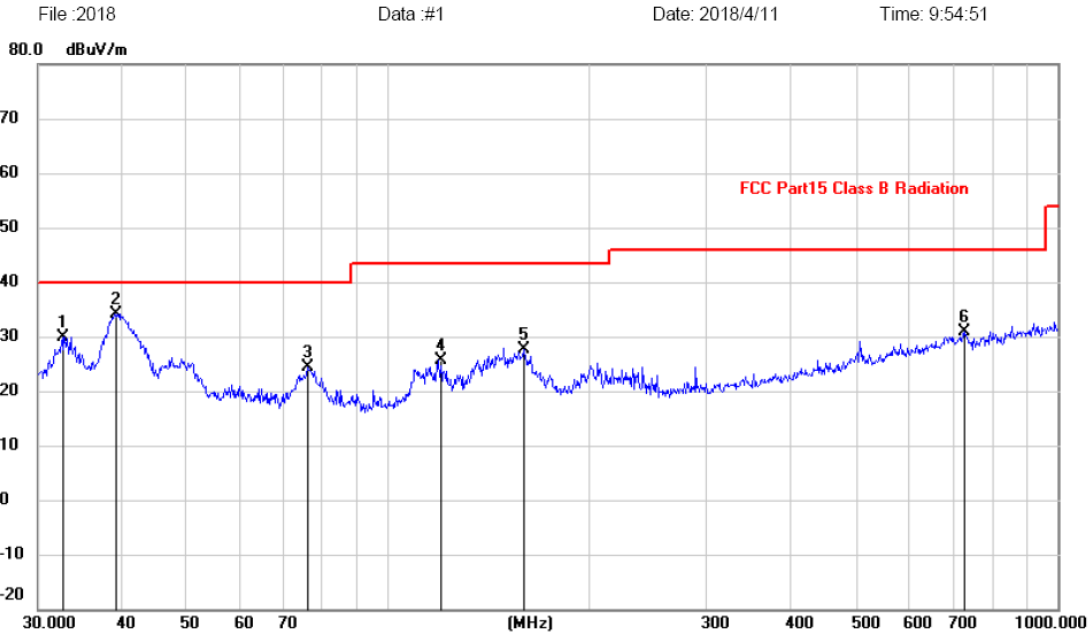

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		32.6340	16.56	13.42	29.98	40.00	-10.02			peak
2	*	39.1616	19.96	14.21	34.17	40.00	-5.83			peak
3		75.9773	14.25	10.15	24.40	40.00	-15.60			peak
4		119.4361	13.16	12.54	25.70	43.50	-17.80			peak
5		159.2251	13.06	14.58	27.64	43.50	-15.86			peak
6		724.2611	9.58	21.24	30.82	46.00	-15.18			peak


Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Test result for BT4.2 (Channel 2480MHz), AC 120V/ 60Hz

Horizontal:

Radiated Emission Measurement

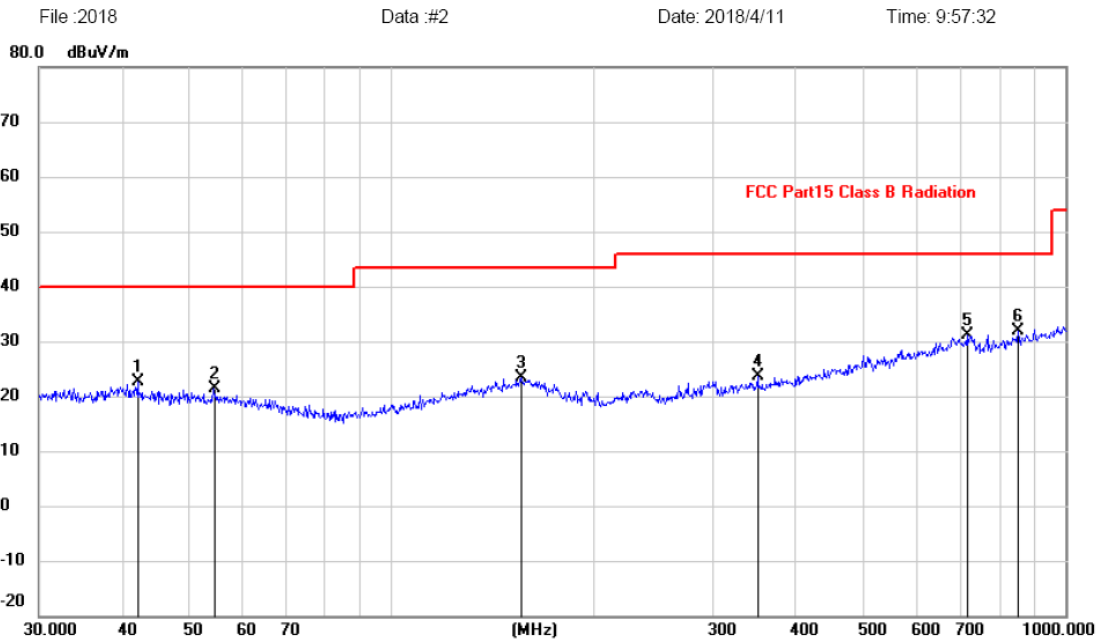

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		42.0066	8.60	14.12	22.72	40.00	-17.28	peak			
2		54.6429	8.07	13.31	21.38	40.00	-18.62	peak			
3		155.9101	8.78	14.57	23.35	43.50	-20.15	peak			
4		350.4768	9.27	14.41	23.68	46.00	-22.32	peak			
5		714.1734	10.29	20.84	31.13	46.00	-14.87	peak			
6	*	851.0353	9.12	22.65	31.77	46.00	-14.23	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

■ Above 1GHz

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	37.87	31.78	8.60	32.09	46.16	74.00	-27.84	Vertical
7206.00	32.59	36.15	11.65	32.00	48.39	74.00	-25.61	Vertical
9608.00	31.55	37.95	14.14	31.62	52.02	74.00	-21.98	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	42.79	31.78	8.60	32.09	51.08	74.00	-22.92	Horizontal
7206.00	33.78	36.15	11.65	32.00	49.58	74.00	-24.42	Horizontal
9608.00	31.08	37.95	14.14	31.62	51.55	74.00	-22.45	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	26.46	31.78	8.60	32.09	34.75	54.00	-19.25	Vertical
7206.00	21.27	36.15	11.65	32.00	37.07	54.00	-16.93	Vertical
9608.00	20.12	37.95	14.14	31.62	40.59	54.00	-13.41	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	30.84	31.78	8.60	32.09	39.13	54.00	-14.87	Horizontal
7206.00	22.75	36.15	11.65	32.00	38.55	54.00	-15.45	Horizontal
9608.00	19.36	37.95	14.14	31.62	39.83	54.00	-14.17	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	38.39	31.85	8.67	32.12	46.79	74.00	-27.21	Vertical
7323.00	32.58	36.37	11.72	31.89	48.78	74.00	-25.22	Vertical
9764.00	31.73	38.35	14.25	31.62	52.71	74.00	-21.29	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	42.38	31.85	8.67	32.12	50.78	74.00	-23.22	Horizontal
7323.00	34.17	36.37	11.72	31.89	50.37	74.00	-23.63	Horizontal
9764.00	31.56	38.35	14.25	31.62	52.54	74.00	-21.46	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	26.42	31.85	8.67	32.12	34.82	54.00	-19.18	Vertical
7323.00	21.05	36.37	11.72	31.89	37.25	54.00	-16.75	Vertical
9764.00	20.13	38.35	14.25	31.62	41.11	54.00	-12.89	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	30.93	31.85	8.67	32.12	39.33	54.00	-14.67	Horizontal
7323.00	22.73	36.37	11.72	31.89	38.93	54.00	-15.07	Horizontal
9764.00	19.59	38.35	14.25	31.62	40.57	54.00	-13.43	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	38.32	31.93	8.73	32.16	46.82	74.00	-27.18	Vertical
7440.00	32.44	36.59	11.79	31.78	49.04	74.00	-24.96	Vertical
9920.00	32.23	38.81	14.38	31.88	53.54	74.00	-20.46	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	42.24	31.93	8.73	32.16	50.74	74.00	-23.26	Horizontal
7440.00	33.94	36.59	11.79	31.78	50.54	74.00	-23.46	Horizontal
9920.00	31.00	38.81	14.38	31.88	52.31	74.00	-21.69	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	26.67	31.93	8.73	32.16	35.17	54.00	-18.83	Vertical
7440.00	20.78	36.59	11.79	31.78	37.38	54.00	-16.62	Vertical
9920.00	19.89	38.81	14.38	31.88	41.20	54.00	-12.80	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	31.28	31.93	8.73	32.16	39.78	54.00	-14.22	Horizontal
7440.00	22.93	36.59	11.79	31.78	39.53	54.00	-14.47	Horizontal
9920.00	19.77	38.81	14.38	31.88	41.08	54.00	-12.92	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“*”, means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

5 Test Setup Photo


Radiated Emission

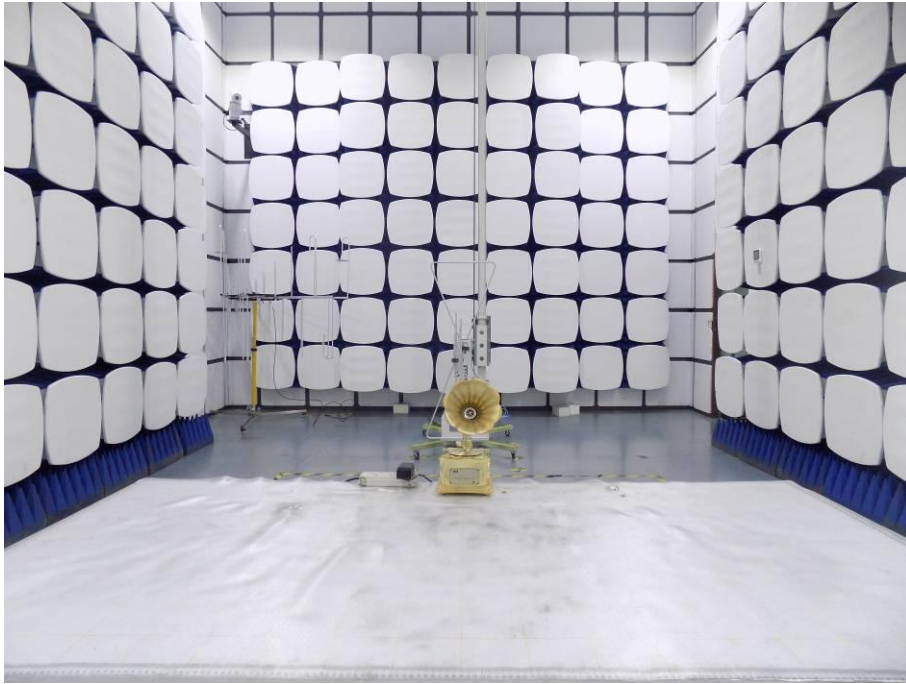


Conducted Emission






6 EUT Constructional Details


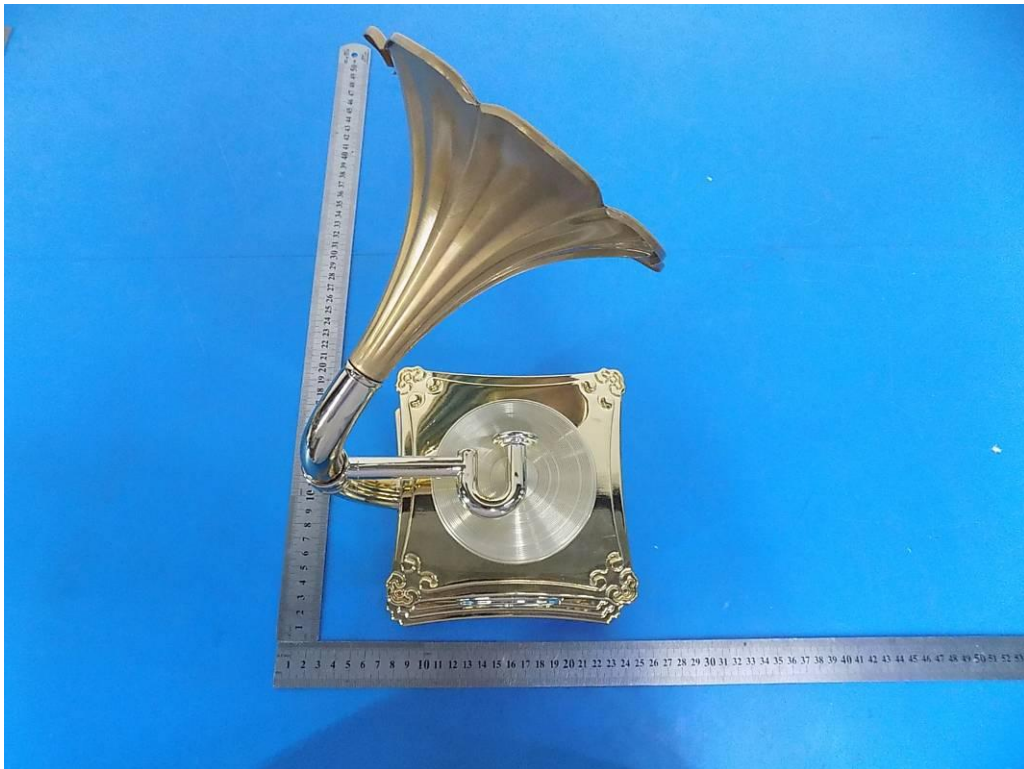


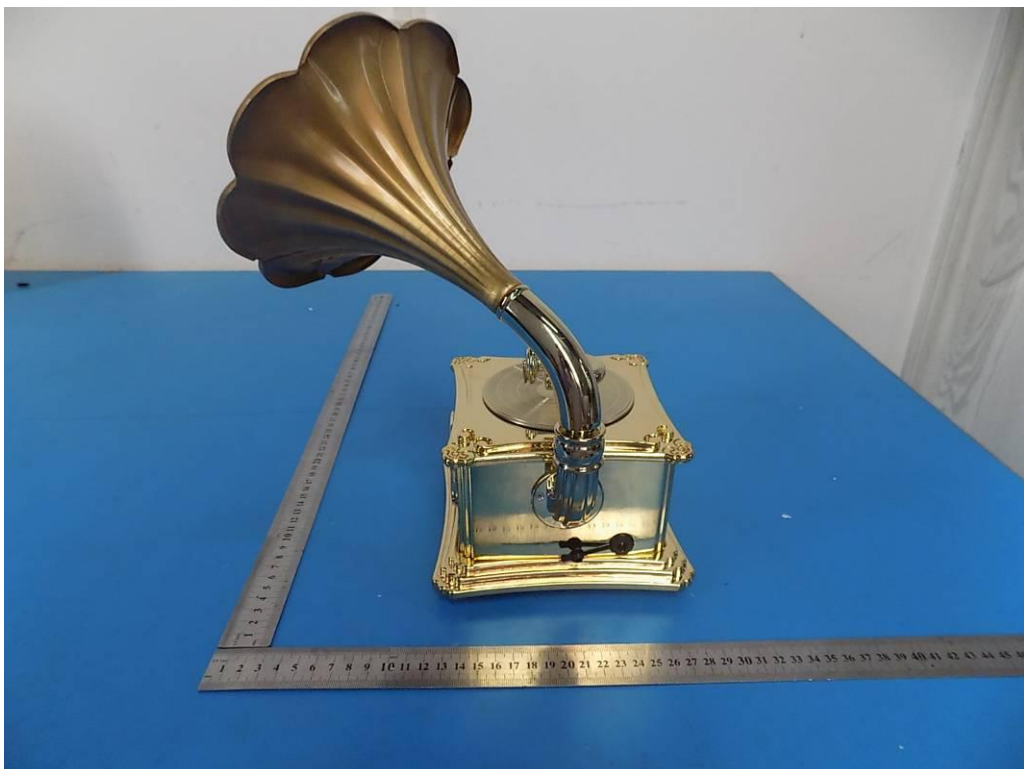




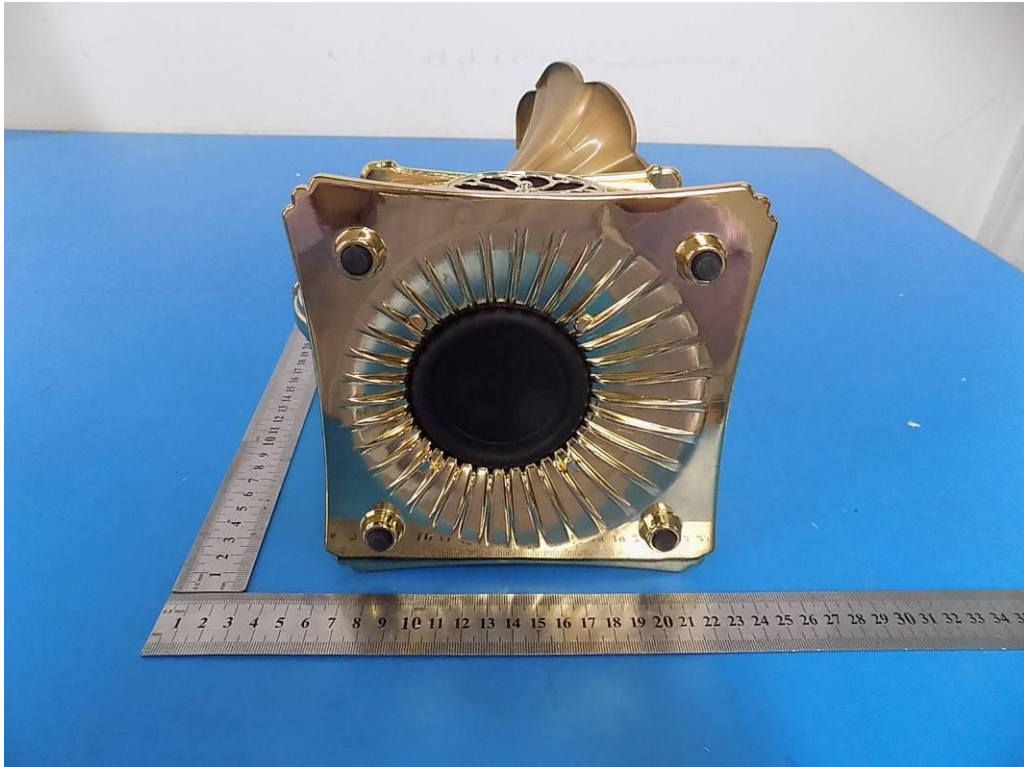

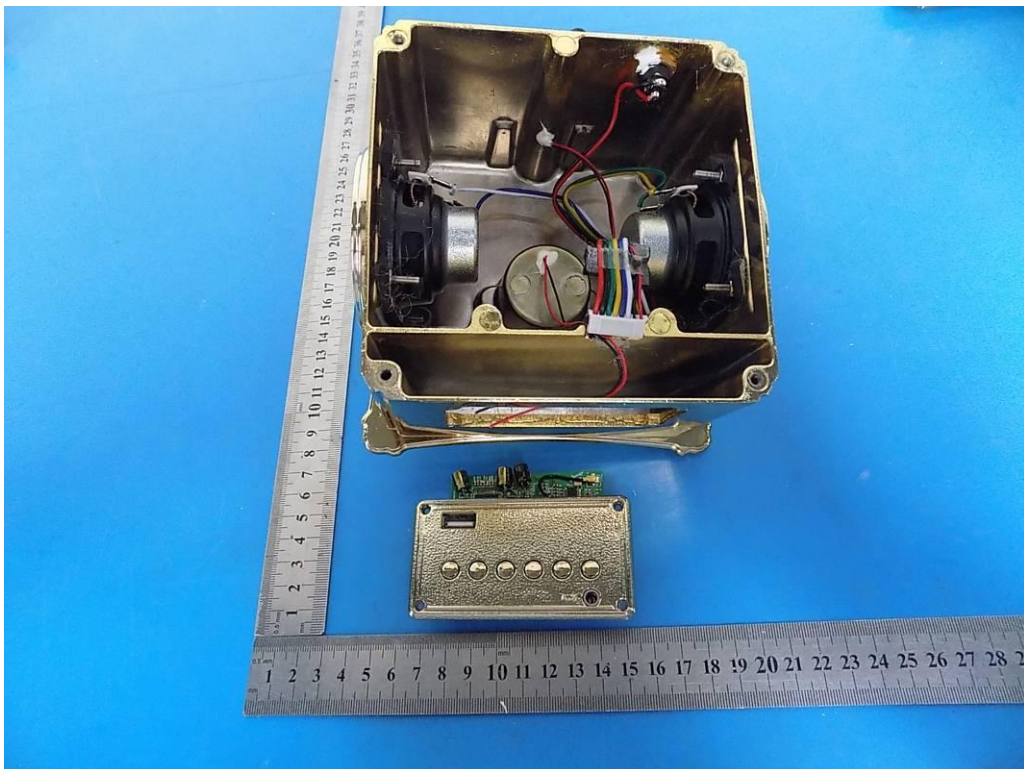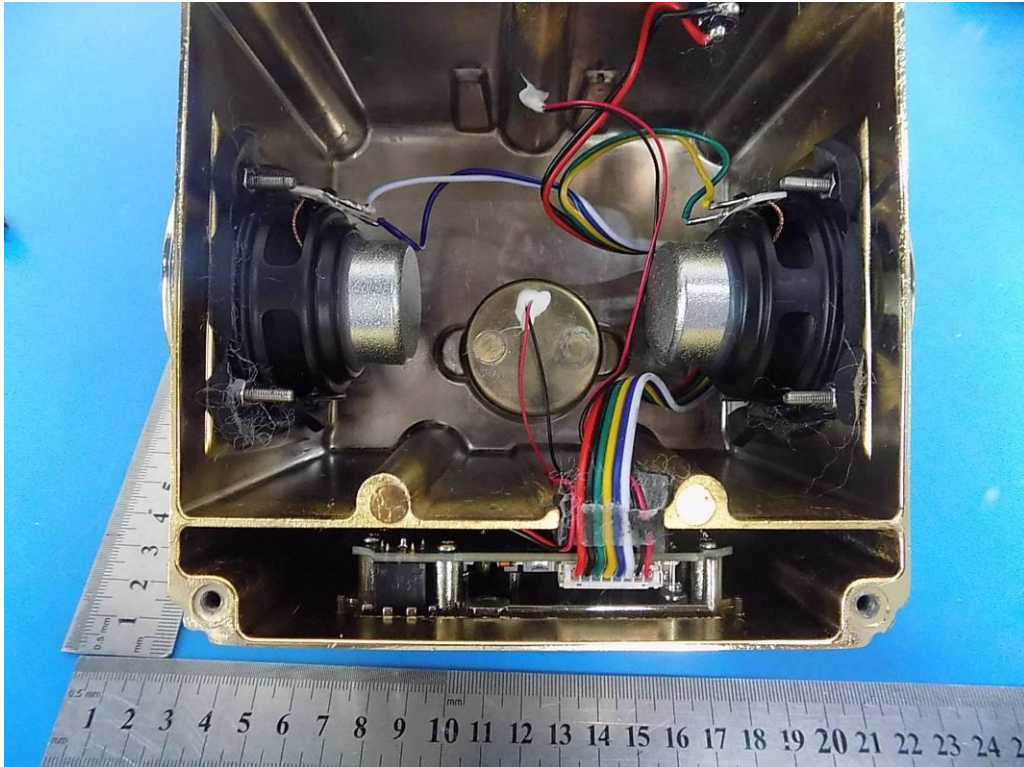

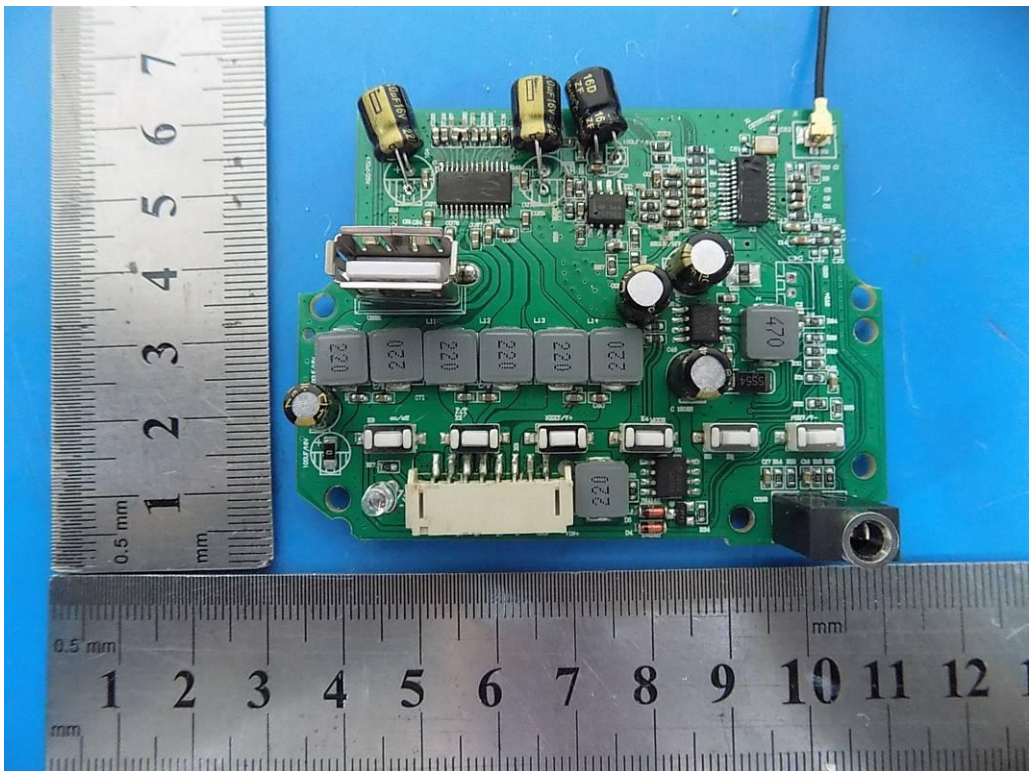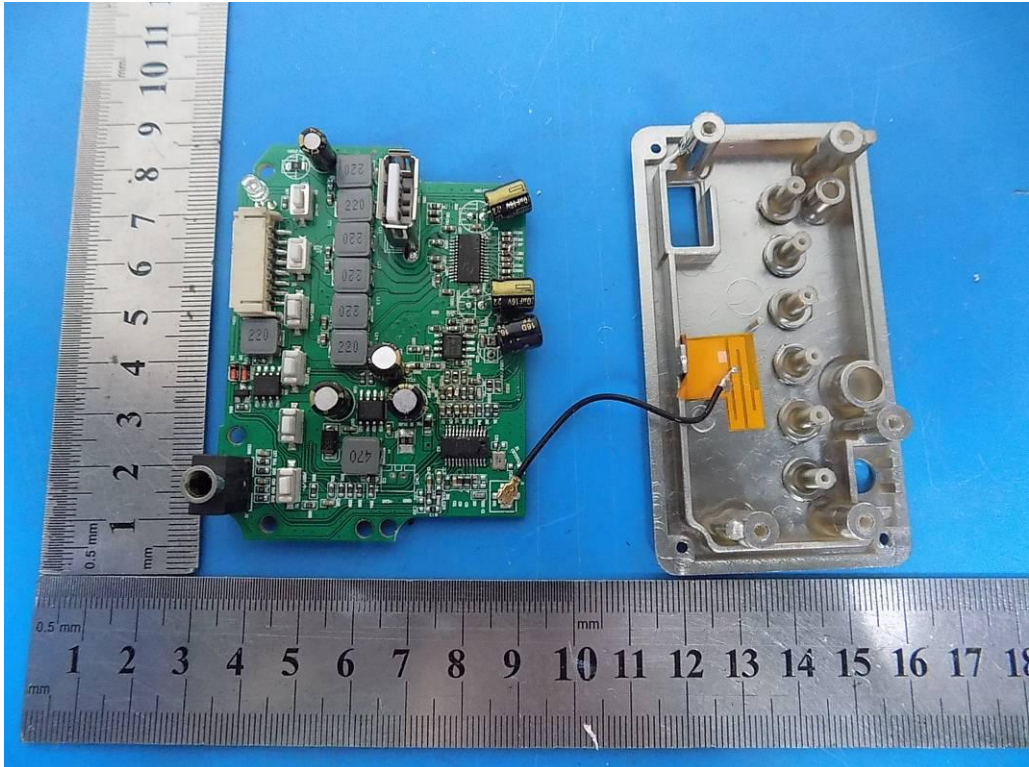

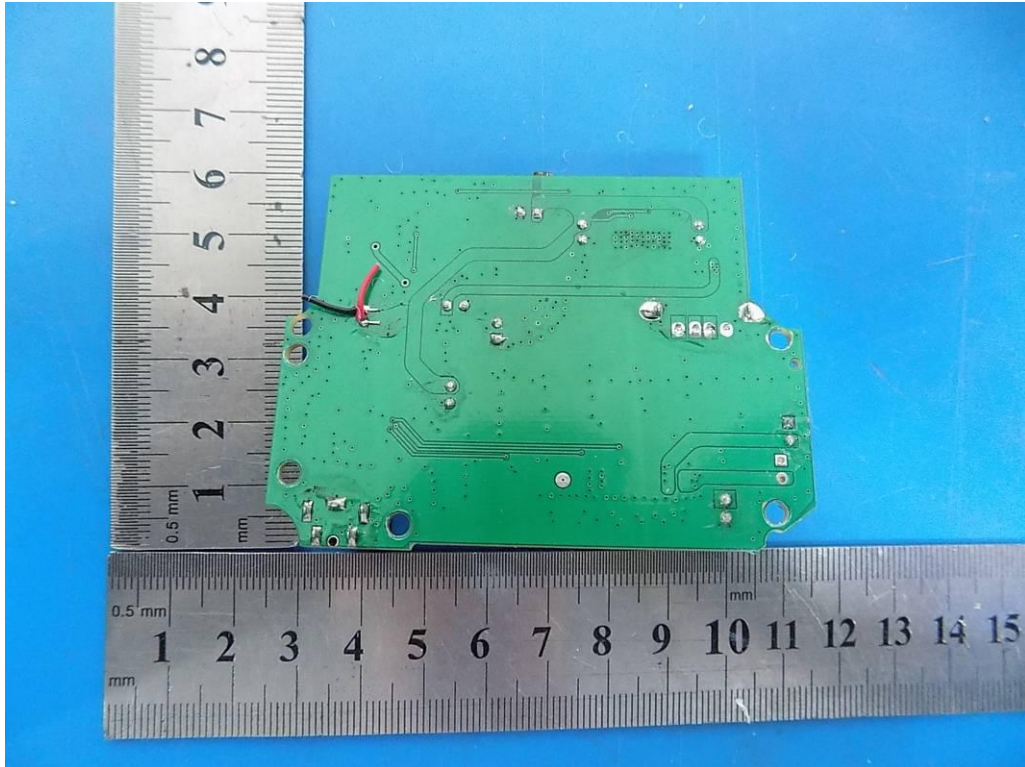

-----End-----