





FCC RADIO TEST REPORT

Applicant : PLUME LABS
Address : 11 bis rue Bachaumont 75002 Paris FRANCE
Equipment : Flow
Model No. : Flow
Trade Name :  plume labs
FCC ID. : 2APMO-FLOW

I HEREBY CERTIFY THAT :


The sample was received on May. 11, 2018 and the testing was carried out on Jun. 04, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Mark Liao / Assistant Manager

Tested by:



Spree Yei / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test.....	6
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software.....	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Antenna Requirements.....	10
4.1 Standard Applicable	10
4.2 Antenna Construction and Directional Gain.....	10
5. Test of AC Power Line Conducted Emission	11
5.1 Test Limit	11
5.2 Test Procedures	11
5.3 Typical Test Setup	12
5.4 Test Result and Data	13
5.5 Test Photographs	17
6. Test of Radiated Spurious Emission.....	19
6.1 Test Limit	19
6.2 Test Procedures	19
6.3 Typical Test Setup	20
6.4 Test Result and Data (9kHz ~ 30MHz).....	21
6.5 Test Result and Data (30MHz ~ 1GHz).....	21
6.6 Test Result and Data (1GHz ~ 25GHz).....	25
6.7 Restricted Bands of Operation	31
6.8 Test Photographs (30MHz ~ 1GHz).....	32
6.9 Test Photographs (1GHz ~ 25GHz).....	34
7. Test of Conducted Spurious Emission	35
7.1 Test Limit	35
7.2 Test Procedure	35
7.3 Test Setup Layout	35
7.4 Test Result and Data	35
8. 6dB Bandwidth Measurement Data	38
8.1 Test Limit	38
8.2 Test Procedures	38
8.3 Test Setup Layout	38
8.4 Test Result and Data	38
9. Maximum Peak and Average Output Power.....	40
9.1 Test Limit	40



9.2 Test Procedures 40

9.3 Test Setup Layout 40

9.4 Test Result and Data 40

10. Power Spectral Density 41

10.1 Test Limit 41

10.2 Test Procedures 41

10.3 Test Setup Layout 41

10.4 Test Result and Data 41

11. Radio Frequency Exposure 43

11.1 Applicable Standards 43

11.2 EUT Specification 43

11.3 Test Results 44

11.4 Calculation 44

11.5 Maximum Permissible Exposure 45



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.209 15.205	Radiated Spurious Emission	Pass
15.247(d)	Conducted Spurious Emission	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(b)	Maximum Peak Output Power	Pass
15.247(e)	Power Spectral Density	Pass

This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	2402-2480 MHz
Type of Modulation	BLE: GFSK for 1Mbps
Antenna Type	Chip Antenna
Antenna Gain	0.5dBi

2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	2480
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "nrgostudio_win-64_1.21.2" under WIN 8 was executed to transmit and receive data via Bluetooth.
- d. The following test mode was performed for the test:

Conducted Emissions from the AC mains power ports and Radiation Emissions (below 1GHz)	
Test Mode	Operating Description
1	GFSK, (1Mbps) for USB Mode
2	GFSK, (1Mbps) for Cradle Mode
Radiation Emissions (above 1GHz)	
Test Mode	Operating Description
1	GFSK, (1Mbps) for USB Mode
6dB Bandwidth, Maximum Peak Output Power, Power Spectral Density	
Test Mode	Operating Description
1	GFSK, (1Mbps) for USB Mode

2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	DELL	LatitudeE5450	Power Cable, Non-shielded, 1.8m



2.5 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-3428, R-4218 for Radiated emission test G-812, G-813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2oC
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2018/03/23	2019/03/23
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31589	2018/04/02	2019/04/01
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200207	2018/03/29	2019/03/28
Preamplifier	EM	EM330	060660	2018/03/08	2019/03/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2017/09/20	2018/09/19
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
MXG-B RF Vector Signal Generator	KEYSIGHT	N5182B	MY53051383	2018/04/02	2019/04/01
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2017/09/04	2018/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2017/09/04	2018/09/03
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
USB Average Power Sensor	Theda	4PS6A	TW5451013~16	2016/11/08	2018/11/07
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	Console	v0.01	N/A	N/A
Software	Keysight	ETSI Standard Test System	1.00.21	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice Monitor Utility	N/A	N/A	N/A



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Chip Antenna
Antenna Gain	0.5 dBi



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




5.3 Typical Test Setup

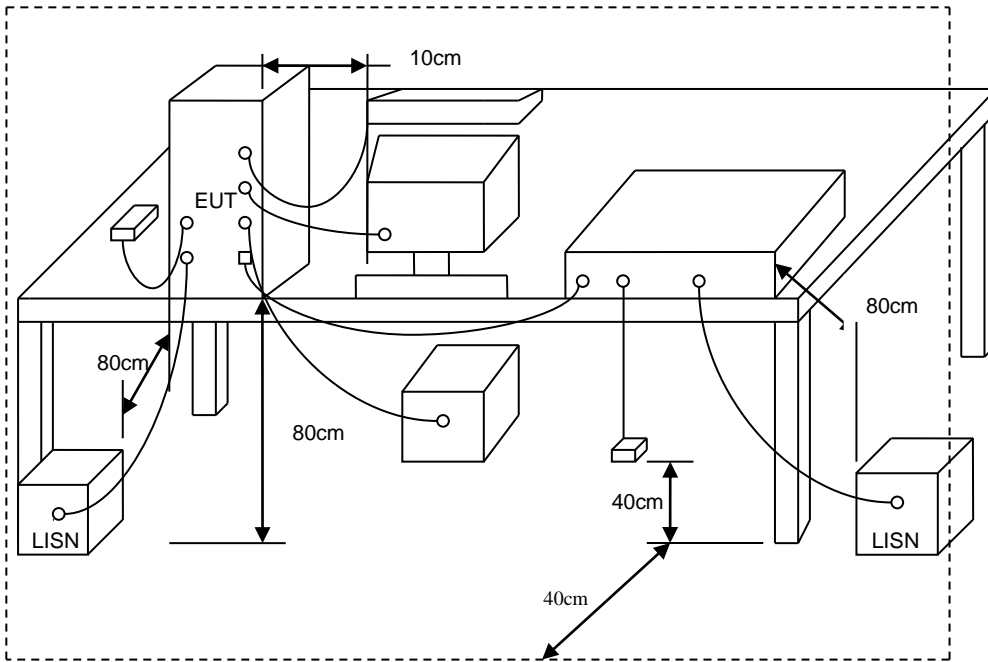



5.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Jun. 05, 2018	Humidity	: 40 %

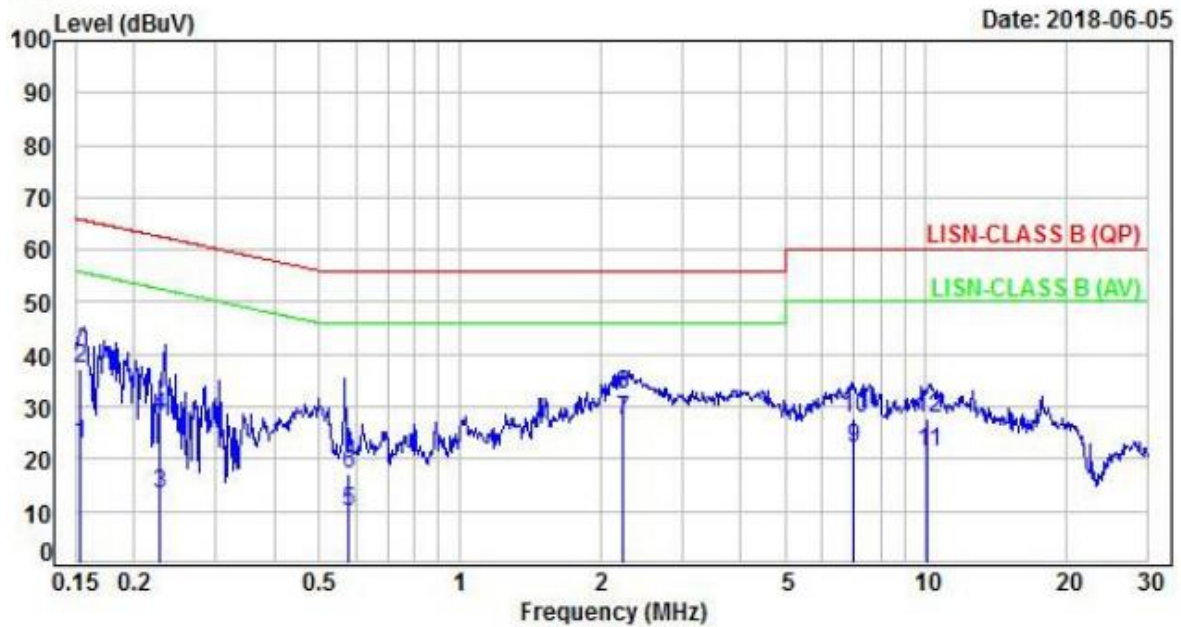


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.15	9.94	12.69	22.63	55.78	-33.15	Average	P
2	0.15	9.94	27.37	37.31	65.78	-28.47	QP	P
3	0.23	9.94	3.37	13.31	52.56	-39.25	Average	P
4	0.23	9.94	18.28	28.22	62.56	-34.34	QP	P
5	0.58	9.97	0.09	10.06	46.00	-35.94	Average	P
6	0.58	9.97	7.06	17.03	56.00	-38.97	QP	P
7	2.23	10.06	17.21	27.27	46.00	-18.73	Average	P
8	2.23	10.06	22.29	32.35	56.00	-23.65	QP	P
9	6.97	10.24	11.92	22.16	50.00	-27.84	Average	P
10	6.97	10.24	17.58	27.82	60.00	-32.18	QP	P
11	10.10	10.32	11.03	21.35	50.00	-28.65	Average	P
12	10.10	10.32	17.26	27.58	60.00	-32.42	QP	P

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor = (LISN, ISN or current probe) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1	Temperature	: 20 °C
Test date	: Jun. 05, 2018	Humidity	: 40 %

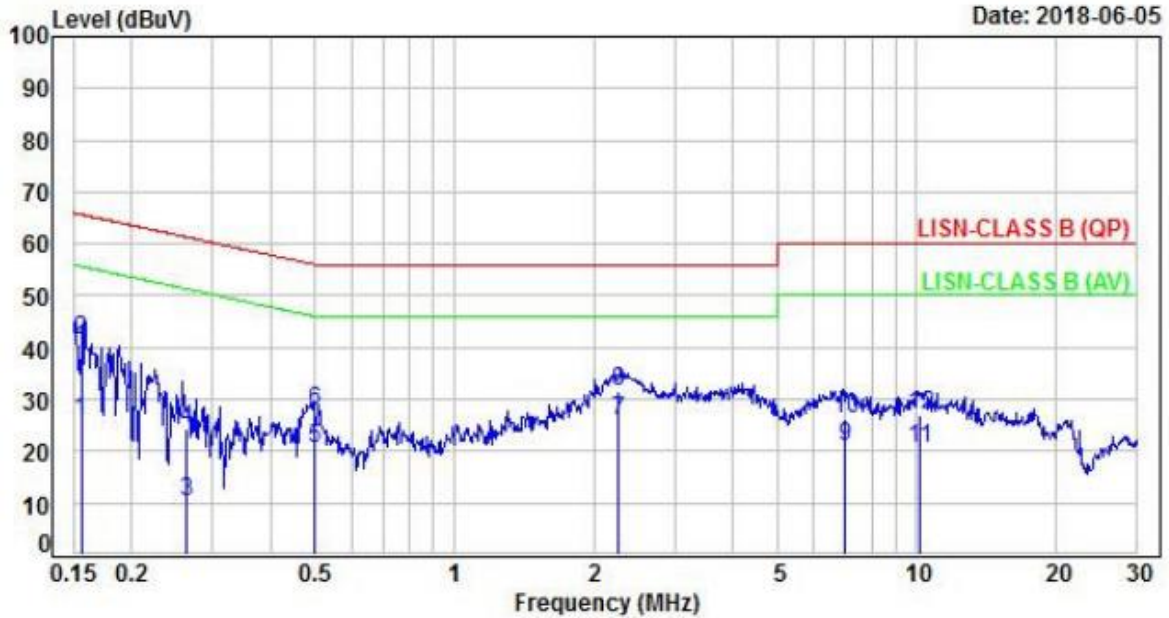


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.16	9.94	15.97	25.91	55.70	-29.79	Average	P
2	0.16	9.94	31.43	41.37	65.70	-24.33	QP	P
3	0.26	9.94	0.45	10.39	51.34	-40.95	Average	P
4	0.26	9.94	14.37	24.31	61.34	-37.03	QP	P
5	0.50	9.95	10.52	20.47	46.02	-25.55	Average	P
6	0.50	9.95	17.74	27.69	56.02	-28.33	QP	P
7	2.26	10.06	15.95	26.01	46.00	-19.99	Average	P
8	2.26	10.06	21.41	31.47	56.00	-24.53	QP	P
9	7.01	10.24	10.71	20.95	50.00	-29.05	Average	P
10	7.01	10.24	16.14	26.38	60.00	-33.62	QP	P
11	10.17	10.32	10.37	20.69	50.00	-29.31	Average	P
12	10.17	10.32	16.60	26.92	60.00	-33.08	QP	P

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor = (LISN, ISN or current probe) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 2	Temperature	: 20 °C
Test date	: Jun. 05, 2018	Humidity	: 40 %

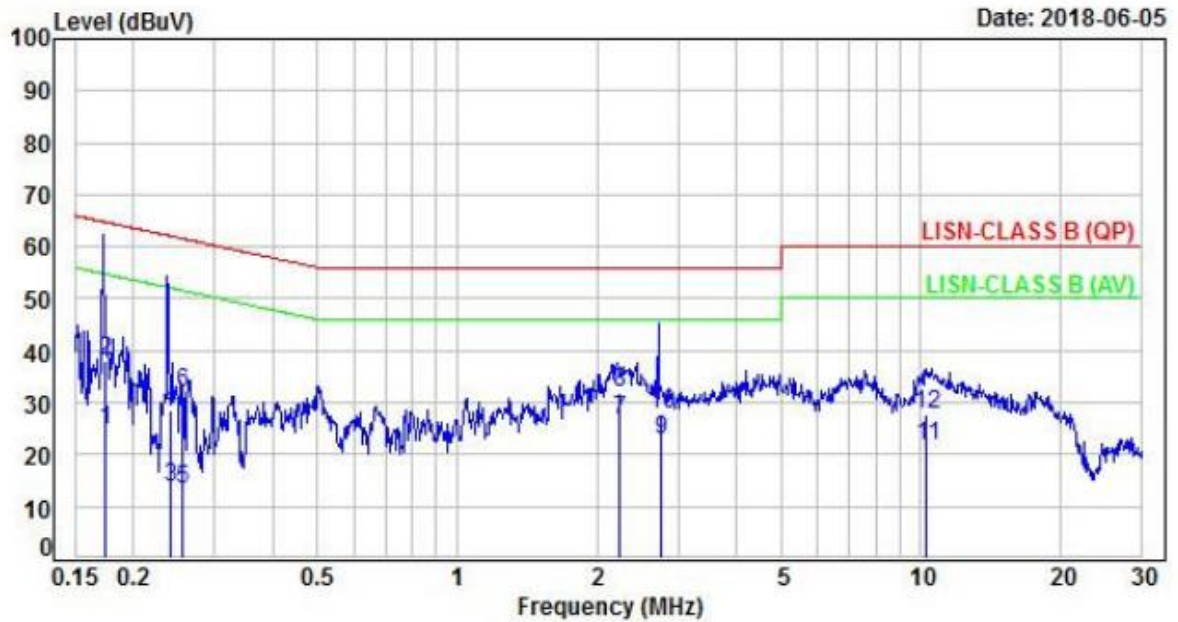


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.94	14.75	24.69	54.77	-30.08	Average	P
2	0.17	9.94	28.02	37.96	64.77	-26.81	QP	P
3	0.24	9.94	3.86	13.80	52.03	-38.23	Average	P
4	0.24	9.94	18.67	28.61	62.03	-33.42	QP	P
5	0.26	9.94	3.35	13.29	51.56	-38.27	Average	P
6	0.26	9.94	21.95	31.89	61.56	-29.67	QP	P
7	2.24	10.06	16.45	26.51	46.00	-19.49	Average	P
8	2.24	10.06	21.89	31.95	56.00	-24.05	QP	P
9	2.74	10.08	12.63	22.71	46.00	-23.29	Average	P
10	2.74	10.08	17.85	27.93	56.00	-28.07	QP	P
11	10.30	10.33	11.43	21.76	50.00	-28.24	Average	P
12	10.30	10.33	17.58	27.91	60.00	-32.09	QP	P

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor = (LISN, ISN or current probe) Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2	Temperature	: 20 °C
Test date	: Jun. 05, 2018	Humidity	: 40 %

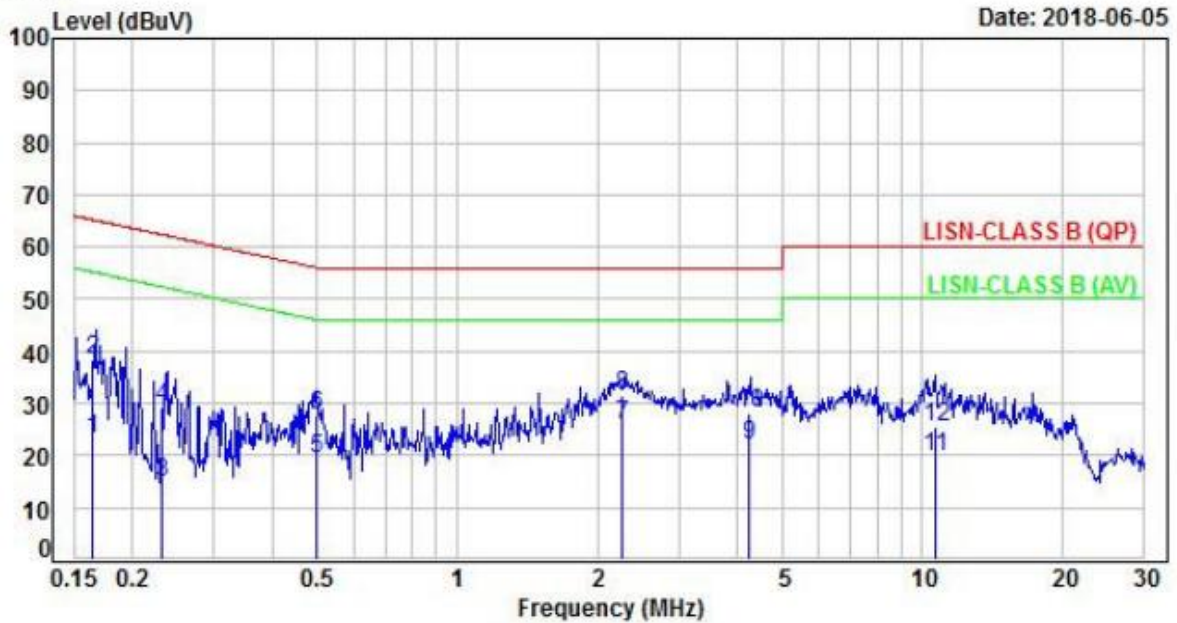

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.94	13.42	23.36	55.25	-31.89	Average	P
2	0.16	9.94	28.65	38.59	65.25	-26.66	QP	P
3	0.23	9.94	5.00	14.94	52.42	-37.48	Average	P
4	0.23	9.94	19.34	29.28	62.42	-33.14	QP	P
5	0.50	9.95	9.50	19.45	46.05	-26.60	Average	P
6	0.50	9.95	17.80	27.75	56.05	-28.30	QP	P
7	2.27	10.06	15.90	25.96	46.00	-20.04	Average	P
8	2.27	10.06	21.32	31.38	56.00	-24.62	QP	P
9	4.23	10.15	11.96	22.11	46.00	-23.89	Average	P
10	4.23	10.15	18.08	28.23	56.00	-27.77	QP	P
11	10.69	10.35	9.37	19.72	50.00	-30.28	Average	P
12	10.69	10.35	15.13	25.48	60.00	-34.52	QP	P

Note: Level = Reading + Factor
 Margin = Level – Limit
 Factor = (LISN, ISN or current probe) Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




6.3 Typical Test Setup


Below 30MHz test setup

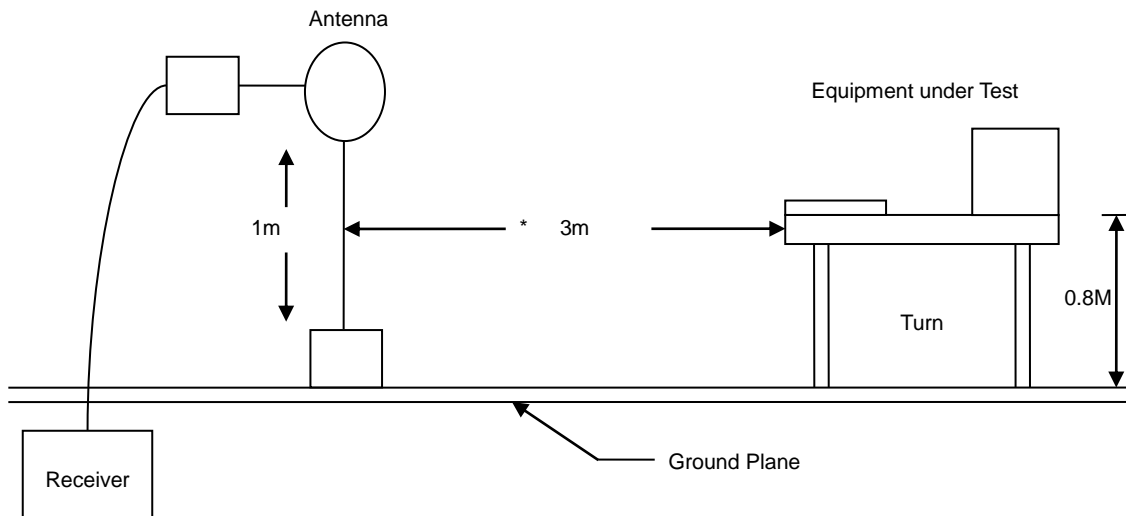

30MHz- 1GHz Test Setup

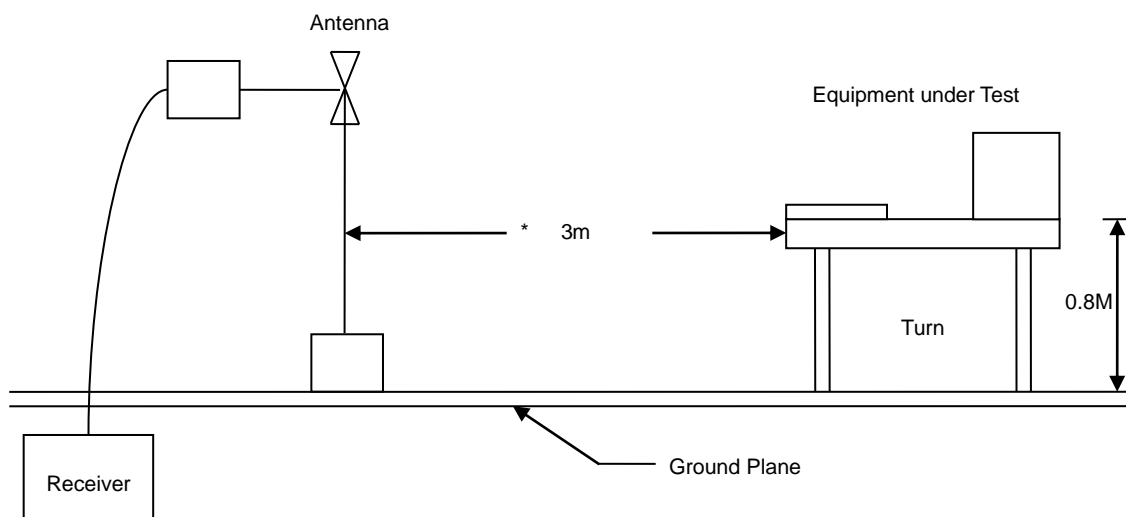

Above 1GHz Test Setup

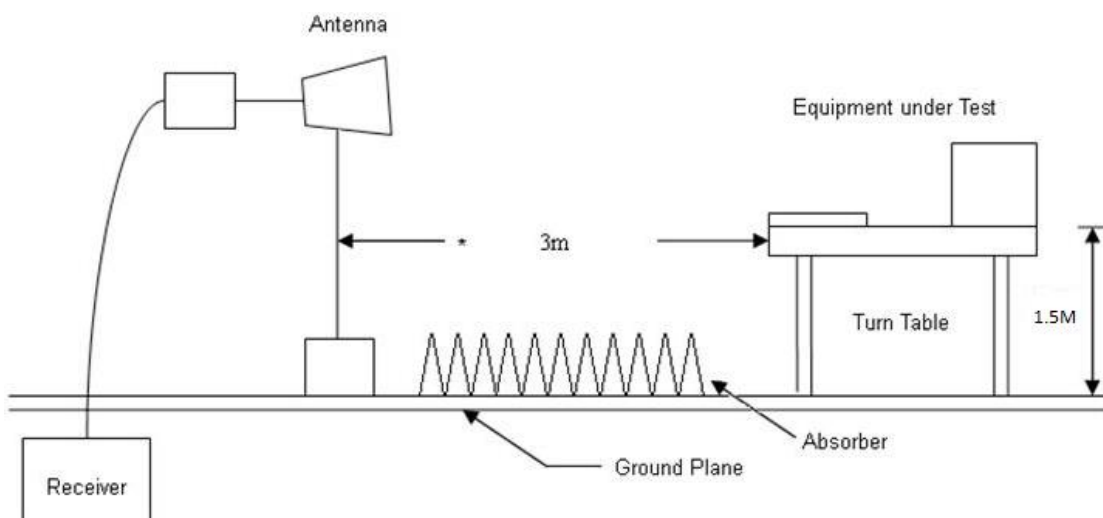




6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jun. 04, 2018	Humidity	: 63 %

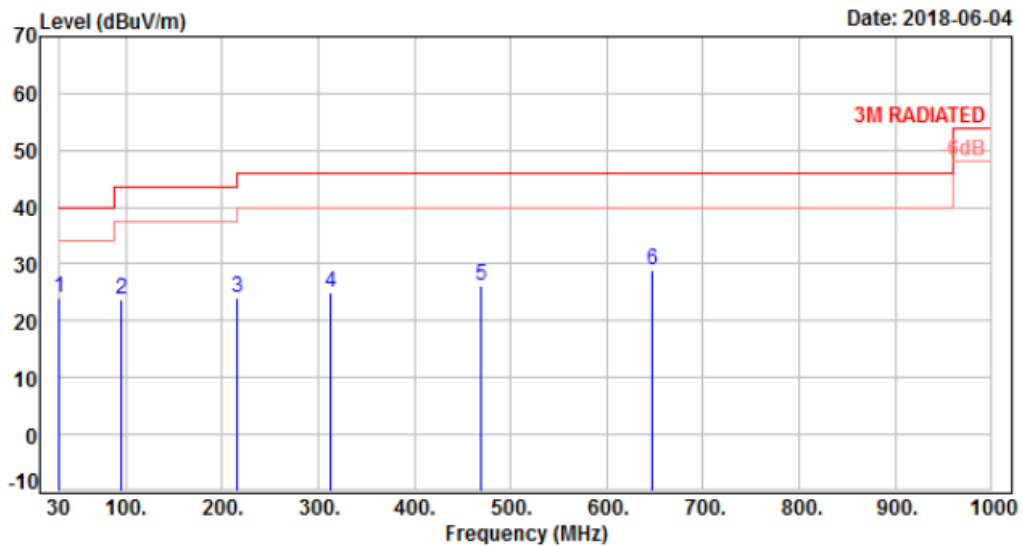


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-11.65	35.73	24.08	40.00	-15.92	Peak	400	0	P
2	95.96	-16.23	39.85	23.62	43.50	-19.88	Peak	400	0	P
3	215.27	-12.90	37.08	24.18	43.50	-19.32	Peak	400	0	P
4	312.27	-9.54	34.57	25.03	46.00	-20.97	Peak	400	0	P
5	468.44	-5.49	31.64	26.15	46.00	-19.85	Peak	400	0	P
6	647.89	-2.20	31.07	28.87	46.00	-17.13	Peak	400	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jun. 04, 2018	Humidity	: 63 %

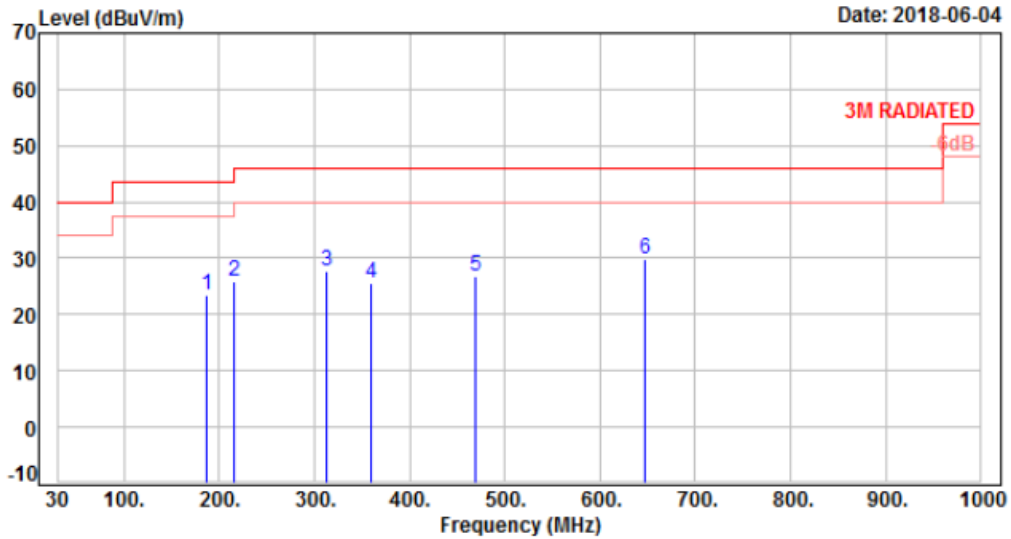


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	187.14	-12.66	36.01	23.35	43.50	-20.15	Peak	100	0	P
2	215.27	-12.90	38.71	25.81	43.50	-17.69	Peak	100	0	P
3	312.27	-9.54	37.22	27.68	46.00	-18.32	Peak	100	0	P
4	359.80	-8.29	33.91	25.62	46.00	-20.38	Peak	100	0	P
5	469.41	-5.48	32.15	26.67	46.00	-19.33	Peak	100	0	P
6	647.89	-2.20	32.15	29.95	46.00	-16.05	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jun. 04, 2018	Humidity	: 63 %

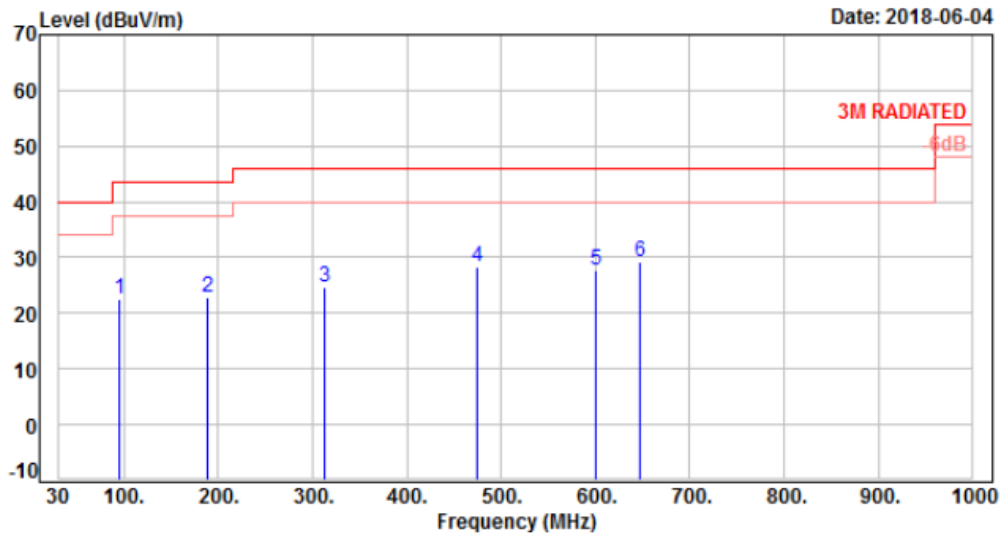


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	95.96	-16.23	38.67	22.44	43.50	-21.06	Peak	400	0	P
2	189.08	-12.82	35.72	22.90	43.50	-20.60	Peak	400	0	P
3	312.27	-9.54	34.07	24.53	46.00	-21.47	Peak	400	0	P
4	475.23	-5.37	33.80	28.43	46.00	-17.57	Peak	400	0	P
5	600.36	-2.80	30.40	27.60	46.00	-18.40	Peak	400	0	P
6	647.89	-2.20	31.41	29.21	46.00	-16.79	Peak	400	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jun. 04, 2018	Humidity	: 63 %

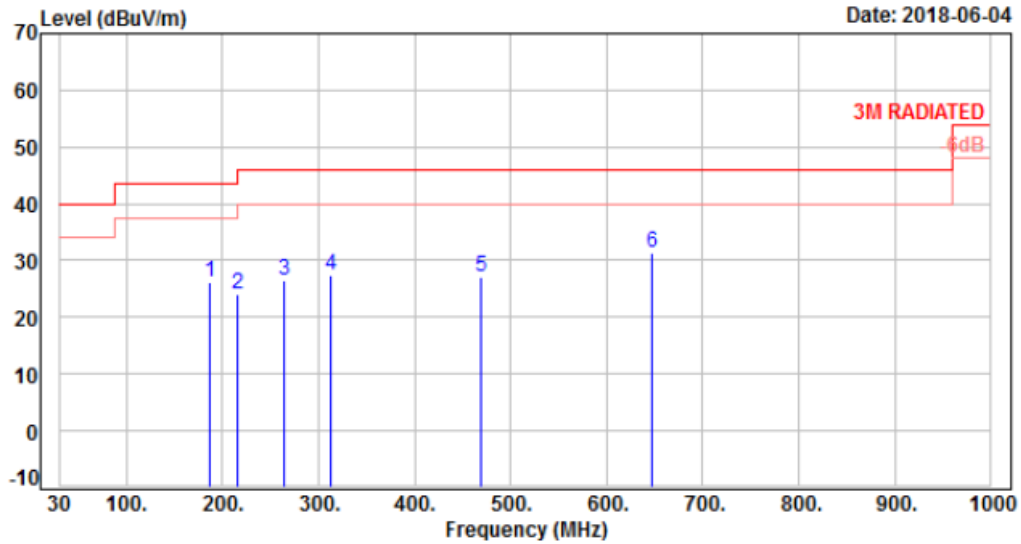


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	187.14	-12.66	38.83	26.17	43.50	-17.33	Peak	100	0	P
2	215.27	-12.90	36.94	24.04	43.50	-19.46	Peak	100	0	P
3	263.77	-11.16	37.63	26.47	46.00	-19.53	Peak	100	0	P
4	312.27	-9.54	36.95	27.41	46.00	-18.59	Peak	100	0	P
5	469.41	-5.48	32.56	27.08	46.00	-18.92	Peak	100	0	P
6	647.89	-2.20	33.64	31.44	46.00	-14.56	Peak	100	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH00	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

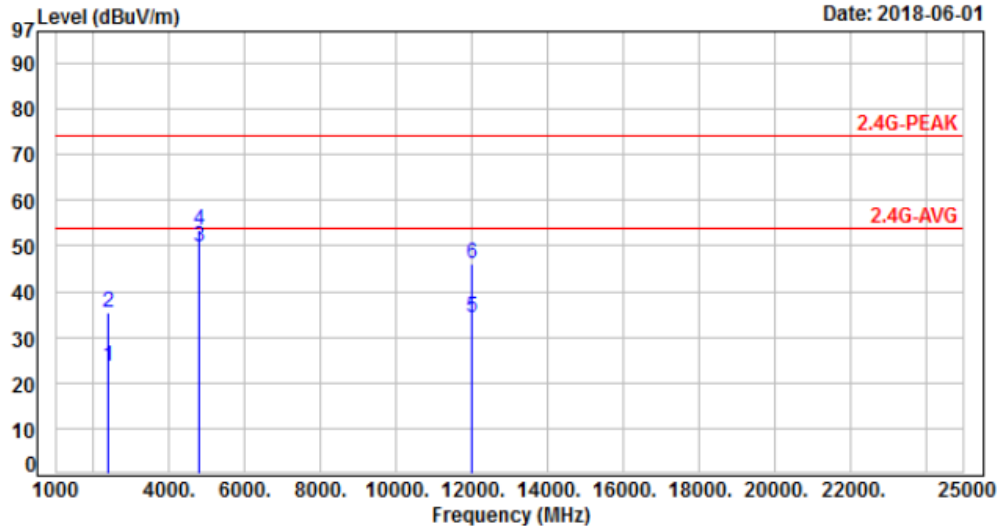


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	39.61	23.65	54.00	-30.35	Average	100	30	P
2	2390.00	-15.96	51.21	35.25	74.00	-38.75	Peak	100	30	P
3	4804.00	-8.87	58.50	49.63	54.00	-4.37	Average	100	55	P
4	4804.00	-8.87	62.20	53.33	74.00	-20.67	Peak	100	55	P
5	12010.00	1.17	33.20	34.37	54.00	-19.63	Average	100	221	P
6	12010.00	1.17	44.98	46.15	74.00	-27.85	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH00	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

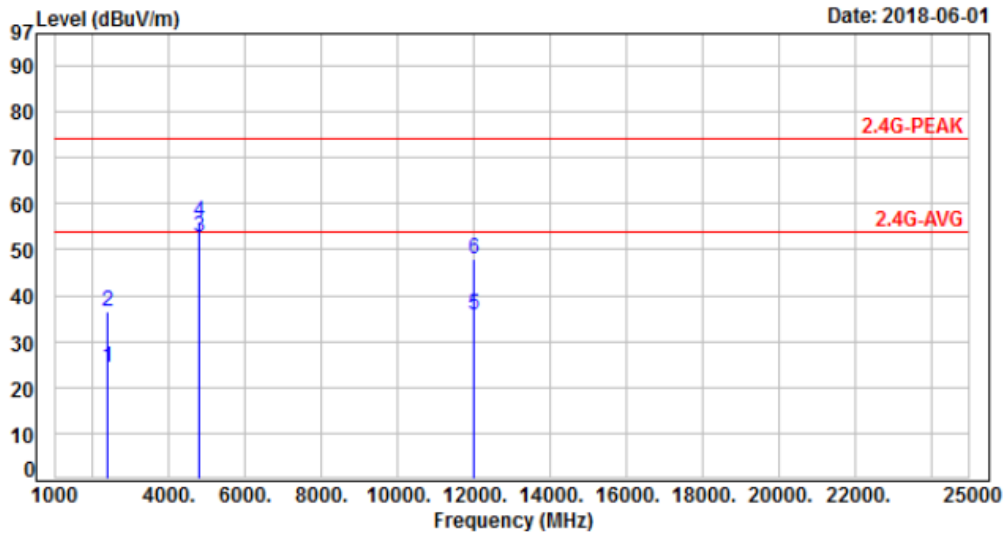


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	40.41	24.45	54.00	-29.55	Average	130	130	P
2	2390.00	-15.96	52.61	36.65	74.00	-37.35	Peak	130	130	P
3	4804.00	-8.87	61.50	52.63	54.00	-1.37	Average	100	16	P
4	4804.00	-8.87	64.80	55.93	74.00	-18.07	Peak	100	16	P
5	12010.00	1.17	34.55	35.72	54.00	-18.28	Average	100	321	P
6	12010.00	1.17	46.60	47.77	74.00	-26.23	Peak	100	321	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH19	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

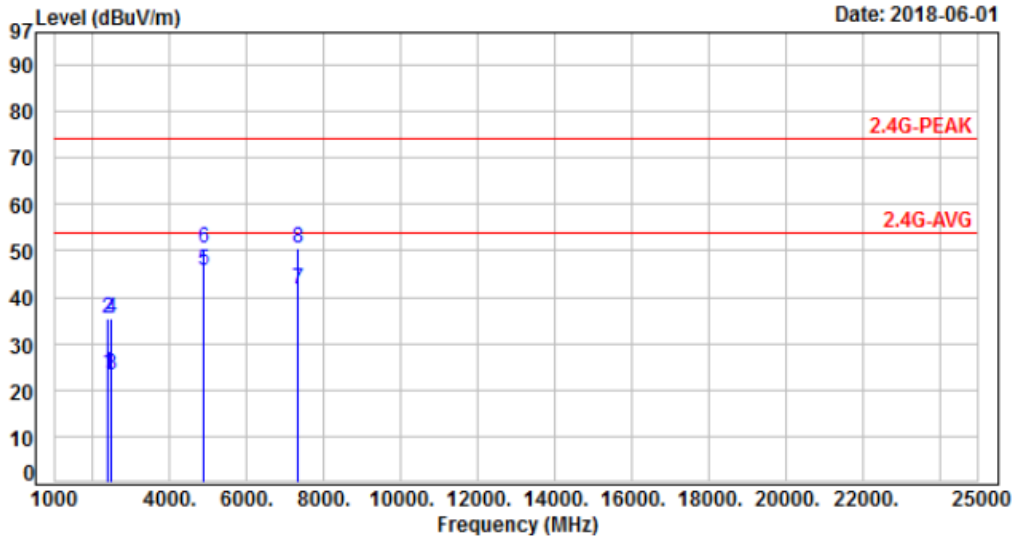


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	39.61	23.65	54.00	-30.35	Average	100	30	P
2	2390.00	-15.96	51.51	35.55	74.00	-38.45	Peak	100	30	P
3	2483.50	-15.65	38.92	23.27	54.00	-30.73	Average	100	30	P
4	2483.50	-15.65	51.23	35.58	74.00	-38.42	Peak	100	30	P
5	4880.00	-8.63	54.50	45.87	54.00	-8.13	Average	100	42	P
6	4880.00	-8.63	59.30	50.67	74.00	-23.33	Peak	100	42	P
7	7320.00	-4.67	46.50	41.83	54.00	-12.17	Average	117	35	P
8	7320.00	-4.67	55.20	50.53	74.00	-23.47	Peak	117	35	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH19	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

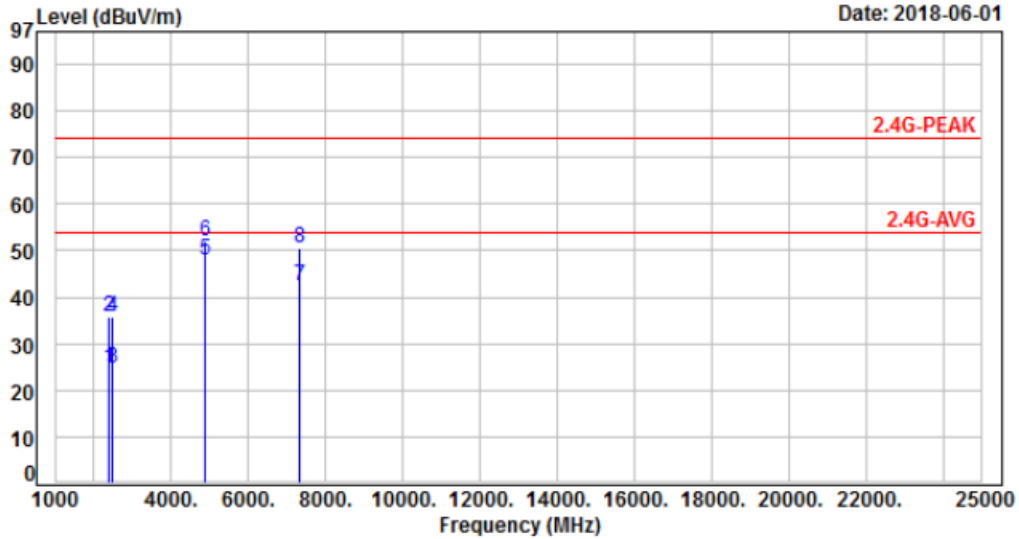


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-15.96	40.51	24.55	54.00	-29.45	Average	130	125	P
2	2390.00	-15.96	51.81	35.85	74.00	-38.15	Peak	130	125	P
3	2483.50	-15.65	40.20	24.55	54.00	-29.45	Average	130	125	P
4	2483.50	-15.65	51.60	35.95	74.00	-38.05	Peak	130	125	P
5	4880.00	-8.63	56.60	47.97	54.00	-6.03	Average	170	17	P
6	4880.00	-8.63	60.80	52.17	74.00	-21.83	Peak	170	17	P
7	7320.00	-4.67	47.22	42.55	54.00	-11.45	Average	100	53	P
8	7320.00	-4.67	55.20	50.53	74.00	-23.47	Peak	100	53	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: VERTICAL
Test Mode	: Mode 1, CH39	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

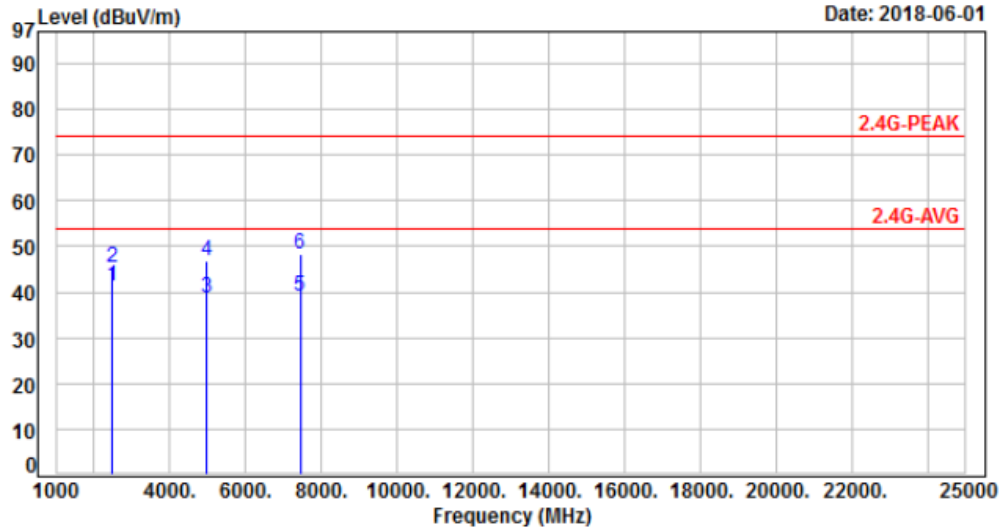


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	57.00	41.35	54.00	-12.65	Average	378	40	P
2	2483.50	-15.65	61.20	45.55	74.00	-28.45	Peak	378	40	P
3	4960.00	-8.38	47.20	38.82	54.00	-15.18	Average	100	40	P
4	4960.00	-8.38	55.20	46.82	74.00	-27.18	Peak	100	40	P
5	7440.00	-4.33	43.50	39.17	54.00	-14.83	Average	100	158	P
6	7440.00	-4.33	52.60	48.27	74.00	-25.73	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1, CH39	Temperature	: 22 °C
Test Date	: Jun. 01, 2018	Humidity	: 63 %

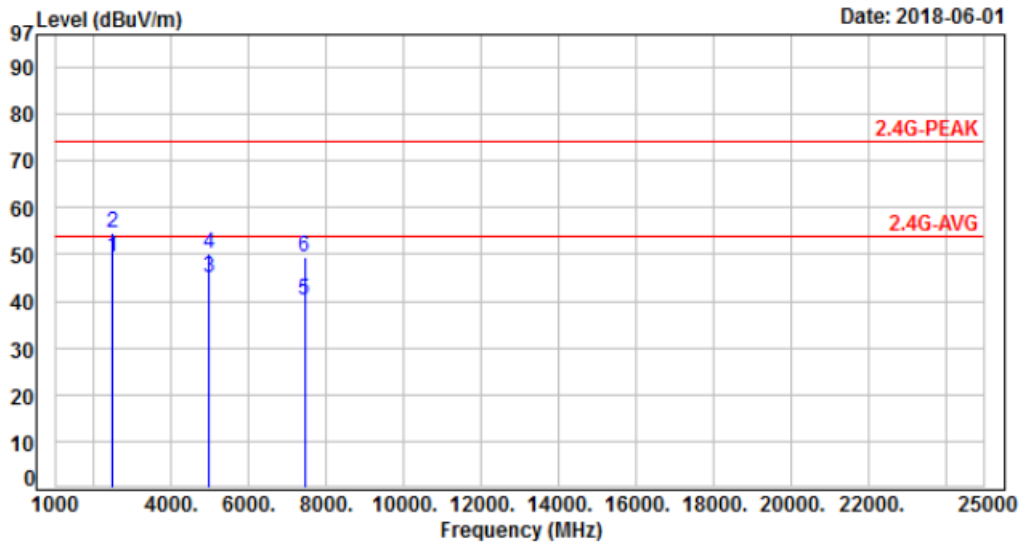

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-15.65	65.12	49.47	54.00	-4.53	Average	120	140	P
2	2483.50	-15.65	70.30	54.65	74.00	-19.35	Peak	120	140	P
3	4960.00	-8.38	53.22	44.84	54.00	-9.16	Average	100	74	P
4	4960.00	-8.38	58.50	50.12	74.00	-23.88	Peak	100	74	P
5	7440.00	-4.33	44.50	40.17	54.00	-13.83	Average	100	351	P
6	7440.00	-4.33	53.60	49.27	74.00	-24.73	Peak	100	351	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



7. Test of Conducted Spurious Emission


7.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

7.3 Test Setup Layout




7.4 Test Result and Data

Test Result	: PASS	Temperature	: 21°C
Test Date	: Jun. 04, 2018	Humidity	: 64%

Note: Test plots refer to the following pages.




Modulation Type: GFSK
CH00

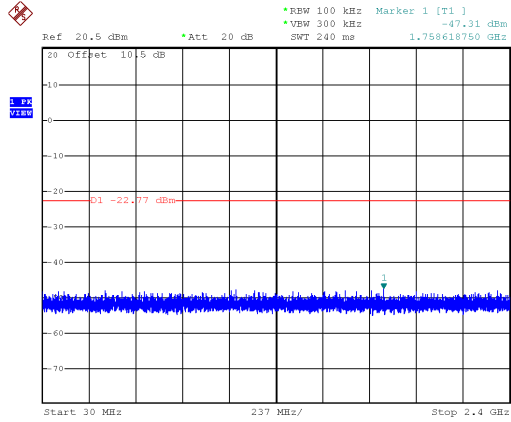


Date: 4.JUN.2018 10:55:02


Modulation Type: GFSK
CH19

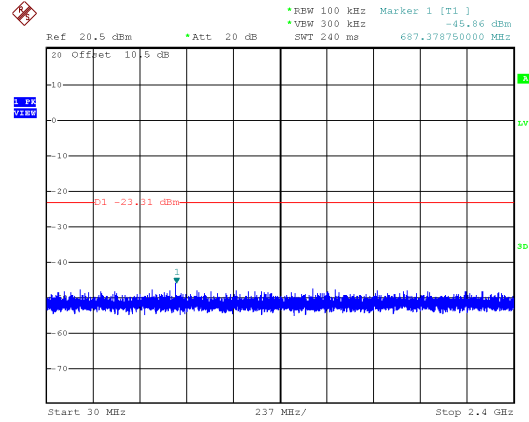


Date: 4.JUN.2018 10:57:24

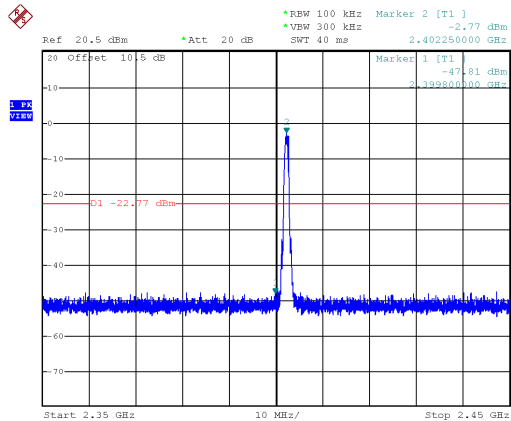


Date: 4.JUN.2018 10:54:32

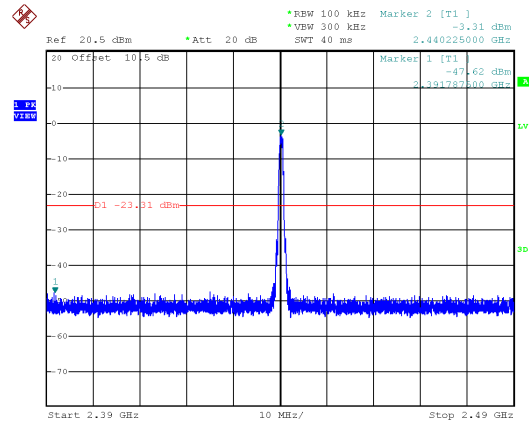

Date: 4.JUN.2018 10:56:42

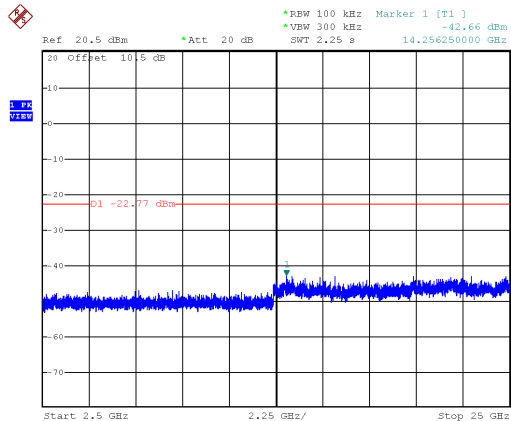


Date: 4.JUN.2018 10:55:32

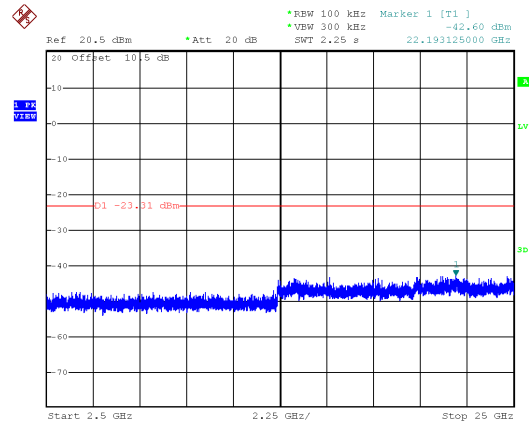


Date: 4.JUN.2018 10:57:51




Modulation Type: GFSK
CH39

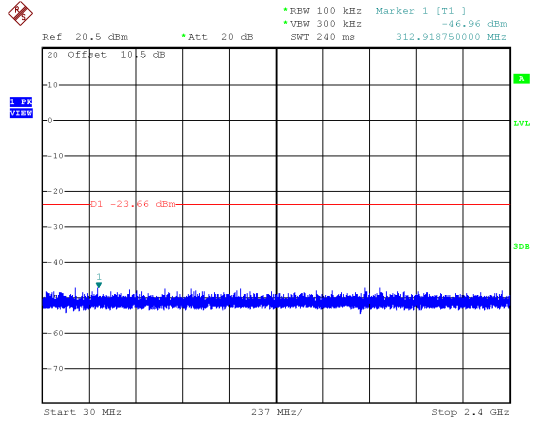

Date: 4.JUN.2018 10:59:30

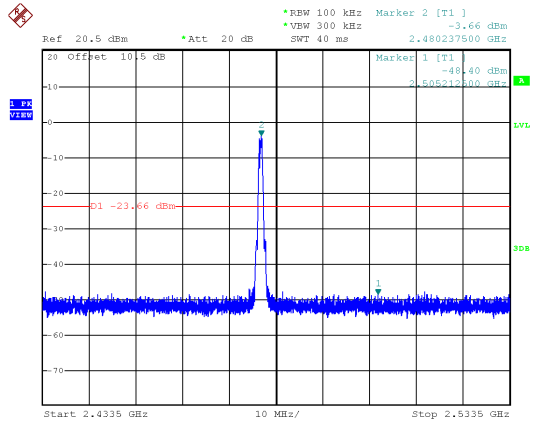

Date: 4.JUN.2018 10:58:50

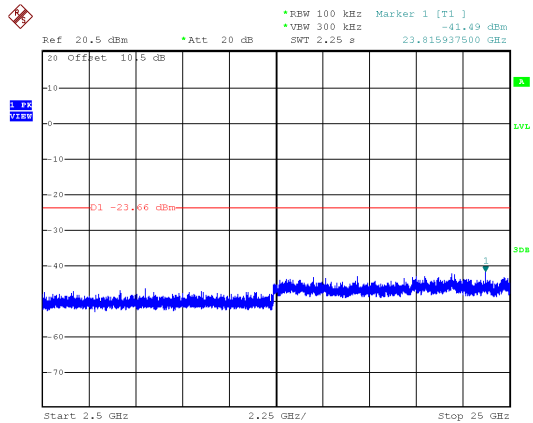

Date: 4.JUN.2018 11:00:09



8. 6dB Bandwidth Measurement Data


8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW \geq 3x RBW.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

8.3 Test Setup Layout




8.4 Test Result and Data

Test Result : PASS Temperature : 21°C
Test Date : Jun. 04, 2018 Humidity : 64%

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK	00	2402	700	500
	19	2440	714	500
	39	2480	702	500




Modulation Type: GFSK
CH00

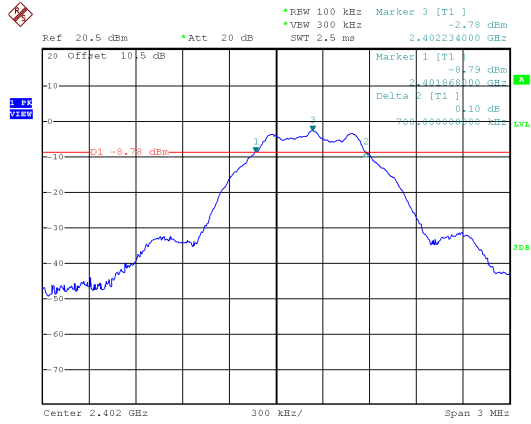


Date: 4.JUN.2018 10:46:53

CH19

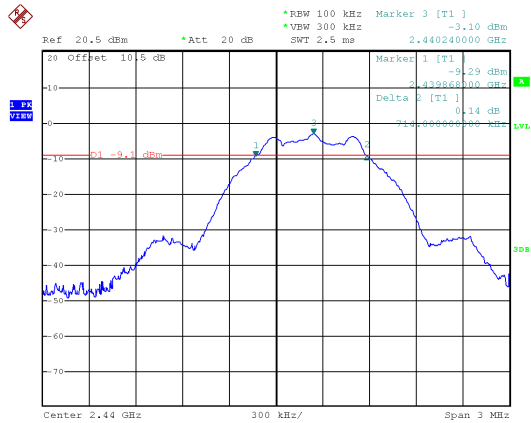

Date: 4.JUN.2018 10:48:04

CH39

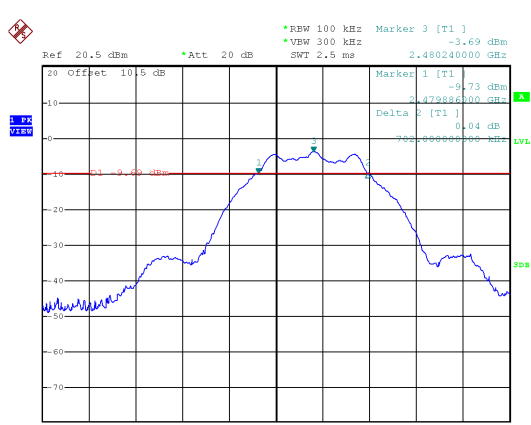

Date: 4.JUN.2018 10:49:00



9. Maximum Peak and Average Output Power


9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout



9.4 Test Result and Data

Test Result : PASS Temperature : 21°C
 Test Date : Jun. 04, 2018 Humidity : 64%

Modulation Standard	Channel	Frequency (MHz)	Power Output (dBm)		Peak Power Output (mW)	
			Peak	Average	Peak	Average
GFSK	00	2402	-3.11	-3.42	0.489	0.455
	19	2440	-3.41	-3.74	0.456	0.423
	39	2480	-4.01	-4.38	0.397	0.365



10. Power Spectral Density


10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

10.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer’s resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

10.3 Test Setup Layout




10.4 Test Result and Data

Test Result : PASS Temperature : 21°C
 Test Date : Jun. 04, 2018 Humidity : 64%

Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit
GFSK	00	2402	-18.38	8.00
	19	2440	-18.8	8.00
	39	2480	-19.43	8.00




Modulation Type: GFSK
CH00

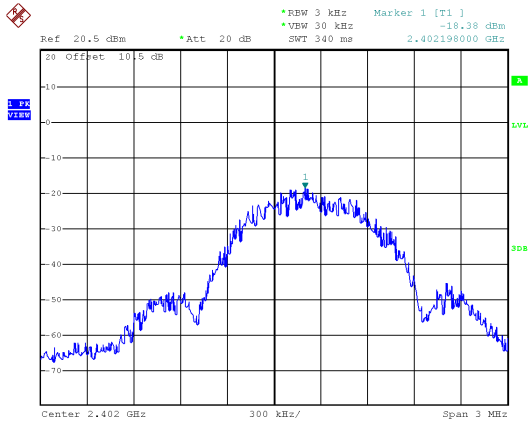


Date: 4.JUN.2018 10:51:49

CH19

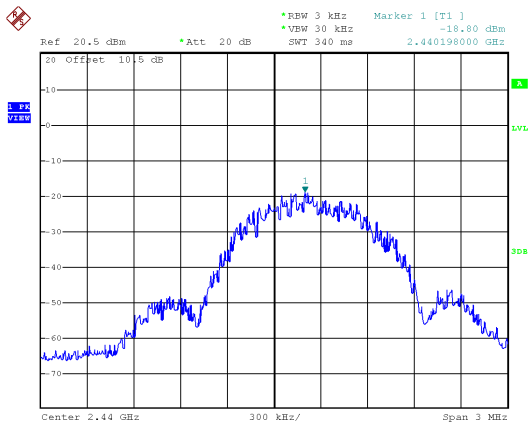

Date: 4.JUN.2018 10:52:23

CH39

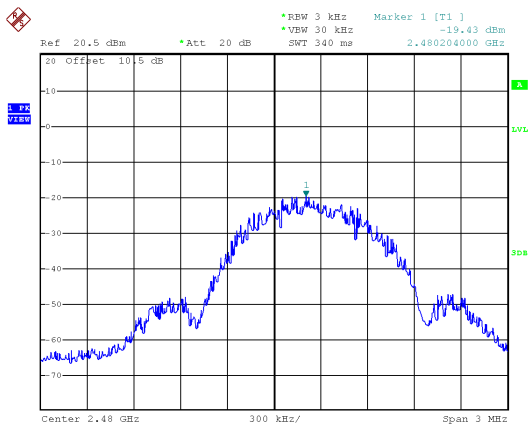

Date: 4.JUN.2018 10:52:59