



CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 <http://www.sz-ctc.org.cn>

TEST REPORT

Report No. : **CTC20240000E04**

FCC ID..... : **2APN5PANELPRO120**

IC : **29127-PANELPRO120**


Applicant : **Shenzhen Sonoff Technologies Co.,Ltd.**

Address..... : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Manufacturer..... : Shenzhen Sonoff Technologies Co.,Ltd.

Address..... : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Product Name : **Smart Home Control Panel**

Trade Mark :  , Sonoff

Model/Type reference..... : NSPanel120PW

Listed Model(s) : NSPanel120PB




Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247 Issue 3**

Date of receipt of test sample..... : Jan. 2, 2024

Date of testing..... : Jan. 2, 2024 to Mar. 8, 2024

Date of issue..... : May 6, 2024

Result..... : **PASS**

Compiled by:		
(Printed name+signature)	Jim Jiang	
Supervised by:		
(Printed name+signature)	Eric Zhang	
Approved by:		
(Printed name+signature)	Totti Zhao	

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

1. TEST SUMMARY 3

1.1. TEST STANDARDS.....3

1.2. REPORT VERSION3

1.3. TEST DESCRIPTION.....3

1.4. TEST FACILITY4

1.5. MEASUREMENT UNCERTAINTY5

1.6. ENVIRONMENTAL CONDITIONS.....5

2. GENERAL INFORMATION 6

2.1. CLIENT INFORMATION6

2.2. GENERAL DESCRIPTION OF EUT6

2.3. ACCESSORY EQUIPMENT INFORMATION7

2.4. OPERATION STATE8

2.5. MEASUREMENT INSTRUMENTS LIST10

3. TEST ITEM AND RESULTS 12

3.1. CONDUCTED EMISSION.....12

3.2. RADIATED EMISSION.....15

3.3. BAND EDGE EMISSIONS (RADIATED)32

3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)49

3.5. DTS BANDWIDTH.....57

3.6. PEAK OUTPUT POWER63

3.7. POWER SPECTRAL DENSITY65

3.8. DUTY CYCLE69

3.9. ANTENNA REQUIREMENT.....75



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC20240000E04	May 6, 2024	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
6dB Bandwidth	15.247(a)(2)	RSS-247 5.2 (a)	Pass	Jim Jiang
Conducted Max Output Power	15.247(b)(3)	RSS-247 5.4 (d)	Pass	Jim Jiang
Power Spectral Density	15.247(e)	RSS-247 5.2 (b)	Pass	Jim Jiang
Transmitter Radiated Spurious	15.209&15.247(d)	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2” and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa




2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

2.2. General Description of EUT

Product Name:	Smart Home Control Panel
Trade Mark:	 SONOFF, Sonoff
Model/Type reference:	NSPanel120PW
Listed Model(s):	NSPanel120PB
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name and appearance color.
Power Supply:	Input: 100-240V~ 50/60Hz 0.15A Max
Hardware Version:	V1.1
Software Version:	V0.1.0
2.4G WiFi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel Number:	802.11b/g/n(HT20): 11 channels 802.11n(HT40): 7 channels
Channel Separation:	5MHz
Antenna Type:	FPC Antenna
Directional Gain:	2dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	150cm
Test Software Information			
Name	Version	/	/
adb tool	/	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40).

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/(HT40)	HT-MCS0



Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

The worse case configurations:

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band		
Test Software	adb tool	
Modulation Mode	Test Channel	Attenuation
802.11b	01	Default
	06	Default
	11	Default
802.11g	01	Default
	06	Default
	11	Default
802.11n(HT20)	01	Default
	06	Default
	11	Default
802.11n(HT40)	03	Default
	06	Default
	09	Default



2.5. Measurement Instruments List

Tonscend RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
2	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
5	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 22, 2024
6	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
7	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
8	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
9	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
10	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 14, 2024
11	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 14, 2024
12	Wideband Radio Communication Tester	R&S	CMW500	102257	May 25, 2024
13	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024
14	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
15	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 24, 2024

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

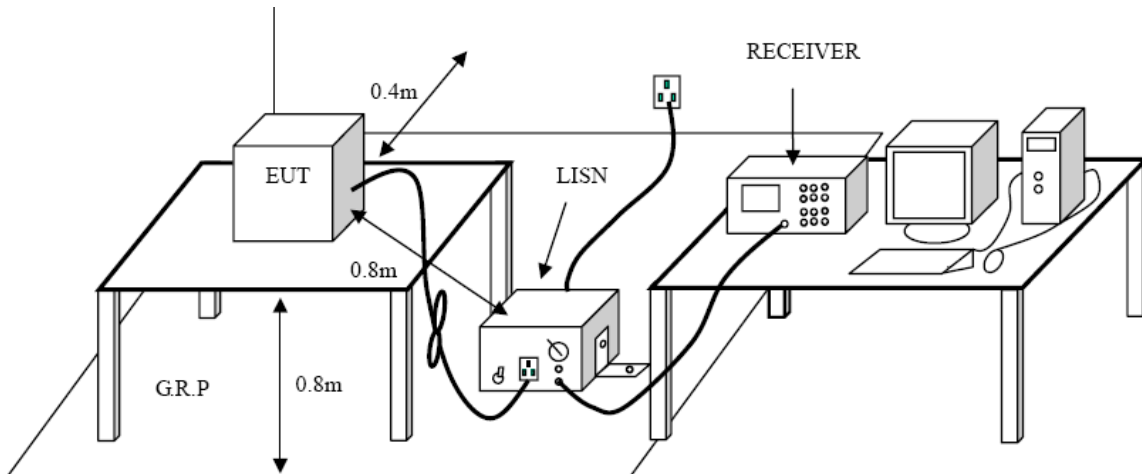

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


Test Mode

Please refer to the clause 2.4.



Test Result

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

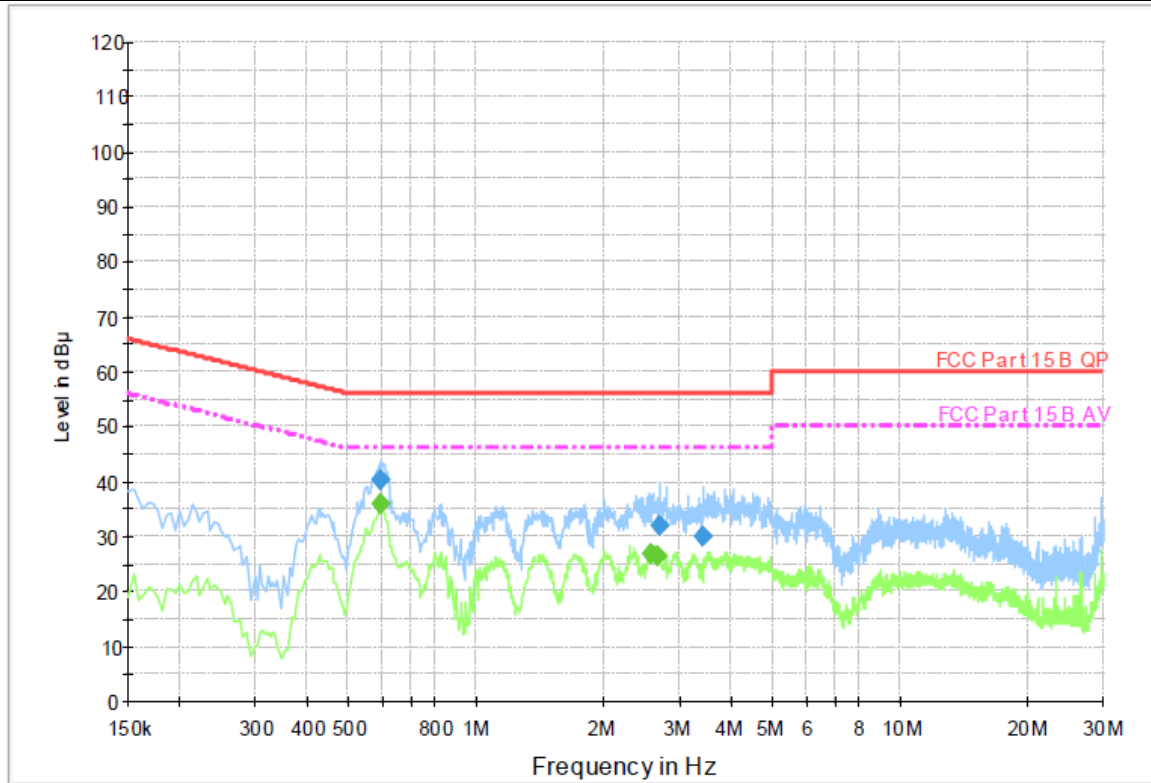

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.591000	40.2	1000.00	9.000	On	L1	9.5	15.8	56.0	
2.692500	31.9	1000.00	9.000	On	L1	9.5	24.1	56.0	
3.412500	30.2	1000.00	9.000	On	L1	9.5	25.8	56.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.595500	35.9	1000.00	9.000	On	L1	9.5	10.1	46.0	
2.571000	26.7	1000.00	9.000	On	L1	9.5	19.3	46.0	
2.665500	26.4	1000.00	9.000	On	L1	9.5	19.6	46.0	

Emission Level = Read Level + Correct Factor





Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

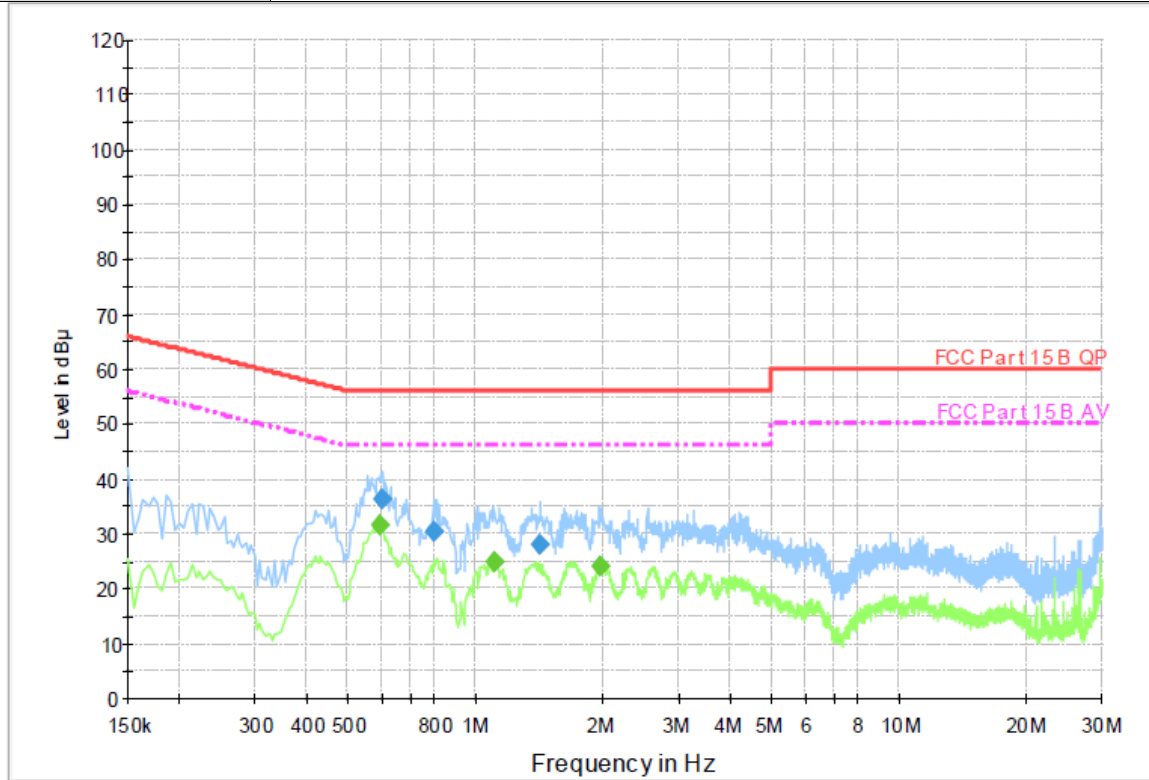

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.600000	36.4	1000.00	9.000	On	N	9.5	19.6	56.0	
0.793500	30.6	1000.00	9.000	On	N	9.5	25.4	56.0	
1.414500	28.0	1000.00	9.000	On	N	9.5	28.0	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµ V)	Comment
0.595500	31.5	1000.00	9.000	On	N	9.5	14.5	46.0	
1.104000	24.9	1000.00	9.000	On	N	9.5	21.1	46.0	
1.963500	24.2	1000.00	9.000	On	N	9.5	21.8	46.0	

Emission Level = Read Level + Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBµV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54

Note:


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBµV/m)=20log Emission Level (µV/m).

Test Configuration

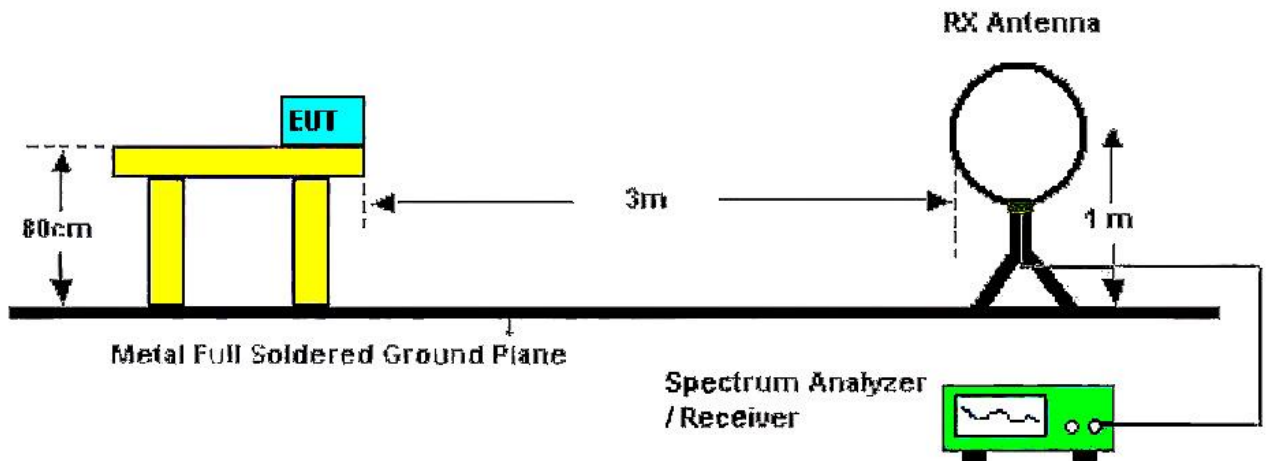


Below 30MHz Test Setup



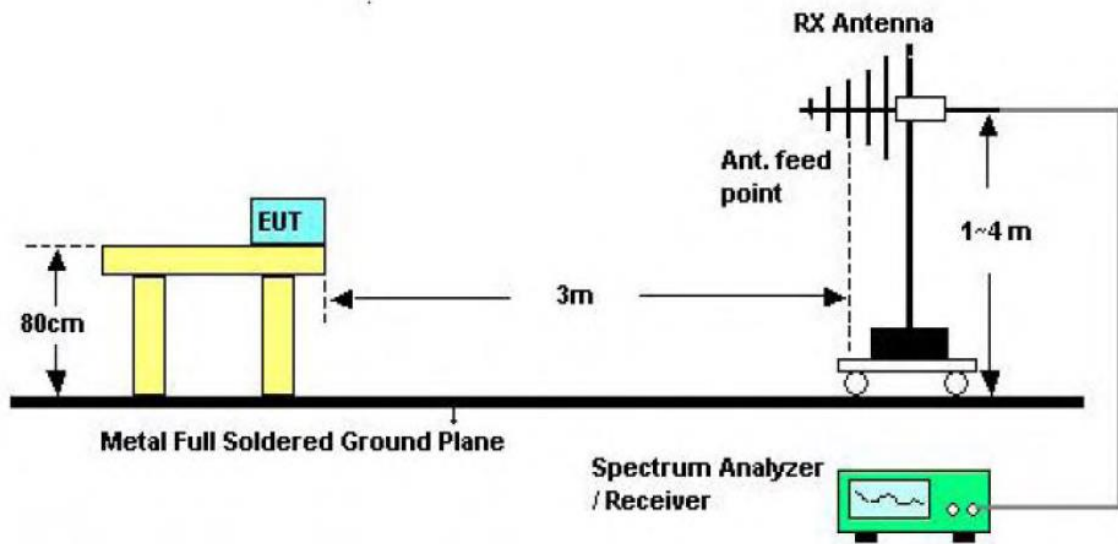

30-1000MHz Test Setup

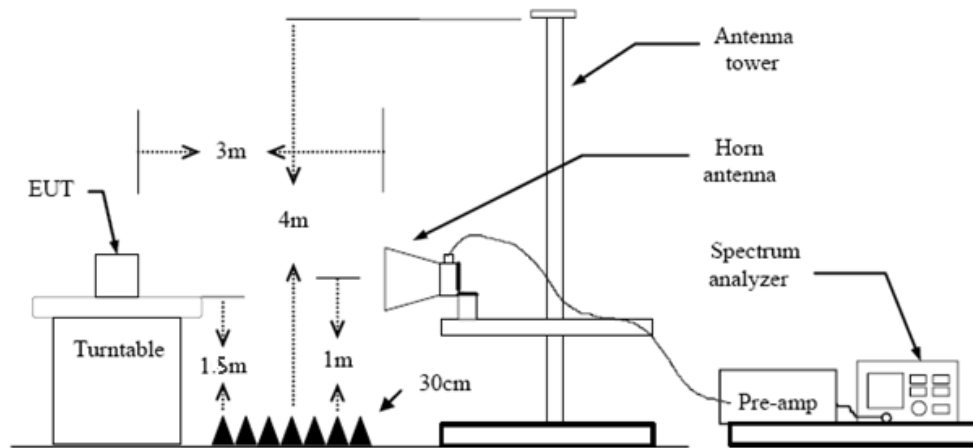

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;



(2) 9k – 150kHz:

RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(3) 0.15M – 30MHz:

RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(4) 30M - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 kHz~30 MHz


From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

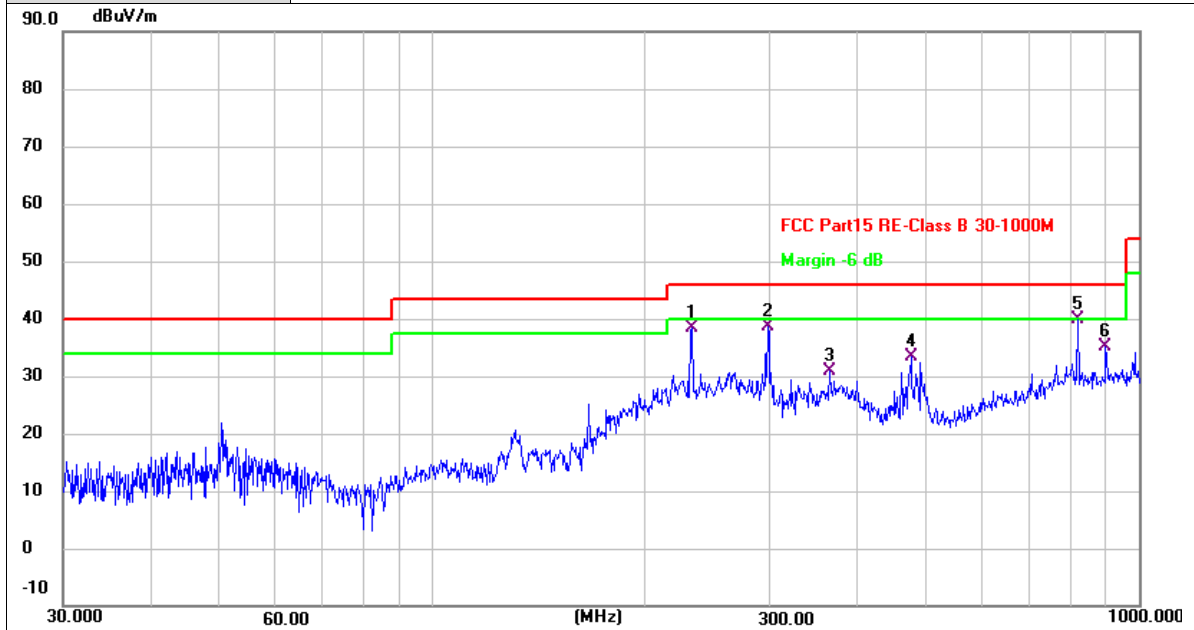

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	232.5318	53.42	-15.01	38.41	46.00	-7.59	QP
2	298.2681	52.03	-13.51	38.52	46.00	-7.48	QP
3	364.2595	42.40	-11.64	30.76	46.00	-15.24	QP
4	475.4990	43.05	-9.78	33.27	46.00	-12.73	QP
5 *	818.8338	44.06	-4.07	39.99	46.00	-6.01	QP
6	896.9964	38.22	-3.01	35.21	46.00	-10.79	QP


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

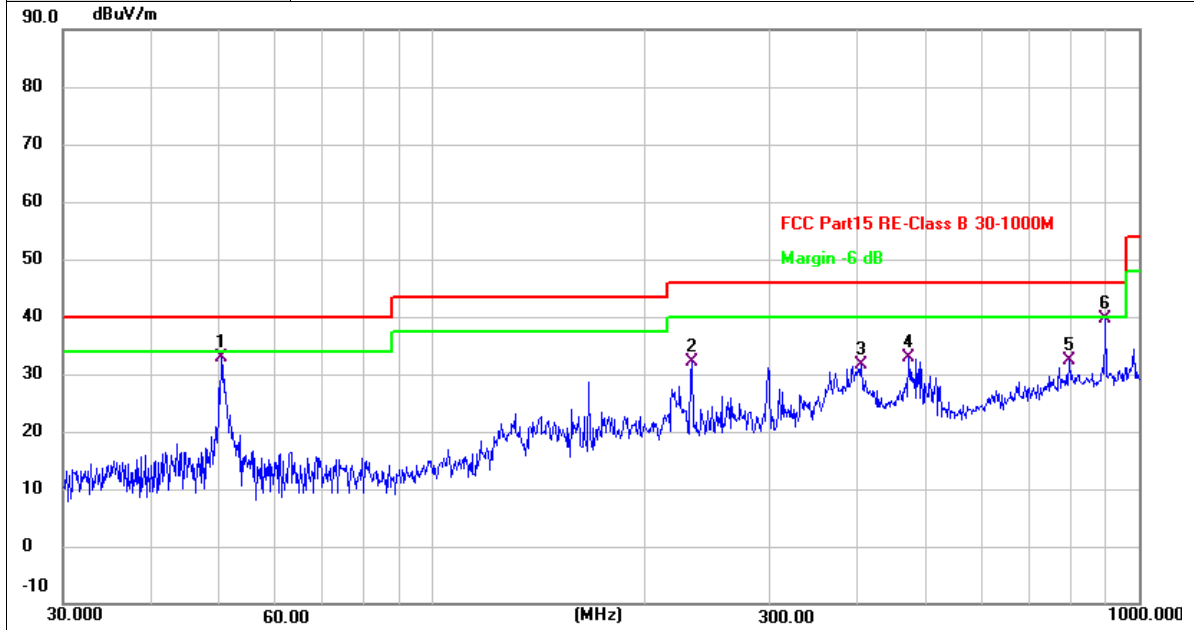

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	50.2324	46.86	-13.93	32.93	40.00	-7.07	QP
2	233.3486	47.17	-14.99	32.18	46.00	-13.82	QP
3	404.6665	42.77	-11.05	31.72	46.00	-14.28	QP
4	472.1760	42.73	-9.85	32.88	46.00	-13.12	QP
5	796.1829	36.71	-4.35	32.36	46.00	-13.64	QP
6 *	896.9965	42.70	-3.01	39.69	46.00	-6.31	QP

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	1148.833	51.45	-7.74	43.71	74.00	-30.29	peak
2	4822.667	40.14	2.10	42.24	74.00	-31.76	peak
3	7282.333	37.69	10.20	47.89	74.00	-26.11	peak
4	9851.667	38.15	13.08	51.23	74.00	-22.77	peak
5 *	11097.167	38.33	14.82	53.15	74.00	-20.85	peak
6	11958.833	37.26	15.58	52.84	74.00	-21.16	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant. Pol.	Vertical						
Test Mode:	TX 802.11b Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	1148.833	50.09	-7.74	42.35	74.00	-31.65	peak
2	4736.500	39.84	1.94	41.78	74.00	-32.22	peak
3	7513.417	37.89	10.18	48.07	74.00	-25.93	peak
4	9561.833	38.15	12.60	50.75	74.00	-23.25	peak
5	10846.500	37.95	14.60	52.55	74.00	-21.45	peak
6 *	12350.500	37.79	15.68	53.47	74.00	-20.53	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.77	-7.74	44.03	74.00	-29.97	peak
2	7153.083	37.62	9.94	47.56	74.00	-26.44	peak
3	7959.917	38.56	10.79	49.35	74.00	-24.65	peak
4	9687.167	37.78	12.79	50.57	74.00	-23.43	peak
5	11586.750	37.38	15.26	52.64	74.00	-21.36	peak
6 *	12385.750	37.46	15.64	53.10	74.00	-20.90	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1395.583	50.08	-6.83	43.25	74.00	-30.75	peak
2	4807.000	39.73	2.08	41.81	74.00	-32.19	peak
3	7196.167	37.67	10.16	47.83	74.00	-26.17	peak
4	8265.417	39.29	10.40	49.69	74.00	-24.31	peak
5	10642.833	38.36	14.23	52.59	74.00	-21.41	peak
6 *	11308.667	38.35	14.95	53.30	74.00	-20.70	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.91	-7.74	44.17	74.00	-29.83	peak
2	4677.750	40.00	1.82	41.82	74.00	-32.18	peak
3	6303.167	37.53	6.59	44.12	74.00	-29.88	peak
4	8018.667	38.67	10.81	49.48	74.00	-24.52	peak
5	11195.083	37.57	14.88	52.45	74.00	-21.55	peak
6 *	12135.083	37.15	15.80	52.95	74.00	-21.05	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	49.03	-7.74	41.29	74.00	-32.71	peak
2	5202.583	41.61	2.92	44.53	74.00	-29.47	peak
3	6381.500	37.16	6.95	44.11	74.00	-29.89	peak
4	7615.250	38.19	10.16	48.35	74.00	-25.65	peak
5	9389.500	37.85	12.51	50.36	74.00	-23.64	peak
6 *	11128.500	38.24	14.85	53.09	74.00	-20.91	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	50.58	-7.74	42.84	74.00	-31.16	peak
2	5186.917	44.07	2.88	46.95	74.00	-27.05	peak
3	7952.083	38.69	10.77	49.46	74.00	-24.54	peak
4	10423.500	38.02	13.99	52.01	74.00	-21.99	peak
5	11269.500	37.45	14.92	52.37	74.00	-21.63	peak
6 *	12393.583	37.56	15.63	53.19	74.00	-20.81	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant. Pol.	Vertical						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	48.97	-7.74	41.23	74.00	-32.77	peak
2	5911.500	38.81	5.17	43.98	74.00	-30.02	peak
3	7153.083	38.00	9.94	47.94	74.00	-26.06	peak
4	9894.750	38.47	13.14	51.61	74.00	-22.39	peak
5	11105.000	38.29	14.83	53.12	74.00	-20.88	peak
6 *	12440.583	37.56	15.72	53.28	74.00	-20.72	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	50.39	-7.74	42.65	74.00	-31.35	peak
2	3968.833	40.10	0.41	40.51	74.00	-33.49	peak
3	7760.167	37.97	10.40	48.37	74.00	-25.63	peak
4	9264.167	37.81	12.37	50.18	74.00	-23.82	peak
5	11136.333	37.52	14.84	52.36	74.00	-21.64	peak
6 *	11860.917	37.45	15.39	52.84	74.00	-21.16	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.0000	51.64	-8.17	43.47	74.00	-30.53	peak
2	5179.083	44.80	2.86	47.66	74.00	-26.34	peak
3	8065.667	38.05	10.70	48.75	74.00	-25.25	peak
4	10768.167	37.93	14.49	52.42	74.00	-21.58	peak
5	11559.333	38.16	15.22	53.38	74.00	-20.62	peak
6 *	12569.833	37.49	16.07	53.56	74.00	-20.44	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.25	-7.74	43.51	74.00	-30.49	peak
2	5668.667	38.57	4.29	42.86	74.00	-31.14	peak
3	7247.083	37.86	10.19	48.05	74.00	-25.95	peak
4	9554.000	38.43	12.60	51.03	74.00	-22.97	peak
5 *	11379.167	37.83	14.98	52.81	74.00	-21.19	peak
6	12460.167	36.35	15.77	52.12	74.00	-21.88	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	49.57	-7.74	41.83	74.00	-32.17	peak
2	5100.750	39.74	2.64	42.38	74.00	-31.62	peak
3	7164.833	37.63	9.99	47.62	74.00	-26.38	peak
4	8433.833	39.19	10.56	49.75	74.00	-24.25	peak
5	10991.417	38.30	14.77	53.07	74.00	-20.93	peak
6 *	12342.667	37.47	15.69	53.16	74.00	-20.84	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.08	-7.74	43.34	74.00	-30.66	peak
2	4975.417	39.56	2.32	41.88	74.00	-32.12	peak
3	7176.583	37.57	10.06	47.63	74.00	-26.37	peak
4	10055.333	38.07	13.39	51.46	74.00	-22.54	peak
5	10877.833	38.03	14.65	52.68	74.00	-21.32	peak
6 *	12092.000	37.29	15.75	53.04	74.00	-20.96	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 2412MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1250.667	49.03	-7.40	41.63	74.00	-32.37	peak
2	4807.000	40.13	2.08	42.21	74.00	-31.79	peak
3	6307.083	38.85	6.61	45.46	74.00	-28.54	peak
4	8050.000	38.21	10.75	48.96	74.00	-25.04	peak
5	10846.500	37.64	14.60	52.24	74.00	-21.76	peak
6 *	11872.667	37.36	15.40	52.76	74.00	-21.24	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.11	-7.74	43.37	74.00	-30.63	peak
2	5774.417	40.83	4.70	45.53	74.00	-28.47	peak
3	7607.417	38.22	10.16	48.38	74.00	-25.62	peak
4	9185.833	38.78	12.25	51.03	74.00	-22.97	peak
5	10693.750	38.14	14.34	52.48	74.00	-21.52	peak
6 *	12080.250	36.97	15.75	52.72	74.00	-21.28	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	48.85	-7.74	41.11	74.00	-32.89	peak
2	4376.167	40.97	1.11	42.08	74.00	-31.92	peak
3	6467.667	37.94	7.23	45.17	74.00	-28.83	peak
4	7650.500	39.31	10.23	49.54	74.00	-24.46	peak
5	9044.833	38.83	11.75	50.58	74.00	-23.42	peak
6 *	11328.250	37.71	14.96	52.67	74.00	-21.33	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.55	-7.74	43.81	74.00	-30.19	peak
2	5183.000	39.36	2.87	42.23	74.00	-31.77	peak
3	7599.583	37.39	10.15	47.54	74.00	-26.46	peak
4	9138.833	38.51	12.09	50.60	74.00	-23.40	peak
5	10893.500	38.06	14.66	52.72	74.00	-21.28	peak
6 *	12710.833	36.52	16.40	52.92	74.00	-21.08	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.0000	50.98	-8.17	42.81	74.00	-31.19	peak
2	5617.750	39.07	4.10	43.17	74.00	-30.83	peak
3	7243.167	37.42	10.19	47.61	74.00	-26.39	peak
4	9671.500	38.69	12.75	51.44	74.00	-22.56	peak
5	11116.750	37.69	14.83	52.52	74.00	-21.48	peak
6 *	12683.417	36.82	16.34	53.16	74.00	-20.84	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.28	-7.74	43.54	74.00	-30.46	peak
2	5946.750	39.63	5.27	44.90	74.00	-29.10	peak
3	7270.583	37.58	10.19	47.77	74.00	-26.23	peak
4	9150.583	38.28	12.13	50.41	74.00	-23.59	peak
5 *	10799.500	38.20	14.56	52.76	74.00	-21.24	peak
6	12236.917	36.90	15.84	52.74	74.00	-21.26	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 2422MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	48.42	-7.74	40.68	74.00	-33.32	peak
2	4740.417	41.10	1.95	43.05	74.00	-30.95	peak
3	7952.083	38.47	10.77	49.24	74.00	-24.76	peak
4	9189.750	38.92	12.27	51.19	74.00	-22.81	peak
5	10697.667	38.74	14.35	53.09	74.00	-20.91	peak
6 *	11653.333	37.92	15.28	53.20	74.00	-20.80	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.58	-7.74	43.84	74.00	-30.16	peak
2	4783.500	40.51	2.03	42.54	74.00	-31.46	peak
3	7869.833	38.48	10.60	49.08	74.00	-24.92	peak
4	9816.417	38.62	13.02	51.64	74.00	-22.36	peak
5 *	11116.750	38.05	14.83	52.88	74.00	-21.12	peak
6	12303.500	37.05	15.74	52.79	74.00	-21.21	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	49.05	-7.59	41.46	74.00	-32.54	peak
2	5958.500	38.07	5.32	43.39	74.00	-30.61	peak
3	7858.083	37.79	10.58	48.37	74.00	-25.63	peak
4	9099.667	38.54	11.95	50.49	74.00	-23.51	peak
5	10309.917	37.94	13.84	51.78	74.00	-22.22	peak
6 *	11833.500	37.14	15.33	52.47	74.00	-21.53	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	48.88	-7.74	41.14	74.00	-32.86	peak
2	4807.000	41.56	2.08	43.64	74.00	-30.36	peak
3	6416.750	37.84	7.08	44.92	74.00	-29.08	peak
4	8053.917	39.72	10.73	50.45	74.00	-23.55	peak
5	9871.250	39.12	13.10	52.22	74.00	-21.78	peak
6 *	12424.917	37.19	15.69	52.88	74.00	-21.12	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.23	-7.74	43.49	74.00	-30.51	peak
2	7305.833	37.67	10.20	47.87	74.00	-26.13	peak
3	8805.917	38.63	11.33	49.96	74.00	-24.04	peak
4	10494.000	38.01	14.04	52.05	74.00	-21.95	peak
5 *	11281.250	37.53	14.93	52.46	74.00	-21.54	peak
6	12327.000	36.45	15.71	52.16	74.00	-21.84	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB μ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

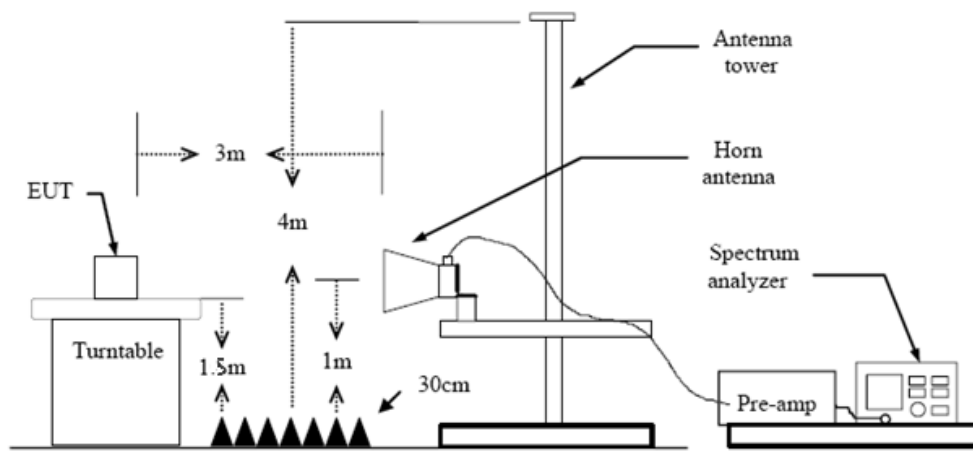

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1MHz, VBW=3MHz Peak detector for Peak value.
 RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements, above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode

Please refer to the clause 2.4.



Test Result

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz

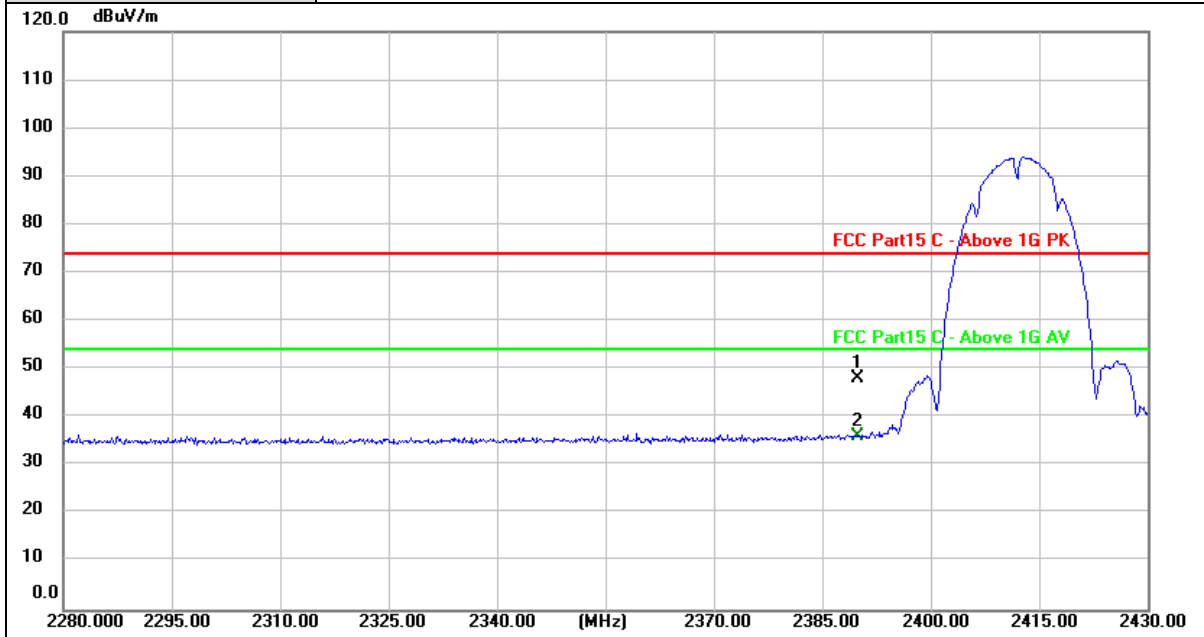


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.72	31.31	48.03	74.00	-25.97	peak
2 *	2390.000	4.94	31.31	36.25	54.00	-17.75	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz

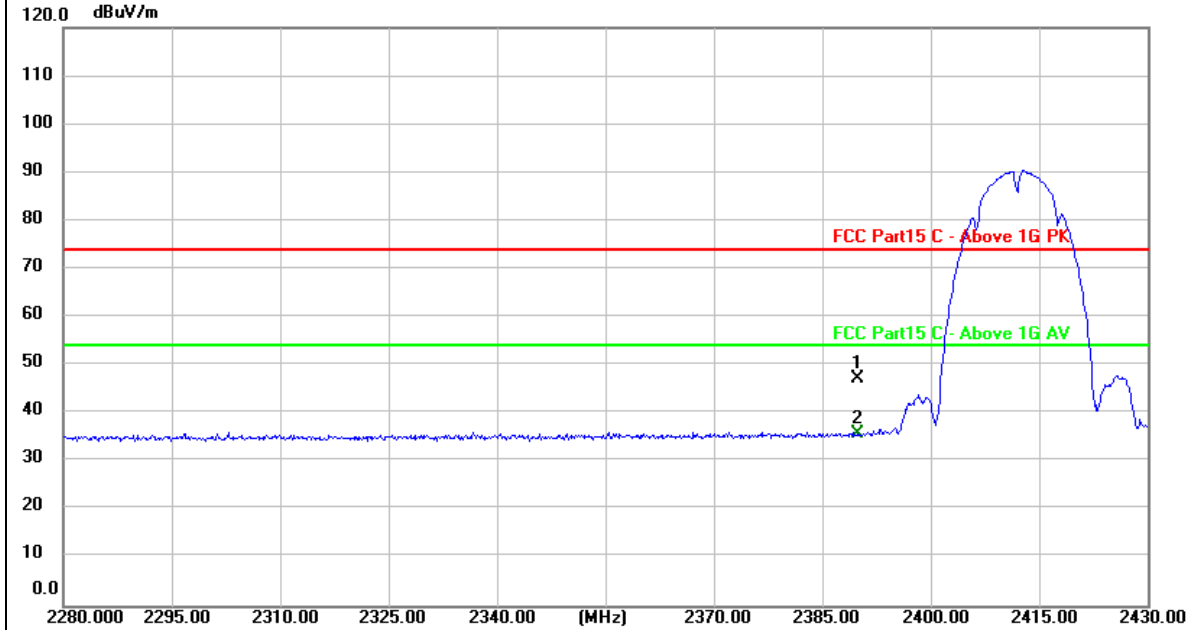


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.00	31.31	47.31	74.00	-26.69	peak
2 *	2390.000	4.51	31.31	35.82	54.00	-18.18	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz

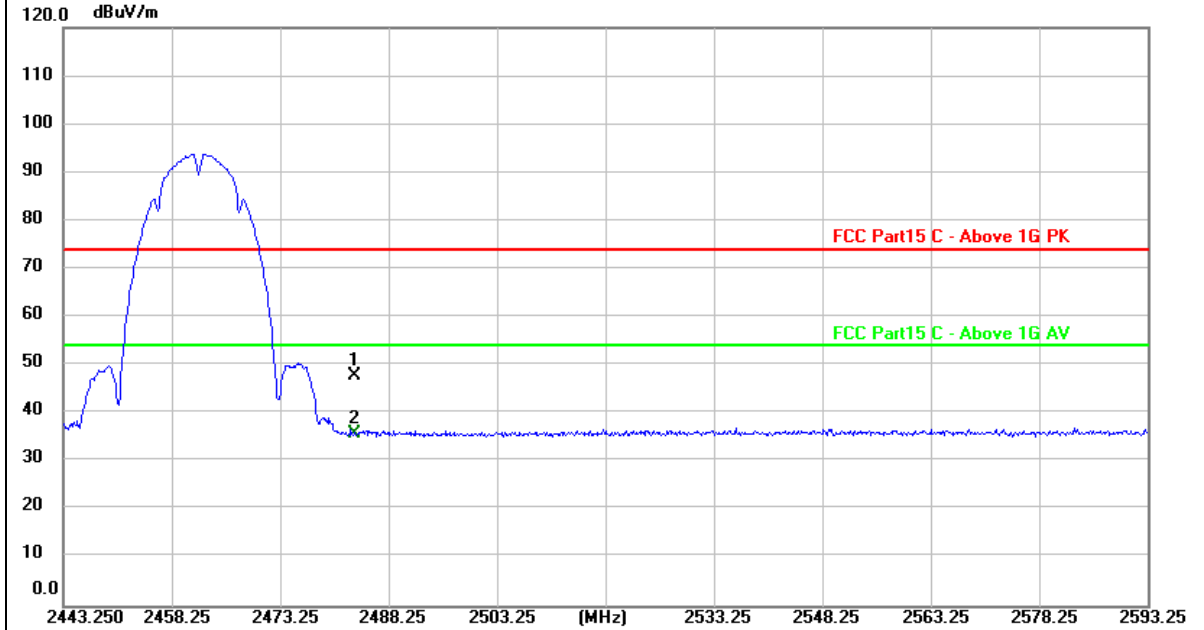

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	16.38	31.48	47.86	74.00	-26.14	peak
2 *	2483.500	4.41	31.48	35.89	54.00	-18.11	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz

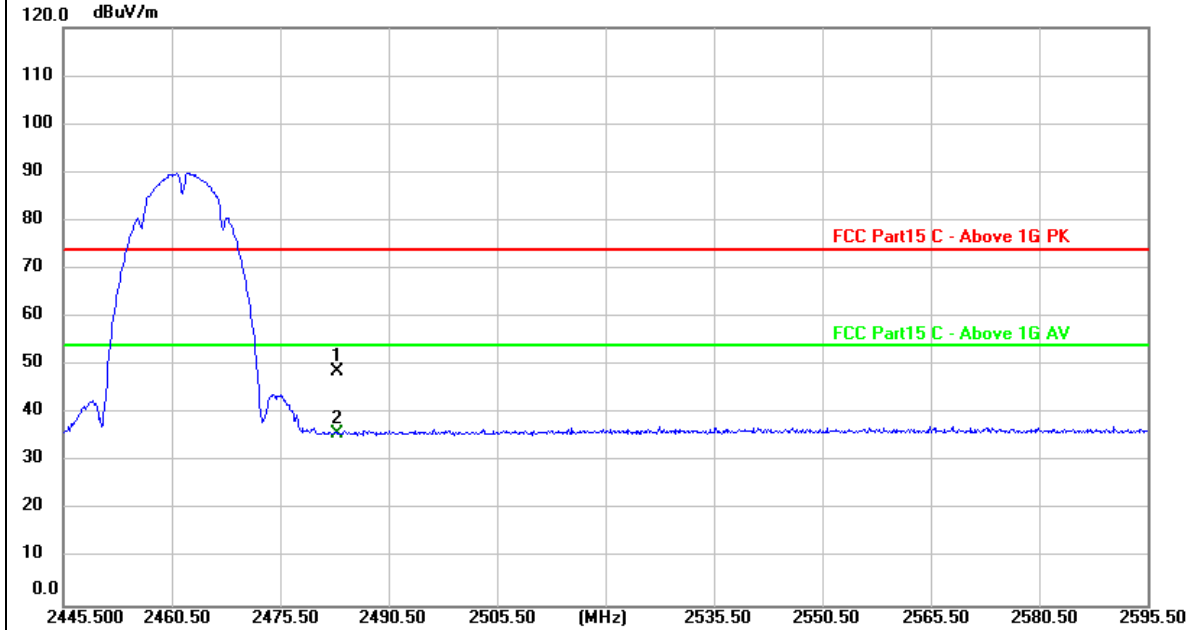


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.14	31.48	48.62	74.00	-25.38	peak
2 *	2483.500	4.27	31.48	35.75	54.00	-18.25	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz

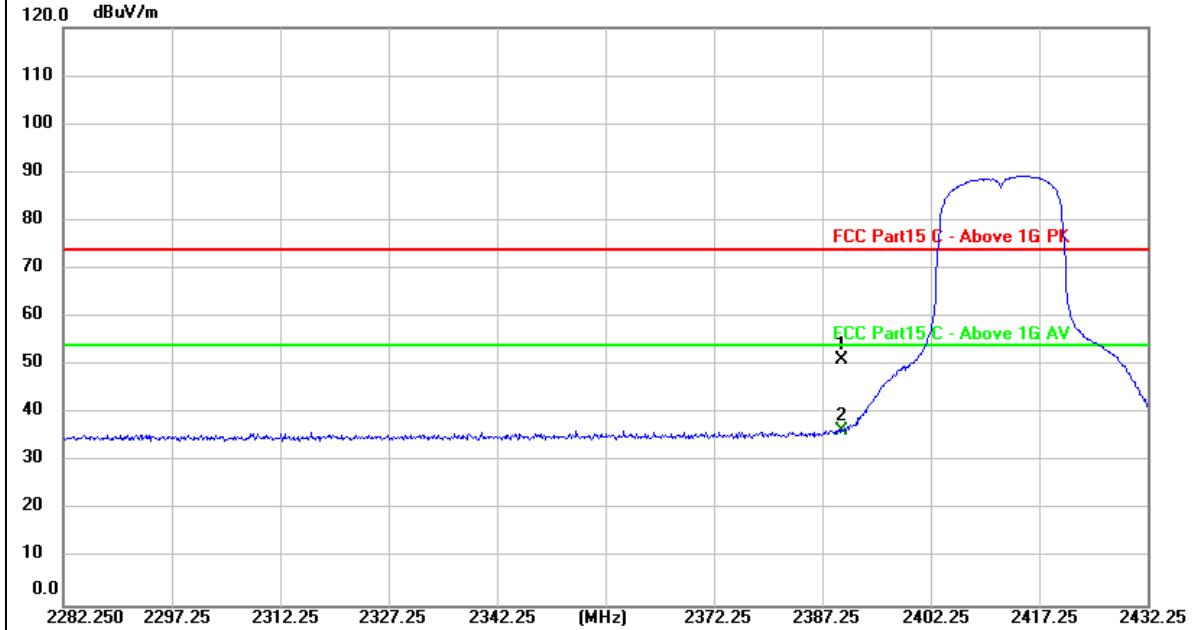


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	19.75	31.31	51.06	74.00	-22.94	peak
2 *	2390.000	5.02	31.31	36.33	54.00	-17.67	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz

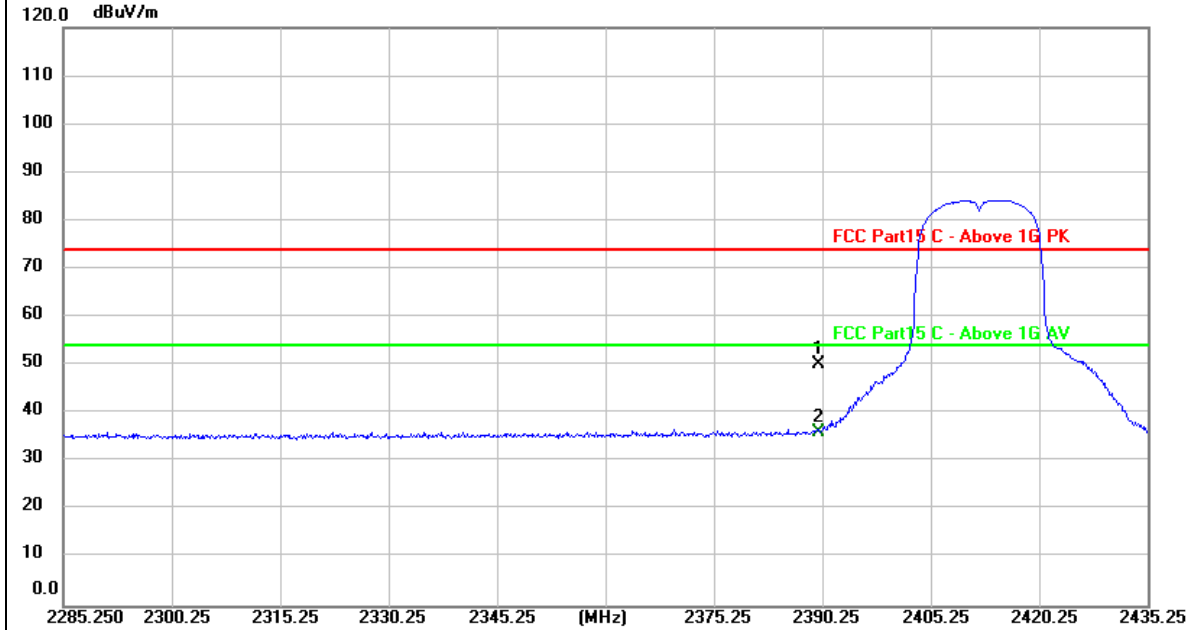

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	18.86	31.31	50.17	74.00	-23.83	peak
2 *	2390.000	4.78	31.31	36.09	54.00	-17.91	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz

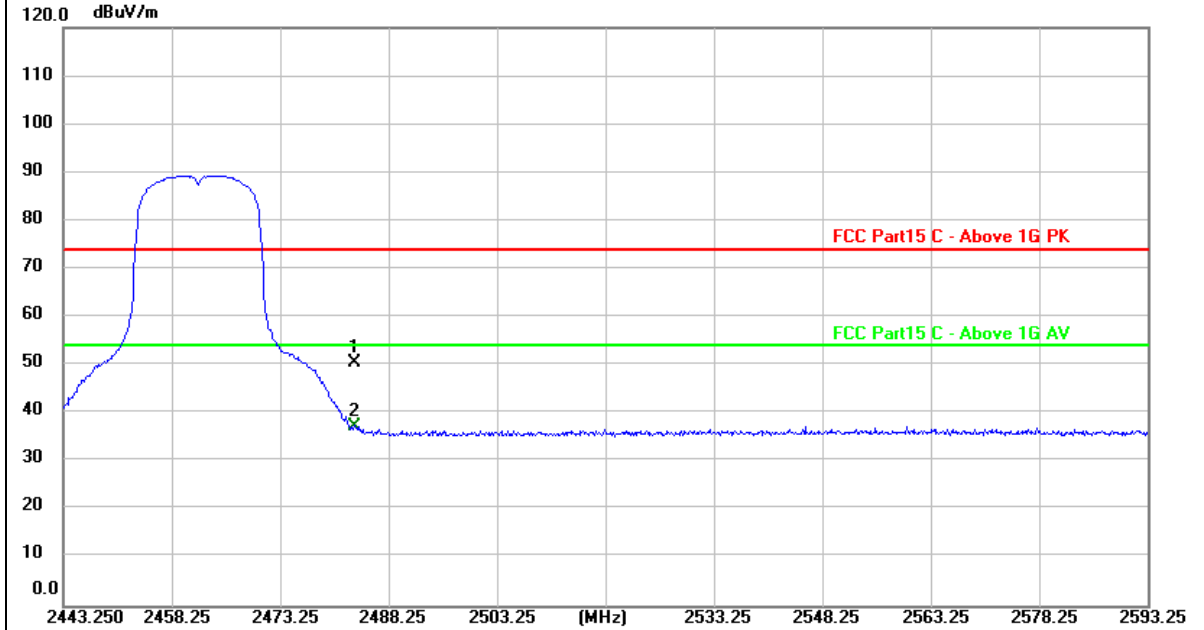

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	19.14	31.48	50.62	74.00	-23.38	peak
2 *	2483.500	5.88	31.48	37.36	54.00	-16.64	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz

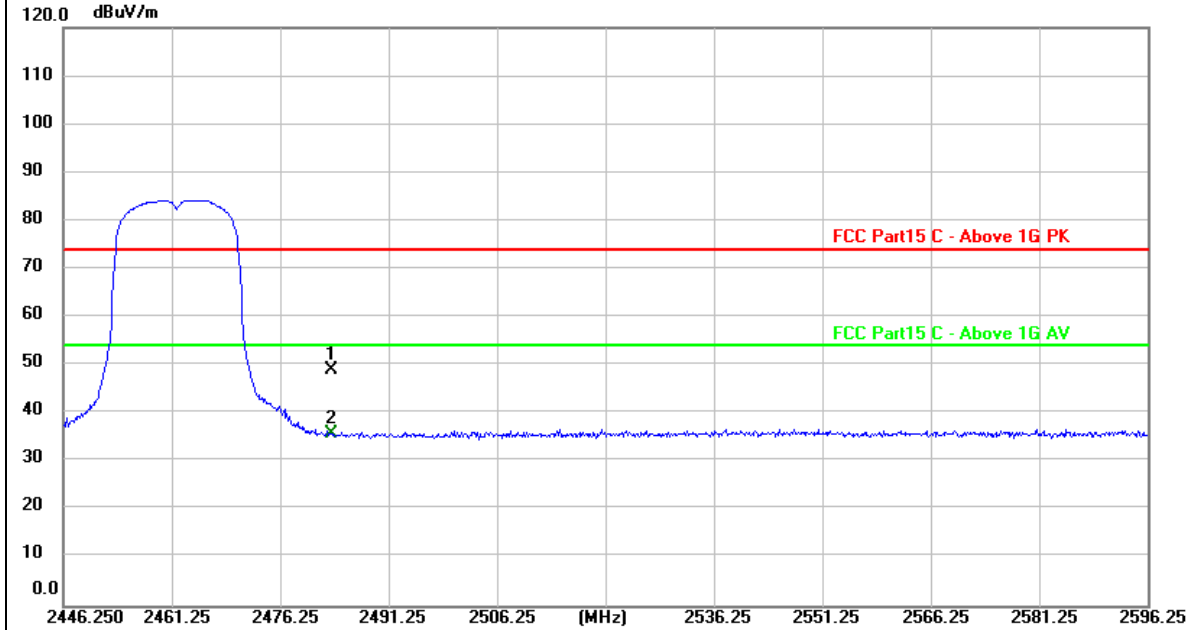

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.47	31.48	48.95	74.00	-25.05	peak
2 *	2483.500	4.39	31.48	35.87	54.00	-18.13	AVG


Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

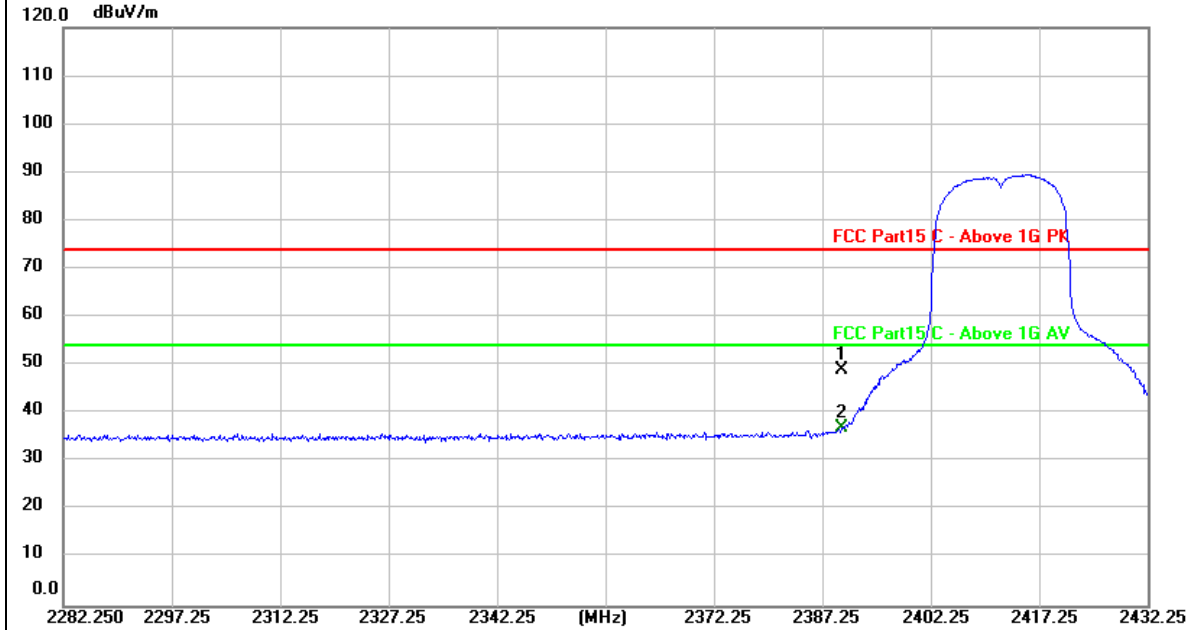


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	17.76	31.31	49.07	74.00	-24.93	peak
2 *	2390.000	5.79	31.31	37.10	54.00	-16.90	AVG

Remarks:
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz

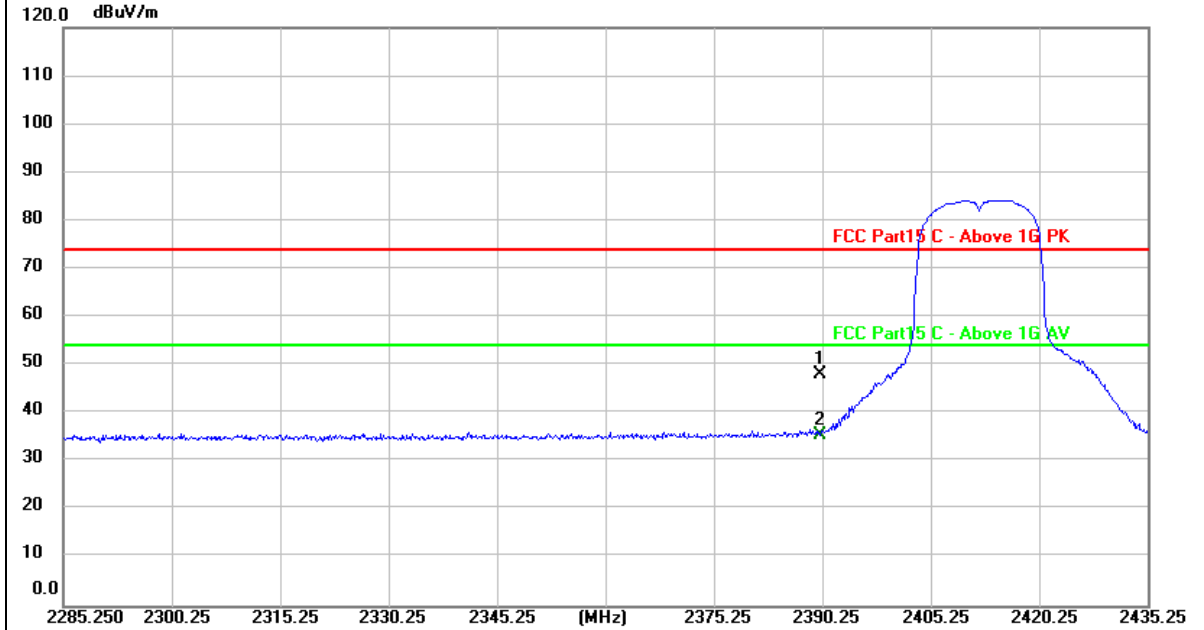

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	16.95	31.31	48.26	74.00	-25.74	peak
2 *	2390.000	4.35	31.31	35.66	54.00	-18.34	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

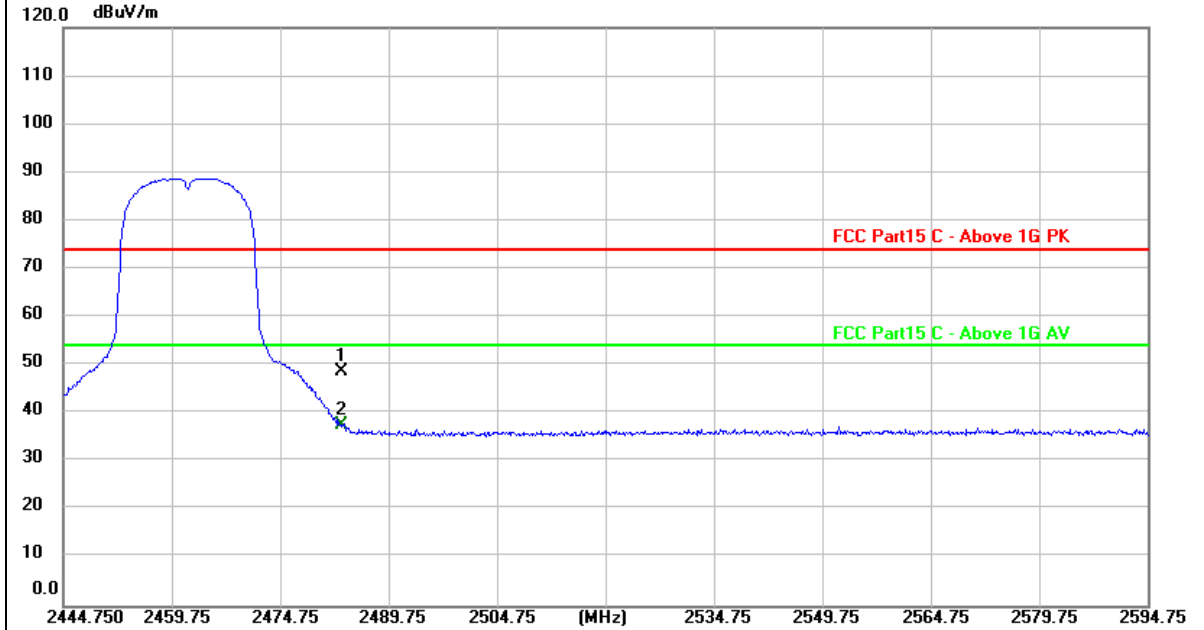


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	17.21	31.48	48.69	74.00	-25.31	peak
2 *	2483.500	6.23	31.48	37.71	54.00	-16.29	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz

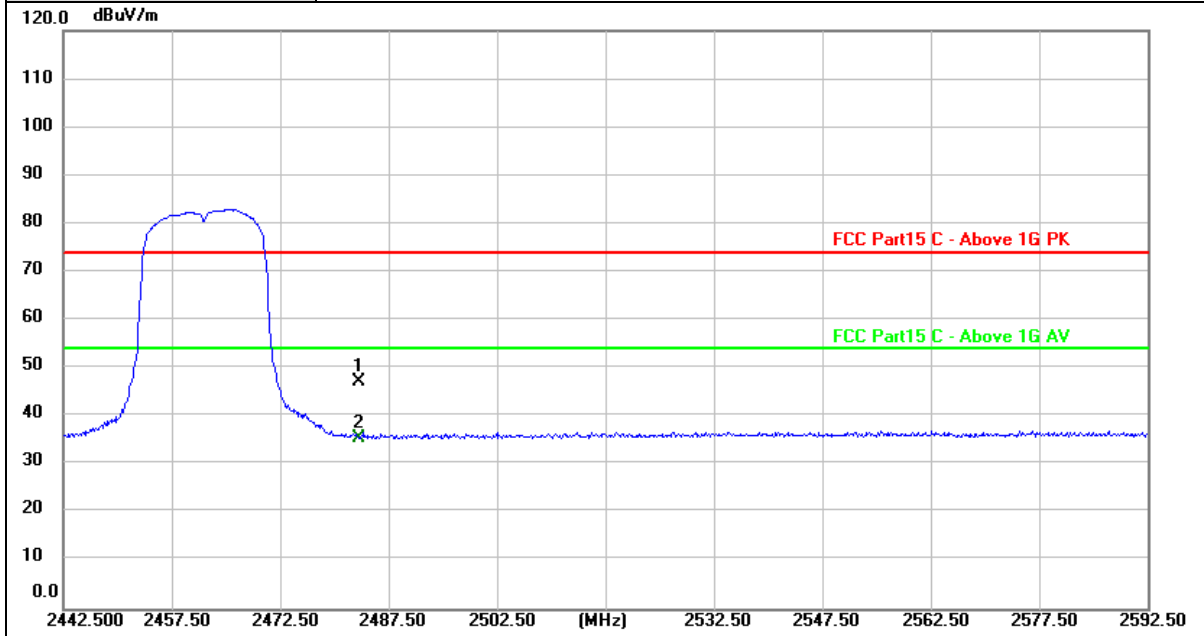


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	15.73	31.48	47.21	74.00	-26.79	peak
2 *	2483.500	4.21	31.48	35.69	54.00	-18.31	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

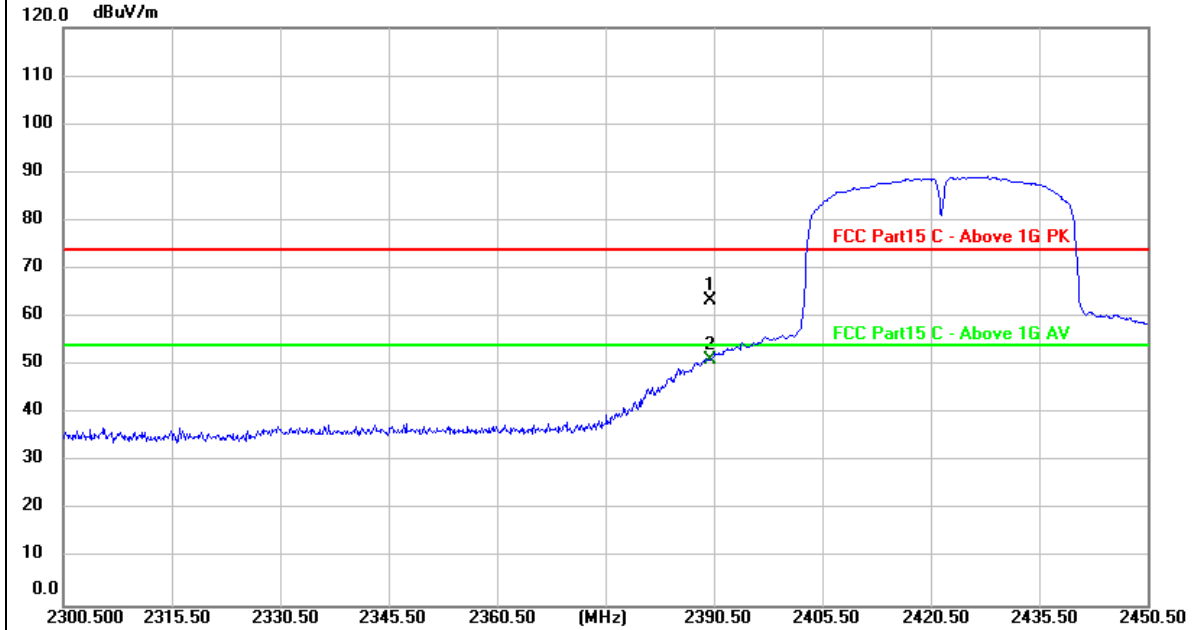


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	32.25	31.31	63.56	74.00	-10.44	peak
2 *	2390.000	19.78	31.31	51.09	54.00	-2.91	AVG

Remarks:
 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz

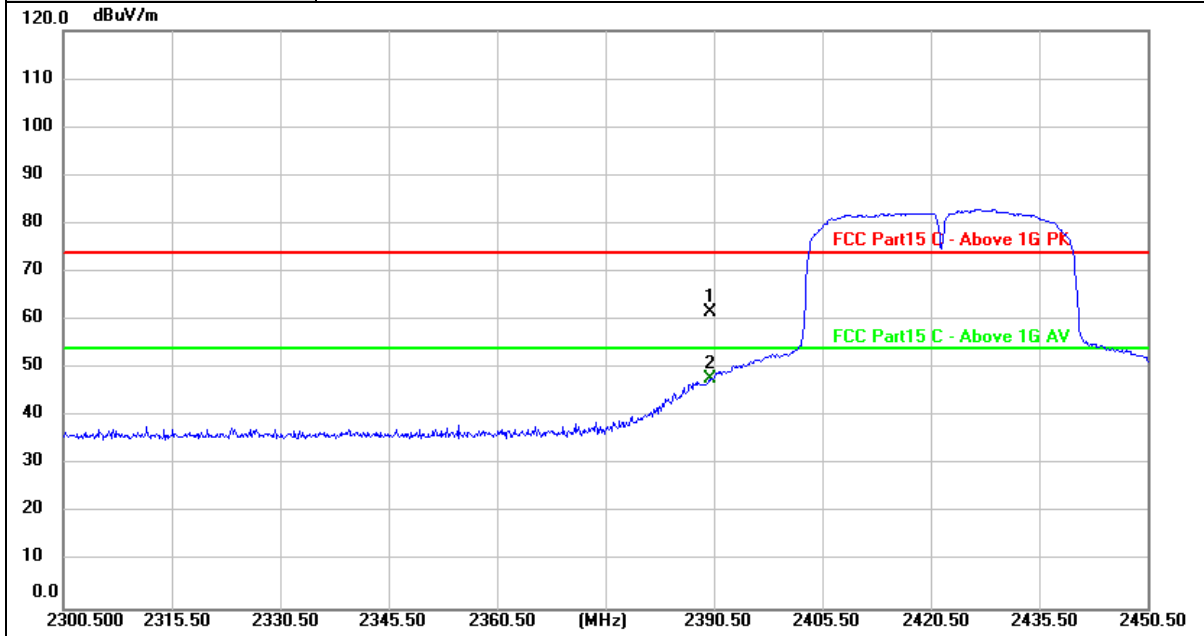


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	30.42	31.31	61.73	74.00	-12.27	peak
2 *	2390.000	16.60	31.31	47.91	54.00	-6.09	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

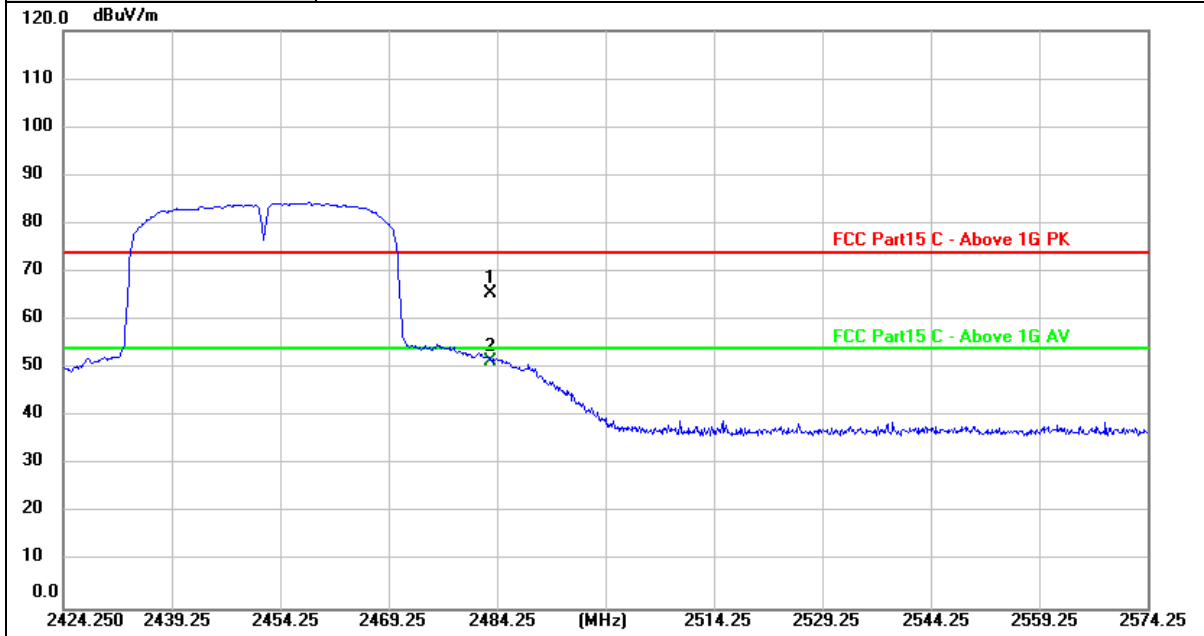


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	34.04	31.48	65.52	74.00	-8.48	peak
2 *	2483.500	20.03	31.48	51.51	54.00	-2.49	AVG

Remarks:
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
 2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz

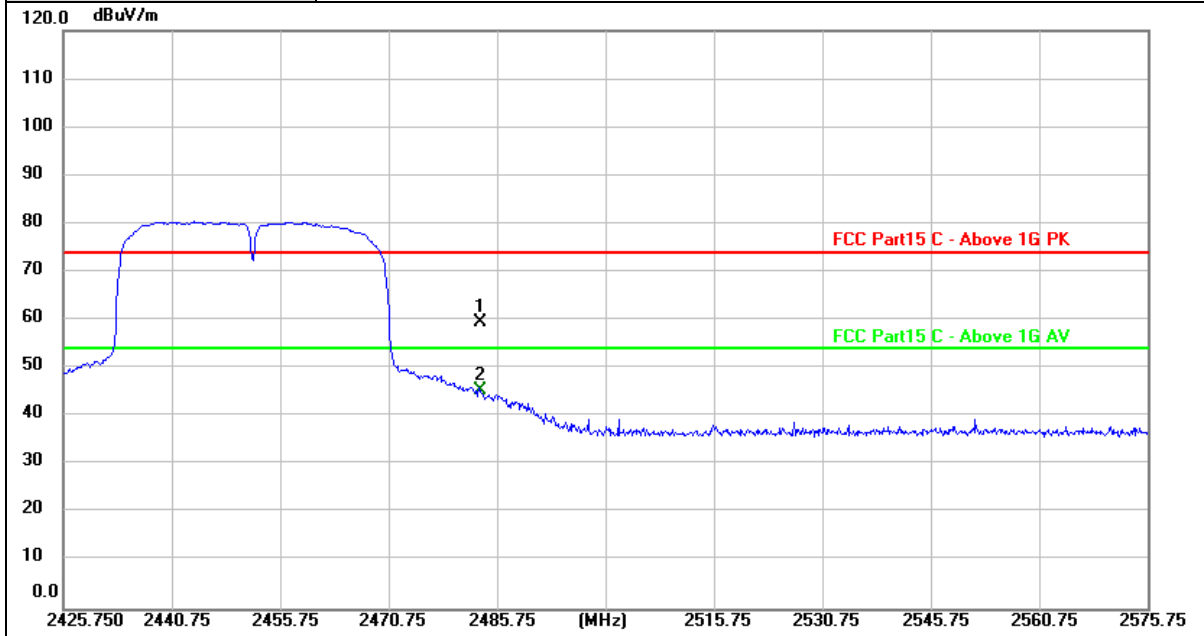

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	28.10	31.48	59.58	74.00	-14.42	peak
2 *	2483.500	13.92	31.48	45.40	54.00	-8.60	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value






3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.