

**RESULTS – 16-QAM**



Duty Cycle CF (dB)	Included in Calculations of Corr'd PSD							
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 5	Chain 6	Chain 7	Chain 8
	1.40	10.97	1.02	9.92	9.74	10.09	1.45	9.46



**PSD Results**



Channel	Frequency (MHz)	Chain 1 Meas (dBm)	Chain 2 Meas (dBm)	Chain 3 Meas (dBm)	Chain 4 Meas (dBm)
Low	2450.700	-22.97	-20.79	-19.30	-17.14
Mid	2460.700	-22.41	-19.93	-18.43	-16.39
High	2470.700	-22.23	-20.76	-19.49	-16.75



Channel	Frequency (MHz)	Chain 5 Meas (dBm)	Chain 6 Meas (dBm)	Chain 7 Meas (dBm)	Chain 8 Meas (dBm)	Total PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2450.700	-16.73	-18.65	-20.96	-21.27	-1.35	8.0	-9.4
Mid	2460.700	-15.05	-17.55	-20.33	-20.43	-0.24	8.0	-8.2
High	2470.700	-16.76	-18.84	-21.11	-22.54	-1.38	8.0	-9.4





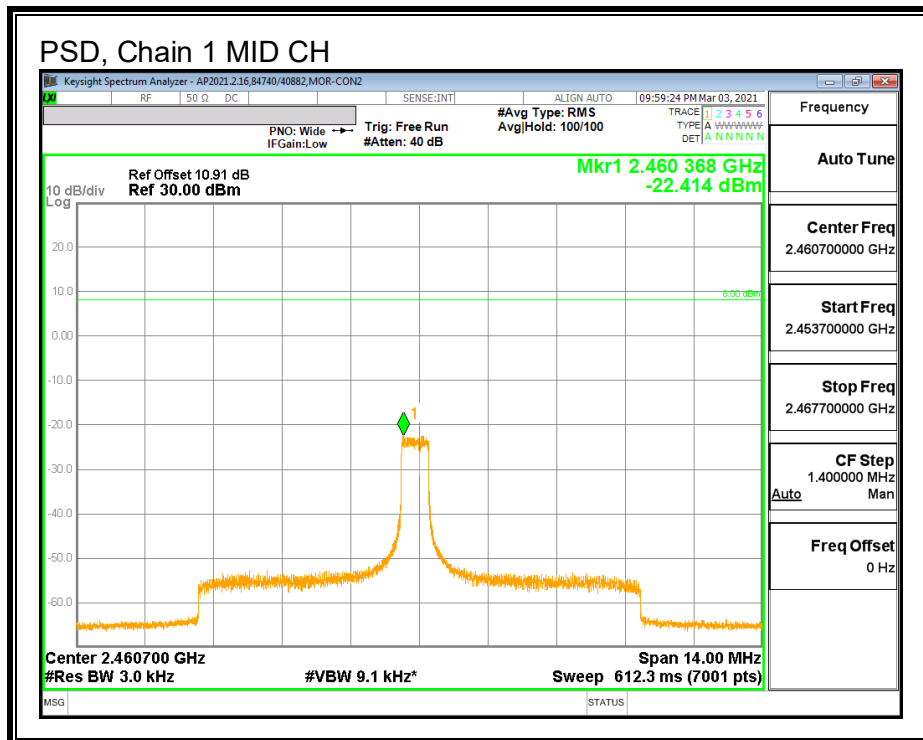
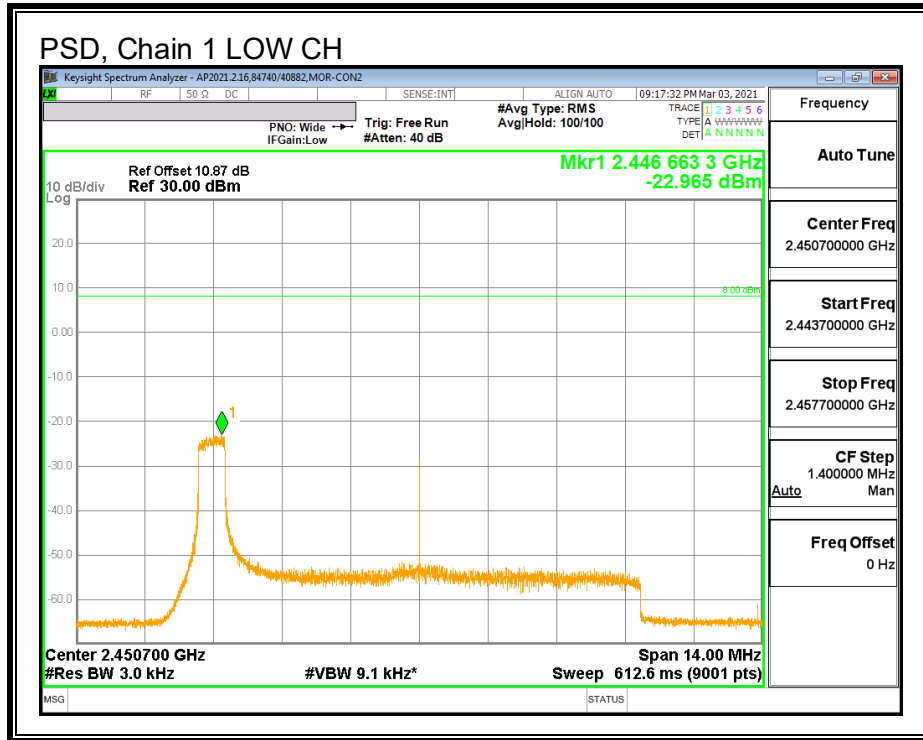


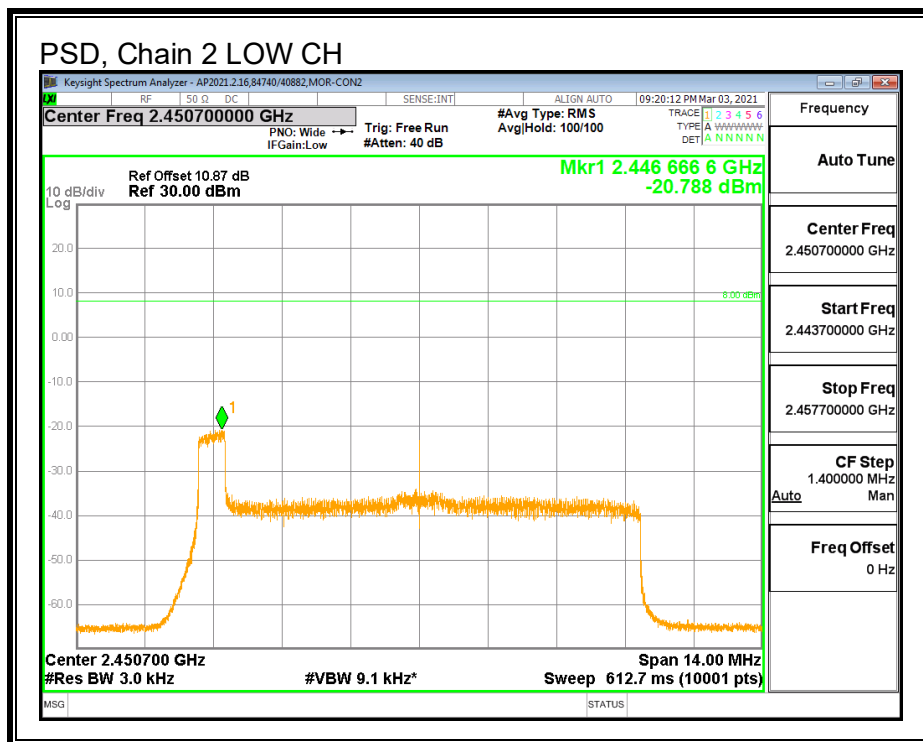
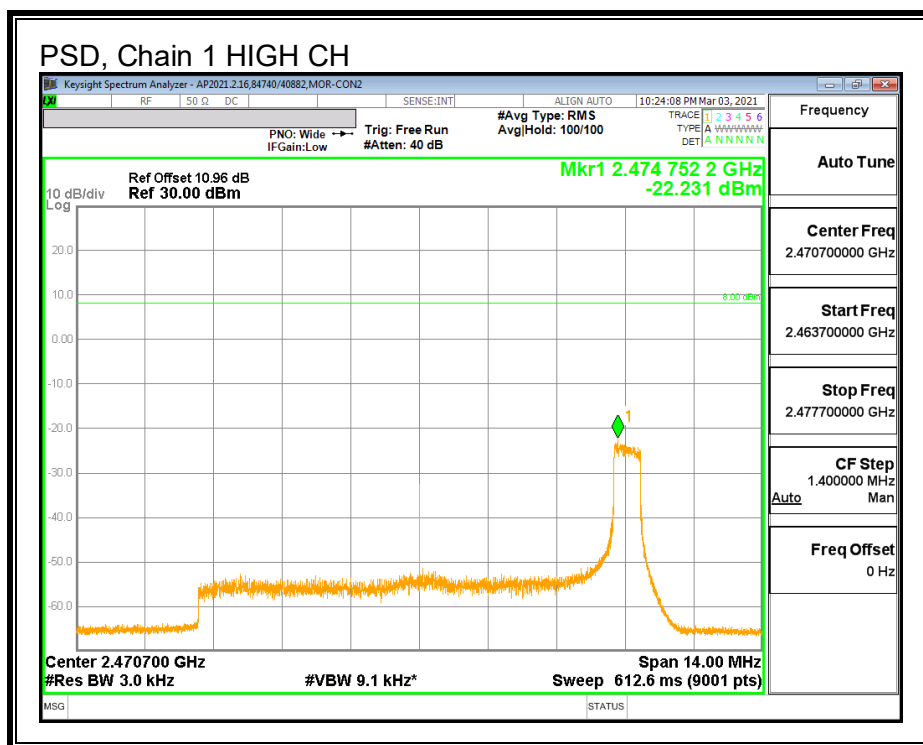


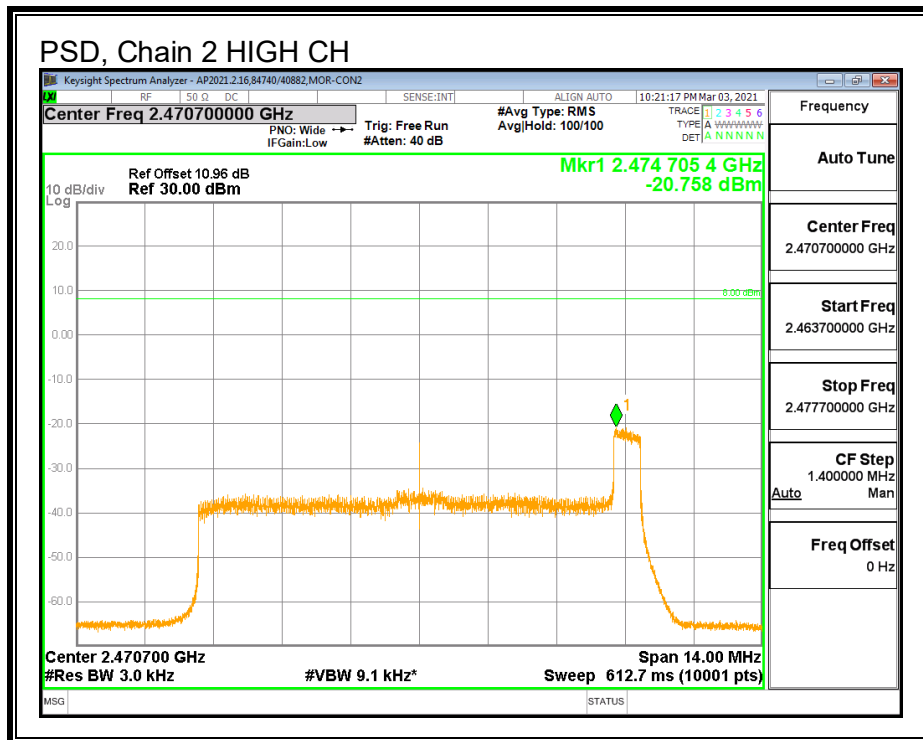
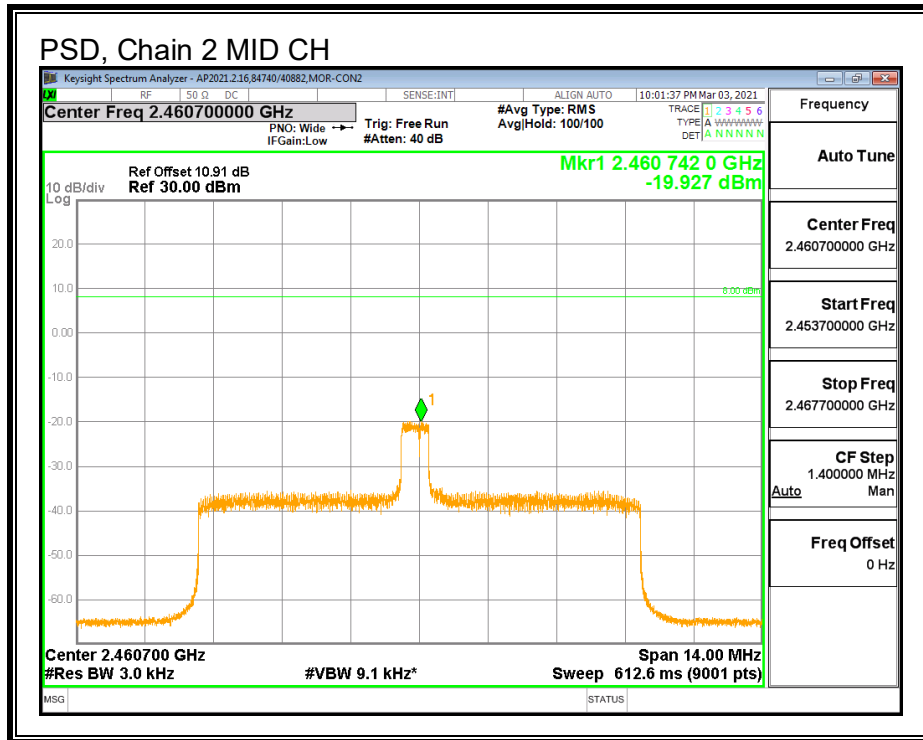


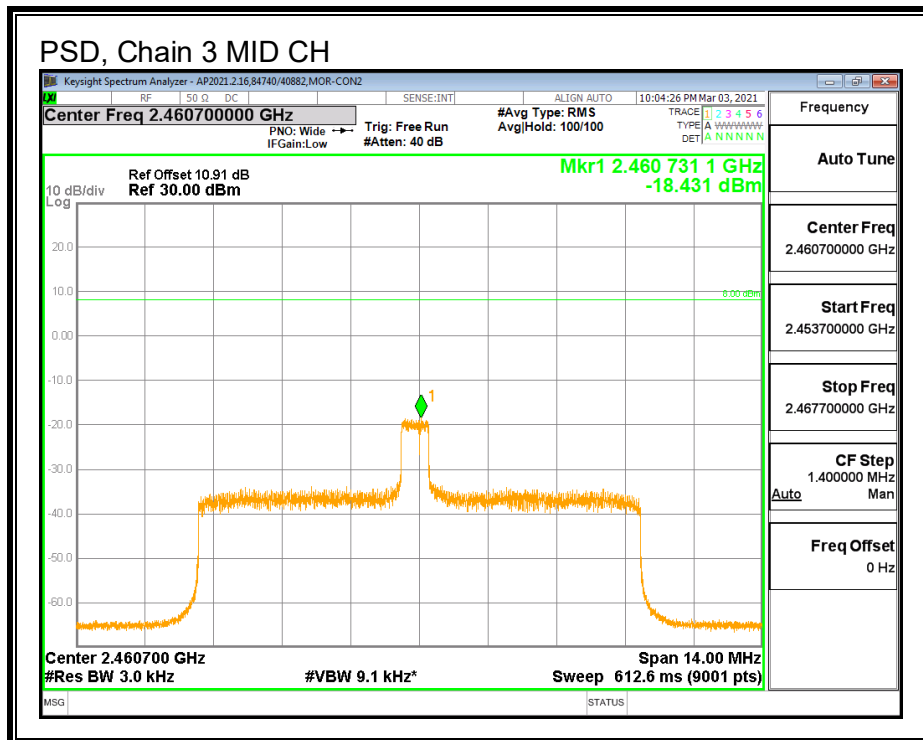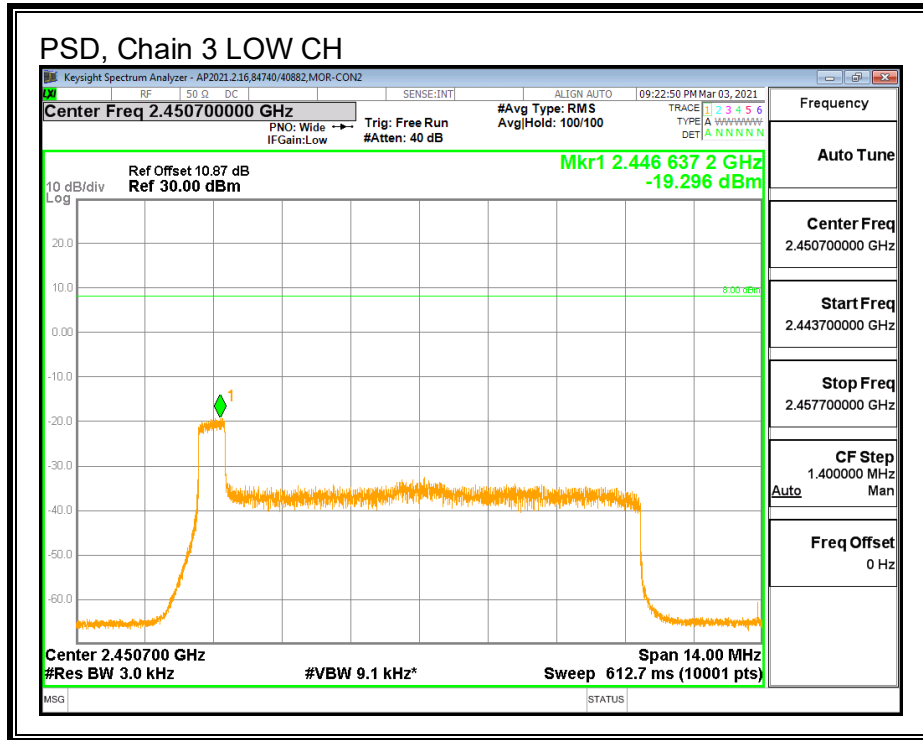

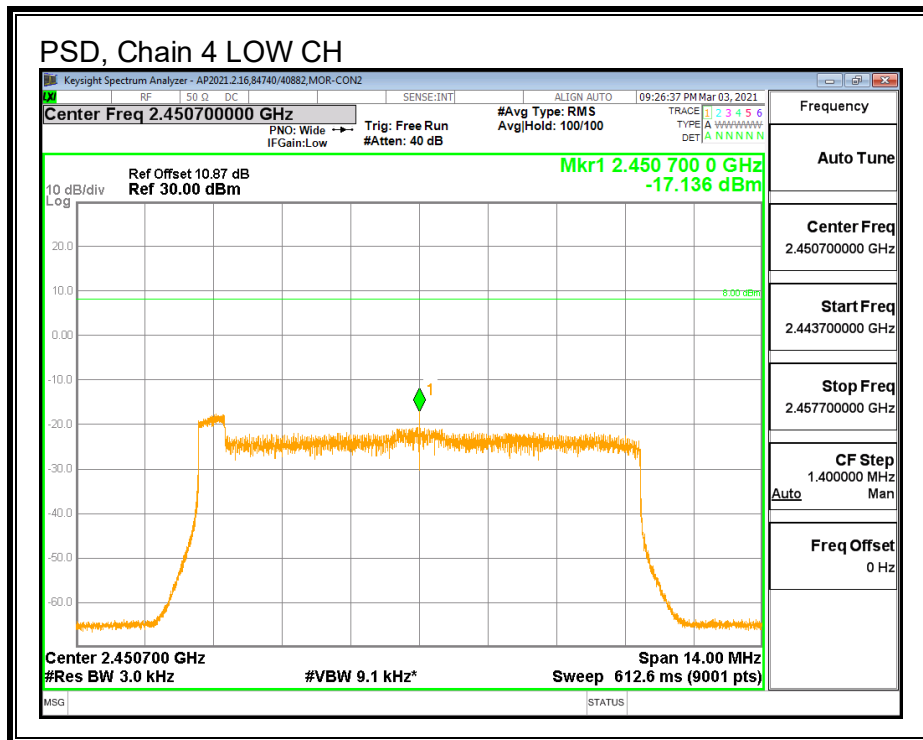
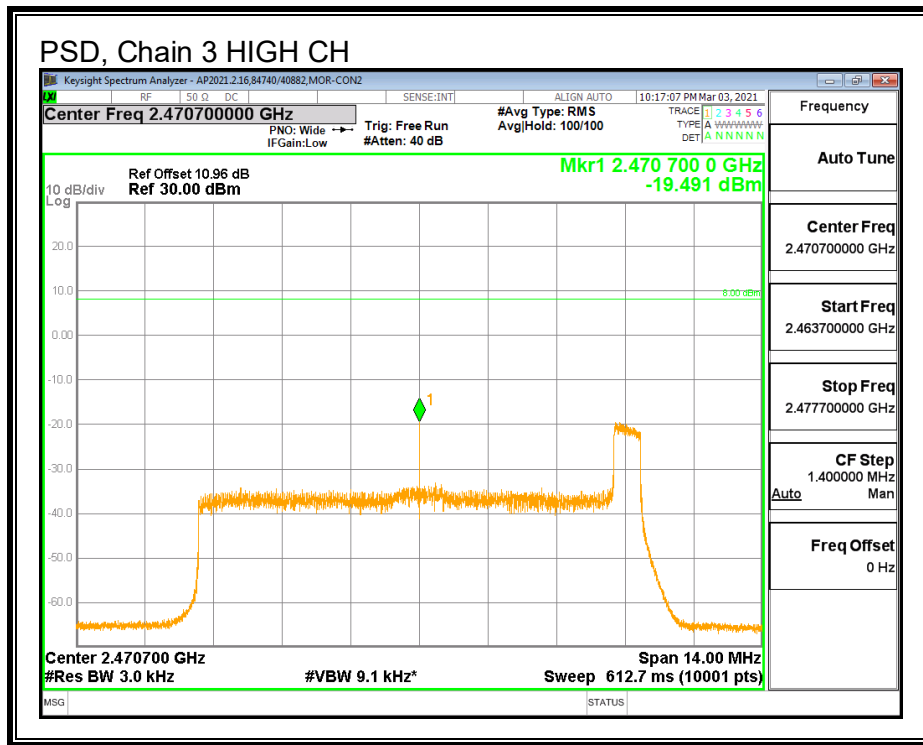


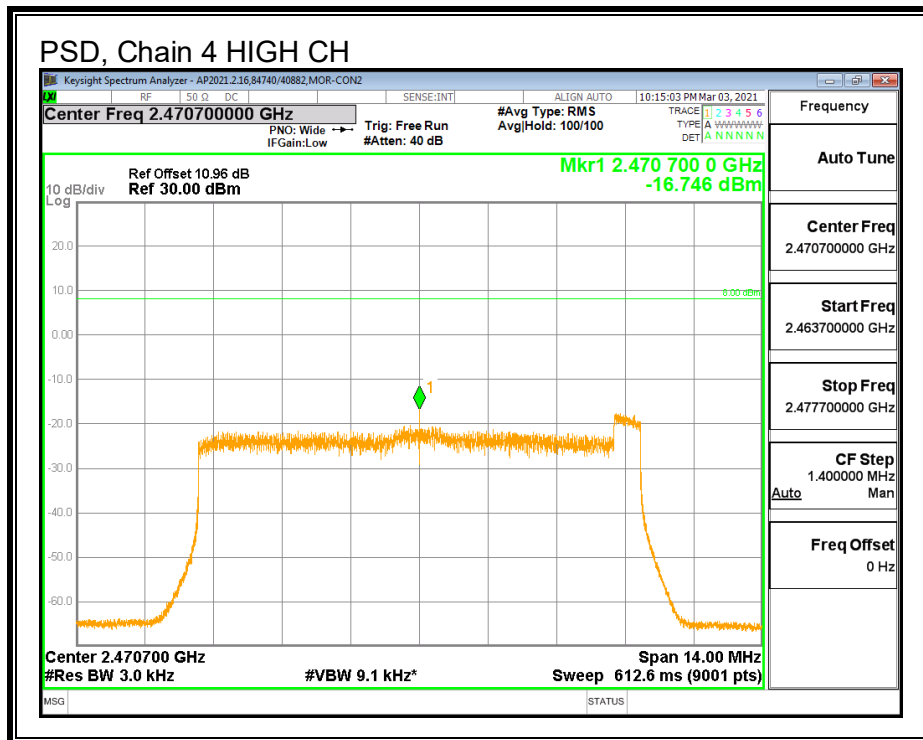
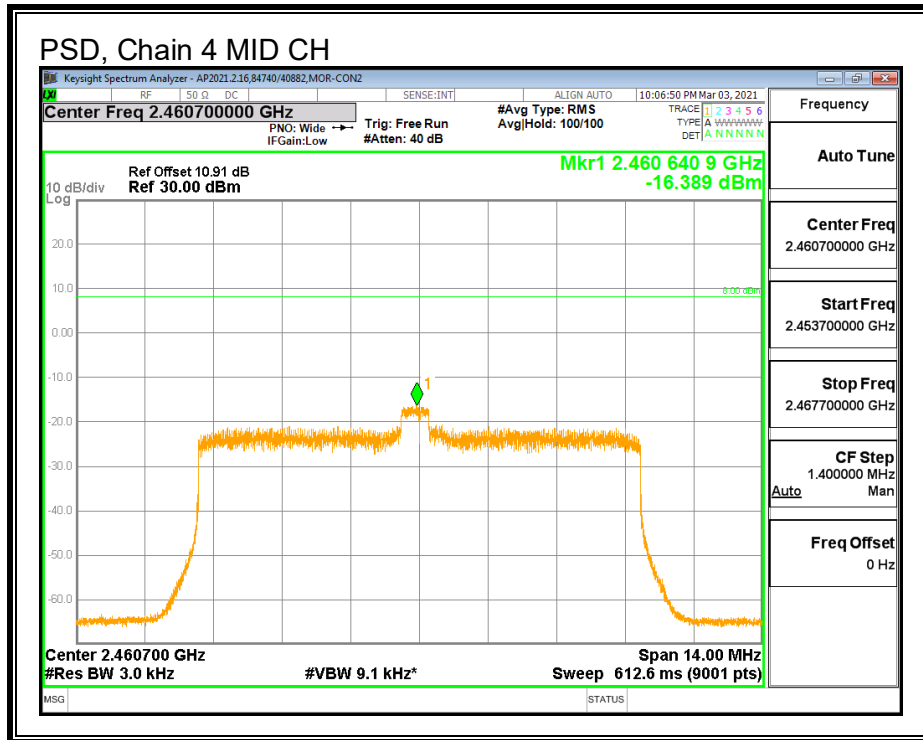


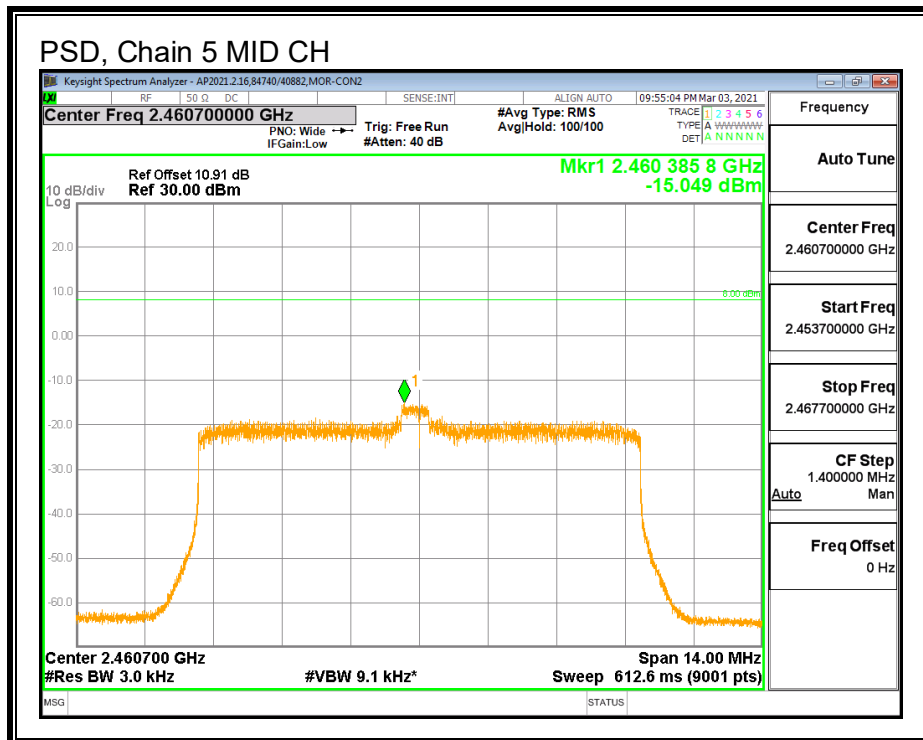
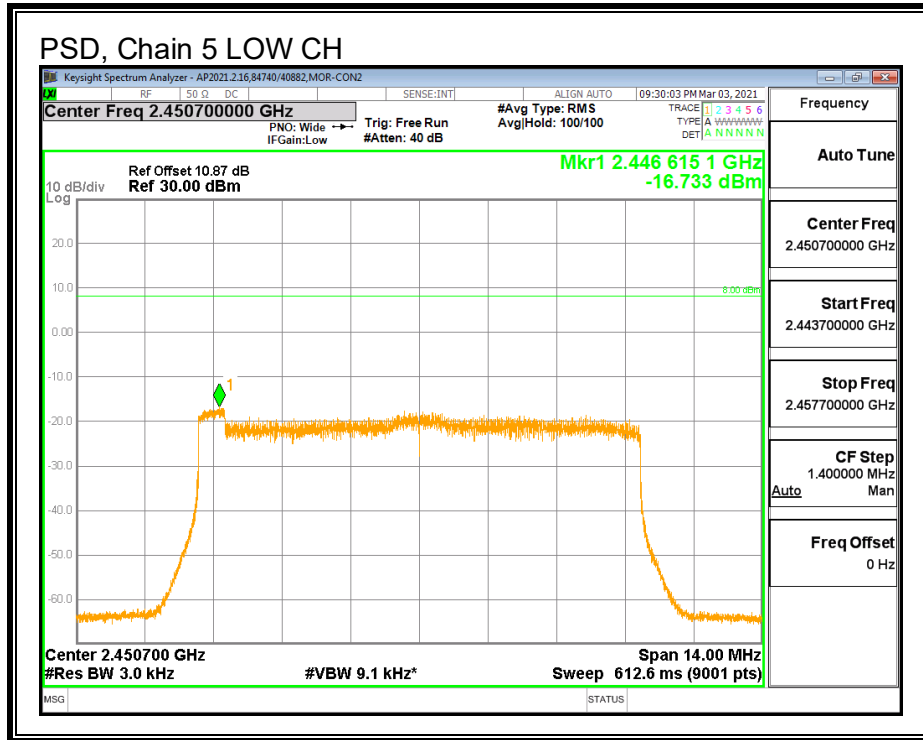


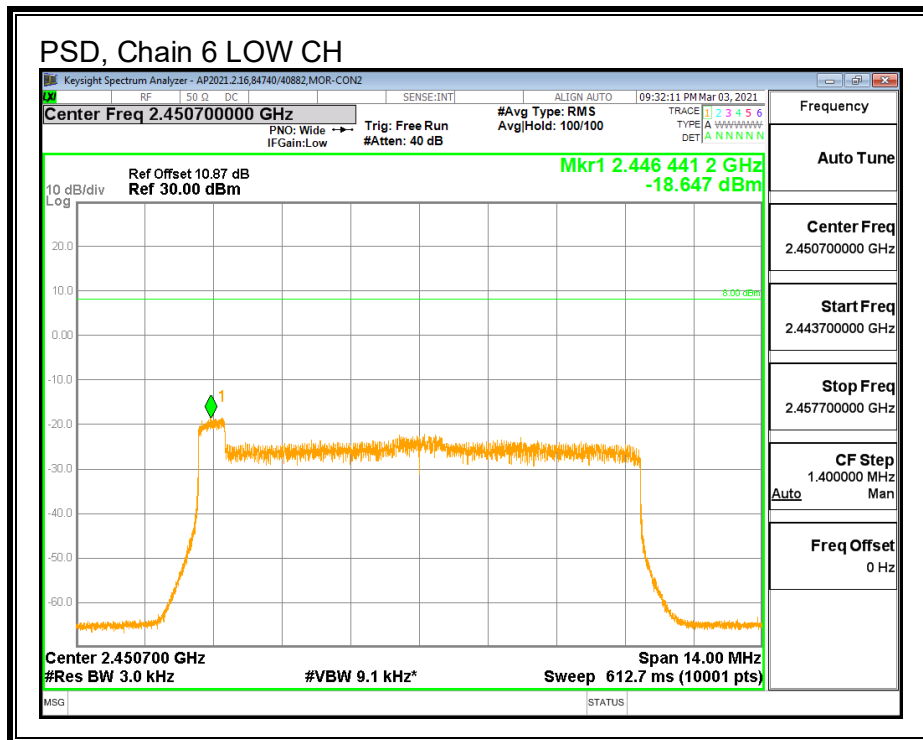
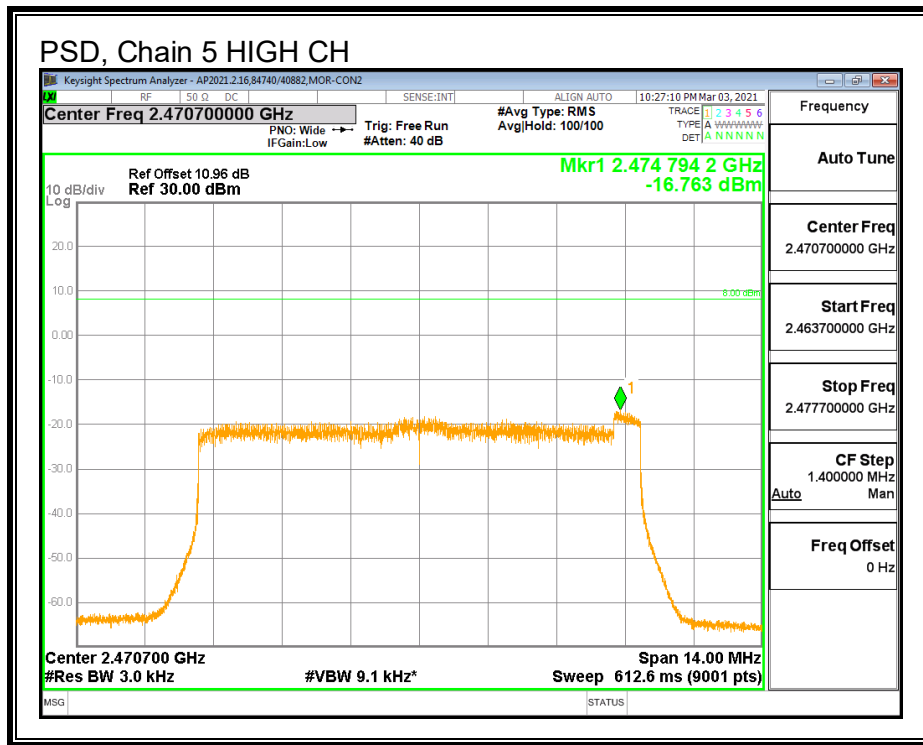




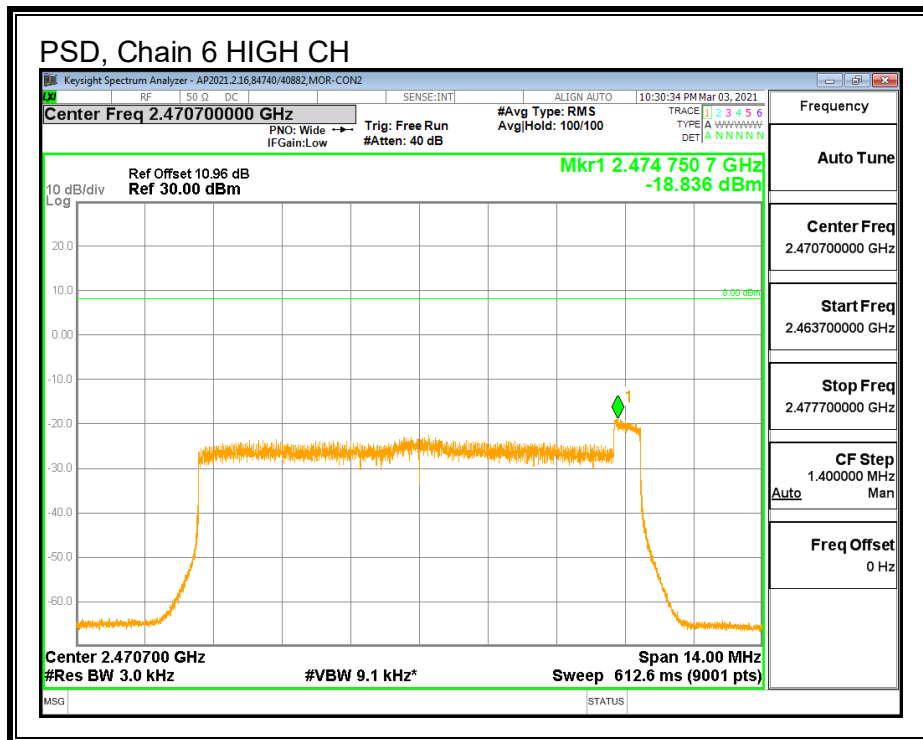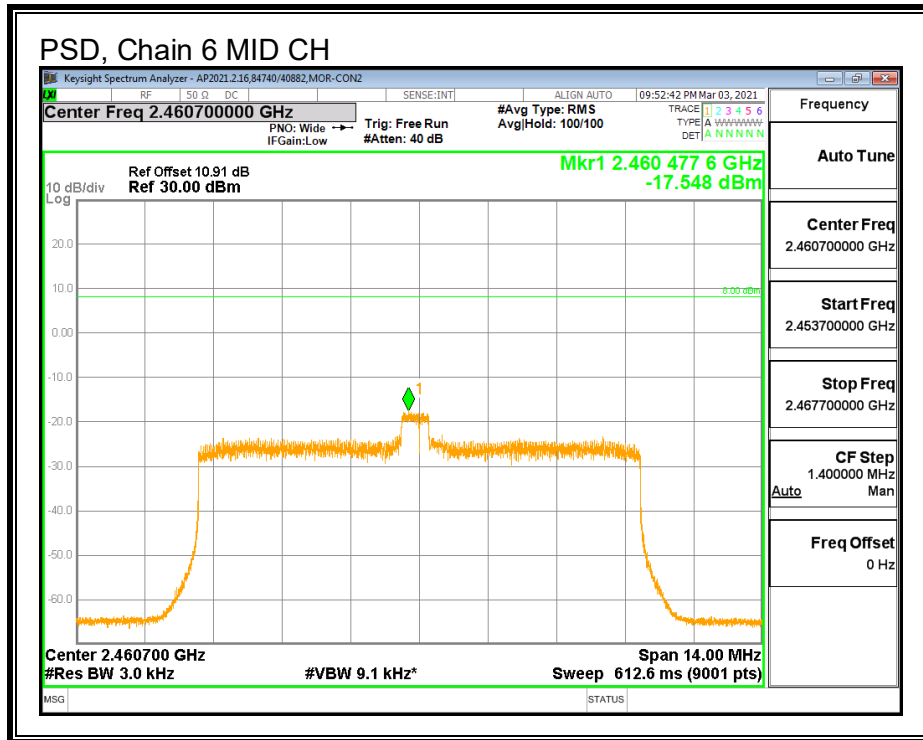

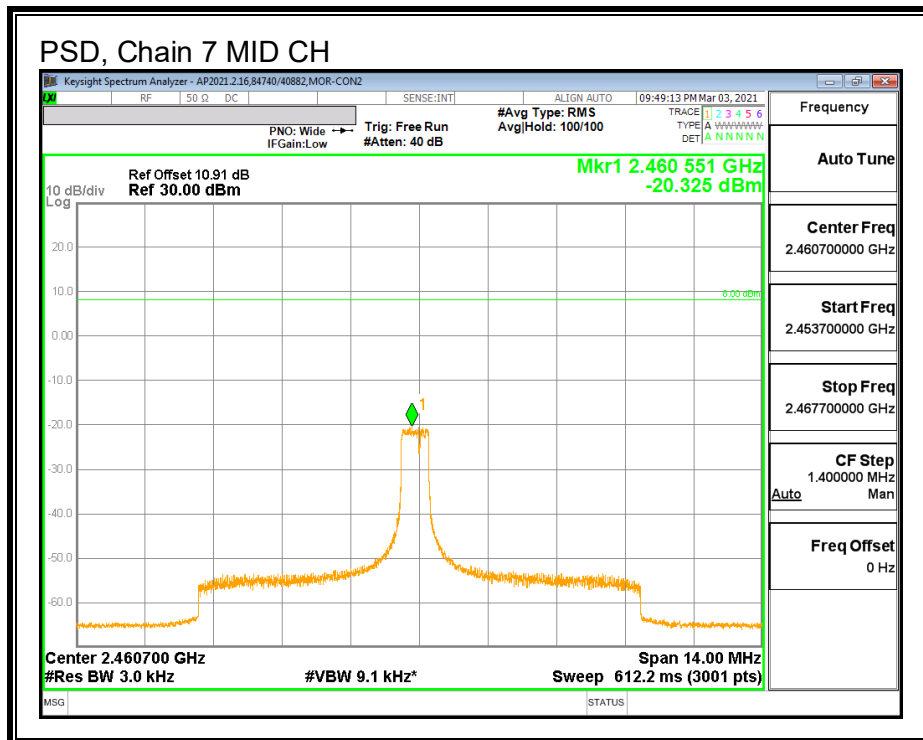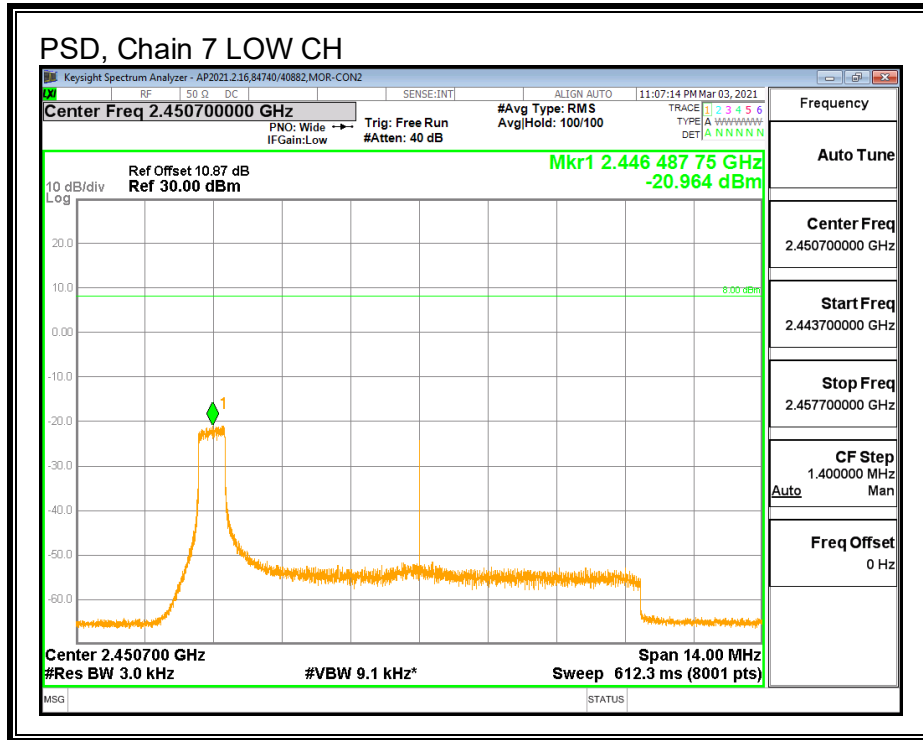

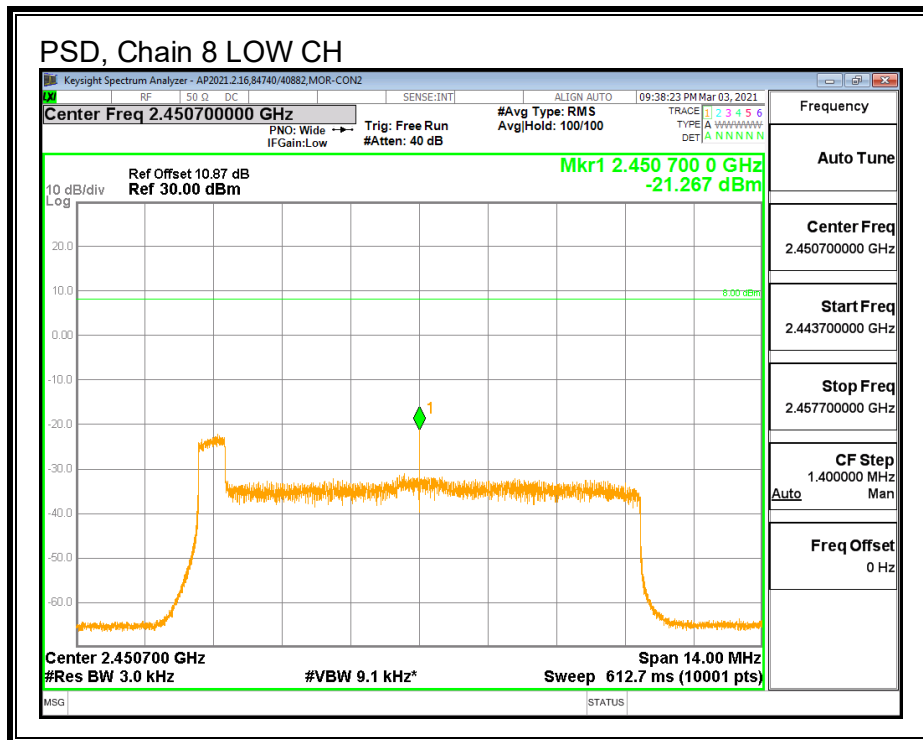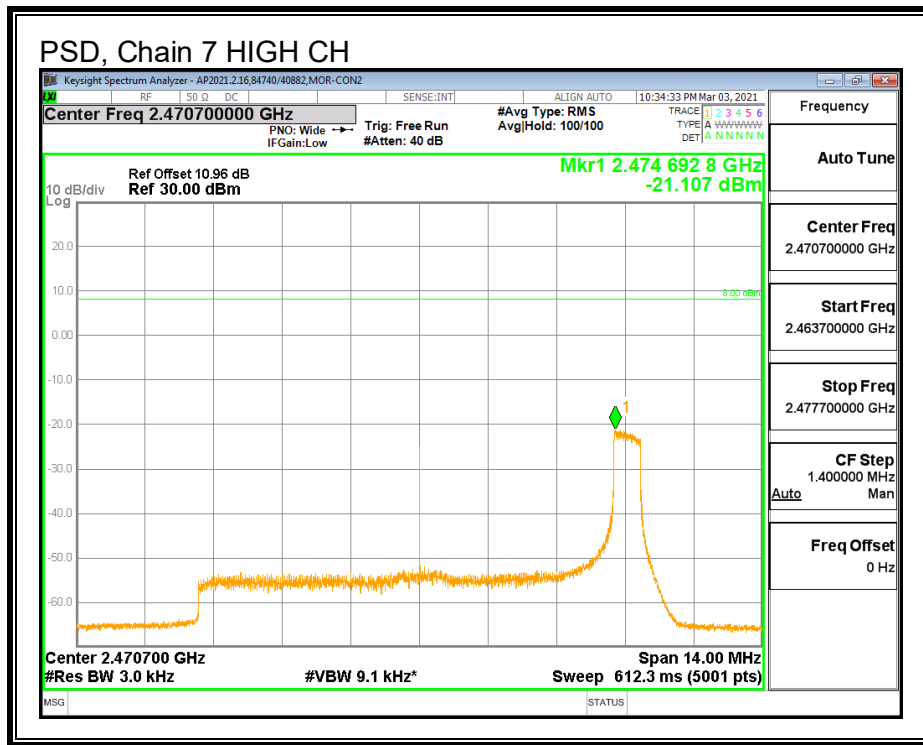

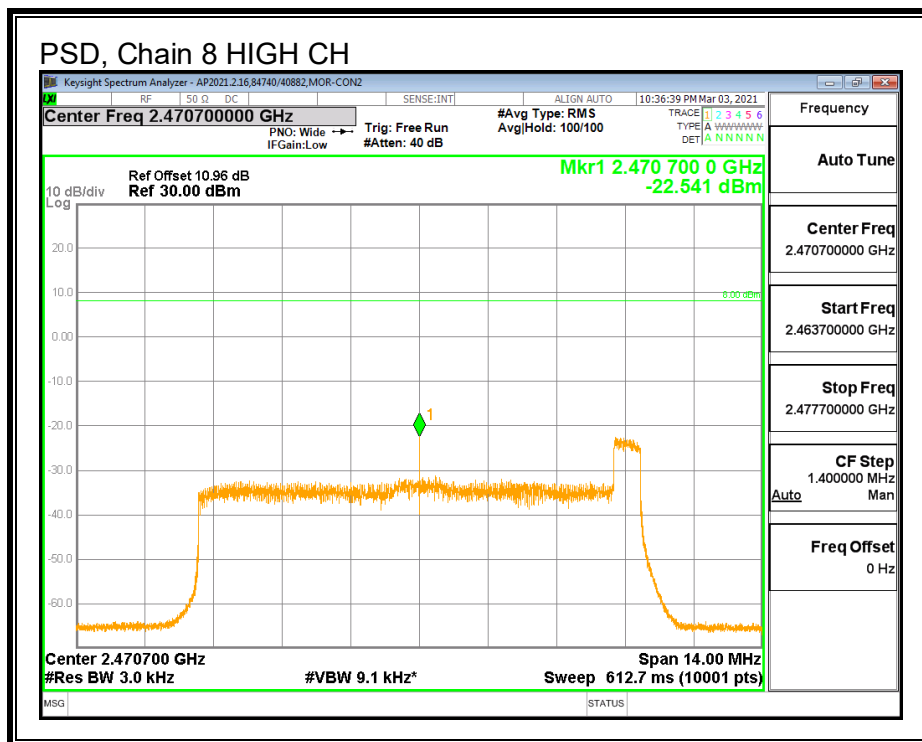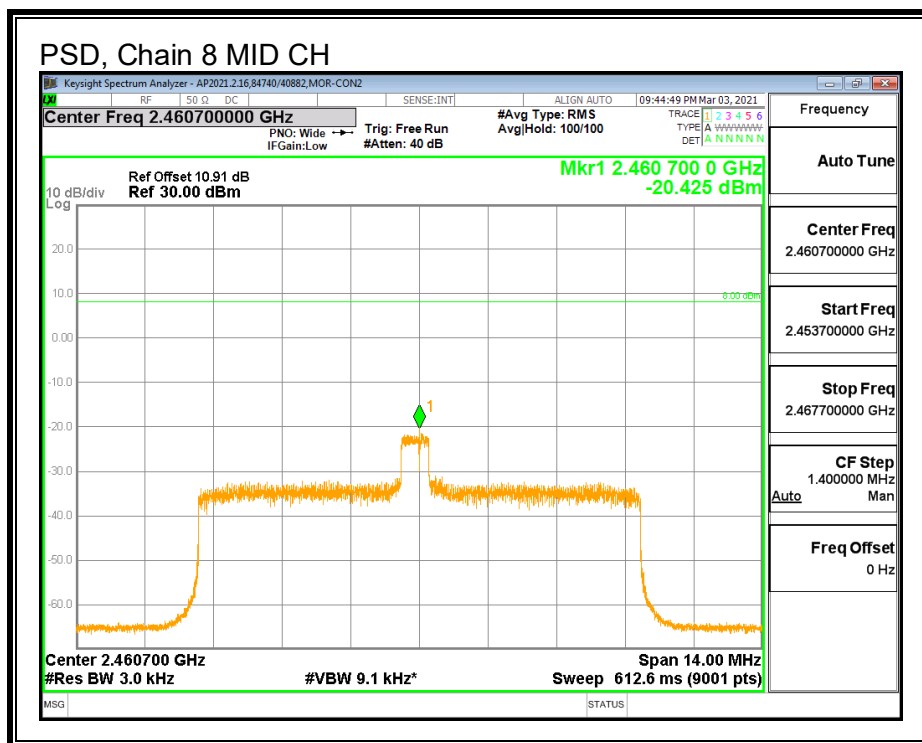



### 9.3.4. OUT-OF-BAND EMISSIONS



#### LIMITS



FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.



**RESULTS - QPSK**

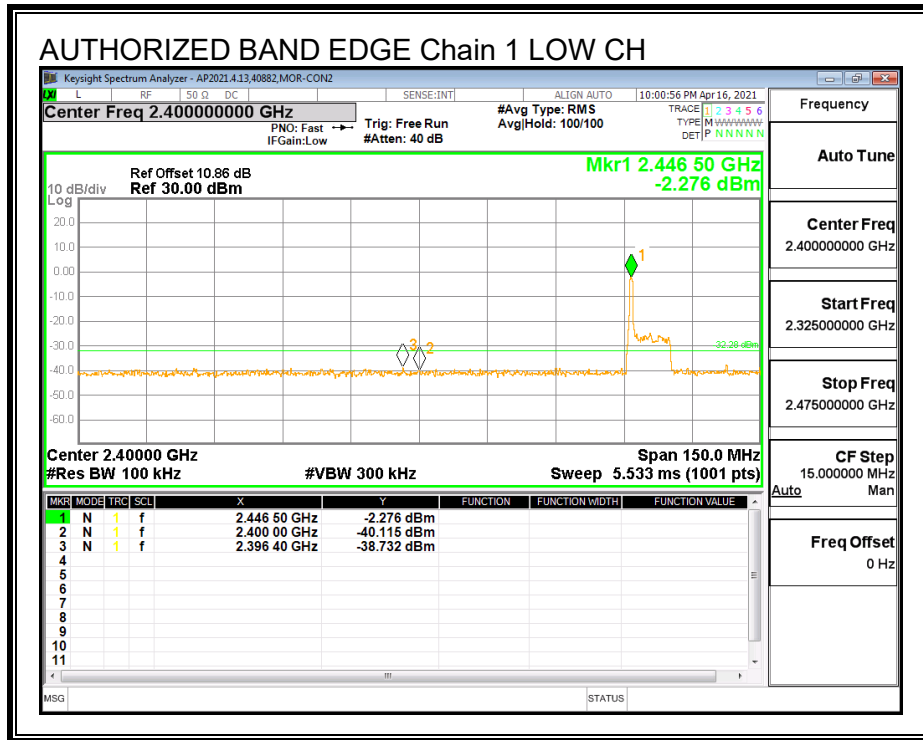
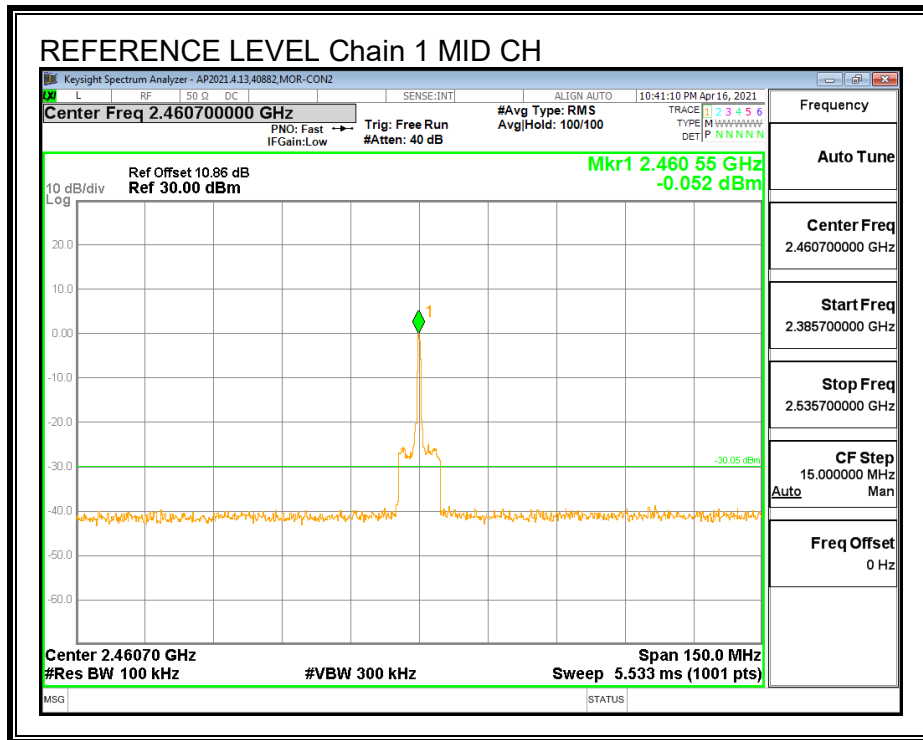


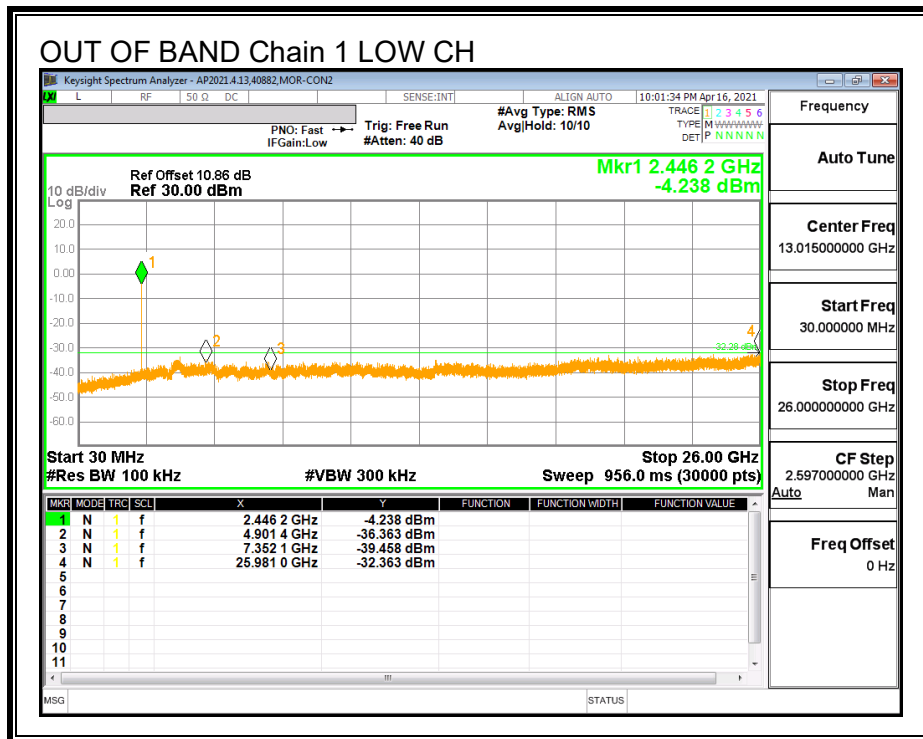
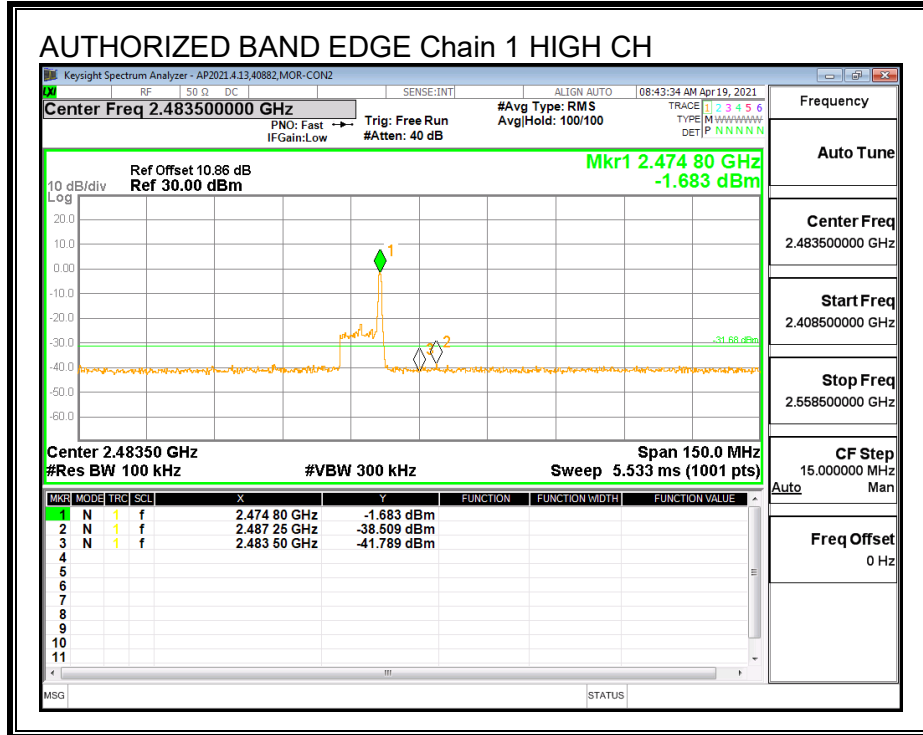


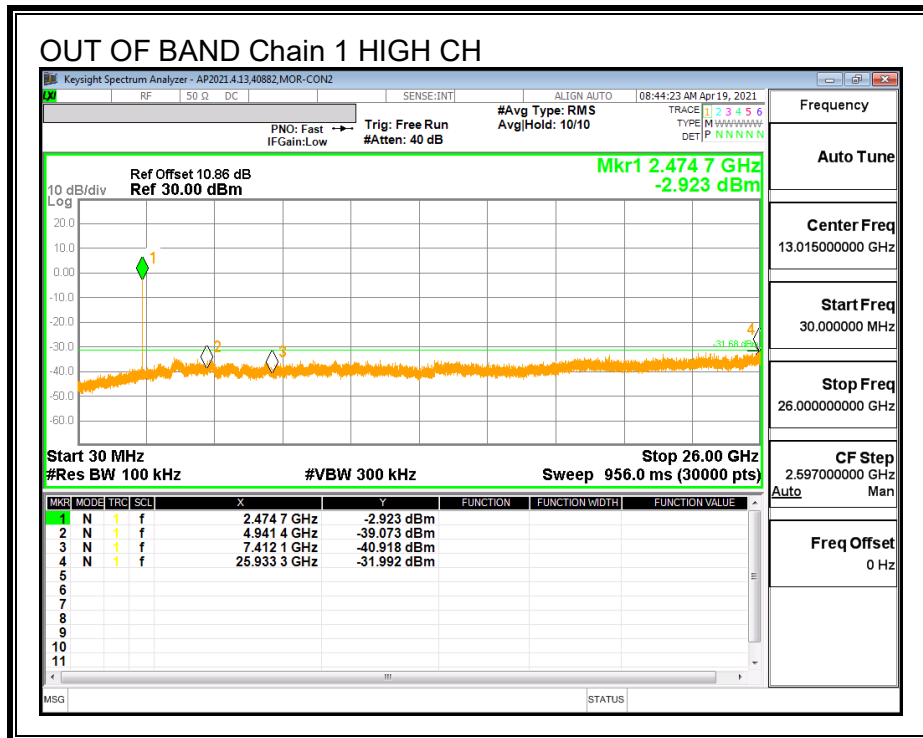
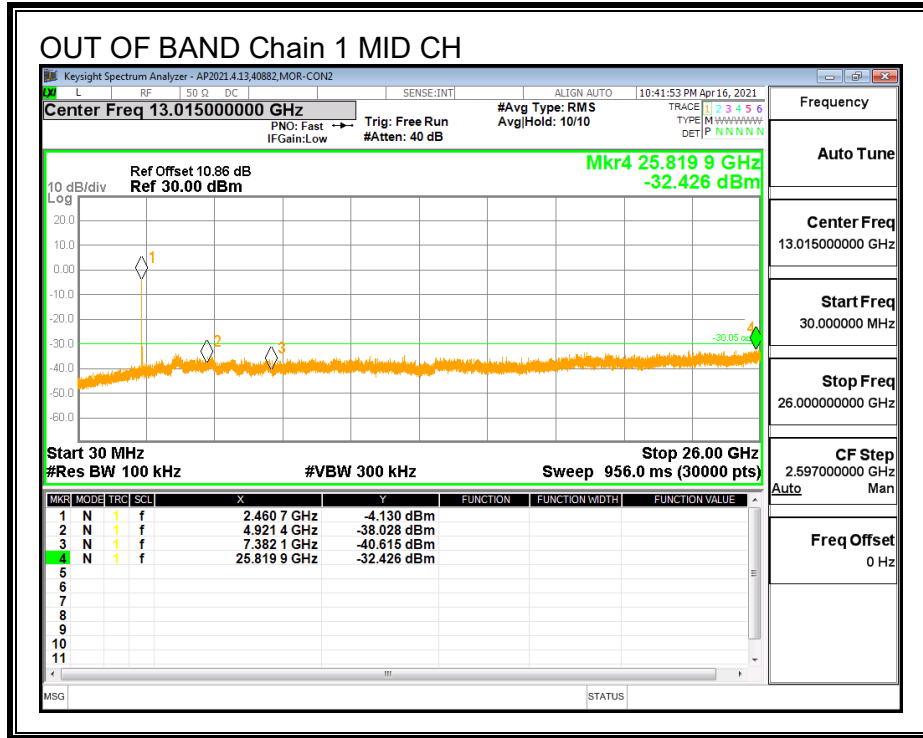






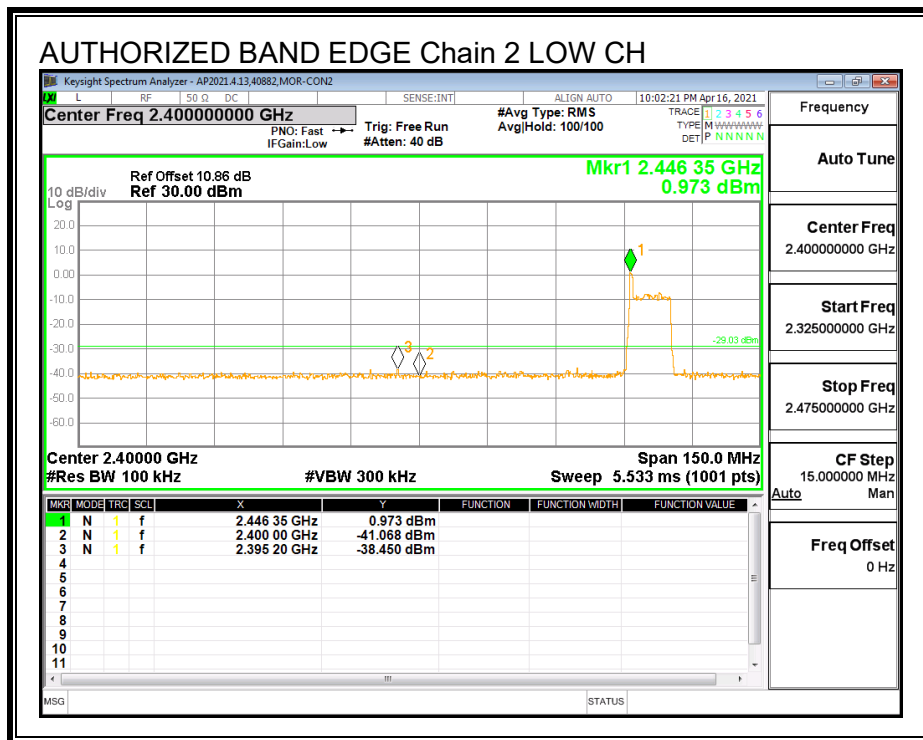
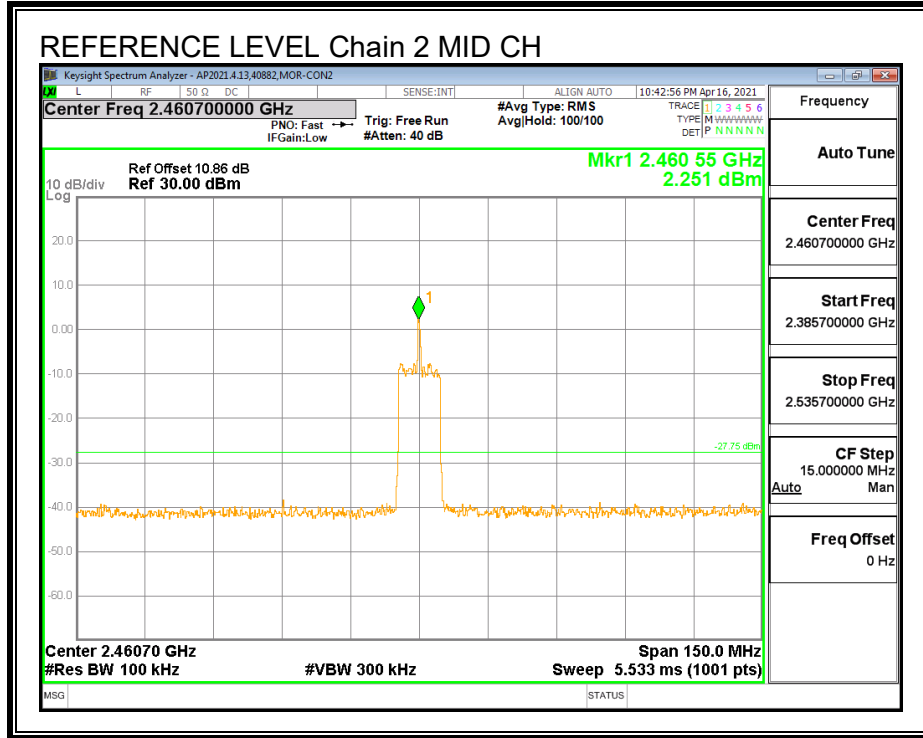


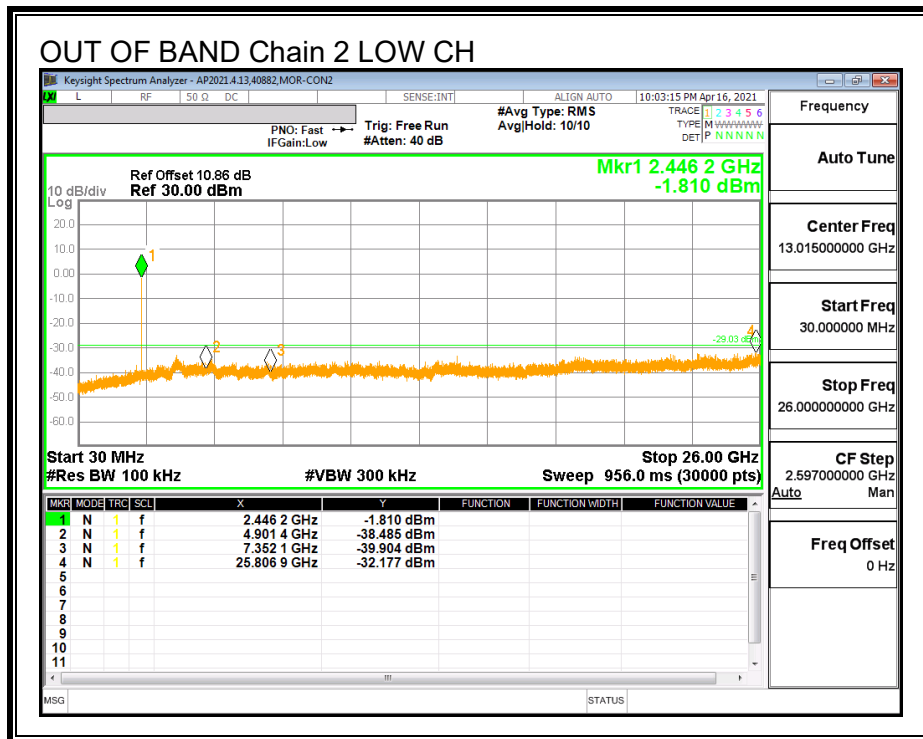
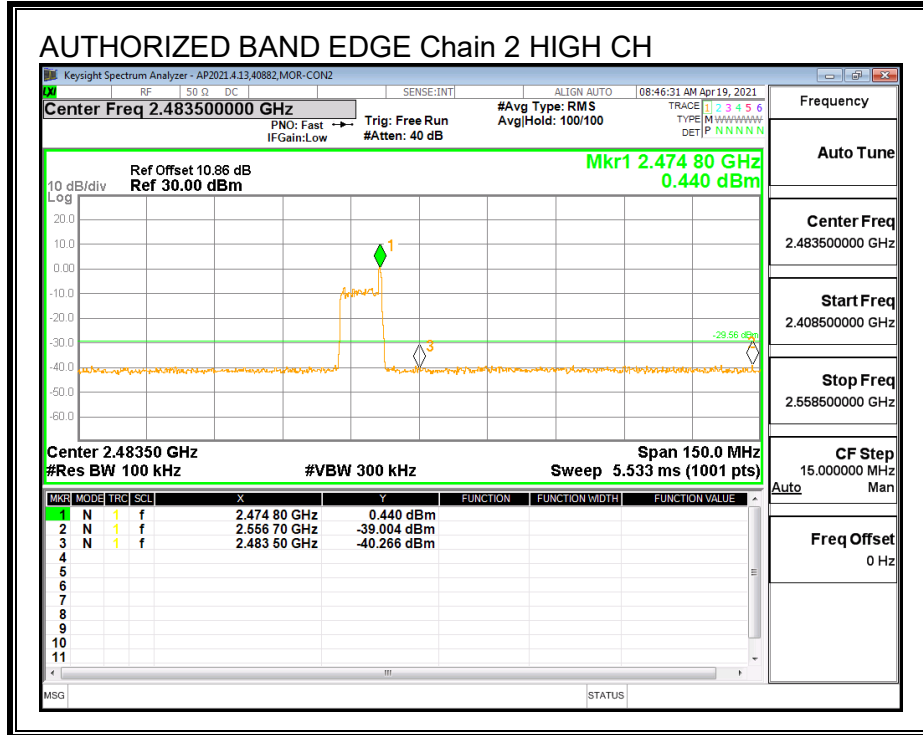


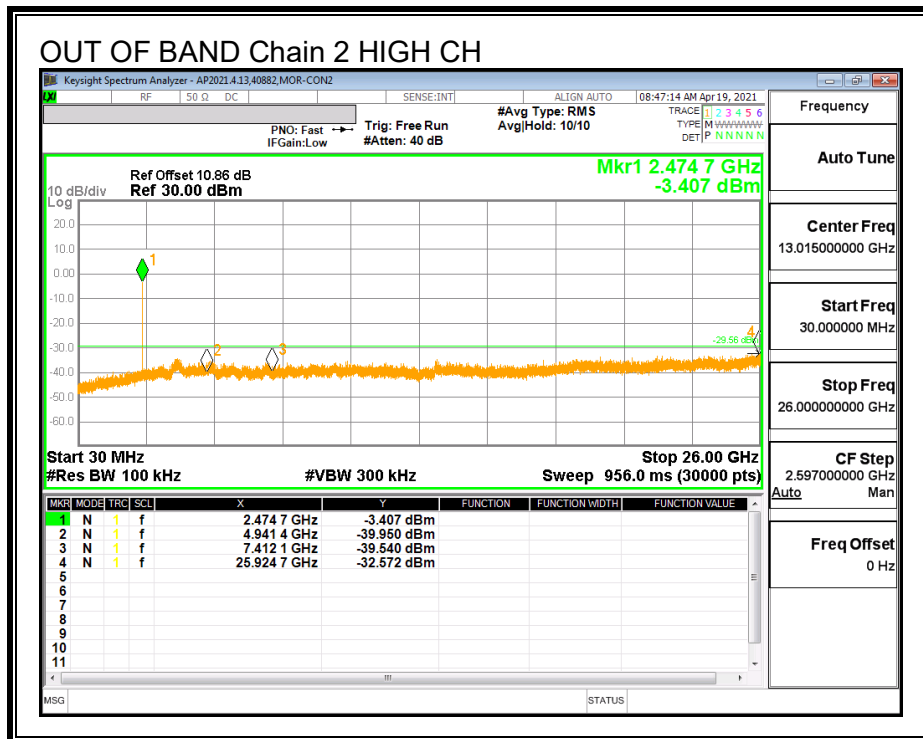
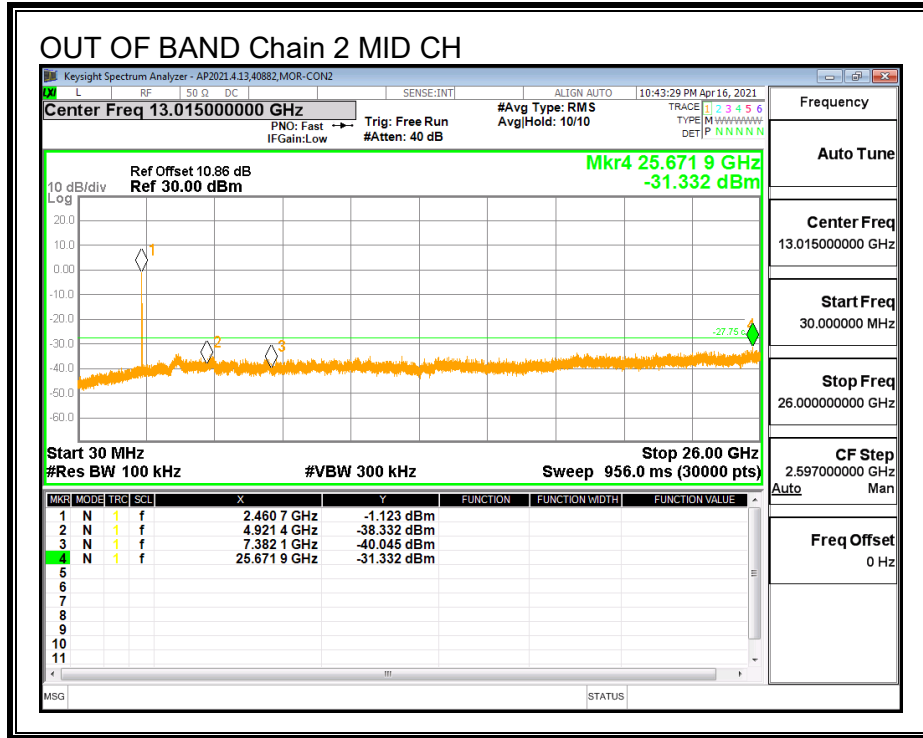


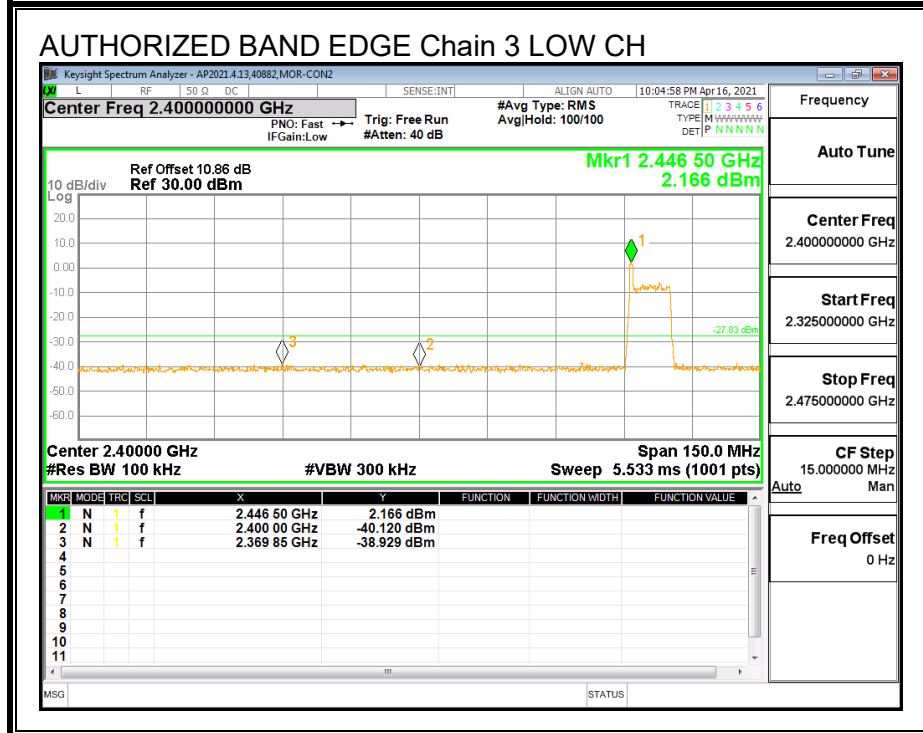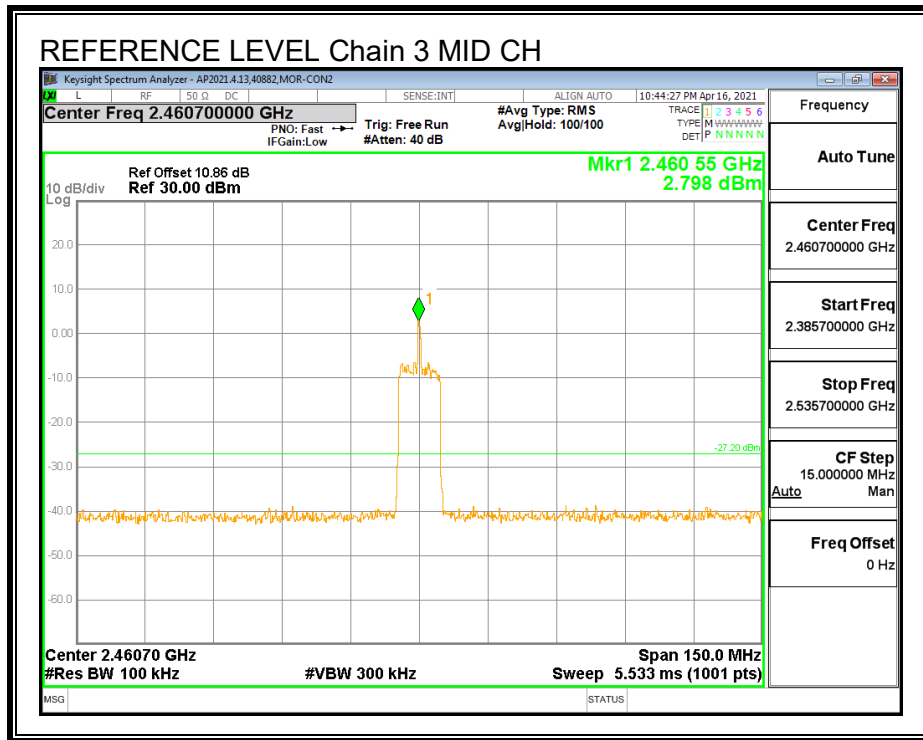

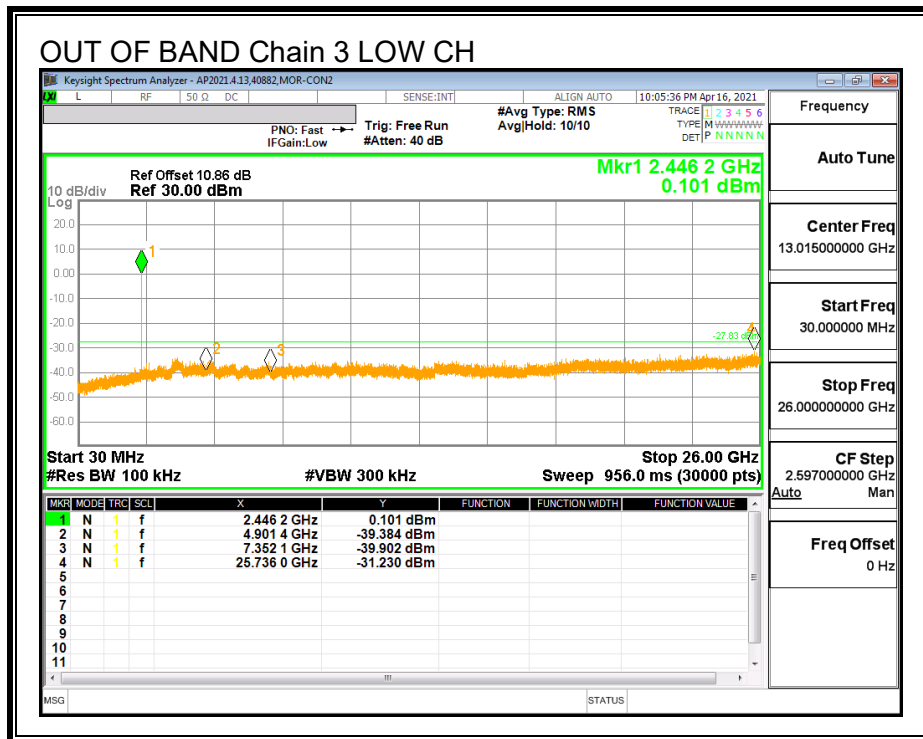
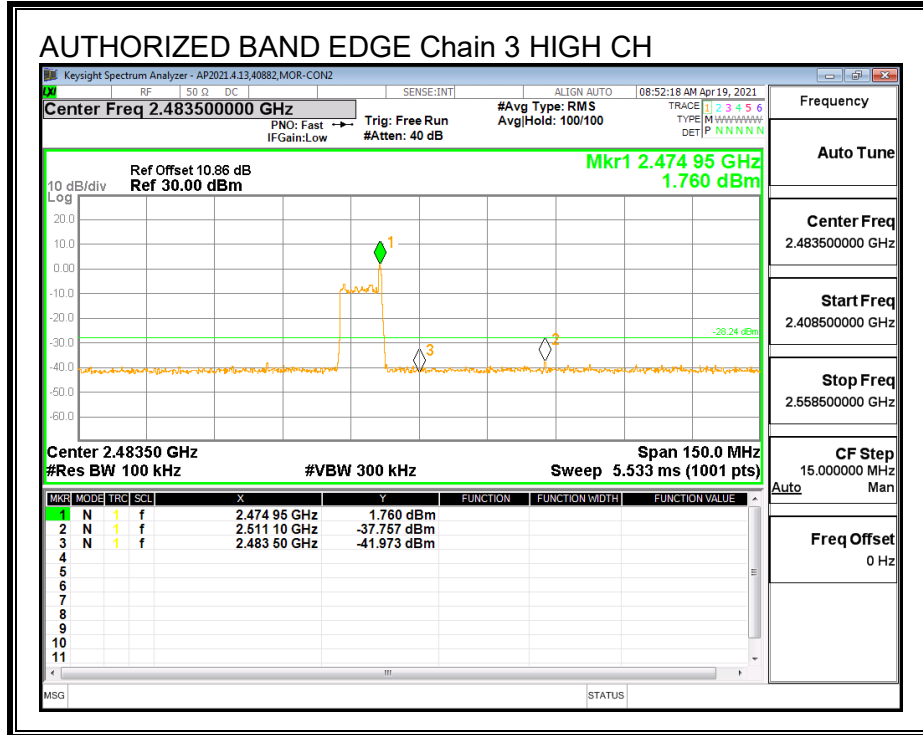


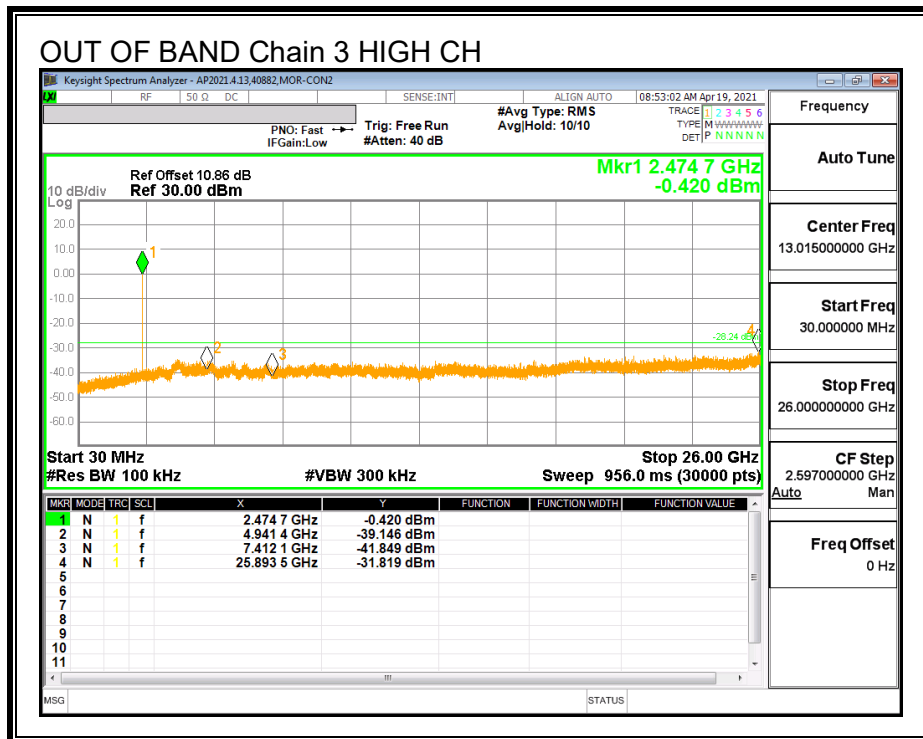
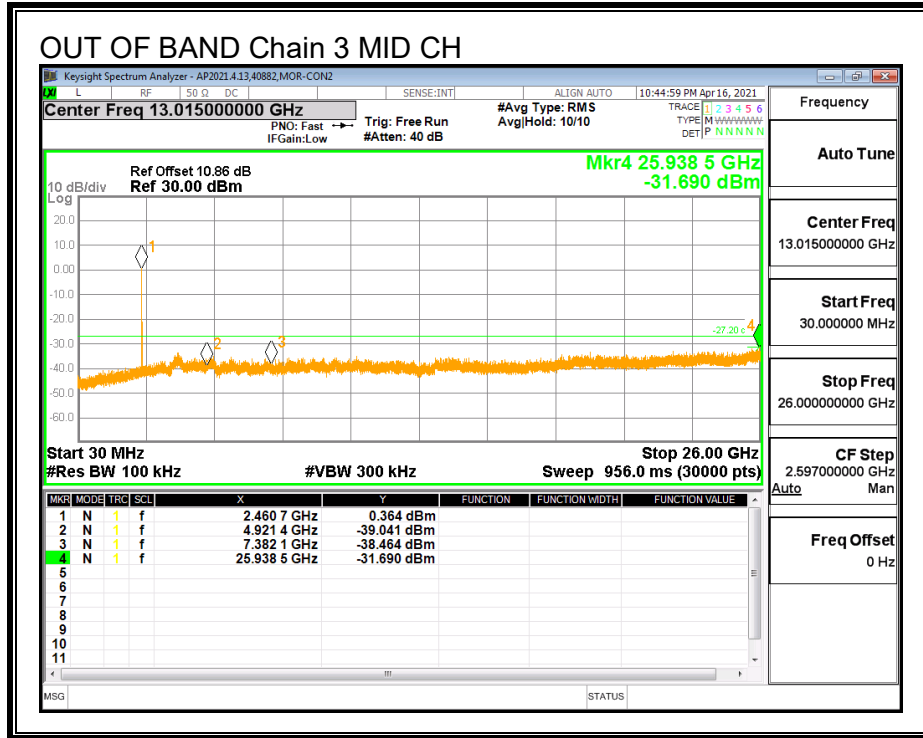


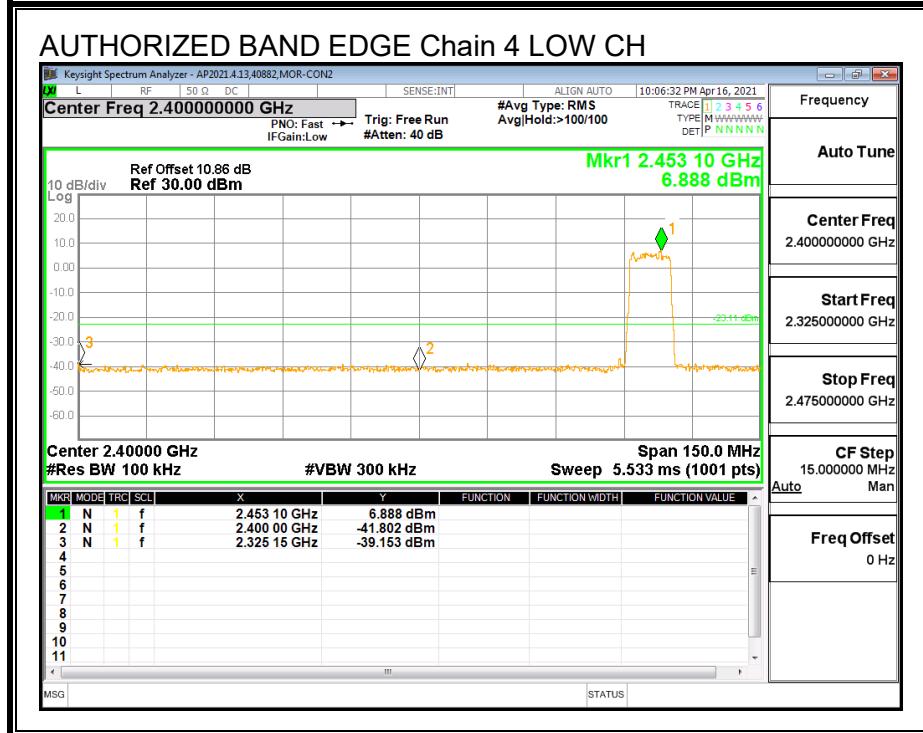
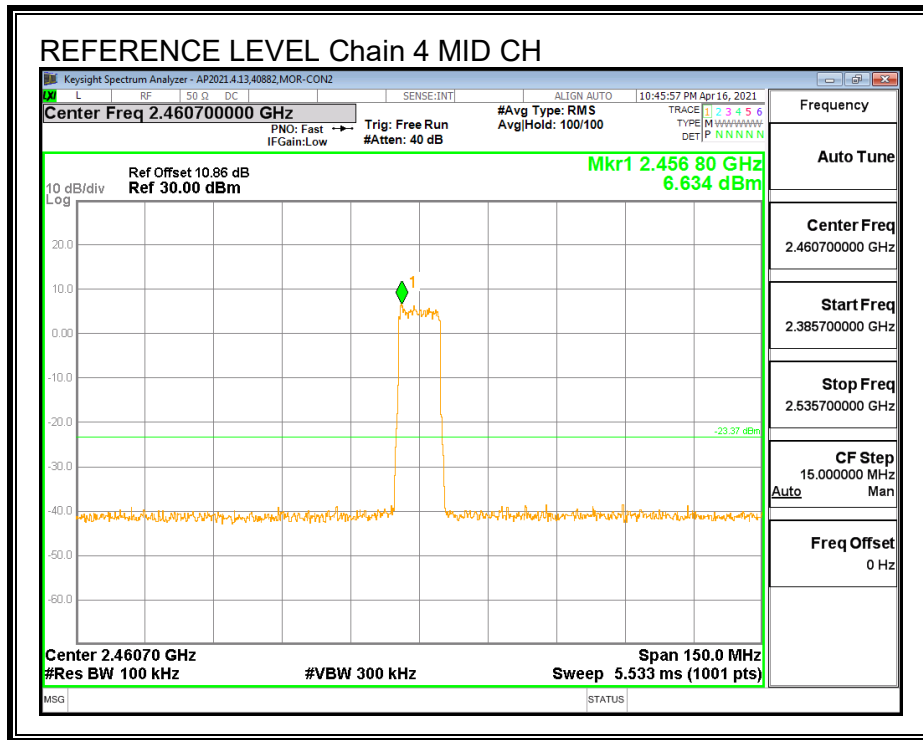


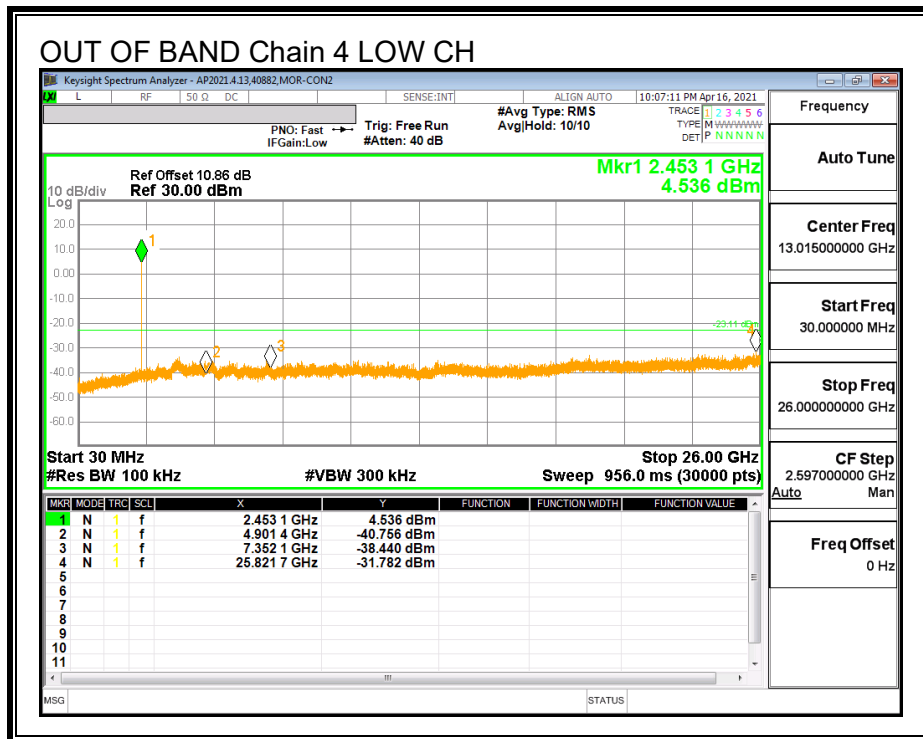
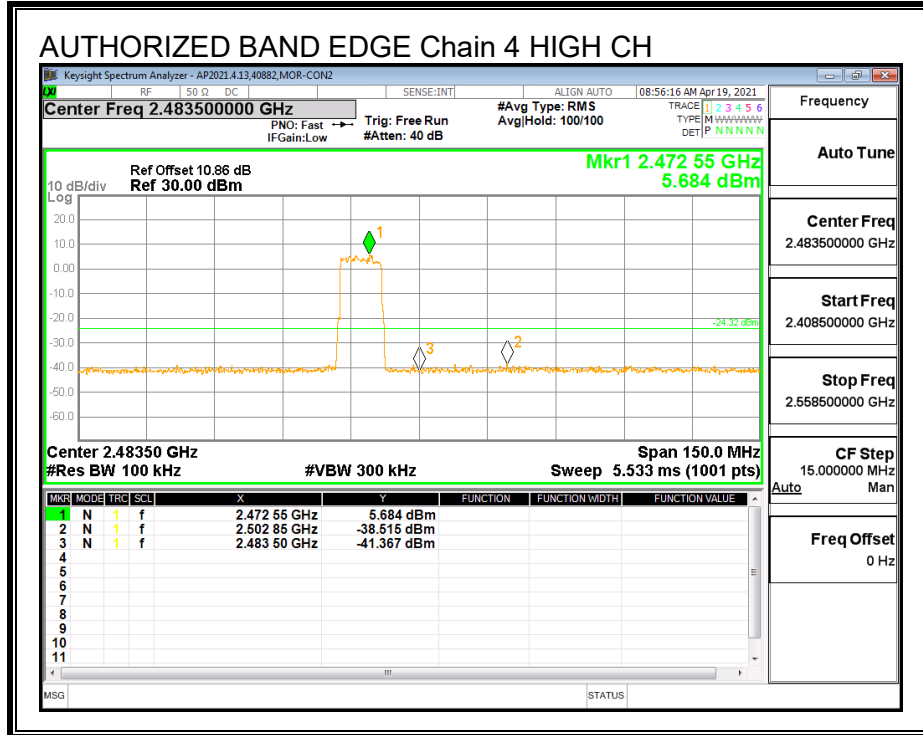






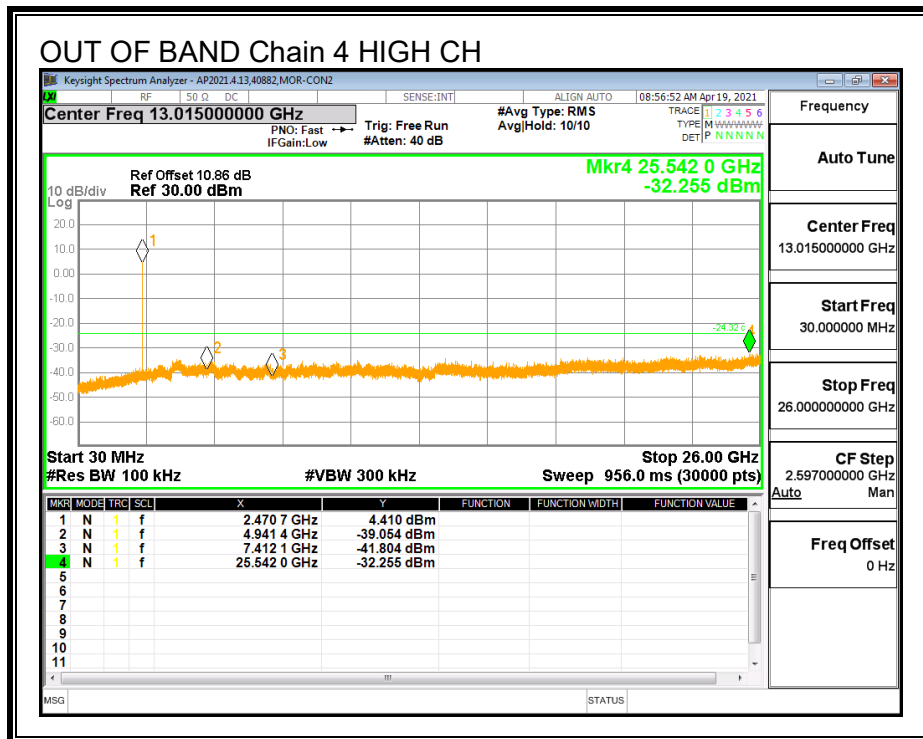
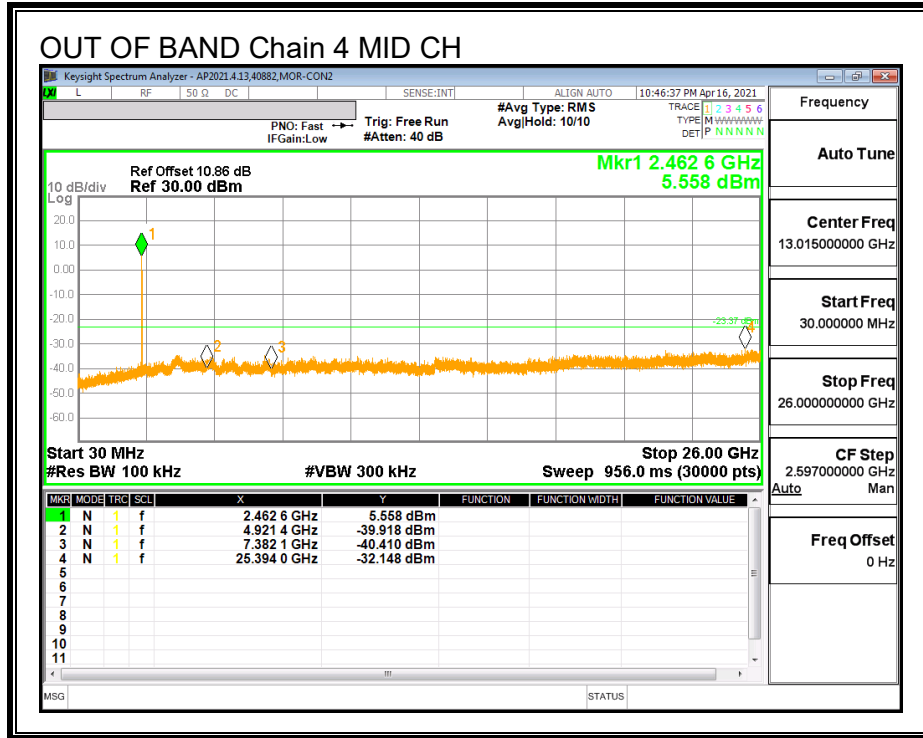


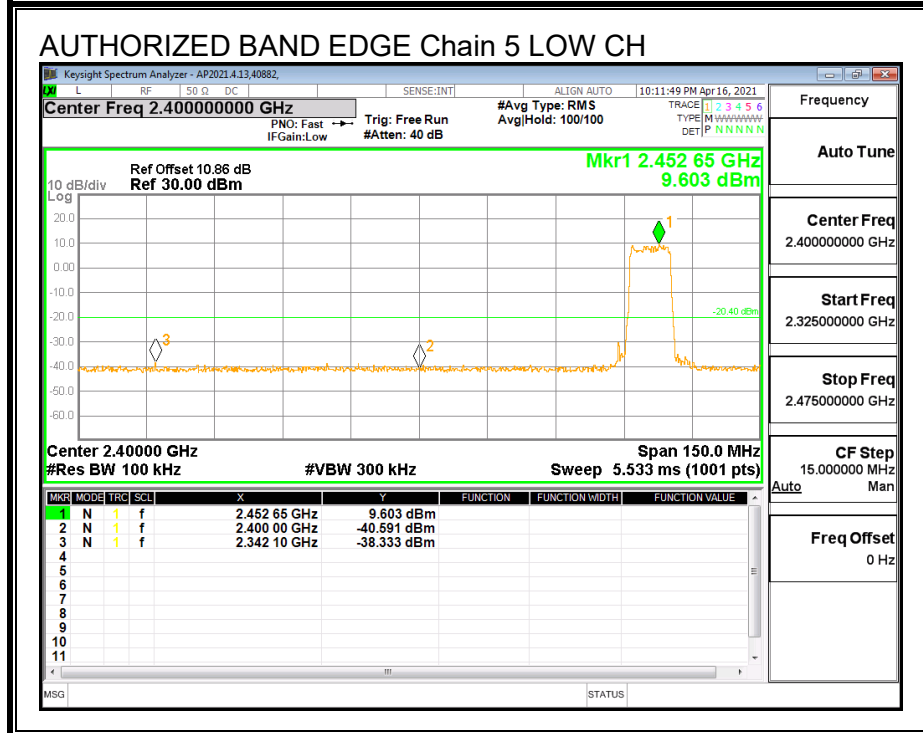
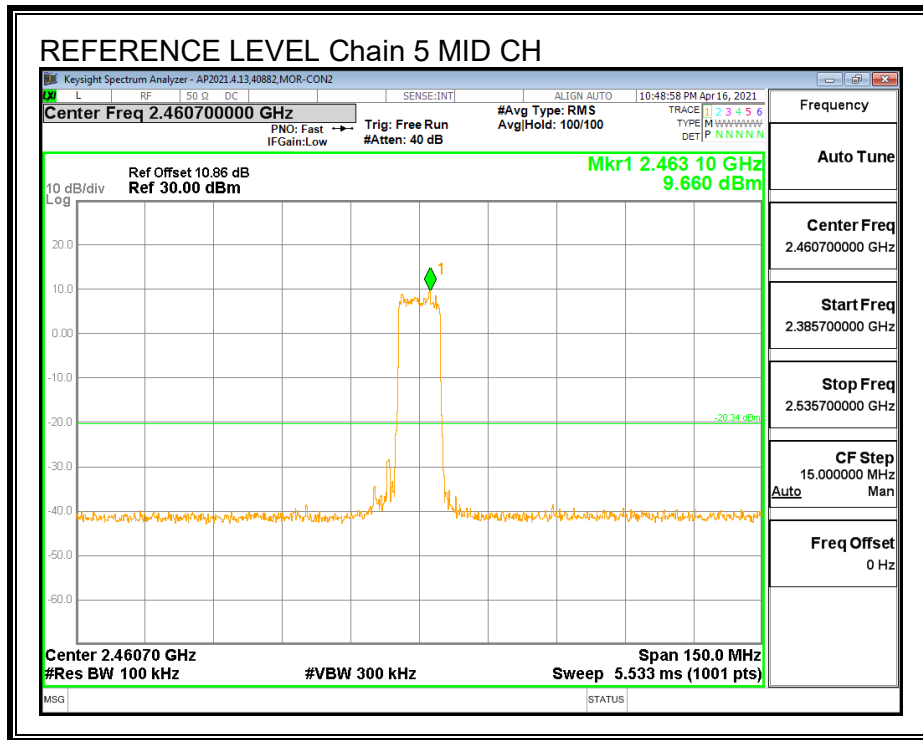


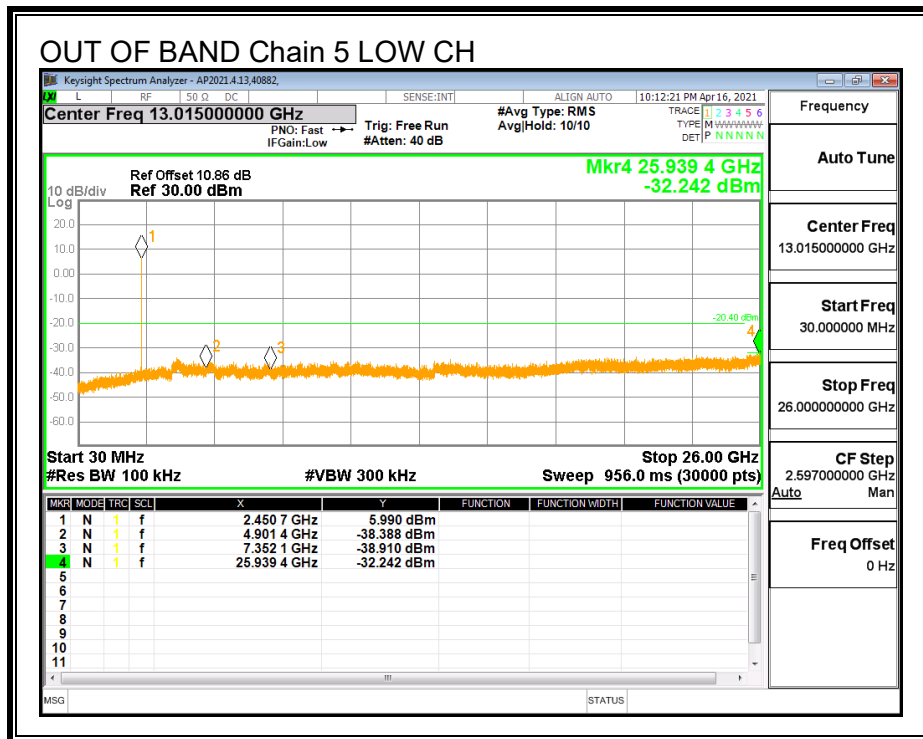
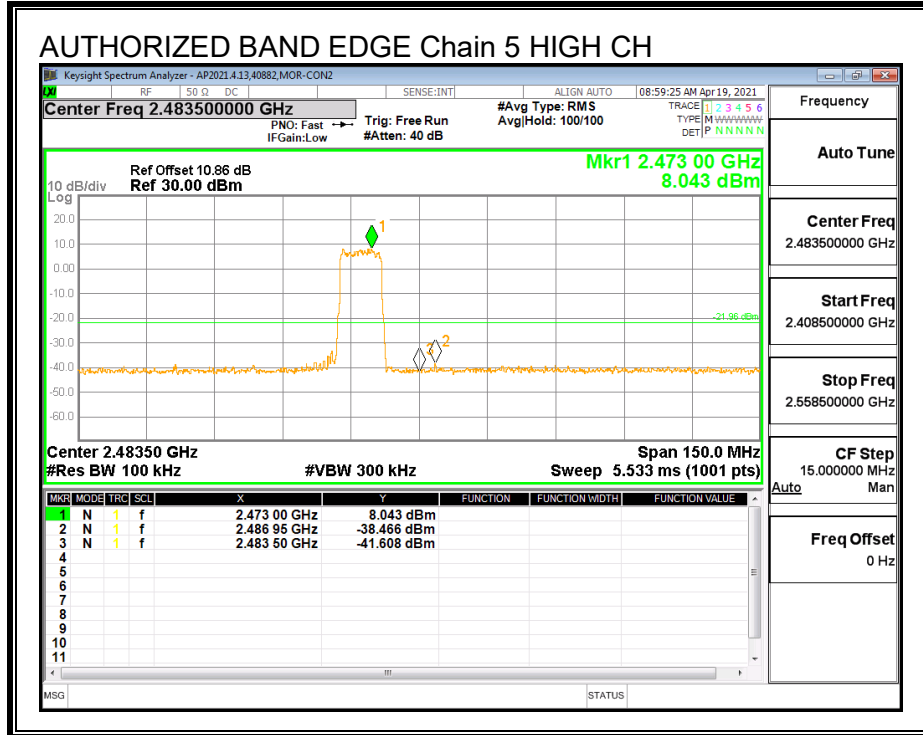


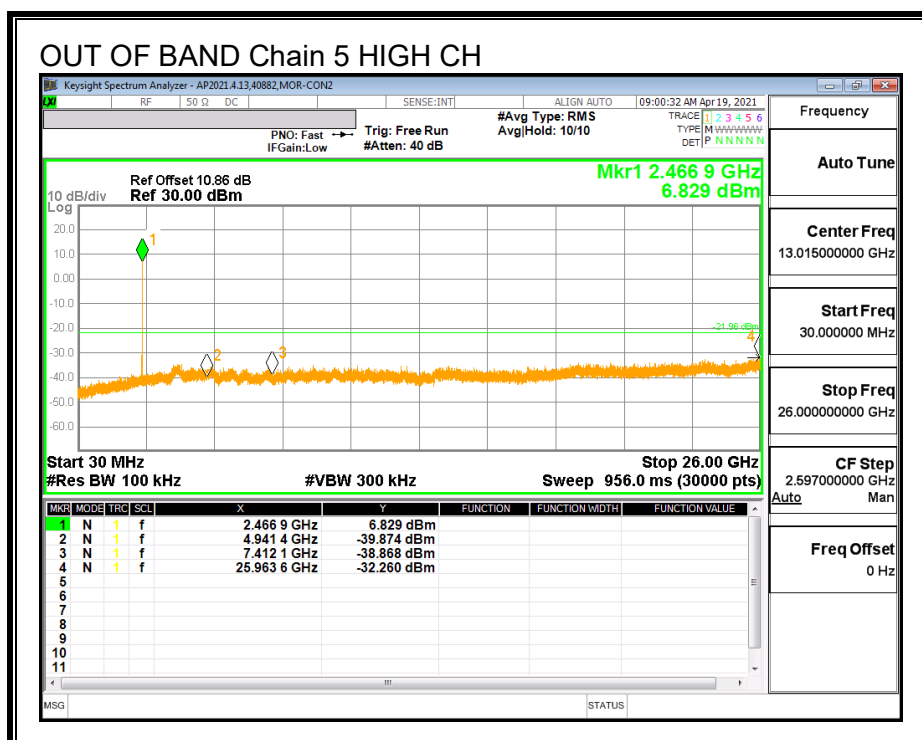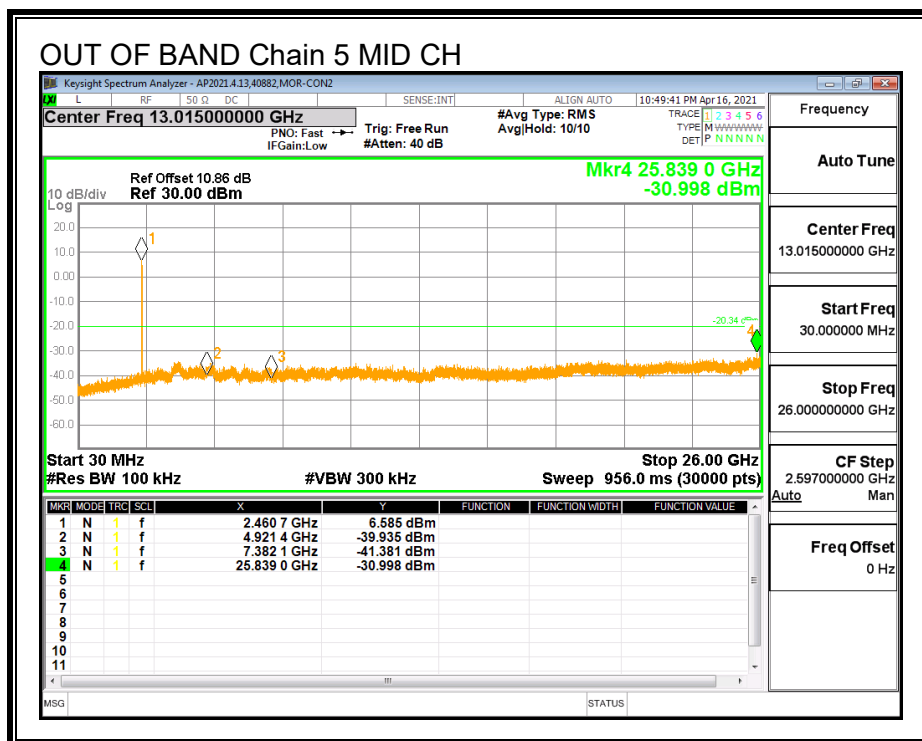

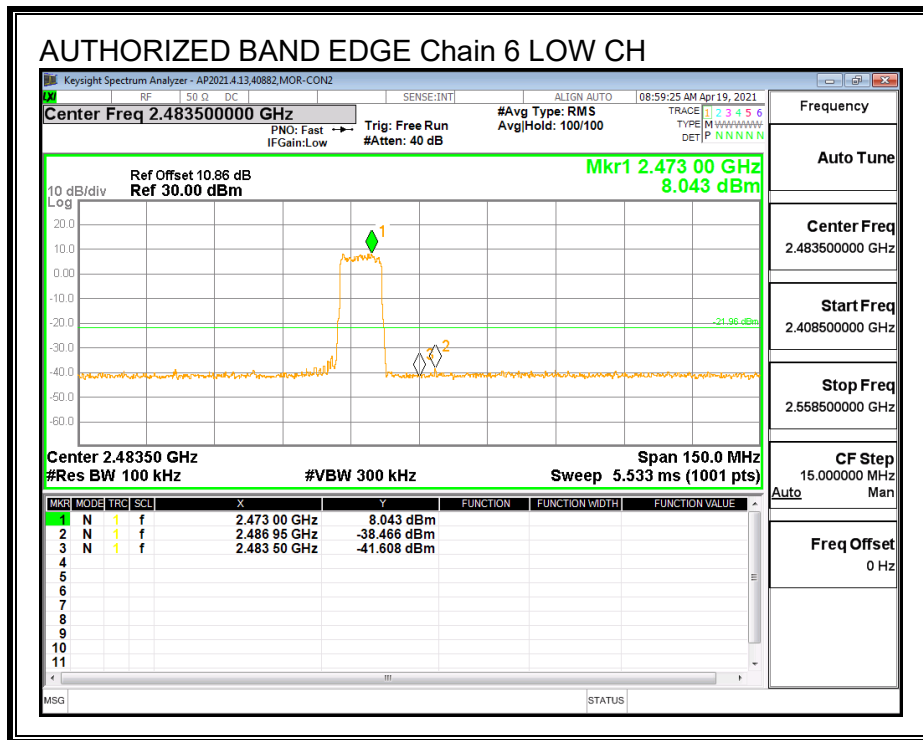
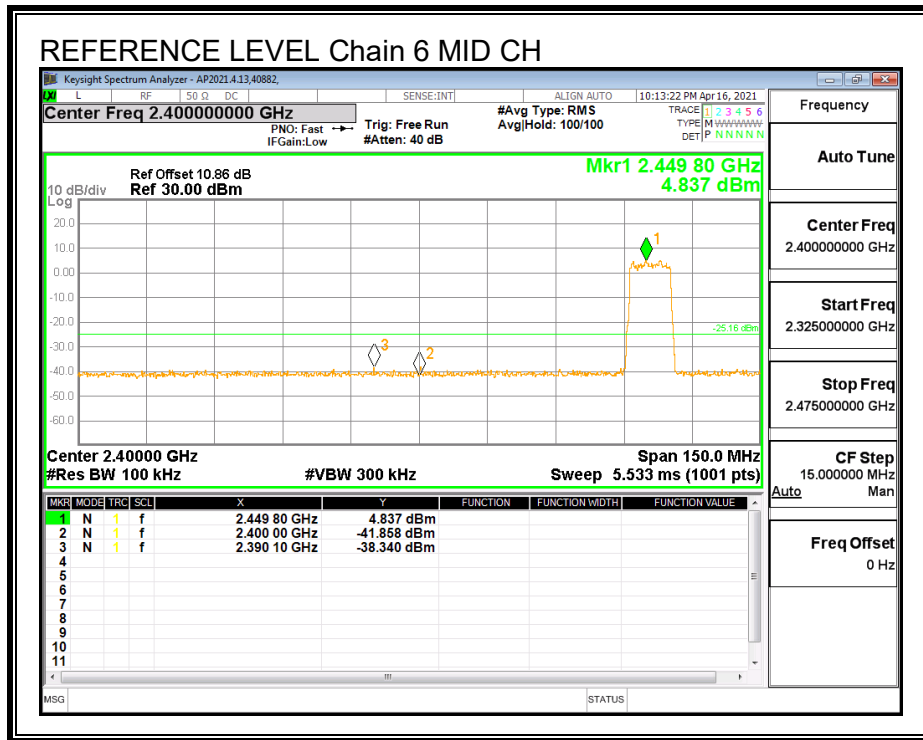


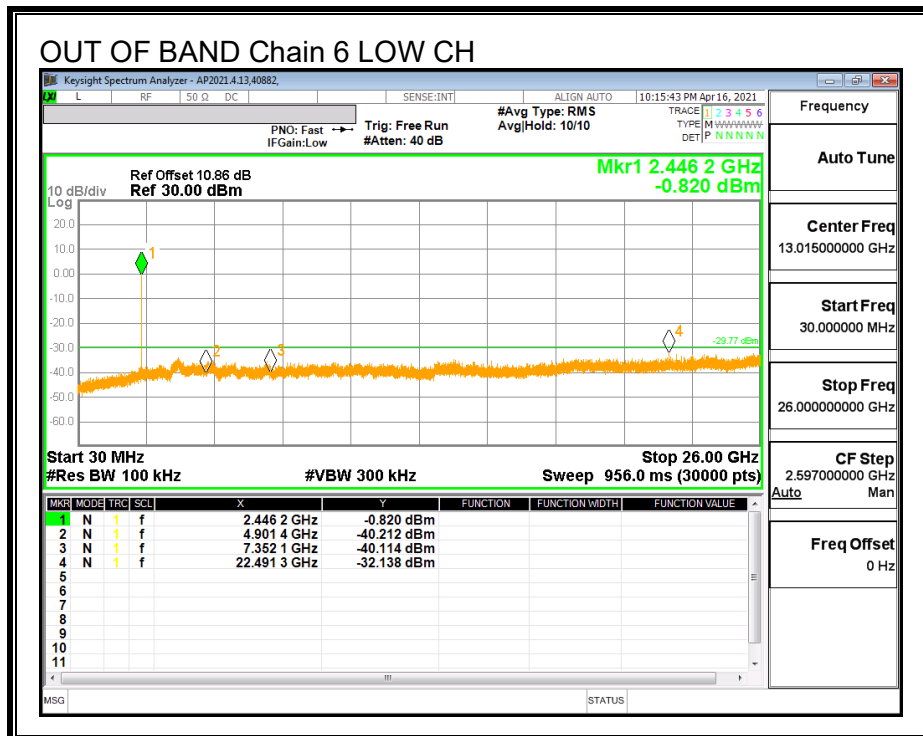
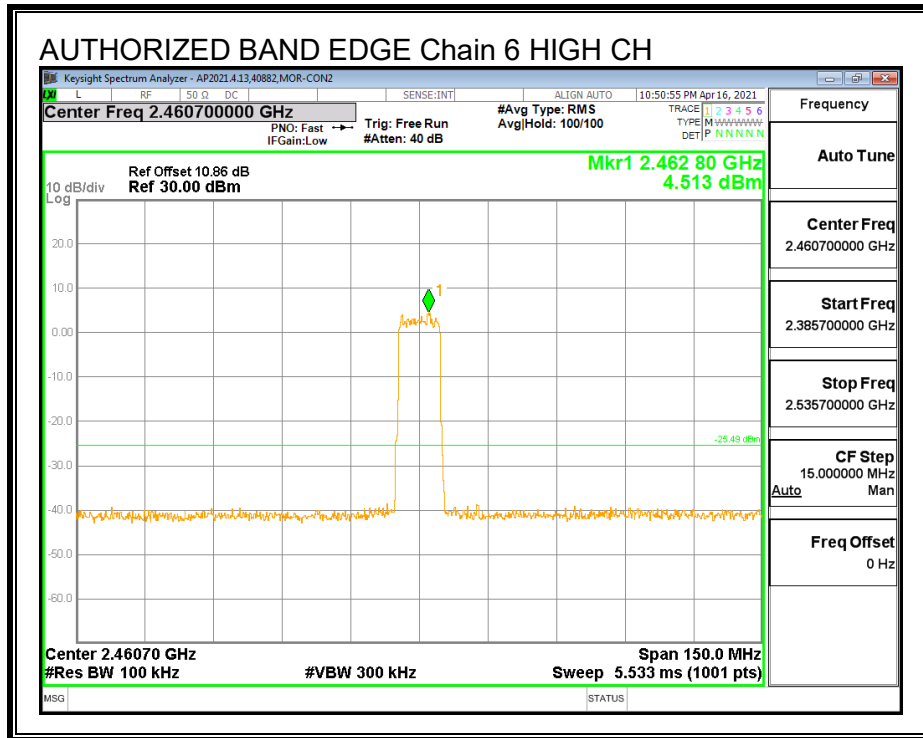


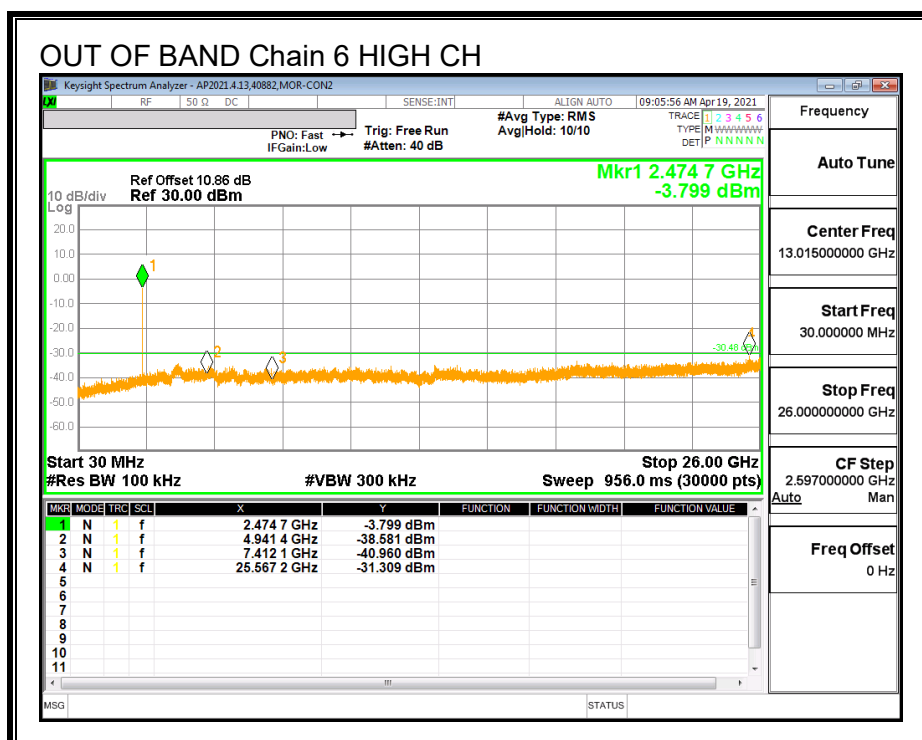
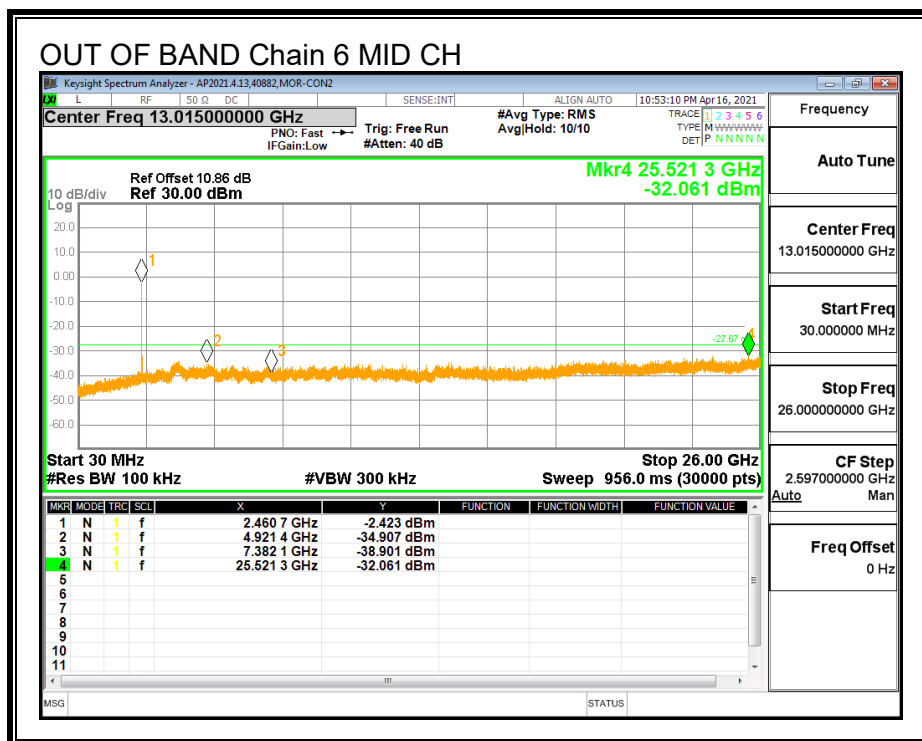


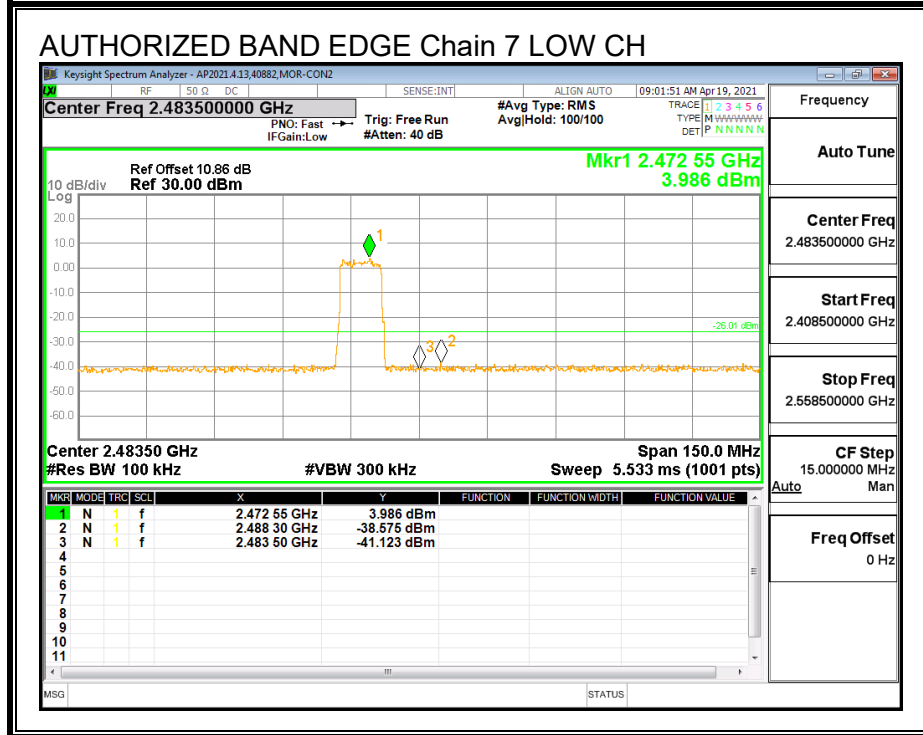
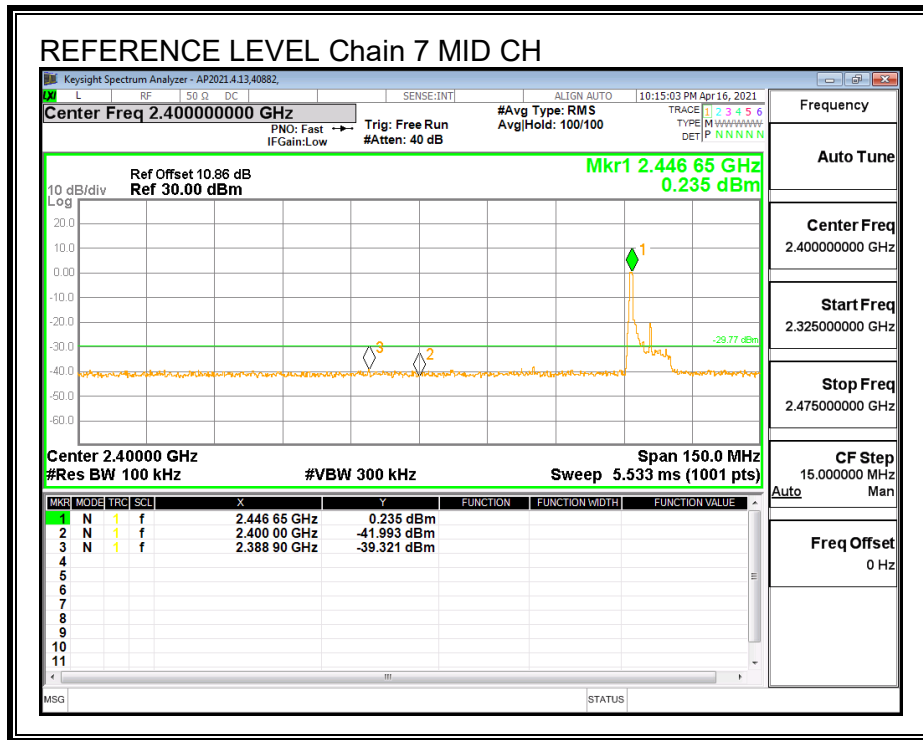






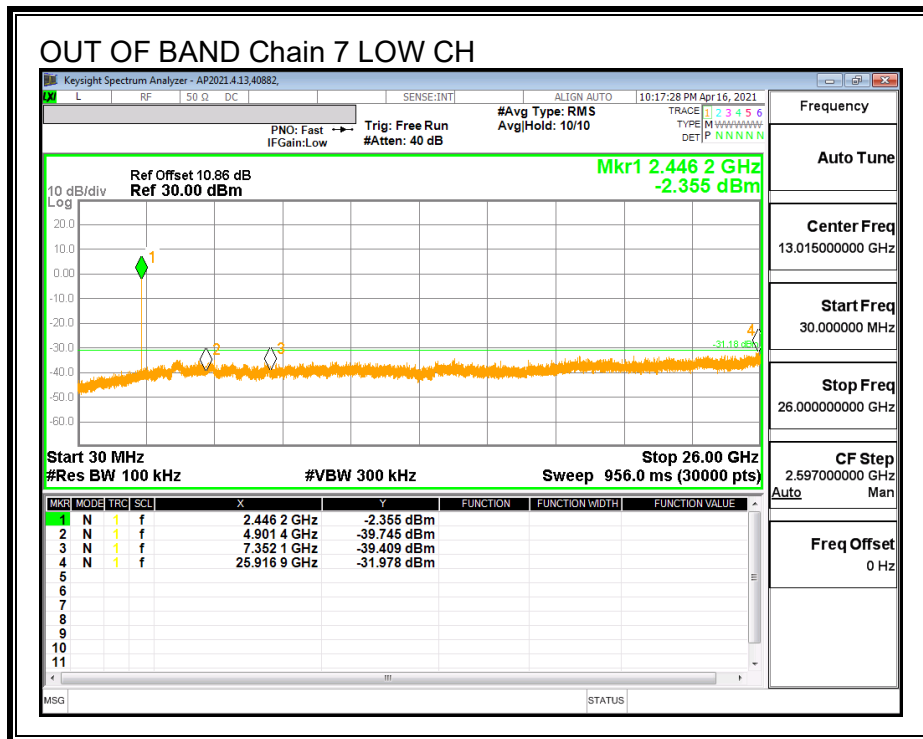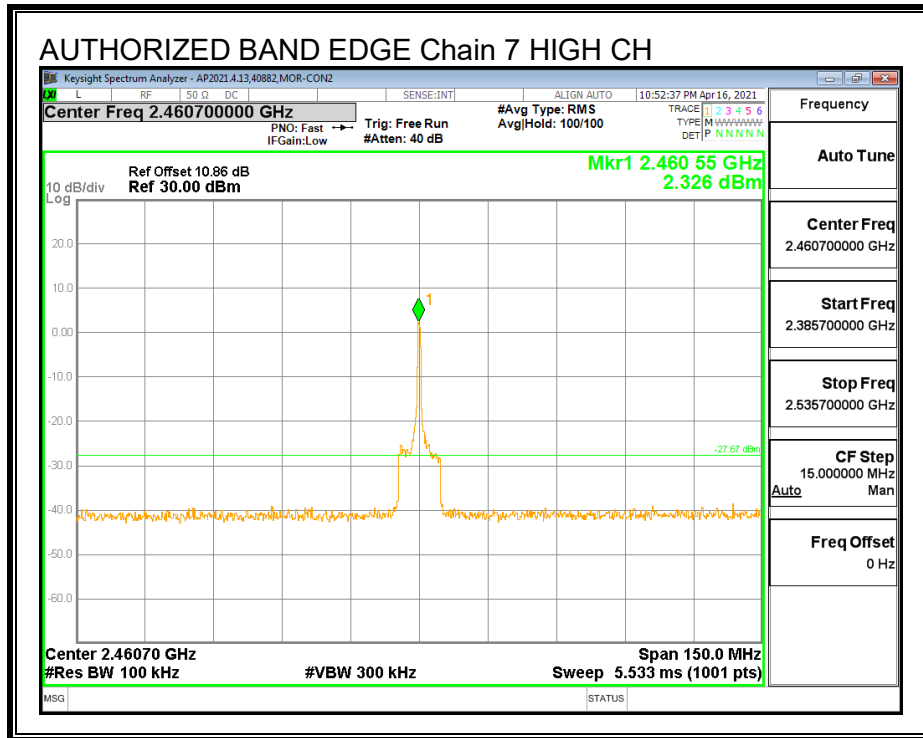

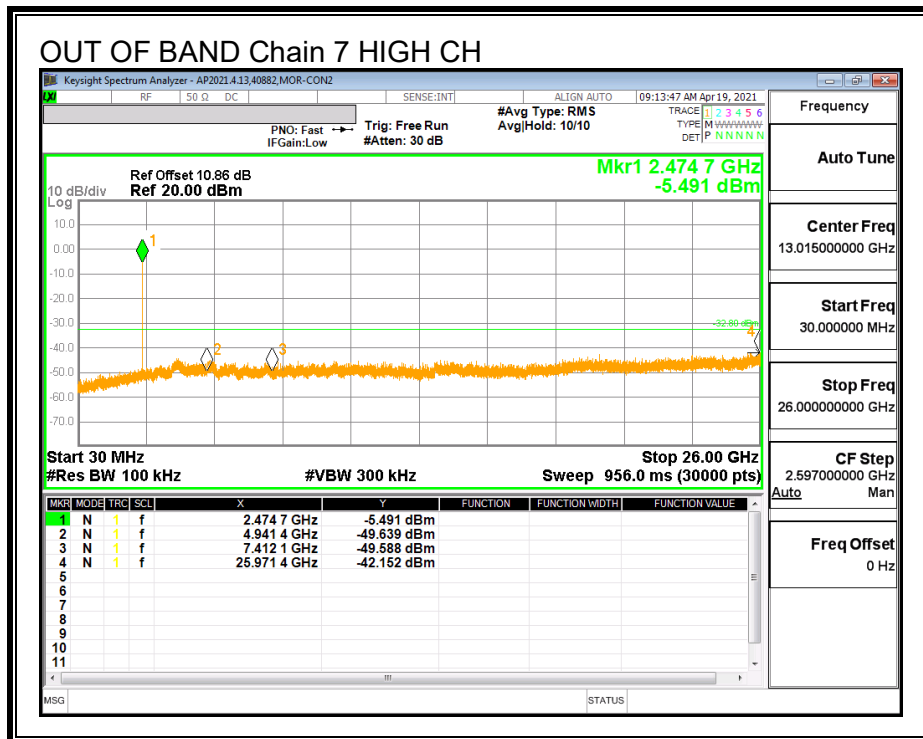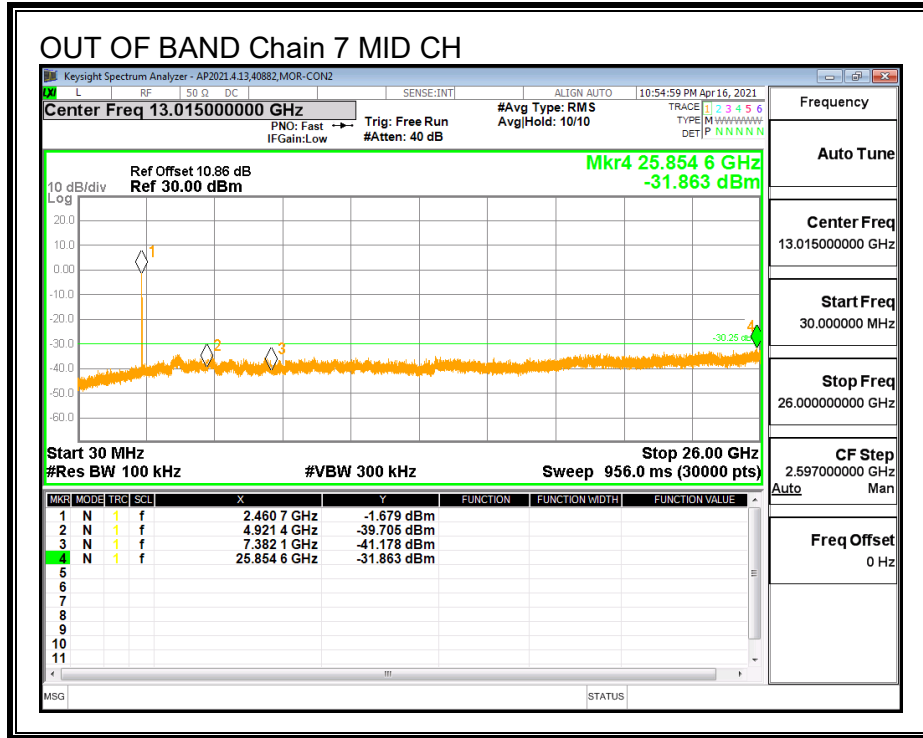

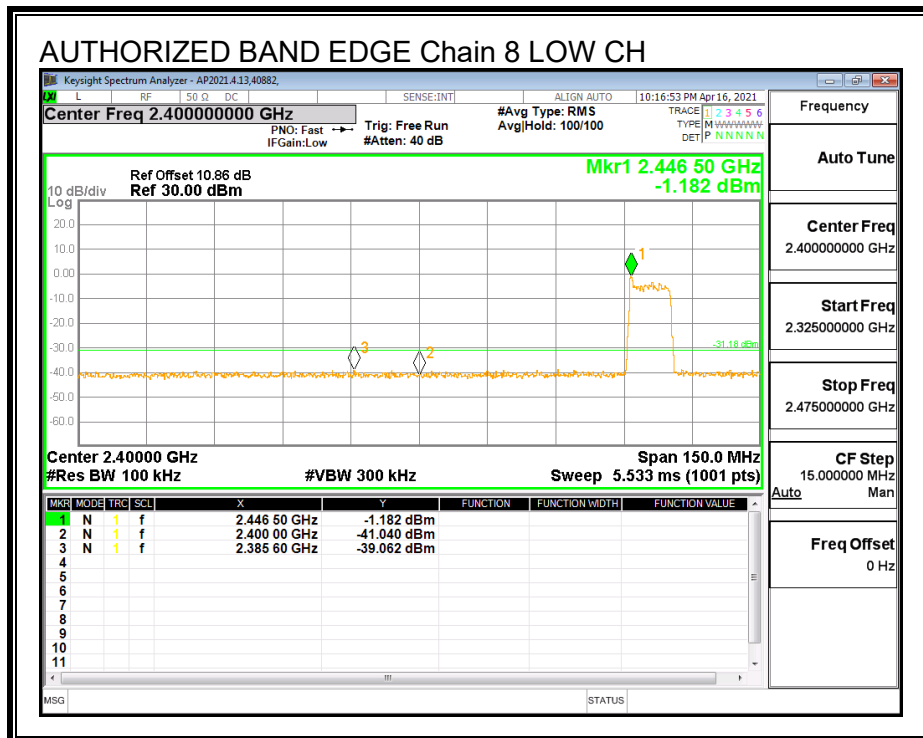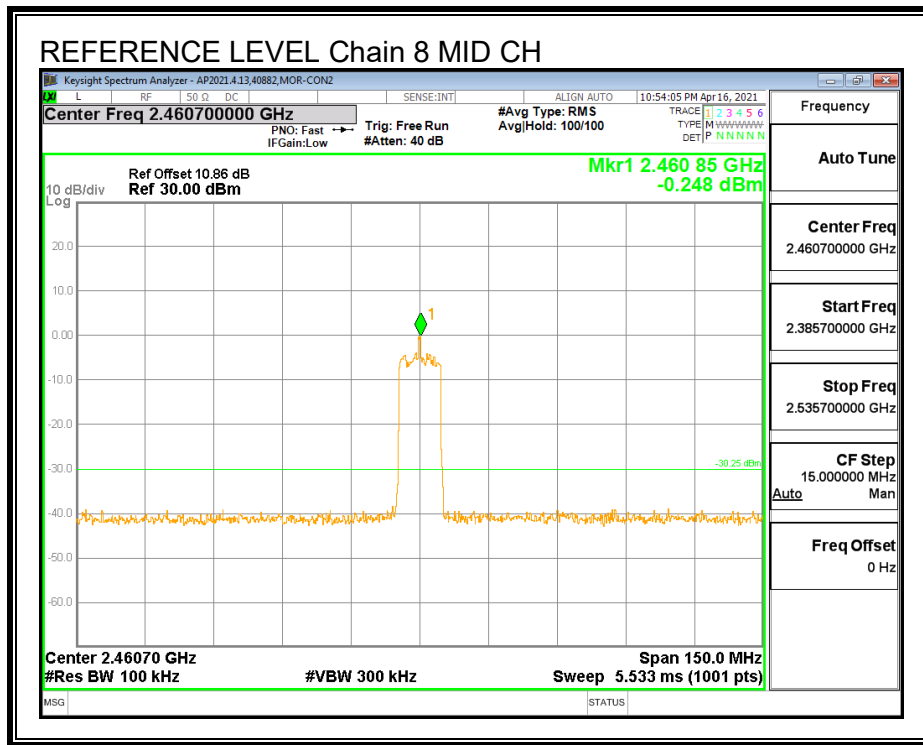

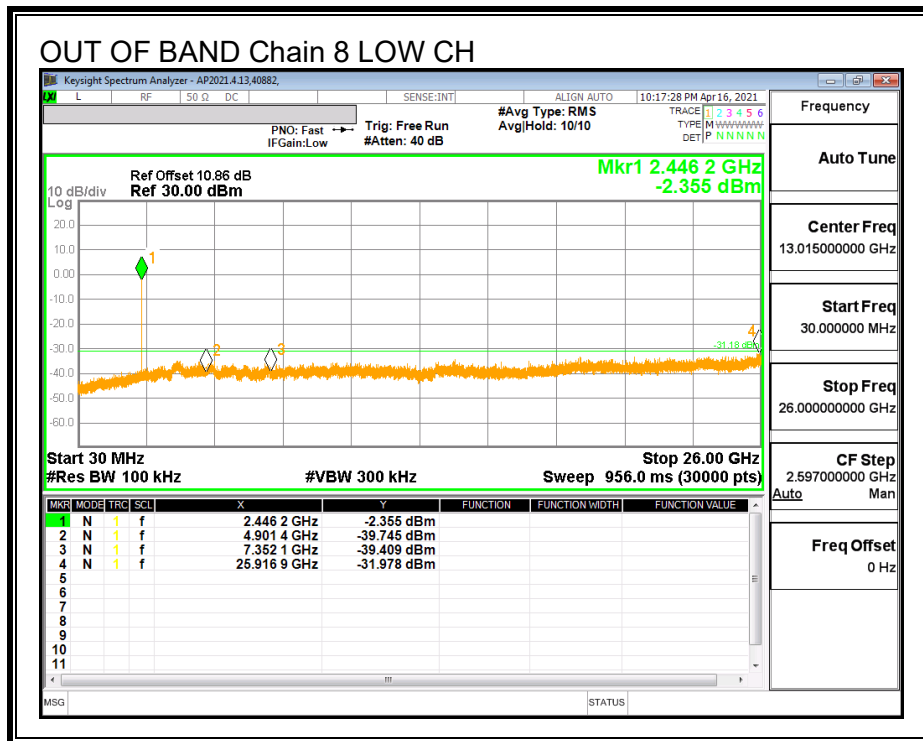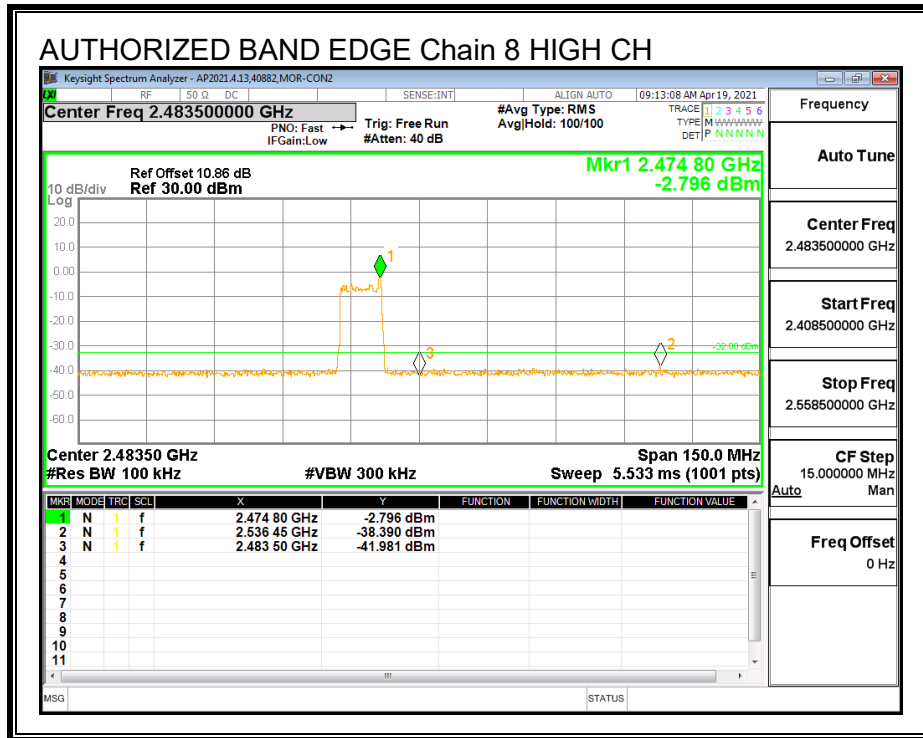

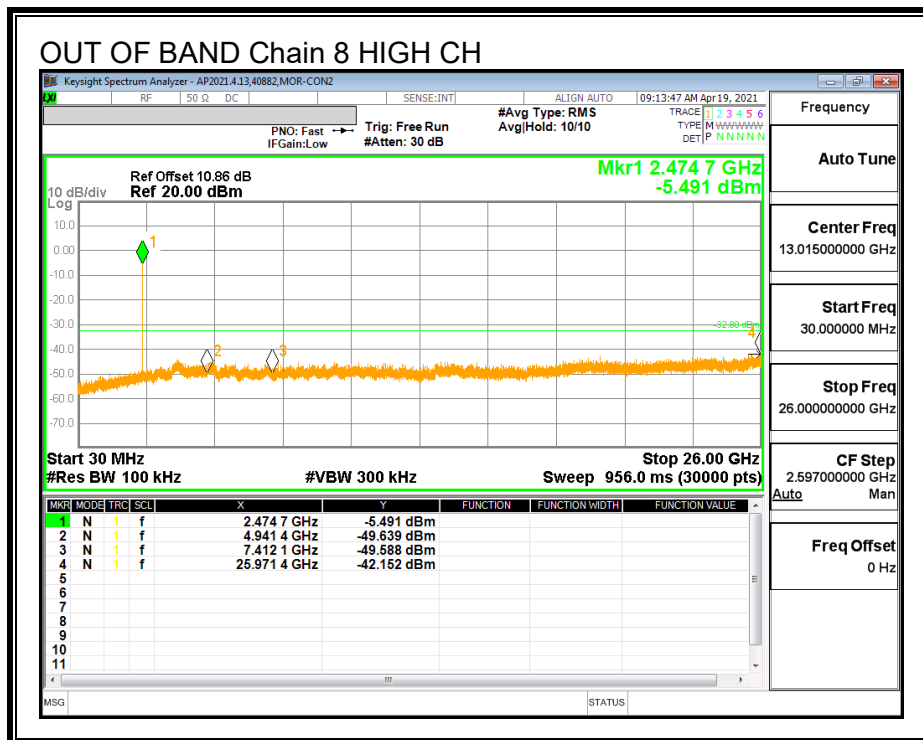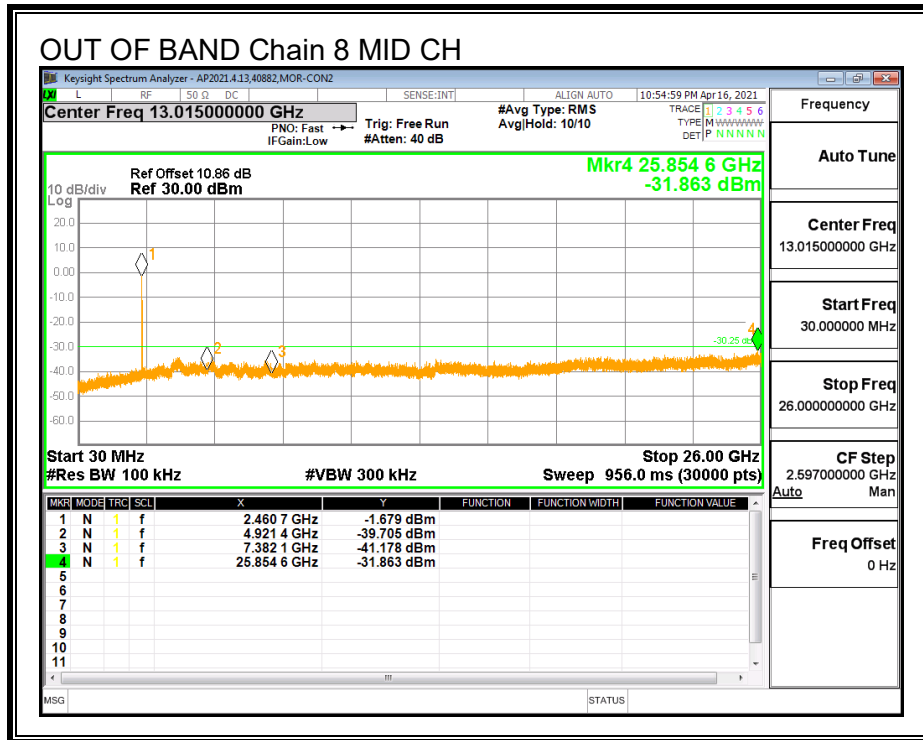

**RESULTS – 16-QAM**

