


### 13.1.1. 3RB, 4.5 MHz BANDWIDTH


#### LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

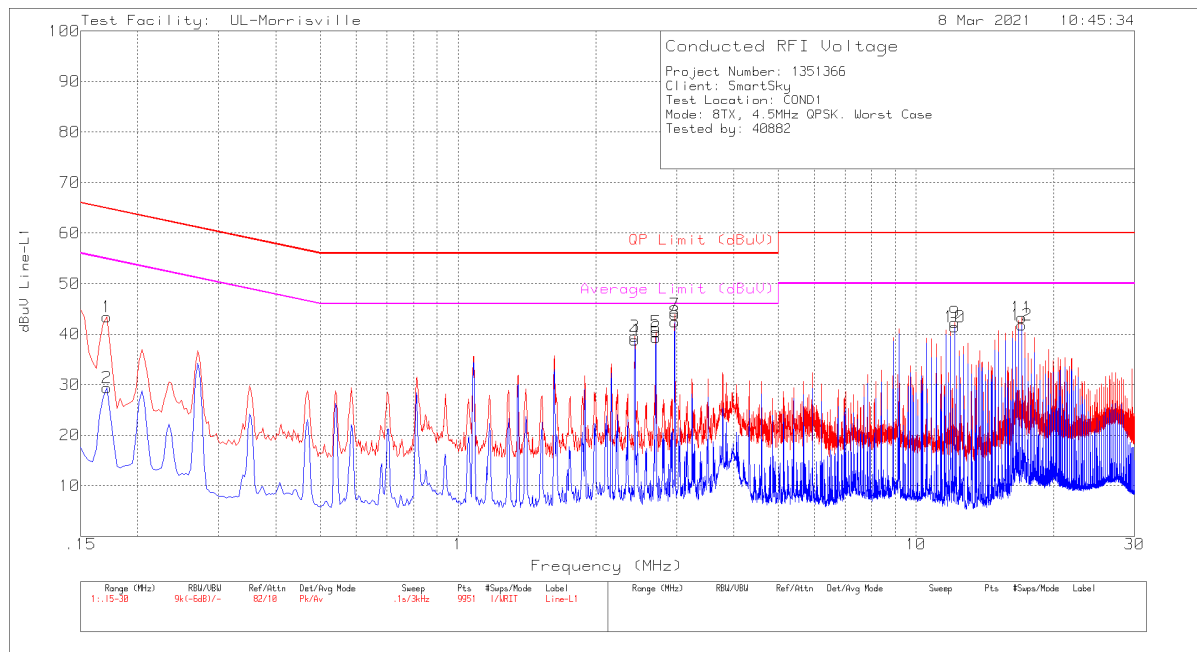

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.39	Pk	.2	9.7	43.29	65.06	-21.77	-	-
14	.168	19.4	Av	.2	9.7	29.3	-	-	55.06	-25.76
15	2.433	22.22	Pk	0	9.8	32.02	56	-23.98	-	-
16	2.433	20.53	Av	0	9.8	30.33	-	-	46	-15.67
17	2.703	23.03	Pk	0	9.8	32.83	56	-23.17	-	-
18	2.703	20.95	Av	0	9.8	30.75	-	-	46	-15.25
19	2.973	31.67	Pk	0	9.8	41.47	56	-14.53	-	-
20	2.973	30.13	Av	0	9.8	39.93	-	-	46	-6.07
21	12.162	26.55	Pk	.1	10	36.65	60	-23.35	-	-
22	12.162	25.62	Av	.1	10	35.72	-	-	50	-14.28
23	17.028	29.76	Pk	.1	10.1	39.96	60	-20.04	-	-
24	17.028	28.45	Av	.1	10.1	38.65	-	-	50	-11.35

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection


**LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL**

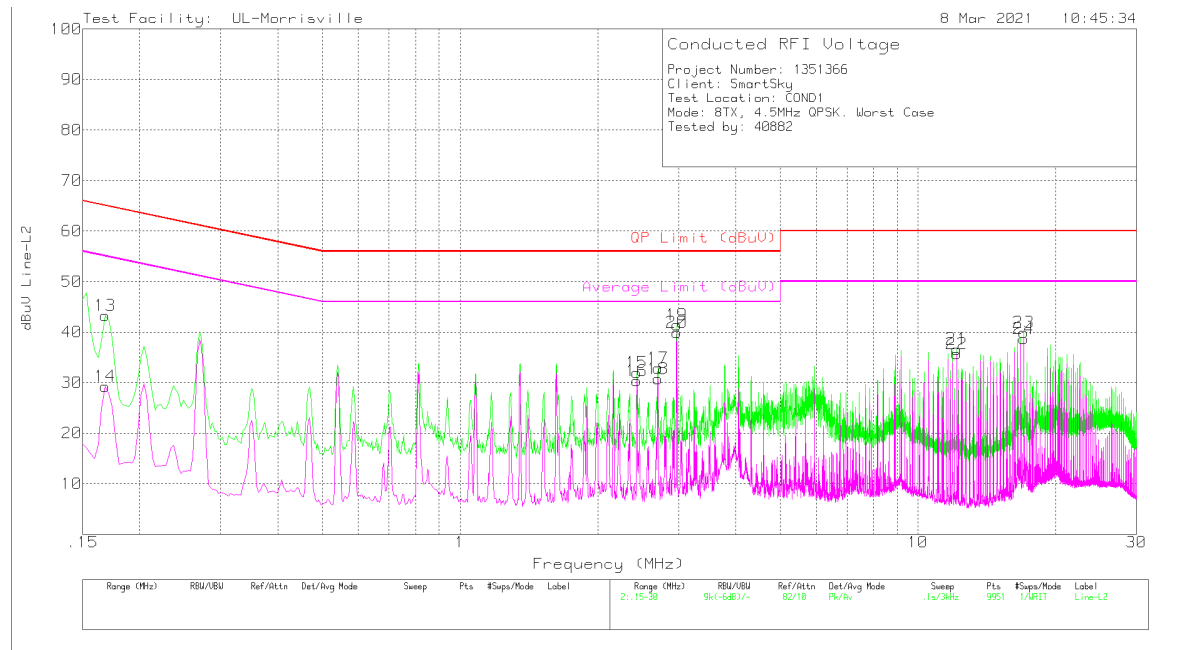

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.39	Pk	.2	9.7	43.29	65.06	-21.77	-	-
14	.168	19.4	Av	.2	9.7	29.3	-	-	55.06	-25.76
15	2.433	22.22	Pk	0	9.8	32.02	56	-23.98	-	-
16	2.433	20.53	Av	0	9.8	30.33	-	-	46	-15.67
17	2.703	23.03	Pk	0	9.8	32.83	56	-23.17	-	-
18	2.703	20.95	Av	0	9.8	30.75	-	-	46	-15.25
19	2.973	31.67	Pk	0	9.8	41.47	56	-14.53	-	-
20	2.973	30.13	Av	0	9.8	39.93	-	-	46	-6.07
21	12.162	26.55	Pk	.1	10	36.65	60	-23.35	-	-
22	12.162	25.62	Av	.1	10	35.72	-	-	50	-14.28
23	17.028	29.76	Pk	.1	10.1	39.96	60	-20.04	-	-
24	17.028	28.45	Av	.1	10.1	38.65	-	-	50	-11.35

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection


**LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL**

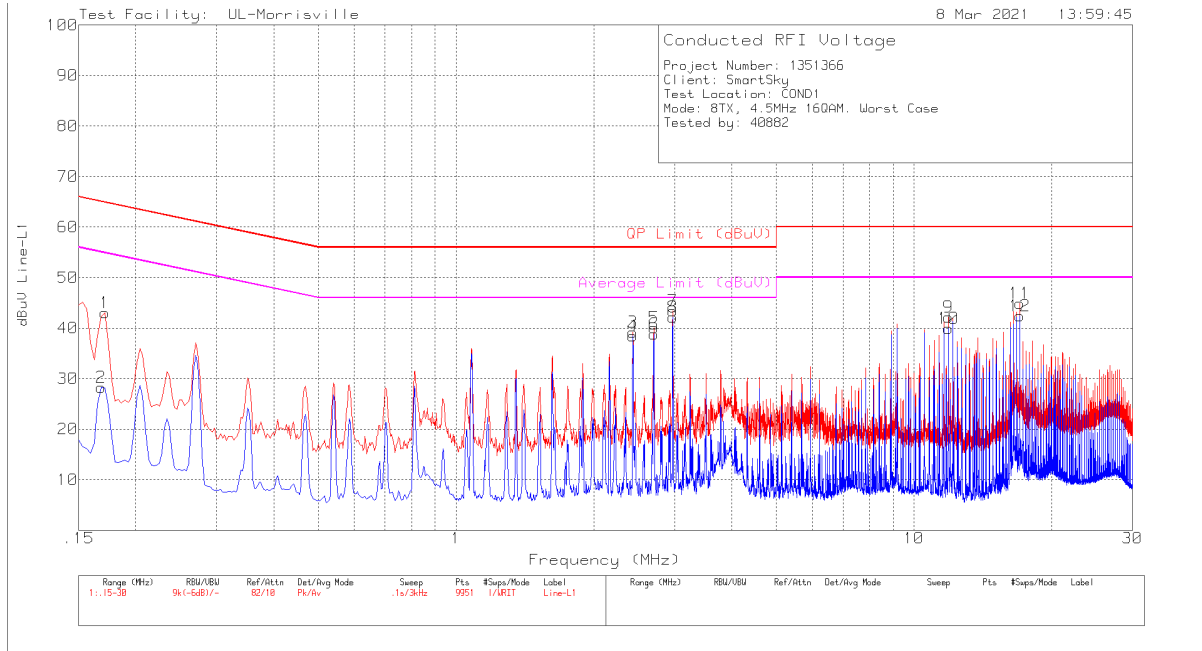

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.11	Pk	.2	9.7	43.01	64.91	-21.9	-	-
2	.168	18.4	Av	.2	9.7	28.3	-	-	55.06	-26.76
3	2.433	29.36	Pk	0	9.8	39.16	56	-16.84	-	-
4	2.433	28.69	Av	0	9.8	38.49	-	-	46	-7.51
5	2.703	30.25	Pk	0	9.8	40.05	56	-15.95	-	-
6	2.703	29.06	Av	0	9.8	38.86	-	-	46	-7.14
7	2.973	33.67	Pk	0	9.8	43.47	56	-12.53	-	-
8	2.97314	32.23	Ca	0	9.8	42.03	-	-	46	-3.97
9	11.892	32.07	Pk	.1	10	42.17	60	-17.83	-	-
10	11.892	29.89	Av	.1	10	39.99	-	-	50	-10.01
11	17.028	34.76	Pk	.1	10.1	44.96	60	-15.04	-	-
12	17.028	32.2	Av	.1	10.1	42.4	-	-	50	-7.6

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection

**LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL**

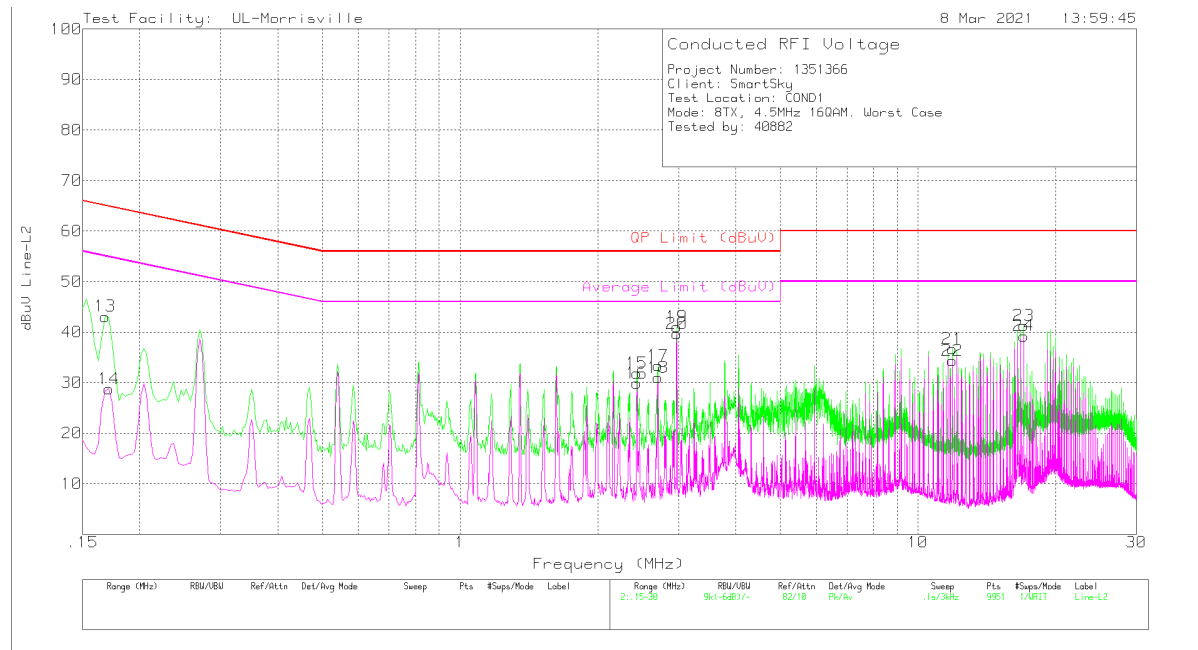


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cb/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.21	Pk	.2	9.7	43.11	65.06	-21.95	-	-
14	.171	18.9	Av	.2	9.7	28.8	-	-	54.91	-26.11
15	2.433	22.05	Pk	0	9.8	31.85	56	-24.15	-	-
16	2.433	20.09	Av	0	9.8	29.89	-	-	46	-16.11
17	2.703	23.52	Pk	0	9.8	33.32	56	-22.68	-	-
18	2.703	21.19	Av	0	9.8	30.99	-	-	46	-15.01
19	2.973	31.26	Pk	0	9.8	41.06	56	-14.94	-	-
20	2.973	29.89	Av	0	9.8	39.69	-	-	46	-6.31
21	11.892	26.62	Pk	.1	10	36.72	60	-23.28	-	-
22	11.892	24.28	Av	.1	10	34.38	-	-	50	-15.62
23	17.028	31.08	Pk	.1	10.1	41.28	60	-18.72	-	-
24	17.028	29.06	Av	.1	10.1	39.26	-	-	50	-10.74

Pk - Peak detector  
 Av - Average detection

**13.1.2. 3RB, 9 MHz BANDWIDTH**


**LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL**

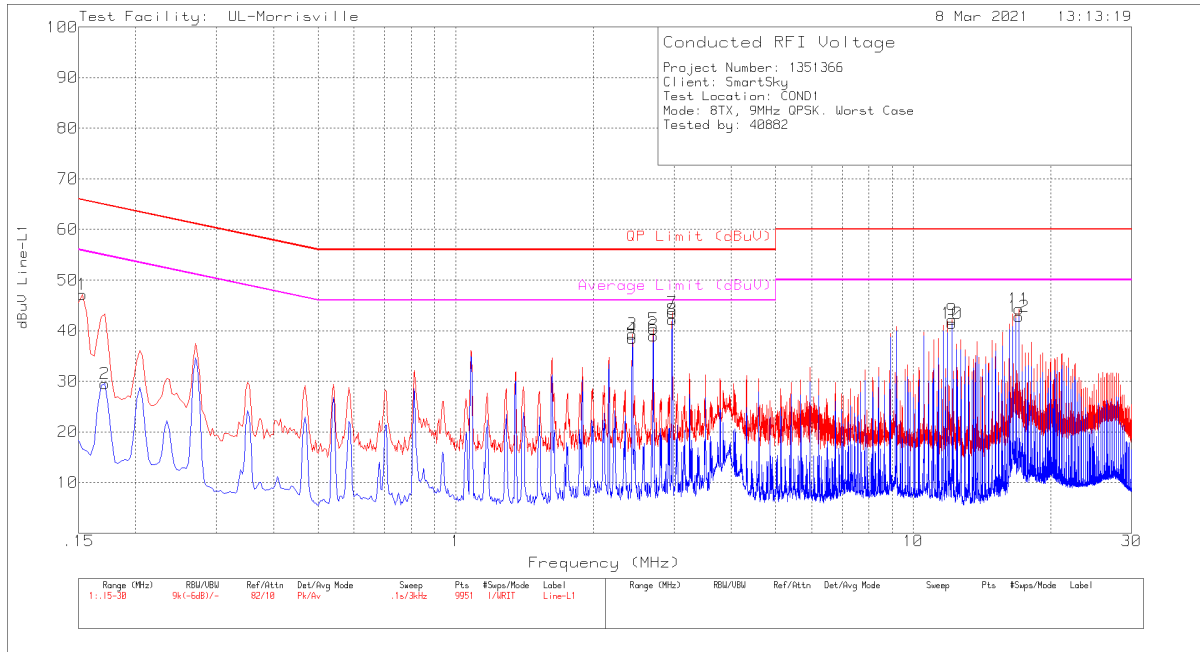

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.153	37.2	Pk	.2	9.7	47.1	65.84	-18.74	-	-
2	.171	19.58	Av	.2	9.7	29.48	-	-	54.91	-25.43
3	2.433	29.48	Pk	0	9.8	39.28	56	-16.72	-	-
4	2.433	28.7	Av	0	9.8	38.5	-	-	46	-7.5
5	2.703	30.5	Pk	0	9.8	40.3	56	-15.7	-	-
6	2.703	29.14	Av	0	9.8	38.94	-	-	46	-7.06
7	2.973	33.79	Pk	0	9.8	43.59	56	-12.41	-	-
8	2.973	32.23	Ca	0	9.8	42.03	-	-	46	-3.97
9	12.162	32.04	Pk	.1	10	42.14	60	-17.86	-	-
10	12.162	31.38	Av	.1	10	41.48	-	-	50	-8.52
11	17.028	34.1	Pk	.1	10.1	44.3	60	-15.7	-	-
12	17.028	32.57	Av	.1	10.1	42.77	-	-	50	-7.23

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection


**LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL**

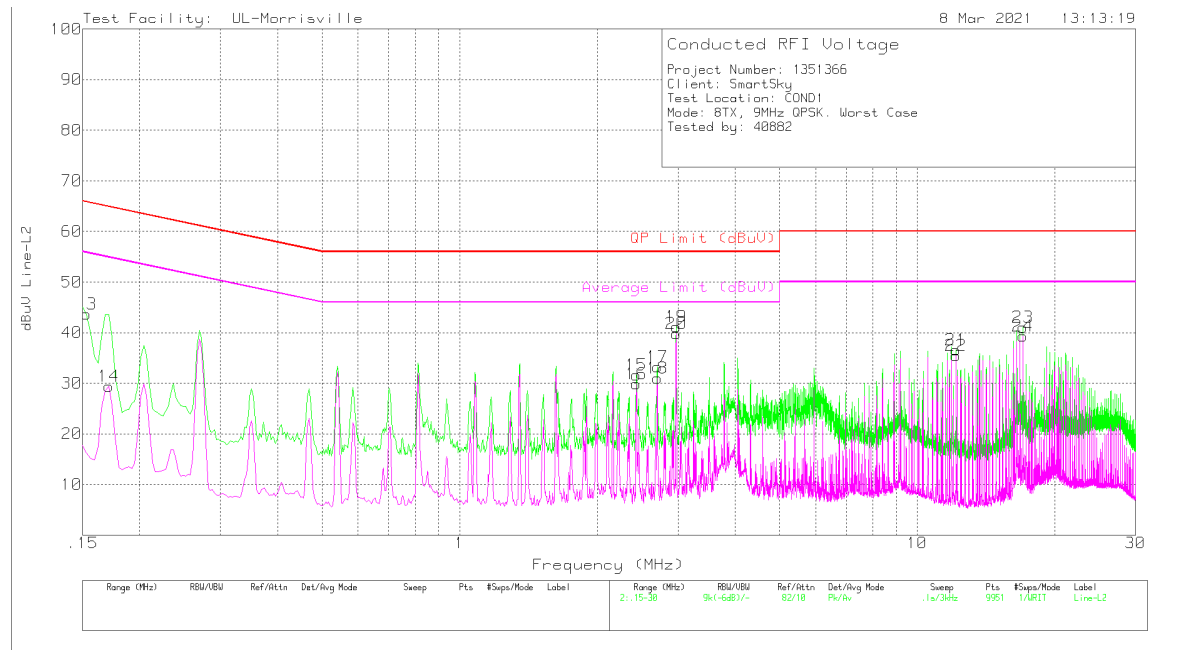

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.153	33.82	Pk	.2	9.7	43.72	65.84	-22.12	-	-
14	.171	19.53	Av	.2	9.7	29.43	-	-	54.91	-25.48
15	2.433	21.82	Pk	0	9.8	31.62	56	-24.38	-	-
16	2.433	20.05	Av	0	9.8	29.85	-	-	46	-16.15
17	2.703	23.42	Pk	0	9.8	33.22	56	-22.78	-	-
18	2.703	21.17	Av	0	9.8	30.97	-	-	46	-15.03
19	2.973	31.4	Pk	0	9.8	41.2	56	-14.8	-	-
20	2.973	29.98	Av	0	9.8	39.78	-	-	46	-6.22
21	12.162	26.52	Pk	.1	10	36.62	60	-23.38	-	-
22	12.162	25.37	Av	.1	10	35.47	-	-	50	-14.53
23	17.028	30.85	Pk	.1	10.1	41.05	60	-18.95	-	-
24	17.028	29.15	Av	.1	10.1	39.35	-	-	50	-10.65

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection


**LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL**

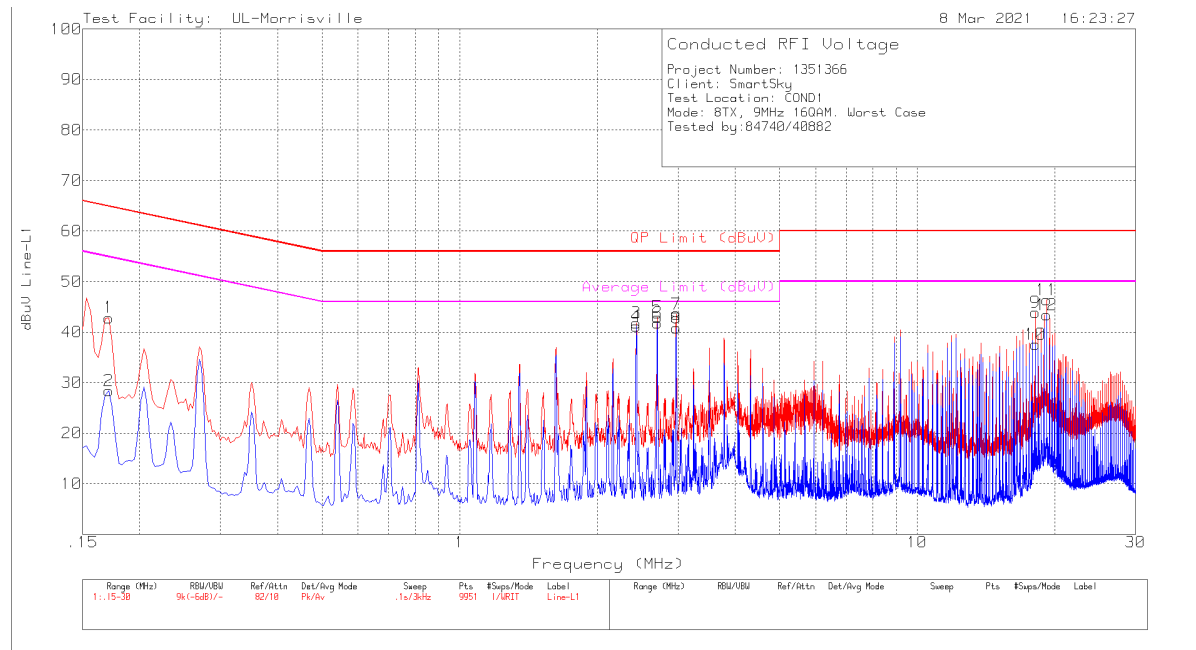

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	32.96	Pk	.2	9.7	42.86	64.91	-22.05	-	-
2	.171	18.53	Av	.2	9.7	28.43	-	-	54.91	-26.48
3	2.433	31.99	Pk	0	9.8	41.79	56	-14.21	-	-
4	2.43235	31.89	Ca	0	9.8	41.69	-	-	46	-4.31
5	2.703	33.18	Pk	0	9.8	42.98	56	-13.02	-	-
6	2.70273	32.43	Ca	0	9.8	42.23	-	-	46	-3.77
7	2.973	33.78	Pk	0	9.8	43.58	56	-12.42	-	-
8	2.9734	31.24	Ca	0	9.8	41.04	-	-	46	-4.96
9	18.108	33.74	Pk	.1	10.1	43.94	60	-16.06	-	-
10	18.108	27.41	Av	.1	10.1	37.61	-	-	50	-12.39
11	19.191	36.09	Pk	.2	10.1	46.39	60	-13.61	-	-
12	19.191	33.08	Av	.2	10.1	43.38	-	-	50	-6.62

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection

**LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL**

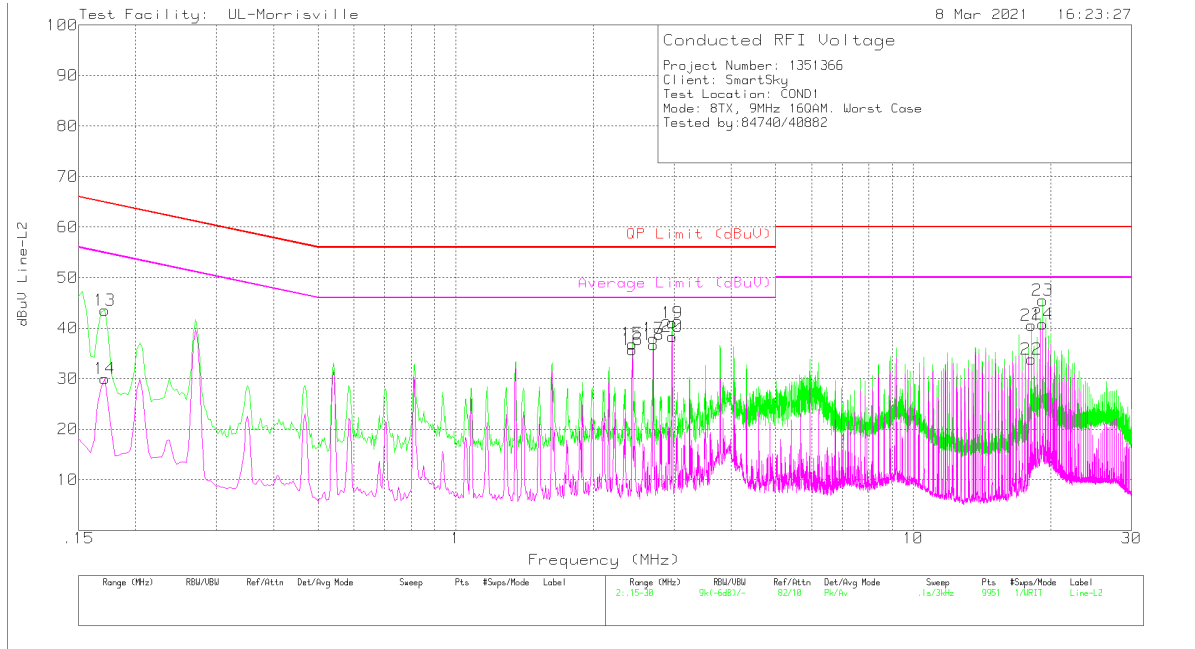


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.171	33.64	Pk	.2	9.7	43.54	64.91	-21.37	-	-
14	.171	20.11	Av	.2	9.7	30.01	-	-	54.91	-24.9
15	2.433	27.1	Pk	0	9.8	36.9	56	-19.1	-	-
16	2.433	25.98	Av	0	9.8	35.78	-	-	46	-10.22
17	2.703	28.16	Pk	0	9.8	37.96	56	-18.04	-	-
18	2.703	26.87	Av	0	9.8	36.67	-	-	46	-9.33
19	2.973	31.23	Pk	0	9.8	41.03	56	-14.97	-	-
20	2.973	28.59	Av	0	9.8	38.39	-	-	46	-7.61
21	18.108	30.34	Pk	.1	10.1	40.54	60	-19.46	-	-
22	18.108	23.69	Av	.1	10.1	33.89	-	-	50	-16.11
23	19.191	35.27	Pk	.1	10.1	45.47	60	-14.53	-	-
24	19.191	30.6	Av	.1	10.1	40.8	-	-	50	-9.2

Pk - Peak detector  
 Av - Average detection



### 13.1.3. FRB, 4.5 MHz BANDWIDTH


#### LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

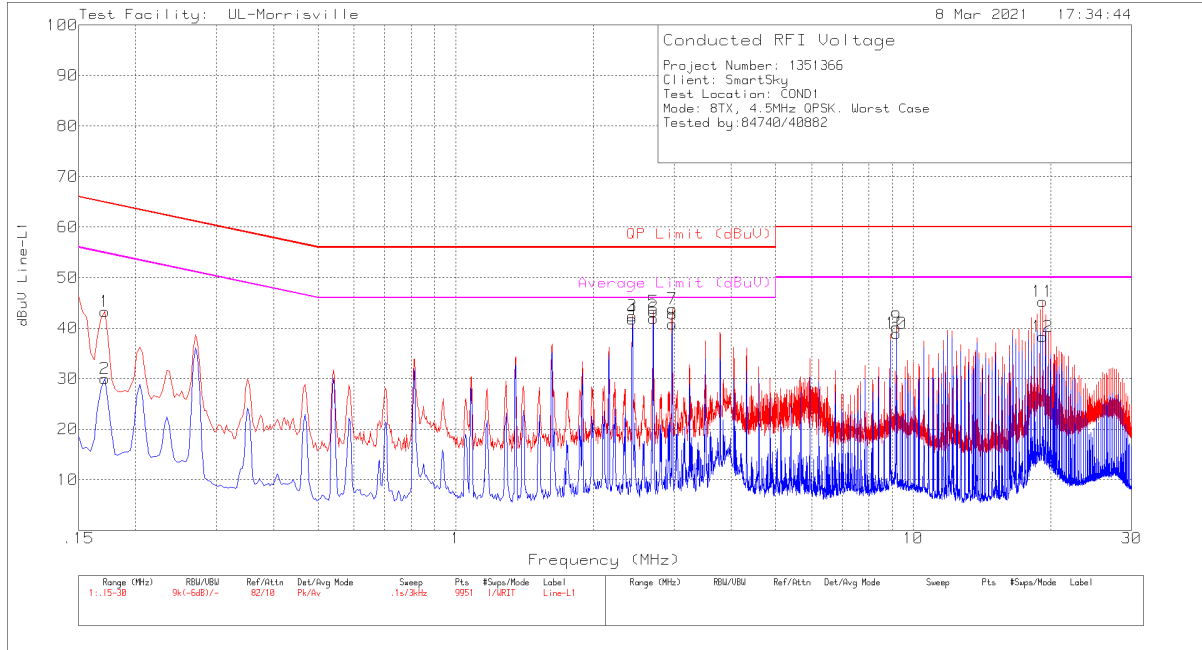

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.38	Pk	.2	9.7	43.28	64.91	-21.63	-	-
2	.171	20.08	Av	.2	9.7	29.98	-	-	54.91	-24.93
3	2.433	32.59	Pk	0	9.8	42.39	56	-13.61	-	-
4	2.43304	32.03	Ca	0	9.8	41.83	-	-	46	-4.17
5	2.703	33.46	Pk	0	9.8	43.26	56	-12.74	-	-
6	2.70288	32.16	Ca	0	9.8	41.96	-	-	46	-4.04
7	2.973	33.97	Pk	0	9.8	43.77	56	-12.23	-	-
8	2.97403	30.7	Ca	0	9.8	40.5	-	-	46	-5.5
9	9.189	30.13	Pk	.1	10	40.23	60	-19.77	-	-
10	9.189	28.9	Av	.1	10	39	-	-	50	-11
11	19.191	34.97	Pk	.2	10.1	45.27	60	-14.73	-	-
12	19.191	27.98	Av	.2	10.1	38.28	-	-	50	-11.72

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection


**LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL**

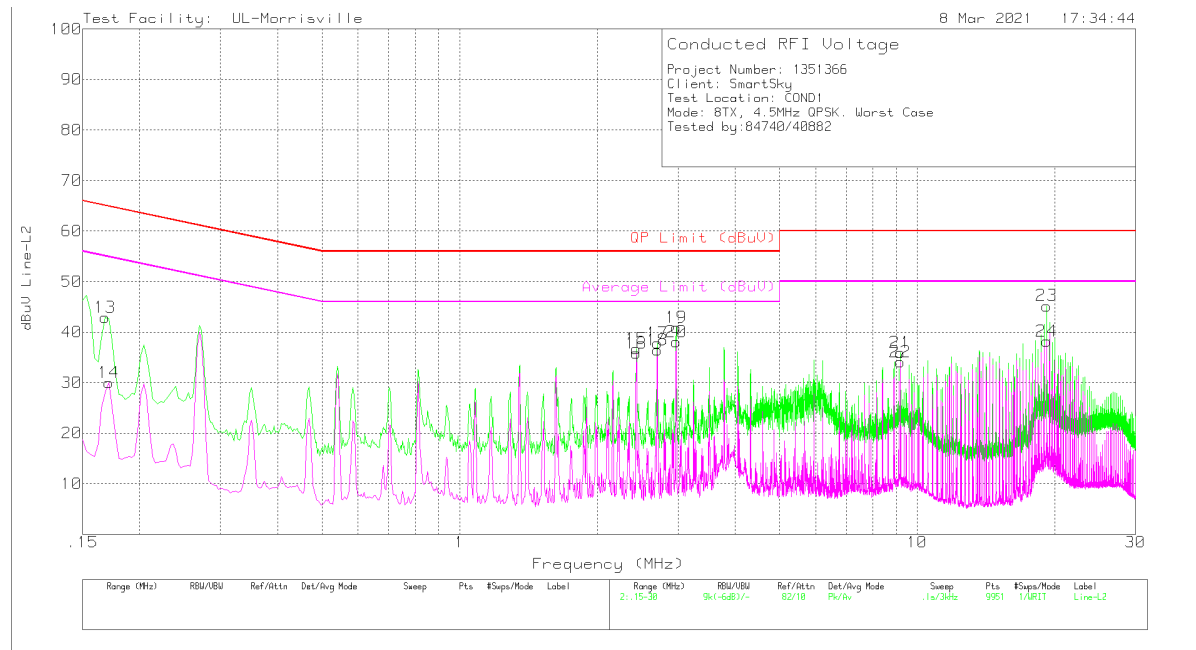

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33	Pk	.2	9.7	42.9	65.06	-22.16	-	-
14	.171	20.12	Av	.2	9.7	30.02	-	-	54.91	-24.89
15	2.433	26.96	Pk	0	9.8	36.76	56	-19.24	-	-
16	2.433	26.03	Av	0	9.8	35.83	-	-	46	-10.17
17	2.703	28.04	Pk	0	9.8	37.84	56	-18.16	-	-
18	2.703	26.65	Av	0	9.8	36.45	-	-	46	-9.55
19	2.973	31.1	Pk	0	9.8	40.9	56	-15.1	-	-
20	2.973	28.26	Av	0	9.8	38.06	-	-	46	-7.94
21	9.189	25.92	Pk	.1	10	36.02	60	-23.98	-	-
22	9.189	24.04	Av	.1	10	34.14	-	-	50	-15.86
23	19.191	35.02	Pk	.1	10.1	45.22	60	-14.78	-	-
24	19.191	28.01	Av	.1	10.1	38.21	-	-	50	-11.79

Pk - Peak detector  
 Av - Average detection


**LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL**

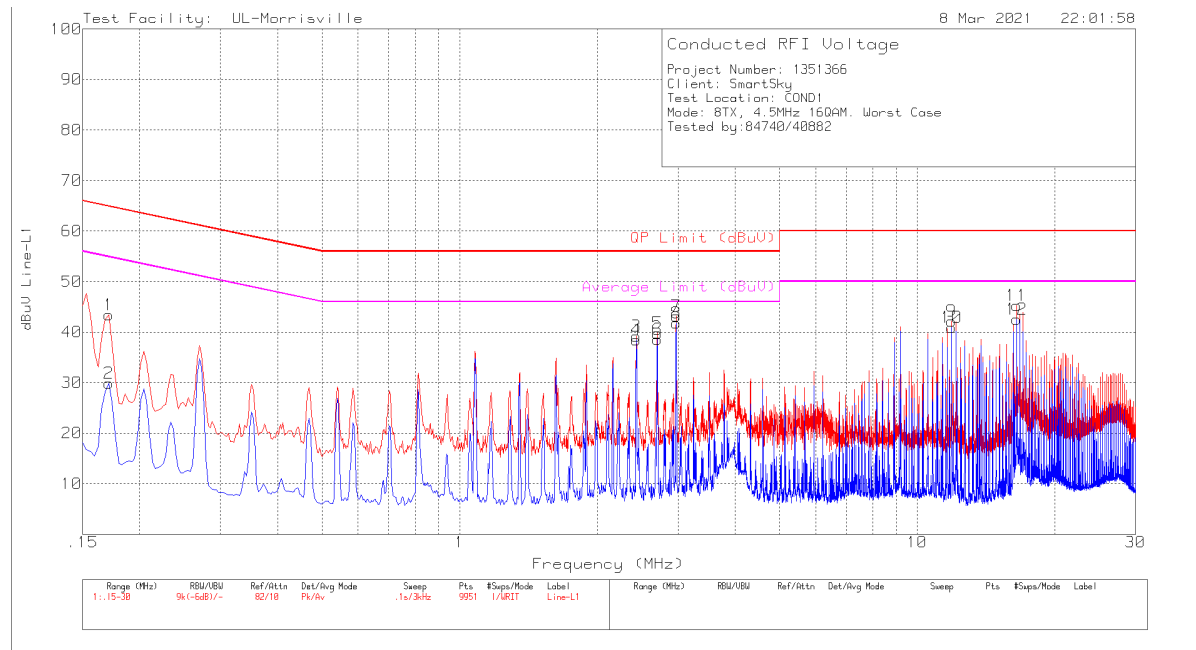

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.51	Pk	.2	9.7	43.41	64.91	-21.5	-	-
2	.171	20.02	Av	.2	9.7	29.92	-	-	54.91	-24.99
3	2.433	29.41	Pk	0	9.8	39.21	56	-16.79	-	-
4	2.433	28.65	Av	0	9.8	38.45	-	-	46	-7.55
5	2.703	29.96	Pk	0	9.8	39.76	56	-16.24	-	-
6	2.703	28.83	Av	0	9.8	38.63	-	-	46	-7.37
7	2.973	33.33	Pk	0	9.8	43.13	56	-12.87	-	-
8	2.97322	31.89	Ca	0	9.8	41.69	-	-	46	-4.31
9	11.892	32.08	Pk	.1	10	42.18	60	-17.82	-	-
10	11.892	30.84	Av	.1	10	40.94	-	-	50	-9.06
11	16.488	35.04	Pk	.1	10.1	45.24	60	-14.76	-	-
12	16.488	32.33	Av	.1	10.1	42.53	-	-	50	-7.47

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection

**LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL**

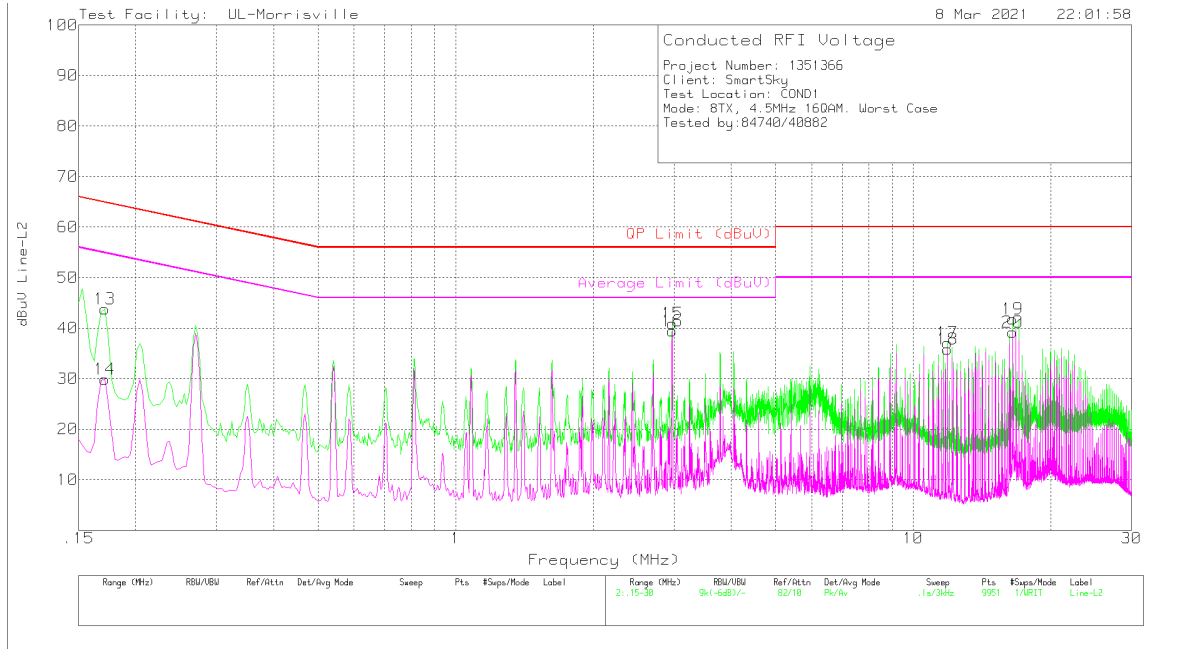


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.171	33.84	Pk	.2	9.7	43.74	64.91	-21.17	-	-
14	.171	20	Av	.2	9.7	29.9	-	-	54.91	-25.01
15	2.973	31.18	Pk	0	9.8	40.98	56	-15.02	-	-
16	2.973	29.62	Av	0	9.8	39.42	-	-	46	-6.58
17	11.892	26.98	Pk	.1	10	37.08	60	-22.92	-	-
18	11.892	25.72	Av	.1	10	35.82	-	-	50	-14.18
19	16.488	31.64	Pk	.1	10.1	41.84	60	-18.16	-	-
20	16.488	29.04	Av	.1	10.1	39.24	-	-	50	-10.76

Pk - Peak detector  
 Av - Average detection

### 13.1.4. FRB, 9 MHz BANDWIDTH


#### LINE 1 RESULTS – QPSK, WORST-CASE CHANNEL

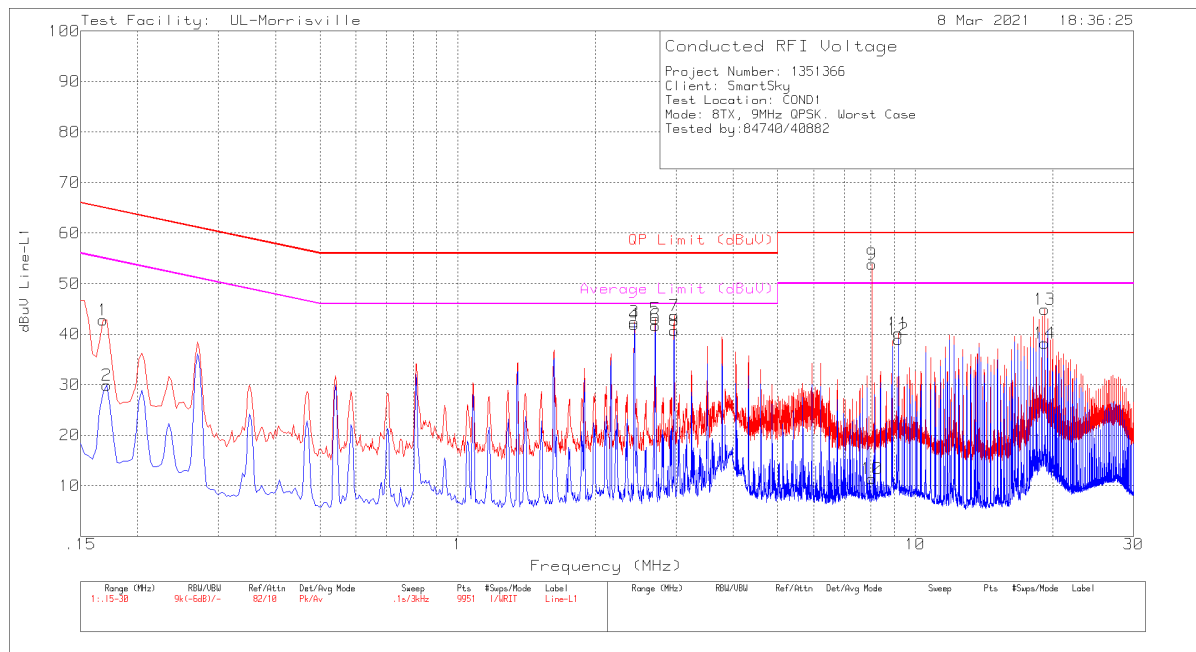

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.168	32.86	Pk	.2	9.7	42.76	65.06	-22.3	-	-
2	.171	20.01	Av	.2	9.7	29.91	-	-	54.91	-25
3	2.433	32.68	Pk	0	9.8	42.48	56	-13.52	-	-
4	2.4323	32.16	Ca	0	9.8	41.96	-	-	46	-4.04
5	2.703	33.28	Pk	0	9.8	43.08	56	-12.92	-	-
6	2.70316	32.92	Ca	0	9.8	42.72	-	-	46	-3.28
7	2.973	33.81	Pk	0	9.8	43.61	56	-12.39	-	-
8	2.97296	32.2	Ca	0	9.8	42	-	-	46	-4
9	8.0413	1.49	Qp	.1	10	11.59	60	-48.41	-	-
10	8.046	1.34	Av	.1	10	11.44	-	-	50	-38.56
11	9.189	30.13	Pk	.1	10	40.23	60	-19.77	-	-
12	9.189	28.91	Av	.1	10	39.01	-	-	50	-10.99
13	19.191	34.66	Pk	.2	10.1	44.96	60	-15.04	-	-
14	19.191	27.85	Av	.2	10.1	38.15	-	-	50	-11.85

Pk - Peak detector  
 Av - Average detection  
 Qp - Quasi-Peak detector  
 Ca - CISPR average detection


**LINE 2 RESULTS – QPSK, WORST-CASE CHANNEL**

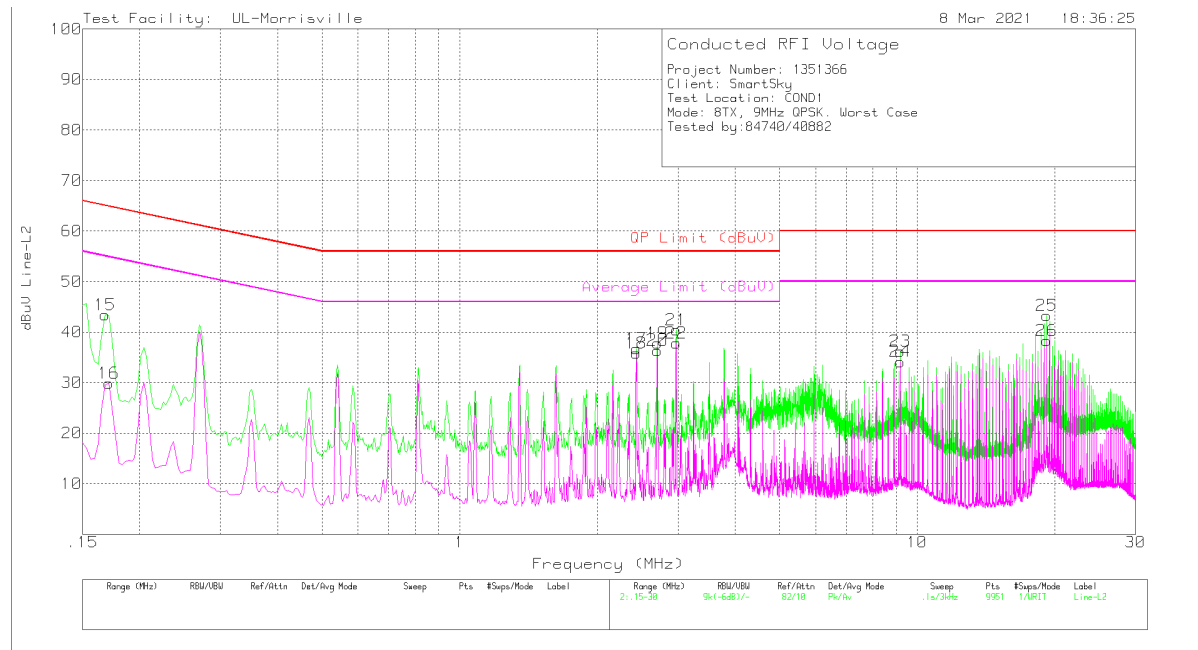

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
15	.168	33.5	Pk	.2	9.7	43.4	65.06	-21.66	-	-
16	.171	19.94	Av	.2	9.7	29.84	-	-	54.91	-25.07
17	2.433	26.92	Pk	0	9.8	36.72	56	-19.28	-	-
18	2.433	26.01	Av	0	9.8	35.81	-	-	46	-10.19
19	2.703	27.99	Pk	0	9.8	37.79	56	-18.21	-	-
20	2.703	26.6	Av	0	9.8	36.4	-	-	46	-9.6
21	2.973	30.65	Pk	0	9.8	40.45	56	-15.55	-	-
22	2.973	28.04	Av	0	9.8	37.84	-	-	46	-8.16
23	9.189	26.07	Pk	.1	10	36.17	60	-23.83	-	-
24	9.189	24.07	Av	.1	10	34.17	-	-	50	-15.83
25	19.191	33.09	Pk	.1	10.1	43.29	60	-16.71	-	-
26	19.191	28.16	Av	.1	10.1	38.36	-	-	50	-11.64

Pk - Peak detector  
 Av - Average detection


**LINE 1 RESULTS – 16-QAM, WORST-CASE CHANNEL**

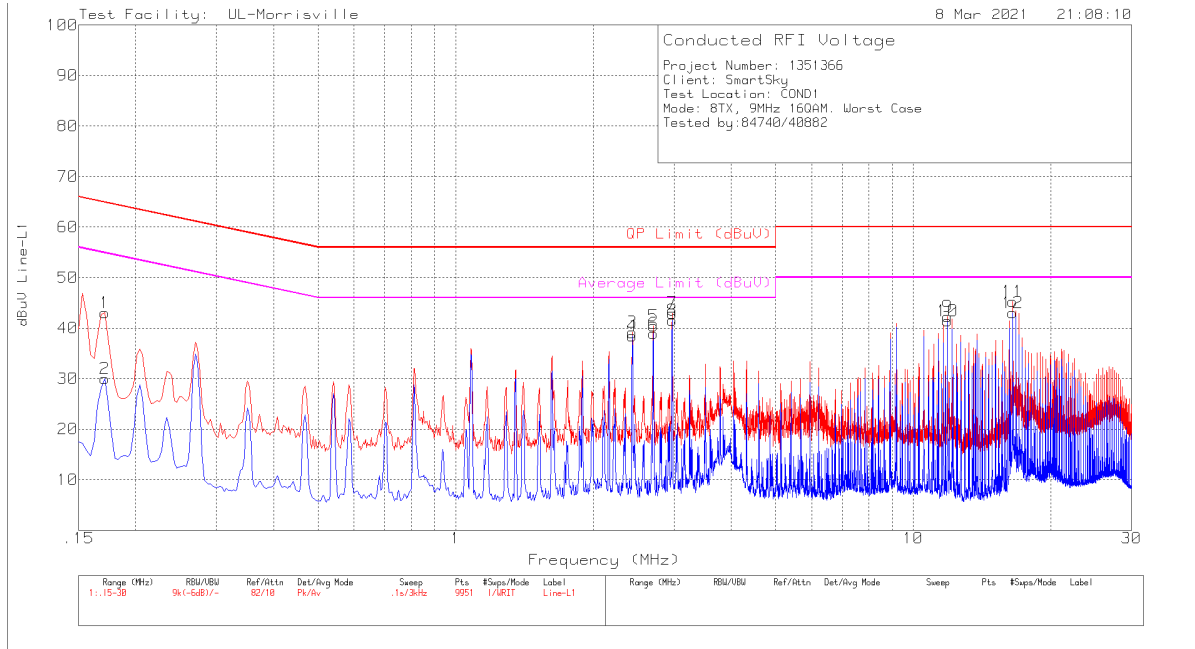

Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
1	.171	33.15	Pk	.2	9.7	43.05	64.91	-21.86	-	-
2	.171	20.1	Av	.2	9.7	30	-	-	54.91	-24.91
3	2.433	29.34	Pk	0	9.8	39.14	56	-16.86	-	-
4	2.433	28.69	Av	0	9.8	38.49	-	-	46	-7.51
5	2.703	30.66	Pk	0	9.8	40.46	56	-15.54	-	-
6	2.703	29.16	Av	0	9.8	38.96	-	-	46	-7.04
7	2.973	33.18	Pk	0	9.8	42.98	56	-13.02	-	-
8	2.97296	31.81	Ca	0	9.8	41.61	-	-	46	-4.39
9	11.892	32.23	Pk	.1	10	42.33	60	-17.67	-	-
10	11.892	31.3	Av	.1	10	41.4	-	-	50	-8.6
11	16.488	35.09	Pk	.1	10.1	45.29	60	-14.71	-	-
12	16.488	32.83	Av	.1	10.1	43.03	-	-	50	-6.97

Pk - Peak detector  
 Av - Average detection  
 Ca - CISPR average detection

**LINE 2 RESULTS – 16-QAM, WORST-CASE CHANNEL**

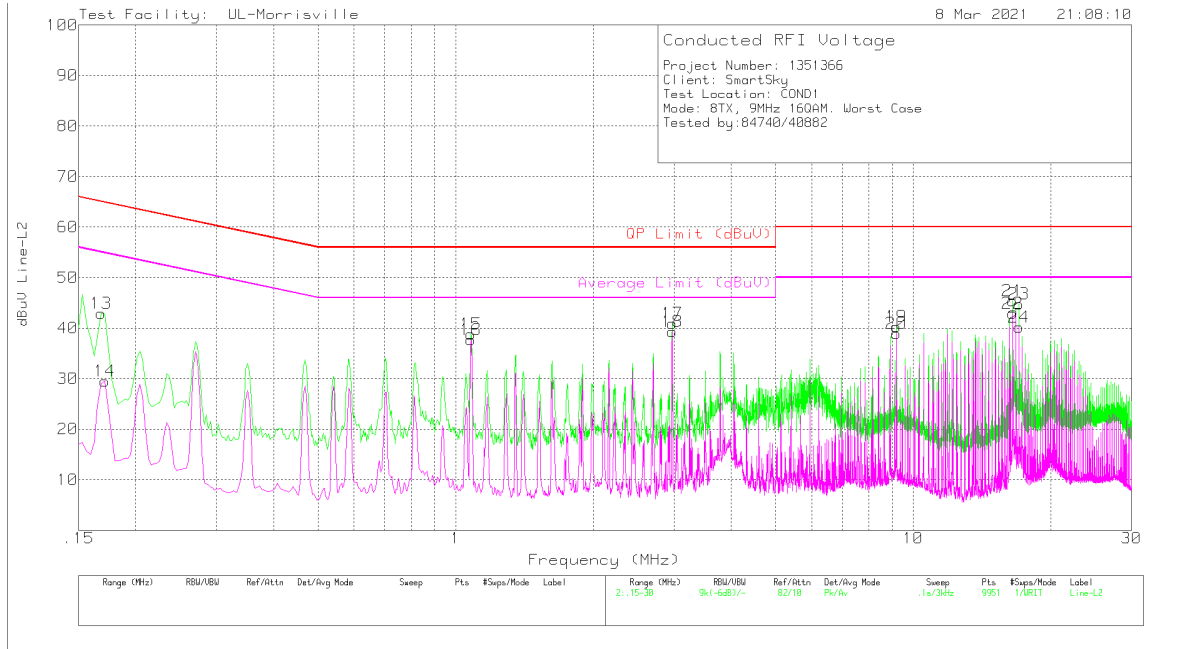


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF (dB)	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit (dBuV)	Margin (dB)	Average Limit (dBuV)	Margin (dB)
13	.168	33.05	Pk	.2	9.7	42.95	65.06	-22.11	-	-
14	.171	19.63	Av	.2	9.7	29.53	-	-	54.91	-25.38
15	1.08	29.03	Pk	0	9.8	38.83	56	-17.17	-	-
16	1.08	27.94	Av	0	9.8	37.74	-	-	46	-8.26
17	2.973	31.09	Pk	0	9.8	40.89	56	-15.11	-	-
18	2.973	29.53	Av	0	9.8	39.33	-	-	46	-6.67
19	9.189	30.23	Pk	.1	10	40.33	60	-19.67	-	-
20	9.189	28.88	Av	.1	10	38.98	-	-	50	-11.02
21	16.488	35.17	Pk	.1	10.1	45.37	60	-14.63	-	-
22	16.488	32.7	Av	.1	10.1	42.9	-	-	50	-7.1
23	17.028	34.6	Pk	.1	10.1	44.8	60	-15.2	-	-
24	17.028	30	Av	.1	10.1	40.2	-	-	50	-9.8

Pk - Peak detector  
 Av - Average detection





## 14. SETUP PHOTOS



### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

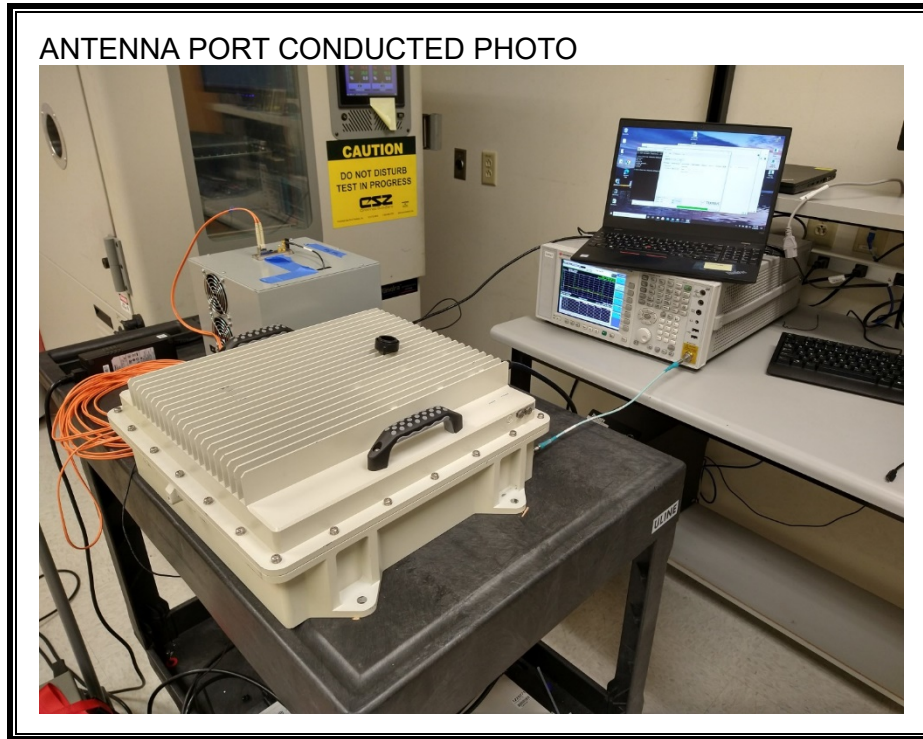

**RADIATED RF MEASUREMENT SETUP (BELOW 30 MHz)**

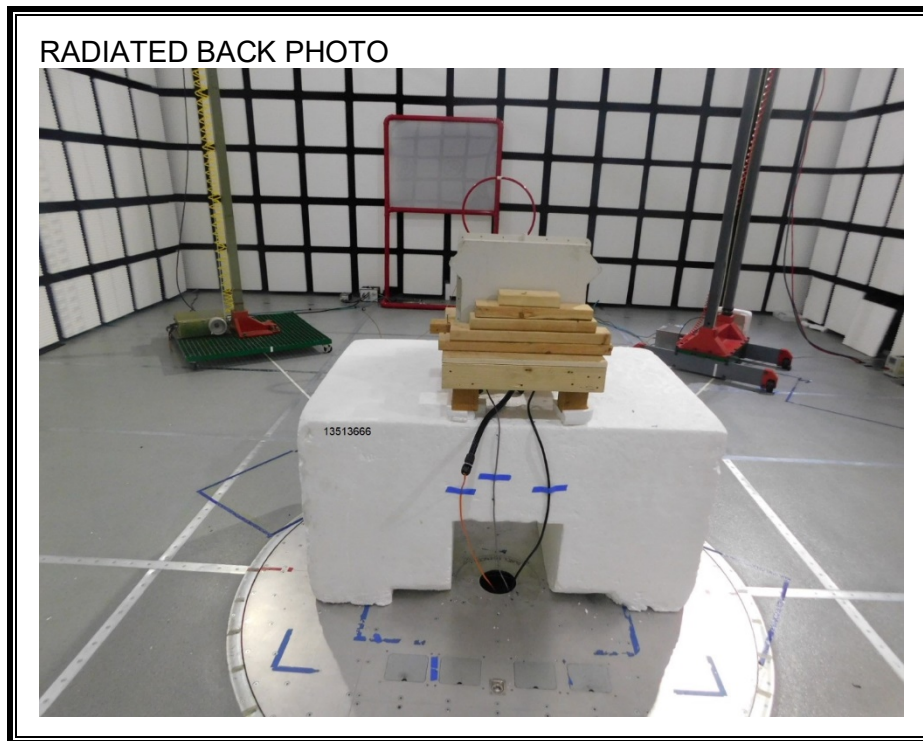
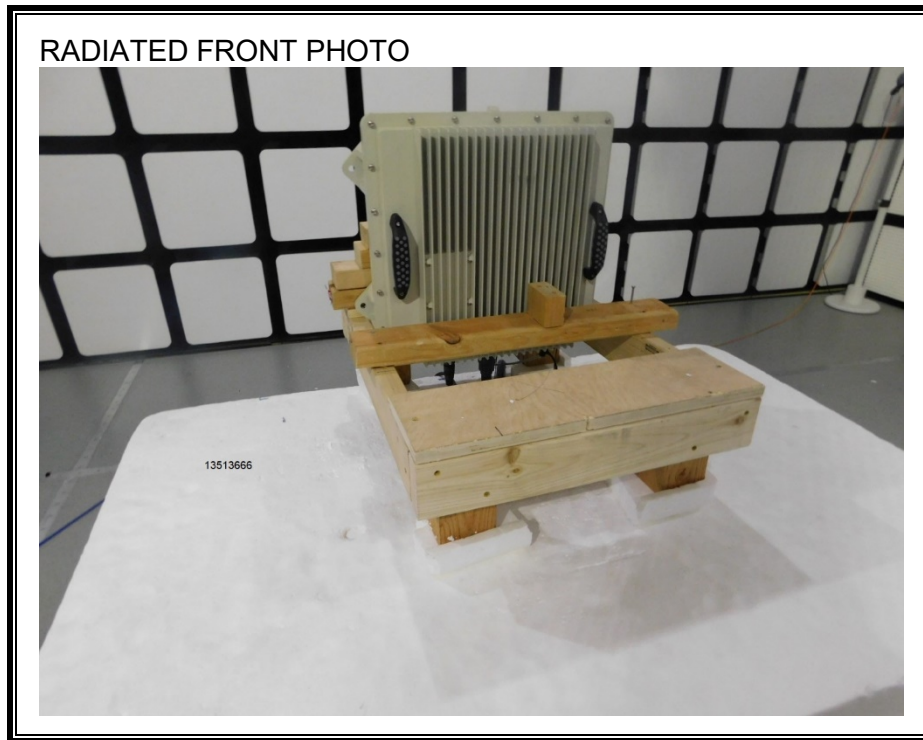


**RADIATED RF MEASUREMENT SETUP (BELOW 1000 MHz)**

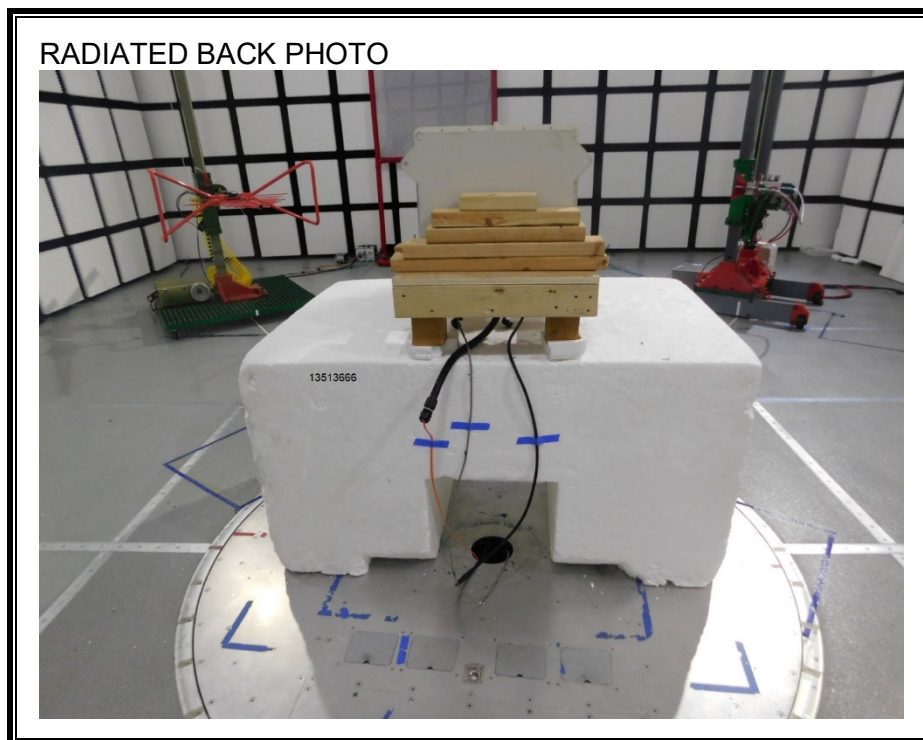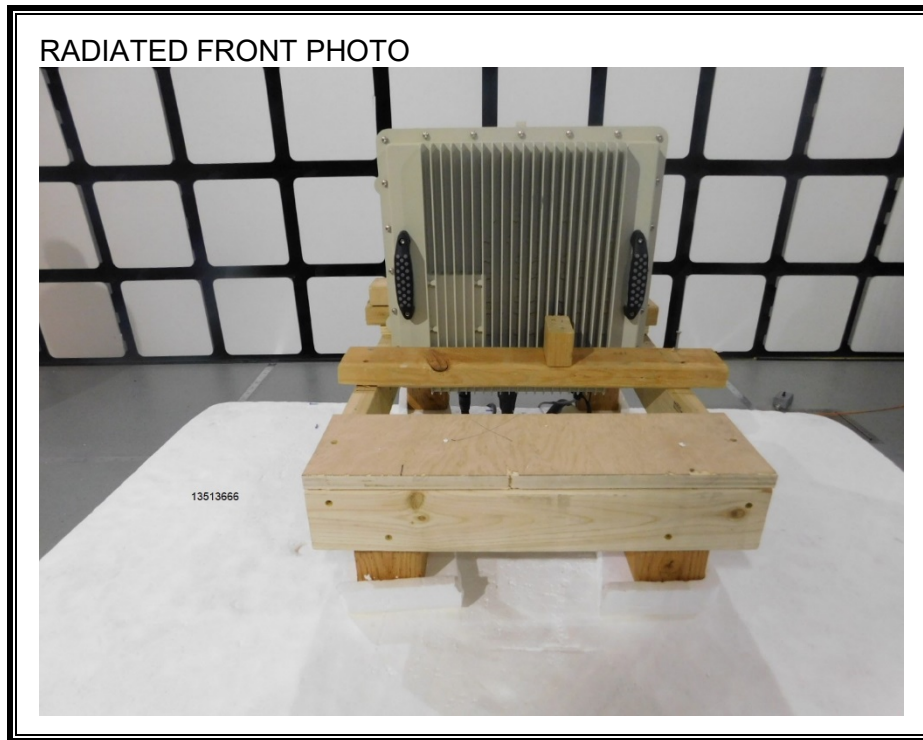





**RADIATED RF MEASUREMENT SETUP (ABOVE 1000 MHz)**

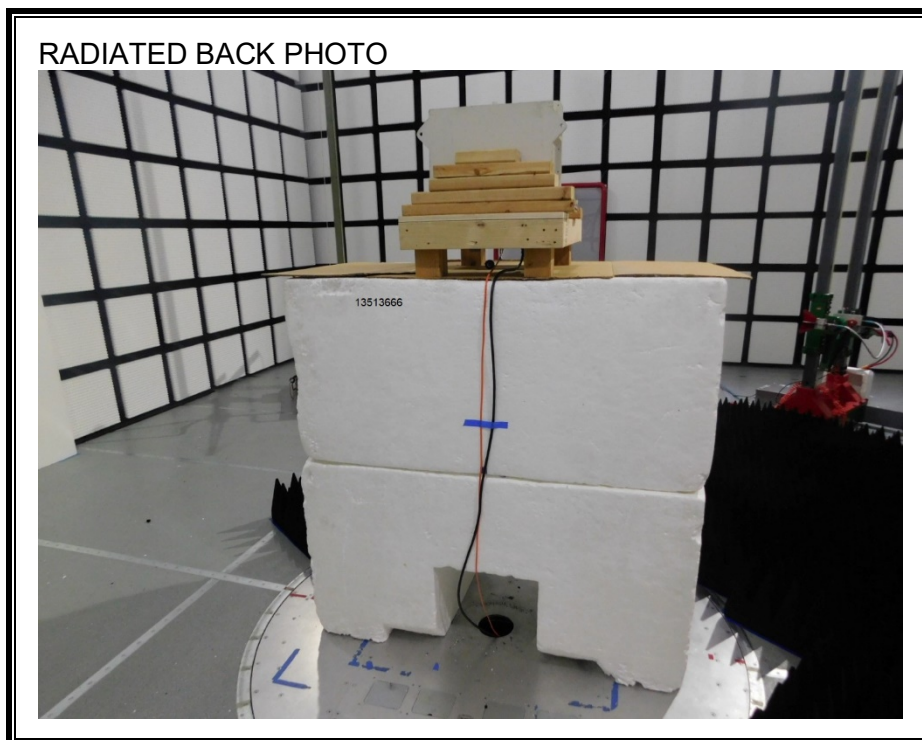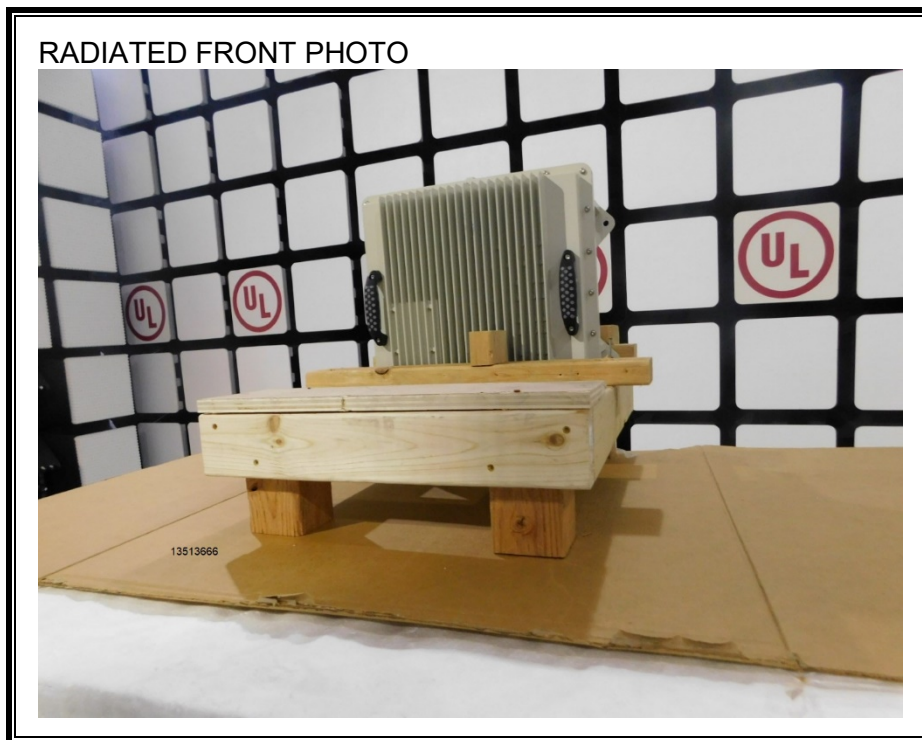

Note: EUT tested at a height slightly higher than 150cm in order to safely test the device.

**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

LINE CONDUCTED PHOTO

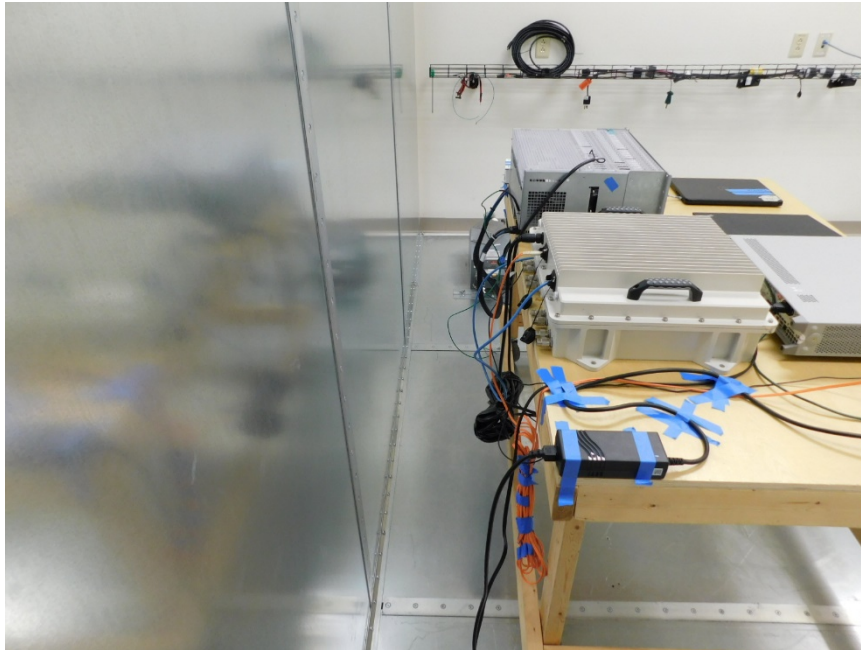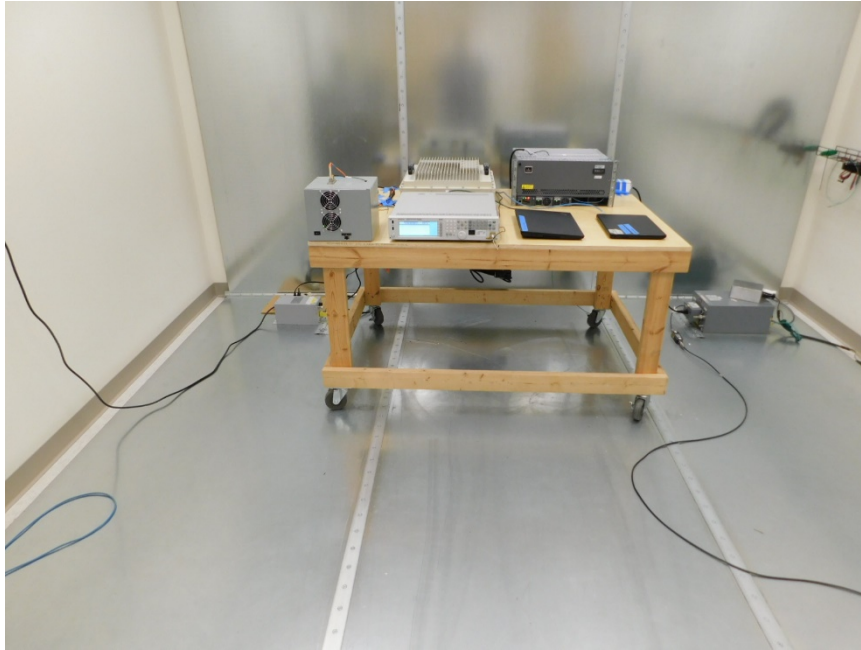

**END OF REPORT**