

SUCR240800028401 Report No.:

01 Rev.: Page: 1 of 32

# TEST REPORT

**Application No.:** SUCR2408000284MO

**Applicant:** Gosuncn Technology Group Co., Ltd.

6F, No. 2819, KaiChuang Avenue, Science City, Huangpu District, **Address of Applicant:** 

Guangzhou City, Guangdong Province, China

Manufacturer: Gosuncn Technology Group Co., Ltd.

6F, No. 2819, KaiChuang Avenue, Science City, Huangpu District, **Address of Manufacturer:** 

Guangzhou City, Guangdong Province, China

**EUT Description:** LTE Module Model No.: GM500 U1A Trade Mark: GOSUNCN

FCC ID: 2APNR-GM500U1A

47 CFR Part 2 Standards:

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

**Date of Receipt:** August 3, 2024

August 5, 2024 to August 28, 2024 **Date of Test:** 

Date of Issue: August 29, 2024

Test Result: PASS \*

Nature Shen

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

**Prepared by : Nature Shen / Project** 

Manager

Approved by : Cloud Peng /

**Technical Manager** 

Cloud Peng

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR240800028401

Rev.: 01 2 of 32 Page:

### Version

Revision Record							
Version	Version Chapter Date Modifier Remark						
01		August 29, 2024		Original			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01 Page: 3 of 32

### **Contents**

Ve	rsion		2
1	Te	est Summary	4
	1.1	GSM850/UMTS Band 5/LTE Band 5	4
	1.2	GSM 1900/UMTS Band 2 /LTE Band 2	5
	1.3	LTE Band 4	6
	1.4	LTE Band 12	7
2	G	eneral Information	8
	2.1	Details of Client	8
	2.2	Test Location	8
	2.3	Test Facility	8
	2.4	General Description of EUT	9
	2.5	Test Mode	10
	2.6	Test Environment	10
	2.7	Description of Support Units	10
	2.8	Technical Specification	
	2.9	Test Frequencies	12
3	D	escription of Tests	16
	3.1	Conducted Output Power	16
	3.2	Effective (Isotropic) Radiated Power of Transmitter	17
	3.3	Occupied Bandwidth	
	3.4	Band Edge at Antenna Terminals	
	3.5	Spurious And Harmonic Emissions at Antenna Terminal	20
	3.6	Peak-Average Ratio	21
	3.7	Field Strength of Spurious Radiation	22
	3.8	Frequency Stability / Temperature Variation	24
	3.9	Test Setups	25
	3.10	Test Conditions	
4	M	ain Test Instruments	29
5	M	easurement Uncertainty	31
6	Α	ppendixes	32

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01 4 of 32 Page:

## **Test Summary**

### 1.1 GSM850/UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W		Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB		Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix B.1&B.4&B.7	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	D. 1&D.4&D.7	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	±2.5ppm.		Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01 5 of 32 Page:

### 1.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W		Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB		Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix B.2&B.3&B.5	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	D.2&D.3&D.3	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.		Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01 6 of 32 Page:

### 1.3 LTE Band 4

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W		Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB		Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Appendix B.6	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.		Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.		Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01 7 of 32 Page:

### 1.4 LTE Band 12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W.		Pass
Peak-Average Ratio		Limit≤13 dB		Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Appendix B.8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Арреник В.о	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.		Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.		Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

01 Rev.: Page: 8 of 32

#### 2 **General Information**

### 2.1 Details of Client

Applicant:	Gosuncn Technology Group Co., Ltd.
Address of Applicant:  6F, No. 2819, KaiChuang Avenue, Science City, Huangpu District Guangzhou City, Guangdong Province, China	
Manufacturer:	Gosuncn Technology Group Co., Ltd.
Address of Manufacturer:	6F, No. 2819, KaiChuang Avenue, Science City, Huangpu District, Guangzhou City, Guangdong Province, China

### 2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	King-p Li, Tizzy Song

## 2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240800028401

Rev.: 01 9 of 32 Page:

## 2.4 General Description of EUT

EUT Description:	LTE Module							
Model No.:	GM500_U1A	GM500_U1A						
Trade Mark:	GOSUNCN							
Hardware Version:	ME3630-U1B_MB_	A						
Software Version:	QS_GM500U1AV2.	.0B06						
Power Supply:	5V							
INACI.	RF Conducted		016100000	0545855				
IMEI:	RSE		016100000	0547901				
Antenna Type:		grated						
	GSM850: 2.72dB		i	GSM1900:		2.15dBi		
	WCDMA Band II: 2.15dBi			WCDMA Band V:		2.72dBi		
	LTE Band 2: 2.15dBi			LTE Band 4:		2.66dBi		
Antenna Gain:	LTE Band 5: 2.72dBi			LTE Band 12:		2.01dBi		
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.							
DE Cable	0.8dB(Below 1GHz)	) ^	1.0dB(1.0~2.4GHz) 1.2dB(2.4-			3(2.4~3.4GHz)		
RF Cable:	1.5dB(Above 3.4GH	lz)			•			
Remark:	•							

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

10 of 32 Page:

### 2.5 Test Mode

Test Mode	Test Modes Description			
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2	GSM system, EGPRS, 8PSK modulation			
UMTS/TM1	UMTS system, WCDMA, QPSK modulation			
LTE/TM1	LTE system, QPSK modulation			
LTE/TM2	LTE system, 16QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

### 2.6 Test Environment

Environment Parameter		101 kPa Selected Values During Tests			
Relative Humidity		44-46 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	3.8		
LTLV		-30	3.4		
LTHV		-30	4.2		
HTLV		50	3.4		
HTHV		50	4.2		
Remark:					
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature		

## 2.7 Description of Support Units

The EUT has been tested as an independent unit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

11 of 32 Page:

## 2.8 Technical Specification

Characteristics	Description							
Radio System Type	⊠ GSM	□ UMTS		□ LTE				
	Band		T	TX			RX	
	GSM850		82	24 to 849	MHz		869 to	894 MHz
	GSM1900		18	350 to 19°	10 MHz		1930 to	o 1990 MHz
	UMTS Band II		18	350 to 19 <sup>-</sup>	10 MHz		1930 to	o 1990 MHz
Supported Frequency Range	UMTS Band I\	/	17	710 to 17	55 MHz		2110 to	o 2155 MHz
Supported Frequency Kange	UMTS Band V		82	24 to 849	MHz		869 to	894 MHz
	LTE Band 2		1850 to 1910 MHz		1930 to 1990 MHz			
	LTE Band 4		1710 to 1755 MHz		2110 to 2155 MHz			
	LTE Band 5	TE Band 5		824 to 849 MHz		869 to 894 MHz		
	LTE Band 12		699 to 716 MHz			729 to	746 MHz	
	GSM system:		⊠0.2 MHz					
	UMTS system:		⊠5 MHz					
	LTE Band 2			1.4 MHz	⊠3 MF	lz [	⊠5 MHz	⊠10 MHz
	LTL Dana 2			15 MHz	⊠20 M	Hz		
Supported Channel Bandwidth	LTE Band 4			1.4 MHz	⊠3 M⊦	lz [	⊠5 MHz	⊠10 MHz
Supported Charmor Bandwidth	LTL Dana +			15 MHz	⊠20 M	Hz		
	LTE Band 5			1.4 MHz	⊠3 M⊦	lz [	⊠5 MHz	⊠10 MHz
	LTE Band 12			1.4 MHz	⊠3 M⊦	lz [	⊠5 MHz	⊠10 MHz
	Note: WCDMA supports H worst case was tested and						-	-, but only the

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

12 of 32 Page:

## 2.9 Test Frequencies

Test Mode	TX / RX	RF Channel				
rest Mode	IA/ NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 128	Channel 190	Channel 251		
GSM850	IA	824.2MHz	836.6 MHz	848.8 MHz		
GSIVI650	DV	Channel 128	Channel 190	Channel 251		
	RX	869.2 MHz	881.6 MHz	893.8 MHz		

Test Mode	TX / RX		RF Channel	
i est ivioue	IA/ NA	Low (L)	Middle (M)	High (H)
	TX	Channel 512	Channel 661	Channel 810
GSM1900		1850.2MHz	1880.0 MHz	1909.8 MHz
G51011900		Channel 512	Channel 661	Channel 810
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX	RF Channel				
rest wode	IA/ NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 9262	Channel 9400	Channel 9538		
WCDMA Band II		1852.4 MHz	1880.0 MHz	1907.6 MHz		
WCDIVIA Barid II	DV	Channel 9662	Channel 9800	Channel 9938		
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz		

Test Mode	TX / RX	RF Channel				
rest Mode	IA/NA	Low (L)	Middle (M)	High (H)		
		Channel 1312	Channel 1413	Channel 1513		
MCDMA Bond IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz		
WCDMA Band IV	RX	Channel 1537	Channel 1638	Channel 1738		
	KΛ	2112.4 MHz	2132.6 MHz	2152.6 MHz		

Test Mode	TX / RX	RF Channel				
rest Mode	IA/KA	Low (L)	Middle (M)	High (H)		
	TX	Channel 4132	Channel 4182	Channel 4233		
MCDMA Bond V	* * * *	826.4MHz	836.4 MHz	846.6 MHz		
WCDMA Band V	DV	Channel 4357	Channel 4407	Channel 4458		
	RX	871.4 MHz	881.4 MHz	891.6 MHz		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

13 of 32 Page:

Toot Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Dandwidth	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
	1.4MHz	TX	1850.7 MHz	1880 MHz	1909.3 MHz
		RX	Channel 607	Channel 900	Channel 1193
			1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		KΛ	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz	TX	Channel 18625	Channel 18900	Channel 19175
			1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LIE Dallu Z	10MHz		Channel 18650	Channel 18900	Channel 19150
		TX	1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		KA.	1937.5 MHz	1960 MHz	1982.5 MHz
Ī			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	DV	Channel 700	Channel 900	Channel 1100
		RX	1940 MHz	1960 MHz	1980 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-">http://www.sgs.com/en/Terms-and-</a> This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

Page: 14 of 32

T	5 1 1 1	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
	1.4MHz	TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
		KA	2112.5 MHz	2132.5MHz	2152.5 MHz
		,	Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
	5MHz		Channel 19975	Channel 20175	Channel 20375
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4		KA	2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Band 4	10MHz	TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		DY	Channel 2000	Channel 2175	Channel 2350
		RX	2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		KΛ	2120 MHz	2132.5MHz	2145 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

15 of 32 Page:

Took Mode	Danielo dalle	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		KA	869.7 MHz	881.5 MHz	893.3 MHz
	3MHz		Channel 20415	Channel 20525	Channel 20635
		TX	825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTE Davide			870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
			826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		NΛ	874 MHz	881.5 MHz	889 MHz

Took Mode	Donalis i dila	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KΛ	729.7 MHz	737.5 MHz	745.3 MHz
	3MHz		Channel 23025	Channel 23095	Channel 23165
		TX	700.5 MHz	707.5 MHz	714.5 MHz
		RX	Channel 5025	Channel 5095	Channel 5165
LTE D			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12		TX	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
	5MHz	RX	Channel 5035	Channel 5095	Channel 5155
			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	RX	Channel 5060	Channel 5095	Channel 5130
		INΛ	734 MHz	737.5 MHz	741 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

01 Rev.:

Page: 16 of 32

#### **Description of Tests** 3

## 3.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240800028401

Rev.: 01

17 of 32 Page:

## 3.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240800028401 Report No.:

Rev.: Λ1

Page: 18 of 32

### 3.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



SUCR240800028401 Report No.:

Rev.: 01

Page: 19 of 32

## 3.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



SUCR240800028401 Report No.:

Rev.: 01

Page: 20 of 32

## 3.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SUCR240800028401 Report No.:

Rev.: Λ1

Page: 21 of 32

## 3.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled.
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240800028401

Rev.: 01

Page: 22 of 32

## 3.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240800028401

01 Rev.:

Page: 23 of 32

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240800028401 Report No.:

Rev.: 01

Page: 24 of 32

## 3.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.




Report No.: SUCR240800028401

Rev.: 01


Page: 25 of 32

## 3.9 Test Setups

#### **Test Setup 1** 3.9.1

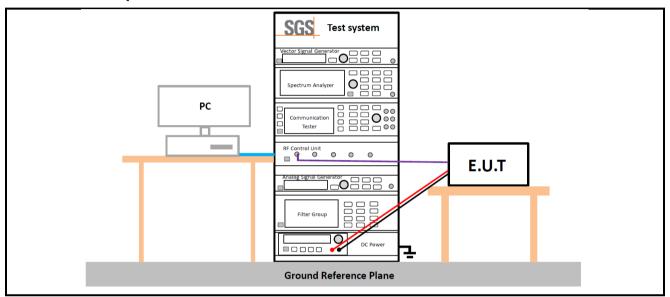

#### 3.9.2 **Test Setup 2**

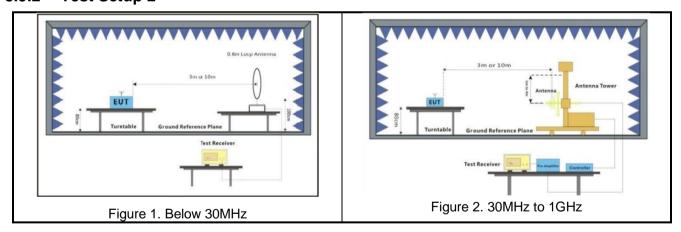

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.




SUCR240800028401 Report No.:

Rev.: 01

26 of 32 Page:

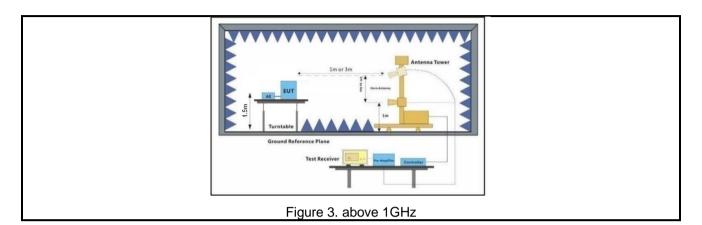

#### 3.9.3 **Test Setup 3**

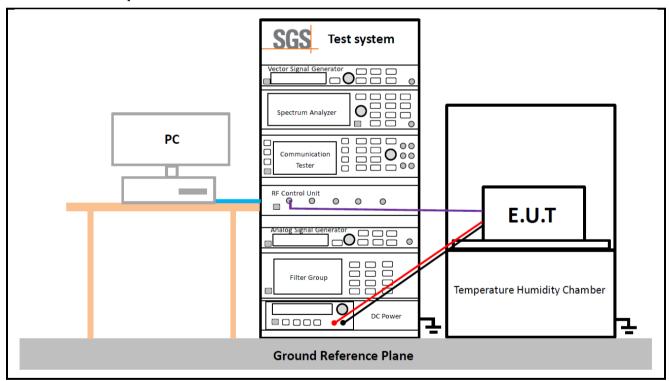

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

27 of 32 Page:

### 3.10Test Conditions

	Transmit Output Power Data - Average Power, Total
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2
	Peak-to-Average Ratio
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2
	Bandwidth - Occupied Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2
	Bandwidth - Emission Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1;LTE/TM2
	Band Edges Compliance
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

28 of 32 Page:

Test Setup	Test Setup 1					
RF Channels (TX)	L, H (L= low channel, H= high channel)					
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1					
	Spurious Emission at Antenna Terminals					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; LTE/TM1					
	Field Strength of Spurious Radiation					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 2					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	GSM/TM1; UMTS/TM1; LTE/TM1 Remark: All bandwidth and modulation of GSM/ UMTS/LTE have been pre tested, and only the worst results are reflected in the report.					
	Frequency Stability					
Test Case	Test Conditions					
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage (2) VL, VN and VH of Rated Voltage at Ambient Climate.					
Test Setup	Test Setup 3					
RF Channels (TX)	M (M= middle channel)					
Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1 The report only show the bandwidth with the worst case.					

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

29 of 32 Page:

### **Main Test Instruments**

	RF Test Equipment						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Shielding Room	Brilliant-emc	N/A	SUWI-04-01- 06	2022/11/09	2025/11/08		
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01- 07	2024/02/18	2025/02/17		
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02- 02	2024/05/08	2025/05/07		
Measurement Software	TST	TST-271-2.0	SUWI-03-55- 01	NCR	NCR		
Measurement Software	Tonscend	J1120 RFAuto Test System	SUWI-02-03- 01	NCR	NCR		
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02- 04	2024/05/08	2025/05/07		
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26- 03	2023/11/21	2024/11/20		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

Page: 30 of 32

9*6*6 Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2023/04/03	2026/03/03
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2024/02/08	2025/02/07
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2023/11/21	2024/11/20
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2023/11/25	2024/11/24
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2025/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2025/05/12
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2023/11/21	2024/11/20
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2023/11/21	2024/11/20
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2024/02/04	2025/02/03
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR
Measurement Software	Tonscend	JS32-RSE 4.0.0.1	SUWI-02-09-06	NCR	NCR

Remark: NCR=No Calibration Requirement.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

01 Rev.:

31 of 32 Page:

#### 5 **Measurement Uncertainty**

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty	
1	Total RF power, conducted	±0.54dB	
2	RF power density, conducted	±1.03dB	
3	Spurious emissions, conducted	±0.54dB	
4	Radio Frequency	±1.0 %	
5	Duty Cycle	±0.37%	
6	Occupied Bandwidth	±1.0 %	
7		± 3.13dB (9k -30MHz)	
	Dadiated Emission	± 4.8dB (30M -1GHz)	
	Radiated Emission	± 4.8dB (1GHz to 18GHz)	
		± 4.80dB (Above 18GHz)	

#### Remark:

The Ulab (lab Uncertainty) is less than Ucispi/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240800028401

Rev.: 01

32 of 32 Page:

## 6 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.1	GSM 850
Appendix B.2	GSM 1900
Appendix B.3	WCDMA Band II
Appendix B.4	WCDMA Band V
Appendix B.5	LTE Band 2
Appendix B.6	LTE Band 4
Appendix B.7	LTE Band 5
Appendix B.8	LTE Band 12

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory