



# FCC RADIO TEST REPORT

Applicant : Newline Interactive Inc.

Address : 101 East Park Blvd. Suite 807 Plano, TX 75074, USA

Equipment : Newline Chromebox A10

Model No. : TCB-AC2

Trade Name : **newline**

FCC ID. : 2APNX00TCBAC2

## I HEREBY CERTIFY THAT :

The sample was received on Apr. 15, 2019 and the testing was carried out on Jun. 08, 2019 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

## Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





## Contents

<b>1. Summary of Test Procedure and Test Results.....</b>	<b>5</b>
1.1 Applicable Standards .....	5
<b>2. Test Configuration of Equipment under Test.....</b>	<b>6</b>
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels .....	7
2.3 Test Mode and Test Software.....	8
2.4 Description of Test System.....	8
2.5 General Information of Test.....	9
2.6 Measurement Uncertainty .....	9
<b>3. Test Equipment and Ancillaries Used for Tests.....</b>	<b>10</b>
<b>4. Antenna Requirements.....</b>	<b>11</b>
4.1 Standard Applicable .....	11
4.2 Antenna Construction and Directional Gain.....	11
<b>5. Test of AC Power Line Conducted Emission .....</b>	<b>12</b>
5.1 Test Limit .....	12
5.2 Test Procedures .....	12
5.3 Typical Test Setup .....	13
5.4 Test Result and Data.....	14
5.5 Test Photographs .....	16
<b>6. Test of Spurious Emission (Radiated) .....</b>	<b>17</b>
6.1 Test Limit .....	17
6.2 Test Procedures .....	17
6.3 Typical Test Setup .....	18
6.4 Test Result and Data (9kHz ~ 30MHz).....	19
6.5 Test Result and Data (30MHz ~ 1GHz).....	19
6.6 Test Result and Data (1GHz ~ 25GHz).....	21
6.7 Restricted Bands of Operation .....	27
6.8 Test Photographs (30MHz ~ 1GHz).....	28
6.9 Test Photographs (1GHz ~ 25GHz) .....	29
<b>7. Test of Spurious Emission (Conducted).....</b>	<b>30</b>
7.1 Test Limit .....	30
7.2 Test Procedure .....	30
7.3 Test Setup Layout .....	30
7.4 Test Result and Data.....	30
<b>8. On Time, Duty Cycle and Measurement methods .....</b>	<b>33</b>
8.1 Test Limit .....	33
8.2 Test Procedure .....	33
8.3 Test Setup Layout .....	33
8.4 Test Result and Data .....	33
<b>9. 6dB Bandwidth Measurement Data.....</b>	<b>35</b>
9.1 Test Limit .....	35



---

9.2	Test Procedures .....	35
9.3	Test Setup Layout .....	35
9.4	Test Result and Data.....	35
<b>10.</b>	<b>Maximum Peak and Average Output Power.....</b>	<b>37</b>
10.1	Test Limit .....	37
10.2	Test Procedures .....	37
10.3	Test Setup Layout .....	37
10.4	Test Result and Data.....	37
<b>11.</b>	<b>Power Spectral Density .....</b>	<b>38</b>
11.1	Test Limit .....	38
11.2	Test Procedures .....	38
11.3	Test Setup Layout .....	38
11.4	Test Result and Data.....	38
<b>12.</b>	<b>Radio Frequency Exposure .....</b>	<b>40</b>
12.1	Applicable Standards .....	40
12.2	EUT Specification.....	40
12.3	Test Results.....	41
12.4	Calculation.....	41
12.5	Maximum Permissible Exposure.....	41



## History of this test report

Report Type		Description
<input type="checkbox"/>	Original report	NA
<input checked="" type="checkbox"/>	Derivative Report	<p>This sample provided has been confirmed to be identical to the original report sample. The only difference are as listed below. As it doesn't affect the test result, the original report number: TEFQ1903256 and content will be used.</p> <ul style="list-style-type: none"> <li>1.Applicant information change.</li> <li>2.Model No. change.</li> <li>3.Trade Name change.</li> </ul>



## 1. Summary of Test Procedure and Test Results

### 1.1 Applicable Standards

**ANSI C63.4:2014**

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	N/A
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Maximum Peak Output Power	PASS
15.247(e)	. Power Spectral Density	PASS

\*The principle of judgment is made according to the laboratory's reporting control and measurement uncertainty standard procedures.

\*This EUT has been also tested and compiled with the requirement of FCC Part 15, Subpart B, recorded in a separate test report(TEFD1901352).



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

WLAN Module	Intel / Dual Band Wireless-AC 7265(Stone Peak)
Frequency Range	BT / BLE: 2400-2483.5MHz 802.11b/g/n: 2400-2483.5MHz 802.11a/n/ac: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11b: CCK, DQPSK, DBPSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Antenna Type	Dipole Antenna
Antenna Gain	2400-2483.5MHz: 3.53dBi 5150-5250MHz: 2.52dBi 5250-5350MHz: 2.52dBi 5470-5725MHz: 2.02dBi 5725-5850MHz: 1.59dBi
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0 – MCS9, VHT20/40/80
Adapter	Chicony \ A11-065N1A INPUT: 100-240V~1.7A 50-60Hz OUTPUT: 19V / 3.42A 65W  Chicony \ A16-090P1A INPUT: 100-240V~1.5A 50-60Hz OUTPUT: 19V / 4.74A 90W

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. EUT support TPC function.



## 2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	<b>2402</b>	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	*19	<b>2440</b>	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	*39	<b>2480</b>
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, " DRTU Ver 11.1833.0-08103" under win7 was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:  
Test Mode 1. GFSK (1Mbps)

### 2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
AP	D-link	DIR-868L	N/A	Adapter / 1.5m / NS
Network cable	N/A	N/A	1.2m / NS	N/A
Network cable	N/A	N/A	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
AP	D-link	DIR-868L	N/A	Adapter / 1.5m / NS
Network cable	N/A	N/A	15m / NS	N/A
Network cable	N/A	N/A	15m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
AP	D-link	DIR-868L	N/A	Adapter / 1.5m / NS
Network cable	N/A	N/A	15m / NS	N/A
Network cable	N/A	N/A	15m / NS	N/A



## 2.5 General Information of Test

Test Site	<b>Cerpass Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061,TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range	Conducted: from 150kHz to 30 MHz	
Investigated:	Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Tested Date	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2019/06/05	21°C / 63%	Leon Huang
Radiated Emissions	3M02-NK	2019/06/03	24°C / 47%	Leon Huang
RF Conduction	CON01-NK	2019/06/08	24°C / 45%	Leon Huang

## 2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±3.405dB
Radiated Spurious Emission(30MHz~1GHz)	±5.326dB
Radiated Spurious Emission(1GHz~25GHz)	±5.918dB
Conducted Spurious Emission	±2.156dB
6dB Bandwidth	±4.401%
20dB Bandwidth	±4.40%
Occupied Bandwidth	±4.41%
Peak Output Power(Conducted Power Meter)	±1.31dB
Dwell Time	±0.11%
Power Spectral Density	±2.146dB
Duty Cycle	±0.17%



### 3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2019/05/24	2020/05/23
Horn Antenna	EMCO	3115	31589	2019/04/01	2020/03/31
Horn Anrenna	EMCO	3116	31974	2018/09/07	2019/09/06
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2018/06/11	2019/06/10
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2018/07/03	2019/07/02
Preamplifier	EM Electronics corp.	EM330	60660	2019/03/11	2020/03/10
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1316	2018/09/12	2019/09/11
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2019/04/09	2020/04/08
Cable-3m(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2019/04/09	2020/04/08
Cable-8m(1G-40G)	Rapidtek	40GHZ 800CM	38MS-38MS800314	2019/04/10	2020/04/09
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSP 40	100219	2018/07/03	2019/07/02
Bluetooth Tester	ROHDE & SCHWARZ	CBT	101133	2019/04/07	2020/04/06
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Power Sensor	Anritsu	MA2411B	1207295	2019/04/11	2020/04/10

Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100821	2018/9/12	2019/09/11
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-740	2018/6/13	2019/06/12
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2018/9/4	2019/09/03
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	3.53dBi



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

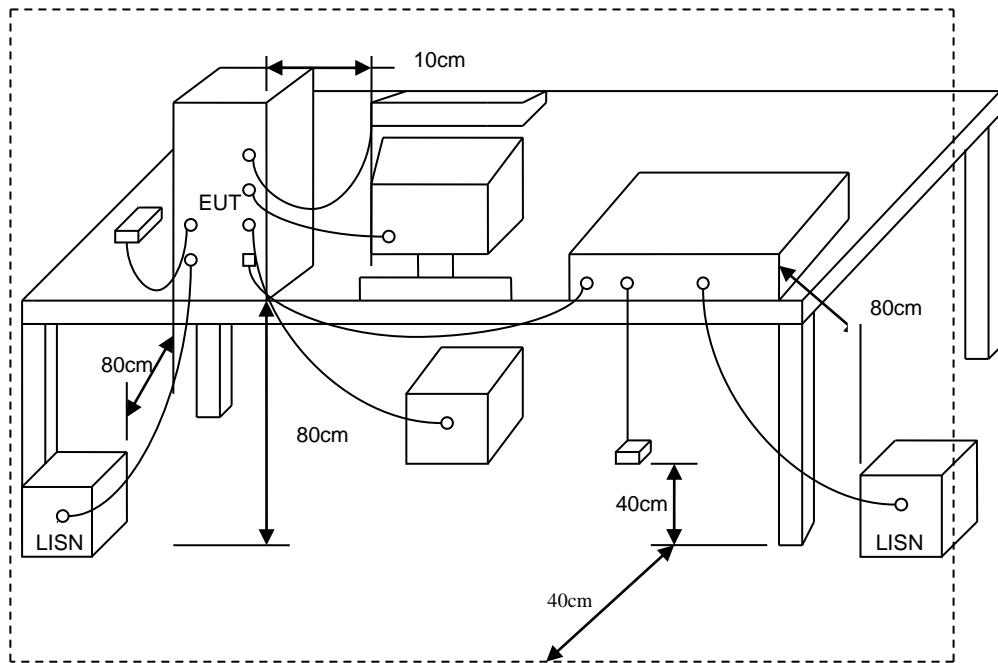



## 5.4 Test Result and Data

Power :	AC 120V / 60Hz	Pol/Phase :	LINE
Test Mode :	Mode 1	:	

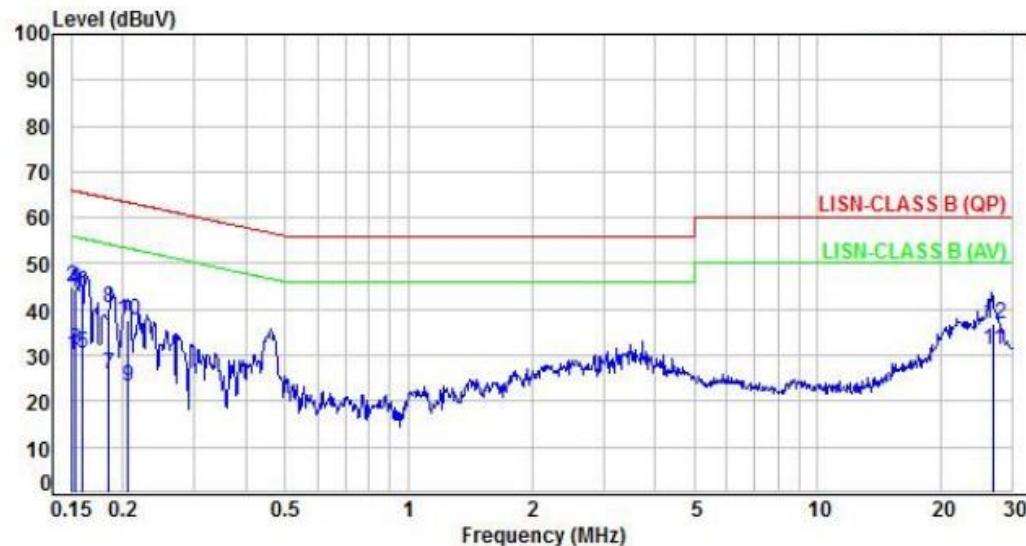

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.92	20.13	30.05	55.97	-25.92	Average	P
2	0.15	9.92	34.96	44.88	65.97	-21.09	QP	P
3	0.15	9.92	21.23	31.15	55.80	-24.65	Average	P
4	0.15	9.92	34.68	44.60	65.80	-21.20	QP	P
5	0.16	9.92	20.35	30.27	55.50	-25.23	Average	P
6	0.16	9.92	33.84	43.76	65.50	-21.74	QP	P
7	0.19	9.92	16.05	25.97	54.23	-28.26	Average	P
8	0.19	9.92	30.25	40.17	64.23	-24.06	QP	P
9	0.21	9.92	13.15	23.07	53.35	-30.28	Average	P
10	0.21	9.92	27.56	37.48	63.35	-25.87	QP	P
11	26.78	10.88	20.25	31.13	50.00	-18.87	Average	P
12	26.78	10.88	25.83	36.71	60.00	-23.29	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power :	AC 120V / 60Hz	Pol/Phase :	NEUTRAL
Test Mode :	Mode 1	:	

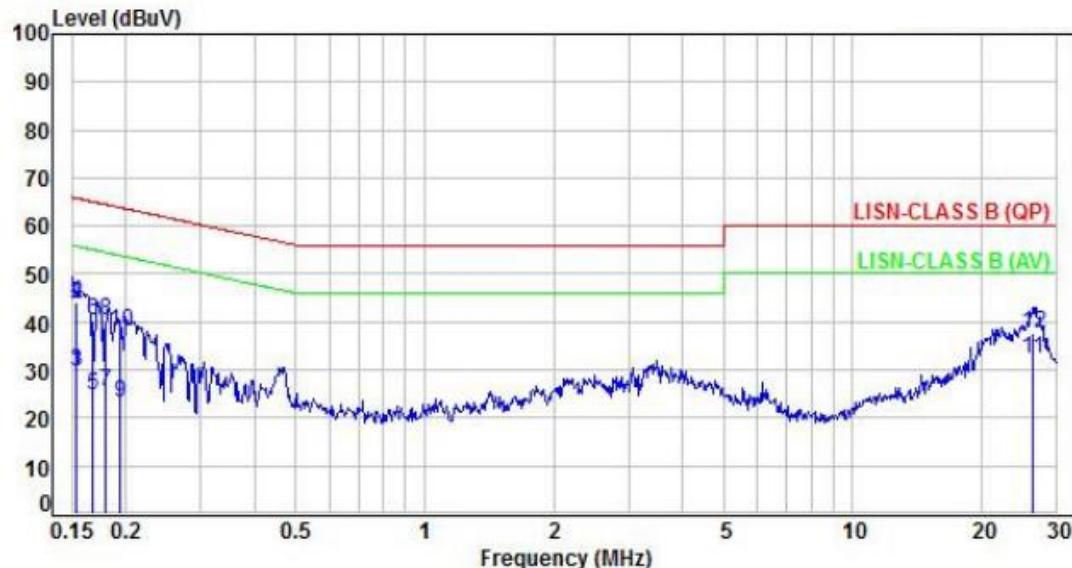

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.95	19.79	29.74	55.82	-26.08	Average	P
2	0.15	9.95	33.81	43.76	65.82	-22.06	QP	P
3	0.15	9.95	19.75	29.70	55.81	-26.11	Average	P
4	0.15	9.95	34.00	43.95	65.81	-21.86	QP	P
5	0.17	9.95	14.91	24.86	55.10	-30.24	Average	P
6	0.17	9.95	30.18	40.13	65.10	-24.97	QP	P
7	0.18	9.95	15.61	25.56	54.52	-28.96	Average	P
8	0.18	9.95	30.17	40.12	64.52	-24.40	QP	P
9	0.19	9.95	13.06	23.01	53.83	-30.82	Average	P
10	0.19	9.95	28.12	38.07	63.83	-25.76	QP	P
11	26.32	10.88	21.37	32.25	50.00	-17.75	Average	P
12	26.32	10.88	26.84	37.72	60.00	-22.28	QP	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


### 6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. “Cone of radiation” has been considered to be 3dB bandwidth of the measurement antenna.




### 6.3 Typical Test Setup


Below 30MHz test setup

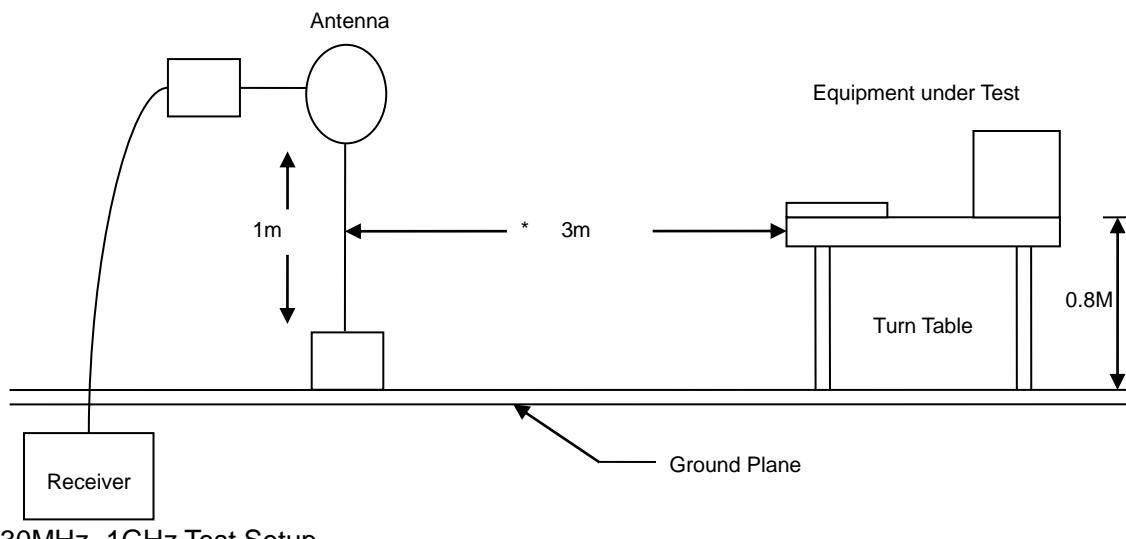

30MHz- 1GHz Test Setup

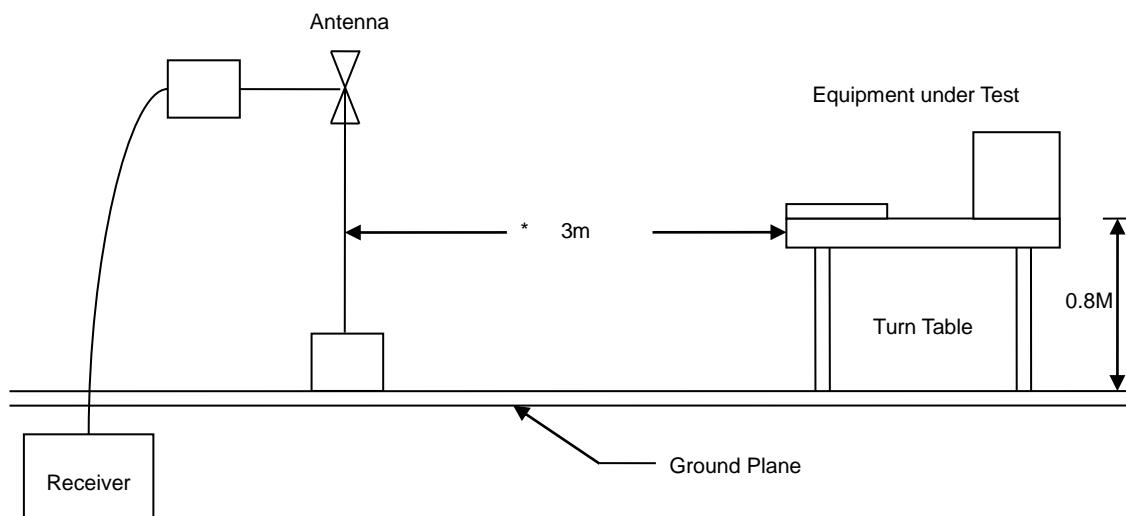

Above 1GHz Test Setup

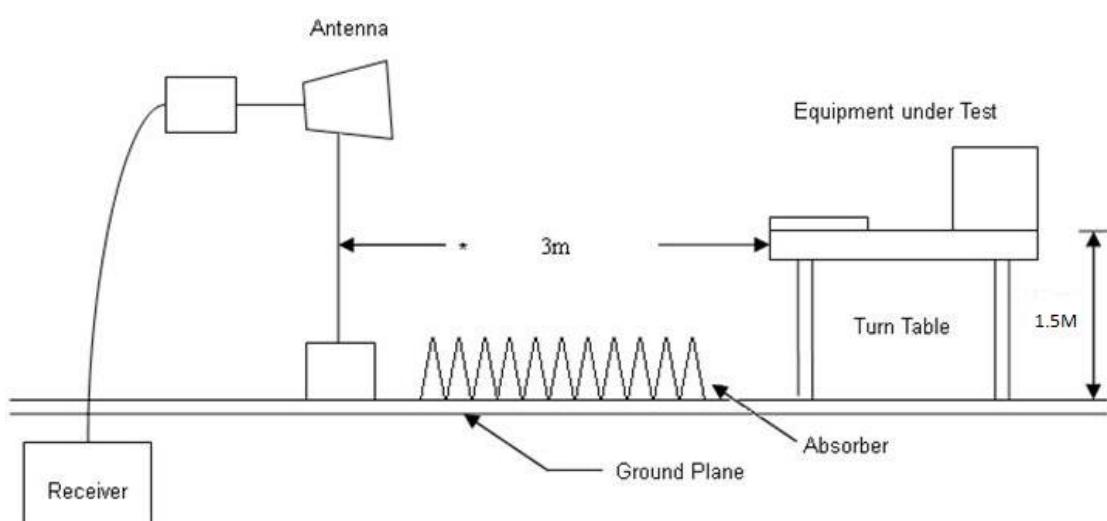




## 6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

## 6.5 Test Result and Data (30MHz ~ 1GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1	:	

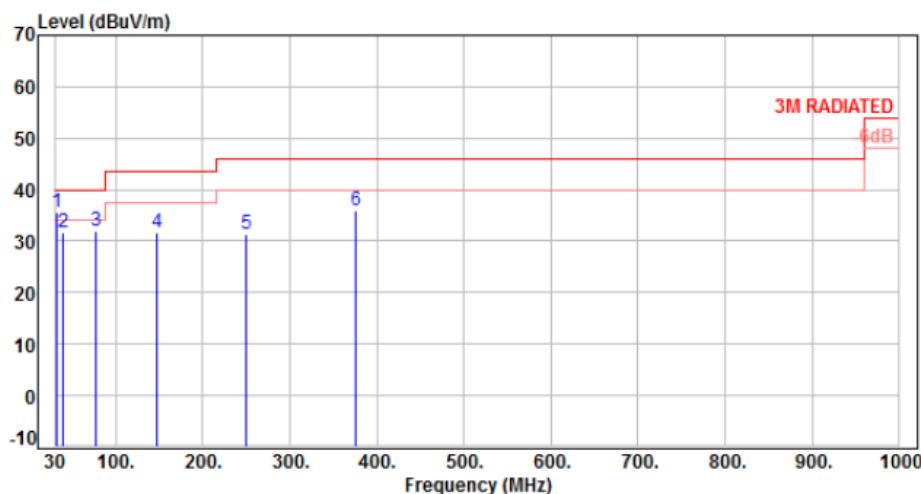

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	31.94	-10.57	46.14	35.57	40.00	-4.43	Peak	400	0	P
2	38.73	-9.81	41.51	31.70	40.00	-8.30	QP	100	105	P
3	77.53	-13.12	45.09	31.97	40.00	-8.03	Peak	400	0	P
4	147.37	-9.66	41.25	31.59	43.50	-11.91	Peak	400	0	P
5	250.19	-10.37	41.80	31.43	46.00	-14.57	Peak	400	0	P
6	375.32	-6.51	42.36	35.85	46.00	-10.15	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1	:	

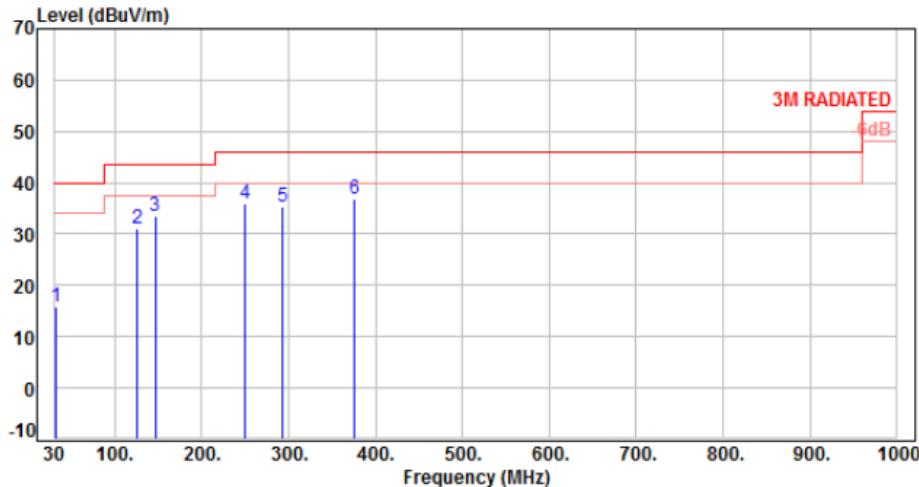

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	32.91	-10.64	26.50	15.86	40.00	-24.14	QP	100	10	P
2	125.06	-11.34	42.47	31.13	43.50	-12.37	Peak	100	0	P
3	146.40	-9.70	43.30	33.60	43.50	-9.90	Peak	100	0	P
4	250.19	-10.37	46.20	35.83	46.00	-10.17	Peak	100	0	P
5	292.87	-8.85	44.27	35.42	46.00	-10.58	Peak	100	0	P
6	375.32	-6.51	43.34	36.83	46.00	-9.17	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.6 Test Result and Data (1GHz ~ 25GHz)

Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH00	:	

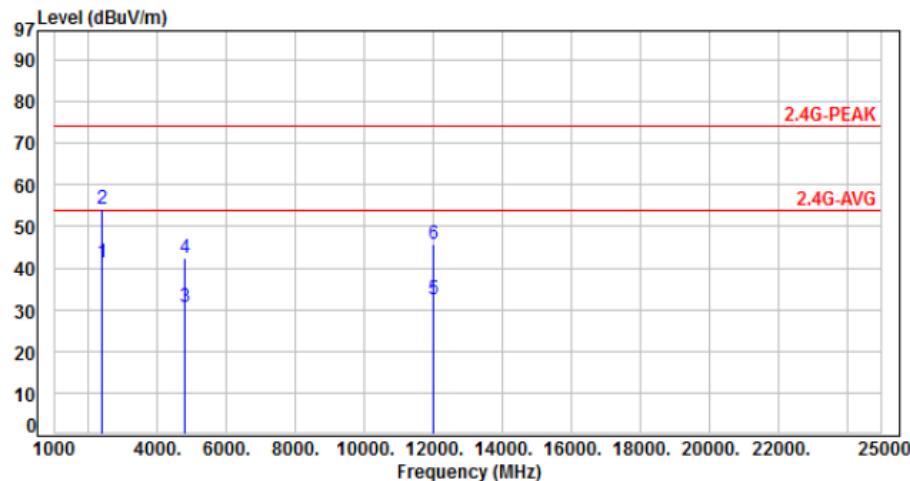

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	56.01	41.40	54.00	-12.60	Average	230	180	P
2	2390.00	-14.61	68.92	54.31	74.00	-19.69	Peak	230	180	P
3	4804.00	-6.91	37.52	30.61	54.00	-23.39	Average	100	166	P
4	4804.00	-6.91	49.32	42.41	74.00	-31.59	Peak	100	166	P
5	12010.00	4.64	27.81	32.45	54.00	-21.55	Average	100	111	P
6	12010.00	4.64	41.26	45.90	74.00	-28.10	Peak	100	111	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH00	:	

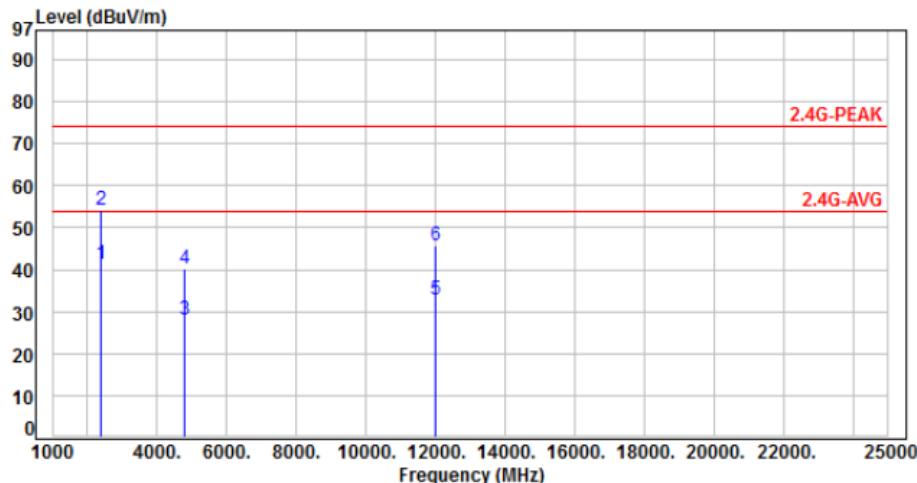

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	55.99	41.38	54.00	-12.62	Average	100	303	P
2	2390.00	-14.61	68.71	54.10	74.00	-19.90	Peak	100	303	P
3	4804.00	-6.91	35.11	28.20	54.00	-25.80	Average	100	153	P
4	4804.00	-6.91	47.13	40.22	74.00	-33.78	Peak	100	153	P
5	12010.00	4.64	28.28	32.92	54.00	-21.08	Average	100	235	P
6	12010.00	4.64	41.07	45.71	74.00	-28.29	Peak	100	235	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH19	:	

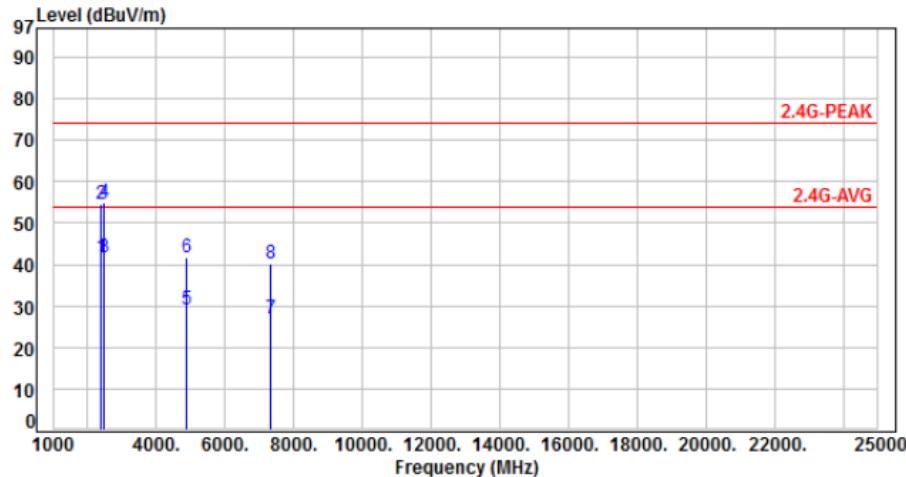

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	56.28	41.67	54.00	-12.33	Average	216	178	P
2	2390.00	-14.61	69.32	54.71	74.00	-19.29	Peak	216	178	P
3	2483.50	-14.22	56.06	41.84	54.00	-12.16	Average	216	178	P
4	2483.50	-14.22	69.23	55.01	74.00	-18.99	Peak	216	178	P
5	4880.00	-6.61	35.83	29.22	54.00	-24.78	Average	100	258	P
6	4880.00	-6.61	48.11	41.50	74.00	-32.50	Peak	100	258	P
7	7320.00	-1.27	28.22	26.95	54.00	-27.05	Average	100	168	P
8	7320.00	-1.27	41.40	40.13	74.00	-33.87	Peak	100	168	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH19	:	

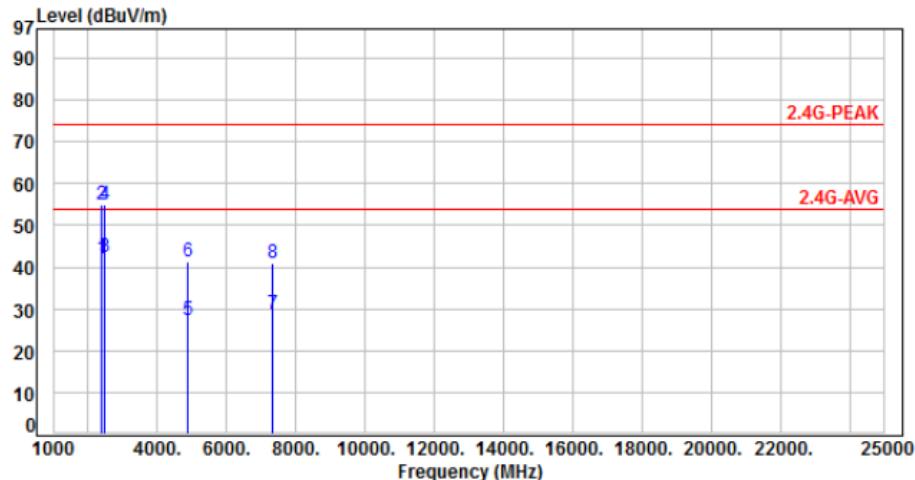

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-14.61	56.78	42.17	54.00	-11.83	Average	385	175	P
2	2390.00	-14.61	69.44	54.83	74.00	-19.17	Peak	385	175	P
3	2483.50	-14.22	56.72	42.50	54.00	-11.50	Average	385	175	P
4	2483.50	-14.22	69.03	54.81	74.00	-19.19	Peak	385	175	P
5	4880.00	-6.61	33.98	27.37	54.00	-26.63	Average	100	132	P
6	4880.00	-6.61	48.03	41.42	74.00	-32.58	Peak	100	132	P
7	7320.00	-1.27	29.87	28.60	54.00	-25.40	Average	100	346	P
8	7320.00	-1.27	42.32	41.05	74.00	-32.95	Peak	100	346	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	VERTICAL
Test Mode :	Mode 1, CH39	:	

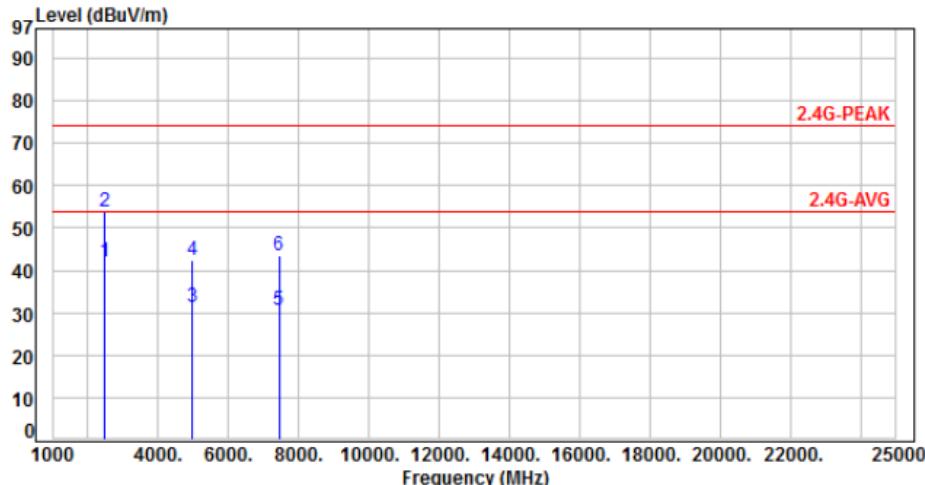

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	56.30	42.08	54.00	-11.92	Average	341	173	P
2	2483.50	-14.22	68.20	53.98	74.00	-20.02	Peak	341	173	P
3	4960.00	-6.39	37.61	31.22	54.00	-22.78	Average	100	136	P
4	4960.00	-6.39	48.82	42.43	74.00	-31.57	Peak	100	136	P
5	7440.00	-1.14	31.93	30.79	54.00	-23.21	Average	100	76	P
6	7440.00	-1.14	44.78	43.64	74.00	-30.36	Peak	100	76	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power :	AC 120V / 60Hz	Pol/Phase :	HORIZONTAL
Test Mode :	Mode 1, CH39	:	

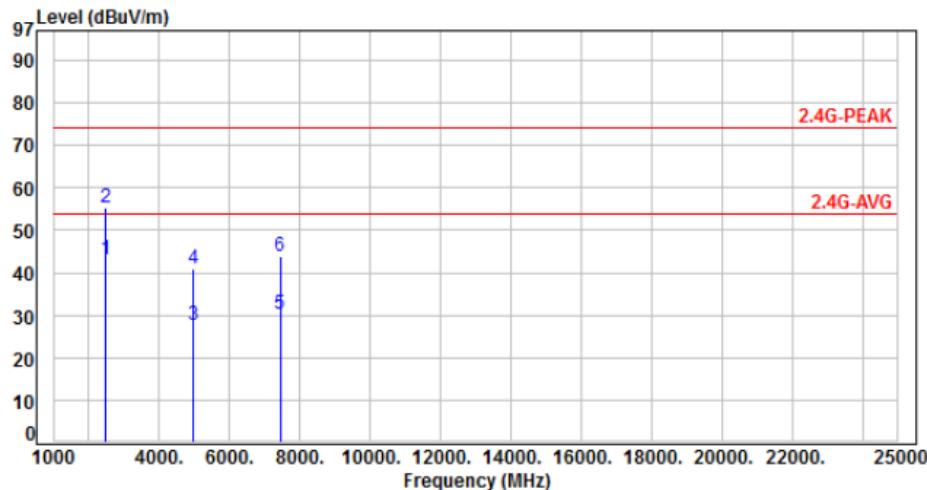

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2483.50	-14.22	57.50	43.28	54.00	-10.72	Average	100	307	P
2	2483.50	-14.22	69.70	55.48	74.00	-18.52	Peak	100	307	P
3	4960.00	-6.39	34.22	27.83	54.00	-26.17	Average	100	109	P
4	4960.00	-6.39	47.35	40.96	74.00	-33.04	Peak	100	109	P
5	7440.00	-1.14	31.55	30.41	54.00	-23.59	Average	100	283	P
6	7440.00	-1.14	44.89	43.75	74.00	-30.25	Peak	100	283	P

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



## 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\*: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



## 7. Test of Spurious Emission (Conducted)


### 7.1 Test Limit

Below –20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout




### 7.4 Test Result and Data






Note: Test plots refer to the following pages.



Modulation Type: GFSK  
CH00



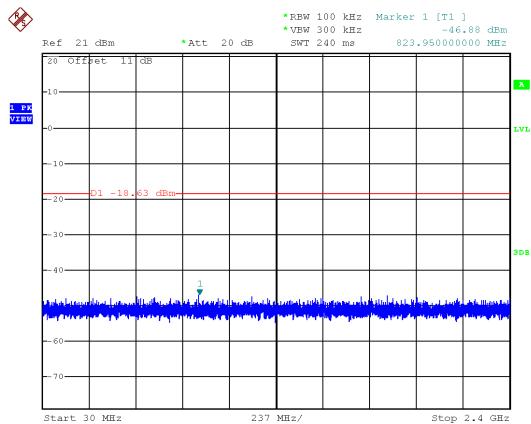


Modulation Type: GFSK  
CH19

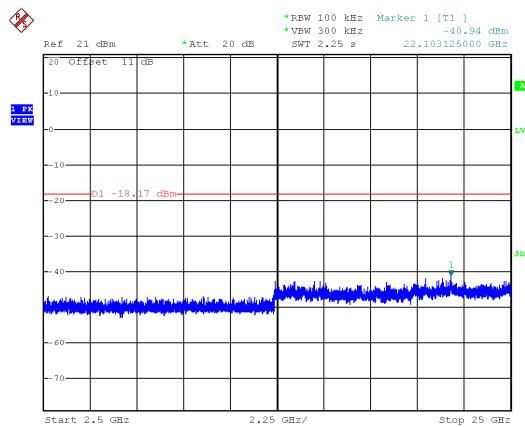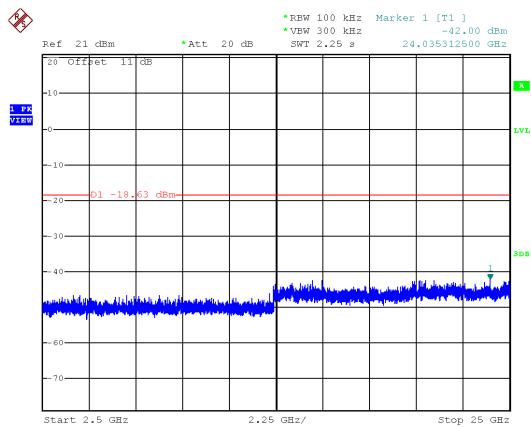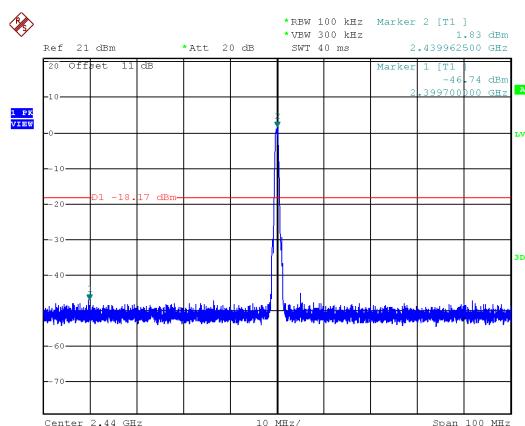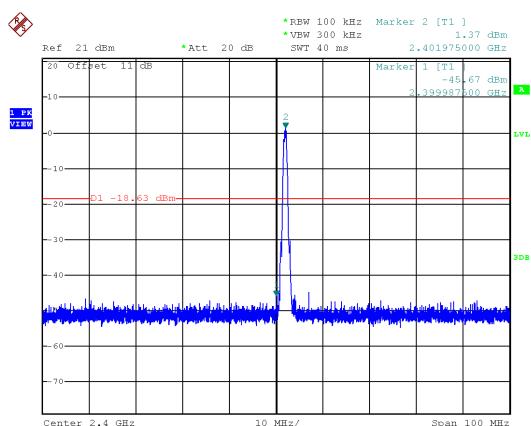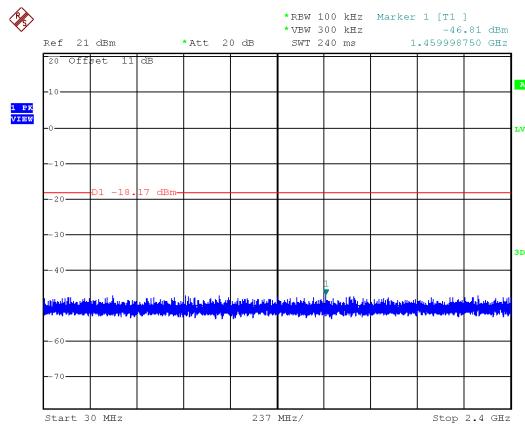



Modulation Type: GFSK  
CH39

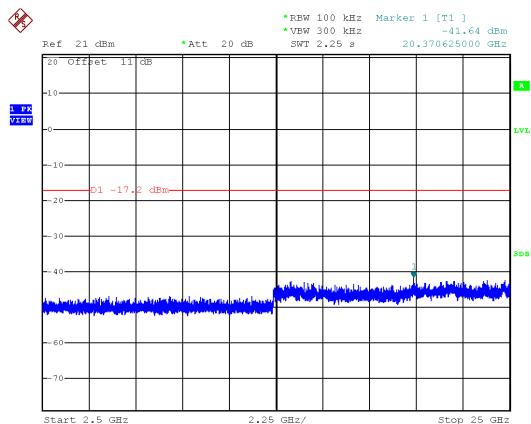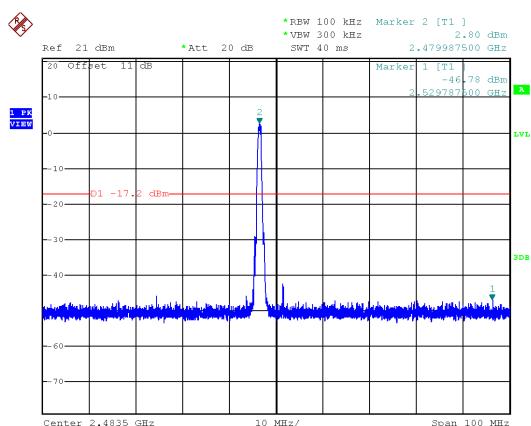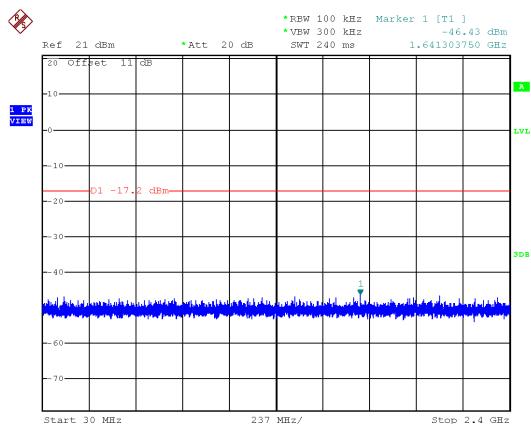



## 8. On Time, Duty Cycle and Measurement methods


### 8.1 Test Limit

None; for reporting purposes only.

### 8.2 Test Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method.

### 8.3 Test Setup Layout




### 8.4 Test Result and Data

Modulation Type	On Time (msec)	Period Time (msec)	Duty Cycle (%)
GFSK	0.40	0.62	64.24%



Modulation Type: GFSK

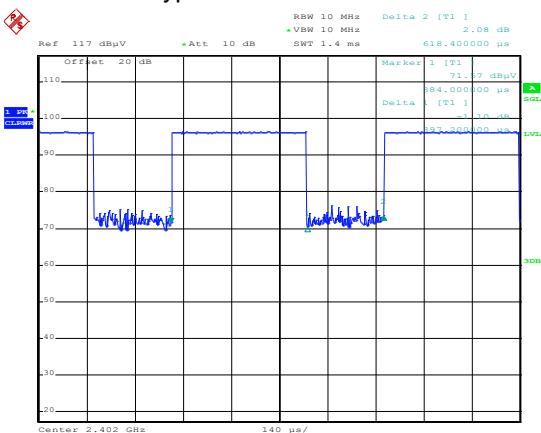



## 9. 6dB Bandwidth Measurement Data


### 9.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 9.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW  $\geq 3 \times$  RBW.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### 9.3 Test Setup Layout




### 9.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK(1Mbps)	0	2402	<b>660.00</b>	500
	19	2440	<b>660.00</b>	500
	39	2480	678.00	500




Modulation Type: GFSK  
CH00

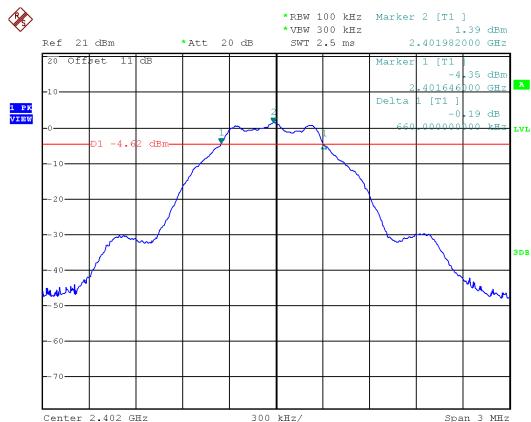

CH19

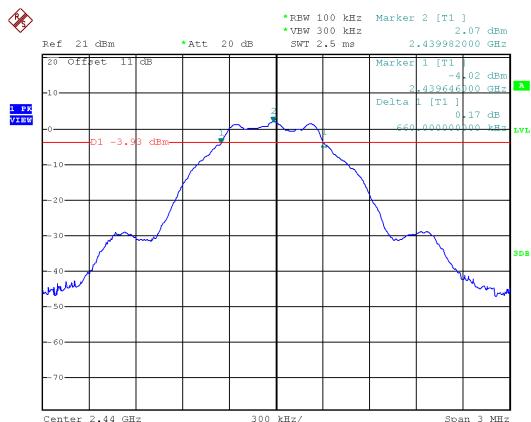

CH39

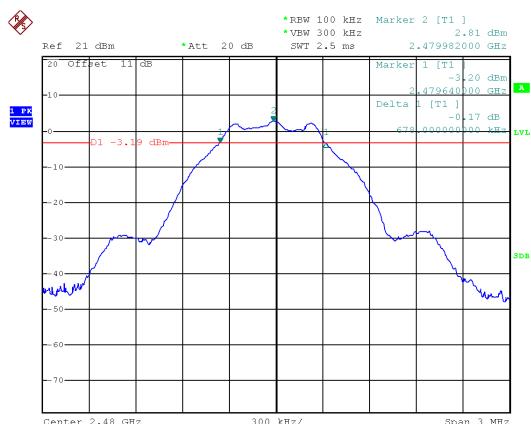



## 10. Maximum Peak and Average Output Power


### 10.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

### 10.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 10.3 Test Setup Layout



### 10.4 Test Result and Data

Modulation Type	Channel	Frequency (MHz)	Power Output (dBm)		Peak Power Output (mW)	
			Peak	Average	Peak	Average
GFSK	00	2402	1.17	1.04	1.309	1.271
	19	2440	1.84	1.75	1.528	1.496
	39	2480	2.6	2.52	1.820	1.786

\*Average Power is for reference only



## 11. Power Spectral Density


### 11.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

### 11.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

### 11.3 Test Setup Layout




### 11.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit
GFSK	00	2402	-14.11	8.00
	19	2440	-13.56	8.00
	39	2480	-12.73	8.00



Modulation Type: GFSK  
CH00

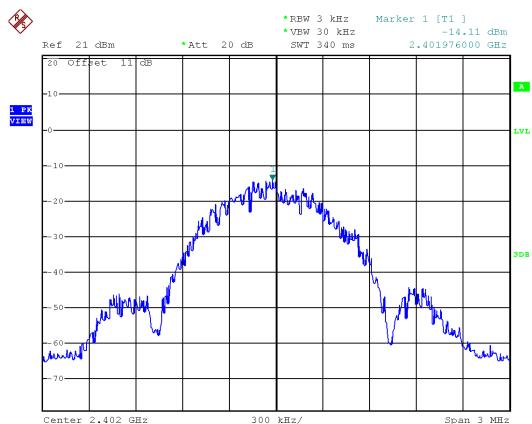

CH19

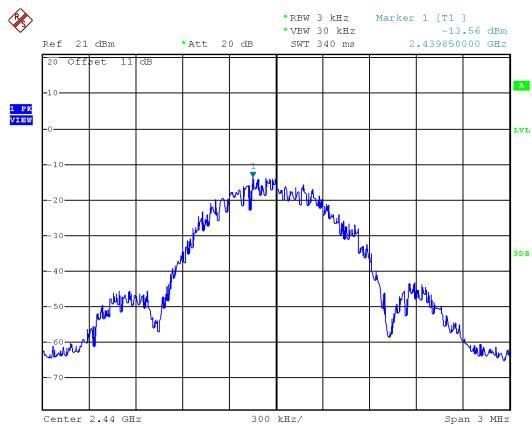

CH39

