


Site: AC1	Time: 2018/04/09 - 16:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant A	

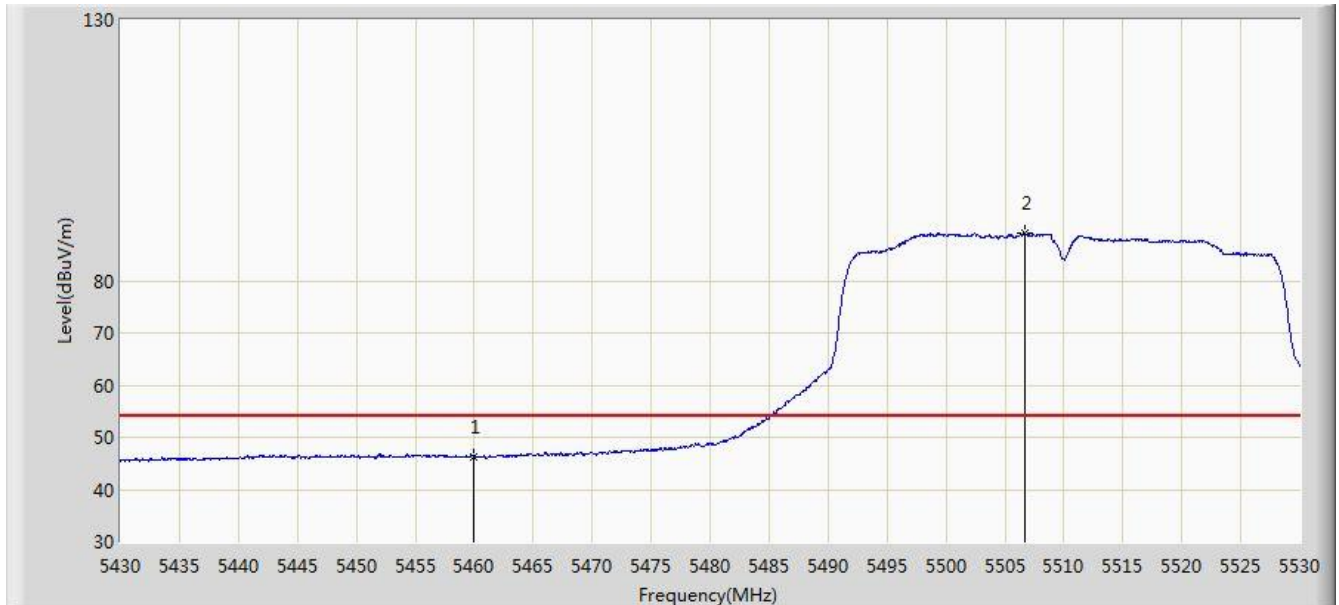


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.366	42.186	-7.634	54.000	4.180	AV
2		*	5506.700	89.171	84.879	N/A	N/A	4.292	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant A	

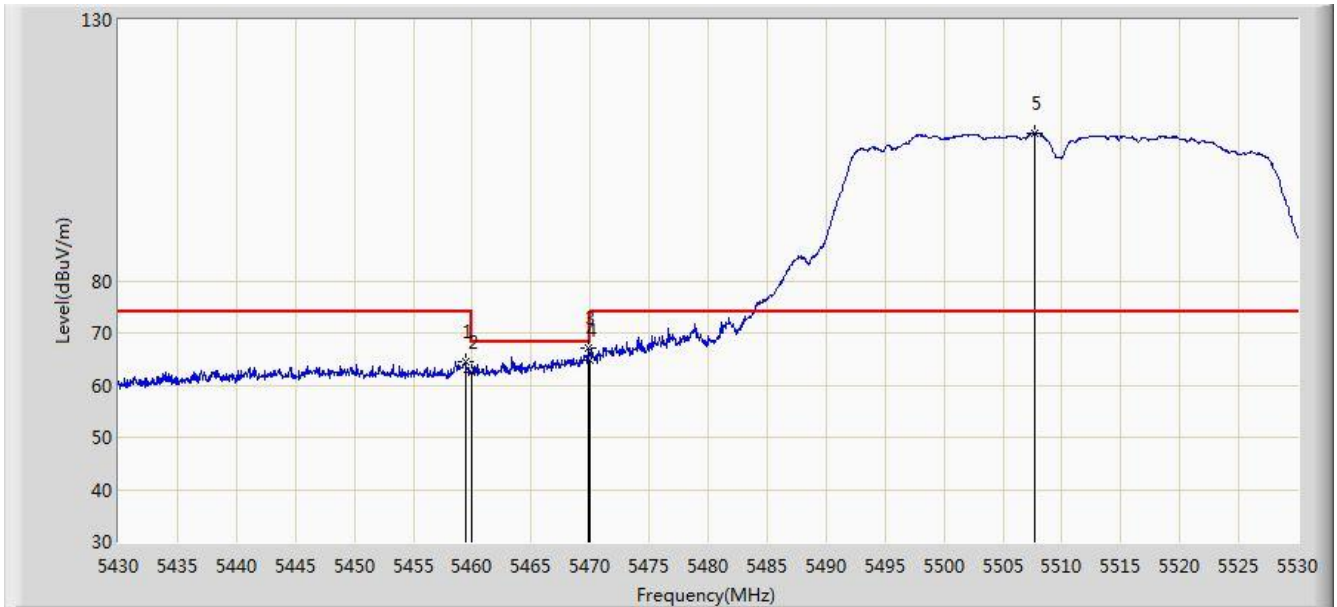


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.450	64.565	60.386	-9.435	74.000	4.179	PK
2			5460.000	62.331	58.151	-11.669	74.000	4.180	PK
3			5469.800	67.126	62.924	-1.074	68.200	4.202	PK
4			5470.000	64.758	60.556	-3.442	68.200	4.202	PK
5		*	5507.700	108.321	104.026	N/A	N/A	4.295	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant A	

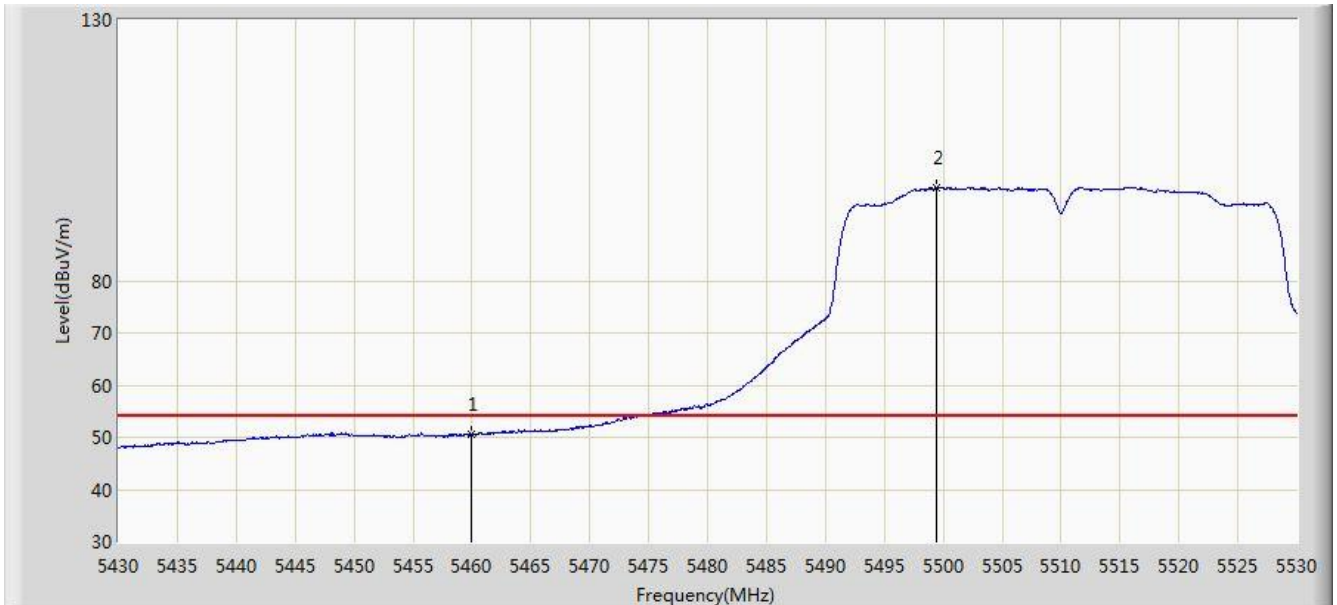


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.503	46.323	-3.497	54.000	4.180	AV
2		*	5499.450	97.881	93.611	N/A	N/A	4.270	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant A	

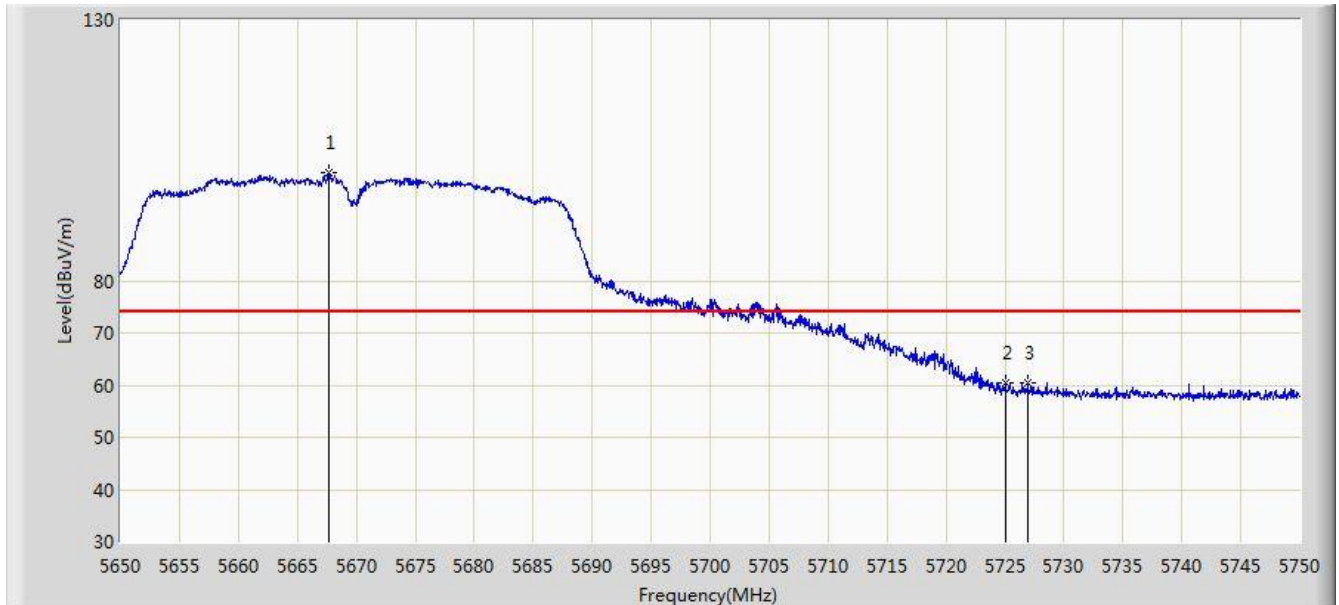


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.700	100.648	95.910	N/A	N/A	4.737	PK
2			5725.000	60.516	55.487	-13.484	74.000	5.029	PK
3			5726.950	60.299	55.258	-13.701	74.000	5.041	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant A	

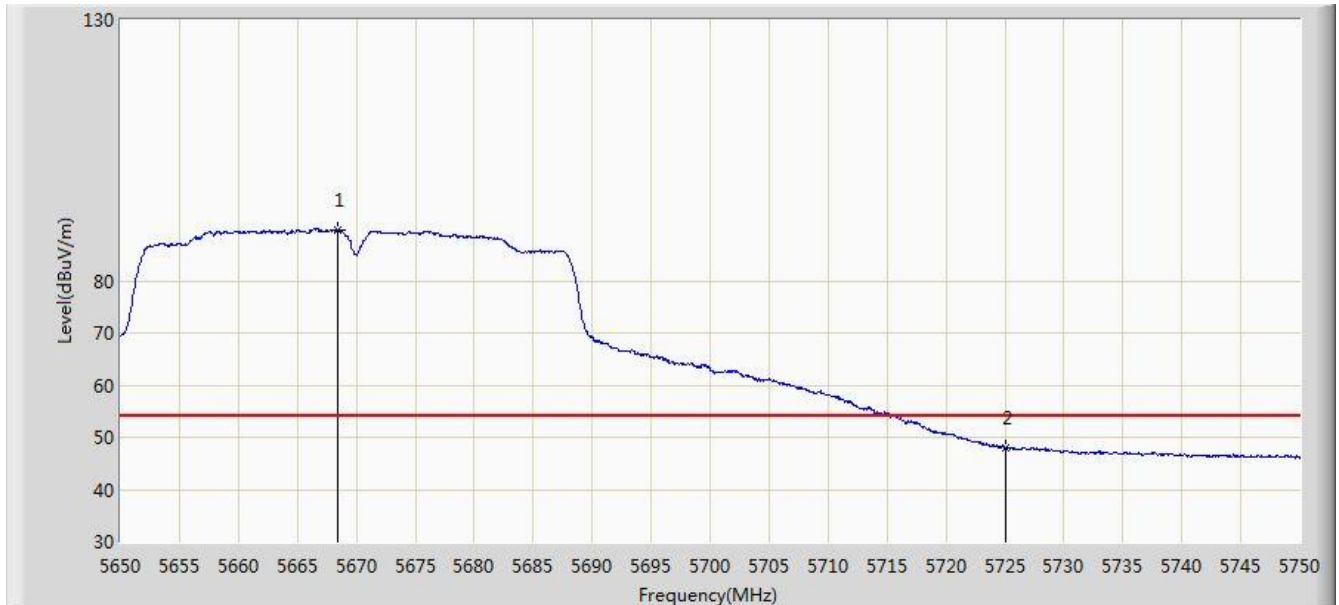


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.450	89.590	84.849	N/A	N/A	4.742	AV
2			5725.000	47.936	42.907	-6.064	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant A	

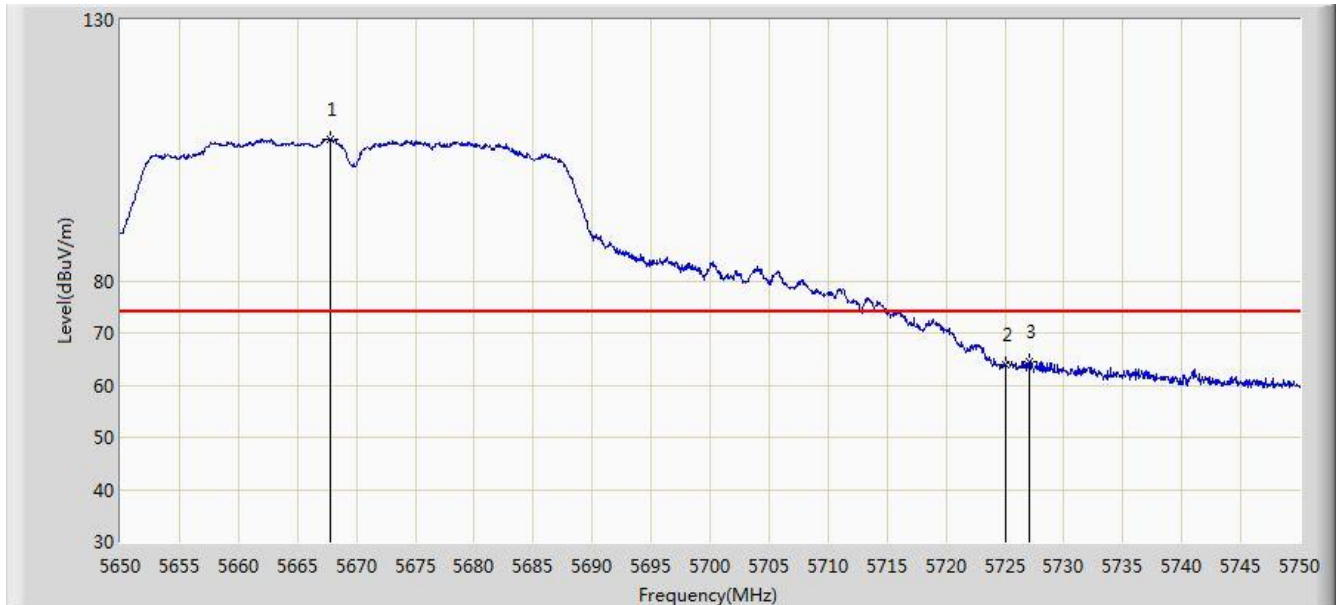


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5667.750	107.187	102.449	N/A	N/A	4.737	PK
2			5725.000	63.845	58.816	-10.155	74.000	5.029	PK
3			5727.100	64.385	59.343	-9.615	74.000	5.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant A	

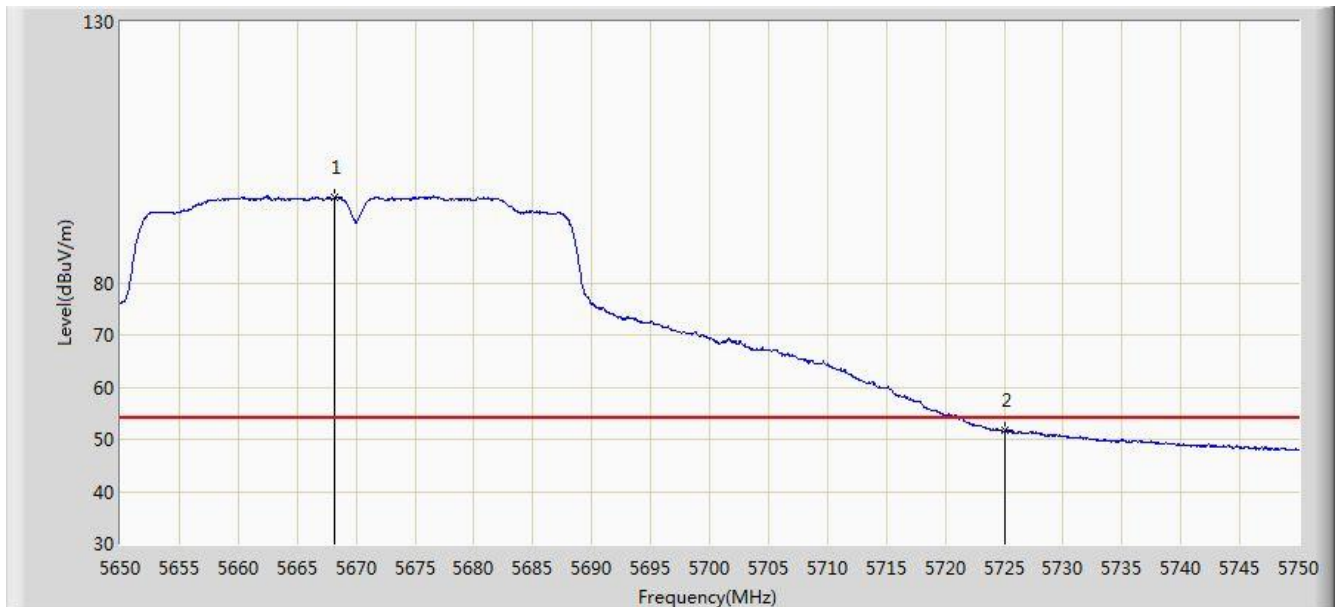


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.200	96.402	91.662	N/A	N/A	4.739	AV
2			5725.000	51.689	46.660	-2.311	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant A	

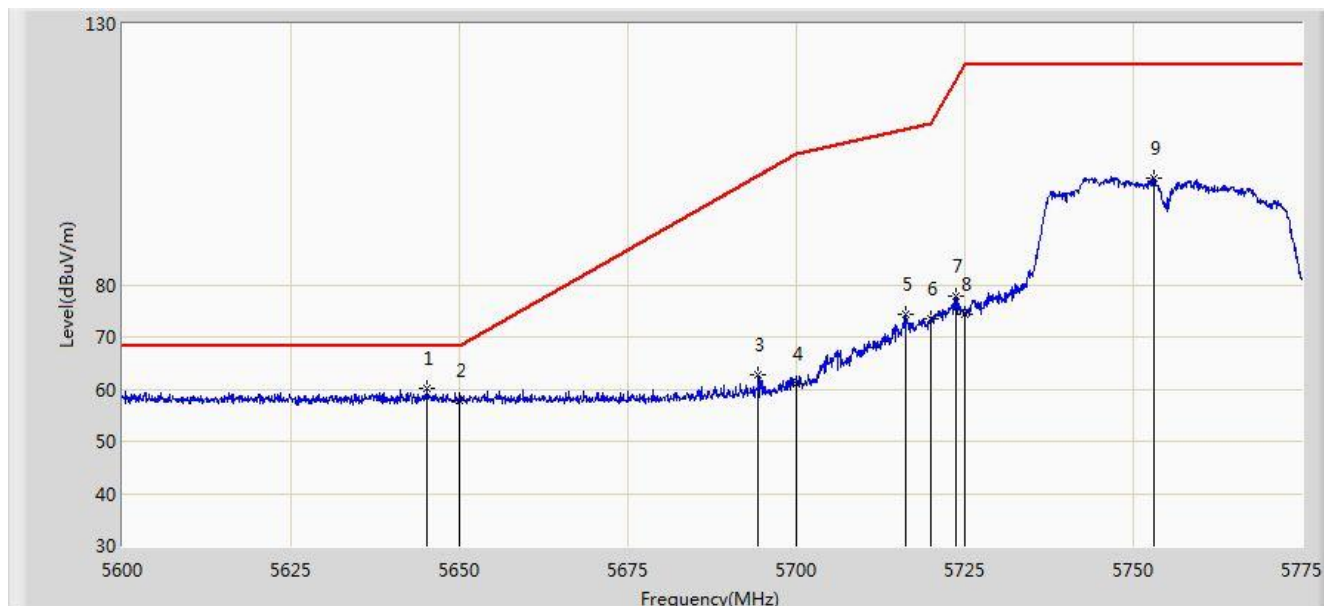


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5645.237	60.258	55.603	-7.942	68.200	4.654	PK
2			5650.000	57.840	53.169	-10.360	68.200	4.671	PK
3			5694.325	62.675	57.827	-38.342	101.017	4.847	PK
4			5700.000	61.117	56.239	-44.083	105.200	4.878	PK
5			5716.288	74.223	69.250	-35.539	109.762	4.974	PK
6			5720.000	73.448	68.451	-37.352	110.800	4.997	PK
7			5723.725	77.901	72.880	-41.393	119.294	5.021	PK
8			5725.000	74.396	69.367	-47.804	122.200	5.029	PK
9			5753.038	100.524	95.323	N/A	N/A	5.200	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant A	

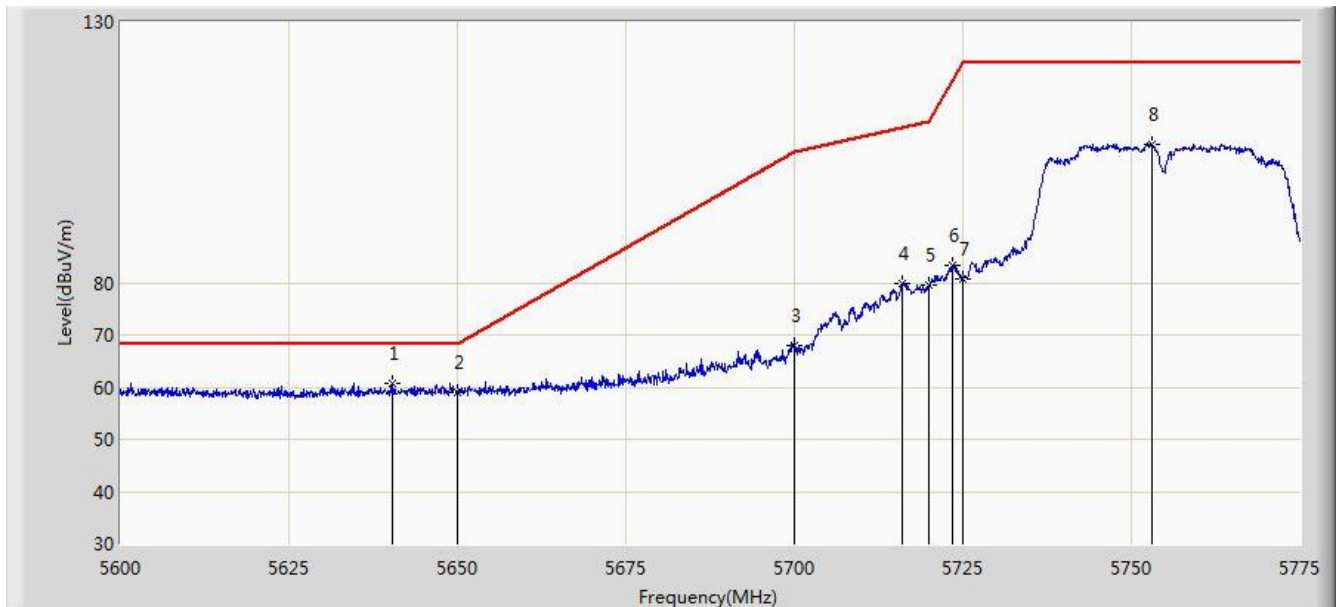


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.425	60.658	56.019	-7.542	68.200	4.639	PK
2			5650.000	59.075	54.404	-9.125	68.200	4.671	PK
3			5700.000	68.083	63.205	-37.117	105.200	4.878	PK
4			5715.937	79.914	74.943	-29.750	109.664	4.971	PK
5			5720.000	79.578	74.581	-31.222	110.800	4.997	PK
6			5723.375	83.360	78.341	-35.137	118.496	5.018	PK
7			5725.000	80.855	75.826	-41.345	122.200	5.029	PK
8			5753.038	106.590	101.389	N/A	N/A	5.200	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:55
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant A	

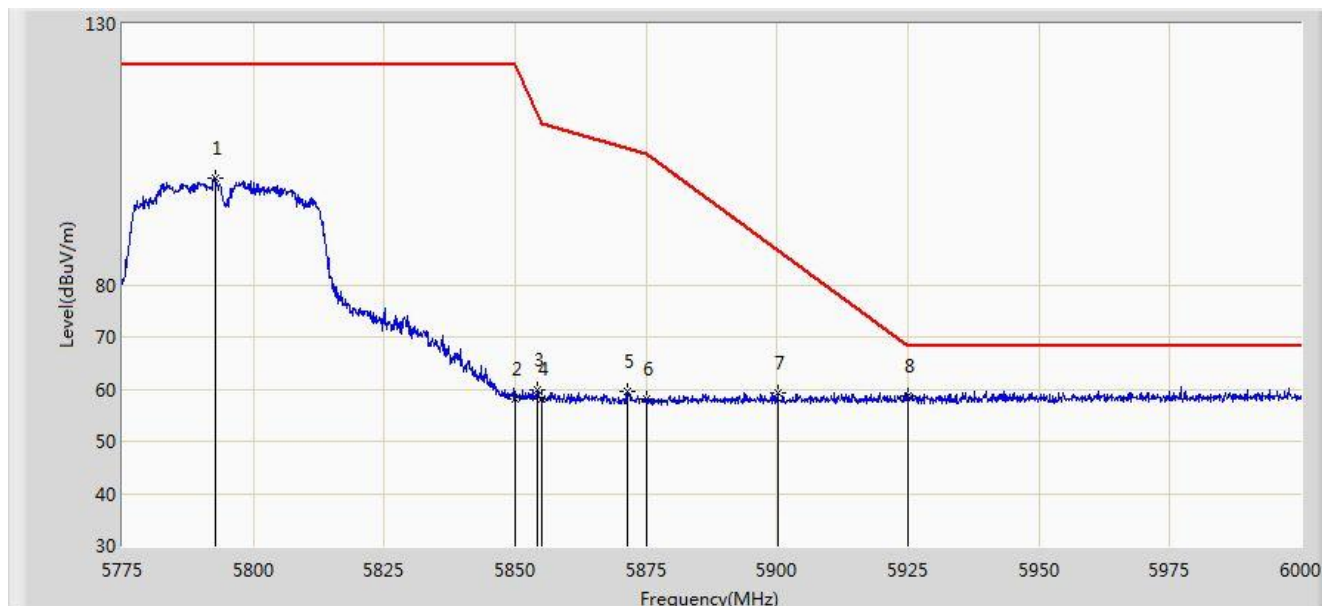


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5792.775	100.532	95.126	N/A	N/A	5.406	PK
2			5850.000	58.177	52.451	-64.023	122.200	5.726	PK
3			5854.200	59.785	54.042	-52.838	112.623	5.743	PK
4			5855.000	58.110	52.364	-52.690	110.800	5.746	PK
5			5871.300	59.423	53.616	-46.811	106.235	5.807	PK
6			5875.000	58.121	52.301	-47.079	105.200	5.820	PK
7			5900.100	59.335	53.431	-27.252	86.587	5.904	PK
8		*	5925.000	58.604	52.638	-9.596	68.200	5.967	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 16:53
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant A	

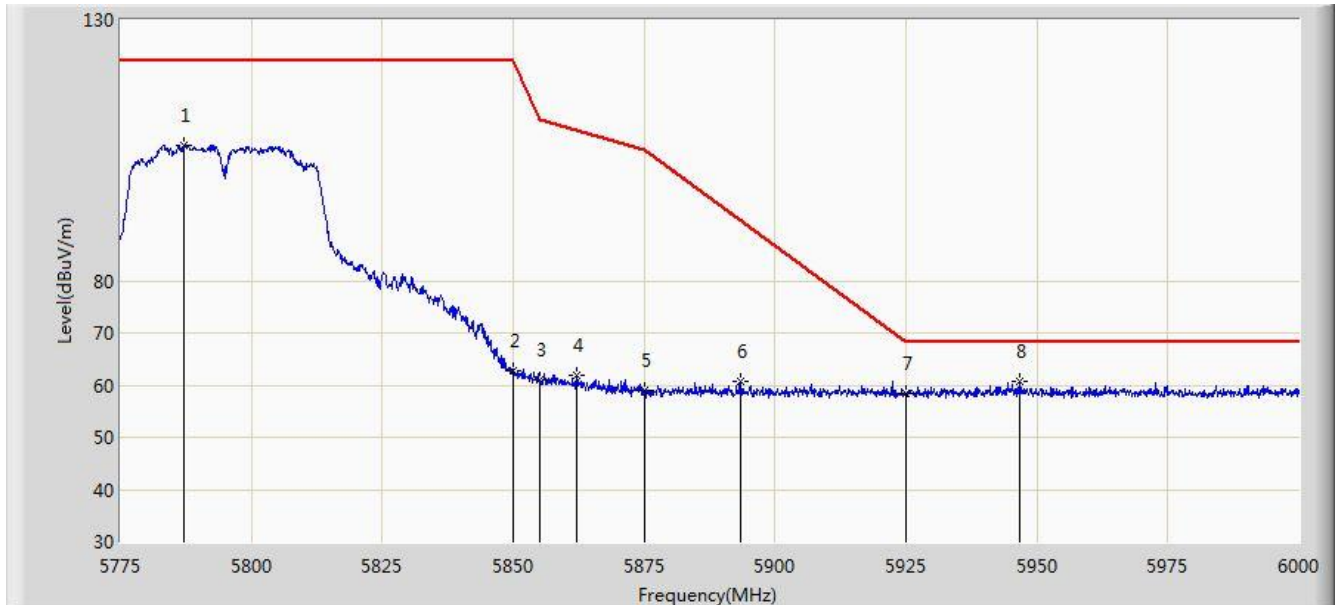


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.150	105.991	100.614	N/A	N/A	5.378	PK
2			5850.000	62.782	57.056	-59.418	122.200	5.726	PK
3			5855.000	60.935	55.189	-49.865	110.800	5.746	PK
4			5862.187	62.022	56.246	-46.764	108.785	5.775	PK
5			5875.000	59.041	53.221	-46.159	105.200	5.820	PK
6			5893.350	60.651	54.768	-30.934	91.585	5.882	PK
7			5925.000	58.398	52.432	-9.802	68.200	5.967	PK
8		*	5946.675	60.742	54.722	-7.458	68.200	6.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant A	

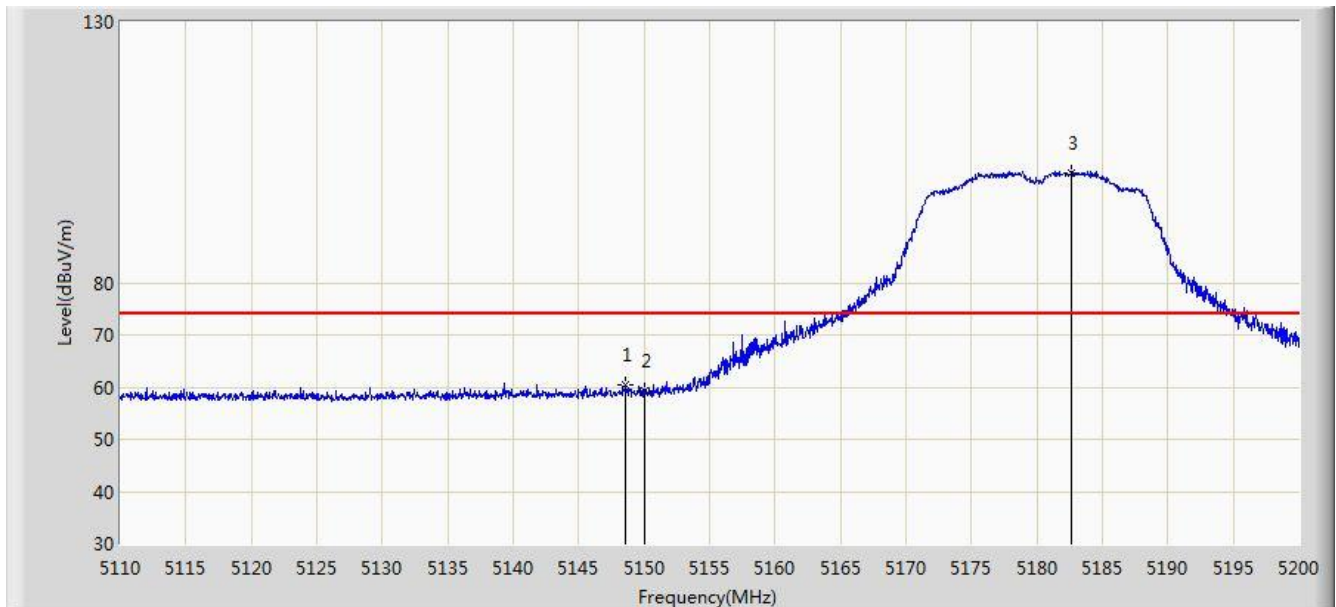


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.610	60.522	56.348	-13.478	74.000	4.174	PK
2			5150.000	59.375	55.206	-14.625	74.000	4.170	PK
3		*	5182.630	101.000	96.940	N/A	N/A	4.060	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant A	

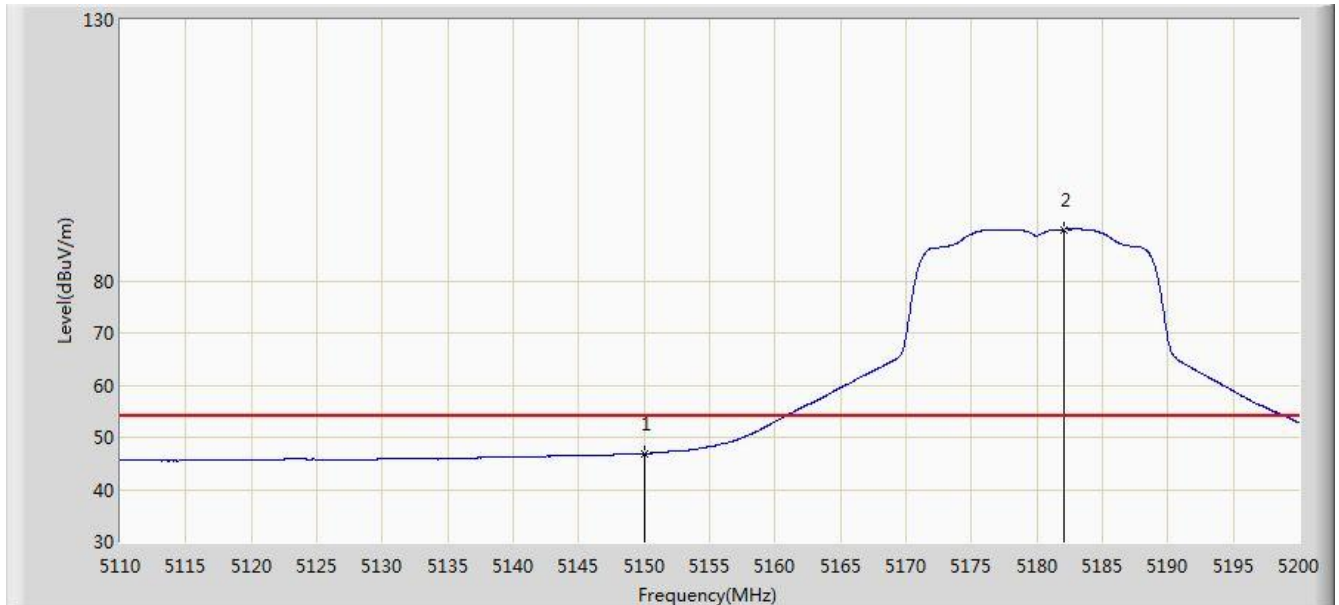


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.898	42.729	-7.102	54.000	4.170	AV
2		*	5182.045	89.841	85.779	N/A	N/A	4.061	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant A	

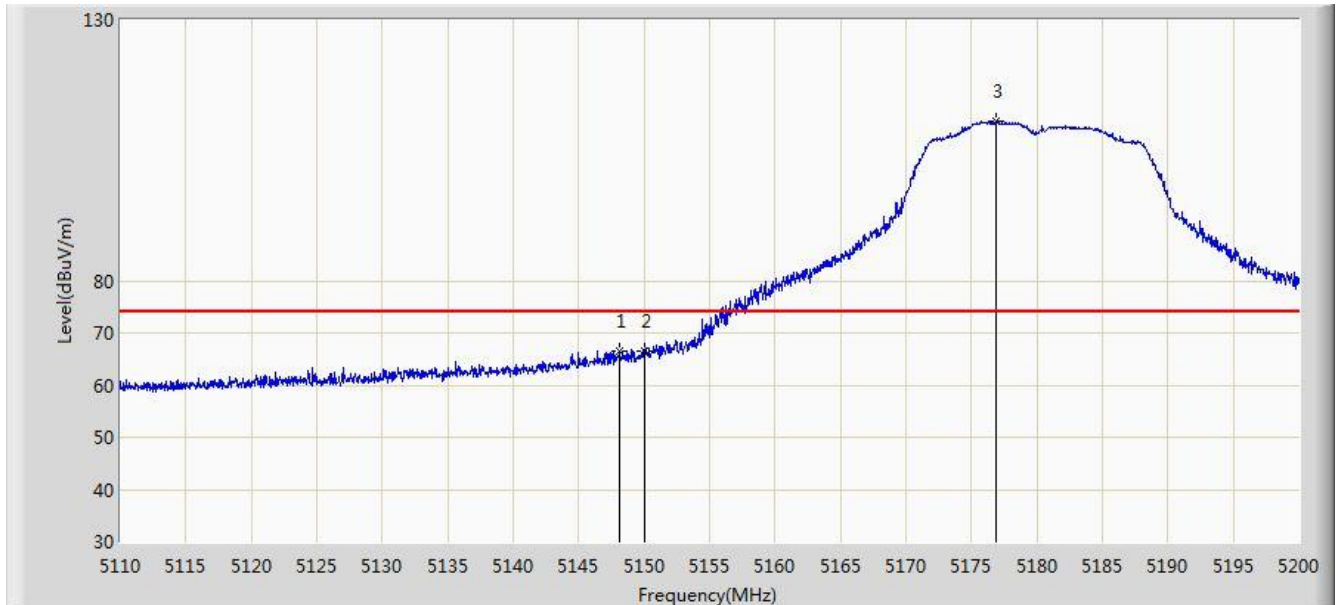


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.160	66.615	62.440	-7.385	74.000	4.175	PK
2			5150.000	66.509	62.340	-7.491	74.000	4.170	PK
3		*	5176.870	110.668	106.588	N/A	N/A	4.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz, Ant A	

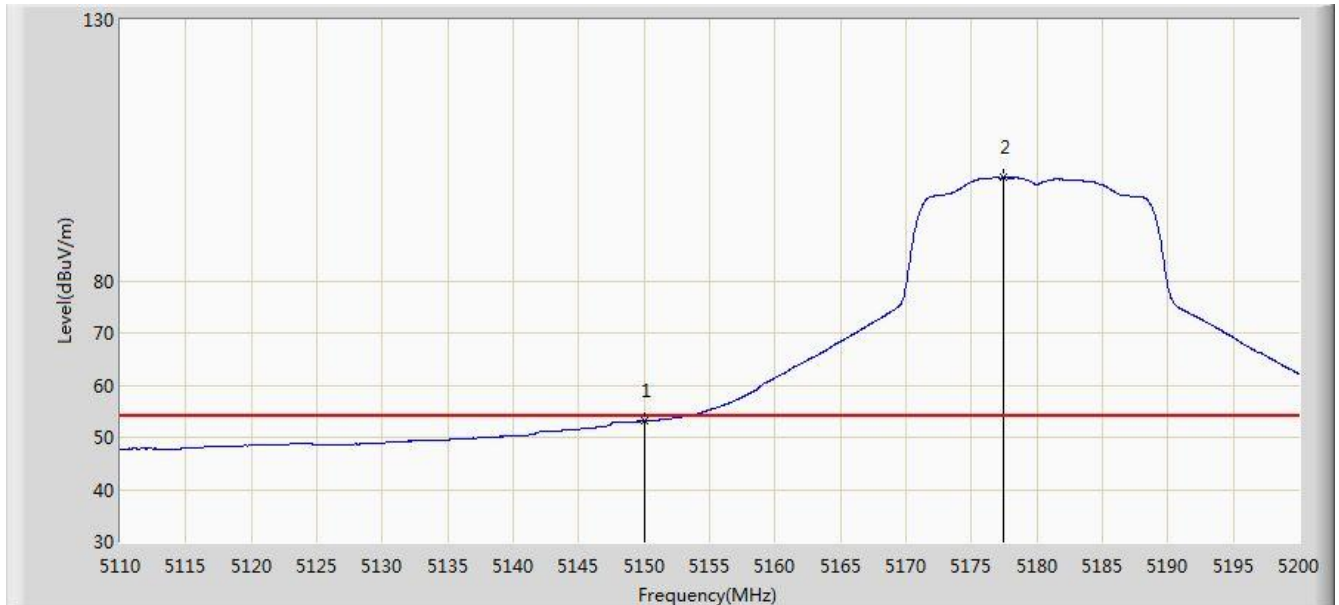


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.089	48.920	-0.911	54.000	4.170	AV
2		*	5177.410	99.740	95.662	N/A	N/A	4.078	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant A	

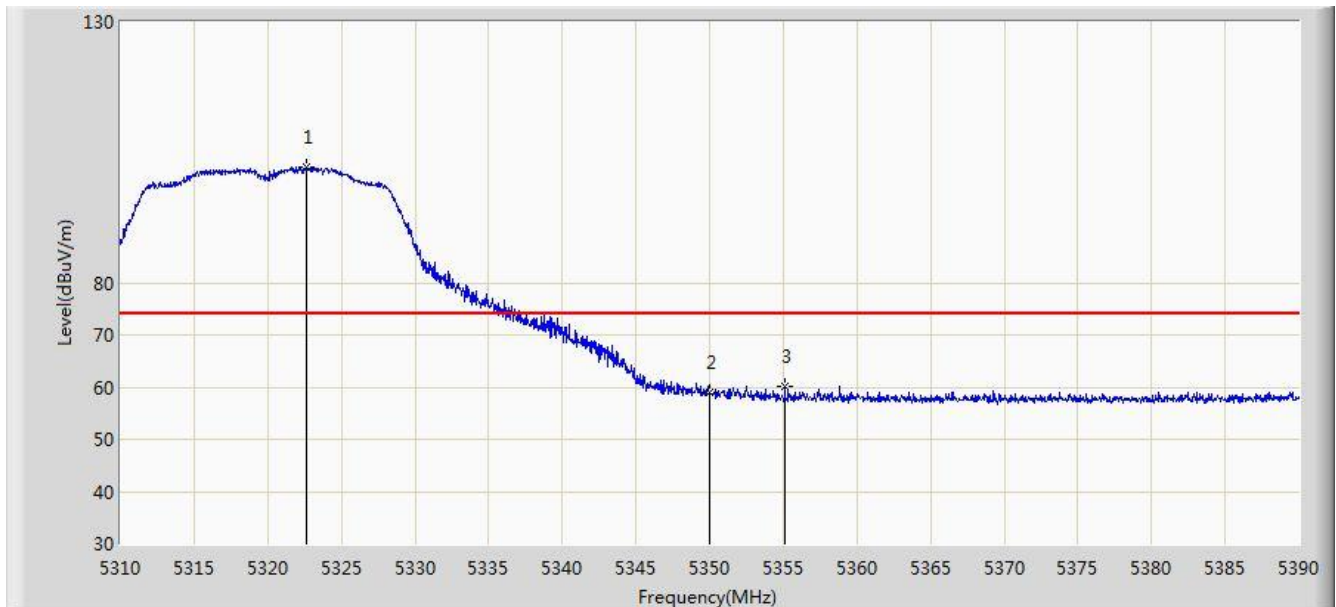


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.640	102.302	98.448	N/A	N/A	3.853	PK
2			5350.000	59.038	55.133	-14.962	74.000	3.904	PK
3			5355.120	60.278	56.364	-13.722	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant A	

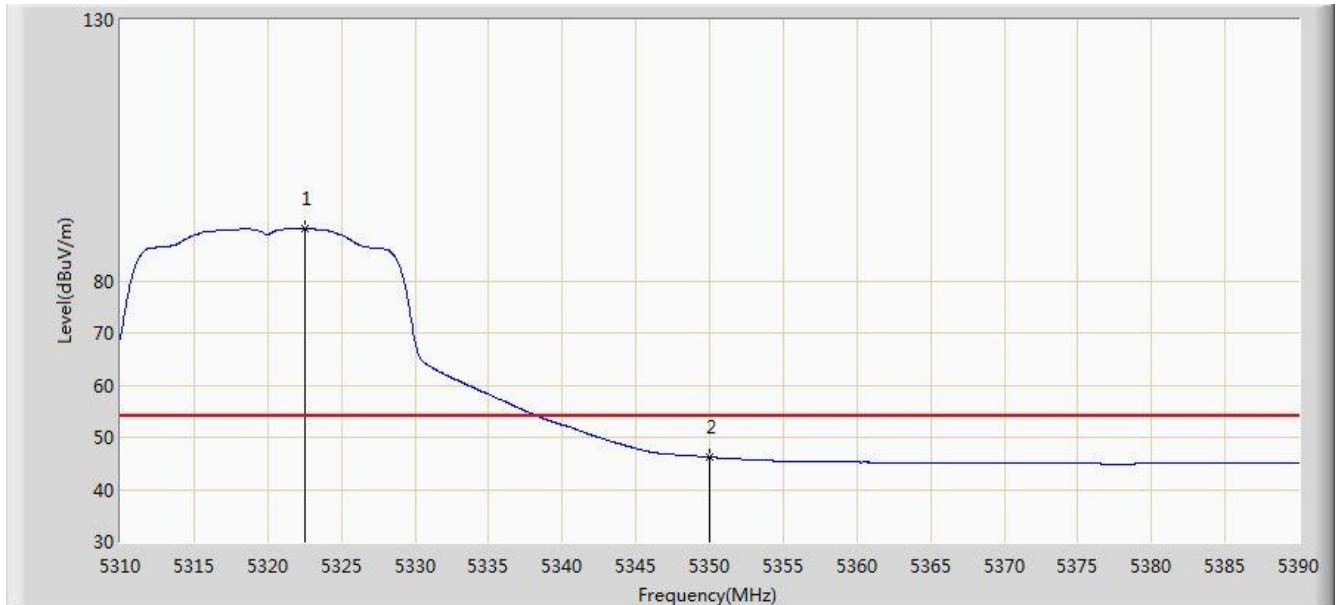


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.520	89.894	86.041	N/A	N/A	3.853	AV
2			5350.000	46.175	42.270	-7.825	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant A	

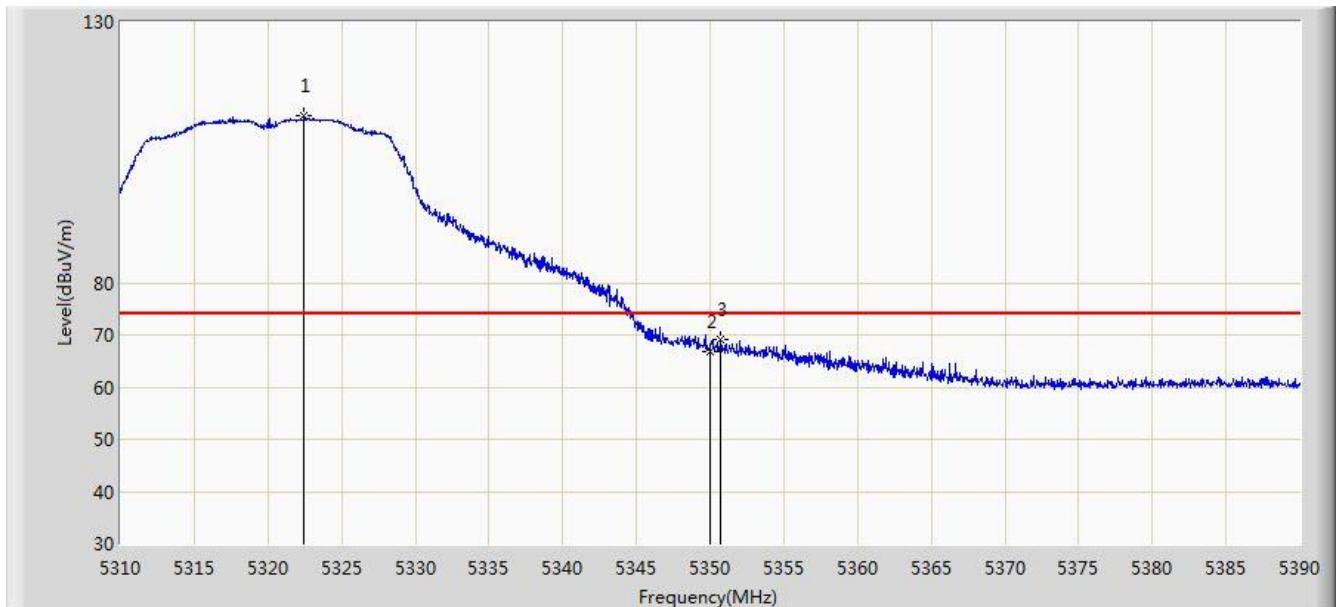


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.480	112.120	108.267	N/A	N/A	3.853	PK
2			5350.000	66.919	63.014	-7.081	74.000	3.904	PK
3			5350.720	69.075	65.169	-4.925	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 17:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz, Ant A	

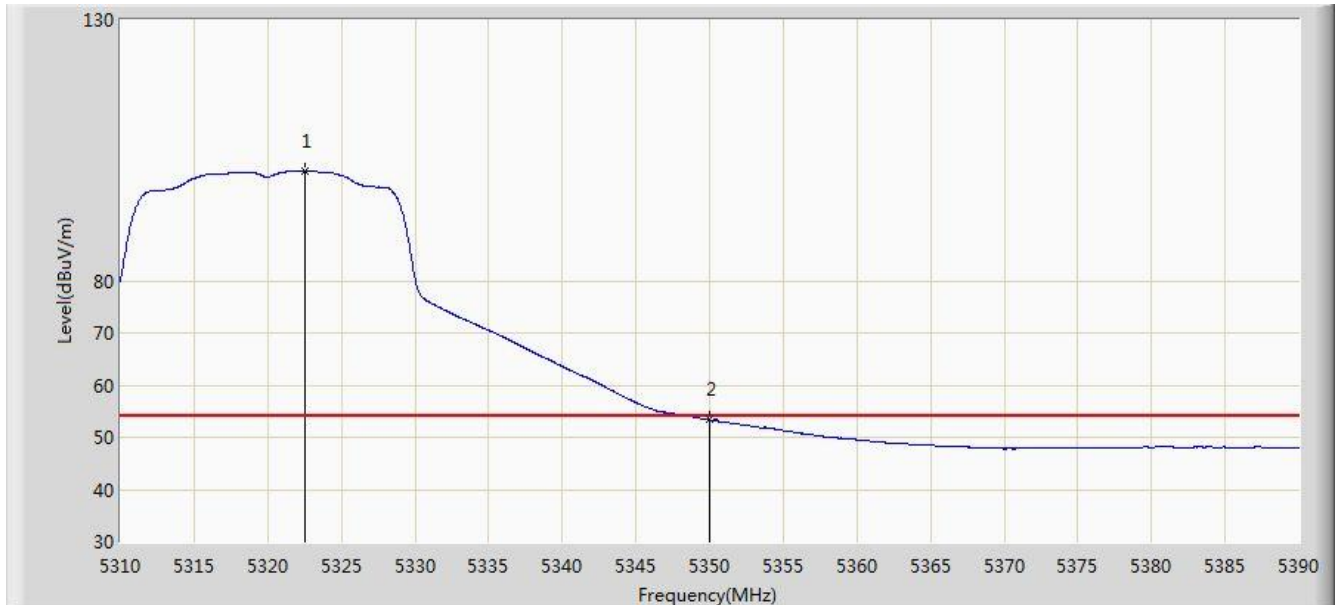


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.520	100.968	97.115	N/A	N/A	3.853	AV
2			5350.000	53.351	49.446	-0.649	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 18:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant A	

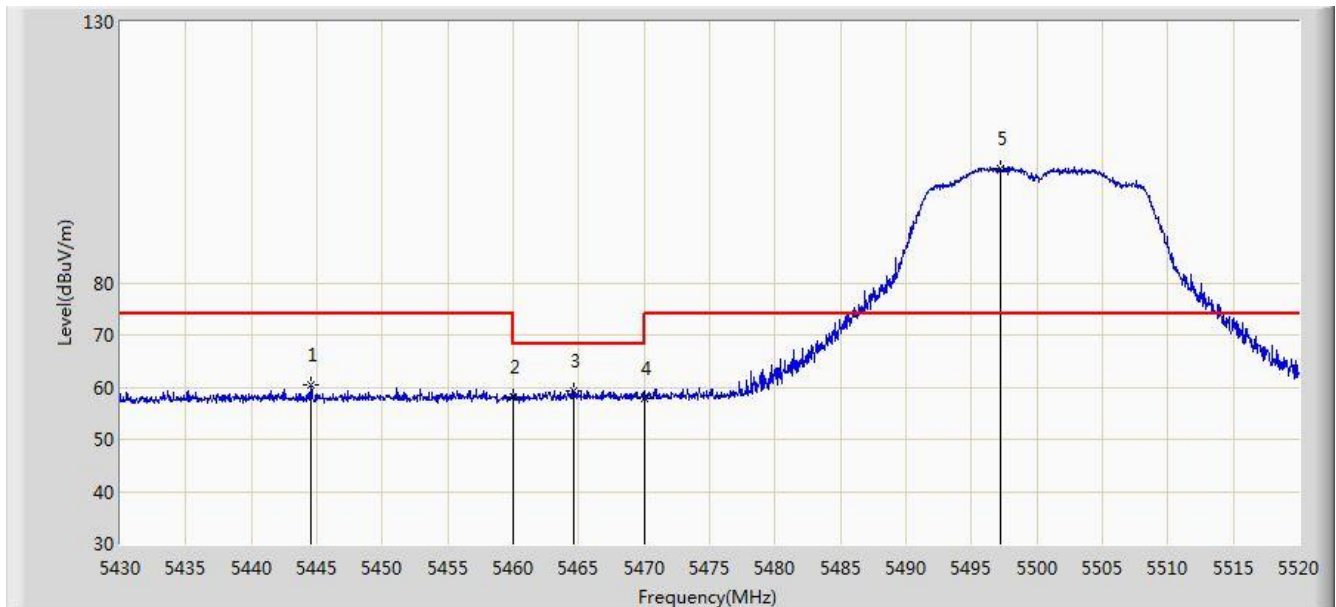


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.535	60.348	56.210	-13.652	74.000	4.138	PK
2			5460.000	58.202	54.022	-15.798	74.000	4.180	PK
3			5464.650	59.390	55.200	-8.810	68.200	4.191	PK
4			5470.000	57.701	53.499	-10.499	68.200	4.202	PK
5		*	5497.185	101.972	97.708	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant A	

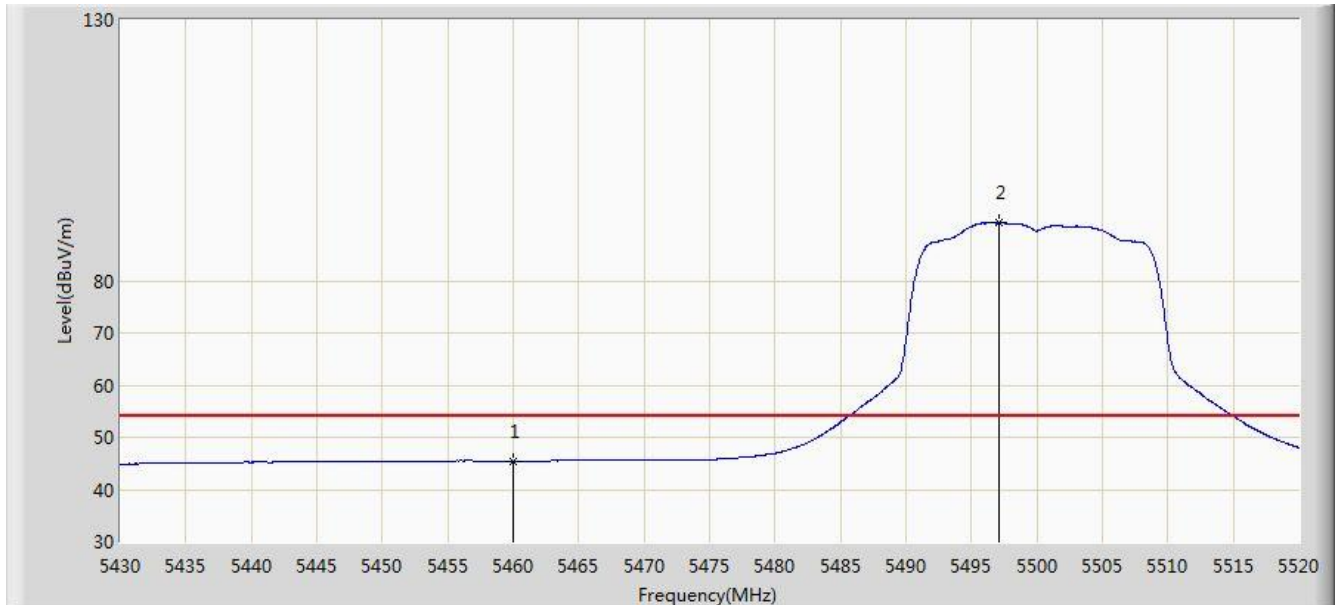


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.395	41.215	-8.605	54.000	4.180	AV
2		*	5497.140	91.070	86.806	N/A	N/A	4.264	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 18:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant A	

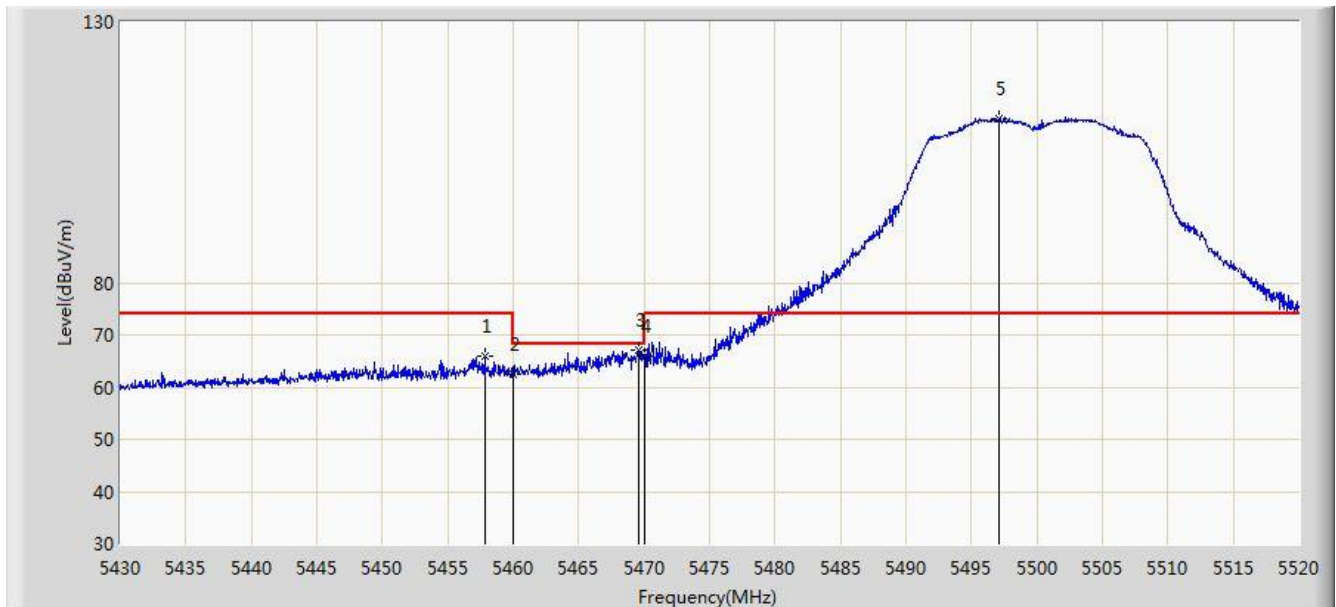


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.810	65.906	61.730	-8.094	74.000	4.176	PK
2			5460.000	62.498	58.318	-11.502	74.000	4.180	PK
3			5469.555	67.110	62.909	-1.090	68.200	4.202	PK
4			5470.000	65.986	61.784	-2.214	68.200	4.202	PK
5		*	5497.050	111.540	107.276	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 18:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz, Ant A	

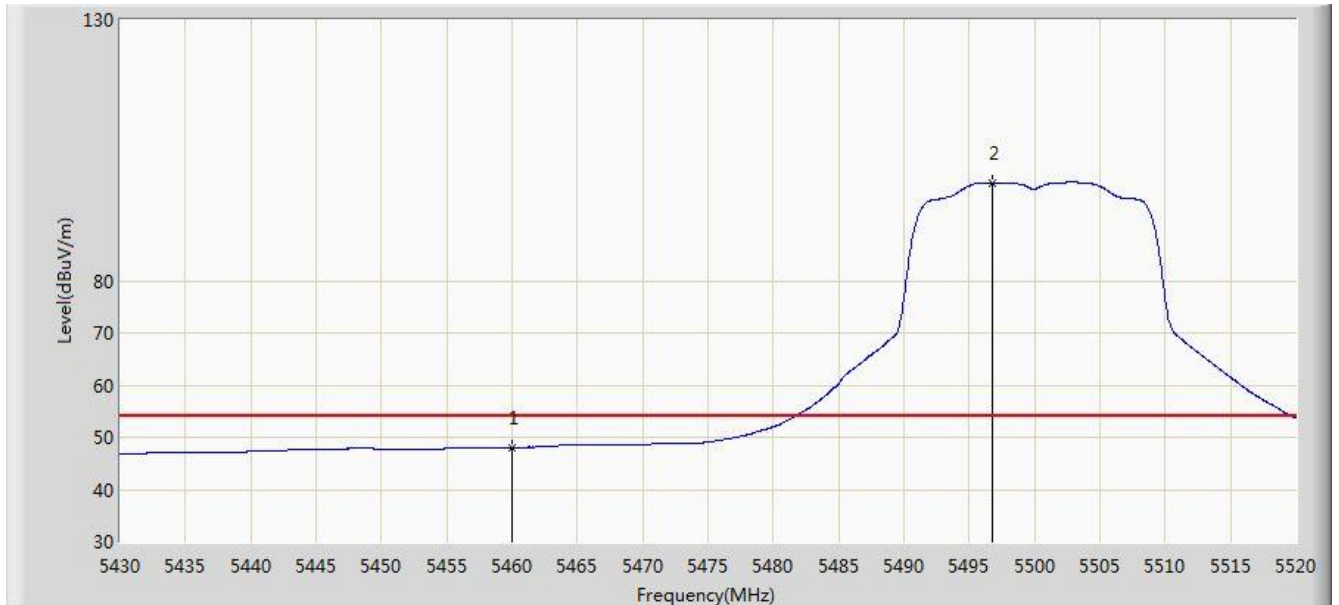


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.008	43.828	-5.992	54.000	4.180	AV
2		*	5496.735	98.797	94.534	N/A	N/A	4.264	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 19:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant A	

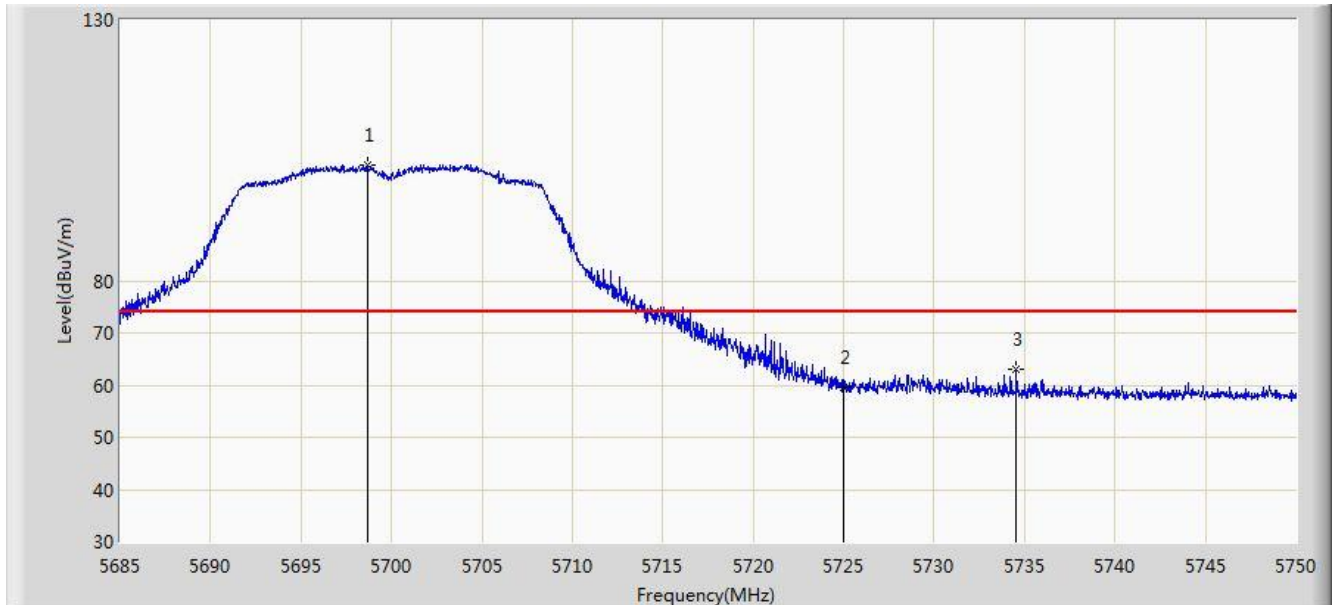


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.650	102.058	97.187	N/A	N/A	4.871	PK
2			5725.000	59.553	54.524	-14.447	74.000	5.029	PK
3			5734.562	63.008	57.918	-10.992	74.000	5.090	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 19:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant A	

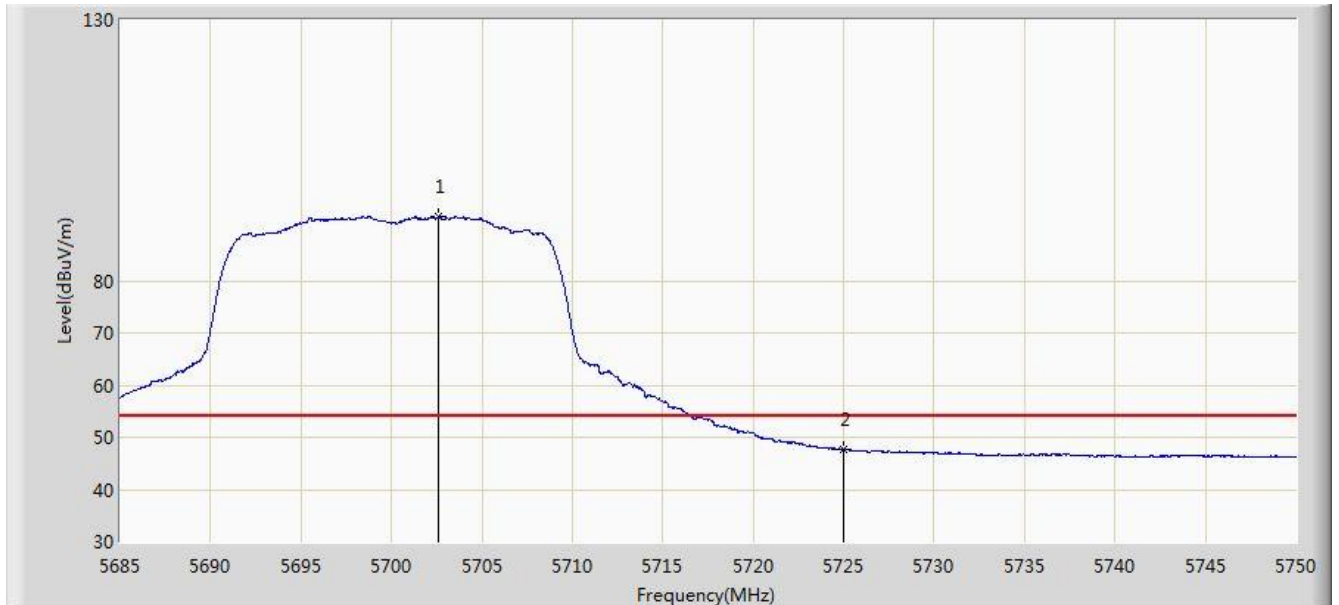


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.615	92.310	87.418	N/A	N/A	4.892	AV
2			5725.000	47.624	42.595	-6.376	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 19:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant A	

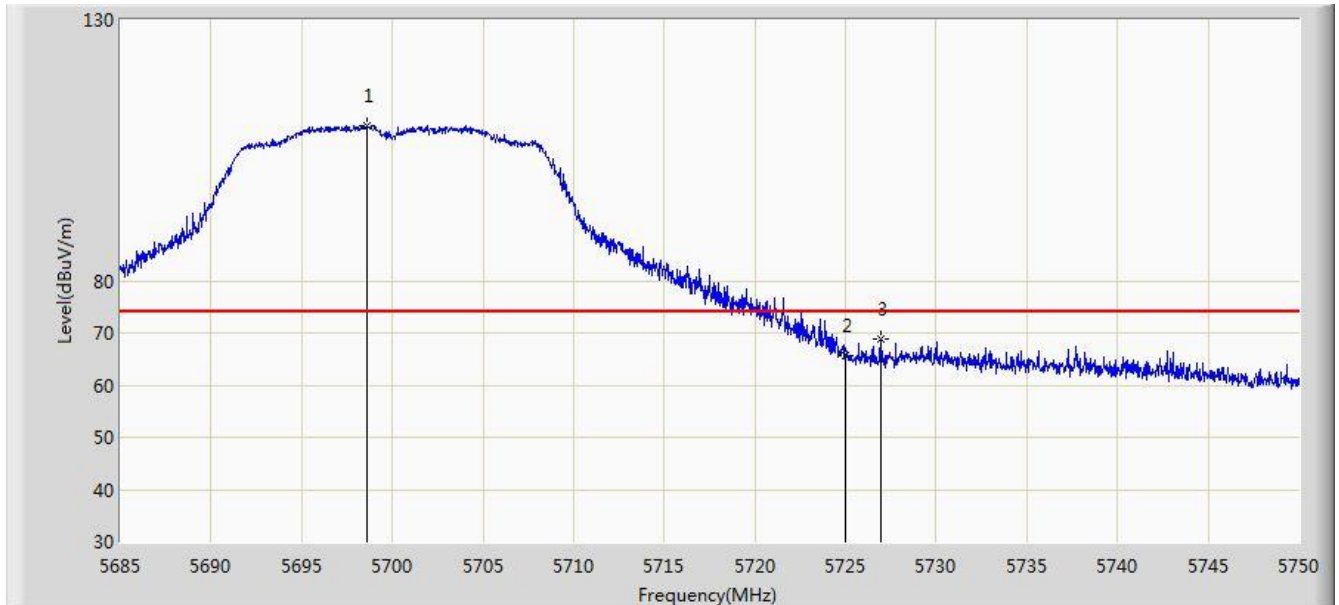


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.585	109.757	104.886	N/A	N/A	4.871	PK
2			5725.000	65.644	60.615	-8.356	74.000	5.029	PK
3			5726.925	68.809	63.768	-5.191	74.000	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 19:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz, Ant A	

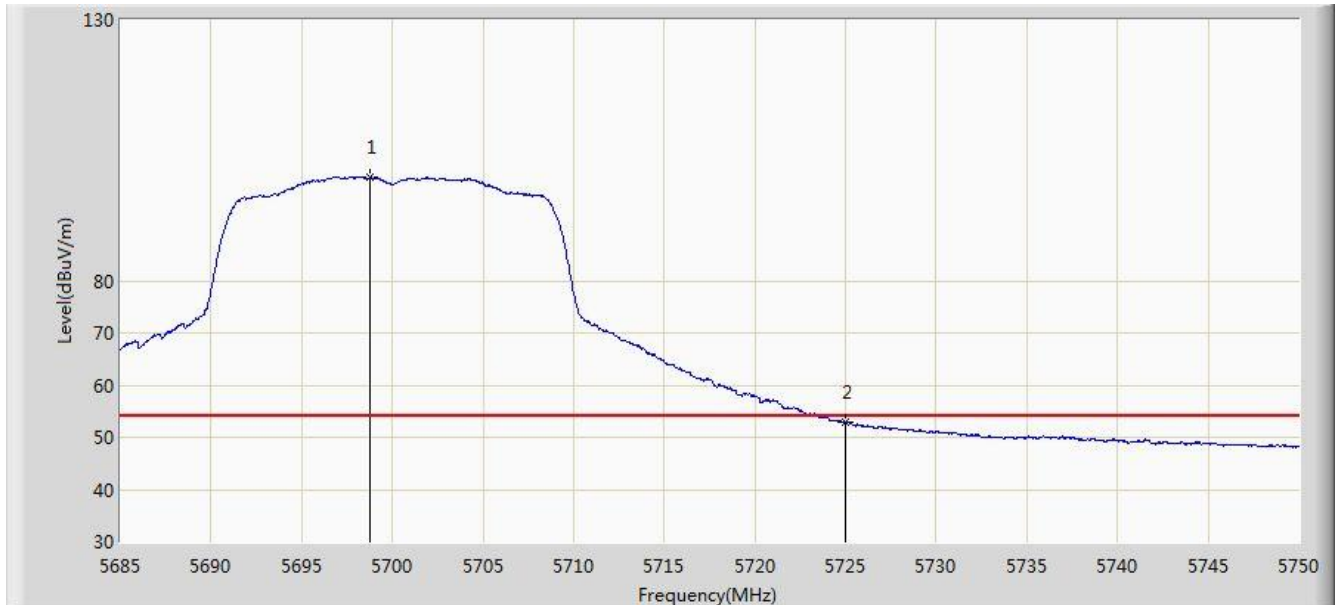


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.780	99.770	94.898	N/A	N/A	4.872	AV
2			5725.000	52.986	47.957	-1.014	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:05
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz, Ant A	

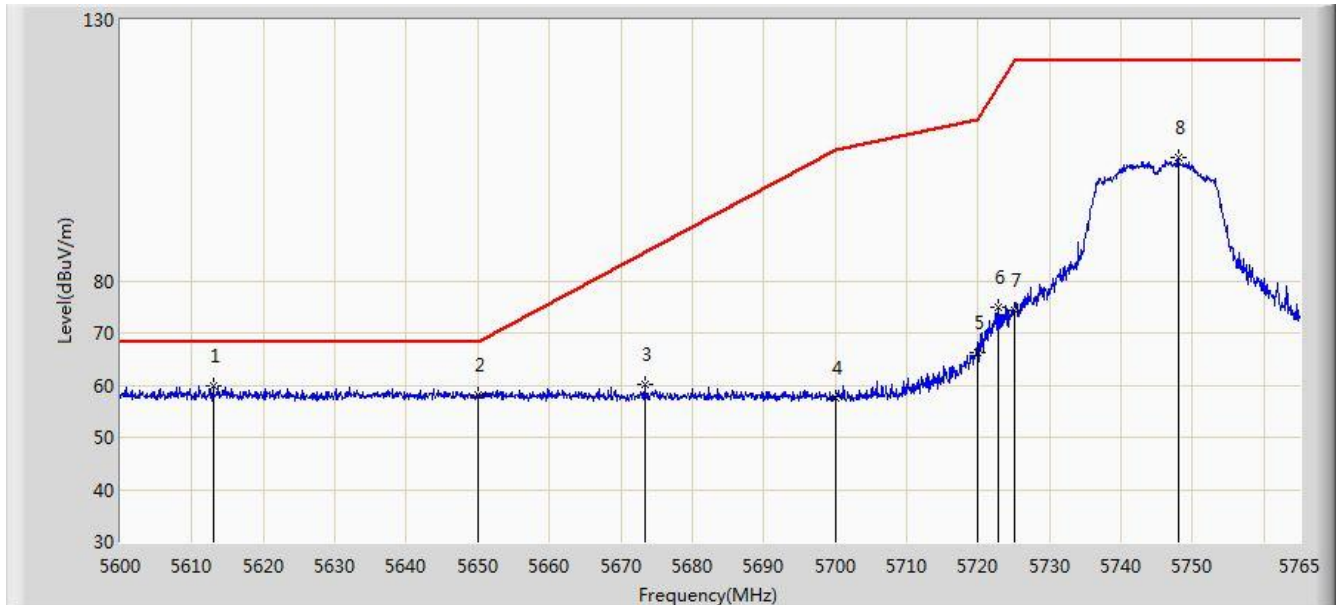


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.035	59.844	55.284	-8.356	68.200	4.561	PK
2			5650.000	58.057	53.386	-10.143	68.200	4.671	PK
3			5673.342	60.081	55.321	-25.432	85.514	4.760	PK
4			5700.000	57.471	52.593	-47.729	105.200	4.878	PK
5			5720.000	66.199	61.202	-44.601	110.800	4.997	PK
6			5722.760	74.975	69.960	-42.119	117.094	5.015	PK
7			5725.000	74.477	69.448	-47.723	122.200	5.029	PK
8			5748.005	103.534	98.362	N/A	N/A	5.172	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:04
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz, Ant A	

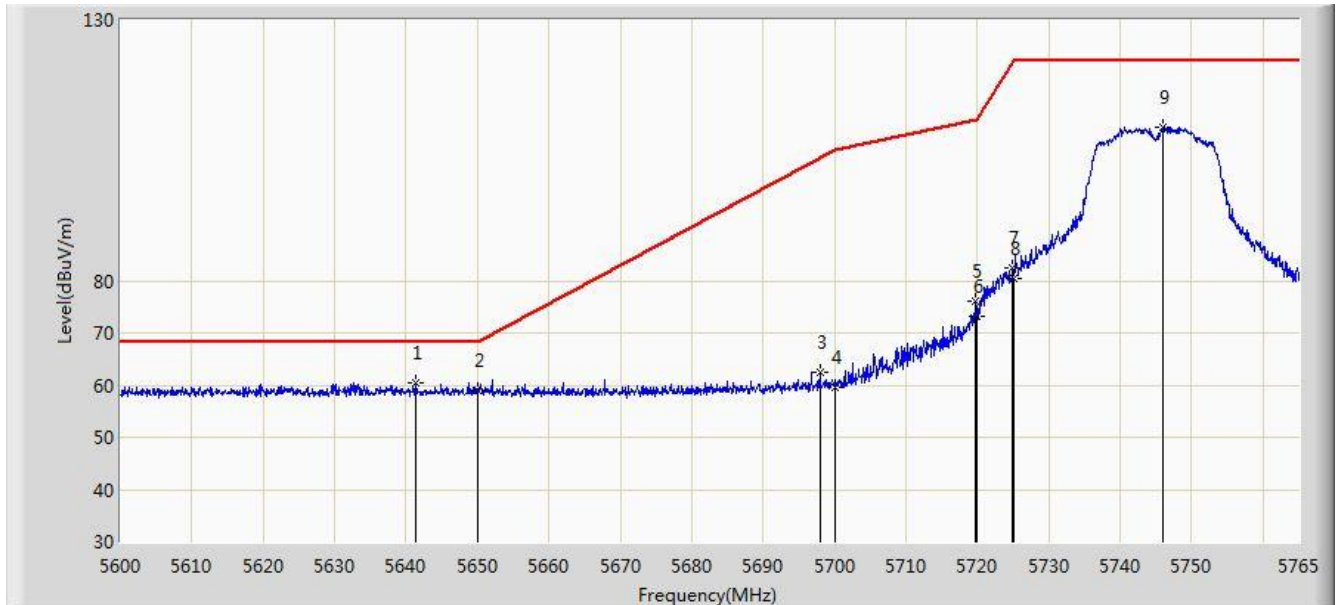


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5641.250	60.393	55.751	-7.807	68.200	4.641	PK
2			5650.000	58.866	54.195	-9.334	68.200	4.671	PK
3			5697.928	62.333	57.466	-41.340	103.673	4.867	PK
4			5700.000	59.642	54.764	-45.558	105.200	4.878	PK
5			5719.790	75.997	71.001	-34.745	110.741	4.995	PK
6			5720.000	73.259	68.262	-37.541	110.800	4.997	PK
7			5724.905	82.438	77.410	-39.545	121.983	5.029	PK
8			5725.000	80.545	75.516	-41.655	122.200	5.029	PK
9			5746.025	109.405	104.244	N/A	N/A	5.161	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:09
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz, Ant A	

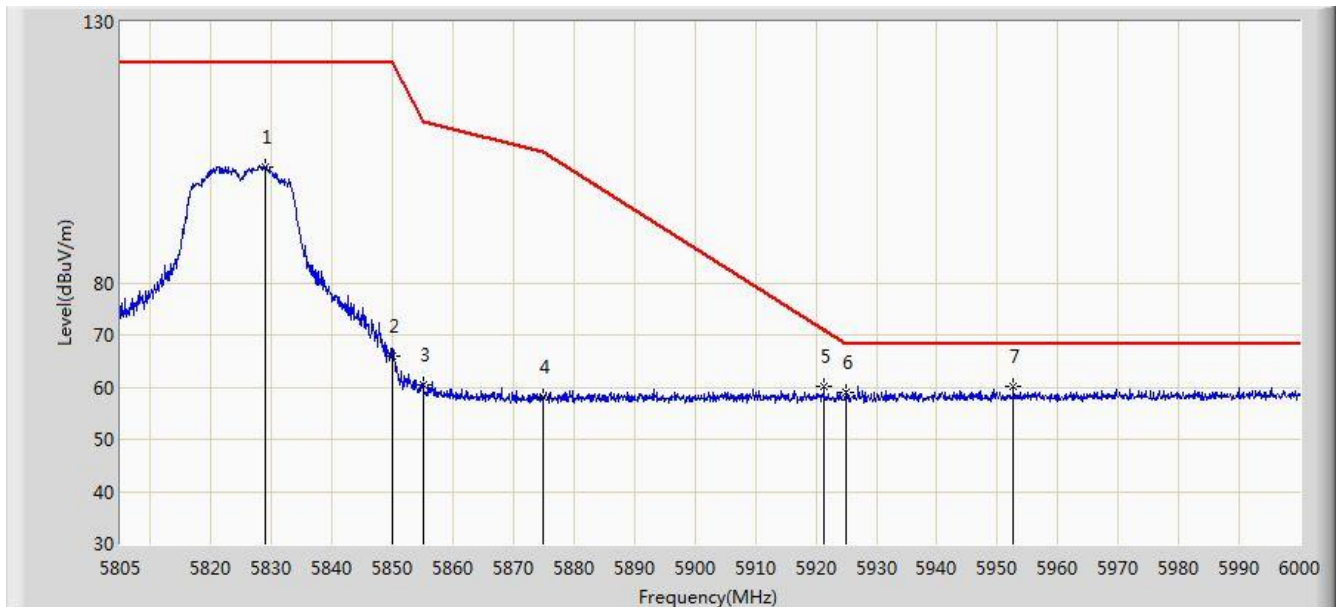


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.985	102.207	96.596	N/A	N/A	5.610	PK
2			5850.000	65.945	60.219	-56.255	122.200	5.726	PK
3			5855.000	60.558	54.812	-50.242	110.800	5.746	PK
4			5875.000	58.097	52.277	-47.103	105.200	5.820	PK
5			5921.317	60.284	54.327	-10.630	70.915	5.956	PK
6			5925.000	59.000	53.034	-9.200	68.200	5.967	PK
7		*	5952.615	60.185	54.154	-8.015	68.200	6.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz, Ant A	

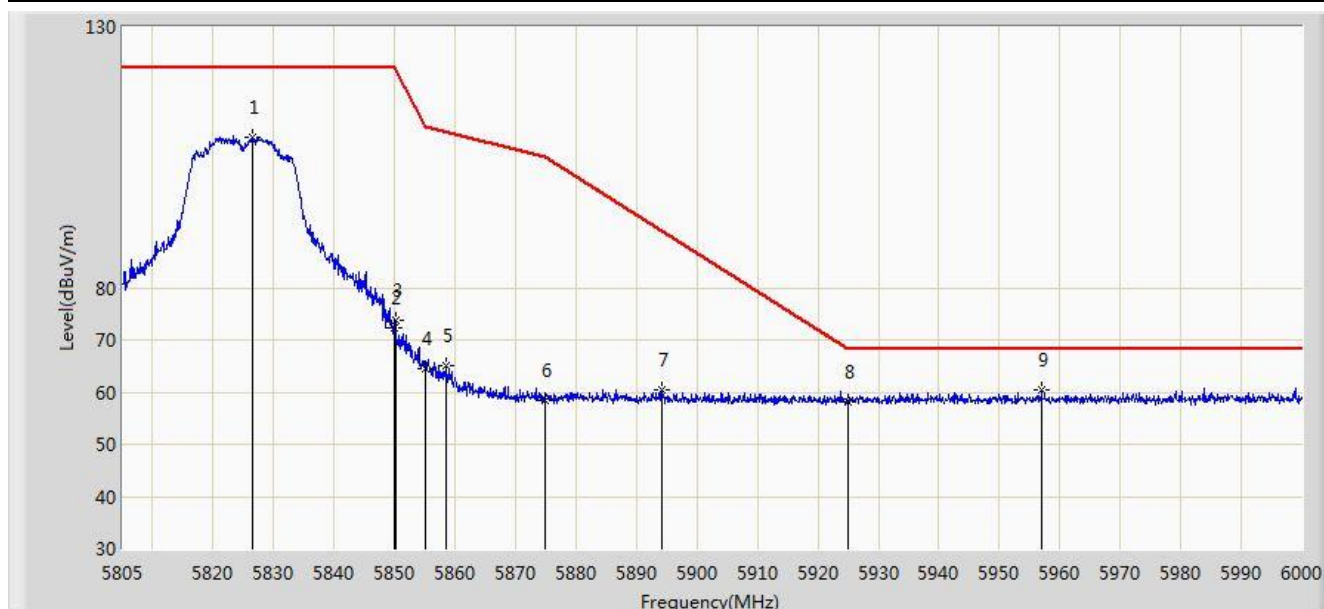


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.450	108.827	103.231	N/A	N/A	5.596	PK
2			5850.000	72.371	66.645	-49.829	122.200	5.726	PK
3			5850.143	73.713	67.987	-48.161	121.874	5.726	PK
4			5855.000	64.577	58.831	-46.223	110.800	5.746	PK
5			5858.430	65.136	59.376	-44.702	109.838	5.760	PK
6			5875.000	58.345	52.525	-46.855	105.200	5.820	PK
7			5894.115	60.333	54.448	-30.684	91.018	5.886	PK
8			5925.000	58.185	52.219	-10.015	68.200	5.967	PK
9		*	5957.002	60.365	54.326	-7.835	68.200	6.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant A	

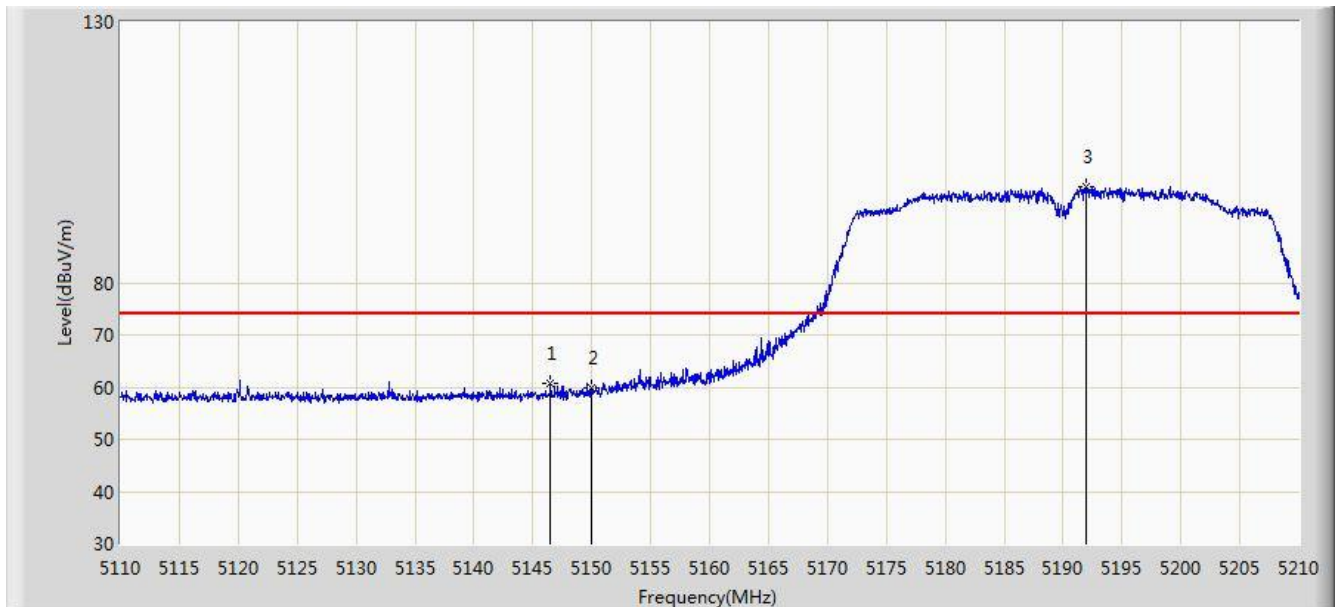


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.500	60.848	56.672	-13.152	74.000	4.176	PK
2			5150.000	59.729	55.560	-14.271	74.000	4.170	PK
3		*	5192.000	98.458	94.432	N/A	N/A	4.027	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant A	

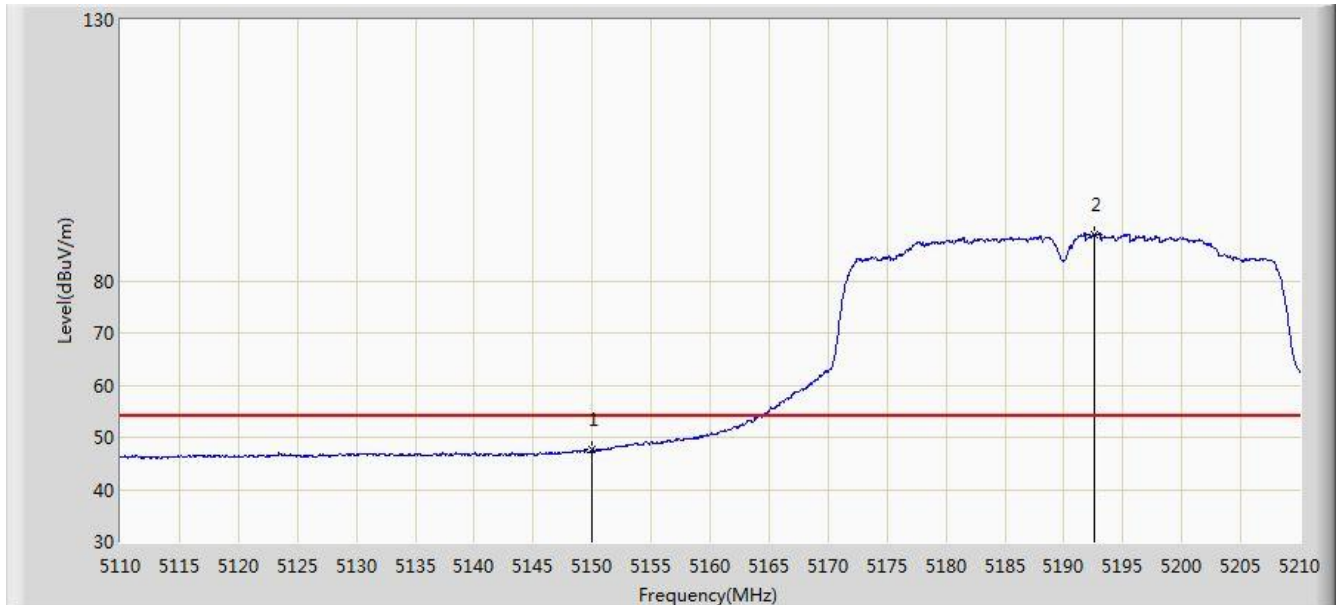


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.594	43.425	-6.406	54.000	4.170	AV
2		*	5192.550	88.873	84.849	N/A	N/A	4.024	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant A	

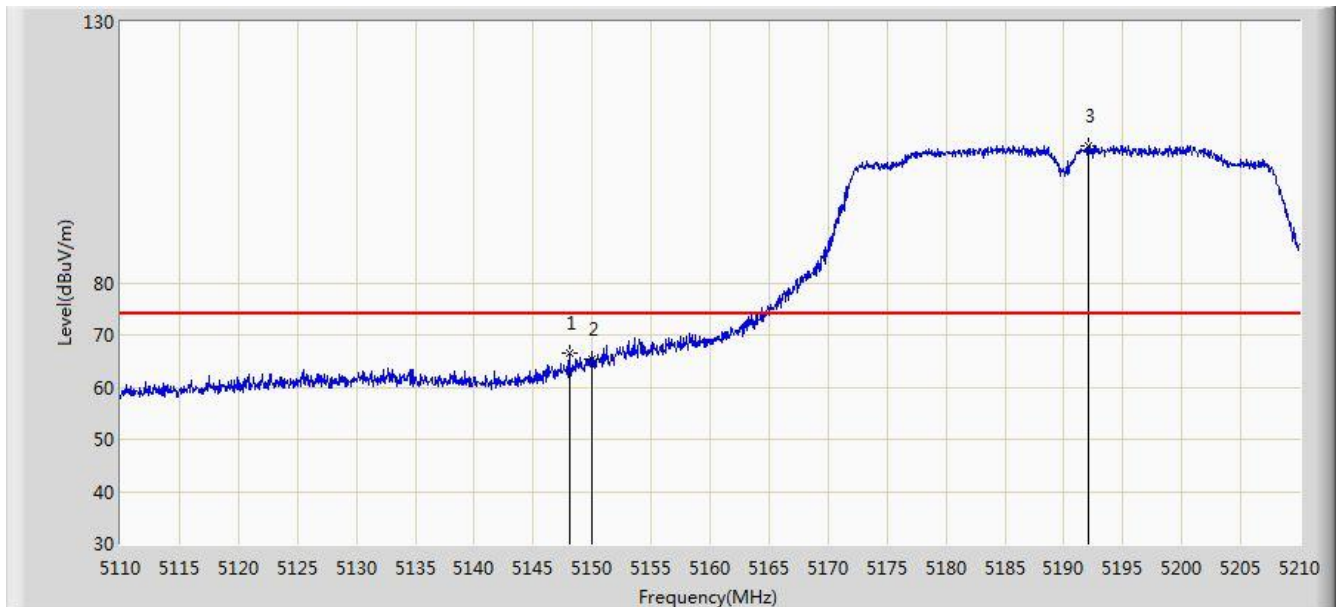


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.050	66.404	62.229	-7.596	74.000	4.176	PK
2			5150.000	65.276	61.107	-8.724	74.000	4.170	PK
3		*	5192.100	106.371	102.345	N/A	N/A	4.027	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz, Ant A	

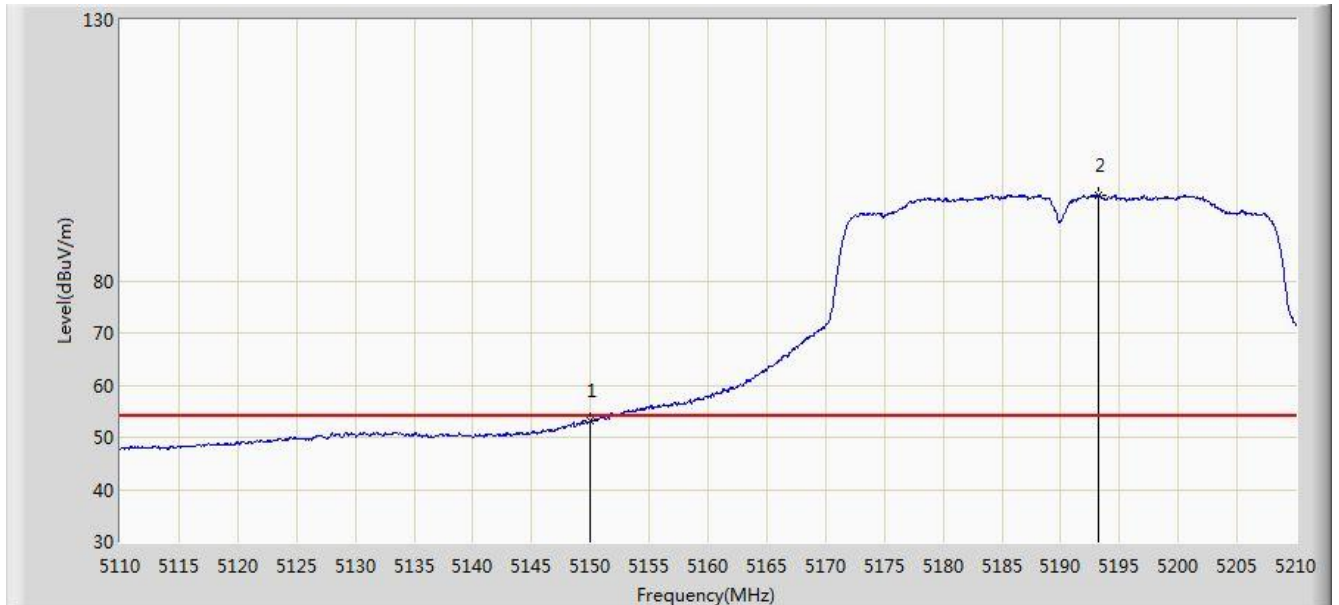


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.046	48.877	-0.954	54.000	4.170	AV
2		*	5193.150	96.383	92.361	N/A	N/A	4.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant A	

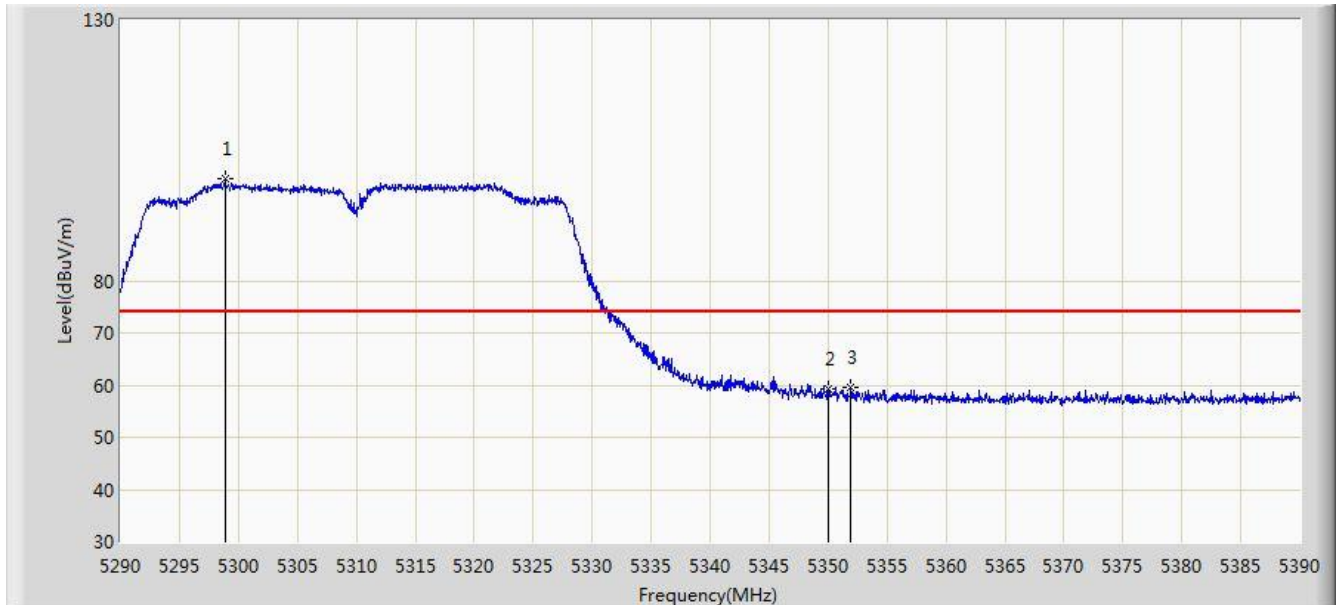


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.850	99.538	95.724	N/A	N/A	3.814	PK
2			5350.000	59.396	55.491	-14.604	74.000	3.904	PK
3			5351.900	59.477	55.569	-14.523	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant A	

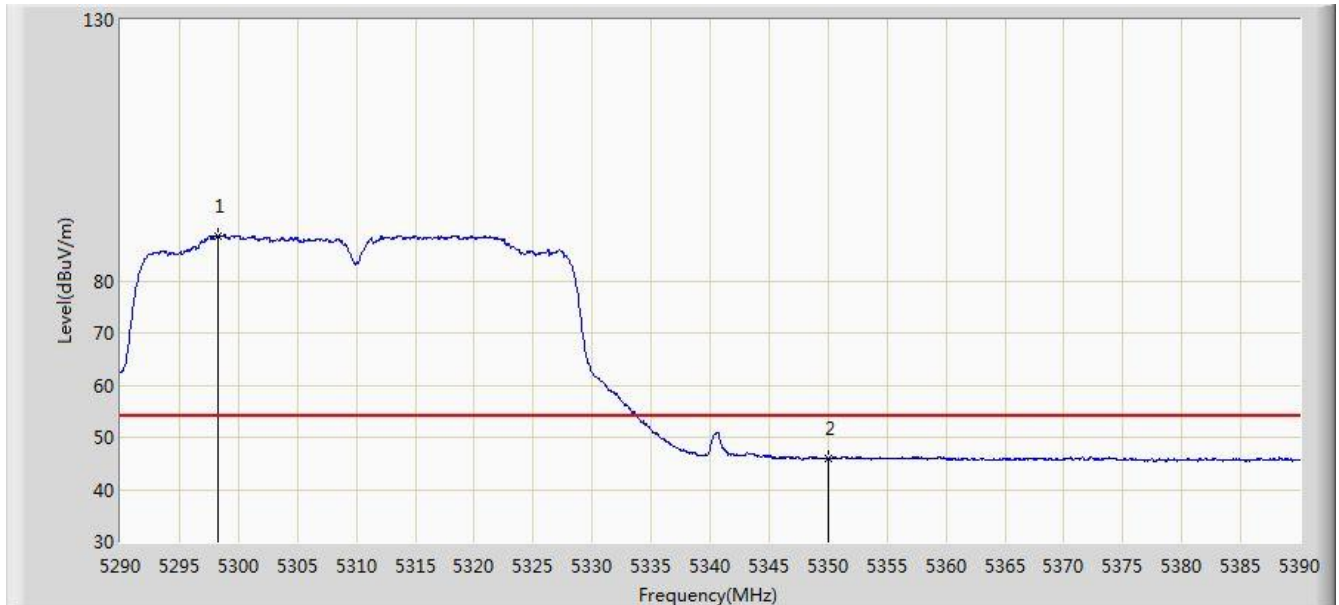


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.250	88.555	84.741	N/A	N/A	3.814	AV
2			5350.000	45.890	41.985	-8.110	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant A	

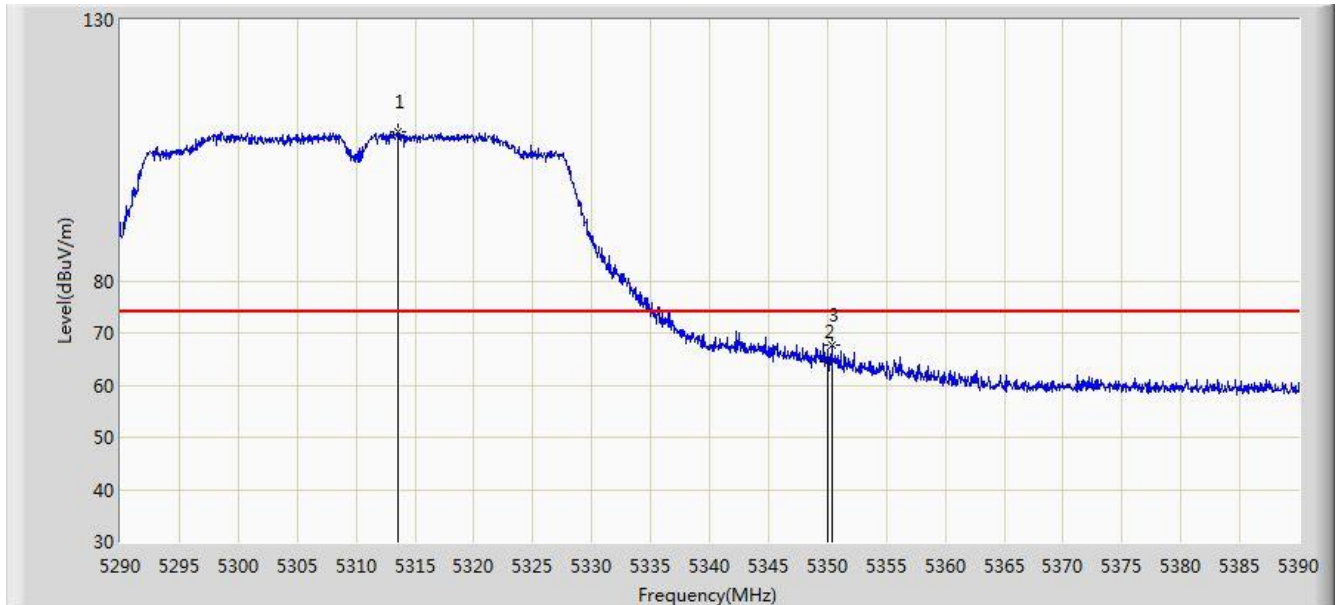


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.600	108.431	104.594	N/A	N/A	3.836	PK
2			5350.000	64.390	60.485	-9.610	74.000	3.904	PK
3			5350.400	67.810	63.905	-6.190	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz, Ant A	

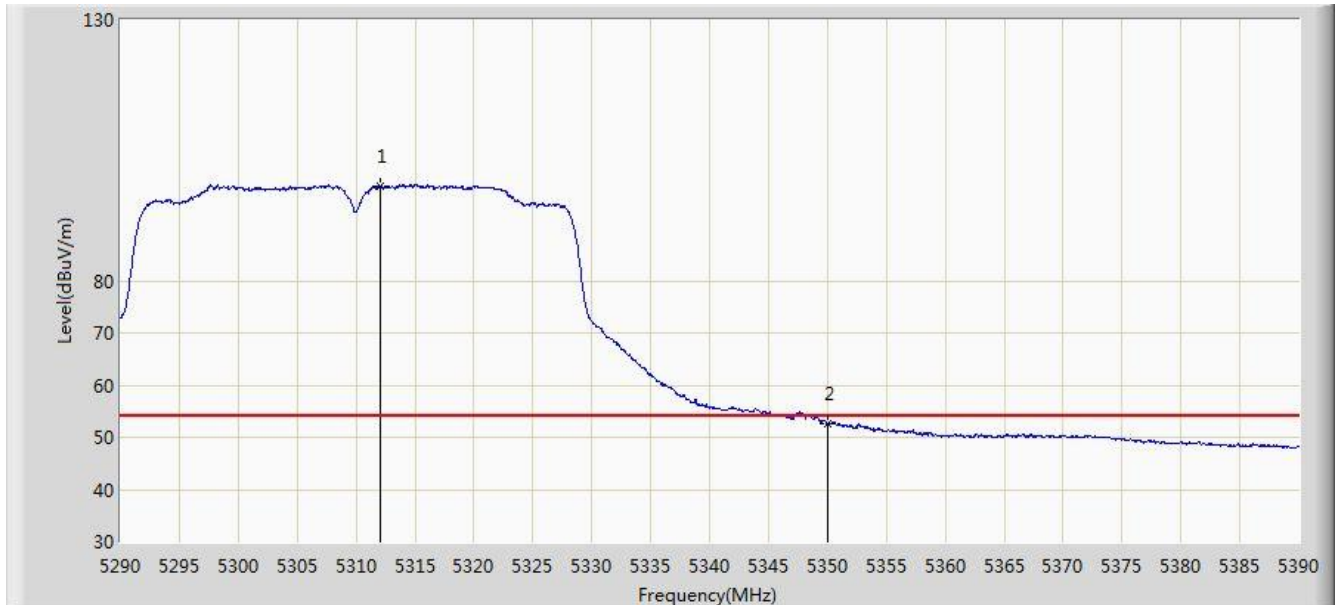


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.050	98.238	94.404	N/A	N/A	3.834	AV
2			5350.000	52.553	48.648	-1.447	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant A	

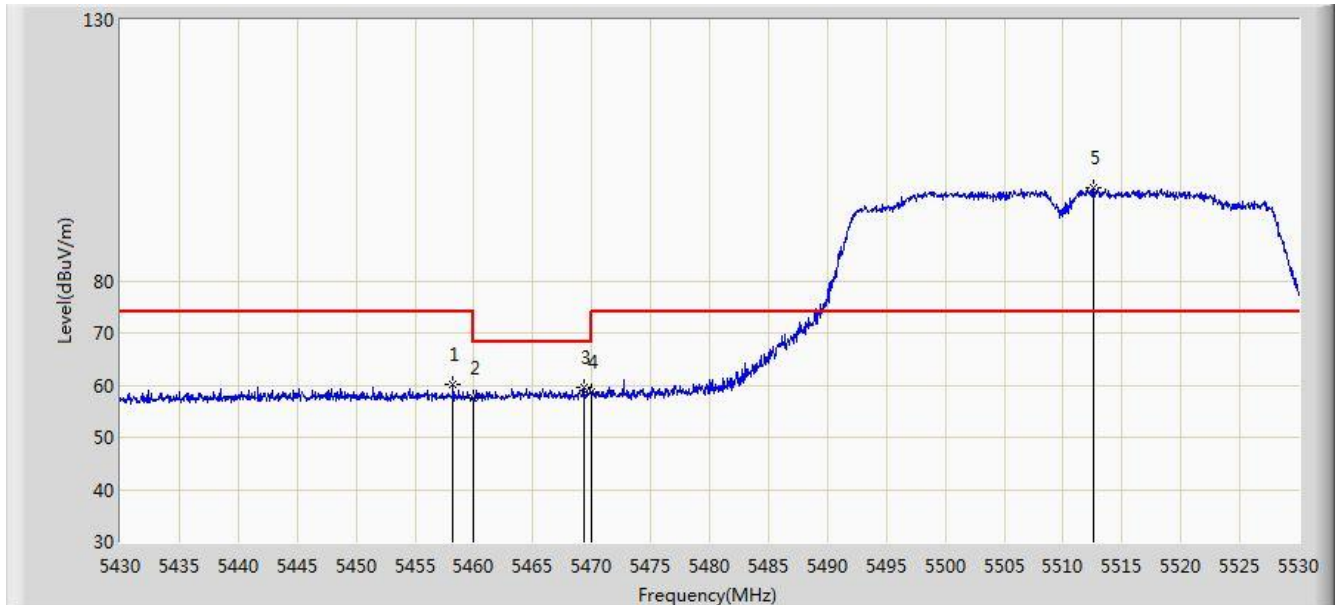


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.250	60.240	56.063	-13.760	74.000	4.177	PK
2			5460.000	57.558	53.378	-16.442	74.000	4.180	PK
3			5469.300	59.477	55.276	-8.723	68.200	4.201	PK
4			5470.000	58.682	54.480	-9.518	68.200	4.202	PK
5		*	5512.600	97.871	93.562	N/A	N/A	4.309	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant A	

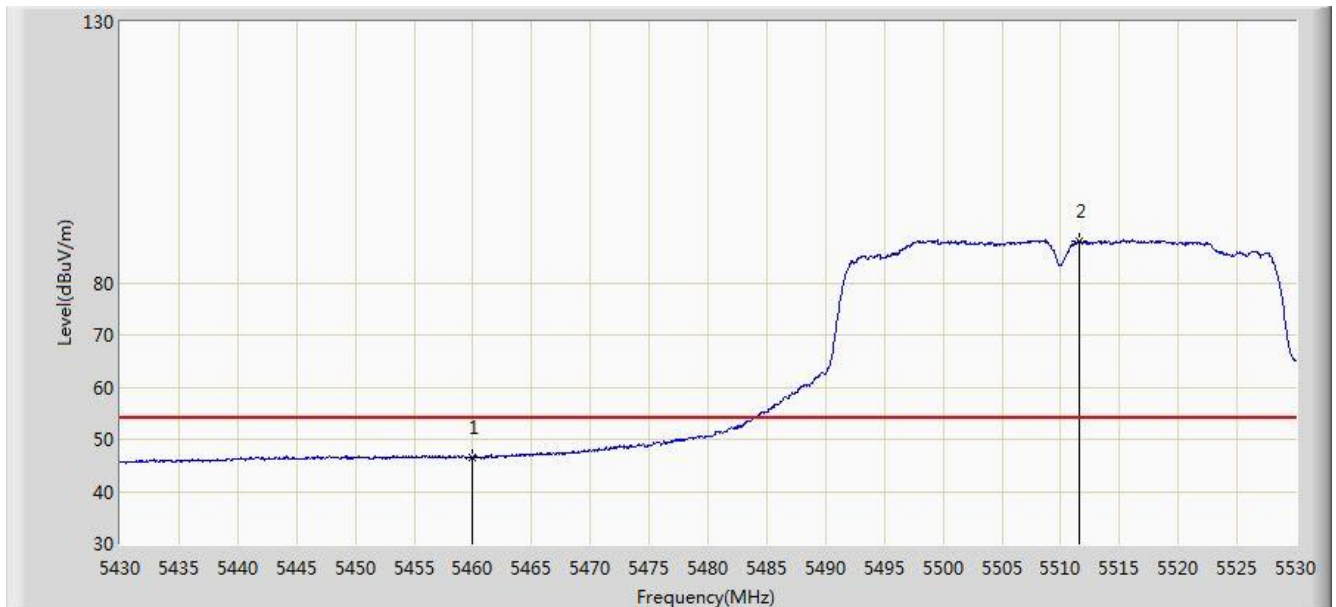


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.538	42.358	-7.462	54.000	4.180	AV
2		*	5511.600	87.987	83.681	N/A	N/A	4.306	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant A	

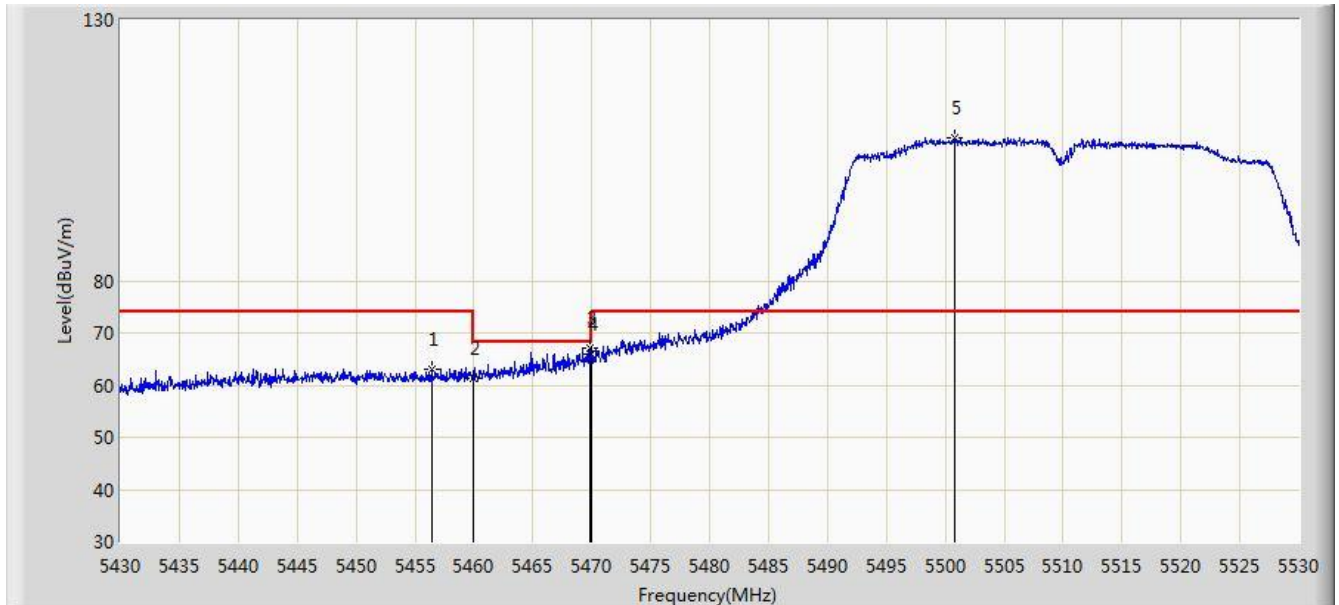


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.400	63.173	59.000	-10.827	74.000	4.172	PK
2			5460.000	61.313	57.133	-12.687	74.000	4.180	PK
3			5469.900	67.243	63.041	-0.957	68.200	4.202	PK
4			5470.000	65.833	61.631	-2.367	68.200	4.202	PK
5		*	5500.800	107.334	103.060	N/A	N/A	4.275	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz, Ant A	

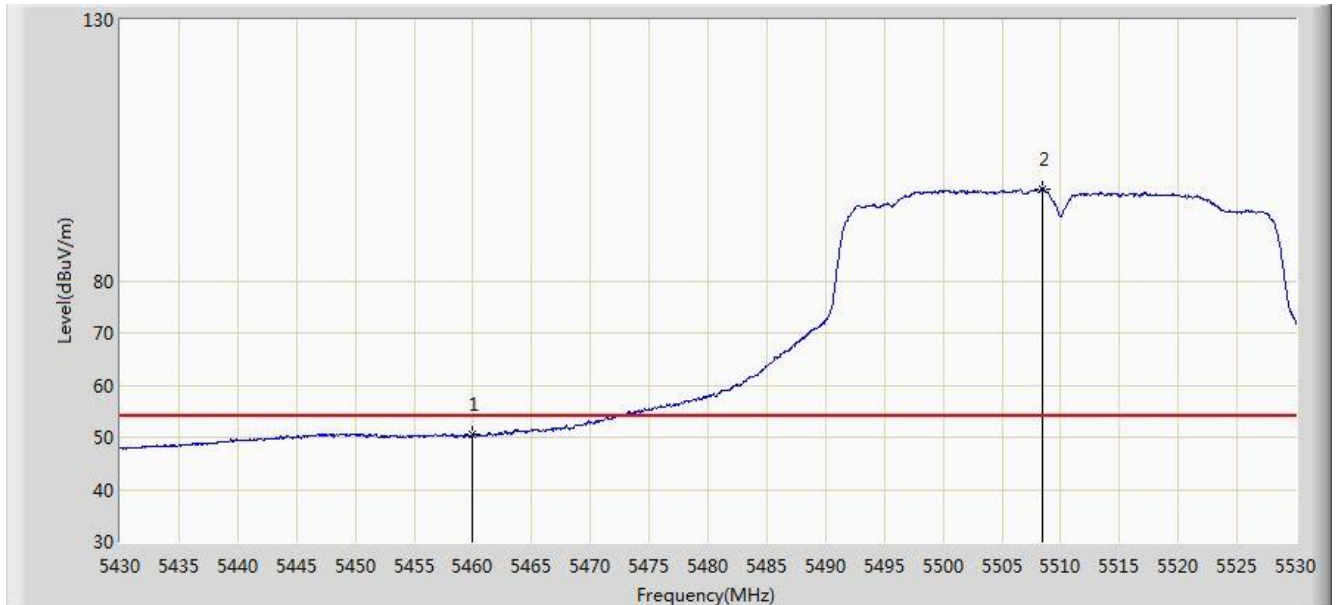


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.536	46.356	-3.464	54.000	4.180	AV
2		*	5508.450	97.595	93.298	N/A	N/A	4.296	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant A	

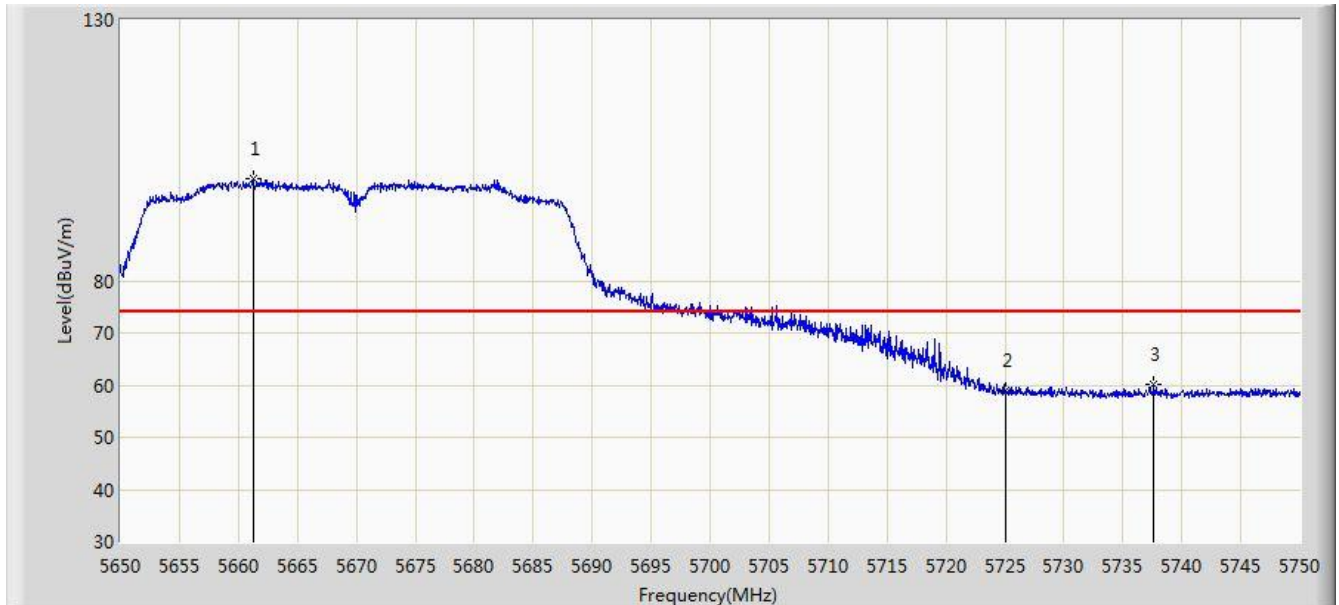


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.250	99.523	94.811	N/A	N/A	4.712	PK
2			5725.000	59.005	53.976	-14.995	74.000	5.029	PK
3			5737.650	60.123	55.013	-13.877	74.000	5.109	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant A	

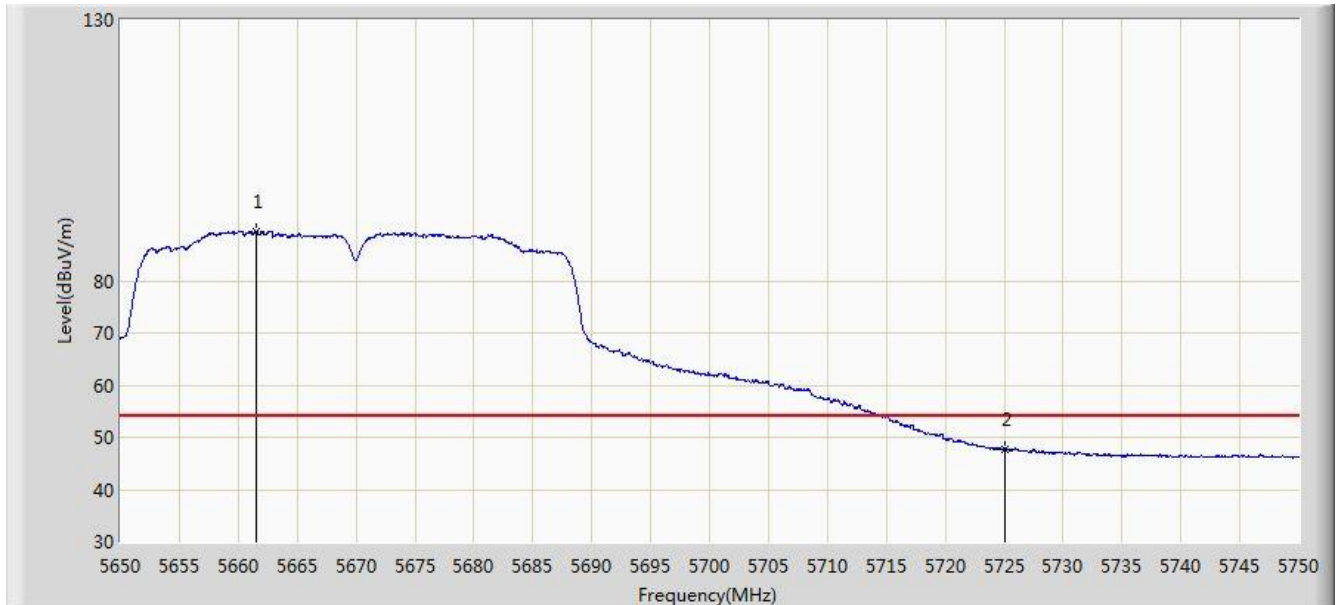


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.550	89.472	84.759	N/A	N/A	4.713	AV
2			5725.000	47.789	42.760	-6.211	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant A	

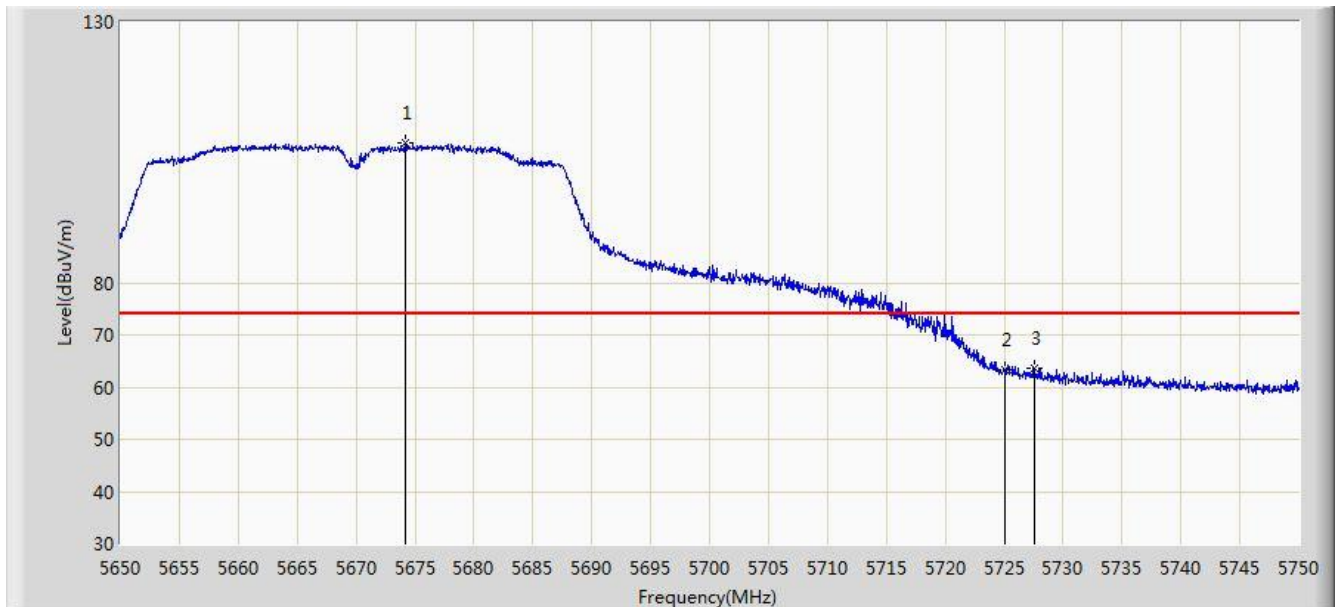


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5674.200	106.922	102.158	N/A	N/A	4.764	PK
2			5725.000	63.253	58.224	-10.747	74.000	5.029	PK
3			5727.600	63.765	58.719	-10.235	74.000	5.046	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz, Ant A	

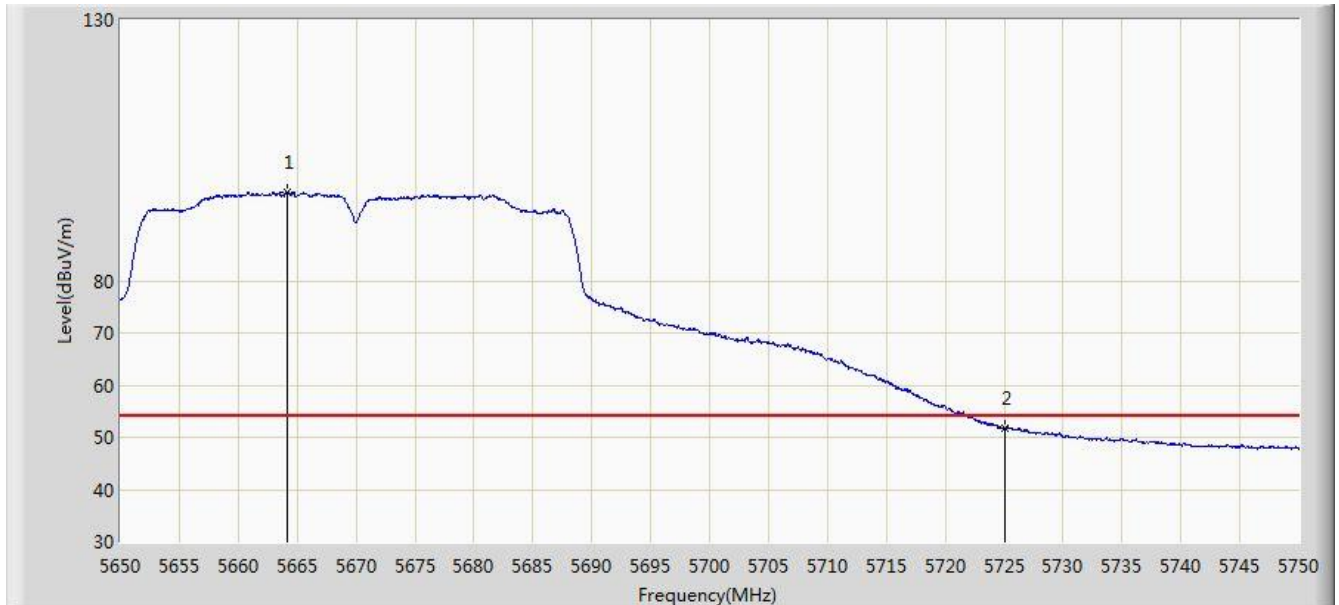


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5664.150	97.045	92.321	N/A	N/A	4.724	AV
2			5725.000	51.729	46.700	-2.271	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:54
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz, Ant A	

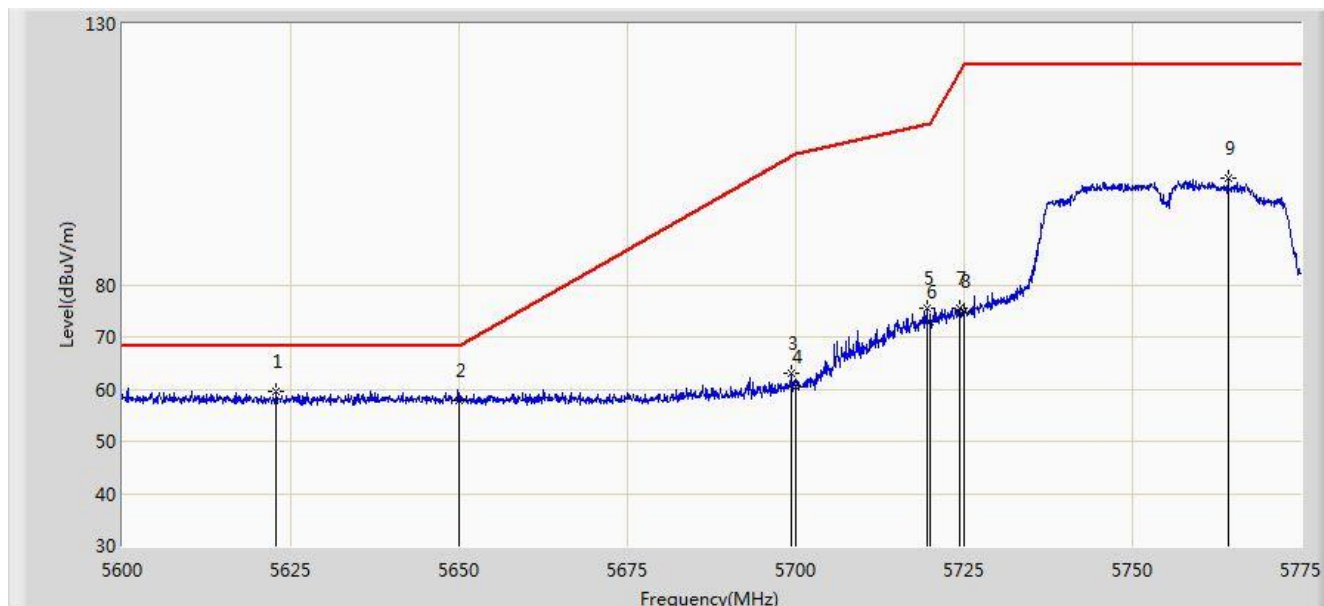


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.837	59.680	55.091	-8.520	68.200	4.589	PK
2			5650.000	57.846	53.175	-10.354	68.200	4.671	PK
3			5699.312	63.018	58.143	-41.675	104.693	4.874	PK
4			5700.000	60.353	55.475	-44.847	105.200	4.878	PK
5			5719.437	75.423	70.430	-35.219	110.643	4.993	PK
6			5720.000	73.038	68.041	-37.762	110.800	4.997	PK
7			5724.250	75.533	70.509	-44.957	120.491	5.024	PK
8			5725.000	75.001	69.972	-47.199	122.200	5.029	PK
9			5764.150	100.357	95.096	N/A	N/A	5.262	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:51
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz, Ant A	

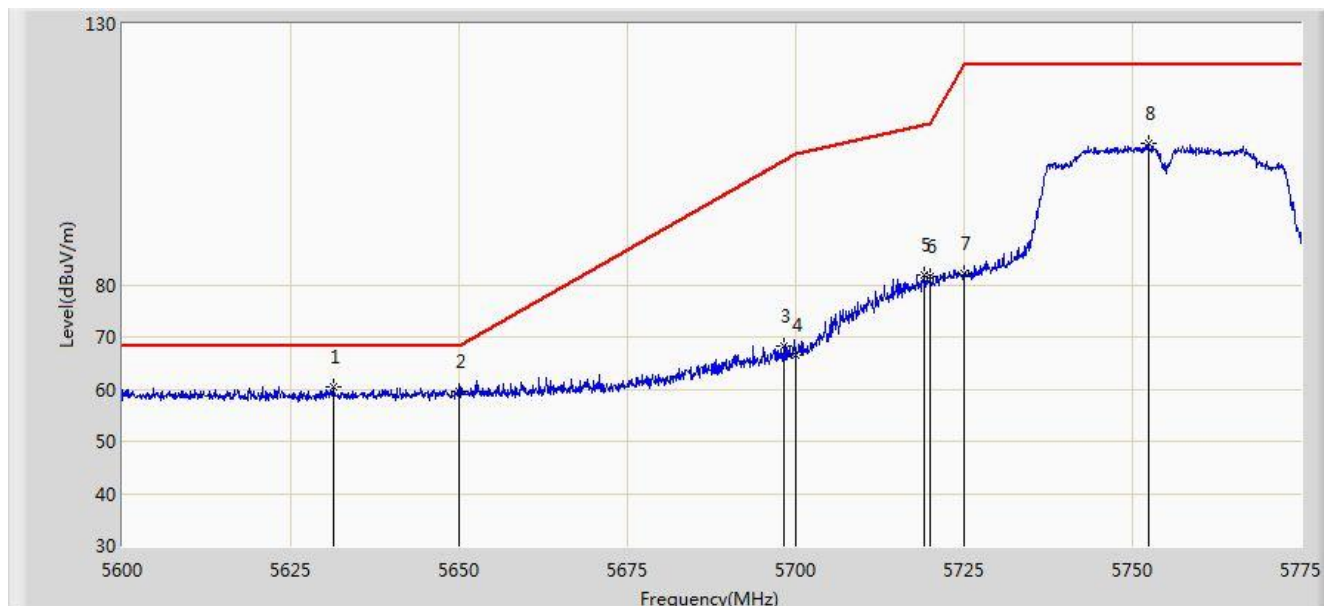


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5631.325	60.417	55.804	-7.783	68.200	4.613	PK
2			5650.000	59.557	54.886	-8.643	68.200	4.671	PK
3			5698.175	68.395	63.526	-35.461	103.855	4.868	PK
4			5700.000	66.484	61.606	-38.716	105.200	4.878	PK
5			5719.087	81.787	76.796	-28.758	110.545	4.992	PK
6			5720.000	81.474	76.477	-29.326	110.800	4.997	PK
7			5725.000	82.042	77.013	-40.158	122.200	5.029	PK
8			5752.337	106.978	101.781	N/A	N/A	5.197	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:58
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz, Ant A	

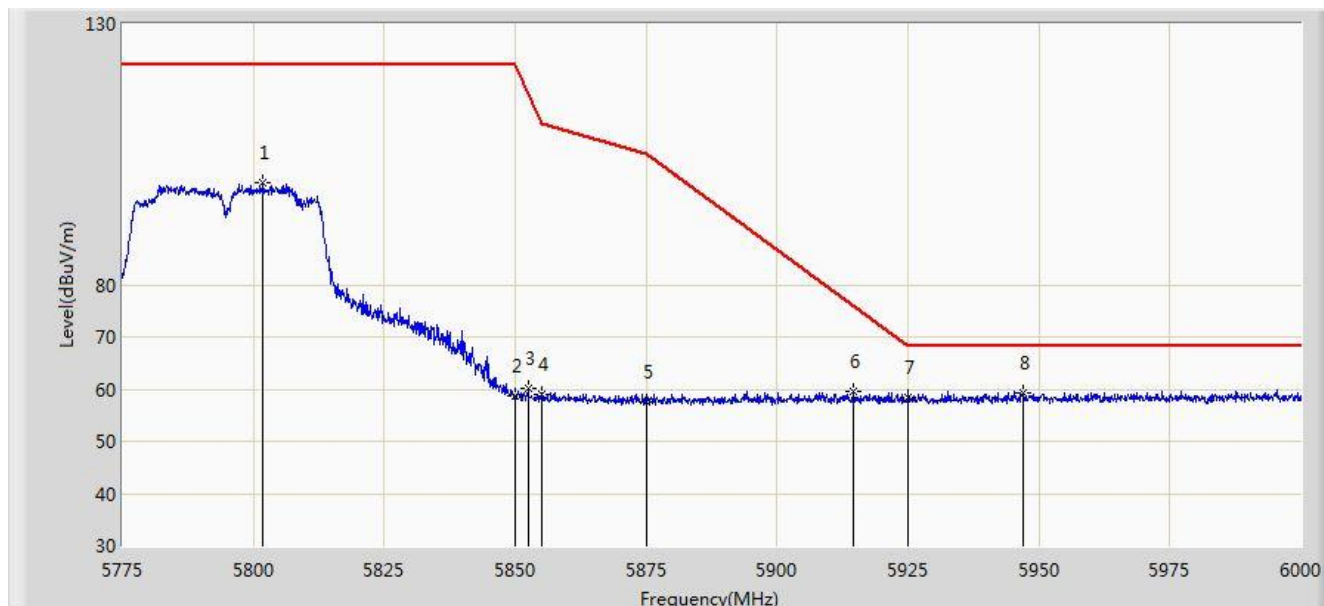


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5801.888	99.426	93.970	N/A	N/A	5.456	PK
2			5850.000	58.588	52.862	-63.612	122.200	5.726	PK
3			5852.513	60.111	54.375	-56.358	116.469	5.736	PK
4			5855.000	58.849	53.103	-51.951	110.800	5.746	PK
5			5875.000	57.662	51.842	-47.538	105.200	5.820	PK
6			5914.612	59.684	53.743	-16.177	75.861	5.941	PK
7			5925.000	58.400	52.434	-9.800	68.200	5.967	PK
8		*	5946.900	59.197	53.177	-9.003	68.200	6.020	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 20:56
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz, Ant A	

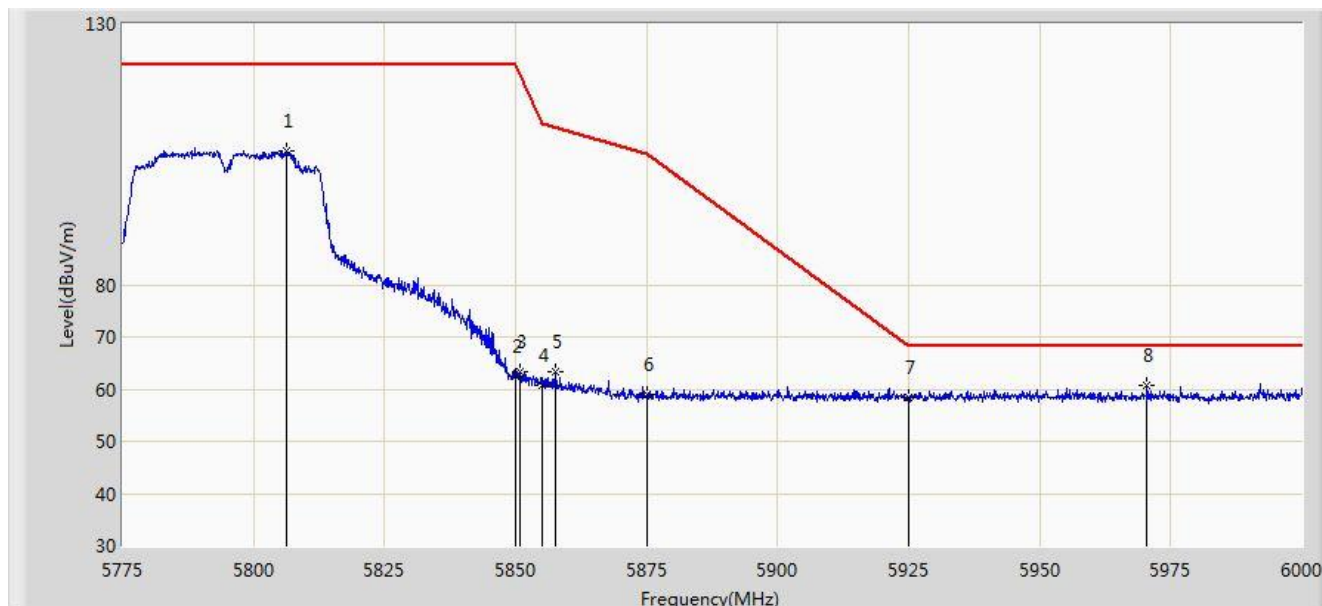


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5806.163	105.765	100.286	N/A	N/A	5.479	PK
2			5850.000	62.553	56.827	-59.647	122.200	5.726	PK
3			5850.712	63.263	57.535	-57.313	120.576	5.729	PK
4			5855.000	60.808	55.062	-49.992	110.800	5.746	PK
5			5857.687	63.212	57.455	-46.834	110.047	5.757	PK
6			5875.000	58.874	53.054	-46.326	105.200	5.820	PK
7			5925.000	58.300	52.334	-9.900	68.200	5.967	PK
8		*	5970.525	60.628	54.566	-7.572	68.200	6.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant A	

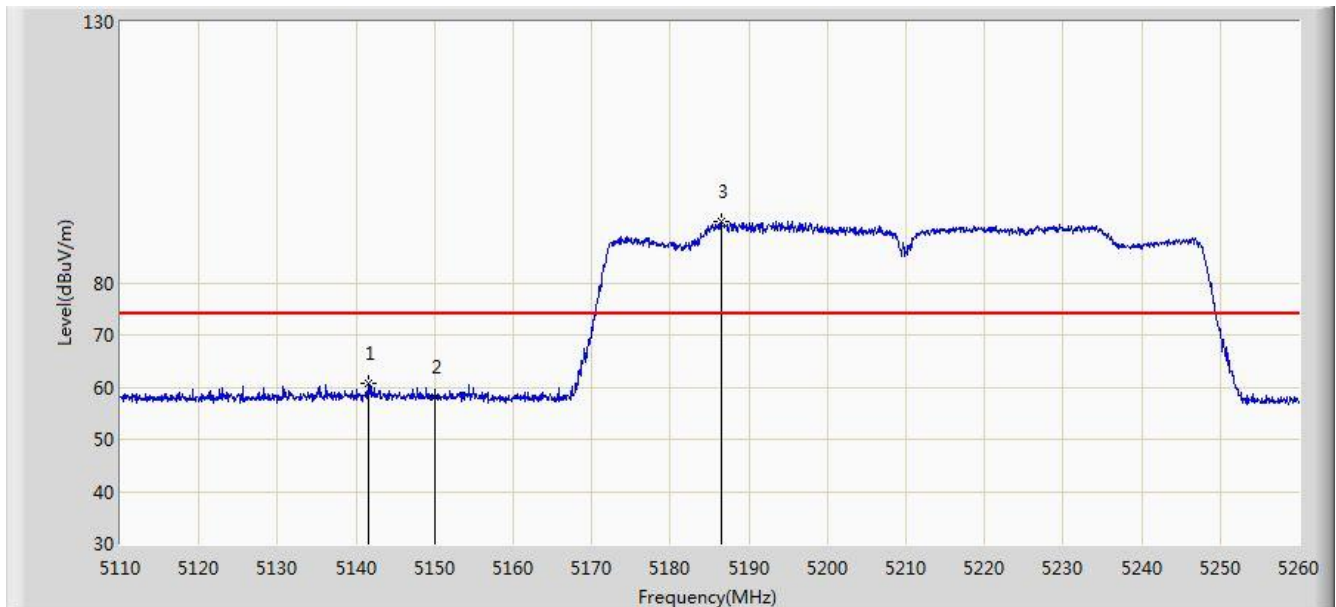


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.500	60.768	56.592	-13.232	74.000	4.176	PK
2			5150.000	58.135	53.966	-15.865	74.000	4.170	PK
3		*	5186.500	91.702	87.656	N/A	N/A	4.046	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant A	

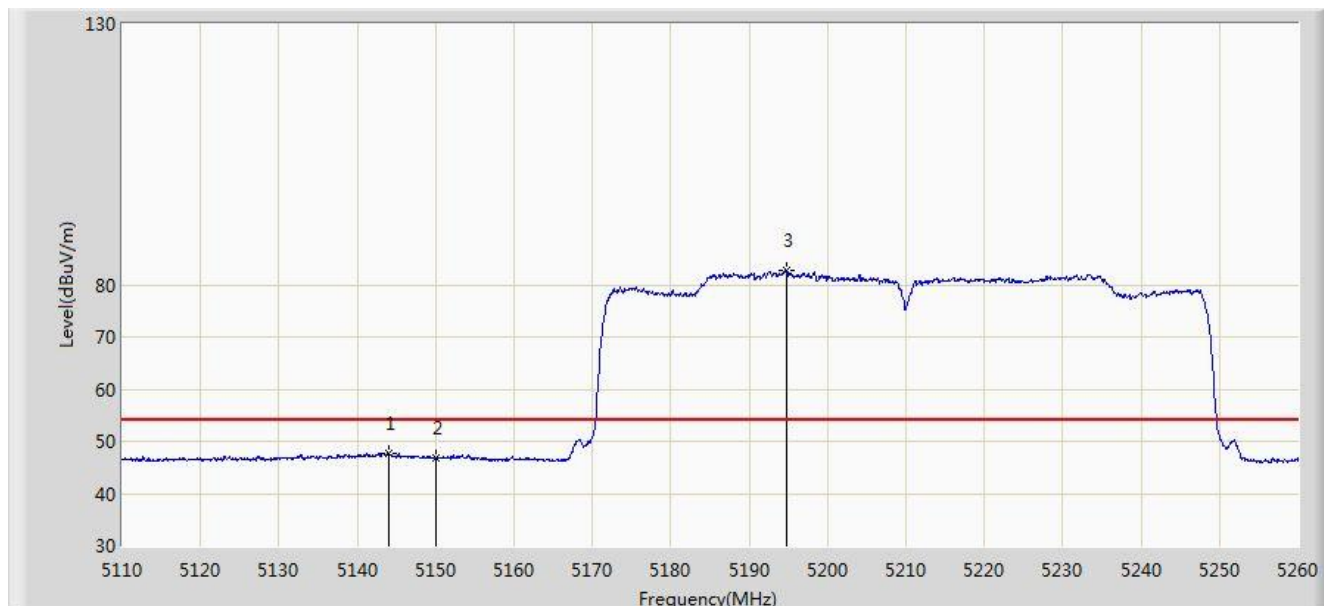


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.975	47.559	43.383	-6.441	54.000	4.176	AV
2			5150.000	46.843	42.674	-7.157	54.000	4.170	AV
3		*	5194.825	82.703	78.687	N/A	N/A	4.016	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant A	

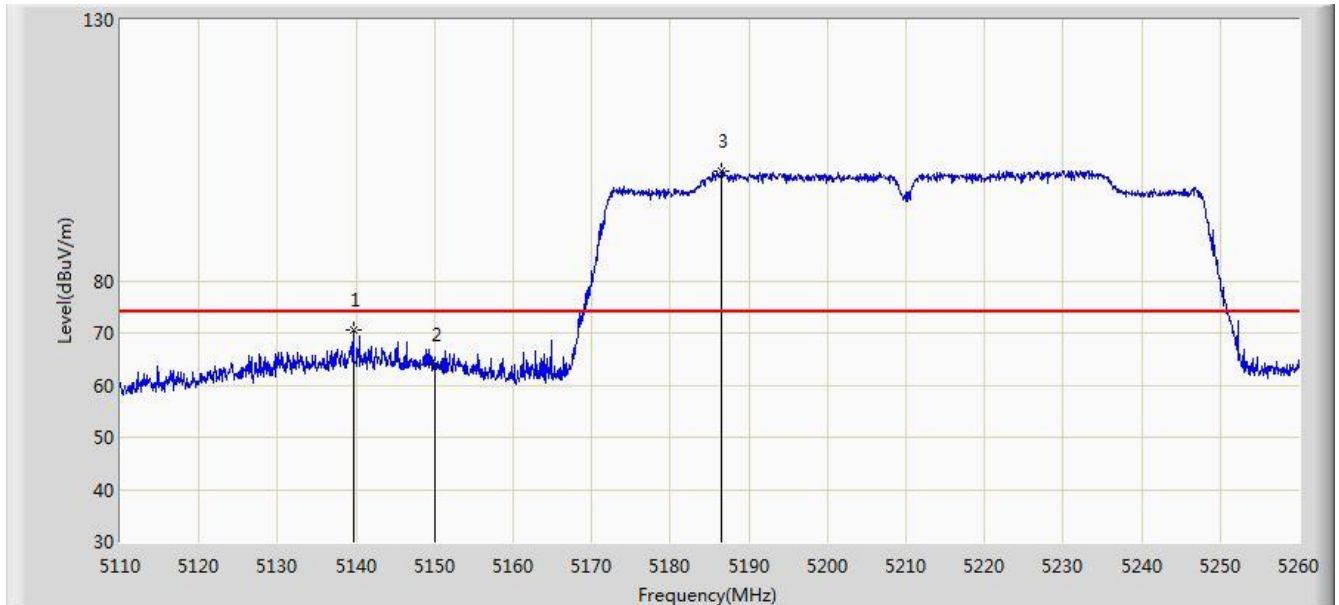


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.625	70.587	66.412	-3.413	74.000	4.175	PK
2			5150.000	63.903	59.734	-10.097	74.000	4.170	PK
3		*	5186.500	101.031	96.985	N/A	N/A	4.046	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz, Ant A	

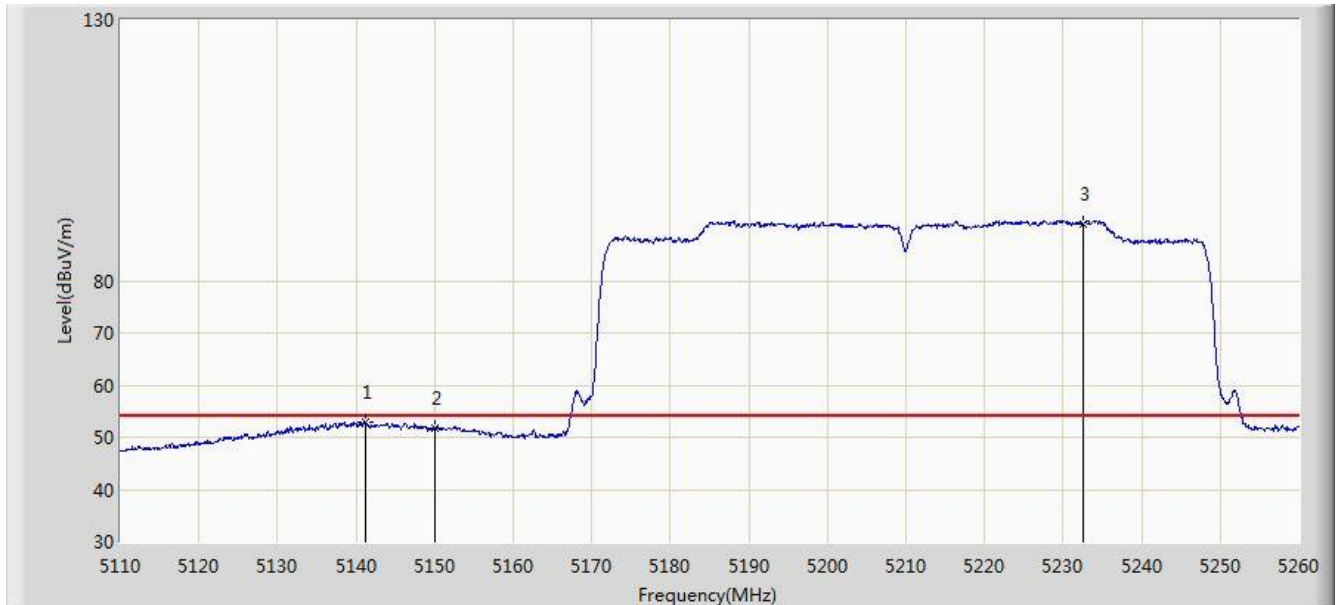


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.200	53.008	48.832	-0.992	54.000	4.175	AV
2			5150.000	51.791	47.622	-2.209	54.000	4.170	AV
3		*	5232.625	90.920	87.018	N/A	N/A	3.902	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant A	

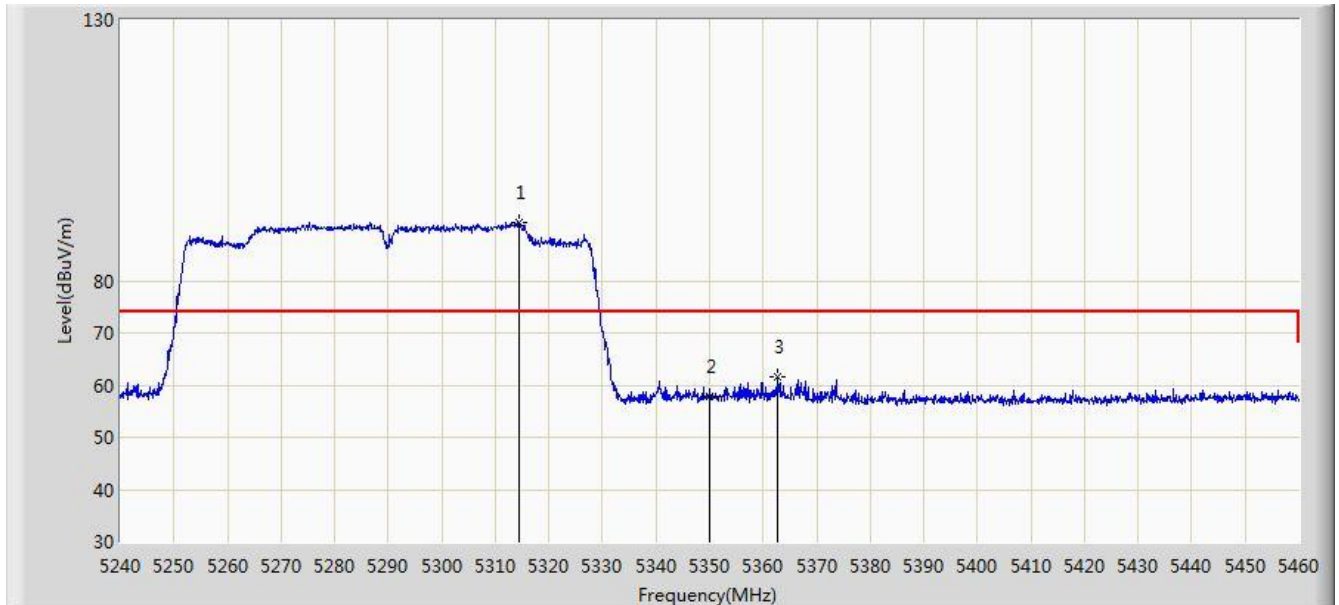


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.360	91.135	87.297	N/A	N/A	3.839	PK
2			5350.000	57.726	53.821	-16.274	74.000	3.904	PK
3			5362.760	61.659	57.731	-12.341	74.000	3.928	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant A	

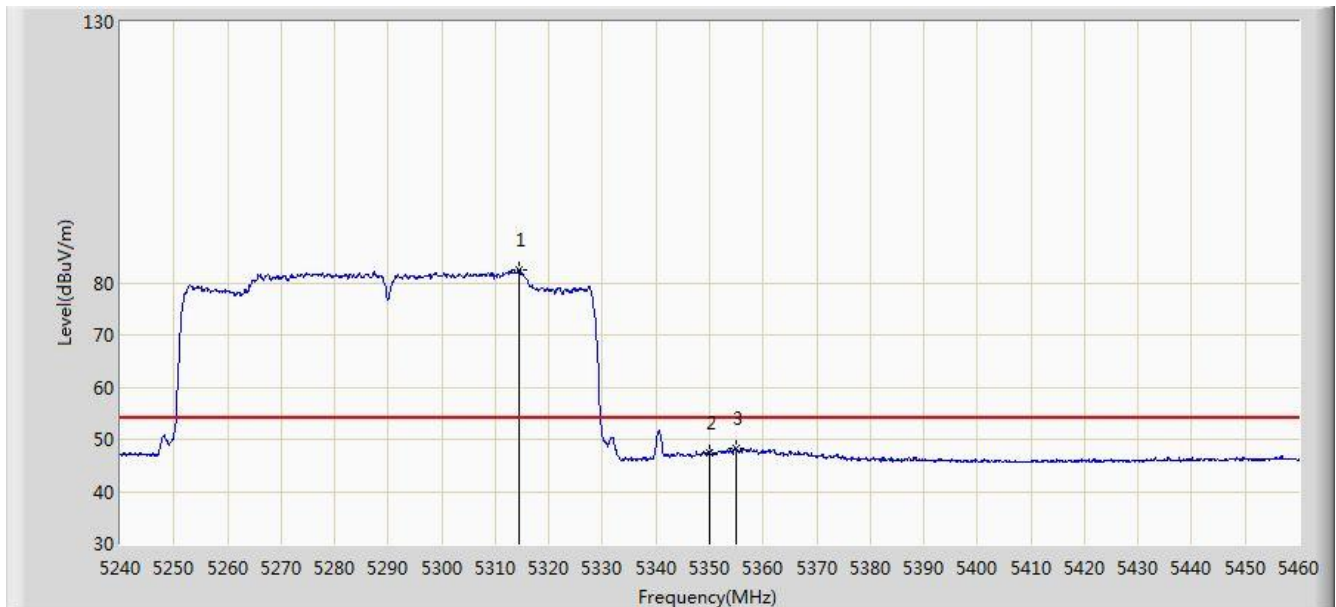


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.470	82.568	78.730	N/A	N/A	3.838	AV
2			5350.000	47.525	43.620	-6.475	54.000	3.904	AV
3			5354.840	48.281	44.367	-5.719	54.000	3.913	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant A	

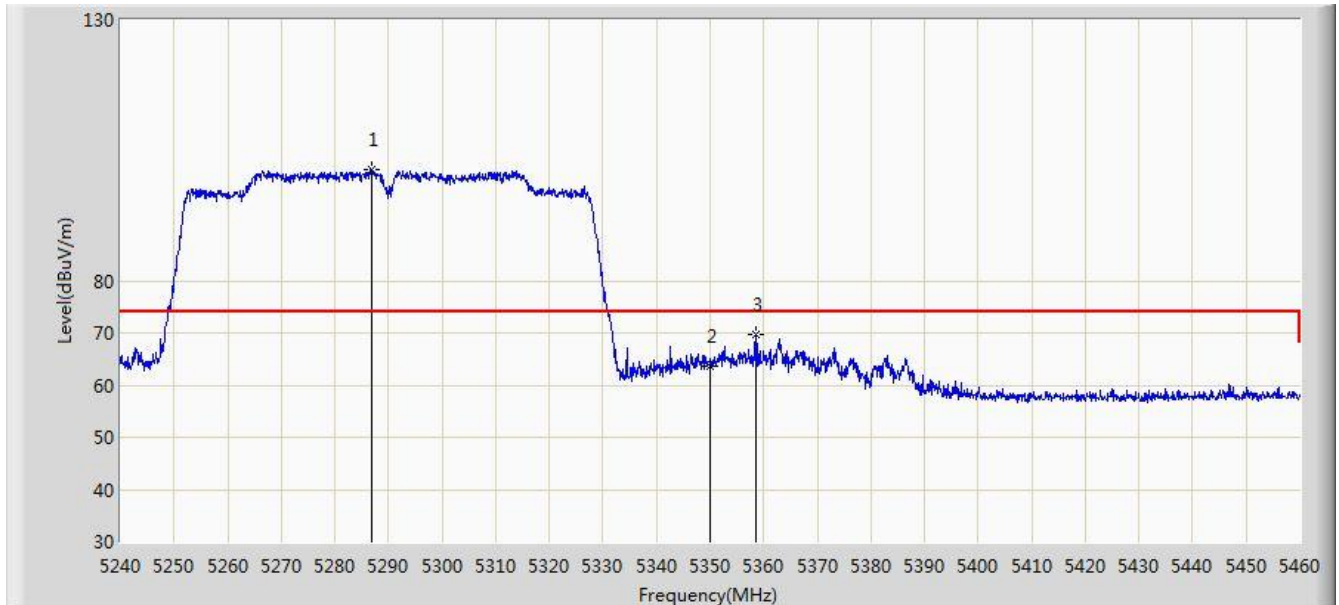


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5286.860	101.315	97.493	N/A	N/A	3.822	PK
2			5350.000	63.756	59.851	-10.244	74.000	3.904	PK
3			5358.470	69.741	65.821	-4.259	74.000	3.919	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz, Ant A	

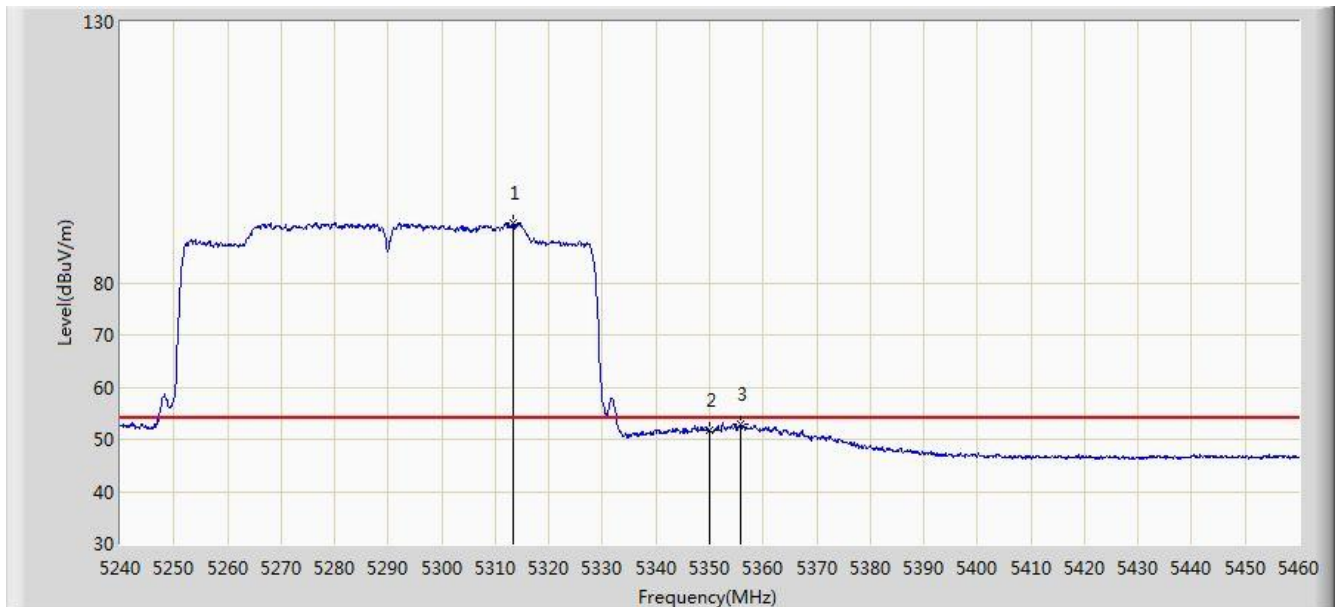


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.260	91.392	87.556	N/A	N/A	3.836	AV
2			5350.000	51.809	47.904	-2.191	54.000	3.904	AV
3			5355.720	52.854	48.939	-1.146	54.000	3.915	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant A	

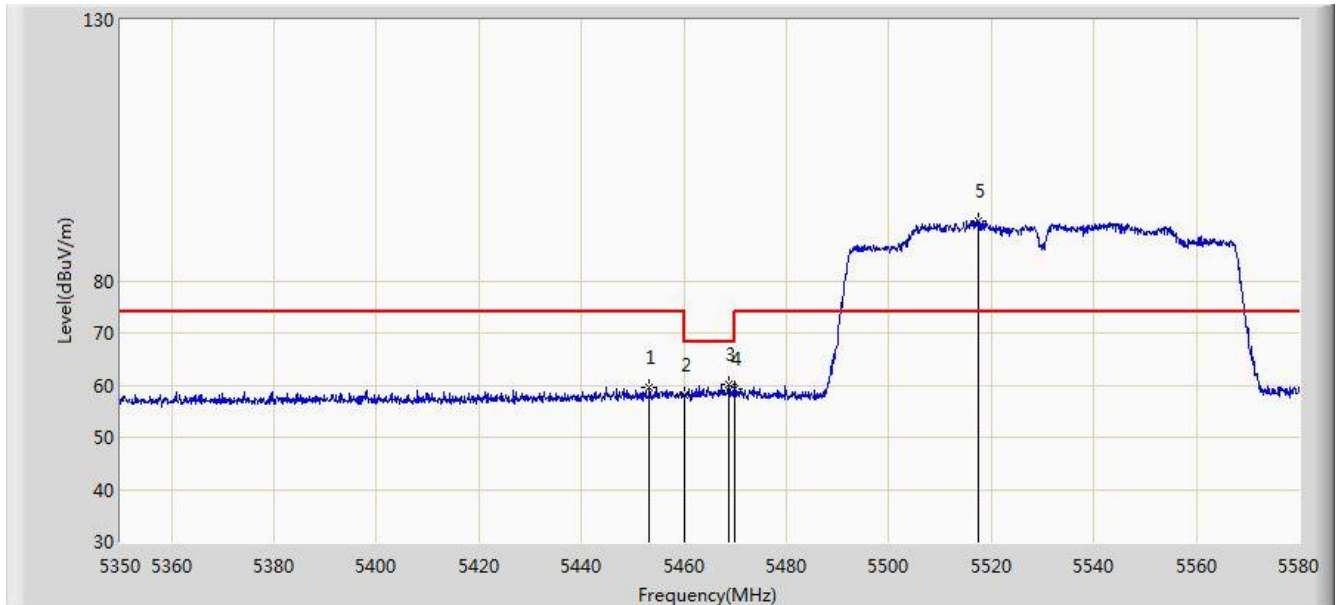


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5453.270	59.667	55.502	-14.333	74.000	4.164	PK
2			5460.000	58.140	53.960	-15.860	74.000	4.180	PK
3			5468.795	60.261	56.061	-7.939	68.200	4.200	PK
4			5470.000	59.311	55.109	-8.889	68.200	4.202	PK
5		*	5517.325	91.369	87.046	N/A	N/A	4.323	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant A	

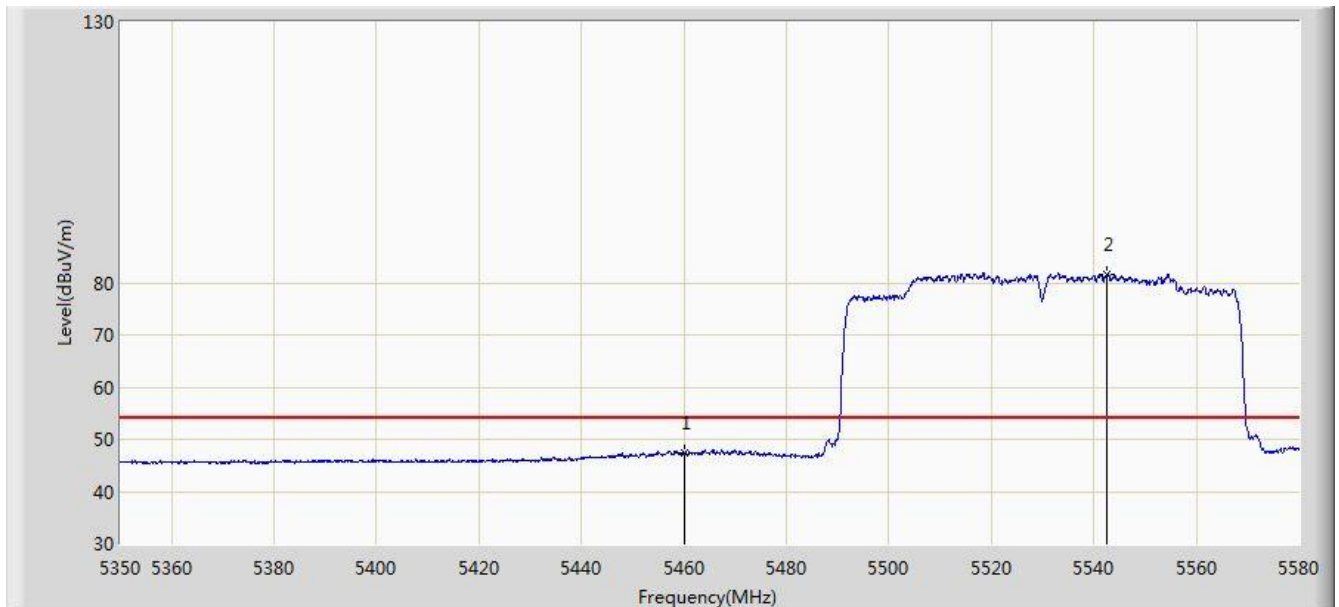


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.423	43.243	-6.577	54.000	4.180	AV
2		*	5542.625	81.657	77.259	N/A	N/A	4.398	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant A	

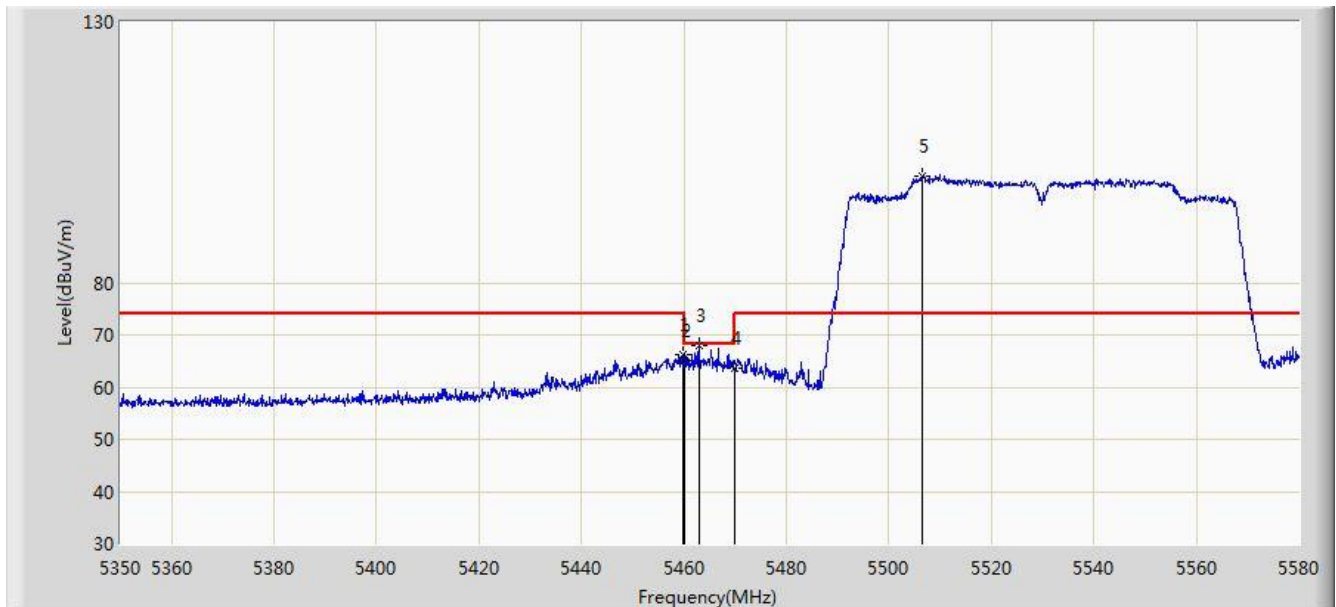


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.825	66.247	62.067	-7.753	74.000	4.180	PK
2			5460.000	65.199	61.019	-8.801	74.000	4.180	PK
3			5462.930	67.872	63.685	-0.328	68.200	4.186	PK
4			5470.000	63.543	59.341	-4.657	68.200	4.202	PK
5		*	5506.630	100.533	96.242	N/A	N/A	4.292	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz, Ant A	

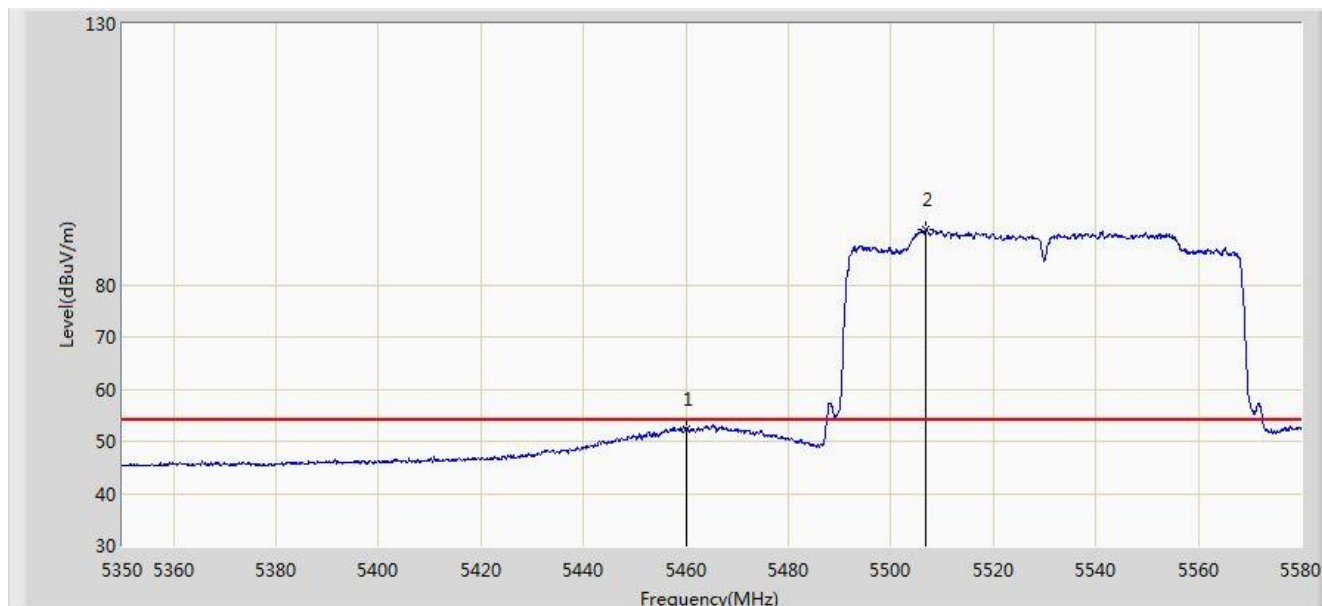


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.449	48.269	-1.551	54.000	4.180	AV
2		*	5506.860	90.560	86.268	N/A	N/A	4.292	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant A	

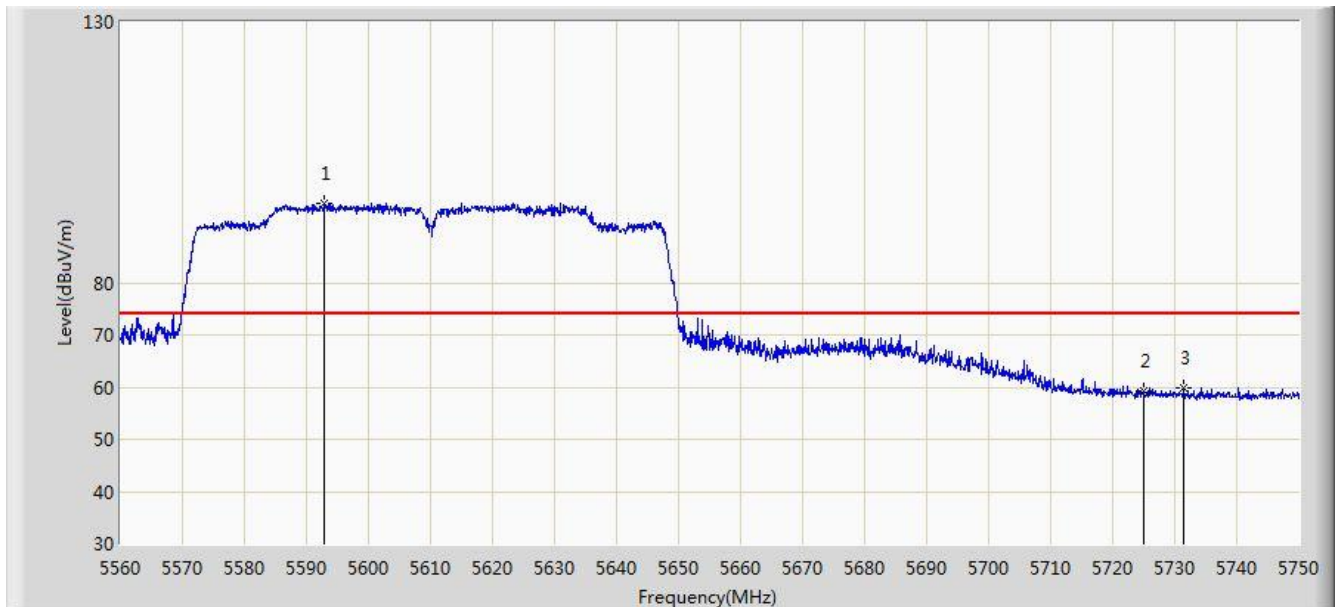


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5592.965	95.186	90.676	N/A	N/A	4.510	PK
2			5725.000	59.263	54.234	-14.737	74.000	5.029	PK
3			5731.475	59.958	54.888	-14.042	74.000	5.070	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant A	

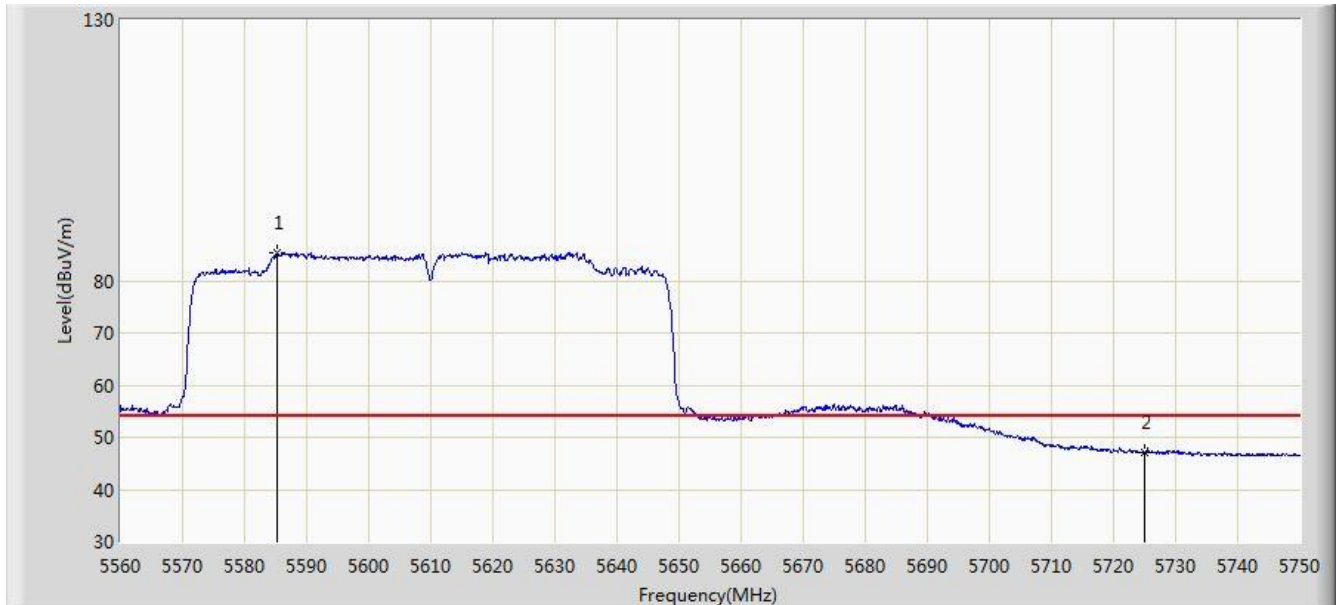


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5585.175	85.242	80.749	N/A	N/A	4.493	AV
2			5725.000	47.214	42.185	-6.786	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant A	

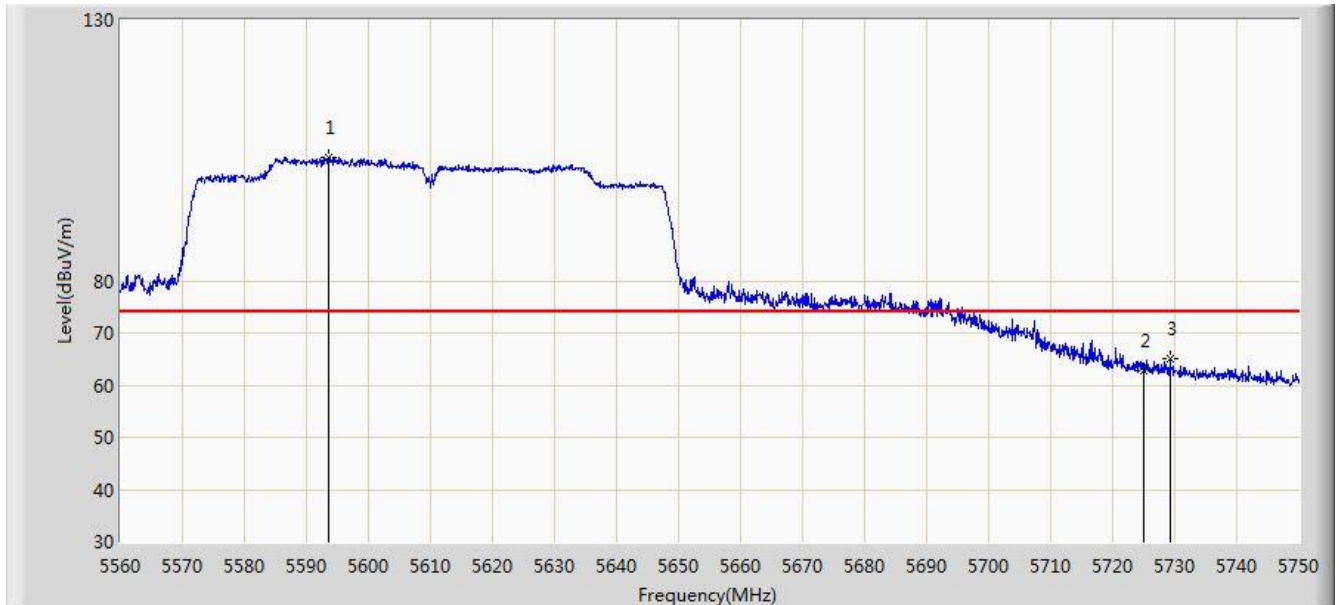


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5593.535	103.498	98.986	N/A	N/A	4.511	PK
2			5725.000	62.885	57.856	-11.115	74.000	5.029	PK
3			5729.290	64.962	59.906	-9.038	74.000	5.056	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant A	

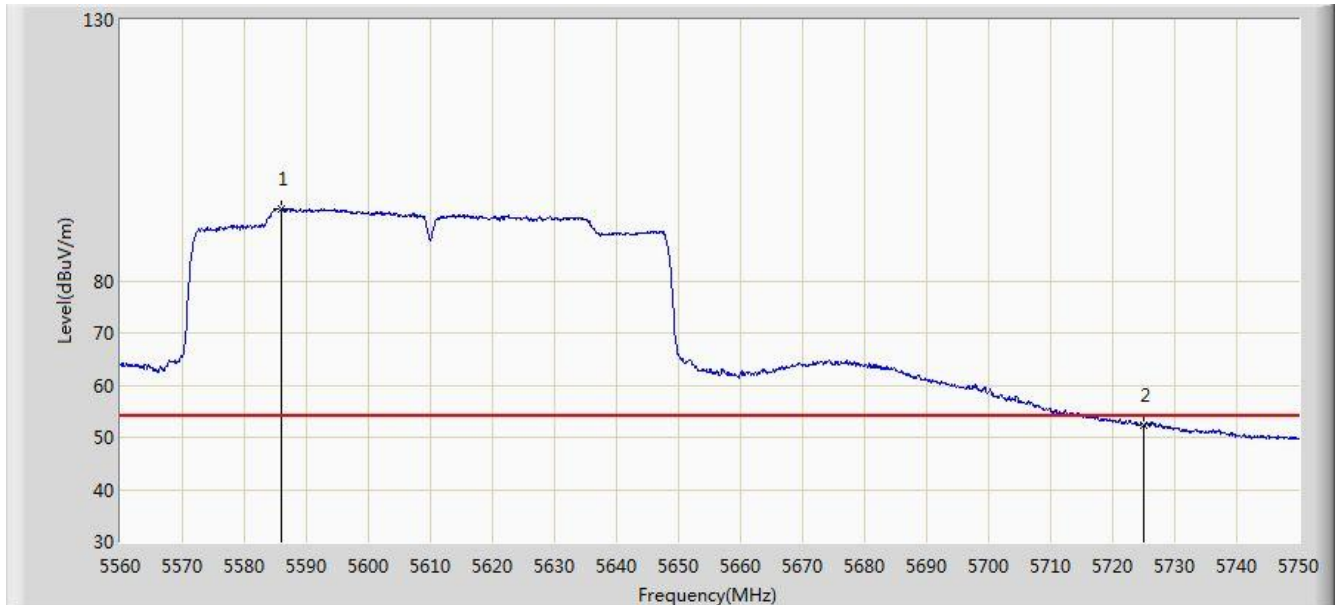


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5585.935	93.820	89.325	N/A	N/A	4.495	AV
2			5725.000	52.407	47.378	-1.593	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:43
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz, Ant A	

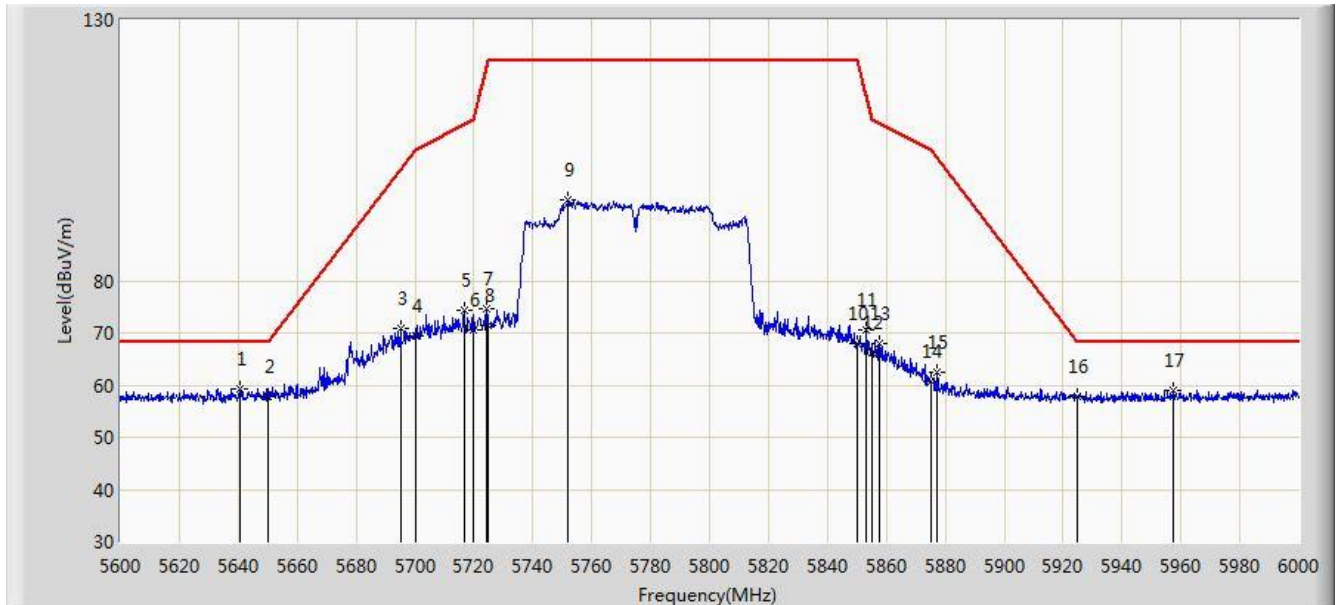


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5640.400	59.350	54.711	-8.850	68.200	4.638	PK
2			5650.000	57.789	53.118	-10.411	68.200	4.671	PK
3			5695.200	70.963	66.110	-30.699	101.662	4.853	PK
4			5700.000	69.393	64.515	-35.807	105.200	4.878	PK
5			5716.600	74.488	69.513	-35.361	109.849	4.975	PK
6			5720.000	70.633	65.636	-40.167	110.800	4.997	PK
7			5724.400	74.639	69.614	-46.193	120.833	5.025	PK
8			5725.000	71.538	66.509	-50.662	122.200	5.029	PK
9			5752.000	95.388	90.193	N/A	N/A	5.194	PK
10			5850.000	68.069	62.343	-54.131	122.200	5.726	PK
11			5853.200	70.537	64.798	-44.366	114.903	5.739	PK
12			5855.000	66.349	60.603	-44.451	110.800	5.746	PK
13			5857.400	68.049	62.293	-42.078	110.127	5.756	PK
14			5875.000	60.580	54.760	-44.620	105.200	5.820	PK
15			5877.000	62.405	56.578	-41.309	103.714	5.826	PK
16			5925.000	57.801	51.835	-10.399	68.200	5.967	PK
17			5957.200	59.090	53.051	-9.110	68.200	6.039	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 21:41
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz, Ant A	

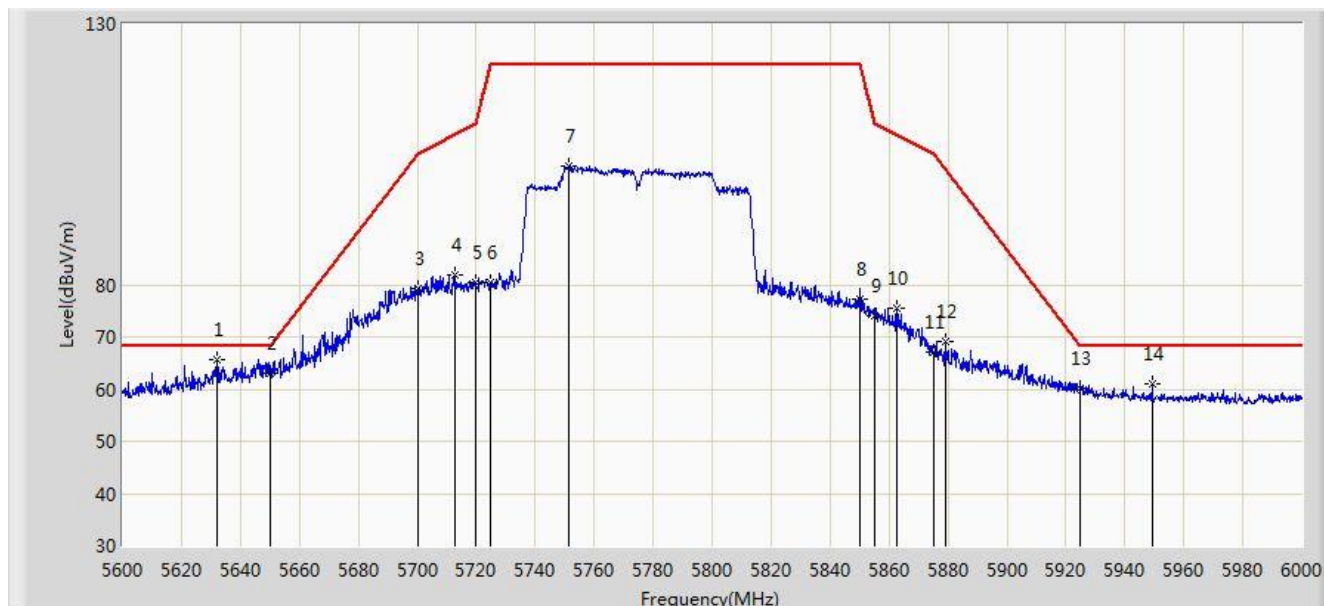


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.000	65.571	60.956	-2.629	68.200	4.615	PK
2			5650.000	63.040	58.369	-5.160	68.200	4.671	PK
3			5700.000	79.193	74.315	-26.007	105.200	4.878	PK
4			5712.600	81.981	77.032	-26.749	108.730	4.949	PK
5			5720.000	80.503	75.506	-30.297	110.800	4.997	PK
6			5725.000	80.474	75.445	-41.726	122.200	5.029	PK
7			5751.600	102.883	97.691	N/A	N/A	5.193	PK
8			5850.000	77.288	71.562	-44.912	122.200	5.726	PK
9			5855.000	74.096	68.350	-36.704	110.800	5.746	PK
10			5862.800	75.584	69.806	-33.030	108.614	5.778	PK
11			5875.000	67.000	61.180	-38.200	105.200	5.820	PK
12			5879.400	69.045	63.210	-32.886	101.931	5.834	PK
13			5925.000	60.027	54.061	-8.173	68.200	5.967	PK
14			5949.200	61.094	55.070	-7.106	68.200	6.024	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz, Ant B	

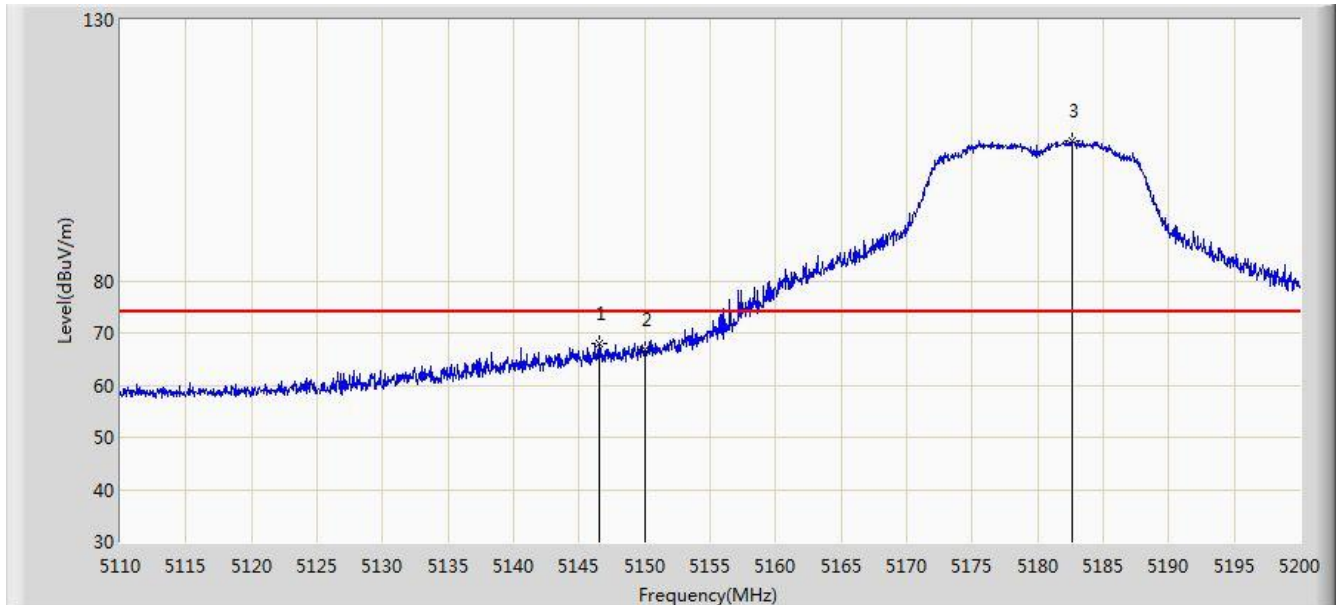


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5146.495	68.042	63.866	-5.958	74.000	4.176	PK
2			5150.000	66.714	62.545	-7.286	74.000	4.170	PK
3		*	5182.585	106.937	102.877	N/A	N/A	4.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz, Ant B	

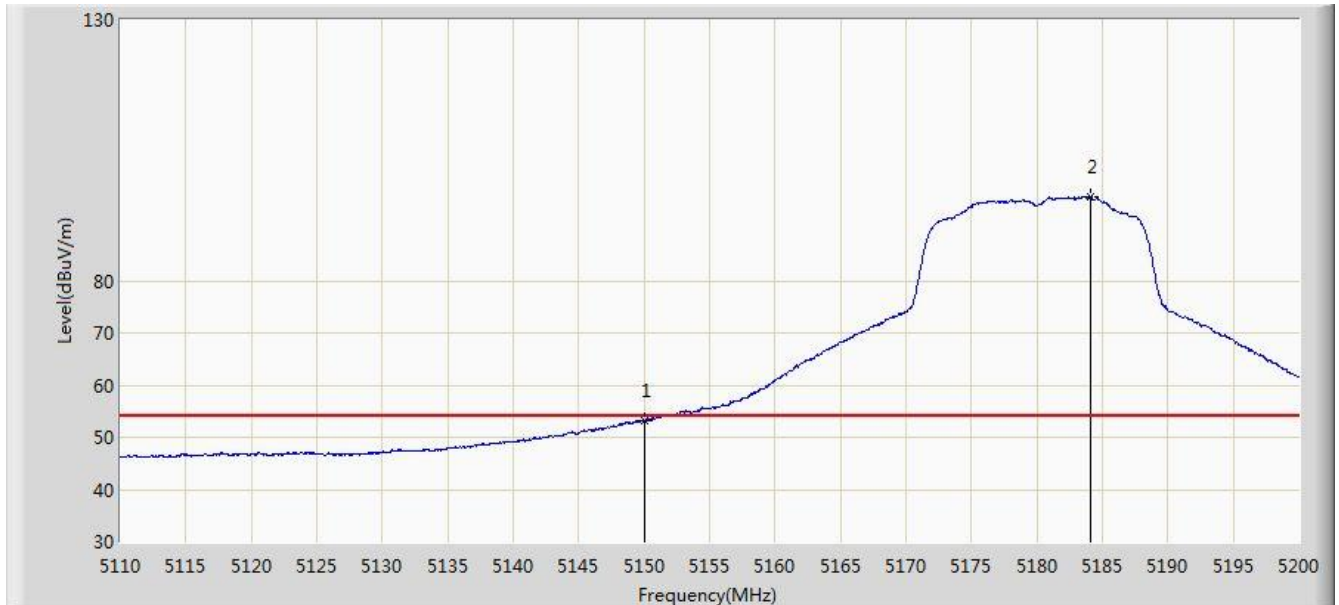


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.291	49.122	-0.709	54.000	4.170	AV
2		*	5184.115	96.073	92.019	N/A	N/A	4.054	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz, Ant B	

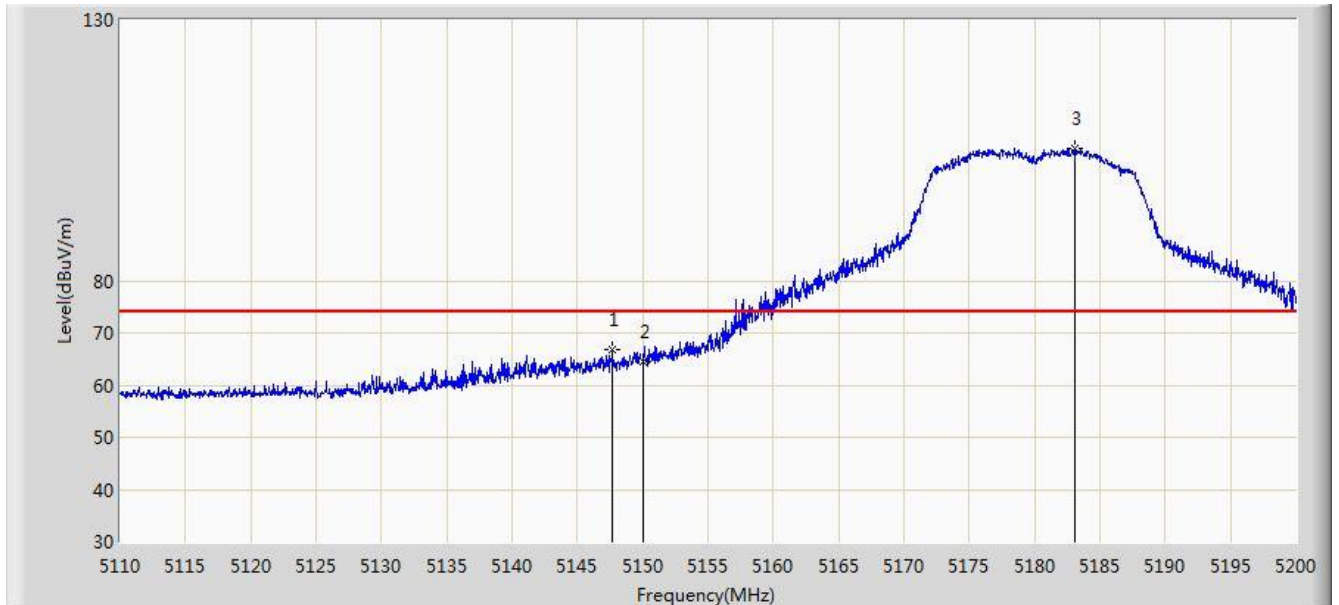


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.665	66.680	62.504	-7.320	74.000	4.176	PK
2			5150.000	64.515	60.346	-9.485	74.000	4.170	PK
3		*	5183.035	105.391	101.333	N/A	N/A	4.057	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz, Ant B	

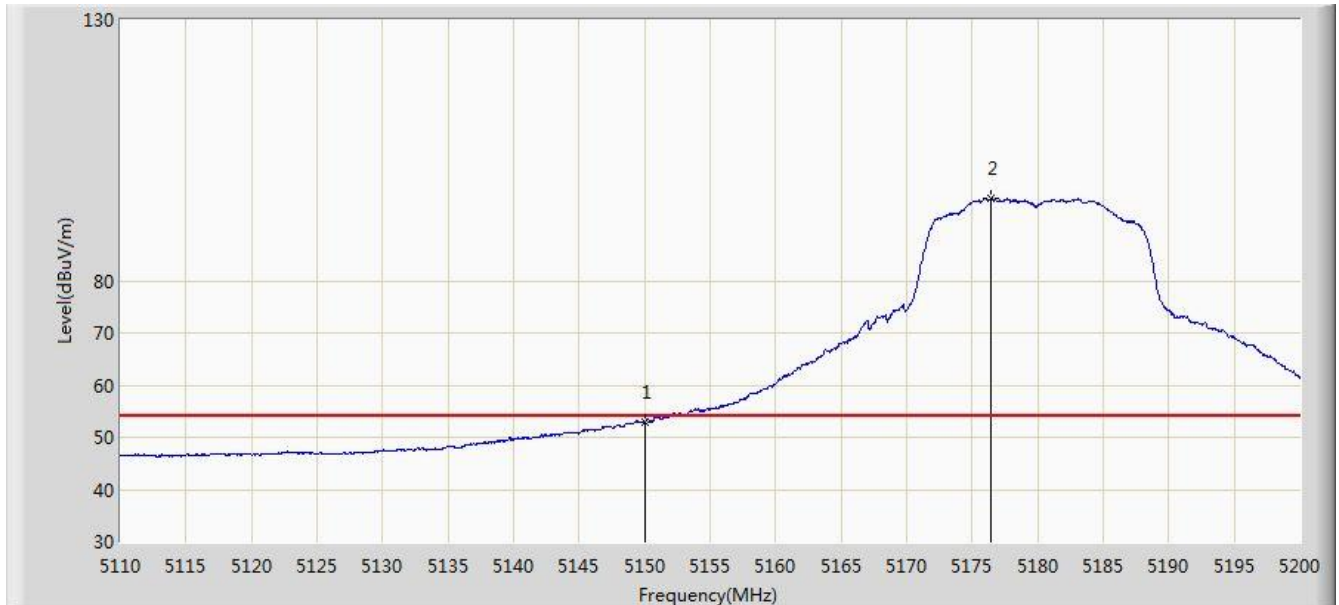


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.982	48.813	-1.018	54.000	4.170	AV
2		*	5176.420	95.763	91.681	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5350MHz, Ant B	

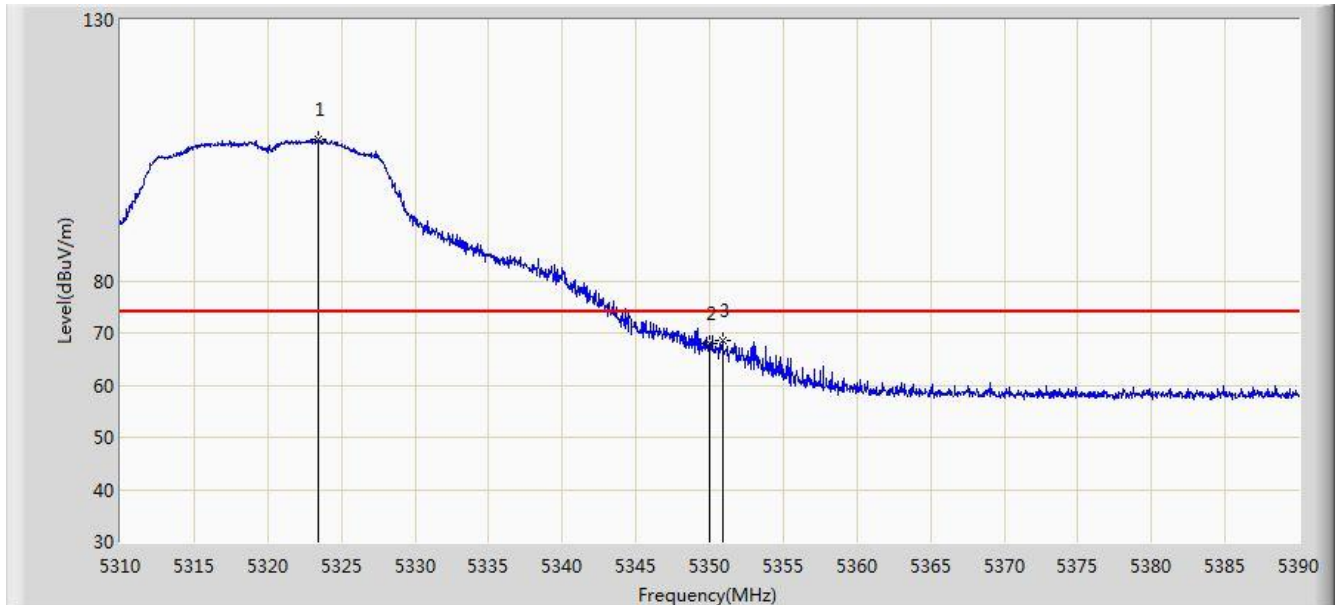


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.440	107.182	103.327	N/A	N/A	3.855	PK
2			5350.000	67.858	63.953	-6.142	74.000	3.904	PK
3			5350.880	68.666	64.760	-5.334	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5350MHz, Ant B	

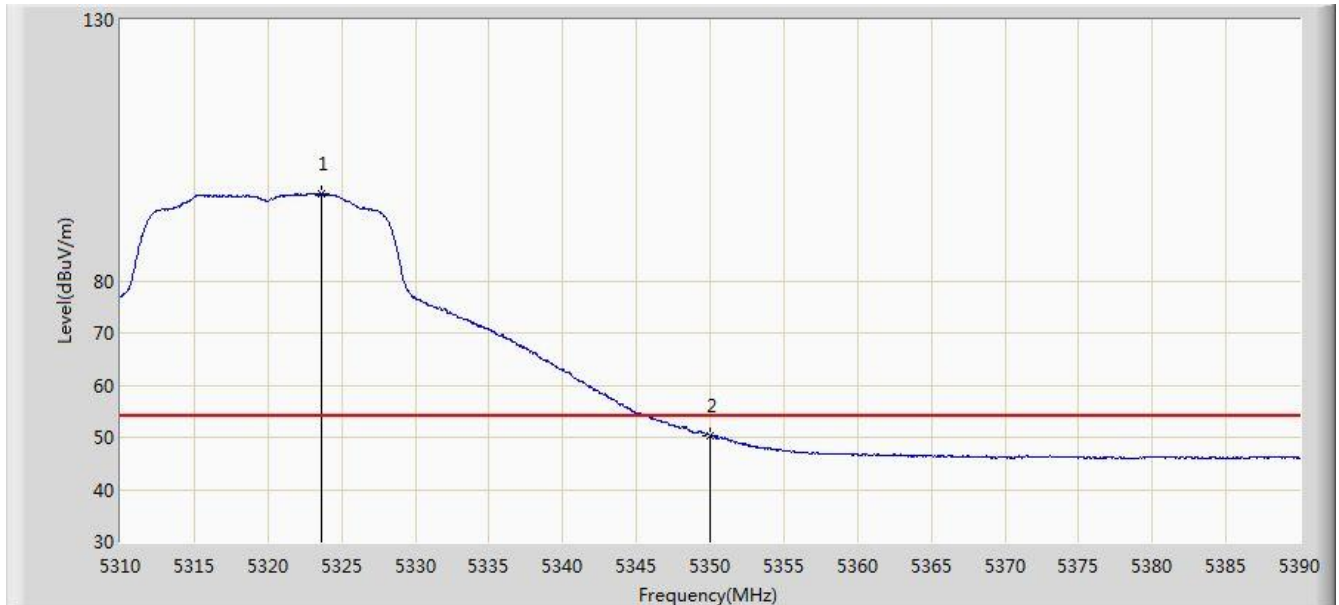


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.640	96.643	92.788	N/A	N/A	3.855	AV
2			5350.000	50.334	46.429	-3.666	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5350MHz, Ant B	

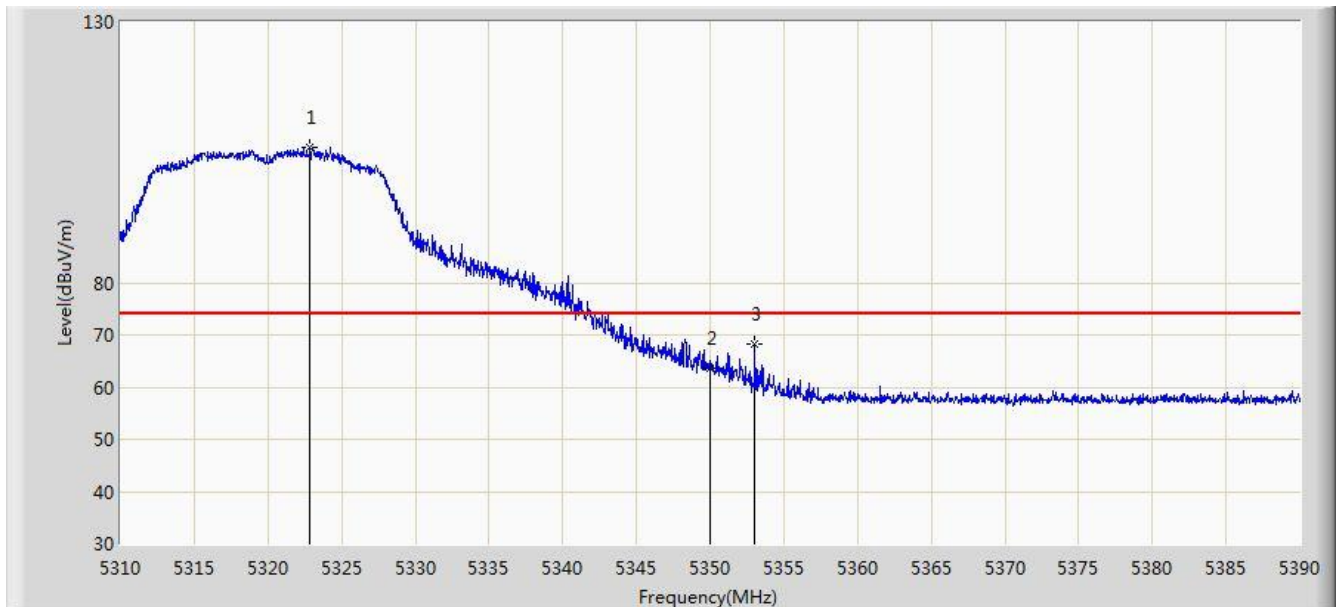


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.840	106.070	102.216	N/A	N/A	3.854	PK
2			5350.000	63.604	59.699	-10.396	74.000	3.904	PK
3			5353.040	68.141	64.231	-5.859	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5350MHz, Ant B	

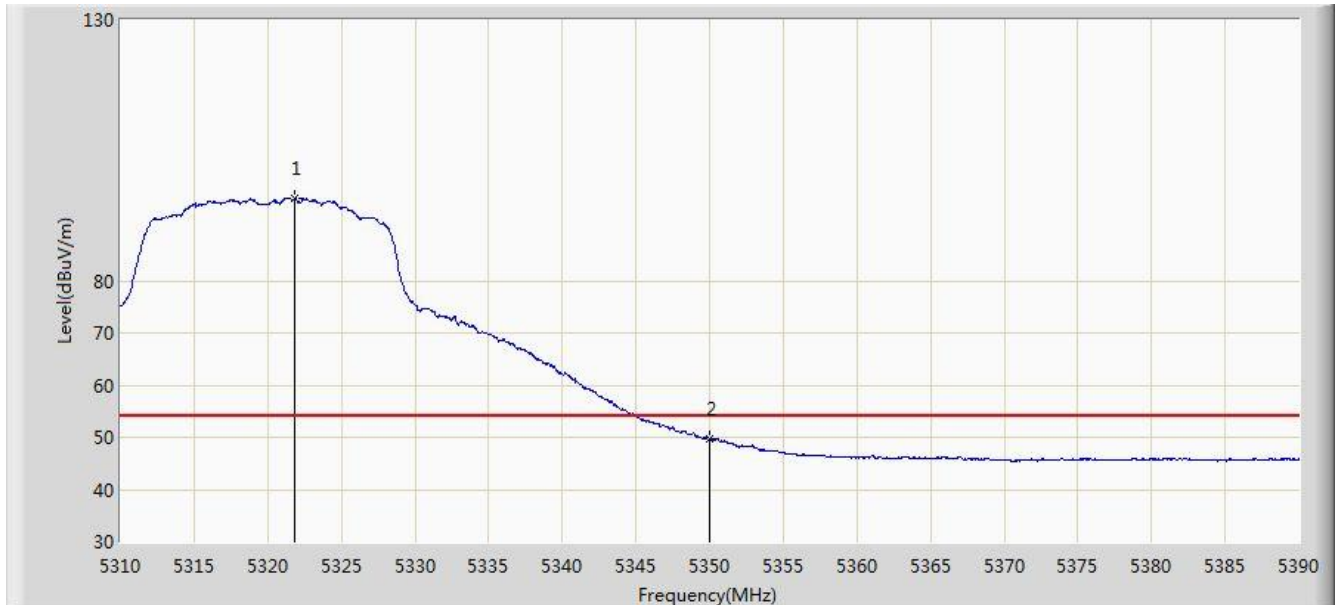


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.800	95.713	91.861	N/A	N/A	3.852	AV
2			5350.000	49.695	45.790	-4.305	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant B	

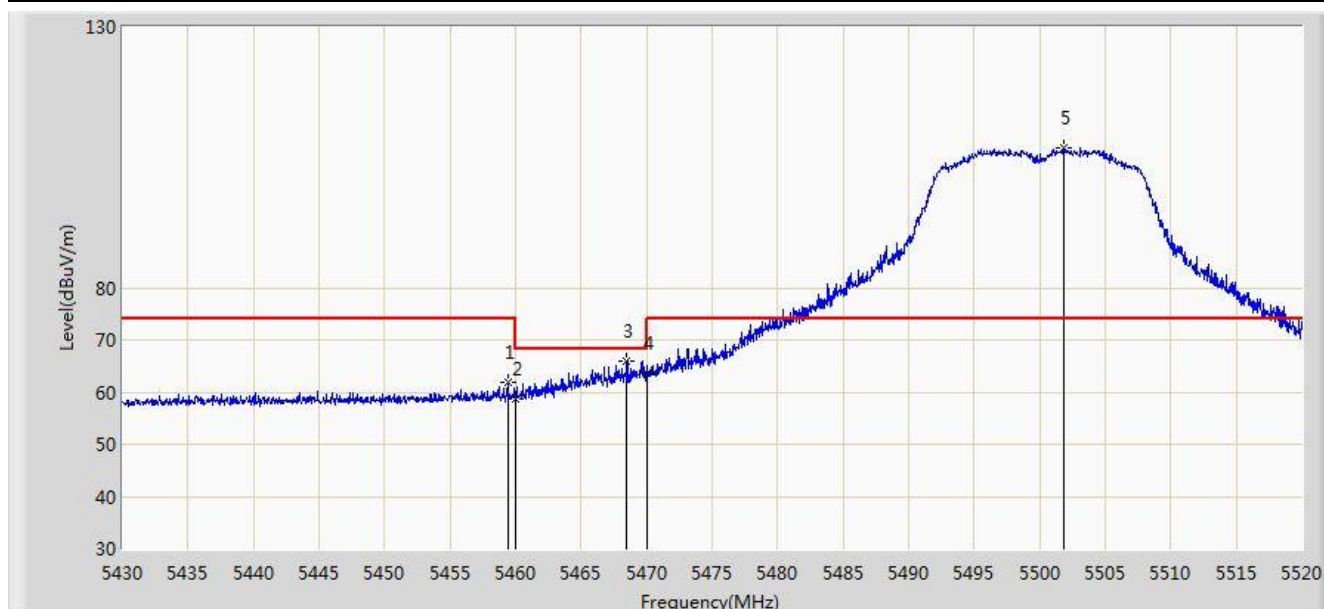


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.385	61.838	57.659	-12.162	74.000	4.178	PK
2			5460.000	58.823	54.643	-15.177	74.000	4.180	PK
3			5468.475	66.031	61.832	-2.169	68.200	4.198	PK
4			5470.000	63.483	59.281	-4.717	68.200	4.202	PK
5		*	5501.865	106.711	102.434	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant B	

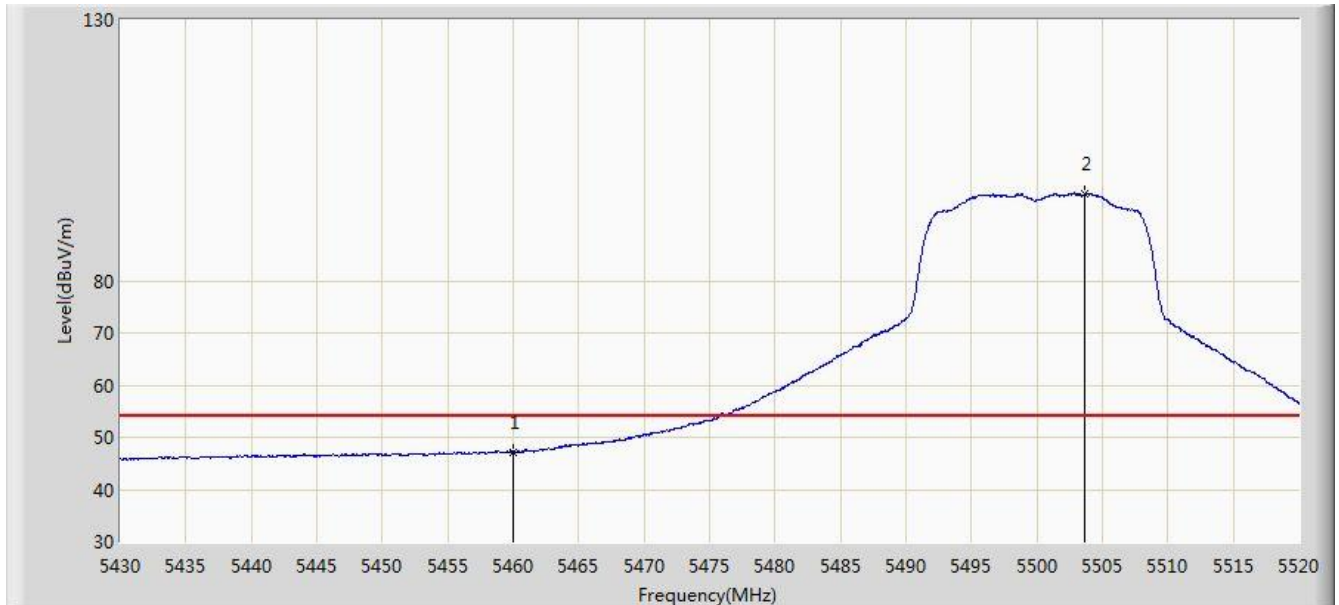


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.232	43.052	-6.768	54.000	4.180	AV
2		*	5503.665	96.638	92.355	N/A	N/A	4.283	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant B	

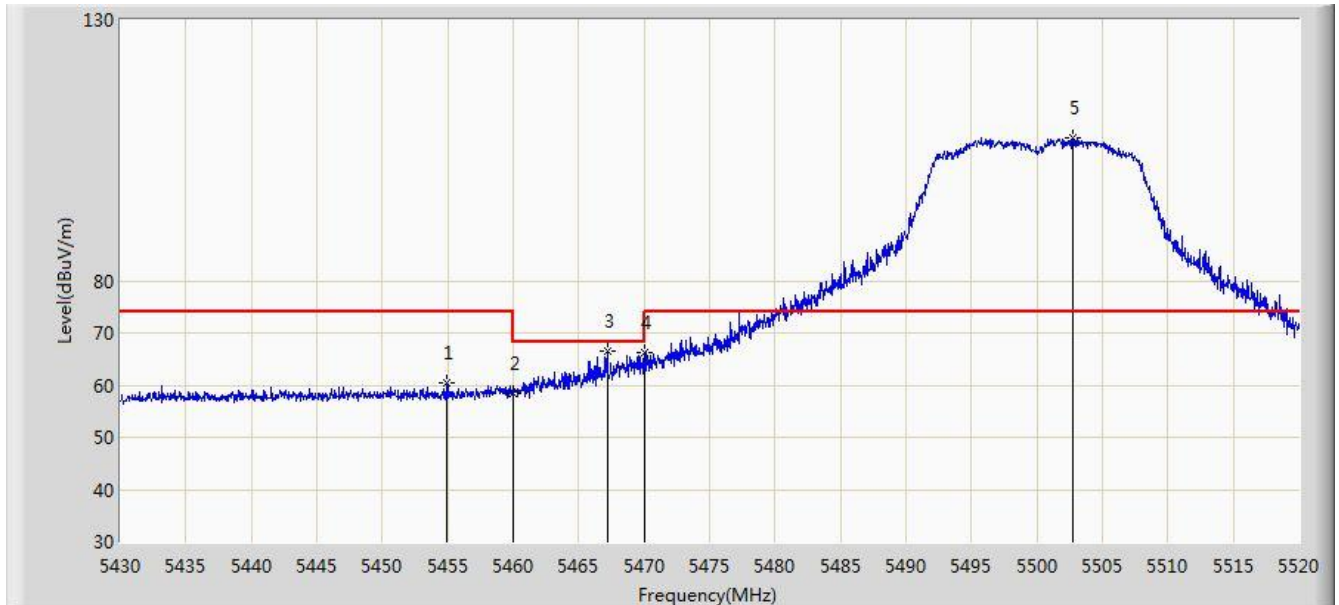


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.930	60.525	56.355	-13.475	74.000	4.170	PK
2			5460.000	58.435	54.255	-15.565	74.000	4.180	PK
3			5467.170	66.650	62.454	-1.550	68.200	4.196	PK
4			5470.000	66.088	61.886	-2.112	68.200	4.202	PK
5		*	5502.765	107.260	102.980	N/A	N/A	4.281	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5500MHz, Ant B	

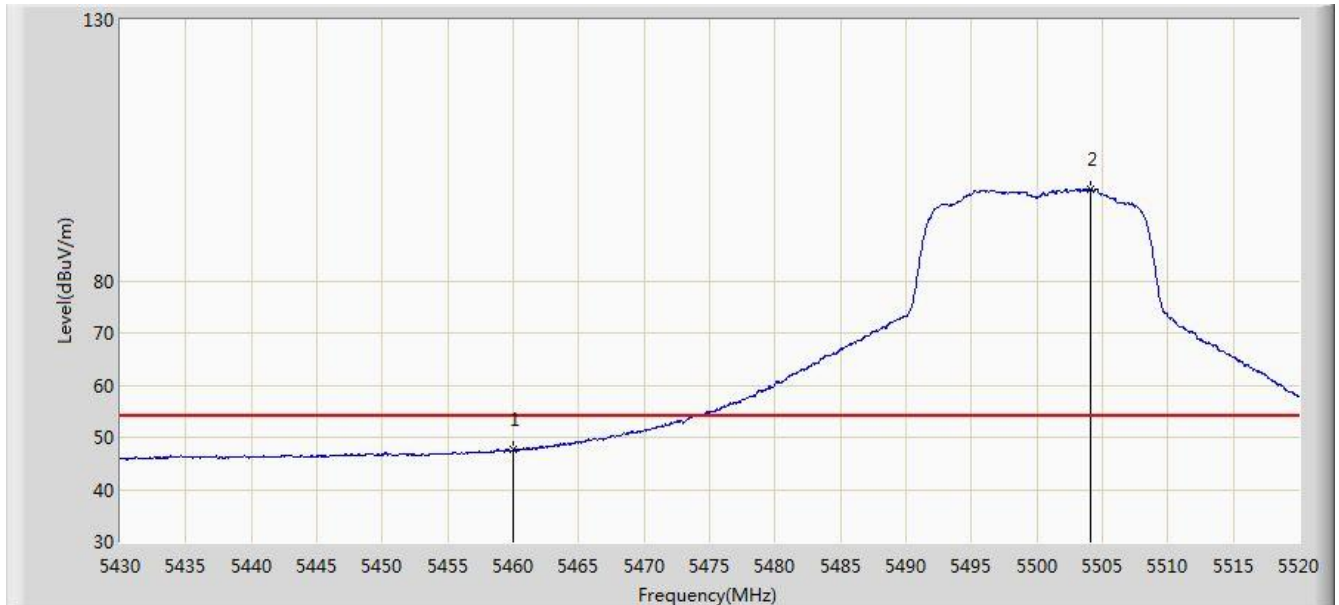


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.582	43.402	-6.418	54.000	4.180	AV
2		*	5504.115	97.668	93.384	N/A	N/A	4.284	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant B	

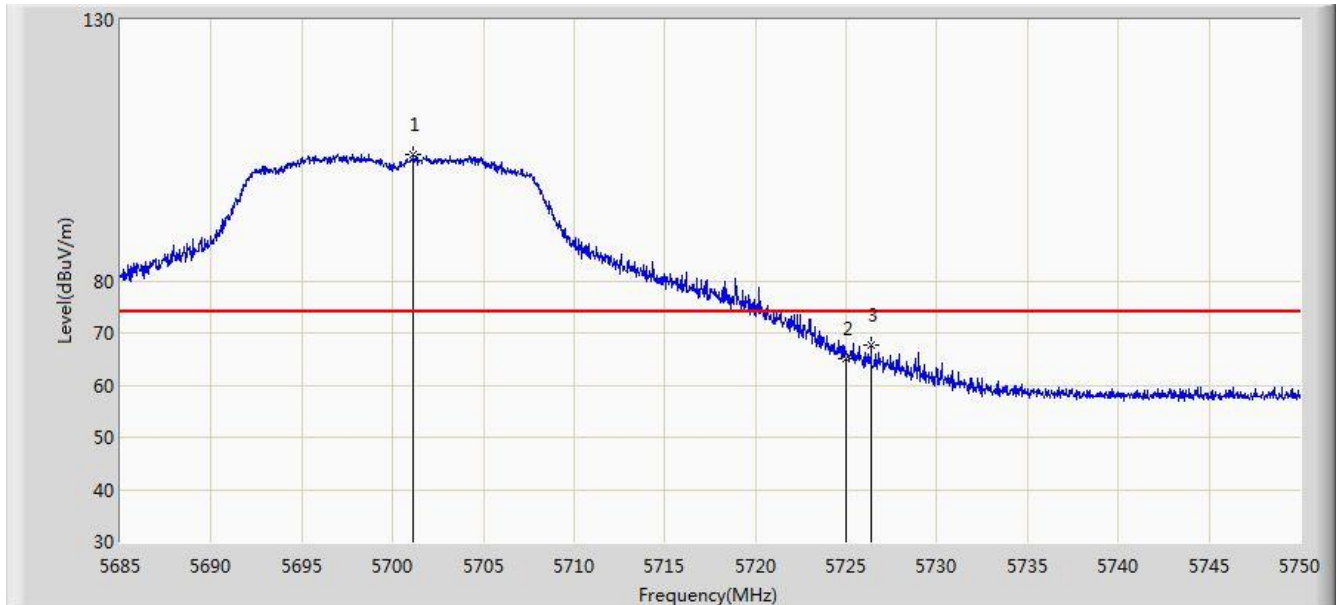


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.152	104.136	99.252	N/A	N/A	4.884	PK
2			5725.000	65.121	60.092	-8.879	74.000	5.029	PK
3			5726.373	67.704	62.666	-6.296	74.000	5.037	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant B	

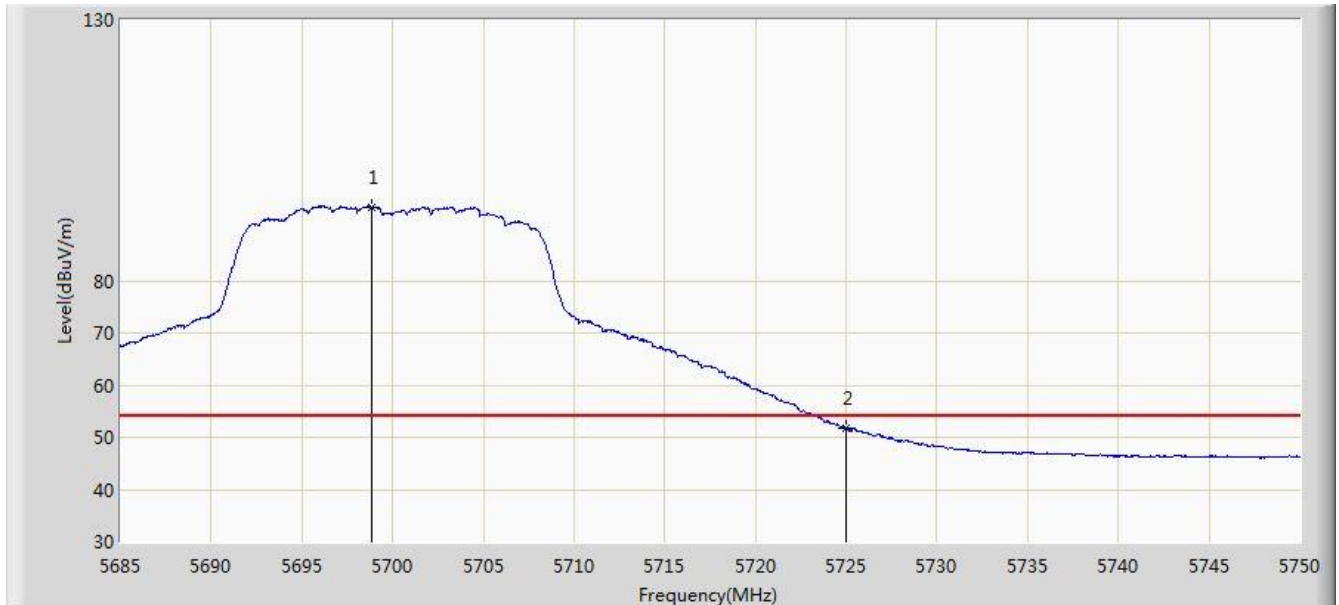


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.812	94.145	89.273	N/A	N/A	4.872	AV
2			5725.000	51.765	46.736	-2.235	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant B	

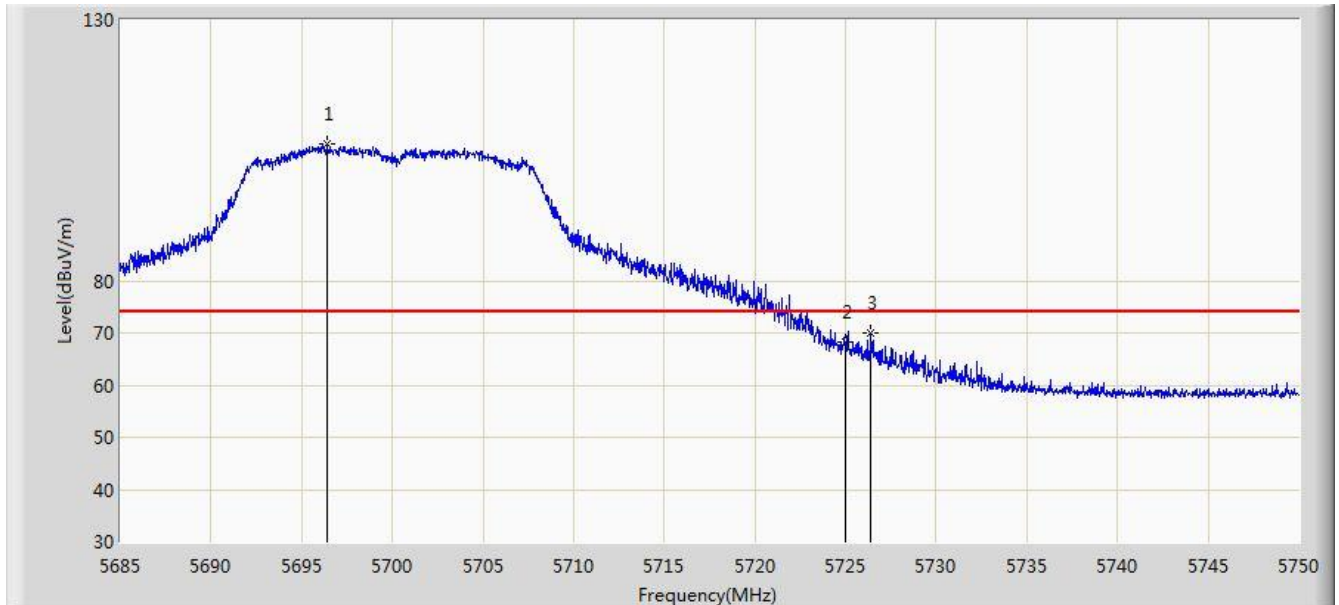


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5696.440	106.167	101.308	N/A	N/A	4.859	PK
2			5725.000	68.125	63.096	-5.875	74.000	5.029	PK
3			5726.405	70.054	65.016	-3.946	74.000	5.038	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5700MHz, Ant B	

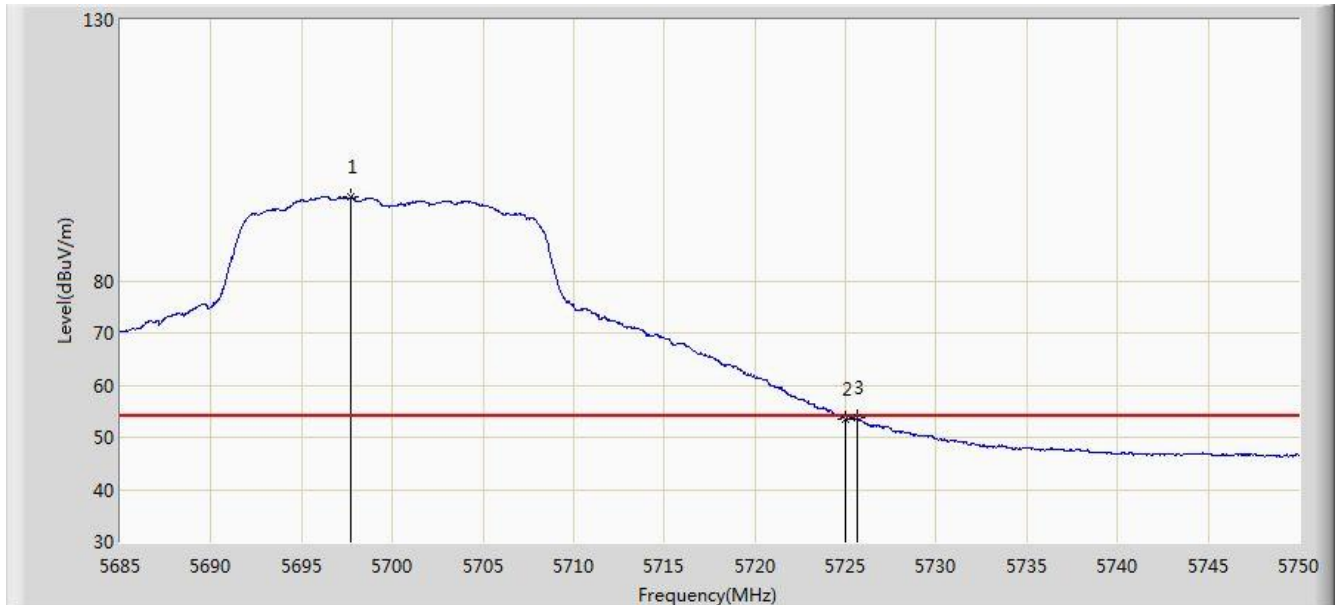


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.740	96.012	91.146	N/A	N/A	4.866	AV
2			5725.000	53.606	48.577	-0.394	54.000	5.029	AV
3			5725.625	53.656	48.623	-0.344	54.000	5.033	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:40
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz, Ant B	

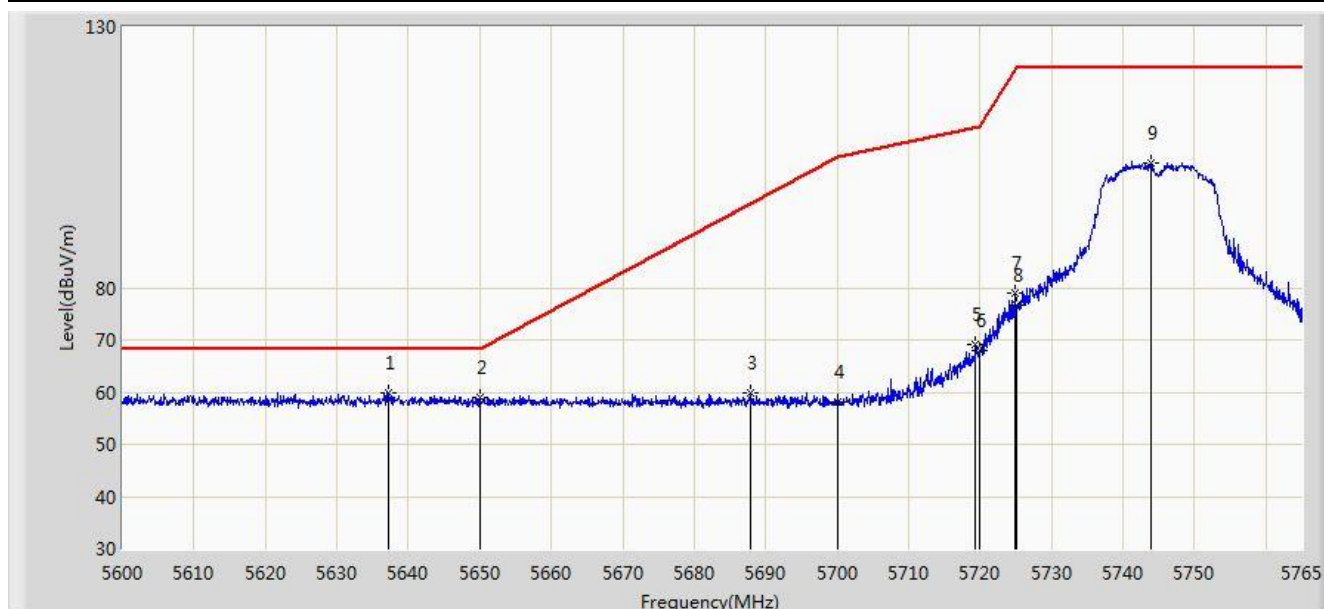


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5637.208	59.845	55.215	-8.355	68.200	4.630	PK
2			5650.000	58.863	54.192	-9.337	68.200	4.671	PK
3			5687.945	59.780	54.961	-36.529	96.309	4.820	PK
4			5700.000	58.010	53.132	-47.190	105.200	4.878	PK
5			5719.295	69.055	64.063	-41.548	110.603	4.992	PK
6			5720.000	68.086	63.089	-42.714	110.800	4.997	PK
7			5724.822	78.991	73.963	-42.803	121.794	5.028	PK
8			5725.000	76.610	71.581	-45.590	122.200	5.029	PK
9			5743.880	103.790	98.641	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:42
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz, Ant B	

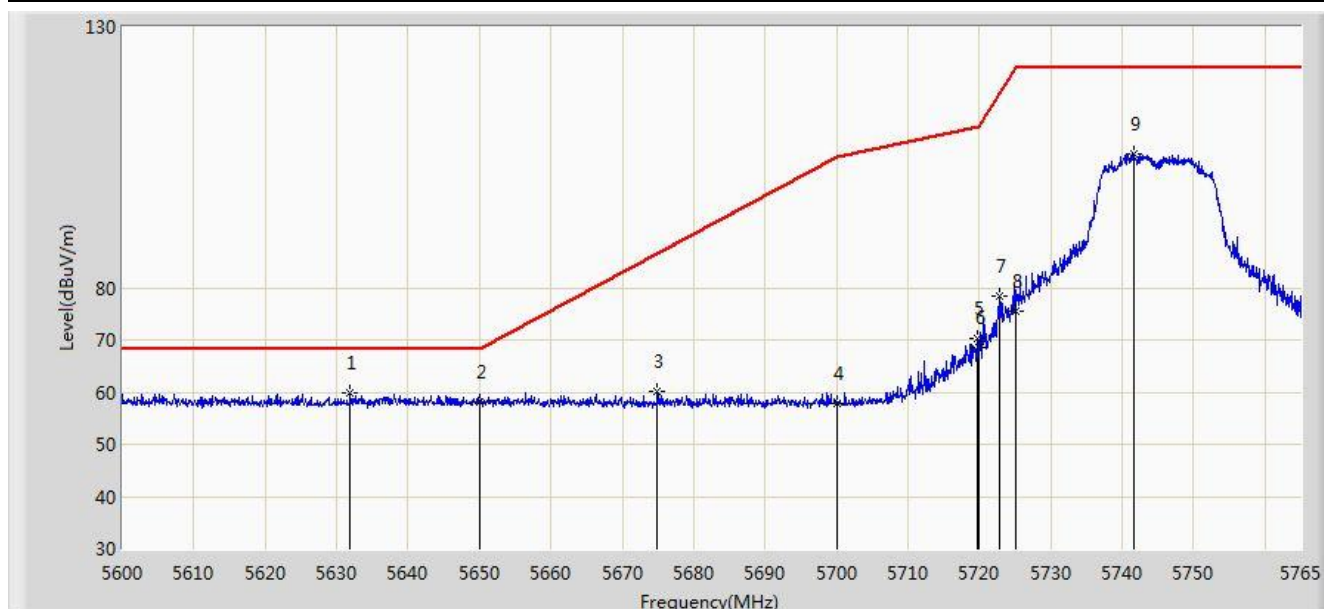


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5631.928	59.728	55.113	-8.472	68.200	4.615	PK
2			5650.000	58.237	53.566	-9.963	68.200	4.671	PK
3			5674.910	60.081	55.314	-26.593	86.674	4.767	PK
4			5700.000	57.940	53.062	-47.260	105.200	4.878	PK
5			5719.790	70.247	65.251	-40.495	110.741	4.995	PK
6			5720.000	68.523	63.526	-42.277	110.800	4.997	PK
7			5722.760	78.297	73.282	-38.797	117.094	5.015	PK
8			5725.000	75.419	70.390	-46.781	122.200	5.029	PK
9			5741.652	105.647	100.512	N/A	N/A	5.135	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:43
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz, Ant B	

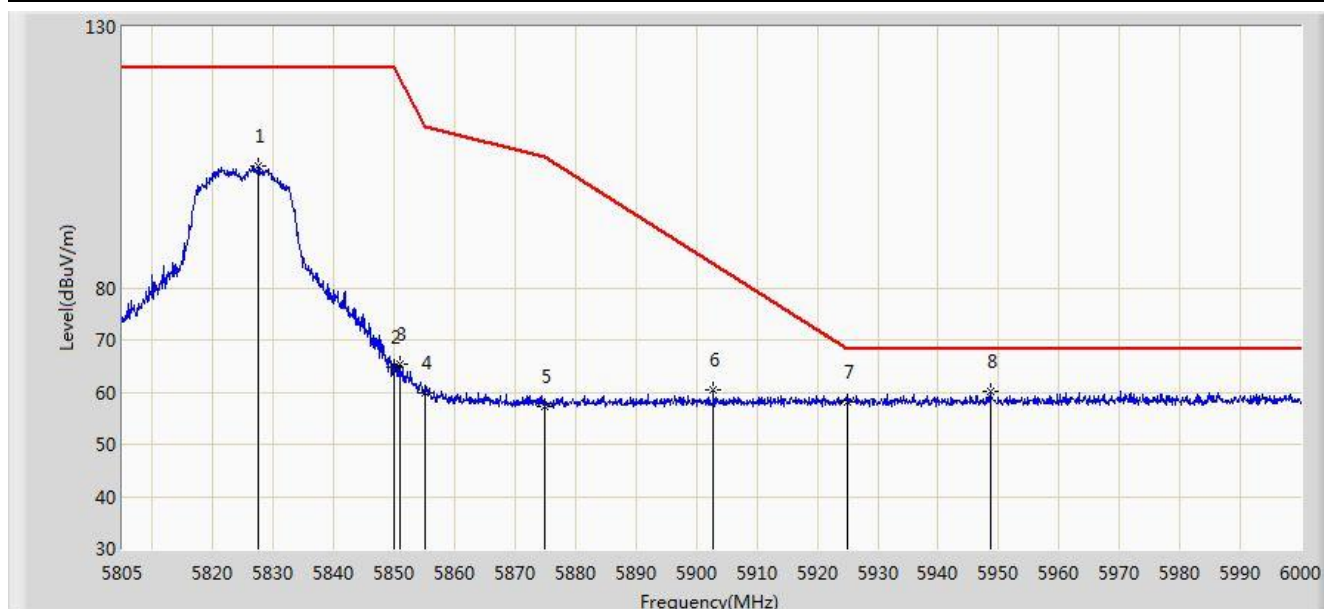


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.522	103.391	97.788	N/A	N/A	5.602	PK
2			5850.000	64.855	59.129	-57.345	122.200	5.726	PK
3			5850.825	65.221	59.492	-55.097	120.318	5.729	PK
4			5855.000	59.910	54.164	-50.890	110.800	5.746	PK
5			5875.000	57.166	51.346	-48.034	105.200	5.820	PK
6			5902.792	60.382	54.471	-24.214	84.595	5.911	PK
7			5925.000	58.057	52.091	-10.143	68.200	5.967	PK
8		*	5948.618	60.267	54.244	-7.933	68.200	6.024	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:45
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz, Ant B	

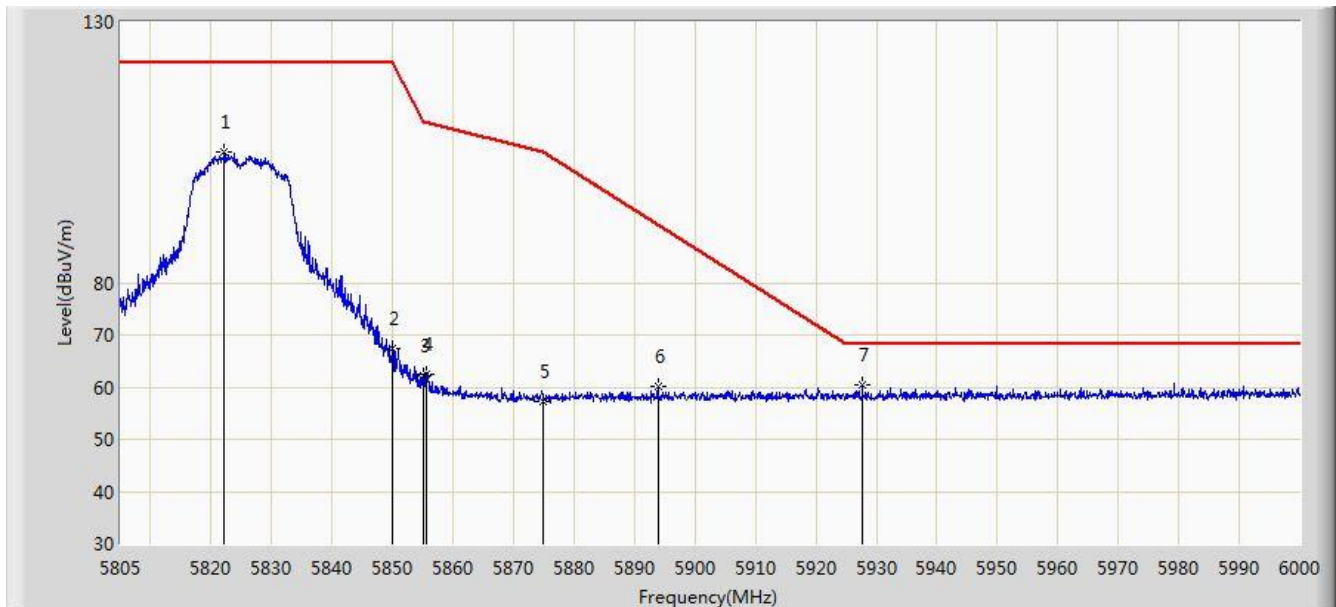


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5822.160	105.198	99.627	N/A	N/A	5.571	PK
2			5850.000	67.461	61.735	-54.739	122.200	5.726	PK
3			5855.000	62.151	56.405	-48.649	110.800	5.746	PK
4			5855.505	62.529	56.781	-48.129	110.658	5.749	PK
5			5875.000	57.389	51.569	-47.811	105.200	5.820	PK
6			5893.920	60.043	54.158	-31.120	91.162	5.885	PK
7		*	5927.655	60.475	54.502	-7.725	68.200	5.974	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant B	

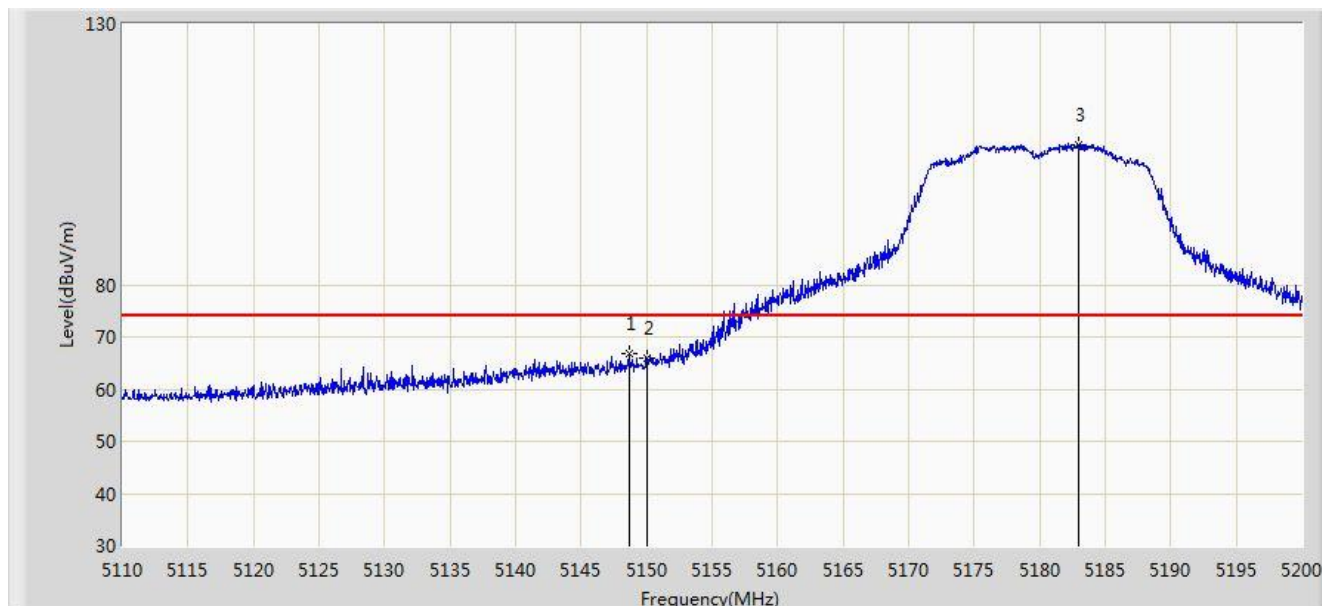


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.655	66.783	62.609	-7.217	74.000	4.174	PK
2			5150.000	65.929	61.760	-8.071	74.000	4.170	PK
3		*	5182.945	106.869	102.811	N/A	N/A	4.059	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 22:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant B	

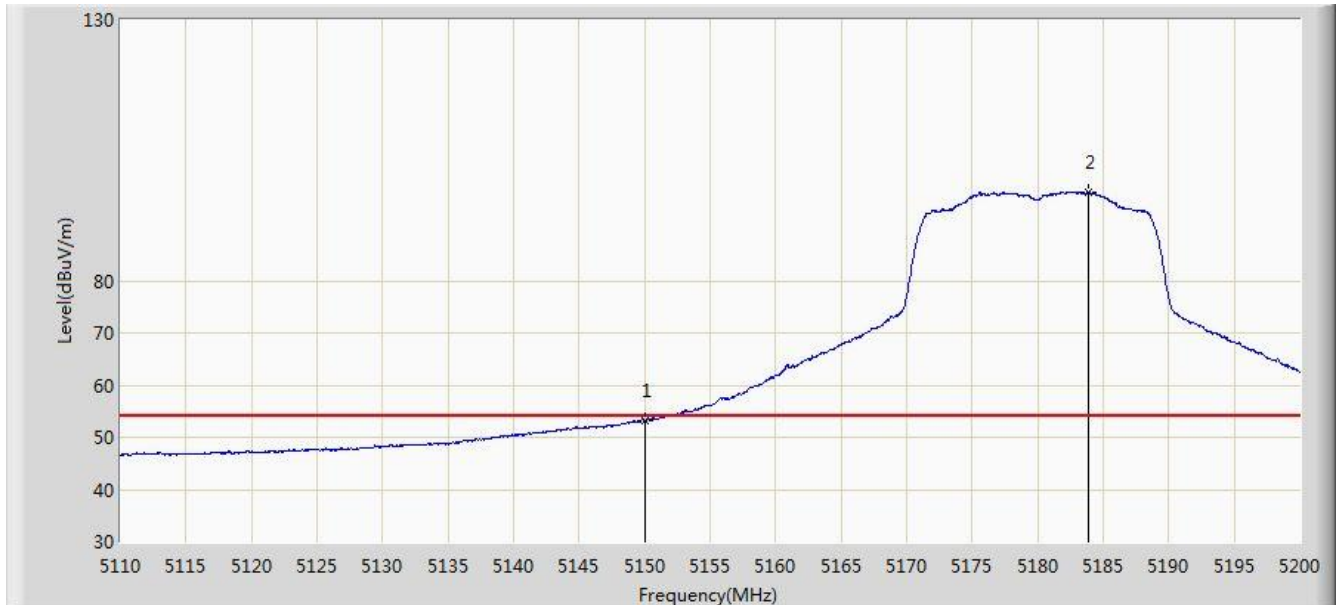


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.141	48.972	-0.859	54.000	4.170	AV
2		*	5183.890	96.926	92.871	N/A	N/A	4.056	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant B	

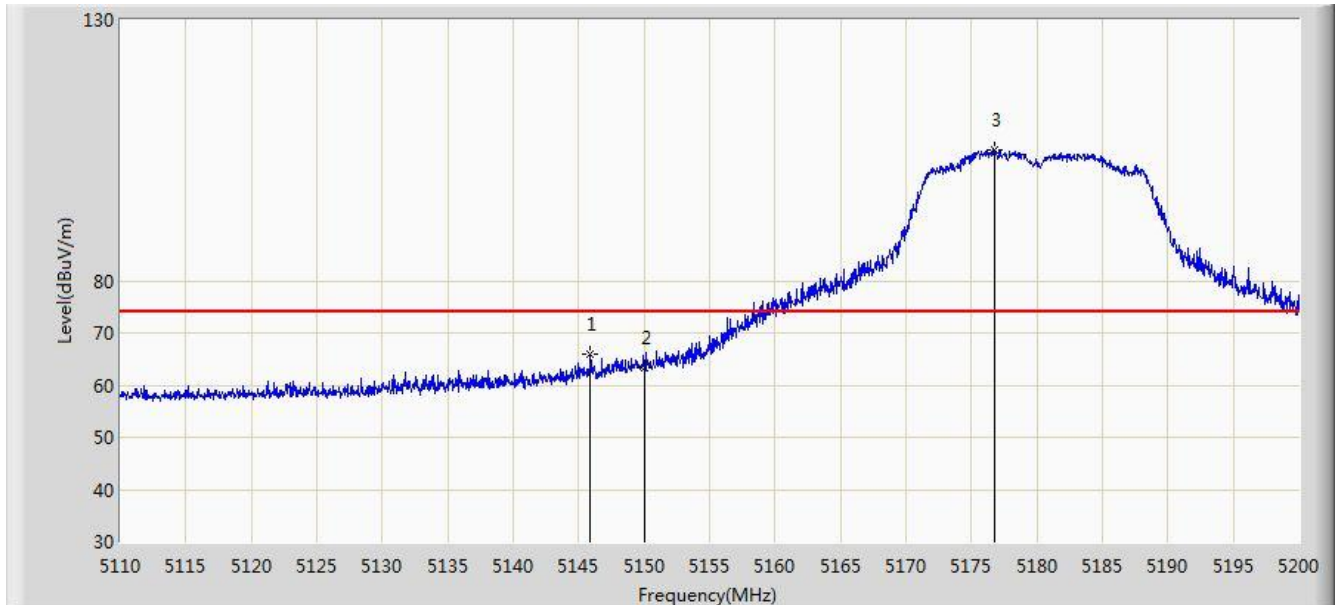


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.910	65.839	61.663	-8.161	74.000	4.176	PK
2			5150.000	63.349	59.180	-10.651	74.000	4.170	PK
3		*	5176.780	105.054	100.974	N/A	N/A	4.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz, Ant B	

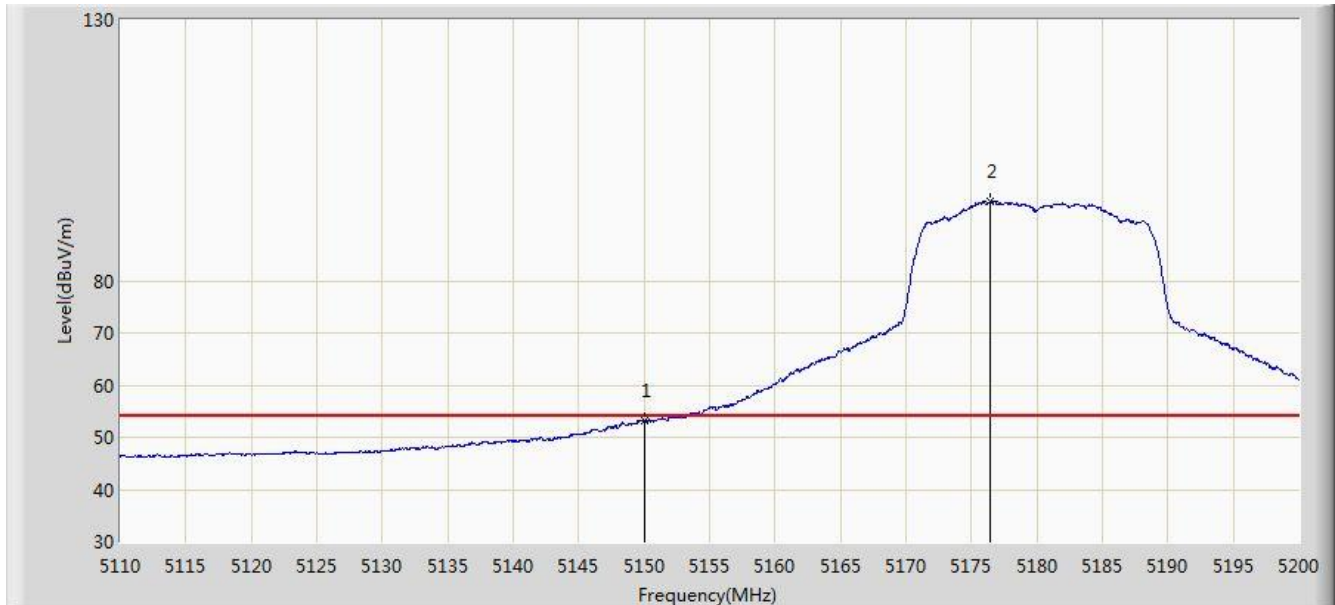


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.236	49.067	-0.764	54.000	4.170	AV
2		*	5176.420	95.160	91.078	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant B	

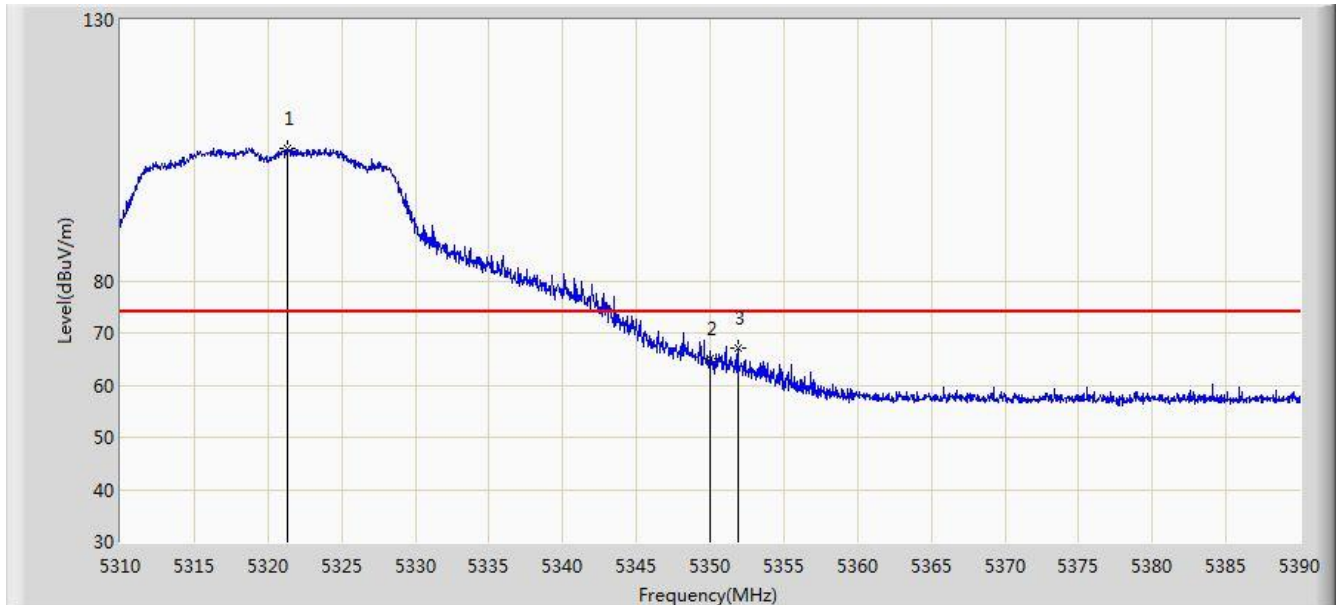


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.320	105.361	101.510	N/A	N/A	3.851	PK
2			5350.000	65.078	61.173	-8.922	74.000	3.904	PK
3			5351.880	67.178	63.270	-6.822	74.000	3.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant B	

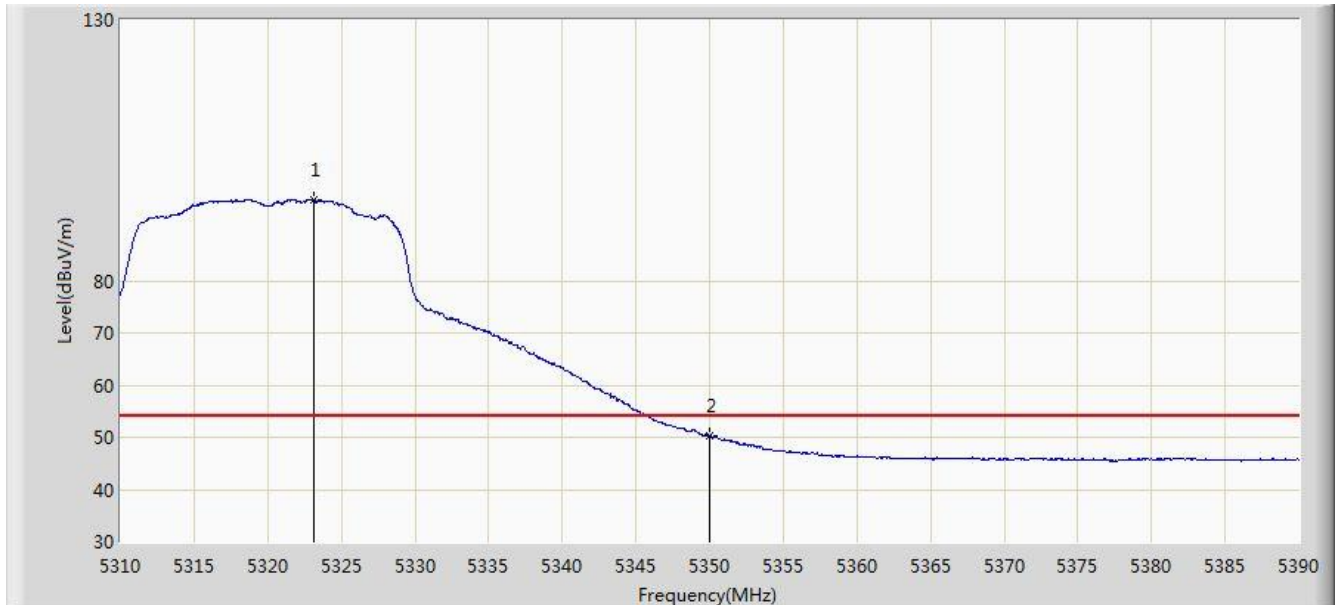


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.160	95.541	91.686	N/A	N/A	3.854	AV
2			5350.000	50.336	46.431	-3.664	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant B	

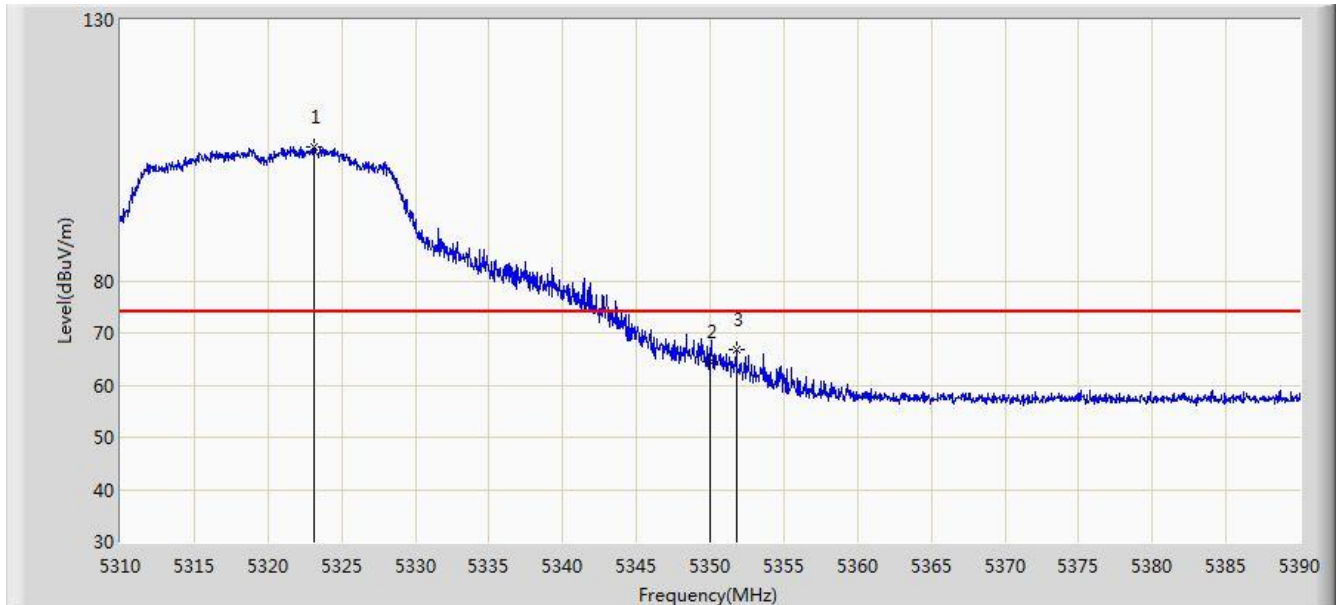


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.160	105.697	101.842	N/A	N/A	3.854	PK
2			5350.000	64.353	60.448	-9.647	74.000	3.904	PK
3			5351.760	66.670	62.762	-7.330	74.000	3.909	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz, Ant B	

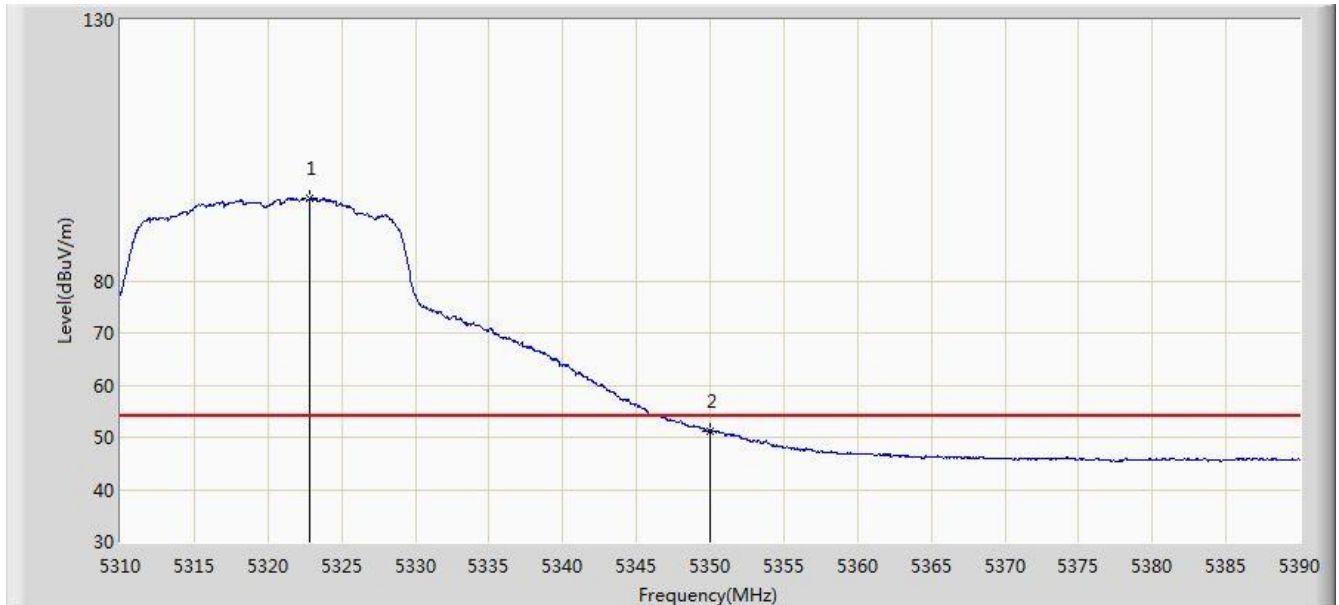


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.880	95.906	92.052	N/A	N/A	3.854	AV
2			5350.000	51.224	47.319	-2.776	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant B	

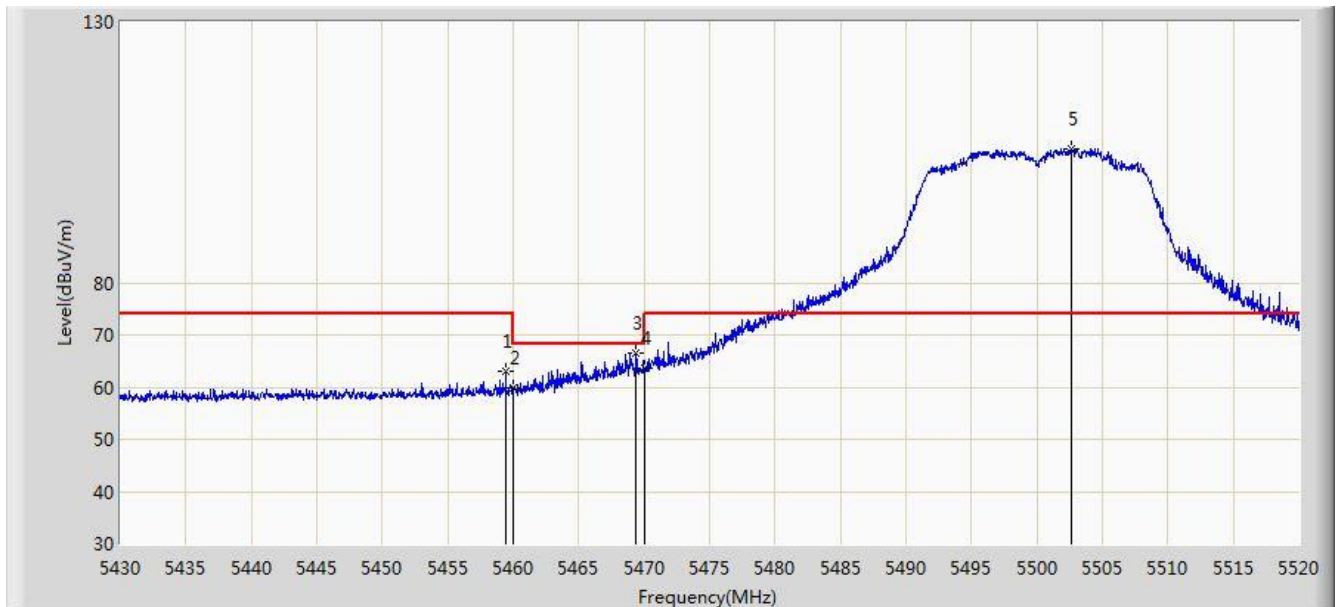

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.430	62.942	58.763	-11.058	74.000	4.179	PK
2			5460.000	59.829	55.649	-14.171	74.000	4.180	PK
3			5469.375	66.603	62.402	-1.597	68.200	4.201	PK
4			5470.000	63.599	59.397	-4.601	68.200	4.202	PK
5		*	5502.585	105.785	101.505	N/A	N/A	4.280	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant B	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.375	43.195	-6.625	54.000	4.180	AV
2		*	5503.035	95.997	91.716	N/A	N/A	4.281	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant B	

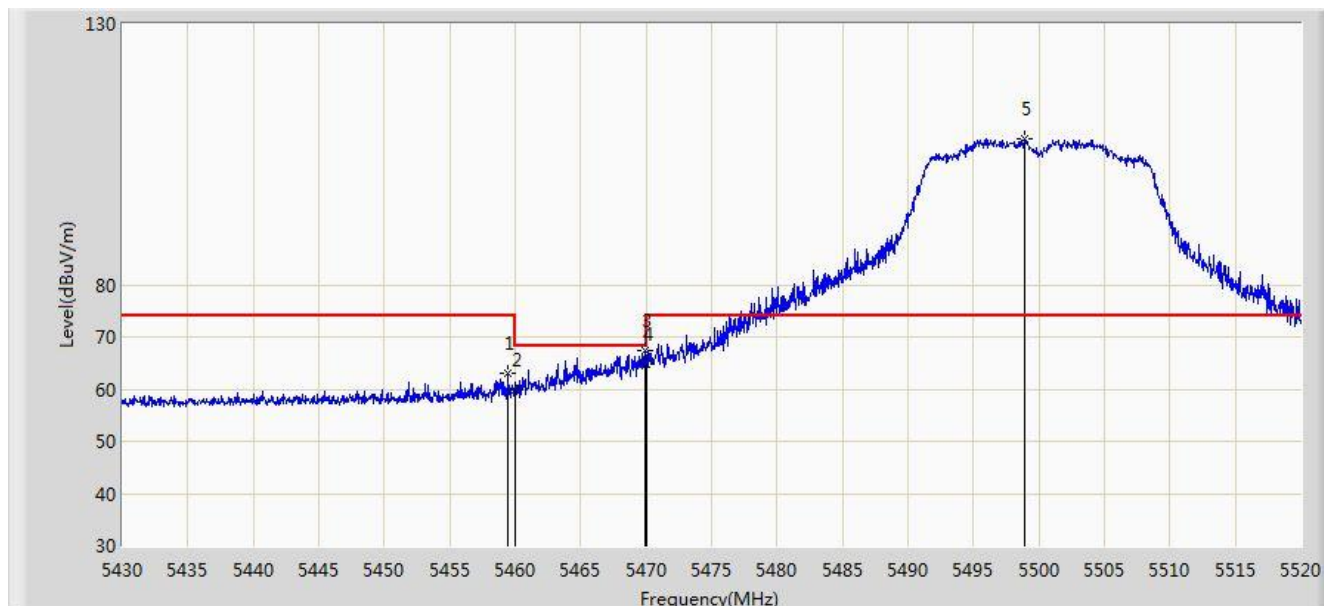


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.430	62.931	58.752	-11.069	74.000	4.179	PK
2			5460.000	59.931	55.751	-14.069	74.000	4.180	PK
3			5469.960	67.326	63.124	-0.874	68.200	4.202	PK
4			5470.000	64.852	60.650	-3.348	68.200	4.202	PK
5		*	5498.895	107.870	103.601	N/A	N/A	4.269	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz, Ant B	

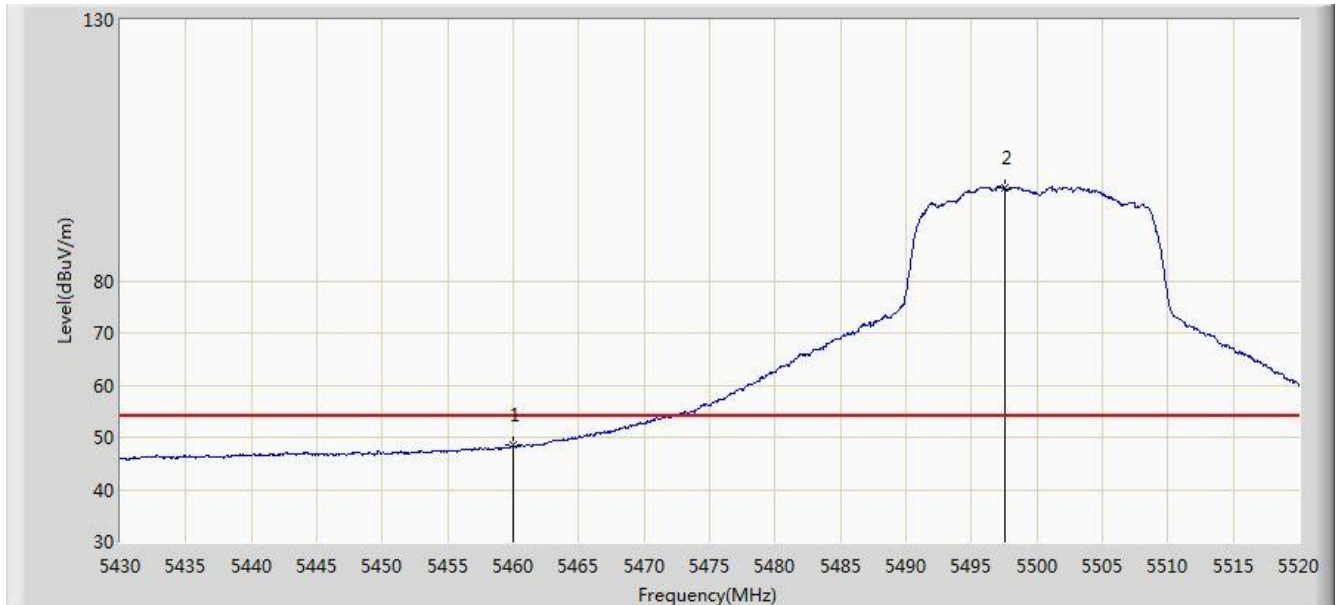


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.436	44.256	-5.564	54.000	4.180	AV
2		*	5497.545	97.893	93.628	N/A	N/A	4.265	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant B	

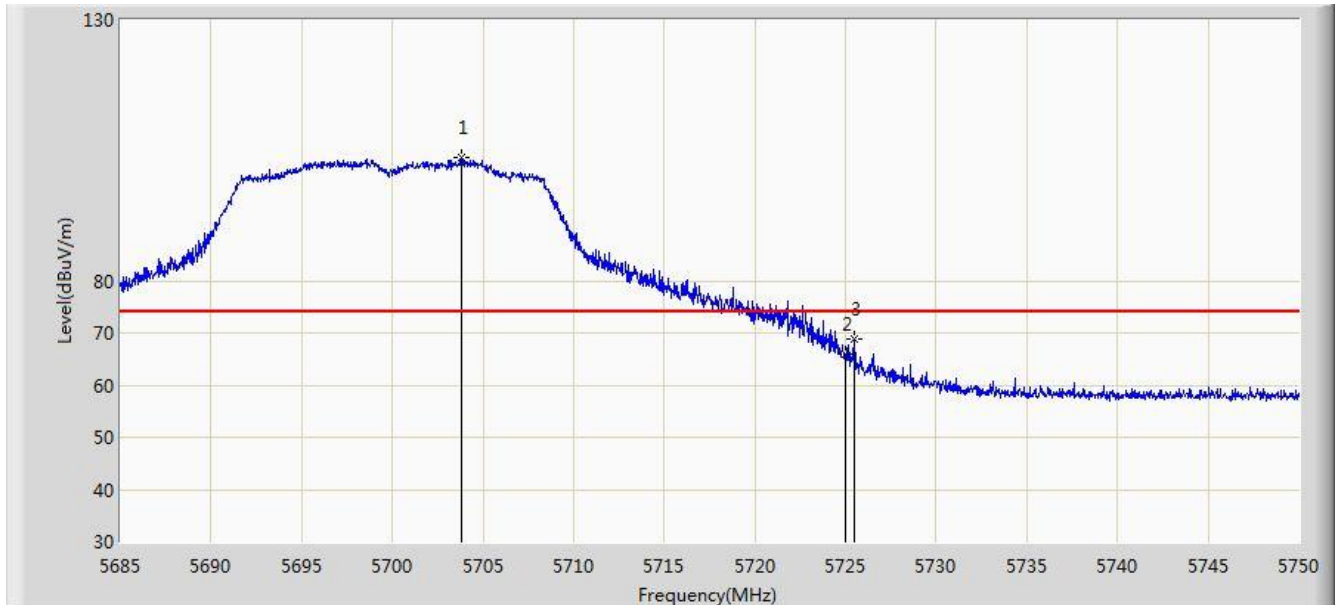


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.850	103.535	98.636	N/A	N/A	4.899	PK
2			5725.000	65.816	60.787	-8.184	74.000	5.029	PK
3			5725.495	68.707	63.675	-5.293	74.000	5.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant B	

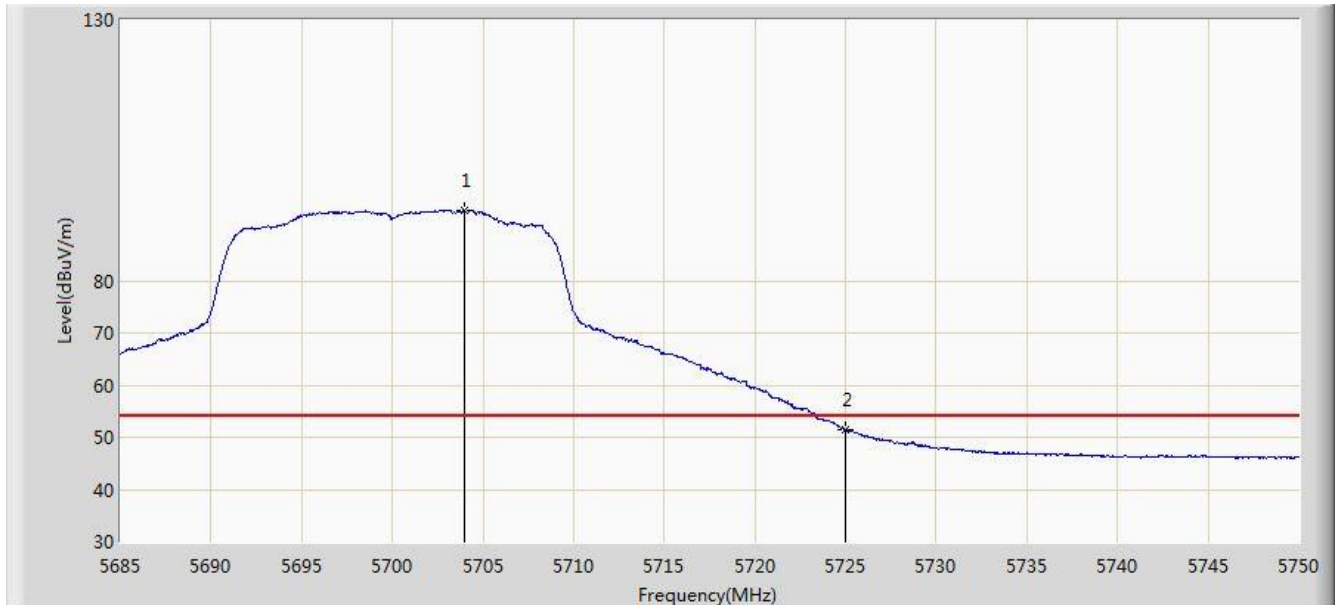


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.013	93.619	88.719	N/A	N/A	4.899	AV
2			5725.000	51.541	46.512	-2.459	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant B	

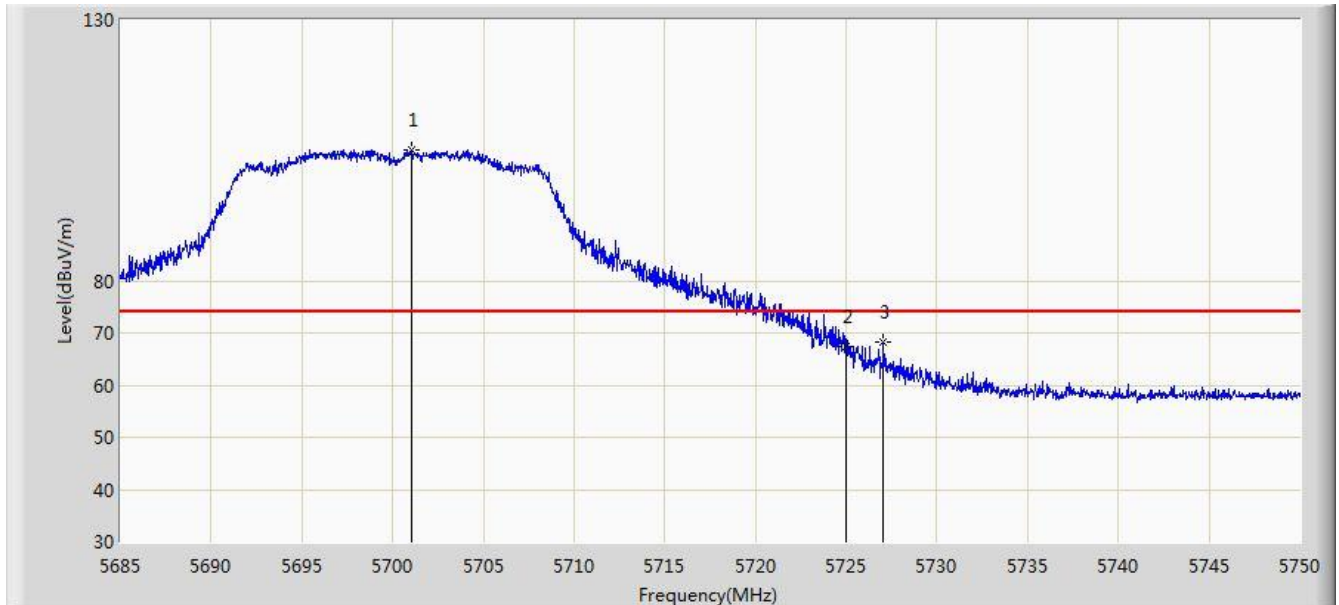


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.022	104.937	100.053	N/A	N/A	4.884	PK
2			5725.000	67.257	62.228	-6.743	74.000	5.029	PK
3			5727.055	68.302	63.260	-5.698	74.000	5.043	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz, Ant B	

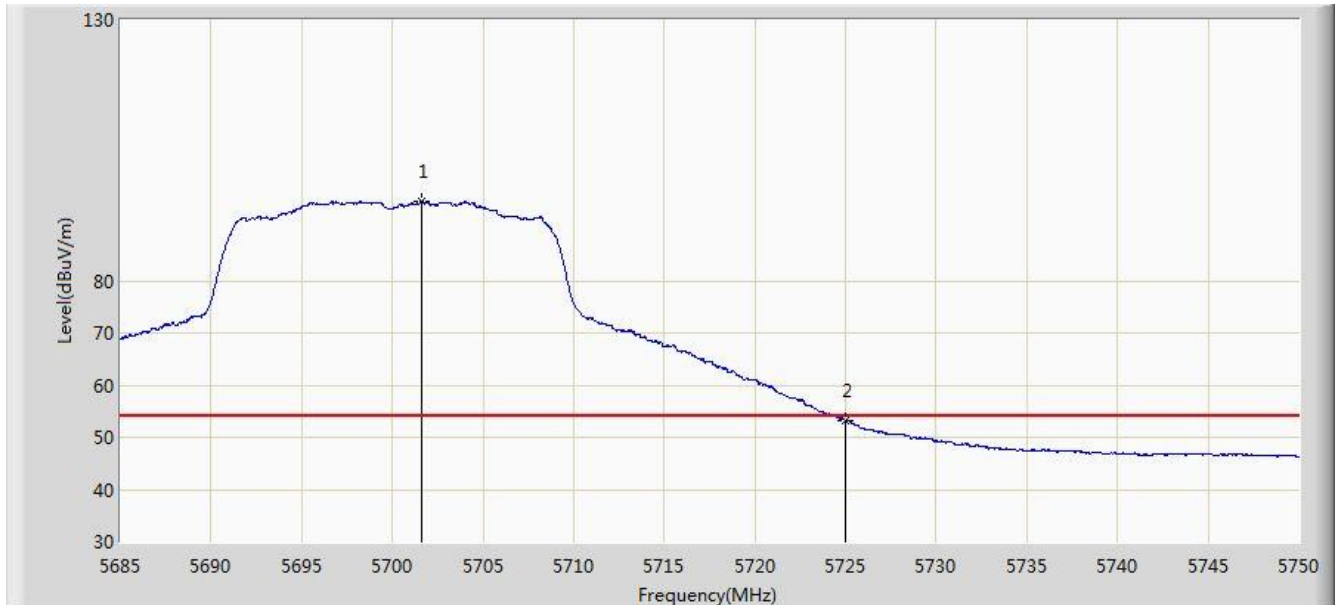


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.640	95.147	90.260	N/A	N/A	4.887	AV
2			5725.000	53.286	48.257	-0.714	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:31
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz, Ant B	

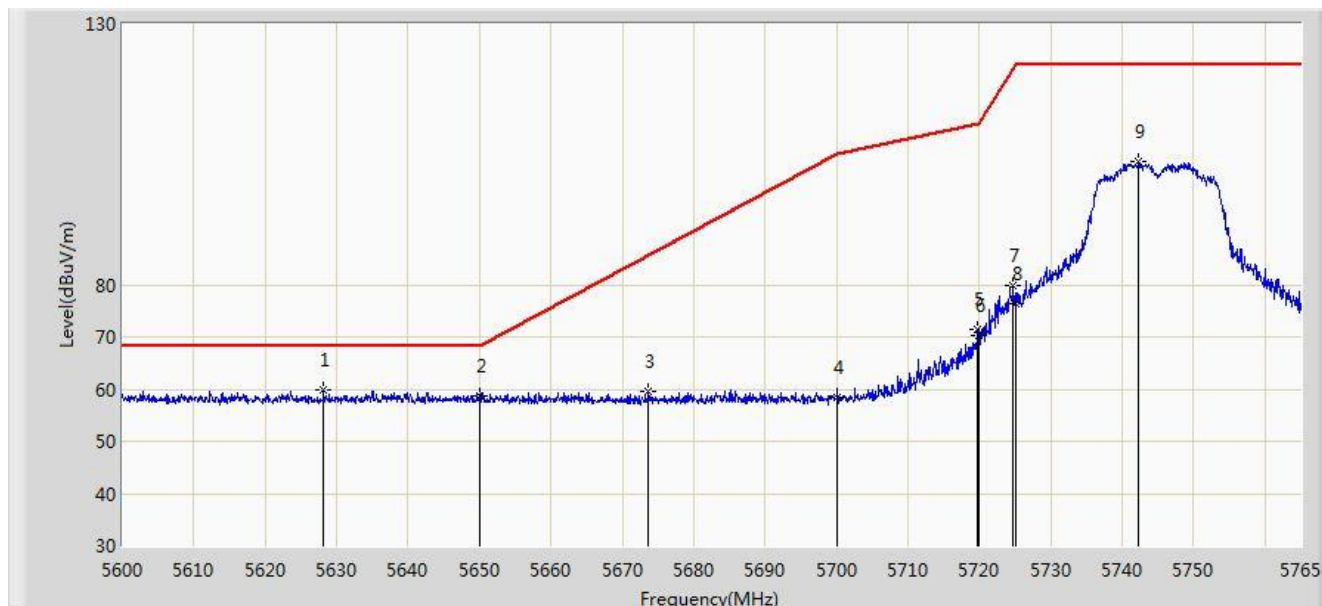


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5628.215	59.747	55.143	-8.453	68.200	4.604	PK
2			5650.000	58.812	54.141	-9.388	68.200	4.671	PK
3			5673.672	59.656	54.894	-26.102	85.758	4.762	PK
4			5700.000	58.367	53.489	-46.833	105.200	4.878	PK
5			5719.790	71.410	66.414	-39.332	110.741	4.995	PK
6			5720.000	70.312	65.315	-40.488	110.800	4.997	PK
7			5724.740	79.880	74.853	-41.727	121.607	5.028	PK
8			5725.000	76.457	71.428	-45.743	122.200	5.029	PK
9			5742.312	103.508	98.369	N/A	N/A	5.139	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:33
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz, Ant B	

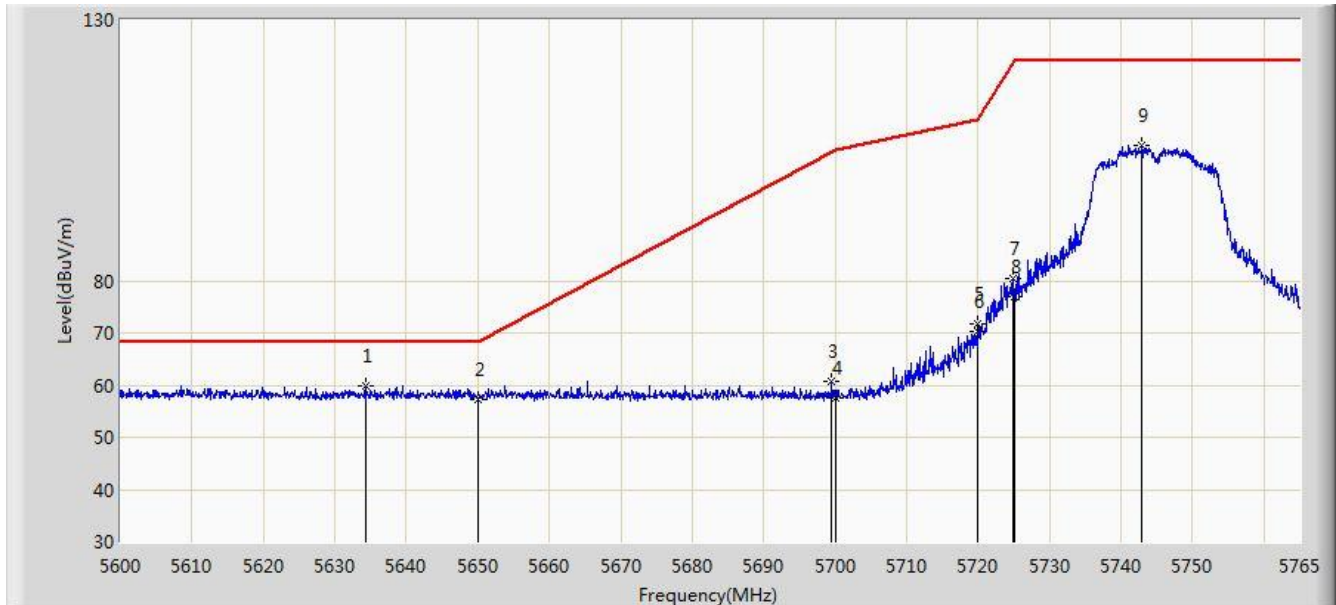


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5634.237	59.716	55.095	-8.484	68.200	4.621	PK
2			5650.000	57.384	52.713	-10.816	68.200	4.671	PK
3			5699.495	60.663	55.787	-44.165	104.828	4.876	PK
4			5700.000	57.464	52.586	-47.736	105.200	4.878	PK
5			5719.955	71.768	66.771	-39.020	110.787	4.997	PK
6			5720.000	70.256	65.259	-40.544	110.800	4.997	PK
7			5724.822	80.459	75.431	-41.335	121.794	5.028	PK
8			5725.000	76.966	71.937	-45.234	122.200	5.029	PK
9			5742.890	105.958	100.815	N/A	N/A	5.144	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:35
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz, Ant B	

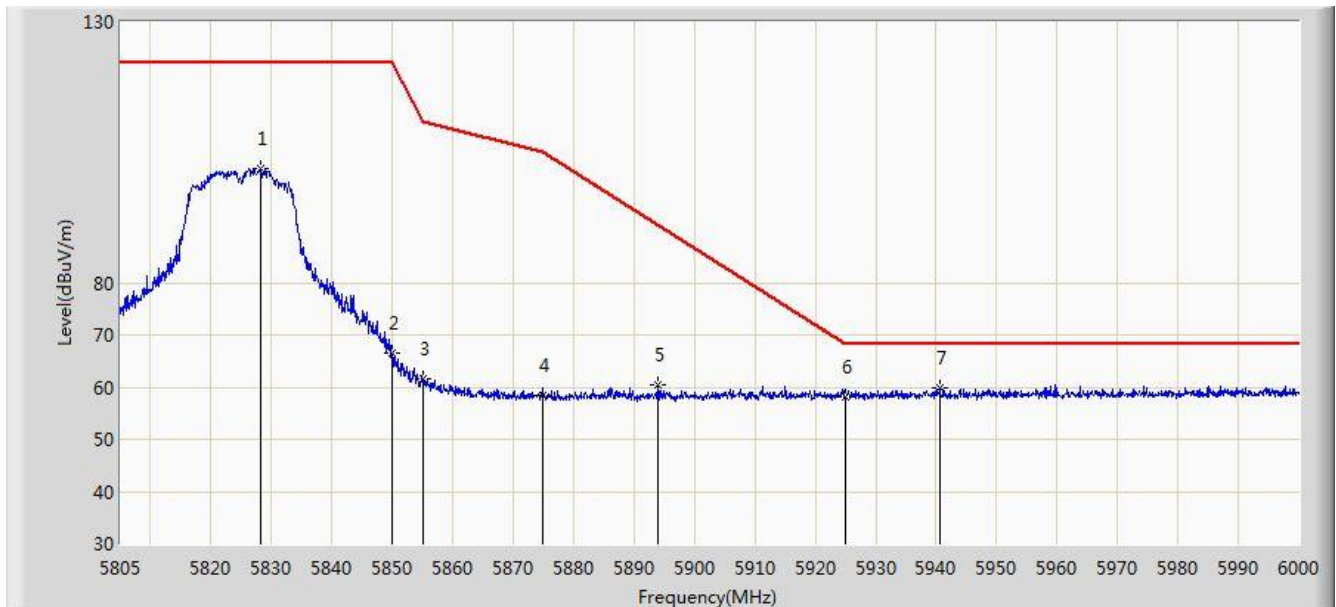


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.107	101.970	96.364	N/A	N/A	5.606	PK
2			5850.000	66.481	60.755	-55.719	122.200	5.726	PK
3			5855.000	61.465	55.719	-49.335	110.800	5.746	PK
4			5875.000	58.445	52.625	-46.755	105.200	5.820	PK
5			5894.018	60.346	54.461	-30.744	91.090	5.885	PK
6			5925.000	58.139	52.173	-10.061	68.200	5.967	PK
7		*	5940.623	59.779	53.774	-8.421	68.200	6.006	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:38
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz, Ant B	

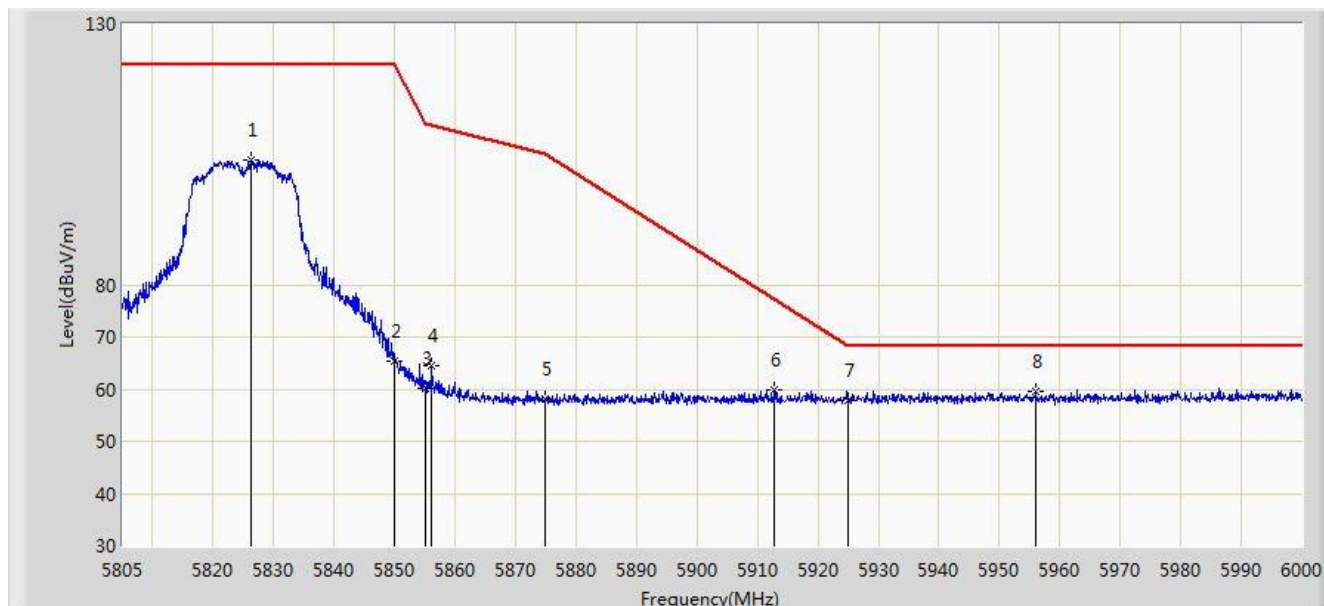


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.255	103.959	98.364	N/A	N/A	5.595	PK
2			5850.000	65.341	59.615	-56.859	122.200	5.726	PK
3			5855.000	60.259	54.513	-50.541	110.800	5.746	PK
4			5856.187	64.620	58.869	-45.847	110.467	5.751	PK
5			5875.000	58.203	52.383	-46.997	105.200	5.820	PK
6			5912.835	59.768	53.831	-17.405	77.173	5.937	PK
7			5925.000	57.957	51.991	-10.243	68.200	5.967	PK
8		*	5956.125	59.519	53.482	-8.681	68.200	6.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant B	

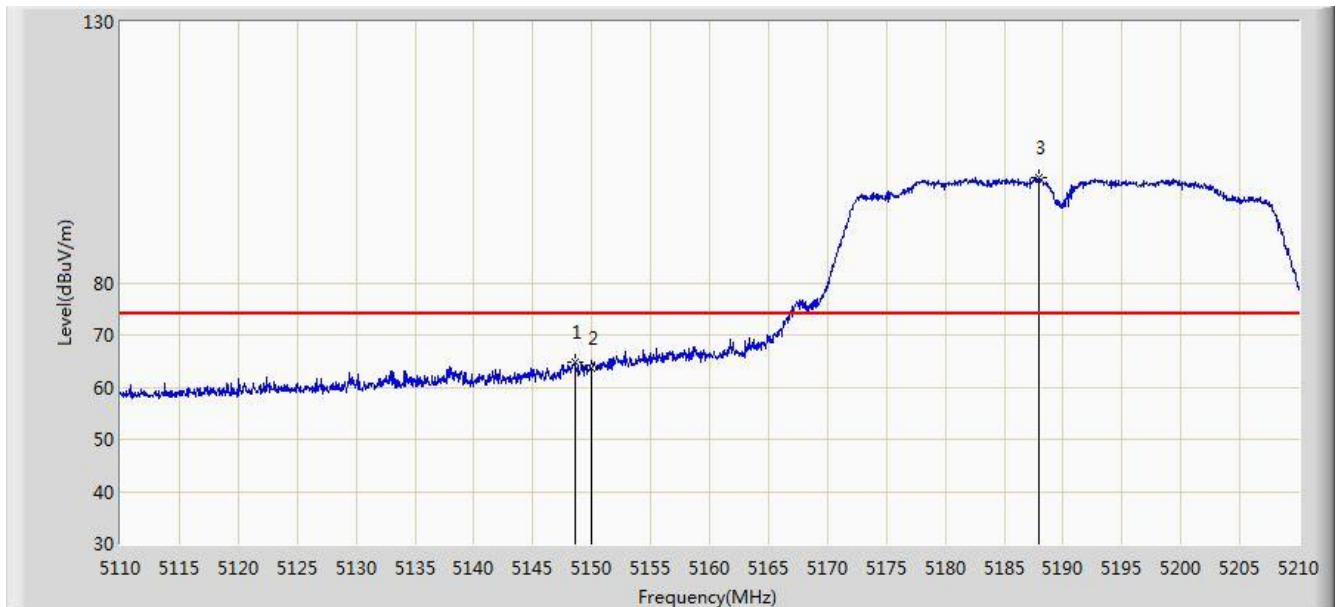


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.600	64.720	60.546	-9.280	74.000	4.173	PK
2			5150.000	63.764	59.595	-10.236	74.000	4.170	PK
3		*	5187.950	100.059	96.018	N/A	N/A	4.041	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant B	

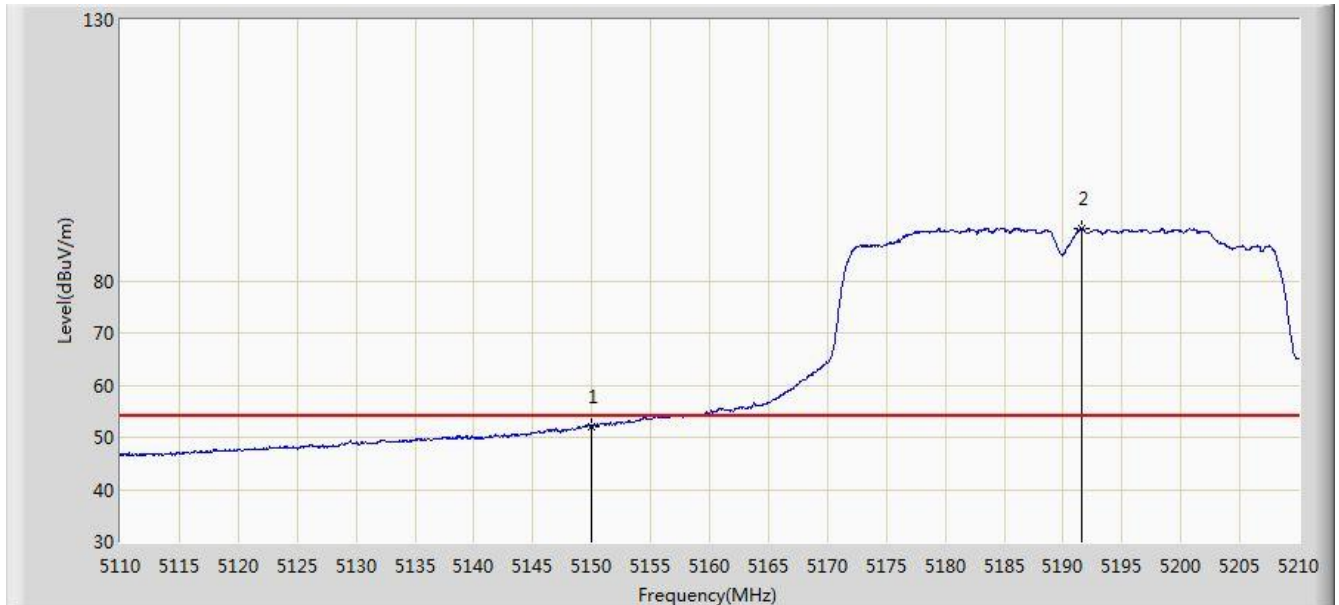


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.131	47.962	-1.869	54.000	4.170	AV
2		*	5191.600	90.009	85.981	N/A	N/A	4.027	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant B	

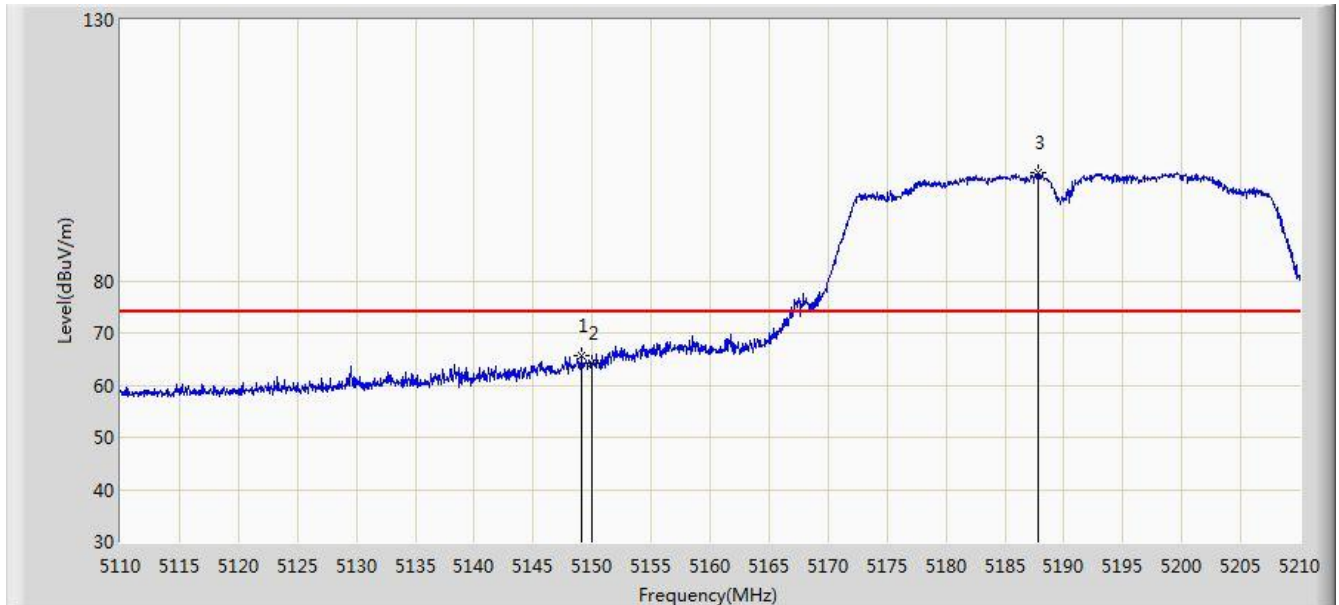


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.100	65.765	61.593	-8.235	74.000	4.173	PK
2			5150.000	64.186	60.017	-9.814	74.000	4.170	PK
3		*	5187.850	100.693	96.652	N/A	N/A	4.041	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/09 - 23:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz, Ant B	

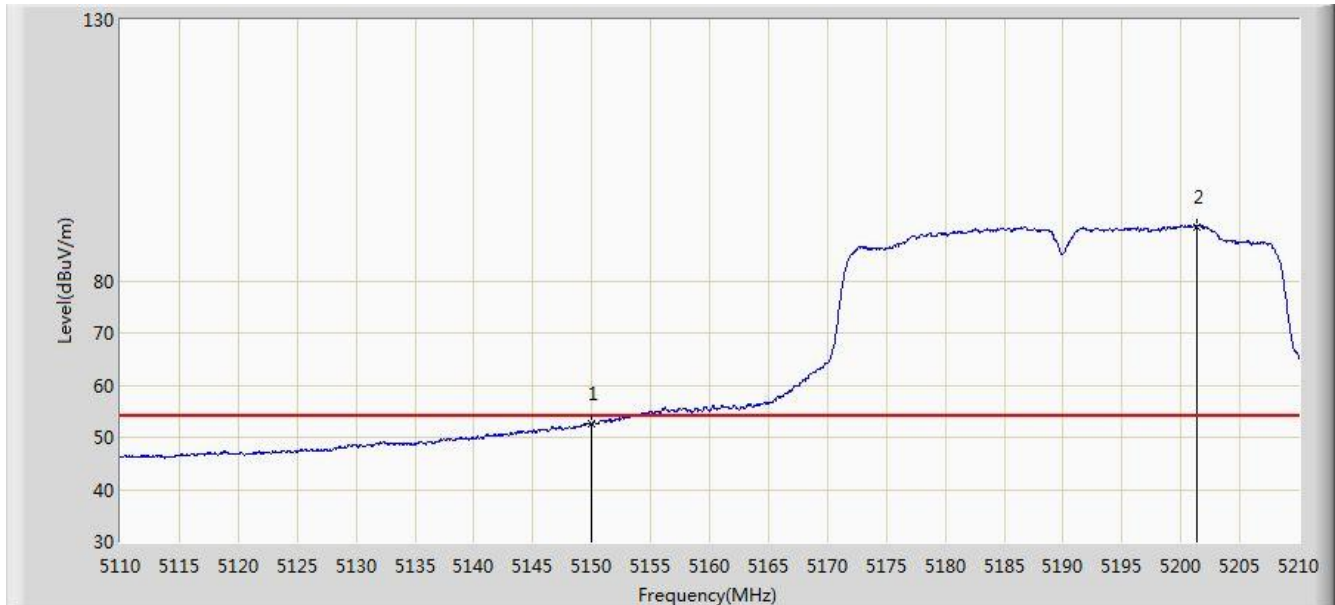


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.505	48.336	-1.495	54.000	4.170	AV
2		*	5201.300	90.409	86.415	N/A	N/A	3.994	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant B	

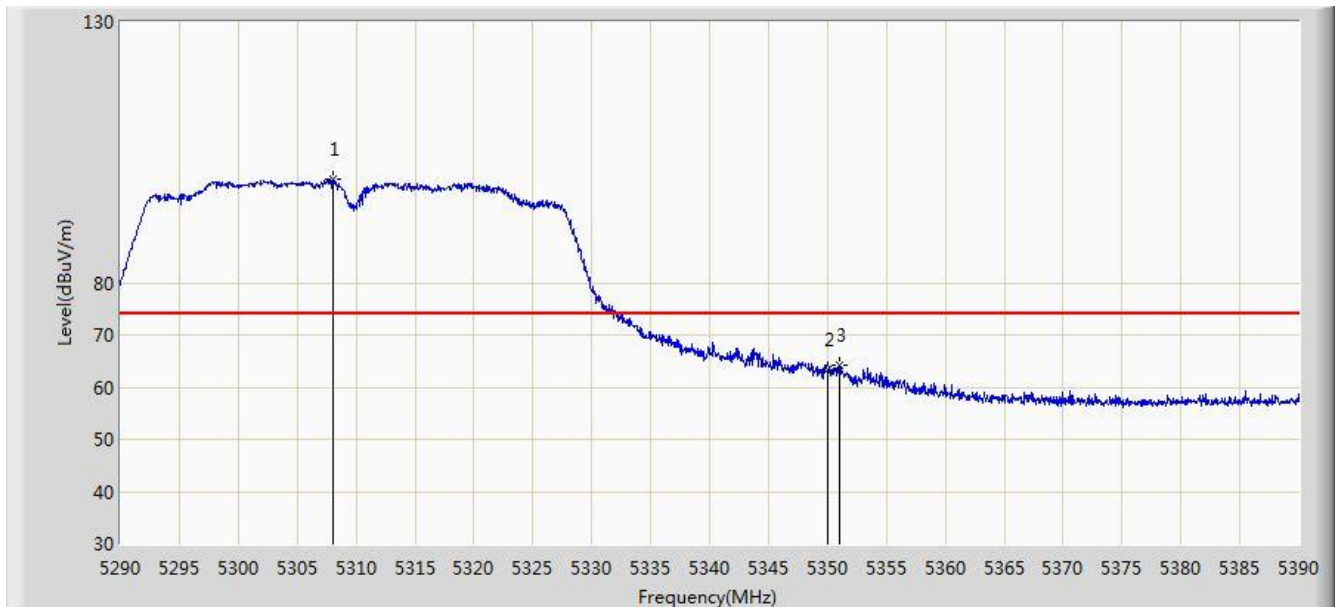


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5308.000	99.728	95.902	N/A	N/A	3.826	PK
2			5350.000	63.388	59.483	-10.612	74.000	3.904	PK
3			5351.050	64.164	60.257	-9.836	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant B	

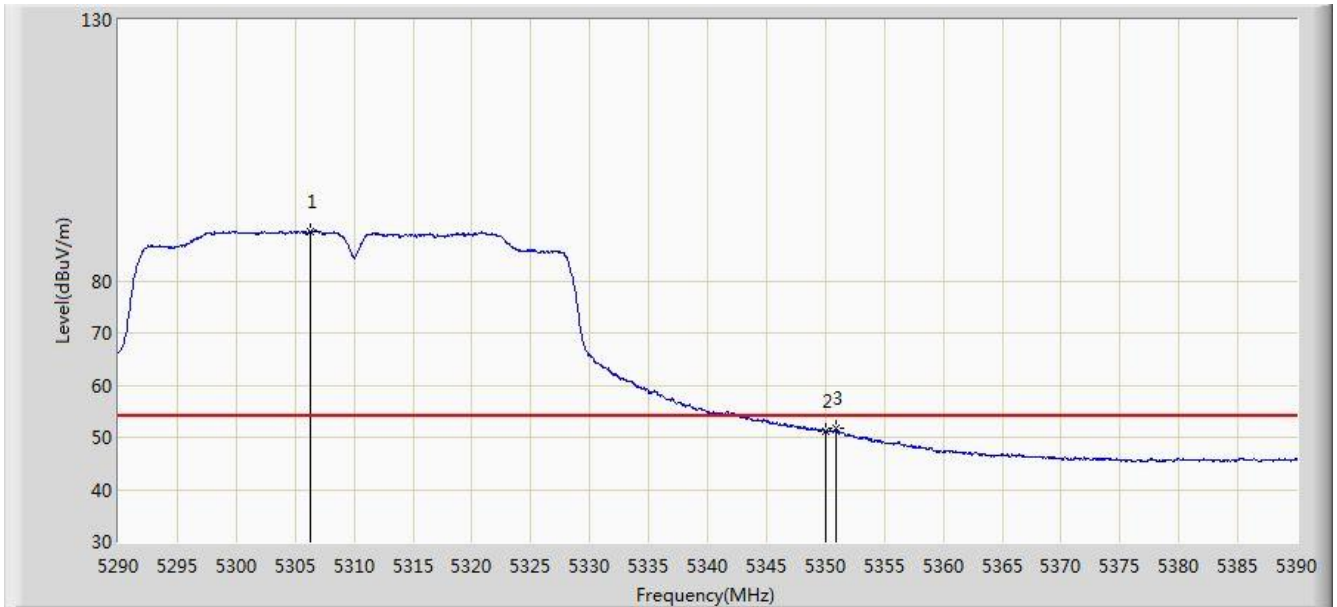


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5306.300	89.474	85.651	N/A	N/A	3.823	AV
2			5350.000	51.161	47.256	-2.839	54.000	3.904	AV
3			5350.950	51.606	47.700	-2.394	54.000	3.906	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant B	

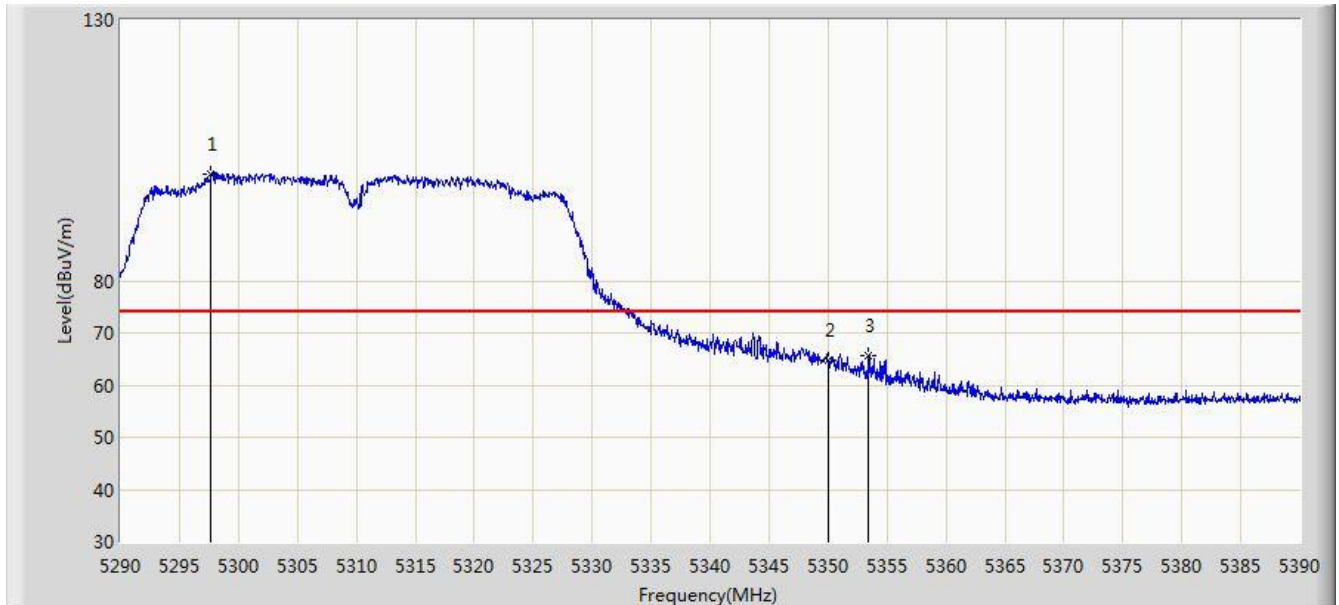


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5297.650	100.490	96.675	N/A	N/A	3.815	PK
2			5350.000	64.721	60.816	-9.279	74.000	3.904	PK
3			5353.400	65.687	61.776	-8.313	74.000	3.910	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz, Ant B	

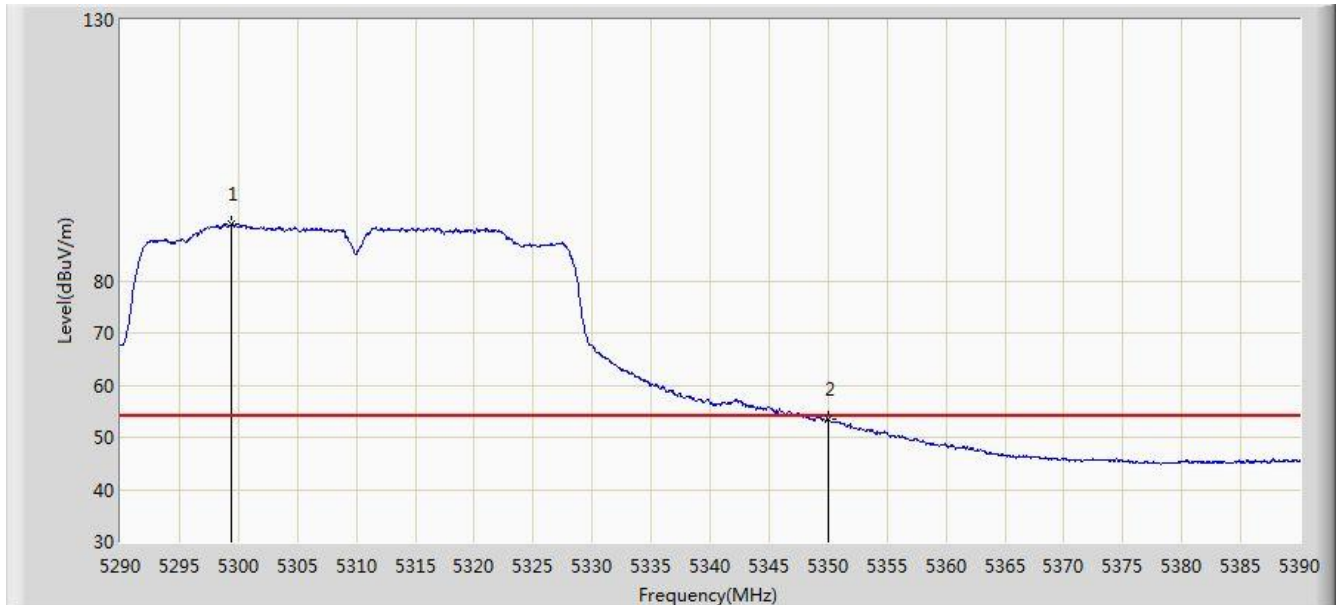


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5299.400	90.816	87.002	N/A	N/A	3.814	AV
2			5350.000	53.347	49.442	-0.653	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant B	

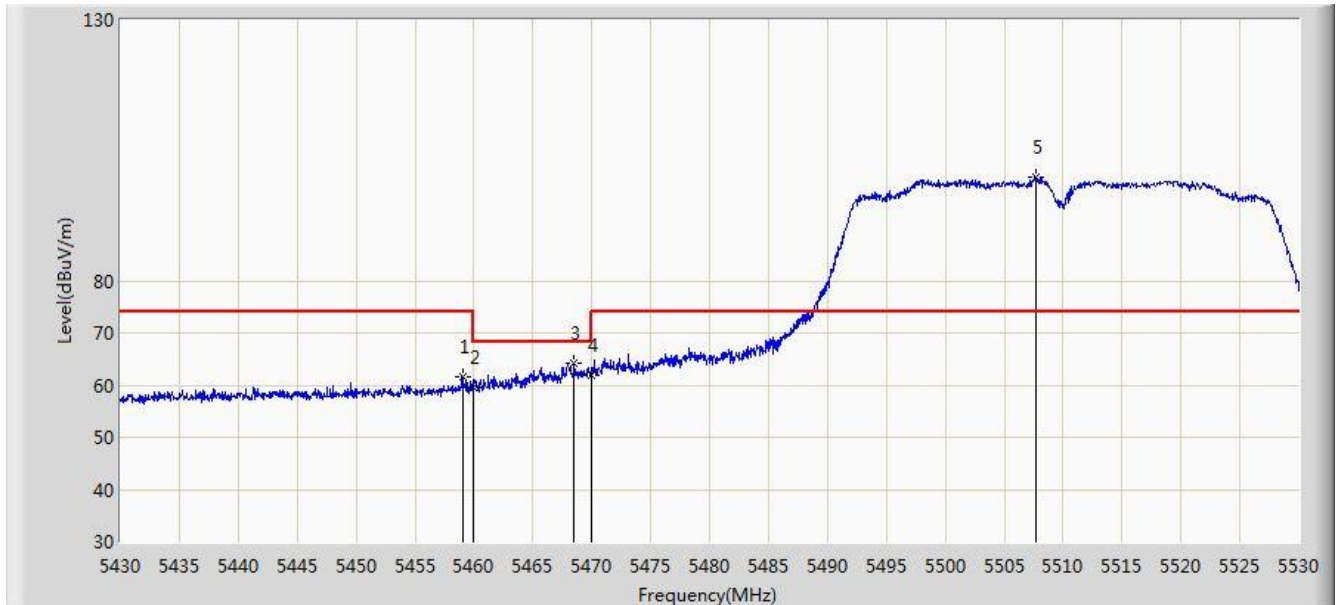


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.050	61.631	57.453	-12.369	74.000	4.178	PK
2			5460.000	59.639	55.459	-14.361	74.000	4.180	PK
3			5468.500	64.066	59.867	-4.134	68.200	4.199	PK
4			5470.000	61.899	57.697	-6.301	68.200	4.202	PK
5		*	5507.750	99.745	95.450	N/A	N/A	4.295	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant B	

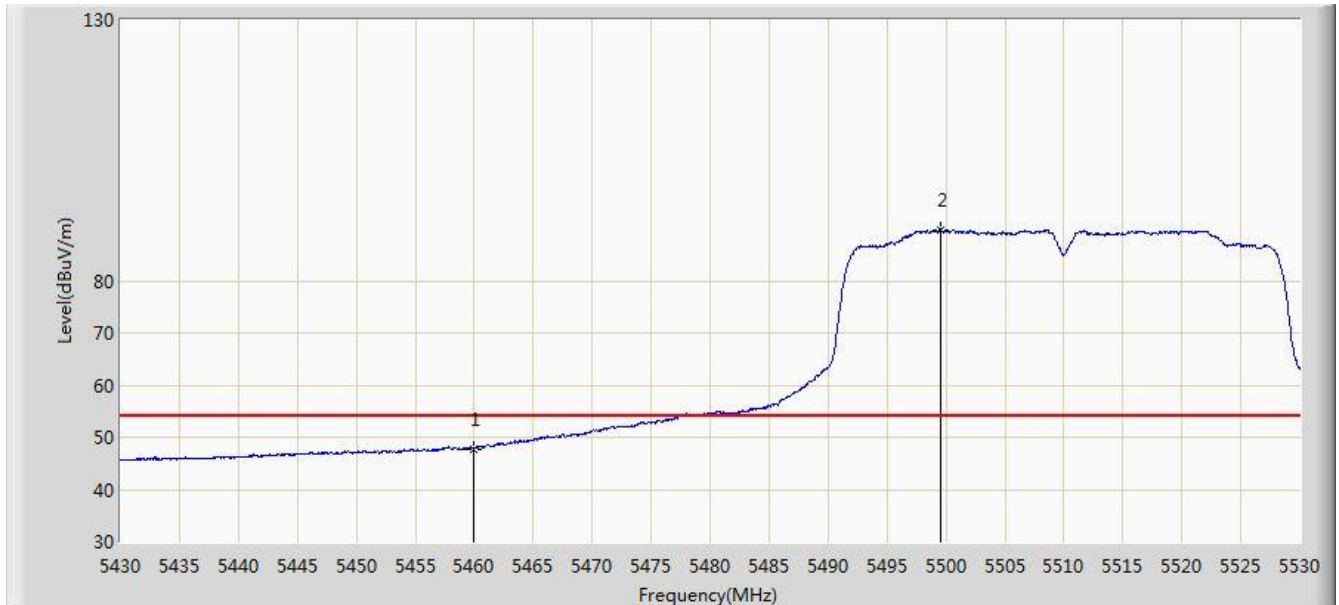


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.814	43.634	-6.186	54.000	4.180	AV
2		*	5499.500	89.851	85.580	N/A	N/A	4.271	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant B	

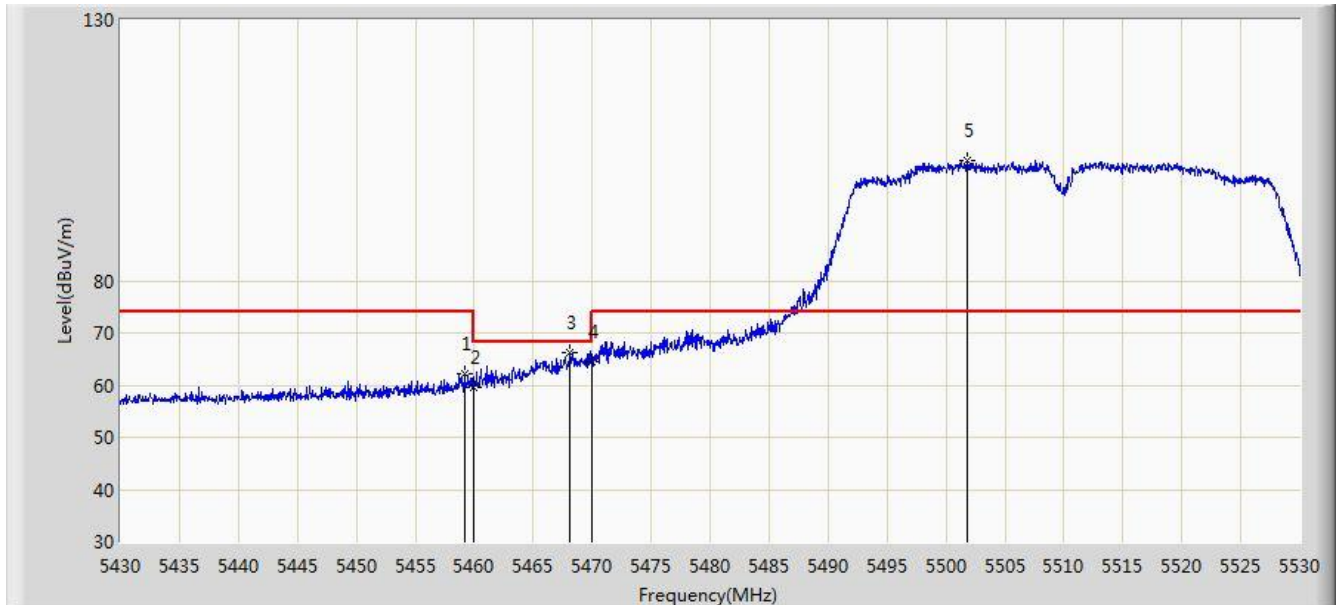


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.150	62.205	58.027	-11.795	74.000	4.178	PK
2			5460.000	59.599	55.419	-14.401	74.000	4.180	PK
3			5468.150	66.320	62.122	-1.880	68.200	4.198	PK
4			5470.000	64.581	60.379	-3.619	68.200	4.202	PK
5		*	5501.750	102.976	98.699	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz, Ant B	

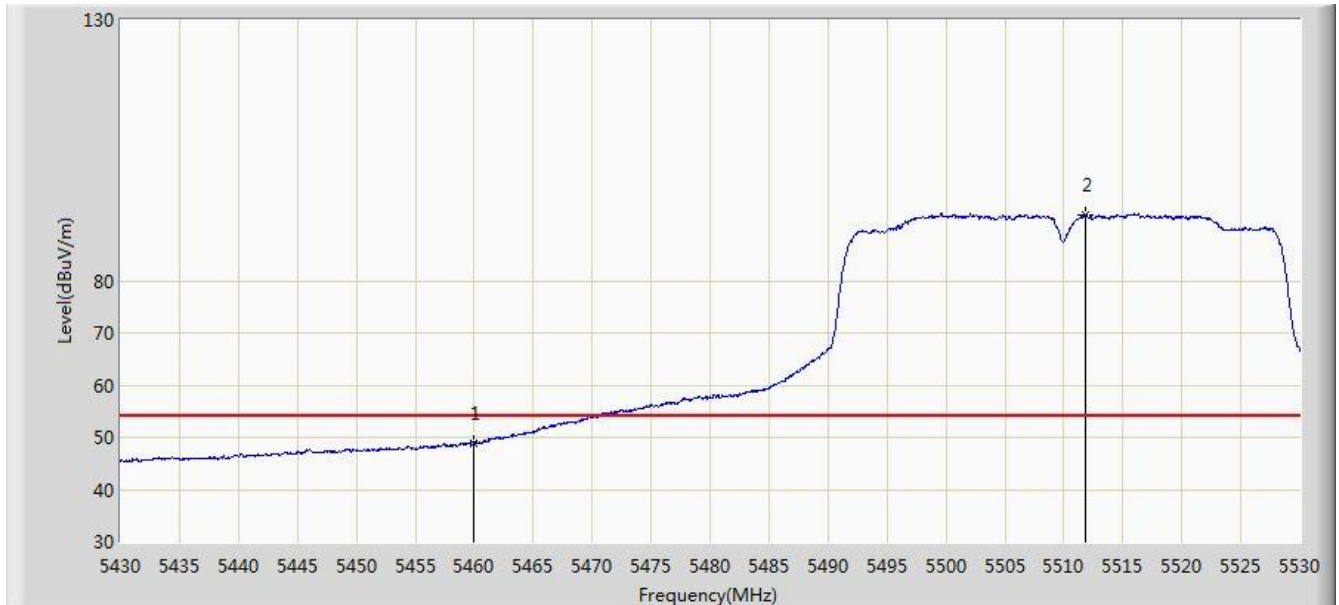


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.884	44.704	-5.116	54.000	4.180	AV
2		*	5511.800	92.615	88.309	N/A	N/A	4.307	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant B	

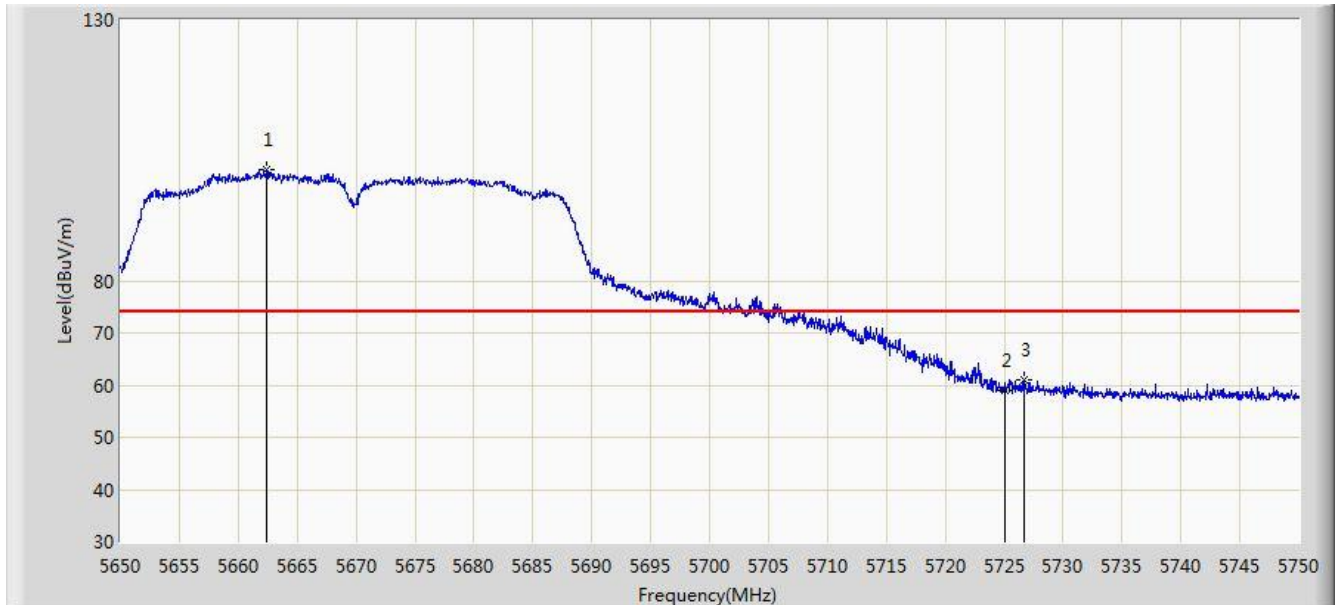

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.450	101.234	96.517	N/A	N/A	4.717	PK
2			5725.000	58.964	53.935	-15.036	74.000	5.029	PK
3			5726.700	61.143	56.103	-12.857	74.000	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant B	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.400	91.754	87.038	N/A	N/A	4.717	AV
2			5725.000	48.987	43.958	-5.013	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant B	

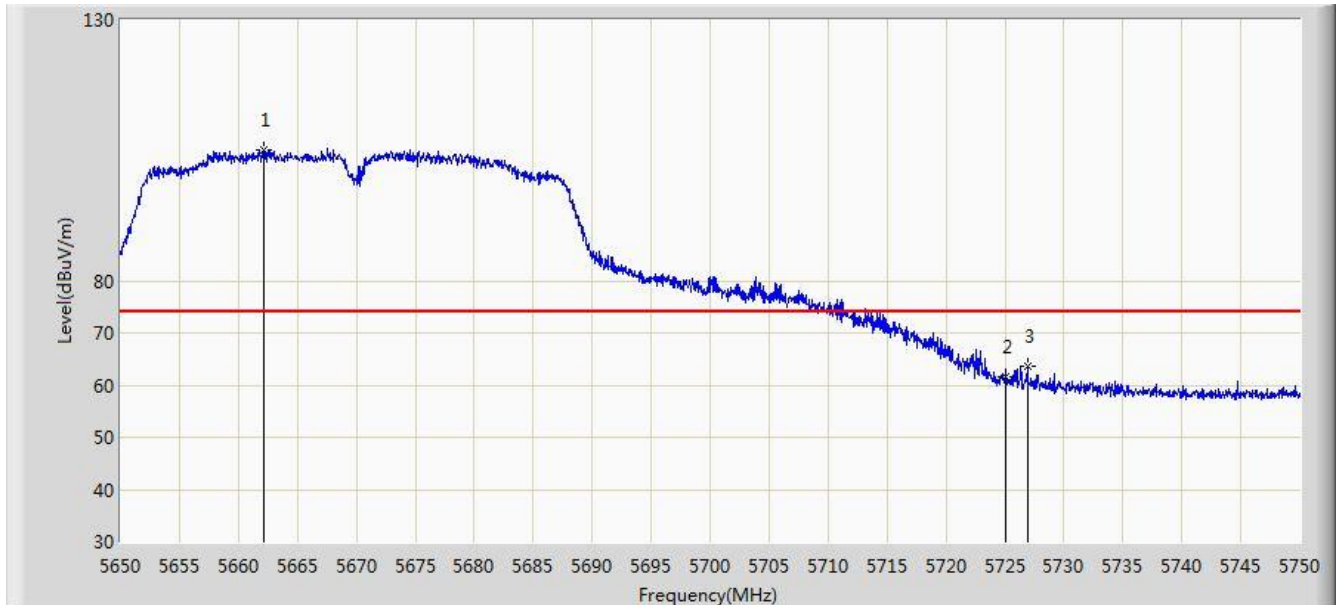


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.200	105.056	100.340	N/A	N/A	4.716	PK
2			5725.000	61.720	56.691	-12.280	74.000	5.029	PK
3			5726.900	63.604	58.563	-10.396	74.000	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz, Ant B	

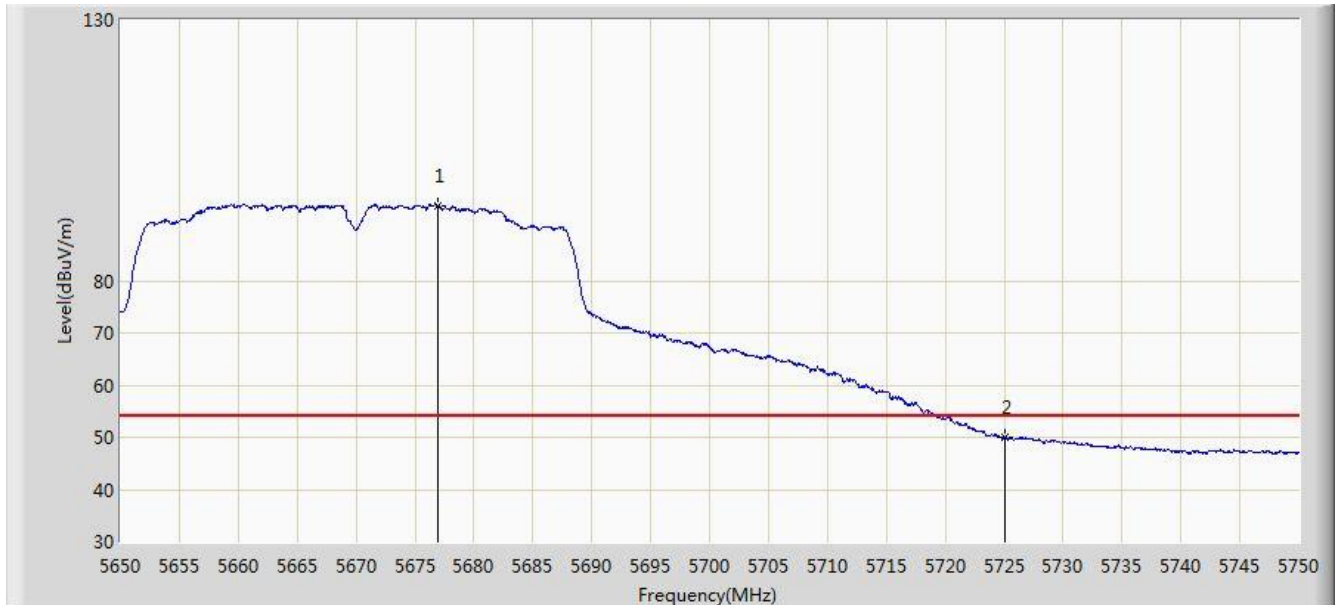


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.950	94.448	89.673	N/A	N/A	4.775	AV
2			5725.000	50.025	44.996	-3.975	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:27
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant B	

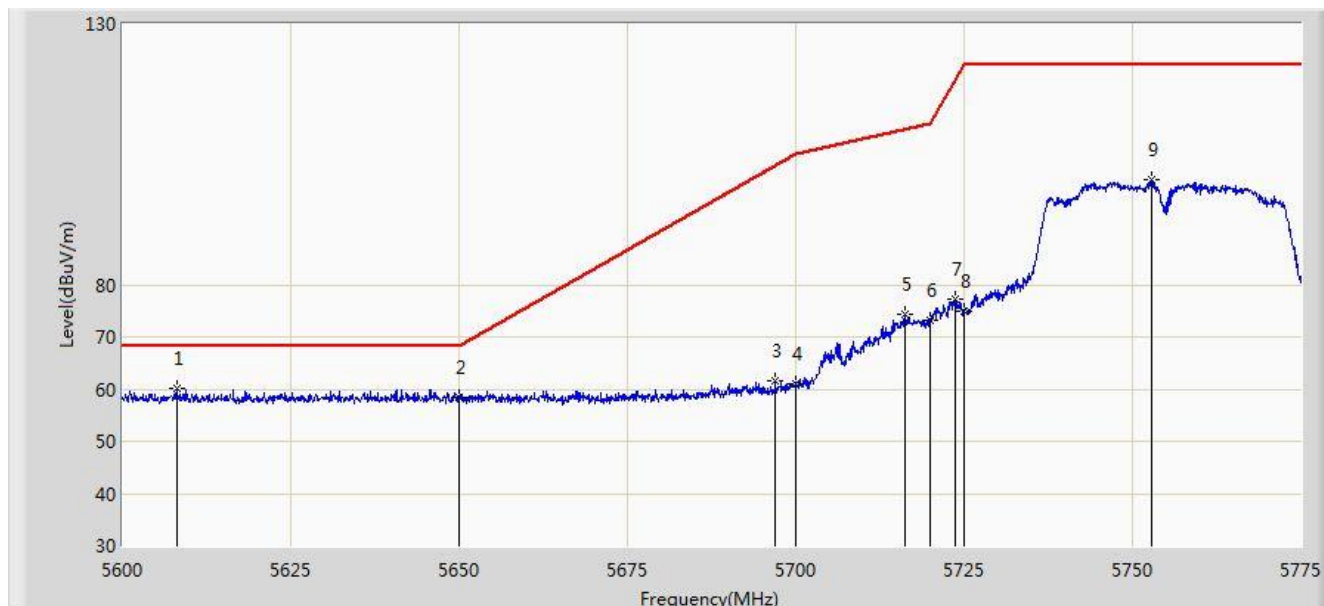


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5608.050	60.159	55.613	-8.041	68.200	4.546	PK
2			5650.000	58.353	53.682	-9.847	68.200	4.671	PK
3			5696.950	61.554	56.692	-41.398	102.952	4.862	PK
4			5700.000	61.039	56.161	-44.161	105.200	4.878	PK
5			5716.288	74.413	69.440	-35.349	109.762	4.974	PK
6			5720.000	73.265	68.268	-37.535	110.800	4.997	PK
7			5723.638	77.388	72.368	-41.707	119.096	5.021	PK
8			5725.000	75.054	70.025	-47.146	122.200	5.029	PK
9			5752.775	100.240	95.041	N/A	N/A	5.199	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:25
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz, Ant B	

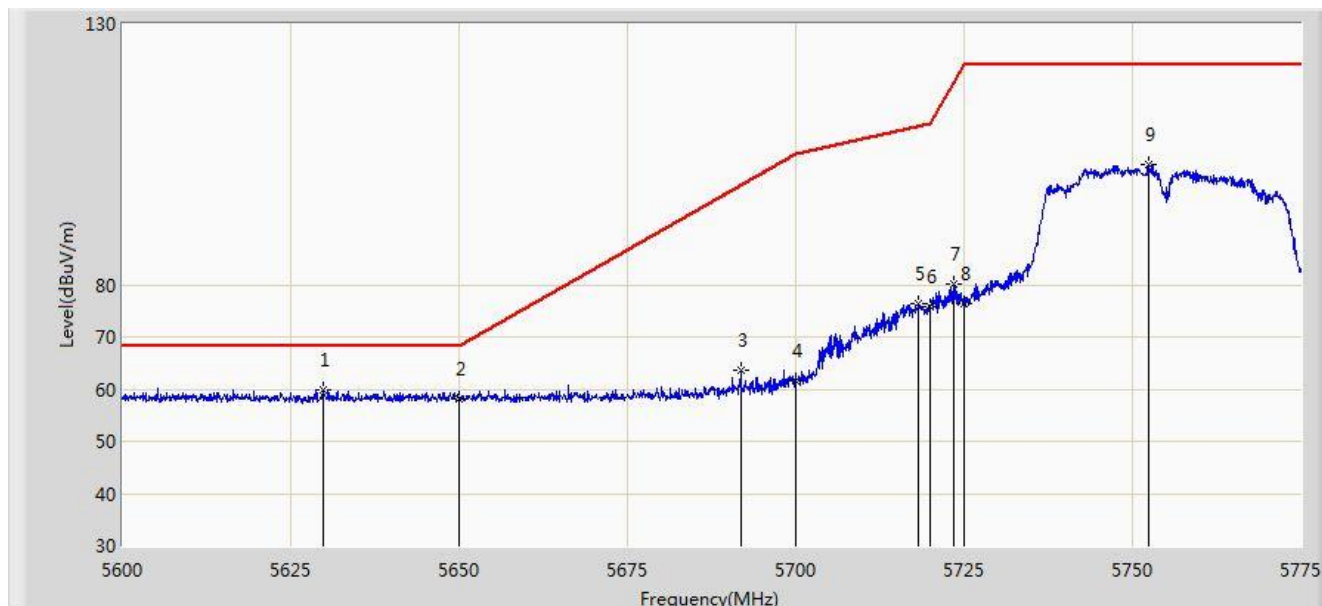


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.750	59.754	55.146	-8.446	68.200	4.608	PK
2			5650.000	58.129	53.458	-10.071	68.200	4.671	PK
3			5691.788	63.516	58.681	-35.630	99.145	4.835	PK
4			5700.000	61.454	56.576	-43.746	105.200	4.878	PK
5			5718.212	76.451	71.466	-33.849	110.300	4.985	PK
6			5720.000	75.713	70.716	-35.087	110.800	4.997	PK
7			5723.375	80.059	75.040	-38.438	118.496	5.018	PK
8			5725.000	76.375	71.346	-45.825	122.200	5.029	PK
9			5752.513	103.000	97.802	N/A	N/A	5.198	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:29
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant B	

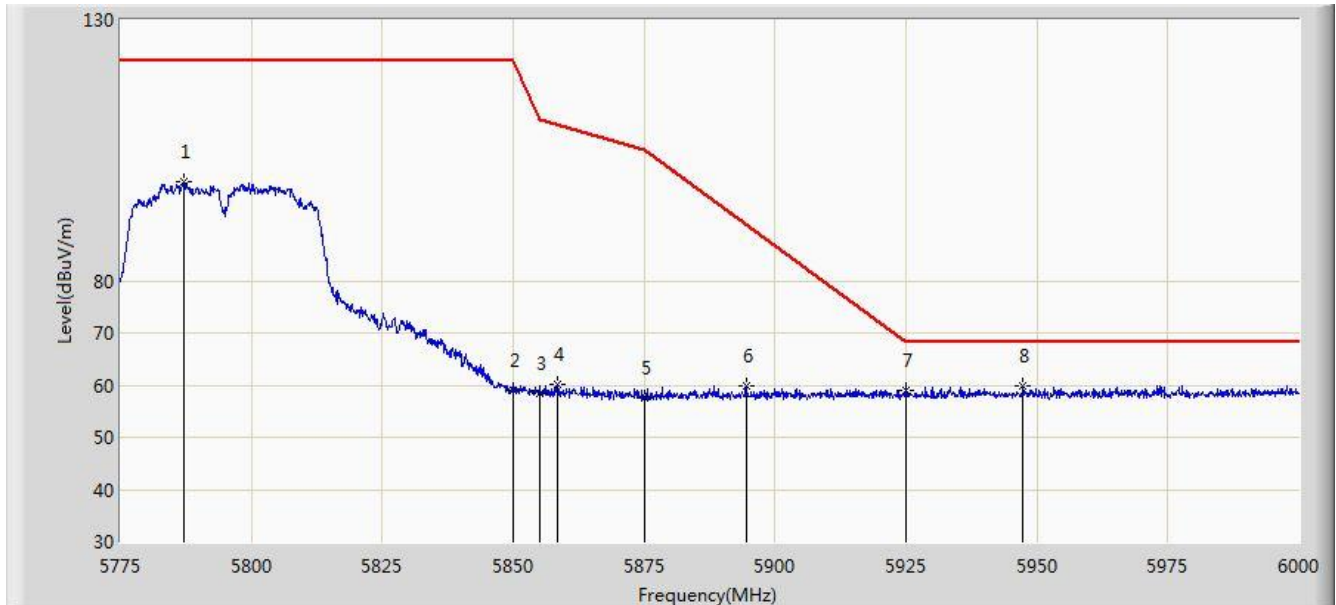


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.038	98.896	93.519	N/A	N/A	5.378	PK
2			5850.000	59.012	53.286	-63.188	122.200	5.726	PK
3			5855.000	58.473	52.727	-52.327	110.800	5.746	PK
4			5858.362	60.015	54.255	-49.842	109.857	5.760	PK
5			5875.000	57.415	51.595	-47.785	105.200	5.820	PK
6			5894.475	59.771	53.884	-30.981	90.751	5.886	PK
7			5925.000	59.077	53.111	-9.123	68.200	5.967	PK
8		*	5947.350	59.962	53.941	-8.238	68.200	6.021	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:31
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz, Ant B	

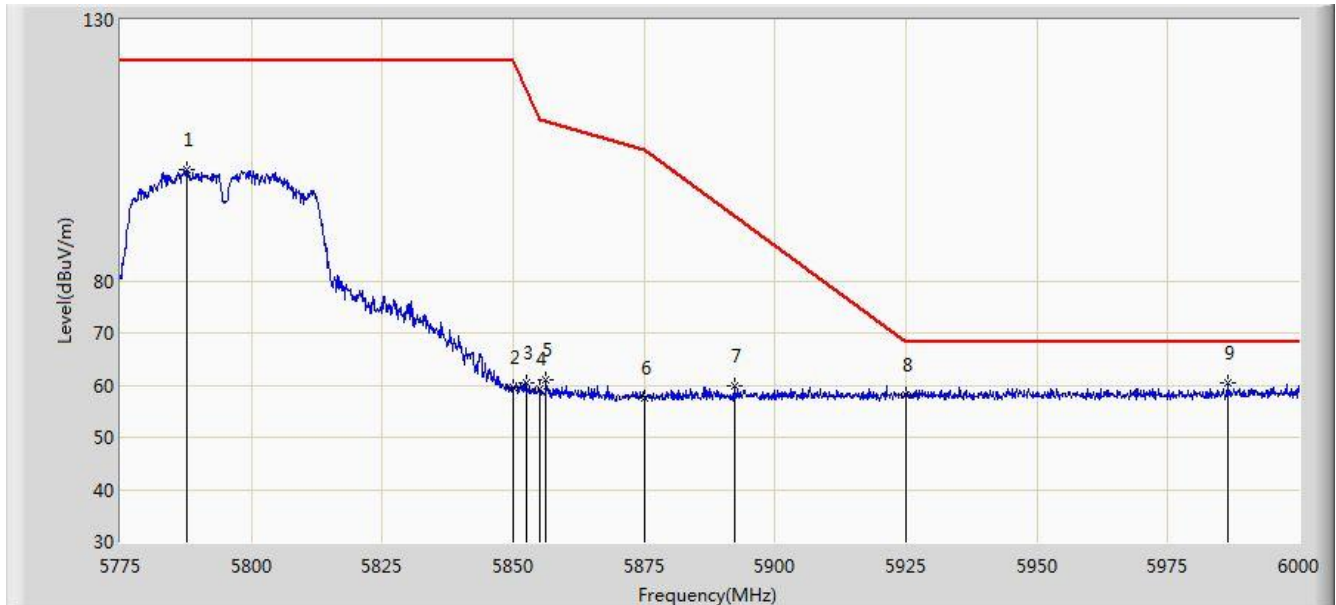


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.825	101.314	95.933	N/A	N/A	5.381	PK
2			5850.000	59.492	53.766	-62.708	122.200	5.726	PK
3			5852.513	60.387	54.651	-56.082	116.469	5.736	PK
4			5855.000	59.268	53.522	-51.532	110.800	5.746	PK
5			5856.337	60.896	55.144	-49.529	110.425	5.751	PK
6			5875.000	57.467	51.647	-47.733	105.200	5.820	PK
7			5892.225	59.985	54.106	-32.433	92.418	5.879	PK
8			5925.000	58.157	52.191	-10.043	68.200	5.967	PK
9		*	5986.500	60.577	54.489	-7.623	68.200	6.089	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5180MHz, Ant B	

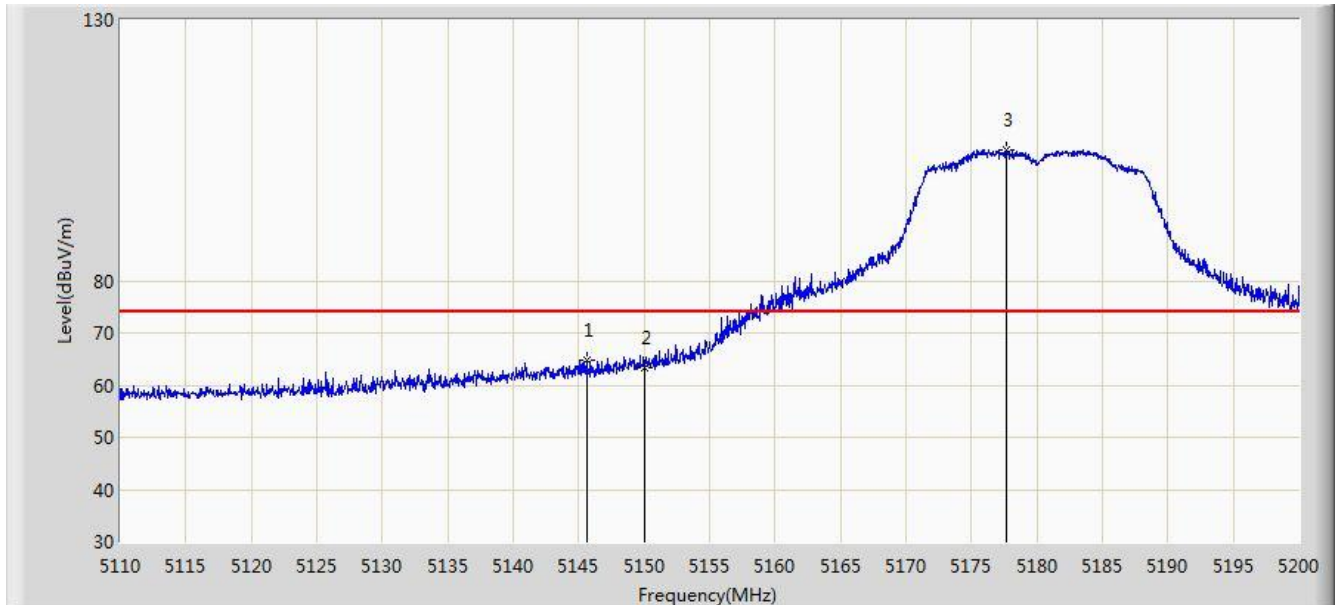


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.595	64.639	60.463	-9.361	74.000	4.176	PK
2			5150.000	63.284	59.115	-10.716	74.000	4.170	PK
3		*	5177.680	105.100	101.023	N/A	N/A	4.077	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5180MHz, Ant B	

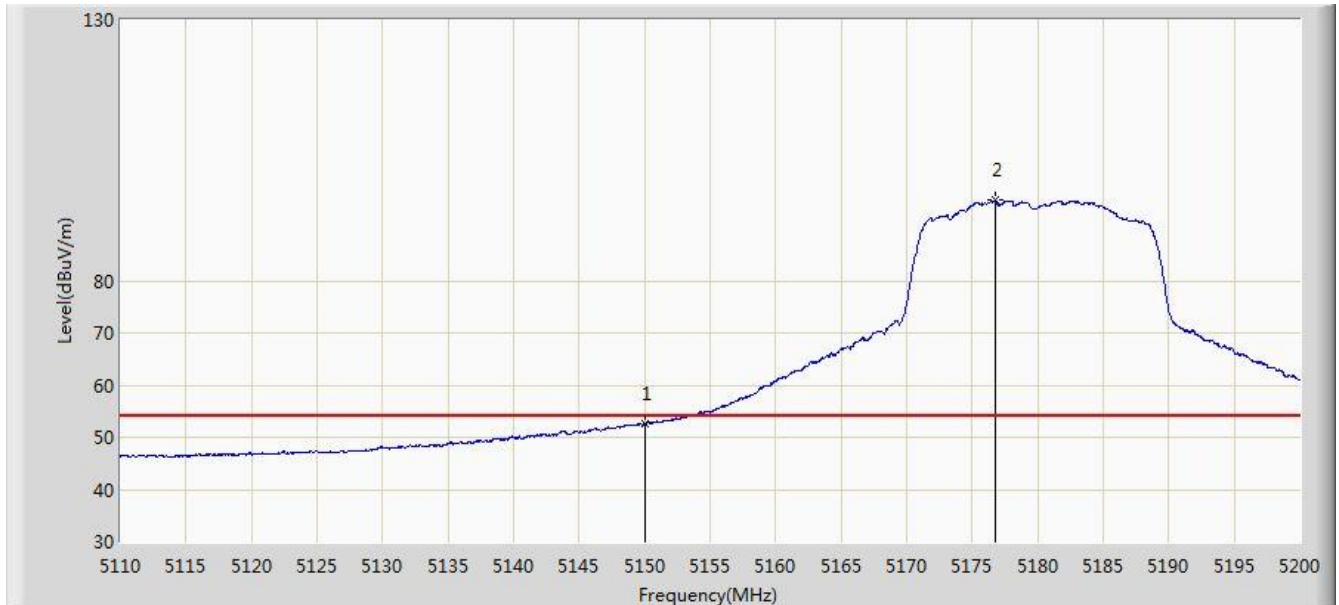


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.633	48.464	-1.367	54.000	4.170	AV
2		*	5176.735	95.399	91.319	N/A	N/A	4.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5180MHz, Ant B	

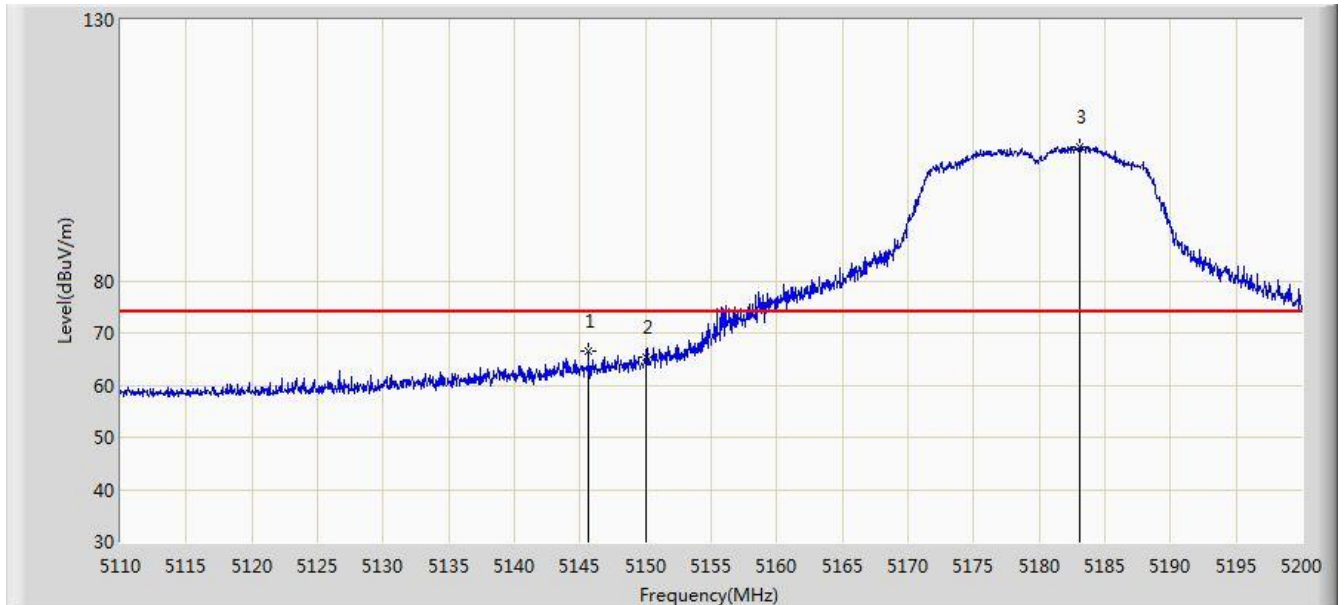


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.685	66.636	62.460	-7.364	74.000	4.176	PK
2			5150.000	65.219	61.050	-8.781	74.000	4.170	PK
3		*	5183.125	105.646	101.588	N/A	N/A	4.057	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5180MHz, Ant B	

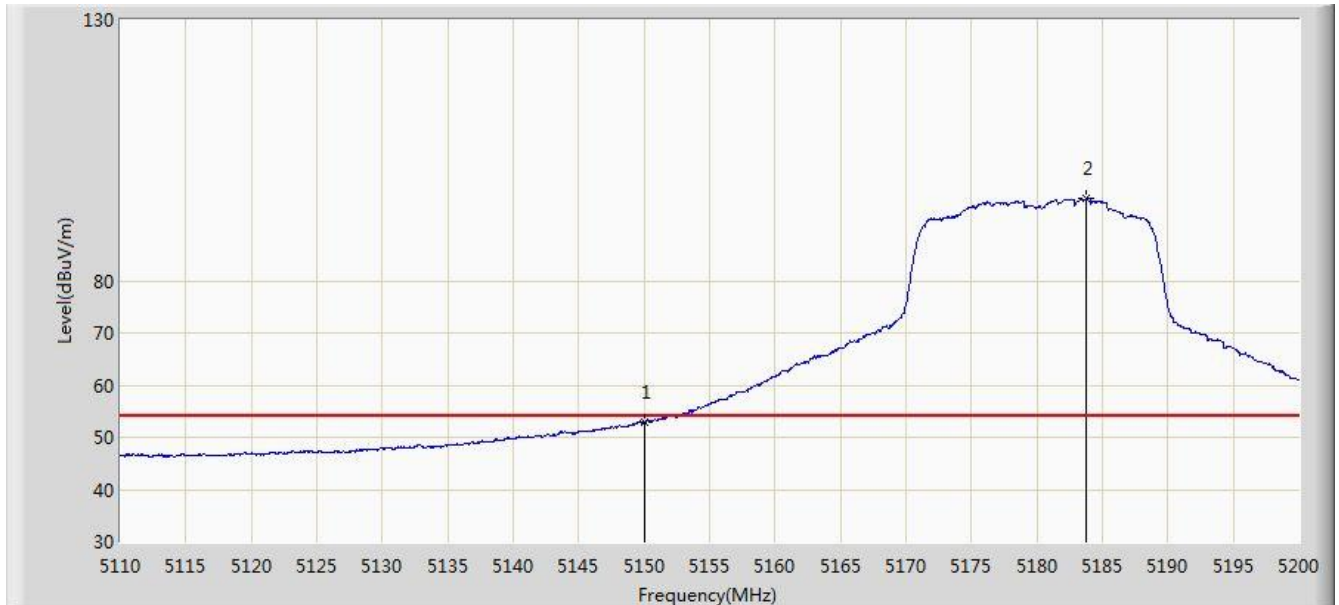


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	52.835	48.666	-1.165	54.000	4.170	AV
2		*	5183.755	95.715	91.659	N/A	N/A	4.056	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5320MHz, Ant B	

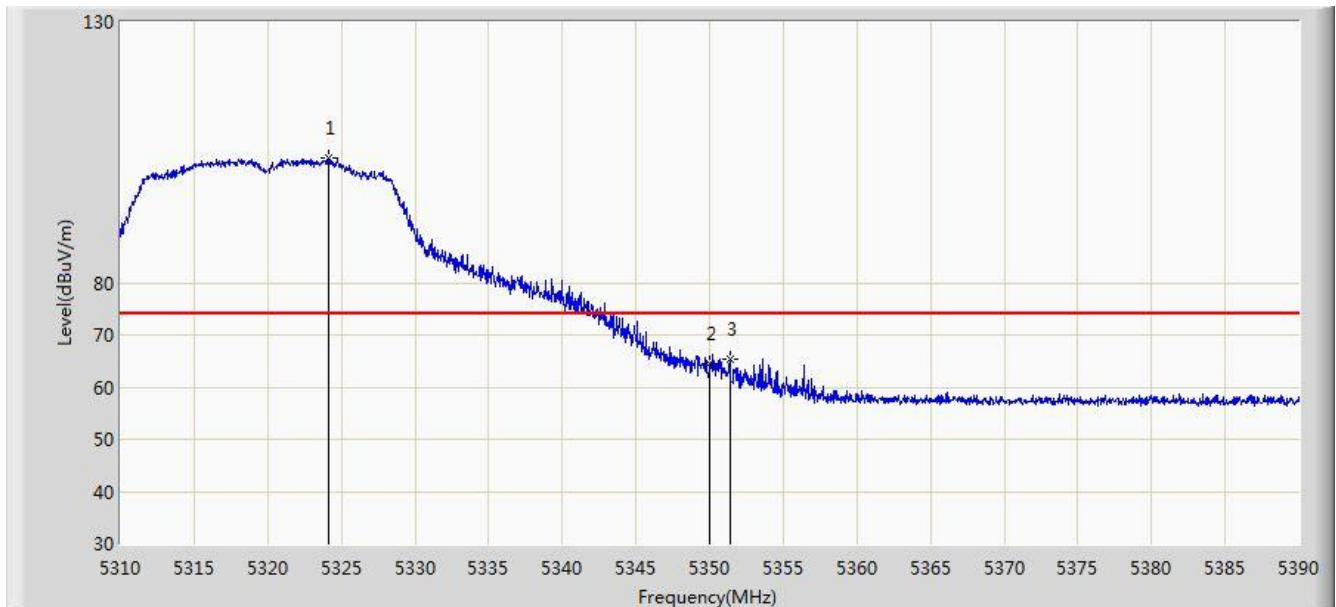


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.160	104.038	100.182	N/A	N/A	3.857	PK
2			5350.000	64.525	60.620	-9.475	74.000	3.904	PK
3			5351.360	65.261	61.354	-8.739	74.000	3.907	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 01:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5320MHz, Ant B	

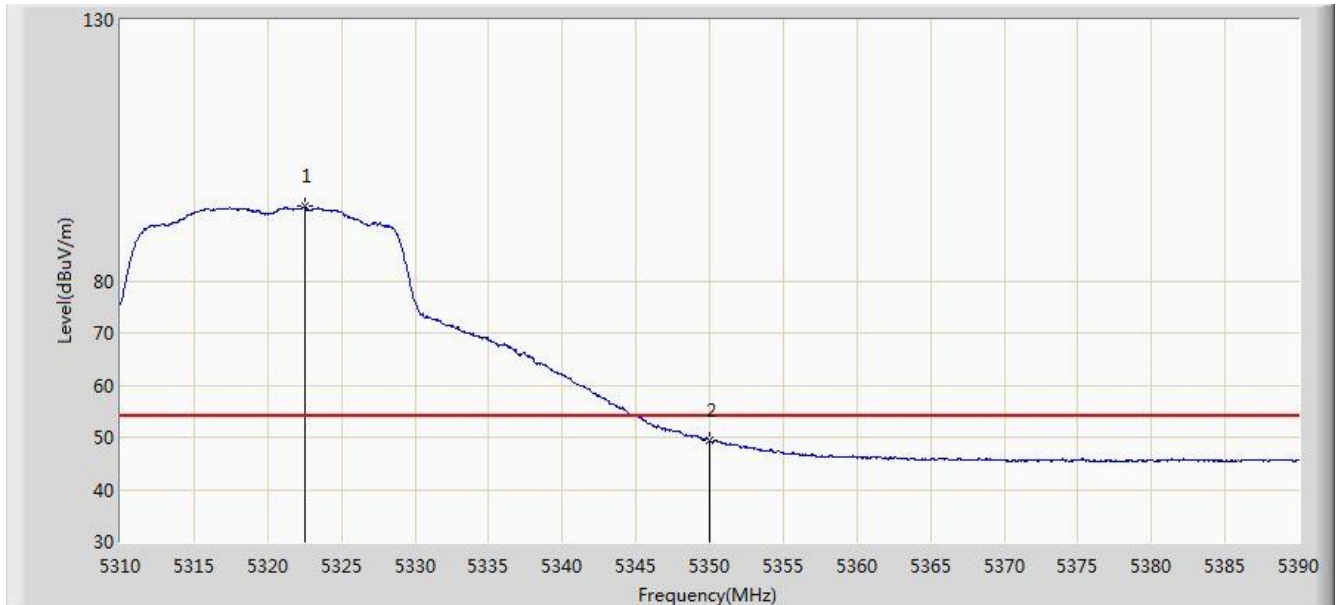


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5322.520	94.211	90.358	N/A	N/A	3.853	AV
2			5350.000	49.408	45.503	-4.592	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5320MHz, Ant B	

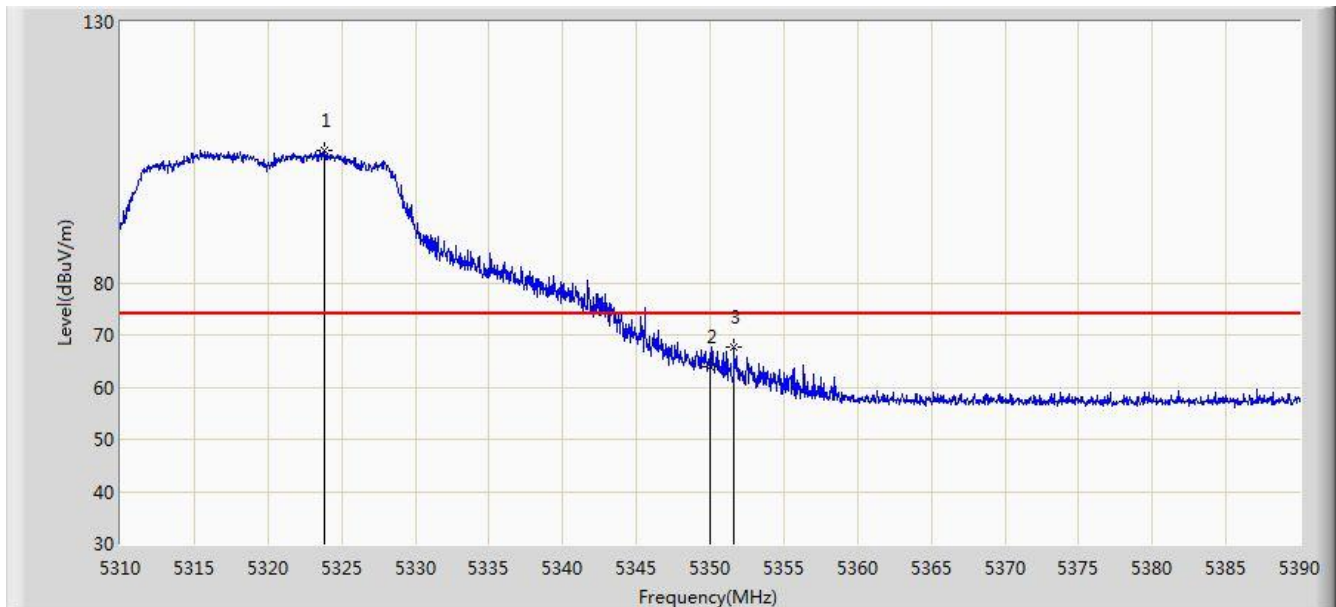


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.800	105.463	101.607	N/A	N/A	3.856	PK
2			5350.000	64.046	60.141	-9.954	74.000	3.904	PK
3			5351.640	67.619	63.711	-6.381	74.000	3.908	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 00:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5320MHz, Ant B	

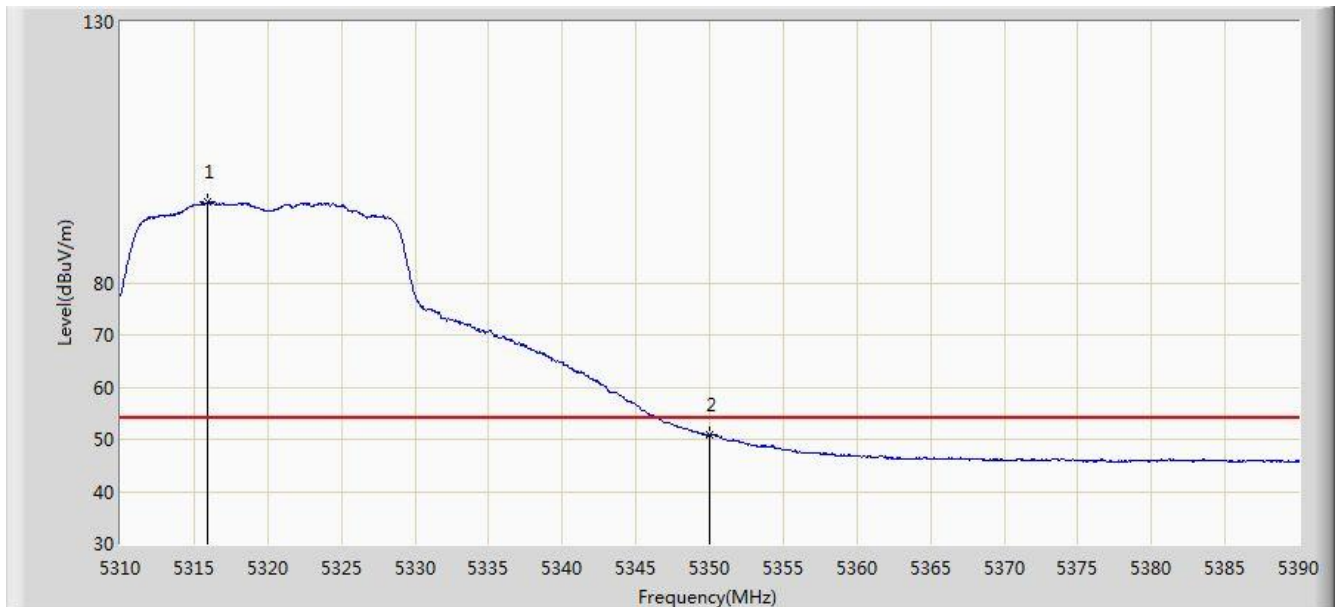


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.920	95.433	91.592	N/A	N/A	3.840	AV
2			5350.000	50.904	46.999	-3.096	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5500MHz, Ant B	

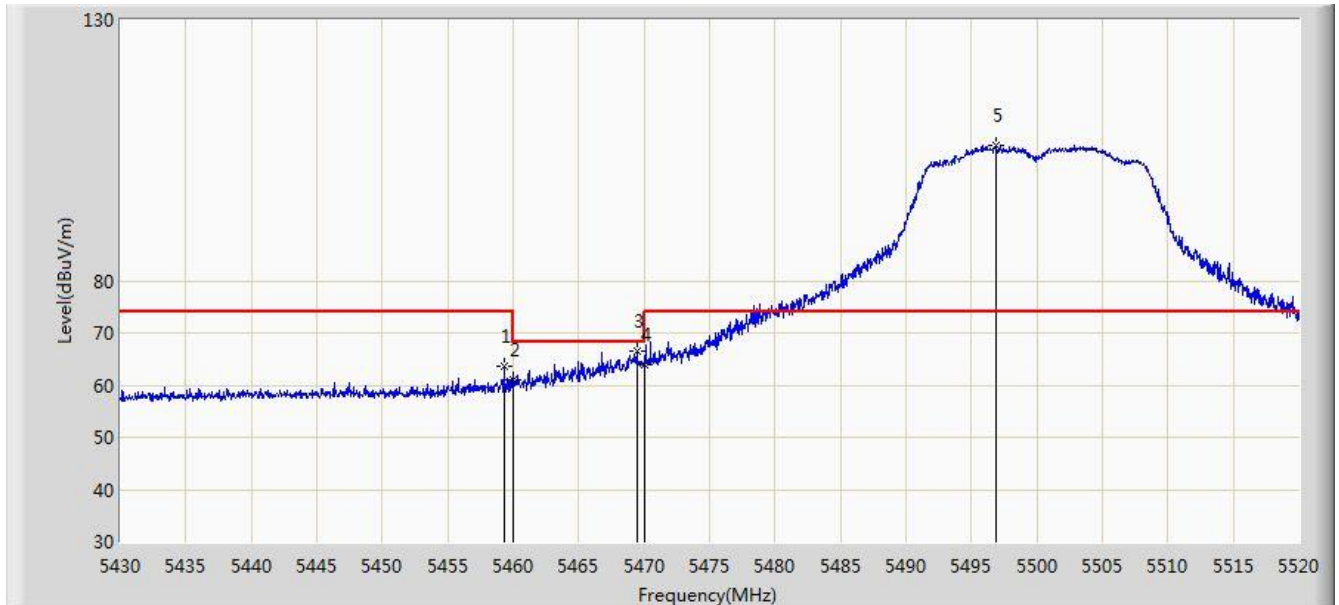


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.295	63.511	59.332	-10.489	74.000	4.178	PK
2			5460.000	61.048	56.868	-12.952	74.000	4.180	PK
3			5469.420	66.550	62.349	-1.650	68.200	4.201	PK
4			5470.000	63.918	59.716	-4.282	68.200	4.202	PK
5		*	5496.915	106.052	101.789	N/A	N/A	4.264	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5500MHz, Ant B	

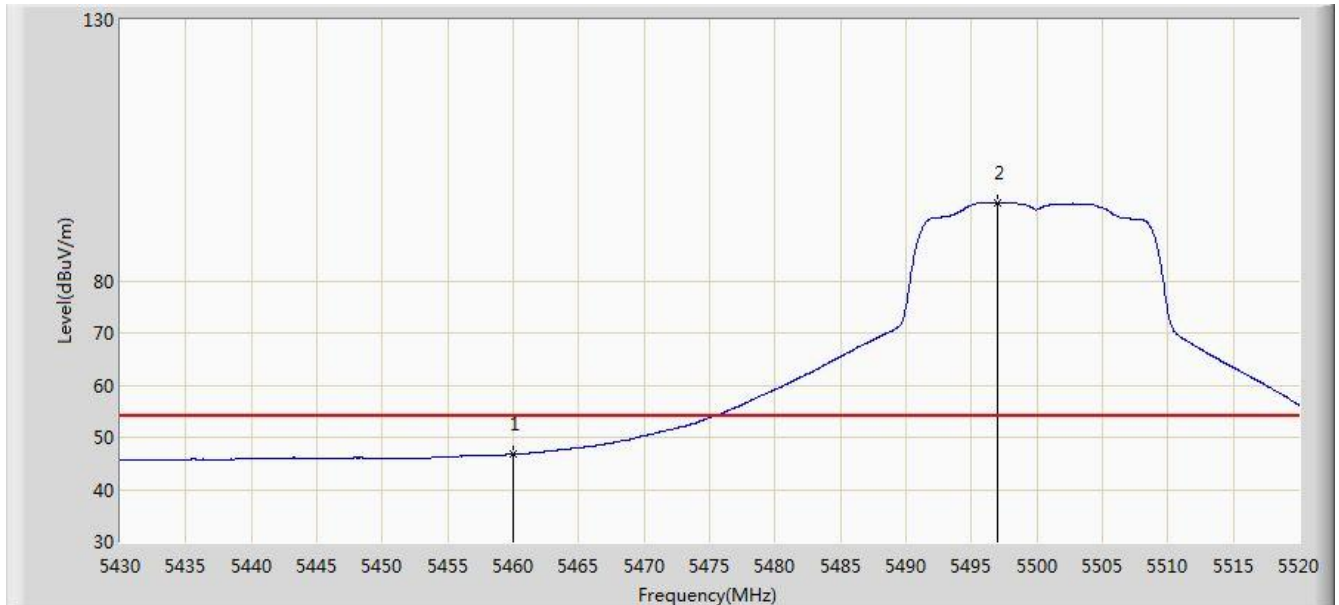


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.736	42.556	-7.264	54.000	4.180	AV
2		*	5497.005	94.956	90.692	N/A	N/A	4.264	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5500MHz, Ant B	

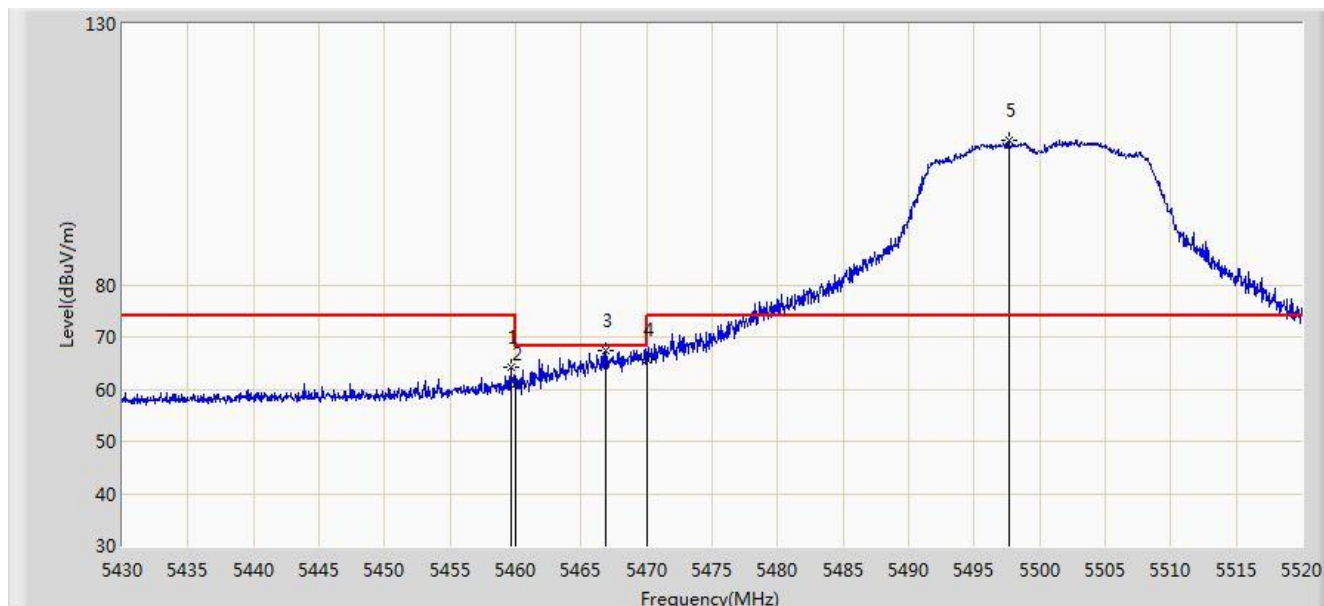


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.610	64.245	60.066	-9.755	74.000	4.180	PK
2			5460.000	60.969	56.789	-13.031	74.000	4.180	PK
3			5466.855	67.318	63.123	-0.882	68.200	4.196	PK
4			5470.000	65.607	61.405	-2.593	68.200	4.202	PK
5		*	5497.635	107.650	103.385	N/A	N/A	4.265	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5500MHz, Ant B	

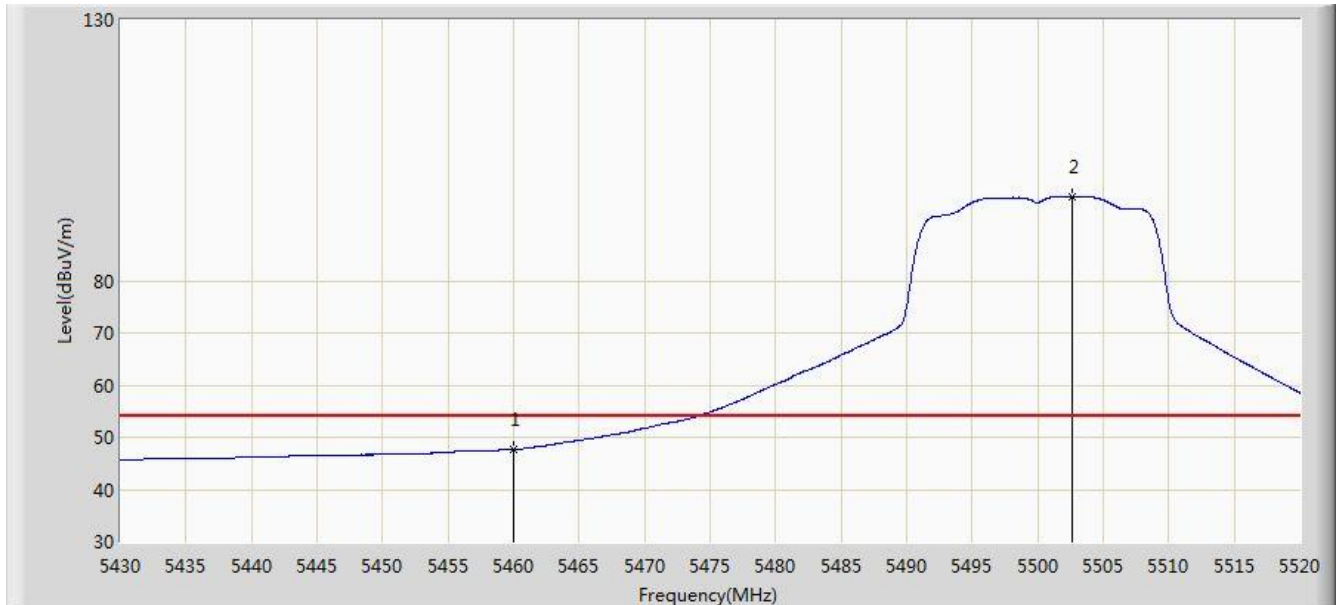


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.694	43.514	-6.306	54.000	4.180	AV
2		*	5502.585	96.153	91.873	N/A	N/A	4.280	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5700MHz, Ant B	

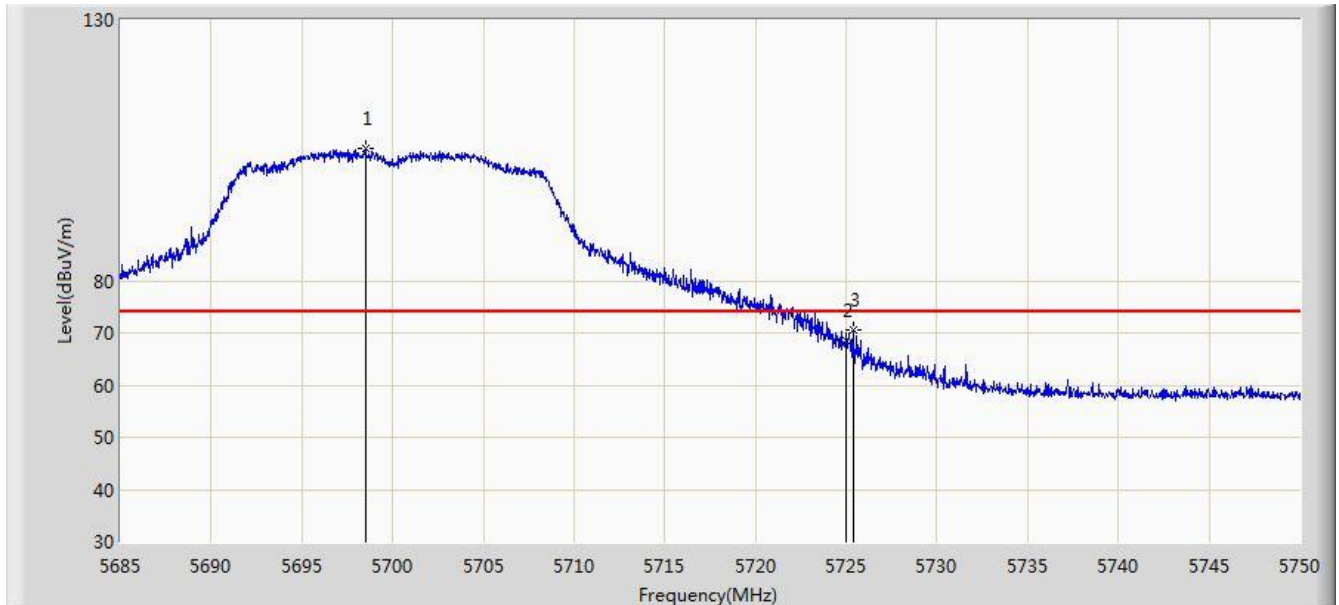


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.487	105.287	100.417	N/A	N/A	4.871	PK
2			5725.000	68.493	63.464	-5.507	74.000	5.029	PK
3			5725.365	70.492	65.461	-3.508	74.000	5.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5700MHz, Ant B	

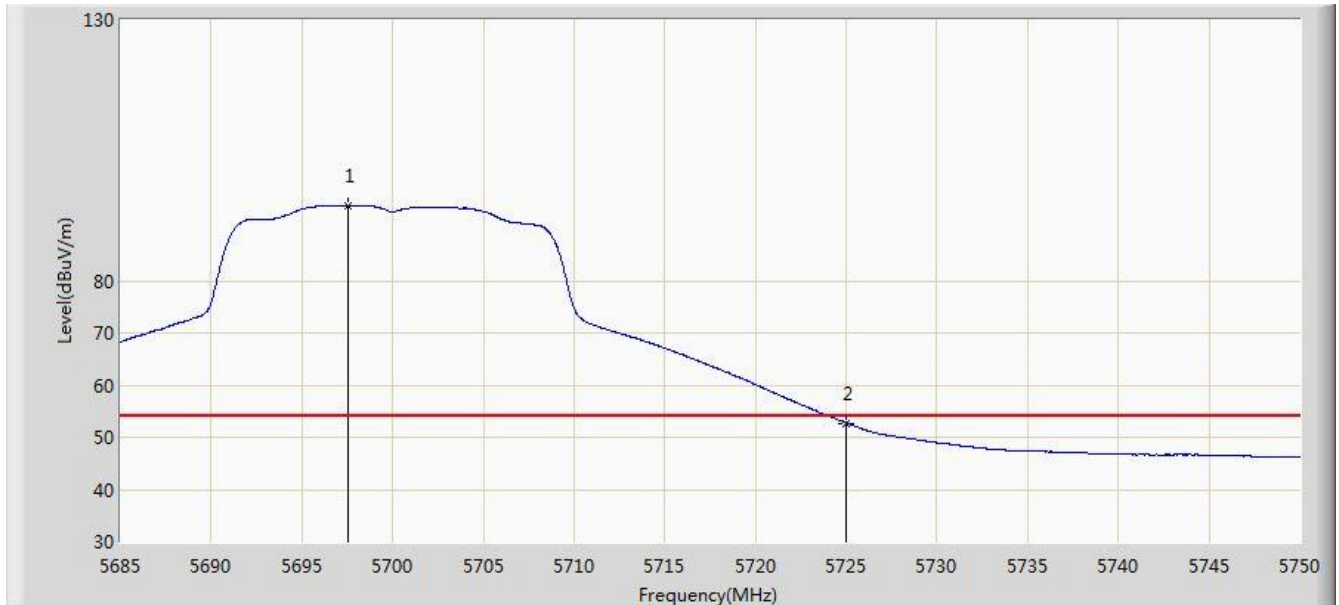


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5697.513	94.359	89.494	N/A	N/A	4.865	AV
2			5725.000	52.730	47.701	-1.270	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5700MHz, Ant B	

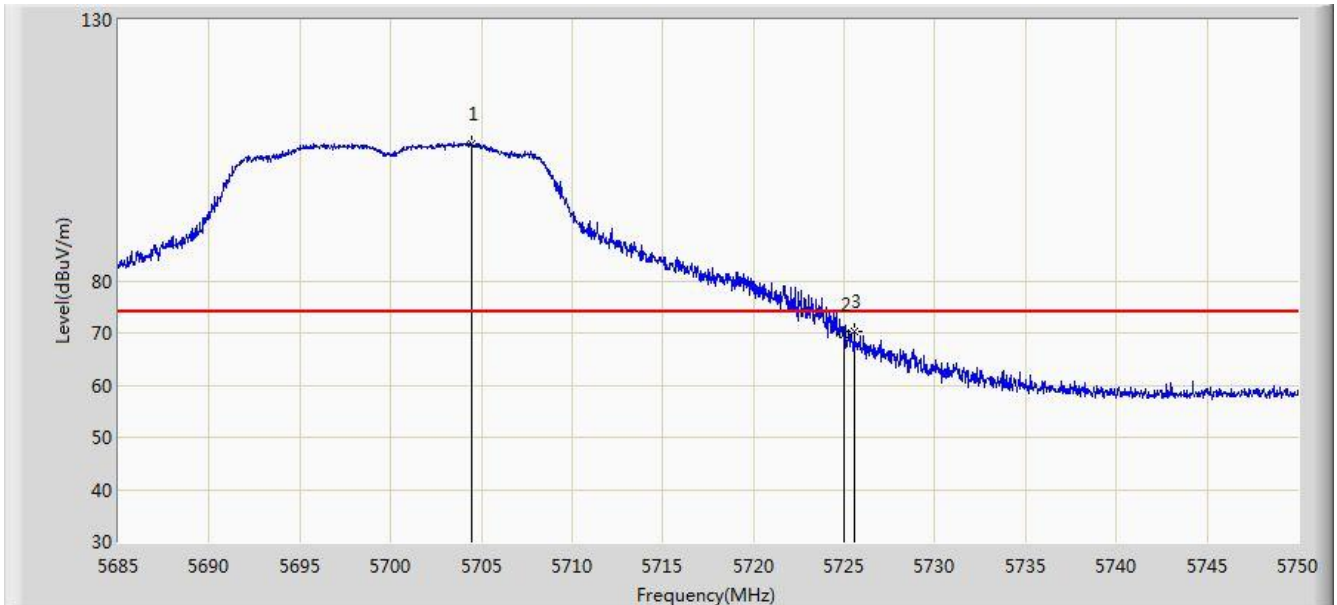


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.467	106.284	101.382	N/A	N/A	4.902	PK
2			5725.000	69.783	64.754	-4.217	74.000	5.029	PK
3			5725.527	70.366	65.334	-3.634	74.000	5.032	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 05:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5700MHz, Ant B	

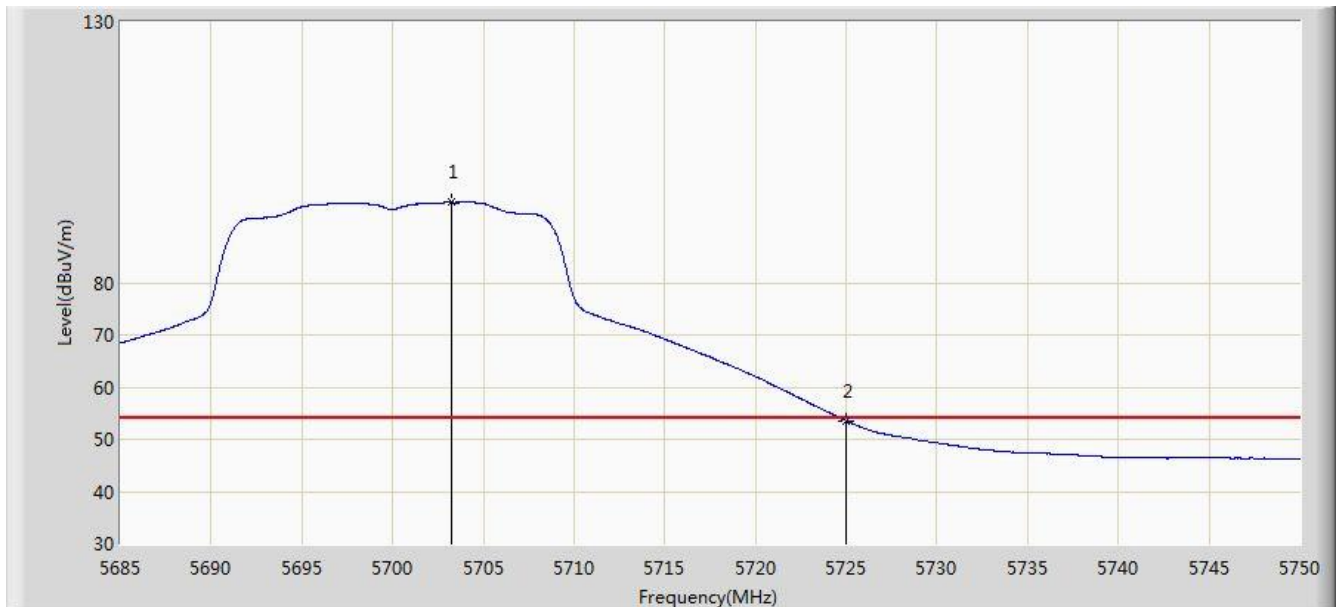


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.265	95.379	90.483	N/A	N/A	4.896	AV
2			5725.000	53.579	48.550	-0.421	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:03
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5745MHz, Ant B	

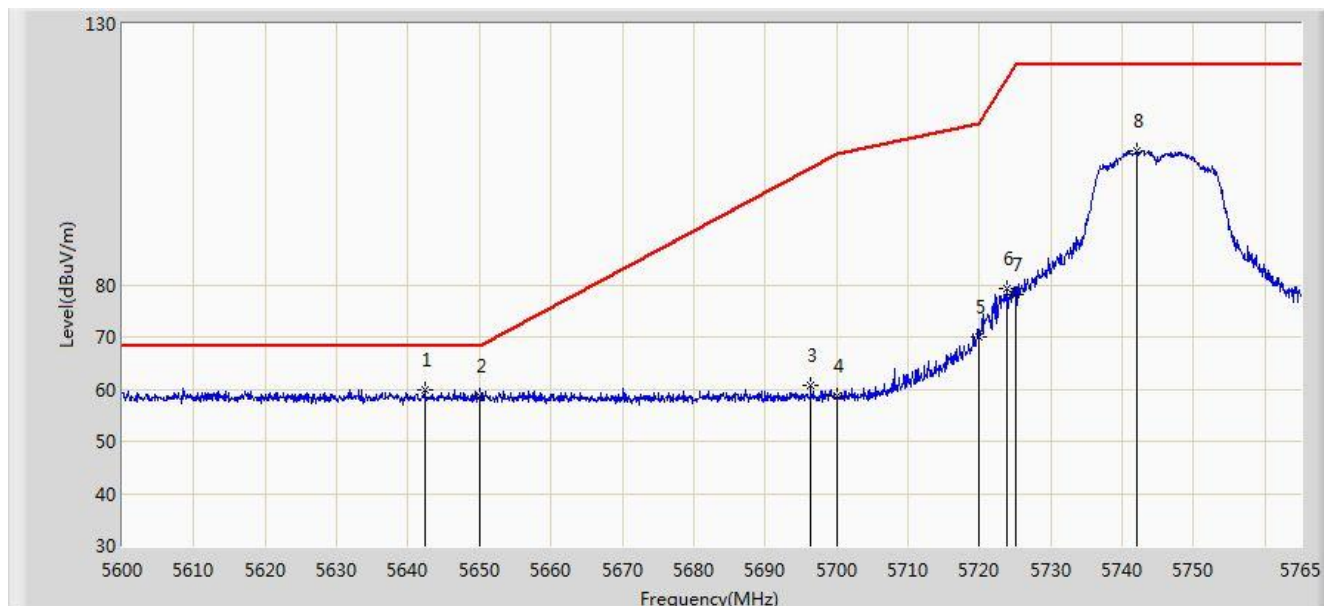


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.322	59.819	55.174	-8.381	68.200	4.646	PK
2			5650.000	58.619	53.948	-9.581	68.200	4.671	PK
3			5696.360	60.756	55.897	-41.761	102.517	4.859	PK
4			5700.000	58.683	53.805	-46.517	105.200	4.878	PK
5			5720.000	70.062	65.065	-40.738	110.800	4.997	PK
6			5723.750	79.346	74.325	-40.005	119.351	5.021	PK
7			5725.000	77.976	72.947	-44.224	122.200	5.029	PK
8			5741.982	105.670	100.533	N/A	N/A	5.137	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:06
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5745MHz, Ant B	

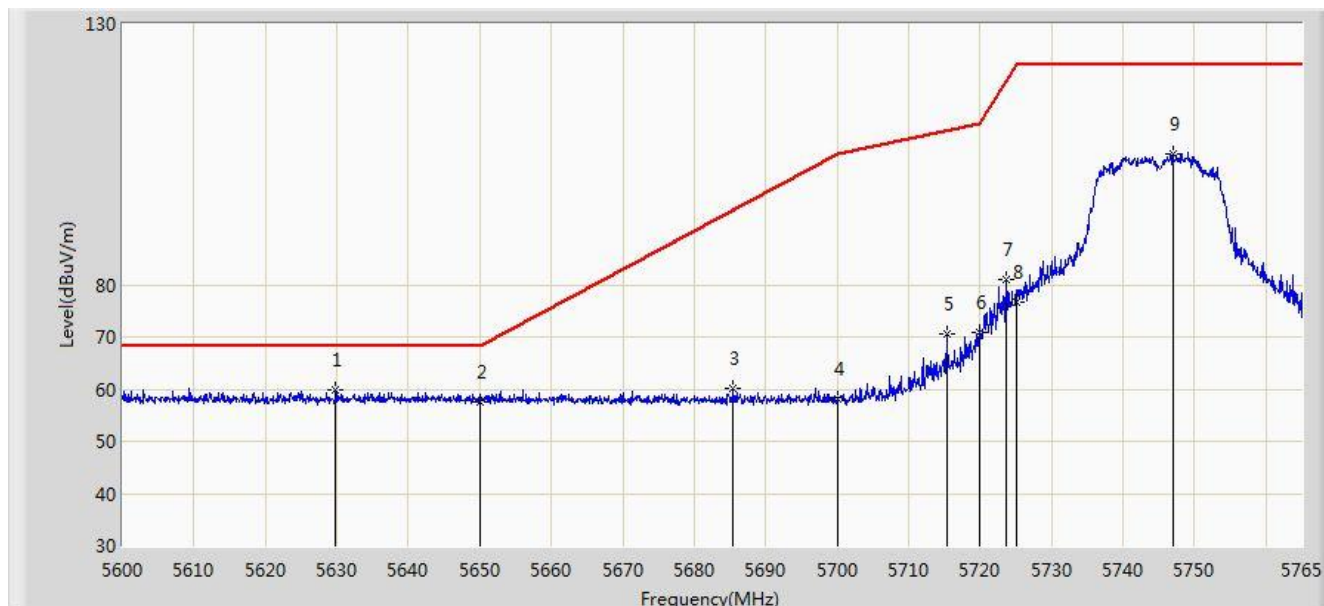


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.783	59.959	55.350	-8.241	68.200	4.609	PK
2			5650.000	57.634	52.963	-10.566	68.200	4.671	PK
3			5685.470	60.173	55.364	-34.308	94.481	4.810	PK
4			5700.000	58.177	53.299	-47.023	105.200	4.878	PK
5			5715.335	70.670	65.703	-38.826	109.496	4.967	PK
6			5720.000	70.753	65.756	-40.047	110.800	4.997	PK
7			5723.667	80.923	75.903	-38.238	119.162	5.021	PK
8			5725.000	76.547	71.518	-45.653	122.200	5.029	PK
9			5746.933	105.060	99.894	N/A	N/A	5.166	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:08
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5825MHz, Ant B	

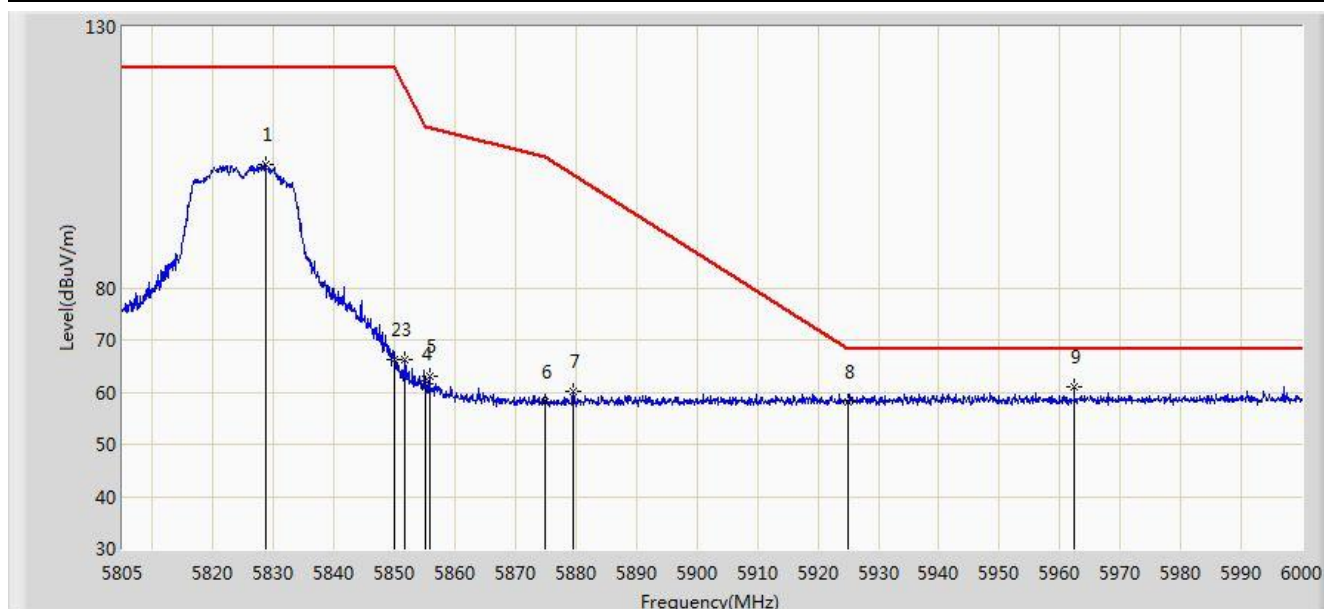


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.692	103.486	97.876	N/A	N/A	5.609	PK
2			5850.000	66.108	60.382	-56.092	122.200	5.726	PK
3			5851.703	66.212	60.479	-52.104	118.316	5.732	PK
4			5855.000	61.611	55.865	-49.189	110.800	5.746	PK
5			5855.797	63.007	57.257	-47.570	110.576	5.749	PK
6			5875.000	57.991	52.171	-47.209	105.200	5.820	PK
7			5879.587	60.081	54.245	-41.712	101.793	5.836	PK
8			5925.000	58.037	52.071	-10.163	68.200	5.967	PK
9		*	5962.365	61.116	55.068	-7.084	68.200	6.048	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:12
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH20 at Channel 5825MHz, Ant B	

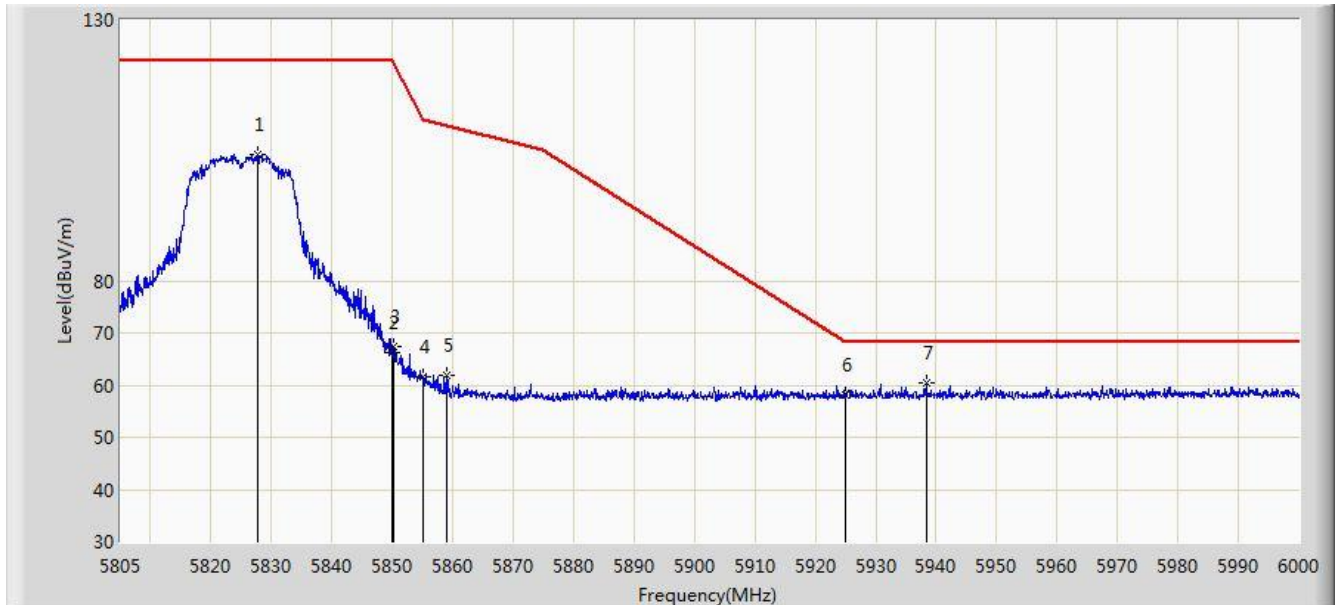


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5827.717	104.177	98.573	N/A	N/A	5.603	PK
2			5850.000	66.088	60.362	-56.112	122.200	5.726	PK
3			5850.143	67.289	61.563	-54.585	121.874	5.726	PK
4			5855.000	61.585	55.839	-49.215	110.800	5.746	PK
5			5858.917	61.815	56.053	-47.886	109.702	5.762	PK
6			5925.000	58.004	52.038	-10.196	68.200	5.967	PK
7		*	5938.380	60.306	54.306	-7.894	68.200	6.000	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5190MHz, Ant B	

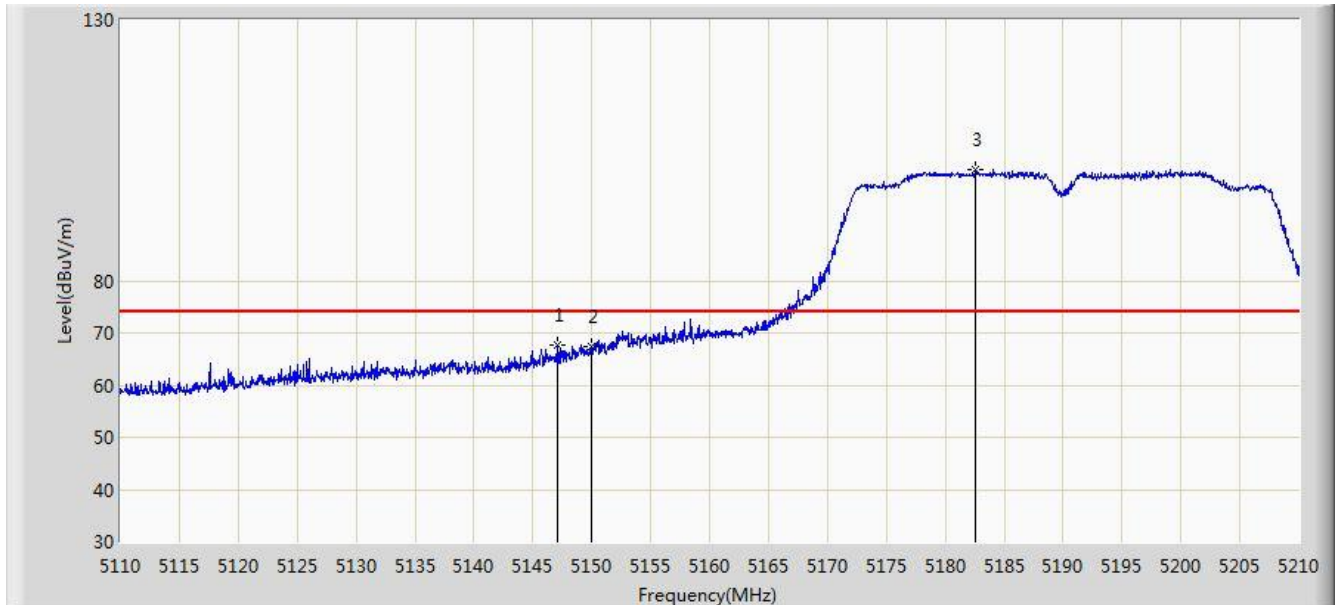


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.150	67.547	63.371	-6.453	74.000	4.176	PK
2			5150.000	67.428	63.259	-6.572	74.000	4.170	PK
3		*	5182.600	101.370	97.310	N/A	N/A	4.060	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5190MHz, Ant B	

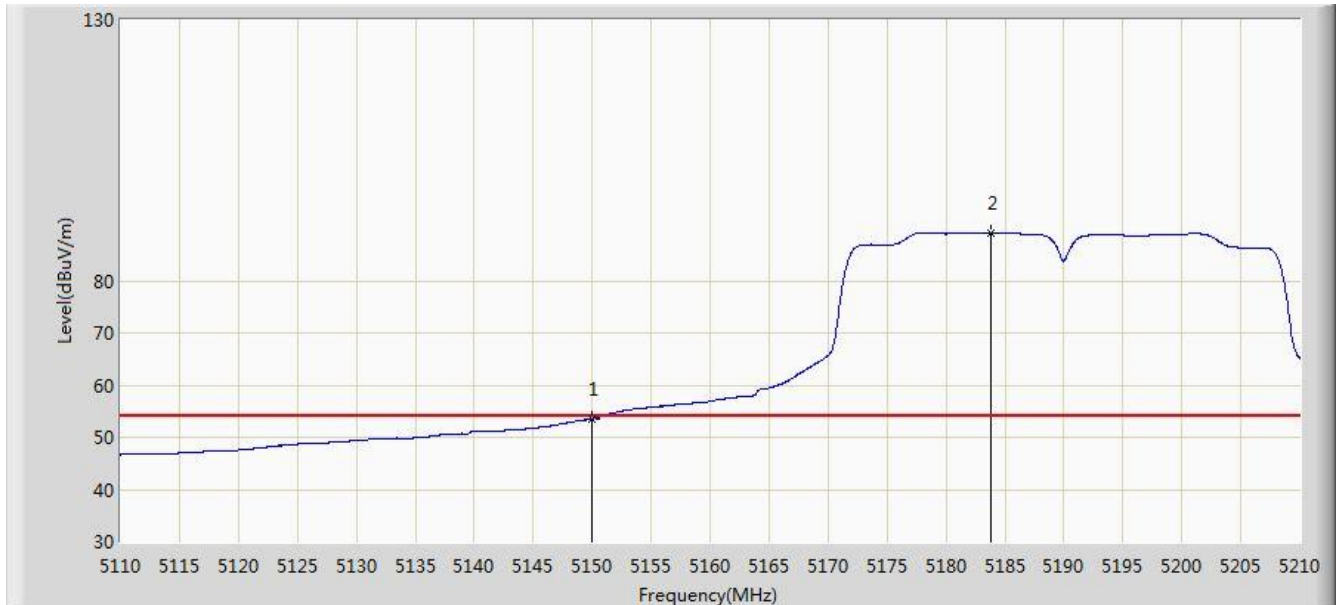


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	53.589	49.420	-0.411	54.000	4.170	AV
2		*	5183.800	89.254	85.199	N/A	N/A	4.056	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5190MHz, Ant B	

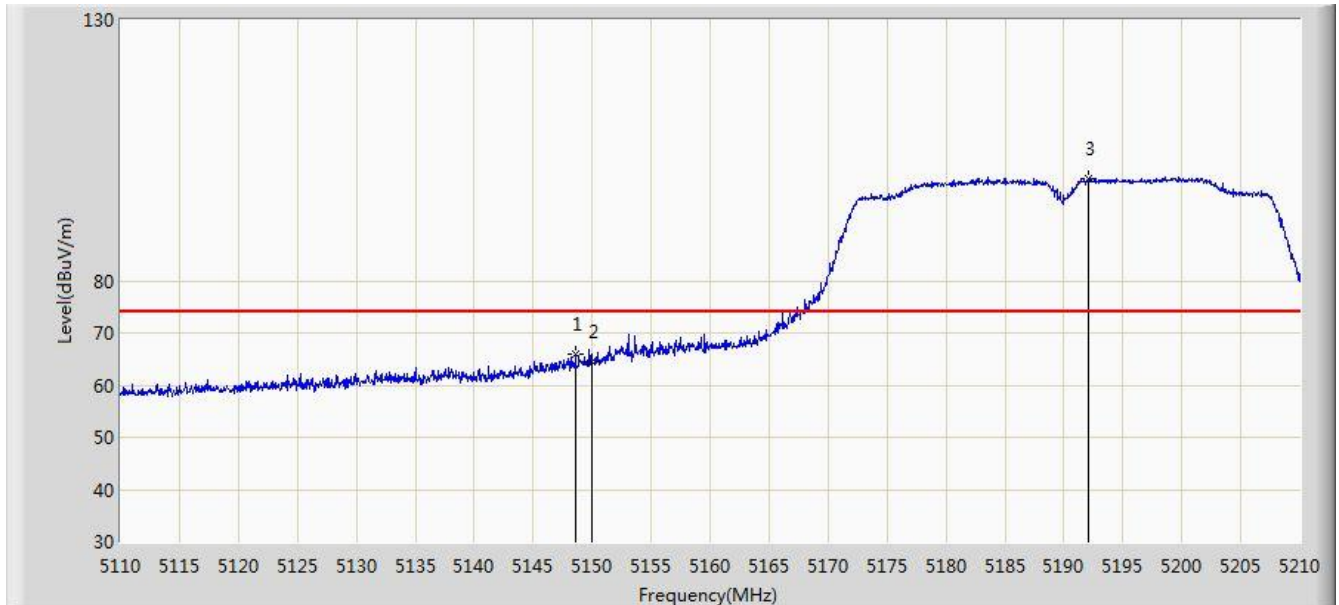


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.600	65.971	61.797	-8.029	74.000	4.173	PK
2			5150.000	64.371	60.202	-9.629	74.000	4.170	PK
3		*	5192.050	99.500	95.474	N/A	N/A	4.027	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 06:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5190MHz, Ant B	

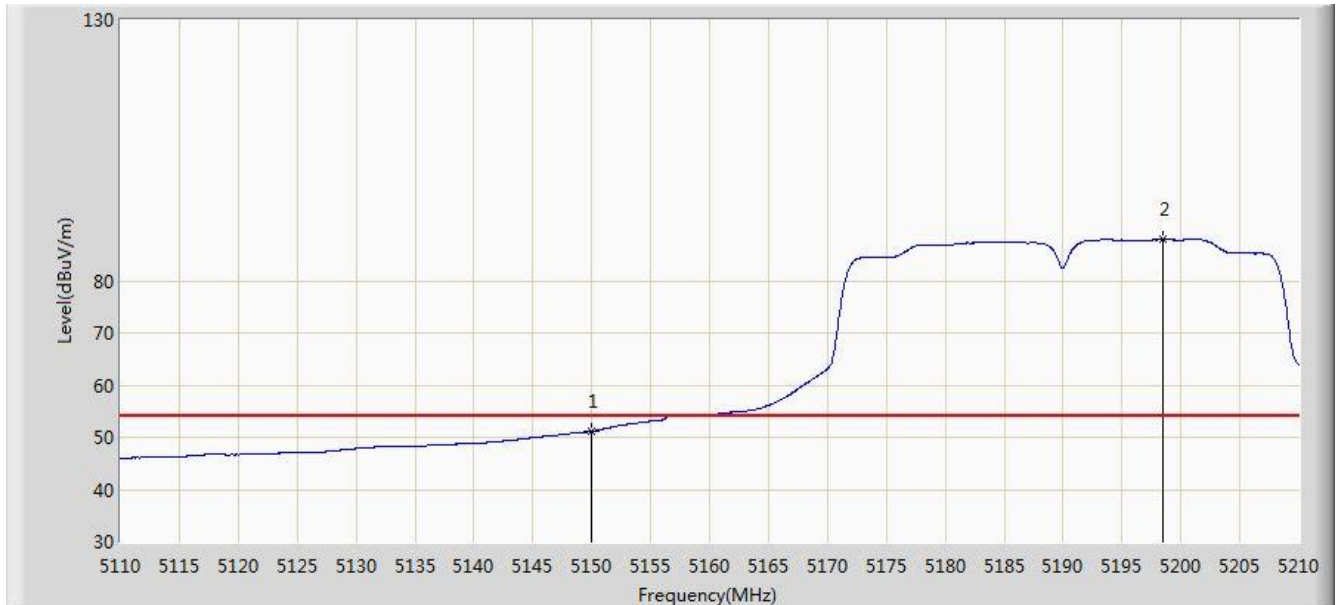


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	51.137	46.968	-2.863	54.000	4.170	AV
2		*	5198.500	87.929	83.926	N/A	N/A	4.003	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5310MHz, Ant B	

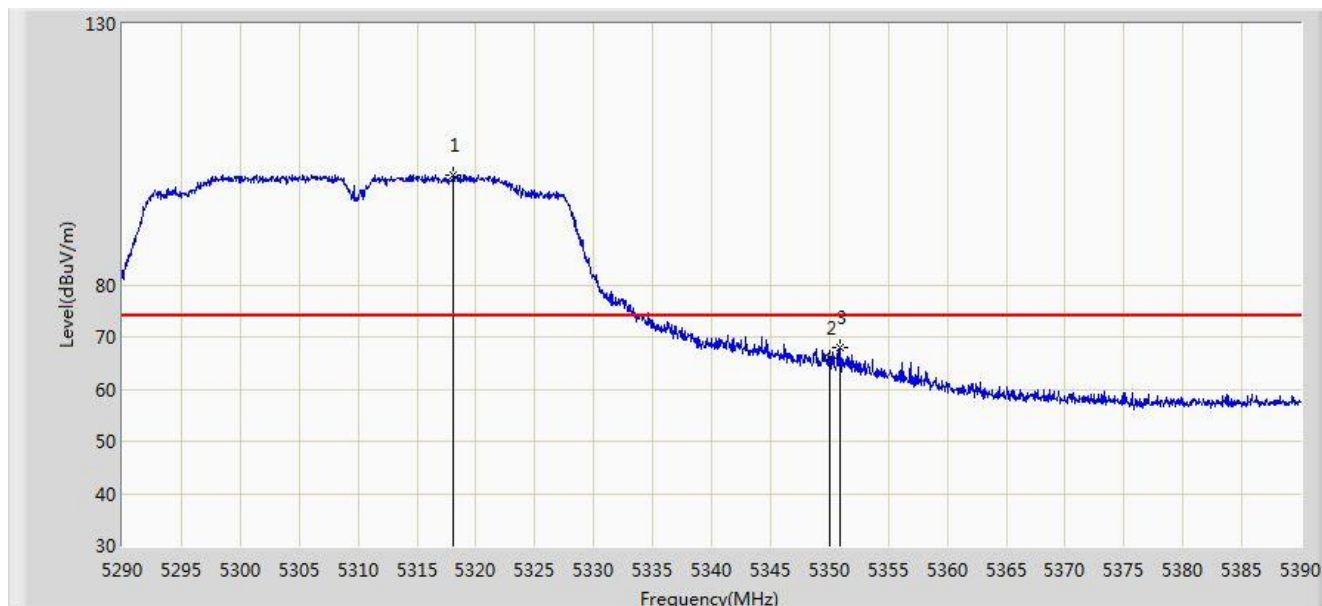


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.100	101.017	97.172	N/A	N/A	3.845	PK
2			5350.000	66.032	62.127	-7.968	74.000	3.904	PK
3			5350.950	67.891	63.985	-6.109	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5310MHz, Ant B	

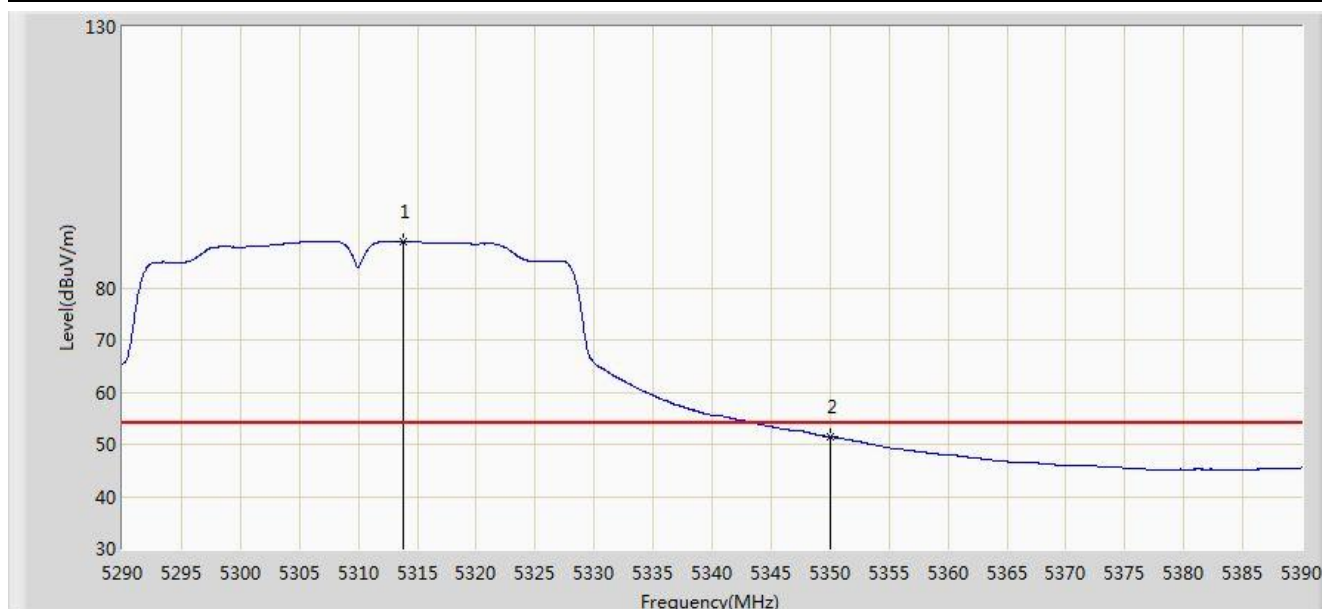


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.750	88.866	85.029	N/A	N/A	3.837	AV
2			5350.000	51.439	47.534	-2.561	54.000	3.904	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5310MHz, Ant B	

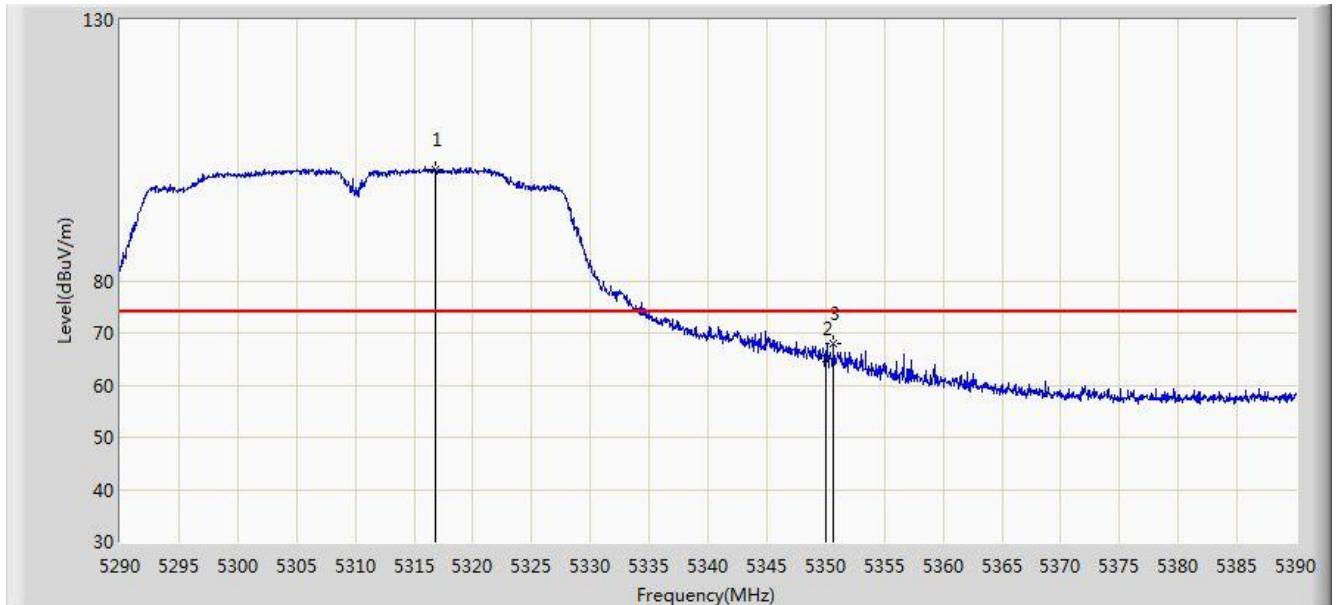


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.850	101.337	97.494	N/A	N/A	3.843	PK
2			5350.000	64.985	61.080	-9.015	74.000	3.904	PK
3			5350.700	68.115	64.209	-5.885	74.000	3.906	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5310MHz, Ant B	

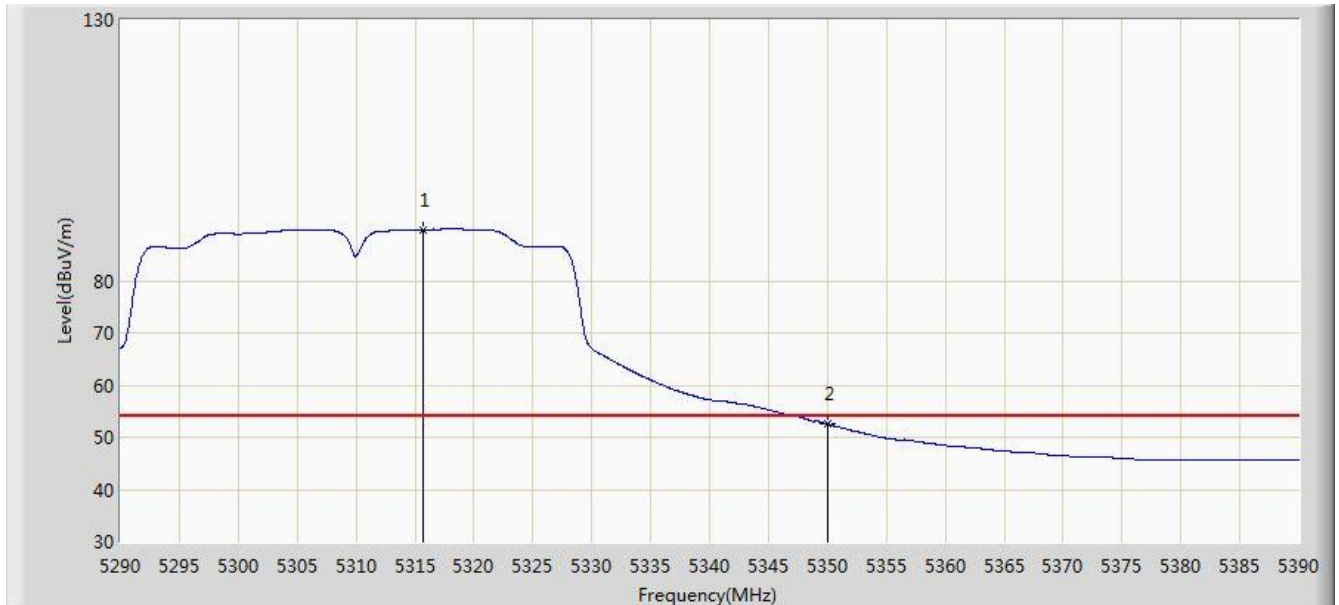


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.750	89.792	85.951	N/A	N/A	3.840	AV
2			5350.000	52.618	48.713	-1.382	54.000	3.904	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5510MHz, Ant B	

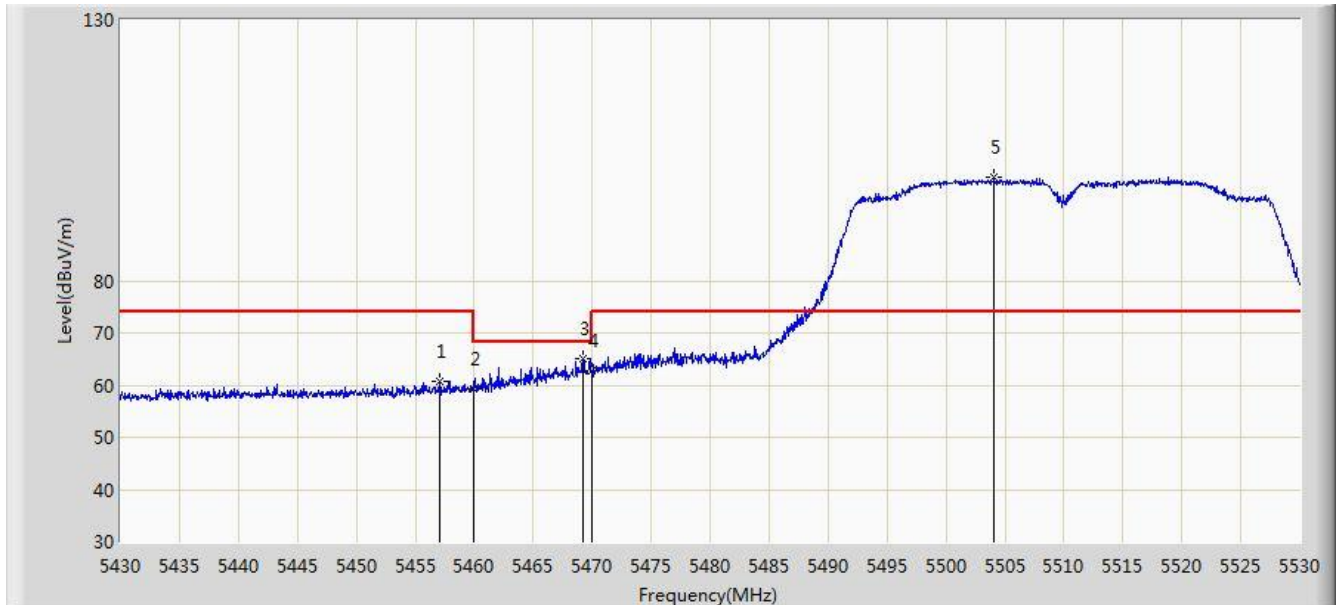

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.050	60.670	56.496	-13.330	74.000	4.174	PK
2			5460.000	59.410	55.230	-14.590	74.000	4.180	PK
3			5469.200	64.933	60.732	-3.267	68.200	4.201	PK
4			5470.000	62.840	58.638	-5.360	68.200	4.202	PK
5		*	5504.050	99.897	95.613	N/A	N/A	4.284	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5510MHz, Ant B	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.978	42.798	-7.022	54.000	4.180	AV
2		*	5505.100	87.926	83.639	N/A	N/A	4.287	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5510MHz, Ant B	

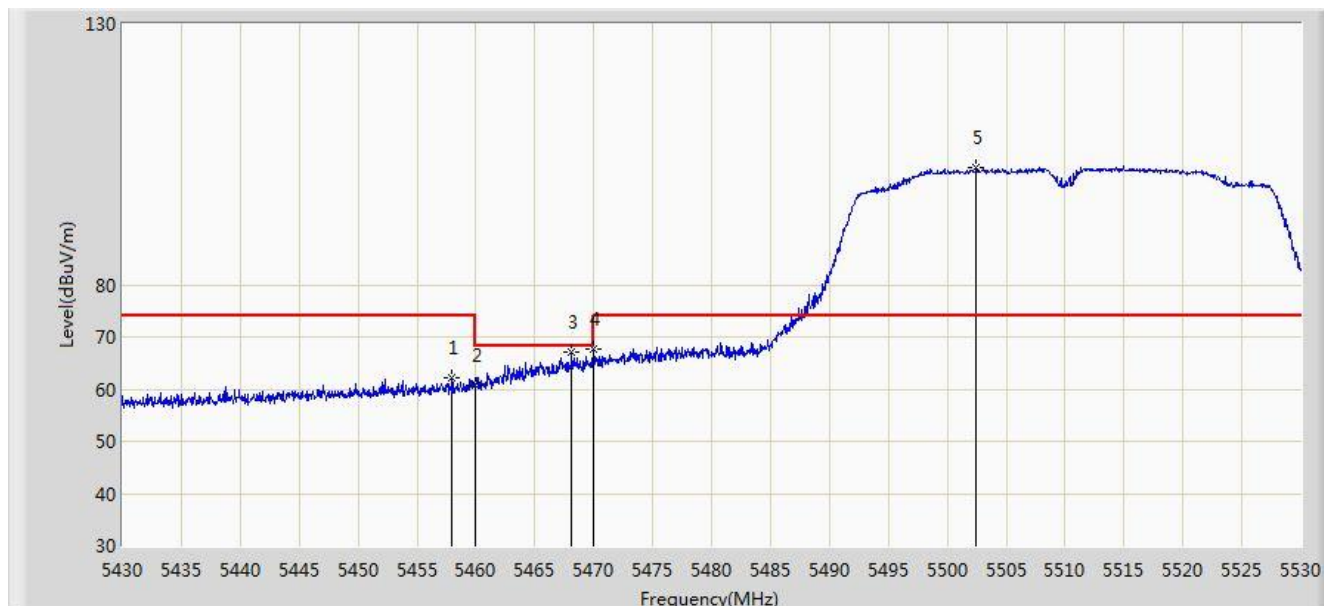


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.950	62.045	57.869	-11.955	74.000	4.176	PK
2			5460.000	60.732	56.552	-13.268	74.000	4.180	PK
3			5468.100	67.209	63.011	-0.991	68.200	4.198	PK
4			5470.000	67.684	63.482	-0.516	68.200	4.202	PK
5		*	5502.450	102.550	98.271	N/A	N/A	4.278	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5510MHz, Ant B	

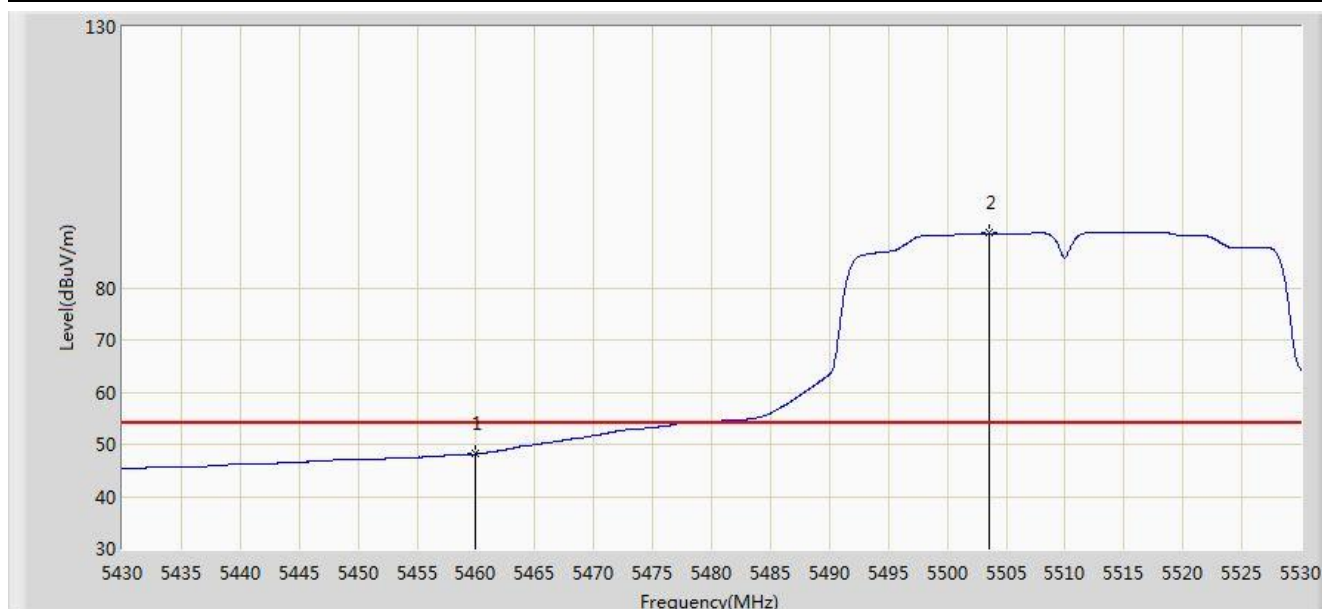


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.116	43.936	-5.884	54.000	4.180	AV
2		*	5503.500	90.436	86.154	N/A	N/A	4.283	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5670MHz, Ant B	

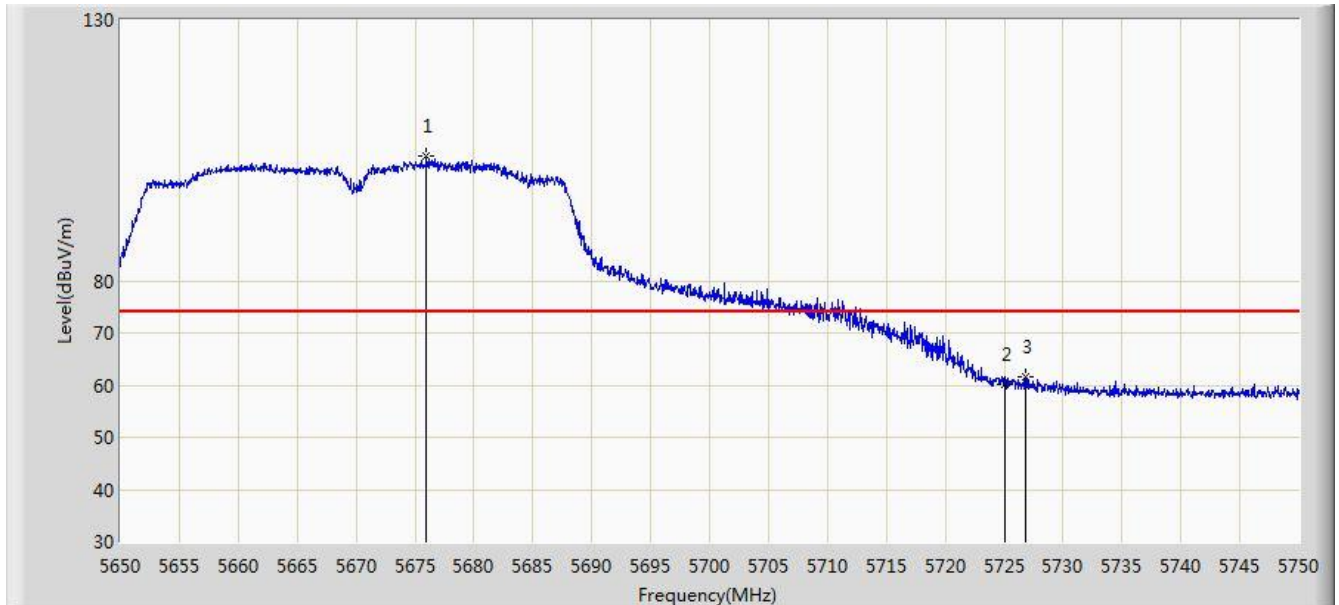


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.000	103.903	99.132	N/A	N/A	4.772	PK
2			5725.000	60.271	55.242	-13.729	74.000	5.029	PK
3			5726.850	61.457	56.416	-12.543	74.000	5.040	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5670MHz, Ant B	

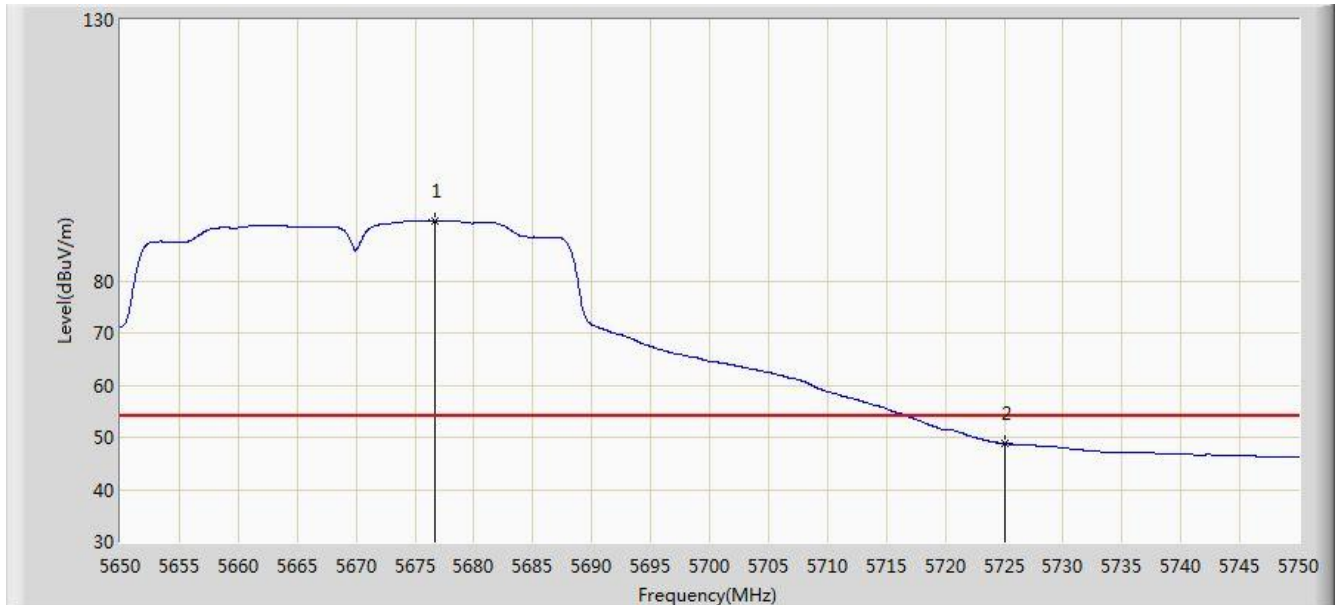


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.700	91.537	86.763	N/A	N/A	4.775	AV
2			5725.000	48.821	43.792	-5.179	54.000	5.029	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5670MHz, Ant B	

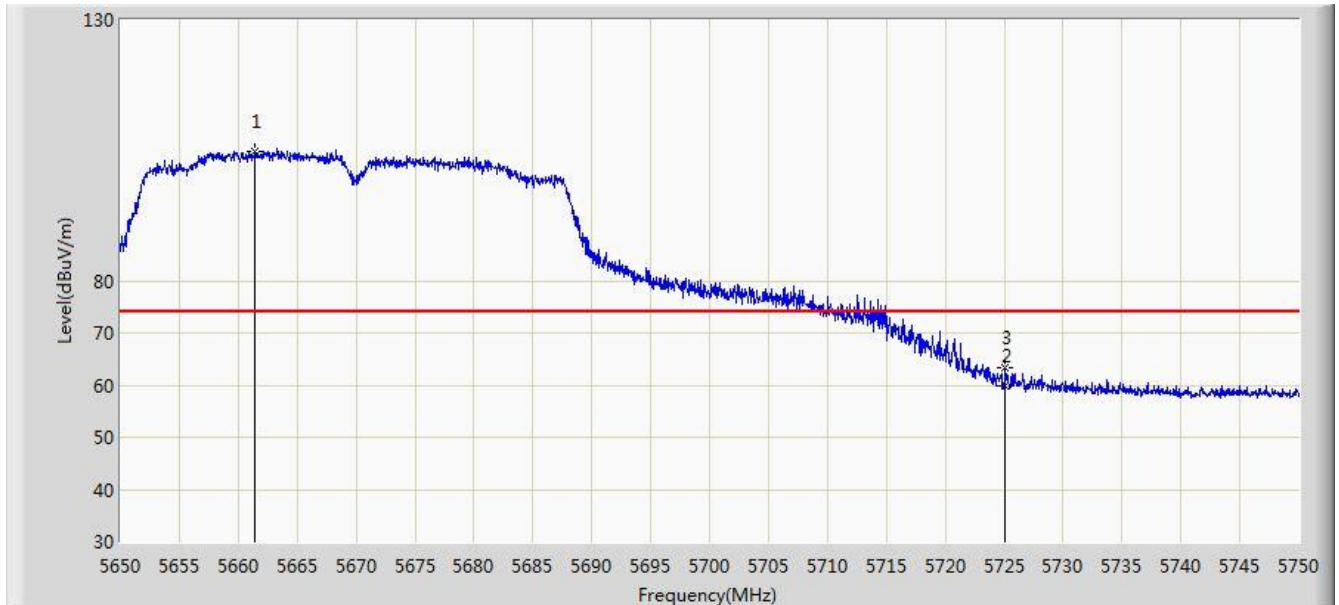


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5661.450	104.696	99.983	N/A	N/A	4.712	PK
2			5725.000	59.883	54.854	-14.117	74.000	5.029	PK
3			5725.050	63.282	58.253	-10.718	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5670MHz, Ant B	

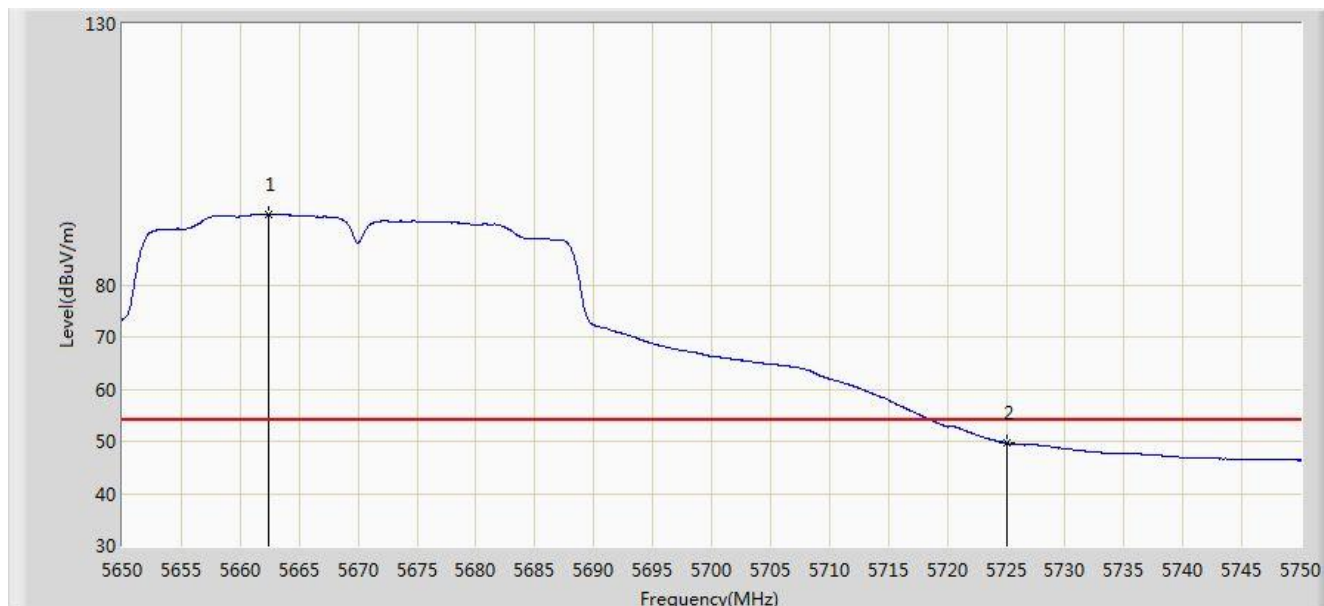


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.400	93.458	88.742	N/A	N/A	4.717	AV
2			5725.000	49.713	44.684	-4.287	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:43
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5755MHz, Ant B	

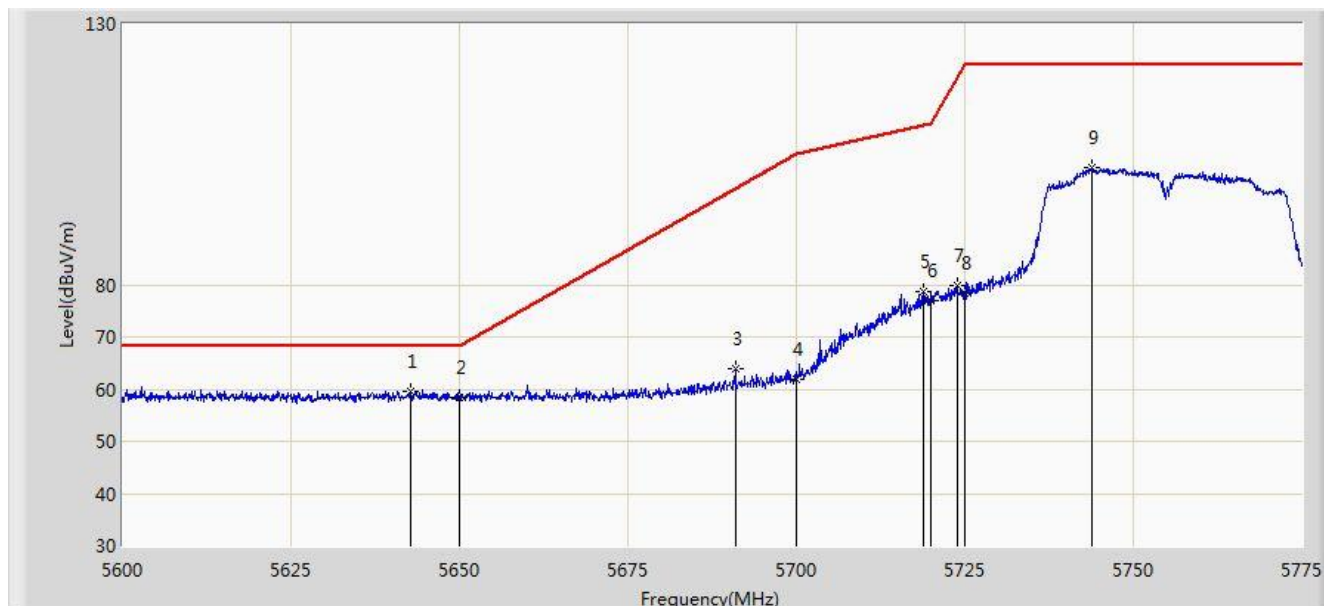


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.700	59.659	55.012	-8.541	68.200	4.646	PK
2			5650.000	58.421	53.750	-9.779	68.200	4.671	PK
3			5690.913	63.988	59.157	-34.512	98.500	4.831	PK
4			5700.000	61.920	57.042	-43.280	105.200	4.878	PK
5			5718.913	78.610	73.620	-31.886	110.496	4.990	PK
6			5720.000	76.855	71.858	-33.945	110.800	4.997	PK
7			5723.812	79.856	74.835	-39.636	119.492	5.022	PK
8			5725.000	78.459	73.430	-43.741	122.200	5.029	PK
9			5743.850	102.345	97.197	N/A	N/A	5.149	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:46
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5755MHz, Ant B	

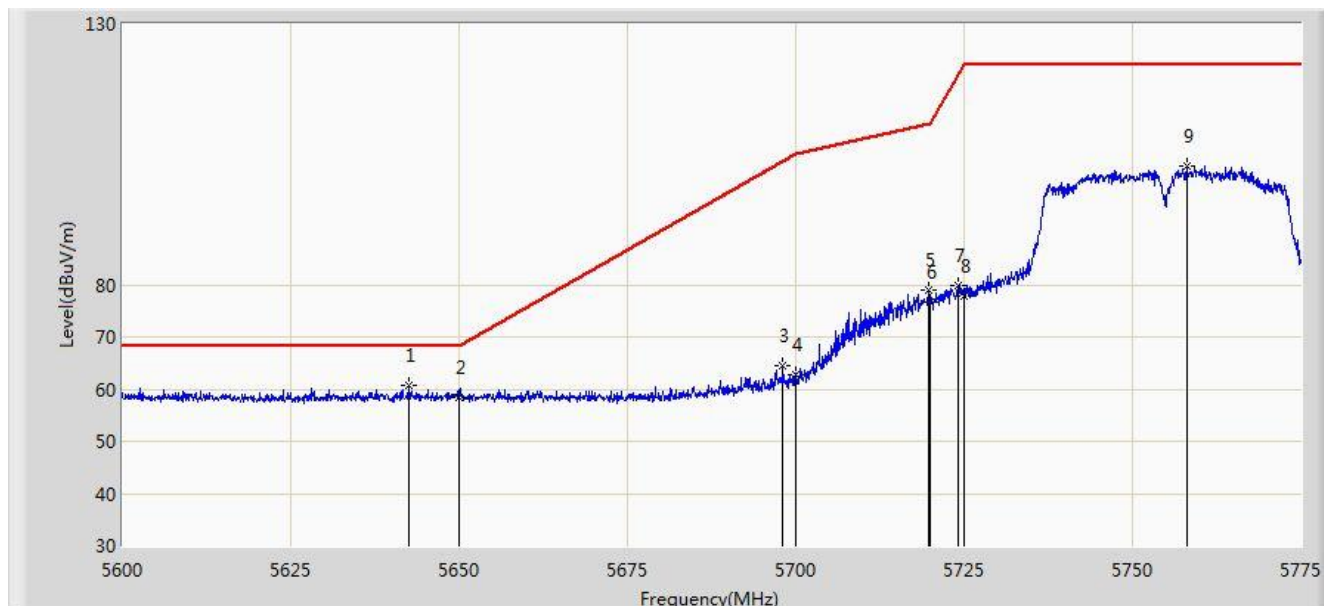


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.612	60.843	56.197	-7.357	68.200	4.646	PK
2			5650.000	58.370	53.699	-9.830	68.200	4.671	PK
3			5698.087	64.432	59.564	-39.358	103.790	4.868	PK
4			5700.000	62.867	57.989	-42.333	105.200	4.878	PK
5			5719.700	78.994	73.999	-31.722	110.716	4.995	PK
6			5720.000	76.730	71.733	-34.070	110.800	4.997	PK
7			5724.075	79.896	74.873	-40.196	120.092	5.023	PK
8			5725.000	77.945	72.916	-44.255	122.200	5.029	PK
9			5758.112	102.851	97.622	N/A	N/A	5.229	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5795MHz, Ant B	

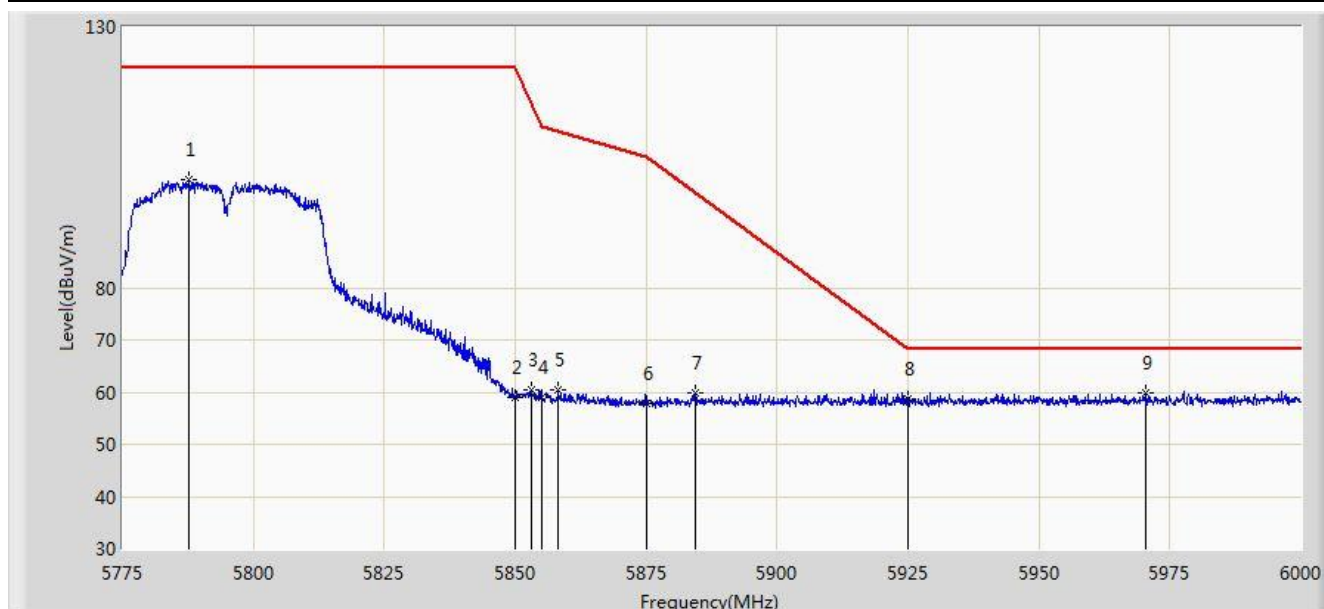


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5787.712	100.702	95.322	N/A	N/A	5.381	PK
2			5850.000	59.007	53.281	-63.193	122.200	5.726	PK
3			5852.962	60.319	54.581	-55.127	115.445	5.738	PK
4			5855.000	59.066	53.320	-51.734	110.800	5.746	PK
5			5858.250	60.356	54.596	-49.533	109.889	5.760	PK
6			5875.000	57.958	52.138	-47.242	105.200	5.820	PK
7			5884.462	59.769	53.917	-38.405	98.174	5.852	PK
8			5925.000	58.690	52.724	-9.510	68.200	5.967	PK
9		*	5970.525	59.756	53.694	-8.444	68.200	6.062	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 07:52
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5795MHz, Ant B	

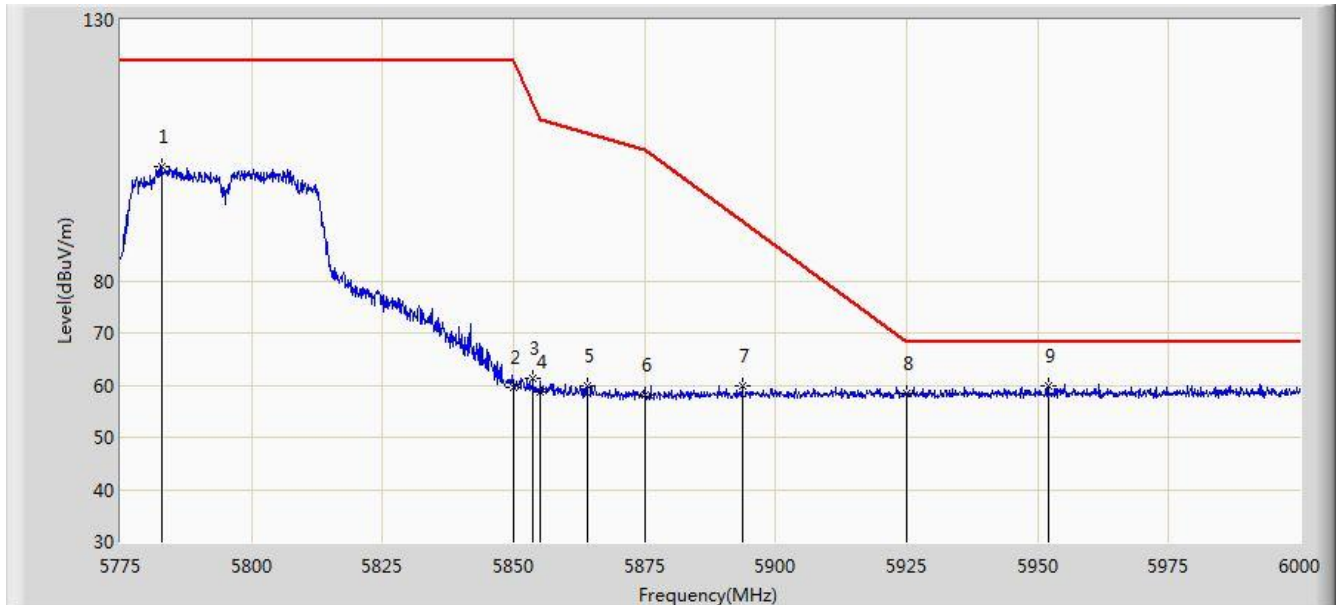


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5782.875	101.947	96.591	N/A	N/A	5.356	PK
2			5850.000	59.453	53.727	-62.747	122.200	5.726	PK
3			5853.638	61.261	55.520	-52.644	113.904	5.741	PK
4			5855.000	58.784	53.038	-52.016	110.800	5.746	PK
5			5864.100	59.761	53.979	-48.488	108.250	5.783	PK
6			5875.000	58.166	52.346	-47.034	105.200	5.820	PK
7			5893.575	59.854	53.970	-31.564	91.418	5.884	PK
8			5925.000	58.353	52.387	-9.847	68.200	5.967	PK
9		*	5951.962	59.735	53.705	-8.465	68.200	6.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5150MHz, Ant B	

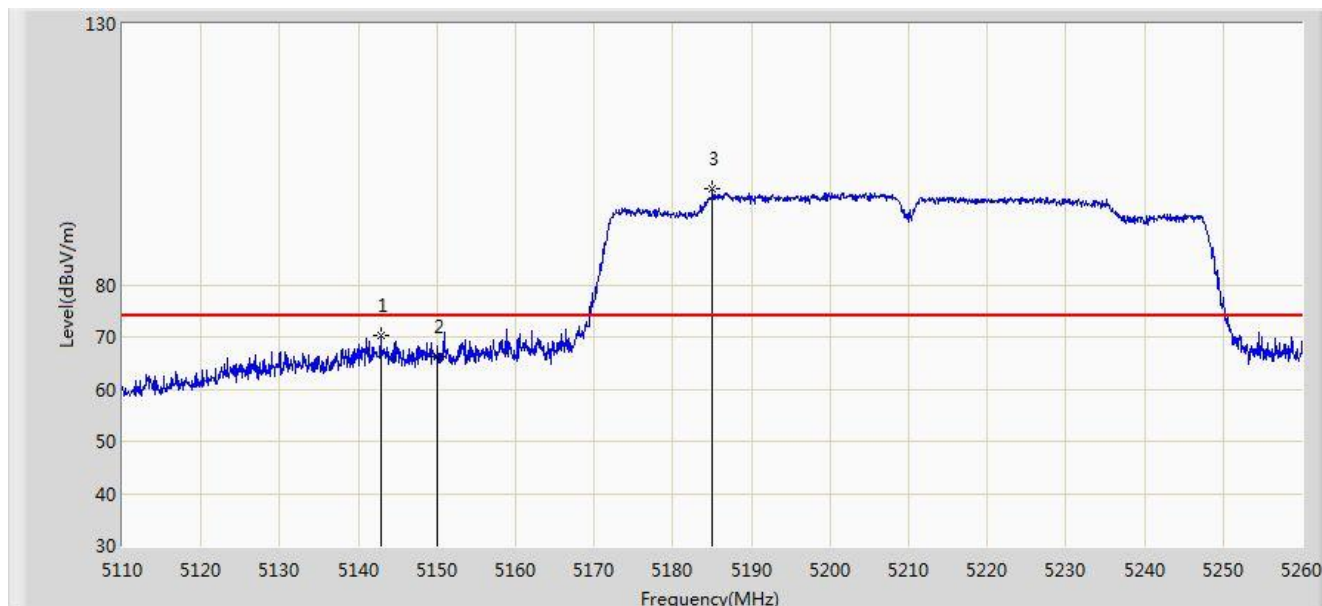


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5142.850	70.361	66.185	-3.639	74.000	4.176	PK
2			5150.000	66.354	62.185	-7.646	74.000	4.170	PK
3		*	5185.000	98.411	94.360	N/A	N/A	4.052	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5150MHz, Ant B	

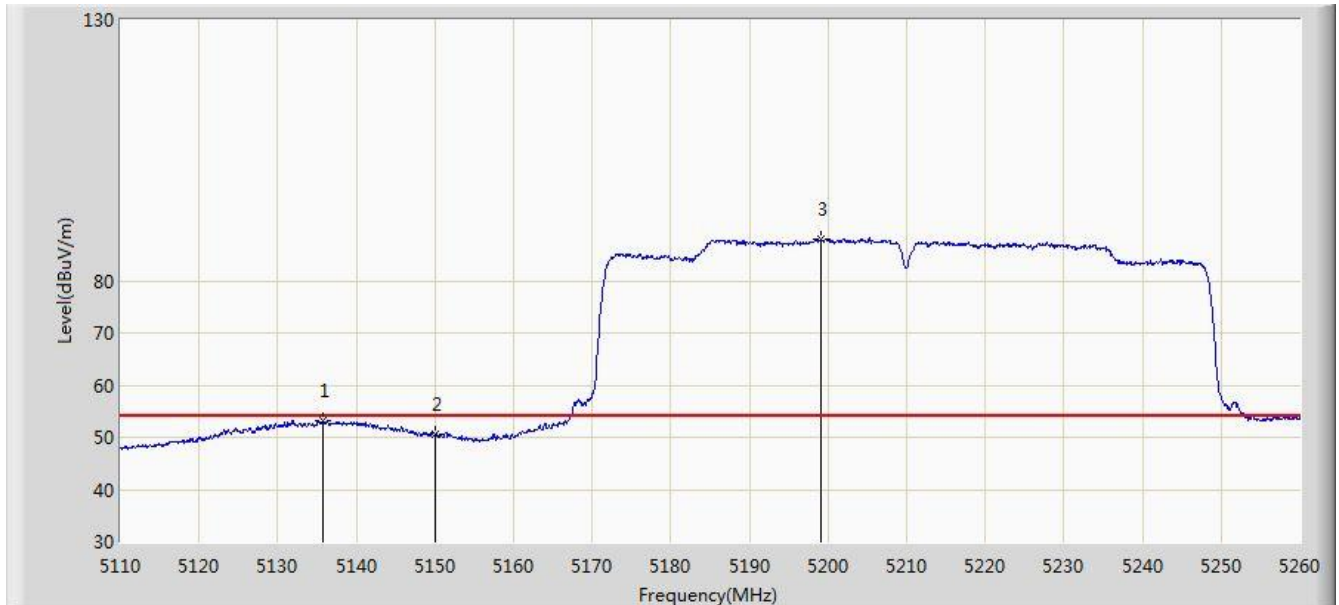


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5135.725	53.145	48.970	-0.855	54.000	4.175	AV
2			5150.000	50.646	46.477	-3.354	54.000	4.170	AV
3		*	5199.175	88.056	84.055	N/A	N/A	4.001	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5150MHz, Ant B	

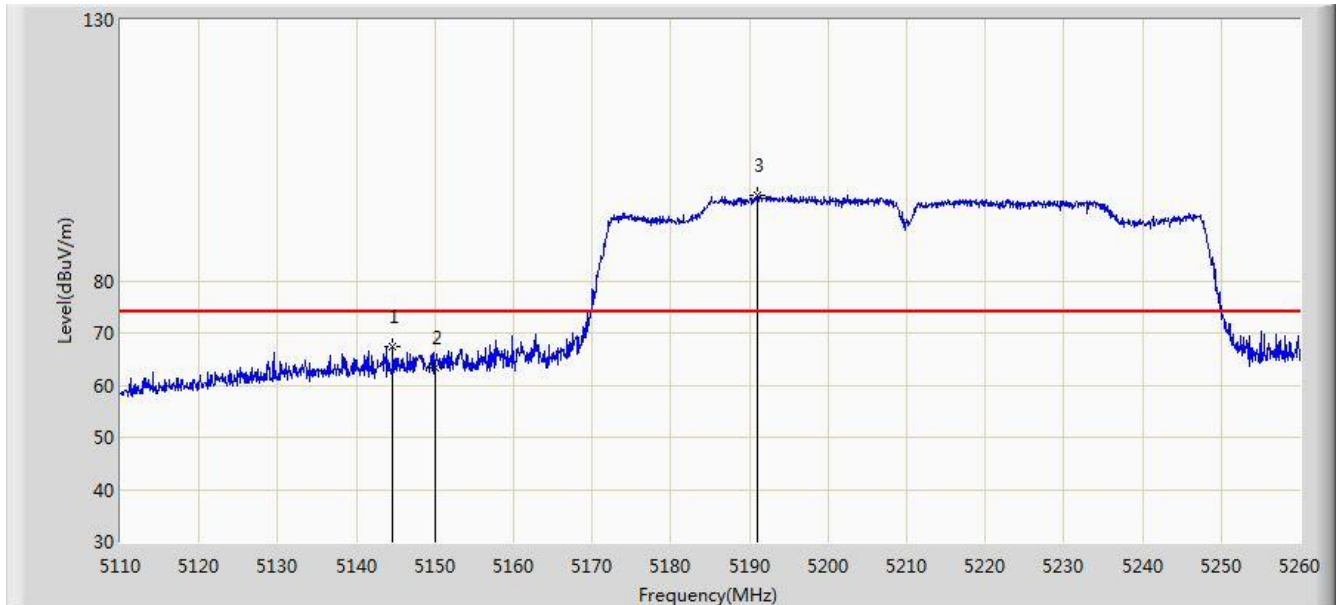


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5144.650	67.425	63.249	-6.575	74.000	4.176	PK
2			5150.000	63.197	59.028	-10.803	74.000	4.170	PK
3		*	5191.075	96.412	92.382	N/A	N/A	4.030	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5150MHz, Ant B	

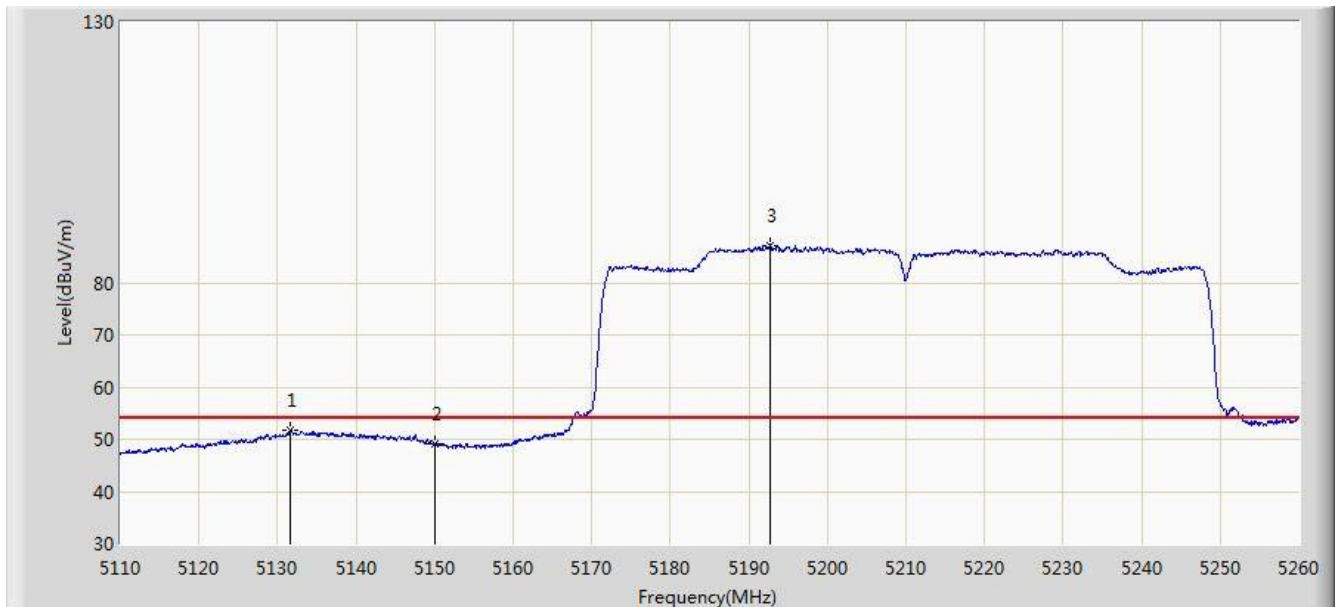


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5131.600	51.645	47.470	-2.355	54.000	4.175	AV
2			5150.000	49.117	44.948	-4.883	54.000	4.170	AV
3		*	5192.725	87.207	83.183	N/A	N/A	4.023	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5290MHz, Ant B	

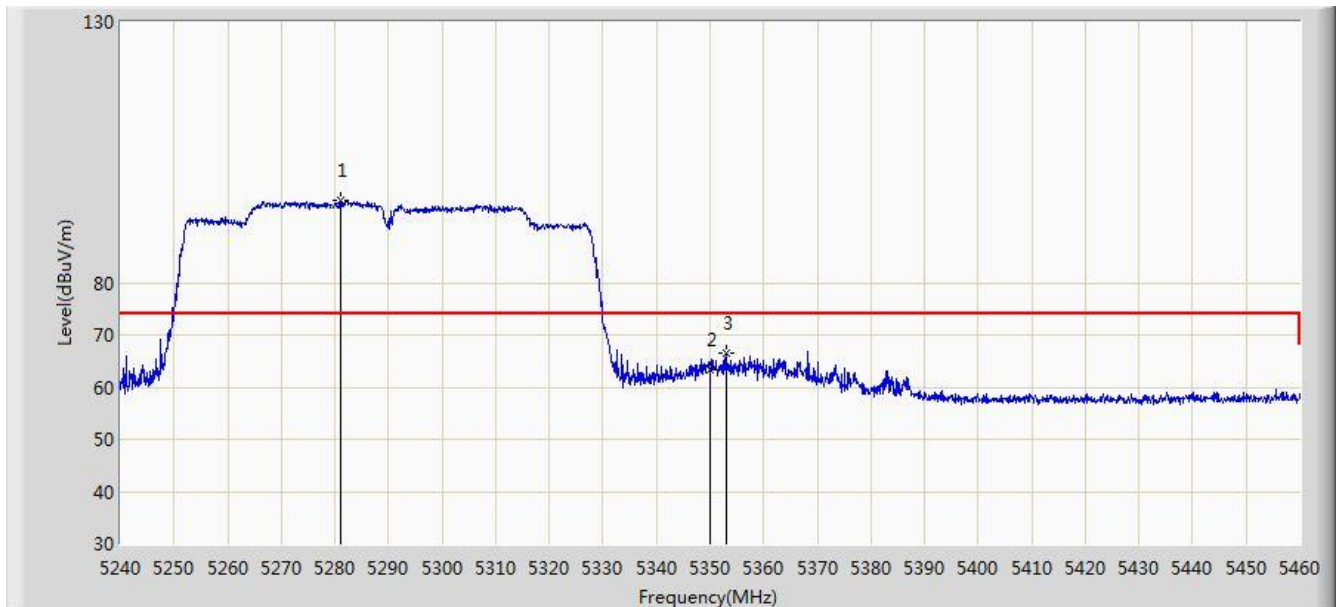


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5281.140	95.662	91.836	N/A	N/A	3.827	PK
2			5350.000	63.457	59.552	-10.543	74.000	3.904	PK
3			5352.970	66.519	62.609	-7.481	74.000	3.911	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5290MHz, Ant B	

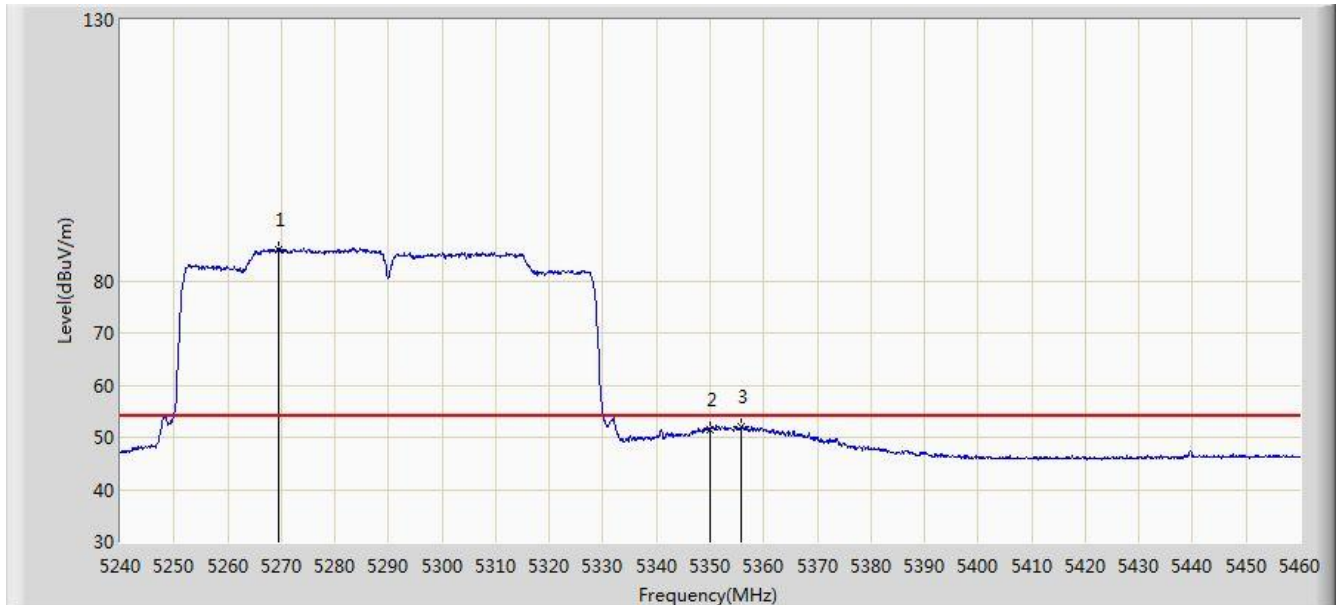


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5269.480	86.062	82.227	N/A	N/A	3.835	AV
2			5350.000	51.509	47.604	-2.491	54.000	3.904	AV
3			5355.830	51.985	48.070	-2.015	54.000	3.915	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5290MHz, Ant B	

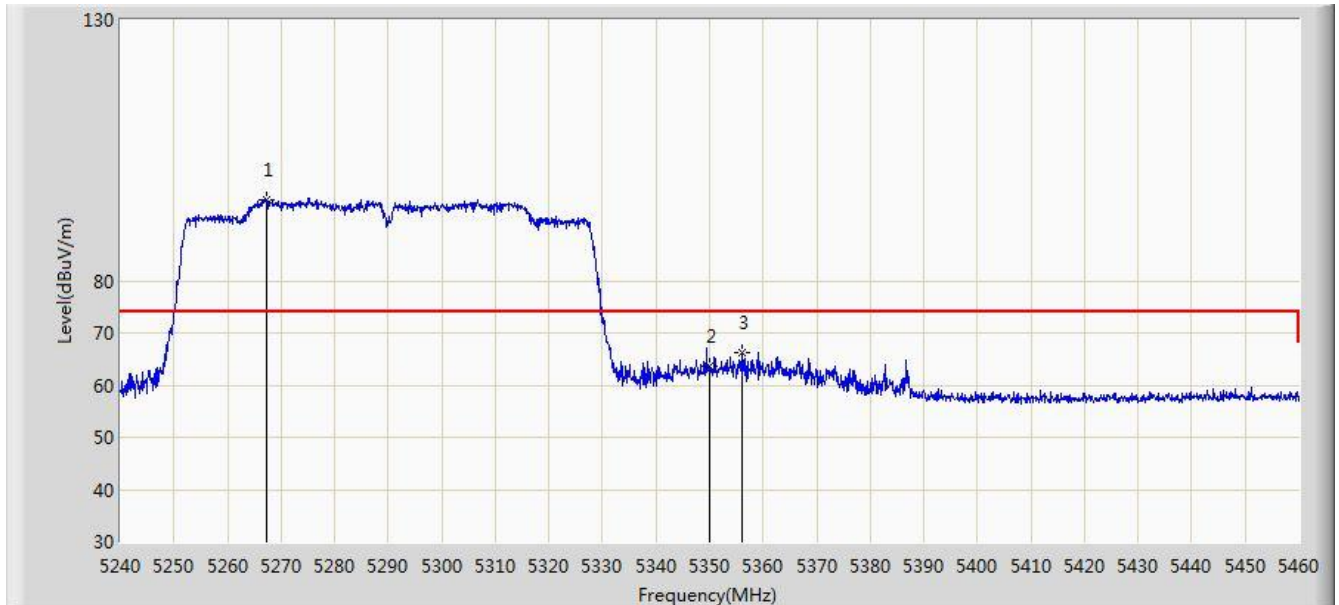


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5267.280	95.538	91.701	N/A	N/A	3.837	PK
2			5350.000	63.752	59.847	-10.248	74.000	3.904	PK
3			5355.940	66.112	62.197	-7.888	74.000	3.915	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5290MHz, Ant B	

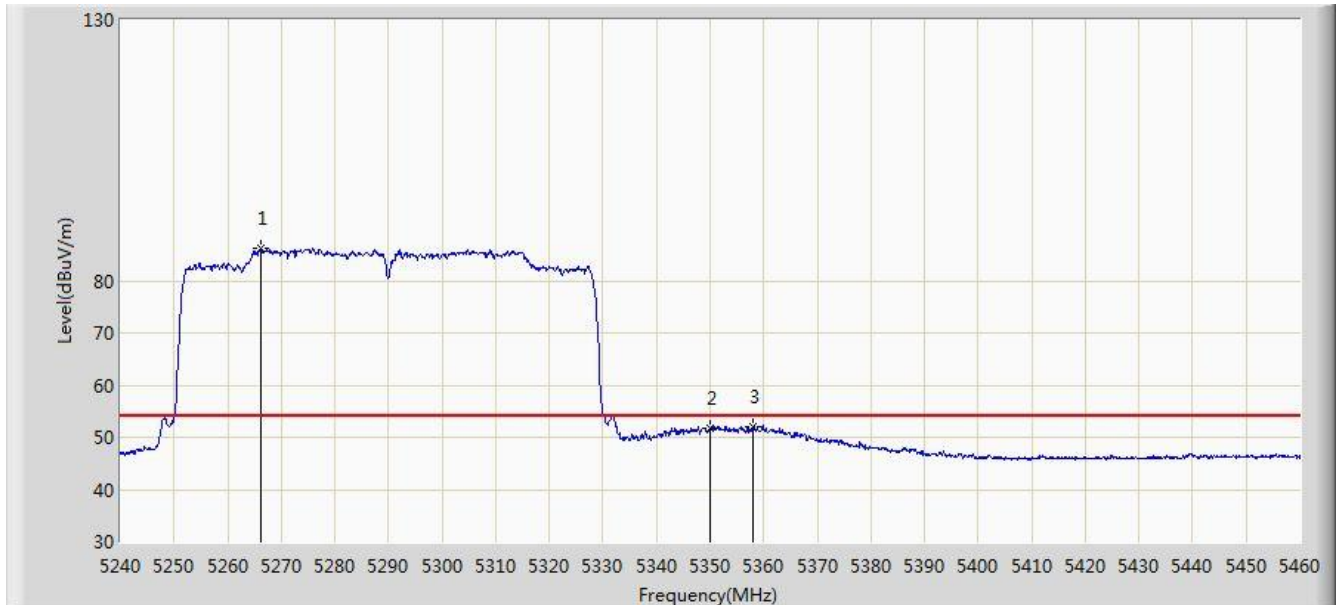


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5266.180	86.094	82.256	N/A	N/A	3.838	AV
2			5350.000	51.727	47.822	-2.273	54.000	3.904	AV
3			5357.920	51.940	48.021	-2.060	54.000	3.919	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5530MHz, Ant B	

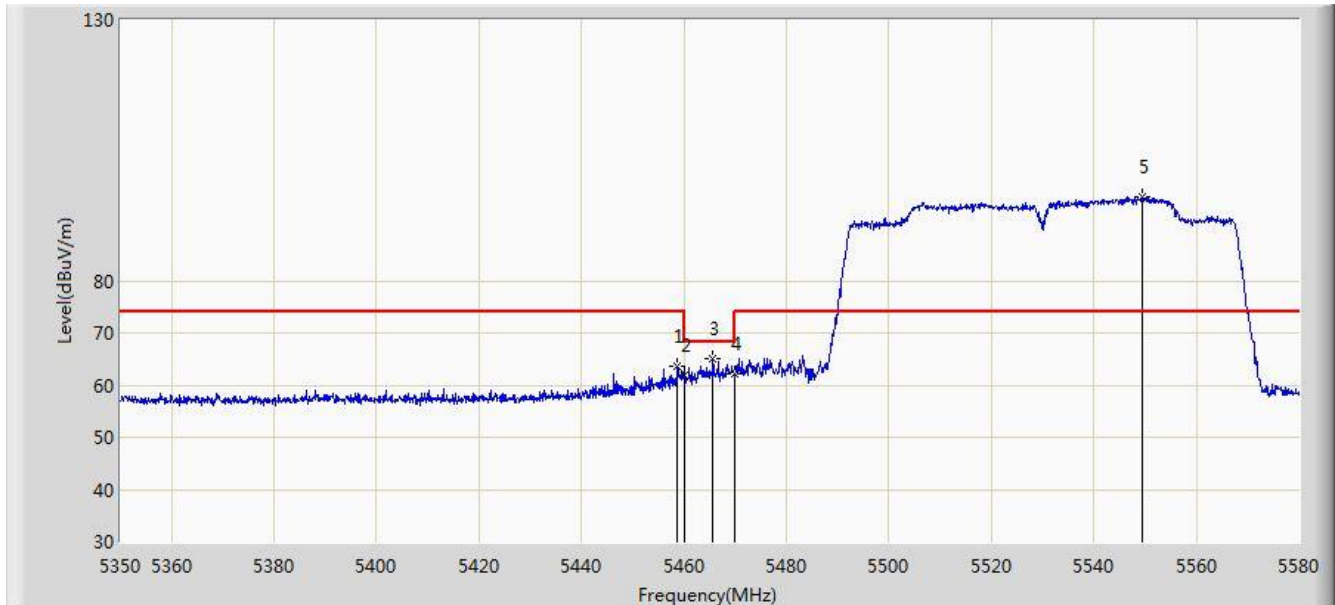


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.790	63.759	59.581	-10.241	74.000	4.178	PK
2			5460.000	62.023	57.843	-11.977	74.000	4.180	PK
3			5465.690	65.127	60.934	-3.073	68.200	4.193	PK
4			5470.000	62.164	57.962	-6.036	68.200	4.202	PK
5		*	5549.410	96.029	91.613	N/A	N/A	4.416	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5530MHz, Ant B	

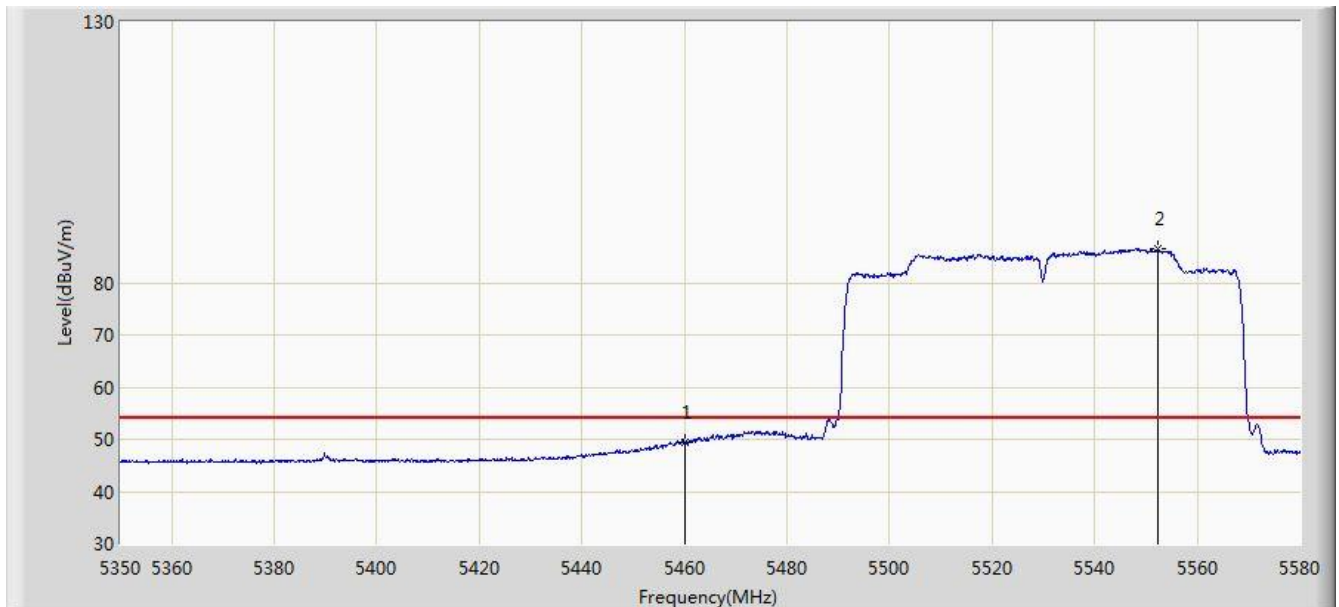


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.421	45.241	-4.579	54.000	4.180	AV
2		*	5552.285	86.403	81.979	N/A	N/A	4.424	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5530MHz, Ant B	

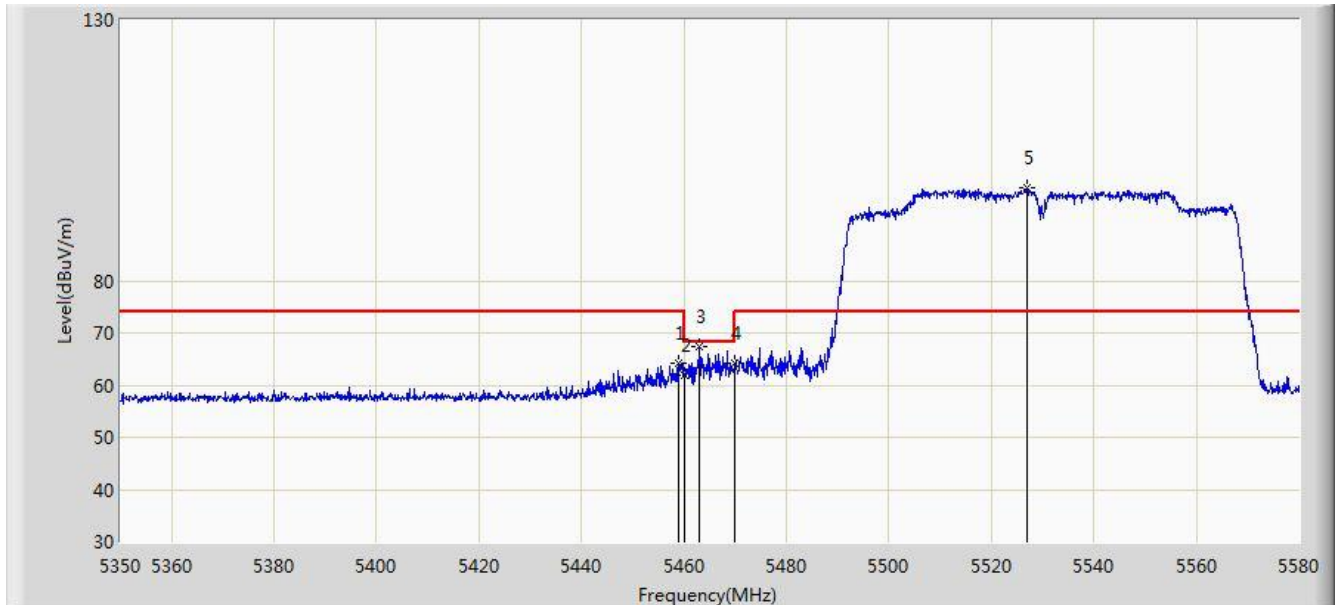


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.020	64.111	59.933	-9.889	74.000	4.178	PK
2			5460.000	61.883	57.703	-12.117	74.000	4.180	PK
3			5463.045	67.251	63.064	-0.949	68.200	4.187	PK
4			5470.000	64.092	59.890	-4.108	68.200	4.202	PK
5		*	5526.870	97.731	93.379	N/A	N/A	4.352	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5530MHz, Ant B	

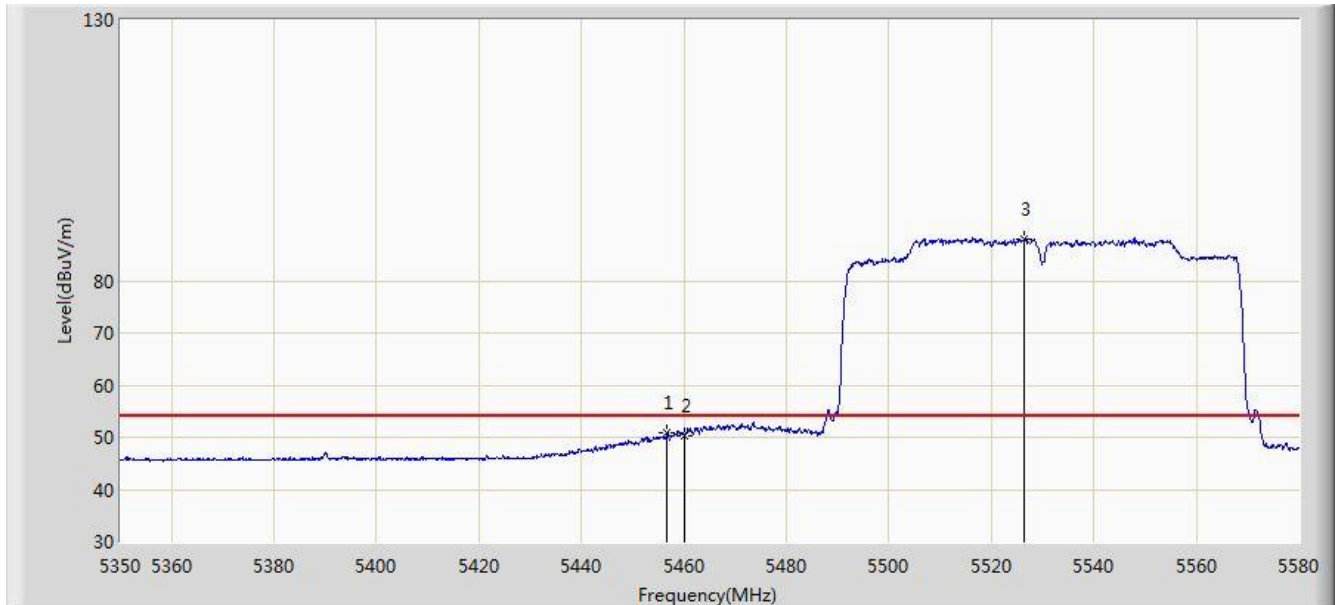


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5456.720	50.792	46.619	-3.208	54.000	4.173	AV
2			5460.000	50.346	46.166	-3.654	54.000	4.180	AV
3		*	5526.525	87.999	83.648	N/A	N/A	4.351	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant B	

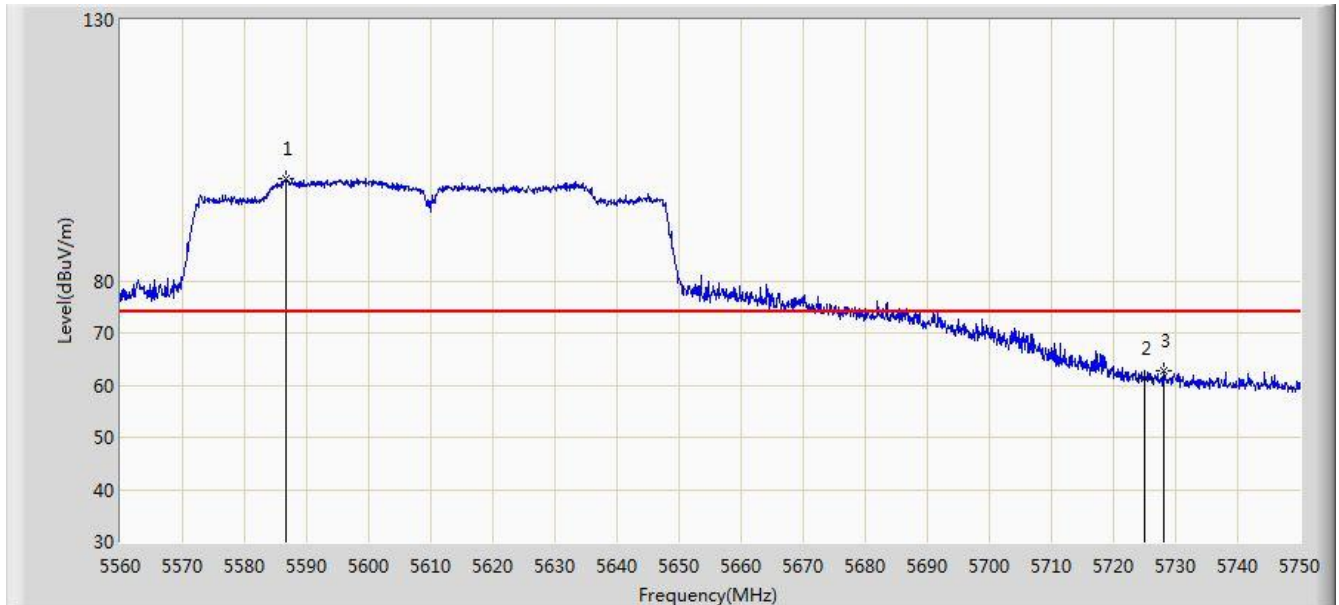


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5586.695	99.425	94.929	N/A	N/A	4.497	PK
2			5725.000	61.177	56.148	-12.823	74.000	5.029	PK
3			5728.055	62.662	57.613	-11.338	74.000	5.048	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant B	

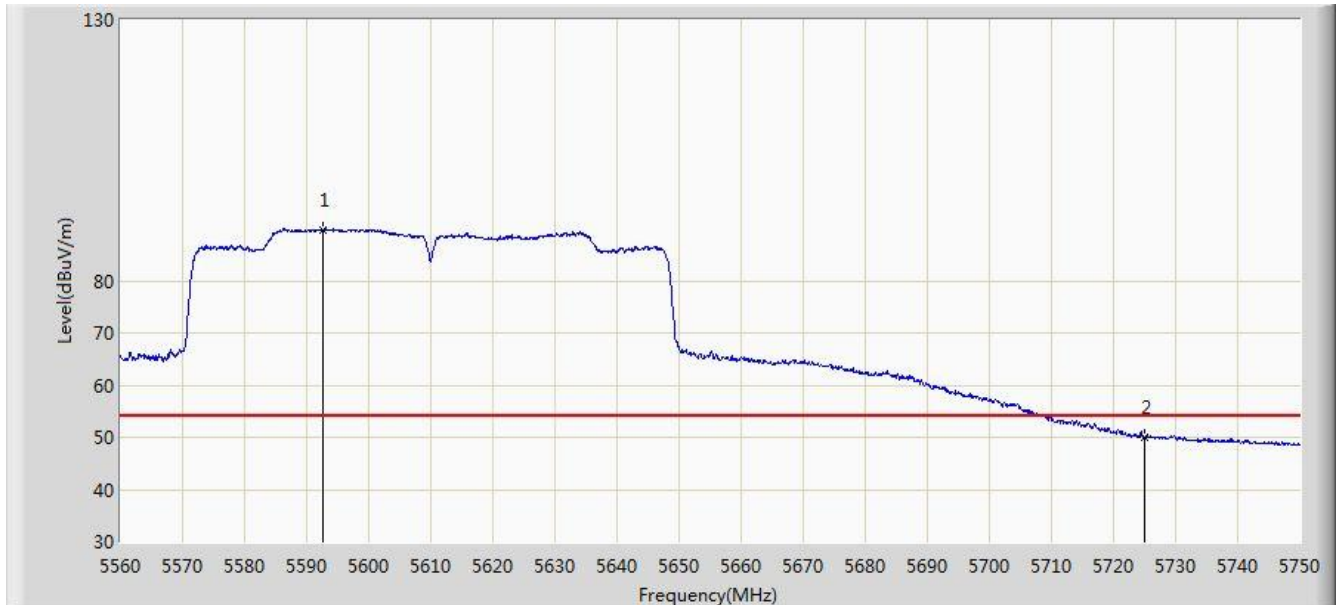


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5592.680	89.819	85.310	N/A	N/A	4.510	AV
2			5725.000	50.006	44.977	-3.994	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant B	

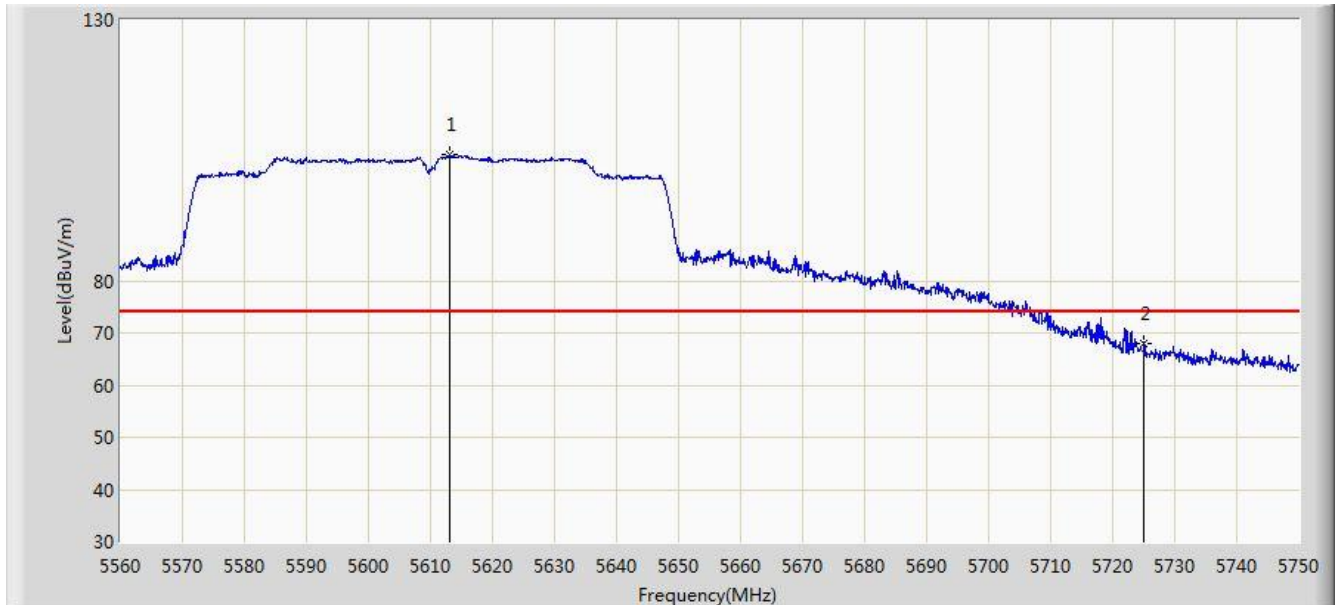


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5613.105	104.145	99.584	N/A	N/A	4.561	PK
2			5725.000	68.014	62.985	-5.986	74.000	5.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/12 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz, Ant B	

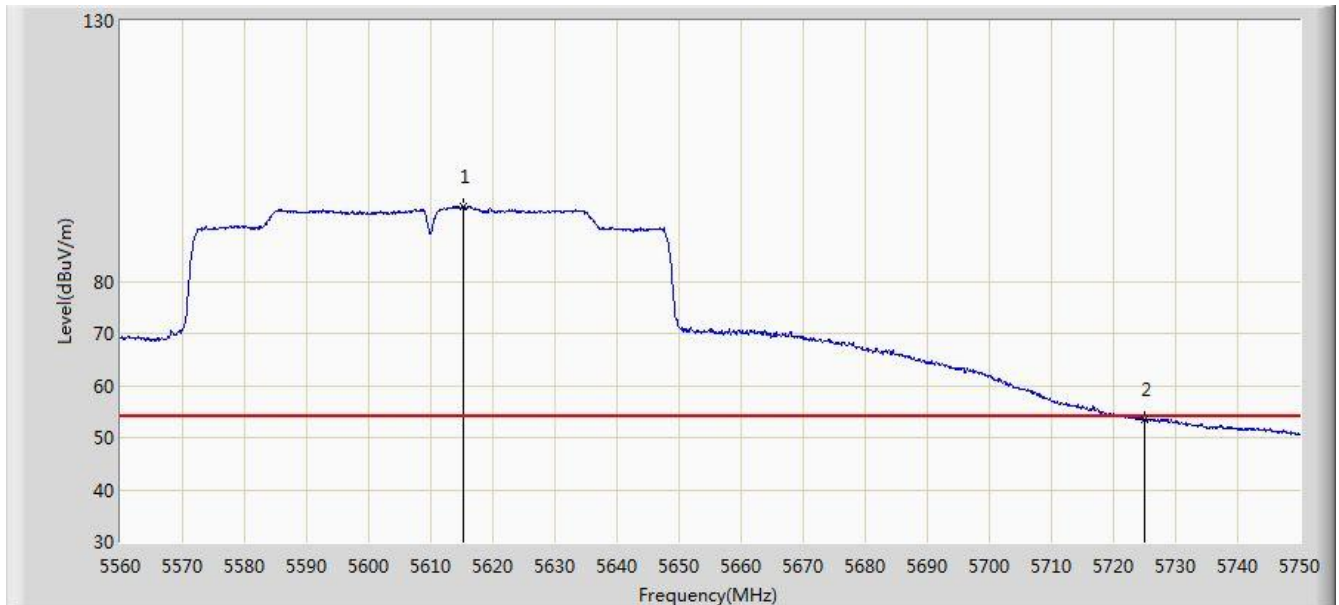


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5615.195	94.241	89.674	N/A	N/A	4.566	AV
2			5725.000	53.370	48.341	-0.630	54.000	5.029	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:56
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Horizontal
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5775MHz, Ant B	

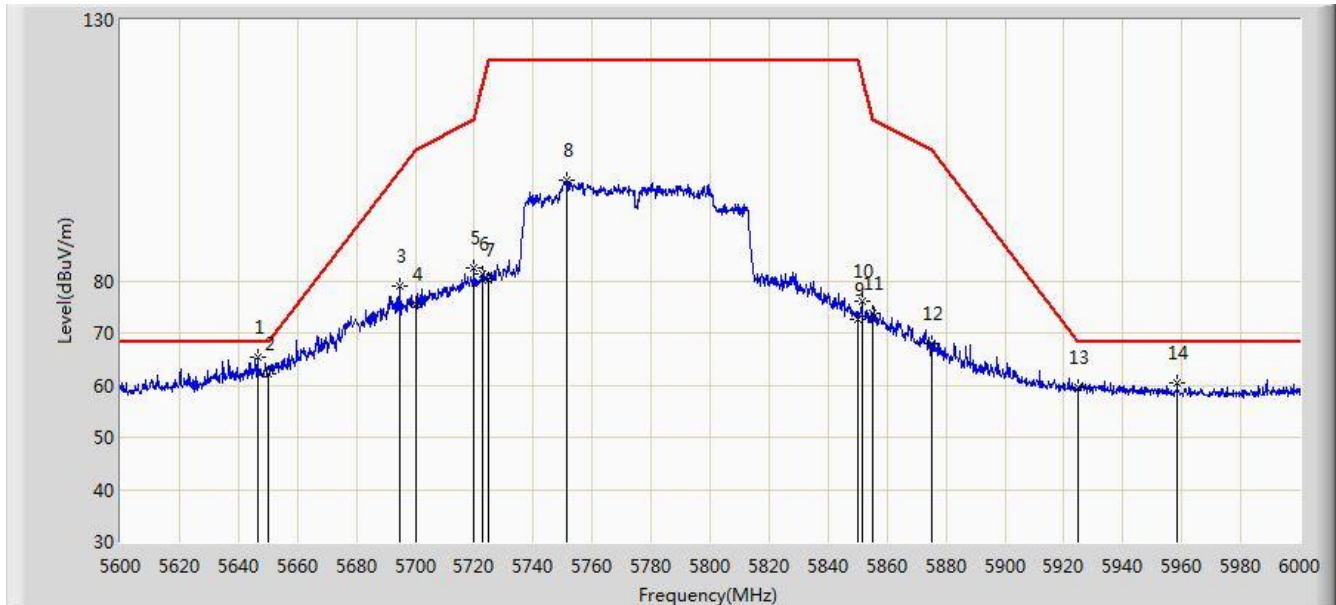


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5646.600	65.344	60.684	-2.856	68.200	4.659	PK
2			5650.000	62.309	57.638	-5.891	68.200	4.671	PK
3			5694.600	78.949	74.099	-22.271	101.220	4.849	PK
4			5700.000	75.435	70.557	-29.765	105.200	4.878	PK
5			5720.000	82.599	77.602	-28.201	110.800	4.997	PK
6			5722.800	81.375	76.360	-35.810	117.185	5.015	PK
7			5725.000	80.282	75.253	-41.918	122.200	5.029	PK
8			5751.600	99.353	94.161	N/A	N/A	5.193	PK
9			5850.000	72.725	66.999	-49.475	122.200	5.726	PK
10			5851.400	76.179	70.448	-42.828	119.007	5.731	PK
11			5855.000	73.718	67.972	-37.082	110.800	5.746	PK
12			5875.000	67.980	62.160	-37.220	105.200	5.820	PK
13			5925.000	59.610	53.644	-8.590	68.200	5.967	PK
14			5958.400	60.502	54.461	-7.698	68.200	6.041	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: AC1	Time: 2018/04/10 - 08:53
Limit: FCC_Part15.407_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1GHz_18GHz	Polarity: Vertical
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VTH40 at Channel 5775MHz, Ant B	

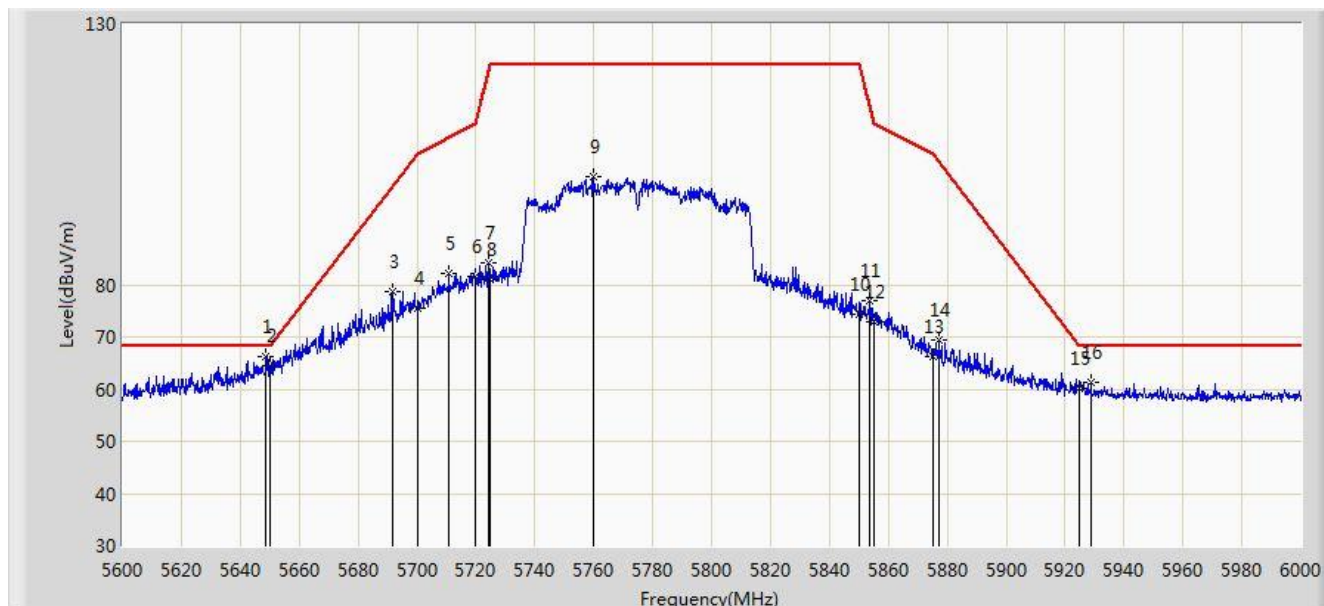

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5648.800	66.336	61.669	-1.864	68.200	4.667	PK
2			5650.000	64.428	59.757	-3.772	68.200	4.671	PK
3			5691.600	78.713	73.879	-20.294	99.007	4.834	PK
4			5700.000	75.383	70.505	-29.817	105.200	4.878	PK
5			5710.800	82.103	77.165	-26.124	108.226	4.938	PK
6			5720.000	81.557	76.560	-29.243	110.800	4.997	PK
7			5724.400	84.341	79.316	-36.491	120.833	5.025	PK
8			5725.000	80.966	75.937	-41.234	122.200	5.029	PK
9			5759.800	100.735	95.496	N/A	N/A	5.239	PK
10			5850.000	74.302	68.576	-47.898	122.200	5.726	PK
11			5853.800	76.994	71.253	-36.541	113.535	5.741	PK
12			5855.000	73.031	67.285	-37.769	110.800	5.746	PK
13			5875.000	66.371	60.551	-38.829	105.200	5.820	PK
14			5877.200	69.473	63.646	-34.092	103.565	5.828	PK
15			5925.000	60.102	54.136	-8.098	68.200	5.967	PK
16			5928.800	61.245	55.269	-6.955	68.200	5.976	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

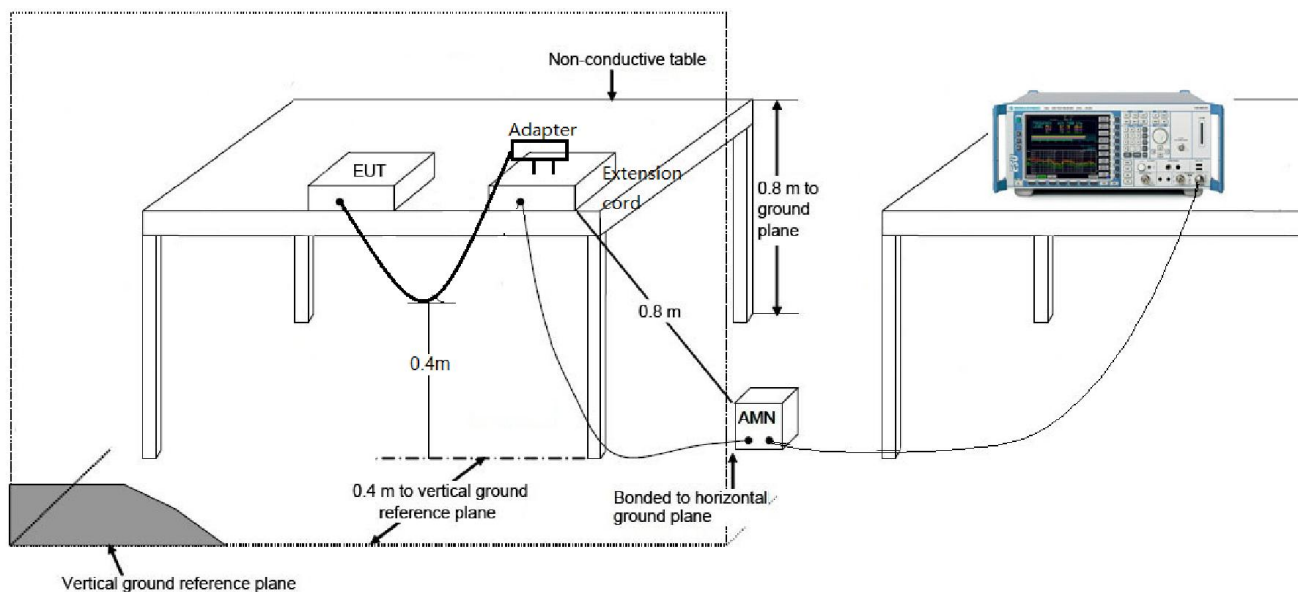

7.10.3.Test Result

Site: SR2	Time: 2018/04/16 - 15:57
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_Filter On	Polarity: Line
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode 1	

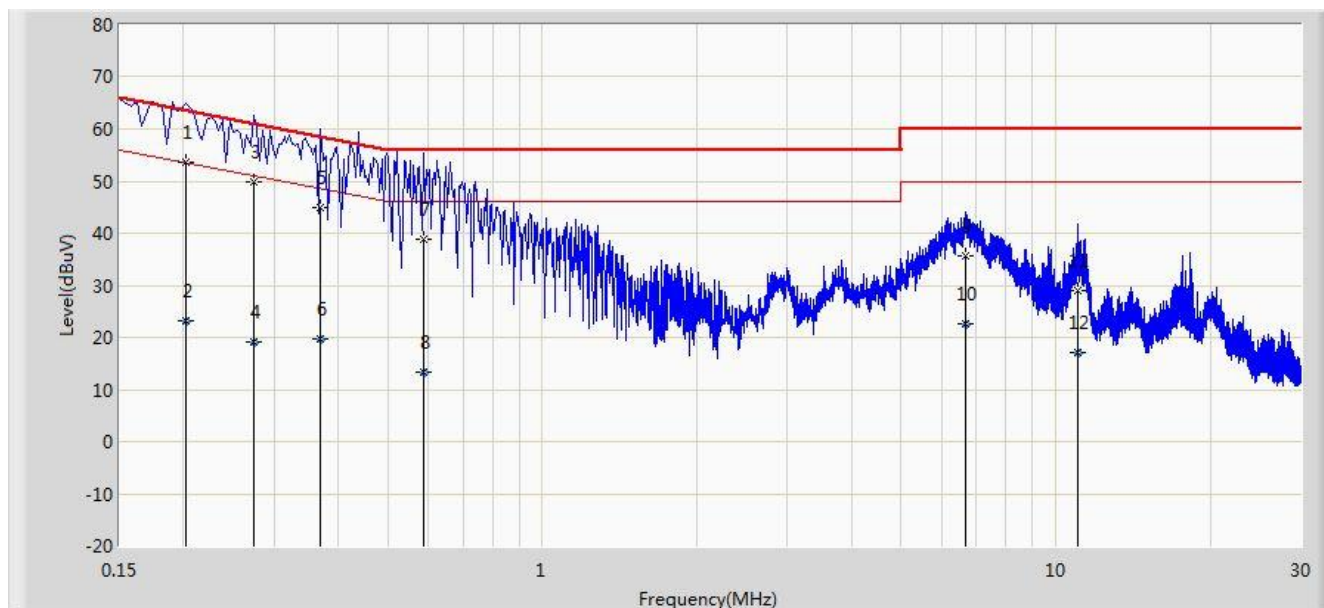


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.202	53.732	43.714	-9.796	63.528	10.018	QP
2			0.202	23.053	13.035	-30.475	53.528	10.018	AV
3			0.274	49.713	39.734	-11.283	60.996	9.979	QP
4			0.274	19.179	9.200	-31.817	50.996	9.979	AV
5			0.370	45.016	34.989	-13.485	58.501	10.026	QP
6			0.370	19.718	9.691	-28.783	48.501	10.026	AV
7			0.586	38.895	28.840	-17.105	56.000	10.055	QP
8			0.586	13.299	3.244	-32.701	46.000	10.055	AV
9			6.674	35.776	25.999	-24.224	60.000	9.777	QP
10			6.674	22.712	12.935	-27.288	50.000	9.777	AV
11			11.066	29.034	19.174	-30.966	60.000	9.861	QP
12			11.066	17.048	7.188	-32.952	50.000	9.861	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/04/16 - 15:57
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kevin Ker
Probe: ENV216_Filter On	Polarity: Neutral
EUT: Acute Angle PC	Power: AC 120V/60Hz
Test Mode 1	

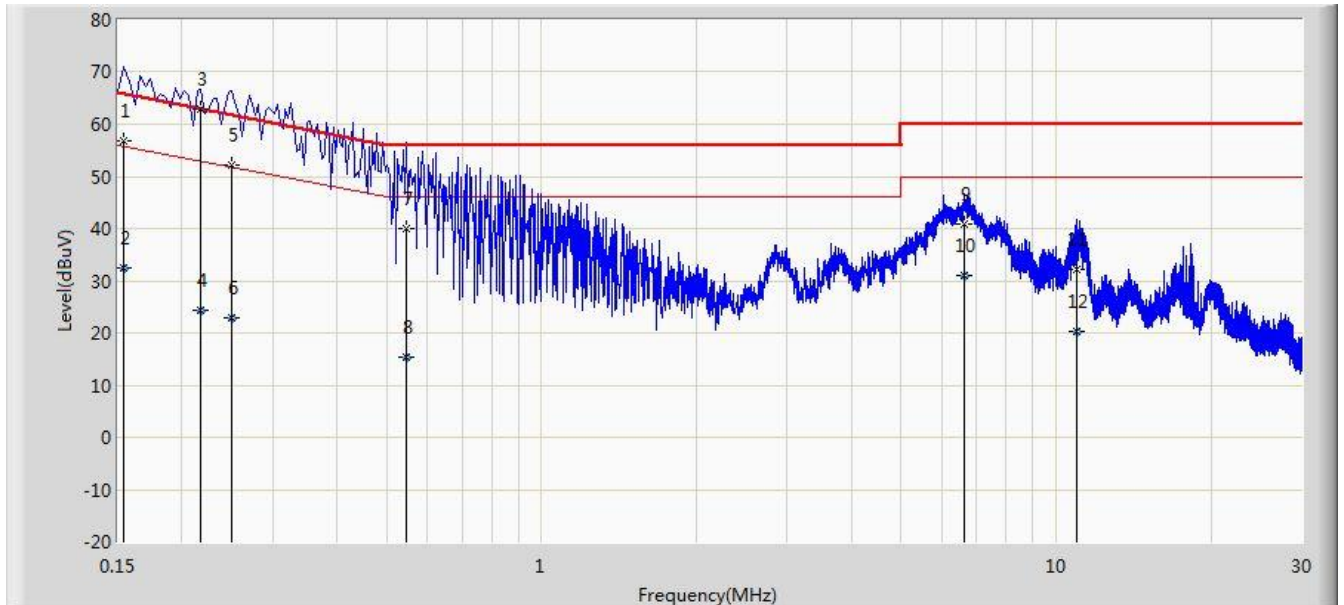

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	56.933	46.208	-8.849	65.781	10.725	QP
2			0.154	32.552	21.827	-23.230	55.781	10.725	AV
3		*	0.218	62.970	53.022	0.075	62.895	9.948	QP
4			0.218	24.367	14.419	-28.528	52.895	9.948	AV
5			0.250	52.185	42.220	-9.573	61.757	9.965	QP
6			0.250	22.884	12.919	-28.874	51.757	9.965	AV
7			0.546	40.034	29.936	-15.966	56.000	10.098	QP
8			0.546	15.323	5.225	-30.677	46.000	10.098	AV
9			6.626	40.754	30.955	-19.246	60.000	9.799	QP
10			6.626	31.130	21.331	-18.870	50.000	9.799	AV
11			10.998	32.234	22.348	-27.766	60.000	9.886	QP
12			10.998	20.220	10.334	-29.780	50.000	9.886	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Acute Angle PC** is in compliance with Part 15E of the FCC Rules.

The End