


# TEST REPORT

**Application No.:** SZCR2410003950HS  
**Applicant:** SHENZHEN OTTO INTELLIGENCE TECHNOLOGY CO LTD  
**Address of Applicant:** SUITE 2901 TOWER 2, HENGYU QIANHAI FINANCIAL CENTER,  
NANSHAN DISTRICT, SHENZHEN, CHINA, 518054  
**Manufacturer:** SHENZHEN OTTO INTELLIGENCE TECHNOLOGY CO LTD  
**Address of Manufacturer:** SUITE 2901 TOWER 2, HENGYU QIANHAI FINANCIAL CENTER,  
NANSHAN DISTRICT, SHENZHEN, CHINA, 518054  
**Factory:** SHENZHEN OTTO INTELLIGENCE TECHNOLOGY CO LTD  
**Address of Factory:** SUITE 2901 TOWER 2, HENGYU QIANHAI FINANCIAL CENTER,  
NANSHAN DISTRICT, SHENZHEN, CHINA, 518054  
**Equipment Under Test (EUT):**  
**EUT Name:** Fit Foundry Wearable Relief Pad  
**Model No.:** FITHPD-B  
**FCC ID:** 2APO6FITHPD-B  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.231  
**Date of Receipt:** 2024-10-24  
**Date of Test:** 2024-11-01 to 2024-11-21  
**Date of Issue:** 2024-11-22

**Test Result:****Pass\***

\* In the configuration tested, the EUT complied with the standards specified above.



Keny Xu  
EMC Laboratory Manager





SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 2 of 27

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2024-11-22 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                           |  |  |
|--------------------------|--|---------------------------|--|--|
| Authorized for issue by: |  |                           |  |  |
|                          |  | Martin Tang               |  |  |
|                          |  | Cady Zhu/Project Engineer |  |  |
|                          |  | Eric Fu                   |  |  |
|                          |  | Eric Fu/Reviewer          |  |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                  |        |
|--------------------------------------|----------------------------------|--------|----------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                      | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.231 | N/A    | 47 CFR Part 15, Subpart C 15.203 | Pass   |

| Radio Spectrum Matter Part                           |                                  |                                    |                                              |        |
|------------------------------------------------------|----------------------------------|------------------------------------|----------------------------------------------|--------|
| Item                                                 | Standard                         | Method                             | Requirement                                  | Result |
| 20dB Bandwidth                                       | 47 CFR Part 15, Subpart C 15.231 | ANSI C63.10 (2013) Section 6.9     | 47 CFR Part 15, Subpart C 15.231(c)          | Pass   |
| Dwell Time (15.231(a))                               |                                  | ANSI C63.10 (2013) Section 7.5     | 47 CFR Part 15, Subpart C 15.231(a)          | Pass   |
| Field Strength of the Fundamental Signal (15.231(b)) |                                  | ANSI C63.10 (2013) Section 6.5     | 47 CFR Part 15, Subpart C 15.231(b)          | Pass   |
| Radiated Emissions below 1GHz                        |                                  | ANSI C63.10 (2013) Section 6.4&6.5 | 47 CFR Part 15C Section 15.231(b) and 15.209 | Pass   |
| Radiated Emissions above 1GHz                        |                                  | ANSI C63.10 (2013) Section 6.6     | 47 CFR Part 15C Section 15.231(b) and 15.209 | Pass   |



### 3 Contents

|                                                                | Page |
|----------------------------------------------------------------|------|
| 1 Cover Page .....                                             | 1    |
| 2 Test Summary.....                                            | 3    |
| 3 Contents .....                                               | 4    |
| 4 General Information.....                                     | 6    |
| 4.1 Details of E.U.T.....                                      | 6    |
| 4.2 Description of Support Units.....                          | 6    |
| 4.3 Measurement Uncertainty .....                              | 6    |
| 4.4 Test Location .....                                        | 7    |
| 4.5 Test Facility.....                                         | 7    |
| 4.6 Deviation from Standards.....                              | 7    |
| 4.7 Abnormalities from Standard Conditions.....                | 7    |
| 5 Equipment List .....                                         | 8    |
| 6 Radio Spectrum Technical Requirement.....                    | 10   |
| 6.1 Antenna Requirement .....                                  | 10   |
| 6.1.1 Test Requirement: .....                                  | 10   |
| 6.1.2 Conclusion .....                                         | 10   |
| 7 Radio Spectrum Matter Test Results.....                      | 11   |
| 7.1 20dB Bandwidth .....                                       | 11   |
| 7.1.1 E.U.T. Operation .....                                   | 11   |
| 7.1.2 Test Mode Description .....                              | 11   |
| 7.1.3 Test Setup Diagram .....                                 | 11   |
| 7.1.4 Measurement Procedure and Data.....                      | 12   |
| 7.2 Dwell Time (15.231(a)).....                                | 13   |
| 7.2.1 E.U.T. Operation .....                                   | 13   |
| 7.2.2 Test Mode Description .....                              | 13   |
| 7.2.3 Test Setup Diagram .....                                 | 13   |
| 7.2.4 Measurement Procedure and Data.....                      | 14   |
| 7.3 Field Strength of the Fundamental Signal (15.231(b)) ..... | 15   |
| 7.3.1 E.U.T. Operation .....                                   | 15   |
| 7.3.2 Test Mode Description .....                              | 15   |
| 7.3.3 Test Setup Diagram .....                                 | 18   |
| 7.3.4 Measurement Procedure and Data.....                      | 19   |
| 7.4 Radiated Emissions.....                                    | 21   |
| 7.4.1 E.U.T. Operation .....                                   | 21   |
| 7.4.2 Test Mode Description .....                              | 21   |
| 7.4.3 Test Setup Diagram .....                                 | 22   |
| 7.4.4 Measurement Procedure and Data.....                      | 22   |
| 8 Test Setup Photo .....                                       | 27   |





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 5 of 27

### 9 EUT Constructional Details (EUT Photos).....27



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

## 4 General Information

### 4.1 Details of E.U.T.

|                                     |                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------|
| Power supply:                       | Rechargeable battery DC3.7V,90mAh,0.333Wh for remote controller, Charged by DC 5V |
| Cable(s):                           | Type-C USB cable:about 50cm unshielded                                            |
| Cable Loss (for RF conducted test): | 0.5dB                                                                             |
| Operation Frequency                 | 433.924MHz                                                                        |
| Modulation Type:                    | ASK                                                                               |
| Antenna Type:                       | PCB Antenna                                                                       |
| Antenna Gain:                       | -6.31dBi                                                                          |

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### 4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-------------|--------------|-----------|------------|
| --          | --           | --        | --         |

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

| Test Item                                            | Measurement Uncertainty              |
|------------------------------------------------------|--------------------------------------|
| 20dB Bandwidth                                       | 3%                                   |
| Dwell Time (15.231(a1))                              | 3%                                   |
| Field Strength of the Fundamental Signal (15.231(b)) | ± 6.0dB                              |
| Radiated Emissions below 1GHz                        | ± 6.0dB                              |
| Radiated Emissions above 1GHz                        | ± 4.6dB (1-18GHz);± 4.8dB (18-40GHz) |

Remark:

The  $U_{lab}$  (lab Uncertainty) is less than  $U_{CISPR/ETSI}$  (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 7 of 27

### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 4.6 Deviation from Standards

None

### 4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch EMC Laboratory.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 5 Equipment List

| 20dB Bandwidth                              |                              |               |               |            |              |
|---------------------------------------------|------------------------------|---------------|---------------|------------|--------------|
| Equipment                                   | Manufacturer                 | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| DC Power Supply                             | Chroma                       | 62012P-80-60  | SEM011-11     | 2024-08-14 | 2025-08-13   |
| MXA Signal Analyzer                         | KEYSIGHT                     | N9020A        | SEM004-19     | 2024-03-14 | 2025-03-13   |
| Measurement Software                        | TST PASS                     | TST PASS V2.0 | N/A           | N/A        | N/A          |
| Coaxial Cable                               | SGS                          | N/A           | SEM031-01     | 2024-07-06 | 2025-07-05   |
| Attenuator                                  | Huber+Suhner                 | 6620_SMA-50-1 | SEM021-09     | 2024-03-27 | 2025-03-26   |
| Programmable Temperature & Humidity Chamber | Votsch Industrietechnik GmbH | VT 4002       | SEM002-15     | 2024-03-19 | 2025-03-18   |

| Dwell Time (15.231(a1))                     |                              |               |               |            |              |
|---------------------------------------------|------------------------------|---------------|---------------|------------|--------------|
| Equipment                                   | Manufacturer                 | Model No.     | Inventory No. | Cal Date   | Cal Due Date |
| DC Power Supply                             | Chroma                       | 62012P-80-60  | SEM011-11     | 2024-08-14 | 2025-08-13   |
| MXA Signal Analyzer                         | KEYSIGHT                     | N9020A        | SEM004-19     | 2024-03-14 | 2025-03-13   |
| Measurement Software                        | TST PASS                     | TST PASS V2.0 | N/A           | N/A        | N/A          |
| Coaxial Cable                               | SGS                          | N/A           | SEM031-01     | 2024-07-06 | 2025-07-05   |
| Attenuator                                  | Huber+Suhner                 | 6620_SMA-50-1 | SEM021-09     | 2024-03-27 | 2025-03-26   |
| Programmable Temperature & Humidity Chamber | Votsch Industrietechnik GmbH | VT 4002       | SEM002-15     | 2024-03-19 | 2025-03-18   |

| Field Strength of the Fundamental Signal (15.231(b)) |                      |                 |               |            |              |
|------------------------------------------------------|----------------------|-----------------|---------------|------------|--------------|
| Equipment                                            | Manufacturer         | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber                             | ETS-LINDGREN         | N/A             | SEM001-01     | 2023-06-19 | 2026-06-18   |
| MXE EMI Receiver                                     | Agilent Technologies | N9038A          | SEM004-15     | 2024-08-14 | 2025-08-13   |
| BiConiLog Antenna                                    | ETS-LINDGREN         | 3142C           | SEM003-01     | 2023-09-16 | 2025-09-15   |
| Pre-Amplifier                                        | Agilent Technologies | 8447D           | SEM005-01     | 2024-03-14 | 2025-03-13   |
| Measurement Software                                 | AUDIX                | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable                                        | SGS                  | N/A             | SEM025-01     | 2024-07-06 | 2025-07-05   |

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 9 of 27

| Radiated Emissions below 1GHz |                      |                 |               |            |              |
|-------------------------------|----------------------|-----------------|---------------|------------|--------------|
| Equipment                     | Manufacturer         | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
| Loop Antenna                  | ETS-Lindgren         | 6502            | SEM003-08     | 2023-11-20 | 2025-11-19   |
| 3m Semi-Anechoic Chamber      | ETS-LINDGREN         | N/A             | SEM001-01     | 2023-06-19 | 2026-06-18   |
| MXE EMI Receiver              | Agilent Technologies | N9038A          | SEM004-15     | 2024-08-14 | 2025-08-13   |
| BiConiLog Antenna             | ETS-LINDGREN         | 3142C           | SEM003-01     | 2023-09-16 | 2025-09-15   |
| Pre-Amplifier                 | Agilent Technologies | 8447D           | SEM005-01     | 2024-03-14 | 2025-03-13   |
| Measurement Software          | AUDIX                | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable                 | SGS                  | N/A             | SEM025-01     | 2024-07-06 | 2025-07-05   |

| Radiated Emissions above 1GHz |                 |                 |               |            |              |
|-------------------------------|-----------------|-----------------|---------------|------------|--------------|
| Equipment                     | Manufacturer    | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
| 3m Fully-Anechoic Chamber     | AUDIX           | N/A             | SEM001-02     | 2024-05-11 | 2027-05-10   |
| Signal Analyzer               | Rohde & Schwarz | FSV40           | SEM008-04     | 2024-03-15 | 2025-03-14   |
| Horn Antenna                  | Rohde&Schwarz   | HF907           | SEM003-07     | 2023-07-23 | 2025-07-22   |
| Microwave system amplifier    | Agilent         | 83017A          | SEM005-25     | 2024-09-14 | 2025-09-13   |
| Measurement Software          | AUDIX           | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable                 | SGS             | N/A             | SEM026-01     | 2024-07-06 | 2025-07-05   |

| General used equipment          |                                           |           |               |            |              |
|---------------------------------|-------------------------------------------|-----------|---------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| Humidity/ Temperature Indicator | deli                                      | 8838      | SEM002-32     | 2024-07-24 | 2025-07-23   |
| Humidity/ Temperature Indicator | deli                                      | 8838      | SEM002-33     | 2024-07-24 | 2025-07-23   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3      | SEM002-01     | 2024-03-18 | 2025-03-17   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

#### 6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Antenna location: Refer to Internal photos



## 7 Radio Spectrum Matter Test Results

### 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.231(c)

Test Method: ANSI C63.10 (2013) Section 6.9

Limit:

| Frequency range(MHz) | Limit                                       |
|----------------------|---------------------------------------------|
| 70-900               | No wider than 0.25% of the center frequency |
| Above 900            | No wider than 0.5% of the center frequency  |

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.9 °C


Humidity: 35.4 % RH

Atmospheric Pressure: 1020 mbar

#### 7.1.2 Test Mode Description


| Pre-scan /<br>Final test | Mode<br>Code | Description                                                        |
|--------------------------|--------------|--------------------------------------------------------------------|
| Final test               | 00           | TX mode.Keep the EUT in continuously transmitting with Modulation. |

#### 7.1.3 Test Setup Diagram

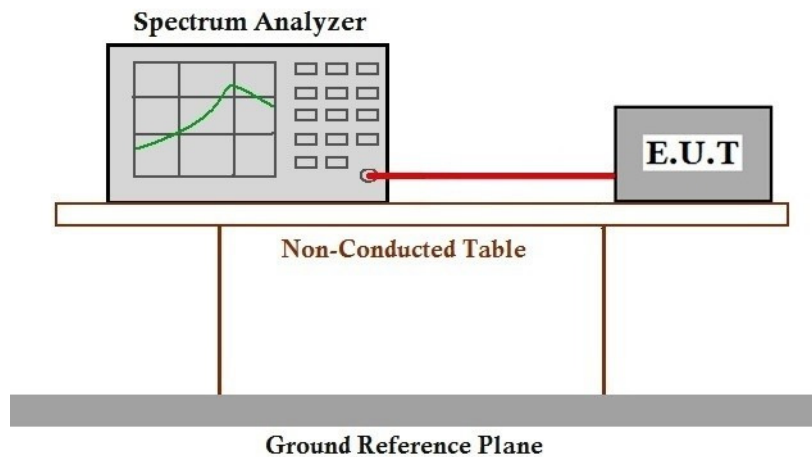

### 7.1.4 Measurement Procedure and Data

| Test channel | 20dB Bandwidth (kHz) | Limit (MHz) | Results |
|--------------|----------------------|-------------|---------|
| 433.924MHz   | 7.588                | 1.085       | Pass    |

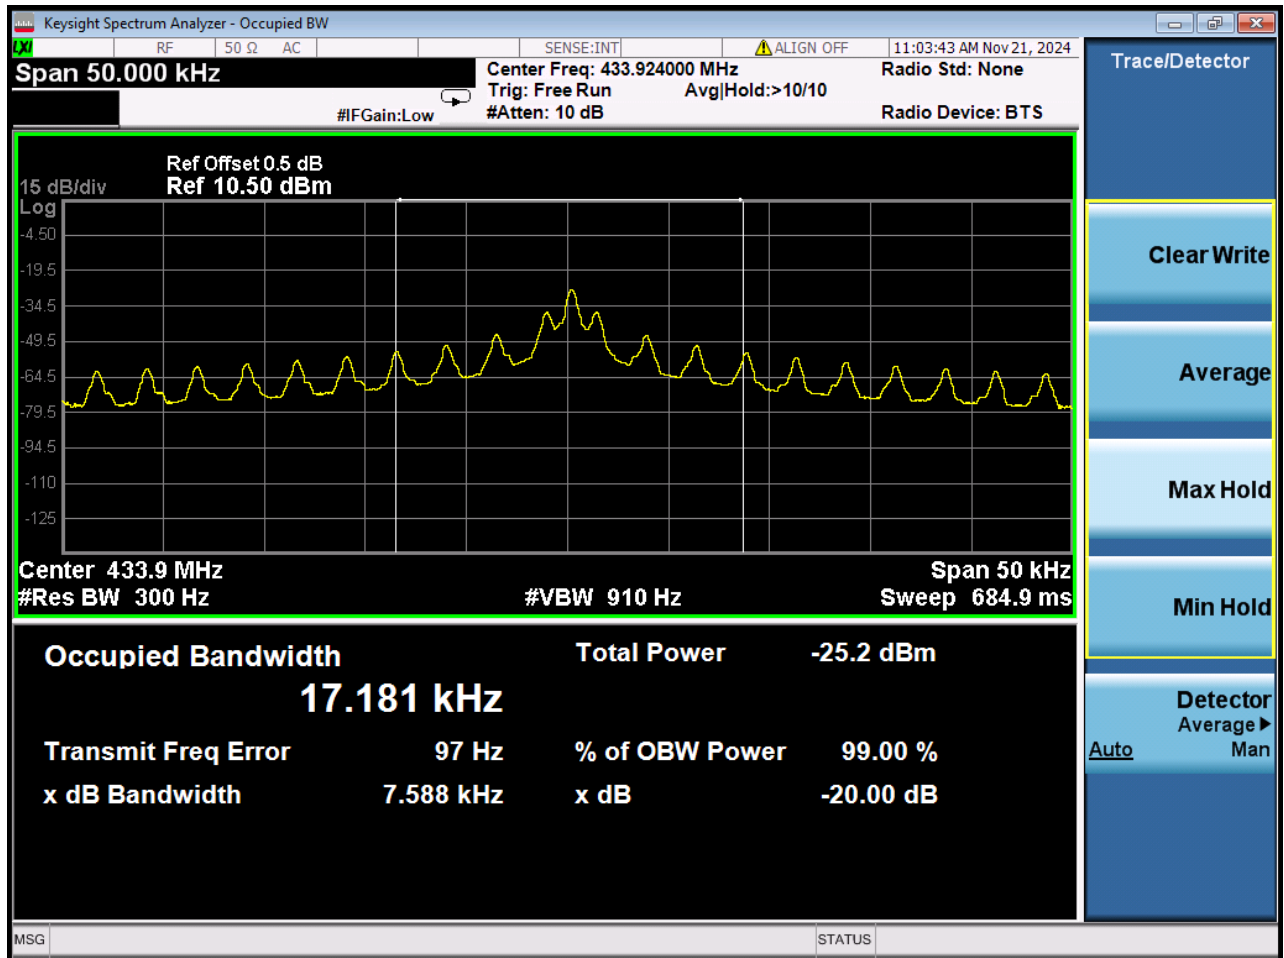

### 7.2 Dwell Time (15.231(a))

47 CFR Part 15, Subpart C 15.231(a)

ANSI C63.10 (2013) Section 7.5

| Device type                                                                                                  | Limit                                                                                                |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| Manually operated transmitter                                                                                | The switch automatically deactivate the transmitter within not more than 5 seconds of being released |
| Automatically actived transmitter                                                                            | Cease transmission within 5 seconds after activation                                                 |
| Periodic transmissions to determine system integrity of transmitters used in security or safety applications | The total transmission time does not exceed 2 seconds per hour                                       |

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.9 °C


Humidity: 35.4 % RH

Atmospheric Pressure: 1020 mbar


#### 7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                        |
|-----------------------|-----------|--------------------------------------------------------------------|
| Final test            | 00        | TX mode.Keep the EUT in continuously transmitting with Modulation. |

#### 7.2.3 Test Setup Diagram

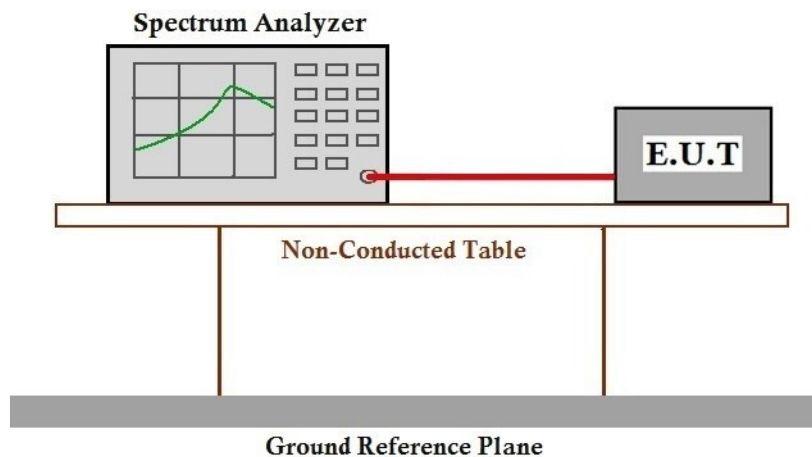

### 7.2.4 Measurement Procedure and Data

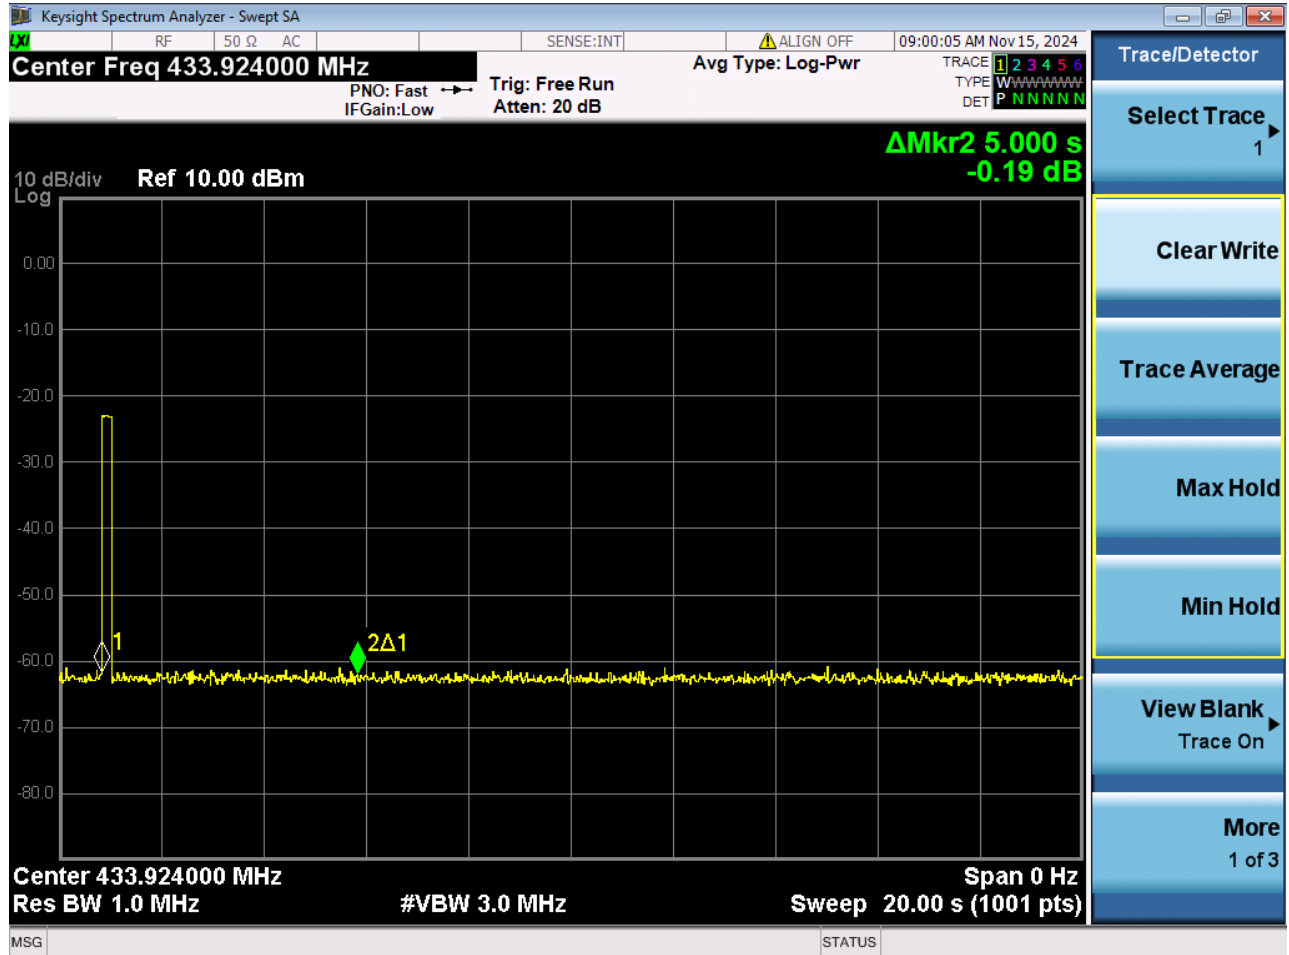

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 15 of 27

## 7.3 Field Strength of the Fundamental Signal (15.231(b))

Test Requirement 47 CFR Part 15, Subpart C 15.231(b)

Test Method: ANSI C63.10 (2013) Section 6.5

Measurement Distance: 3m

Limit:

| Fundamental frequency(MHz) | Field strength of fundamental(microvolts/meter) | Field strength of spurious emissions(microvolts/meter) |
|----------------------------|-------------------------------------------------|--------------------------------------------------------|
| 40.66-40.70                | 2250                                            | 225                                                    |
| 70-130                     | 1250                                            | 125                                                    |
| 130-174                    | 1250 to 3750                                    | 125 to 375                                             |
| 174-260                    | 3750                                            | 375                                                    |
| 260-470                    | 3750 to 12500                                   | 375 to 1250                                            |
| Above 470                  | 12500                                           | 1250                                                   |

Remark: the emission limit is based on measurement instrumentation employing an average detector at a distance of 3 meters. The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

\*\* linear interpolations

The fundamental frequency of the EUT is 433.924 MHz

The limit for average or QP field strength dBuV/m for the fundamental emission= 80.83 dBuV/m

No fundamental is allowed in the restricted bands.

The limit for average field strength dBuV/m for the spurious emission=60.83 dBuV/m. Spurious in the restricted bands must be less than 60.83 dBuV/m or 15.209, whichever limit permits a higher field strength.

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 51.4 % RH

Atmospheric Pressure: 1020 mbar

### 7.3.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                        |
|-----------------------|-----------|--------------------------------------------------------------------|
| Final test            | 00        | TX mode.Keep the EUT in continuously transmitting with Modulation. |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Laboratory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


| Average value:     |                                                      |
|--------------------|------------------------------------------------------|
| Calculate Formula: | Average value=Peak value + PDCF                      |
|                    | PDCF=20 log(Duty cycle)= 20 log[13.90/40.70]=-9.33dB |
|                    | Duty cycle= T on time / T period                     |
| Test data:         | Ton time =0.4*25+3.90=13.90ms                        |
|                    | T period =40.70ms                                    |

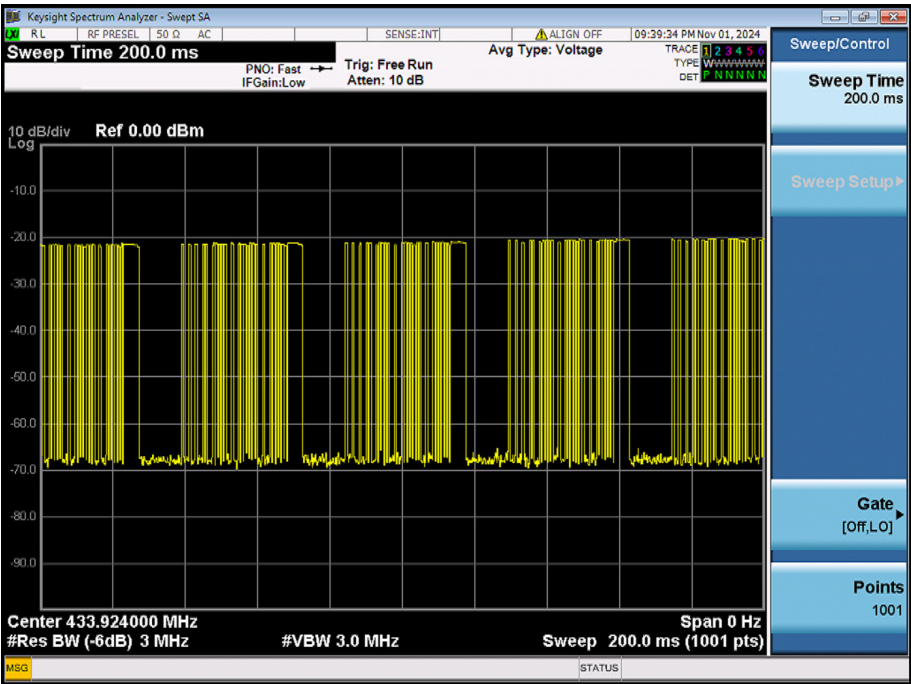

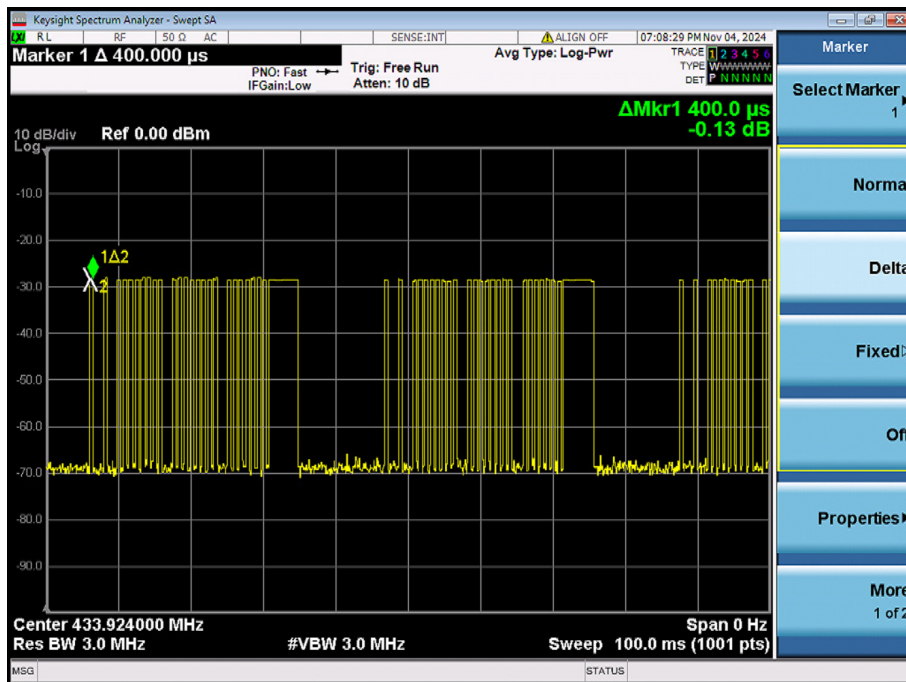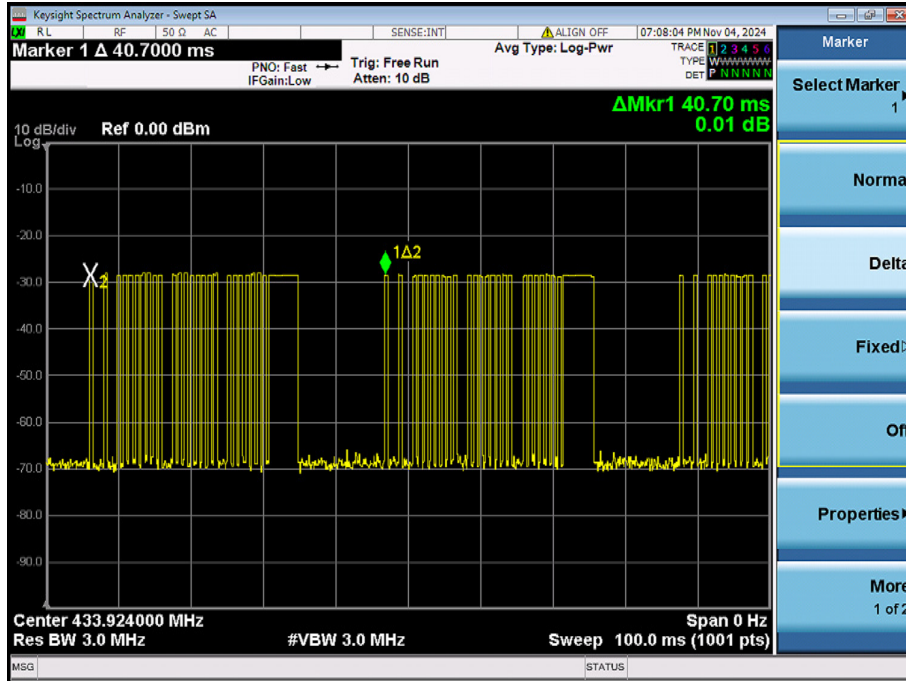

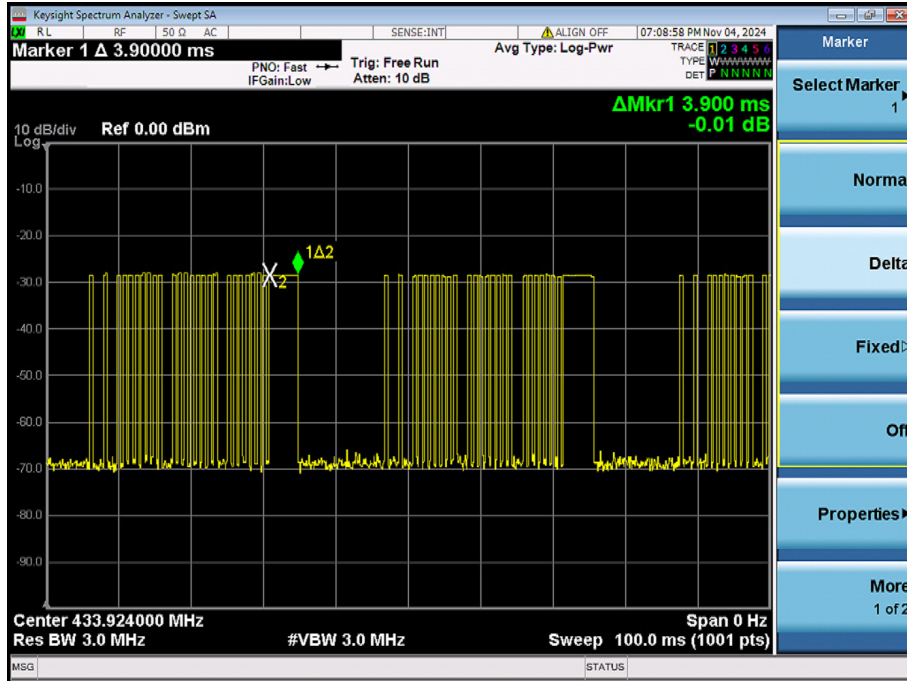

### 7.3.3 Test Setup Diagram

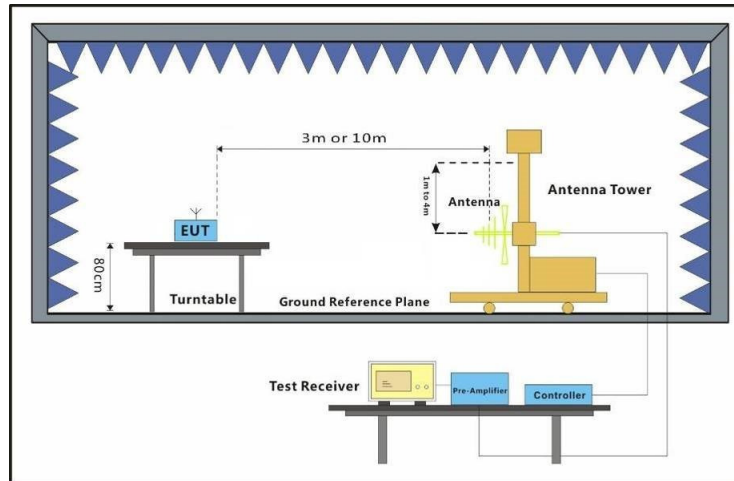

## 7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 20 of 27

## Peak value:

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamplifier Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-----------------|-----------------------|--------------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 433.924         | 2.67            | 21.02                 | 27.60                    | 91.02             | 87.11          | 100.83              | -13.72          | Horizontal   |
| 867.848         | 4.01            | 27.65                 | 27.26                    | 50.47             | 54.87          | 80.83               | -25.96          | Horizontal   |
| 433.924         | 2.67            | 21.02                 | 27.60                    | 77.84             | 73.93          | 100.83              | -26.90          | Vertical     |
| 867.848         | 4.01            | 27.65                 | 27.25                    | 36.73             | 41.14          | 80.83               | -39.69          | Vertical     |

## Average value:

| Frequency (MHz) | Average correction factor | Peak Level (dBuV/m) | Average Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|---------------------------|---------------------|------------------------|---------------------|-----------------|--------------|
| 433.924         | -9.33                     | 87.11               | 77.78                  | 80.83               | -3.05           | Horizontal   |
| 867.848         | -9.33                     | 54.87               | 45.54                  | 60.83               | -15.29          | Horizontal   |
| 433.924         | -9.33                     | 73.93               | 64.60                  | 80.83               | -16.23          | Vertical     |
| 867.848         | -9.33                     | 41.14               | 31.81                  | 60.83               | -29.02          | Vertical     |

Note: Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor

Average Level= Peak value + Average correction factor



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 7.4 Radiated Emissions

Test Requirement 47 CFR Part 15C Section 15.231(b) and 15.209

Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 51.4 % RH


Atmospheric Pressure: 1020 mbar

### 7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description                                                        |
|-----------------------|-----------|--------------------------------------------------------------------|
| Final test            | 00        | TX mode.Keep the EUT in continuously transmitting with Modulation. |



### 7.4.3 Test Setup Diagram

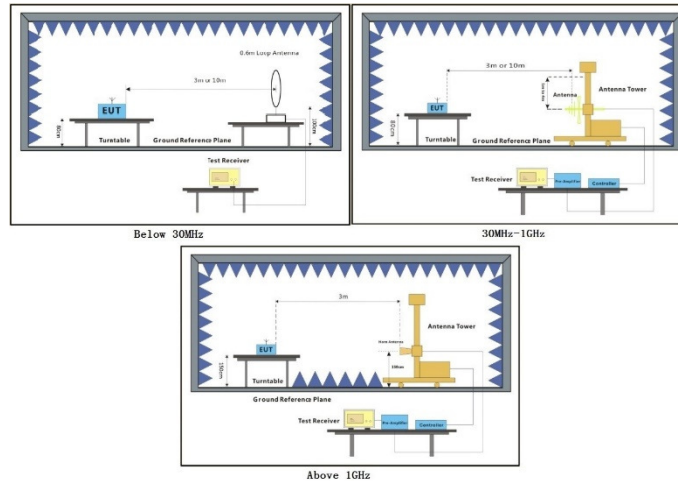

### 7.4.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.


Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- Scan from 9kHz to 1GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Below 1GHz:

Test Mode: 00; Polarity: Horizontal

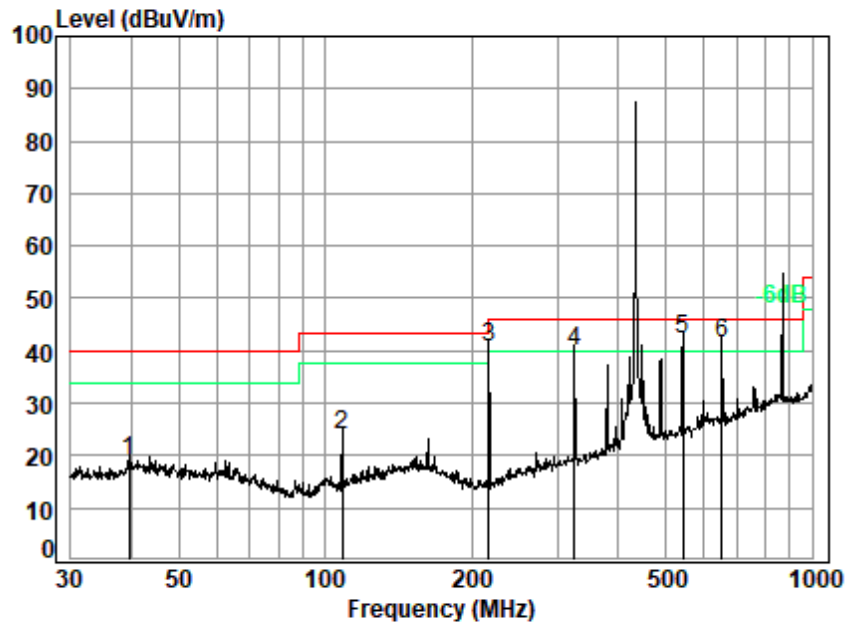

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 03950HS  
Mode : 00

|   |        | Cable | Ant    | Preamp | Read  | Limit  | Over   |              |
|---|--------|-------|--------|--------|-------|--------|--------|--------------|
|   | Freq   | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark |
|   | MHz    | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB           |
| 1 | 39.58  | 0.75  | 16.60  | 27.71  | 29.40 | 19.04  | 40.00  | -20.96 QP    |
| 2 | 108.27 | 1.25  | 12.06  | 27.56  | 38.21 | 23.96  | 43.50  | -19.54 QP    |
| 3 | 216.78 | 1.82  | 14.93  | 27.10  | 51.04 | 40.69  | 46.00  | -5.31 QP     |
| 4 | 325.60 | 2.28  | 18.62  | 27.05  | 46.15 | 40.00  | 46.00  | -6.00 QP     |
| 5 | 543.27 | 3.04  | 23.74  | 28.04  | 43.47 | 42.21  | 46.00  | -3.79 QP     |
| 6 | 651.94 | 3.37  | 24.86  | 28.05  | 41.34 | 41.52  | 46.00  | -4.48 QP     |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 24 of 27

Test Mode: 00; Polarity: Vertical

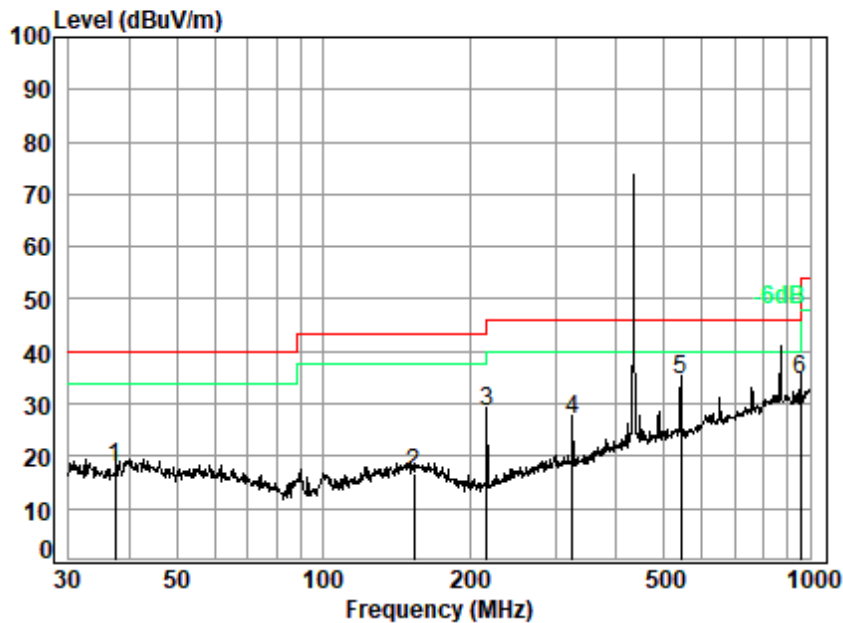

Site : chamber  
Condition: 3m VERTICAL  
Job No : 03950HS  
Mode : 00

|   | Freq   | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|--------|------------|------------|---------------|------------|--------|------------|------------|--------|
|   | MHz    | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 37.42  | 0.72       | 17.56      | 27.72         | 27.26      | 17.82  | 40.00      | -22.18     | QP     |
| 2 | 153.74 | 1.53       | 13.43      | 27.33         | 29.14      | 16.77  | 43.50      | -26.73     | QP     |
| 3 | 216.78 | 1.82       | 14.93      | 27.10         | 38.76      | 28.41  | 46.00      | -17.59     | QP     |
| 4 | 325.60 | 2.28       | 18.62      | 27.05         | 33.01      | 26.86  | 46.00      | -19.14     | QP     |
| 5 | 543.27 | 3.04       | 23.74      | 28.04         | 35.75      | 34.49  | 46.00      | -11.51     | QP     |
| 6 | 955.44 | 4.24       | 28.10      | 26.85         | 29.27      | 34.76  | 46.00      | -11.24     | QP     |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 25 of 27

Above 1GHz:

Test Mode: 00; Polarity: Horizontal

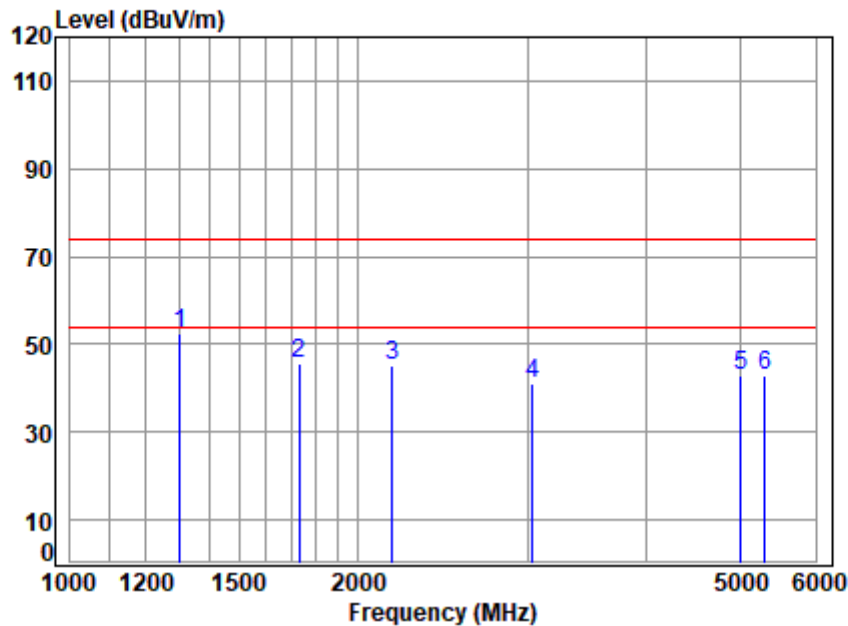

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 03950HS  
Mode : 00  
Note :

|   | Freq    | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|------------|------------|---------------|------------|--------|------------|------------|--------|
|   | MHz     | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 1301.77 | 3.76       | 24.79      | 38.36         | 62.11      | 52.30  | 74.00      | -21.70     | Peak   |
| 2 | 1735.70 | 4.38       | 26.63      | 38.42         | 52.96      | 45.55  | 74.00      | -28.45     | Peak   |
| 3 | 2169.62 | 4.86       | 28.04      | 37.99         | 50.36      | 45.27  | 74.00      | -28.73     | Peak   |
| 4 | 3037.47 | 5.63       | 30.20      | 36.14         | 41.42      | 41.11  | 74.00      | -32.89     | Peak   |
| 5 | 5015.75 | 7.44       | 34.31      | 35.38         | 36.32      | 42.69  | 74.00      | -31.31     | Peak   |
| 6 | 5311.74 | 7.68       | 34.25      | 35.23         | 36.29      | 42.99  | 74.00      | -31.01     | Peak   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR241000395002

Page: 26 of 27

Test Mode: 00; Polarity: Vertical

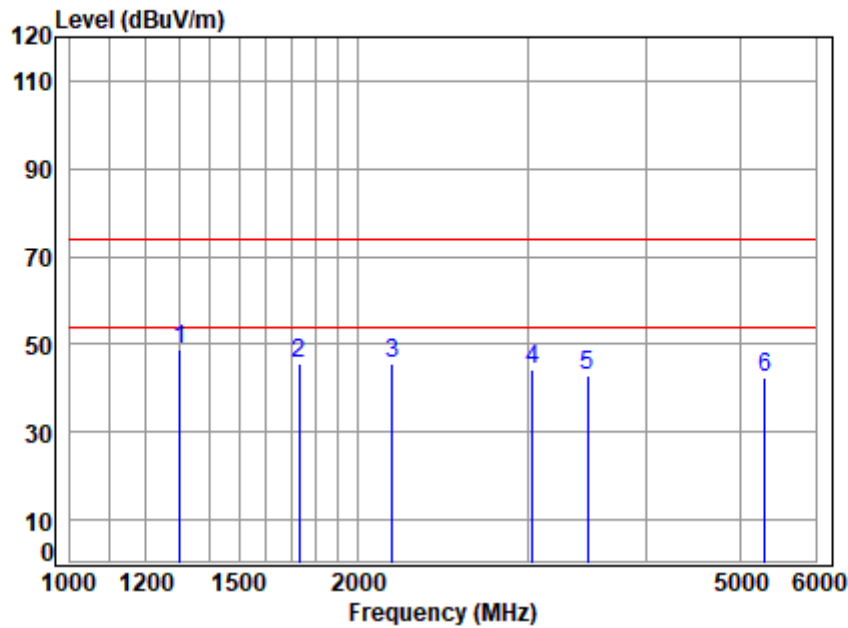

Site : chamber  
Condition: 3m VERTICAL  
Job No : 03950HS  
Mode : 00  
Note :

|   | Freq    | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|------------|------------|---------------|------------|--------|------------|------------|--------|
|   | MHz     | dB         |            | dB            | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 1301.77 | 3.76       | 24.79      | 38.36         | 58.68      | 48.87  | 74.00      | -25.13     | Peak   |
| 2 | 1735.70 | 4.38       | 26.63      | 38.42         | 52.93      | 45.52  | 74.00      | -28.48     | Peak   |
| 3 | 2169.62 | 4.86       | 28.04      | 37.99         | 50.58      | 45.49  | 74.00      | -28.51     | Peak   |
| 4 | 3037.47 | 5.63       | 30.20      | 36.14         | 44.51      | 44.20  | 74.00      | -29.80     | Peak   |
| 5 | 3471.39 | 6.19       | 31.71      | 36.12         | 41.07      | 42.85  | 74.00      | -31.15     | Peak   |
| 6 | 5311.74 | 7.68       | 34.25      | 35.23         | 35.88      | 42.58  | 74.00      | -31.42     | Peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2410003950HS

## 9 EUT Constructional Details (EUT Photos)

Refer to Appendix\_ External and Internal Photos for SZCR2410003950HS

- End of the Report -

