

Test report

Customer:

eGym GmbH

Einsteinstraße 172

81677 München

Germany Tel.: +49 89 921 3105-00

Fax: +49 89 921 3105-99

RF test report

190129-AU01+W03



Industry
Canada

eGym GmbH

RFID reader module

eGym RFID Board v2



The test result refers exclusively to the model tested.

This test report may not be copied or published in extracts without the written authorization of the accreditation agency and/or EMV **TESTHAUS** GmbH



Deutsche
Akkreditierungsstelle
D-PL-12155-01-00

EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Germany
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



Test Firm Type "accredited": Valid until 2019-06-05
MRA US-EU, FCC designation number: DE0010
BNetzA-CAB-02/21-02/5 Valid until 2023-11-26

Recognized on March 14th, 2019 by the
Department of Innovation, Science and Economic Development (ISED) Canada
as a wireless testing laboratory
CAB identifier: DE0011

Test laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of
EMV **TESTHAUS** GmbH.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

Table of contents

1	Summary of test results	5
2	Referenced publications	7
3	Equipment under test (EUT)	8
3.1	General information	8
3.2	Radio specifications.....	9
3.3	Photo documentation.....	9
4	Test configuration and mode of operation.....	10
4.1	Test configuration	10
4.2	Mode of operation.....	10
5	Test procedures.....	11
5.1	General specifications	11
5.2	AC power line conducted emission	11
5.3	Radiated emissions below 30 MHz	13
5.4	Radiated emissions from 30 MHz to 1 GHz	15
5.5	Bandwidth measurements	18
5.6	Operation within the band 13.110 MHz - 14.010 MHz.....	18
5.7	Carrier frequency stability	19
6	Test results.....	20
6.1	AC power line conducted emissions 150 kHz to 30 MHz	21
6.2	20 dB bandwidth.....	28
6.3	Occupied bandwidth	32
6.4	Operation within the band 13.110 MHz – 14.010 MHz	34
6.5	Carrier frequency stability	38
6.6	Emissions outside the operating frequency band(s) specified.....	42
7	Equipment calibration status.....	50
8	Measurement uncertainties	51
9	Revision history	52



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

List of figures

Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz.....	12
Figure 2: Setup for radiated emissions test below 30 MHz	15
Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz	17
Figure 4: Test setup for carrier frequency stability measurement.....	19
Figure 5: Chart of AC power-line conducted emissions test – phase L1, without termination.....	24
Figure 6: Chart of AC power-line conducted emissions test – phase N, without termination	25
Figure 7: Chart of AC power-line conducted emissions test – phase L1, with termination.....	26
Figure 8: Chart of AC power-line conducted emissions test – phase N, with termination	27
Figure 9: Chart of 20 dB bandwidth	30
Figure 10: Chart of occupied bandwidth test.....	33
Figure 11: Spektrum mask of 13.56 MHz @ 3m distance	36
Figure 12: Chart of emissions test below 30 MHz without tag in position 1, antenna in line @ 3 m	45
Figure 13: Chart of emissions test from 30 MHz to 1 GHz with tag in position 2 with tag @ 3 m....	49

List of tables

Table 1: Devices used for testing	10
Table 2: Bandwidth and detector type for AC power-line conducted emissions test.....	12
Table 3: Recalculation factors for extrapolation	13
Table 4: Bandwidth and detector type for radiated emissions test below 30 MHz.....	14
Table 5: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz	15
Table 6: AC power-line conducted limits.....	21
Table 7: Final results of AC power-line conducted emissions test – phase L1, without termination	24
Table 8: Final results of AC power-line conducted emissions test – phase N, without termination.	25
Table 9: Final results of AC power-line conducted emissions test – phase L1, with termination	26
Table 10: Final results of AC power-line conducted emissions test – phase N, with termination....	27
Table 11: Results of 20 dB bandwidth tests.....	30
Table 12: Results of occupied bandwidth test.....	33
Table 13: Results of emission within the band 13.110 MHz to 14.010 MHz	36
Table 14: General radiated emission limits up to 30 MHz according to §15.209	43
Table 15: Final results of emission below 30 MHz, without tag in position 1, antenna in line	45
Table 16: General radiated emission limits \geq 30 MHz according to §15.209	47
Table 17: Chart of emissions test from 30 MHz to 1 GHz with tag in position 2 with tag @ 3 m....	49



1 Summary of test results

System type: RFID Reader

47 CFR part and section	Test	Equivalent to IC radio standard(s)	Page	Result	Note(s)
15.207	AC power line conducted emissions 150 kHz to 30 MHz	RSS-210, section 3.1 RSS-Gen, section 8.8	---	Passed	
15.215(c)	20 dB bandwidth	---	21	For information only	
2.202(a) ANSI C63.10	Occupied bandwidth (99 %)	RSS-Gen, section 6.7	32	For information only	
15.225 (a) – (d)	Operation within the band 13.110 – 14.010 MHz	RSS-210 section B.6	34	Passed	
15.225(e)	Carrier frequency stability	RSS-210, section B.6 RSS-Gen, section 6.11	38	Passed	
15.209	Emissions outside the operating frequency band(s) specified 9 kHz to 1 GHz	RSS-Gen, section 6.13 RSS-Gen, section 8.9			
			42	Passed	---
			46	Passed	---
			---	Not applicable	1,2

Notes (for information about EUT see clause 3):

- 1 Not applicable if the 10th harmonic of the intentional transmitter is beyond 1 GHz (please see 47 CFR Part 15, section 15.33(a)(1), and RSS-Gen, section 6.13)
- 2 According to 47 CFR Part 15, §15.33, the frequency range of investigation for the digital device shall be used if the range of investigation determined by the highest internal frequency of the digital device is higher than the 10th harmonic of the intentional radiator



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

Straubing, April 15, 2019



Andreas Menacher
Test engineer
EMV **TESTHAUS** GmbH



Konrad Graß
Head of radio department
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

190129-AU01+W03

Page 6 of 52

2 Referenced publications

<i>Publication</i>	<i>Title</i>
CFR 47 Part 2 October 2017	Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15 October 2017	Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.10 June 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 174176 D01 June 3, 2015	AC power-line conducted emissions Frequently Asked Questions
RSS-Gen, Issue 5 April 2018	Spectrum Management and Telecommunications - Radio Standards Specification - General Requirements for Compliance of Radio Apparatus
RSS-210 Issue 9, August 2016	Spectrum Management and Telecommunications Radio Standards Specification Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

3 Equipment under test (EUT)

All Information in this clause is declared by customer.

3.1 General information

Product type: RFID Reader Module
Model name: eGym RFID Board v2
Serial number(s): Serial prototype
Applicant: eGym GmbH
Manufacturer: eGym GmbH
Version: Hardware: 1.0
Software: 102
Additional modifications: ---
FCC ID: 2APOCEGYMRIFID02S
IC registration number: 23832-EGYMRIFID02S
Power supply: DC supply
Nominal voltage: 5.00 V
Minimum voltage: 4.75 V
Maximum voltage: 5.25 V
Nominal frequency: ---
Temperature range: -25 °C to +50 °C (customer defined)
Device type: Portable Mobile Fixed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

3.2 Radio specifications

System type: RFID Reader

Application frequency band: 13.110 MHz – 14.010 MHz

Frequency range used: 13.559915 MHz – 13.560348 MHz

Operating frequency: 13.56 MHz

Short description: The EUT is a RFID Reader operating at the frequency 13.56 MHz.

Number of RF channels 1

Highest internal frequency: < 108 MHz

Modulation ASK

Antenna: Type: PCB antenna
Connector: external internal
 temporary none (integral antenna)

3.3 Photo documentation

For external photos of the EUT see annex B, for internal ones see annex C.
Photos taken during testing including EUT positions can be found in annex A.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

4 Test configuration and mode of operation

4.1 Test configuration

Device	Type designation	Serial or inventory no.	Manufacturer
<i>EUT</i>			
RFID Reader Module	eGym RFID Board v2	Serial prototype	eGym GmbH
<i>Support equipment</i>			
Notebook	LIFEBOOK U772	O00632	Fujitsu
Notebook Power Supply	A11-100P3A	O00632	Fujitsu
PC ¹	Esprimo E900	O00500	Fujitsu
Display ¹	TFT B22T-7 Pro	O00857	Fujitsu
USB Power Box ²	USB Messbox	SEB01231	EMV Testhaus GmbH
RFID tag	13.56 MHz	---	eGym GmbH
DC-Power supply ²	Statron 3231.1	E01235	Statron Gerätetechnik GmbH
USB 2.0 Cat. Extender 1-Port, POC	UA0267	W01406	LogiLink

Table 1: Devices used for testing

4.2 Mode of operation

4.2.1 Test software used for all tests

Firmware EUT: 102-EMV
Software: HTerm.exe

4.2.2 Test modes applied

EUT was configured by manufacturer to search permanently after tags. When a tag was detected the UID was send permanently to the Notebook via USB. The UID then was displayed via HTerm.exe. The information if a tag was used or not has been noted at the respective test.

¹ Used for AC-power line conducted emissions measurements.

² Only used for frequency stability tests.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

5 Test procedures

5.1 General specifications

5.1.1 Test setups

Tabletop devices are placed on a non-conductive table with a height of 0.8 m. In case of AC power-line conducted emissions test, the rear of the EUT is located 40 cm to the vertical wall of the RF-shielded (screened) room which is used as vertical conducting plane. For radiated emission measurements above 1 GHz, tabletop devices are placed at a height of 1.5 m above the floor using a support made of styrene placed on top of the non-conductive table.

Floor-standing devices are placed either directly on the reference ground-plane or on insulating material (see clause 6.3.3 of ANSI C63.4-2014 for more details).

All other surfaces of tabletop or floor-standing EUTs are at least 80 cm from any other grounded conducting surface. This includes the case or cases of one or more LISNs when performing an AC power-line conducted emissions test.

Radiated emission measurements of equipment that can be used in multiple orientations (e.g. portable or handheld devices) are performed with the EUT in each of three orthogonal axis positions.

5.2 AC power line conducted emission

AC power-line conducted emissions are measured according to clause 6.2 of ANSI C63.10 over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from all of the EUT current-carrying power input terminals that are directly (or indirectly via separate transformers or power supplies) connected to a public power network. The tests are performed in a shielded room.

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements are made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required.

For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter is used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
150 kHz ≤ f < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Quasi-peak, Average	Quasi-peak, Average

Table 2: Bandwidth and detector type for AC power-line conducted emissions test

The AC power-line conducted emissions test is performed in the following steps:

- a) The EUT is arranged as tabletop or floor-standing equipment, as applicable, and connected to a line impedance stabilization network (LISN) with 50 μH / 50 Ω. If required, a second LISN of the same type and terminated by 50 Ω is used for peripheral devices. The EUT is switched on.
- b) The measurement equipment is connected to the LISN for the EUT and set-up according to the specifications of the test (see table 2). At the LISN, the neutral line is selected to be tested.
- c) The prescan is performed with both detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescan, but not for final scan.
- d) When the prescan is completed, maximum levels with less margin than 10 dB or exceeding the limit are determined and collected in a list.
- e) With the first frequency of the list selected, a frequency zoom over a range of ten times of the measurement receiver bandwidth around this frequency is performed. If the EUT has no significant drift in frequency, the frequency zoom can be skipped.
- f) For final scan, the emission level is measured and the maximum is recorded.
- g) Steps e) to f) are repeated for all other frequencies in the list. At least the six highest EUT emissions relative to the limit have to be recorded.
- h) Steps c) to g) are repeated for all current-carrying conductors of all of the power cords of EUT, i.e. all phase and (if used) neutral line(s).

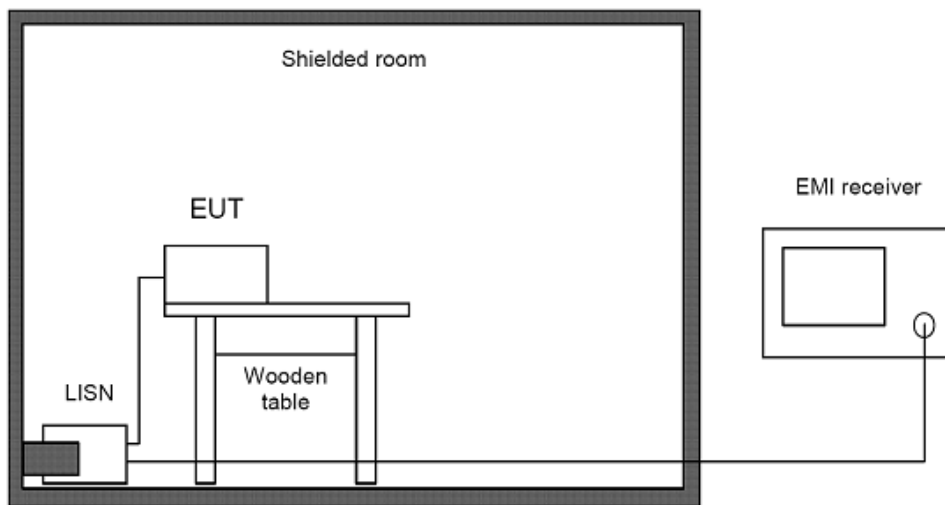


Figure 1: Setup for AC power-line conducted emissions test from 150 kHz to 30 MHz

5.3 Radiated emissions below 30 MHz

Radiated emissions below 30 MHz are measured according to clause 6.4 of ANSI C63.10 using an inductive shielded loop antenna. As this antenna measures the magnetic field only, its antenna factors are converted to electric field strength values assuming a free space impedance of 377 Ω as described in clause 4.3.1 of ANSI C63.10. This results in an additional correction of 51.53 dB.

According to clause 6.4.3 of ANSI C63.10, at frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements. In this case, the results are extrapolated to the specified distance by using a recalculation factor determined according to one of the methods described in clause 6.4.4 of ANSI C63.10, provided that the maximum dimension of the device is equal to or less than 0.625 times the wavelength at the frequency being measured. As the minimum wavelength is 10 meters corresponding to the maximum frequency of 30 MHz, this requirement is fulfilled if the maximum dimension of the device is equal to or less than 6.25 meters.

Unless otherwise stated, the recalculation factor is determined according to clause 6.4.4.2 “Extrapolation from the measurement of a single point” of ANSI C63.10:

$$d_{near\ field} = 47.77 / f_{MHz}, \text{ or}$$

$$f_{MHz} = 47.77 / d_{near\ field}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula to determine the recalculation factor:

$$f_{MHz}(300\ m) \approx 0.159\ MHz$$

$$f_{MHz}(30\ m) \approx 1.592\ MHz$$

$$f_{MHz}(3\ m) \approx 15.923\ MHz$$

Based on the test distances for the general radiated emission limits as specified in §15.209 of 47 CFR Part 15, the following formulas are used to determine the recalculation factor:

Frequency (f)	d_{limit}	$d_{measure}$	Formula for recalculation factor
9 kHz ≤ f ≤ 159 kHz 490 kHz < f ≤ 1.592 MHz	300 m 30 m	3 m	-40 log($d_{limit} / d_{measure}$)
159 kHz < f ≤ 490 kHz 1.592 MHz < f ≤ 15.923 MHz	300 m 30 m	3 m	-40 log($d_{near\ field} / d_{measure}$) - 20 log($d_{limit} / d_{near\ field}$)
f > 15.923 MHz	30 m	3 m	-20 log($d_{limit} / d_{measure}$)

Table 3: Recalculation factors for extrapolation

Prescans for radiated measurements below 30 MHz are performed in a fully anechoic room (called “CDC”). The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 4.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
9 kHz ≤ f < 150 kHz	200 Hz	≤ 100 Hz	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average
150 kHz ≤ f < 30 MHz	9 kHz	≤ 4.5 kHz	Peak, Average	Peak Quasi-peak, Average	Peak Quasi-peak, Average

Table 4: Bandwidth and detector type for radiated emissions test below 30 MHz

Sample calculation:

Frequency (MHz)	Reading value (dBμV)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dBμV/m)
10	20.00	19.59	0.33	19.92	39.92

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 20 dBμV + 19.92 dB/m = 39.92 dBμV/m

Prescans are performed with all detectors activated at the same time. If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans. If no limit is specified for certain detectors, final scan measurement with these detectors may be omitted.

The radiated emissions test below 30 MHz is performed in the following steps:

- The loop antenna is positioned with its plane perpendicular to the ground with the lowest height of the antenna 1 m above the ground.
- The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- The measurement equipment is connected to the loop antenna and set-up according to the specifications of the test (see table 4).
- The EUT is turned to a position likely to get the maximum and the test antenna is rotated to detect the maximum of the fundamental in this EUT position.
- Then the EUT is rotated in a horizontal plane through 360° in steps of 45°. Starting at 0°, at each table position the spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the current table position is noted as the maximum position.
- After the last prescan, the significant maximum emissions and their table positions are determined and collected in a list.
- With the test receiver set to the first frequency of the list, the EUT is rotated by ±45° around the table position found during prescans while measuring the emission level continuously. For final scan, the worst-case table position is set and the maximum emission level is recorded.
- Step g) is repeated for all other frequencies in the list.
- Finally, for frequencies with critical emissions the loop antenna is rotated again to find the maximum of emission. At least, frequency and level of the six highest emissions relative to the



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to i) are repeated in two other orthogonal positions. If the EUT may be used in one position only, steps a) to i) are repeated in one orthogonal position.

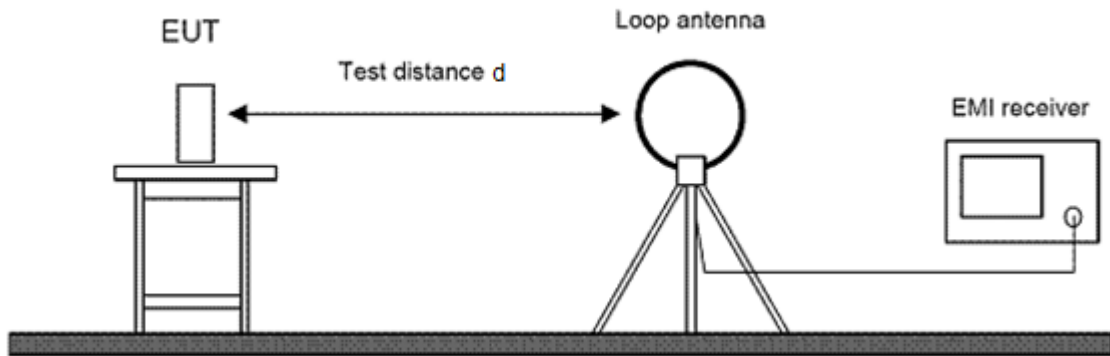


Figure 2: Setup for radiated emissions test below 30 MHz

5.4 Radiated emissions from 30 MHz to 1 GHz

Radiated emissions in the frequency range 30 MHz to 1 GHz are measured according to clause 6.5 of ANSI C63.10 using a semi-anechoic chamber (SAC) with a ground plane on the floor. The measurement distance is 3 meters. The emissions of the EUT are recorded with an EMI test receiver configured as described in table 5.

Frequency (f)	Measurement receiver bandwidth	Step size	Detector type		
			Prescan	Prescan with FFT	Final scan
30 MHz ≤ f ≤ 1 GHz	120 kHz	≤ 60 kHz	Peak	Quasi-peak	Quasi-peak

Table 5: Bandwidth and detector type for radiated emissions test from 30 MHz to 1 GHz

Sample calculation:

Frequency (MHz)	Reading value (dBμV)	Antenna correction (dB/m)	Cable attenuation (dB)	Correction factor (Corr.) (dB/m)	Level (dBμV/m)
100	30.00	11.71	1.06	12.77	42.77

Correction factor = Antenna correction + Cable attenuation

Level = Reading value + Correction factor = 30 dBμV + 12.77 dB/m = 42.77 dBμV/m



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

The measurement antenna is a combination of a biconical antenna and a logarithmic-periodic dipole array antenna. It is mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and in a height between 1 m and 4 m above the ground plane.

If the test receiver is capable of FFT analysis, it is used for prescans, but not for final scans.

The radiated emissions test from 30 MHz to 1 GHz is performed in the following steps:

- a) The measurement antenna is oriented initially for vertical polarization.
- b) The EUT is placed in its standard position on a turntable capable of rotation through 360° in the horizontal plane and arranged as tabletop or floor-standing equipment, as applicable. The EUT is switched on.
- c) The measurement equipment is connected to the measurement antenna and set-up according to the specifications of the test (see table 5).
- d) The table position is set to 0°.
- e) The antenna height is set to 1 m.
- f) The spectrum for the full frequency range is recorded. If the emission at a certain frequency is higher than the levels already recorded, the polarization and height of the measurement antenna as well as the current table position are noted as the maximum position.
- g) The antenna height is increased to 4 m in steps of 50 cm. At each height, step f) is repeated.
- h) The polarization of the measurement antenna is changed to horizontal.
- i) The antenna height is decreased from 4 m to 1 m in steps of 50 cm. At each height, step f) is repeated.
- j) The EUT is rotated in a horizontal plane through 360° in steps of 60°. At each table position, steps e) to i) are repeated.
- k) After the last prescan, the significant maximum emissions with their polarizations and heights of the measurement antenna as well as their table positions are determined and collected in a list.
- l) With the test receiver set to the first frequency of the list, the measurement antenna is set to the polarization and height and the table is moved to the position as determined during prescans.
- m) The antenna is moved by ± 50 cm around this height and the EUT is rotated by $\pm 60^\circ$ around this table position while measuring the emission level continuously.
- n) For final scan, the worst-case positions of antenna and table are set and the maximum emission level is recorded.
- o) Steps l) to n) are repeated for all other frequencies in the list. At least, frequency and level of the six highest emissions relative to the limit have to be recorded. However, emissions more than 20 dB below the limit do not need to be reported.

If the EUT may be used in various positions, steps a) to o) are repeated in two other orthogonal positions.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

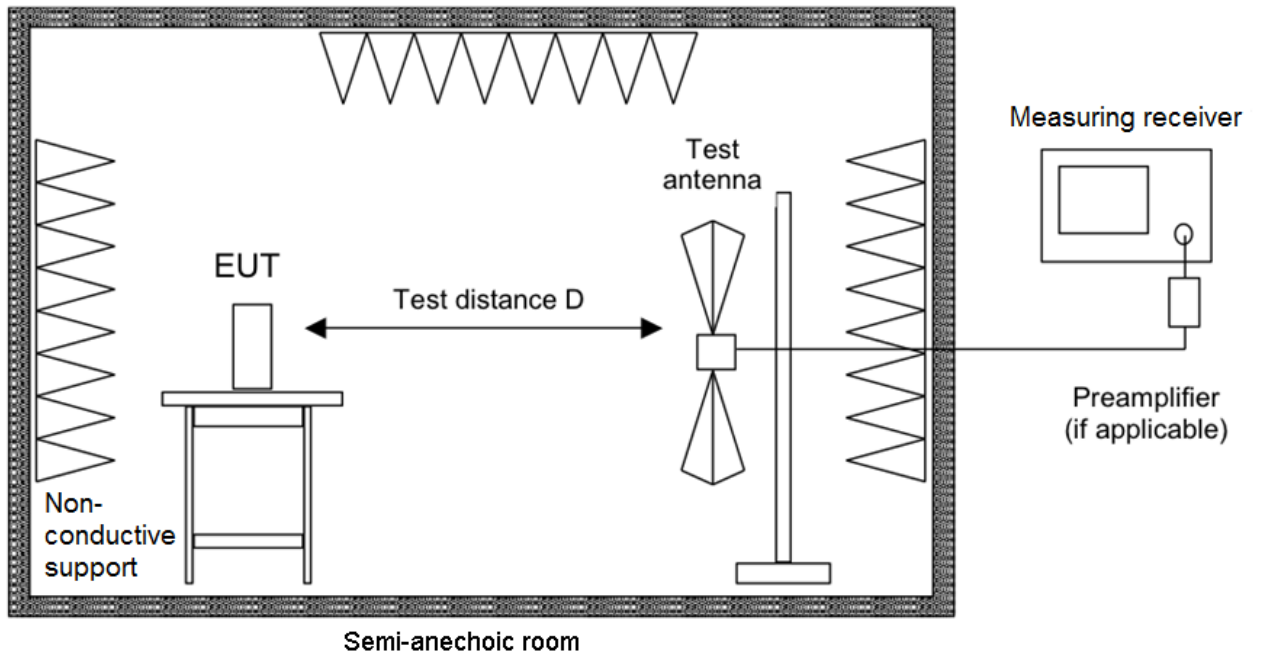


Figure 3: Setup for radiated emissions test from 30 MHz to 1 GHz

5.5 Bandwidth measurements

5.5.1 20 dB bandwidth of the emission

The 20 dB bandwidth of the emission is measured according to clause 6.9.2 of ANSI C63.10 as the width of the spectral envelope of the modulated signal, at an amplitude level reduced by a ratio of 20 dB down from the reference value.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer is between two times and five times the 20 dB bandwidth. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 % to 5 % of the 20 dB bandwidth and the video bandwidth (VBW) shall be approximately three times RBW.

The reference level of the instrument is set as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (20 \text{ dB bandwidth/RBW})]$ below the reference level.

5.5.2 99 % occupied bandwidth

According to section 6.7 of RSS-Gen, the occupied bandwidth (OBW) is defined as the 99 % emission bandwidth.

The span of the spectrum analyzer is set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The resolution bandwidth is in the range of 1 % to 5 % of the occupied bandwidth and the video bandwidth is not smaller than three times the resolution bandwidth. Video averaging is not permitted.

If possible, the detector of the spectrum analyzer is set to "Sample". However, if the device is not transmitting continuously, a peak, or peak hold is used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement).

To measure the 99 % emission bandwidth, the OBW function of the test receiver is used with the power bandwidth set to 99 %. This function indicates the lowest frequency (starting from the left side of the span) and the highest frequency (starting from the right side of the span) where 0.5% of the total sum is reached. The difference between the two frequencies is the 99 % occupied bandwidth.

5.6 Operation within the band 13.110 MHz - 14.010 MHz

The EUT was placed in a fully anechoic chamber and the testing was performed in accordance with ANSI C63.10 and 47 CFR Part 15, section 15.225 (a) to (d). The measurement distance was 3



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

m. To find the closest margin of the spectrum to the limit mask adapted to the test distance the EUT was rotated by 360 degrees with detector of the test receiver set to peak. The loop antenna placed in a fixed height of 1 meter was rotated by 360 degrees to get the maximum of emission. In case of exceeding the limits the detector is switched to quasi peak for final testing in position of maximum emission.

5.7 Carrier frequency stability

1. If possible EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance. If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.
2. The carrier frequency is measured depending on the variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment an external supply voltage can be used and set at the battery nominal voltage, and again at the battery operating end point voltage which must be specified by the equipment manufacturer. Alternatively, tests shall be performed using a new battery.
3. The carrier frequency is measured over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage.

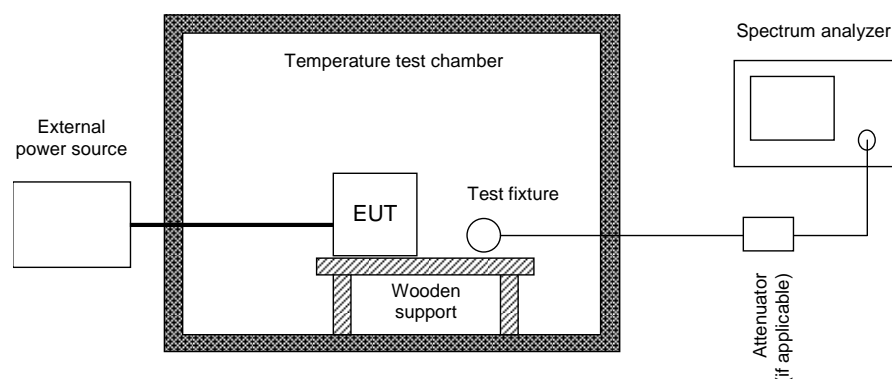


Figure 4: Test setup for carrier frequency stability measurement

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 5.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.1 AC power line conducted emissions 150 kHz to 30 MHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.207
	Reference(s):	ANSI C63.10, clause 6.2
Section(s) in RSS:	Requirement(s):	RSS-Gen, section 8.8
	Reference(s):	ANSI C63.10, clause 6.2

Result³ Test passed Test not passed

6.1.1 Test equipment

<i>Type</i>	<i>Designation</i>	<i>Manufacturer</i>	<i>Inventory no.</i>
<input checked="" type="checkbox"/> Shielded room	P92007	Siemens Matsushita	E00107
<input checked="" type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESCS 30	Rohde & Schwarz	E00003
<input type="checkbox"/> Artificial mains network	ESH2-Z5	Rohde & Schwarz	E00004
<input checked="" type="checkbox"/> Artificial mains network	ESH2-Z5	Rohde & Schwarz	E00005
<input checked="" type="checkbox"/> Attenuator (10 dB)	50FHB-010-10	JFW Industries	E00471
<input checked="" type="checkbox"/> Test software	EMC32-EB (V10.35)	Rohde & Schwarz	E00777

6.1.2 Limits

As specified in section 15.209 of 47 CFR Part 15, the emissions from an intentional radiator shall not exceed the conducted limits as specified in table 6.

<i>Frequency of emission [MHz]</i>	<i>Conducted limit</i>	
	<i>Quasi-peak [dBμV]</i>	<i>Average [dBμV]</i>
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5.0	56	46
5 – 30	60	50

Table 6: AC power-line conducted limits

³ For information about measurement uncertainties see page 85.



* Decreases with the logarithm of the frequency.

6.1.3 Test procedure

AC power line conducted emissions are measured using the test procedure as described in clause 5.2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.1.4 Test results

Performed by:	Andreas Menacher	Date(s) of test:	March 14, 2019
Climatic conditions:	Ambient temperature 23 °C	Relative humidity 38 %	Barometric pressure 976 hPa

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
150 kHz – 30 MHz	≤ 4.5 kHz	9 kHz	PK, AV	QP, AV	10 ms	1 s	Off

Remark: According to KDB 174176 D01 Line Conducted FAQ v01r01 the intentional operator which operates below 30 MHz was first measured with the antenna connected to determine compliance with section 15.207 limits outside the transmitter's fundamental emission band and then the antenna was replaced by a dummy load and the test was repeated to show compliance with section 15.207 limits within the transmitter's fundamental emission band.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

190129-AU01+W03

Page 23 of 52

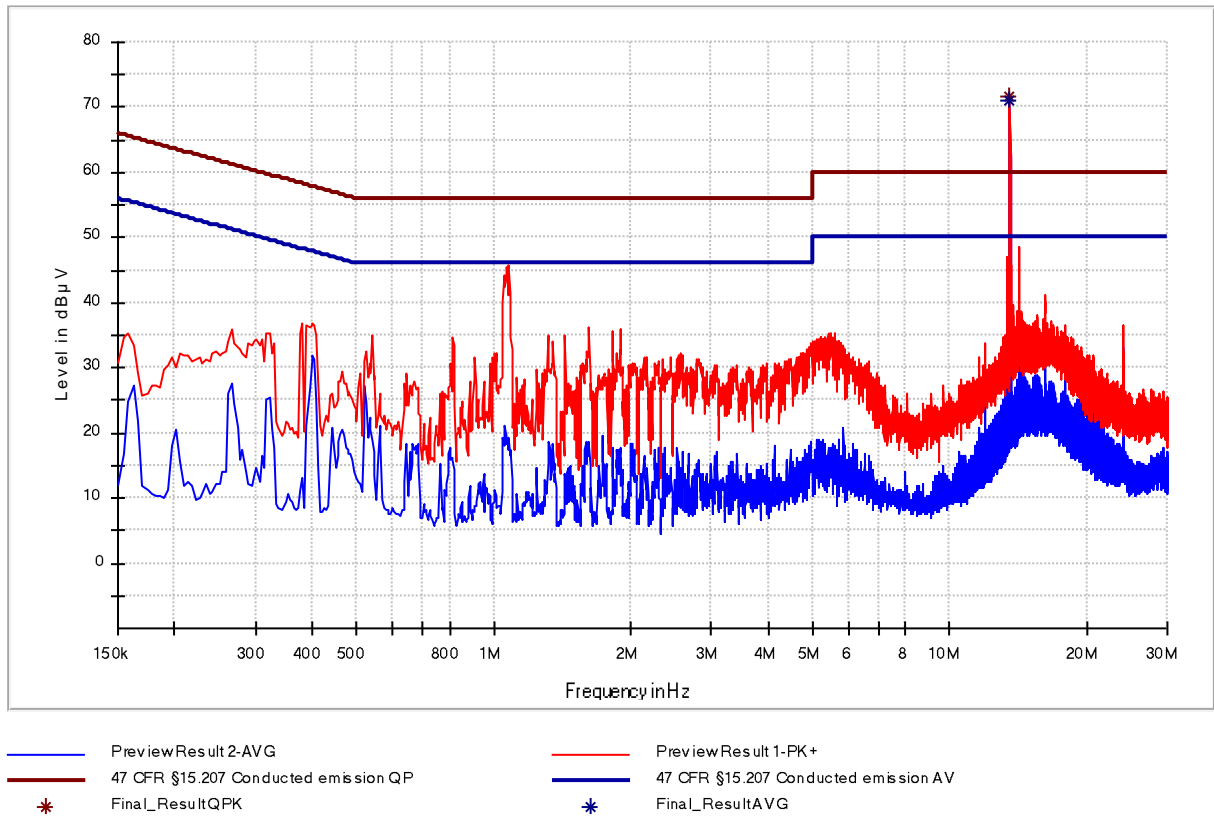


Figure 5: Chart of AC power-line conducted emissions test – phase L1, without termination

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
13.561000	---	71.14	50.00	-21.14	1000.0	9.000	L1	GND	11.8
13.561000	71.66	---	60.00	-11.66	1000.0	9.000	L1	GND	11.8

Table 7: Final results of AC power-line conducted emissions test – phase L1, without termination

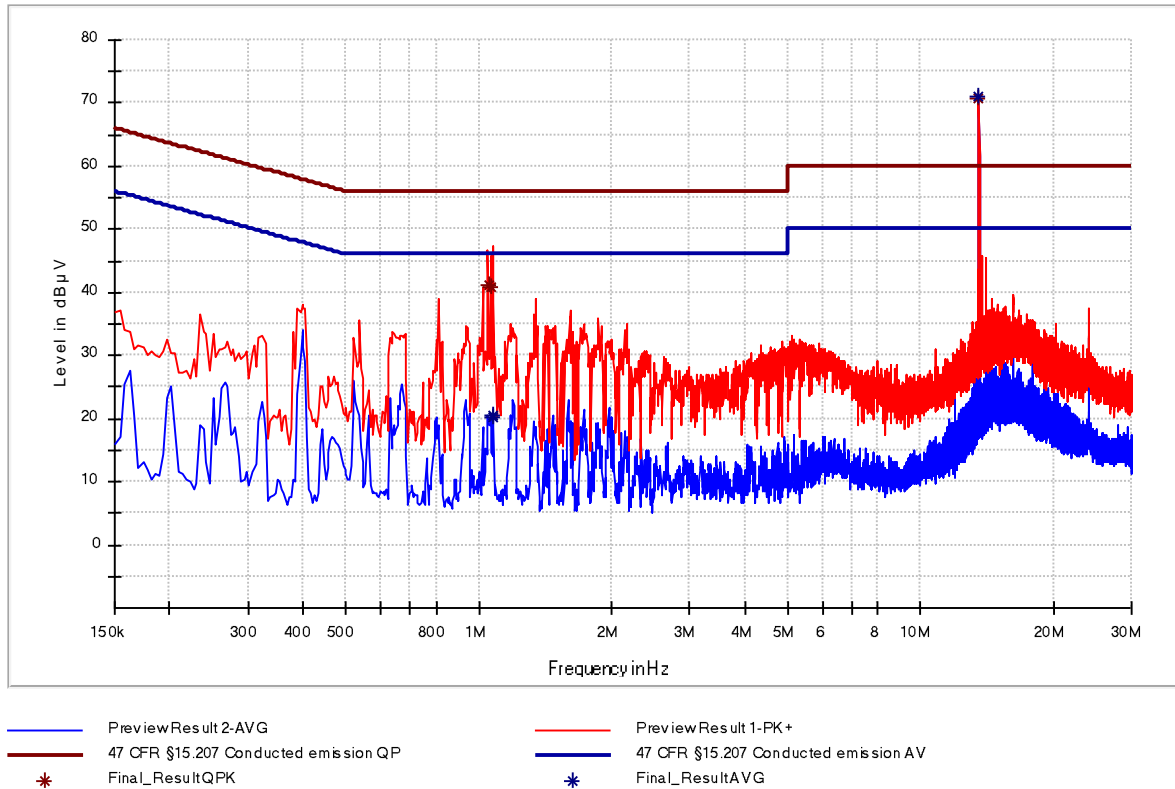


Figure 6: Chart of AC power-line conducted emissions test – phase N, without termination

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
1.061000	41.22	---	56.00	14.78	1000.0	9.000	N	GND	10.2
1.065000	40.93	---	56.00	15.07	1000.0	9.000	N	GND	10.3
1.073000	---	20.40	46.00	25.60	1000.0	9.000	N	GND	10.3
1.081000	---	20.13	46.00	25.87	1000.0	9.000	N	GND	10.3
13.561000	---	70.97	50.00	-20.97	1000.0	9.000	N	GND	12.0
13.561000	70.70	---	60.00	-10.70	1000.0	9.000	N	GND	12.0

Table 8: Final results of AC power-line conducted emissions test – phase N, without termination

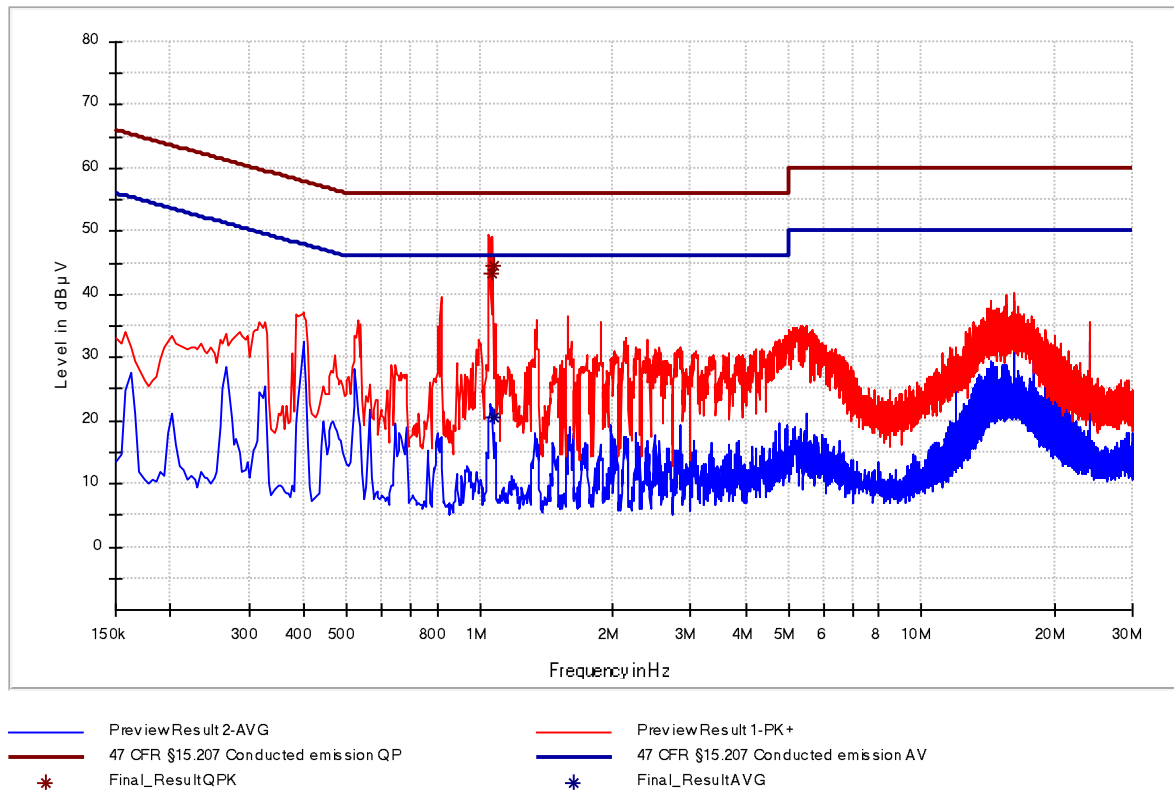


Figure 7: Chart of AC power-line conducted emissions test – phase L1, with termination

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
1.069000	43.47	---	56.00	12.53	1000.0	9.000	L1	GND	10.3
1.073000	---	20.38	46.00	25.62	1000.0	9.000	L1	GND	10.3
1.077000	44.42	---	56.00	11.58	1000.0	9.000	L1	GND	10.3

Table 9: Final results of AC power-line conducted emissions test – phase L1, with termination

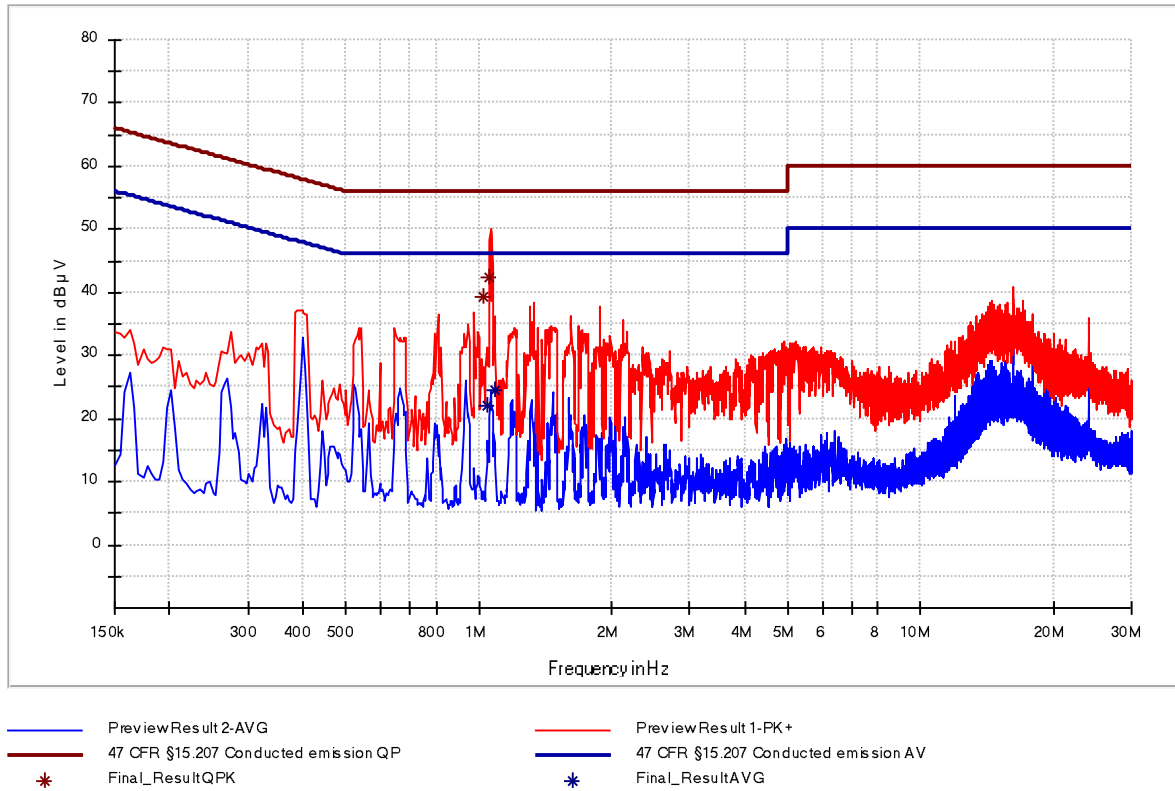


Figure 8: Chart of AC power-line conducted emissions test – phase N, with termination

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)
1.029000	39.30	---	56.00	16.70	1000.0	9.000	N	GND	10.2
1.049000	---	22.04	46.00	23.96	1000.0	9.000	N	GND	10.2
1.053000	42.39	---	56.00	13.61	1000.0	9.000	N	GND	10.2
1.085000	---	24.45	46.00	21.55	1000.0	9.000	N	GND	10.3

Table 10: Final results of AC power-line conducted emissions test – phase N, with termination



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.2 20 dB bandwidth

Section(s) in 47 CFR Part 15: Requirement(s): 15.215(c)
 Reference(s): ANSI C63.10 , clause 6.9

Performed by:	Andreas Menacher	Date(s) of test:	March 21, 2019
Climatic conditions:	Ambient temperature 22 °C	Relative humidity 32 %	Barometric pressure 976 hPa
Result ⁴ :	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.2.1 Test equipment

	Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/>	EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	Field probe	RF-R 400-1	Langer EMV-Technik	E00270

⁴ For information about measurement uncertainties see page 51.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.2.1 Limits

According to §15.215(c), intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2.2 Test procedure

The 20 dB bandwidth is measured using the test procedure as described in clause 5.5.1.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.2.3 Test results

Remark: The 20 dB bandwidth measurement was performed without tag, because this was the worst case.

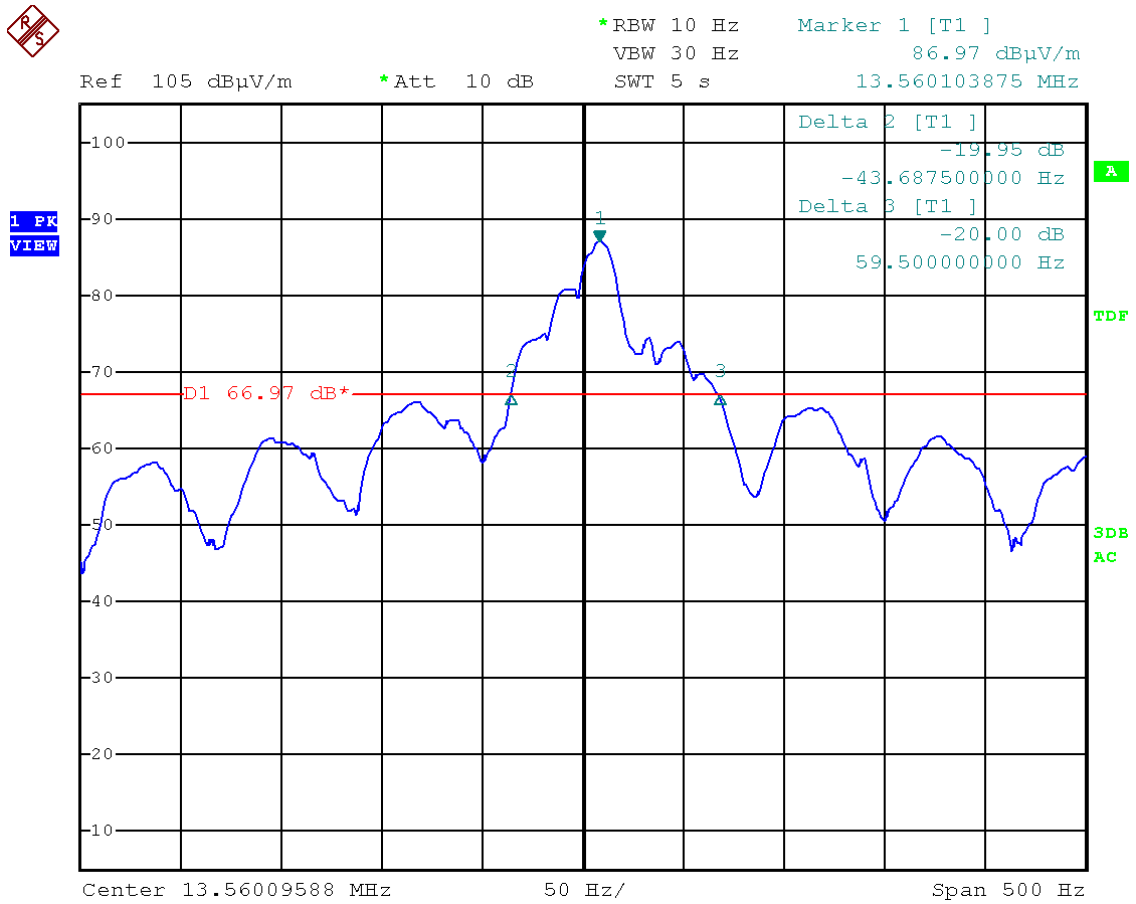


Figure 9: Chart of 20 dB bandwidth

20 dB bandwidth [Hz]	Band edge left		Band edge right		Result
	Frequency [MHz]	Limit [MHz]	Frequency [MHz]	Limit [MHz]	
102	13.560002	13.110	13.560163	14.010	Recorded

Table 11: Results of 20 dB bandwidth tests



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

f_{assigned} (MHz)	Index	$f_{-20\text{dB}}$ (MHz)	Δf_T (Hz)	Δf_U (Hz)	$f_{-20\text{dB}(T, U)}$ (MHz)	Limit (MHz)	Margin (kHz)	Result
13.560000	low	13.560002	87	---	13,559915	13.110000	449.915	Passed
	high	13.560163	87	98	13.560348	14.010000	449.652	Passed
	Bandwidth	102 Hz			433 Hz			

with: $f_{-20\text{dB}(low)}$ = lower frequency in MHz where emission is at least 20 dB below the carrier
 $f_{-20\text{dB}(high)}$ = upper frequency in MHz where emission is at least 20 dB below the carrier
 f_{assigned} = assigned frequency in kHz
 $\Delta f_{T(low)}$ = maximum absolute value of negative frequency offset to frequency at nominal conditions caused by temperature variation in kHz
 $\Delta f_{U(low)}$ = maximum absolute value of negative frequency offset to frequency at nominal conditions caused by voltage variation in kHz
 $\Delta f_{T(high)}$ = maximum absolute value of positive frequency offset to frequency at nominal conditions caused by temperature variation in kHz
 $\Delta f_{U(high)}$ = maximum absolute value of positive frequency offset to frequency at nominal conditions caused by voltage variation in kHz
 $\Delta f_{volt(high)}$ = maximum absolute value of positive frequency offset to frequency at nominal conditions caused by voltage variation in kHz
 $f_{-20\text{dB}(T, U)}$ = frequency in MHz where emission is at least 20 dB below the carrier, including offset caused by variations of temperature and supply voltage as recorded in clause 5.7

Measured -20 dB emission bandwidth:

At nominal conditions: 102 Hz

Including variations in temperature and supply voltage: 433 Hz



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.3 Occupied bandwidth

Section(s) in 47 CFR Part 15: Requirement(s): 2.202(a)
Reference(s): ANSI C63.10, clause 6.9

Section(s) in RSS: Requirement(s): RSS-Gen, section 6.7
Reference(s): ANSI C63.10, clause 6.9

Performed by:	Andreas Menacher	Date(s) of test:	March 21, 2019
Climatic conditions:	Ambient temperature 22 °C	Relative humidity 32 %	Barometric pressure 976 hPa

Result⁵: Test passed Test not passed

6.3.1 Test equipment

	Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/>	EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input checked="" type="checkbox"/>	Field probe	RF-R 400-1	Langer EMV-Technik	E00270

6.3.2 Limits

Although there is no limit specified, the occupied bandwidth has to be recorded and reported.

6.3.3 Test procedure

The occupied bandwidth is measured using the test procedure as described in clause 5.5.2.

⁵ For information about measurement uncertainties see page 51.



6.3.4 Test results

Remark: The occupied bandwidth measurement was performed without tag, because this was the worst case.

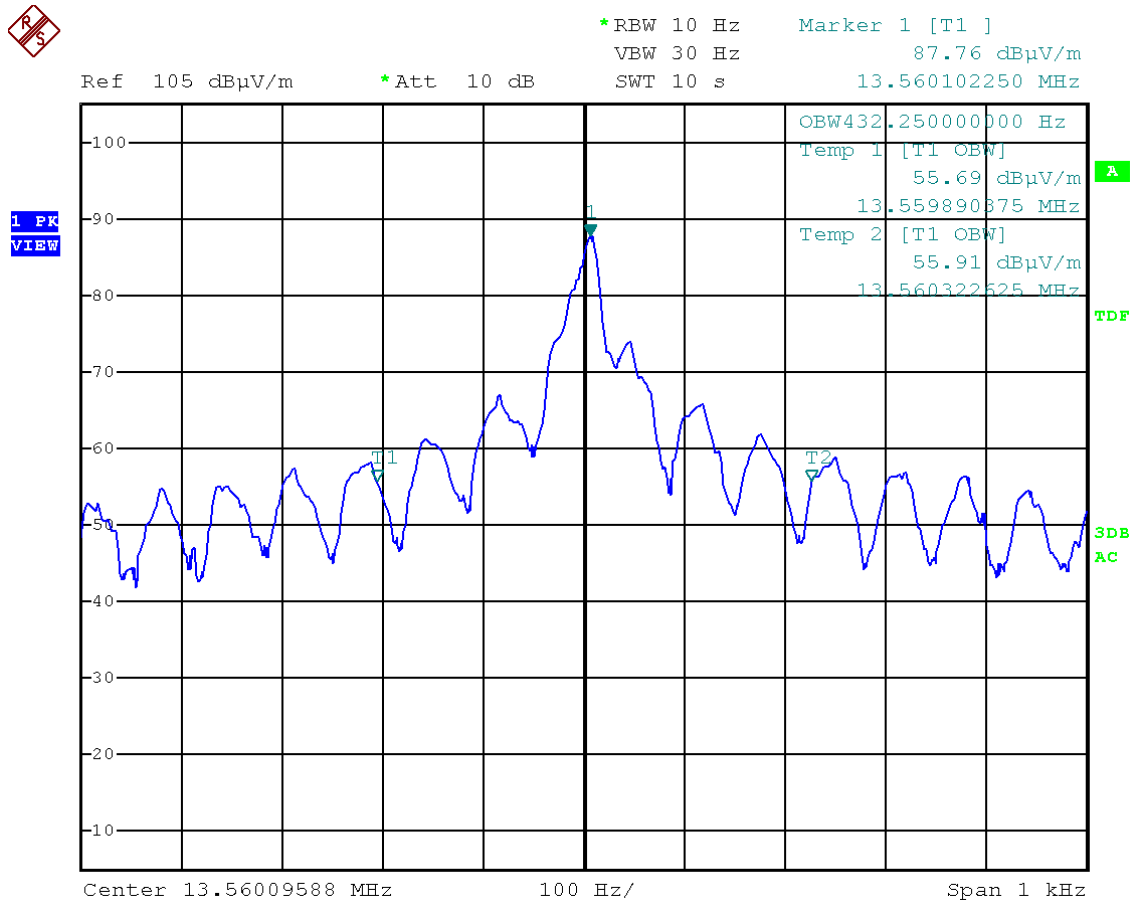


Figure 10: Chart of occupied bandwidth test

99% bandwidth [Hz]	Band edge left		Band edge right		Result
	Frequency [MHz]	Limit [MHz]	Frequency [MHz]	Limit [MHz]	
432	13.559890	13.110	13.560322	14.010	Recorded

Table 12: Results of occupied bandwidth test



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.4 Operation within the band 13.110 MHz – 14.010 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.225 (a)-(e)
 Reference(s): ANSI C63.10, section 6.4

Section(s) in RSS: Requirement(s): RSS-210, section B.6
 Reference(s): ANSI C63.10, section 6.4

Performed by:	Andreas Menacher	Date(s) of test:	March 14, 2019
Climatic conditions:	Ambient temperature 23 °C	Relative humidity 38 %	Barometric pressure 976 hPa
Result ⁶ :	<input checked="" type="checkbox"/> Test passed	<input type="checkbox"/> Test not passed	

6.4.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input type="checkbox"/> Open area test site (OATS)	---	EMV TESTHAUS	E00354
<input type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input type="checkbox"/> Field probe	RF-R 400-1	Langer EMV-Technik	E00270
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/> Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215

⁶ For information about measurement uncertainties see page 51.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.4.2 Limits

As specified in section 15.225(a)-(d) of 47 CFR Part 15:

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

In case of measurements are performed at other distances than that specified in the requirements, the limits in the charts and tables reported with the test results are derived from the general radiated emission limits as listed above using the recalculation factor as described in clause 5.3.

6.4.3 Test procedure

The emission within the band 13.110 MHz – 14.010 MHz is measured using the test procedure as described in clause 5.6.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.4.4 Test results

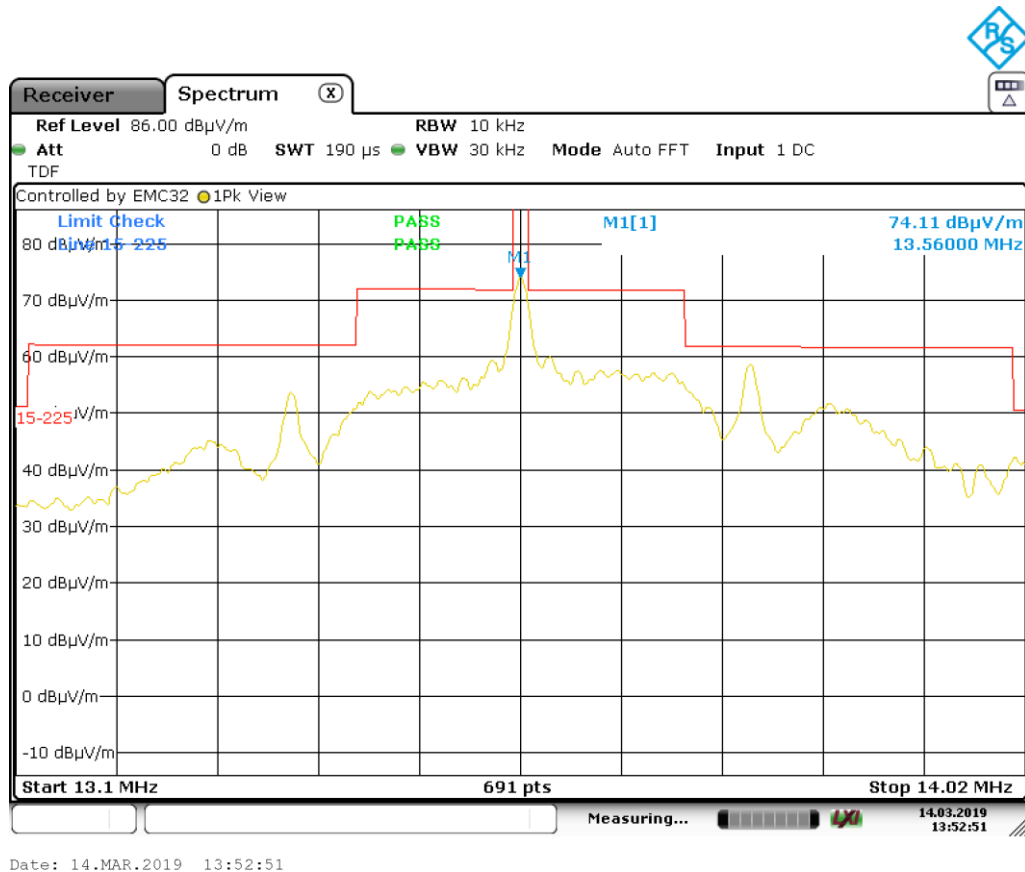


Figure 11: Spektrum mask of 13.56 MHz @ 3m distance

The final measurement was performed with tag, because the emission was 0.32 dB higher than without tag.

Frequency [MHz]	Measured value [dBµV/m] @ 3 m	Detector	Recalculation factor [dB]	Field strength [dBµV/m] @ 30 m	Limit [dBµV/m] @ 30 m	Margin [dB]	BW [kHz]
13.560000	74.11	PK	-21.40	52.71	84.00	31.29	10

Table 13: Results of emission within the band 13.110 MHz to 14.010 MHz

Recalculation factor is determined according to ANSI C63.10, section 6.4.4.2 “Extrapolation from the measurement of a single point”:

$$d_{\text{near field}} = 47.77 / f_{\text{MHz}}$$

$$\text{Recalculation factor} = -40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$$

f_{MHz} [MHz]	$d_{\text{near field}}$ [m]	d_{measure} [m]	d_{limit} [m]	Recalculation factor [dB]
13.560000	3.523	3.000	30.000	-21.40



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.5 Carrier frequency stability

Section(s) in 47 CFR Part 15: Requirement(s): 15.225(e)
Reference(s): 15.225(e)

Section(s) in RSS: Requirement(s): RSS-210, annex B6,
RSS-Gen, section 6.11
Reference(s): RSS-Gen, section 6.11

Performed by:	Andreas Menacher	Date(s) of test:	March 19, 2019
Climatic conditions:	Ambient temperature 24 °C	Relative humidity 41 %	Barometric pressure 977 hPa

Result⁷: Test passed Test not passed

6.5.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input type="checkbox"/> Climatic chamber 990 I	VC4100	Vötsch Industrietechnik	C00014
<input checked="" type="checkbox"/> Climatic chamber 340 I	VC ³ 4034	Vötsch Industrietechnik	C00015
<input checked="" type="checkbox"/> EMI test receiver (CDC)	ESCI 3	Rohde & Schwarz	E00552
<input type="checkbox"/> EMI test receiver (OATS)	ESCI 3	Rohde & Schwarz	E00001
<input type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input type="checkbox"/> EMI test receiver	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> Field probe	RF-R 400-1	Langer EMV-Technik	E00270

⁷ For information about measurement uncertainties see page 51.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.5.2 Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (100 ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

For battery operated equipment, the equipment tests shall be performed using a new battery. Alternatively, an external supply voltage can be used and set at the battery nominal voltage, and again at the battery operating end point voltage which must be specified by the equipment manufacturer.

6.5.3 Test procedure

The carrier frequency stability is measured using the test procedure as described in clause 5.7.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.5.4 Test results

Carrier frequency stability vs. temperature

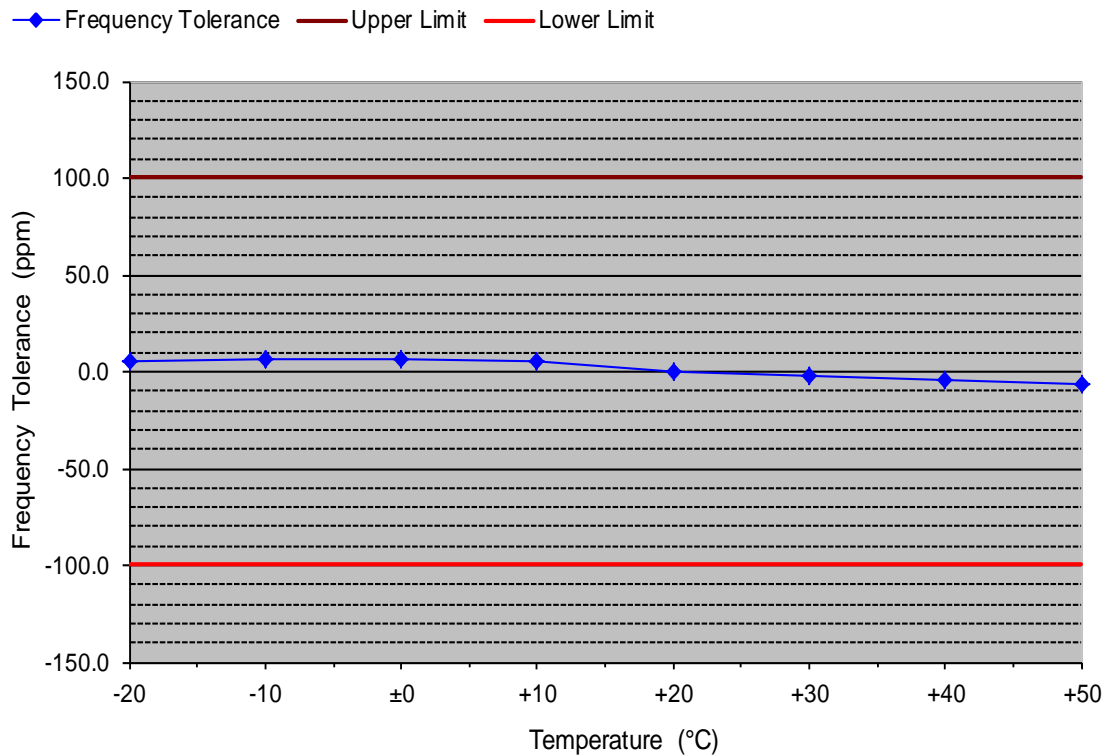

Supply voltage: 5 V Frequency under nominal conditions: 13.560098 MHz


Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.560170	72	5.3	+100.0	-100.0	94.7
-10	13.560185	87	6.4	+100.0	-100.0	93.6
±0	13.560185	87	6.4	+100.0	-100.0	93.6
+10	13.560171	73	5.4	+100.0	-100.0	94.6
+20	13.560098	0	0.0	+100.0	-100.0	100.0
+30	13.560070	-28	-2.1	+100.0	-100.0	97.9
+40	13.560040	-58	-4.3	+100.0	-100.0	95.7
+50	13.560011	-87	-6.4	+100.0	-100.0	93.6



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

Carrier frequency stability vs. supply voltage

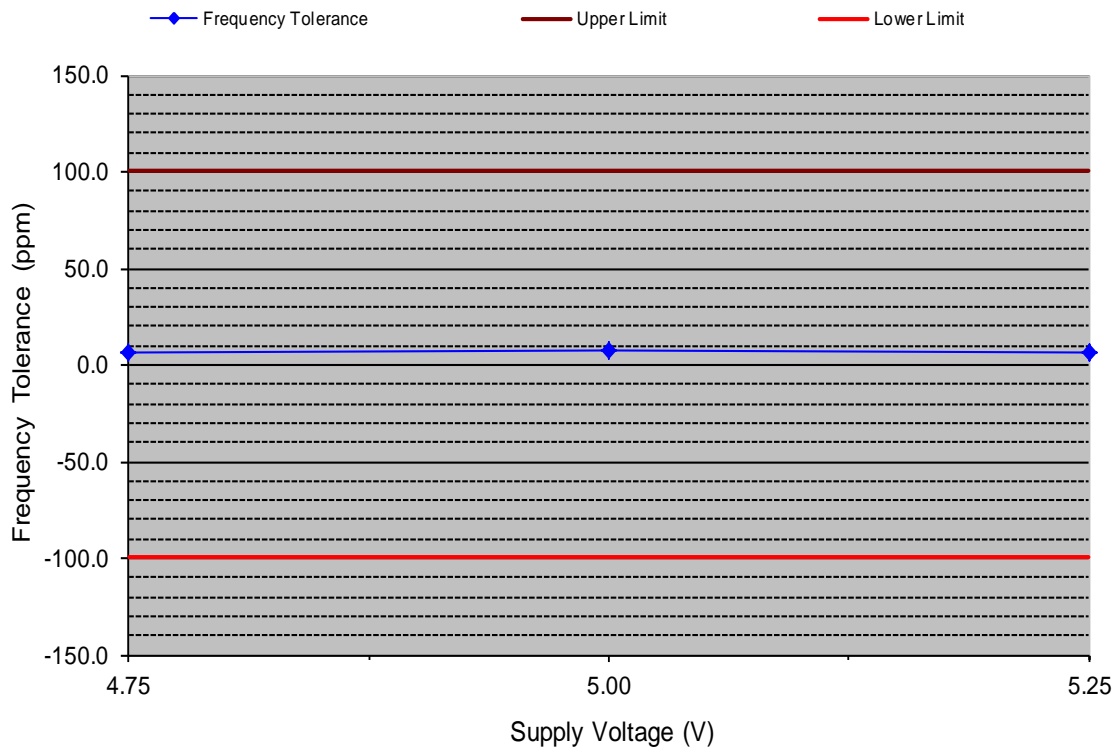

Temperature:	+20 °C	Battery End Point:	Not applicable
Frequency under nominal conditions:	13.56 MHz		

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
4.75	13.560084	84	6.2	+100.0	-100.0	93.8
5.00	13.560098	98	7.2	+100.0	-100.0	92.8
5.25	13.560084	84	6.2	+100.0	-100.0	93.8



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.6 Emissions outside the operating frequency band(s) specified

6.6.1 Emissions below 30 MHz

Section(s) in 47 CFR Part 15: Requirement(s): 15.209
Reference(s): ANSI C63.10, clause 6.4

Section(s) in RSS: Requirement(s): RSS-Gen, section 6.13
Reference(s): ANSI C63.10, clause 6.4

Result⁸: Test passed Test not passed

6.6.1.1 Test equipment

Type	Designation	Manufacturer	Inventory no.
<input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC)	VK041.0174	Albatross Projects	E00026
<input checked="" type="checkbox"/> EMI test receiver	ESR 7	Rohde & Schwarz	E00739
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/> Cable set CDC	RF cable(s)	Huber + Suhner AME HF-Technik AME HF-Technik Stabo	E00446 E00920 E00921 E01215
<input checked="" type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E00778

⁸ For information about measurement uncertainties see page 51.



6.6.1.2 Limits

Frequency [MHz]	Field strength		Measurement distance [m]
	[μ V/m]	[dB μ V/m]	
0.009 – 0.490	2400/F(kHz) (266.67 – 4.90)	48.52 – 13.80	300
0.490 – 1.705	24000/F(kHz) (48.98 – 14.08)	33.80 – 22.97	30
1.705 – 30	30	29.54	30

Table 14: General radiated emission limits up to 30 MHz according to §15.209

In case of measurements are performed at other distances than that specified in the requirements, the limits in the charts and tables reported with the test results are derived from the general radiated emission limits as listed in table 14 using the recalculation factor as described in clause 5.3.

6.6.1.3 Test procedure

The emissions below 30 MHz are measured using the

- test procedure for radiated measurements as described in clause 5.3.



6.6.1.4 Test results

Performed by:	Andreas Menacher	Date(s) of test:	March 14, 2019
Climatic conditions:	Ambient temperature 23 °C	Relative humidity 38 %	Barometric pressure 976 hPa
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
Antenna alignment:	<input type="checkbox"/> in parallel	<input checked="" type="checkbox"/> in line	<input type="checkbox"/> angle °
EUT position ⁹ :	<input checked="" type="checkbox"/> Position 1	<input checked="" type="checkbox"/> Position 2	<input checked="" type="checkbox"/> Position 3

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
9 kHz – 150 kHz	50 Hz	200 Hz	QP, PK, CAV	QP, PK, AV	2 s	1 s	Off
150 kHz – 30 MHz	2.25 kHz	9 kHz	QP, PK, CAV	QP, PK, AV	2 s	1 s	Off

⁹ Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show the worst case position, only.



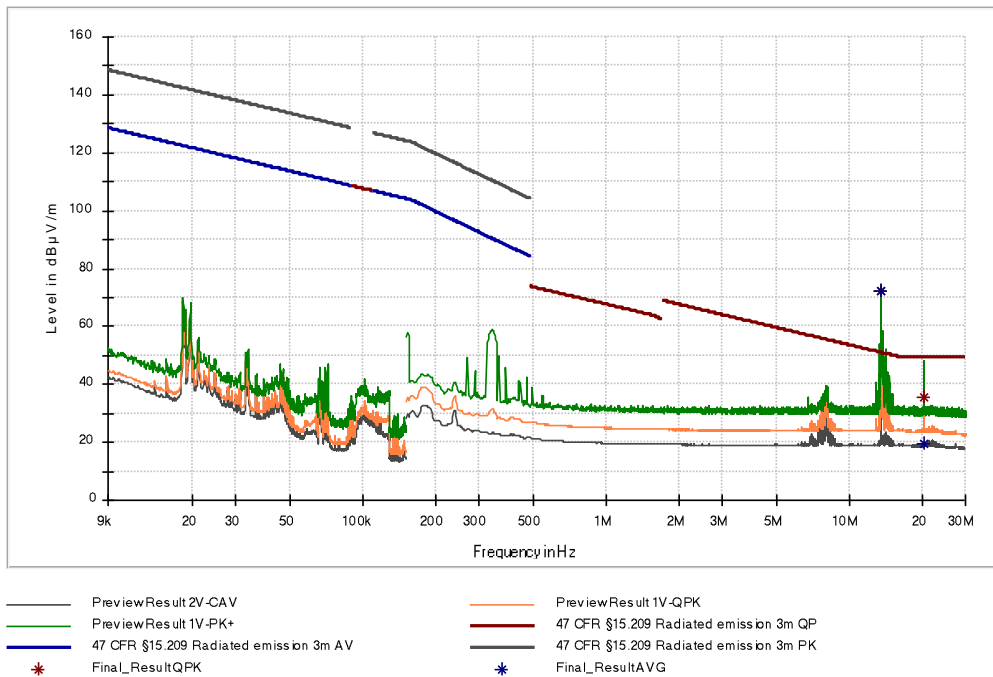


Figure 12: Chart of emissions test below 30 MHz without tag in position 1, antenna in line @ 3 m

Frequency (MHz)	Measured value QuasiPeak (dBµV/m) @ 3 m	Recalculation factor (dB)	Field strength (dBµV/m) @ 30 m	Limit (dBµV/m) @ 30 m	Margin (dB)	Azimuth (deg)	Result
13.560000	72.38	-21.40	50.98	84.00	33.02	195.0	Pass
20.339250	35.84	-17.06	18.78	29.54	10.76	135.0	Pass

Table 15: Final results of emission below 30 MHz, without tag in position 1, antenna in line

Note: The frequency 13.56 MHz is the carrier frequency and doesn't fall under the limit of CFR 47 15.209.

Recalculation factor is determined according to ANSI C63.10, section 6.4.4.2 "Extrapolation from the measurement of a single point":

$$d_{\text{near field}} = 47.77 / f_{\text{MHz}}$$

$$\text{Recalculation factor} = -40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$$

f_{MHz} [MHz]	$d_{\text{near field}}$ [m]	d_{measure} [m]	d_{limit} [m]	Recalculation factor [dB]
13.560000	3.523	3.000	30.000	-21.40
22.339250	2.138	3.000	30.000	-17.06



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

6.6.2 Emissions from 30 MHz to 1 GHz

Section(s) in 47 CFR Part 15:	Requirement(s):	15.209
	Reference(s):	ANSI C63.10, clause 6.5
Section(s) in RSS:	Requirement(s):	RSS-Gen, section 6.13
	Reference(s):	ANSI C63.10, clause 6.5

Result¹⁰: Test passed Test not passed

6.6.2.1 Test equipment

<i>Type</i>	<i>Designation</i>	<i>Manufacturer</i>	<i>Inventory no.</i>
<input checked="" type="checkbox"/> Semi-anechoic chamber (SAC)	SAC3	Albatross Projects	E00716
<input checked="" type="checkbox"/> EMI test receiver	ESW 44	Rohde & Schwarz	E00895
<input checked="" type="checkbox"/> TRILOG broadband antenna (SAC)	VULB 9162	Schwarzbeck	E00643
<input checked="" type="checkbox"/> Cable set SAC	RF cable(s)	Huber + Suhner	E00755 E01033 E01034
<input checked="" type="checkbox"/> Test software	EMC32-MEB (V10.35)	Rohde & Schwarz	E01073

¹⁰ For information about measurement uncertainties see page 51.



6.6.2.2 Limits

<i>Frequency [MHz]</i>	<i>Field strength</i>		<i>Measurement distance [m]</i>
	<i>[μV/m]</i>	<i>[dBμV/m]</i>	
30 – 88	100	40.00	3
88 – 216	150	43.52	3
216 - 960	200	46.02	3
Above 960	500	53.98	3

Table 16: General radiated emission limits \geq 30 MHz according to §15.209

6.6.2.3 Test procedure

The emissions from 30 MHz to 1 GHz are measured using the

- test procedure for radiated measurements as described in clause 5.4.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

6.6.2.4 Test results

Performed by:	Andreas Menacher	Date(s) of test:	February 27, 2019
Climatic conditions:	Ambient temperature 21 °C	Relative humidity 33%	Barometric pressure 978 hPa
Test distance:	<input checked="" type="checkbox"/> 3 m	<input type="checkbox"/> 10 m	<input type="checkbox"/> m
EUT position ¹¹ :	<input checked="" type="checkbox"/> Position 1	<input checked="" type="checkbox"/> Position 2	<input checked="" type="checkbox"/> Position 3

Frequency range	Step size	IF Bandwidth	Detector		Measurement Time		Preamplifier
			Prescan	Final scan	Prescan	Final scan	
30 MHz – 1 GHz	30 kHz	120 kHz	QP	QP	1 s	1 s	20 dB

Premeasurements showed that the spurious emissions of the EUT were higher when a tag was used.

¹¹ Exploratory measurements are performed in all positions as indicated. However, the figures and result tables within this test report show the worst case position, only.



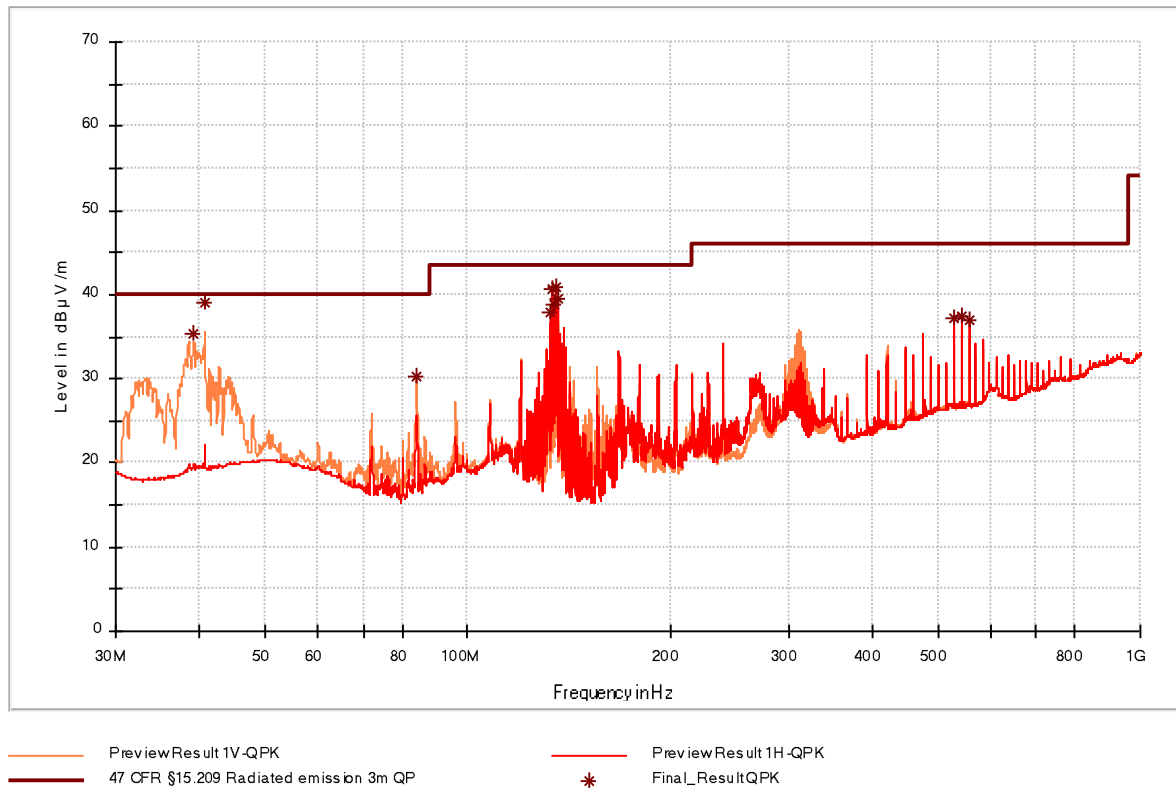


Figure 13: Chart of emissions test from 30 MHz to 1 GHz with tag in position 2 with tag @ 3 m

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.240000	35.44	40.00	4.56	1000.0	120.000	100.0	V	311.0	13.1
40.680000	38.97	40.00	1.03	1000.0	120.000	100.0	V	349.0	13.5
83.970000	30.33	40.00	9.67	1000.0	120.000	117.0	V	320.0	8.5
133.230000	37.84	43.50	5.66	1000.0	120.000	167.0	H	278.0	9.5
134.070000	40.75	43.50	2.75	1000.0	120.000	156.0	H	274.0	9.5
134.910000	38.70	43.50	4.80	1000.0	120.000	173.0	H	274.0	9.4
135.720000	40.93	43.50	2.57	1000.0	120.000	190.0	H	270.0	9.4
136.560000	39.39	43.50	4.11	1000.0	120.000	190.0	H	270.0	9.4
528.840000	37.24	46.00	8.76	1000.0	120.000	162.0	H	218.0	19.8
542.400000	37.40	46.00	8.60	1000.0	120.000	145.0	H	227.0	20.0
555.960000	37.02	46.00	8.98	1000.0	120.000	129.0	H	235.0	20.4

Table 17: Chart of emissions test from 30 MHz to 1 GHz with tag in position 2 with tag @ 3 m



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

7 Equipment calibration status

Description	Modell number	Serial number	Inventory number(s)	Last calibration	Next calibration
EMI test receiver	ESW44	101538	E00895	2018-04	2019-04
EMI test receiver	ESR7	101059	E00739	2018-05	2019-05
Loop antenna	HFH2-Z2	871398/0050	E00060	2018-10	2020-10
EMI test receiver	ESCI3	100328	E00552	2018-10	2020-10
EMI test receiver	ESCI3	100013	E00001	2018-05	2020-05
Artificial mains network	ESH2-Z5	893406/009	E00005	2018-10	2020-10
Artificial mains network	ESH2-Z5	881362/037	E00004	Note 1	
Field probe	RF-R 400-1	---	E00270	Note 2	
TRILOG broadband antenna (SAC3)	VULB 9162	9162-041	E00643	2018-03	2021-03
Shielded room	P92007	B 83117 C 1109 T 211	E00107	N/A	
Compact diagnostic chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	N/A	
Semi-anechoic chamber (SAC)	SAC3	C62128-A520-A643-x-0006	E00716	2018-03	2021-03
Cable set CDC	RG214/U	---	E00446	2018-04	2019-04
	LCF12-50J	---	E01215	2018-04	2019-04
	LMR400	1718020006	E00920	2018-01	2019-01
	RG214 Hiflex	171802007	E00921	2018-01	2019-01
Cable set of semi-anechoic chamber SAC3	SF104EA/11PC35/11PC35/10000M M	501347/4EA	E00755	2017-12	2018-12
	SF104E/11PC35/11PC35/2000MM	507410/4E	E01033	2017-12	2018-12
	SF104E/11PC35/11PC35/2000MM	507411/4E	E01034	2017-09	2018-09

Notes:

- 1: Only used for decoupling of support equipment.
- 2: Only used for relative measurements.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

eGym GmbH
 RFID reader module
 eGym RFID Board v2

8 Measurement uncertainties

<i>Description</i>	<i>Uncertainty</i>	<i>k=</i>
AC power line conducted emission	± 4.1 dB	2
Carrier frequency separation Number of hopping frequencies Time of occupancy (dwell time)	± 5.0 %	2
Bandwidth tests	± 2.0 %	
Maximum conducted output power (conducted)	± 1.5 dB	
Power spectral density (conducted)	± 2.9 dB	
Conducted spurious emissions	± 2.9 dB	
Radiated emissions in semi-anechoic chamber		
9 kHz to 30 MHz	± 4.8 dB	2
30 MHz to 300 MHz	± 5.4 dB	2
300MHz to 1 GHz	± 4.7 dB	2
Radiated emissions in semi-anechoic chamber with RF absorbing material on the floor or fully anechoic room		
1 GHz to 25 GHz	± 4.5 dB	2

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.

Test related measurement uncertainties have to be taken into consideration when evaluating the test results. All used test instrument as well as the test accessories are calibrated at regular intervals.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2

9 Revision history

<i>Revision</i>	<i>Date</i>	<i>Issued by</i>	<i>Description of modifications</i>
0	2019-04-15	Andreas Menacher	First edition



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

eGym GmbH
RFID reader module
eGym RFID Board v2