

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List |               |         |               |         |               |         |               |
|--------------|---------------|---------|---------------|---------|---------------|---------|---------------|
| Channel      | Frequenc<br>y | Channel | Frequenc<br>y | Channel | Frequenc<br>y | Channel | Frequenc<br>y |
| 01           | 125           |         |               |         |               |         |               |
|              |               |         |               |         |               |         |               |
|              |               |         |               |         |               |         |               |
|              |               |         |               |         |               |         |               |

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

## 2. SUMMARY OF TEST RESULTS

### 2.1 Test procedures according to the technical standards:

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v02

| FCC CFR 47                                             |                                   |          |        |
|--------------------------------------------------------|-----------------------------------|----------|--------|
| Standard Section                                       | Test Item                         | Judgment | Remark |
| FCC CFR 47 part1,<br>1.1310 KDB680106<br>D01v02 (3)(3) | Electric Field Strength (E) (V/m) | PASS     |        |
|                                                        | Magnetic Field Strength (H) (A/m) | PASS     |        |

### 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

| No. | Item                                       | Uncertainty               |
|-----|--------------------------------------------|---------------------------|
| 1   | All emissions, radiated (<30M)(9KHz-30MHz) | $\pm 2.45$ dB             |
| 2   | Temperature                                | $\pm 0.5^{\circ}\text{C}$ |
| 3   | Humidity                                   | $\pm 2\%$                 |

### 2.3 Test Instruments

| Description           | Brand     | Model No. | Frequency Range | Calibrated Until |
|-----------------------|-----------|-----------|-----------------|------------------|
| Broadband Field Meter | NARDA     | NBM-550   | —               | Jan. 01, 2019    |
| Magnetic Field Meter  | NARDA     | ELT-400   | 1 – 400kHz      | Jan. 01, 2019    |
| Magnetic Probe        | NARDA     | HF-3061   | 300kHz – 30MHz  | Jan. 01, 2019    |
| Magnetic Probe        | NARDA     | HF-0191   | 27 – 1000MHz    | Jan. 01, 2019    |
| Broadband Field Meter | NARDA     | NBM-550   | —               | Jan. 01, 2019    |
| Electric Field Meter  | COMBINOVA | EFM 200   | 5Hz – 400kHz    | Jan. 01, 2019    |
| E-Field Probe         | NARDA     | EF-0391   | 100kHz – 3GHz   | Jan. 01, 2019    |
| E-Field Probe         | NARDA     | EF-6091   | 100MHz –60GHz   | Jan. 01, 2019    |

NOTE: The calibration interval of the above test instruments is 12 months.

### 3. MAXIMUM PERMISSIBLE EXPOSURE

#### 3.1 MAXIMUM PERMISSIBLE EXPOSURE

##### Limit of Maximum Permissible Exposure

| Limits for Occupational / Controlled Exposure         |                                   |                                   |                                          |                                                                   |
|-------------------------------------------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| Frequency Range (MHz)                                 | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
| 0.3-3.0                                               | 614                               | 1.63                              | (100)*                                   | 6                                                                 |
| 3.0-30                                                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                 |
| 30-300                                                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                 |
| 300-1500                                              |                                   |                                   | F/300                                    | 6                                                                 |
| 1500-100,000                                          |                                   |                                   | 5                                        | 6                                                                 |
| Limits for General Population / Uncontrolled Exposure |                                   |                                   |                                          |                                                                   |
| Frequency Range (MHz)                                 | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
| 0.3-1.34                                              | 614                               | 1.63                              | (100)*                                   | 30                                                                |
| 1.34-30                                               | 824/f                             | 2.19/f                            | (180 / f)*                               | 30                                                                |
| 30-300                                                | 27.5                              | 0.073                             | 0.2                                      | 30                                                                |
| 300-1500                                              |                                   |                                   | F/1500                                   | 30                                                                |
| 1500-100,000                                          |                                   |                                   | 1                                        | 30                                                                |

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density


2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v02

3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

#### 4. TEST PROCEDURE

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 10 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device.

##### 4.1 TEST SETUP

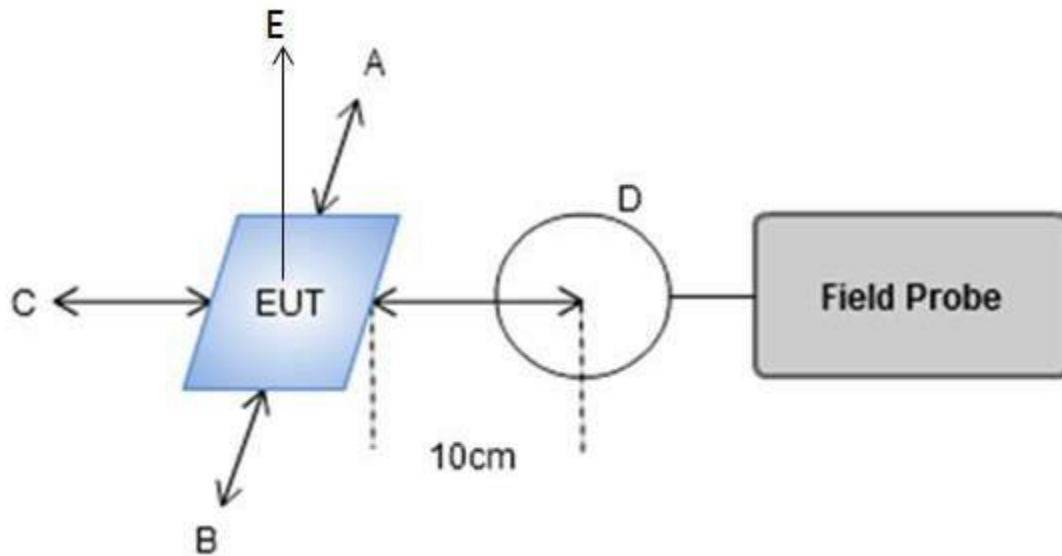

##### 4.2 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE

For Full load mode:

E-Filed Strength at 10 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 1.20            | 1.18            | 1.22            | 1.25            | 1.18            | 184.2                 | 614               |

H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 0.20            | 0.22            | 0.23            | 0.20            | 0.18            | 0.489                 | 1.63              |

For Half Load for wrist band mode:

E-Filed Strength at 10 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 1.20            | 1.16            | 1.22            | 1.20            | 1.18            | 184.2                 | 614               |

H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 0.20            | 0.22            | 0.20            | 0.18            | 0.18            | 0.489                 | 1.63              |

For Half Load for shoe pod mode:

E-Filed Strength at 10 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 1.15            | 1.18            | 1.20            | 1.22            | 1.18            | 184.2                 | 614               |

H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 0.22            | 0.21            | 0.20            | 0.19            | 0.19            | 0.489                 | 1.63              |

For No load mode:

E-Filed Strength at 10 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 1.18            | 1.16            | 1.16            | 1.18            | 1.16            | 184.2                 | 614               |

H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0.120-0.205           | 0.19            | 0.22            | 0.22            | 0.18            | 0.18            | 0.489                 | 1.63              |

\*\*\*\*\*THE END\*\*\*\*\*