AG-40A英文说明书

ACOUSTIC GUITAR AMP AG-40A

OWNER'S MANUAL

Thank you for purchasing AROMA AG-40A, please read this manual carefully before your operation.

AROMN

©2018 Aroma Music Co., Ltd.

Precautions

Location

Using the unit in the following locations can result in a malfunction.

- In direct sunlight
- Locations of extreme temperature or humidity
- Excessively dusty or dirty locations Locations of excessive vibration
- Close to magnetic fields

Power supply

Be sure to turn the power OFF when the unit is not in use.

If using a power adapter, please connect the designated AC adapter to an AC outlet of the correct voltage. Do not connect it to an AC outlet of voltage other than that for which your unit is intended.

Interference with other electrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Handling

To avoid breakage, do not apply excessive force to the switches or controls.

If the exterior becomes dirty, wipe it with a clean, dry cloth. Do not use liquid cleaners such as benzene or thinner, or cleaning compounds of flammable polishes.

Keeping foreign matter out of your equipment


After reading this manual, please keep it for later reference.

Never set any container with liquid in it near this equipment. If liquid gets into the equipment, it could cause a breakdown, fire, or electrical shock. Be careful not to let metal objects get into the equipment.

FEATURES

- 8 inch full frequency speaker (including treble cup), peak power 40W.
- Guitar channel and Mic channel function independently.
- 3 bands equalizer, reverb controls for both guitar and mic channels.
- Anti notch function even using the amp within a short distance.
- High efficient compressor inside to protect speaker and prevent distortion.
- Bluetooth inside for convenient connection with your smart phones or other devices with bluetooth function.
- Big power capacity rechargeable Li battery inside for convenient use any where.
- Metal handle, stand base and cloth bag included for easy carry and use outside.

PANEL FUNCTION



1Mic 3 bands equalizer
2,Mic chorus control
3Guitar 3 bands equalizer
4Guitar chorus control
5 Notch filter control
63 power levels indicator (red color, indication details at Diagram One)
7Bluetooth switch (Bluetooth preset Off when amp power On)
8Bluetooth use indicator (blue color, indication details at Diagram One)
9Guitar In (6.35mm gauge)
10Guitar pickup style select
11,2 in 1 jack (XLR and 6.35mm gauge), Mic in
12AMP in and out
13Wall power indicator and power recharging indicator
(red color and green color, details at Diagram Two)
14
15. Power switch

Diagram One:


Bluetooth Pause

3 power levels indicator (red) Bluetooth indicator (blue) Power On Press and hold to turn On bluetooth (Bluetooth is prese Off when amp power On) Blue indicator flashes fast Different indicators lighting up relevant to Bluetooth Play Blue indicator flashes slov

Diagram Two:

	Bluetooth indicator (blue)	ı	Connect adapter	Red green indicator	
	Light Off		Recharging	Red indicator On	
	Press and hold to turn On		Full recharged	Green indicator On	
	bluetooth (Bluetooth is preset Off when amp power On) Blue indicator flashes fast	l r	Remind: Amp is able to be used during power recharging. Recharging is possible no matter		
	Blue indicator flashes slow		power switch On or Off.		
	Blue indicator light solid				

AMP CONNECTION

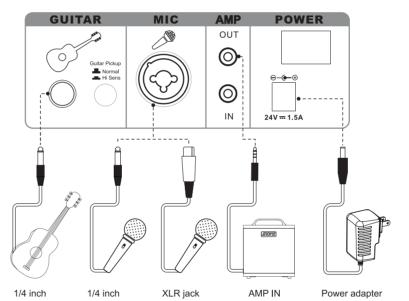

- **HOW TO USE** 1. When using the amp, turn all the panel knobs to the middle position firstly, and then turn the volume up and turn the reverb knob accordingly. Adjust the tones to your like.
- * Remind: Please make sure the type of guitar pickup is Positive or Passive, and then use the knob (#10) to select.
- 2. Follow the same direction as above when using a mic.
- 3. AMPOUT is only for connecting with another amp AMPIN. Another connected amp is
- controlled by the main amp, all the tone, volume level and effects stay the same. * Remind: Use Bluetooth to play music from another Bluetooth machine only.

- bluetooth turned On. The amp name is "AG-40A". IOS system phone needs to input code "0000". Android system phone needs no code.

A beep sound "Di...." will be gendered when bluetooth connection succeed.

Remind: 1. The bluetooth volume level is preset according to Android system. Please turn the volume down accordingly if you use a IOS system phone.

4. Connect Bluetooth, press and hold button #7. The blue indicator On, which means the

2. If you need to change the bluetooth connection of the amp to another phone, please disconnect the previous connection.

Guitar Channel

Net weight: 7 Kg

Gross weight: 8.8 Kg

Li battery: 18V/2200mAH

Input jack: 6.35mm gauge

Chorus effect: available

EQ bands: bass, middle, treble

Volume control: independent

SPECIFICATIONS

Mic Channel Input jack: 2 in 1 (XLR and 6.35mm gauge) Input impedance: 1K ohm EQ bands: bass, middle, treble

Volume control: independent Chorus effect: available

Power peak: 40W Speaker: 8 inch, full range, including treble cup, 50W

Bluetooth edition: 4.1 Power jack: 24V=-/1.5A (⊝--(⊕--⊕)

Use duration: 5H(80% volume level) Recharging length: <3H

Dimension: 250×250×250mm PACKAGE ENCLOSURE

1. AG-40A amp x 1 2. Power adapter x 1 3. AG-40A cloth bag x 1 4. 3.5mm gauge audio cable x 1 5. Operation manual x 1

This equipment has been tested and found to comply with the limits for a Class Bdigital device, pursuant to part 15 of the FCC Rules. These limits are designed toprovide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if notinstalled and used in accordance with the instructions, may cause harmful interferenceto radio communications. However, there is no guarantee that interference will notoccur in a particular installation. If this equipment does cause harmful interference toradio or television reception, which can be determined by turning the equipment offand on, the user is encouraged to try to correct the interference by one or more of thefollowing measures

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which thereceiver is connected.

Consult the dealer or an experienced radio/TV technician for help.
Caution: Any changes or modifications to this device not explicitlyapproved bymanufacturer could void your authority to

operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that

maycause undesired operation. The device has been evaluated to meet general RF exposure requirement. The devicecan be used in portable exposure

☑CE MADE IN CHINA

• 产品料号

0000

• 物料名称 AG-40A英文说明书

潘绍者 • 设计师

• 日期 20180529