

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/05/17	Test Channel:	19
Test Mode:	BLE - 1Mbps		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	43.3	2.9	46.2	74.0	-27.8	Peak	Horizontal
	7315.5	38.1	10.3	48.4	74.0	-25.6	Peak	Horizontal
	10987.5	35.6	15.5	51.1	74.0	-22.9	Peak	Horizontal
	4876.0	43.0	2.9	45.9	74.0	-28.1	Peak	Vertical
	7570.5	36.9	10.4	47.3	74.0	-26.7	Peak	Vertical
	11395.5	36.5	16.1	52.6	74.0	-21.4	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/05/17	Test Channel:	39
Test Mode:	BLE - 1Mbps		
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	41.8	3.0	44.8	74.0	-29.2	Peak	Horizontal
	7443.0	37.3	10.5	47.8	74.0	-26.2	Peak	Horizontal
	11038.5	34.9	16.2	51.1	74.0	-22.9	Peak	Horizontal
	4961.0	42.4	3.0	45.4	74.0	-28.6	Peak	Vertical
	8250.5	37.1	10.7	47.8	74.0	-26.2	Peak	Vertical
	11710.0	35.8	16.3	52.1	74.0	-21.9	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/05/17	Test Channel:	00
Test Mode:	BLE - 2Mbps		
Remark:	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dB $\mu$ V)	Factor (dB)	Measure Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4799.5	43.5	2.9	46.4	74.0	-27.6	Peak	Horizontal
	8165.5	37.2	11.1	48.3	74.0	-25.7	Peak	Horizontal
	11378.5	35.7	16.1	51.8	74.0	-22.2	Peak	Horizontal
	4799.5	43.7	2.9	46.6	74.0	-27.4	Peak	Vertical
	7460.0	37.1	10.4	47.5	74.0	-26.5	Peak	Vertical
	11387.0	35.9	16.2	52.1	74.0	-21.9	Peak	Vertical

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/05/17	Test Channel:	19
Test Mode:	BLE - 2Mbps		
Remark:	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	42.5	2.9	45.4	74.0	-28.6	Peak	Horizontal
	7324.0	37.1	10.2	47.3	74.0	-26.7	Peak	Horizontal
	11395.5	35.9	16.1	52.0	74.0	-22.0	Peak	Horizontal
	4884.5	43.5	2.9	46.4	74.0	-27.6	Peak	Vertical
	7358.0	37.1	10.6	47.7	74.0	-26.3	Peak	Vertical
	11098.0	35.2	16.2	51.4	74.0	-22.6	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	NS-AC1	Test Engineer	Dillon Diao
Test Date	2021/05/17	Test Channel:	39
Test Mode:	BLE - 2Mbps		
Remark:	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	42.7	3.0	45.7	74.0	-28.3	Peak	Horizontal
	7443.0	39.2	10.5	49.7	74.0	-24.3	Peak	Horizontal
	11438.0	36.4	15.7	52.1	74.0	-21.9	Peak	Horizontal
	4961.0	42.0	3.0	45.0	74.0	-29.0	Peak	Vertical
	7349.5	36.9	10.5	47.4	74.0	-26.6	Peak	Vertical
	11633.5	35.2	16.8	52.0	74.0	-22.0	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The worst case of Radiated Emission below 1GHz:**

Site: NS-AC1	Test Date: 2021/05/13
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
<b>Worse Case Mode:</b> Transmit by BLE 1Mbps at channel 2402MHz	

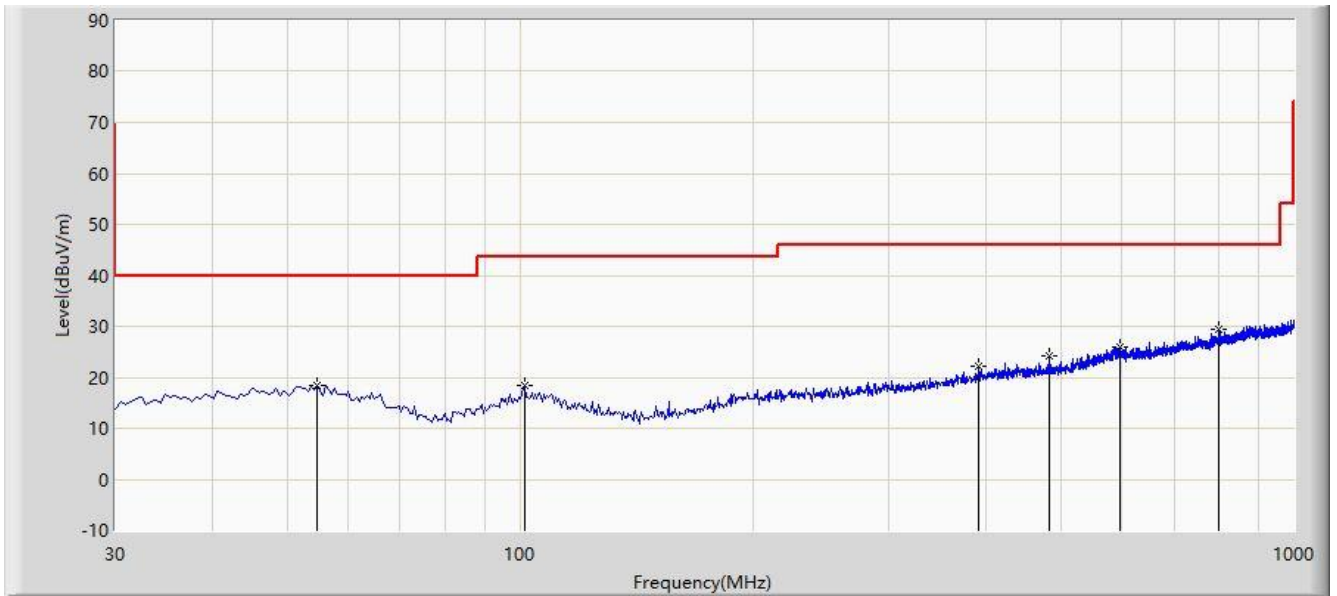


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			54.735	18.421	-1.280	-21.579	40.000	19.701	PK
2			101.295	18.285	0.314	-25.215	43.500	17.971	PK
3			391.810	22.121	0.714	-23.879	46.000	21.407	PK
4			482.020	24.080	1.815	-21.920	46.000	22.265	PK
5			595.995	26.022	1.269	-19.978	46.000	24.753	PK
6		*	801.150	29.310	2.006	-16.690	46.000	27.304	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: NS-AC1	Test Date: 2021/05/13
Limit: FCC_Part 15.209_RSE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
<b>Worse Case Mode:</b> Transmit by BLE 1Mbps at channel 2402MHz	

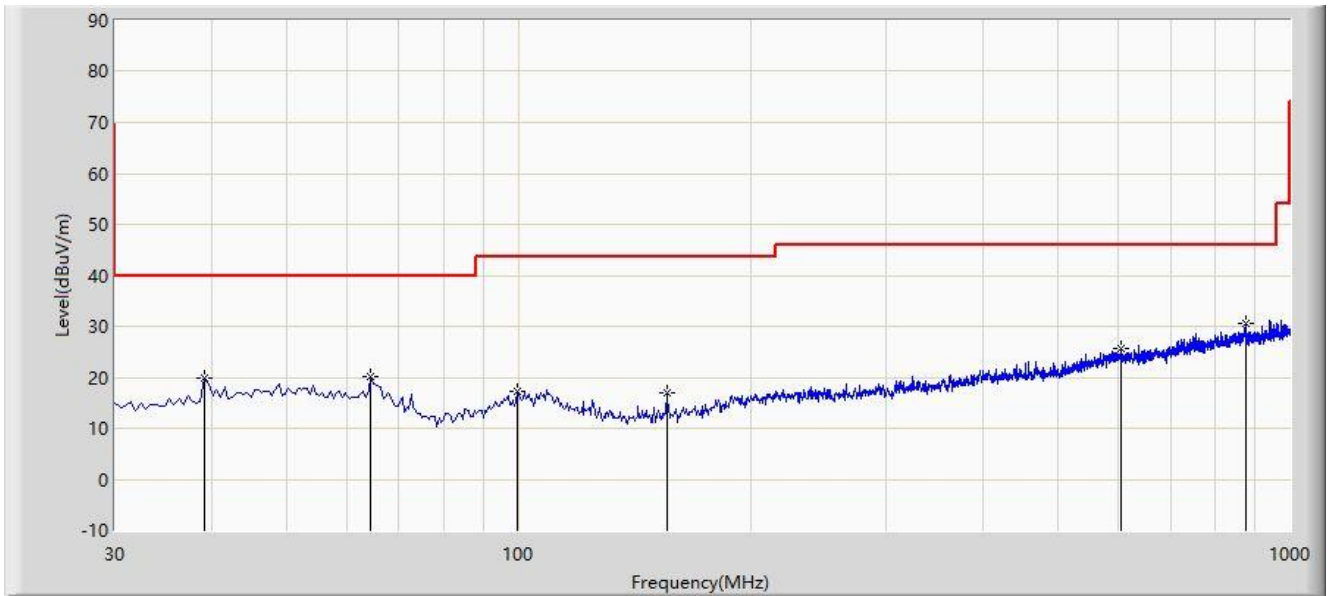

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			39.215	19.876	1.728	-20.124	40.000	18.149	PK
2			64.435	20.103	2.418	-19.897	40.000	17.685	PK
3			99.840	17.160	-0.722	-26.340	43.500	17.882	PK
4			155.615	16.969	2.571	-26.531	43.500	14.399	PK
5			603.270	25.656	0.791	-20.344	46.000	24.865	PK
6		*	874.870	30.470	2.050	-15.530	46.000	28.420	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

## 6.7. Radiated Restricted Band Edge Measurement

### 6.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in below table.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**6.7.2. Test Procedure Used**

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10

**6.7.3. Test Setting**


**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10Hz
4. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

#### 6.7.4. Test Setup

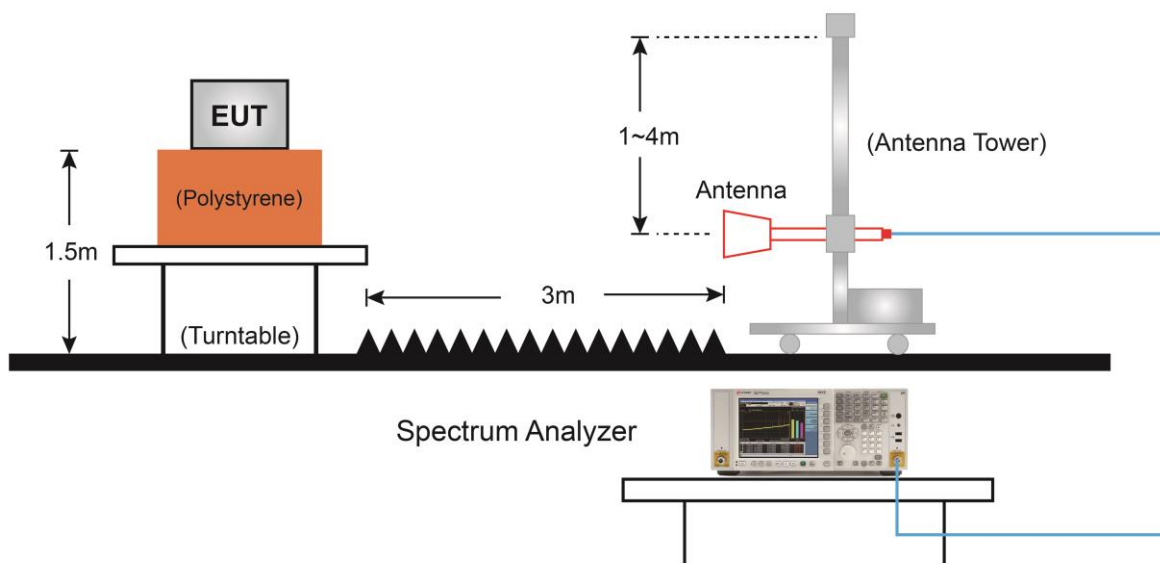

### 6.7.5. Test Result

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2402MHz	

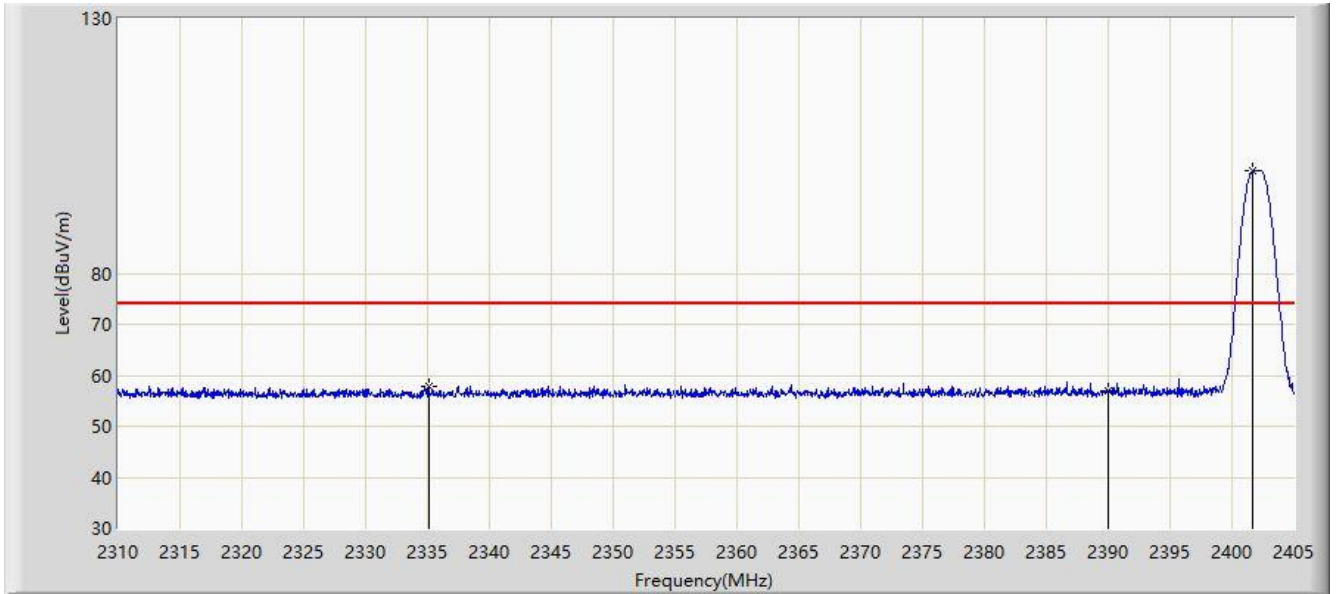


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2335.080	57.817	26.773	-16.183	74.000	31.044	PK
2			2390.000	56.967	26.061	-17.033	74.000	30.906	PK
3		*	2401.675	100.084	69.188	N/A	N/A	30.897	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2402MHz	

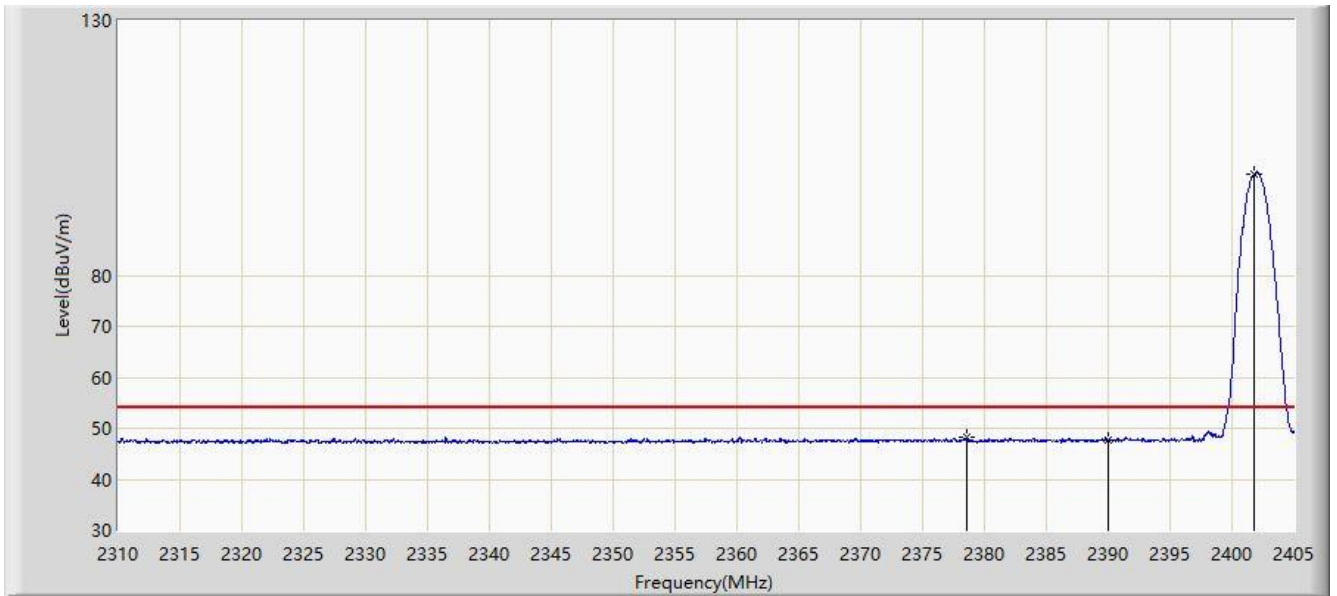


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2378.542	48.195	17.262	-5.805	54.000	30.932	AV
2			2390.000	47.668	16.762	-6.332	54.000	30.906	AV
3		*	2401.817	99.763	68.867	N/A	N/A	30.896	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2402MHz	

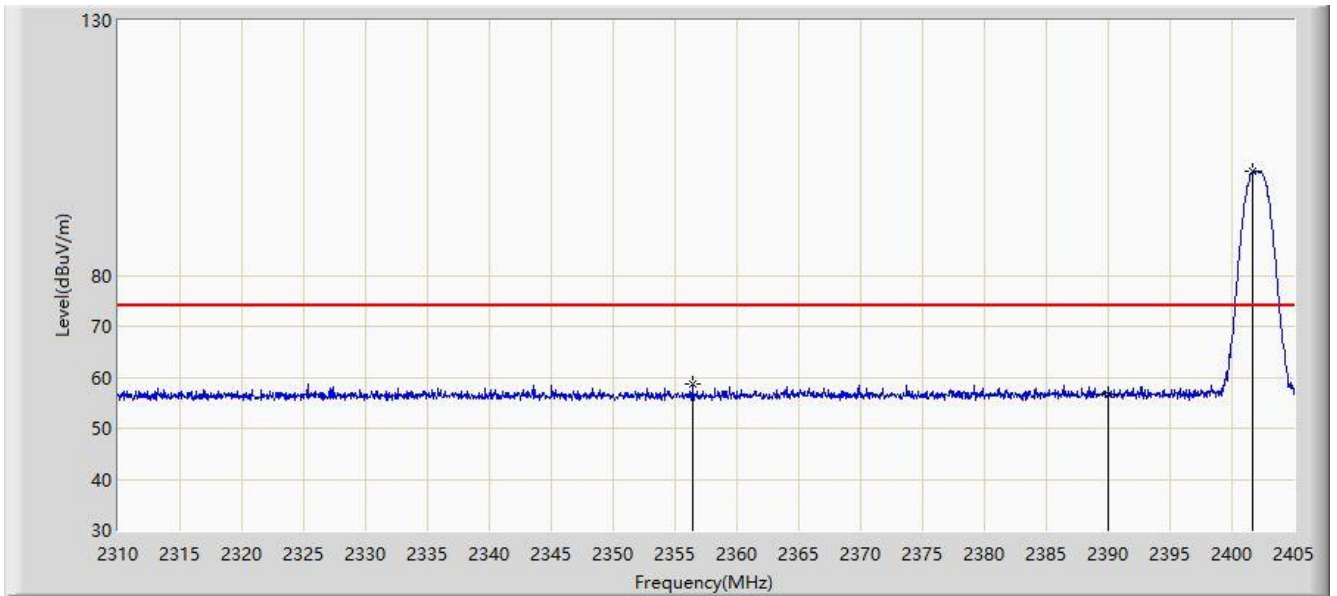


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2356.407	58.613	27.628	-15.387	74.000	30.985	PK
2			2390.000	56.800	25.894	-17.200	74.000	30.906	PK
3		*	2401.722	100.408	69.512	N/A	N/A	30.897	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2402MHz	

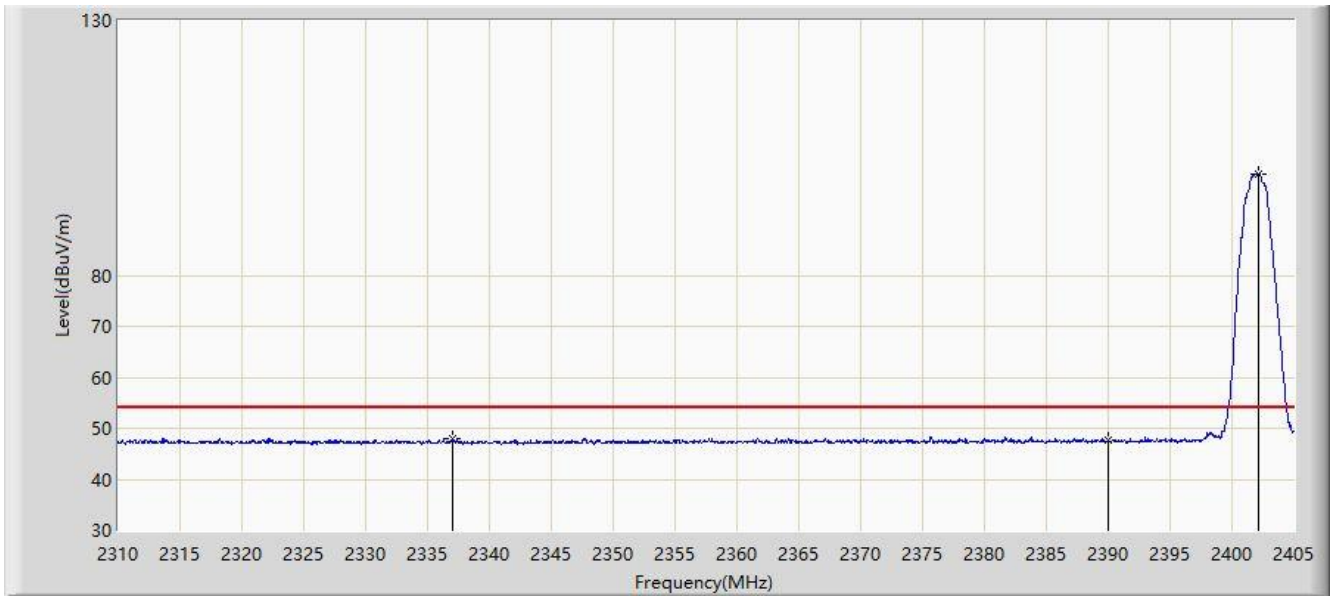


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2337.028	47.942	16.905	-6.058	54.000	31.038	AV
2			2390.000	47.605	16.699	-6.395	54.000	30.906	AV
3		*	2402.150	99.859	68.963	N/A	N/A	30.897	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2480MHz	

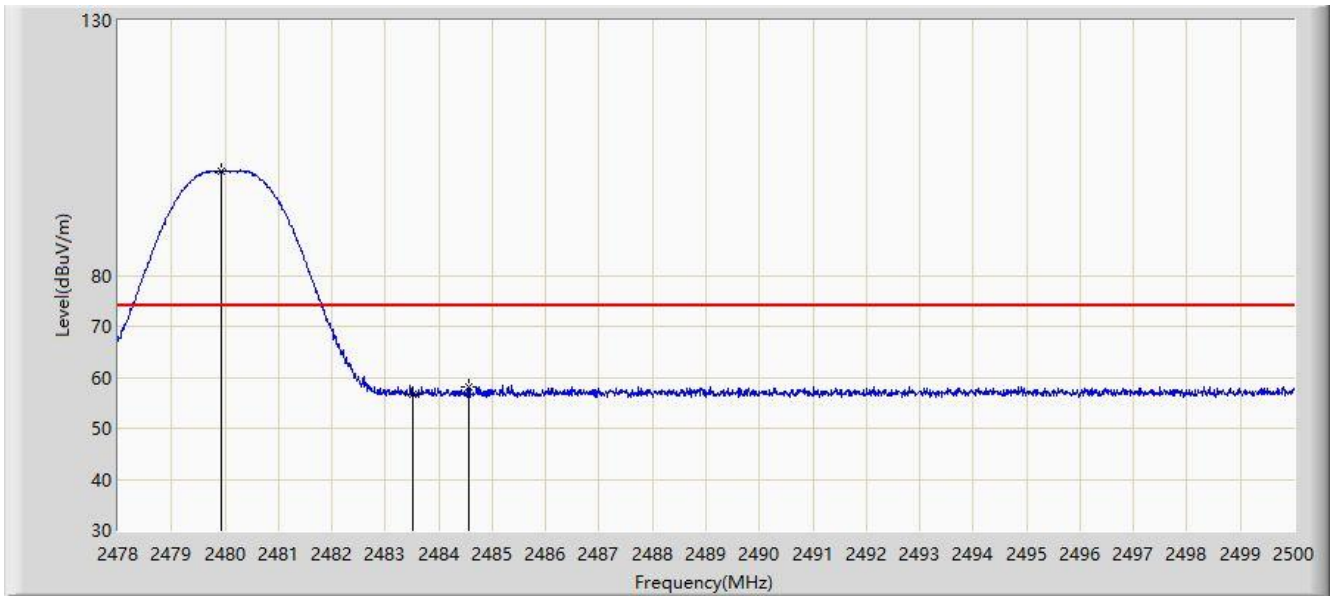


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.936	100.483	69.592	N/A	N/A	30.891	PK
2			2483.500	56.783	25.895	-17.217	74.000	30.888	PK
3			2484.556	58.063	27.176	-15.937	74.000	30.887	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2480MHz	

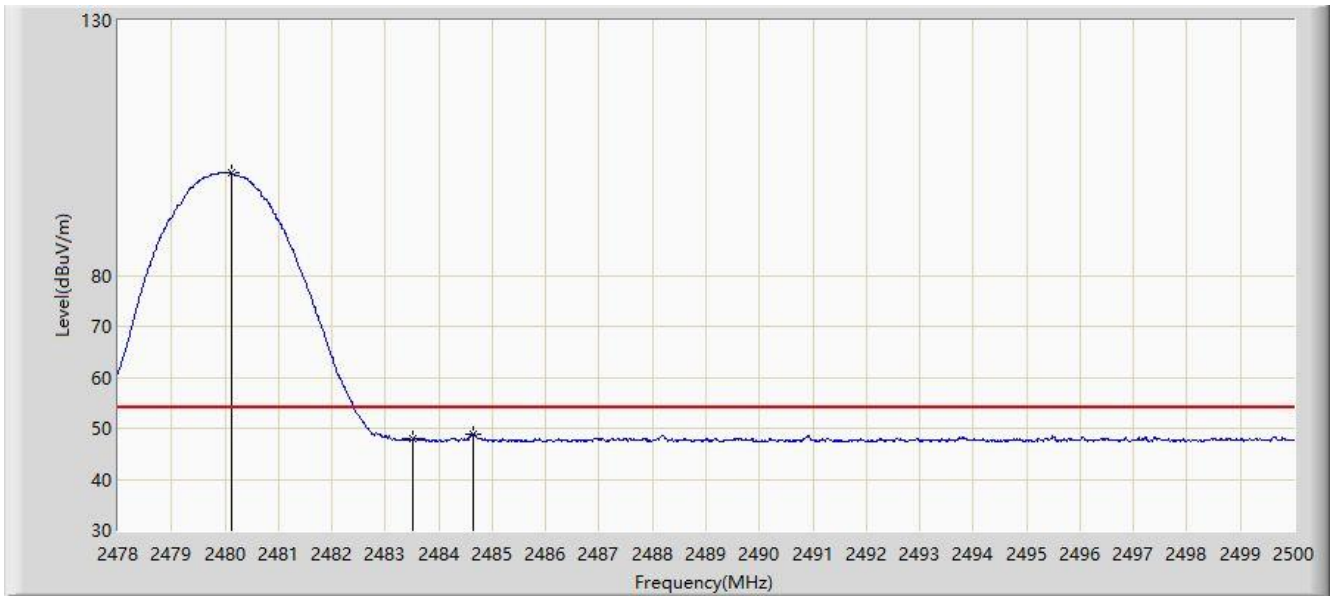


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2480.112	100.083	69.192	N/A	N/A	30.891	AV
2			2483.500	48.054	17.166	-5.946	54.000	30.888	AV
3			2484.655	48.851	17.964	-5.149	54.000	30.887	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2480MHz	

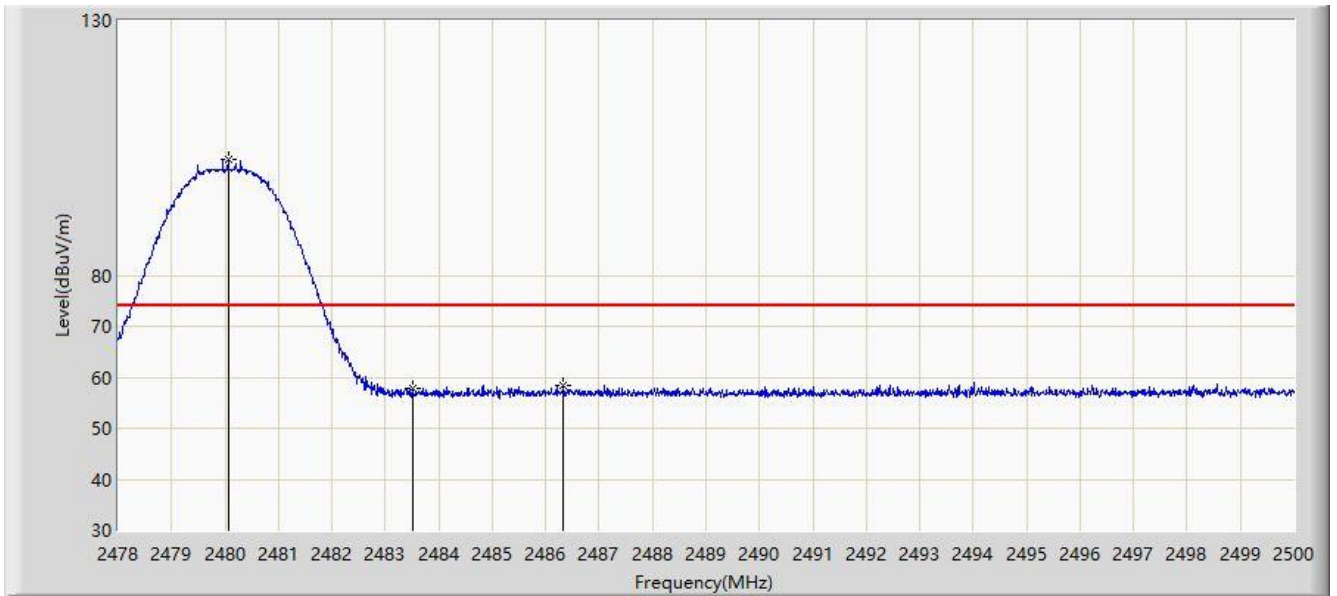


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2480.068	102.672	71.781	N/A	N/A	30.891	PK
2			2483.500	57.795	26.907	-16.205	74.000	30.888	PK
3			2486.327	58.515	27.629	-15.485	74.000	30.886	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 1Mbps at channel 2480MHz	

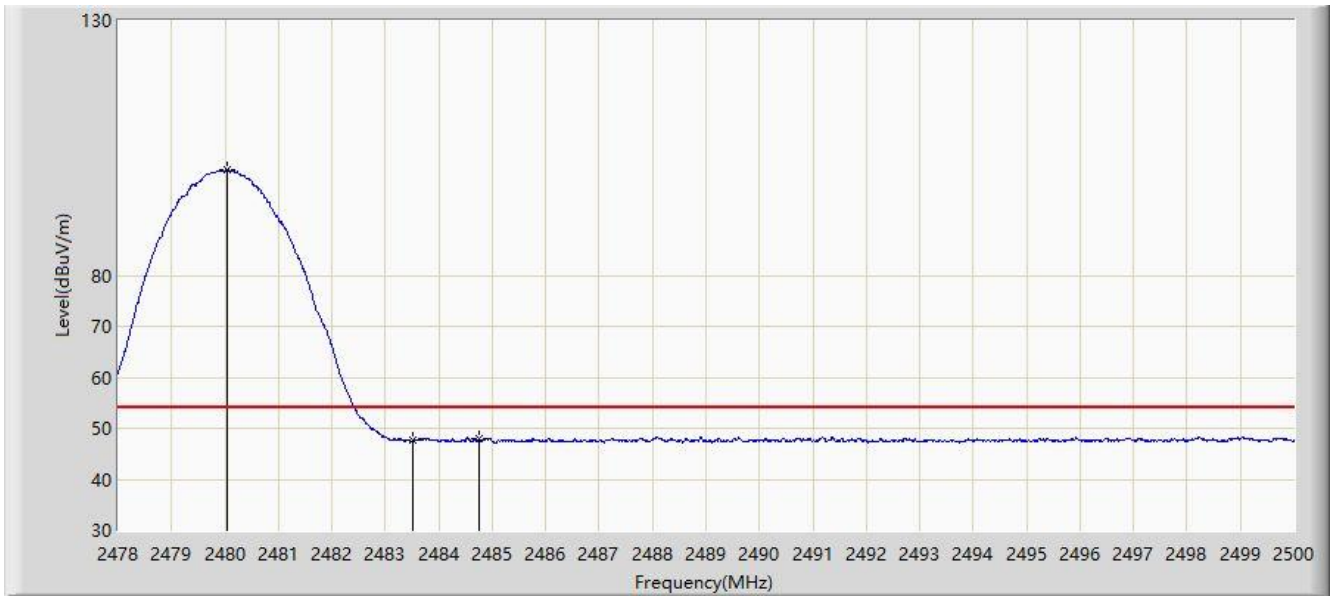


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2480.046	100.617	69.726	N/A	N/A	30.891	AV
2			2483.500	47.557	16.669	-6.443	54.000	30.888	AV
3			2484.765	47.869	16.982	-6.131	54.000	30.887	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2402MHz	

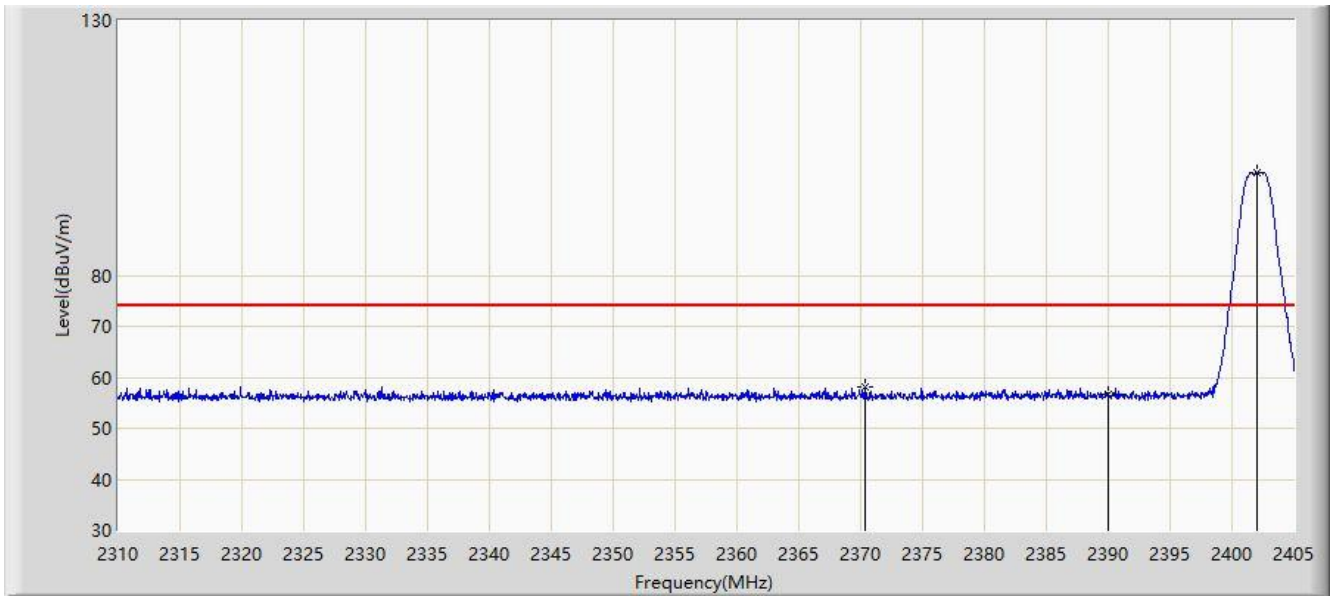


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2370.325	58.188	27.236	-15.812	74.000	30.952	PK
2			2390.000	56.657	25.751	-17.343	74.000	30.906	PK
3		*	2402.008	100.129	69.233	N/A	N/A	30.896	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2402MHz	

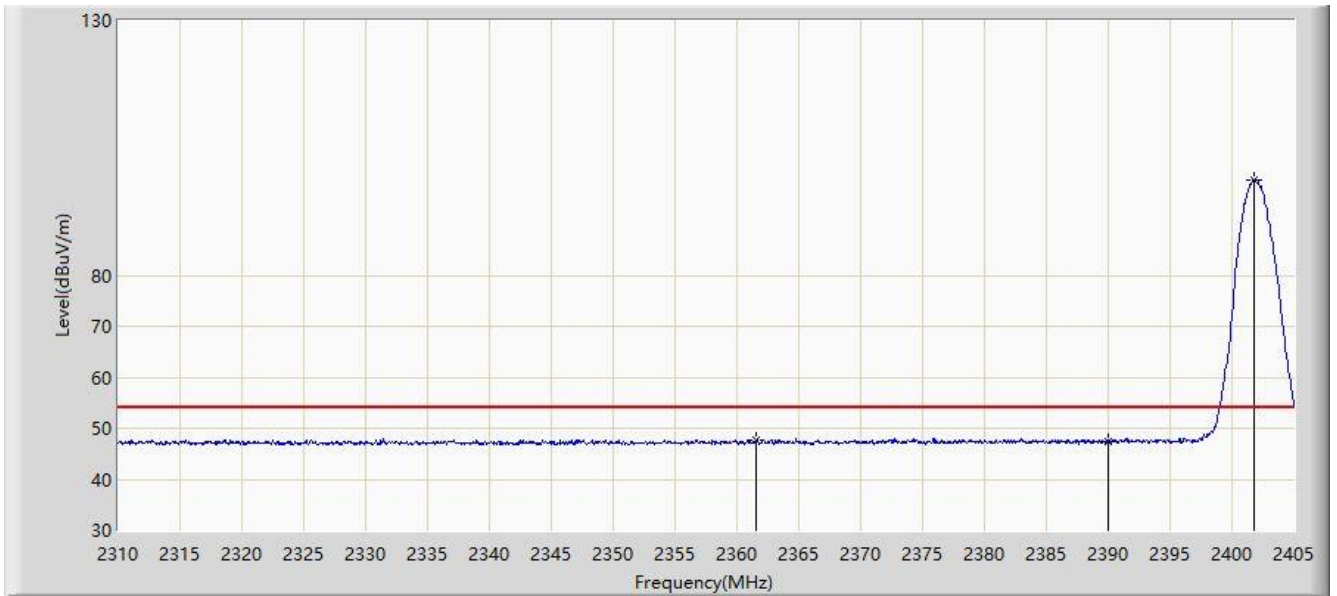


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2361.538	47.603	16.631	-6.397	54.000	30.973	AV
2			2390.000	47.326	16.420	-6.674	54.000	30.906	AV
3		*	2401.770	98.817	67.921	N/A	N/A	30.896	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2402MHz	

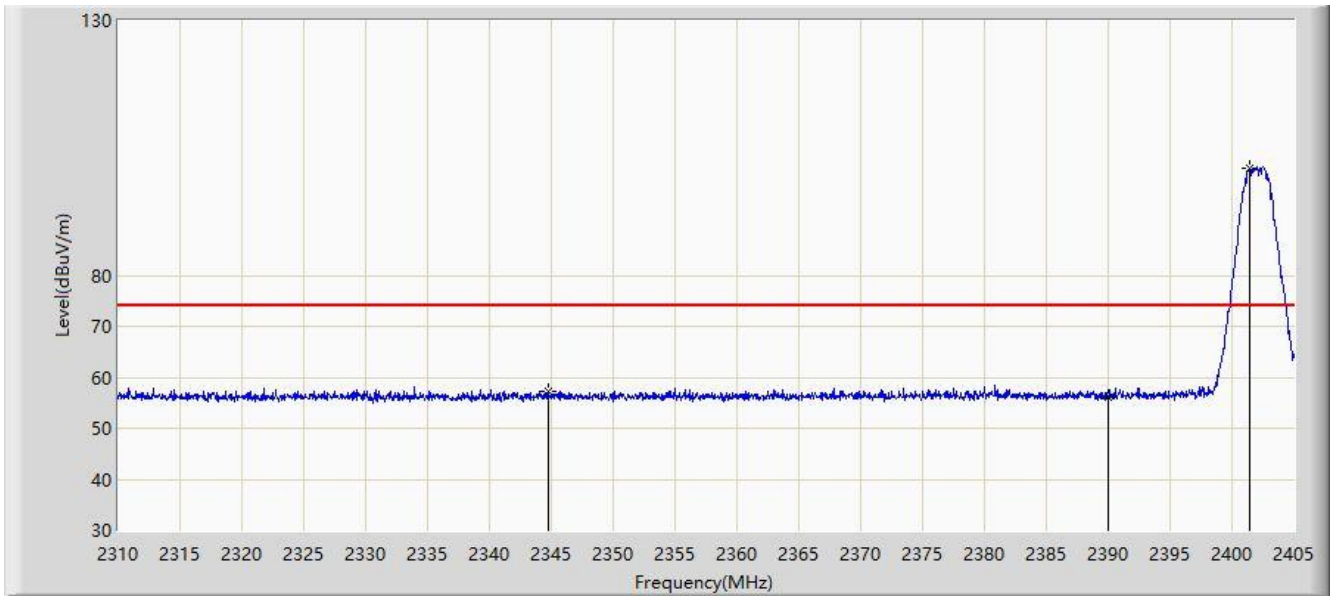


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2344.722	57.378	26.364	-16.622	74.000	31.014	PK
2			2390.000	56.138	25.232	-17.862	74.000	30.906	PK
3		*	2401.437	101.066	70.170	N/A	N/A	30.896	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2402MHz	

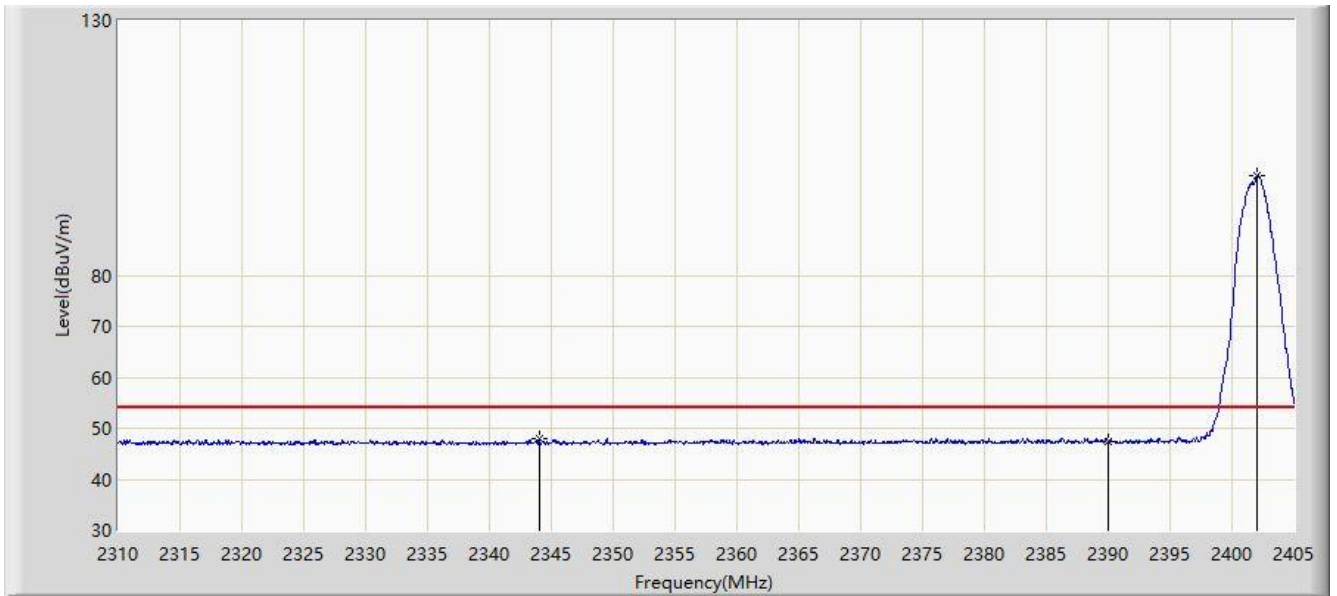


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			2344.010	47.931	16.915	-6.069	54.000	31.016	AV
2			2390.000	47.447	16.541	-6.553	54.000	30.906	AV
3		*	2402.008	99.461	68.565	N/A	N/A	30.896	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2480MHz	

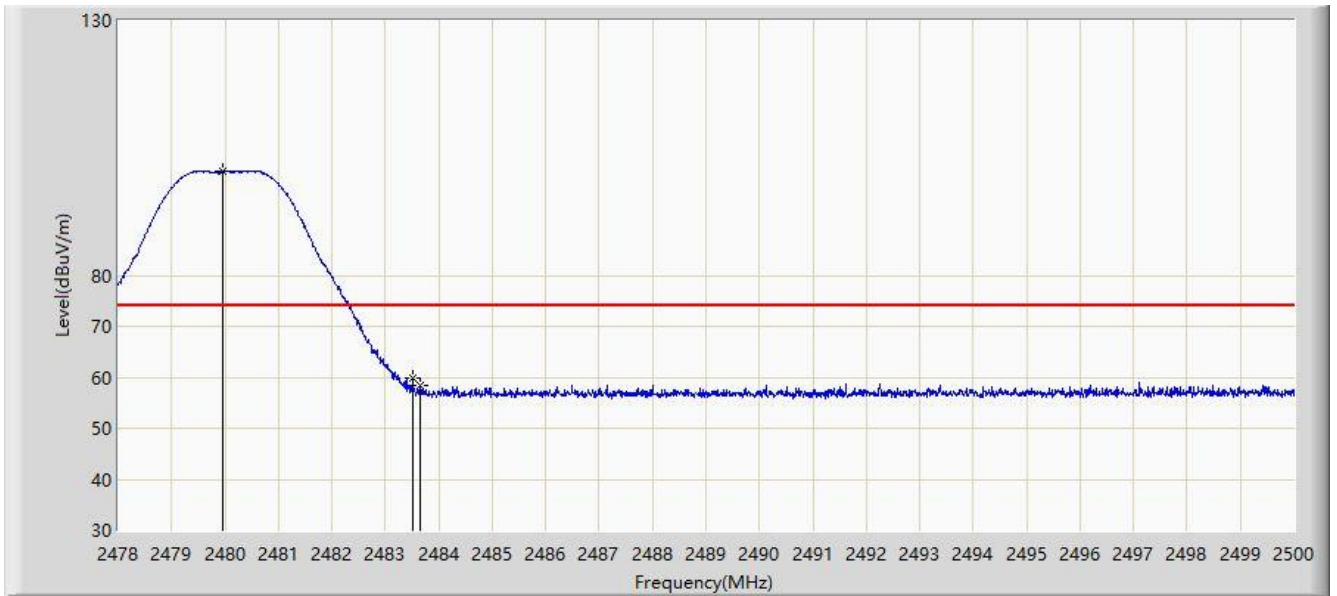

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.969	100.498	69.607	N/A	N/A	30.891	PK
2			2483.500	59.729	28.841	-14.271	74.000	30.888	PK
3			2483.643	58.421	27.533	-15.579	74.000	30.888	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Horizontal
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2479.969	99.101	68.210	N/A	N/A	30.891	AV
2			2483.500	49.457	18.569	-4.543	54.000	30.888	AV
3			2483.588	50.035	19.147	-3.965	54.000	30.888	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2480MHz	

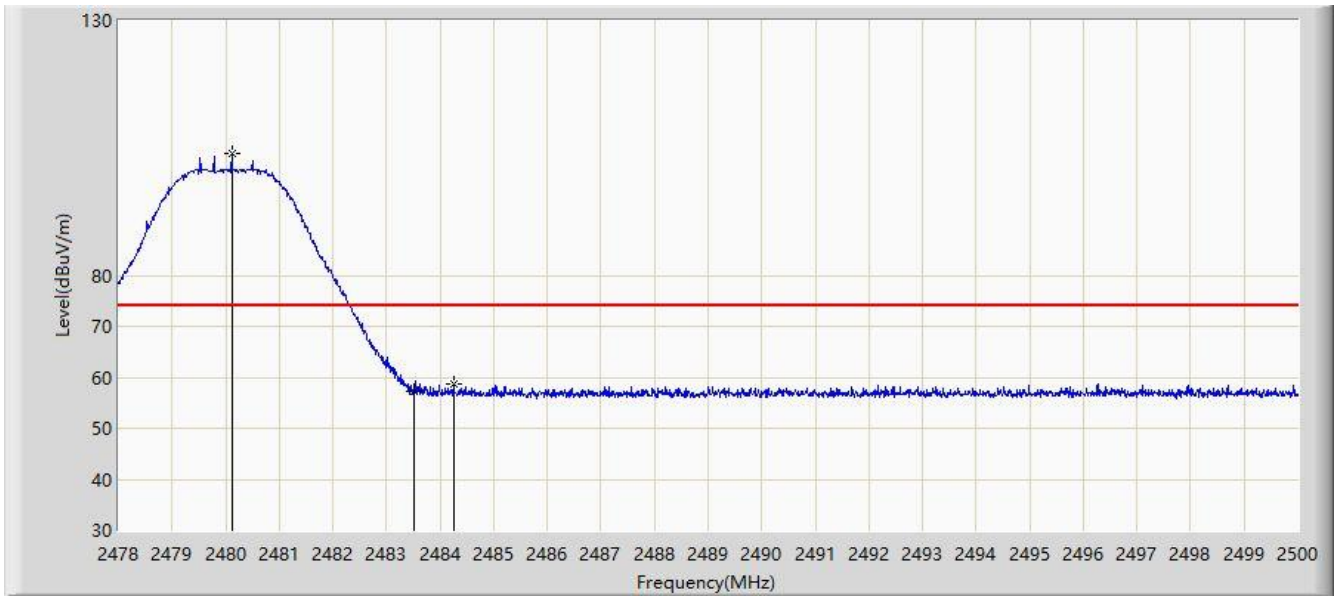

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2480.112	103.783	72.892	N/A	N/A	30.891	PK
2			2483.500	57.285	26.397	-16.715	74.000	30.888	PK
3			2484.259	58.715	27.827	-15.285	74.000	30.888	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2021/05/17
Limit: FCC_Part15_15.209_RE(3m)	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_2111	Polarity: Vertical
EUT: View Plus for Business	Power: By Battery
Test Mode: Transmit by BLE 2Mbps at channel 2480MHz	



No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1		*	2480.002	99.291	68.400	N/A	N/A	30.891	AV
2			2483.500	49.479	18.591	-4.521	54.000	30.888	AV
3			2483.874	48.794	17.906	-5.206	54.000	30.888	AV

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 6.8. AC Conducted Emissions Measurement


### 6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.8.2. Test Setup

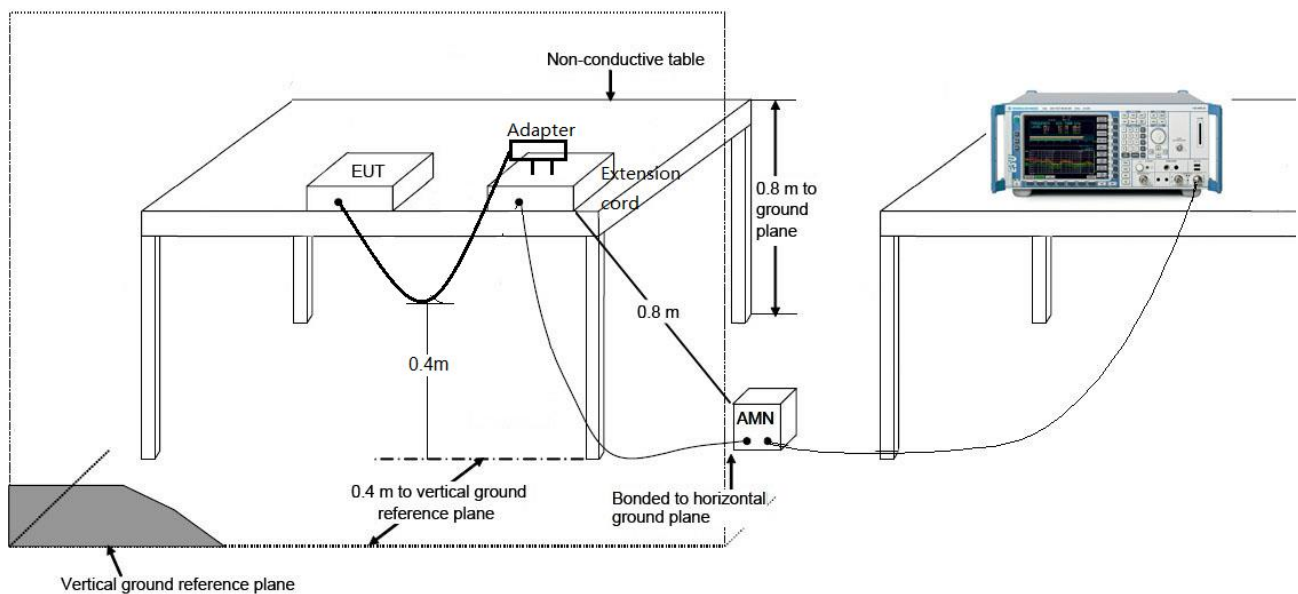

### 6.8.3. Test Result

Site: NS-SR2	Time: 2021/03/31
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_Filter Off_0.15~30MHz	Polarity: Line
EUT: View Pollution	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2440MHz	

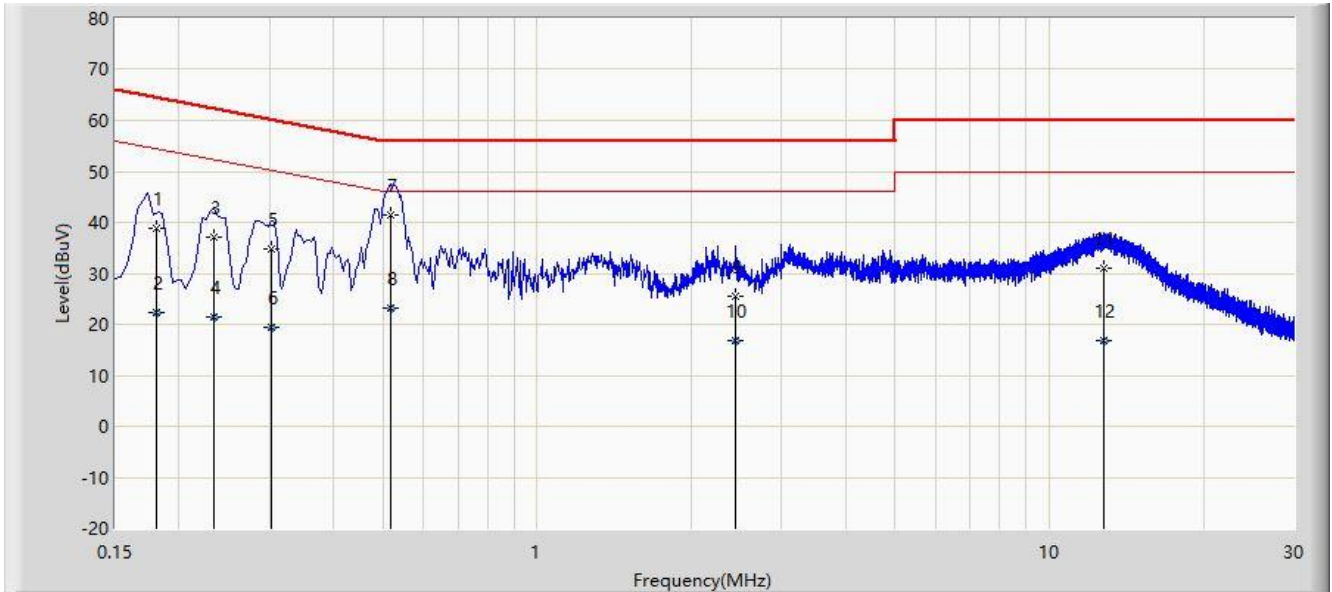


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V)	Factor (dB)	Type
1			0.180	38.910	29.368	-25.589	64.499	9.542	QP
2			0.180	22.180	12.638	-32.319	54.499	9.542	AV
3			0.234	37.169	27.626	-25.138	62.307	9.542	QP
4			0.234	21.433	11.890	-30.874	52.307	9.542	AV
5			0.302	34.898	25.353	-25.290	60.188	9.545	QP
6		*	0.302	19.337	9.792	-30.851	50.188	9.545	AV
7			0.518	41.544	31.980	-14.456	56.000	9.564	QP
8			0.518	23.279	13.715	-22.721	46.000	9.564	AV
9			2.434	25.468	15.823	-30.532	56.000	9.646	QP
10			2.434	16.729	7.083	-29.271	46.000	9.646	AV
11			12.754	31.153	21.325	-28.847	60.000	9.828	QP
12			12.754	16.783	6.954	-33.217	50.000	9.828	AV

Note: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: NS-SR2	Time: 2021/03/31
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_Filter Off_0.15~30MHz	Polarity: Neutral
EUT: View Pollution	Power: AC 120V/60Hz
Test Mode: Transmit by BLE at Channel 2440MHz	

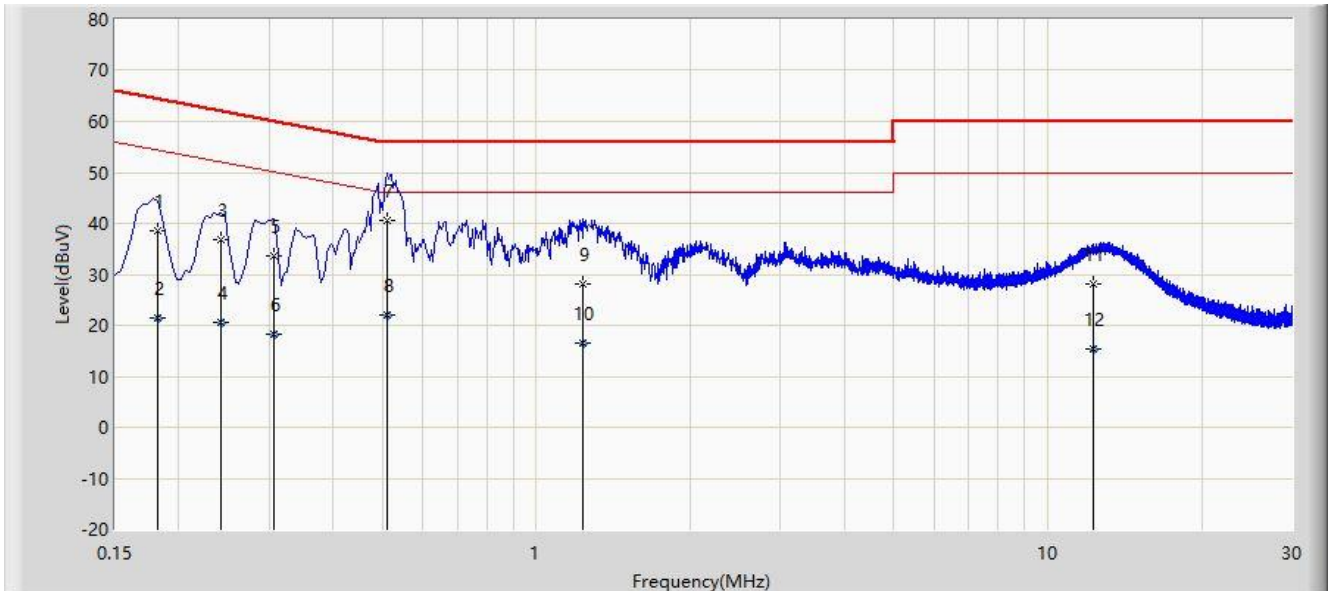


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.182	38.452	28.910	-25.942	64.394	9.542	QP
2			0.182	21.583	12.041	-32.811	54.394	9.542	AV
3			0.242	36.725	27.181	-25.302	62.027	9.544	QP
4			0.242	20.647	11.103	-31.380	52.027	9.544	AV
5			0.306	33.731	24.176	-26.347	60.078	9.555	QP
6			0.306	18.381	8.826	-31.697	50.078	9.555	AV
7			0.510	40.534	30.960	-15.466	56.000	9.574	QP
8		*	0.510	21.994	12.420	-24.006	46.000	9.574	AV
9			1.234	27.992	18.385	-28.008	56.000	9.607	QP
10			1.234	16.654	7.047	-29.346	46.000	9.607	AV
11			12.274	28.175	18.320	-31.825	60.000	9.855	QP
12			12.274	15.448	5.593	-34.552	50.000	9.855	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

### 6.9. Test Result of Radiated Emissions for Co-location

Site: NS-AC1	Time: 2021/04/30
Limit: FCC_Part 15.109_RE(3m)_ClassB	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Horizontal
EUT: View	Power: By Battery
Note: Co-location	

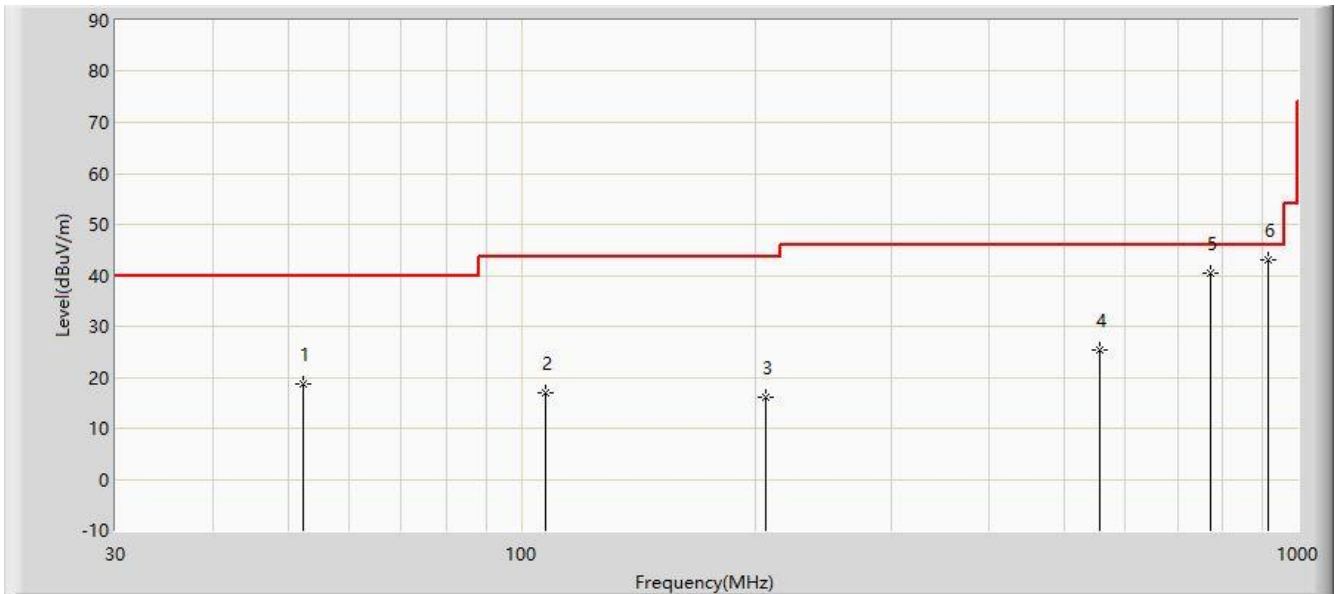


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			52.310	18.675	-0.911	-21.325	40.000	19.586	PK
2			107.600	16.938	-1.152	-26.562	43.500	18.090	PK
3			206.540	15.992	-1.555	-27.508	43.500	17.547	PK
4			556.710	25.471	1.558	-20.529	46.000	23.913	PK
5			772.050	40.541	13.510	-5.459	46.000	27.031	PK
6		*	916.095	42.935	14.164	-3.065	46.000	28.771	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Site: NS-AC1	Time: 2021/04/30
Limit: FCC_Part 15.109_RE(3m)_ClassB	Engineer: Dillon Diao
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: View	Power: By Battery
Note: Co-location	

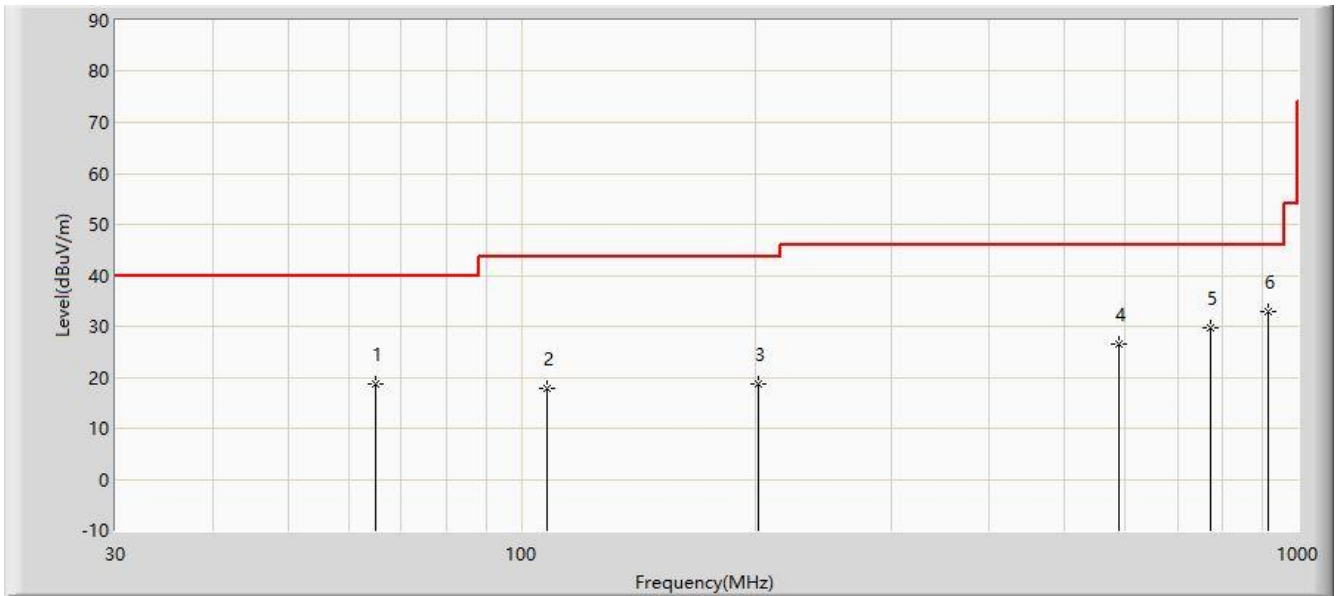


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			64.920	18.778	1.170	-21.222	40.000	17.608	PK
2			108.085	17.752	-0.330	-25.748	43.500	18.081	PK
3			201.690	18.590	1.095	-24.910	43.500	17.495	PK
4			589.205	26.414	1.806	-19.586	46.000	24.608	PK
5			773.020	29.634	2.597	-16.366	46.000	27.037	PK
6		*	917.065	32.891	4.115	-13.109	46.000	28.776	PK

Note 1: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Site: NS-AC1	Time: 2021/04/30
Limit: FCC_Part 15.109_RE(3m)_ClassB	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: View	Power: By Battery
Note: Co-location	

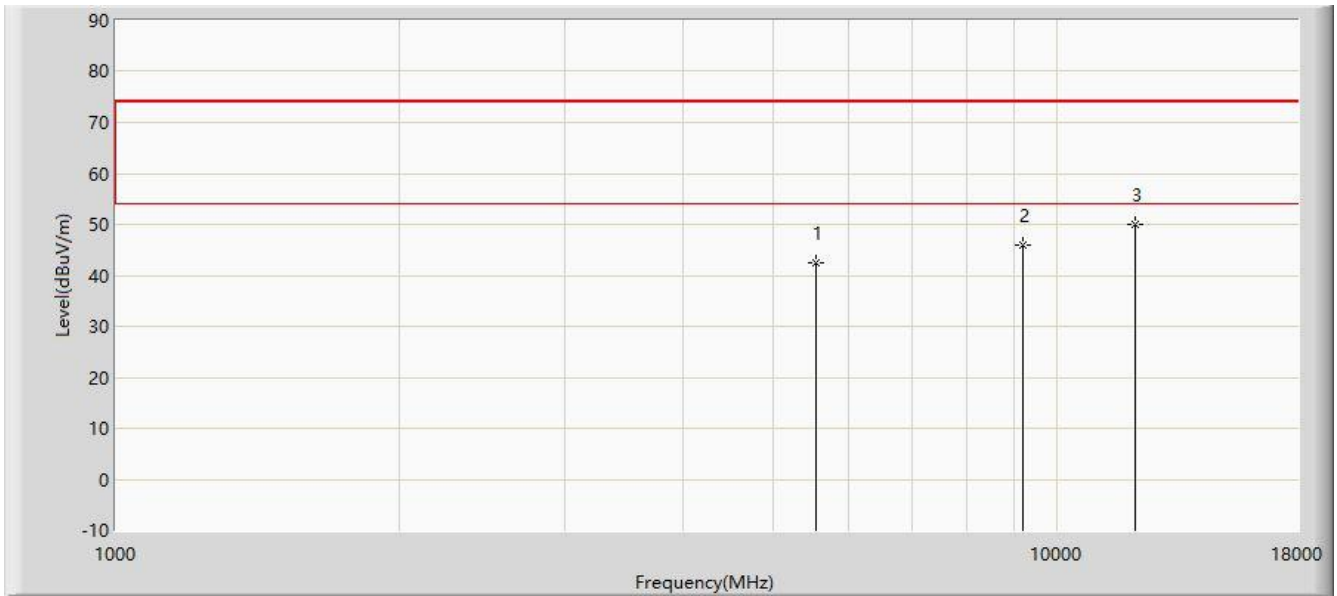


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			5547.500	42.377	38.375	-31.623	74.000	4.003	PK
2			9177.000	45.806	33.469	-28.194	74.000	12.337	PK
3		*	12109.500	49.915	34.076	-24.085	74.000	15.839	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Site: NS-AC1	Time: 2021/04/30
Limit: FCC_Part 15.109_RE(3m)_ClassB	Engineer: Dillon Diao
Probe: NS-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: View	Power: By Battery
Note: Co-location	

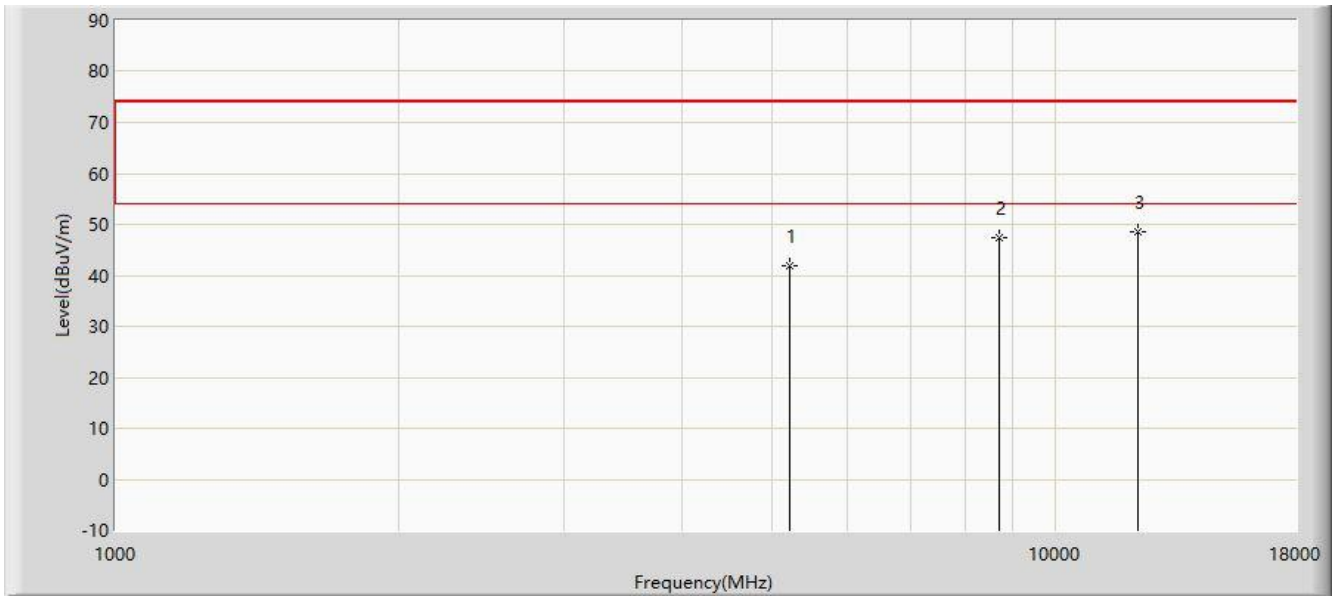

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB)	Type
1			5207.500	41.753	38.242	-32.247	74.000	3.511	PK
2			8718.000	47.481	35.626	-26.519	74.000	11.855	PK
3		*	12228.500	48.588	33.193	-25.412	74.000	15.395	PK

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

## 7. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with Part 15C of the FCC Rules.

————— The End —————

## Appendix A - Test Setup Photograph

Refer to "2103RSU015-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2103RSU015-UE" file.