

# RF MEASUREMENT REPORT

---

**FCC ID:** 2APPT-325  
**Applicant:** Airthings ASA  
**Product:** AT-325  
**Model No.:** 325  
**Brand Name:** Airthings  
**FCC Classification:** FCC Part 15 Spread Spectrum Transmitter (DSS)  
**FCC Rule Part(s):** Part15 Subpart C (Section 15.247)  
**Result:** Complies  
**Received Date:** 2024-03-27  
**Test Date:** 2024-04-01 ~ 2024-04-07

**Reviewed By:**

\_\_\_\_\_  
Denise Zhou

**Approved By:**

\_\_\_\_\_  
Robin Wu



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standards through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

### Revision History

Report No.	Version	Description	Issue Date	Note
2403RSU058-U2	V01	Initial Report	2024-05-08	Invalid
2403RSU058-U2	V02	Revise Type of Modulation in Clause 1.5	2024-05-24	Valid

---

## CONTENTS

Description	Page
<b>1. General Information .....</b>	<b>6</b>
1.1. Applicant .....	6
1.2. Manufacturer .....	6
1.3. Testing Facility .....	6
1.4. Product Information.....	7
1.5. Radio Specification under Test .....	7
1.6. Working Frequencies .....	8
<b>2. Test Configuration .....</b>	<b>10</b>
2.1. Test Mode .....	10
2.2. Test System Connection Diagram .....	10
2.3. Test Software .....	10
2.4. Applied Standards.....	11
2.5. Test Environment Condition .....	11
<b>3. Antenna Requirement .....</b>	<b>12</b>
<b>4. Measuring Instrument .....</b>	<b>13</b>
<b>5. Decision Rules and Measurement Uncertainty .....</b>	<b>14</b>
5.1. Decision Rules .....	14
5.2. Measurement Uncertainty.....	14
<b>6. Test Result.....</b>	<b>15</b>
6.1. Summary .....	15
6.2. 20dB Bandwidth Measurement.....	16
6.2.1. Test Limit .....	16
6.2.2. Test Procedure.....	16
6.2.3. Test Setting .....	16
6.2.4. Test Setup .....	16
6.2.5. Test Result .....	16
6.3. Output Power Measurement.....	17
6.3.1. Test Limit .....	17
6.3.2. Test Procedure.....	17
6.3.3. Test Setting .....	17
6.3.4. Test Setup .....	17
6.3.5. Test Result .....	17
6.4. Carrier Frequency Separation Measurement .....	18
6.4.1. Test Limit .....	18
6.4.2. Test Procedure.....	18
6.4.3. Test Setting .....	18

---

6.4.4.	Test Setup .....	18
6.4.5.	Test Result .....	18
6.5.	Number of Hopping Channels Measurement .....	19
6.5.1.	Test Limit .....	19
6.5.2.	Test Procedure .....	19
6.5.3.	Test Settintg .....	19
6.5.4.	Test Setup .....	19
6.5.5.	Test Result .....	19
6.6.	Time of Occupancy Measurement .....	20
6.6.1.	Test Limit .....	20
6.6.2.	Test Procedure .....	20
6.6.3.	Test Settintg .....	20
6.6.4.	Test Setup .....	20
6.6.5.	Test Result .....	20
6.7.	Band-edge Compliance Measurement .....	21
6.7.1.	Test Limit .....	21
6.7.2.	Test Procedure .....	21
6.7.3.	Test Setting .....	21
6.7.4.	Test Setup .....	21
6.7.5.	Test Result .....	21
6.8.	Conducted Spurious Emissions Measurement .....	22
6.8.1.	Test Limit .....	22
6.8.2.	Test Procedure .....	22
6.8.3.	Test Setting .....	22
6.8.4.	Test Setup .....	22
6.8.5.	Test Result .....	23
6.9.	Radiated Spurious Emission Measurement .....	24
6.9.1.	Test Limit .....	24
6.9.2.	Test Procedure .....	24
6.9.3.	Test Setting .....	24
6.9.4.	Test Setup .....	26
6.9.5.	Test Result .....	27
6.10.	Radiated Restricted Band Edge Measurement .....	28
6.10.1.	Test Limit .....	28
6.10.2.	Test Procedure .....	29
6.10.3.	Test Setting .....	29
6.10.4.	Test Setup .....	30
6.10.5.	Test Result .....	30
6.11.	AC Conducted Emissions Measurement .....	31

---

---

6.11.1. Test Limit .....	31
6.11.2. Test Setup .....	31
6.11.3. Test Result .....	31
<b>Appendix A - Test Result.....</b>	<b>32</b>
A.1 Duty Cycle Test Result .....	32
A.2 20dB Bandwidth Test Result .....	33
A.3 Output Power Test Result .....	35
A.4 Carrier Frequency Separation Test Result.....	37
A.5 Number of Hopping Channels Test Result.....	39
A.6 Time of Occupancy Test Result .....	40
A.7 Band-edge Compliance Test Result.....	42
A.8 Conducted Spurious Emissions Test Result .....	44
A.9 Radiated Spurious Emission Test Result .....	46
A.10 Radiated Restricted Band Edge Test Result.....	52
<b>Appendix B - Test Setup Photograph .....</b>	<b>60</b>
<b>Appendix C - EUT Photograph .....</b>	<b>61</b>



#### 1.4. Product Information

Product	AT-325
Model No.	325
EUT Identification No.	CERT_R_1 for Conducted measurement CERT_R_3 for Radiated measurement
Bluetooth Specification	v5.1 Single Mode (BLE)
SmartLink Specification	905.6 ~ 926MHz
Sidewalk Specification	902.2 ~ 915.8MHz
Antenna Information	Refer to 1.5.
Operating Temp.	0 ~ 45°C
Working Voltage	2x AA batteries giving max 3.6V
<p>Note:</p> <p>The information of EUT is provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</p>	

#### 1.5. Radio Specification under Test

Frequency Range	SmartLink: 905.6 ~ 926 MHz Sidewalk: 902.2 ~ 915.8 MHz
Channel Number	SmartLink: 52 Sidewalk: 69
Type of modulation	GFSK
Antenna Type	Fixed Internal Antenna
Antenna Gain	2.15 dBi

## 1.6. Working Frequencies

SmartLink

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	905.6 MHz	2	906.0 MHz	3	906.4 MHz
4	906.8 MHz	5	907.2 MHz	6	907.6 MHz
7	908.0 MHz	8	908.4 MHz	9	908.8 MHz
10	909.2 MHz	11	909.6 MHz	12	910.0 MHz
13	910.4 MHz	14	910.8 MHz	15	911.2 MHz
16	911.6 MHz	17	912.0 MHz	18	912.4 MHz
19	912.8 MHz	20	913.2 MHz	21	913.6 MHz
22	914.0 MHz	23	914.4 MHz	24	914.8 MHz
25	915.2 MHz	26	915.6 MHz	27	916.0 MHz
28	916.4 MHz	29	916.8 MHz	30	917.2 MHz
31	917.6 MHz	32	918.0 MHz	33	918.4 MHz
34	918.8 MHz	35	919.2 MHz	36	919.6 MHz
37	920.0 MHz	38	920.4 MHz	39	920.8 MHz
40	921.2 MHz	41	921.6 MHz	42	922.0 MHz
43	922.4 MHz	44	922.8 MHz	45	923.2 MHz
46	923.6 MHz	47	924.0 MHz	48	924.4 MHz
49	924.8 MHz	50	925.2 MHz	51	925.6 MHz
52	926.0 MHz	-	-	-	-



## Sidewalk

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	902.2 MHz	2	902.4 MHz	3	902.6 MHz
4	902.8 MHz	5	903.0 MHz	6	903.2 MHz
7	903.4 MHz	8	903.6 MHz	9	903.8 MHz
10	904.0 MHz	11	904.2 MHz	12	904.4 MHz
13	904.6 MHz	14	904.8 MHz	15	905.0 MHz
16	905.2 MHz	17	905.4 MHz	18	905.6 MHz
19	905.8 MHz	20	906.0 MHz	21	906.2 MHz
22	906.4 MHz	23	906.6 MHz	24	906.8 MHz
25	907.0 MHz	26	907.2 MHz	27	907.4 MHz
28	907.6 MHz	29	907.8 MHz	30	908.0 MHz
31	908.2 MHz	32	908.4 MHz	33	908.6 MHz
34	908.8 MHz	35	909.0 MHz	36	909.2 MHz
37	909.4 MHz	38	909.6 MHz	39	909.8 MHz
40	910.0 MHz	41	910.2 MHz	42	910.4 MHz
43	910.6 MHz	44	910.8 MHz	45	911.0 MHz
46	911.2 MHz	47	911.4 MHz	48	911.6 MHz
49	911.8 MHz	50	912.0 MHz	51	912.2 MHz
52	912.4 MHz	53	912.6 MHz	54	912.8 MHz
55	913.0 MHz	56	913.2 MHz	57	913.4 MHz
58	913.6 MHz	59	913.8 MHz	60	914.0 MHz
61	914.2 MHz	62	914.4 MHz	63	914.6 MHz
64	914.8 MHz	65	915.0 MHz	66	915.2 MHz
67	915.4 MHz	68	915.6 MHz	69	915.8 MHz


## 2. Test Configuration

### 2.1. Test Mode

Mode 1: Transmit by SmartLink
Mode 2: Transmit by Sidewalk

### 2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing.

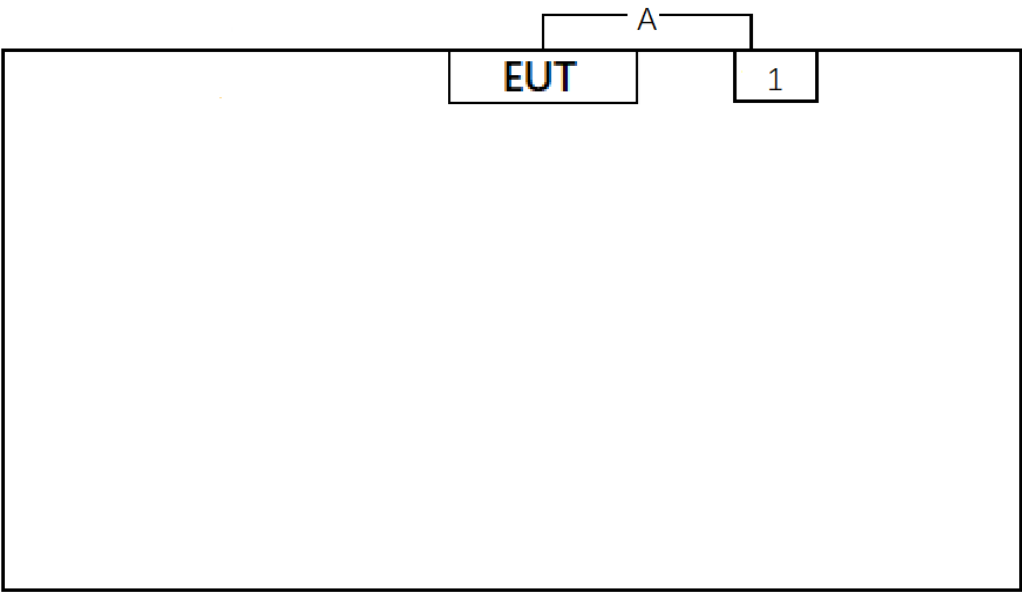Connection Diagram – Radiated Emission testing			
			
Cable Type		Cable Spec.	Length
A	Serial Cable	Shielding	1.5m
Product		Manufacturer	Model No.
1	Notebook	DELL	DELL Inspiron 5359

### 2.3. Test Software

The test utility software used during testing was “IPOP”, and the version was 4.1.

#### 2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

#### 2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75 %RH

### 3. Antenna Requirement

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The unit complies with the requirement of §15.203.

#### 4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2024-12-04	WZ-AC2
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2024-05-15	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2024-05-23	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2024-10-11	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2024-05-07	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2024-04-20	WZ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11263	1 year	2024-11-07	WZ-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2024-05-23	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2024-05-31	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11093	1 year	2024-06-08	WZ-SR5

Software	Version	Function
EMI V3	V 3.0.0	EMI Test Software
Controller_MF 7802	1.02	RE Antenna & Turntable

## 5. Decision Rules and Measurement Uncertainty

### 5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>AC Conducted Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
<b>Radiated Emission Measurement</b>
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
<b>Spurious Emissions, Conducted</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.2dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.4dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 2.7%

## 6. Test Result

### 6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(1)(i)	20dB Bandwidth	Conducted	Pass
15.247(b)(2)	Peak Transmitter Output Power		Pass
15.247(a)(1)	Channel Separation		Pass
15.247(a)(1)(i)	Number of Channels		Pass
15.247(a)(1)(i)	Time of Occupancy		Pass
15.247(d)	Band Edge / Out- of-Band Emissions		Pass
15.205, 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	N/A

#### Notes:

1. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
3. "N/A" means that this item is not applicable, and the detail information refer to relevant section.

## 6.2. 20dB Bandwidth Measurement

### 6.2.1. Test Limit

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.


### 6.2.2. Test Procedure

ANSI C63.10-2013 - Section 6.9.2 (20dB Bandwidth)

### 6.2.3. Test Setting

1. Set RBW = 1% to 5% of the 20dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 6.2.4. Test Setup

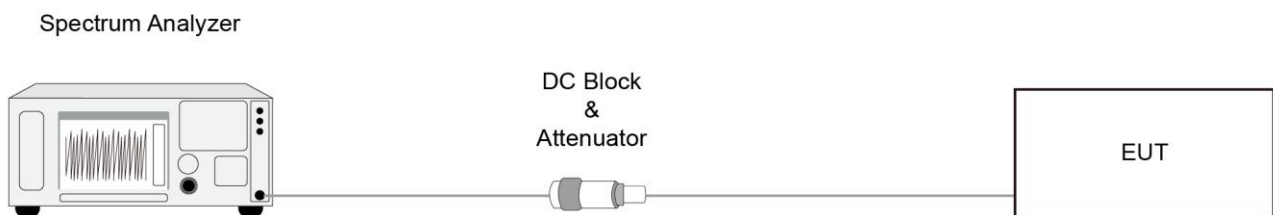

### 6.2.5. Test Result

Refer to Appendix A.2.



### 6.3. Output Power Measurement

#### 6.3.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels


#### 6.3.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.5

#### 6.3.3. Test Setting

1. Set RBW  $\geq$  the 20 dB bandwidth of the emission being measured.
2. VBW  $\geq$  RBW
3. Span = approximately five times the 20dB bandwidth, centered on a hopping channel
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize, Use the marker-to-peak function to set the marker to the peak of the emission.  
The indicated level is the peak output power (don't forget added the external attenuation and cable loss)

#### 6.3.4. Test Setup

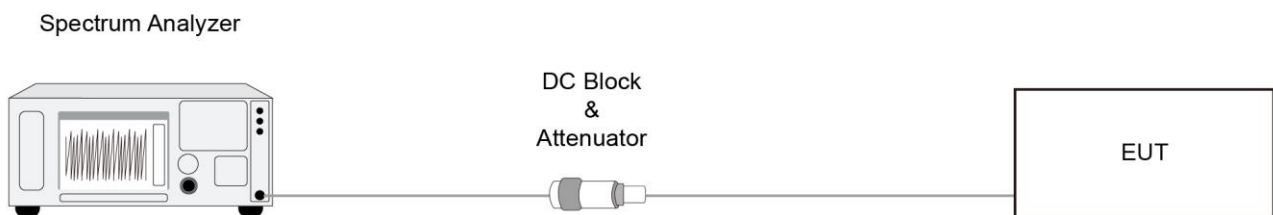

#### 6.3.5. Test Result

Refer to Appendix A.3.

## 6.4. Carrier Frequency Separation Measurement

### 6.4.1. Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


### 6.4.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.2.

#### 6.4.3. Test Setting

1. Span = wide enough to capture the peaks of two adjacent channels.
2. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. VBW  $\geq$  RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allowed the trace to stabilize
8. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 6.4.4. Test Setup

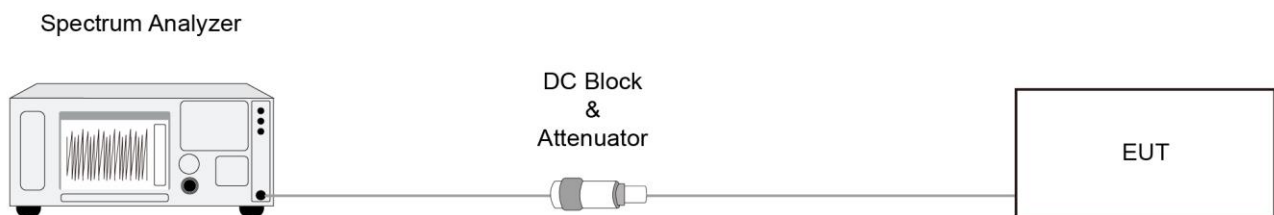

#### 6.4.5. Test Result

Refer to Appendix A.4.

## 6.5. Number of Hopping Channels Measurement

### 6.5.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


### 6.5.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.3.

### 6.5.3. Test Setting

1. Span = the frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW  $\geq$  RBW
4. Sweep time = Auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. Allow the trace to stabilize

### 6.5.4. Test Setup

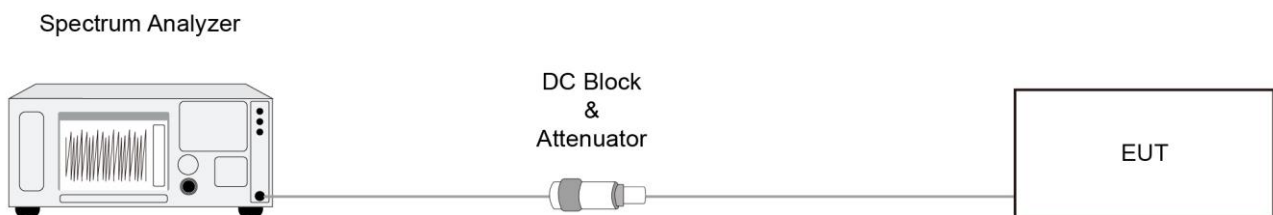

### 6.5.5. Test Result

Refer to Appendix A.5.

## 6.6. Time of Occupancy Measurement

### 6.6.1. Test Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


### 6.6.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.4.

### 6.6.3. Test Setting

1. Span = zero span, centered on a hopping channel.
2. RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
3. VBW  $\geq$  RBW
4. Sweep time = as necessary to capture the entire dwell time per hopping channel
5. Detector = Peak
6. Trace mode = max hold
7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.

### 6.6.4. Test Setup

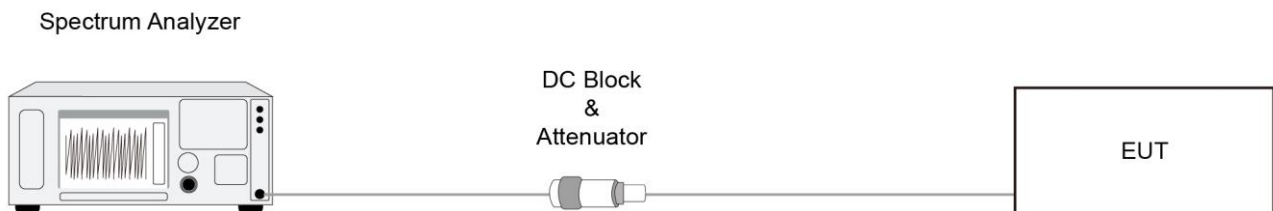

### 6.6.5. Test Result

Refer to Appendix A.6.

## 6.7. Band-edge Compliance Measurement

### 6.7.1. Test Limit

The maximum permissible emission level is 20dBc. Any emissions were lying outside of the emission bandwidth and in authorized band edges to a field strength limit specified in Section 15.209 of the Title 47 CFR.


### 6.7.2. Test Procedure

ANSI C63.10-2013 - Section 6.10.4.

### 6.7.3. Test Setting

1. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.

### 6.7.4. Test Setup

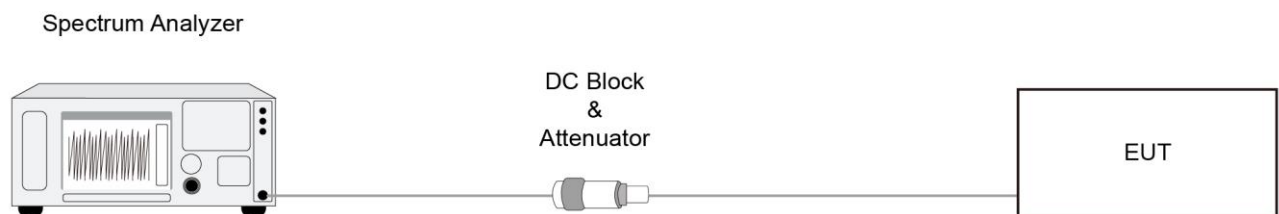

### 6.7.5. Test Result

Refer to Appendix A.7.

## 6.8. Conducted Spurious Emissions Measurement

### 6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### 6.8.2. Test Procedure

ANSI C63.10-2013 - Section 7.8.8.

### 6.8.3. Test Setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

### 6.8.4. Test Setup

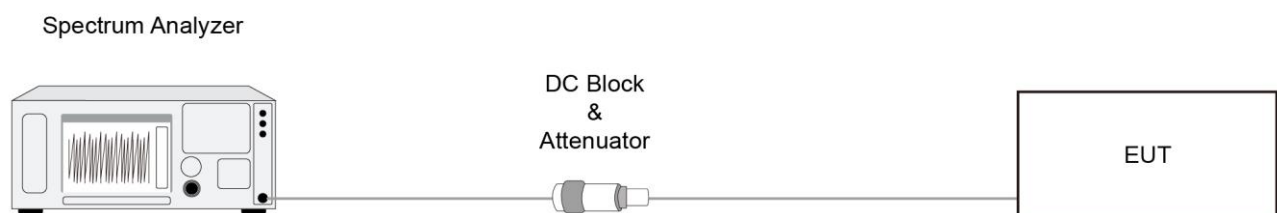

### **6.8.5. Test Result**

Refer to Appendix A.8.

## 6.9. Radiated Spurious Emission Measurement

### 6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V}/\text{m}$ ]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.9.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 6.9.3. Test Setting

**Table 1 - RBW as a function of frequency**

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz



**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.9.4. Test Setup


Below 30MHz Test Setup:

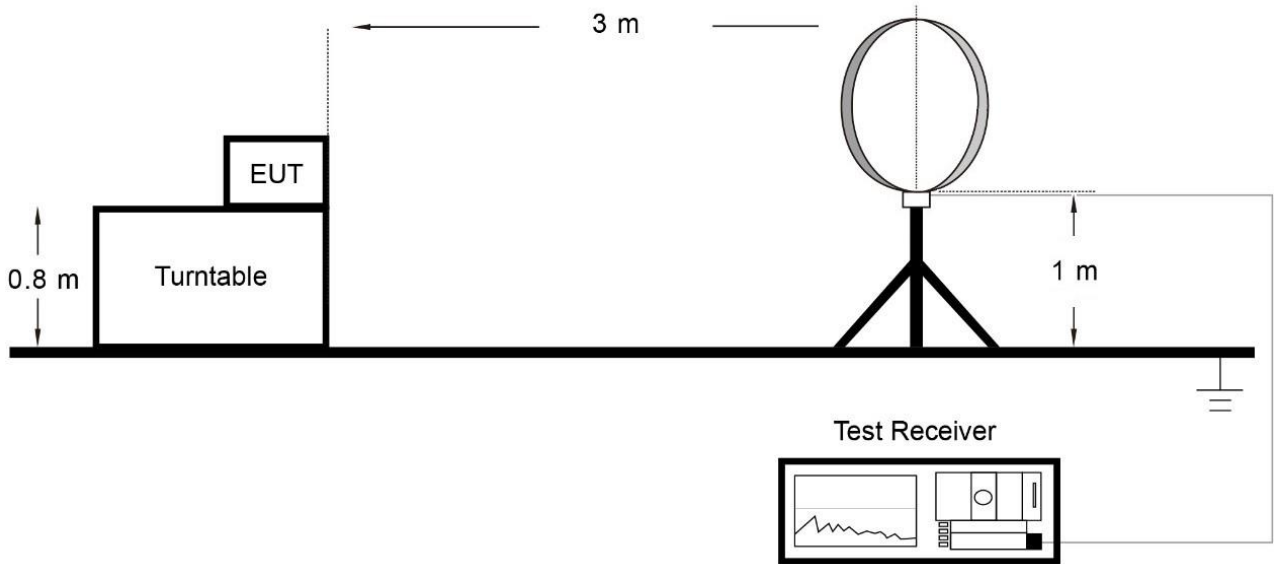

Below 1GHz Test Setup:

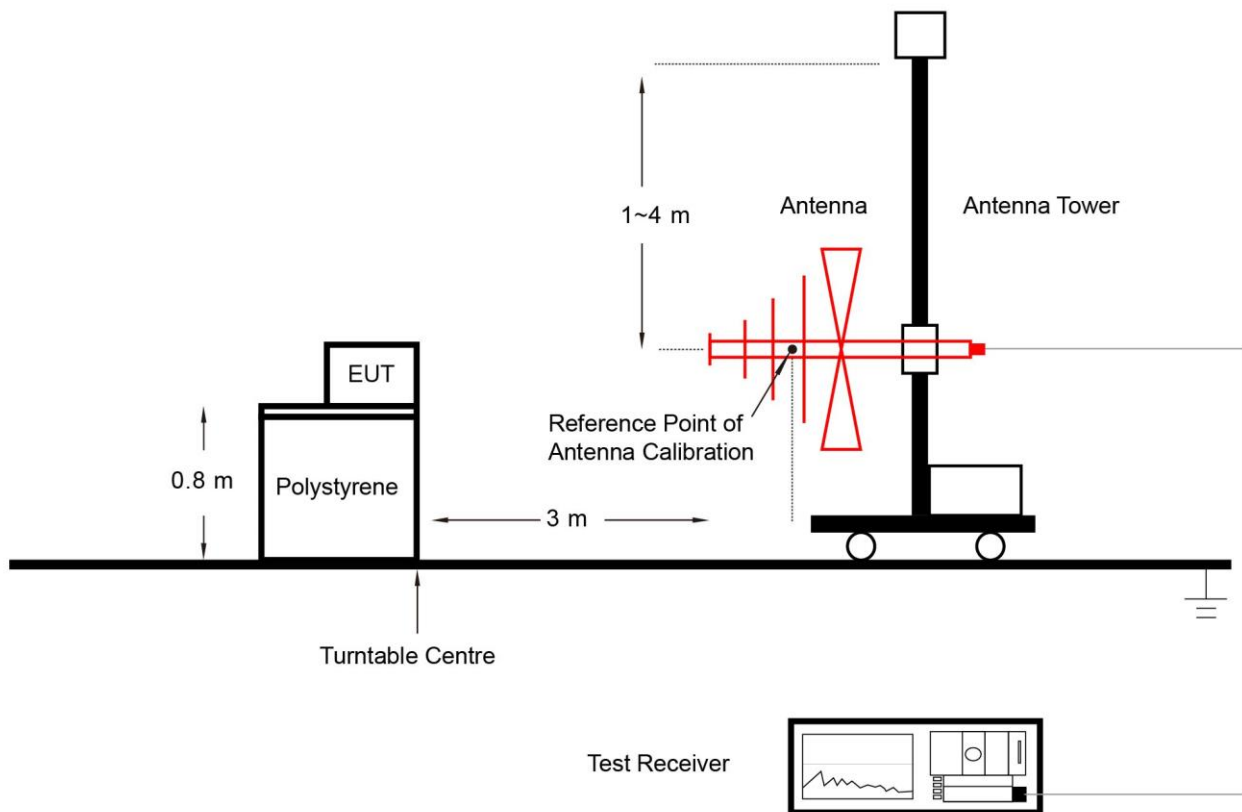

Above 1GHz Test Setup:

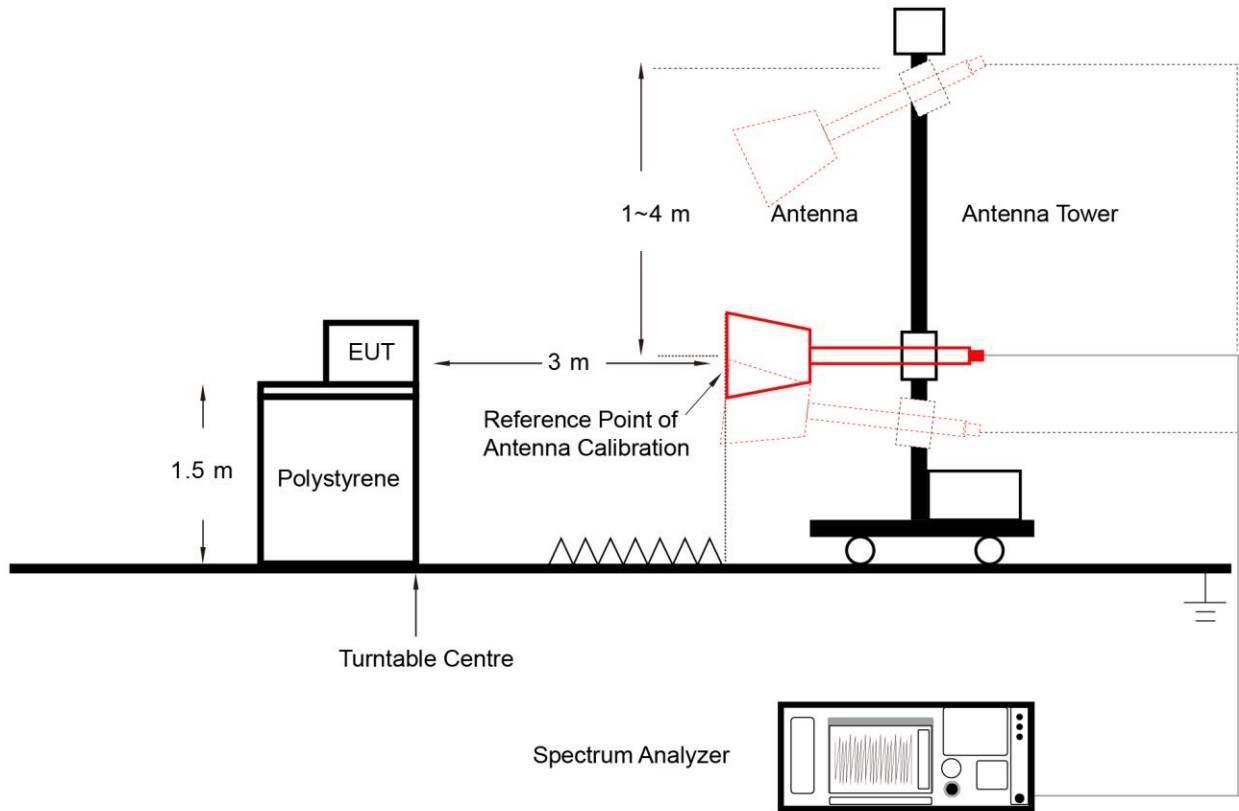

**6.9.5. Test Result**

Refer to Appendix A.9.

## 6.10. Radiated Restricted Band Edge Measurement

### 6.10.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 6.10.2. Test Procedure

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 6.10.3. Test Setting


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 6.10.4. Test Setup

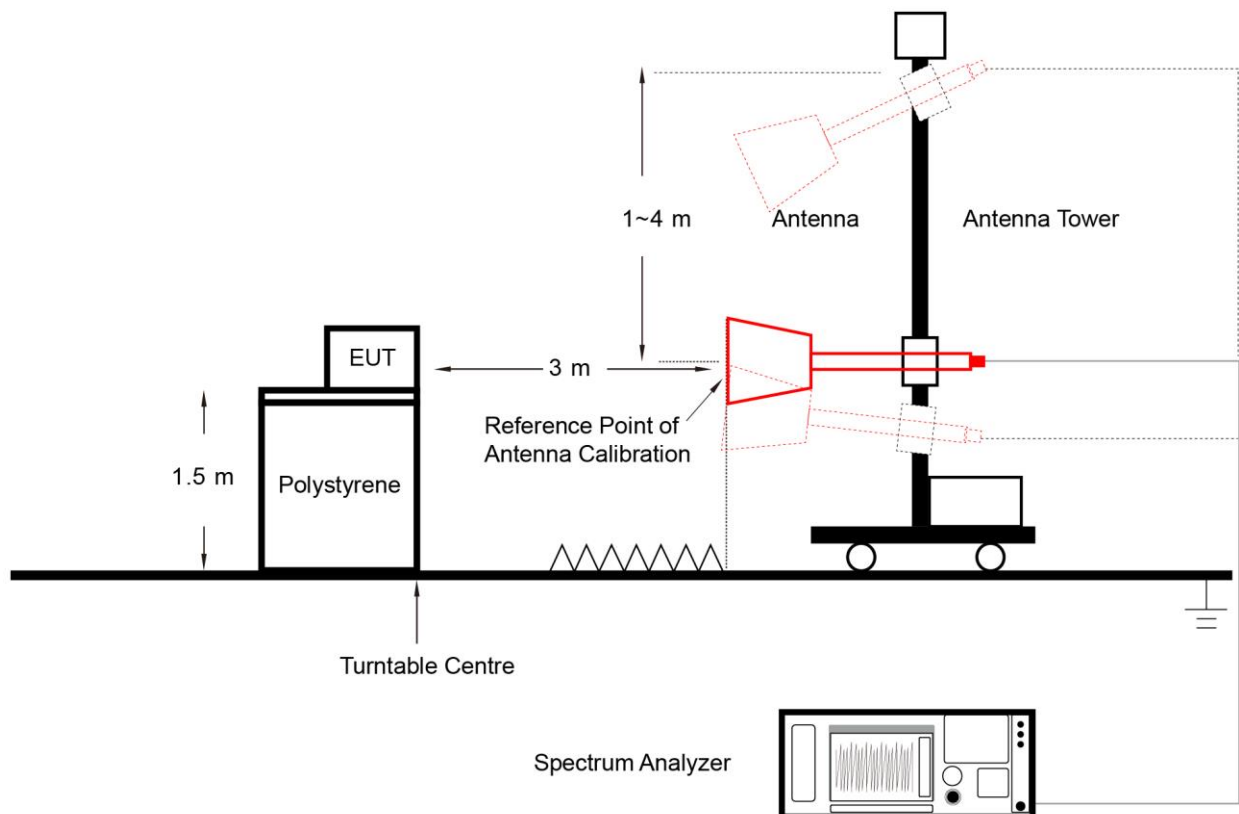

#### 6.10.5. Test Result

Refer to Appendix A.10.

## 6.11. AC Conducted Emissions Measurement


### 6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 6.11.2. Test Setup

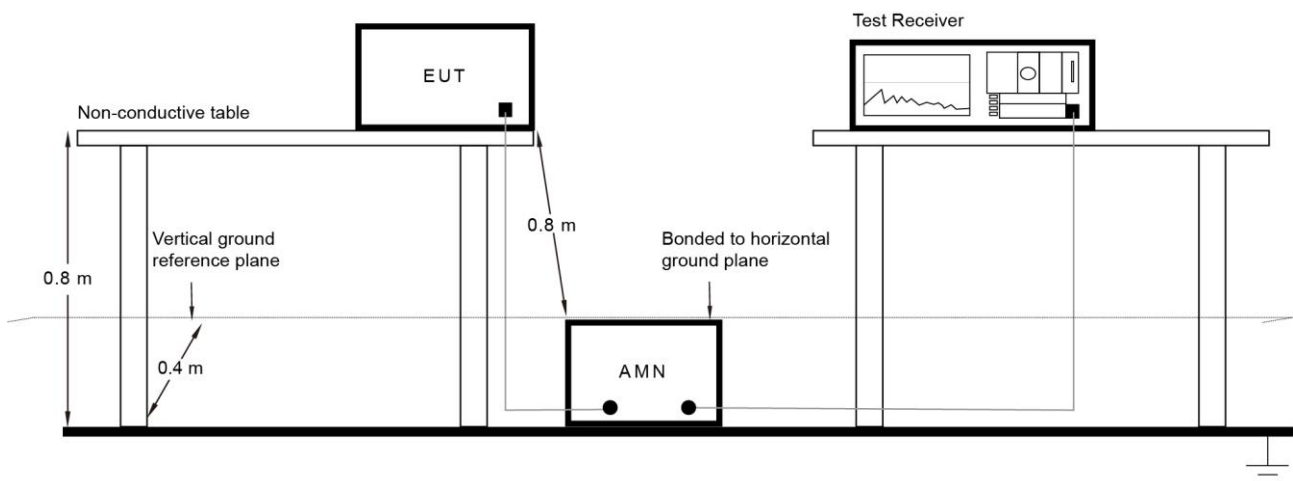

### 6.11.3. Test Result


The device is powered by battery, so this item is not applicable.

## Appendix A - Test Result

### A.1 Duty Cycle Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 1

Channel No.	Duty Cycle
01	100%

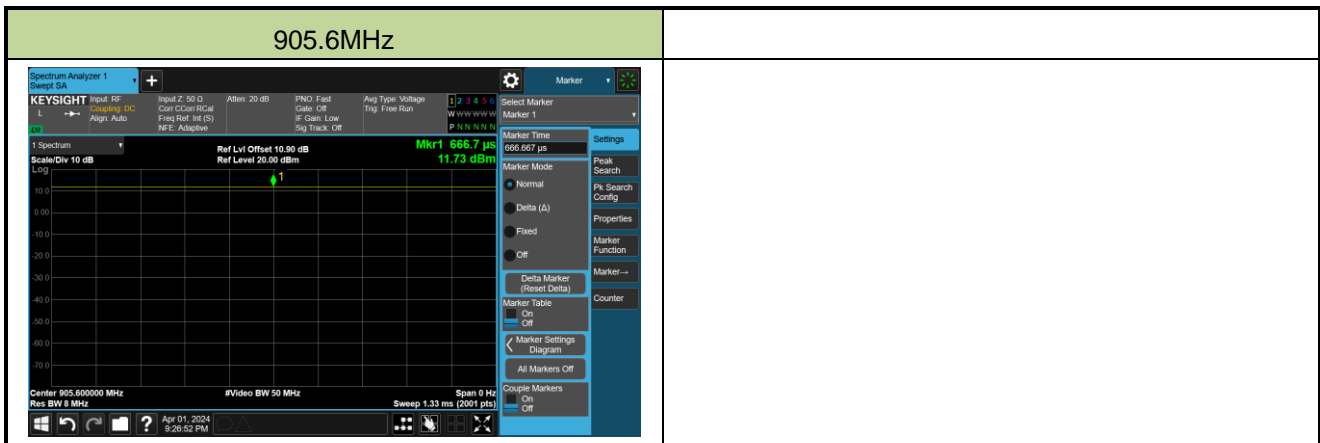

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 2

Channel No.	Duty Cycle
01	100%






### A.2 20dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 1

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
01	905.6	94.58	≤ 500
26	915.6	94.88	≤ 500
52	926.0	96.38	≤ 500

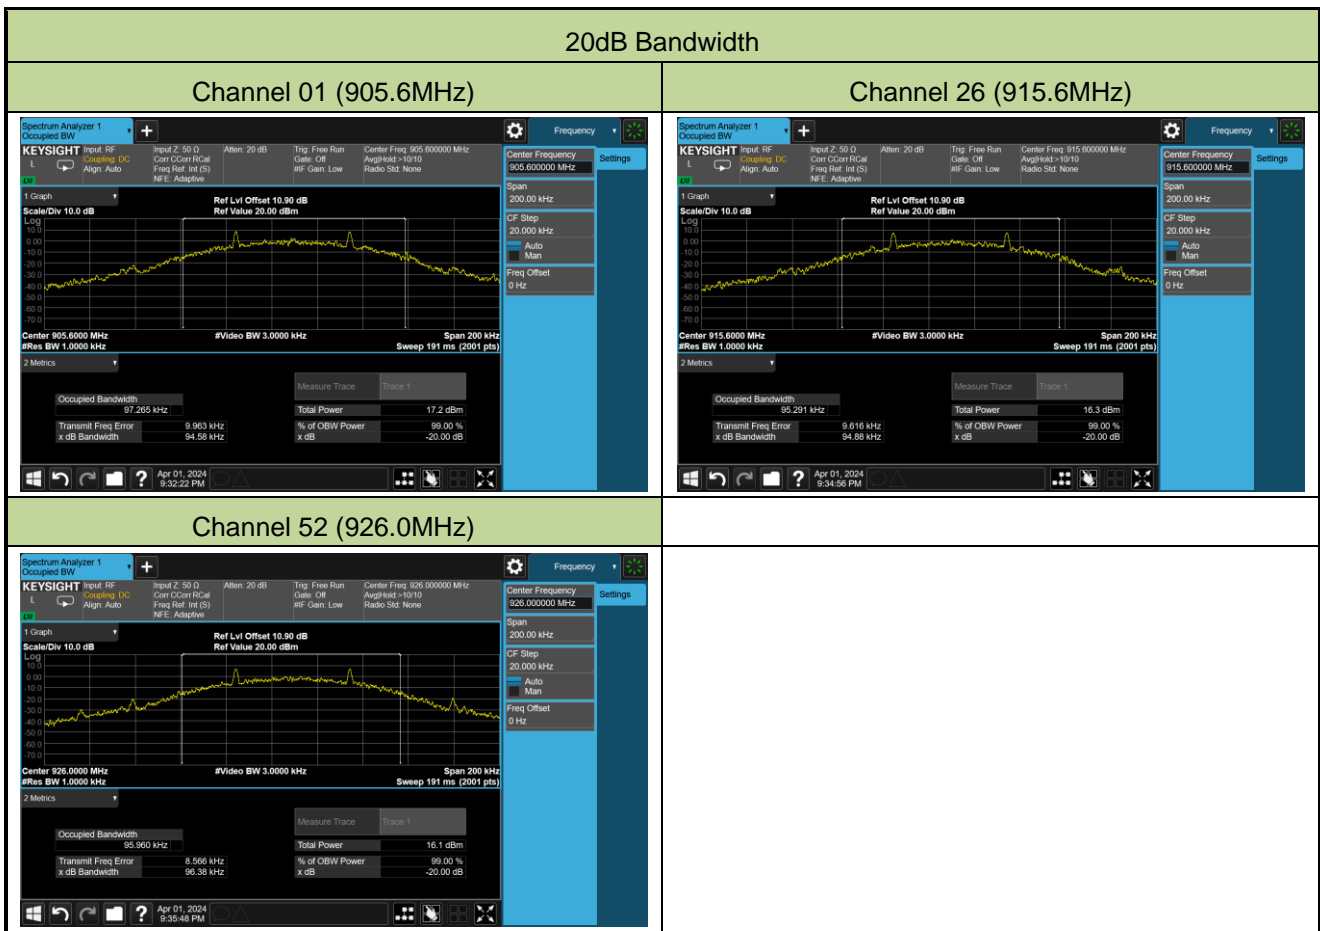

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 2


Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
01	902.2	92.03	≤ 500
35	909.0	95.07	≤ 500
69	915.8	94.39	≤ 500



### A.3 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 1

Channel No.	Frequency (MHz)	Output Power (dBm)	Power Limit (dBm)
01	905.6	11.77	≤ 30.00
26	915.6	11.31	≤ 30.00
52	926.0	10.81	≤ 30.00

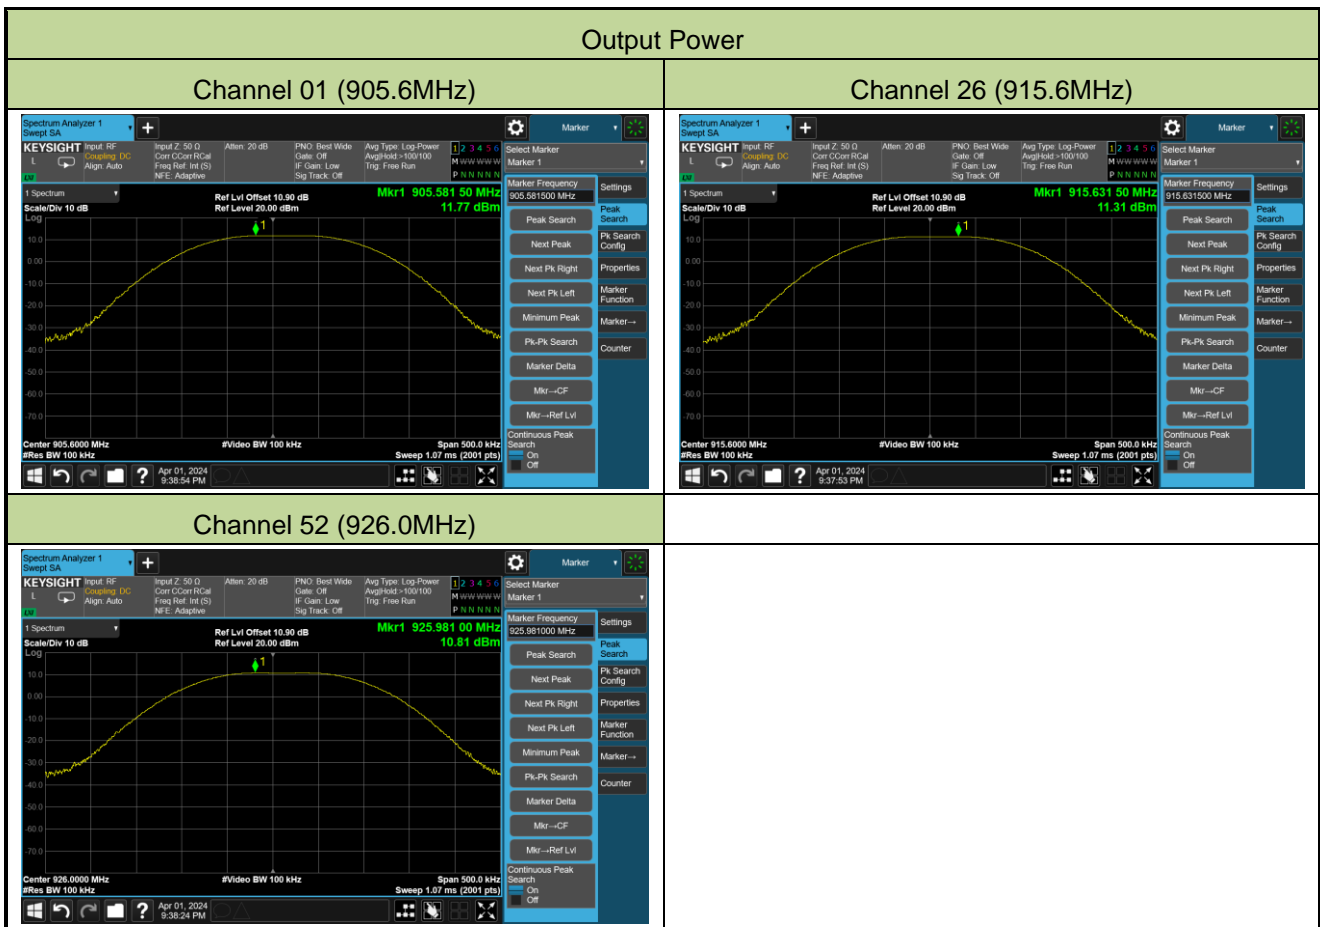

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 2

Channel No.	Frequency (MHz)	Output Power (dBm)	Power Limit (dBm)
01	902.2	11.92	≤ 30.00
35	909.0	11.63	≤ 30.00
69	915.8	11.30	≤ 30.00




### A.4 Carrier Frequency Separation Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 1

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
01	905.6	400	≥ 94.58	Pass
26	915.6	400	≥ 94.88	Pass
52	926.0	400	≥ 96.38	Pass


Note: The limit is the value of the 20dB BW.

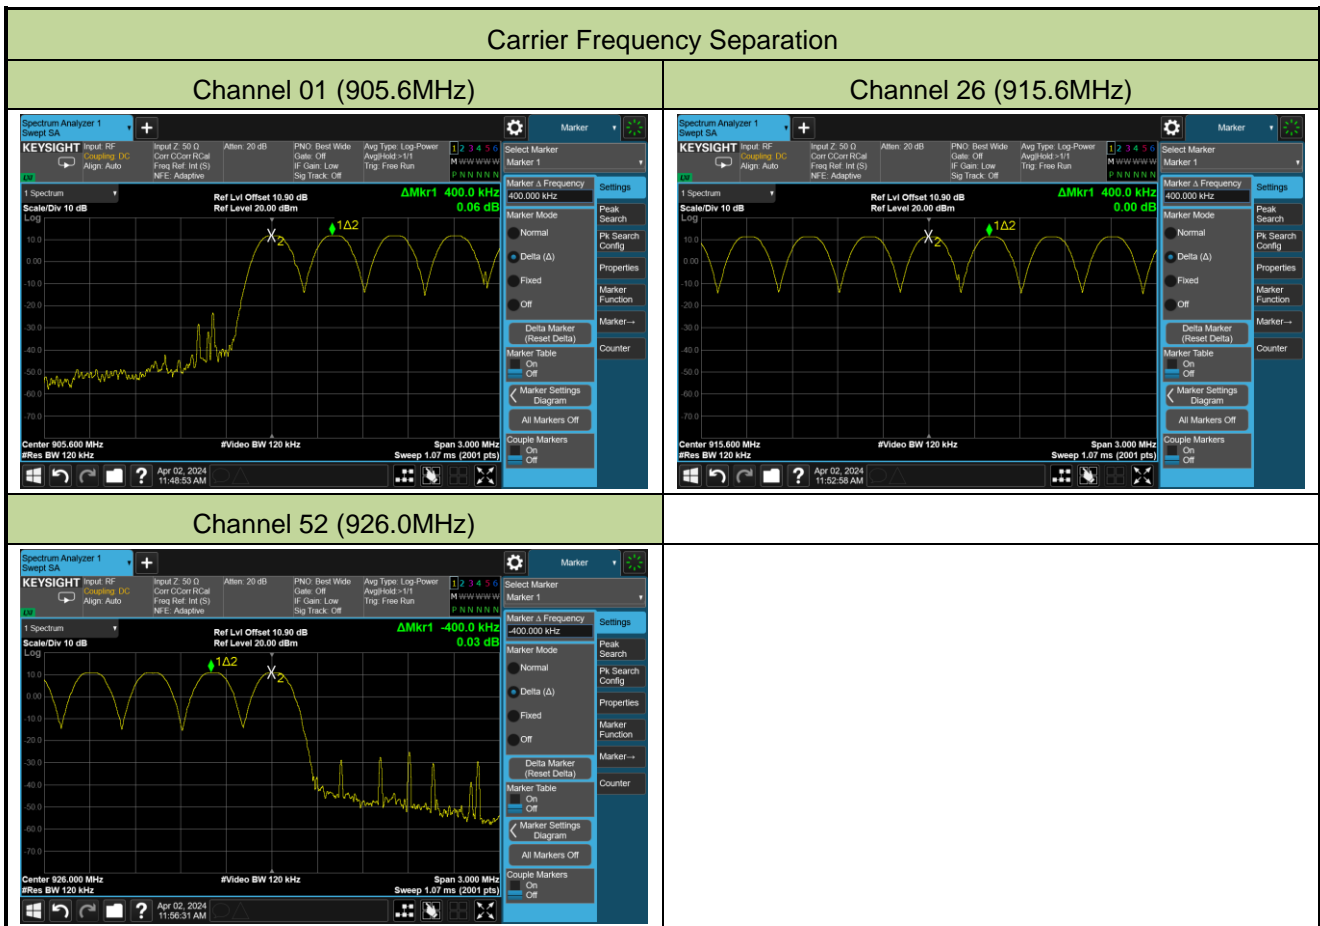

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 2

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
01	902.2	200	≥ 92.03	Pass
35	909.0	200	≥ 95.07	Pass
69	915.8	200	≥ 94.39	Pass


Note: The Limit is the value of the 20dB BW.

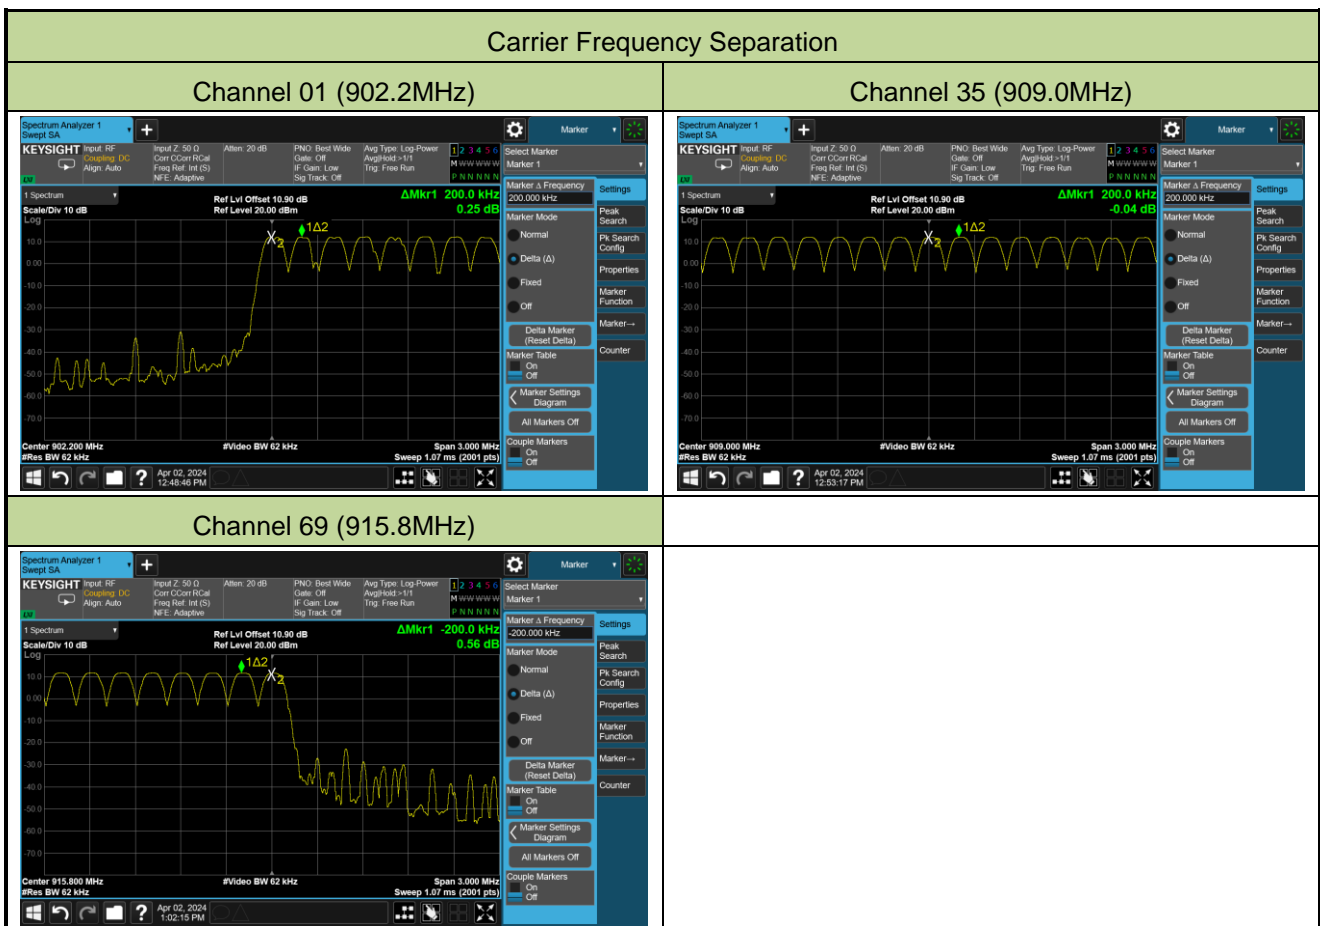

**A.5 Number of Hopping Channels Test Result**


Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 1

Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
52	905.6~926.0	≥ 50	Pass

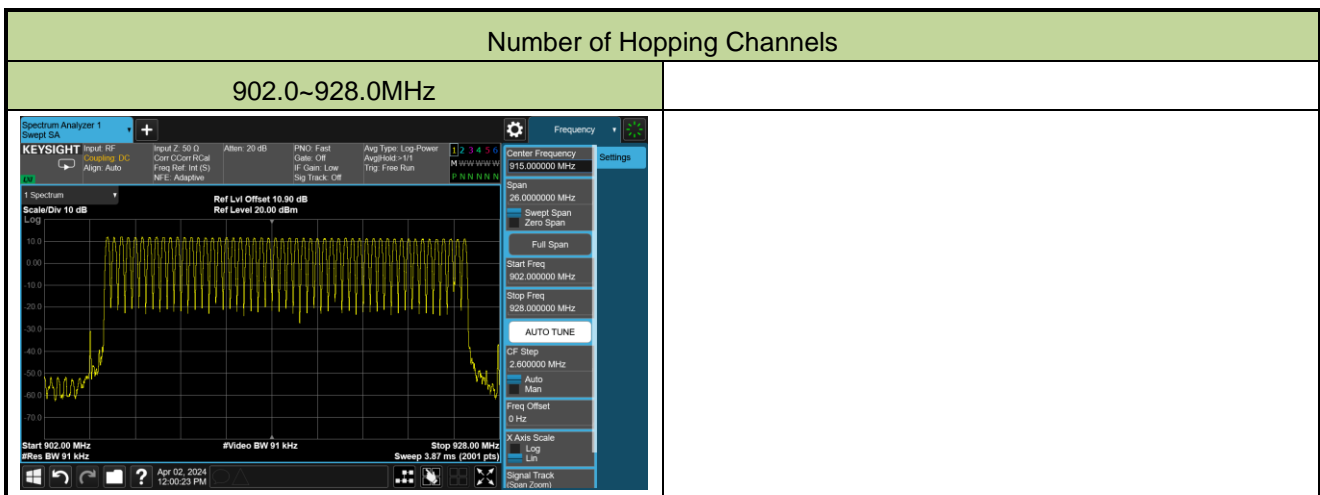

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 2

Channel Numbers	Frequency (MHz)	Limit (Hopping Channels)	Result
69	902.2~915.8	≥ 50	Pass

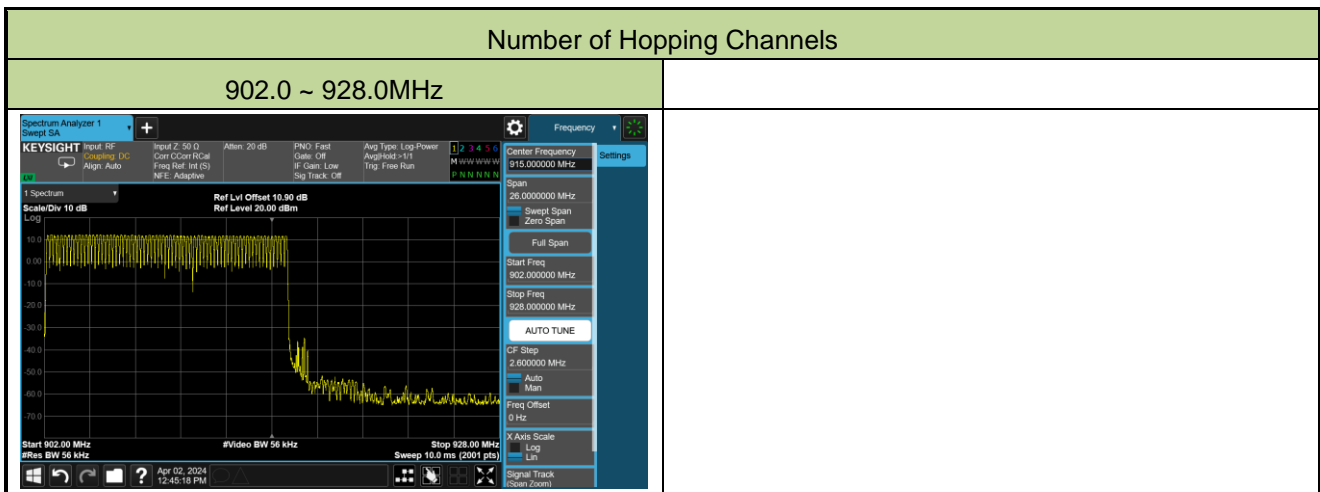


### A.6 Time of Occupancy Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 1

Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
01~52	905.6~926.0	9.75	20	2	19.5	≤ 400	Pass

Note: Time of Occupancy (ms) = Transmit Time Per Hop (ms) \* Number of Hops in Observation Period

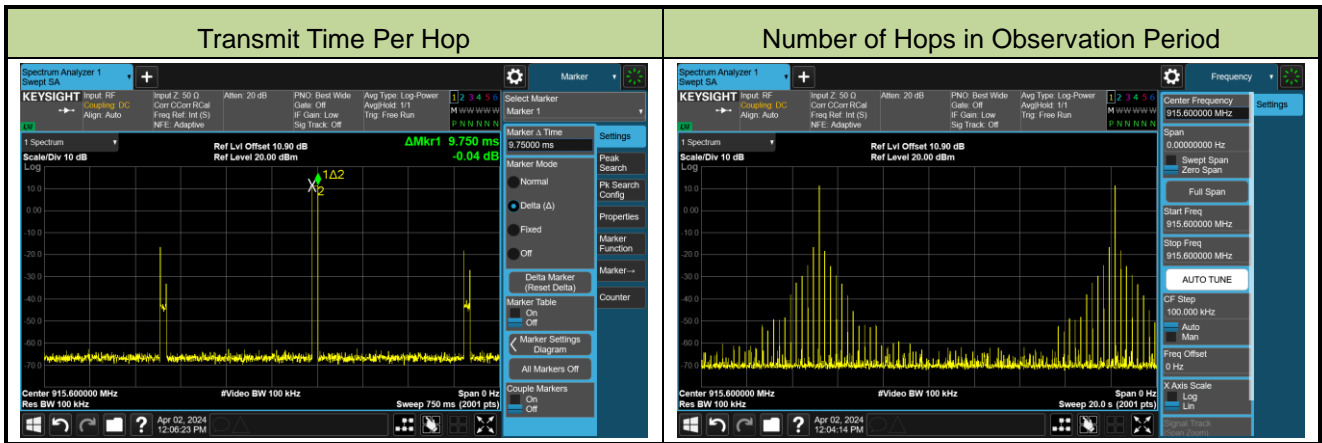




Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-02	Test Mode	Mode 2

Channel No.	Frequency (MHz)	Transmit Time Per Hop (ms)	Observation Period (s)	Number of Hops in Observation Period	Time of Occupancy (ms)	Limit (ms)	Result
01~69	902.2~915.8	9.75	20	2	19.5	≤ 400	Pass



Note: Time of Occupancy (ms) = Transmit Time Per Hop (ms) \* Number of Hops in Observation Period

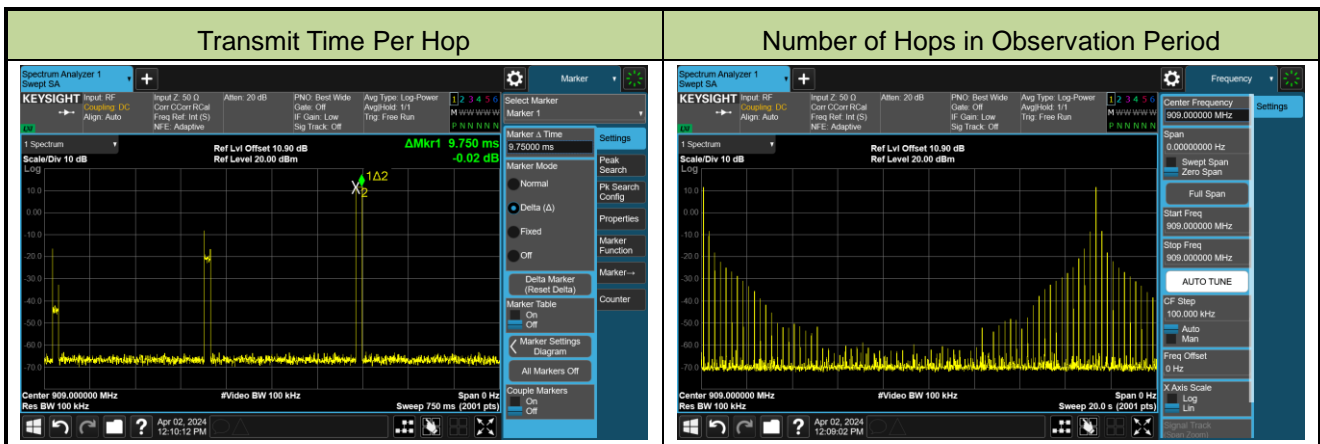

**A.7 Band-edge Compliance Test Result**



Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01 ~ 2024-04-02	Test Mode	Mode 1

Channel No.	Frequency (MHz)	Limit	Result
01	905.6	20dBc	Pass
52	926.0	20dBc	Pass

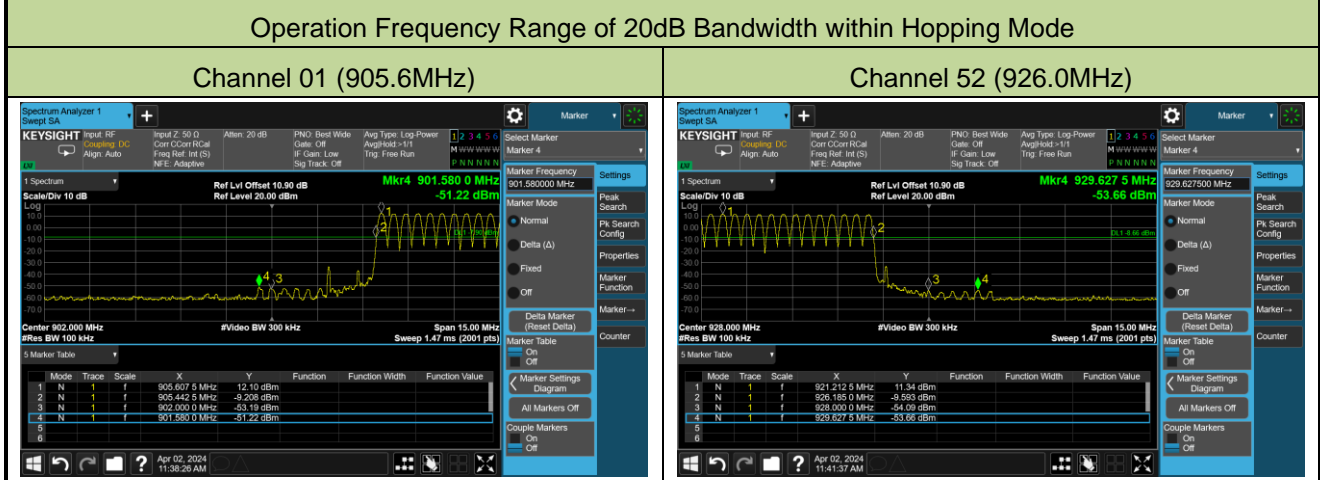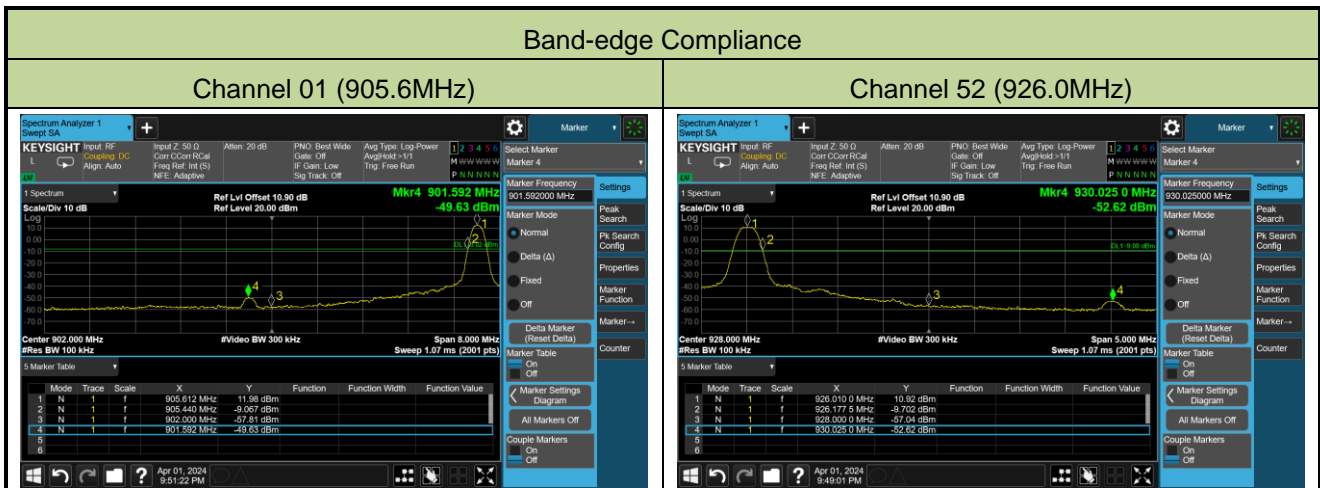

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01 ~ 2024-04-02	Test Mode	Mode 2


Channel No.	Frequency (MHz)	Limit	Result
01	902.2	20dBc	Pass
69	915.8	20dBc	Pass

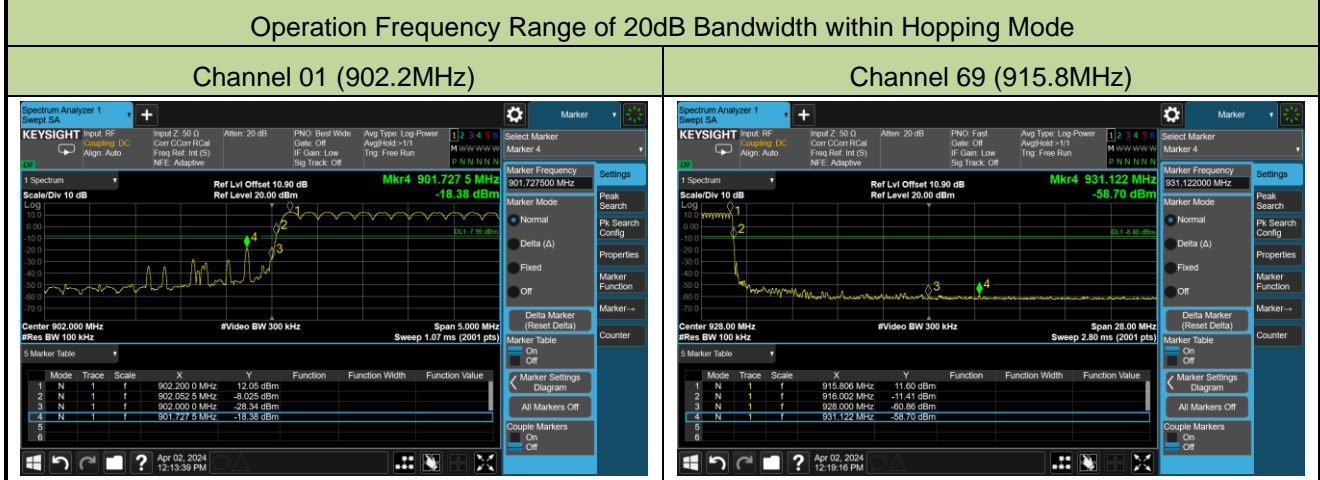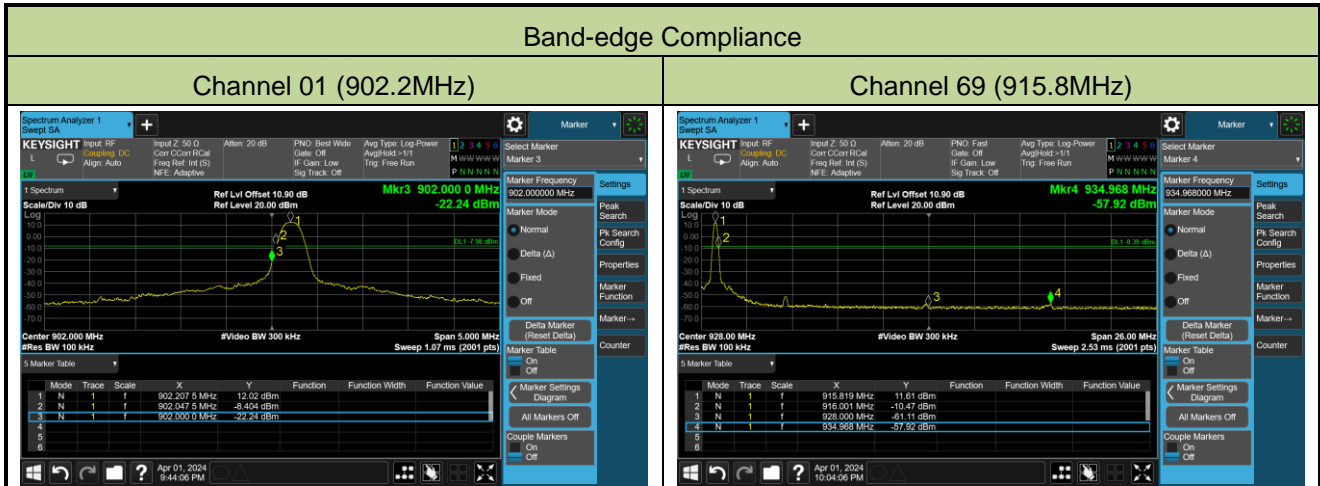

### A.8 Conducted Spurious Emissions Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 1

Channel No.	Frequency (MHz)	Limit (MHz)	Result
01	905.6	20dBc	Pass
26	915.6	20dBc	Pass
52	926.0	20dBc	Pass

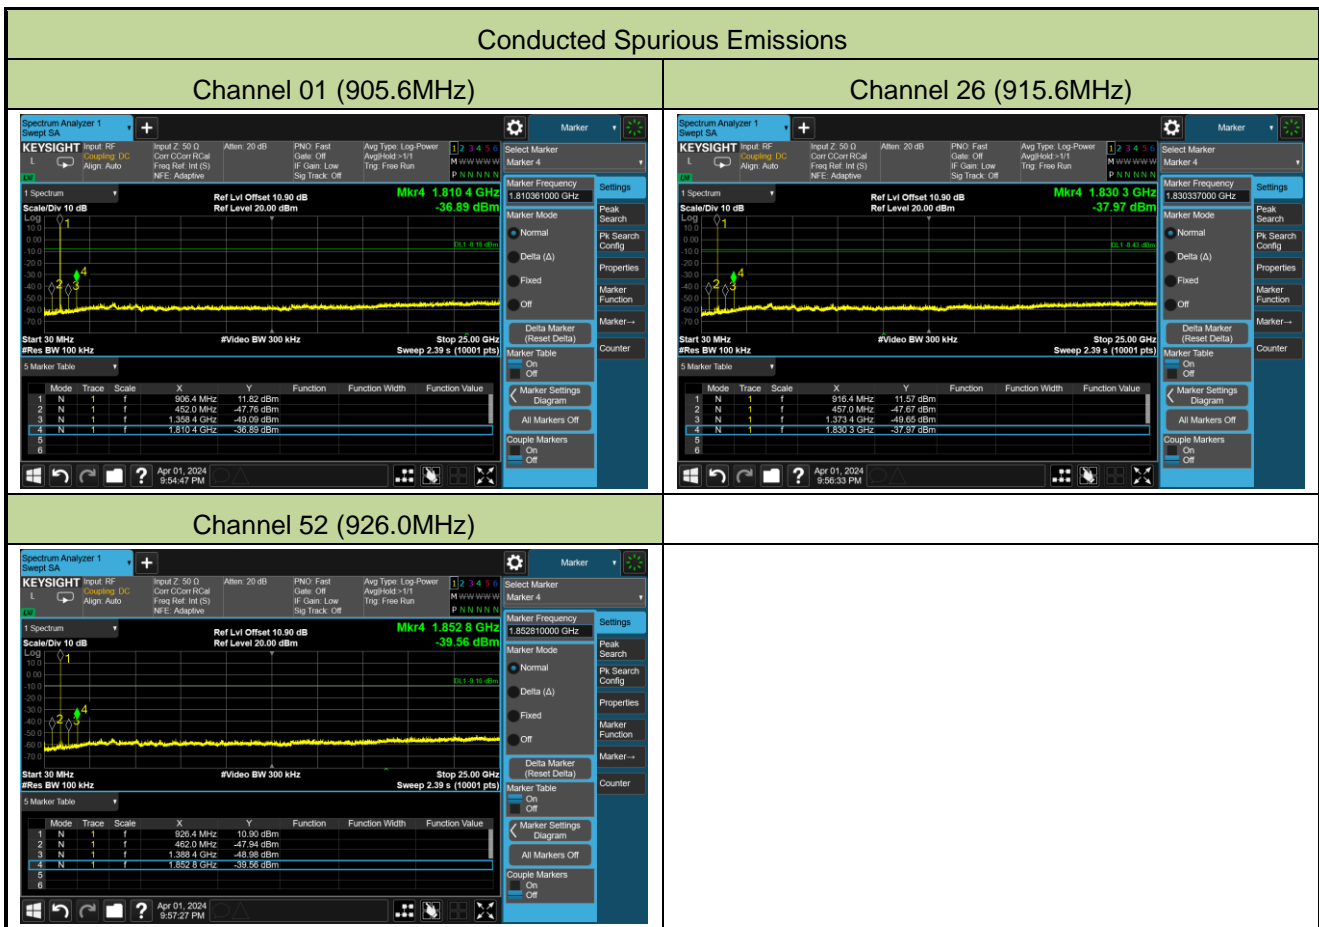

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2024-04-01	Test Mode	Mode 2

Channel No.	Frequency (MHz)	Limit (MHz)	Result
01	902.2	20dBc	Pass
35	909.0	20dBc	Pass
69	915.8	20dBc	Pass

### Conducted Spurious Emissions

#### Channel 01 (902.2MHz)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	901.5 MHz	12.02 dBm			
2	N	1	452.0 MHz	-48.39 dBm			
3	N	1	1.353.4 GHz	-40.29 dBm			
4	N	1	1.805.4 GHz	-36.46 dBm			

#### Channel 35 (909.0MHz)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	908.9 MHz	11.83 dBm			
2	N	1	454.5 MHz	-47.86 dBm			
3	N	1	1.363.4 GHz	-49.74 dBm			
4	N	1	1.817.9 GHz	-37.25 dBm			

#### Channel 69 (915.8MHz)

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	916.4 MHz	11.52 dBm			
2	N	1	457.0 MHz	-47.49 dBm			
3	N	1	1.379.4 GHz	-49.92 dBm			
4	N	1	1.832.8 GHz	-37.96 dBm			

**A.9 Radiated Spurious Emission Test Result**

Test Site	WZ-AC2	Test Engineer	Dick Chen
Test Date	2024-04-03~2024-04-07	Test Mode	Mode 1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-10GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	1357.0	46.0	-5.0	41.0	74.0	-33.0	Peak	Horizontal
	4808.0	35.6	2.9	38.5	74.0	-35.5	Peak	Horizontal
	8148.5	35.3	11.6	46.9	74.0	-27.1	Peak	Horizontal
	1357.0	50.6	-5.0	45.6	74.0	-28.4	Peak	Vertical
	2717.0	44.9	-2.2	42.7	74.0	-31.3	Peak	Vertical
	4808.0	35.5	2.9	38.4	74.0	-35.6	Peak	Vertical
26	1374.0	44.0	-5.0	39.0	74.0	-35.0	Peak	Horizontal
	2751.0	45.7	-2.4	43.3	74.0	-30.7	Peak	Horizontal
	4910.0	34.4	3.2	37.6	74.0	-36.4	Peak	Horizontal
	1374.0	49.1	-5.0	44.1	74.0	-29.9	Peak	Vertical
	2751.0	46.2	-2.4	43.8	74.0	-30.2	Peak	Vertical
	4910.0	35.0	3.2	38.2	74.0	-35.8	Peak	Vertical
52	2776.5	46.1	-2.4	43.7	74.0	-30.3	Peak	Horizontal
	4808.0	35.7	2.9	38.6	74.0	-35.4	Peak	Horizontal
	8335.5	36.1	11.0	47.1	74.0	-26.9	Peak	Horizontal
	2776.5	47.4	-2.4	45.0	74.0	-29.0	Peak	Vertical
	3805.0	35.9	-0.2	35.7	74.0	-38.3	Peak	Vertical
	4884.5	35.6	3.0	38.6	74.0	-35.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-04-02~2024-04-03	Test Mode	Mode 2
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-10GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	2708.5	43.4	-2.2	41.2	74.0	-32.8	Peak	Horizontal
	4060.0	36.0	0.4	36.4	74.0	-37.6	Peak	Horizontal
	8123.0	35.7	12.0	47.7	74.0	-26.3	Peak	Horizontal
	1357.0	51.0	-5.0	46.0	74.0	-28.0	Peak	Vertical
	4060.0	35.6	0.4	36.0	74.0	-38.0	Peak	Vertical
	5071.5	35.2	3.5	38.7	74.0	-35.3	Peak	Vertical
35	2725.5	44.3	-2.2	42.1	74.0	-31.9	Peak	Horizontal
	3635.0	38.3	-0.4	37.9	74.0	-36.1	Peak	Horizontal
	8182.5	34.6	11.5	46.1	74.0	-27.9	Peak	Horizontal
	2725.5	45.9	-2.2	43.7	74.0	-30.3	Peak	Vertical
	3635.0	36.9	-0.4	36.5	74.0	-37.5	Peak	Vertical
	5012.0	35.0	3.3	38.3	74.0	-35.7	Peak	Vertical
69	2751.0	45.3	-2.4	42.9	74.0	-31.1	Peak	Horizontal
	4060.0	35.6	0.4	36.0	74.0	-38.0	Peak	Horizontal
	4799.5	34.4	3.0	37.4	74.0	-36.6	Peak	Horizontal
	2751.0	46.0	-2.4	43.6	74.0	-30.4	Peak	Vertical
	3839.0	36.7	-0.3	36.4	74.0	-37.6	Peak	Vertical
	4714.5	34.2	2.9	37.1	74.0	-36.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor ((dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Result of Radiated Emission below 1GHz:**

Site: WZ-AC2	Time: 2024-04-07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 905.6MHz	

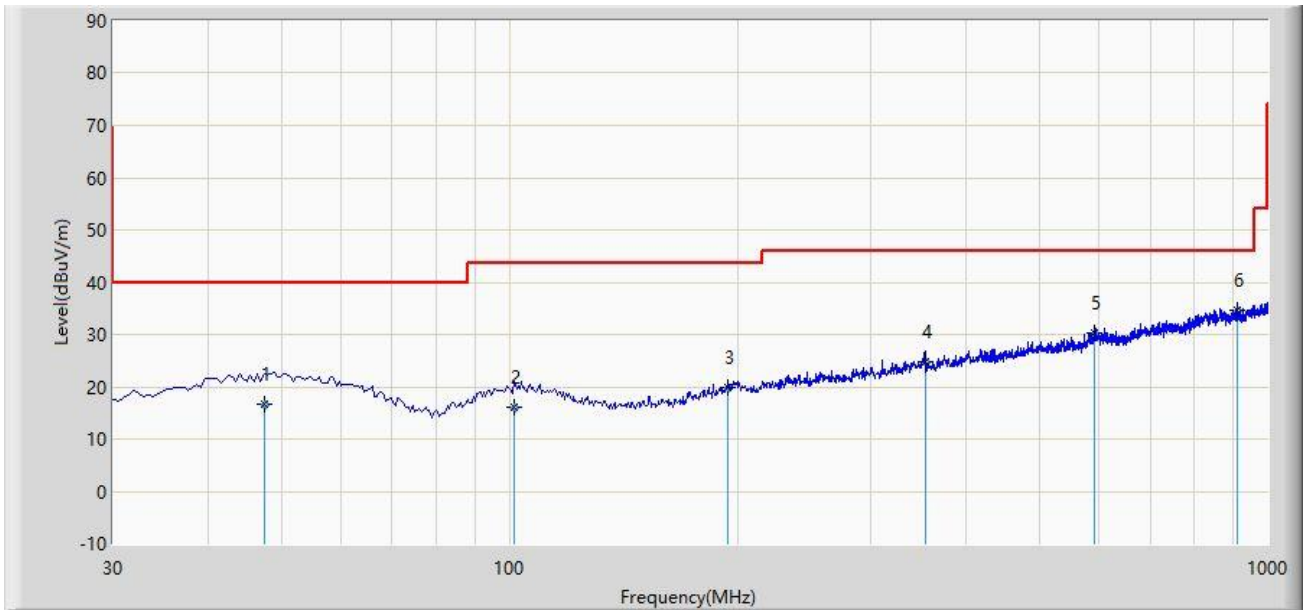

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		47.460	16.603	-3.900	-23.397	40.000	20.503	QP
2		101.295	16.046	-2.500	-27.454	43.500	18.547	QP
3		194.415	19.882	1.200	-23.618	43.500	18.682	QP
4		353.495	24.680	2.100	-21.320	46.000	22.581	QP
5		590.660	30.408	2.900	-15.592	46.000	27.508	QP
6	*	910.275	34.559	3.600	-11.441	46.000	30.959	QP

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.



Site: WZ-AC2	Time: 2024-04-07
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 905.6MHz	

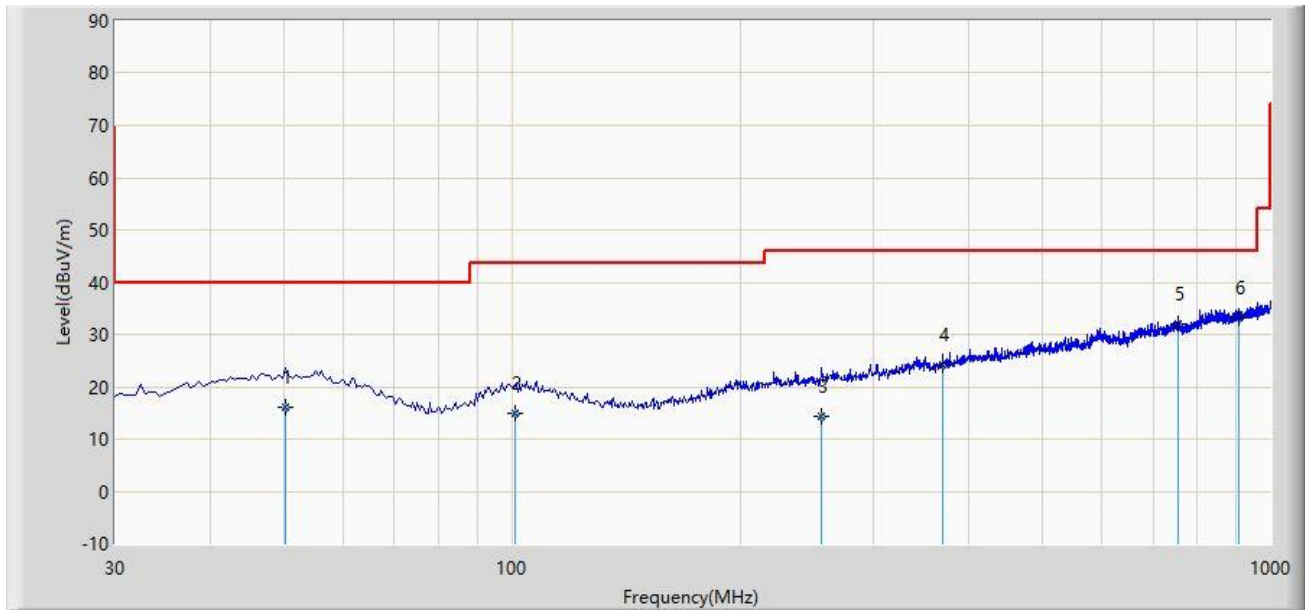

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		50.370	16.199	-4.300	-23.801	40.000	20.499	QP
2		100.810	14.928	-3.600	-28.572	43.500	18.528	QP
3		256.010	14.296	-6.000	-31.704	46.000	20.296	QP
4		369.985	24.154	1.600	-21.846	46.000	22.554	QP
5		755.075	31.997	2.800	-14.003	46.000	29.198	QP
6	*	906.200	33.075	2.200	-12.925	46.000	30.875	QP


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 902.2MHz	

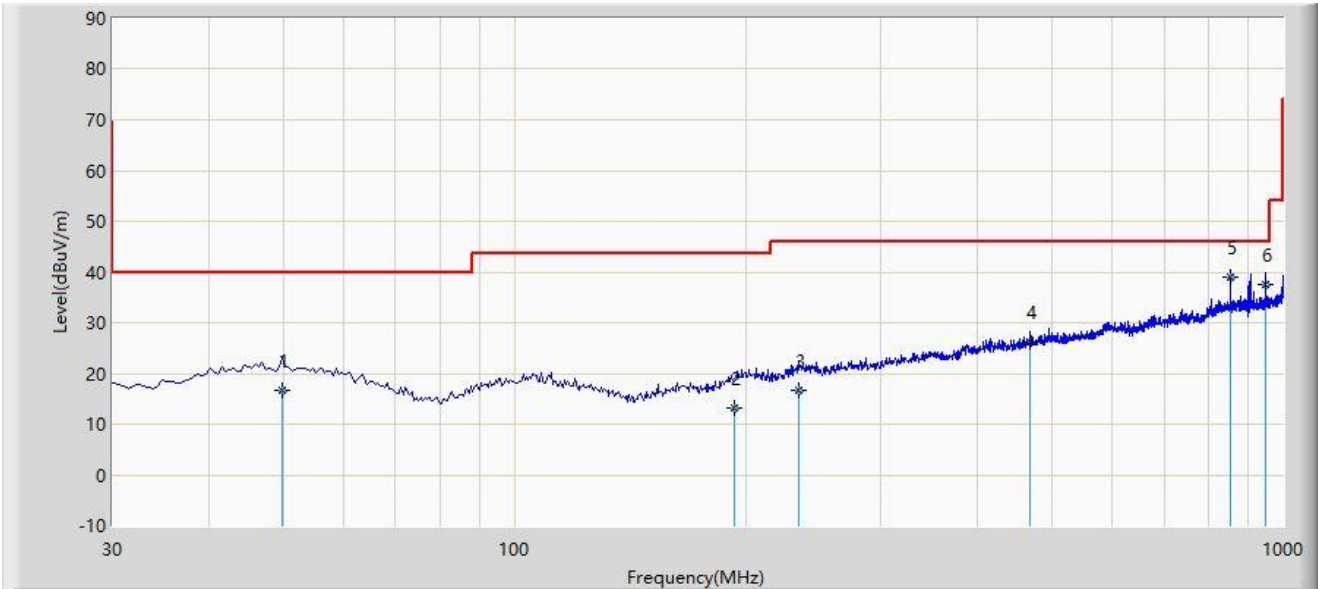

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		49.885	16.533	-4.000	-23.467	40.000	20.534	QP
2		193.445	13.246	-5.300	-30.254	43.500	18.547	QP
3		234.185	16.562	-3.000	-29.438	46.000	19.562	QP
4		468.440	26.135	1.600	-19.865	46.000	24.535	QP
5	*	854.015	39.013	8.000	-6.987	46.000	31.013	QP
6		950.188	37.619	6.000	-8.381	46.000	31.619	QP


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 902.2MHz	

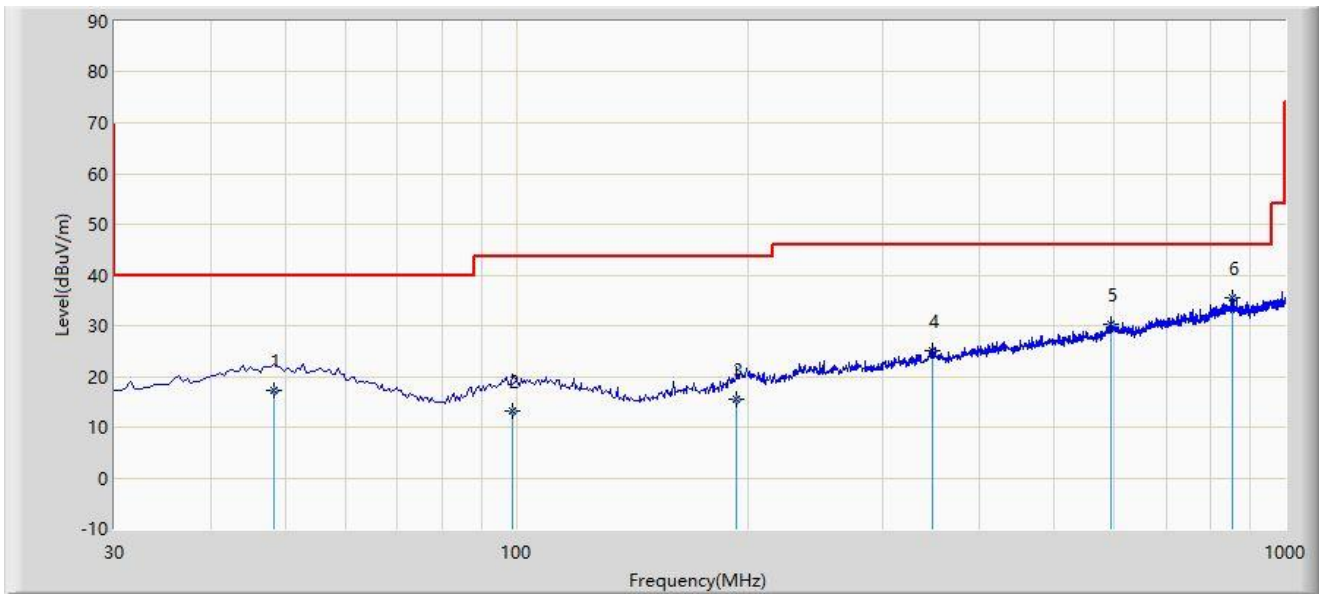

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		48.430	17.259	-3.300	-22.741	40.000	20.559	QP
2		98.870	13.168	-5.200	-30.332	43.500	18.368	QP
3		193.445	15.646	-2.900	-27.854	43.500	18.547	QP
4		348.160	25.102	2.300	-20.898	46.000	22.802	QP
5		593.085	30.176	2.600	-15.824	46.000	27.576	QP
6	*	853.000	35.372	4.300	-10.628	46.000	31.072	QP

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.10 Radiated Restricted Band Edge Test Result

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 905.6MHz	

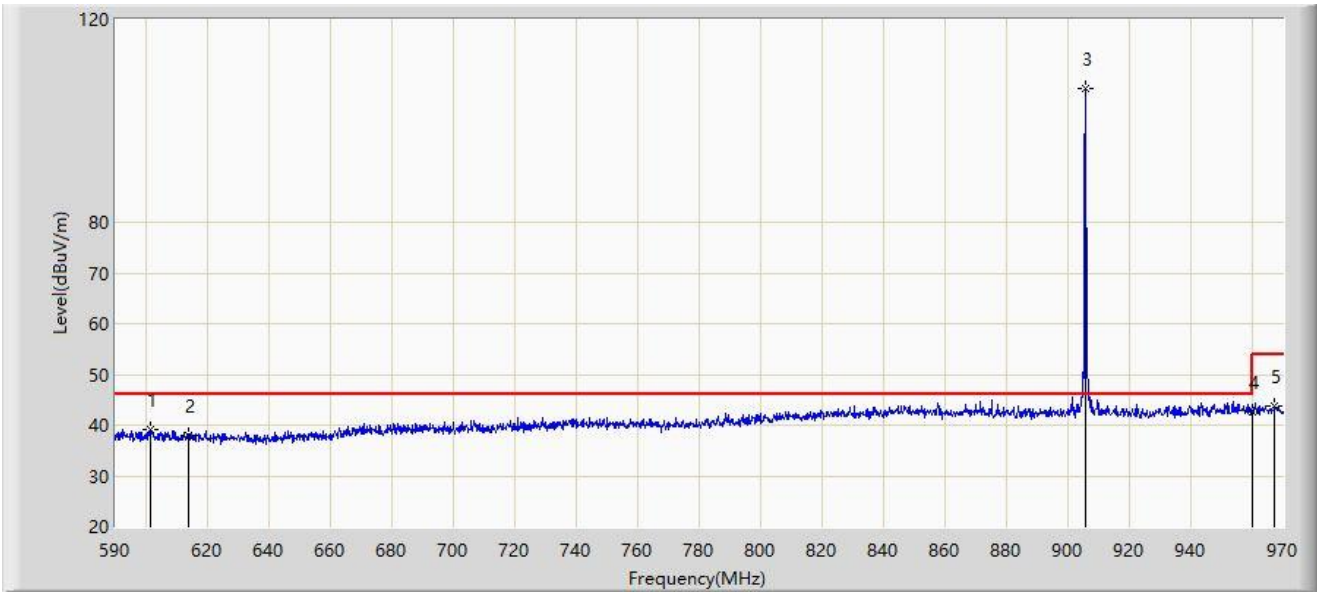


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		601.210	39.123	11.595	-6.877	46.000	27.528	PK
2		614.000	37.865	10.454	-8.135	46.000	27.410	PK
3		905.590	106.514	75.663	N/A	N/A	30.851	PK
4	*	960.000	42.740	11.077	-3.260	46.000	31.663	PK
5		967.340	43.775	11.865	-10.225	54.000	31.911	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 905.6MHz	

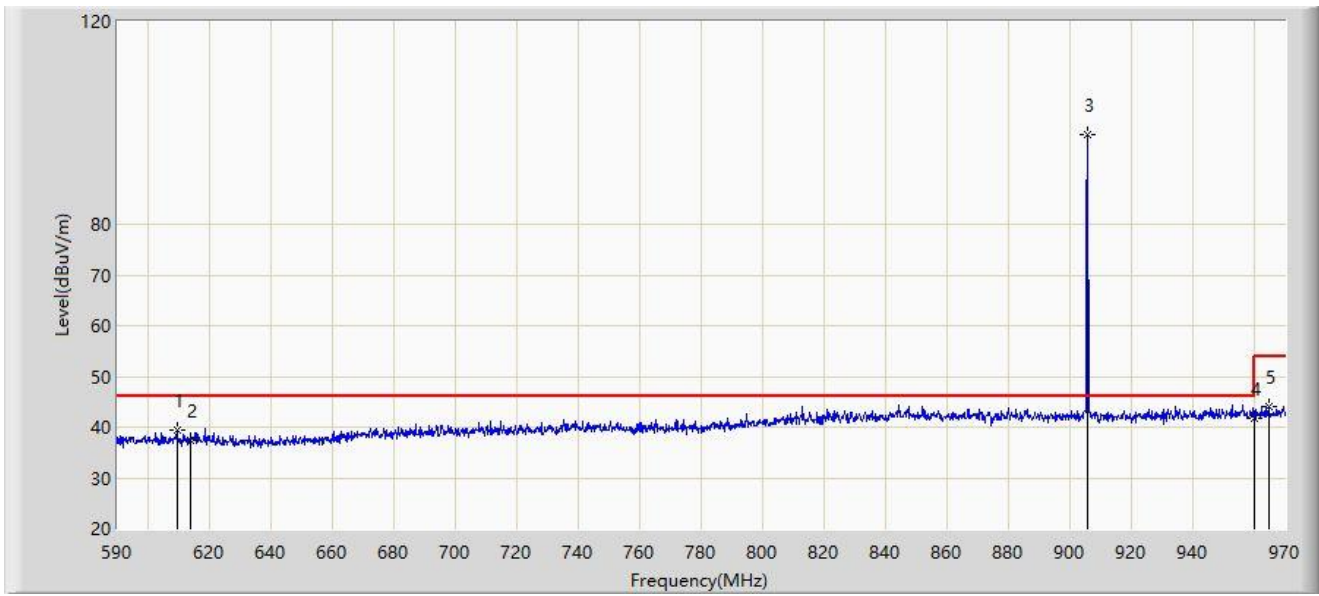


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		609.380	39.319	11.877	-6.681	46.000	27.442	PK
2		614.000	37.316	9.905	-8.684	46.000	27.410	PK
3		905.590	97.784	66.933	N/A	N/A	30.851	PK
4	*	960.000	41.804	10.141	-4.196	46.000	31.663	PK
5		964.680	43.961	12.136	-10.039	54.000	31.825	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 926MHz	

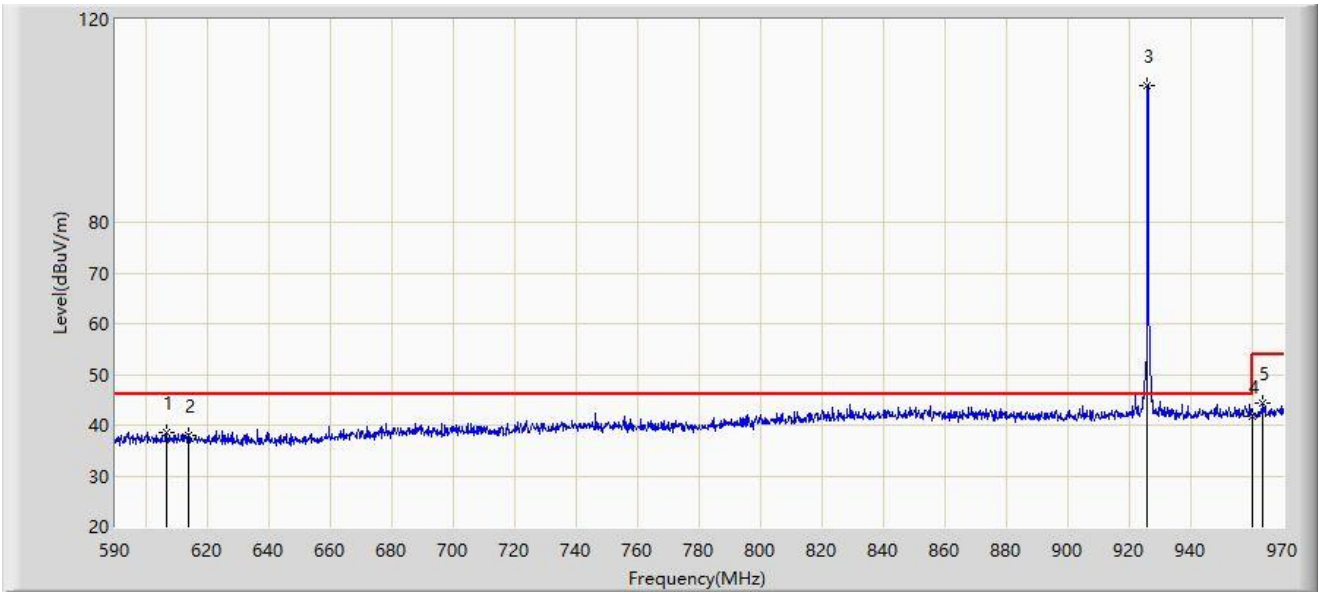


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		606.530	38.553	11.086	-7.447	46.000	27.467	PK
2		614.000	37.940	10.529	-8.060	46.000	27.410	PK
3		925.920	106.960	75.948	N/A	N/A	31.012	PK
4	*	960.000	41.841	10.178	-4.159	46.000	31.663	PK
5		963.540	44.273	12.479	-9.727	54.000	31.794	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Smartlink at 926MHz	

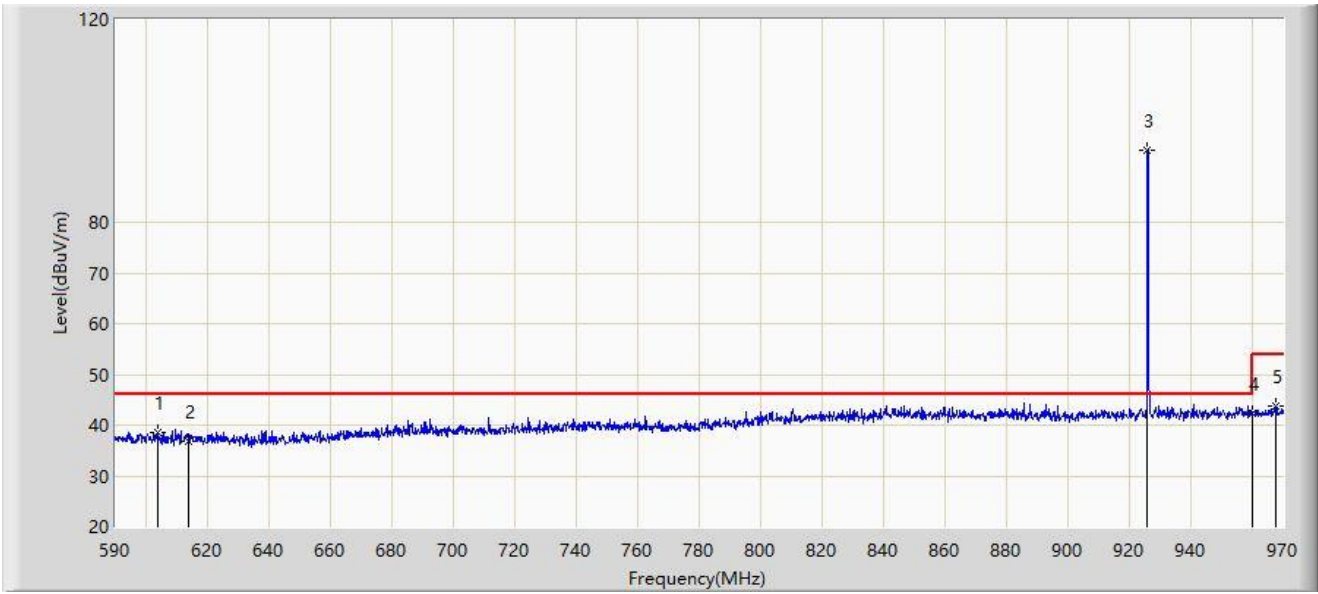


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		603.680	38.667	11.166	-7.333	46.000	27.501	PK
2		614.000	36.939	9.528	-9.061	46.000	27.410	PK
3		925.920	94.241	63.229	N/A	N/A	31.012	PK
4	*	960.000	42.255	10.592	-3.745	46.000	31.663	PK
5		967.530	43.894	11.976	-10.106	54.000	31.918	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 902.2MHz	

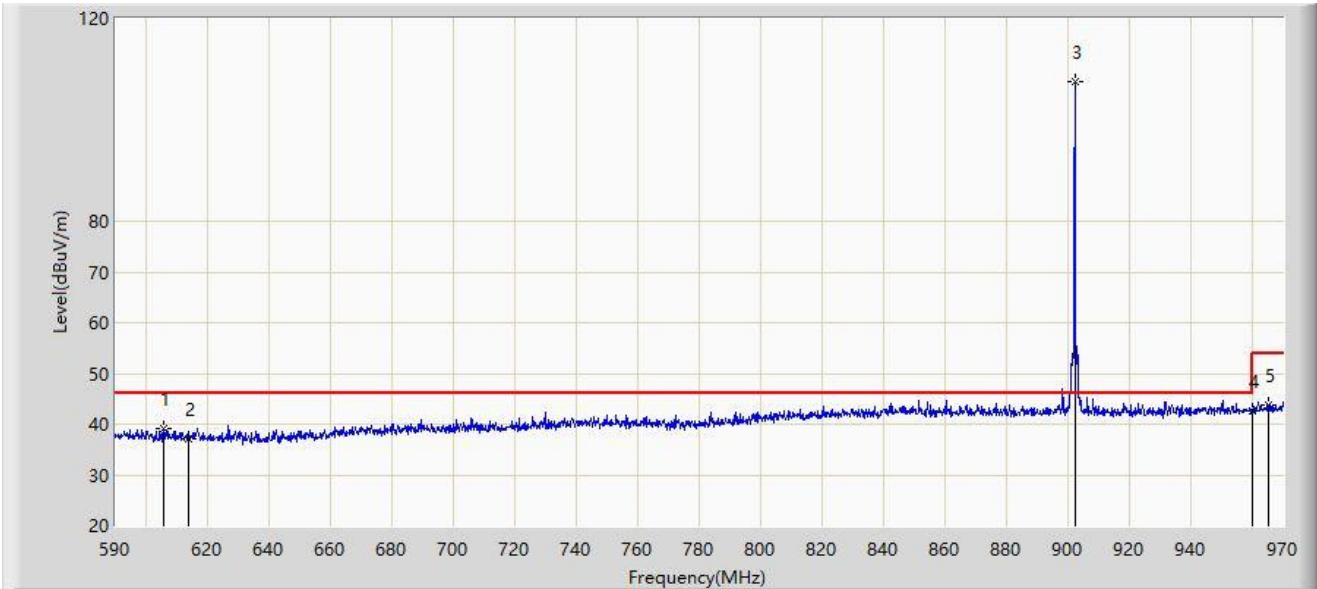

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		605.580	39.020	11.542	-6.980	46.000	27.479	PK
2		614.000	37.194	9.783	-8.806	46.000	27.410	PK
3		902.170	107.485	76.811	N/A	N/A	30.675	PK
4	*	960.000	42.527	10.864	-3.473	46.000	31.663	PK
5		965.440	43.728	11.884	-10.272	54.000	31.843	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).



Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 902.2MHz	

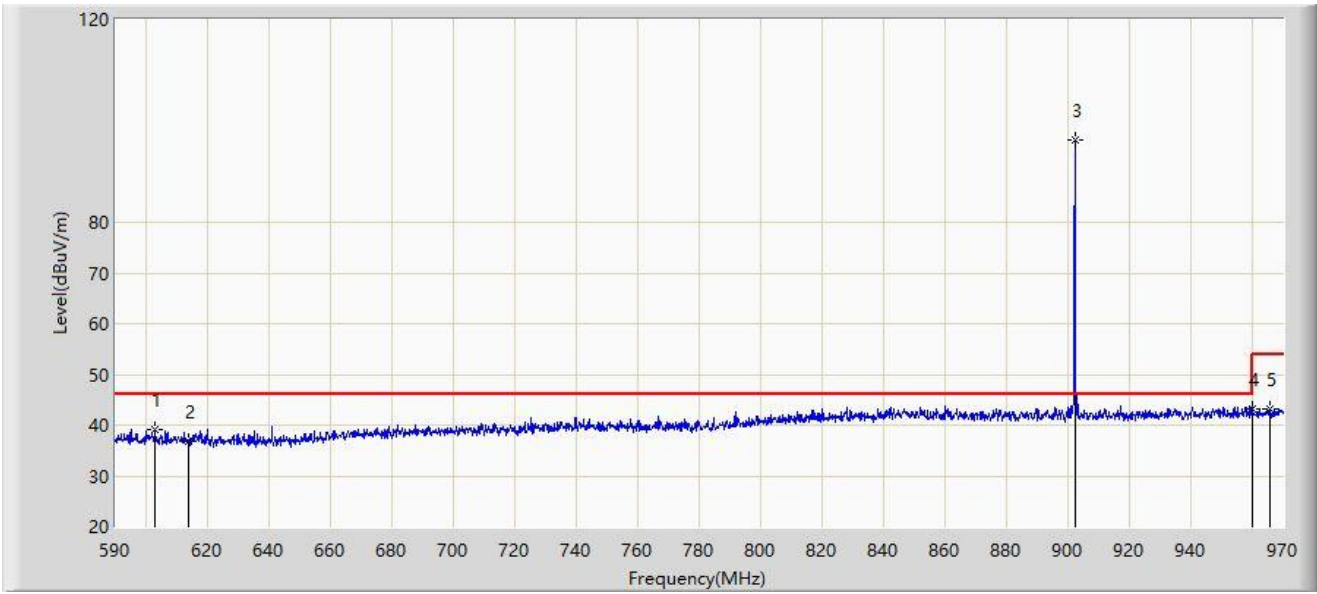


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		602.920	38.986	11.481	-7.014	46.000	27.504	PK
2		614.000	36.943	9.532	-9.057	46.000	27.410	PK
3		902.170	96.147	65.473	N/A	N/A	30.675	PK
4	*	960.000	43.056	11.393	-2.944	46.000	31.663	PK
5		965.820	43.299	11.446	-10.701	54.000	31.853	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 915.8MHz	

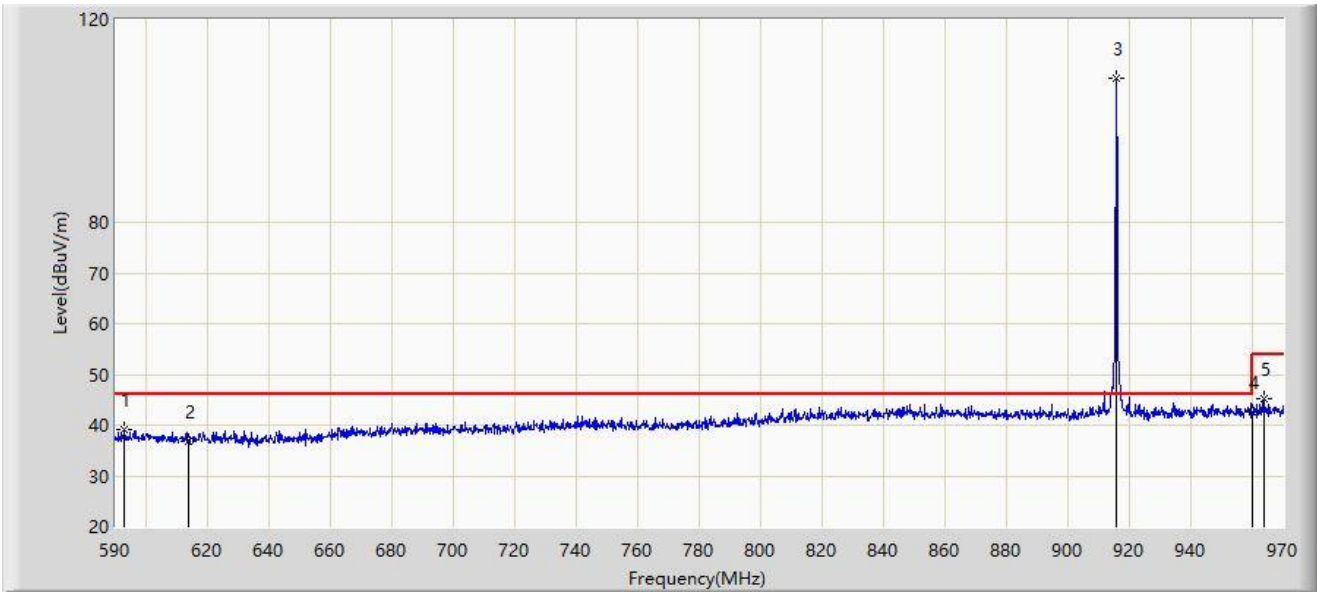


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		593.040	39.020	11.444	-6.980	46.000	27.576	PK
2		614.000	36.778	9.367	-9.222	46.000	27.410	PK
3		915.850	108.519	77.530	N/A	N/A	30.988	PK
4	*	960.000	42.509	10.846	-3.491	46.000	31.663	PK
5		963.730	45.129	13.330	-8.871	54.000	31.800	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Test Date: 2024-04-02
Limit: FCC_Part15.209_RSE(3m)	Engineer: Dick Shen
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: AT-325	Power: By Battery
Test Mode: Transmit by Sidewalk at 915.8MHz	

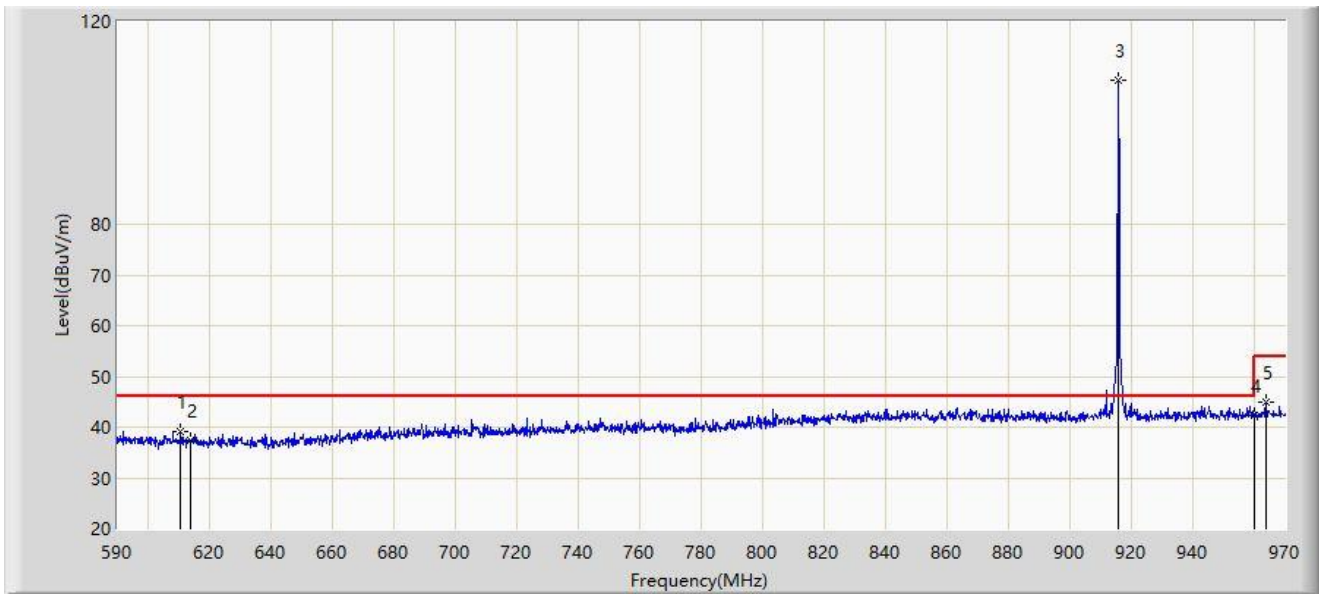

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		610.520	39.186	11.752	-6.814	46.000	27.435	PK
2		614.000	37.470	10.059	-8.530	46.000	27.410	PK
3		915.850	108.498	77.509	N/A	N/A	30.988	PK
4	*	960.000	42.434	10.771	-3.566	46.000	31.663	PK
5		963.920	44.819	13.014	-9.181	54.000	31.804	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

## Appendix B - Test Setup Photograph

Refer to "2403RSU058-UT" file.

## Appendix C - EUT Photograph

Refer to "2403RSU058-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_