

FCC Test Report

Report No.: AGC14499230609FE08

FCC ID : 2APPZ-AP6221

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: IP Phone

BRAND NAME : Fanvil

MODEL NAME : X305

APPLICANT: Fanvil Technology Co., Ltd.

DATE OF ISSUE : Jul. 19, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 51

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 19, 2023	Valid	Initial Release






TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	7
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF TESTED SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	19
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
10.3. MEASUREMENT EQUIPMENT USED	26
10.4. LIMITS AND MEASUREMENT RESULT	26



Report No.: AGC14499230609FE08 Page 4 of 51

 11. RADIATED EMISSION
 28

 11.1. MEASUREMENT PROCEDURE
 28

 11.2. TEST SETUP
 29

 11.3. LIMITS AND MEASUREMENT RESULT
 30

 11.4. TEST RESULT
 30

 12. LINE CONDUCTED EMISSION TEST
 45

 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST
 45

 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST
 45

 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST
 46

 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST
 46

 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
 46

 APPENDIX I: PHOTOGRAPHS OF TEST SETUP
 51

 APPENDIX II: PHOTOGRAPHS OF EUT
 51



Page 5 of 51

1. VERIFICATION OF COMPLIANCE

Applicant	Fanvil Technology Co., Ltd.		
Address	10/F Block A, Dualshine Global Science Innovation, Honglang North 2nd Road, Bao'an District, Shenzhen, China		
Manufacturer	Fanvil Technology Co., Ltd.		
Address 10/F Block A, Dualshine Global Science Innovation, Honglang Nor Bao'an District, Shenzhen, China			
Factory	Fanvil Technology Co., Ltd.		
Address	10/F Block A, Dualshine Global Science Innovation, Honglang North 2nd Road, Bao'an District, Shenzhen, China		
Product Designation	IP Phone		
Brand Name	Fanvil		
Test Model	X305		
Date of receipt of test item	Jun. 30, 2023		
Date of Test	Jun. 30, 2023~Jul. 19, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247..

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
Authorized Officer

Bibo Zhang
(Project Engineer)

Jul. 19, 2023

Jul. 19, 2023



Page 6 of 51

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "IP Phone". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	-1.843dBm (Max)		
Bluetooth Version	V5.0		
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps		
Number of channels	40 Channel		
Antenna Designation	PIFA Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	4.2dBi		
Hardware Version	V1.0		
Software Version	T2.12.0.11		
Power Supply	DC 5V by adapter or DC 48V by PoE		

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band Channel Number		Frequency		
2400~2483.5MHz	0	2402 MHz		
	1	2404 MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		



Page 7 of 51

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2APPZ-AP6221** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 8 of 51

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	U _c = ±2 %		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		






4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_CH00 by DC 5V adapter
2	Middle channel TX_CH19 by DC 5V adapter
3	High channel TX_CH39 by DC 5V adapter
4	Low channel TX_CH00 by DC 48V PoE
5	Middle channel TX_CH19 by DC 48V PoE
6	High channel TX_CH39 by DC 48V PoE

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

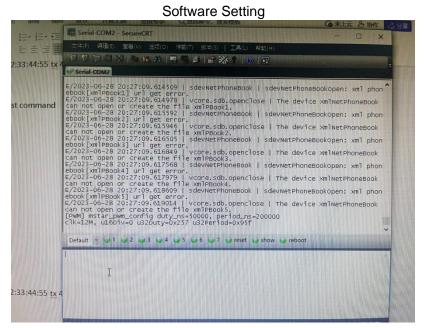




Page 10 of 51

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	IP Phone	X305	FCC ID: 2APPZ-AP6221	EUT
2	Adapter	GQ12-050200-AU	Input: AC 100-240V 50/60Hz, 0.4A Output: DC 5.0V 2A	AE
3	Ethernet Cable	N/A	N/A	AE
4	Handset Wire	N/A	1.5m Unshielded	AE
5	Handset	N/A	N/A	AE
6	Wall Stand	N/A	N/A	AE
7	Stand	N/A	N/A	AE
8	PoE	ADS-120HK-48-1 520120E	DC 12V 1A (IEEE 802.3af)	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission Complian	



Page 11 of 51

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test software	R&S	ES-K1 (Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 03, 2023	Mar. 02, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	N/A	N/A
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 12 of 51

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

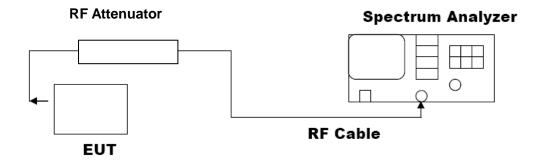




Page 13 of 51

7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power							
Test Mode Test Channel (MHz)		Peak Power (dBm)	Limits (dBm)	Pass or Fail			
GFSK 1M	2402	-1.843	≤30	Pass			
	2440	-3.284	≤30	Pass			
	2480	-3.686	≤30	Pass			

Test Graphs of Conducted Output Power






Scale Type

Lin

Span 5.000 MHz Sweep 1.066 ms (1000 pts)



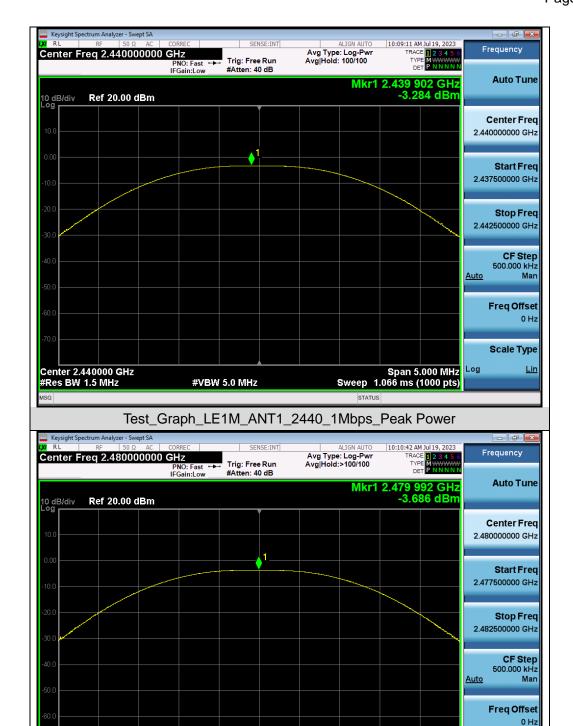

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2480_1Mbps_Peak Power

#VBW 5.0 MHz

Center 2.480000 GHz #Res BW 1.5 MHz



Page 15 of 51

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS


Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Mode Test Channel (MHz)		DTS Bandwidth (MHz)	DTS Limits (MHz)	Pass or Fail			
GFSK 1M	2402	1.038	0.682	≥0.5	Pass			
	2440	1.039	0.681	≥0.5	Pass			
	2480	1.038	0.684	≥0.5	Pass			








Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






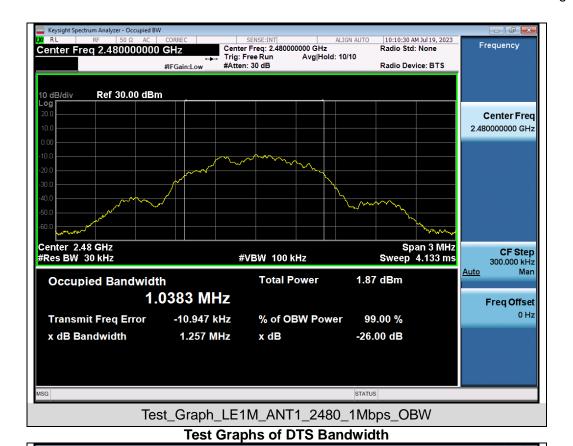



Test Graph LE1M ANT1 2402 1Mbps DTSBW

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/









Page 19 of 51

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

VIII EIIII I VIII III EI VOOREII EI II ILOOE I						
LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Center Freq 2.402000000 GHz Trig: Free Run #Atten: 30 dB TYPE IFGain:Low **Auto Tune** Mkr1 2.401 736 3 GHz -2.355 dBm 10 dB/div Ref 20.00 dBm Center Freq 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz Auto Man Frea Offset 0 Hz **Scale Type** Log Center 2.402000 GHz #Res BW 100 kHz Span 3.000 MHz Sweep 2.000 ms (30000 pts) <u>Lin</u> #VBW 300 kHz Test_Graph_LE1M_ANT1_2402_1Mbps_Reference Level Center Freq 1.210000000 GHz Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 PNO: Fast ---IFGain:Low Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 2.383 23 GHz -57.061 dBm Ref 20.00 dBm 10 dB/div Center Frea 1.210000000 GHz Start Freq 30.000000 MHz Stop Freq 2 390000000 GHz CF Step 236.000000 MHz <u>Auto</u> Freq Offset 0 Hz **Scale Type** Start 0.030 GHz #Res BW 100 kHz Stop 2.390 GHz Sweep 226.0 ms (30000 pts) <u>Lin</u> #VBW 300 kHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions




Scale Type

Lin

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



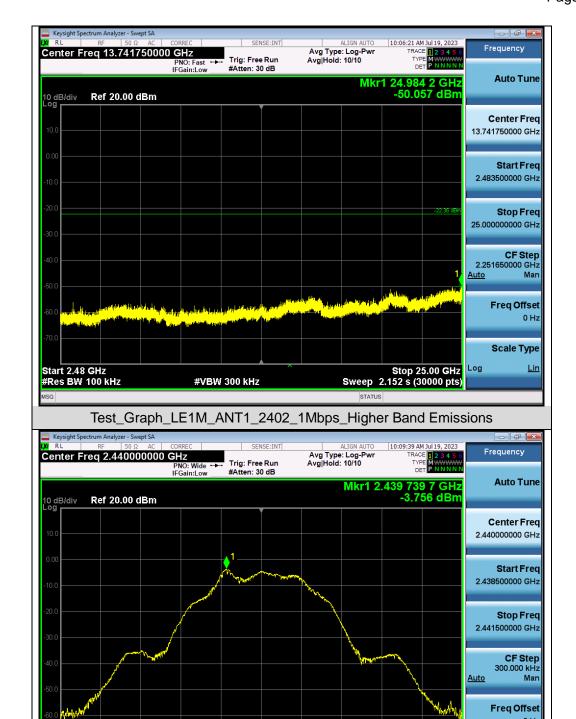


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_Reference Level

#VBW 300 kHz


Center 2.440000 GHz #Res BW 100 kHz





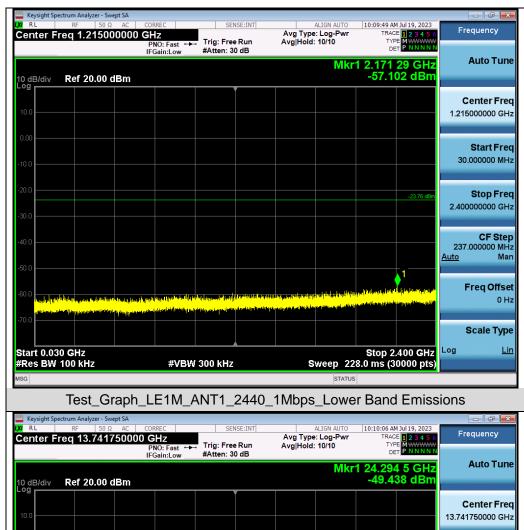



| Center Freq | 13.741750000 GHz | Start Freq | 2.483500000 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Stop Freq | 25.000000000 GHz | Start 2.48 GHz | Start 2.48 GHz | Stop Freq | 2.5152 s (30000 pts) | Start 2.48 GHz | Start 2.48 GHz | Stop Freq | Start 2.48 GHz | St









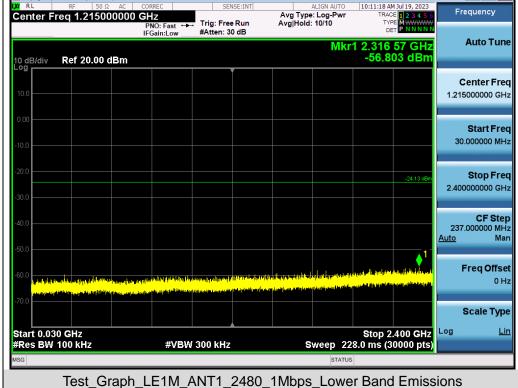






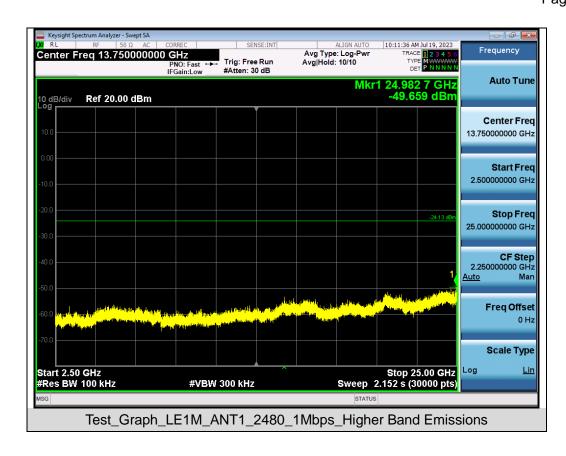





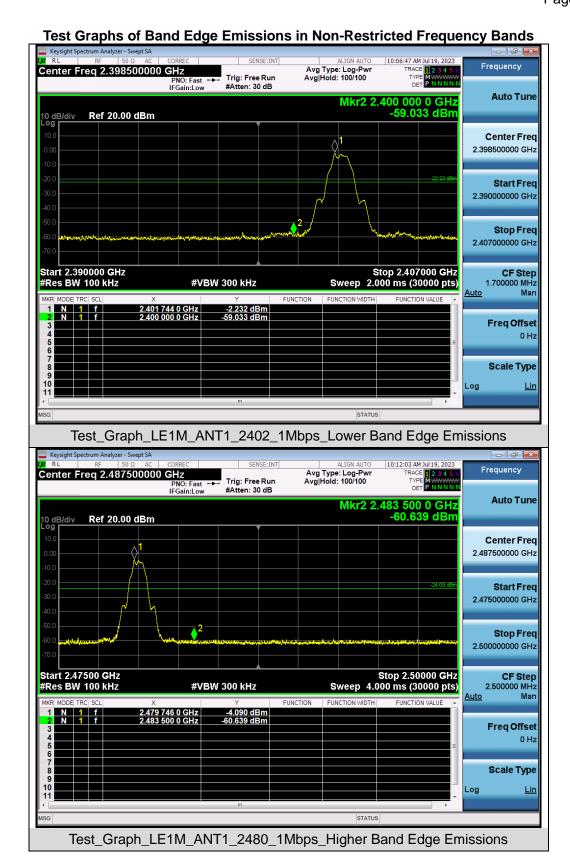



Page 26 of 51

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT


Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-16.898	≤8	Pass			
GFSK 1M	2440	-18.310	≤8	Pass			
	2480	-18.737	≪8	Pass			

Test Graphs of Conducted Output Power Spectral Density

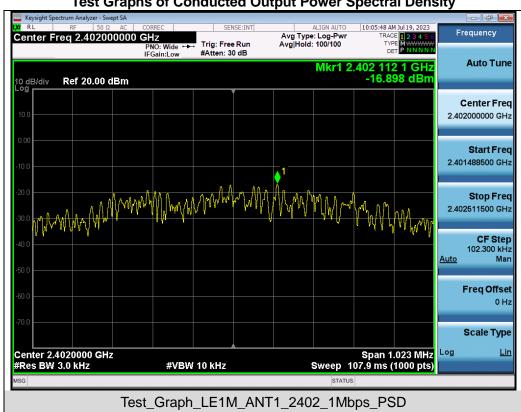





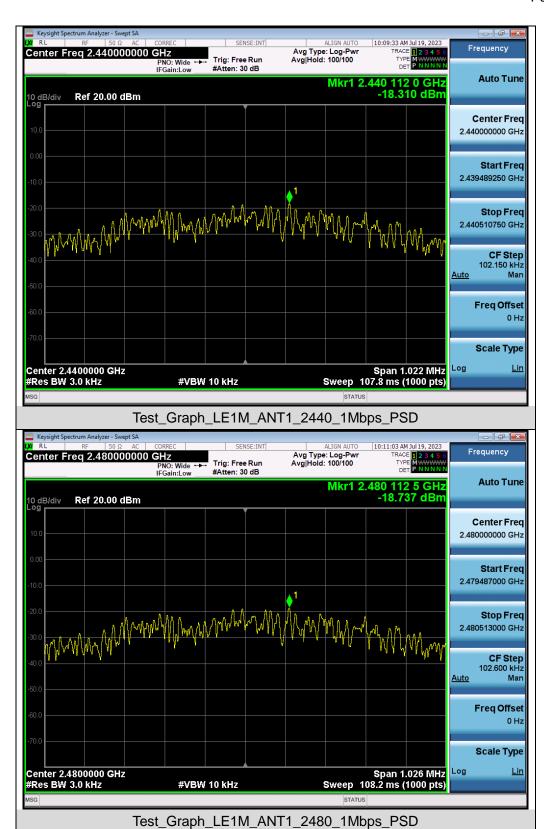



Page 28 of 51

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

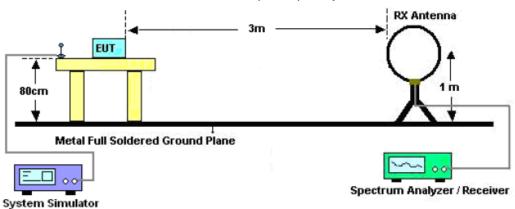

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

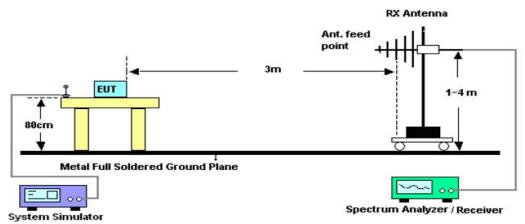

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

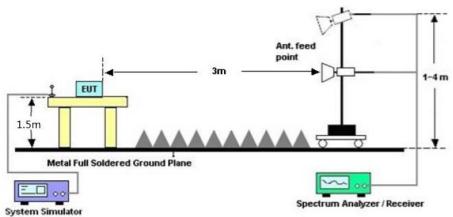

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 30 of 51

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed


Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.






Radiated emission from 30MHz to 1000MHz

EUT	IP Phone	Model Name	X305
Temperature	23.5° C	Relative Humidity	60.7%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna	Horizontal

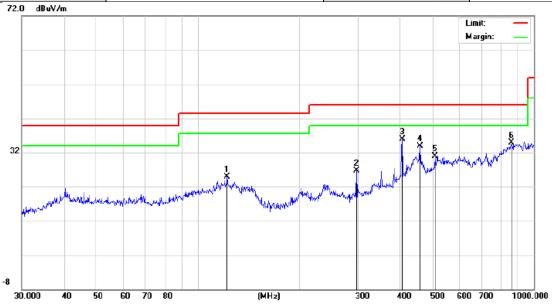


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	1	22.4040	8.73	16.26	24.99	43.50	-18.51	peak
2	2	297.2241	11.48	15.28	26.76	46.00	-19.24	peak
3	* 4	106.0880	15.47	20.52	35.99	46.00	-10.01	peak
4	4	159.1144	9.52	24.43	33.95	46.00	-12.05	peak
5	5	08.2582	7.56	23.38	30.94	46.00	-15.06	peak
6	8	357.0247	5.99	28.92	34.91	46.00	-11.09	peak

RESULT: PASS






EUT	IP Phone	Model Name	X305
Temperature	23.5° C	Relative Humidity	60.7%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna	Vertical

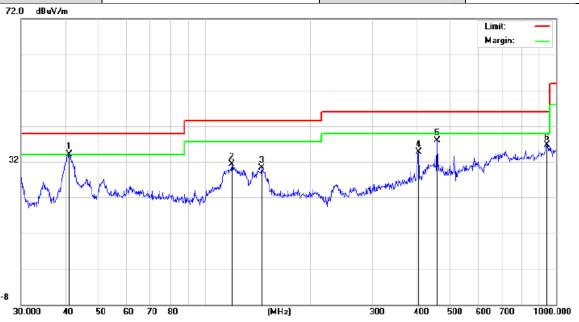

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	41.1320	17.21	16.91	34.12	40.00	-5.88	peak
2		119.4361	13.67	17.60	31.27	43.50	-12.23	peak
3		145.3506	12.06	18.20	30.26	43.50	-13.24	peak
4		406.0880	12.24	22.41	34.65	46.00	-11.35	peak
5		459.1144	12.72	25.24	37.96	46.00	-8.04	peak
6		942.1304	5.70	30.91	36.61	46.00	-9.39	peak


RESULT: PASS

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.






EUT	IP Phone	Model Name	X305
Temperature	23.5° C	Relative Humidity	60.7%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 6	Antenna	Horizontal

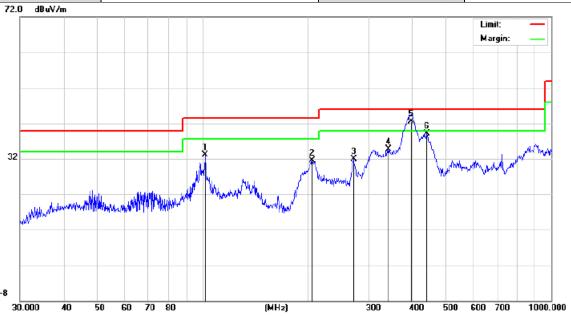


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		102.0014	16.87	16.22	33.09	43.50	-10.41	peak
2		206.3976	17.02	14.47	31.49	43.50	-12.01	peak
3		271.3246	17.66	14.29	31.95	46.00	-14.05	peak
4		341.9786	17.63	17.15	34.78	46.00	-11.22	peak
5	*	396.2415	22.44	19.99	42.43	46.00	-3.57	QP
6		440.1963	13.98	25.09	39.07	46.00	-6.93	peak

RESULT: PASS





EUT	IP Phone	Model Name	X305
Temperature	23.5° C	Relative Humidity	60.7%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 6	Antenna	Vertical

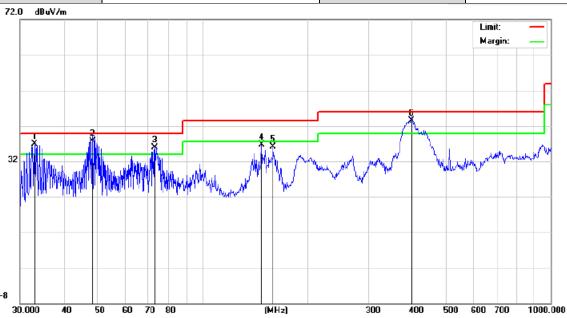

	No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
-			MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
	1	İ	32.9791	21.81	14.58	36.39	40.00	-3.61	peak
	2	*	48.3318	19.67	16.98	36.65	40.00	-3.35	QP
	3	İ	73.1025	19.00	16.97	35.97	40.00	-4.03	peak
Ī	4		147.9214	18.49	18.20	36.69	43.50	-6.81	peak
Ī	5		159.7844	17.92	18.20	36.12	43.50	-7.38	peak
	6	ļ	399.0302	20.40	22.16	42.56	46.00	-3.44	QP

RESULT: PASS

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been tested. The mode 6 is the worst case and recorded in the report.



Page 35 of 51

Radiated emission above 1GHz

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4804.000	49.36	0.08	49.44	74.00	-24.56	peak			
4804.000	35.25	0.08	35.33	54.00	-18.67	AVG			
7206.000	43.25	2.21	45.46	74.00	-28.54	peak			
7206.000	31.25	2.21	33.46	54.00	-20.54	AVG			
Remark:									
Factor = Anten	na Factor + Cabl	e Loss – Pre-	amplifier.						

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	50.12	0.08	50.20	74.00	-23.80	peak
4804.000	36.33	0.08	36.41	54.00	-17.59	AVG
7206.000	46.39	2.21	48.60	74.00	-25.40	peak
7206.000	30.58	2.21	32.79	54.00	-21.21	AVG
temark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			



Report No.: AGC14499230609FE08 Page 36 of 51

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	49.36	0.14	49.50	74.00	-24.50	peak
4880.000	38.61	0.14	38.75	54.00	-15.25	AVG
7320.000	48.41	2.36	50.77	74.00	-23.23	peak
7320.000	35.46	2.36	37.82	54.00	-16.18	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type			
4880.000	50.19	0.14	50.33	74.00	-23.67	peak			
4880.000	37.74	0.14	37.88	54.00	-16.12	AVG			
7320.000	47.63	2.36	49.99	74.00	-24.01	peak			
7320.000	36.61	2.36	38.97	54.00	-15.03	AVG			
lemark:									
-actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.		·	·			



Report No.: AGC14499230609FE08 Page 37 of 51

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	51.31	0.22	51.53	74.00	-22.47	peak
4960.000	42.33	0.22	42.55	54.00	-11.45	AVG
7440.000	48.61	2.64	51.25	74.00	-22.75	peak
7440.000	39.05	2.64	41.69	54.00	-12.31	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	52.39	0.22	52.61	74.00	-21.39	peak
4960.000	40.28	0.22	40.50	54.00	-13.50	AVG
7440.000	49.31	2.64	51.95	74.00	-22.05	peak
7440.000	38.74	2.64	41.38	54.00	-12.62	AVG
Remark:						1
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier			



Report No.: AGC14499230609FE08 Page 38 of 51

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 4	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	51.84	0.08	51.92	74.00	-22.08	peak
4804.000	42.19	0.08	42.27	54.00	-11.73	AVG
7206.000	49.66	2.21	51.87	74.00	-22.13	peak
7206.000	40.37	2.21	42.58	54.00	-11.42	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 4	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	51.84	0.08	51.92	74.00	-22.08	peak
4804.000	42.19	0.08	42.27	54.00	-11.73	AVG
7206.000	49.66	2.21	51.87	74.00	-22.13	peak
7206.000	40.37	2.21	42.58	54.00	-11.42	AVG
Remark:						
Eactor = Anter	na Factor + Cahl	a I nee _ Pra_a	mnlifier	•	•	

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC14499230609FE08 Page 39 of 51

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 5	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.050	49.63	0.14	49.77	74.00	-24.23	peak
4880.050	41.31	0.14	41.45	54.00	-12.55	AVG
7320.000	48.63	2.36	50.99	74.00	-23.01	peak
7320.000	41.33	2.36	43.69	54.00	-10.31	AVG
Remark:	1					

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 5	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.050	50.36	0.14	50.50	74.00	-23.50	peak
4880.050	42.31	0.14	42.45	54.00	-11.55	AVG
7320.000	49.12	2.36	51.48	74.00	-22.52	peak
7320.000	40.28	2.36	42.64	54.00	-11.36	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Report No.: AGC14499230609FE08 Page 40 of 51

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 6	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dB) (dBµV/m)		(dB)	Value Type			
4960.000	49.69	0.22	49.91	74.00	-24.09	peak			
4960.000	42.31	0.22	42.53	54.00	-11.47	AVG			
7440.000	46.39	2.64	49.03	74.00	-24.97	peak			
7440.000	38.05	2.64	40.69	54.00	-13.31	AVG			
Remark:									
Factor - Antenna Factor + Cable Loss Pre amplifier									

Factor = Antenna Factor + Cable Loss – Pre-amplifier

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 48V
Test Mode	Mode 6	Antenna	Vertical


Frequency	Meter Reading	Factor	Factor Emission Level		Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
4960.000	48.96	0.22	49.18	74.00	-24.82	peak		
4960.000	41.31	0.22	41.53	54.00	-12.47	AVG		
7440.000	48.31	2.64	50.95	74.00	-23.05	peak		
7440.000	39.51	2.64	42.15	54.00	-11.85	AVG		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RESULT: PASS

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.








Test result for band edge emission at restricted bands

EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

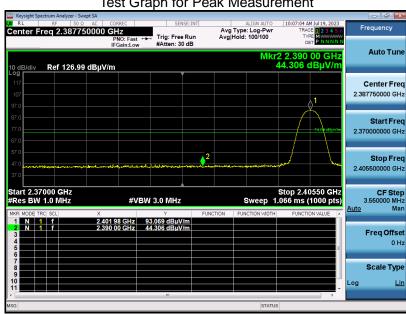



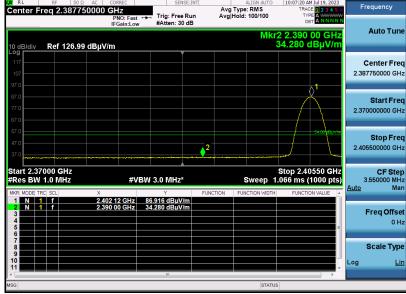


RESULT: PASS







EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

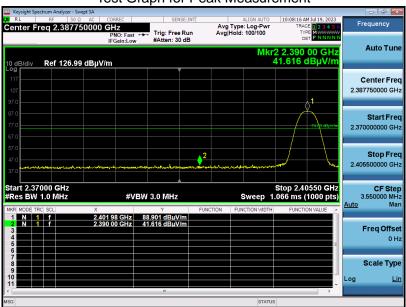

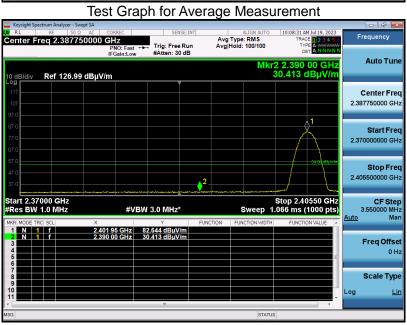


RESULT: PASS






EUT	IP Phone	Model Name	X305
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna	Horizontal


Test Graph for Peak Measurement

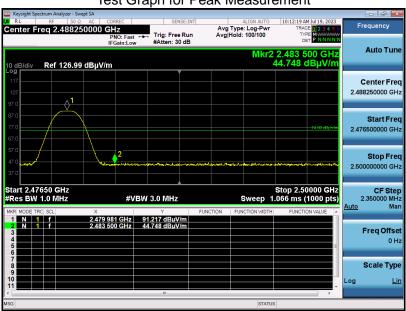






RESULT: PASS






EUT IP Phone **Model Name** X305 25° C **Temperature Relative Humidity** 55.4% 960hPa **Test Voltage** DC₅V **Pressure Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

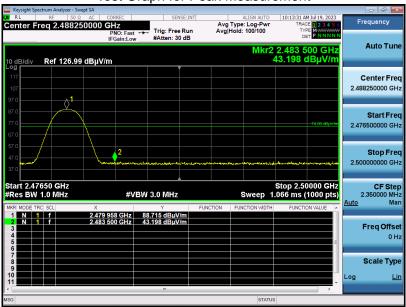

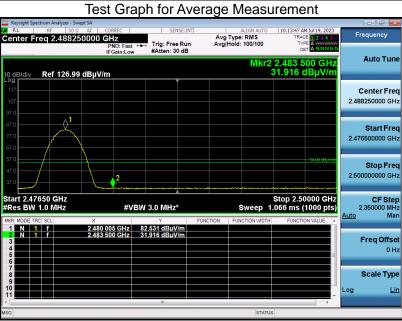

RESULT: PASS

Note:

- 1. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 2. All voltages are tested. The test data of the worst case (DC 5V) was reported on the Summary Data page.



Report No.: AGC14499230609FE08

Page 45 of 51

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

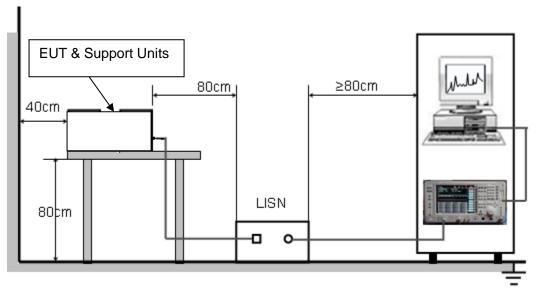



Report No.: AGC14499230609FE08

Page 46 of 51

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter or DC 48V power from PoE which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case (Low channel) condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



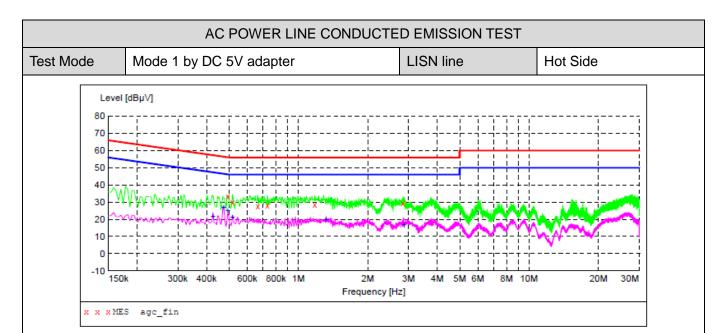


MEASUREMENT RESULT: "agc fin"

2023/7	7/12 13:4	7					
Fre	equency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.	494000	33.20	6.1	56	22.9	QP	L1
0.	518000	29.80	6.1	56	26.2	QP	L1
0.	666000	27.70	6.2	56	28.3	QP	L1
0.	734000	28.20	6.2	56	27.8	QP	L1
1.	178000	28.30	6.2	56	27.7	QP	L1
2.	842000	29.60	6.3	56	26.4	QP	L1

MEASUREMENT RESULT: "agc fin2"

2023/7/12 13:	47					
Frequency	Level	Transd	Limit	Margin	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.426000	21.90	6.1	47	25.4	AV	L1
0.474000	27.20	6.1	46	19.2	AV	L1
0.494000	25.40	6.1	46	20.7	AV	L1
0.518000	21.50	6.1	46	24.5	AV	L1
1.318000	19.70	6.2	46	26.3	AV	L1
2.858000	17.20	6.3	46	28.8	AV	L1



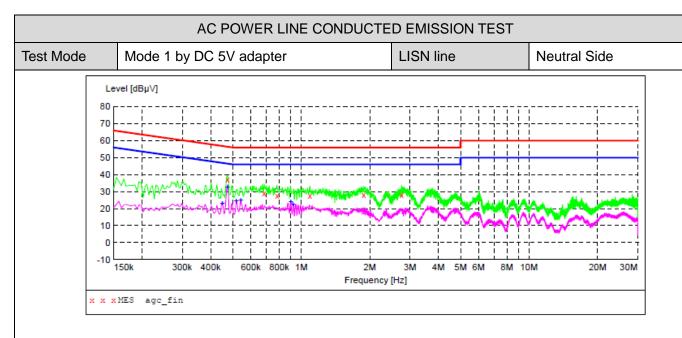


MEASUREMENT RESULT: "agc fin"


2023/7/12 13:	50					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.474000	37.20	6.1	56	19.2	QP	N
0.686000	28.90	6.2	56	27.1	QP	N
0.782000	27.80	6.2	56	28.2	QP	N
1.090000	27.50	6.2	56	28.5	QP	N
1.882000	28.10	6.2	56	27.9	QP	N
2.754000	28.20	6.3	56	27.8	QP	N

MEASUREMEN

2023/7/12 13:50							
Frequency MH:	y Level z dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	
0.45000	23.30	6.1	47	23.6	AV	N	
0.474000	32.70	6.1	46	13.7	AV	N	
0.518000	24.90	6.1	46	21.1	AV	N	
0.542000	25.10	6.1	46	20.9	AV	N	
0.898000	24.00	6.2	46	22.0	AV	N	
0.918000	23.00	6.2	46	23.0	AV	N	





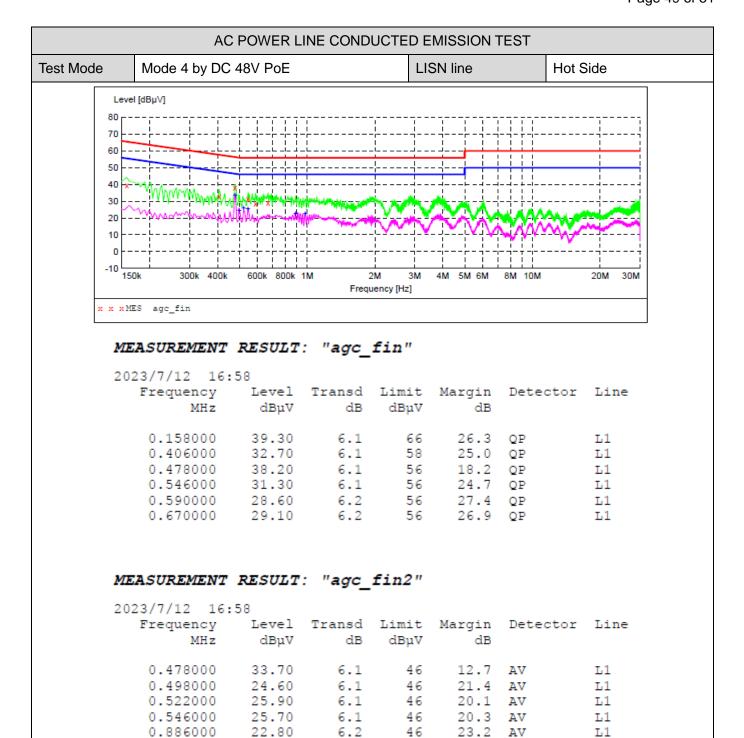

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.2

46

23.2


ΑV

L1

22.80

0.978000



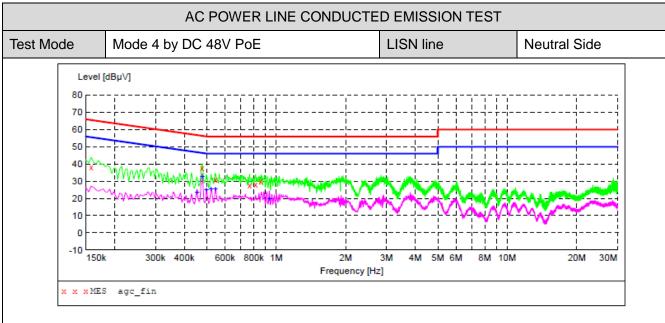

MEASUREMENT RESULT: "agc_fin"

2023/7/12 17:02								
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	
	0.158000	38.00	6.1	66	27.6	QP	N	
	0.478000	37.80	6.1	56	18.6	QP	N	
	0.546000	31.10	6.1	56	24.9	QP	N	
	0.766000	27.60	6.2	56	28.4	QP	N	
	0.814000	28.00	6.2	56	28.0	QP	N	
	0.858000	29.80	6.2	56	26.2	QP	N	

MEASUREMENT RESULT: "agc fin2"

2023/7/12						
Frequenc MH	y Level z dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.45400	0 23.60	6.1	47	23.2	AV	N
0.47800	0 32.80	6.1	46	13.6	AV	N
0.49800	0 25.20	6.1	46	20.8	AV	N
0.52200	0 25.60	6.1	46	20.4	AV	N
0.54600	0 25.80	6.1	46	20.2	AV	N
0.93400	0 19.80	6.2	46	26.2	AV	N



Report No.: AGC14499230609FE08

Page 51 of 51

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC14499230609AP01

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC14499230609AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.