

**SAR Plots****Plot: 1#****DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.205 W/kg


**Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.725 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

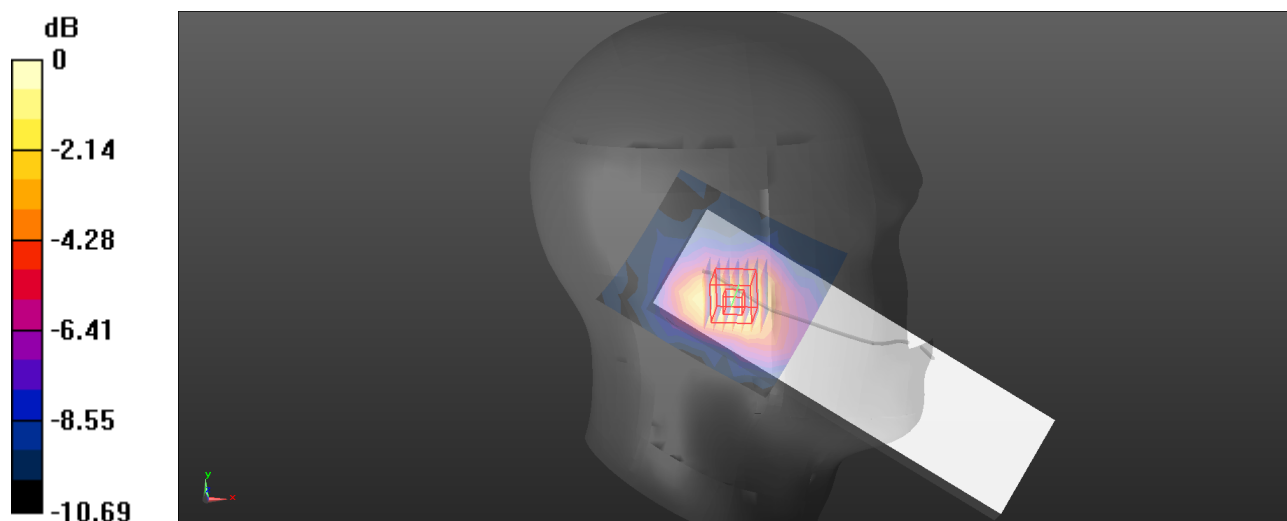

0 dB = 0.205 W/kg = -6.88 dBW/kg

**Plot: 2#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 802.11b Mid/Area Scan (11x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0907 W/kg


**Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.806 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.339 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

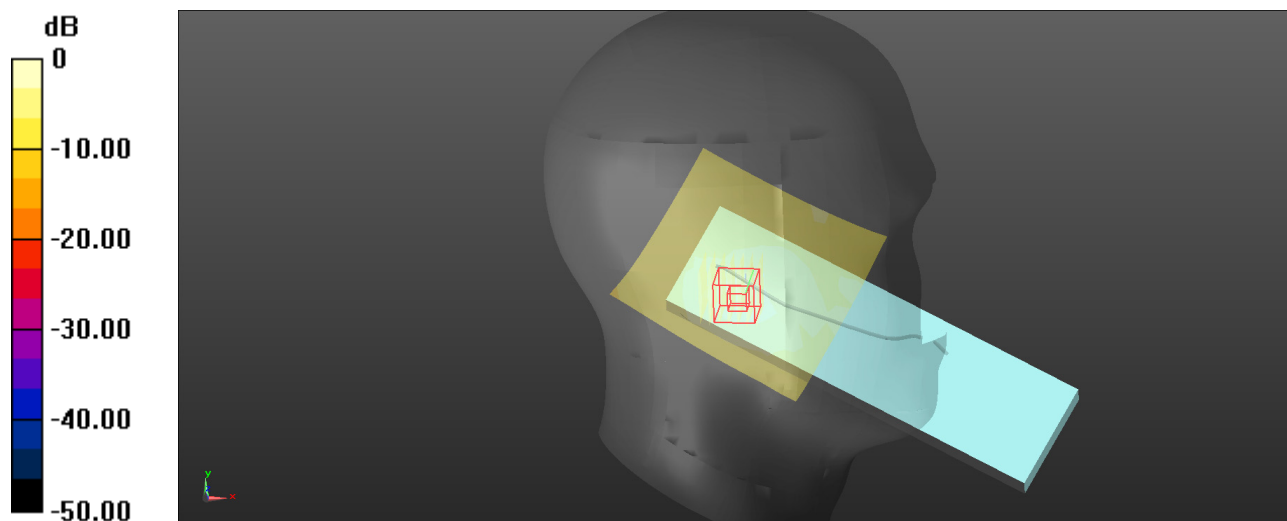

0 dB = 0.122 W/kg = -9.14 dBW/kg

**Plot: 3#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.300 W/kg


**Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.504 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.381 W/kg

**SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.319 W/kg

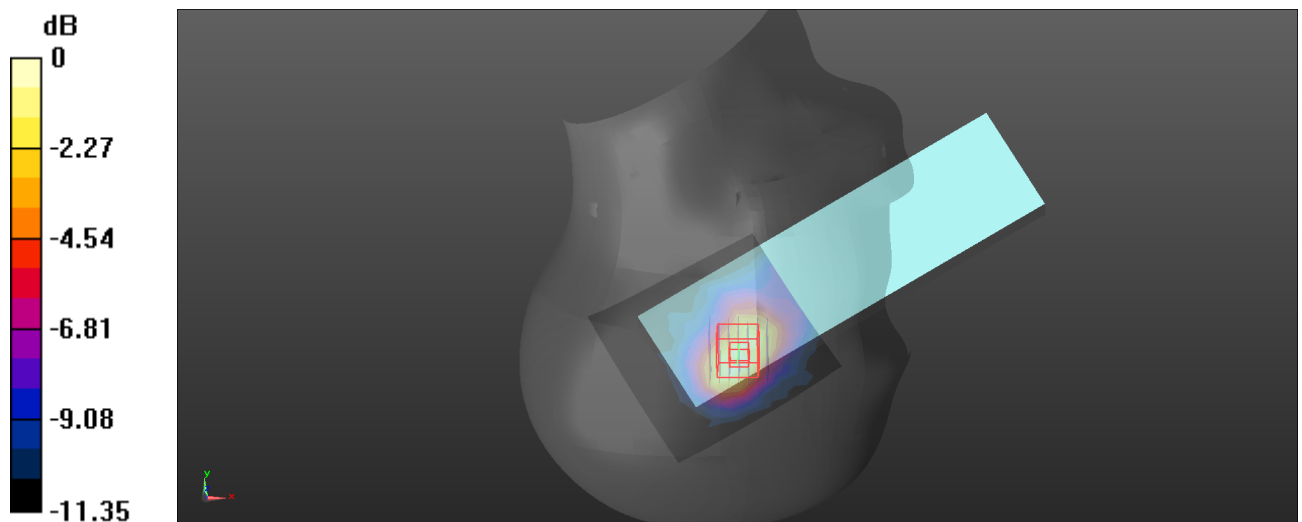

0 dB = 0.319 W/kg = -4.96 dBW/kg

**Plot: 4#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 802.11b Mid/Area Scan (10x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.126 W/kg


**Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.630 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

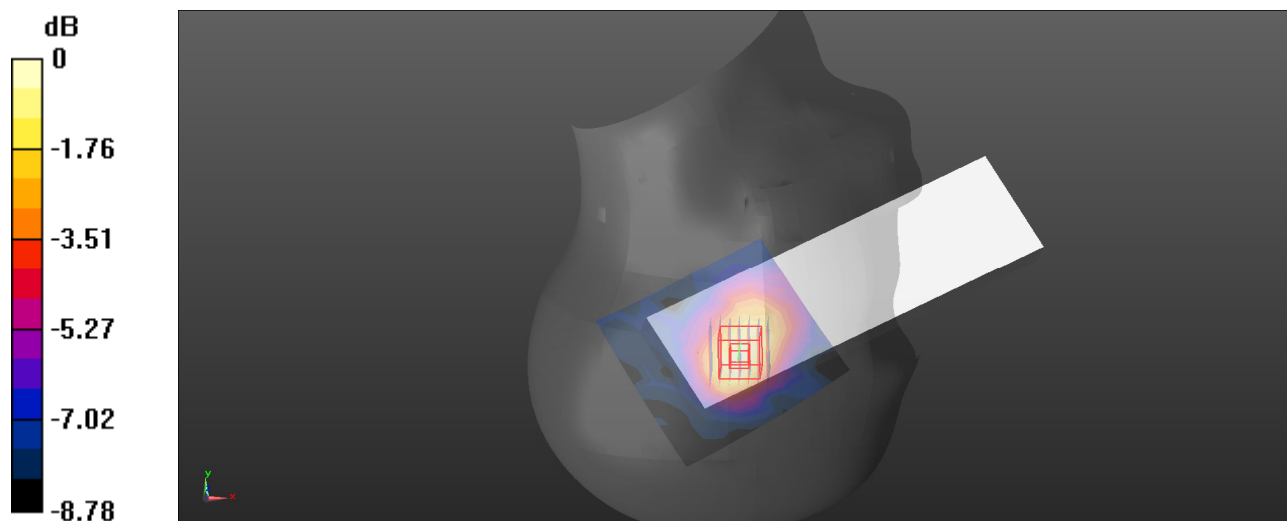

0 dB = 0.124 W/kg = -9.07 dBW/kg

**Plot: 5#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 802.11b Mid/Area Scan (10x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.121 W/kg


**Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.592 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.148 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

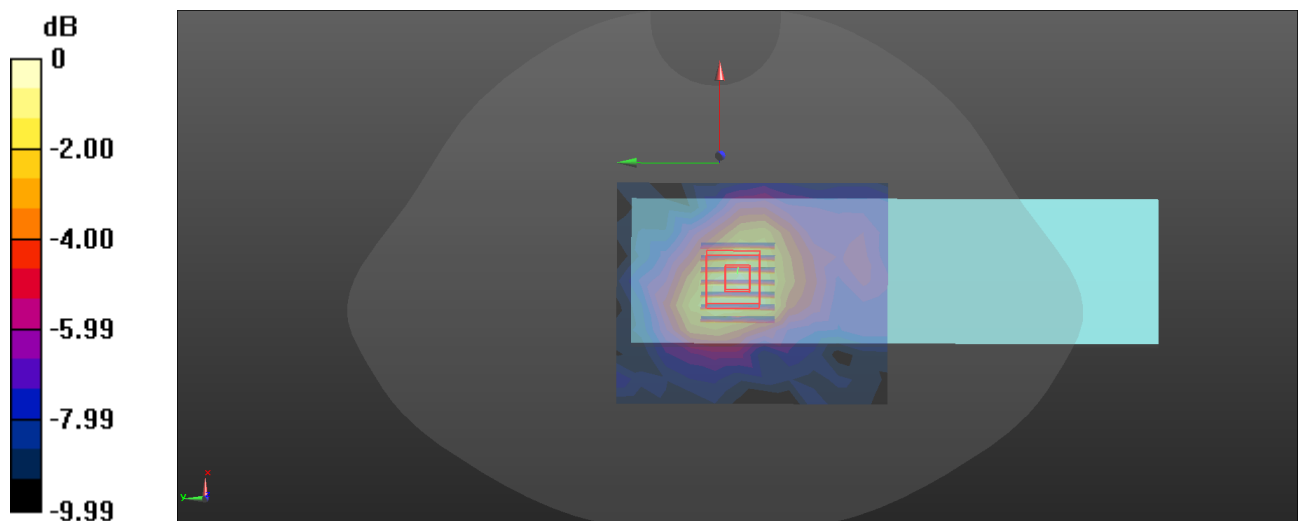

0 dB = 0.131 W/kg = -8.83 dBW/kg

**Plot: 6#****DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.11

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 802.11b Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.104 W/kg


**Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.565 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.106 W/kg

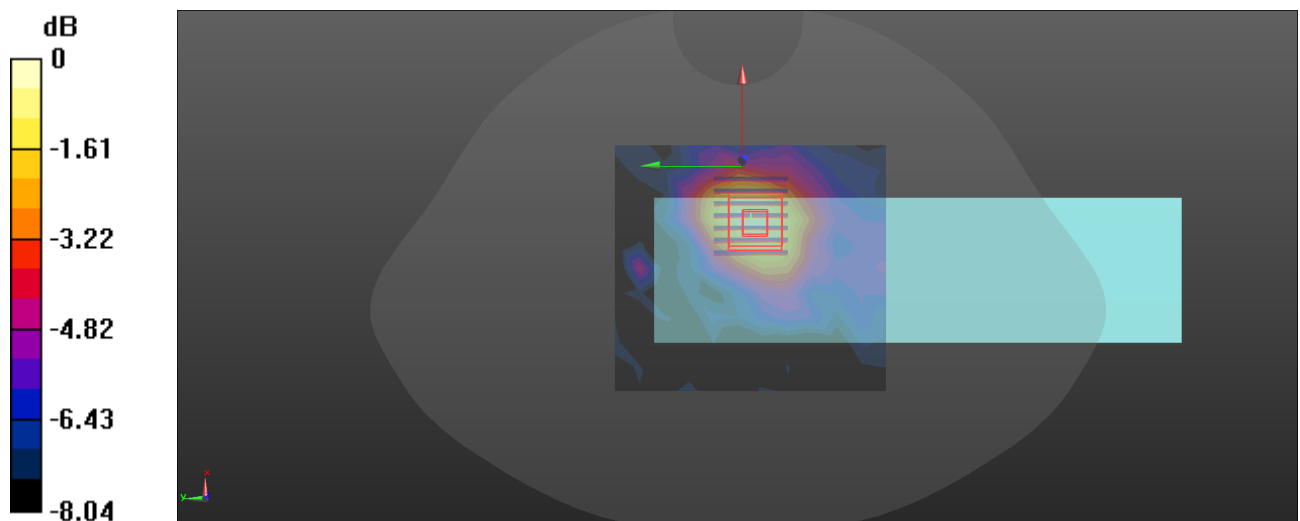

0 dB = 0.106 W/kg = -9.75 dBW/kg

**Plot: 7#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 802.11b Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0949 W/kg


**Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.064 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.109 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.0993 W/kg

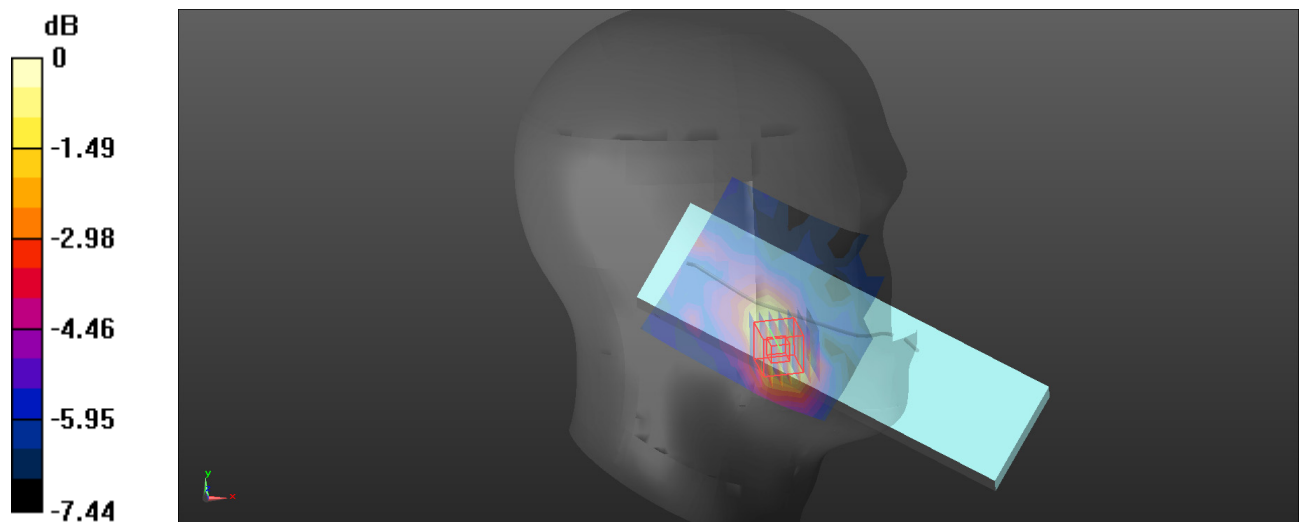

0 dB = 0.0993 W/kg = -10.03 dBW/kg

**Plot: 8#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 802.11b Mid/Area Scan (10x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0391 W/kg


**Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.827 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0370 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0354 W/kg

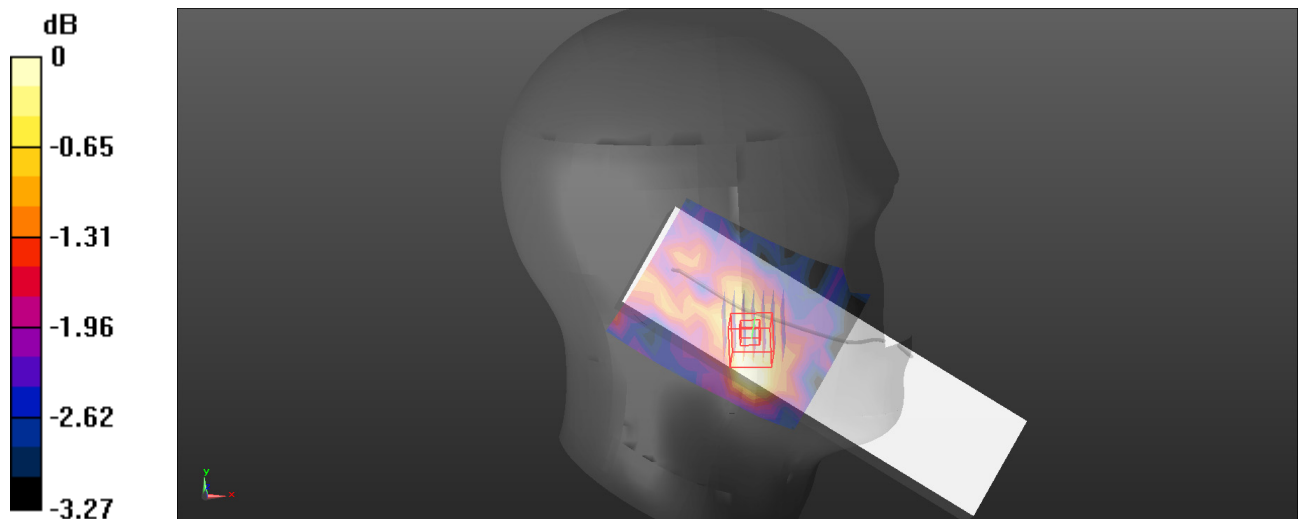

0 dB = 0.0354 W/kg = -14.51 dBW/kg



**Plot: 9#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 802.11b Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0508 W/kg


**Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.263 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0285 W/kg

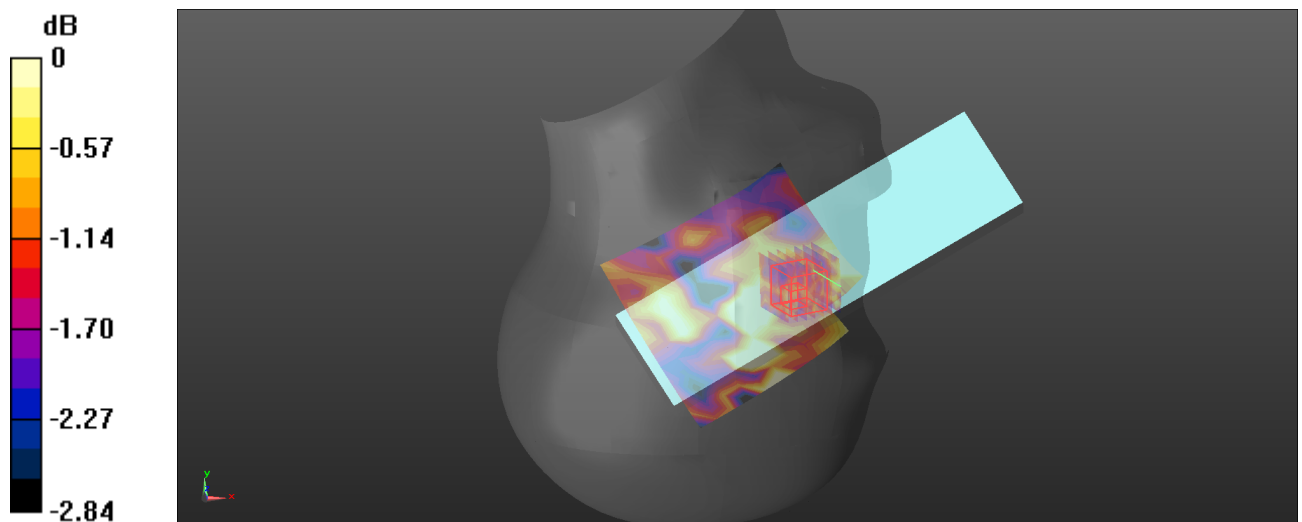

0 dB = 0.0285 W/kg = -15.45 dBW/kg

**Plot: 10#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 802.11b Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0286 W/kg


**Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.156 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0597 W/kg

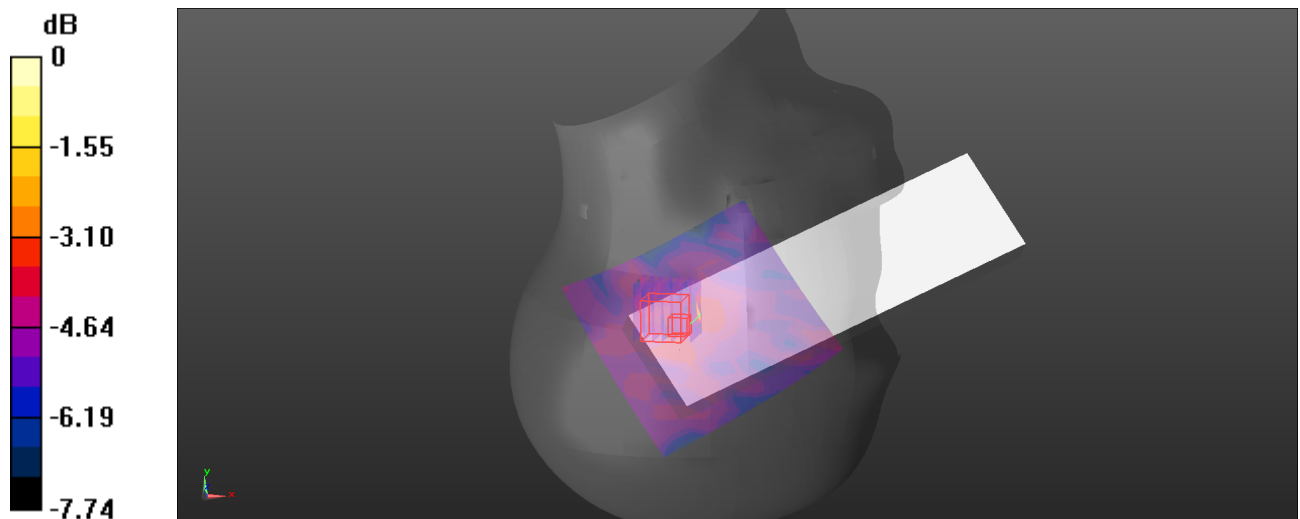

0 dB = 0.0597 W/kg = -12.24 dBW/kg

**Plot: 11#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 38.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 802.11b Mid/Area Scan (10x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0777 W/kg


**Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.913 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0780 W/kg

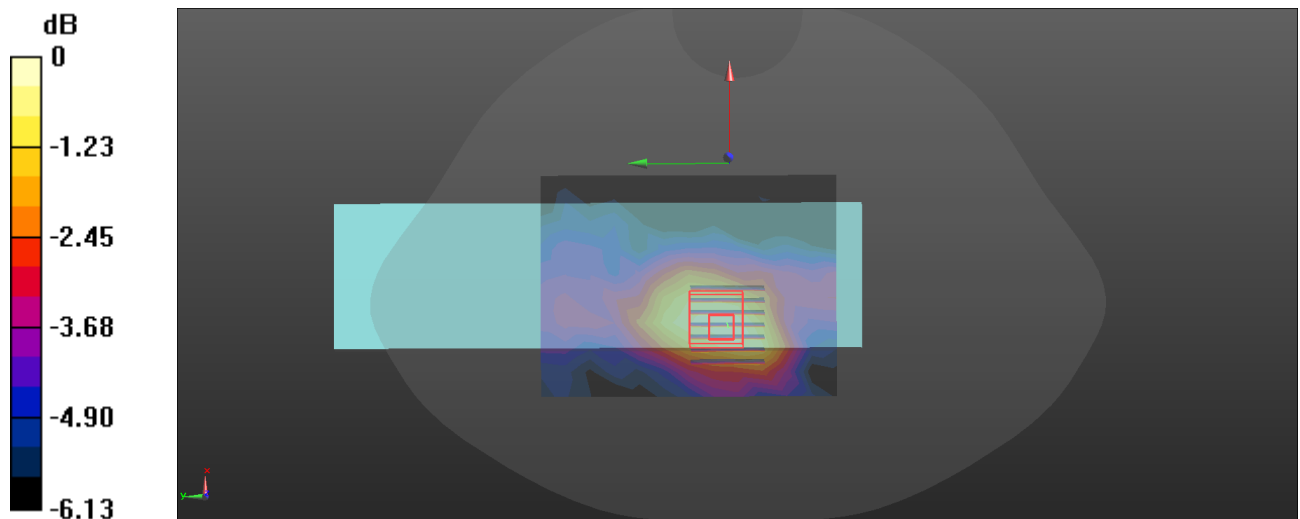

0 dB = 0.0780 W/kg = -11.08 dBW/kg

**Plot: 12#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.12

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.824 \text{ S/m}$ ;  $\epsilon_r = 38.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 802.11b Mid/Area Scan (10x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.184 W/kg


**Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.616 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.218 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.187 W/kg

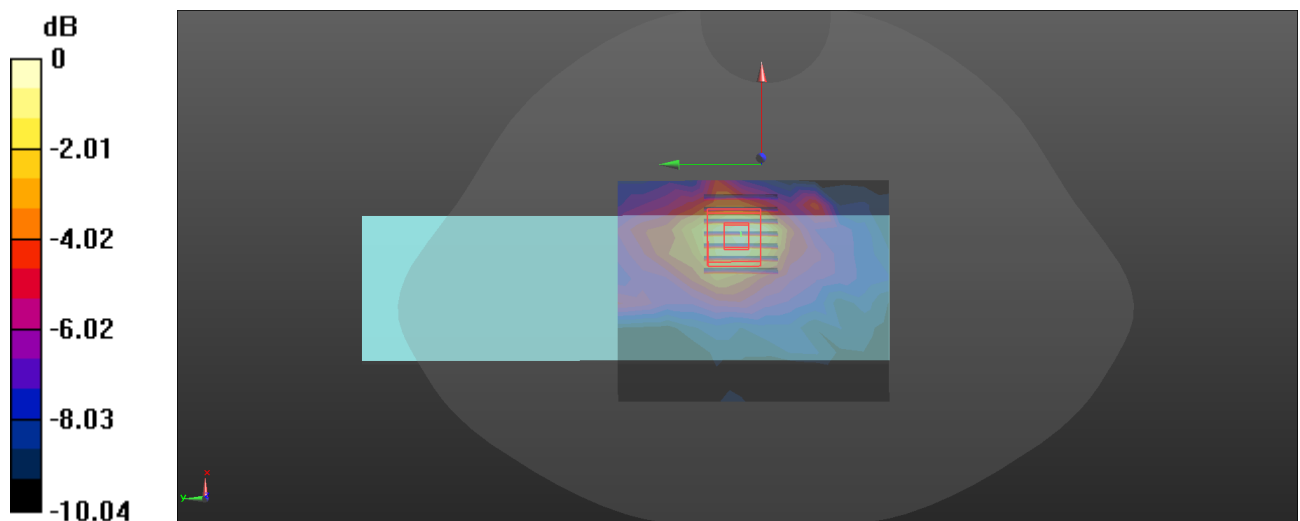

0 dB = 0.187 W/kg = -7.28 dBW/kg

**Plot: 13#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.862 W/kg


**Head Left Cheek/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.965 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.226 W/kg**

Maximum value of SAR (measured) = 0.901 W/kg

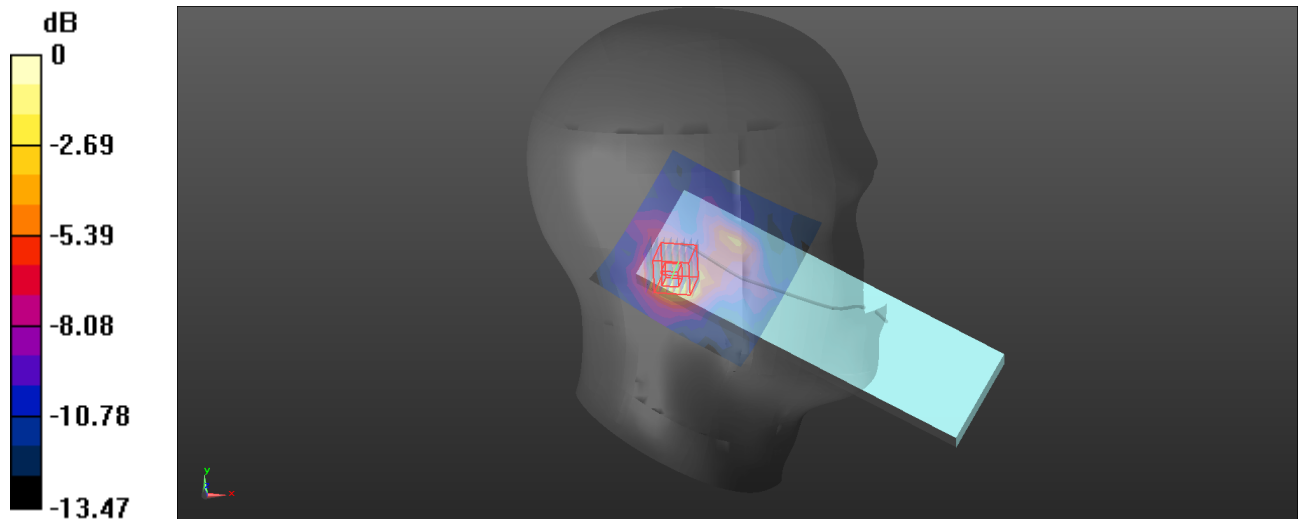

0 dB = 0.901 W/kg = -0.45 dBW/kg

**Plot: 14#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.409 W/kg


**Head Left Tilt/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.237 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.442 W/kg

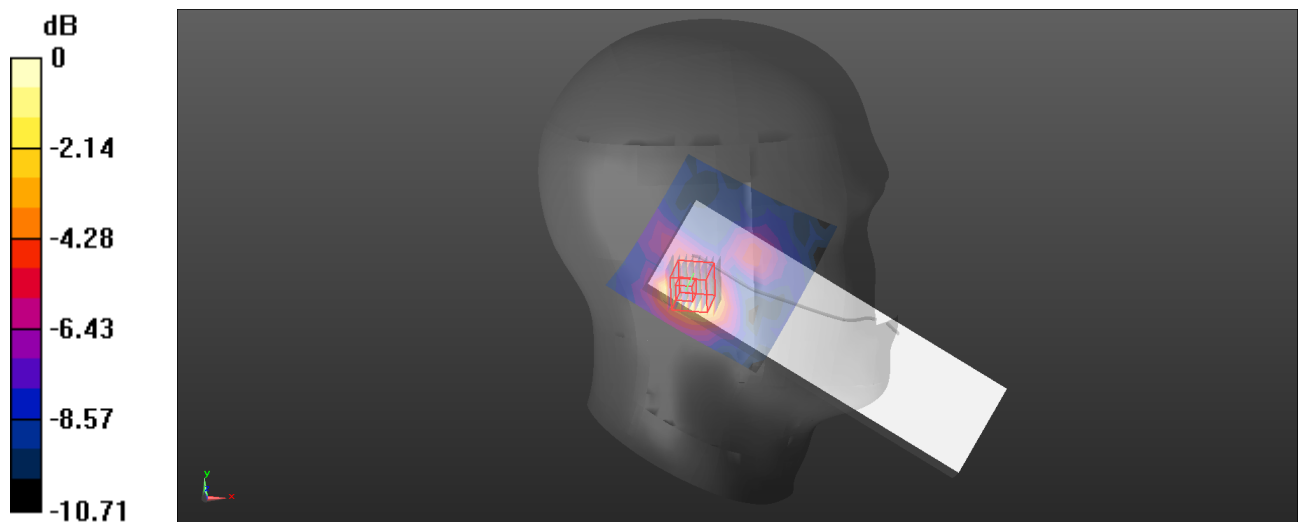

0 dB = 0.442 W/kg = -3.55 dBW/kg

**Plot: 15#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.646$  S/m;  $\epsilon_r = 35.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.2G 802.11ax20 Low/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.52 W/kg


**Head Right Cheek/WLAN 5.2G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.447 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.90 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.363 W/kg**

Maximum value of SAR (measured) = 2.05 W/kg

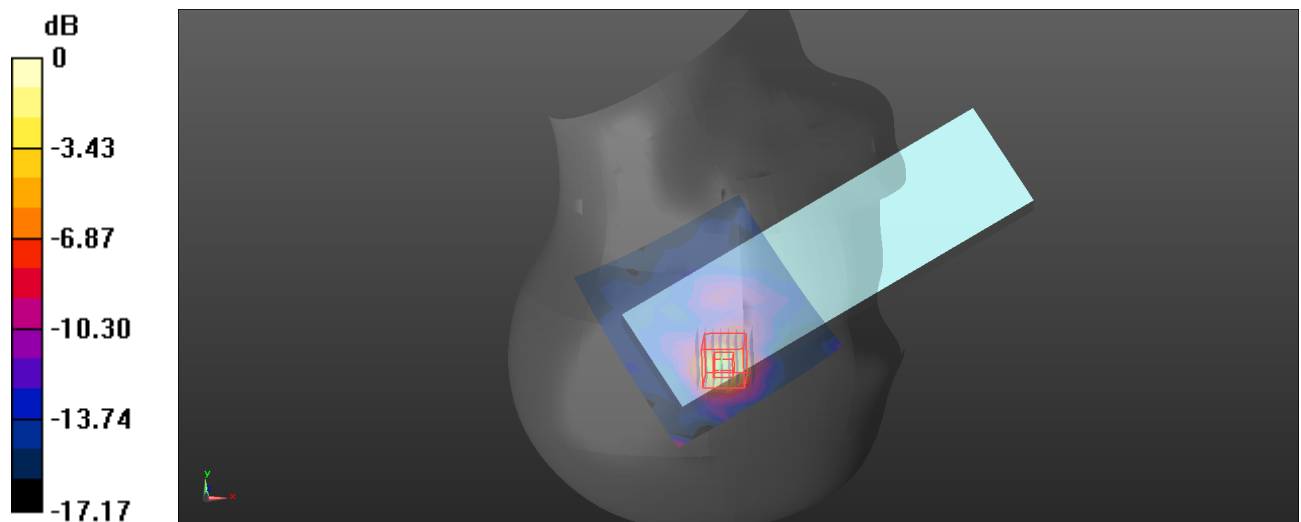

0 dB = 2.05 W/kg = 3.12 dBW/kg

**Plot: 16#****DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.655$  S/m;  $\epsilon_r = 35.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.70 W/kg


**Head Right Cheek/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.122 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.32 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 1.73 W/kg

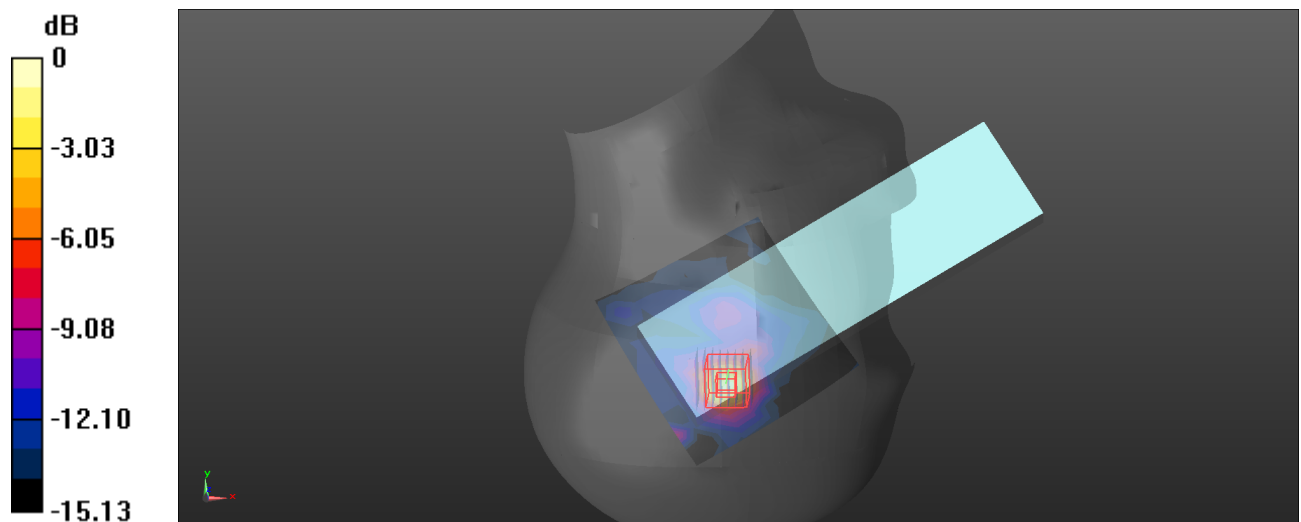

0 dB = 1.73 W/kg = 2.38 dBW/kg



**Plot: 17#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.672$  S/m;  $\epsilon_r = 35.227$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.2G 802.11ax20 High/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.60 W/kg


**Head Right Cheek/WLAN 5.2G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.757 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.28 W/kg

**SAR(1 g) = 0.810 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 1.63 W/kg

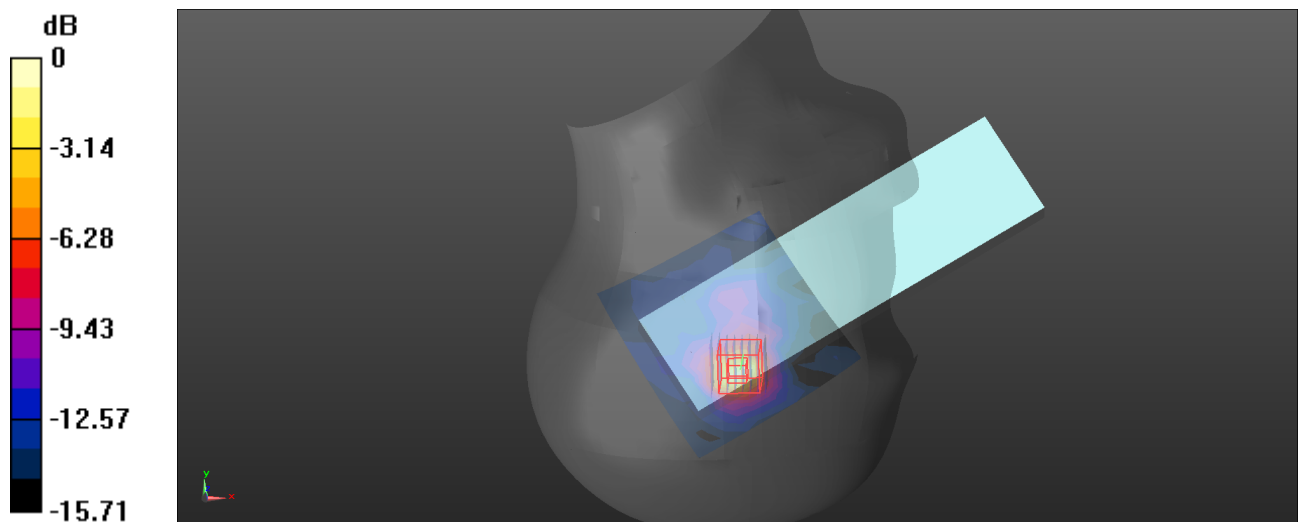

0 dB = 1.63 W/kg = 2.12 dBW/kg

**Plot: 18#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.655$  S/m;  $\epsilon_r = 35.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.666 W/kg


**Head Right Tilt/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.345 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.767 W/kg

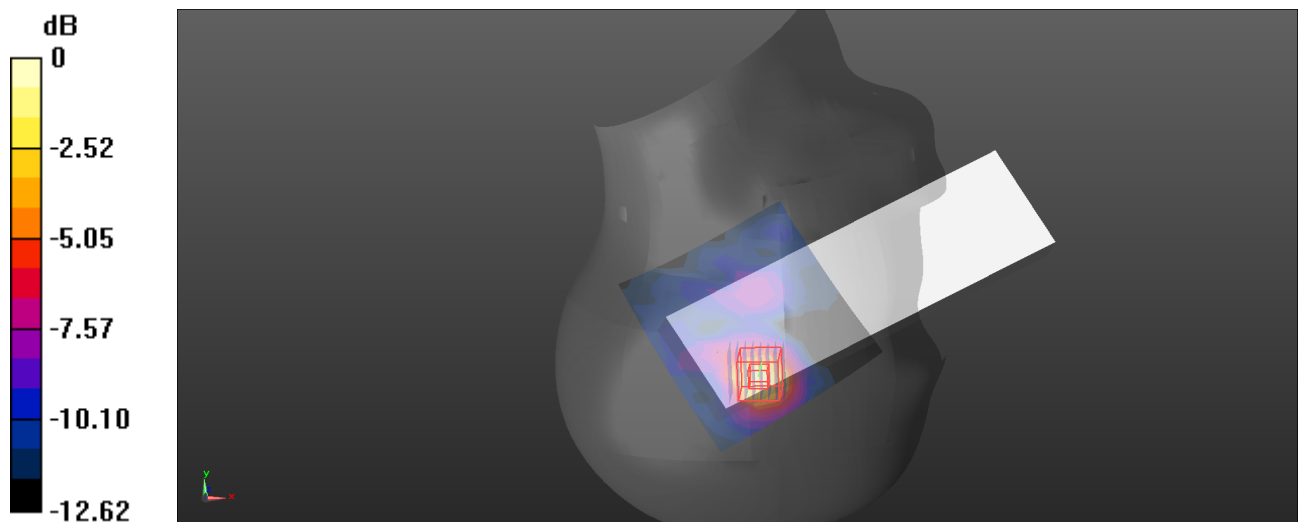

0 dB = 0.767 W/kg = -1.15 dBW/kg

**Plot: 19#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.753 W/kg


**Body Front/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 4.271 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 0.805 W/kg

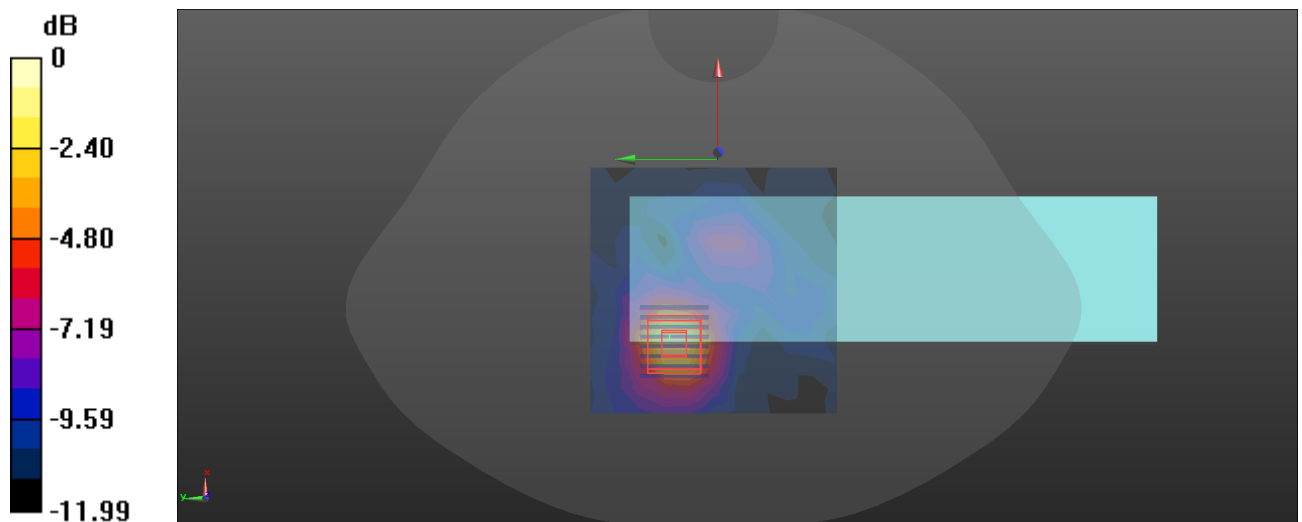

0 dB = 0.805 W/kg = -0.94 dBW/kg

**Plot: 20#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ax20 Mid/Area Scan (11x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.343 W/kg


**Body Back/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 3.811 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.436 W/kg

**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 0.351 W/kg

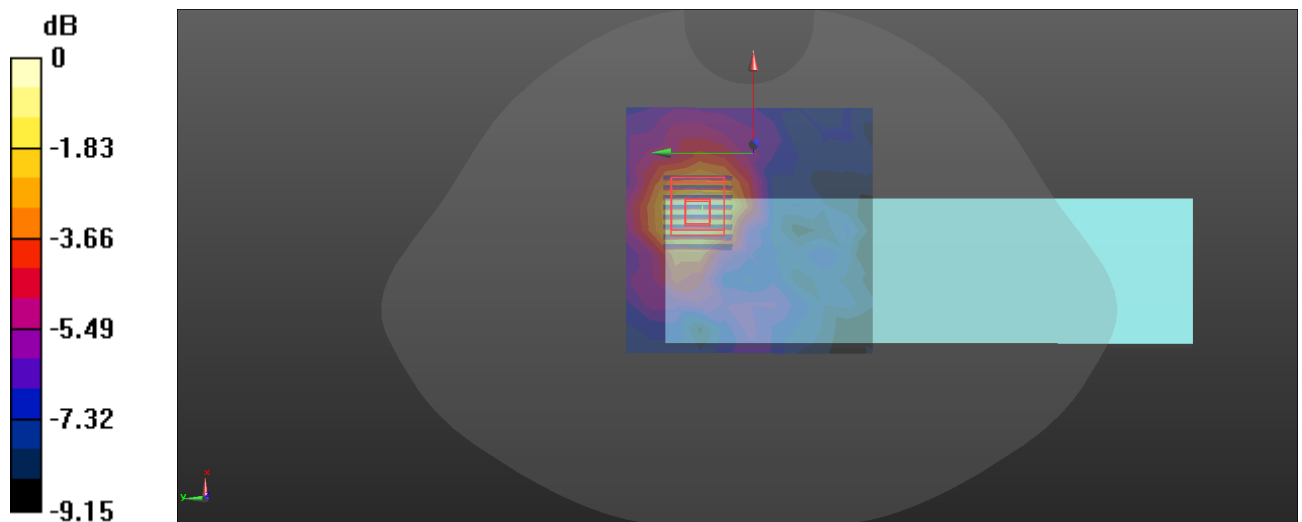

0 dB = 0.351 W/kg = -4.55 dBW/kg

**Plot: 21#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.106 W/kg


**Head Left Cheek/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.989 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.314 W/kg

**SAR(1 g) = 0.00111 W/kg; SAR(10 g) = 0.00015 W/kg**

Maximum value of SAR (measured) = 0.314 W/kg

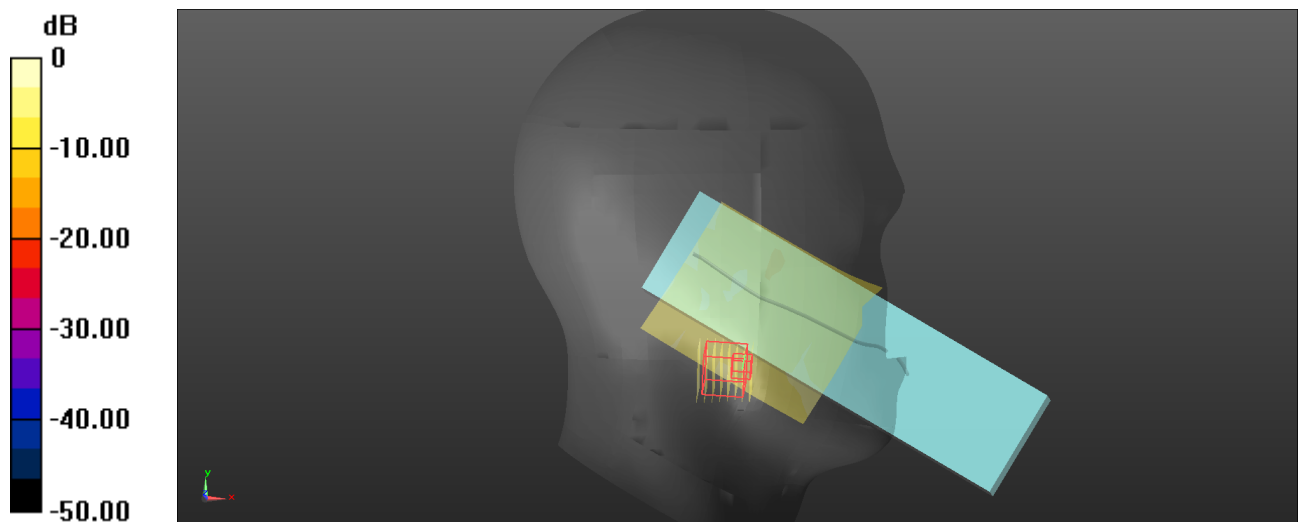

0 dB = 0.314 W/kg = -5.03 dBW/kg

**Plot: 22#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0712 W/kg


**Head Left Tilt/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.891 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.561 W/kg

**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00151 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

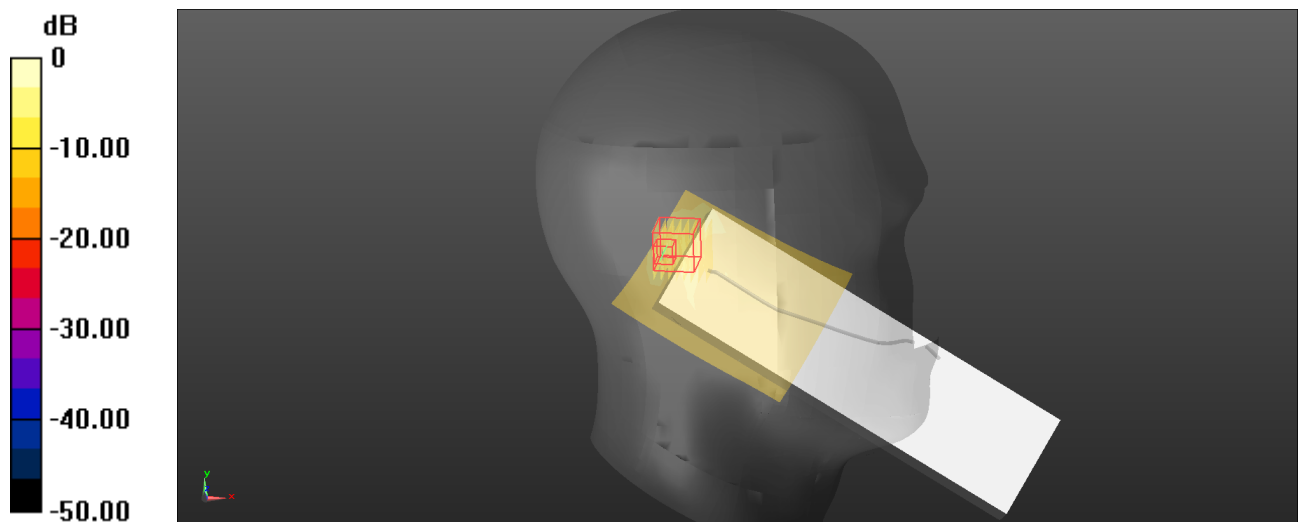

0 dB = 0.561 W/kg = -2.51 dBW/kg

**Plot: 23#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0878 W/kg


**Head Right Cheek/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.910 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0980 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0974 W/kg

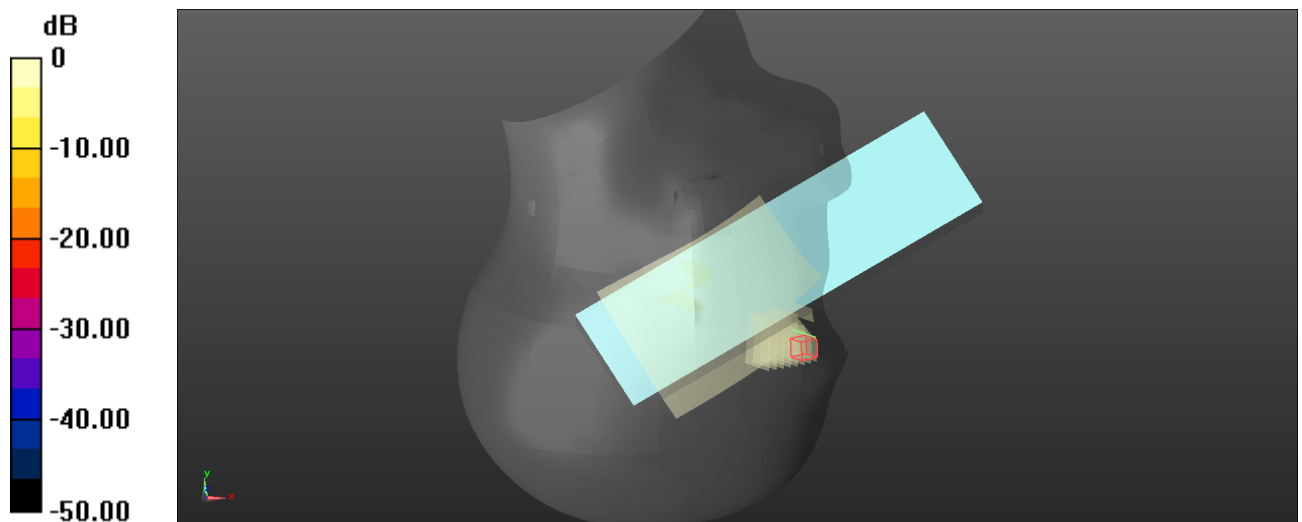

0 dB = 0.0974 W/kg = -10.11 dBW/kg

**Plot: 24#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.655$  S/m;  $\epsilon_r = 35.234$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0817 W/kg


**Head Right Tilt/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.323 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.101 W/kg

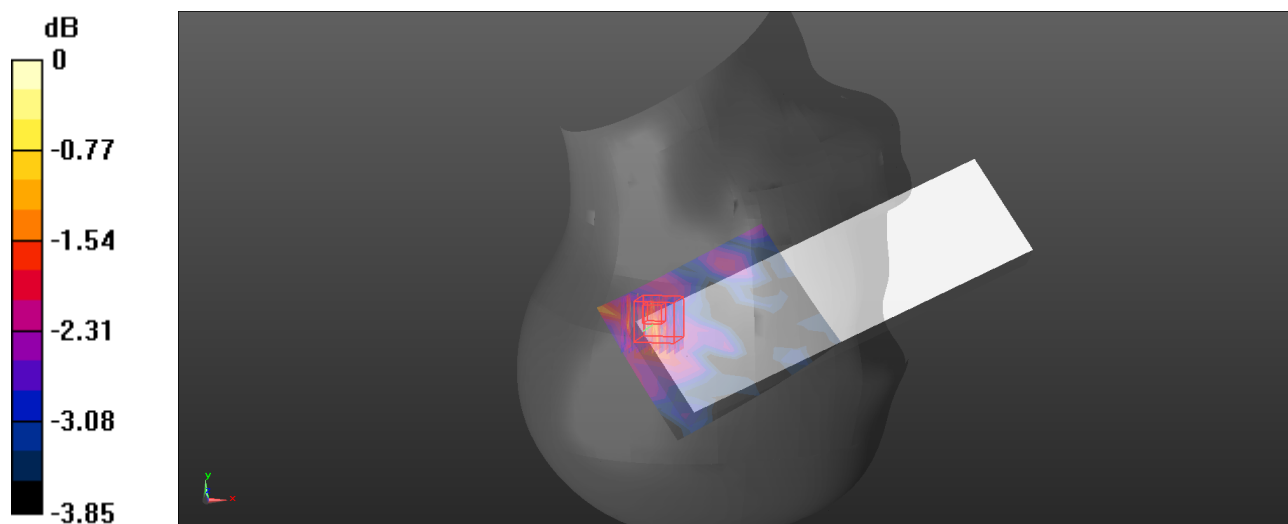

0 dB = 0.101 W/kg = -9.96 dBW/kg



**Plot: 25#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.273 W/kg


**Body Front/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.589 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.567 W/kg

**SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.095 W/kg**

Maximum value of SAR (measured) = 0.285 W/kg

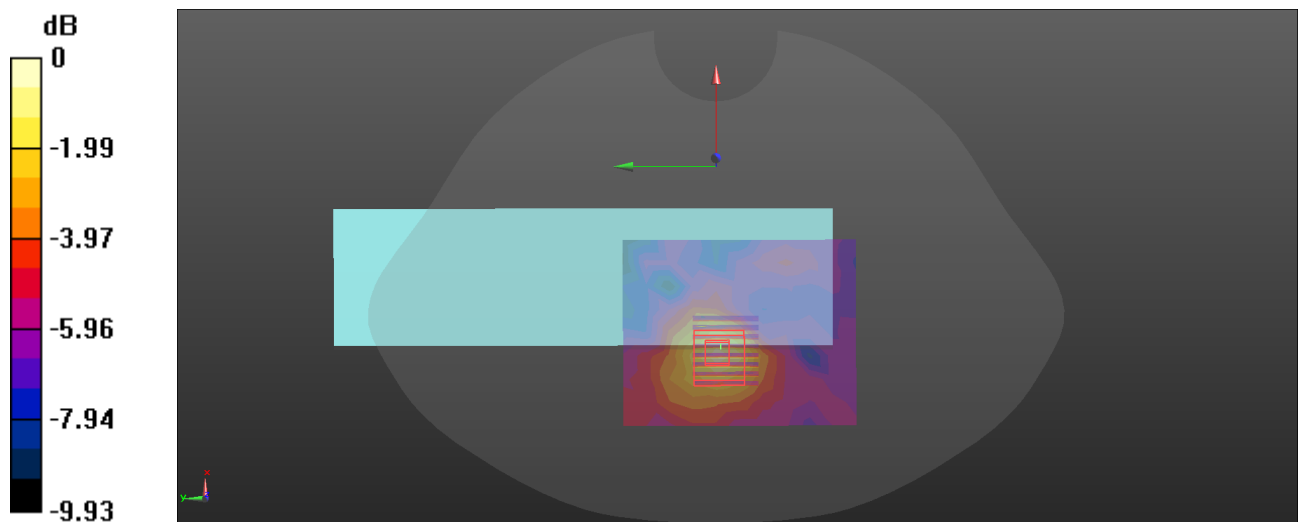

0 dB = 0.285 W/kg = -5.45 dBW/kg

**Plot: 26#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.10

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 4.646$  S/m;  $\epsilon_r = 35.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ax20 Low/Area Scan (9x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.06 W/kg


**Body Back/WLAN 5.2G 802.11ax20 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.662 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 0.863 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 1.74 W/kg

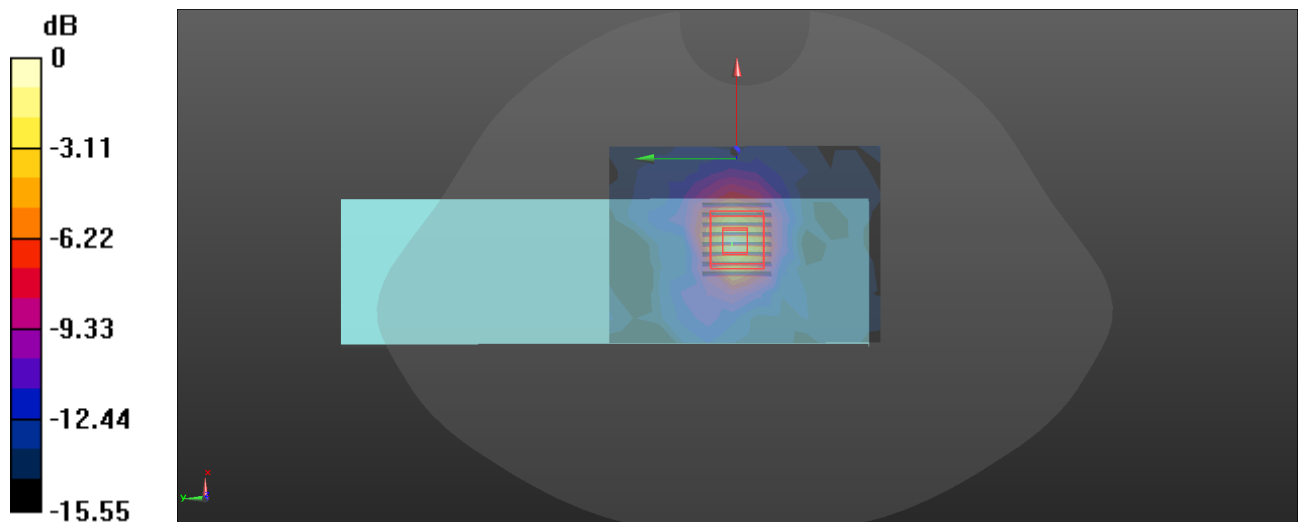

0 dB = 1.74 W/kg = 2.41 dBW/kg

**Plot: 27#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.655 \text{ S/m}$ ;  $\epsilon_r = 35.234$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5200 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ax20 Mid/Area Scan (9x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.84 W/kg


**Body Back/WLAN 5.2G 802.11ax20 Mid/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 7.385 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.96 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.308 W/kg**

Maximum value of SAR (measured) = 2.17 W/kg

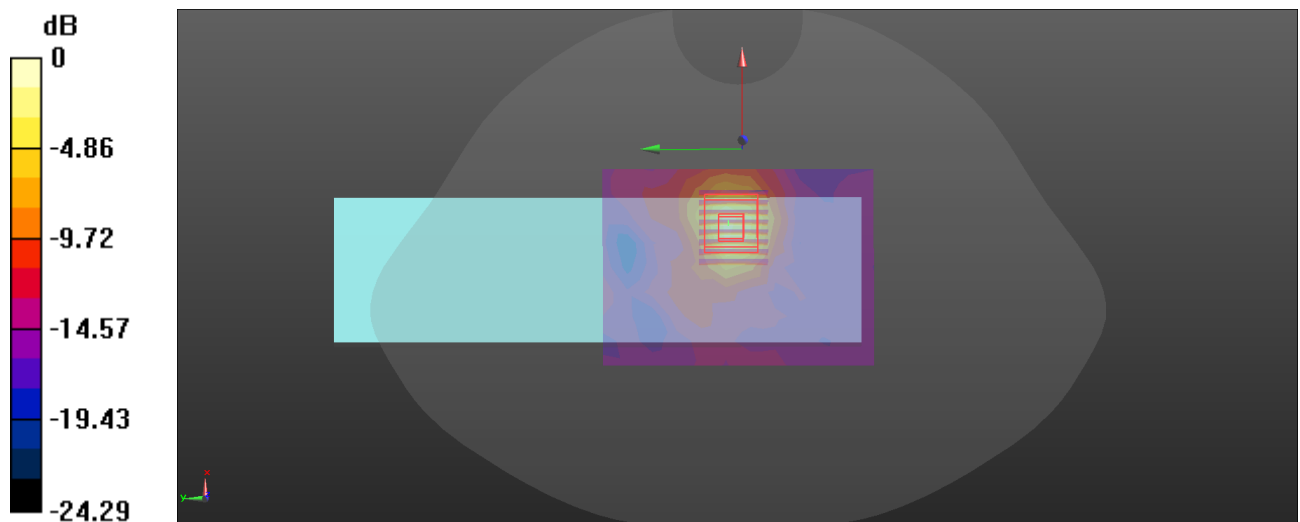

0 dB = 2.17 W/kg = 3.36 dBW/kg

**Plot: 28#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz;Duty Cycle: 1:1.10

Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 4.672 \text{ S/m}$ ;  $\epsilon_r = 35.227$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5240 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.2G 802.11ax20 High/Area Scan (9x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.24 W/kg


**Body Back/WLAN 5.2G 802.11ax20 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.88 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.09 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.402 W/kg**

Maximum value of SAR (measured) = 2.20 W/kg

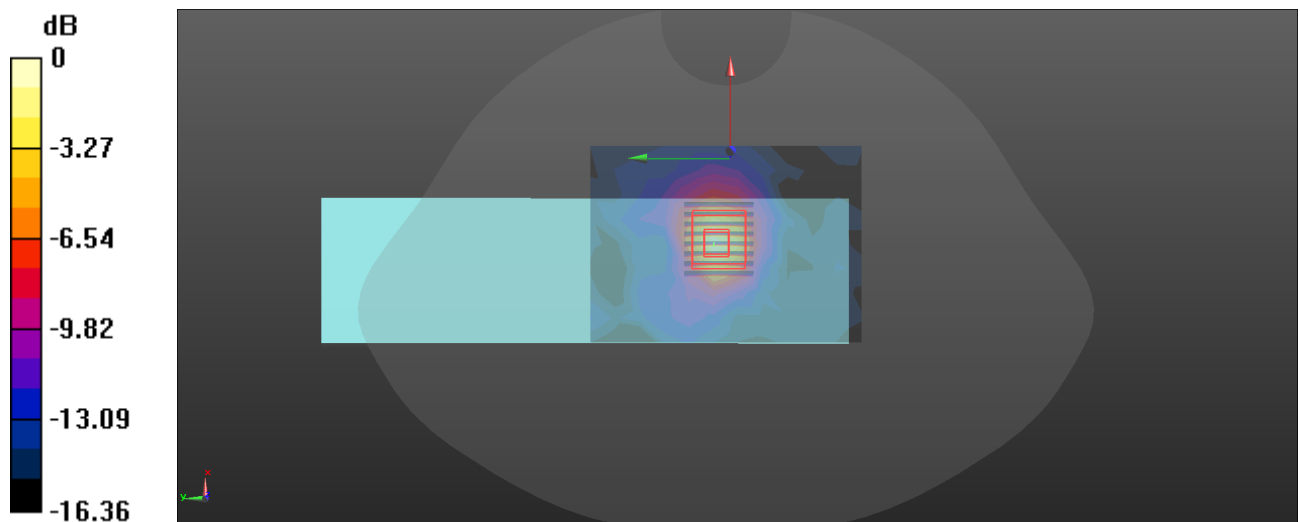

0 dB = 2.20 W/kg = 3.42 dBW/kg

**Plot: 29#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.958 W/kg


**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.248 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.278 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg

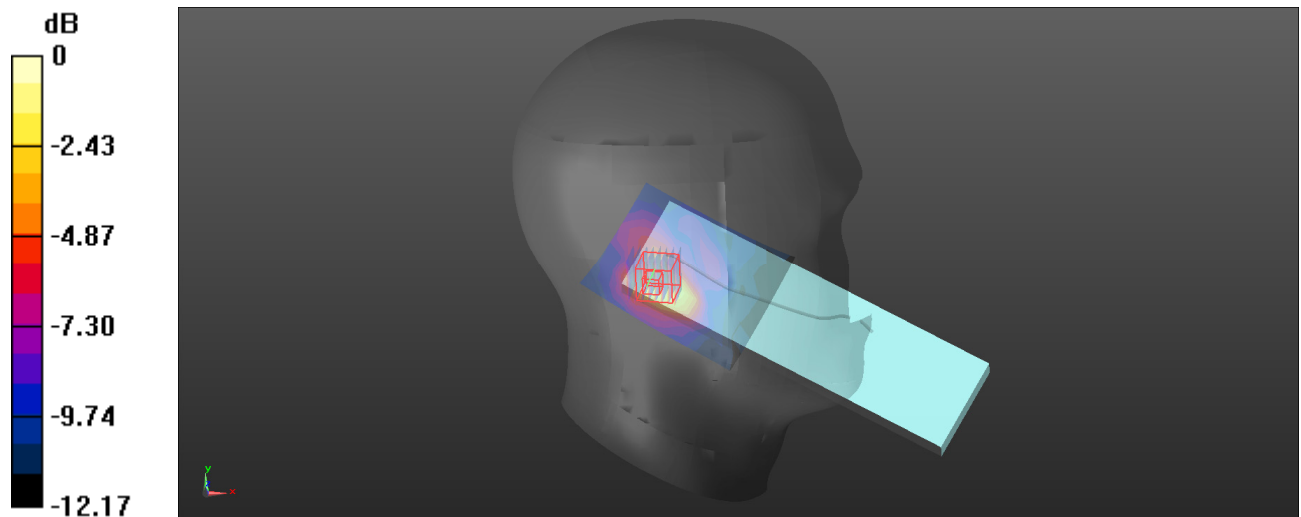

0 dB = 1.07 W/kg = 0.29 dBW/kg

**Plot: 30#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.737 W/kg


**Head Left Tilt/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 5.349 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.213 W/kg**

Maximum value of SAR (measured) = 0.822 W/kg

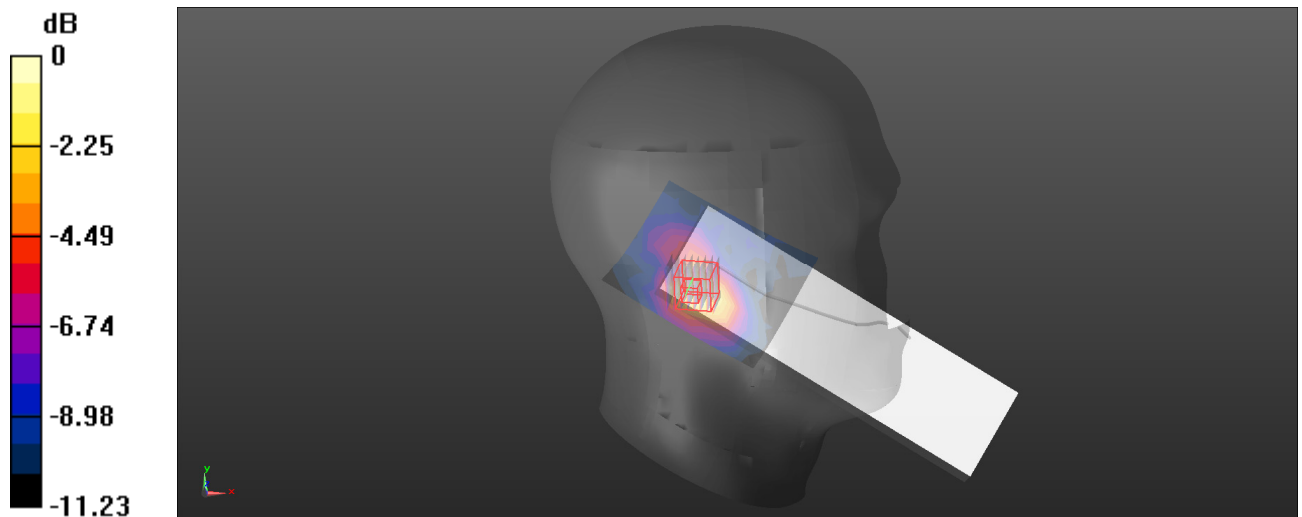

0 dB = 0.822 W/kg = -0.85 dBW/kg

**Plot: 31#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.174 \text{ S/m}$ ;  $\epsilon_r = 36.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.68 W/kg


**Head Right Cheek/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.110 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 5.04 W/kg

**SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.375 W/kg**

Maximum value of SAR (measured) = 2.08 W/kg

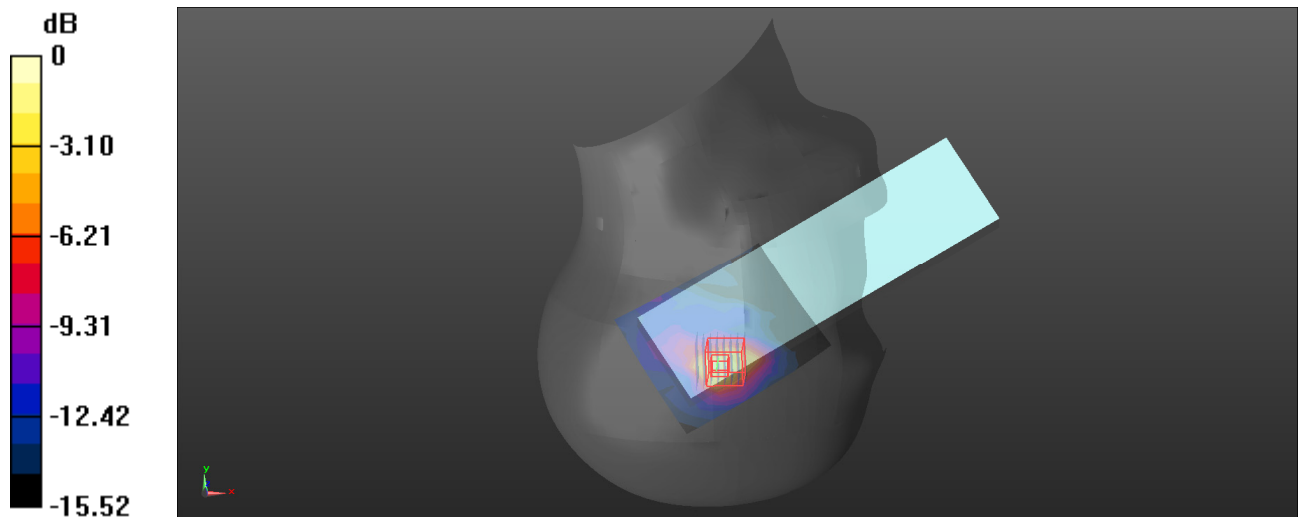

0 dB = 2.08 W/kg = 3.18 dBW/kg

**Plot: 32#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.46 W/kg

**Head Right Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 6.272 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 2.80 W/kg

**SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.347 W/kg**

Maximum value of SAR (measured) = 1.89 W/kg

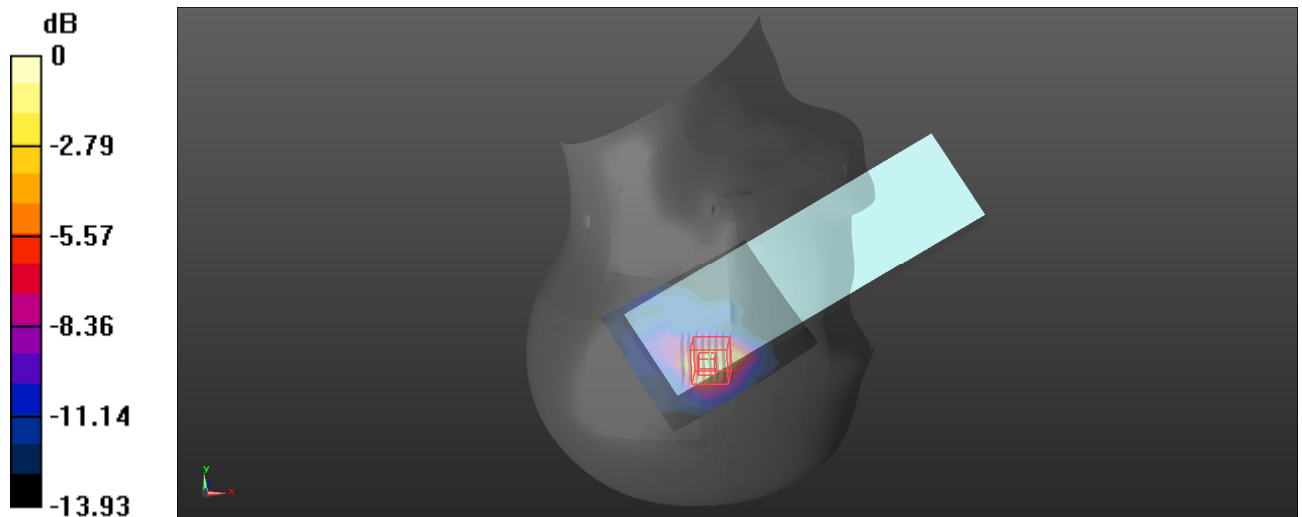

0 dB = 1.89 W/kg = 2.76 dBW/kg



**Plot: 33#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg


**Head Right Tilt/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.904 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.260 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

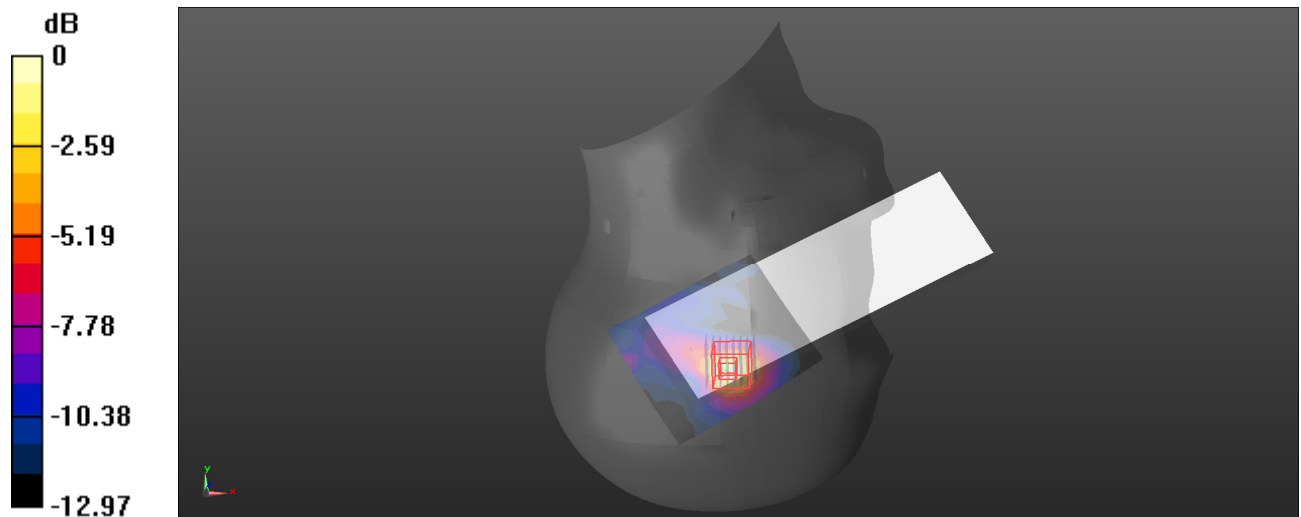

0 dB = 1.18 W/kg = 0.72 dBW/kg

**Plot: 34#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.972 W/kg


**Body Front/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.012 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

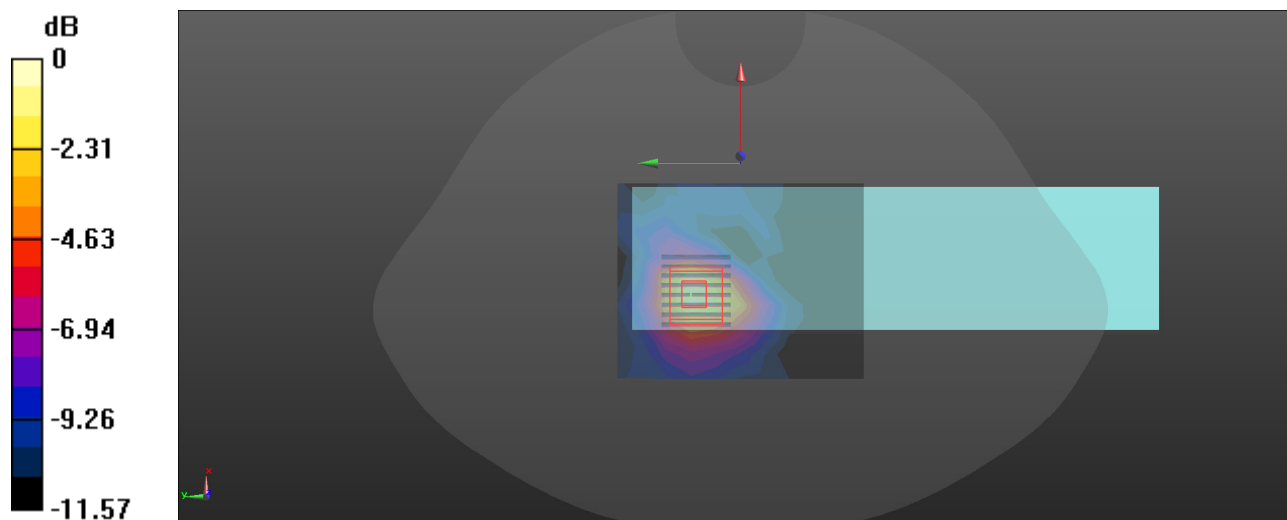

0 dB = 1.09 W/kg = 0.37 dBW/kg

**Plot: 35#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.8G 802.11ax40 High/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.601 W/kg


**Body Back/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.784 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.985 W/kg

**SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.199 W/kg**

Maximum value of SAR (measured) = 0.693 W/kg

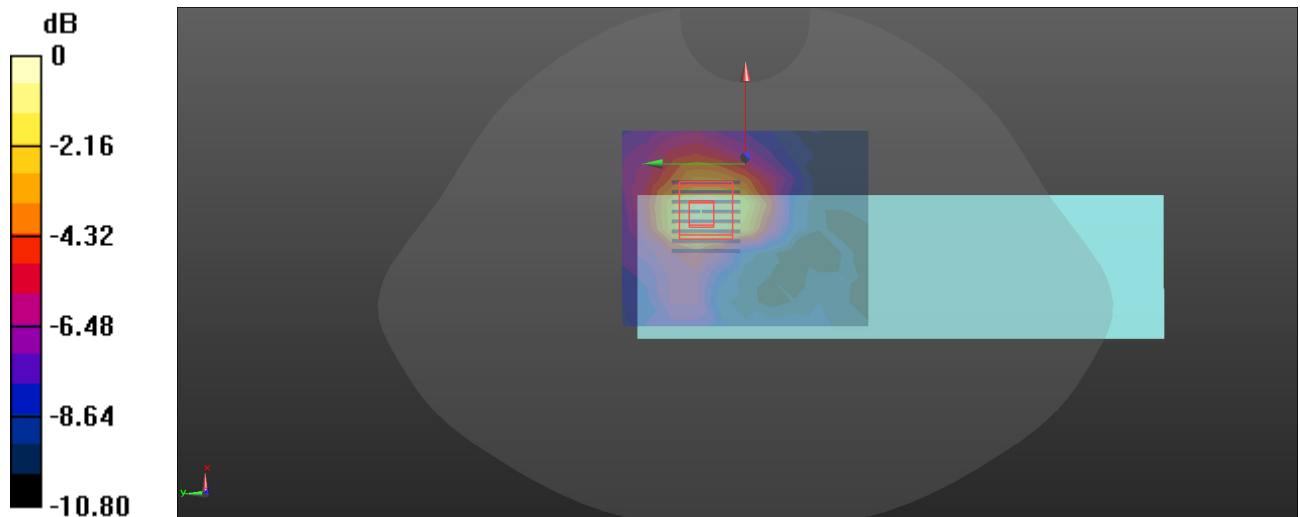

0 dB = 0.693 W/kg = -1.59 dBW/kg

**Plot: 36#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.194 W/kg


**Head Left Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.967 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.230 W/kg

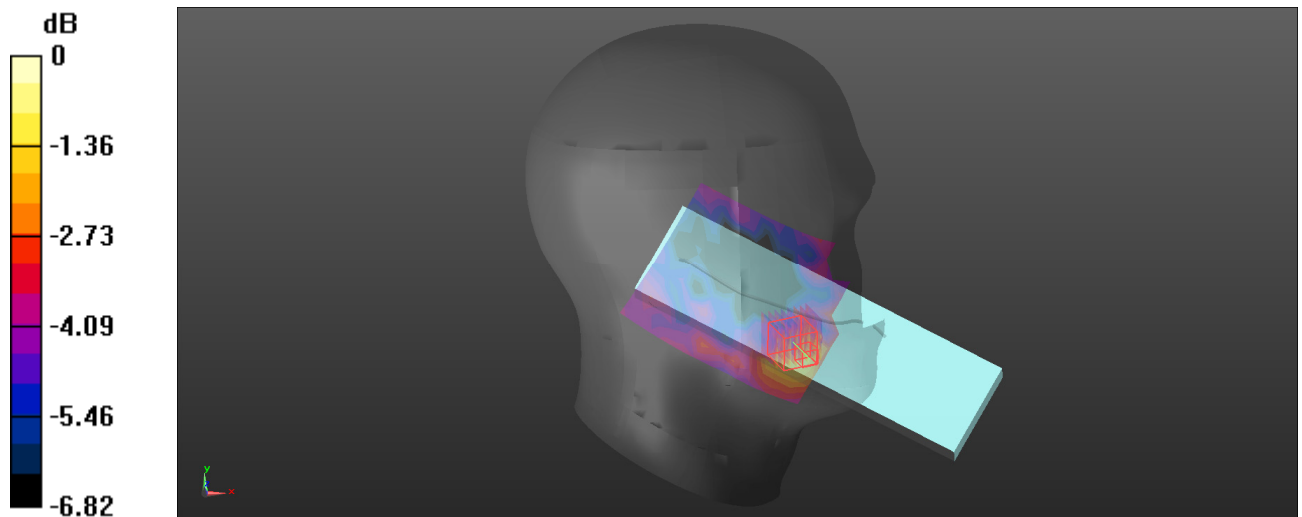

0 dB = 0.230 W/kg = -6.38 dBW/kg

**Plot: 37#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Left Tilt/WLAN 5.8G 802.11ax40 High/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.121 W/kg


**Head Left Tilt/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.458 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

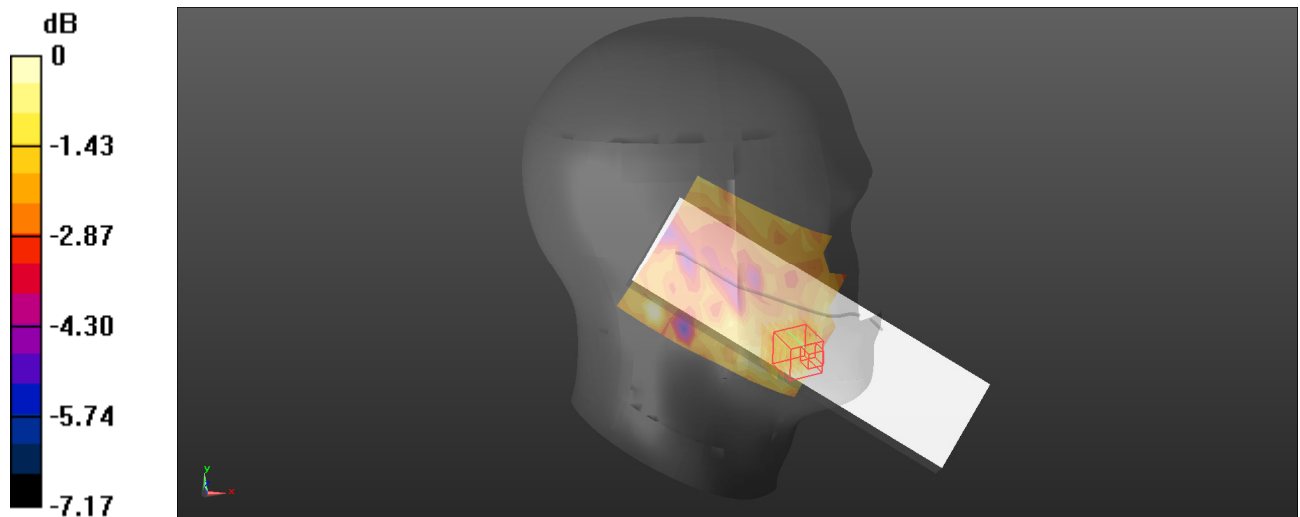

0 dB = 0.105 W/kg = -9.79 dBW/kg

**Plot: 38#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Cheek/WLAN 5.8G 802.11ax40 High/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.147 W/kg

**Head Right Cheek/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.460 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

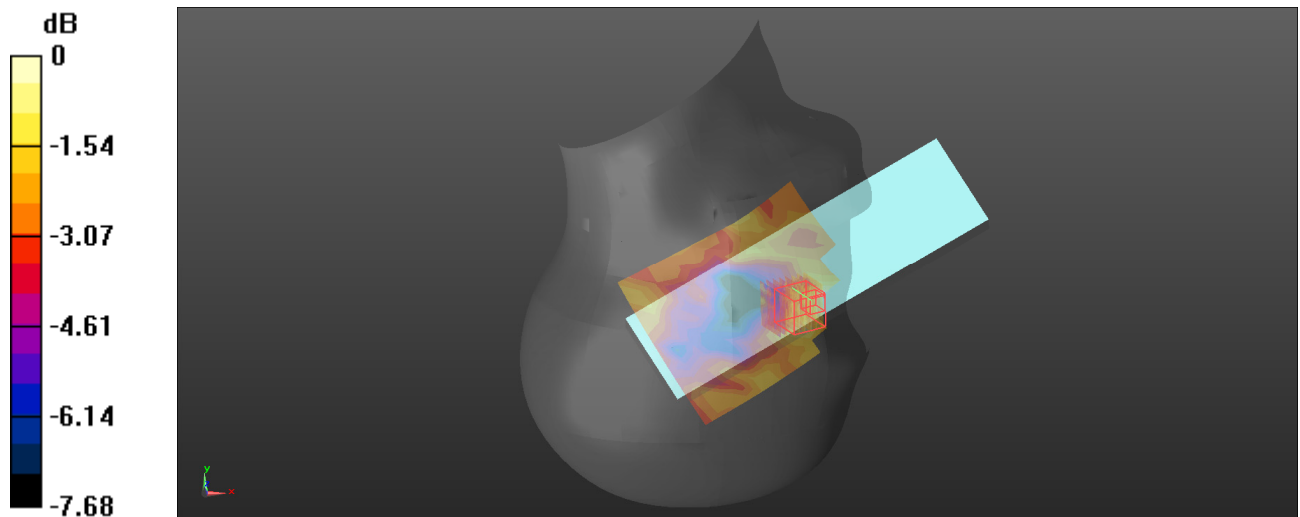

0 dB = 0.135 W/kg = -8.70 dBW/kg

**Plot: 39#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Head Right Tilt/WLAN 5.8G 802.11ax40 High/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.133 W/kg


**Head Right Tilt/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.493 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

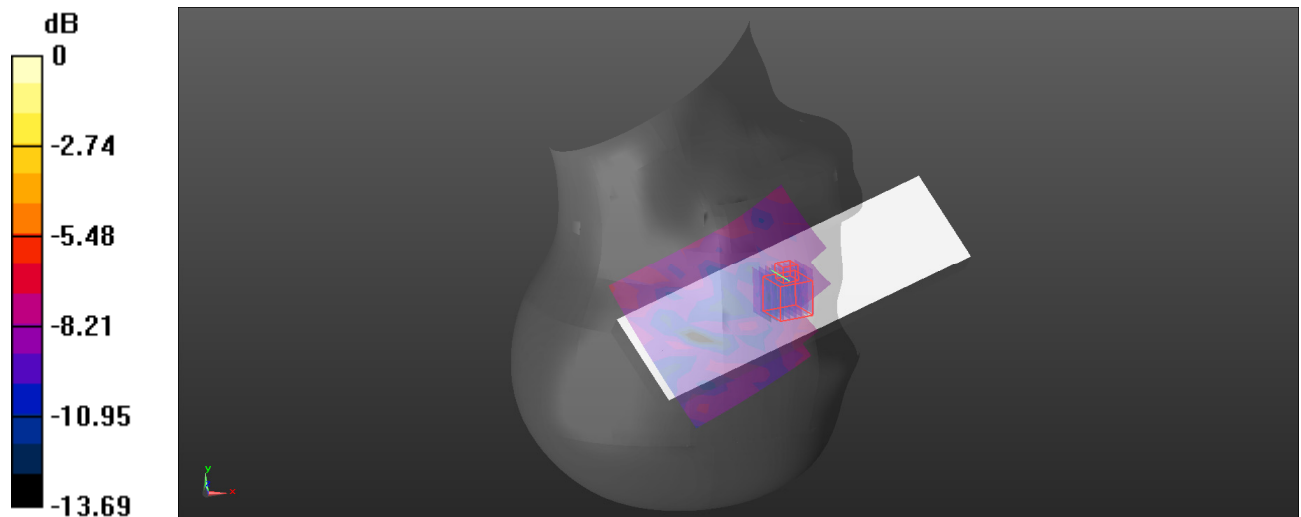

0 dB = 0.410 W/kg = -3.87 dBW/kg

**Plot: 40#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795$  MHz;  $\sigma = 5.178$  S/m;  $\epsilon_r = 36.061$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Front/WLAN 5.8G 802.11ax40 High/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.445 W/kg


**Body Front/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.419 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.353 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.296 W/kg

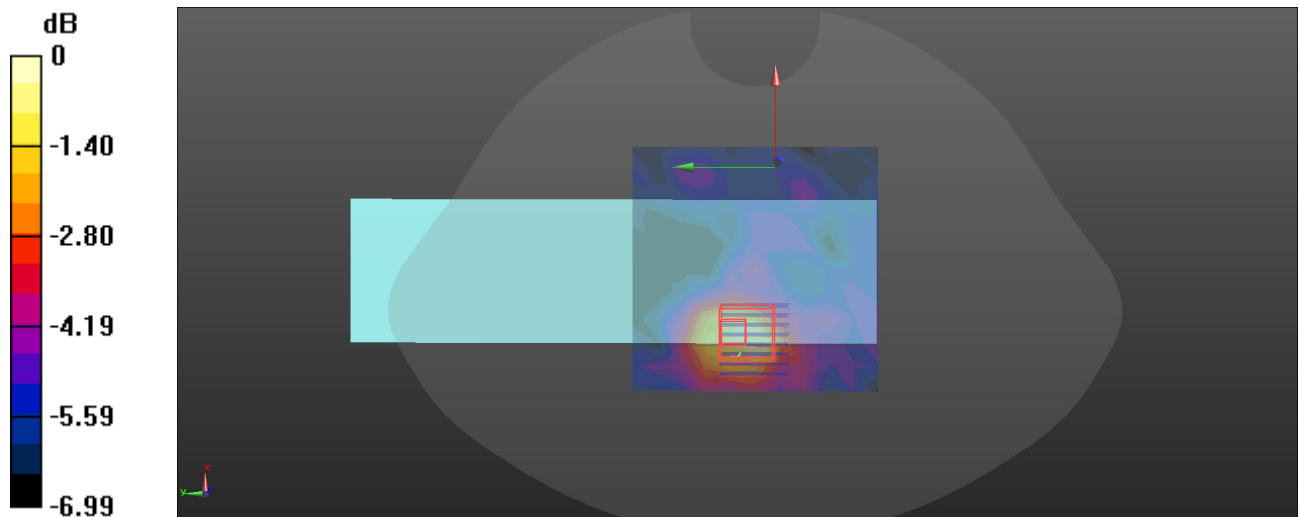

0 dB = 0.296 W/kg = -5.29 dBW/kg



**Plot: 41#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5755 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5755 \text{ MHz}$ ;  $\sigma = 5.174 \text{ S/m}$ ;  $\epsilon_r = 36.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5755 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.8G 802.11ax40 Low/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.55 W/kg


**Body Back/WLAN 5.8G 802.11ax40 Low/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.163 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.70 W/kg

**SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (measured) = 1.70 W/kg

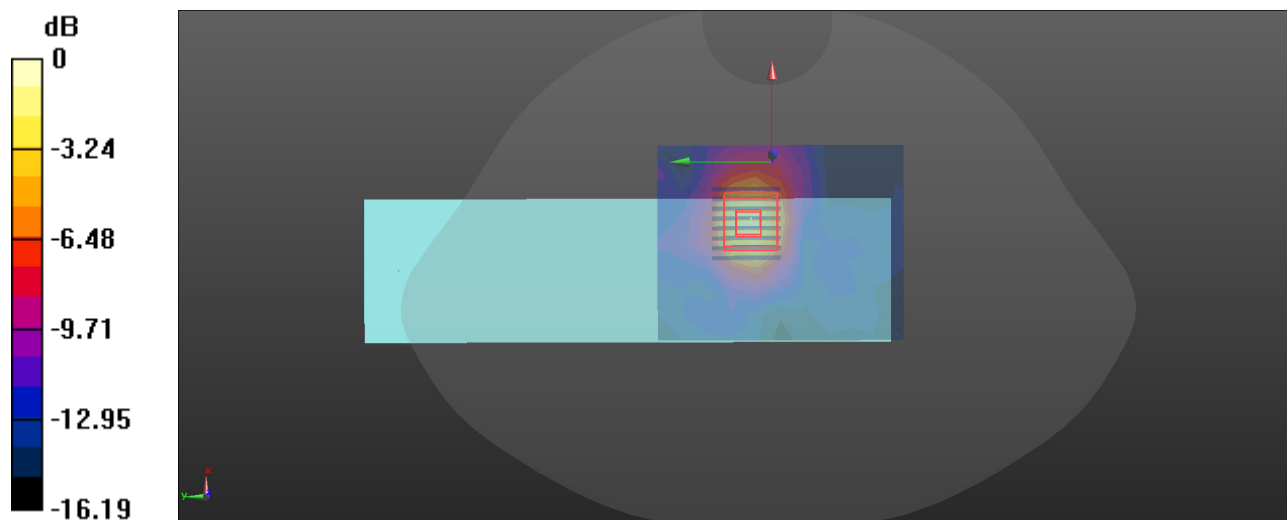

0 dB = 1.70 W/kg = 2.30 dBW/kg

**Plot: 42#**

**DUT: Portable Wi-Fi Phone; Type: H603W; Serial: 2ON5-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5795 MHz;Duty Cycle: 1:1.16

Medium parameters used:  $f = 5795 \text{ MHz}$ ;  $\sigma = 5.178 \text{ S/m}$ ;  $\epsilon_r = 36.061$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5795 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Body Back/WLAN 5.8G 802.11ax40 High/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.72 W/kg


**Body Back/WLAN 5.8G 802.11ax40 High/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.126 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.83 W/kg

**SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.315 W/kg**

Maximum value of SAR (measured) = 1.80 W/kg

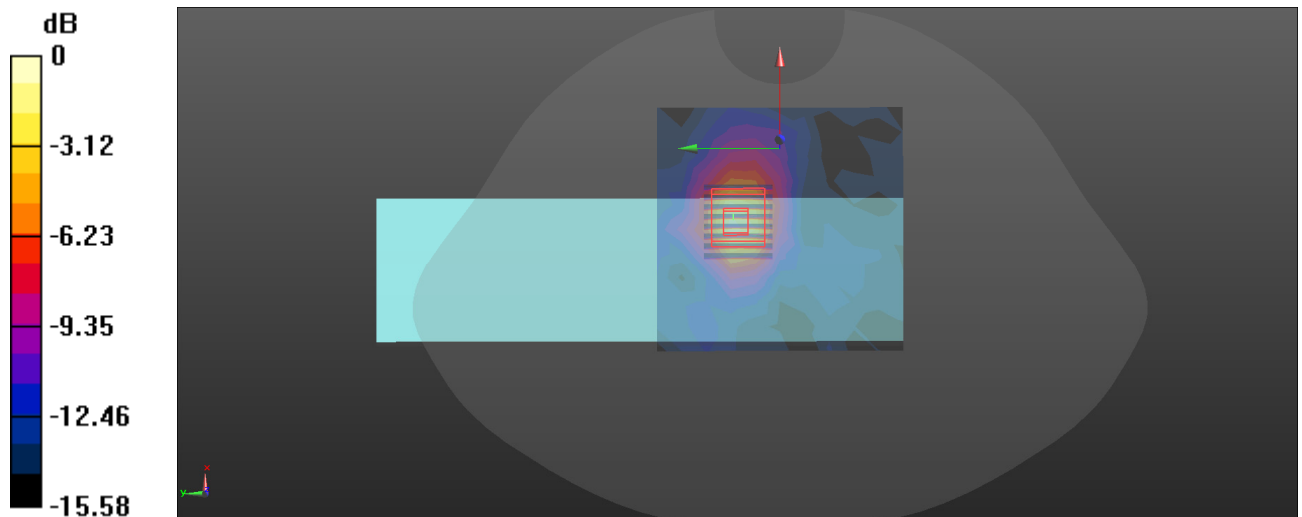

0 dB = 1.80 W/kg = 2.55 dBW/kg