


Freq Offset 0 Hz

Scale Type

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)



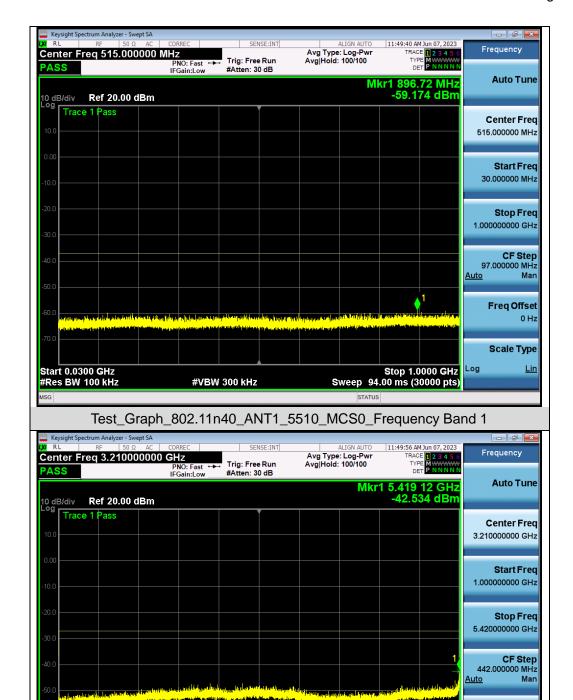


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n40 ANT1 5510 MCS0 Frequency Band 2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz






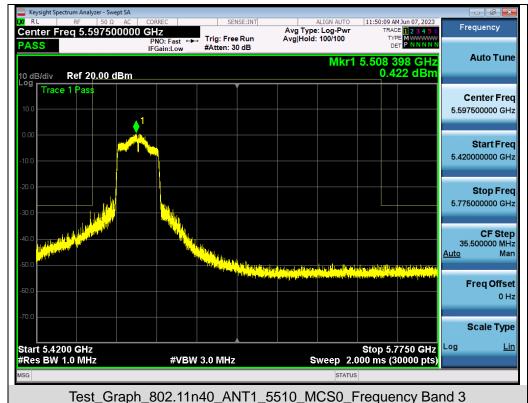









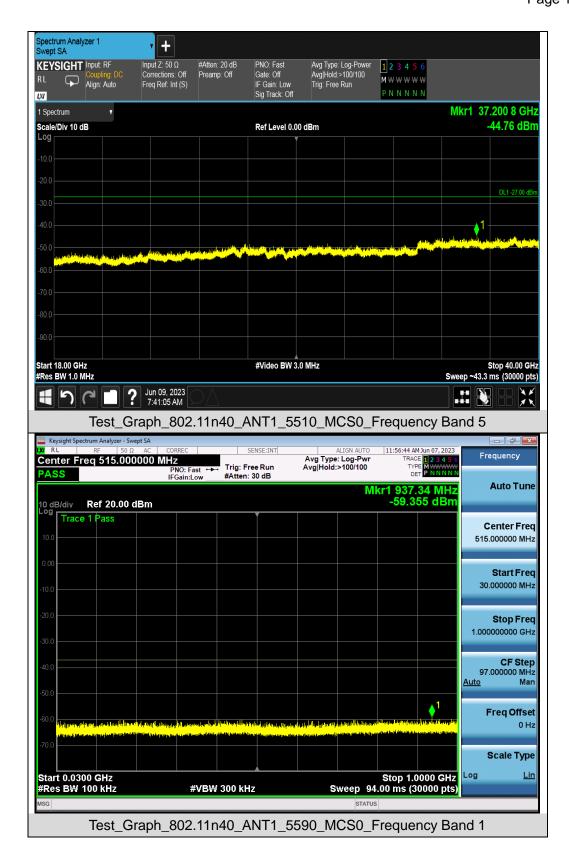







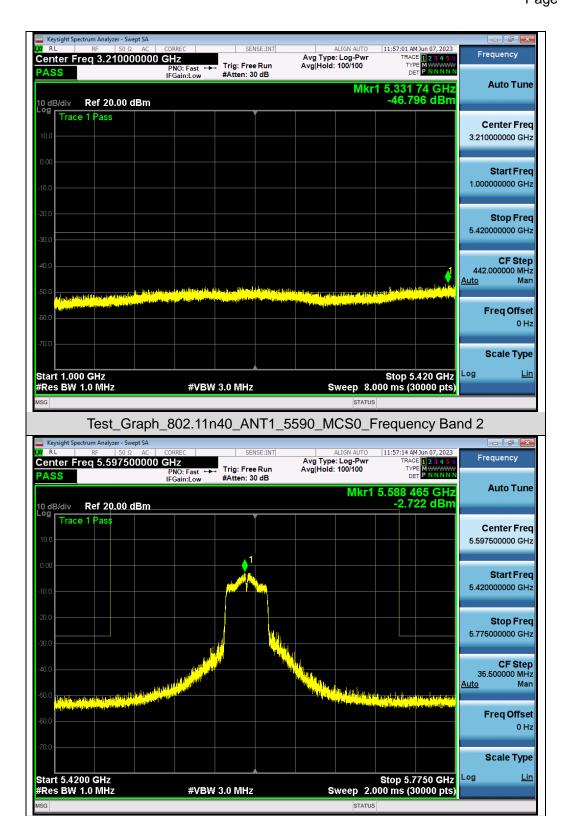


Test Graph 802.11n40 ANT1 5590 MCS0 Frequency Band 3





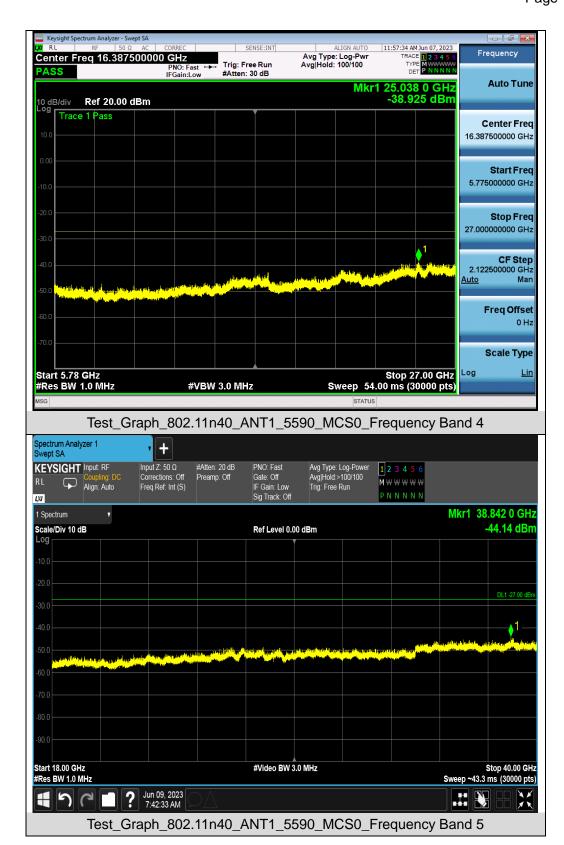




Freq Offset 0 Hz

Scale Type

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)



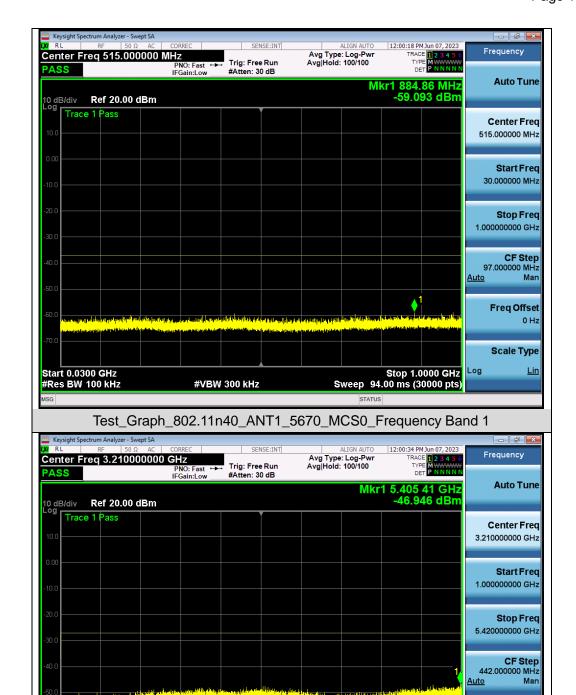


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 5670 MCS0 Frequency Band 2

#VBW 3.0 MHz

Start 1.000 GHz #Res BW 1.0 MHz




Stop Freq 27.000000000 GHz

CF Step 2.122500000 GHz

Man


<u>Auto</u>



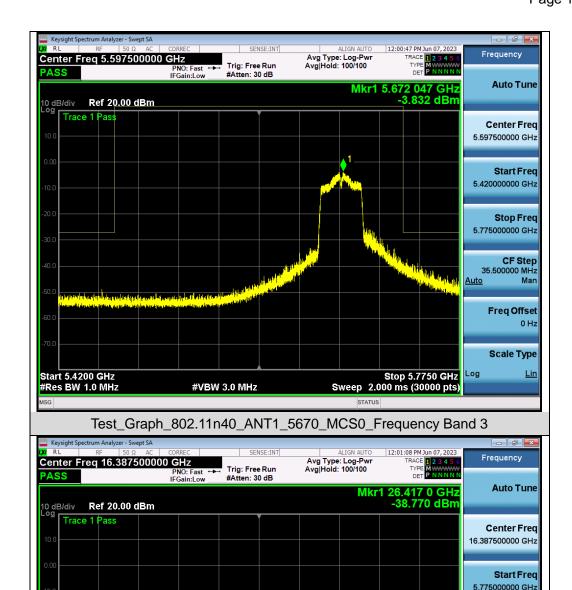



Start 5.78 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 54.00 ms (30000 pts)

Test_Graph_802.11n40_ANT1_5670_MCS0_Frequency Band 4






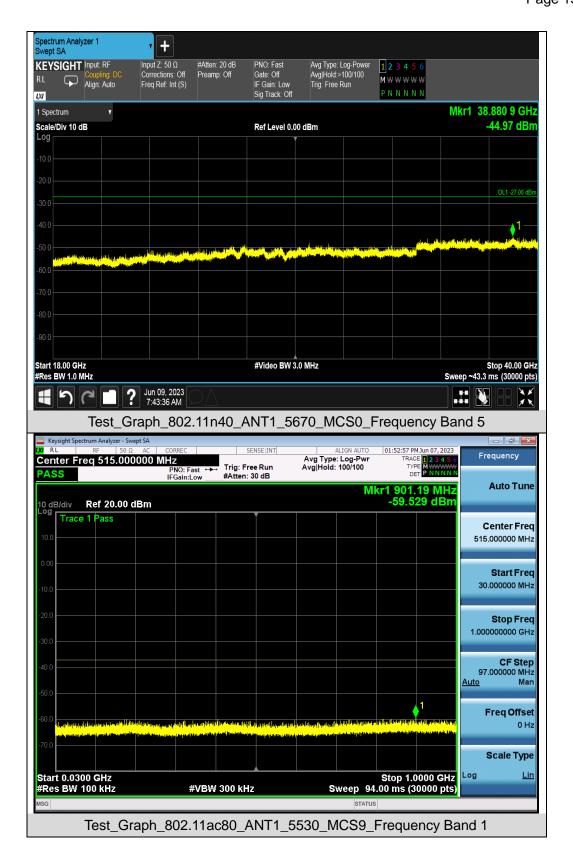









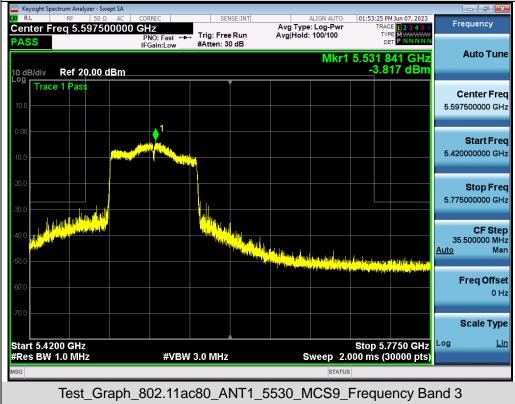


Web: http://www.agccert.com/






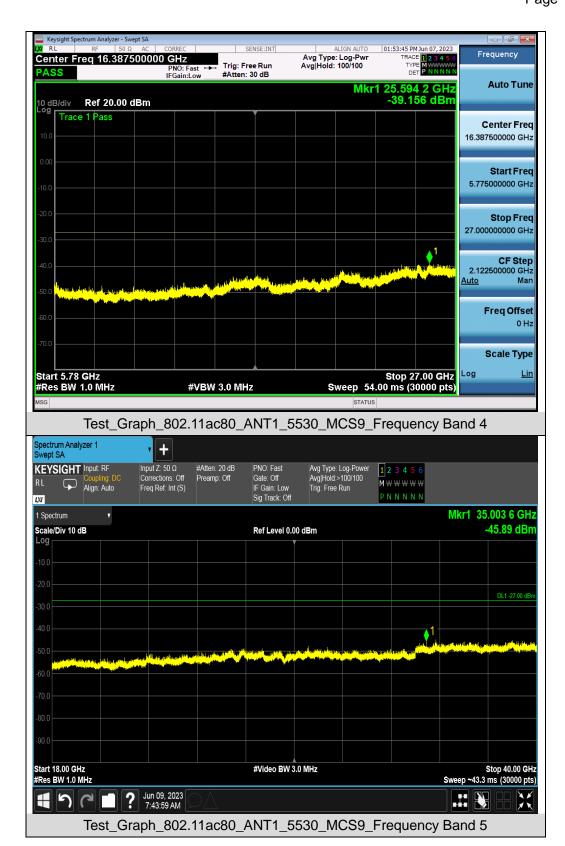







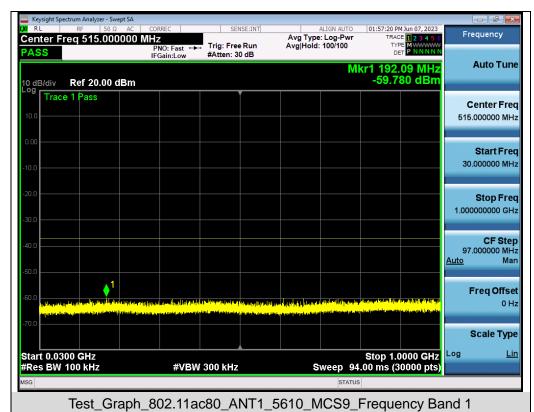








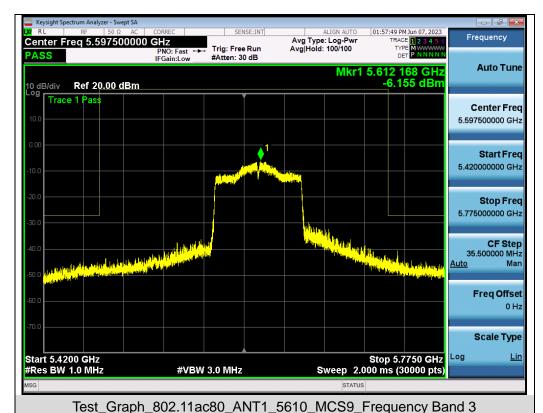





Web: http://www.agccert.com/






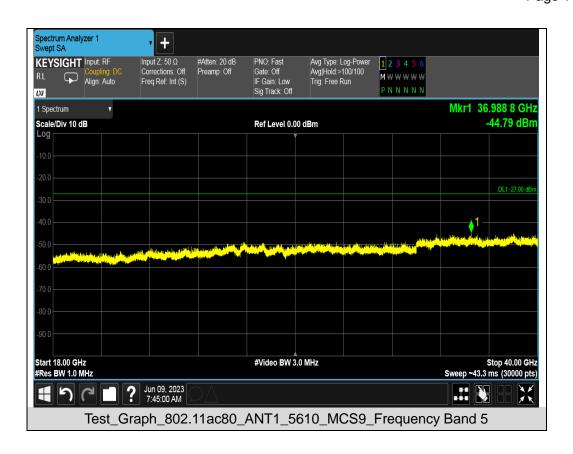







Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

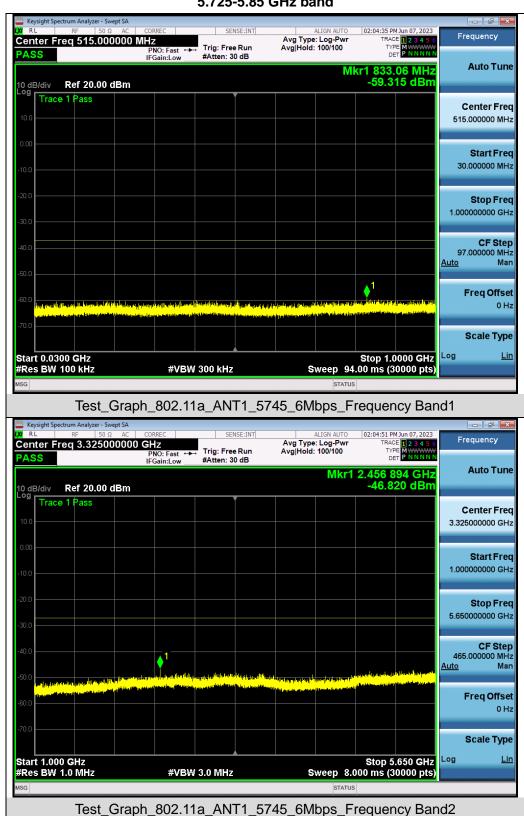







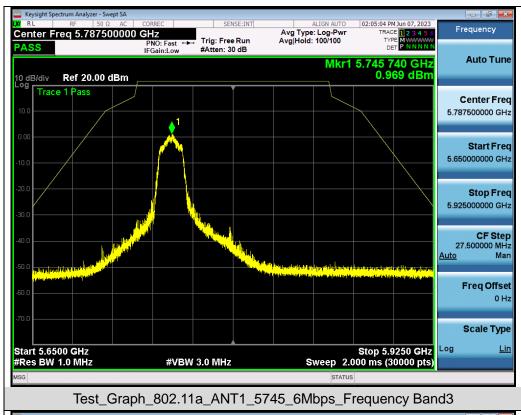








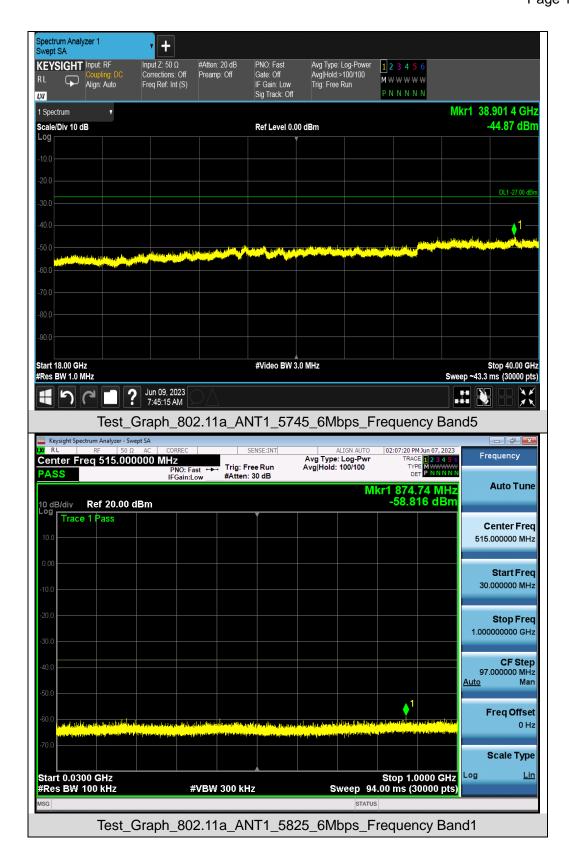




<u>Auto</u>

Stop 5.9250 GHz Sweep 2.000 ms (30000 pts) Man

Freq Offset 0 Hz

Scale Type



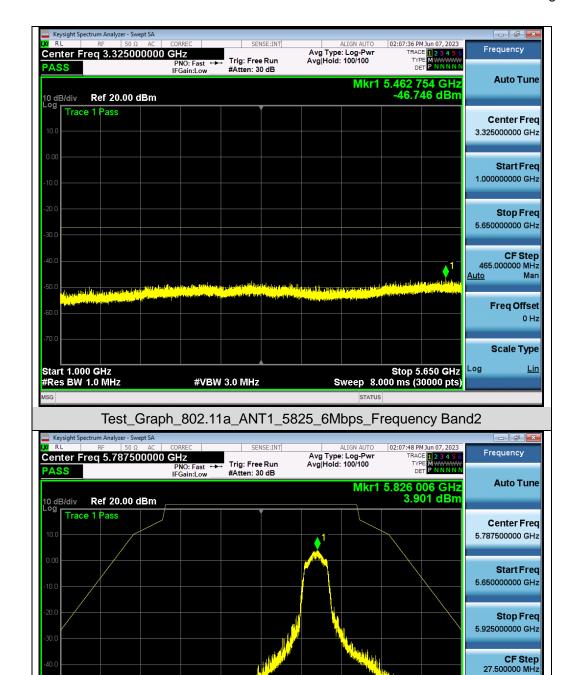


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11a ANT1 5825 6Mbps Frequency Band3


#VBW 3.0 MHz

Start 5.6500 GHz #Res BW 1.0 MHz





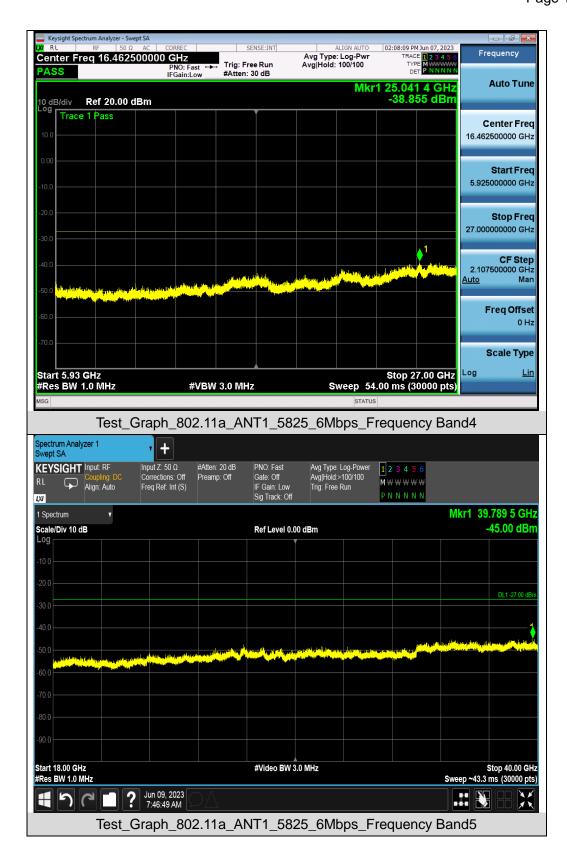




Freq Offset 0 Hz

Scale Type

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)



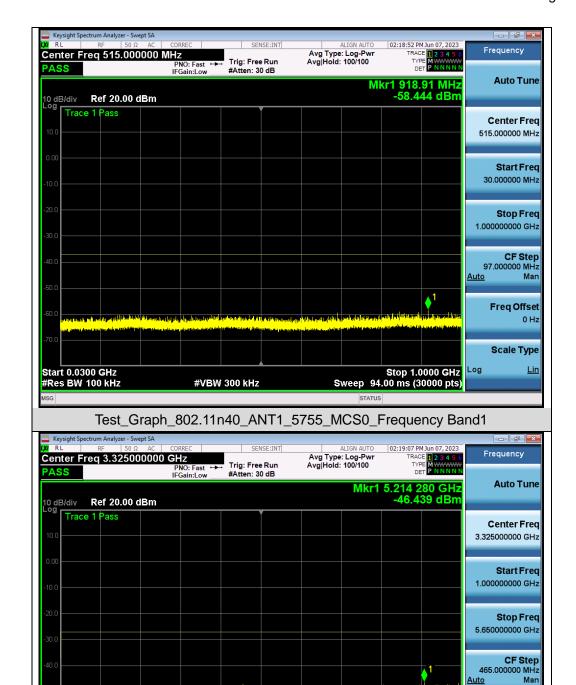


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n40 ANT1 5755 MCS0 Frequency Band2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz






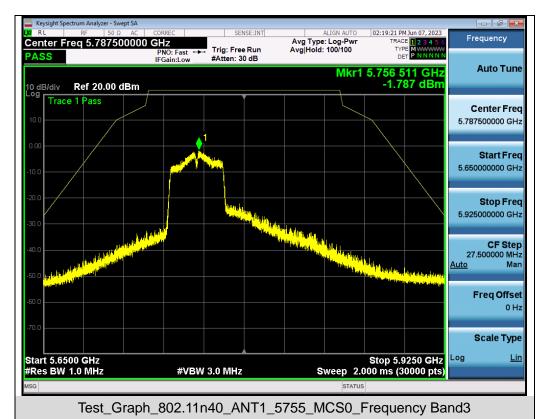








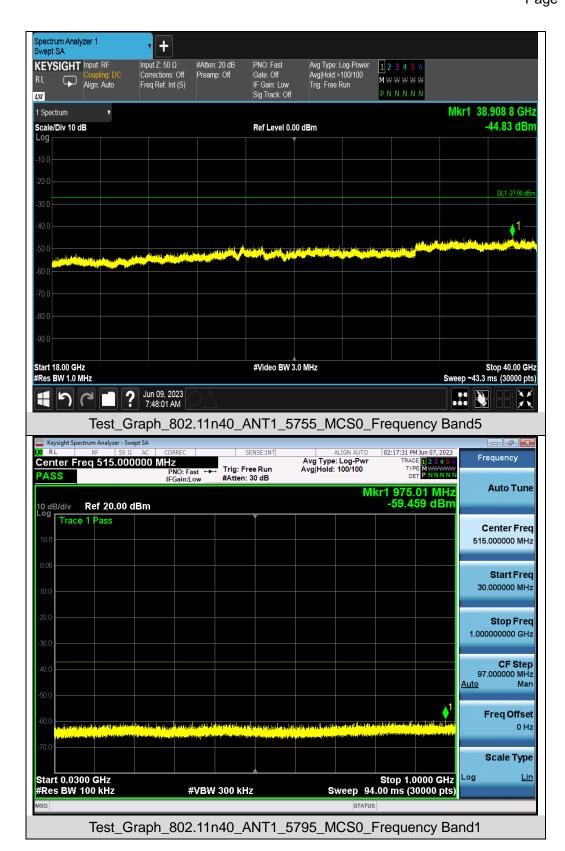




0 Hz

Scale Type

Log

Stop 5.9250 GHz Sweep 2.000 ms (30000 pts)



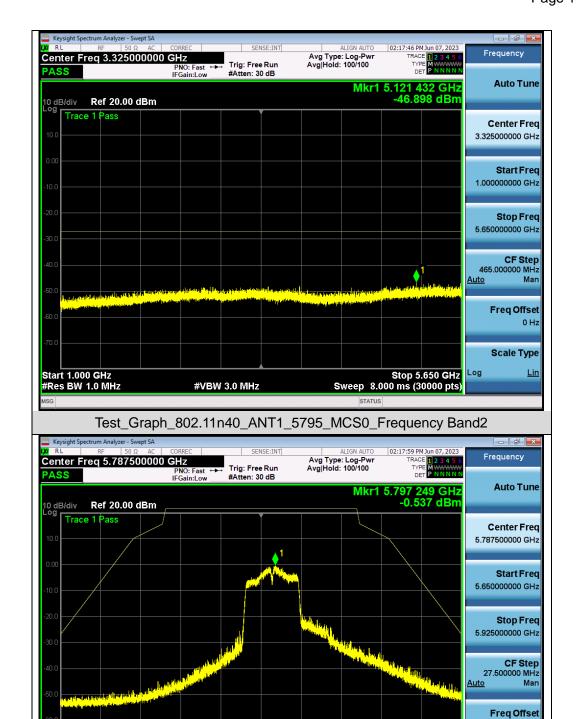


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test Graph 802.11n40 ANT1 5795 MCS0 Frequency Band3


#VBW 3.0 MHz

Start 5.6500 GHz #Res BW 1.0 MHz





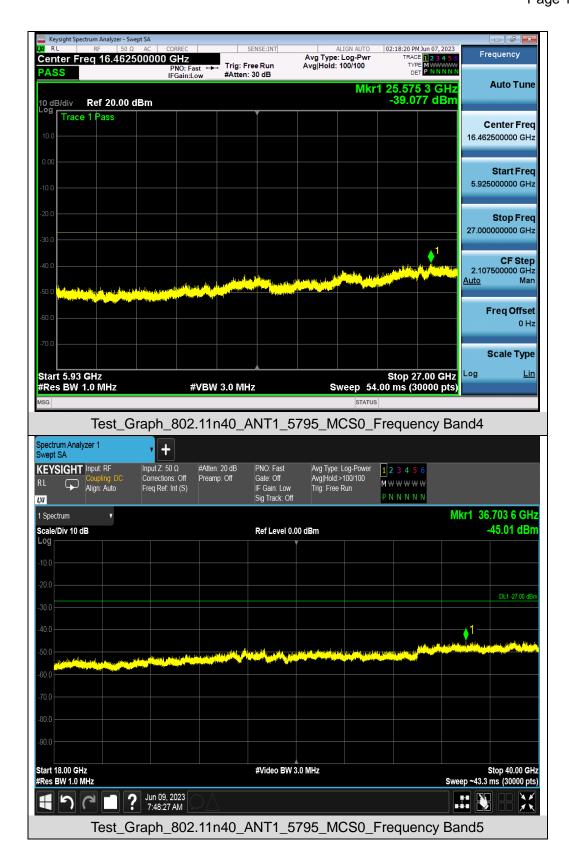




Freq Offset 0 Hz

Scale Type

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)



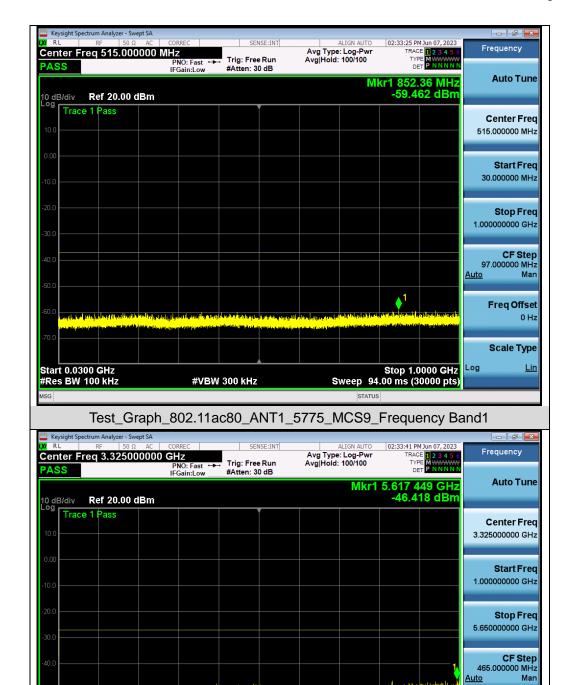


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ac80_ANT1_5775_MCS9_Frequency Band2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz














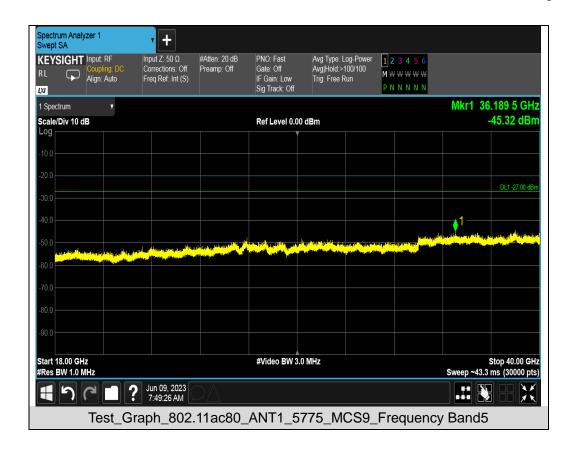



10. RADIATED EMISSION

10.1 LIMITS OF RADIATED EMISSION TEST

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dBuV/m) = 20 \log Emission level (uV/m)$.
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

	•				
	Applicable to	Limit			
Restricted	789033 D02 General UNII Test	Field stre	ength at 3m (dBuV/m)		
bands	1 Tocedures New Trailes Vozior	PK: 74	AV: 54		
Out of the	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
	FCC 15.407(b)(1)		PK: 68.2		
restricted bands	15.407(b)(2)	PK: -27			
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E =
$$\frac{1000000 \sqrt{30 P}}{3}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge,

and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band. Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection".



Page 157 of 197

edge.

10.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 158 of 197

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10 $\log (1/x)$, where x is the duty cycle.




10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

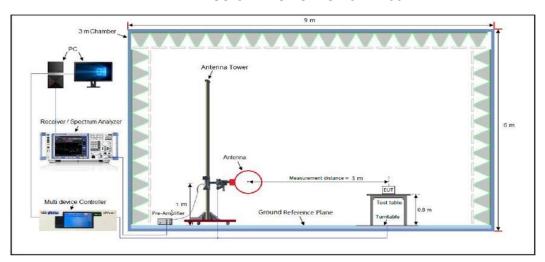

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

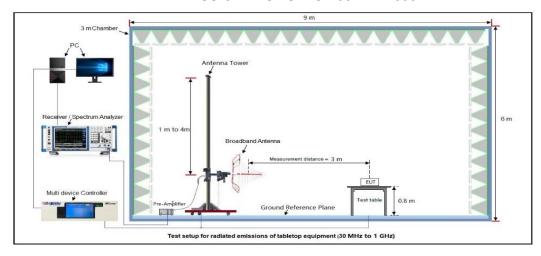

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

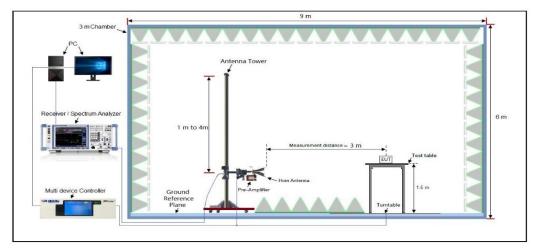

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




10.4 MEASUREMENT RESULT

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Radiated emission from 30MHz to 1000MHz

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

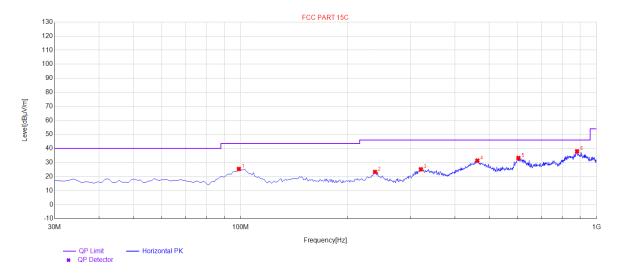


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	98.87	25.41	20.81	43.50	18.09	100	100	Horizontal
2	238.55	23.32	17.30	46.00	22.68	100	330	Horizontal
3	321	25.20	21.31	46.00	20.80	100	240	Horizontal
4	462.62	31.35	27.40	46.00	14.65	100	80	Horizontal
5	603.27	33.21	28.60	46.00	12.79	100	150	Horizontal
6	881.66	38.02	33.14	46.00	7.98	100	260	Horizontal

RESULT: PASS





EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

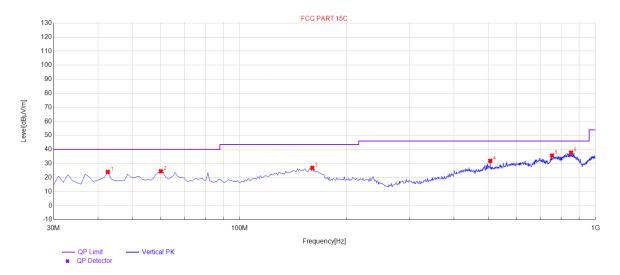

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.61	24.01	12.15	40.00	15.99	100	220	Vertical
2	60.07	24.47	14.90	40.00	15.53	100	240	Vertical
3	159.98	26.87	21.94	43.50	16.63	100	200	Vertical
4	506.27	31.92	23.63	46.00	14.08	100	120	Vertical
5	754.59	35.61	29.54	46.00	10.39	100	0	Vertical
6	853.53	37.74	32.18	46.00	8.26	100	140	Vertical

RESULT: PASS

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Page 162 of 197

Radiated emission above 1GHz

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity 60%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10360.042	47.64	9.14	56.78	68.20	-11.42	peak		
15540.063	42.15	10.22	52.37	74.00	-21.63	peak		
15540.000	32.46	10.22	42.68	54.00	-11.32	AVG		
Remark:	Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
10360.042	48.64	9.14	57.78	68.20	-10.42	peak	
15540.063	41.56	10.22	51.78	74.00	-22.22	peak	
15540.000	33.08	10.22	43.30	54.00	-10.70	AVG	
Remark:							
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.				



Page 163 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity 60%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	49.64	9.14	58.78	68.20	-9.42	peak
15600.063	42.15	10.22	52.37	74.00	-21.63	peak
15600.063	33.54	10.22	43.76	54.00	-10.24	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-ai	mplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
10400.042	48.64	9.14	57.78	68.20	-10.42	peak
15600.063	42.15	10.22	52.37	74.00	-21.63	peak
15600.063	32.48	10.22	42.70	54.00	-11.30	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			



Page 164 of 197

EUT Portable Wi-Fi Phone		Model Name	W610W	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical	

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)			
10480.042	48.64	9.27	57.91	68.20	-10.29	peak		
15720.063	42.51	10.38	52.89	74.00	-21.11	peak		
15720.063	32.47	10.38	42.85	54.00	-11.15	AVG		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
47.64	9.27	56.91	68.20	-11.29	peak
42.15	10.38	52.53	74.00	-21.47	peak
32.45	10.38	42.83	54.00	-11.17	AVG
na Factor + Cabl	e Loss – Pre-ai	mplifier.			
	47.64 42.15 32.45	47.64 9.27 42.15 10.38 32.45 10.38	47.64 9.27 56.91 42.15 10.38 52.53	47.64 9.27 56.91 68.20 42.15 10.38 52.53 74.00 32.45 10.38 42.83 54.00	47.64 9.27 56.91 68.20 -11.29 42.15 10.38 52.53 74.00 -21.47 32.45 10.38 42.83 54.00 -11.17



Page 165 of 197

EUT	Portable Wi-Fi Phone Model Name		W610W	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5260MHz	Antenna	Horizontal/Vertical	

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
10520.044	48.96	9.29	58.25	68.20	-9.95	peak		
15780.066	43.54	10.42	53.96	74.00	-20.04	peak		
15780.066 33.47 10.42 43.89 54.00 -10.11 AVG								
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10520.044	46.35	9.29	55.64	68.20	-12.56	peak	
15780.066	42.15	10.42	52.57	74.00	-21.43	peak	
15780.066 31.98 10.42 42.40 54.00 -11.60 AVG							
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Page 166 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5300MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
10600.044	47.64	9.31	56.95	74.00	-17.05	peak
10600.044	37.94	9.31	47.25	54.00	-6.75	AVG
15900.066	42.15	10.44	52.59	74.00	-21.41	peak
15900.066	33.05	10.44	43.49	54.00	-10.51	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10600.044	48.64	9.31	57.95	74.00	-16.05	peak			
10600.044	38.54	9.31	47.85	54.00	-6.15	AVG			
15780.066	43.10	10.44	53.54	74.00	-20.46	peak			
15780.066	33.15	10.44	43.59	54.00	-10.41	AVG			
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									



Page 167 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
10640.044	47.84	9.35	57.19	74.00	-16.81	peak				
10640.044	38.64	9.35	47.99	54.00	-6.01	AVG				
15960.066	42.15	10.46	52.61	74.00	-21.39	peak				
15960.066	31.59	10.46	42.05	54.00	-11.95	AVG				
Remark:	Remark:									
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
10640.044	47.64	9.35	56.99	74.00	-17.01	peak				
10640.044	38.64	9.35	47.99	54.00	-6.01	AVG				
15960.066	42.15	10.46	52.61	74.00	-21.39	peak				
15960.066	32.58	10.46	43.04	54.00	-10.96	AVG				
Remark:	Remark:									
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.									



Page 168 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11000.044	47.98	9.37	57.35	74.00	-16.65	peak			
11000.044	38.54	9.37	47.91	54.00	-6.09	AVG			
16500.066	42.51	10.48	52.99	68.20	-15.21	peak			
Remark:									
Factor = Anten	na Factor + Cabl	e Loss – Pre-ai	mplifier.						

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11000.044	48.64	9.37	58.01	74.00	-15.99	peak			
11000.044	38.64	9.37	48.01	54.00	-5.99	AVG			
16500.066	42.15	10.48	52.63	68.20	-15.57	peak			
Remark:									
Factor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.								



Page 169 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5600MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
11200.044	49.64	9.38	59.02	74.00	-14.98	peak
11200.044	38.65	9.38	48.03	54.00	-5.97	AVG
16800.066	42.15	10.49	52.64	68.20	-15.56	peak

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
11200.044	47.64	9.38	57.02	74.00	-16.98	peak				
11200.044	38.54	9.38	47.92	54.00	-6.08	AVG				
16800.066	41.09	10.49	51.58	68.20	-16.62	peak				
Remark:	Remark:									
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.									



Page 170 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5700MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11400.044	48.64	9.39	58.03	74.00	-15.97	peak			
11400.044	37.54	9.39	46.93	54.00	-7.07	AVG			
17100.066	41.06	10.49	51.55	68.20	-16.65	peak			
Remark:									
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
11400.044	47.64	9.39	57.03	74.00	-16.97	peak				
11400.044	38.64	9.39	48.03	54.00	-5.97	AVG				
17100.066	42.15	10.49	52.64	68.20	-15.56	peak				
Remark:	Remark:									
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.									





EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
11490.042	48.67	9.42	58.09	74.00	-15.91	peak	
11490.042	31.59	9.42	41.01	54.00	-12.99	AVG	
17235.063	40.55	10.51	51.06	68.20	-17.14	peak	
Remark:			•		•		
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
11490.042	47.64	9.42	57.06	74.00	-16.94	peak
11490.042	38.49	9.42	47.91	54.00	-6.09	AVG
17235.063	40.58	10.51	51.09	68.20	-17.11	peak
Dama and						
Remark:						
Factor = Anten	na Factor + Cab	le Loss – Pre-ai	mplifier.			



Page 172 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11570.042	46.59	9.42	56.01	74.00	-17.99	peak		
11570.042	35.85	9.42	45.27	54.00	-8.73	AVG		
17355.063	39.65	10.51	50.16	68.20	-18.04	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	47.65	9.42	57.07	74.00	-16.93	peak
11570.042	36.52	9.42	45.94	54.00	-8.06	AVG
17355.063	41.79	10.51	52.30	68.20	-15.90	peak
Remark:						
Factor = Anten	na Factor + Cab	e Loss – Pre-a	amplifier.			



Page 173 of 197

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11650.042	48.64	9.62	58.26	74.00	-15.74	peak	
11650.042	32.58	9.62	42.20	54.00	-11.80	AVG	
17475.063	32.49	10.75	43.24	68.20	-24.96	peak	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							
•							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11650.042	49.64	9.62	59.26	74.00	-14.74	peak	
11650.042	38.45	9.62	48.07	54.00	-5.93	AVG	
17475.063	42.33	10.75	53.08	68.20	-15.12	peak	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Note: All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report.

Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.




Test result for band edge emission at restricted bands

EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement

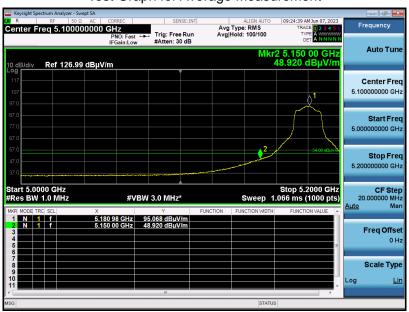

RESULT: PASS






EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

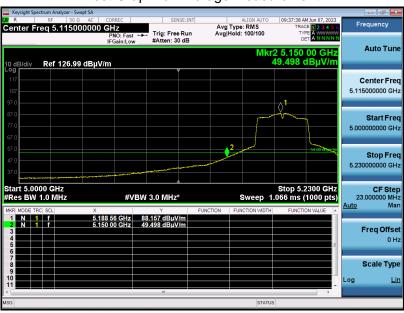







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

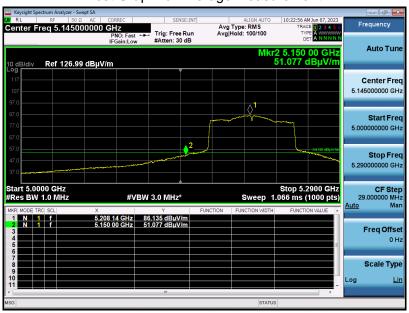







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

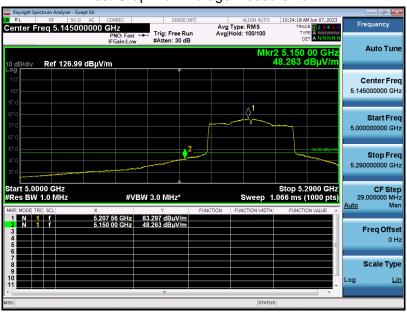





EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS






EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Horizontal


Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

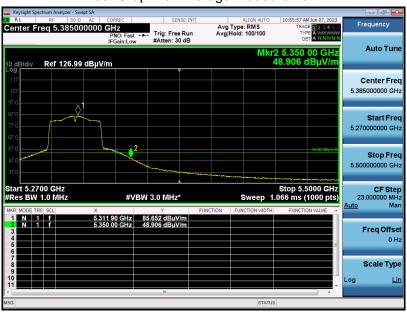






EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Vertical


Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

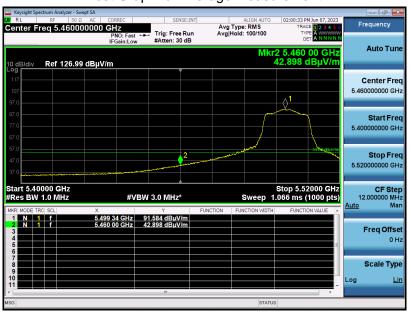






EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	
Pressure	960hPa	Test Voltage	
Test Mode	802.11n40 5510MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5510MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	
Pressure	960hPa	Test Voltage	
Test Mode	802.11ac80 5530MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement







EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5530MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





Page 192 of 197

Note: 1. All the antennas have been pre-tested, and all modes of each antenna are tested. All the 20MHz bandwidth modulation had been tested, the 802.11a20 at 5180MHz, 5320MHz and 5500MHz the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11n40 at 5190MHz, 5310Mhz and 5510MHz was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11AC80 at 5210MHz, 5290MHz and 5530MHz was the worst case and record in his test report.

- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.
- 4.The sideband standard of U NII-3 frequency band is not defined, the transmitted signal does not fall in the restricted band, and the edge signal is far away from the edge of other restricted bands, and it is not recorded in the report.



Page 193 of 197

11. AC POWER LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

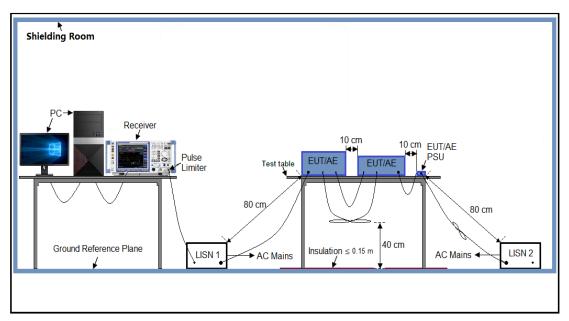



Page 194 of 197

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.
- The worst mode is 802.11a 5180MHz.



11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

AC POWER LINE CONDUCTED EMISSION TEST-L

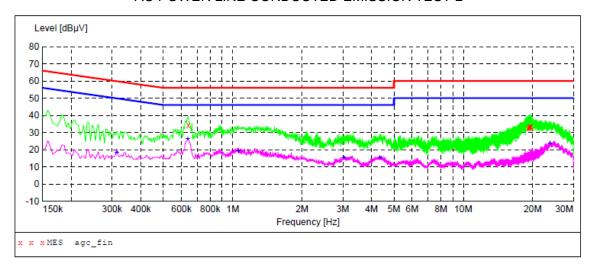

MEASUREMENT RESULT: "agc_fin"

0.0	00	-	100	4 4	E 0
~ 0	231	6 /	/13	11:	5.3

220/0/10 11.	-					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.642000	34.20	4.5	56	21.8	QP	L1
19.074000	32.40	5.6	60	27.6	QP	L1
19.294000	33.00	5.6	60	27.0	QP	L1
19.486000	33.60	5.7	60	26.4	QP	L1
19.570000	33.00	5.7	60	27.0	QP	L1
19.670000	33.40	5.7	60	26.6	QP	L1

MEASUREMENT RESULT: "agc fin2"

2023/6/13 11:53

_	, -,						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.314000	18.30	4.5	50	31.6	AV	L1
	0.638000	26.20	4.5	46	19.8	AV	L1
	1.058000	19.30	4.6	46	26.7	AV	L1
	3.038000	15.20	4.7	46	30.8	AV	L1
	4.354000	15.20	4.7	46	30.8	AV	L1
	23.714000	23.50	6.6	50	26.5	AV	L1


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



AC POWER LINE CONDUCTED EMISSION TEST-N

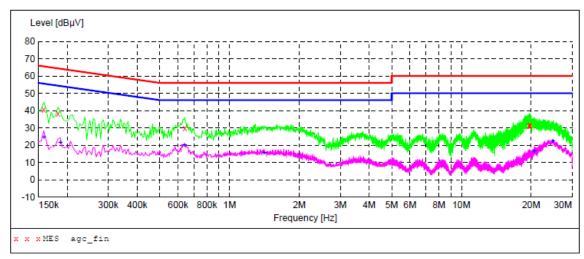

MEASUREMENT RESULT: "agc_fin"

20	23/6/13 11:	50					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.158000	40.50	4.5	66	25.1	QP	N
	0.182000	38.10	4.5	64	26.3	QP	N
	0.642000	29.70	4.5	56	26.3	QP	N
	19.558000	31.40	5.7	60	28.6	QP	N
	19.730000	31.20	5.7	60	28.8	QP	N
	19.738000	31.60	5.7	60	28.4	QP	N

MEASUREMENT RESULT: "agc_fin2"

2023/6/13 11:50

Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.158000	24.60	4.5	56	31.0	AV	N
0.186000	21.40	4.5	54	32.8	AV	N
0.638000	20.10	4.5	46	25.9	AV	N
1.410000	15.70	4.6	46	30.3	AV	N
20.586000	16.50	5.8	50	33.5	AV	N
24.786000	22.20	6.9	50	27.8	AV	N

RESULT: PASS



Page 197 of 197

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC14499230501AP02

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC14499230501AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.