



# CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.com.cn

## TEST REPORT

**Report No.** .....: **CTC20200268E04**

**FCC ID**.....: **2APPZ-X7A**

**Applicant**.....: **Fanvil Technology Co., Ltd**

Address.....: 4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II), 67th District, Bao'An, Shenzhen, China

Manufacturer.....: Fanvil Technology Co., Ltd

Address.....: 4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II), 67th District, Bao'An, Shenzhen, China

**Product Name**.....: **IP Phone**

Trade Mark.....: Fanvil

Model/Type reference.....: X7A

Listed Model(s) .....: N/A




**Standard**.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample...: Mar. 10, 2020

Date of testing.....: Mar. 11, 2020 to Mar. 18, 2020

Date of issue.....: Mar. 19, 2020

**Result**.....: **PASS**

Compiled by:		
(Printed name+signature)	Terry Su	
Supervised by:		
(Printed name+signature)	Miller Ma	
Approved by:		
(Printed name+signature)	Walter Chen	

**Testing Laboratory Name**..... **CTC Laboratories, Inc.**

Address ..... 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

**1. TEST SUMMARY..... 3**

1.1. TEST STANDARDS.....3

1.2. REPORT VERSION.....3

1.3. TEST DESCRIPTION.....4

1.4. TEST FACILITY .....5

1.5. MEASUREMENT UNCERTAINTY .....5

1.6. ENVIRONMENTAL CONDITIONS .....6

**2. GENERAL INFORMATION..... 7**

2.1. CLIENT INFORMATION .....7

2.2. GENERAL DESCRIPTION OF EUT .....7

2.3. OPERATION STATE.....8

2.4. MEASUREMENT INSTRUMENTS LIST .....9

**3. TEST ITEM AND RESULTS..... 11**

3.1. CONDUCTED EMISSION.....11

3.2. RADIATED EMISSION .....14

3.3. BAND EDGE EMISSIONS.....36

3.4. OCCUPIED CHANNEL BANDWIDTH AND 20DB BANDWIDTH.....55

3.5. CHANNEL SEPARATION.....62

3.6. NUMBER OF HOPPING CHANNEL.....67

3.7. DWELL TIME .....69

3.8. PEAK OUTPUT POWER .....74

3.9. ANTENNA REQUIREMENT .....78



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

## 1.2. Report version

Revised No.	Date of issue	Description
01	Mar. 19, 2020	Original



### 1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Rod Lou
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jon Huang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Rod Lou
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Rod Lou
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Rod Lou
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Rod Lou
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Rod Lou
Band Edge Emissions	15.247(d)	RSS 247 5.5	Pass	Rod Lou
Radiated Spurious Emission	15.247(d)&15.209	RSS 247 5.5& RSS-Gen 8.9	Pass	Rod Lou
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Rod Lou

Note: The measurement uncertainty is not included in the test result.



## 1.4. Test Facility

### CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

**Note (1):** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Fanvil Technology Co., Ltd
Address:	4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II), 67th District, Bao'An, Shenzhen, China
Manufacturer:	Fanvil Technology Co., Ltd
Address:	4F, Block A, Building 1#, GaoXinQi Hi-Tech Park (Phase-II), 67th District, Bao'An, Shenzhen, China

### 2.2. General Description of EUT

Product Name:	IP Phone
Trade Mark:	Fanvil
Model/Type reference:	X7A
Listed Model(s):	N/A
Power supply:	Supplied from POE 5Vdc/2A from AC/DC Adapter
Adapter Model:	F12W8-050200SPAU Input:100-240V 50/60Hz 0.3A Output:5V/2A
Hardware version:	N/A
Software version:	N/A
<b>Bluetooth 4.2+EDR</b>	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	FPC Antenna
Antenna gain:	2.2dBi



### 2.3. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:


Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

Note: The display in grey were the channel selected for testing.

#### Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.





## 2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2021
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 27, 2020
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 27, 2020
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 27, 2020
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 27, 2020
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 27, 2020
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 27, 2020
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 27, 2020
10	Climate Chamber	ESPEC	MT3065	/	Dec. 27, 2020
11	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 27, 2020
12	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 27, 2020
2	High pass filter	micro-tranics	HPM50111	142	Dec. 27, 2020
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 27, 2020
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 27, 2020
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 27, 2020
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 27, 2020
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 27, 2020
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 27, 2020
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 27, 2020
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 27, 2020
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX102	DA1580	Dec. 27, 2020
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 27, 2020
15	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	Dec. 27, 2020

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



中国国家认证认可监督管理委员会  
Certification and Accreditation Administration of the People's Republic of China

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



16	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 27, 2020
17	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 27, 2020
18	Attenuator	Chengdu E-Microwave	EMCAXX-10R NZ-3	---	Dec. 27, 2020
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 27, 2020

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	Rohde & Schwarz	ENV216	101112	Dec. 27, 2020
2	LISN	Rohde & Schwarz	ENV216	101113	Dec. 27, 2020
3	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 27, 2020

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


**Limit**

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**Test Configuration**

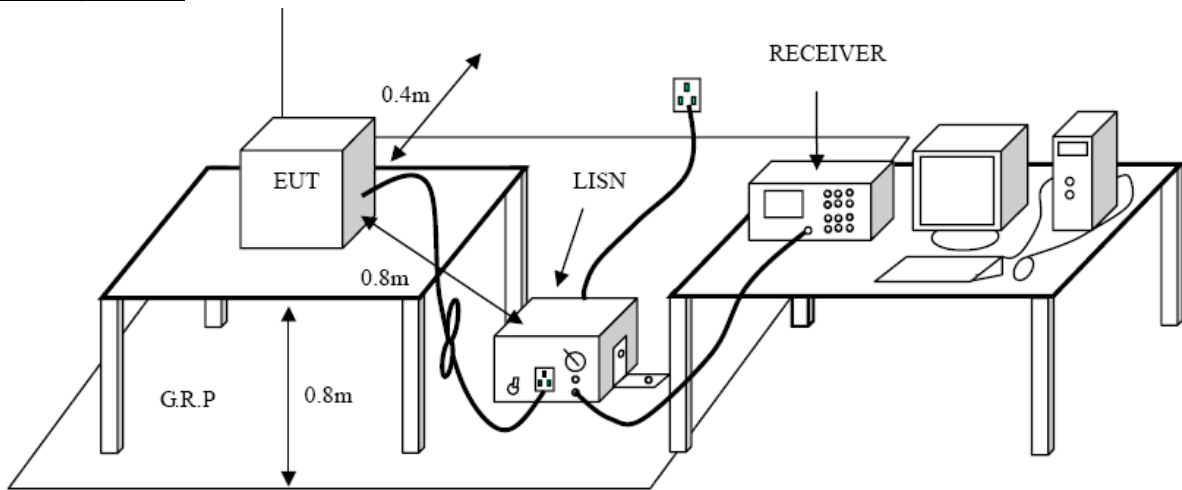

**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.


**Test Mode**

Please refer to the clause 2.3.



**Test Results**

<b>Test Voltage:</b>	AC 120V/60 Hz
<b>Terminal:</b>	Line

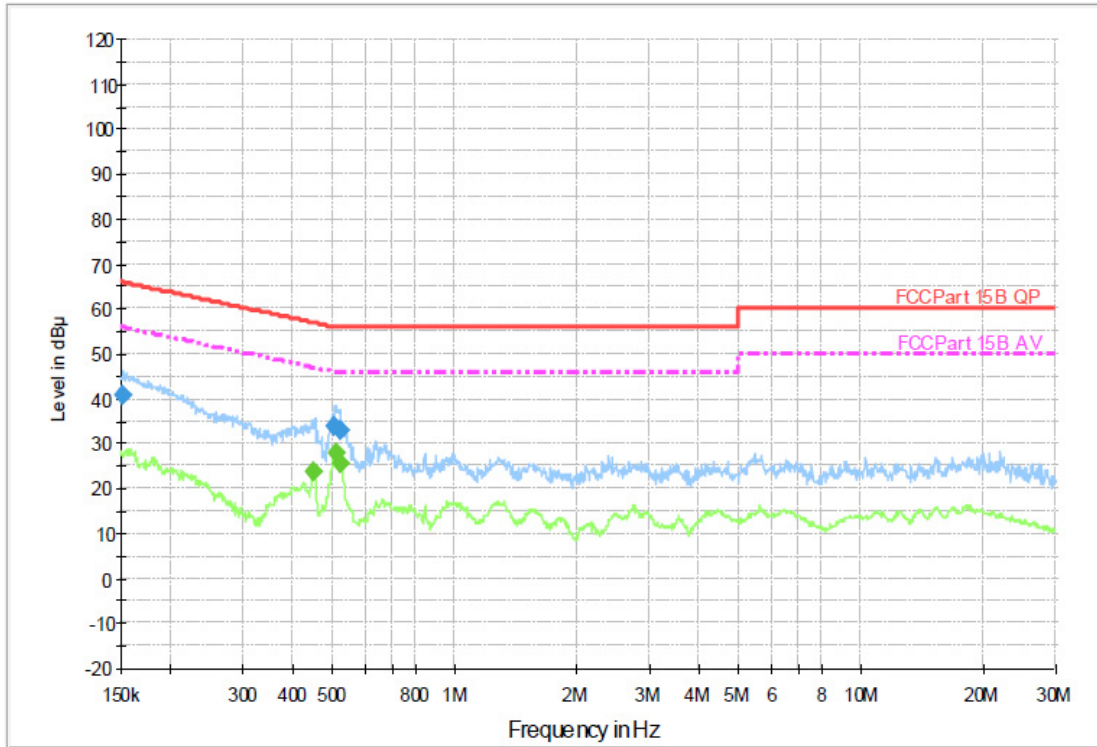

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.152410	40.6	1000.00	9.000	On	L1	9.4	25.3	65.9	
0.504820	33.8	1000.00	9.000	On	L1	9.4	22.2	56.0	
0.521210	33.0	1000.00	9.000	On	L1	9.4	23.0	56.0	


**Final Measurement Detector 2**

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.446060	23.7	1000.00	9.000	On	L1	9.4	23.2	46.9	
0.508870	27.7	1000.00	9.000	On	L1	9.4	18.3	46.0	
0.521210	25.7	1000.00	9.000	On	L1	9.4	20.3	46.0	

**Emission Level= Read Level+ Correct Factor**



<b>Test Voltage:</b>	AC 120V/60 Hz
<b>Terminal:</b>	Neutral

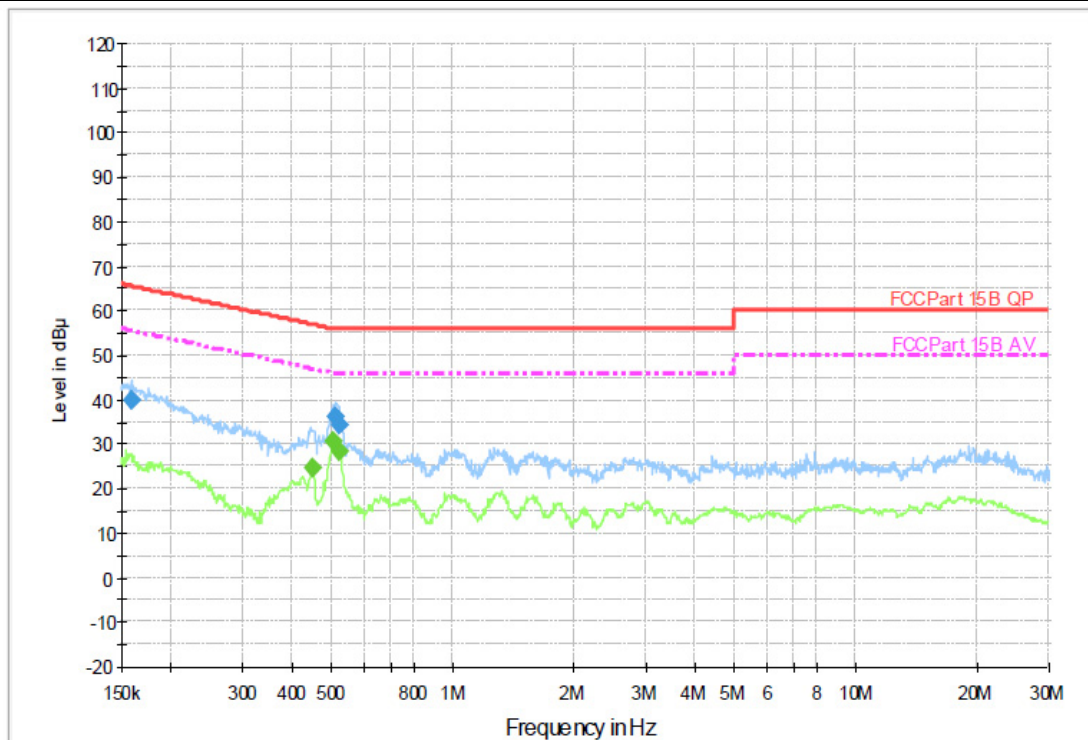

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.158620	40.0	1000.00	9.000	On	N	9.4	25.5	65.5	
0.510910	36.2	1000.00	9.000	On	N	9.4	19.8	56.0	
0.521210	34.6	1000.00	9.000	On	N	9.4	21.4	56.0	

### Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.446060	24.7	1000.00	9.000	On	N	9.4	22.2	46.9	
0.500810	30.4	1000.00	9.000	On	N	9.4	15.6	46.0	
0.521210	28.5	1000.00	9.000	On	N	9.4	17.6	46.0	

**Emission Level= Read Level+ Correct Factor**

### 3.2. Radiated Emission

**Limit**


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).


**Test Configuration**

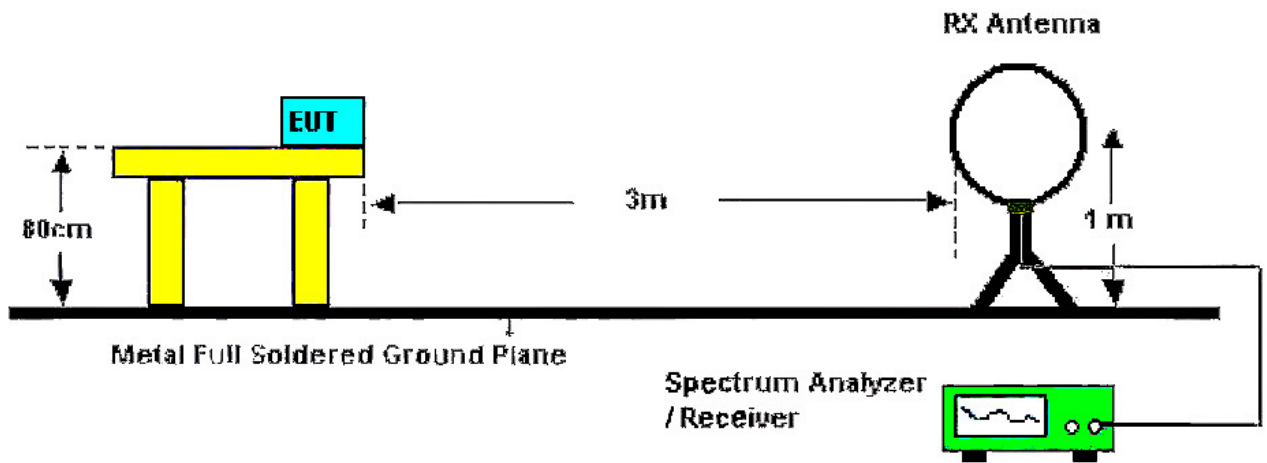

Below 30MHz Test Setup

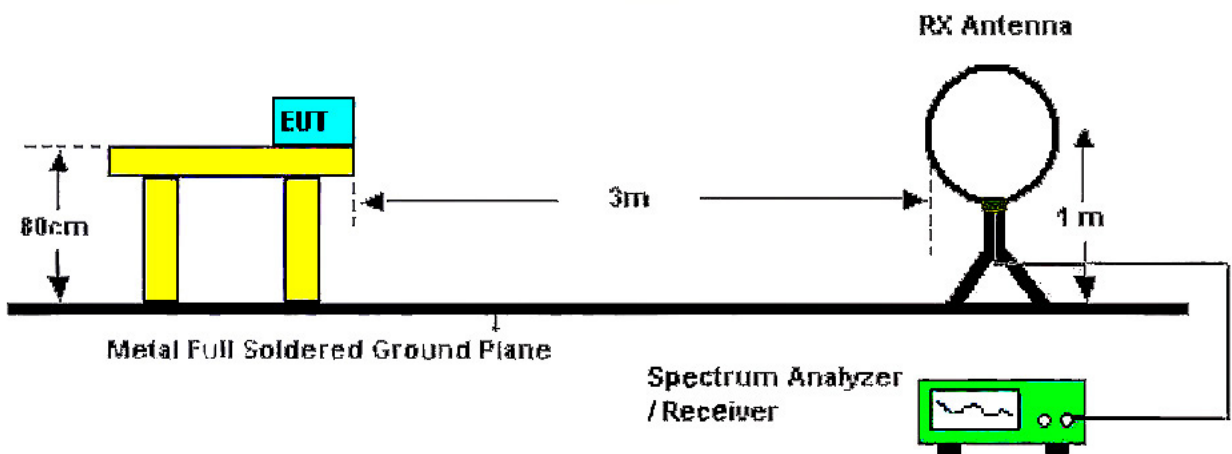

Below 1000MHz Test Setup

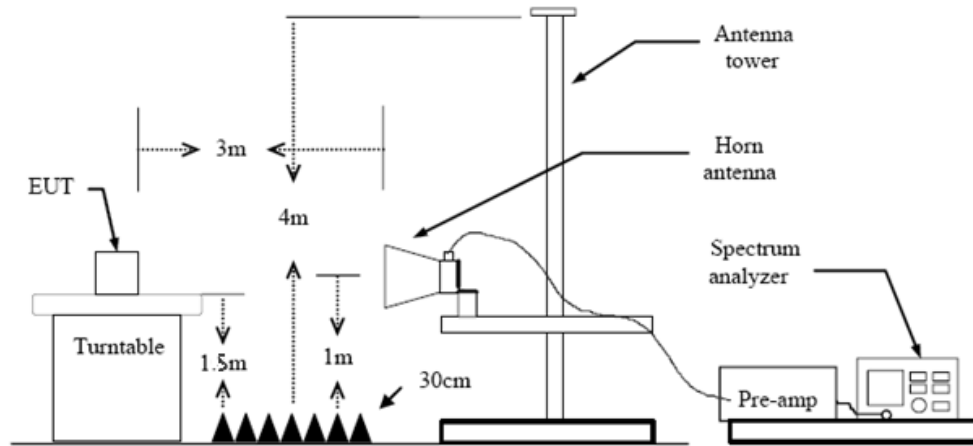

Above 1GHz Test Setup

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

### Test Mode

Please refer to the clause 2.3.

### Test Result


#### **9 KHz~30 MHz**

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

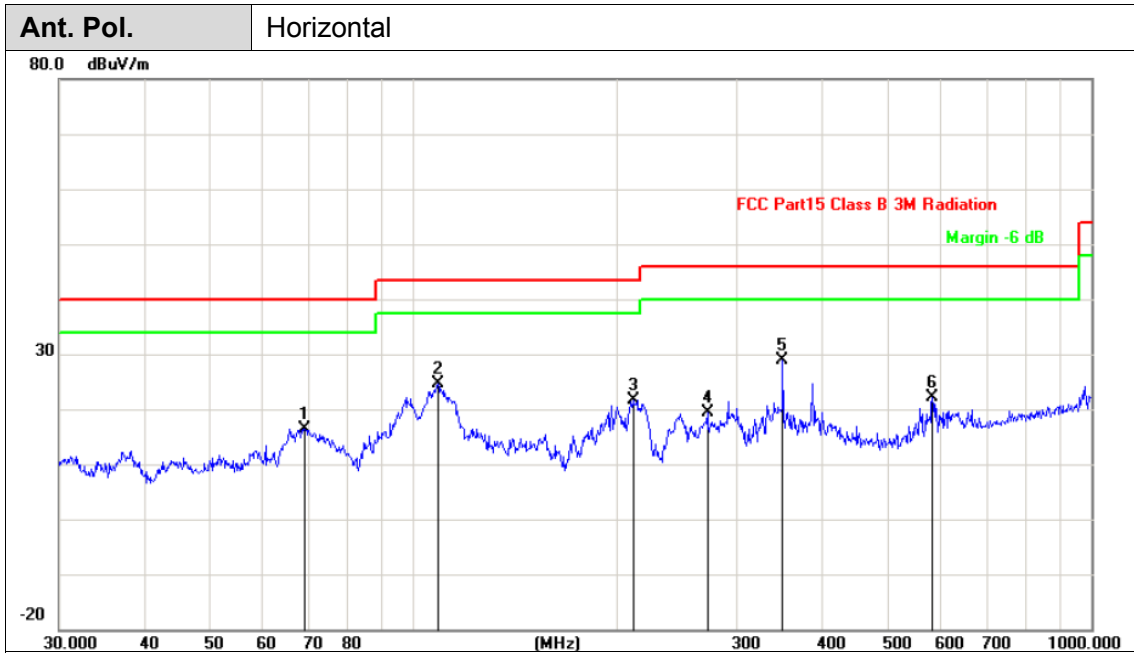


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	69.1141	-20.24	36.69	16.45	40.00	-23.55	QP
2	108.6470	-20.26	44.84	24.58	43.50	-18.92	QP
3	210.7860	-20.52	42.09	21.57	43.50	-21.93	QP
4	271.3246	-18.63	38.01	19.38	46.00	-26.62	QP
5	350.4768	-16.71	45.70	28.99	46.00	-17.01	QP
6	582.7425	-12.53	34.73	22.20	46.00	-23.80	QP

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value




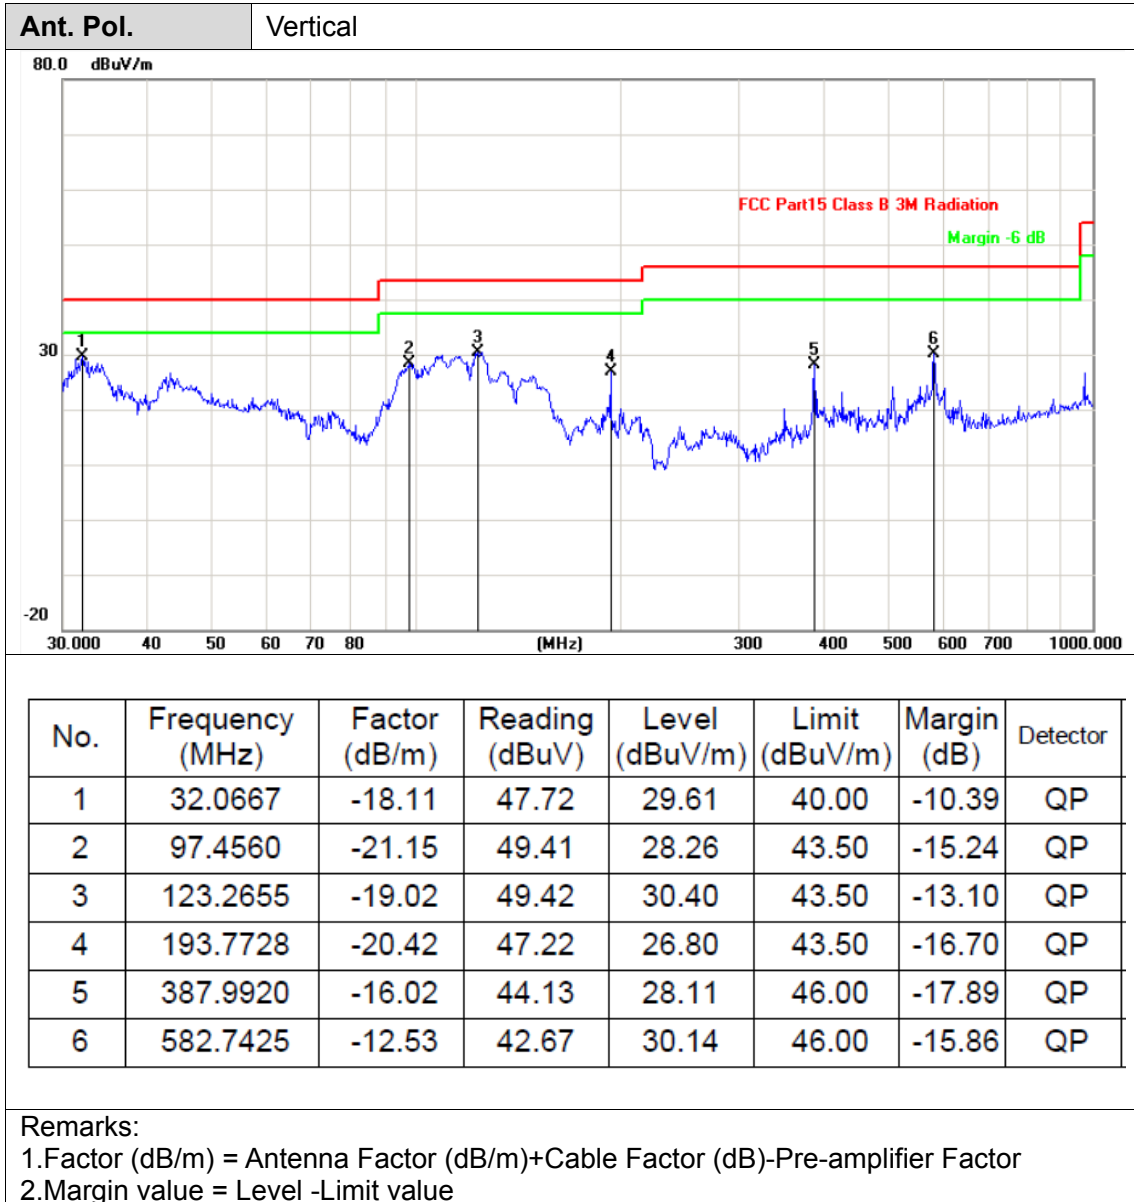



Above 1GHz

<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX GFSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

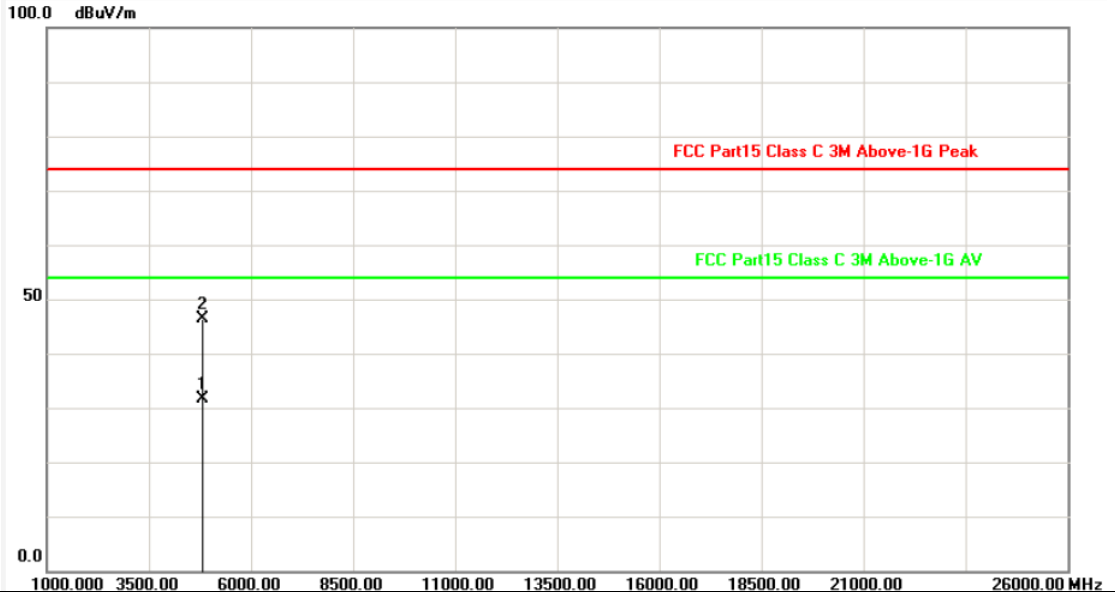


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.080	-2.82	34.57	31.75	54.00	-22.25	AVG
2	4803.460	-2.82	49.22	46.40	74.00	-27.60	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX GFSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

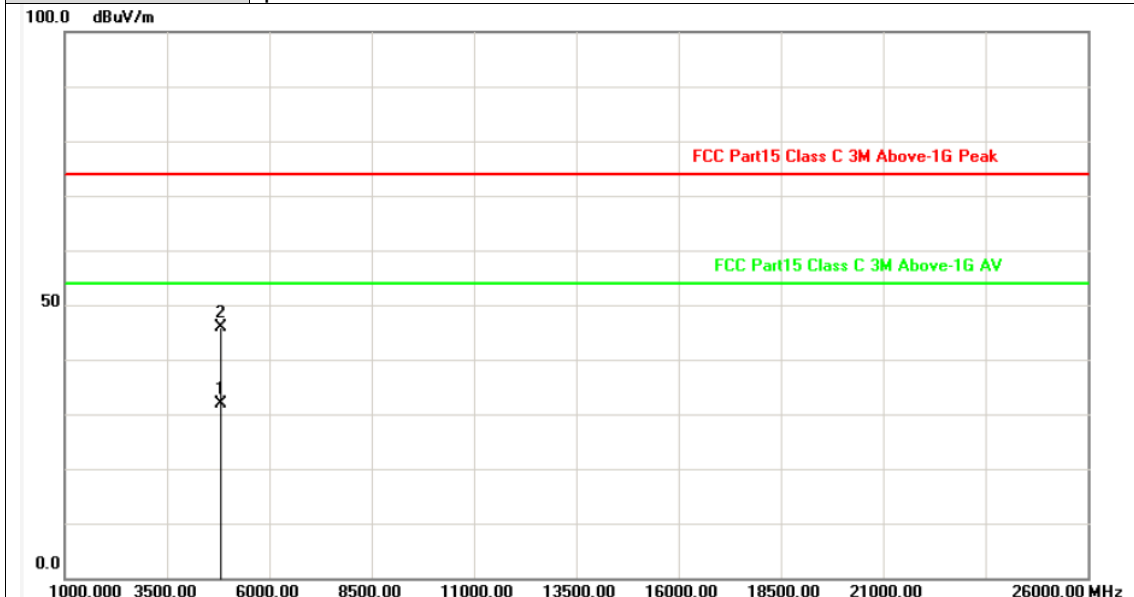


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.060	-2.82	34.68	31.86	54.00	-22.14	AVG
2	4803.636	-2.82	48.65	45.83	74.00	-28.17	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX GFSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

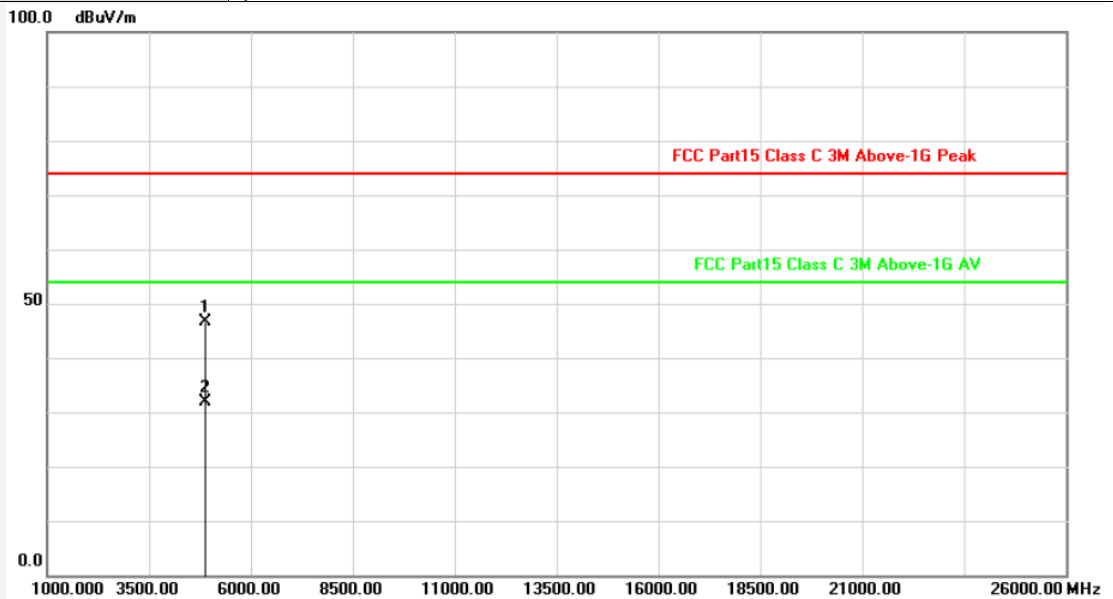


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4883.372	-2.59	49.20	46.61	74.00	-27.39	peak
2	4883.850	-2.59	34.55	31.96	54.00	-22.04	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX GFSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

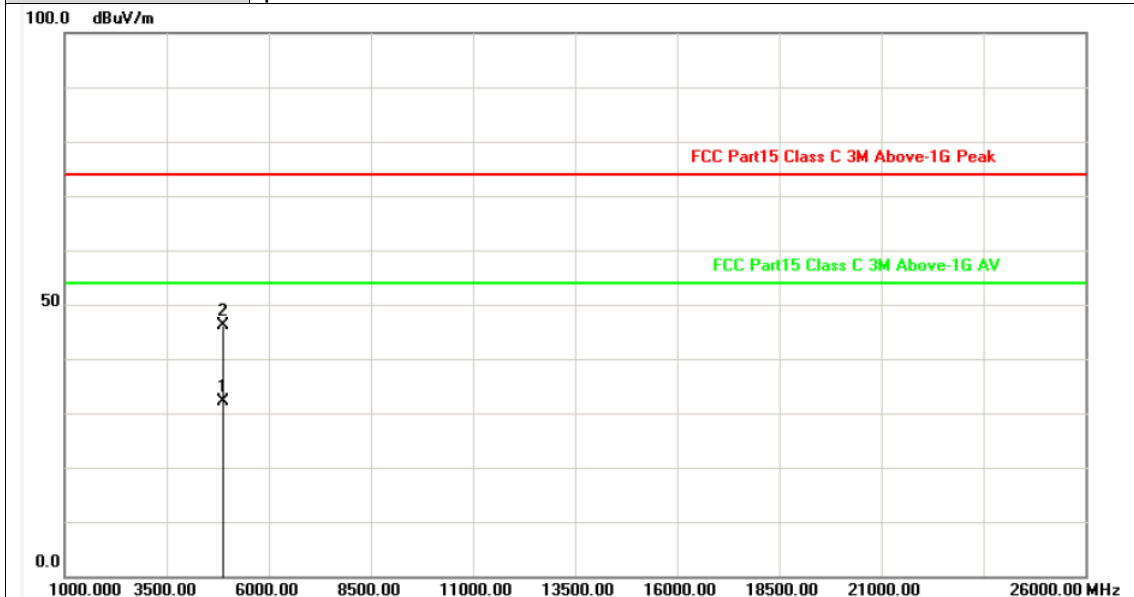


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.060	-2.60	34.76	32.16	54.00	-21.84	AVG
2	4882.984	-2.59	48.74	46.15	74.00	-27.85	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX GFSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

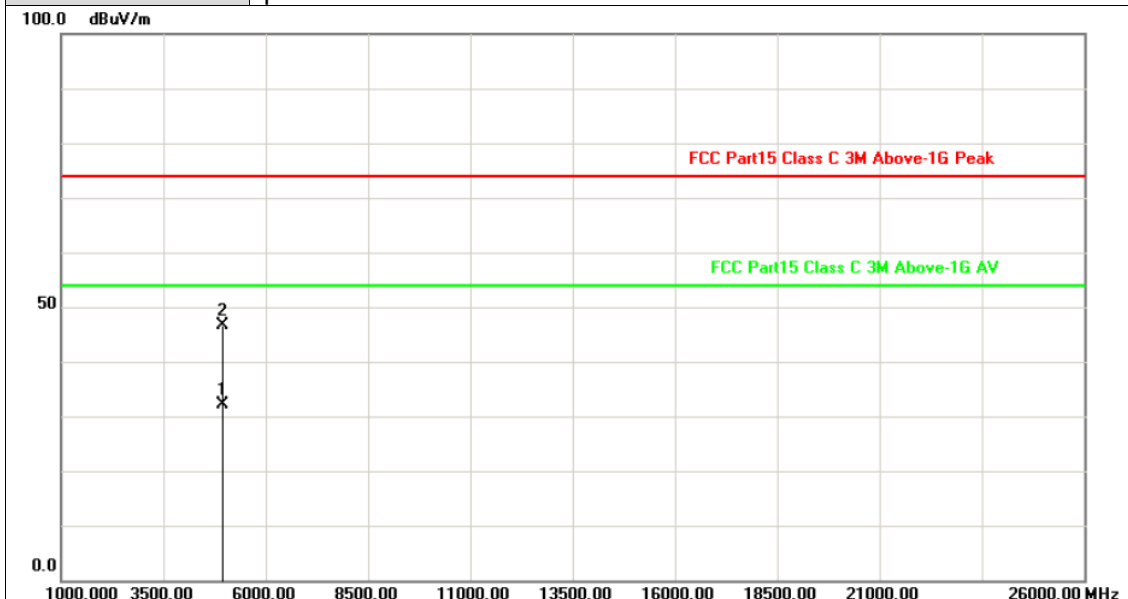


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.484	-2.38	34.59	32.21	54.00	-21.79	AVG
2	4960.982	-2.38	49.01	46.63	74.00	-27.37	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX GFSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

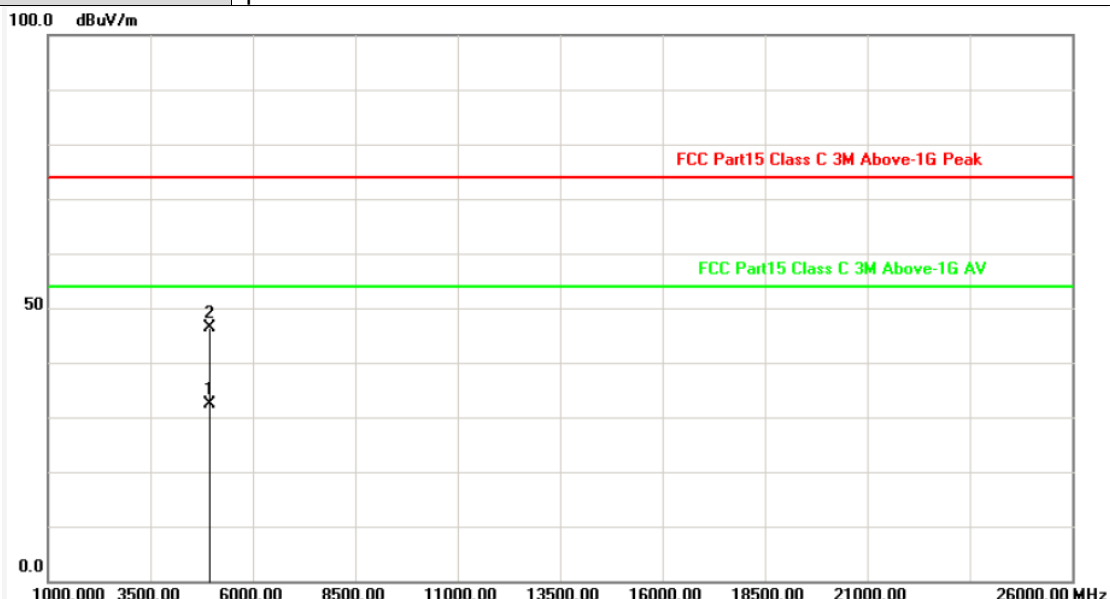


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.000	-2.38	34.64	32.26	54.00	-21.74	AVG
2	4960.562	-2.38	48.85	46.47	74.00	-27.53	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

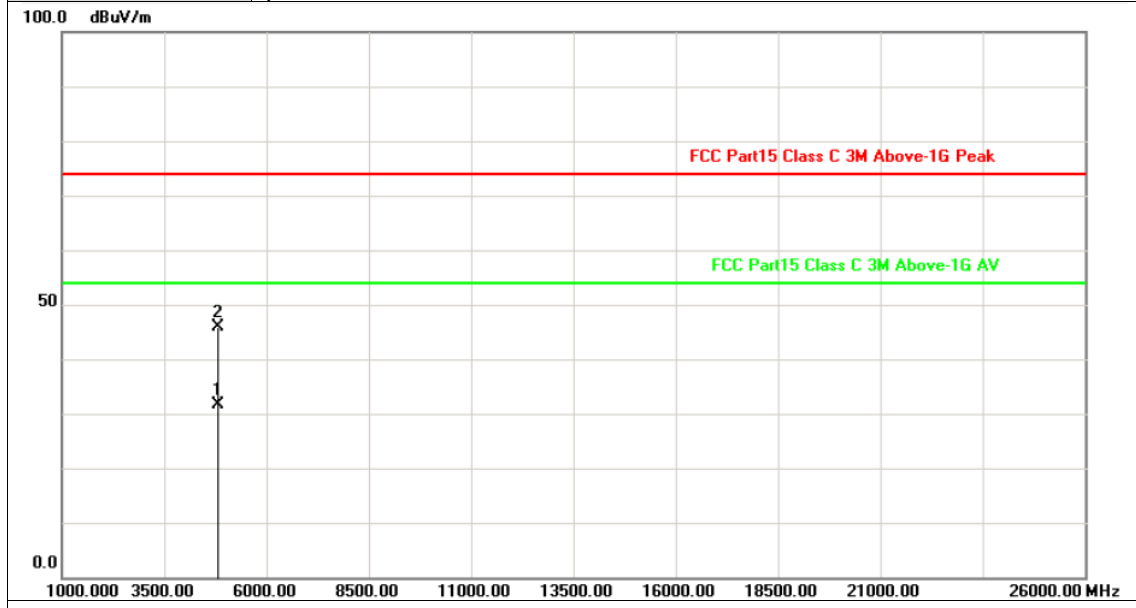


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.342	-2.82	34.55	31.73	54.00	-22.27	AVG
2	4803.900	-2.82	48.59	45.77	74.00	-28.23	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

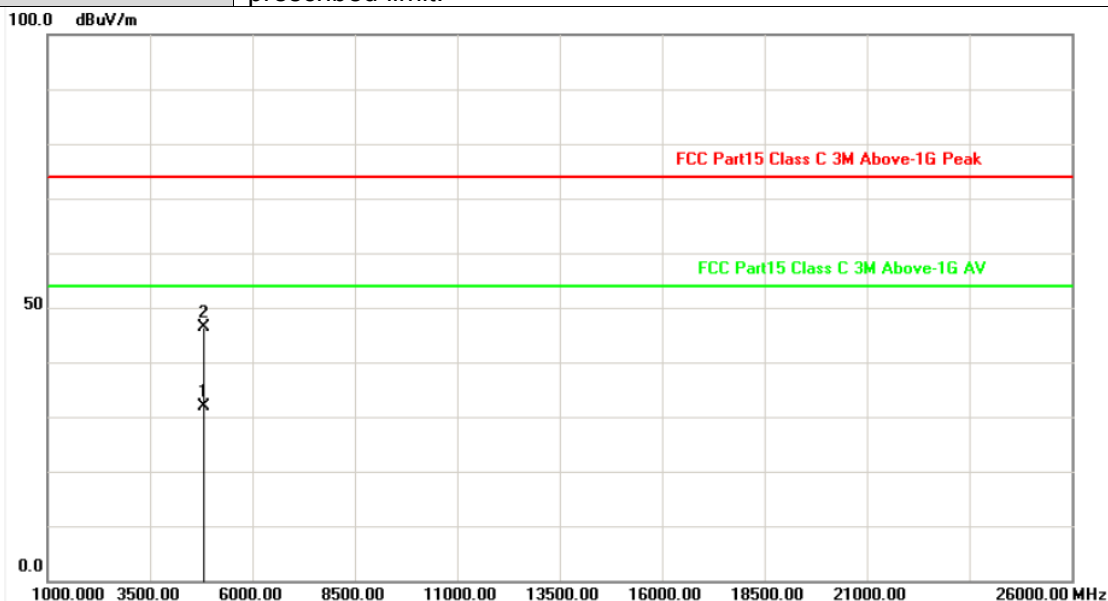


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.180	-2.82	34.70	31.88	54.00	-22.12	AVG
2	4803.332	-2.82	49.20	46.38	74.00	-27.62	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

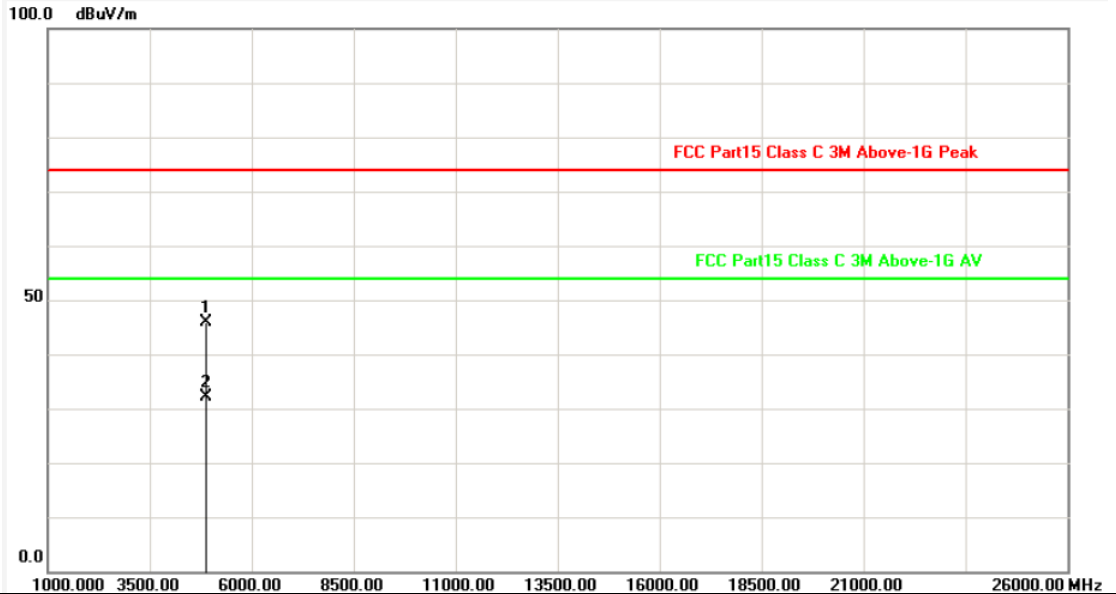


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.482	-2.60	48.58	45.98	74.00	-28.02	peak
2	4882.374	-2.60	34.68	32.08	54.00	-21.92	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

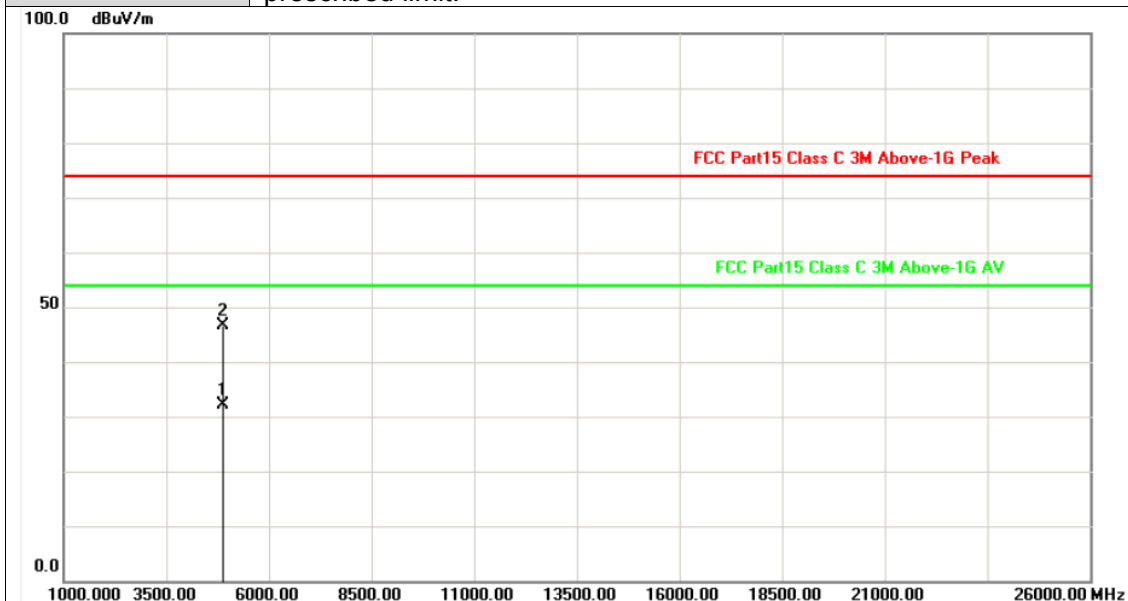


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.040	-2.60	34.73	32.13	54.00	-21.87	AVG
2	4881.064	-2.60	49.23	46.63	74.00	-27.37	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

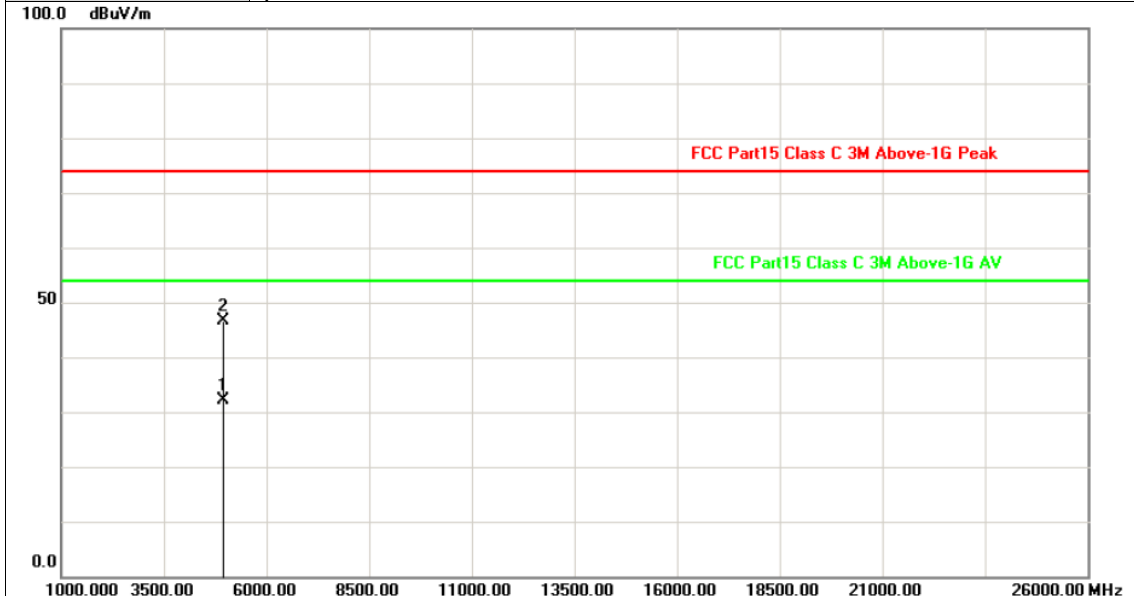


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.162	-2.38	34.63	32.25	54.00	-21.75	AVG
2	4960.768	-2.38	49.04	46.66	74.00	-27.34	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX $\pi/4$ -DQPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

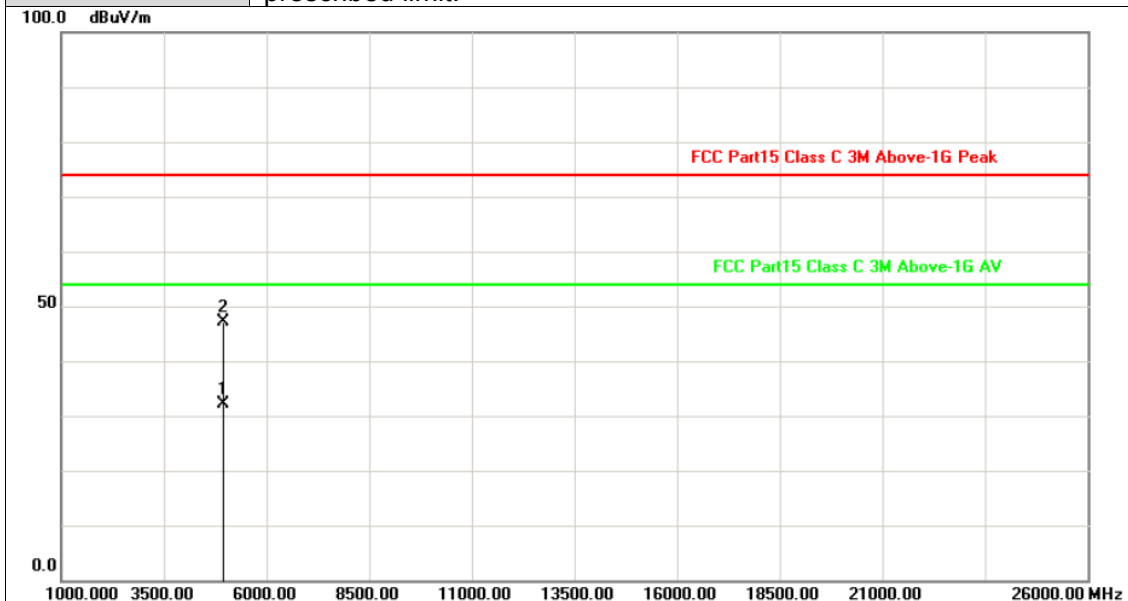


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.162	-2.38	34.61	32.23	54.00	-21.77	AVG
2	4959.486	-2.38	49.54	47.16	74.00	-26.84	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

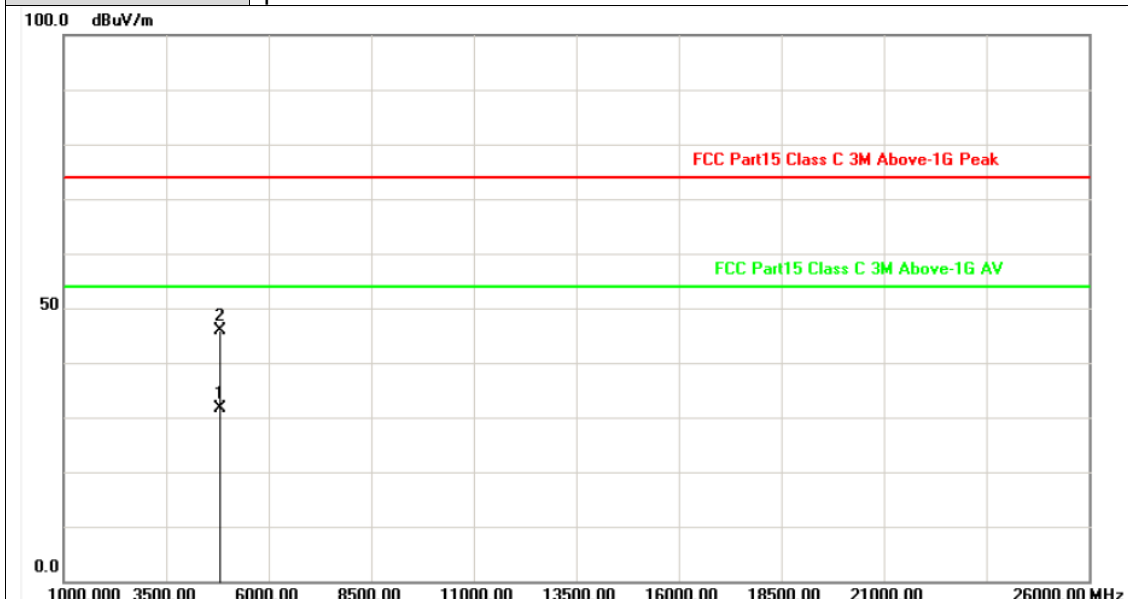


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.930	-2.82	34.57	31.75	54.00	-22.25	AVG
2	4804.418	-2.82	48.78	45.96	74.00	-28.04	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 8-DPSK Mode 2402MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

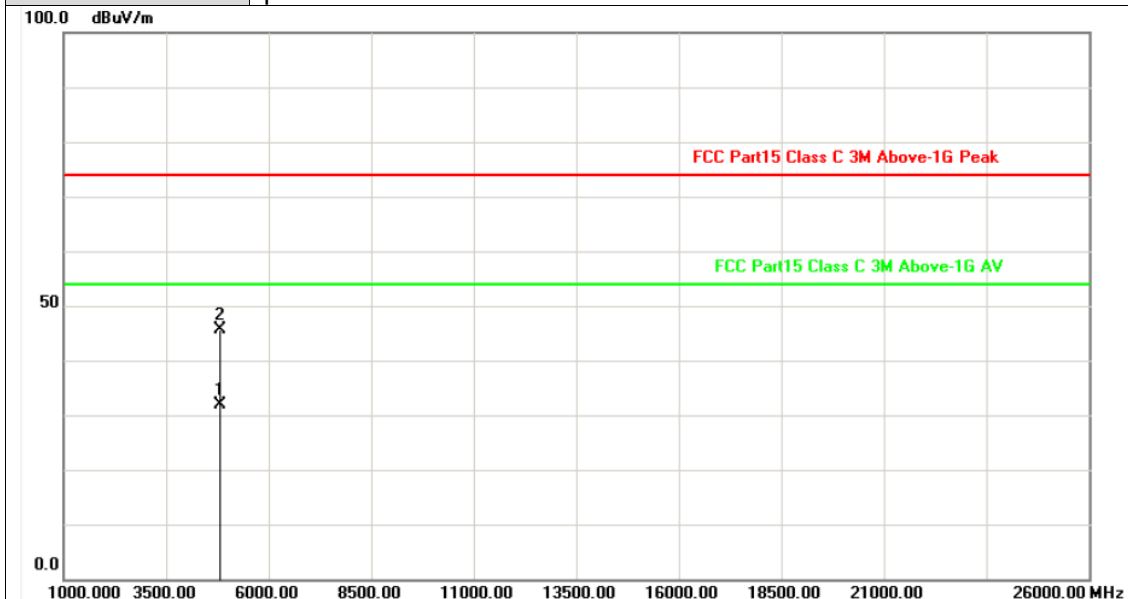


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.242	-2.82	34.65	31.83	54.00	-22.17	AVG
2	4804.214	-2.82	48.39	45.57	74.00	-28.43	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

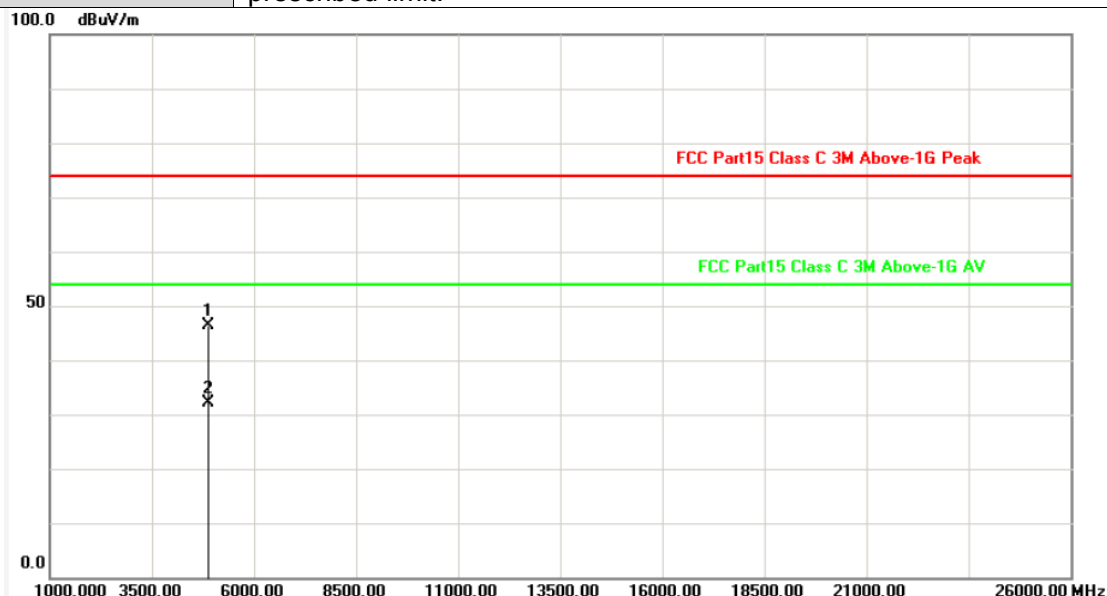

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.000	-2.60	48.99	46.39	74.00	-27.61	peak
2	4881.020	-2.60	34.67	32.07	54.00	-21.93	AVG


Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 8-DPSK Mode 2441MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

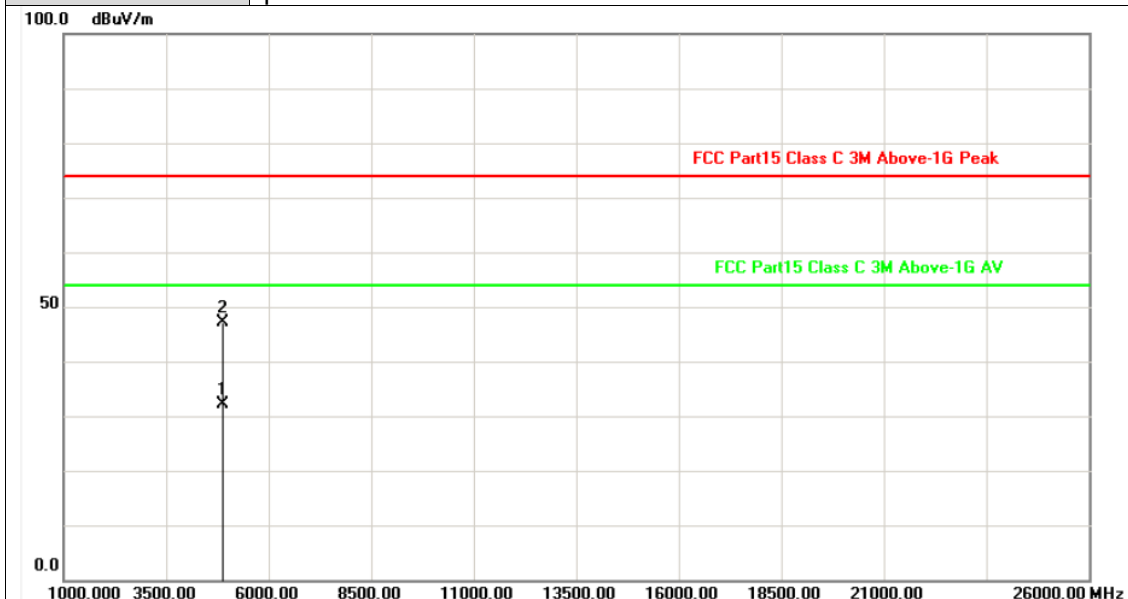


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.362	-2.60	34.75	32.15	54.00	-21.85	AVG
2	4881.618	-2.60	49.80	47.20	74.00	-26.80	peak

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

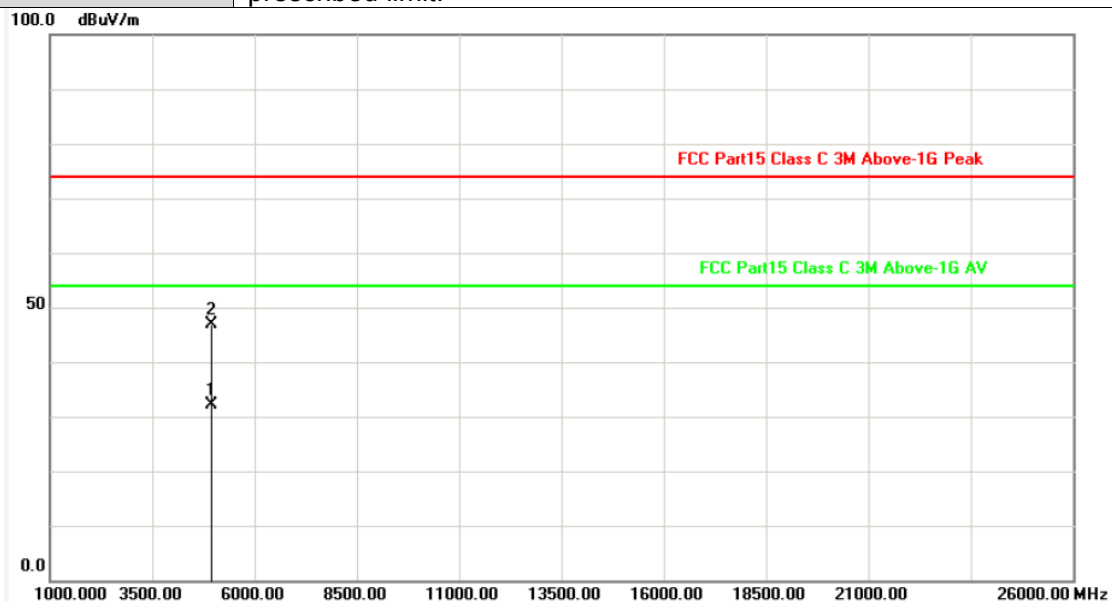


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.000	-2.38	34.57	32.19	54.00	-21.81	AVG
2	4960.372	-2.38	49.27	46.89	74.00	-27.11	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	TX 8-DPSK Mode 2480MHz
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.

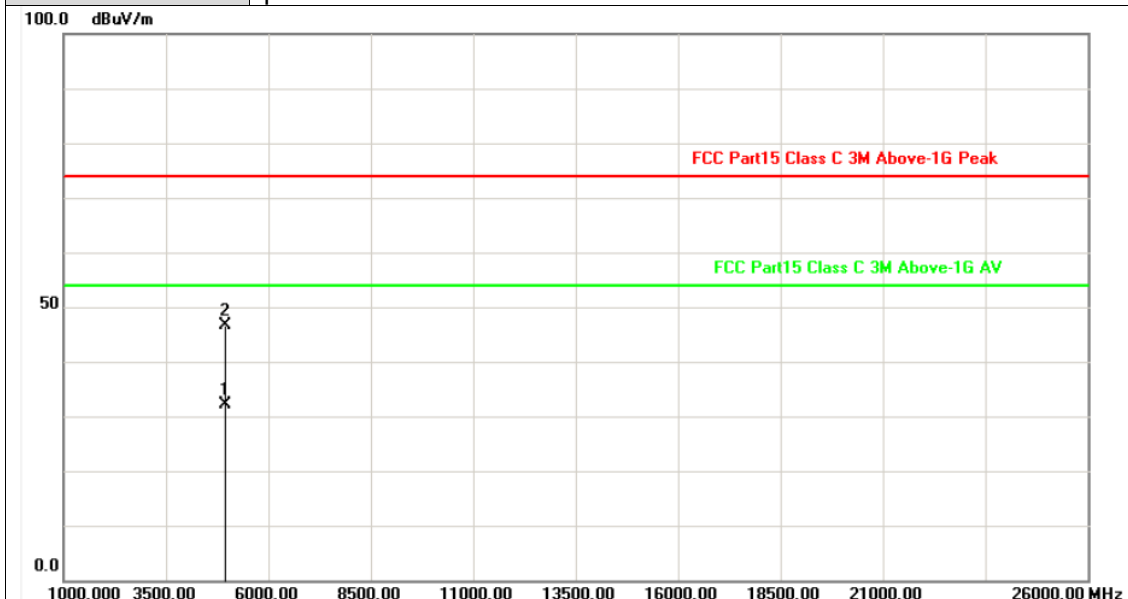

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.262	-2.38	34.53	32.15	54.00	-21.85	AVG
2	4959.564	-2.38	48.98	46.60	74.00	-27.40	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

### 3.3. Band Edge Emissions


#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

#### Test Configuration

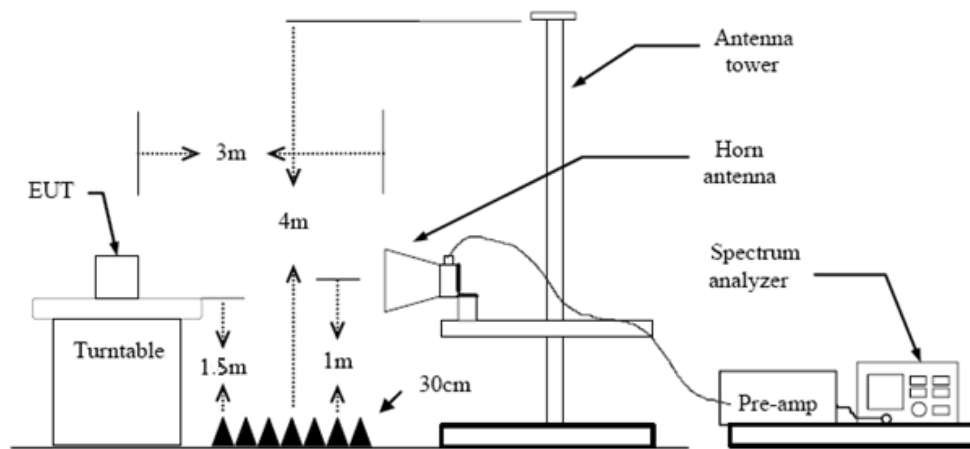

#### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.  
 RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.


#### Test Mode

Please refer to the clause 2.3.




**Test Results**

**(1) Radiation Test**

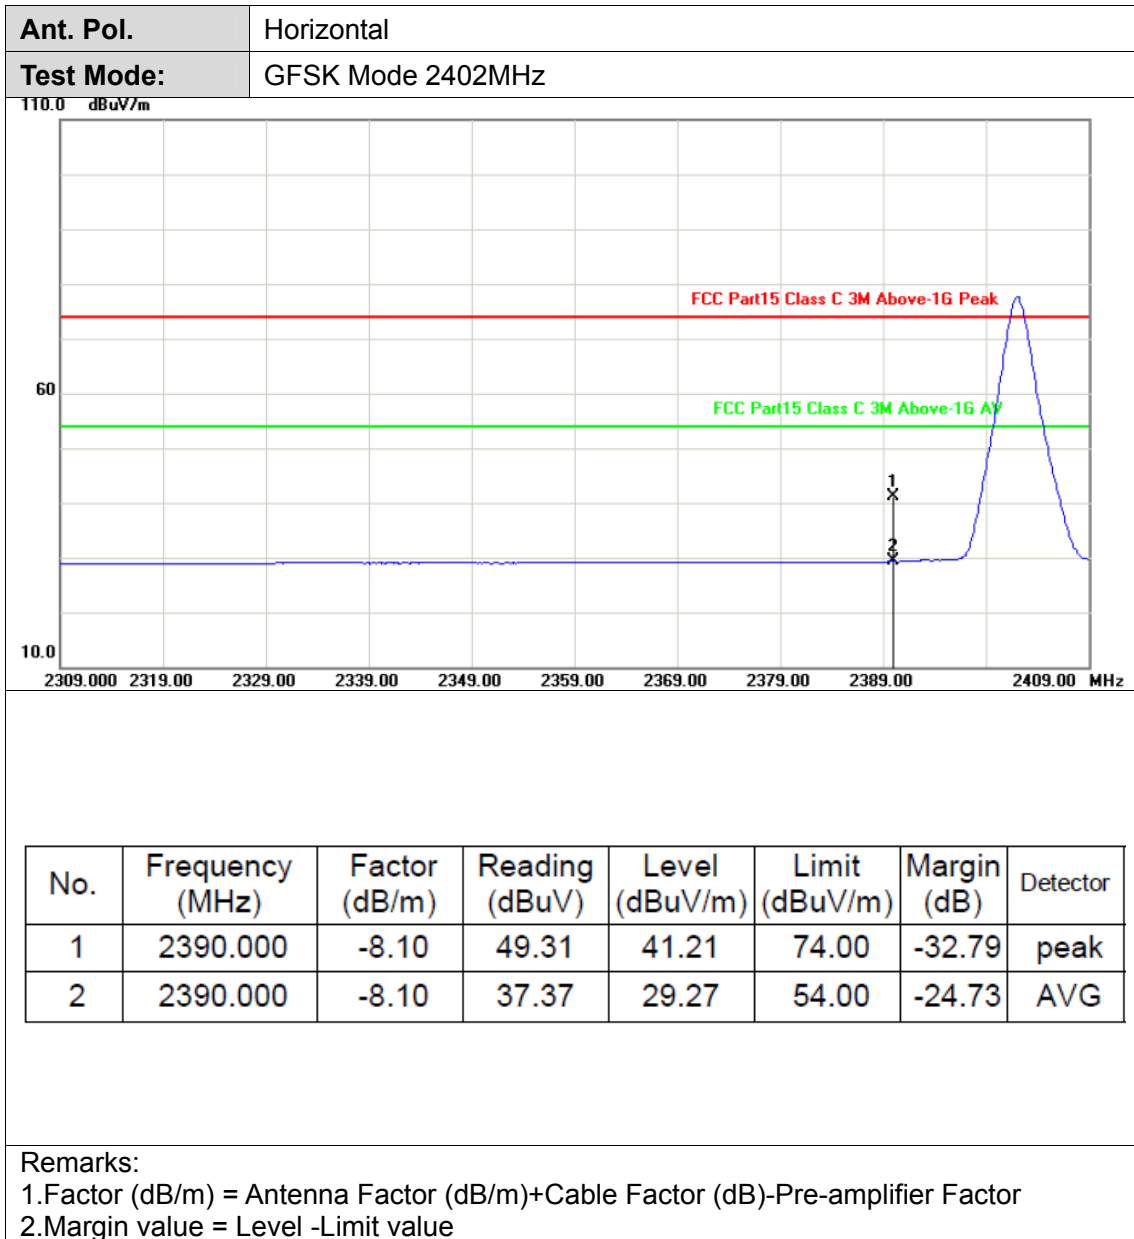



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	GFSK Mode 2402MHz

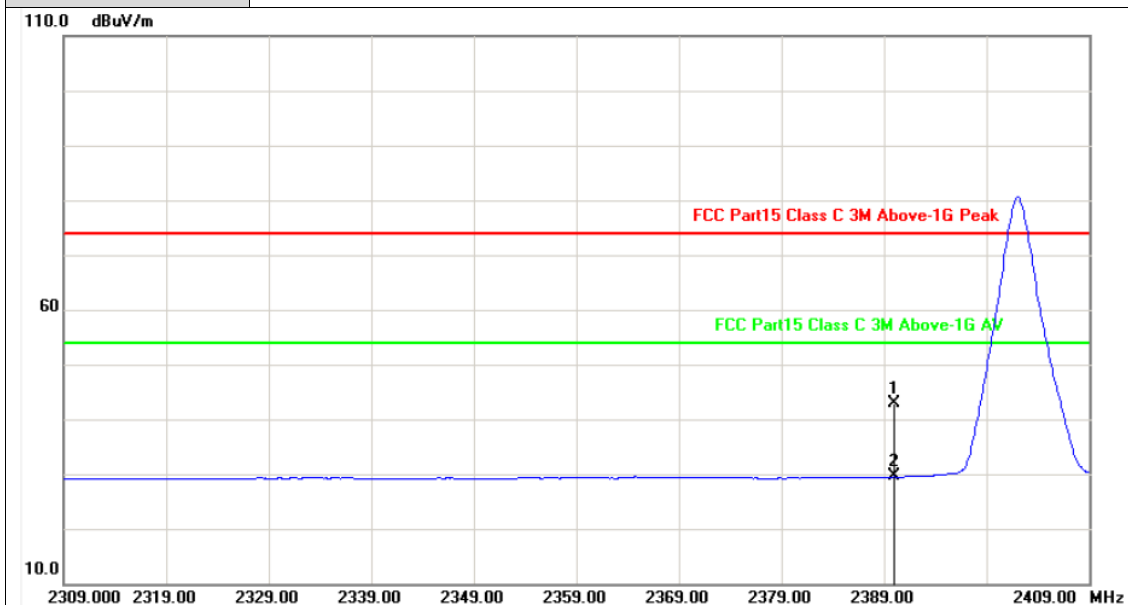


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	50.99	42.89	74.00	-31.11	peak
2	2390.000	-8.10	37.61	29.51	54.00	-24.49	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	GFSK Mode 2480 MHz

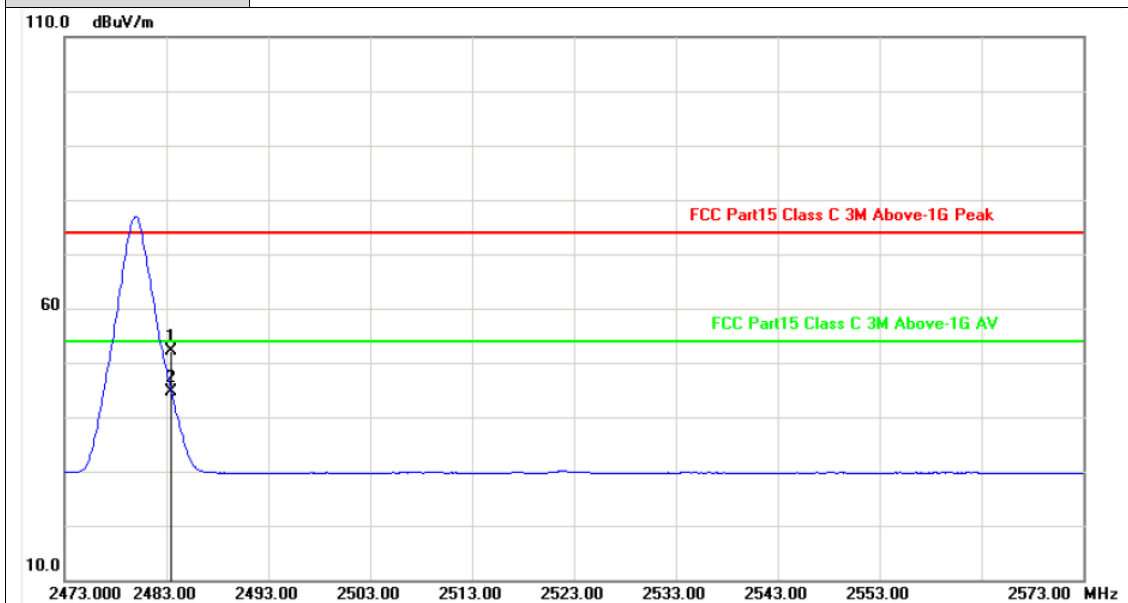


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	59.91	52.23	74.00	-21.77	peak
2	2483.500	-7.68	52.29	44.61	54.00	-9.39	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	GFSK Mode 2480 MHz

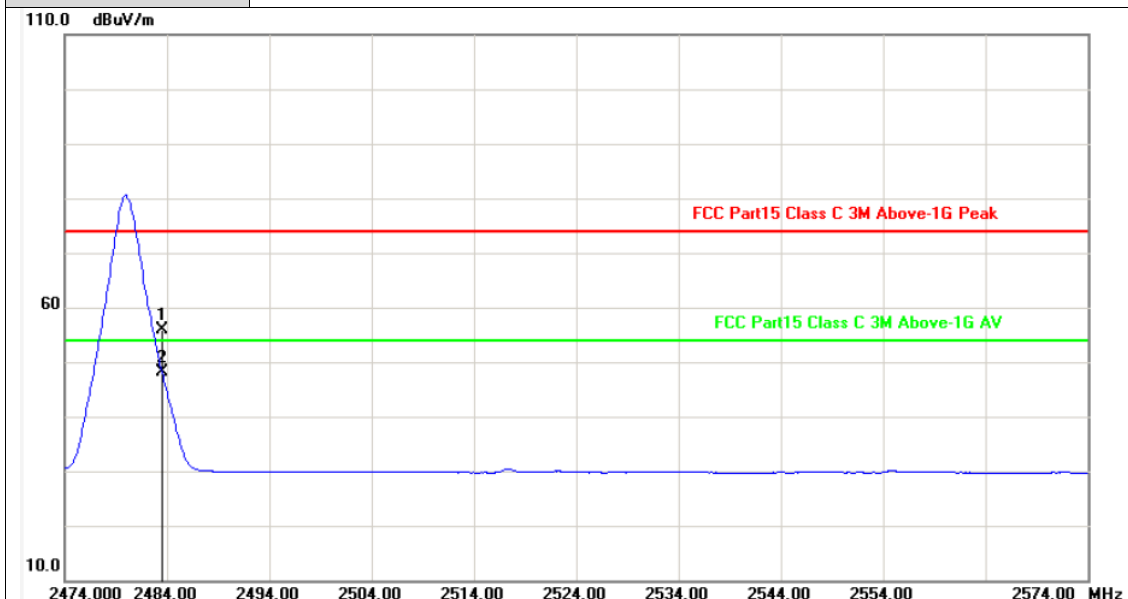


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	63.67	55.99	74.00	-18.01	peak
2	2483.500	-7.68	55.77	48.09	54.00	-5.91	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value





<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	$\pi/4$ -DQPSK Mode 2402MHz

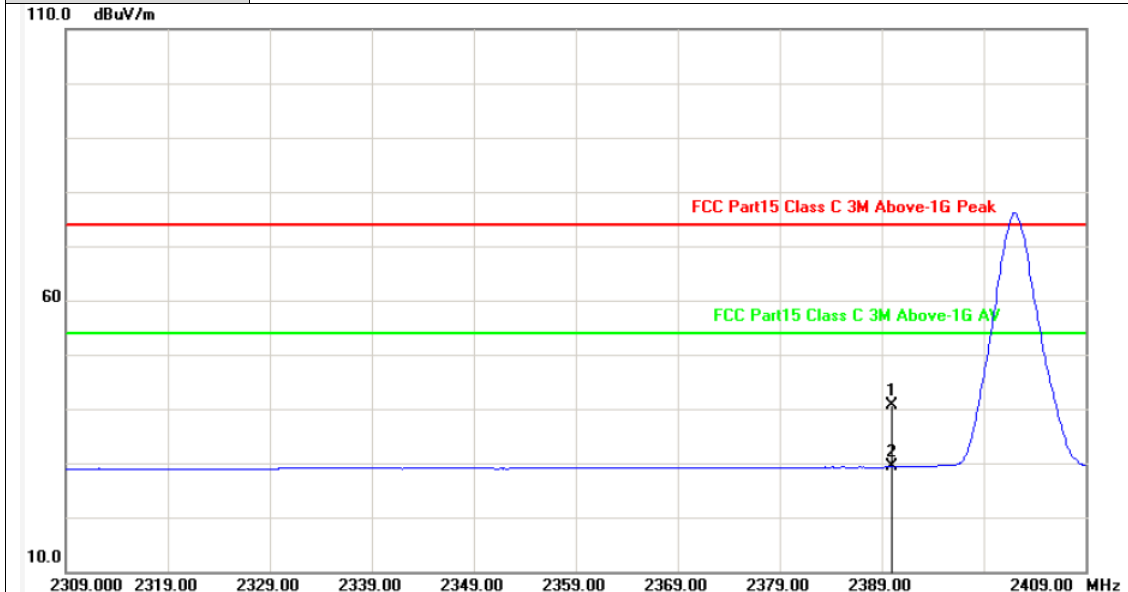


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	48.79	40.69	74.00	-33.31	peak
2	2390.000	-8.10	37.36	29.26	54.00	-24.74	AVG

Remarks:

- 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	$\pi/4$ -DQPSK Mode 2402MHz

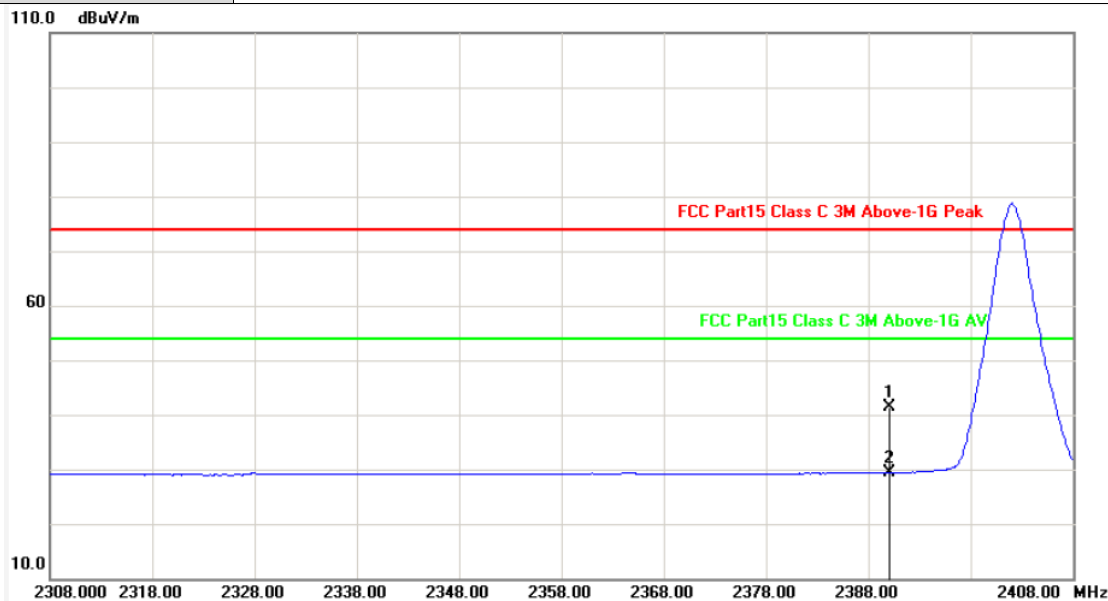


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	49.60	41.50	74.00	-32.50	peak
2	2390.000	-8.10	37.52	29.42	54.00	-24.58	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	$\pi/4$ -DQPSK Mode 2480MHz

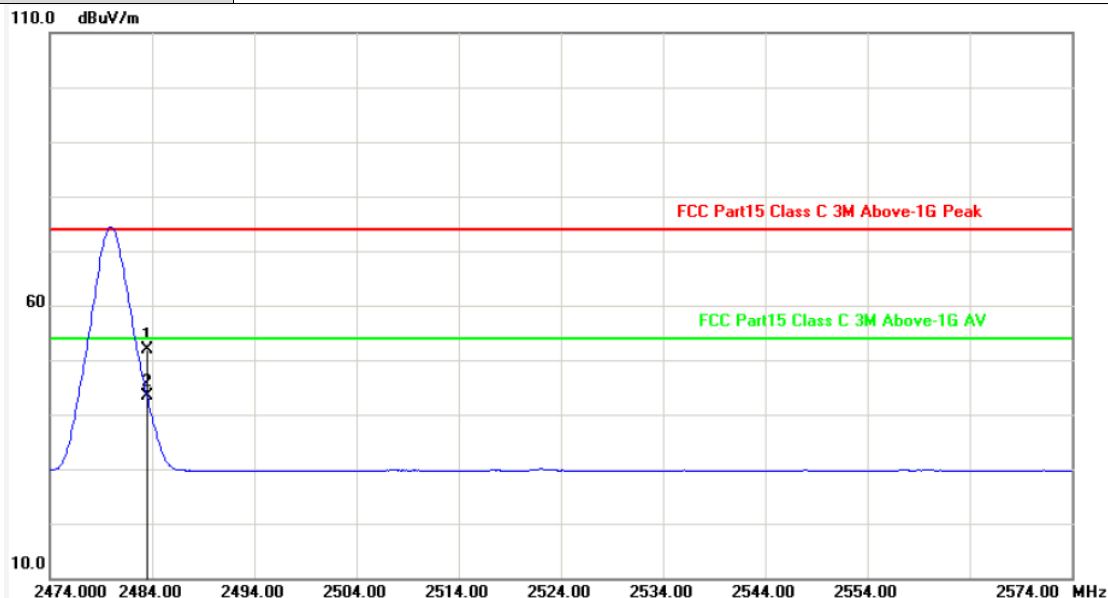


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	59.65	51.97	74.00	-22.03	peak
2	2483.500	-7.68	51.10	43.42	54.00	-10.58	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	$\pi/4$ -DQPSK Mode 2480MHz

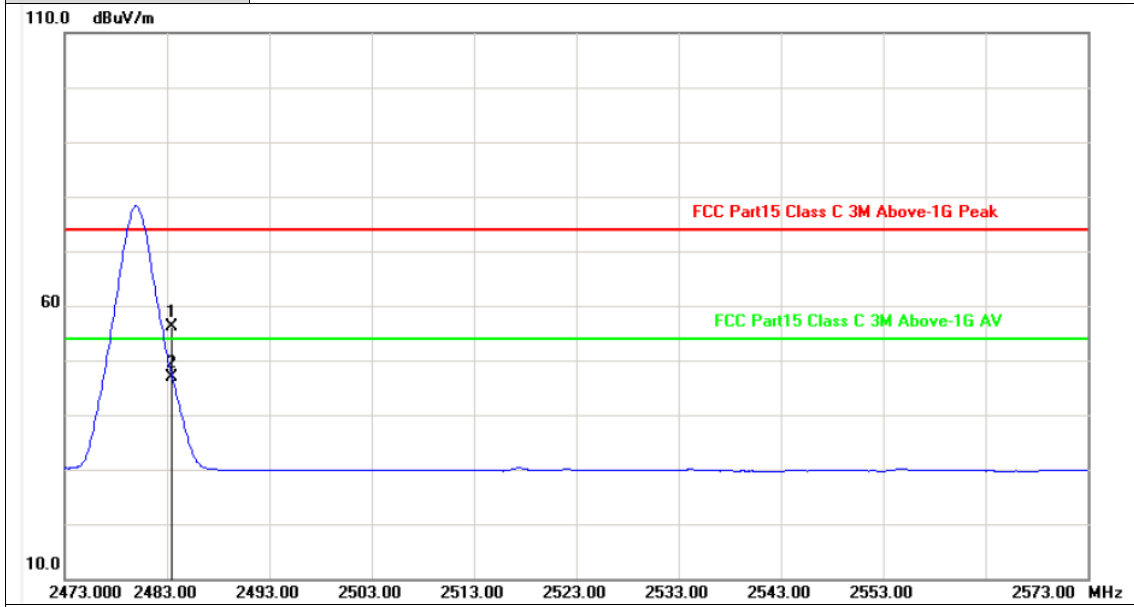


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	63.92	56.24	74.00	-17.76	peak
2	2483.500	-7.68	54.48	46.80	54.00	-7.20	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	8-DPSK Mode 2402MHz

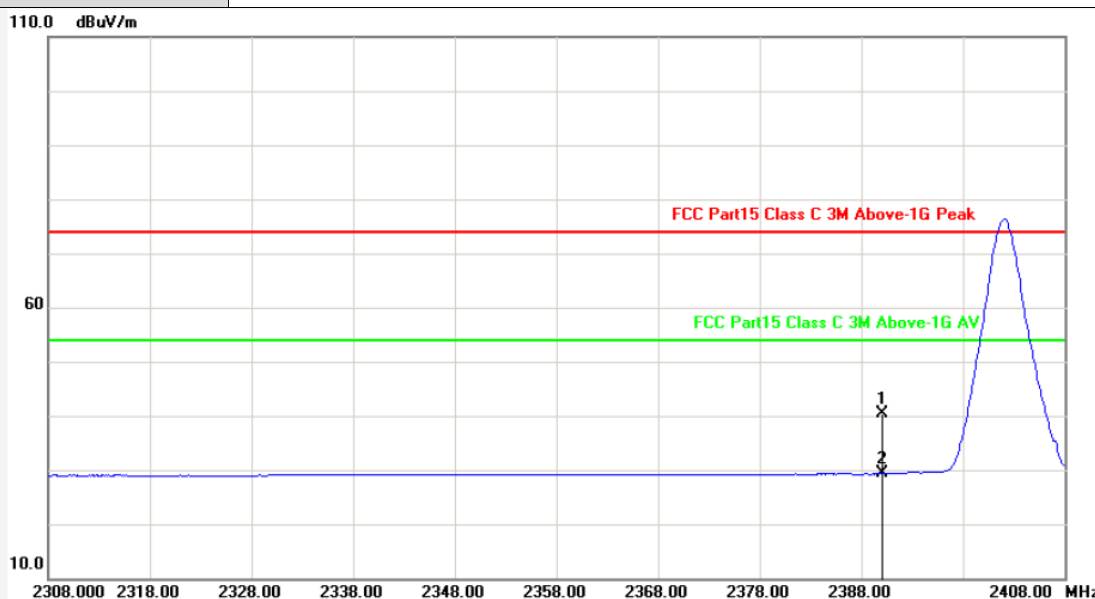


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	48.54	40.44	74.00	-33.56	peak
2	2390.000	-8.10	37.45	29.35	54.00	-24.65	AVG

**Remarks:**

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



<b>Ant. Pol.</b>	Vertical
<b>Test Mode:</b>	8-DPSK Mode 2402MHz

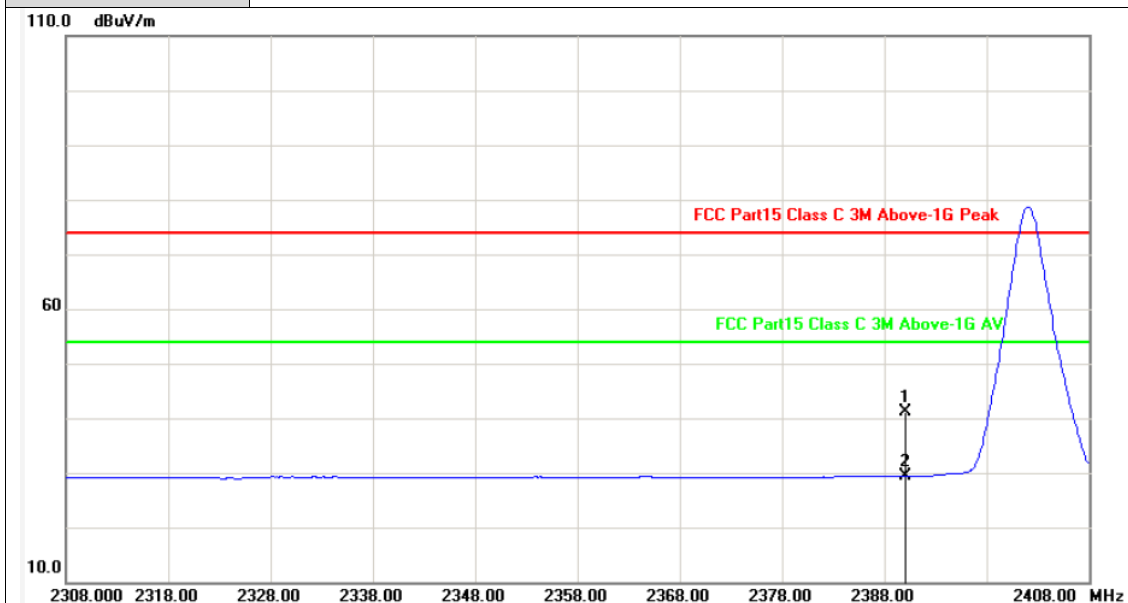


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.000	-8.10	49.15	41.05	74.00	-32.95	peak
2	2390.000	-8.10	37.53	29.43	54.00	-24.57	AVG

Remarks:  
 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor  
 2. Margin value = Level -Limit value




<b>Ant. Pol.</b>	Horizontal
<b>Test Mode:</b>	8-DPSK Mode 2480MHz

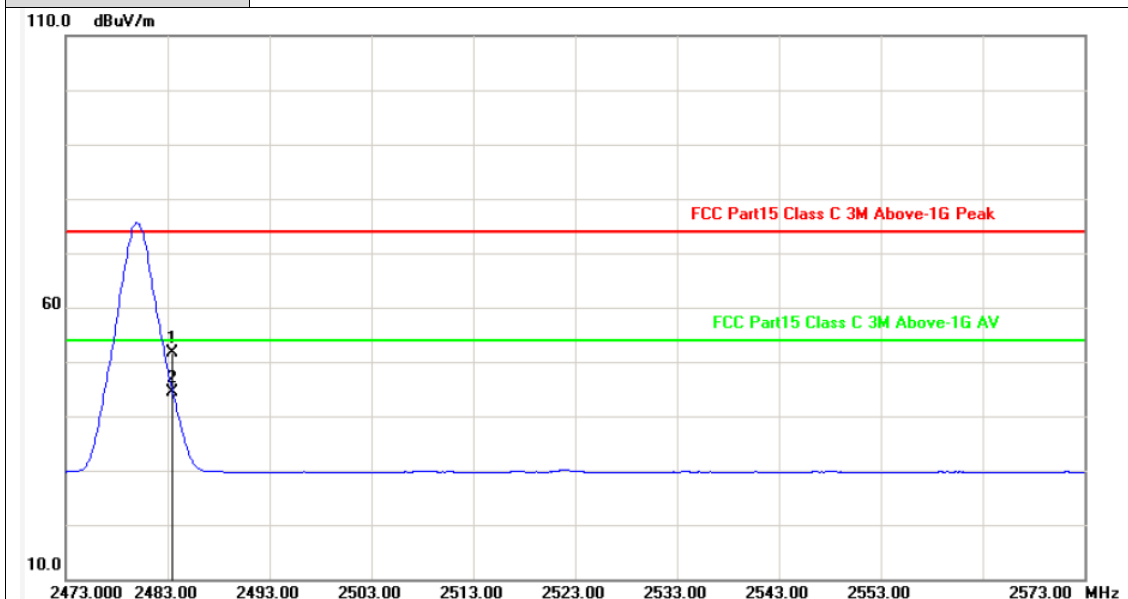

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.500	-7.68	59.42	51.74	74.00	-22.26	peak
2	2483.500	-7.68	51.98	44.30	54.00	-9.70	AVG

Remarks:



- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value


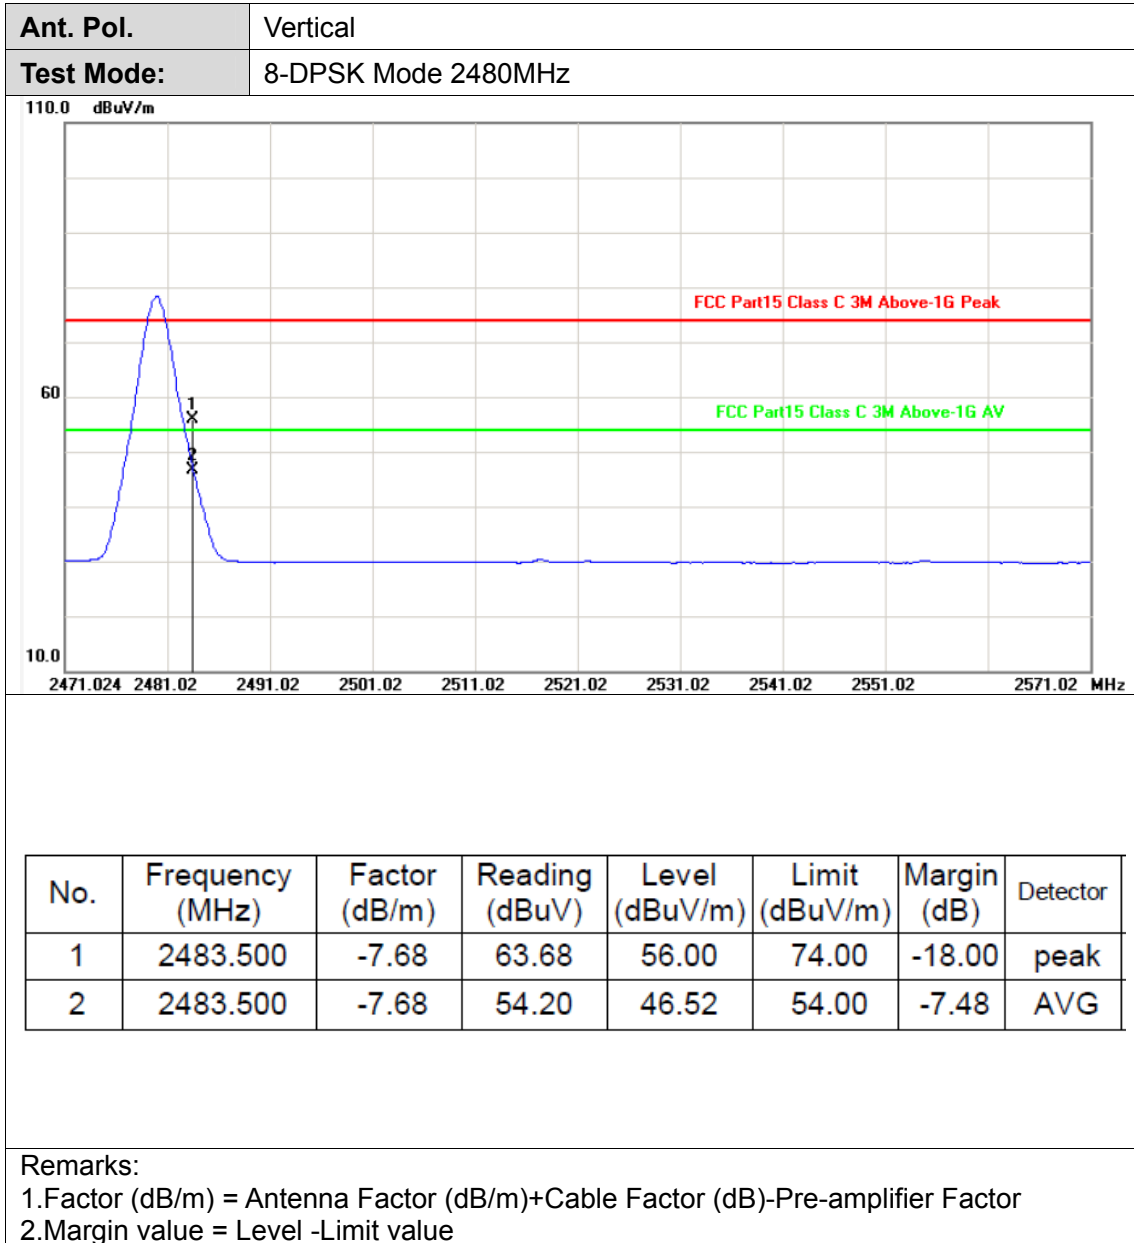







(2) Conducted Test

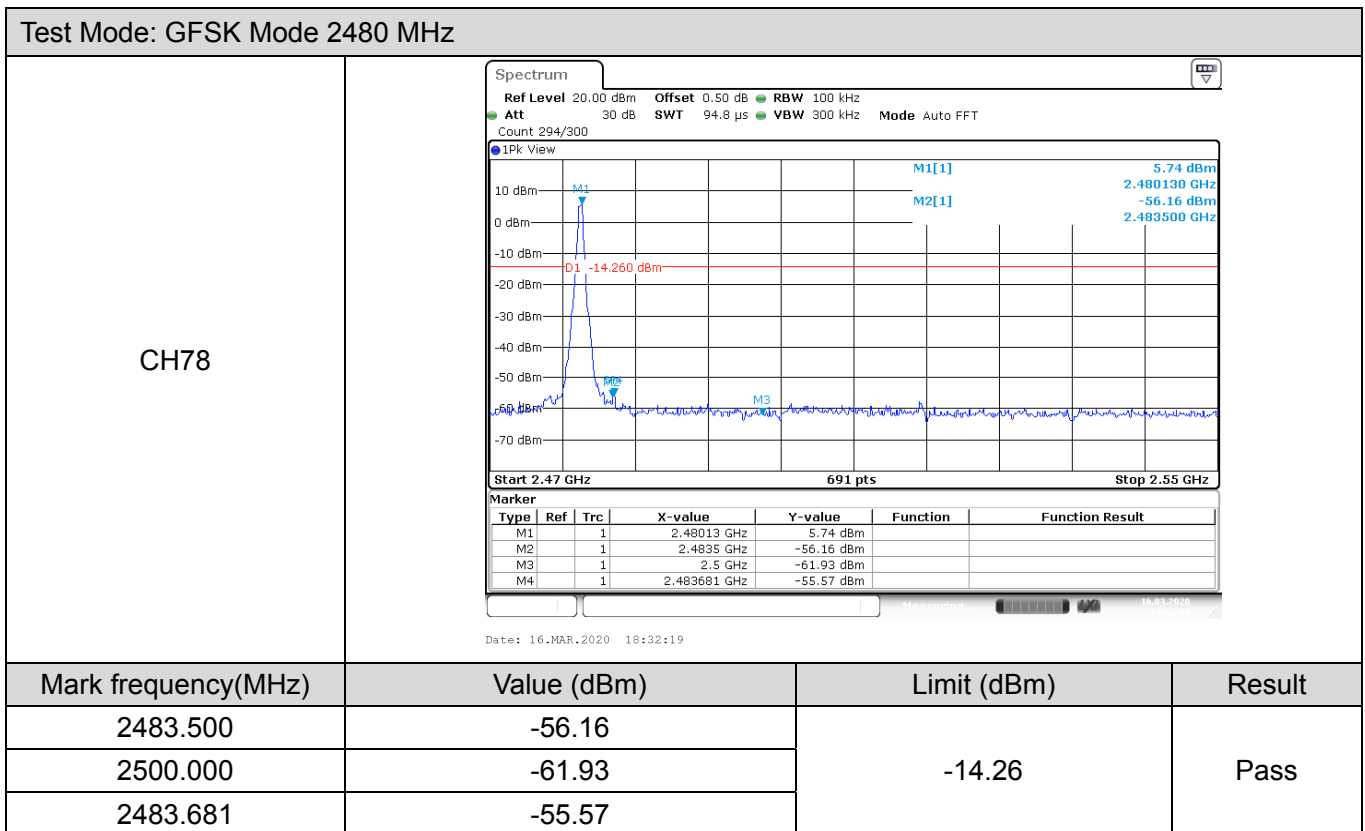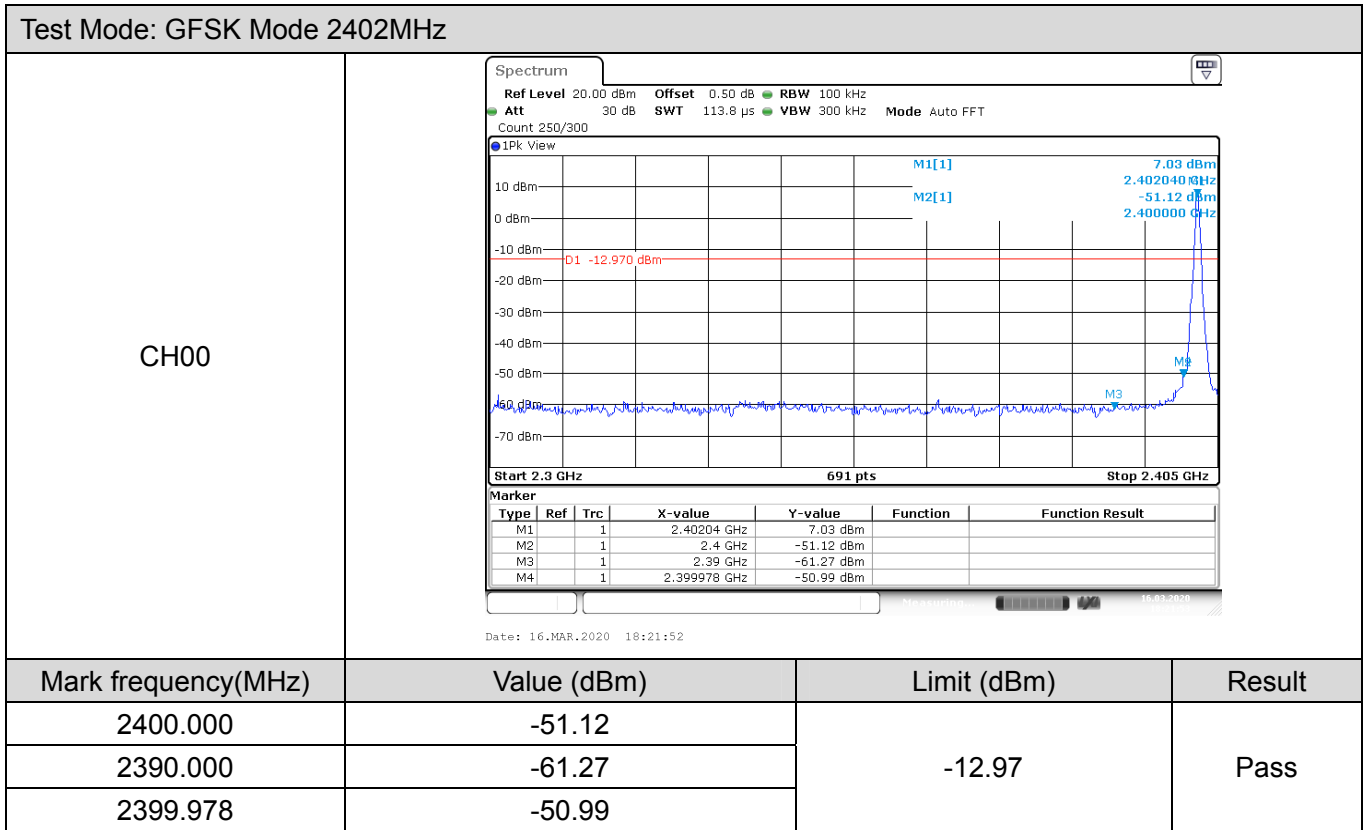

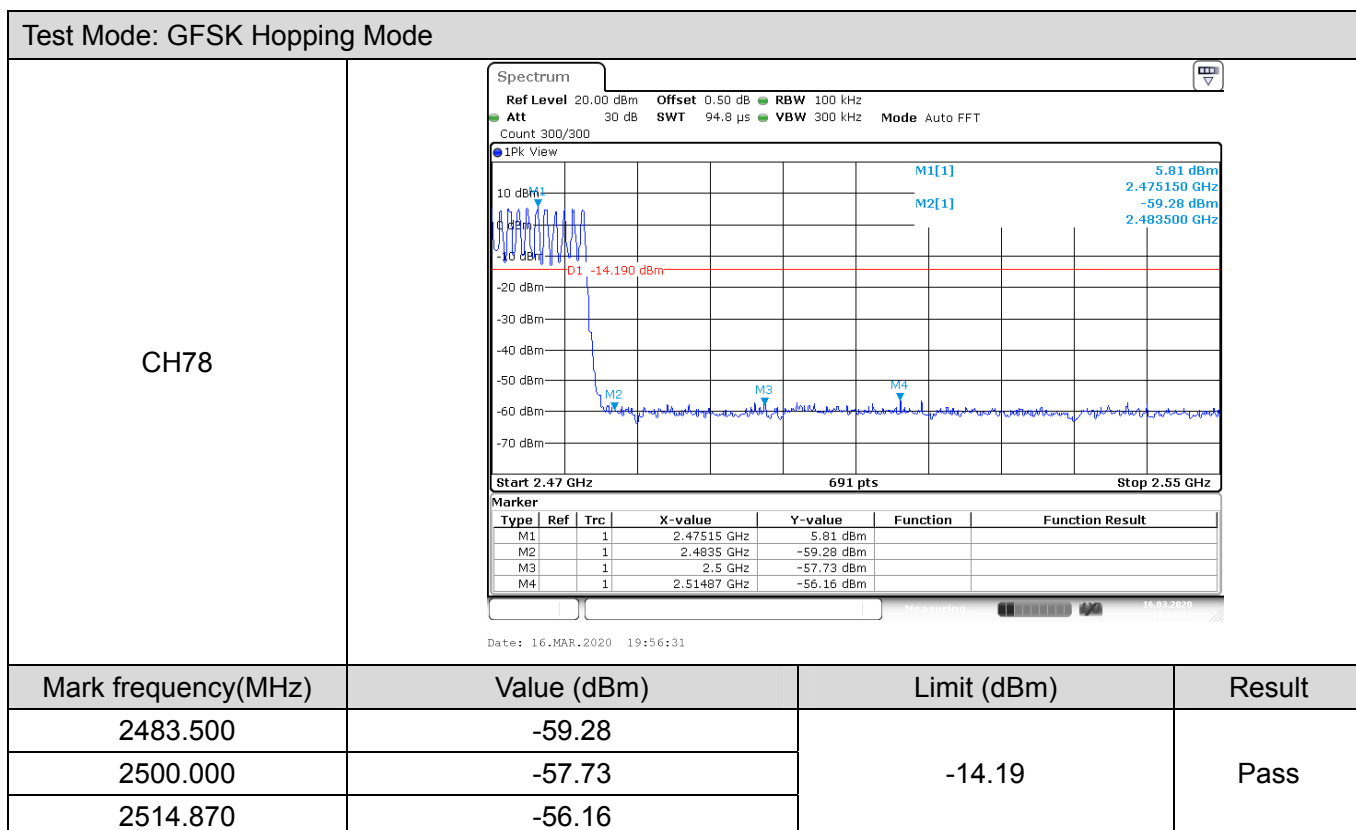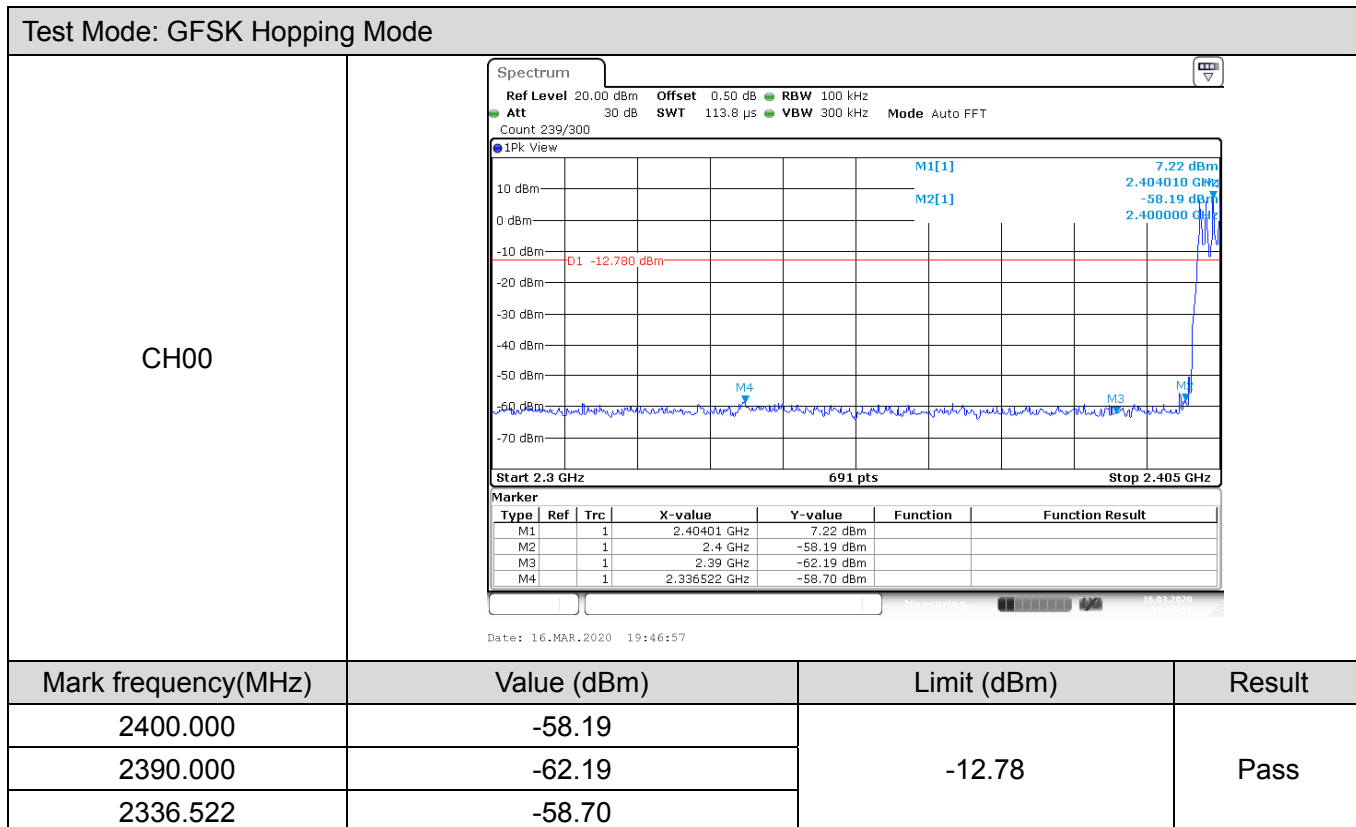




Test Mode:π/4-DQPSK Mode 2402MHz


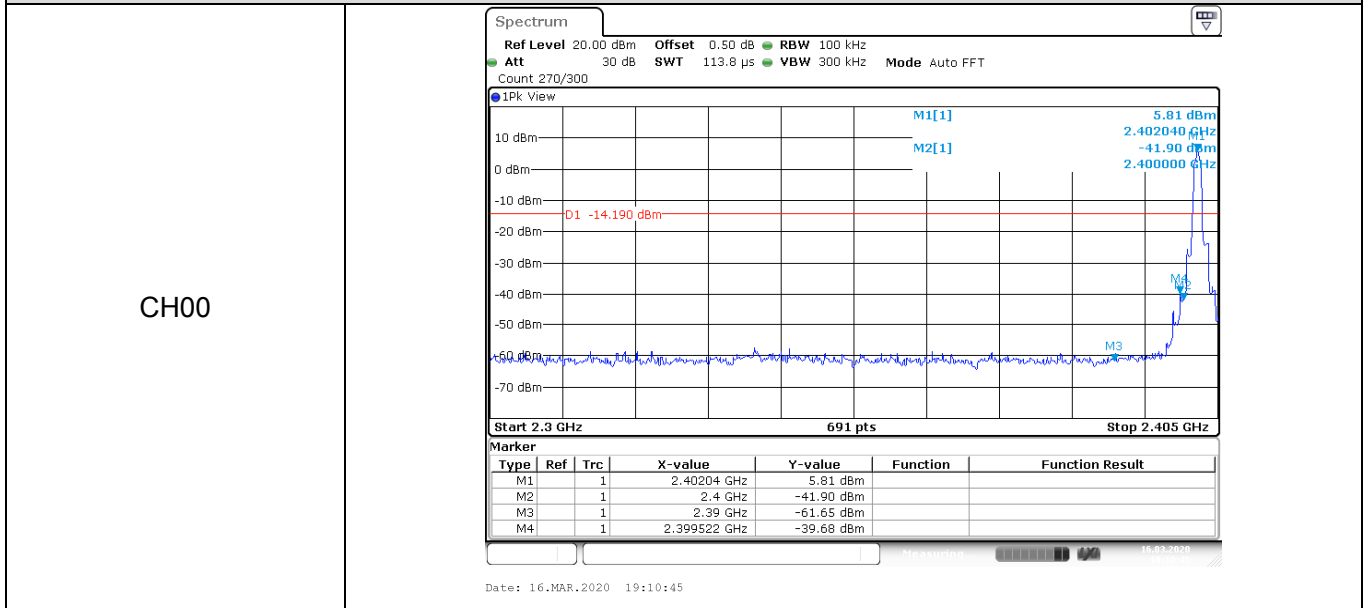


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.000	-41.90	-14.19	Pass
2390.000	-61.65		
2399.522	-39.68		

Test Mode:π/4-DQPSK Mode 2480 MHz

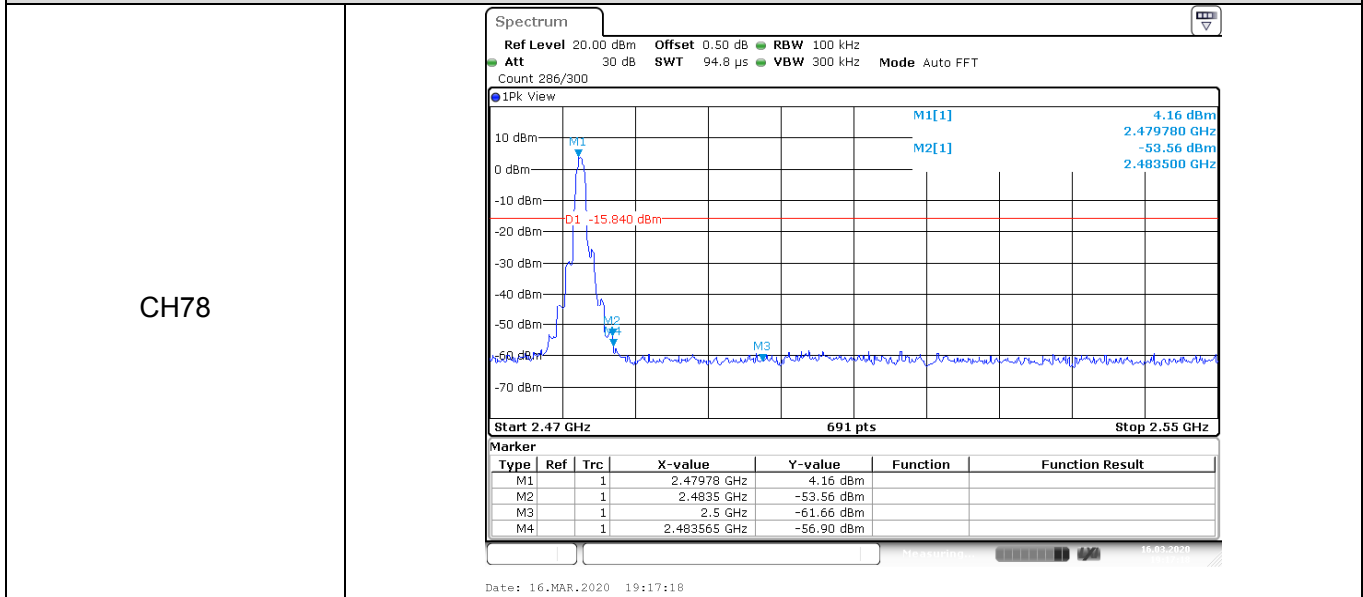


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.500	-53.56	-15.84	Pass
2500.000	-61.66		
2483.565	-56.90		

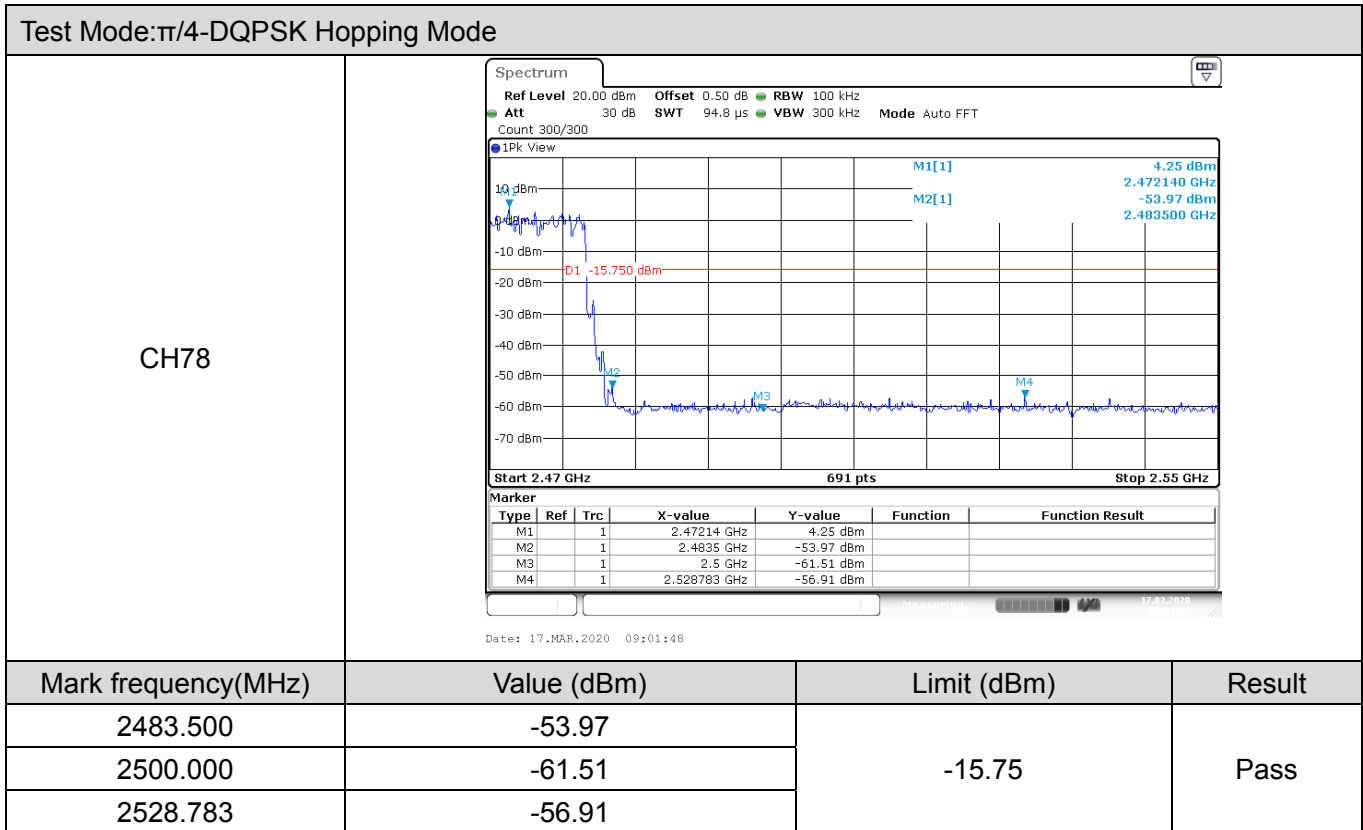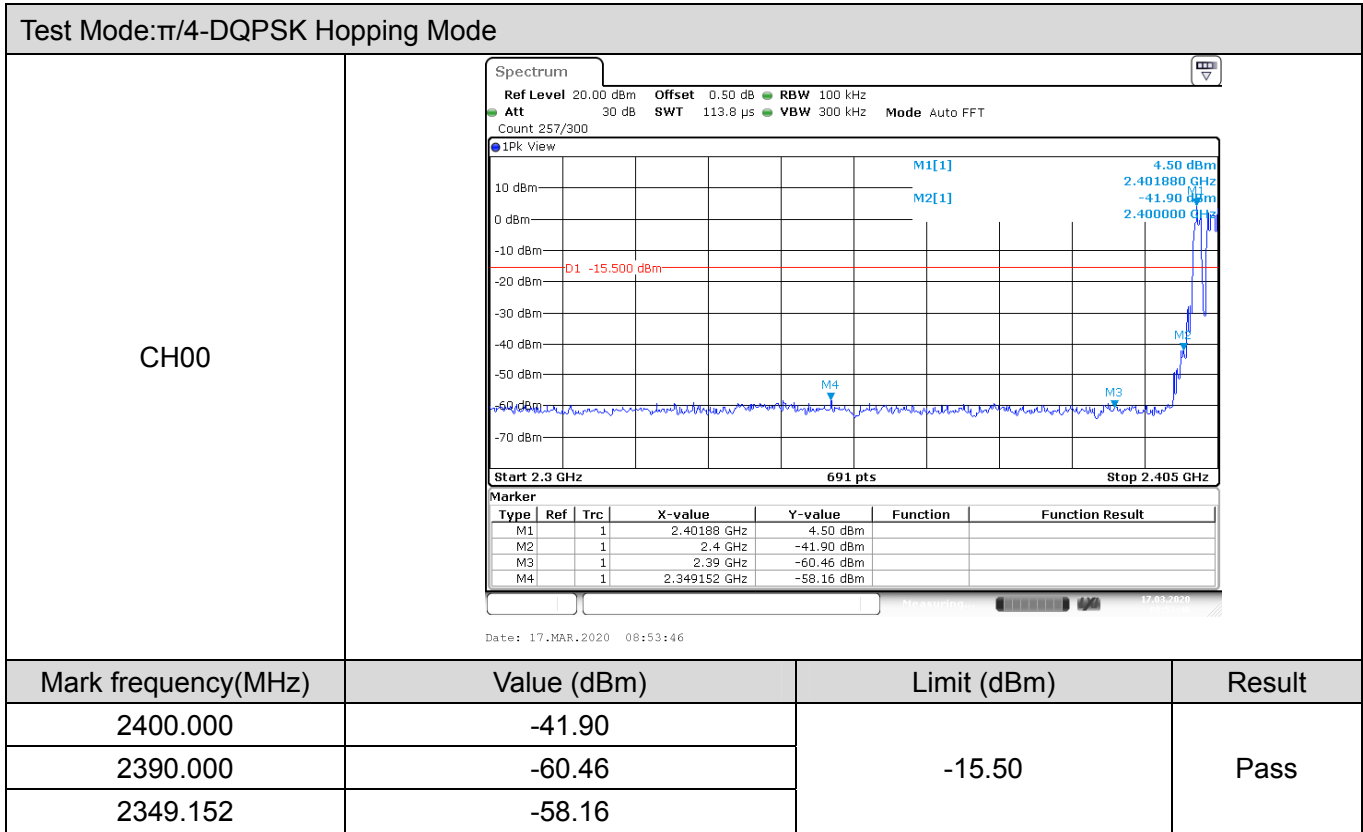




Test Mode: 8-DPSK Mode 2402MHz

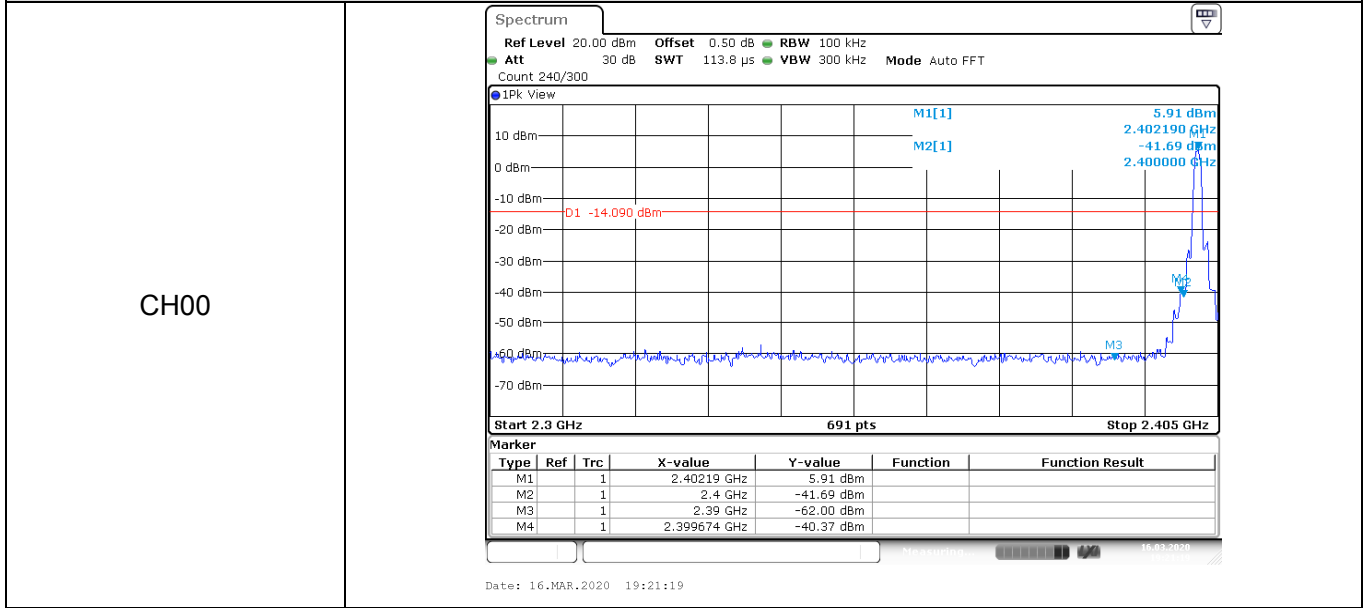

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.000	-41.69	-14.09	Pass
2390.000	-62.00		
2399.674	-40.37		


Test Mode: 8-DPSK Mode 2480 MHz

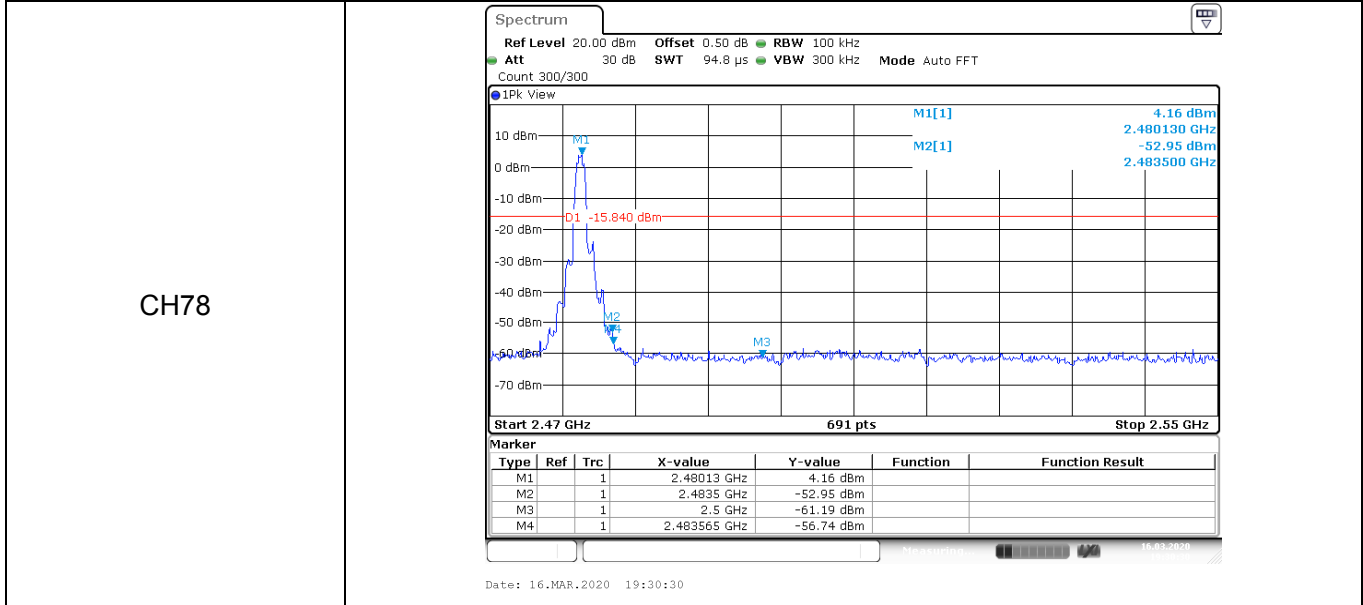

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.500	-52.95	-15.84	Pass
2500.000	-61.19		
2483.565	-56.74		




Test Mode: 8-DPSK Hopping Mode

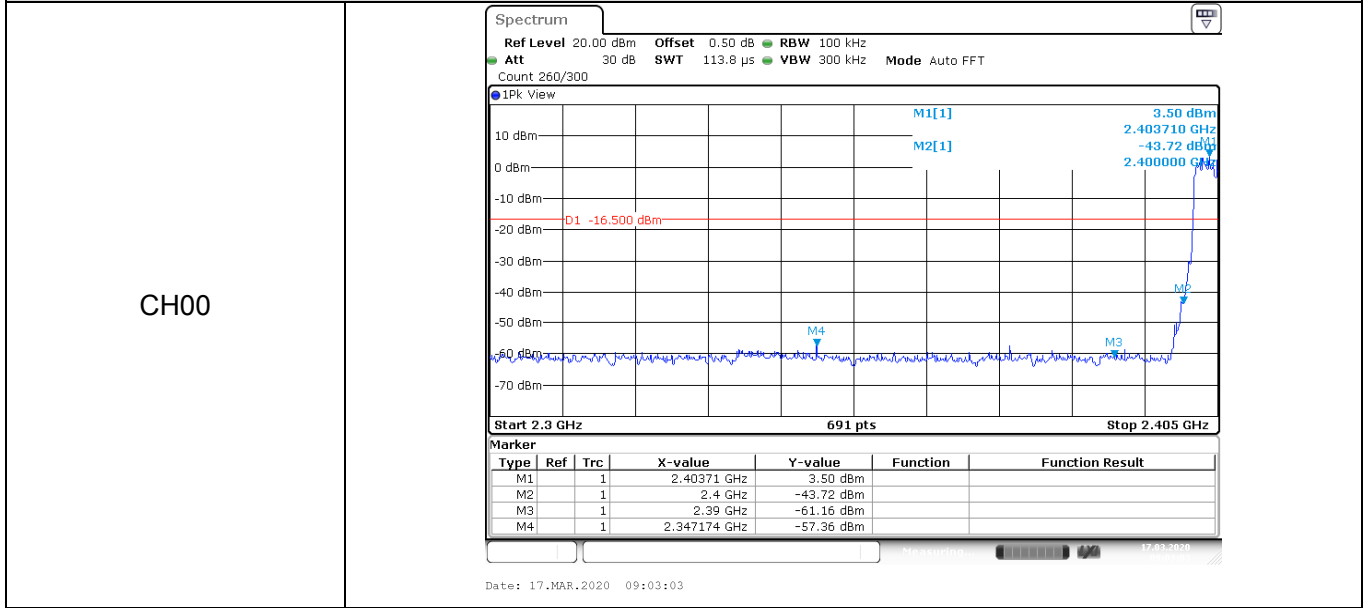

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.000	-43.72	-16.50	Pass
2390.000	-61.16		
2347.174	-57.36		

Test Mode: 8-DPSK Hopping Mode

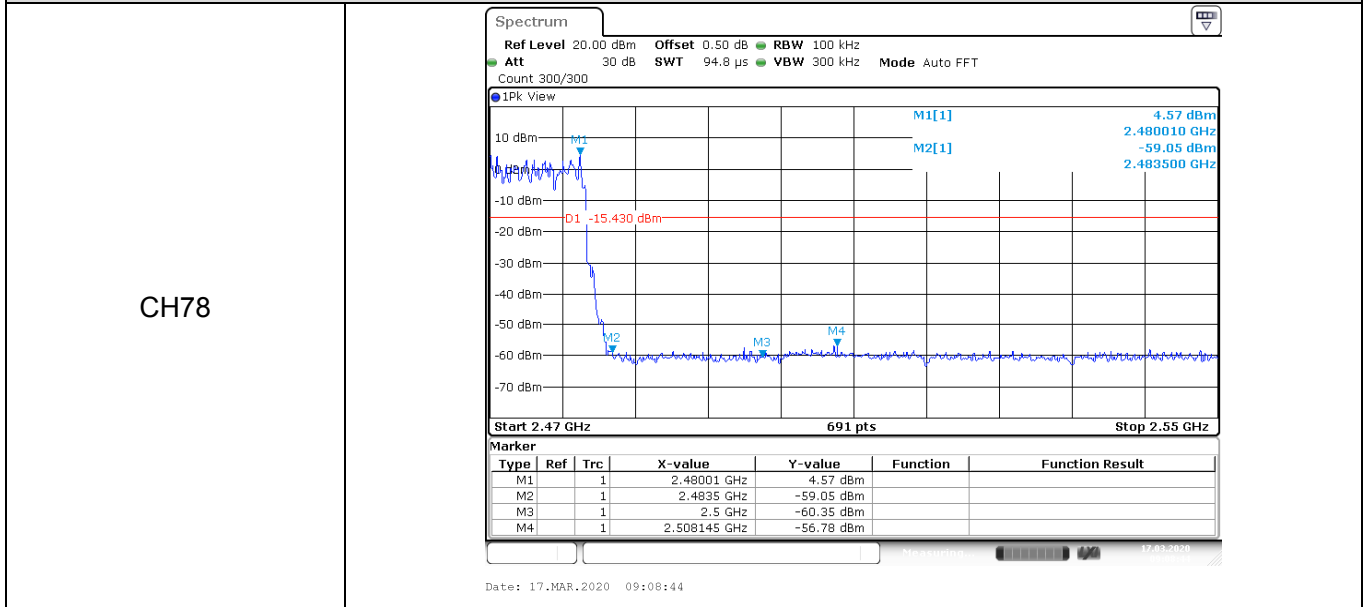

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.500	-59.05	-15.43	Pass
2500.000	-60.35		
2508.145	-56.78		




### 3.4. Occupied Channel Bandwidth and 20DB Bandwidth

**Limit**

N/A

**Test Configuration**



**Test Procedure**

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. OCB and 20dB Spectrum Setting:
  - (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

**Test Mode**

Please refer to the clause 2.3.

**Test Results**

Modulation type	Channel	99% Bandwidth (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
GFSK	00	899	978	652.00
	39	896	978	652.00
	78	899	981	654.00
π/4-DQPSK	00	1220	1359	906.00
	39	1217	1362	908.00
	78	1220	1362	908.00
8-DPSK	00	1211	1317	878.00
	39	1211	1326	884.00
	78	1214	1320	880.00



20dB Bandwidth																													
Modulation Type: GFSK																													
CH00	<p><b>Marker Table:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td>1</td> <td>2.401502 GHz</td> <td>-13.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td>1</td> <td>2.402126 GHz</td> <td>6.31 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>978.0 kHz</td> <td>-0.13 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	2.401502 GHz	-13.70 dBm			M2	1	1	2.402126 GHz	6.31 dBm			D3	M1	1	978.0 kHz	-0.13 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1	1	2.401502 GHz	-13.70 dBm																									
M2	1	1	2.402126 GHz	6.31 dBm																									
D3	M1	1	978.0 kHz	-0.13 dB																									
CH39	<p><b>Marker Table:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td>1</td> <td>2.440505 GHz</td> <td>-14.47 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td>1</td> <td>2.441129 GHz</td> <td>5.54 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>978.0 kHz</td> <td>-0.08 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	2.440505 GHz	-14.47 dBm			M2	1	1	2.441129 GHz	5.54 dBm			D3	M1	1	978.0 kHz	-0.08 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1	1	2.440505 GHz	-14.47 dBm																									
M2	1	1	2.441129 GHz	5.54 dBm																									
D3	M1	1	978.0 kHz	-0.08 dB																									
CH78	<p><b>Marker Table:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td>1</td> <td>2.479508 GHz</td> <td>-15.78 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td>1</td> <td>2.480135 GHz</td> <td>4.43 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>981.0 kHz</td> <td>0.02 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1	1	2.479508 GHz	-15.78 dBm			M2	1	1	2.480135 GHz	4.43 dBm			D3	M1	1	981.0 kHz	0.02 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1	1	2.479508 GHz	-15.78 dBm																									
M2	1	1	2.480135 GHz	4.43 dBm																									
D3	M1	1	981.0 kHz	0.02 dB																									

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)






Modulation Type:  $\pi/4$ -DQPSK

CH00

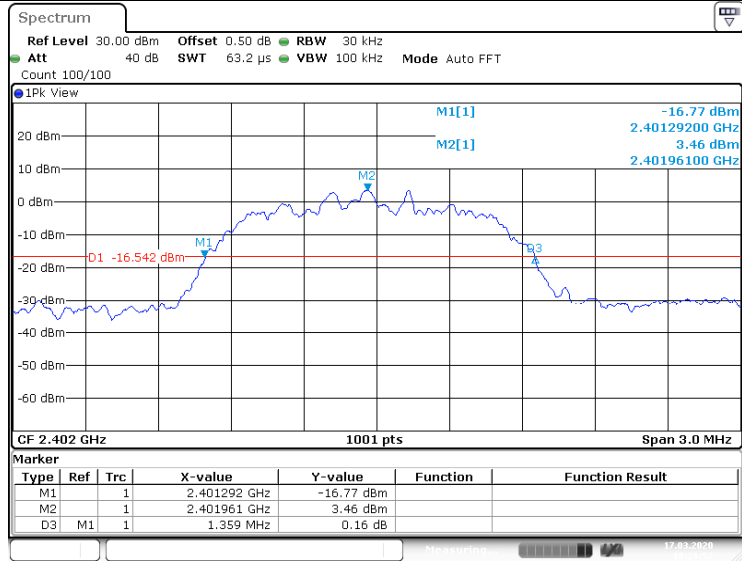


Date: 17.MAR.2020 19:26:52

CH39

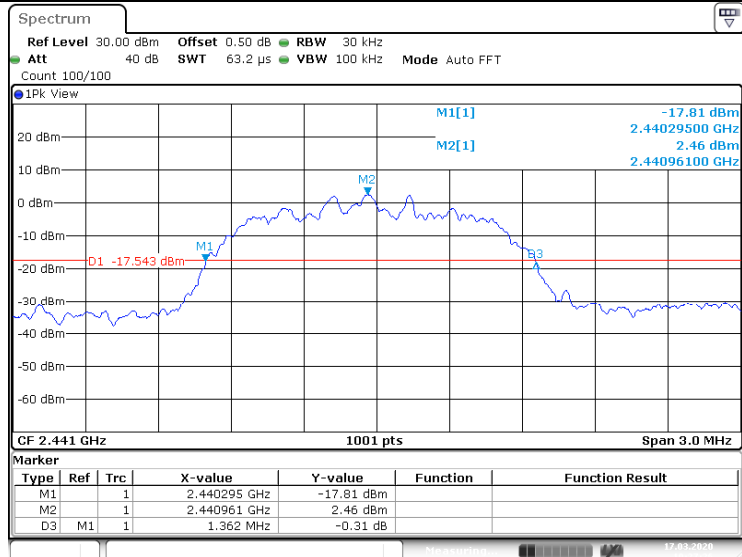

Date: 17.MAR.2020 19:27:25

CH78

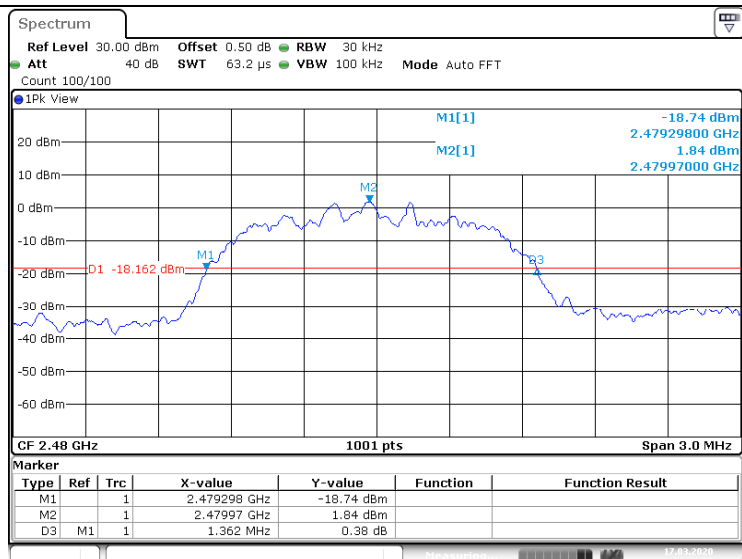

Date: 17.MAR.2020 19:27:59

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




Modulation Type: 8-DPSK

CH00

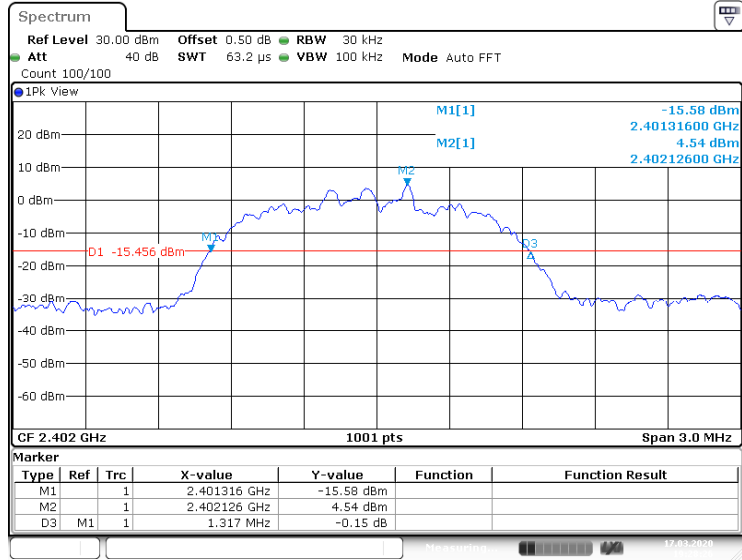


Date: 17.MAR.2020 19:28:26

CH39

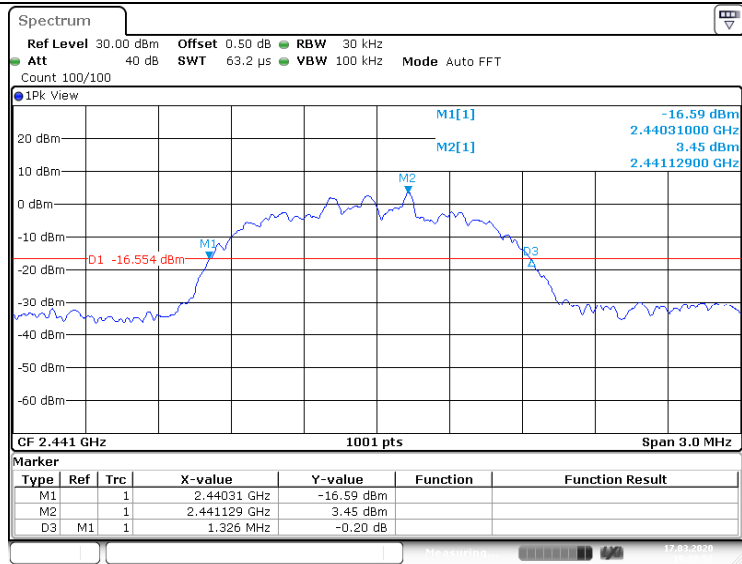

Date: 17.MAR.2020 19:28:52

CH78

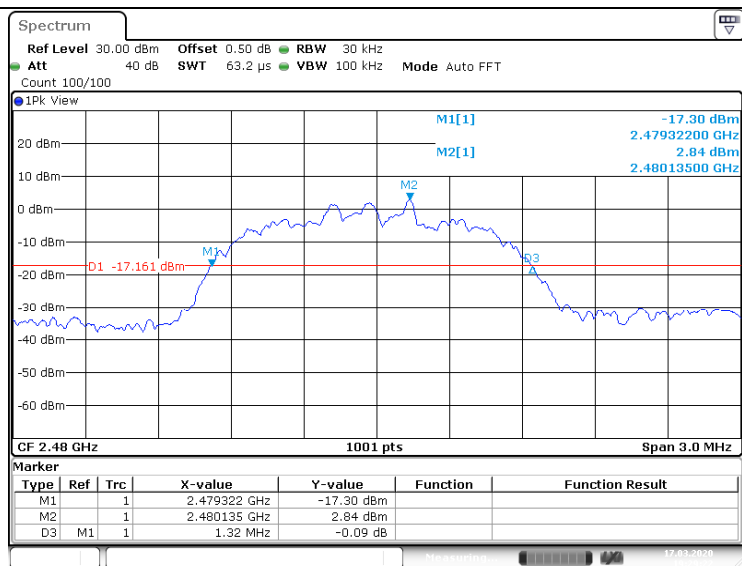

Date: 17.MAR.2020 19:29:21

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn  
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)







99% Bandwidth

Modulation Type: GFSK


CH00

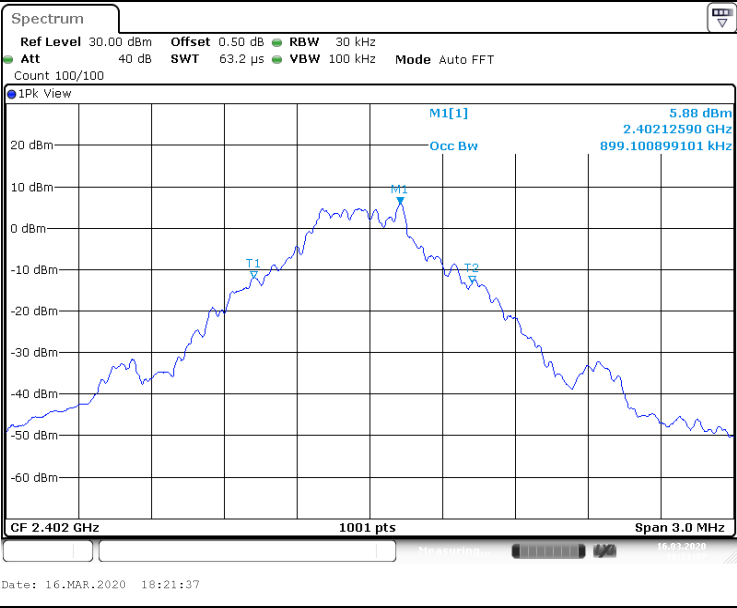

CH39

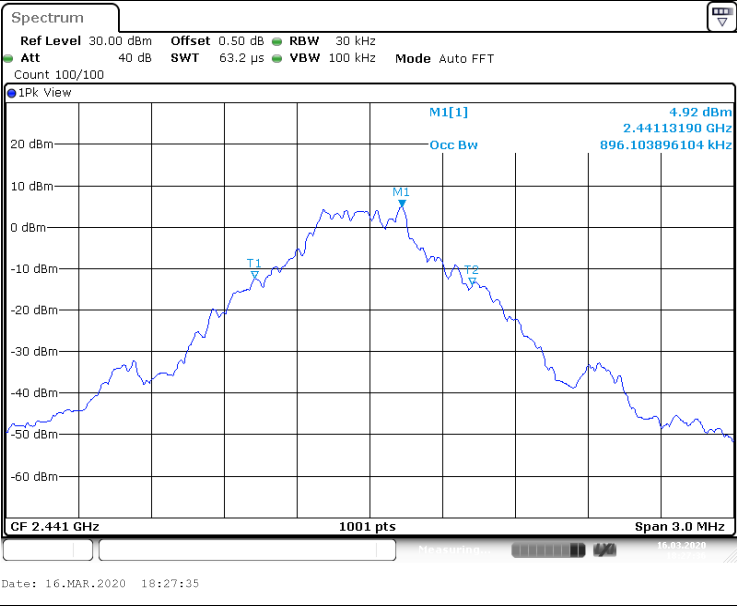

CH78

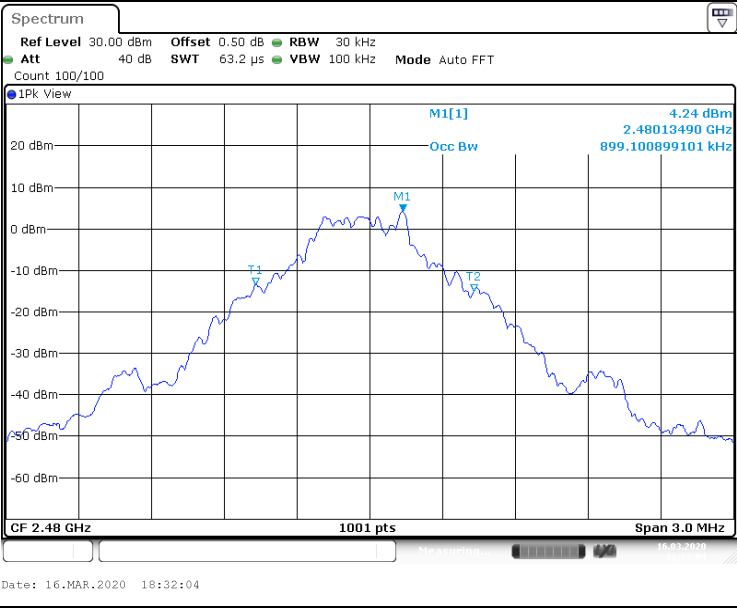

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
 Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type:		$\pi/4$ -DQPSK
CH00	<p>Date: 16.MAR.2020 19:10:30</p>	
CH39	<p>Date: 16.MAR.2020 19:13:58</p>	
CH78	<p>Date: 16.MAR.2020 19:17:03</p>	

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type: 8-DPSK	
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 4.27 dBm 2.40212590 GHz Occ Bw 1.210789211 MHz</p> <p>CF 2.402 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 16.MAR.2020 19:21:03</p>
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 3.26 dBm 2.44113190 GHz Occ Bw 1.210789211 MHz</p> <p>CF 2.441 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 16.MAR.2020 19:24:55</p>
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 30 kHz Att 40 dB SWT 63.2 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>M1[1] 2.66 dBm 2.48013490 GHz Occ Bw 1.213786214 MHz</p> <p>CF 2.48 GHz 1001 pts Span 3.0 MHz</p> <p>Date: 16.MAR.2020 19:30:15</p>




### 3.5. Channel Separation

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

#### Test Configuration



#### Test Procedure

3. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
4. Spectrum Setting:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

#### Test Mode

Please refer to the clause 2.3.

**Test Results**

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	00	1.004	652.00	Pass
	39	1.000	652.00	
	78	0.960	654.00	
$\pi/4$ -DQPSK	00	1.003	906.00	Pass
	39	1.003	908.00	
	78	1.029	908.00	
8-DPSK	00	0.999	878.00	Pass
	39	0.999	884.00	
	78	0.999	880.00	



Modulation Type: GFSK	
CH00	<p>Date: 16.MAR.2020 19:48:23</p>
CH39	<p>Date: 16.MAR.2020 19:49:04</p>
CH78	<p>Date: 17.MAR.2020 09:25:26</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)





Modulation Type: $\pi/4$ -DQPSK	
CH00	<p> <b>Spectrum</b>            Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz            Att 40 dB SWT 19 <math>\mu</math>s VBW 300 kHz Mode Auto FFT            Count 100/100            1Pk View            D1[1] -0.02 dB            1.00290 MHz            5.31 dBm            2.40212230 GHz            M1[1]            M1            D1            Start 2.401 GHz 691 pts Stop 2.404 GHz            Date: 17.MAR.2020 09:29:56         </p>
CH39	<p> <b>Spectrum</b>            Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz            Att 40 dB SWT 19 <math>\mu</math>s VBW 300 kHz Mode Auto FFT            Count 100/100            1Pk View            D1[1] -0.07 dB            1.00290 MHz            4.75 dBm            2.44113100 GHz            M1[1]            M1            D1            Start 2.44 GHz 691 pts Stop 2.443 GHz            Date: 17.MAR.2020 09:32:34         </p>
CH78	<p> <b>Spectrum</b>            Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz            Att 40 dB SWT 19 <math>\mu</math>s VBW 300 kHz Mode Auto FFT            Count 100/100            1Pk View            M1[1] 3.90 dBm            2.47896600 GHz            D1[1] 0.30 dB            1.02890 MHz            M1            D1            Start 2.478 GHz 691 pts Stop 2.481 GHz            Date: 17.MAR.2020 09:35:22         </p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type: 8-DPSK	
CH00	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm</p> <p>Start 2.401 GHz 691 pts Stop 2.404 GHz</p> <p>Date: 17.MAR.2020 09:46:22</p>
CH39	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 17.MAR.2020 09:44:12</p>
CH78	<p>Ref Level 30.00 dBm Offset 0.50 dB RBW 100 kHz Att 40 dB SWT 19 μs VBW 300 kHz Mode Auto FFT Count 100/100</p> <p>1Pk View</p> <p>20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 17.MAR.2020 09:40:30</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: [yz.cnca.cn](http://yz.cnca.cn)




### 3.6. Number of Hopping Channel

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

#### Test Configuration



#### Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
  - Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

#### Test Mode

Please refer to the clause 2.3.

#### Test Result

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4-DQPSK	79		
8DPSK	79		



<p style="text-align: center;">GFSK</p>	
<p style="text-align: center;"><math>\pi/4</math>-DQPSK</p>	
<p style="text-align: center;">8-DPSK</p>	




### 3.7. Dwell Time

#### Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
  - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
  - (3) Sweep Time is more than once pulse time.
  - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
  - (5) Measure the maximum time duration of one single pulse.
  - (6) Set the EUT for packet transmitting.

#### Test Mode

Please refer to the clause 2.3.

**Test Result**

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.386	123.52	31.60	≤ 0.40	Pass
	DH3	2441	1.633	261.28	31.60		
	DH5	2441	2.877	306.88	31.60		
π/4-DQPSK	2DH1	2441	0.386	123.52	31.60	≤ 0.40	Pass
	2DH3	2441	1.633	261.28	31.60		
	2DH5	2441	2.877	306.88	31.60		
8-DPSK	3DH1	2441	0.386	123.52	31.60	≤ 0.40	Pass
	3DH3	2441	1.633	261.28	31.60		
	3DH5	2441	2.880	307.20	31.60		

Note: 1DH1/ 2DH1/3DH1 Total of Dwell= Pulse Time\*(1600/2)\*31.6/79

1DH3/2DH3/3DH3 Total of Dwell= Pulse Time\*(1600/4)\*31.6/79

1DH5/2DH5/3DH5 Total of Dwell= Pulse Time\*(1600/6)\*31.6/79



Modulation Type: GFSK	
DH1	<p>Date: 17.MAR.2020 09:18:11</p>
DH3	<p>Date: 17.MAR.2020 09:19:09</p>
DH5	<p>Date: 17.MAR.2020 08:53:08</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type:		$\pi/4$ -DQPSK
2DH1		<p>Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 10 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] 0.77 dBm D2[1] -1.23 μs 4.32 dB 386.30 μs</p> <p>TRG 3.600 dBm</p> <p>CF 2.441 GHz 8000 pts 1.0 ms/</p> <p>Date: 17.MAR.2020 09:20:04</p>
2DH3		<p>Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 20 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] 4.77 dBm D2[1] 25 ns 0.63 dB 1.63270 ms</p> <p>TRG 3.700 dBm</p> <p>CF 2.441 GHz 8000 pts 2.0 ms/</p> <p>Date: 17.MAR.2020 09:20:38</p>
2DH5		<p>Ref Level 30.00 dBm Att 40 dB RBW 1 MHz SWT 30 ms VBW 3 MHz</p> <p>SGL TRG:VID IPk Clrw</p> <p>M1[1] 4.97 dBm D2[1] -1.23 μs -0.35 dB 2.87661 ms</p> <p>TRG 3.800 dBm</p> <p>CF 2.441 GHz 8000 pts 3.0 ms/</p> <p>Date: 17.MAR.2020 09:01:14</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: [yz.cnca.cn](http://yz.cnca.cn)





Modulation Type: 8-DPSK	
3DH1	<p>Spectrum  Ref Level 30.00 dBm RBW 1 MHz  Att 40 dB SWT 10 ms VBW 3 MHz  SGL TRG:VID  IPk Clrw  M1[1] 2.76 dBm  -1.23 μs  D2[1] 2.79 dB  386.30 μs  TRG 3.800 dBm  CF 2.441 GHz 8000 pts 1.0 ms/  Date: 17.MAR.2020 09:21:13</p>
3DH3	<p>Spectrum  Ref Level 30.00 dBm RBW 1 MHz  Att 40 dB SWT 20 ms VBW 3 MHz  SGL TRG:VID  IPk Clrw  M1[1] 4.75 dBm  25 ns  D2[1] 1.37 dB  1.63270 ms  TRG 3.800 dBm  CF 2.441 GHz 8000 pts 2.0 ms/  Date: 17.MAR.2020 09:21:49</p>
3DH5	<p>Spectrum  Ref Level 30.00 dBm RBW 1 MHz  Att 40 dB SWT 30 ms VBW 3 MHz  SGL TRG:VID  IPk Clrw  M1[1] 1.22 dBm  -4.98 μs  D2[1] 4.70 dB  2.88036 ms  TRG 4.000 dBm  CF 2.441 GHz 8000 pts 3.0 ms/  Date: 17.MAR.2020 09:08:10</p>




### 3.8. Peak Output Power

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

#### Test Configuration



#### Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

#### Test Mode

Please refer to the clause 2.3.

#### Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	7.65	≤ 30.00	Pass
	39	7.05		
	78	5.95		
π/4-DQPSK	00	8.03	≤ 21.00	Pass
	39	7.09		
	78	6.44		
8-DPSK	00	8.25	≤ 21.00	Pass
	39	7.55		
	78	6.51		



Modulation Type: GFSK	
CH00	<p>Date: 16.MAR.2020 18:23:54</p>
CH39	<p>Date: 16.MAR.2020 18:28:37</p>
CH78	<p>Date: 16.MAR.2020 18:34:20</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type:		$\pi/4$ -DQPSK
CH00	<p>Date: 16.MAR.2020 19:12:46</p>	
CH39	<p>Date: 16.MAR.2020 19:14:59</p>	
CH78	<p>Date: 16.MAR.2020 19:19:19</p>	

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



Modulation Type: 8-DPSK	
CH00	<p><b>Spectrum</b>  Ref Level 30.00 dBm Offset 0.50 dB RBW 2 MHz  Att 40 dB SWT 956 ns VBW 3 MHz Mode Auto FFT  Count 100/100  IPk View  M1[1] 8.25 dBm 2.40190010 GHz  CF 2.402 GHz 691 pts Span 3.0 MHz  Date: 16.MAR.2020 19:23:20</p>
CH39	<p><b>Spectrum</b>  Ref Level 30.00 dBm Offset 0.50 dB RBW 2 MHz  Att 40 dB SWT 956 ns VBW 3 MHz Mode Auto FFT  Count 100/100  IPk View  M1[1] 7.55 dBm 2.44095220 GHz  CF 2.441 GHz 691 pts Span 3.0 MHz  Date: 16.MAR.2020 19:25:56</p>
CH78	<p><b>Spectrum</b>  Ref Level 30.00 dBm Offset 0.50 dB RBW 2 MHz  Att 40 dB SWT 956 ns VBW 3 MHz Mode Auto FFT  Count 100/100  IPk View  M1[1] 6.51 dBm 2.47996960 GHz  CF 2.48 GHz 691 pts Span 3.0 MHz  Date: 16.MAR.2020 19:32:31</p>

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



### 3.9. Antenna requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END\*\*\*\*\*