


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL




802.11g TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL




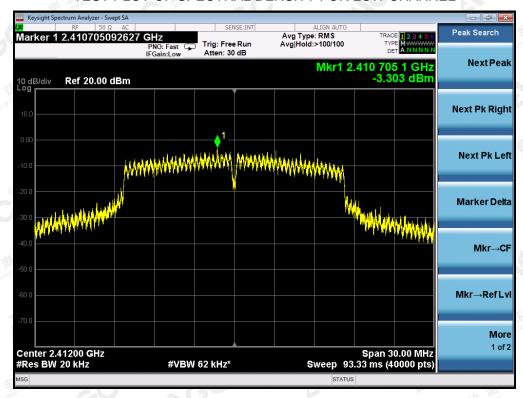

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

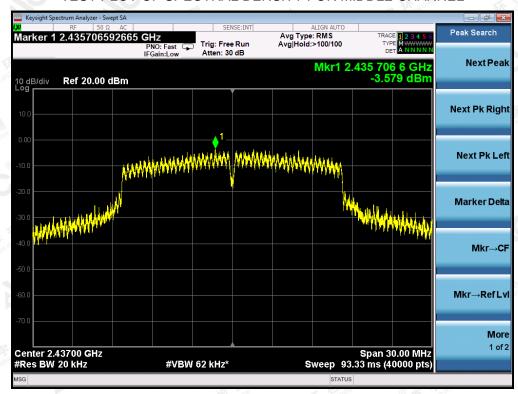


TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

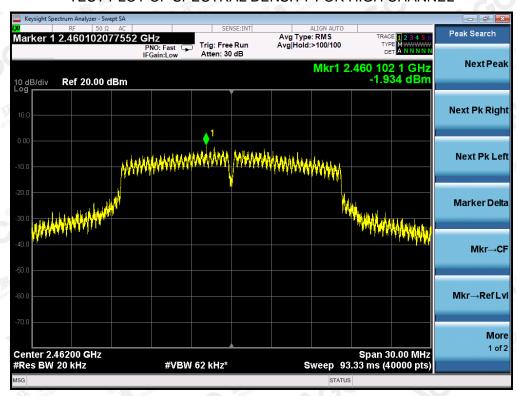


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a transfer



802.11n 20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

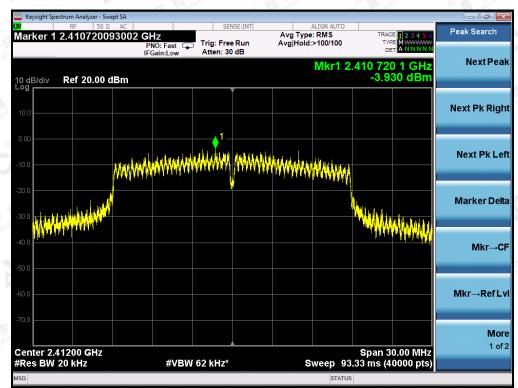


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

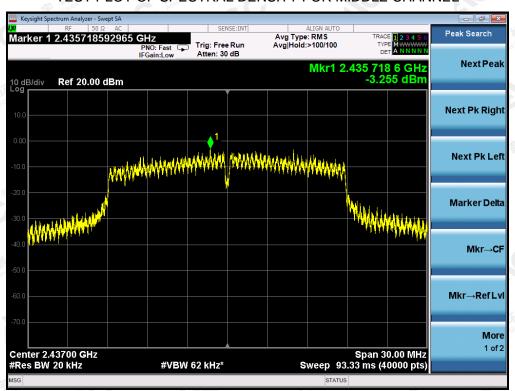




TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

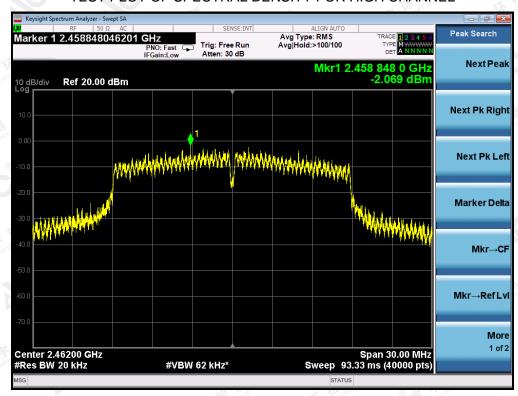


802.11n 40 TEST RESULT
TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

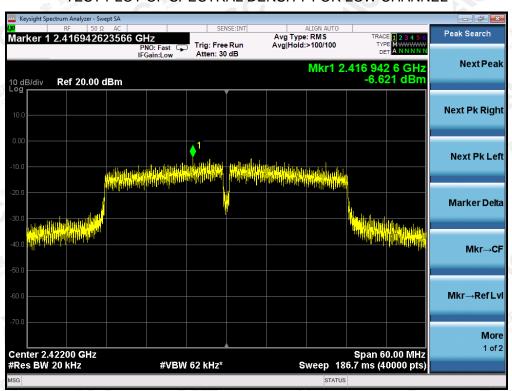




TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

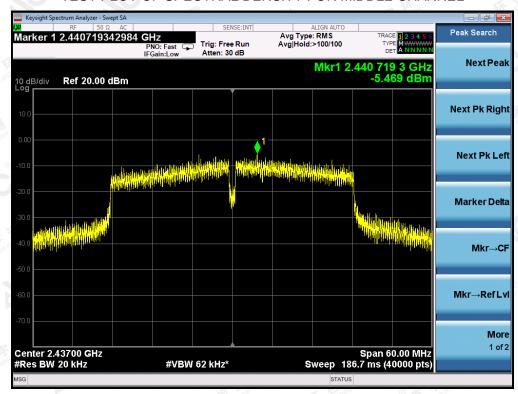

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

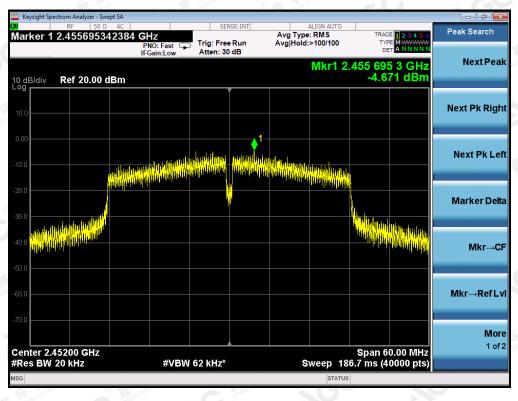



Report No.: AGC01628180406FE05

Page 51 of 81

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.

Attestation of Global Compliance




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

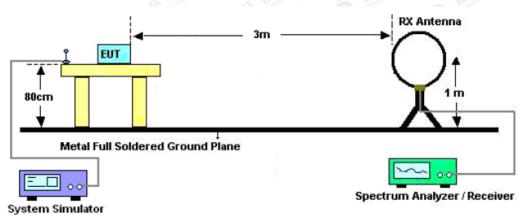

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

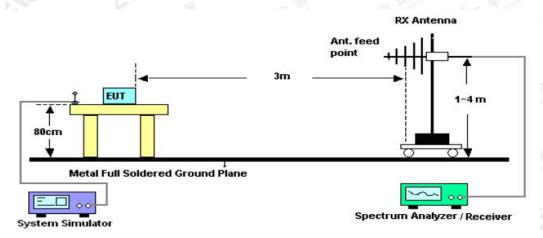

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

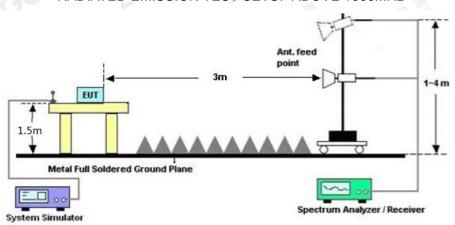



Report No.: AGC01628180406FE05

Page 53 of 81

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

• •				
Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	The state of the s		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.



RADIATED EMISSION BELOW 1GHZ

EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

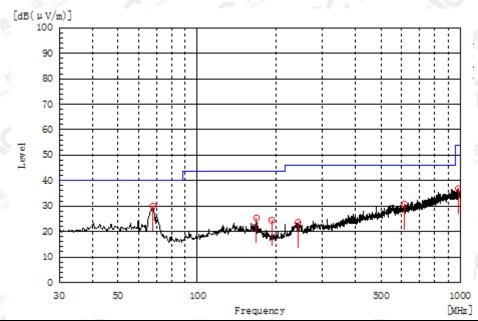


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
67.830	H (S)	15.0	15.0	30.0	40.0	10.0	Pass	150.0	106.1
167.740	Н	9.3	16.1	25.4	43.5	18.1	Pass	150.0	106.1
191.990	H	10.7	13.7	24.4	43.5	19.1	Pass	200.0	73.2
241.460	(S) Hot Global	7.4	16.2	23.6	46.0	22.4	Pass	150.0	32.5
614.910	J H	5.5	25.2	30.7	46.0	15.3	Pass	200.0	73.2
984.965	Н	5.9	31.0	36.9	54.0	17.1	Pass	150.0	32.5

RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

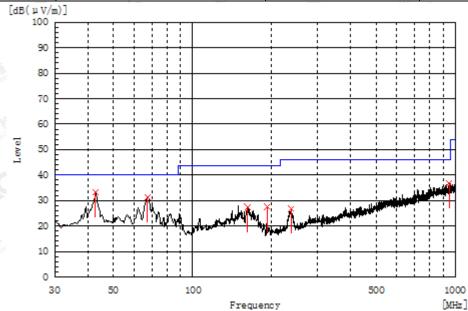

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
42.610	V	15.8	17.4	33.2	40.0	6.8	Pass	200.0	213.4
67.345	The V	16.3	15.1	31.4	40.0	8.6	Pass	150.0	289.8
161.920	V	10.9	16.6	27.5	43.5	16.0	Pass	200.0	213.4
191.990	V	13.8	13.7	27.5	43.5	16.0	Pass	100.0	90.2
237.580	V	10.7	16.2	26.9	46.0	19.1	Pass	200.0	284.2
948.105	© The Var of Globa	6.3	30.6	36.9	46.0	9.1	Pass	100.0	54.4

RESULT: PASS

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel is the worst case and recorded in the report.



Report No.: AGC01628180406FE05

Page 56 of 81

RADIATED EMISSION ABOVE 1GHZ

EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.049	46.14	3.72	49.86	74	-24.14	peak
4824.086	40.85	3.72	44.57	54	-9.43	AVG
7236.115	42.78	8.15	50.93	74	-23.07	peak
7236.072	37.34	8.15	45.49	54	-8.51	AVG
Allestation	(B) The station C.	Attestan				litre
					T AM	KST Marco
emark:			lin:	不	Compilar	E 3Nobal Com
actor = Ante	enna Factor + Ca	ble Loss – I	Pre-amplifier.	® A Jion of Glov	(E) ### 15101	ijono
	AII	2 10 100	-4 900	7.00		

The same of the sa			
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.050	44.36	3.72	48.08	74	-25.92	peak
4824.044	38.21	3.72	41.93	54	-12.07	AVG
7236.046	43.58	8.15	51.73	74	-22.27	peak
7236.057	36.92	8.15	45.07	54	-8.93	AVG
i manos	For Global (8)	ation of Glo	Allesto			
		Pille			-1	
Remark:				11111	ALSI.	nce ?
actor = Ante	enna Factor + C	Cable Loss – I	Pre-amplifier.	The Compliance	Thomas Comp.	Alte sta
			to VIII	22		

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KeC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc-gent.com.

Attestation of Global Compliance





7,102,		351/2 (Co.	
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.077	48.06	3.75	51.81	74	-22.19	peak
4874.030	40.54	3.75	44.29	54	-9.71	AVG
7311.103	43.28	8.16	51.44	74	-22.56	peak
7311.075	39.13	8.16	47.29	54	-6.71	AVG
Altestation,	(B) Mestation 6	Altestan				Illino
	F.U .				300	THE MINIOS
emark:	D B		TIME:	私	Complian	* Kopal Com
actor = Ante	enna Factor + C	able Loss –	Pre-amplifier.	® Standictor	(B) ### stall	Jon o.
	-311	- No	7 7	7 10 2		

	-1113	34/2 1.00 E	(R) Fig. 100
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.096	46.72	3.75	50.47	74	-23.53	peak
4874.113	43.03	3.75	46.78	54	-7.22	AVG
7311.098	42.66	8.16	50.82	74	-23.18	peak
7311.059	37.25	8.16	45.41	54	-8.59	AVG
				K Kindlianes	The Compile	CE (S) A SECOND
Remark:	JZ.	-700	The state of the s	F of Global	® # tallon of Glo	
actor = Ante	enna Factor + Ca	ble Loss – P	re-amplifier	testation	Alle	

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.cett.com.

Attestation of Global Compliance



Report No.: AGC01628180406FE05 Page 58 of 81

J. 100	And the second s		Till III
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type
46.32	3.81	50.13	74	-23.87	peak
40.67	3.81	44.48	54	-9.52	AVG
43.29	8.19	51.48	74	-22.52	peak
39.05	8.19	47.24	54	-6.76	AVG
(S) The standard Colored Color	® station of C		3 G Y		
Alles	-0			Mir	THE STATE OF
	(dBµV) 46.32 40.67 43.29	(dBµV) (dB) 46.32 3.81 40.67 3.81 43.29 8.19	(dBμV) (dB) (dBμV/m) 46.32 3.81 50.13 40.67 3.81 44.48 43.29 8.19 51.48	(dBμV) (dB) (dBμV/m) (dBμV/m) 46.32 3.81 50.13 74 40.67 3.81 44.48 54 43.29 8.19 51.48 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 46.32 3.81 50.13 74 -23.87 40.67 3.81 44.48 54 -9.52 43.29 8.19 51.48 74 -22.52

EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.023	45.74	3.81	49.55	74	-24.45	peak
4924.096	39.27	3.81	43.08	54	-10.92	AVG
7386.050	40.32	8.19	48.51	74	-25.49	peak
7386.035	35.78	8.19	43.97	54	-10.03	AVG
	The malance	- IV "Complies	® # ion of Glob	® ###	onor	
0 4 3	of Global ®	allon of Gre	Alless			
emark:	Atte					
actor = Ante	enna Factor + Ca	able Loss -	Pre-amplifier.	- 51111		45 - 1113

RESULT: PASS

Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Report No.: AGC01628180406FE05 Page 59 of 81

12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

12.2. TEST SET-UP

same as 11.2

Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance



12.3. TEST RESULT

EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

PK



AV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical



ΑV



RESULT: PASS



3/3 10			
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



			l and
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHZ	Antenna	Vertical



AV



RESULT: PASS



3/3 10			
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Horizontal



AV



RESULT: PASS



			line little
EUT	miniDSP Wi-DG	Model Name Wi-DG	
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2412MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 20 with data rate 6.5 2462MHZ	Antenna	Vertical



ΑV



RESULT: PASS



100			line (III)
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



100			line (III)
EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2422MHZ	Antenna	Vertical



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40with data rate 13.5 2452MHZ	Antenna	Horizontal



ΑV



RESULT: PASS



EUT	miniDSP Wi-DG	Model Name	Wi-DG
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n 40 with data rate 13.5 2452MHZ	Antenna	Vertical



ΑV



RESULT: PASS



13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	■ 56 Final Control ■ ■	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

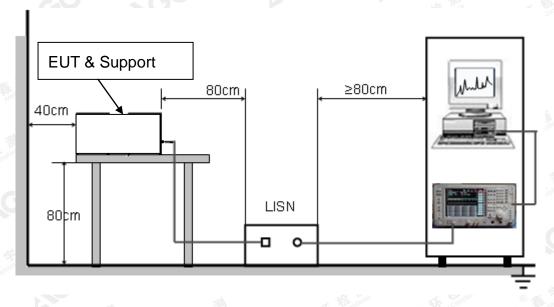



Report No.: AGC01628180406FE05 Page 77 of 81

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN...
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST LINE 1-L

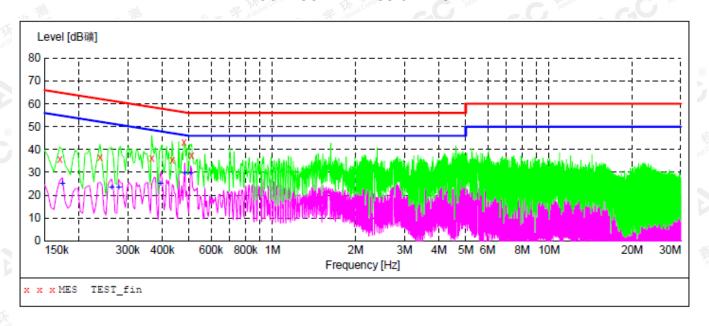

MEASUREMENT RESULT: "TEST fin"

Fre	quency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line	PE
0.	170000	35.70	10.0	65	29.3	QP	L1	FLO
0.	238000	36.40	10.1	62	25.8	QP	L1	FLO
0.	366000	36.20	10.0	59	22.4	QP	L1	FLO
0.	434000	35.20	10.0	57	22.0	QP	L1	FLO
0.	478000	43.20	10.0	56	13.2	QP	L1	FLO
0.	510000	37.60	9.9	56	18.4	QP	L1	FLO

MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.174000 0.262000 0.278000 0.394000 0.482000	24.90 23.50 23.20 25.00 29.70	10.0 10.1 10.1 10.0 10.0	55 51 51 48 46	27.7 23.0	AV AV AV AV	L1 L1 L1 L1 L1	FLO FLO FLO FLO
0.506000	29.50	9.9	46	16.5	AV	L1	FLO


RESULT: PASS

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.

Attestation of Global Compliance



Line Conducted Emission Test Line 2-N

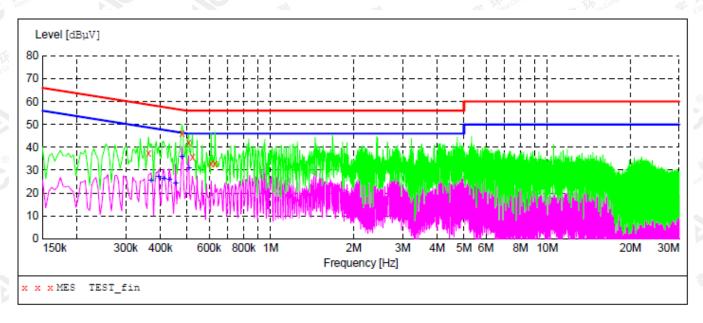

MEASUREMENT RESULT: "TEST fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.362000	37.40	10.0	59	21.3	QP	N	FLO
0.478000	46.10	10.0	56	10.3	QP	N	FLO
0.506000	41.80	9.9	56	14.2	QP	N	FLO
0.522000	35.80	9.9	56	20.2	QP	N	FLO
0.610000	32.70	9.9	56	23.3	QP	N	FLO
0.630000	32.90	9.9	56	23.1	QP	N	FLO

MEASUREMENT RESULT: "TEST fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.370000	25.50	10.0	49	23.0	AV	N	FLO
0.394000	27.00	10.0	48	21.0	AV	N	FLO
0.410000	26.20	10.0	48	21.4	AV	N	FLO
0.430000	26.00	10.0	47	21.3	AV	N	FLO
0.454000	24.10	10.0	47	22.7	AV	N	FLO
0.478000	35.70	10.0	46	10.7	AV	N	FLO
0.506000	30.70	9.9	46	15.3	AV	N	FLO

RESULT: PASS

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.

Attestation of Global Compliance




APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

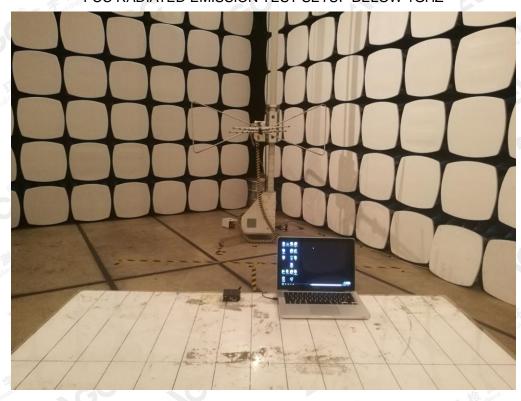


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ

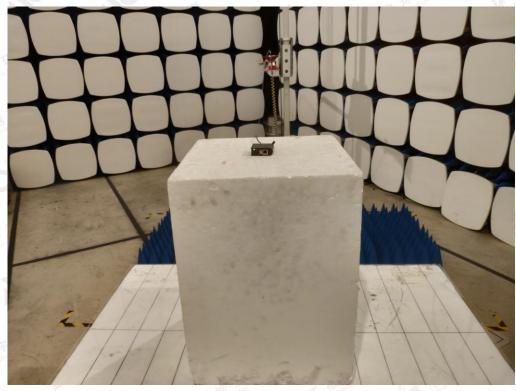

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (CE), this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China