

# RF EXPOSURE REPORT

## FCC ID: 2APQM-WI-I

Report Reference No. .... : 22EFSS06055 05331  
Date Sample(s) Received ..... : 2022-06-15  
Date of Tested ..... : From 2022-06-15 to 2022-06-23  
Date of issue ..... : 2022-06-23

Applicant's name ..... : PULNDA INTERNATIONAL LIMITED  
Address ..... : FLAT/RM A 20/F Kiu Fu Commercial Bldg 300 lockhart road wan chai HK,China  
Manufacturer ..... : PULNDA INTERNATIONAL LIMITED

Equipment ..... : Wireless Charger  
Trade Mark ..... : COKOEYE  
Model ..... : WI- I , WI- II , WI-III, WI-IV , WI- V , WI-VI, WI-VII, WI-VIII, WI-IX, WI- X  
Ratings ..... : I/P: DC 9V---2A/5V---2A  
O/P: 15W / 10W / 5W

Testing Laboratory ..... : DongGuan ShuoXin Electronic Technology Co., Ltd.  
Address ..... : Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China  
According ..... : FCC CFR 47 part1,1.1310 KDB680106 D01v03 R01


Test Engineer:

  
Blue Qiu

Responsible Engineer :

  
Smile Wang

Authorized Signatory:

  
King Wang

## 1,GENERAL DESCRIPTION OF EUT

Equipment	Wireless Charger	
Brand Name	COKOEYE	
Test Model	WI- I , WI- II , WI-III, WI-IV , WI- V , WI-VI, WI-VII, WI-VIII, WI-IX, WI- X	
Series Model	/	
Model Difference(s)	/	
Hardware Version	V1.0	
Software Version	V1.0	
PowerSource	DC 9V---2A/5V---2A	
Operation Frequency	110.5kHz-205kHz	
Modulation Technology	FSK	
Antenna Information	Antenna Type:Coil	Maximum Peak Gain: 0dBi

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)	Note
1	N/A	WI- I	Coil	N/A	0	

### 1.1, MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
H-filed	$\pm 1.3\mu\text{T}$
E-filed	$\pm 12\%$

## 2, MAXIMUM PERMISSIBLE EXPOSURE

### 2.1 EPUITMENT LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Electromagnetic field strength analyzer	Narda	ELT-400	L-0019	2022.11.23
2	Three-dimensional omnidirectional electric and magnetic field combo probe	Narda	ELT	N/A	2022.11.23

### 2.2 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

Note 1: f = frequency in MHz ; \*Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.


Note 4: The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

### **2.3 TEST PROCEDURE**

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 20 cm(Top) and 15cm(Edge). E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 20 cm(Top) and 15cm(Edge) measured from the center of the probe(s) to the edge of the device.

Test Mode:worse case wireless output power :15W

**2.4 TEST SETUP**

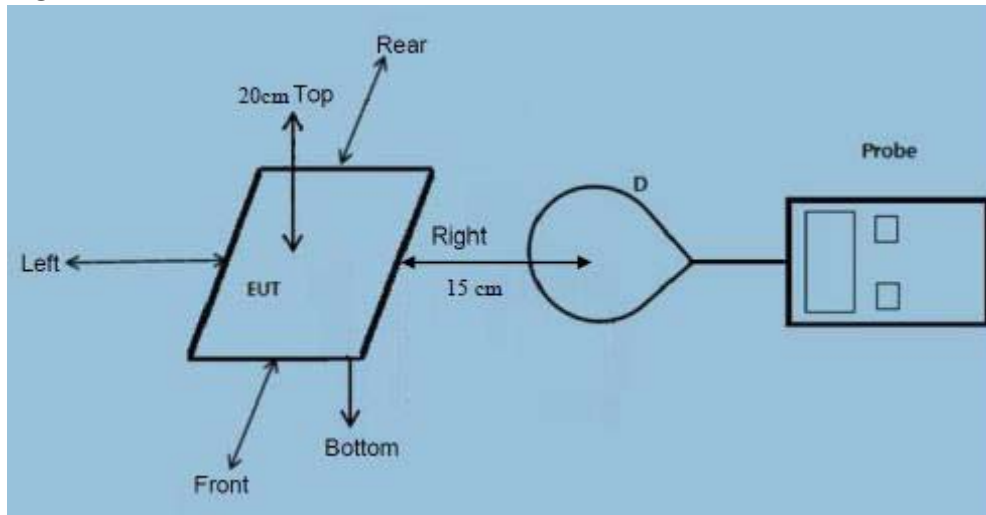

**2.5 SUPPORT UNITS**

Item	Equipment	Brand	Model No.	Series No.
AE1	iphone 11	Apple	/	/

**2.6 TEST RESULTS**

The EUT does comply with item 5 KDB680106 D01 v03.

- (1) Power transfer frequency is less than 1 MHz.  
(Conform)
- (2) Output power from each primary coil is less than or equal to 15 watts.  
(Conform)
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.  
(Conform)
- (4) Client device is placed directly in contact with the transmitter.  
(Conform)
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).  
(Conform)
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.  
(Conform)

**2.7 MAXIMUM PERMISSIBLE EXPOSURE**

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
< 1% Battery	15cm	Front	5.136	0.126
< 1% Battery	15cm	Rear	5.228	0.129
< 1% Battery	15cm	Left	5.157	0.153
< 1% Battery	15cm	Right	5.339	0.144
< 1% Battery	20cm	Top	5.364	0.176
Limit			614	1.63
Margin Limit (%)			0.87%	10.80%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
50% Battery	15cm	Front	5.338	0.165
50% Battery	15cm	Rear	5.431	0.138
50% Battery	15cm	Left	5.645	0.146
50% Battery	15cm	Right	5.794	0.187
50% Battery	20cm	Top	5.991	0.143
Limit			614	1.63
Margin Limit (%)			0.98%	8.77%

Maximum Permissible Exposure				
Charging	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
> 99% Battery	15cm	Front	5.643	0.155
> 99% Battery	15cm	Rear	5.754	0.134
> 99% Battery	15cm	Left	5.882	0.176
> 99% Battery	15cm	Right	5.671	0.163
> 99% Battery	20cm	Top	5.329	0.133
Limit			614	1.63
Margin Limit (%)			0.87%	8.16%

**MPE SETUP PHOTO**

