
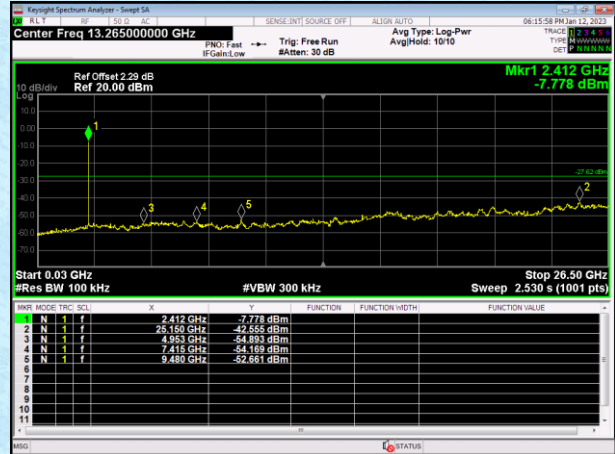


Test plot as follows (ANT B):



Test mode:	802.11b	Test mode:	802.11g
------------	---------	------------	---------

Lowest channel

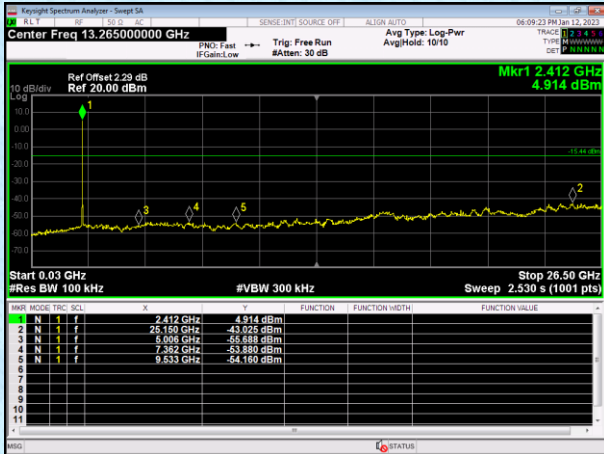



30MHz~26.5GHz

Middle channel

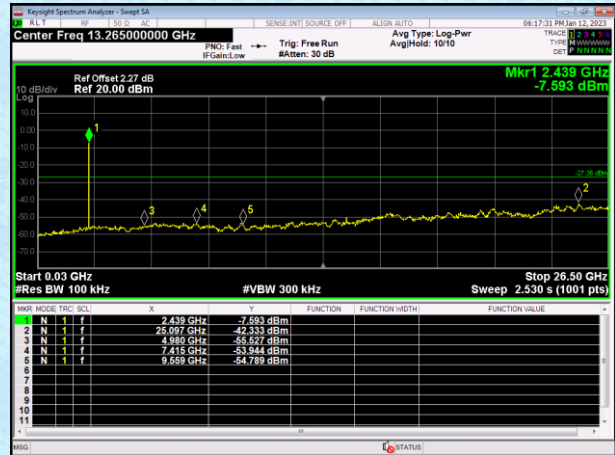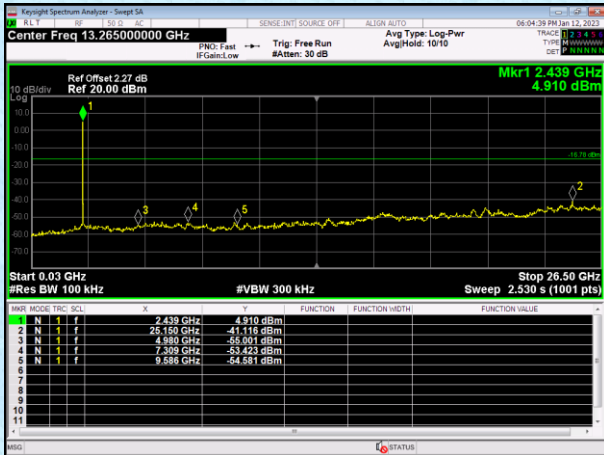

30MHz~26.5GHz



Highest channel

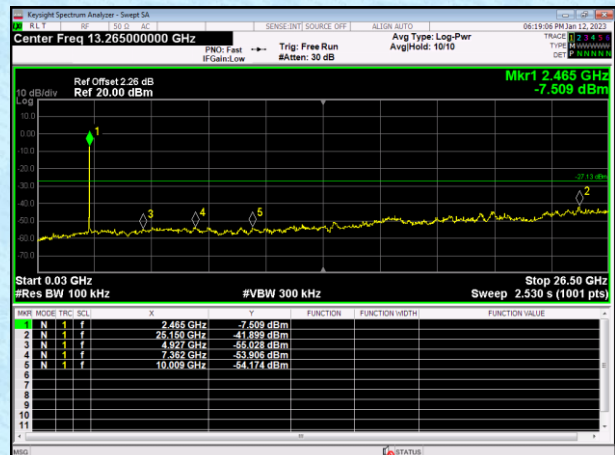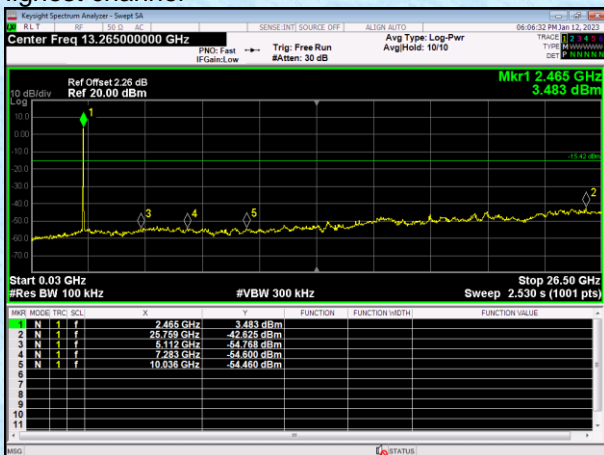

30MHz~26.5GHz



Test mode:	802.11n(HT20)	Test mode:	802.11n(HT40)
------------	---------------	------------	---------------

Lowest channel

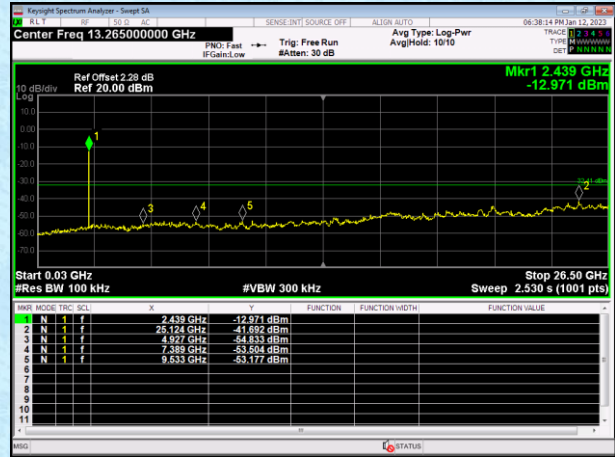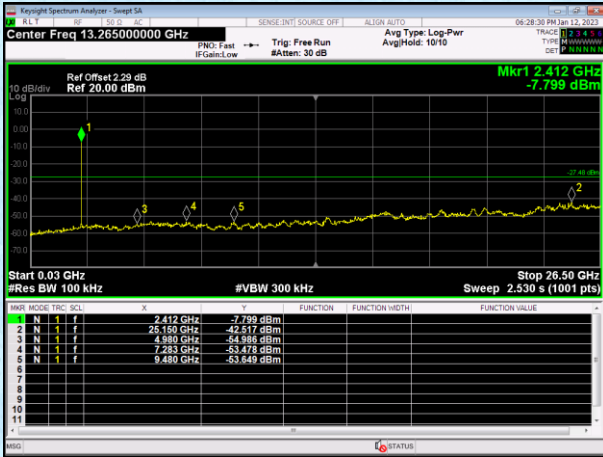



30MHz~26.5GHz

Middle channel

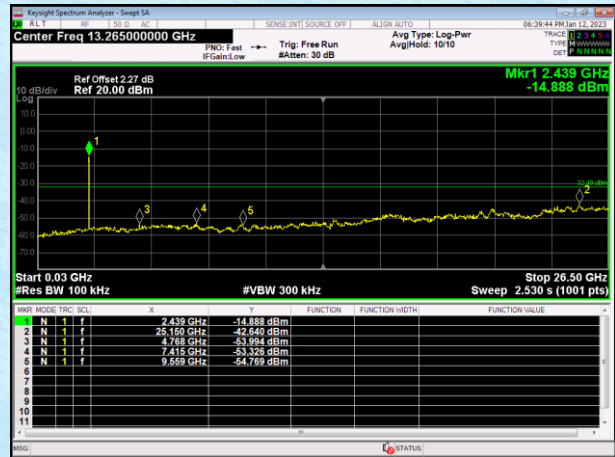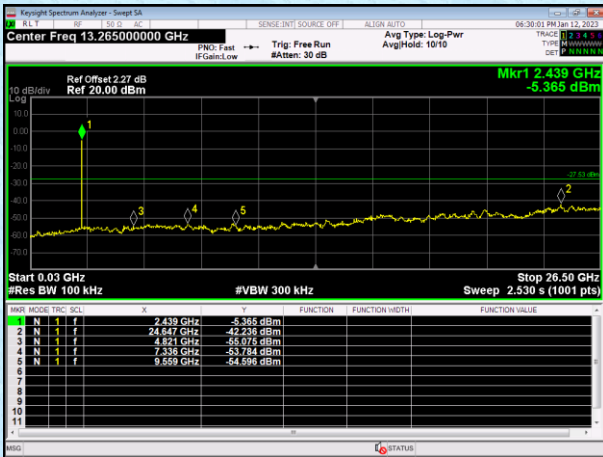

30MHz~26.5GHz



Highest channel

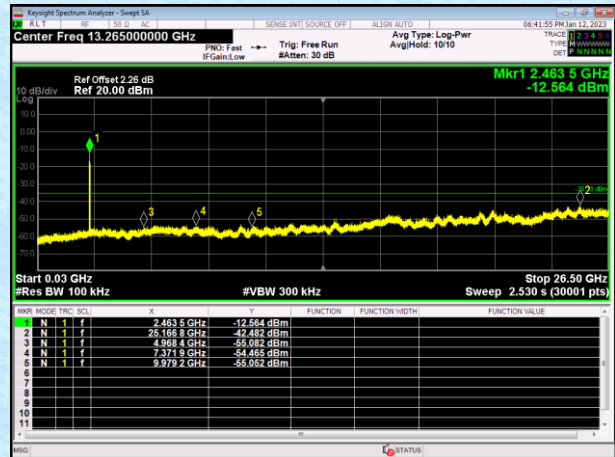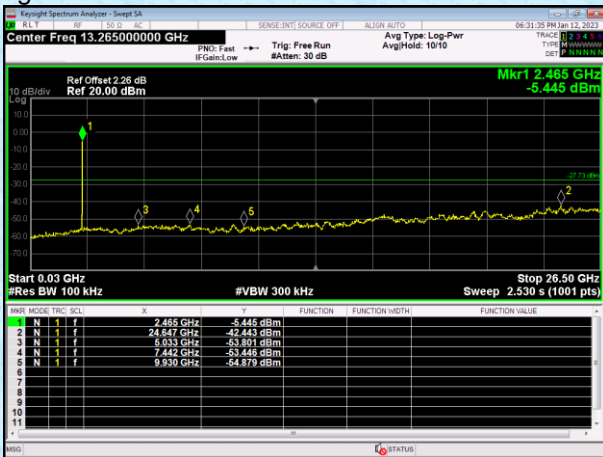

30MHz~26.5GHz



Test mode:	802.11ax(HE20)	Test mode:	802.11ax(HE40)
------------	----------------	------------	----------------

Lowest channel

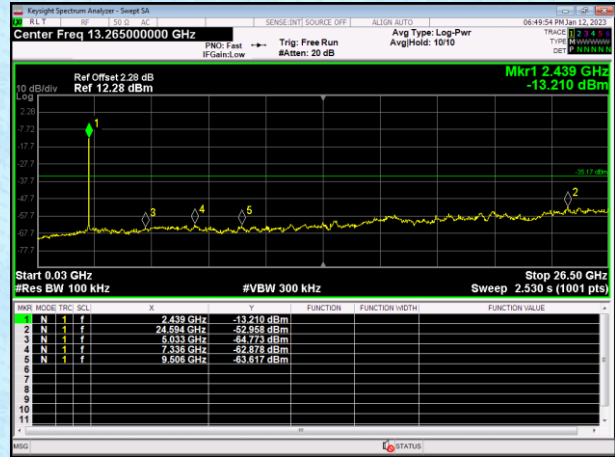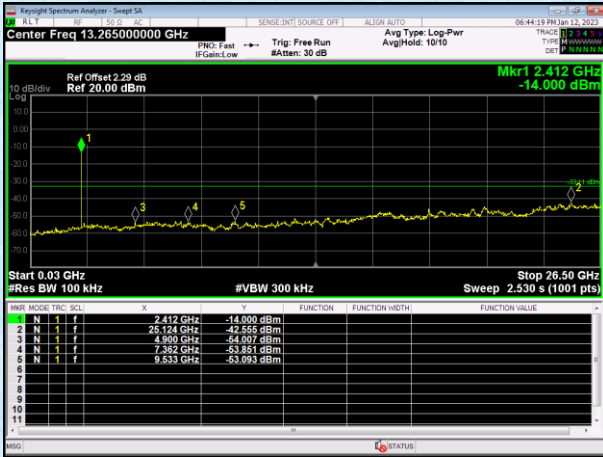



30MHz~26.5GHz

Middle channel

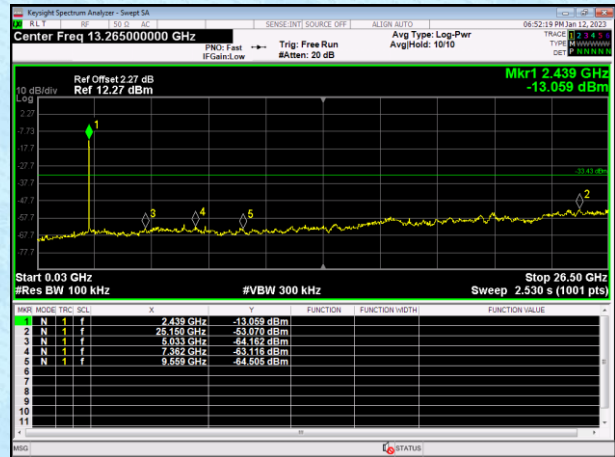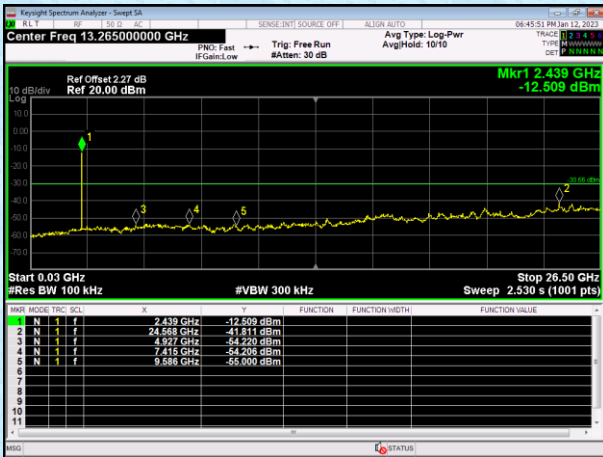

30MHz~26.5GHz


Highest channel

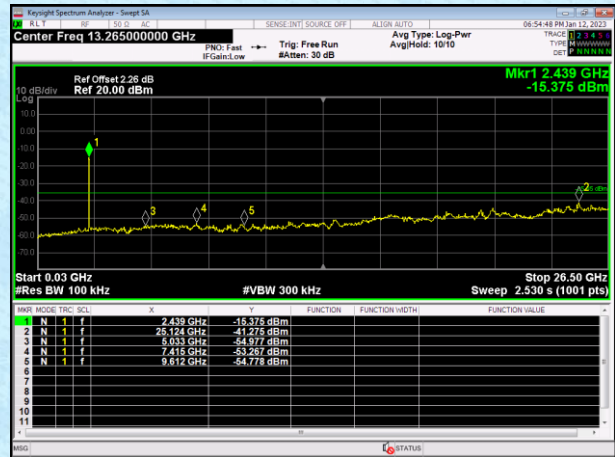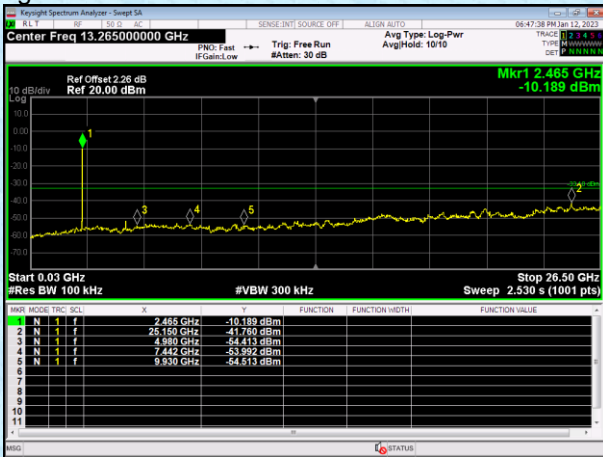


30MHz~26.5GHz

Test plot as follows (ANT A):

Test mode: 802.11b

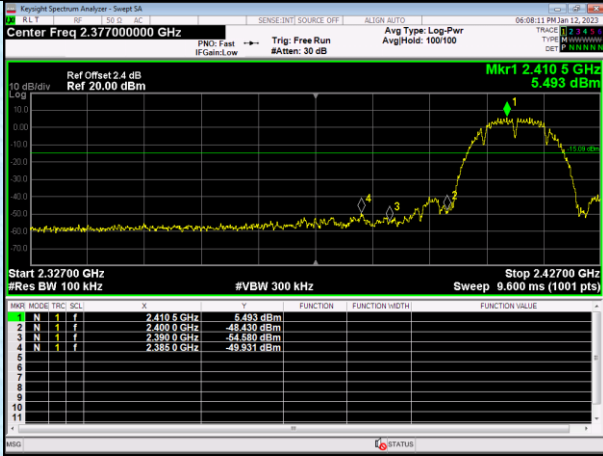


Lowest channel

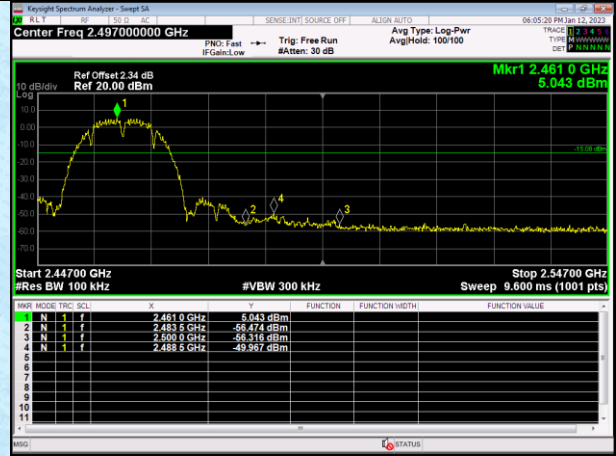


Highest channel

Test mode: 802.11g

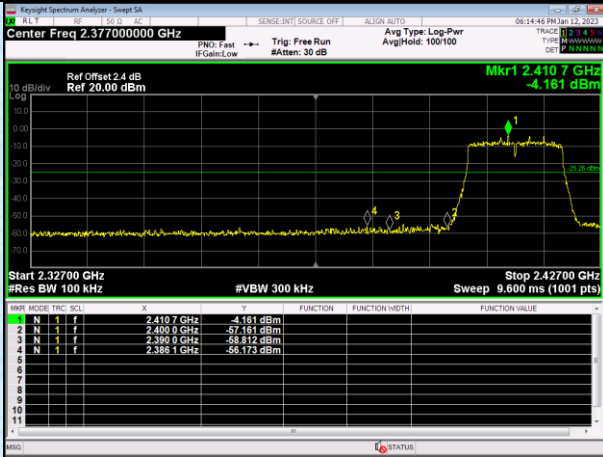


Lowest channel

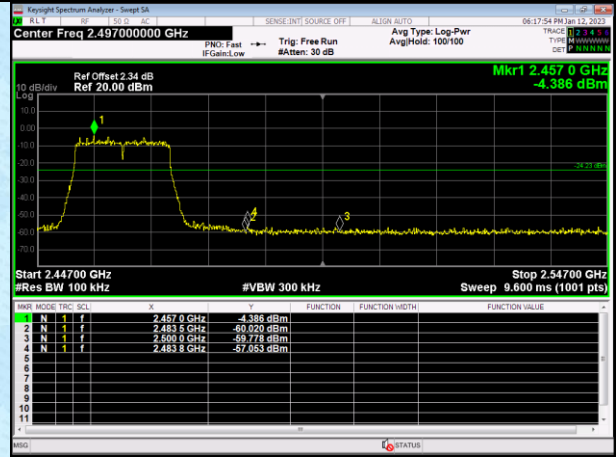


Highest channel

Test mode: 802.11n(HT20)

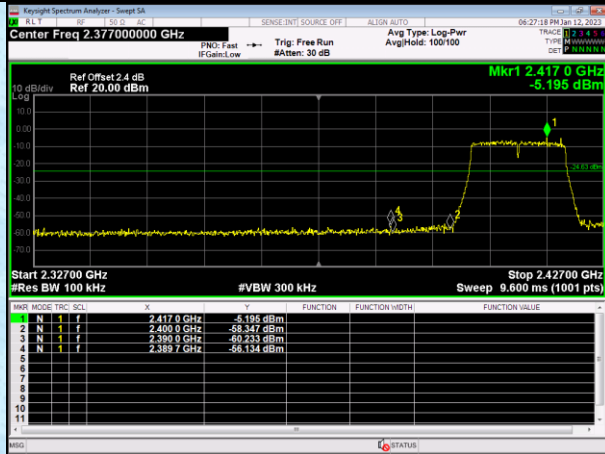


Lowest channel

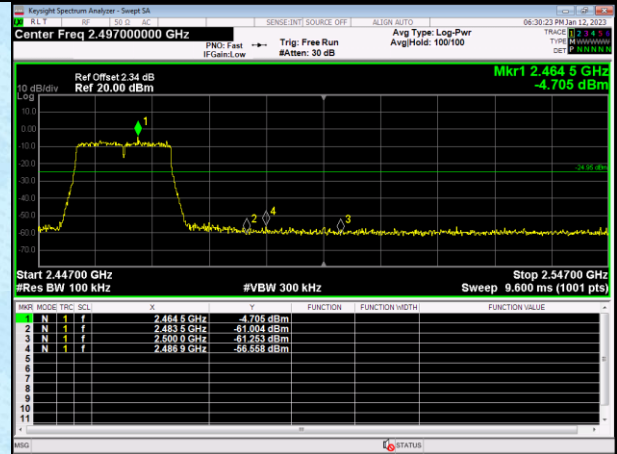


Highest channel

Test mode: 802.11n(HT40)

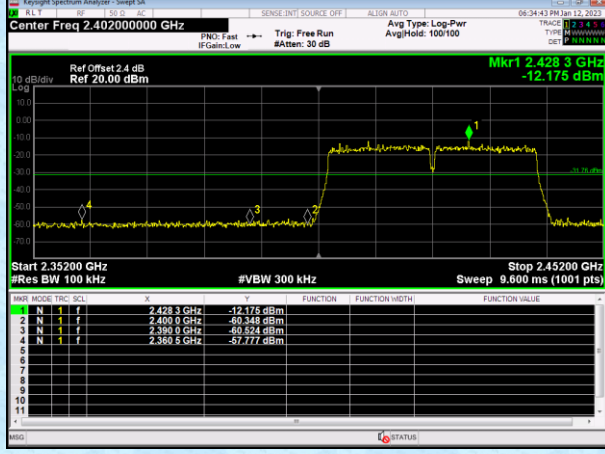


Lowest channel

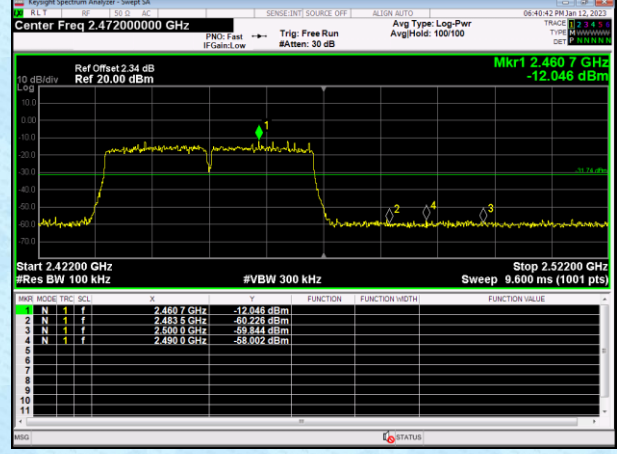


Highest channel

Test mode: 802.11ax(HE20)

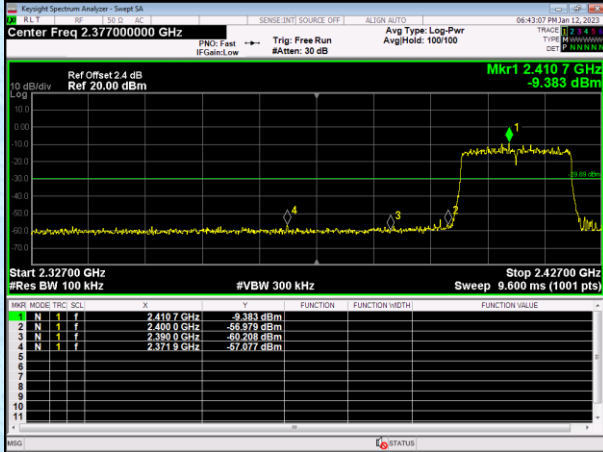


Lowest channel

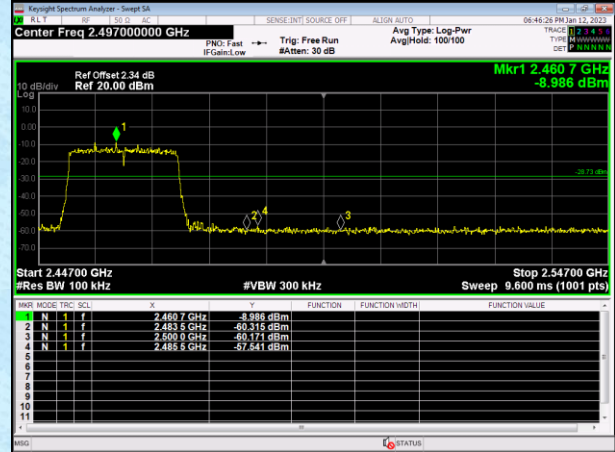


Highest channel

Test mode: 802.11ax(HE40)

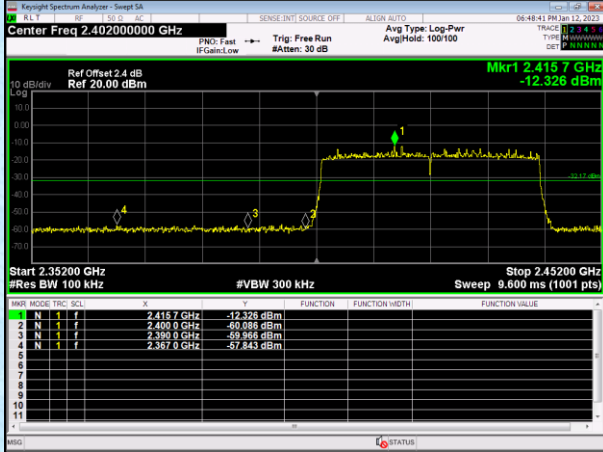


Lowest channel

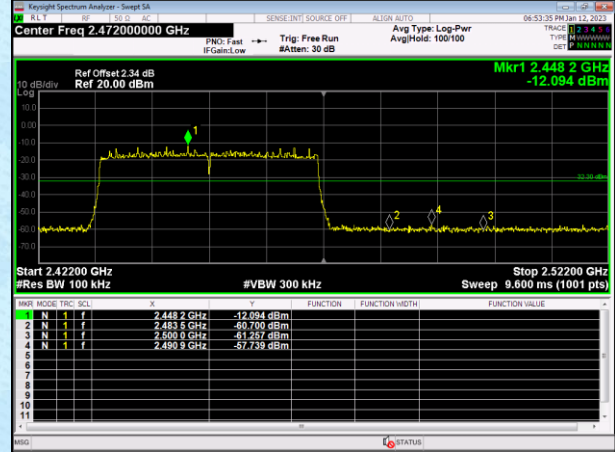


Highest channel

Test plot as follows (ANT B):

Test mode: 802.11b

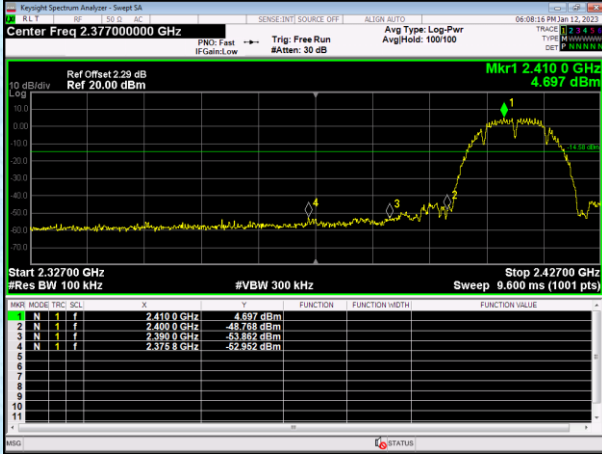


Lowest channel

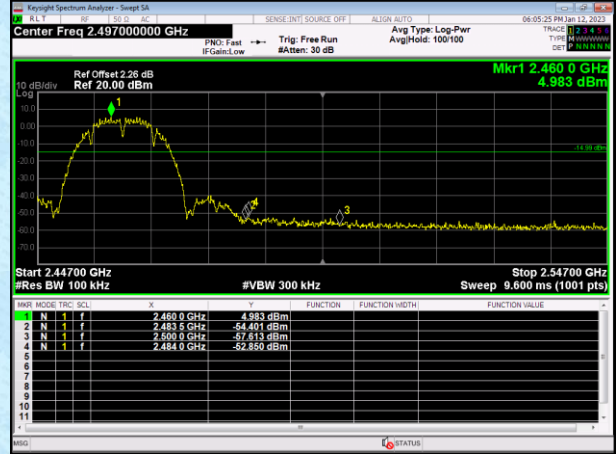


Highest channel

Test mode: 802.11g

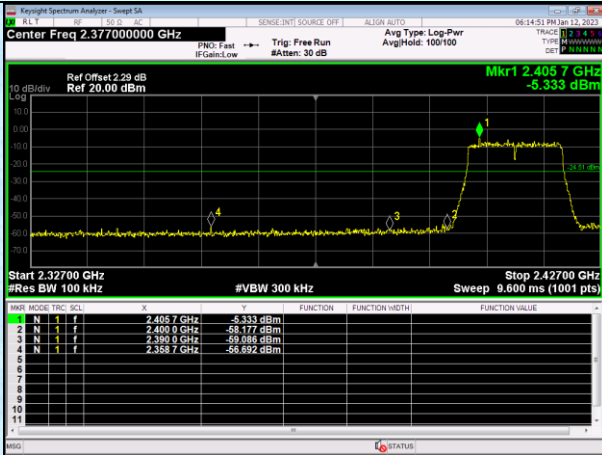


Lowest channel

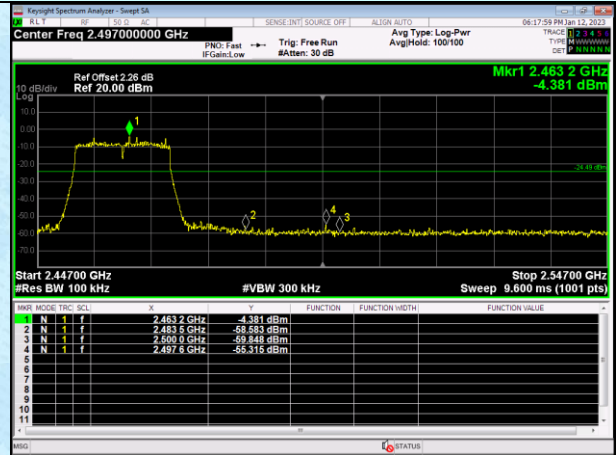


Highest channel

Test mode: 802.11n(HT20)

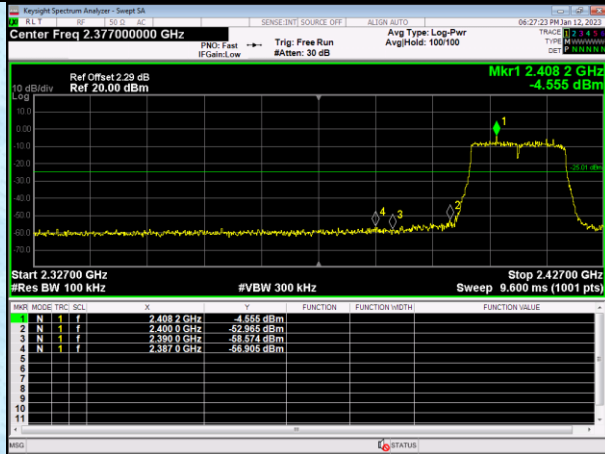


Lowest channel

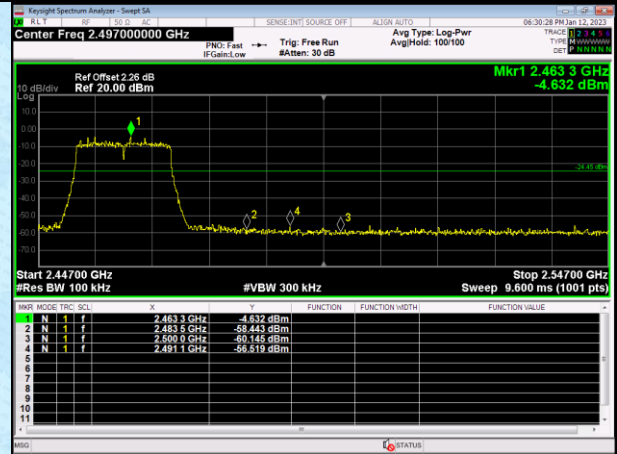


Highest channel

Test mode: 802.11n(HT40)

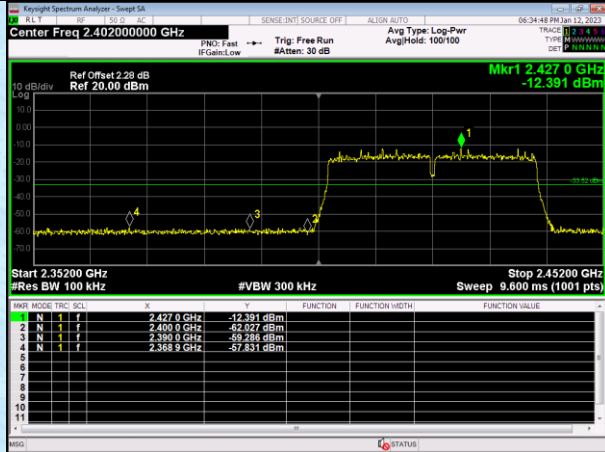


Lowest channel

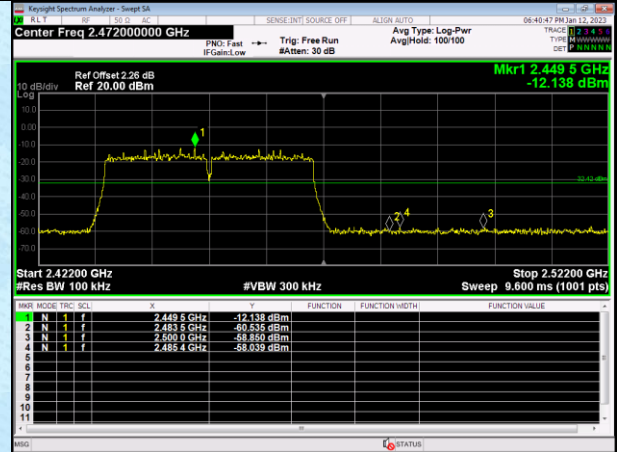


Highest channel

Test mode: 802.11ax(HE20)

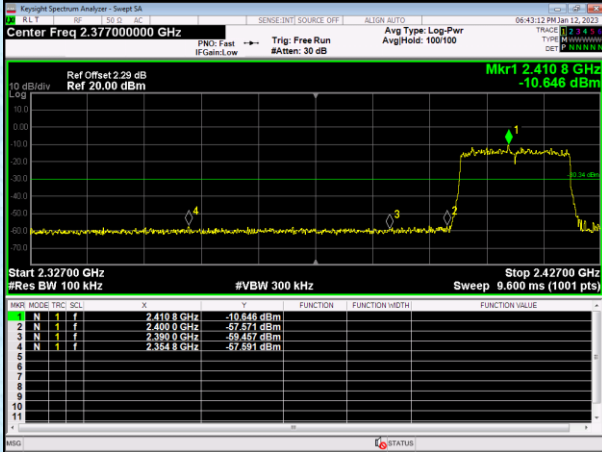


Lowest channel

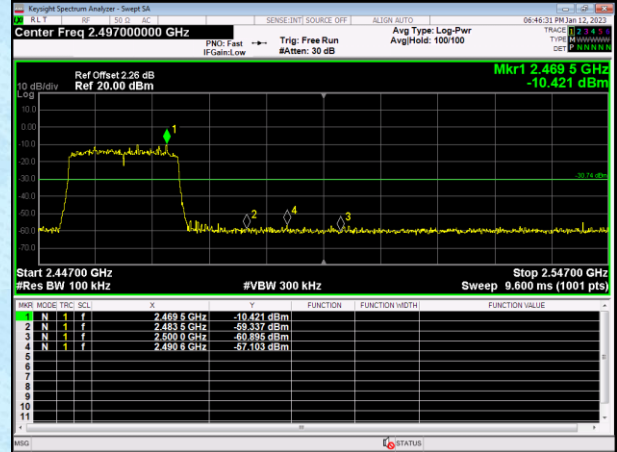


Highest channel

Test mode: 802.11ax(HE40)

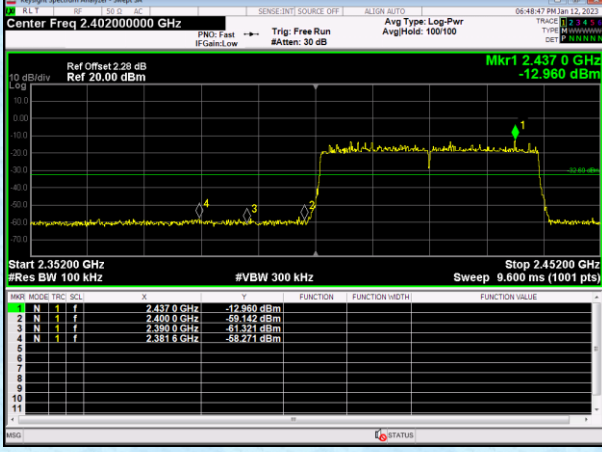



Lowest channel

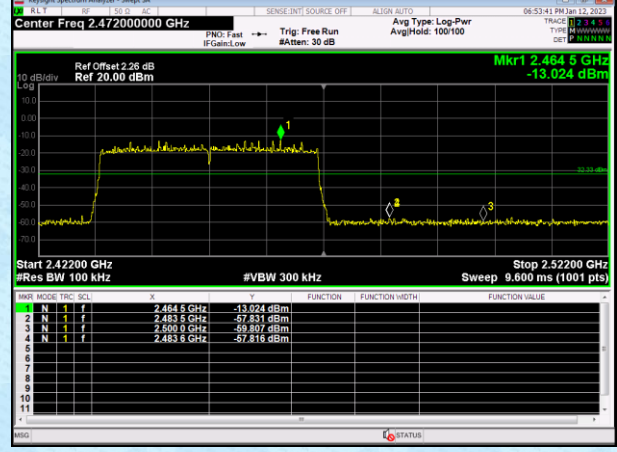

Highest channel

7.5.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 26.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(kHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(kHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Test setup:	For radiated emissions from 9kHz to 30MHz				

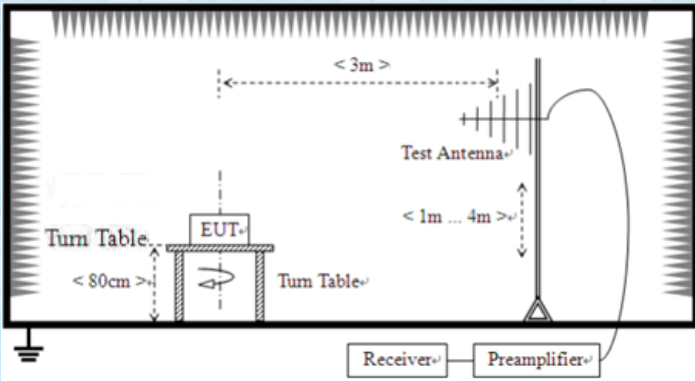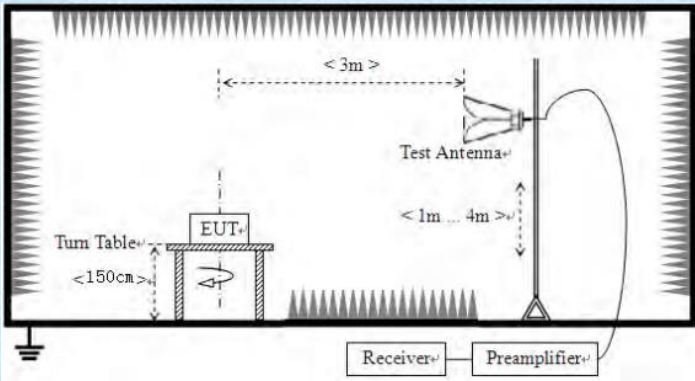	<p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>

Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	26 °C	Humid.:	53%	Press.:	1010mbar
Test voltage:	DC 5V					
Test results:	Pass					

Remarks:

1. We tested all the modes and only recorded the worst case (MIMO) in the report.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
3. Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:


- 9kHz~30MHz

The emission from 9 kHz-30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) the test result no need to reported.

Below 1GHz


Pre-scan all test modes, found worst case at 802.11b 2412MHz, and so only show the test result of 802.11b 2412MHz.

Horizontal:

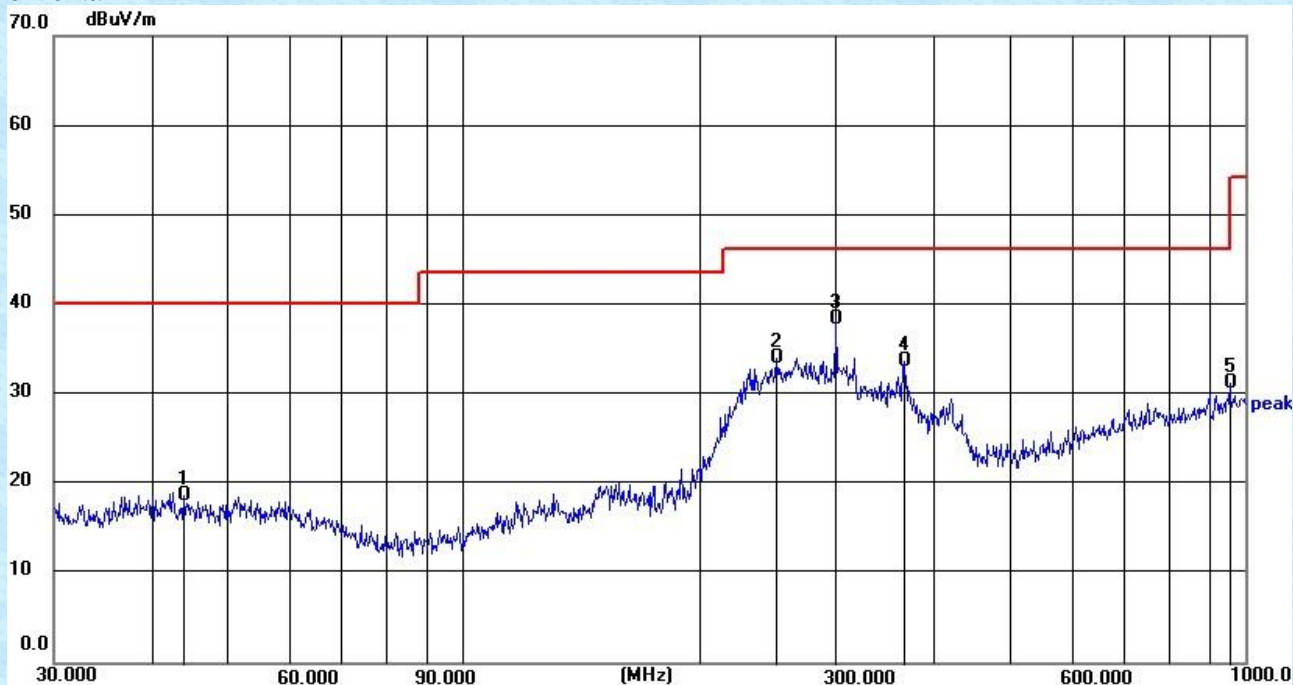

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	43.9658	4.13	14.63	18.76	40.00	21.24	QP
2	252.0627	20.48	13.56	34.04	46.00	11.96	QP
3	300.3672	23.56	14.77	38.33	46.00	7.67	QP
4	366.8231	17.60	16.17	33.77	46.00	12.23	QP
5	955.4381	6.70	24.62	31.32	46.00	14.68	QP

Vertical:

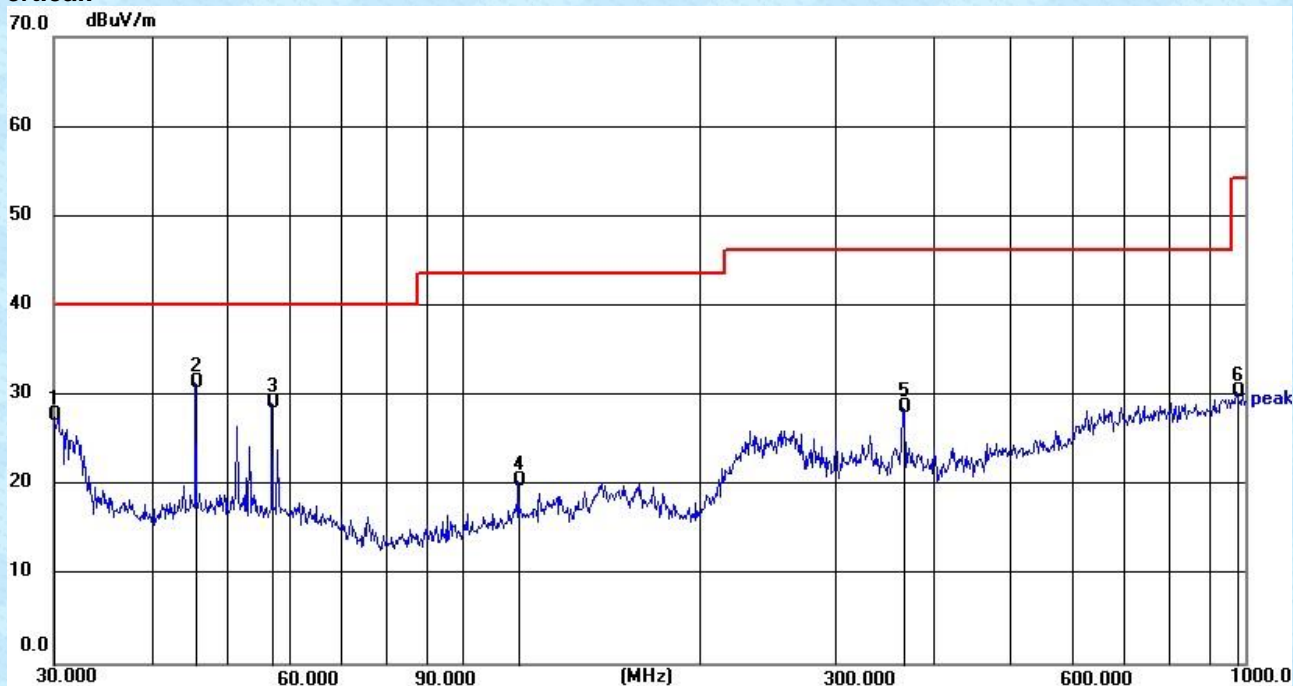

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	14.97	12.87	27.84	40.00	12.16	QP
2	45.5348	16.86	14.56	31.42	40.00	8.58	QP
3	56.9912	14.98	14.10	29.08	40.00	10.92	QP
4	117.7725	6.66	13.80	20.46	43.50	23.04	QP
5	365.5391	12.55	16.14	28.69	46.00	17.31	QP
6	975.7529	5.69	24.67	30.36	54.00	23.64	QP

Remark:

1. $Level = Reading\ Level + Factor$
1. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Unwanted Emissions in non-restricted Frequency Bands

■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	51.22	31.79	8.62	32.1	59.53	74	-14.47	Vertical
7236	37.53	36.19	11.68	31.97	53.43	74	-20.57	Vertical
4824	51.15	31.79	8.62	32.1	59.46	74	-14.54	Horizontal
7236	42.49	36.19	11.68	31.97	58.39	74	-15.61	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	42.16	31.79	8.62	32.1	50.47	54	-3.53	Vertical
7236	28.51	36.19	11.68	31.97	44.41	54	-9.59	Vertical
4824	40.36	31.79	8.62	32.1	48.67	54	-5.33	Horizontal
7236	30.04	36.19	11.68	31.97	45.94	54	-8.06	Horizontal

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	51.39	31.85	8.66	32.12	59.78	74	-14.22	Vertical
7311	37.65	36.37	11.71	31.91	53.82	74	-20.18	Vertical
4874	52.01	31.85	8.66	32.12	60.4	74	-13.6	Horizontal
7311	42.71	36.37	11.71	31.91	58.88	74	-15.12	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	42.27	31.85	8.66	32.12	50.66	54	-3.34	Vertical
7311	28.78	36.37	11.71	31.91	44.95	54	-9.05	Vertical
4874	40.4	31.85	8.66	32.12	48.79	54	-5.21	Horizontal
7311	29.88	36.37	11.71	31.91	46.05	54	-7.95	Horizontal

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.8	31.9	8.7	32.15	60.25	74	-13.75	Vertical
7386	38.39	36.49	11.76	31.83	54.81	74	-19.19	Vertical
4924	52.16	31.9	8.7	32.15	60.61	74	-13.39	Horizontal
7386	42.52	36.49	11.76	31.83	58.94	74	-15.06	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	43.1	31.9	8.7	32.15	51.55	54	-2.45	Vertical
7386	28.98	36.49	11.76	31.83	45.4	54	-8.6	Vertical
4924	41.32	31.9	8.7	32.15	49.77	54	-4.23	Horizontal
7386	30.47	36.49	11.76	31.83	46.89	54	-7.11	Horizontal

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	51.4	31.79	8.62	32.1	59.71	74	-14.29	Vertical
7236	37.72	36.19	11.68	31.97	53.62	74	-20.38	Vertical
4824	51.61	31.79	8.62	32.1	59.92	74	-14.08	Horizontal
7236	43.23	36.19	11.68	31.97	59.13	74	-14.87	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	43.12	31.79	8.62	32.1	51.43	54	-2.57	Vertical
7236	29.22	36.19	11.68	31.97	45.12	54	-8.88	Vertical
4824	40.48	31.79	8.62	32.1	48.79	54	-5.21	Horizontal
7236	30.26	36.19	11.68	31.97	46.16	54	-7.84	Horizontal

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	51.74	31.85	8.66	32.12	60.13	74	-13.87	Vertical
7311	38.49	36.37	11.71	31.91	54.66	74	-19.34	Vertical
4874	52.6	31.85	8.66	32.12	60.99	74	-13.01	Horizontal
7311	42.92	36.37	11.71	31.91	59.09	74	-14.91	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	42.45	31.85	8.66	32.12	50.84	54	-3.16	Vertical
7311	29.66	36.37	11.71	31.91	45.83	54	-8.17	Vertical
4874	40.92	31.85	8.66	32.12	49.31	54	-4.69	Horizontal
7311	30.63	36.37	11.71	31.91	46.8	54	-7.2	Horizontal

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	52.38	31.9	8.7	32.15	60.83	74	-13.17	Vertical
7386	38.83	36.49	11.76	31.83	55.25	74	-18.75	Vertical
4924	52.92	31.9	8.7	32.15	61.37	74	-12.63	Horizontal
7386	42.87	36.49	11.76	31.83	59.29	74	-14.71	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	41.61	31.9	8.7	32.15	50.06	54	-3.94	Vertical
7386	29.84	36.49	11.76	31.83	46.26	54	-7.74	Vertical
4924	42.28	31.9	8.7	32.15	50.73	54	-3.27	Horizontal
7386	30.78	36.49	11.76	31.83	47.2	54	-6.8	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	48.33	31.79	8.62	32.1	56.64	74	-17.36	Vertical
7236	35.29	36.19	11.68	31.97	51.19	74	-22.81	Vertical
4824	48.68	31.79	8.62	32.1	56.99	74	-17.01	Horizontal
7236	36.59	36.19	11.68	31.97	52.49	74	-21.51	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	39.5	31.79	8.62	32.1	47.81	54	-6.19	Vertical
7236	23.9	36.19	11.68	31.97	39.8	54	-14.2	Vertical
4824	40.94	31.79	8.62	32.1	49.25	54	-4.75	Horizontal
7236	27.13	36.19	11.68	31.97	43.03	54	-10.97	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	47.06	31.85	8.66	32.12	55.45	74	-18.55	Vertical
7311	35.04	36.37	11.71	31.91	51.21	74	-22.79	Vertical
4874	49.27	31.85	8.66	32.12	57.66	74	-16.34	Horizontal
7311	33.86	36.37	11.71	31.91	50.03	74	-23.97	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	37.01	31.85	8.66	32.12	45.4	54	-8.6	Vertical
7311	26.1	36.37	11.71	31.91	42.27	54	-11.73	Vertical
4874	39.13	31.85	8.66	32.12	47.52	54	-6.48	Horizontal
7311	22.78	36.37	11.71	31.91	38.95	54	-15.05	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.78	31.9	8.7	32.15	60.23	74	-13.77	Vertical
7386	38.09	36.49	11.76	31.83	54.51	74	-19.49	Vertical
4924	52.06	31.9	8.7	32.15	60.51	74	-13.49	Horizontal
7386	42.42	36.49	11.76	31.83	58.84	74	-15.16	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	40.95	31.9	8.7	32.15	49.4	54	-4.6	Vertical
7386	28.89	36.49	11.76	31.83	45.31	54	-8.69	Vertical
4924	41.42	31.9	8.7	32.15	49.87	54	-4.13	Horizontal
7386	30.39	36.49	11.76	31.83	46.81	54	-7.19	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	48.26	31.81	8.63	32.11	56.59	74	-17.41	Vertical
7266	33.76	36.28	11.69	31.94	49.79	74	-24.21	Vertical
4844	48.25	31.81	8.63	32.11	56.58	74	-17.42	Horizontal
7266	33.45	36.28	11.69	31.94	49.48	74	-24.52	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	37.03	31.81	8.63	32.11	45.36	54	-8.64	Vertical
7266	25.58	36.28	11.69	31.94	41.61	54	-12.39	Vertical
4844	39.81	31.81	8.63	32.11	48.14	54	-5.86	Horizontal
7266	23.08	36.28	11.69	31.94	39.11	54	-14.89	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	45.89	31.85	8.66	32.12	54.28	74	-19.72	Vertical
7311	35.99	36.37	11.71	31.91	52.16	74	-21.84	Vertical
4874	47.4	31.85	8.66	32.12	55.79	74	-18.21	Horizontal
7311	33.9	36.37	11.71	31.91	50.07	74	-23.93	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	38.25	31.85	8.66	32.12	46.64	54	-7.36	Vertical
7311	23.99	36.37	11.71	31.91	40.16	54	-13.84	Vertical
4874	37.23	31.85	8.66	32.12	45.62	54	-8.38	Horizontal
7311	23.12	36.37	11.71	31.91	39.29	54	-14.71	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	46.5	31.88	8.68	32.13	54.93	74	-19.07	Vertical
7356	32.64	36.45	11.75	31.86	48.98	74	-25.02	Vertical
4904	46.84	31.88	8.68	32.13	55.27	74	-18.73	Horizontal
7356	34.23	36.45	11.75	31.86	50.57	74	-23.43	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	38.24	31.88	8.68	32.13	46.67	54	-7.33	Vertical
7356	24.22	36.45	11.75	31.86	40.56	54	-13.44	Vertical
4904	38.37	31.88	8.68	32.13	46.8	54	-7.2	Horizontal
7356	23.9	36.45	11.75	31.86	40.24	54	-13.76	Horizontal

Test mode:	802.11ax(HE20)	Test channel:	Lowest
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	50.91	31.79	8.62	32.1	59.22	74	-14.78	Vertical
7236	37.05	36.19	11.68	31.97	52.95	74	-21.05	Vertical
4824	50.01	31.79	8.62	32.1	58.32	74	-15.68	Horizontal
7236	42.35	36.19	11.68	31.97	58.25	74	-15.75	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	42.61	31.79	8.62	32.1	50.92	54	-3.08	Vertical
7236	28.41	36.19	11.68	31.97	44.31	54	-9.69	Vertical
4824	38.95	31.79	8.62	32.1	47.26	54	-6.74	Horizontal
7236	29.23	36.19	11.68	31.97	45.13	54	-8.87	Horizontal

Test mode:	802.11ax(HE20)	Test channel:	Middle
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	50.45	31.85	8.66	32.12	58.84	74	-15.16	Vertical
7311	37.36	36.37	11.71	31.91	53.53	74	-20.47	Vertical
4874	51.68	31.85	8.66	32.12	60.07	74	-13.93	Horizontal
7311	42.44	36.37	11.71	31.91	58.61	74	-15.39	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	41.75	31.85	8.66	32.12	50.14	54	-3.86	Vertical
7311	28.51	36.37	11.71	31.91	44.68	54	-9.32	Vertical
4874	40.46	31.85	8.66	32.12	48.85	54	-5.15	Horizontal
7311	30.21	36.37	11.71	31.91	46.38	54	-7.62	Horizontal

Test mode:	802.11ax(HE20)	Test channel:	Highest
------------	----------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.76	31.9	8.7	32.15	60.21	74	-13.79	Vertical
7386	37.56	36.49	11.76	31.83	53.98	74	-20.02	Vertical
4924	51.19	31.9	8.7	32.15	59.64	74	-14.36	Horizontal
7386	42.34	36.49	11.76	31.83	58.76	74	-15.24	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	42.02	31.9	8.7	32.15	50.47	54	-3.53	Vertical
7386	28.08	36.49	11.76	31.83	44.5	54	-9.5	Vertical
4924	40.9	31.9	8.7	32.15	49.35	54	-4.65	Horizontal
7386	30.08	36.49	11.76	31.83	46.5	54	-7.5	Horizontal

Test mode:	802.11ax(HE40)	Test channel:	Lowest
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	47.62	31.81	8.63	32.11	55.95	74	-18.05	Vertical
7266	33.53	36.28	11.69	31.94	49.56	74	-24.44	Vertical
4844	47.55	31.81	8.63	32.11	55.88	74	-18.12	Horizontal
7266	32.9	36.28	11.69	31.94	48.93	74	-25.07	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844	36.83	31.81	8.63	32.11	45.16	54	-8.84	Vertical
7266	24.87	36.28	11.69	31.94	40.9	54	-13.1	Vertical
4844	38.96	31.81	8.63	32.11	47.29	54	-6.71	Horizontal
7266	22.13	36.28	11.69	31.94	38.16	54	-15.84	Horizontal

Test mode:	802.11ax(HE40)	Test channel:	Middle
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	45.42	31.85	8.66	32.12	53.81	74	-20.19	Vertical
7311	35.99	36.37	11.71	31.91	52.16	74	-21.84	Vertical
4874	46.72	31.85	8.66	32.12	55.11	74	-18.89	Horizontal
7311	33.12	36.37	11.71	31.91	49.29	74	-24.71	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	37.79	31.85	8.66	32.12	46.18	54	-7.82	Vertical
7311	23.32	36.37	11.71	31.91	39.49	54	-14.51	Vertical
4874	36.27	31.85	8.66	32.12	44.66	54	-9.34	Horizontal
7311	22.41	36.37	11.71	31.91	38.58	54	-15.42	Horizontal

Test mode:	802.11ax(HE40)	Test channel:	Highest
------------	----------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	45.96	31.88	8.68	32.13	54.39	74	-19.61	Vertical
7356	31.94	36.45	11.75	31.86	48.28	74	-25.72	Vertical
4904	45.91	31.88	8.68	32.13	54.34	74	-19.66	Horizontal
7356	33.34	36.45	11.75	31.86	49.68	74	-24.32	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	37.96	31.88	8.68	32.13	46.39	54	-7.61	Vertical
7356	24.15	36.45	11.75	31.86	40.49	54	-13.51	Vertical
4904	38.2	31.88	8.68	32.13	46.63	54	-7.37	Horizontal
7356	24.79	36.45	11.75	31.86	41.13	54	-12.87	Horizontal

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	53.33	27.14	6.19	42.04	44.62	74	-29.38	Horizontal
2390	71.93	27.37	6.31	42.11	63.5	74	-10.5	Horizontal
2310	51.52	27.14	6.19	42.04	42.81	74	-31.19	Vertical
2390	69.52	27.37	6.31	42.11	61.09	74	-12.91	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	35.12	27.14	6.19	42.04	26.41	54	-27.59	Horizontal
2390	53.92	27.37	6.31	42.11	45.49	54	-8.51	Horizontal
2310	35.23	27.14	6.19	42.04	26.52	54	-27.48	Vertical
2390	50.45	27.37	6.31	42.11	42.02	54	-11.98	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	69.19	27.66	6.45	42.01	61.29	74	-12.71	Horizontal
2500	51.1	27.7	6.47	42	43.27	74	-30.73	Horizontal
2483.5	68.4	27.66	6.45	42.01	60.5	74	-13.5	Vertical
2500	51.78	27.7	6.47	42	43.95	74	-30.05	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	56.01	27.66	6.45	42.01	48.11	54	-5.89	Horizontal
2500	36.1	27.7	6.47	42	28.27	54	-25.73	Horizontal
2483.5	53.01	27.66	6.45	42.01	45.11	54	-8.89	Vertical
2500	36.1	27.7	6.47	42	28.27	54	-25.73	Vertical

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	50.89	27.14	6.19	42.04	42.18	74	-31.82	Horizontal
2390	67.43	27.37	6.31	42.11	59	74	-15	Horizontal
2310	51.06	27.14	6.19	42.04	42.35	74	-31.65	Vertical
2390	64.78	27.37	6.31	42.11	56.35	74	-17.65	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	35.39	27.14	6.19	42.04	26.68	54	-27.32	Horizontal
2390	53.41	27.37	6.31	42.11	44.98	54	-9.02	Horizontal
2310	35.3	27.14	6.19	42.04	26.59	54	-27.41	Vertical
2390	50.91	27.37	6.31	42.11	42.48	54	-11.52	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	71	27.66	6.45	42.01	63.1	74	-10.9	Horizontal
2500	53.17	27.7	6.47	42	45.34	74	-28.66	Horizontal
2483.5	67.52	27.66	6.45	42.01	59.62	74	-14.38	Vertical
2500	51.27	27.7	6.47	42	43.44	74	-30.56	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	54.61	27.66	6.45	42.01	46.71	54	-7.29	Horizontal
2500	36.55	27.7	6.47	42	28.72	54	-25.28	Horizontal
2483.5	52.55	27.66	6.45	42.01	44.65	54	-9.35	Vertical
2500	35.14	27.7	6.47	42	27.31	54	-26.69	Vertical

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	50.39	27.14	6.19	42.04	41.68	74	-32.32	Horizontal
2390	67.26	27.37	6.31	42.11	58.83	74	-15.17	Horizontal
2310	50.97	27.14	6.19	42.04	42.26	74	-31.74	Vertical
2390	64.16	27.37	6.31	42.11	55.73	74	-18.27	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	34.92	27.14	6.19	42.04	26.21	54	-27.79	Horizontal
2390	52.8	27.37	6.31	42.11	44.37	54	-9.63	Horizontal
2310	34.7	27.14	6.19	42.04	25.99	54	-28.01	Vertical
2390	50.53	27.37	6.31	42.11	42.1	54	-11.9	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	80.03	27.66	6.45	52.01	62.13	74	-11.87	Horizontal
2500	52.32	27.7	6.47	42	44.49	74	-29.51	Horizontal
2483.5	67.51	27.66	6.45	42.01	59.61	74	-14.39	Vertical
2500	51.18	27.7	6.47	42	43.35	74	-30.65	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	54.14	27.66	6.45	42.01	46.24	54	-7.76	Horizontal
2500	36.01	27.7	6.47	42	28.18	54	-25.82	Horizontal
2483.5	52.49	27.66	6.45	42.01	44.59	54	-9.41	Vertical
2500	34.61	27.7	6.47	42	26.78	54	-27.22	Vertical

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	50.99	27.14	6.19	42.04	42.28	74	-31.72	Horizontal
2390	68.05	27.37	6.31	42.11	59.62	74	-14.38	Horizontal
2310	51.63	27.14	6.19	42.04	42.92	74	-31.08	Vertical
2390	64.37	27.37	6.31	42.11	55.94	74	-18.06	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	35.52	27.14	6.19	42.04	26.81	54	-27.19	Horizontal
2390	53.23	27.37	6.31	42.11	44.8	54	-9.2	Horizontal
2310	35.51	27.14	6.19	42.04	26.8	54	-27.2	Vertical
2390	50.83	27.37	6.31	42.11	42.4	54	-11.6	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	70.12	27.66	6.45	42.01	62.22	74	-11.78	Horizontal
2500	52.94	27.7	6.47	42	45.11	74	-28.89	Horizontal
2483.5	68.17	27.66	6.45	42.01	60.27	74	-13.73	Vertical
2500	52.05	27.7	6.47	42	44.22	74	-29.78	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	54.52	27.66	6.45	42.01	46.62	54	-7.38	Horizontal
2500	36.78	27.7	6.47	42	28.95	54	-25.05	Horizontal
2483.5	52.93	27.66	6.45	42.01	45.03	54	-8.97	Vertical
2500	34.72	27.7	6.47	42	26.89	54	-27.11	Vertical

Test mode:	802.11ax(HE20)	Test channel:	Lowest
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	49.5	27.14	6.19	42.04	40.79	74	-33.21	Horizontal
2390	66.58	27.37	6.31	42.11	58.15	74	-15.85	Horizontal
2310	50.92	27.14	6.19	42.04	42.21	74	-31.79	Vertical
2390	63.53	27.37	6.31	42.11	55.1	74	-18.9	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	34.53	27.14	6.19	42.04	25.82	54	-28.18	Horizontal
2390	52.03	27.37	6.31	42.11	43.6	54	-10.4	Horizontal
2310	34.48	27.14	6.19	42.04	25.77	54	-28.23	Vertical
2390	49.67	27.37	6.31	42.11	41.24	54	-12.76	Vertical

Test mode:	802.11ax(HE20)	Test channel:	Highest
------------	----------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	79.58	27.66	6.45	52.01	61.68	74	-12.32	Horizontal
2500	51.98	27.7	6.47	42	44.15	74	-29.85	Horizontal
2483.5	67.08	27.66	6.45	42.01	59.18	74	-14.82	Vertical
2500	51.14	27.7	6.47	42	43.31	74	-30.69	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	53.17	27.66	6.45	42.01	45.27	54	-8.73	Horizontal
2500	35.89	27.7	6.47	42	28.06	54	-25.94	Horizontal
2483.5	52.49	27.66	6.45	42.01	44.59	54	-9.41	Vertical
2500	33.63	27.7	6.47	42	25.8	54	-28.2	Vertical

Test mode:	802.11ax(HE40)	Test channel:	Lowest
------------	----------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	50.24	27.14	6.19	42.04	41.53	74	-32.47	Horizontal
2390	67.79	27.37	6.31	42.11	59.36	74	-14.64	Horizontal
2310	51.32	27.14	6.19	42.04	42.61	74	-31.39	Vertical
2390	63.48	27.37	6.31	42.11	55.05	74	-18.95	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	35.05	27.14	6.19	42.04	26.34	54	-27.66	Horizontal
2390	52.39	27.37	6.31	42.11	43.96	54	-10.04	Horizontal
2310	34.73	27.14	6.19	42.04	26.02	54	-27.98	Vertical
2390	50.51	27.37	6.31	42.11	42.08	54	-11.92	Vertical

Test mode:	802.11ax(HE40)	Test channel:	Highest
------------	----------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	69.71	27.66	6.45	42.01	61.81	74	-12.19	Horizontal
2500	52.07	27.7	6.47	42	44.24	74	-29.76	Horizontal
2483.5	67.93	27.66	6.45	42.01	60.03	74	-13.97	Vertical
2500	51.69	27.7	6.47	42	43.86	74	-30.14	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	53.94	27.66	6.45	42.01	46.04	54	-7.96	Horizontal
2500	36.06	27.7	6.47	42	28.23	54	-25.77	Horizontal
2483.5	52.86	27.66	6.45	42.01	44.96	54	-9.04	Vertical
2500	34.62	27.7	6.47	42	26.79	54	-27.21	Vertical

Remark.

1. $Level = Reading\ Level + Antenna\ factor + Cable\ Loss - Amplifier\ factor$
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----