



# FCC Test Report

**APPLICANT** : KonnectONE, LLC  
**EQUIPMENT** : Wireless Home Phone  
**BRAND NAME** : moxee  
**MODEL NAME** : K500HPEL  
**FCC ID** : 2APQU-K500HPEL  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Jul. 19, 2019 and testing was completed on Aug. 31, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

*Derreck Chen*

Reviewed by: Derreck Chen / Supervisor

*Eric Shih*

Approved by: Eric Shih / Manager



**Sporton International (ShenZhen) Inc.**

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055  
People's Republic of China



# TABLE OF CONTENTS

REVISION HISTORY ..... 3

SUMMARY OF TEST RESULT ..... 4

1. GENERAL DESCRIPTION ..... 5

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 6

    1.6. Test Location ..... 7

    1.7. Applicable Standards ..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 9

    2.3. Support Unit used in test configuration and system ..... 9

    2.4. EUT Operation Test Setup ..... 10

3. TEST RESULT ..... 11

    3.1. Test of AC Conducted Emission Measurement ..... 11

    3.2. Test of Radiated Emission Measurement ..... 15

4. LIST OF MEASURING EQUIPMENT ..... 20

5. UNCERTAINTY OF EVALUATION ..... 21

APPENDIX A. SETUP PHOTOGRAPHS



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC971908-01	Rev. 01	Initial issue of report	Sep. 12, 2019



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 9.97 dB at 0.170 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.56 dB at 57.160 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

KonnnectONE, LLC  
40 Lake Bellevue Drive, Suite 350, Bellevue, Washington 98005, U.S.A

## 1.2. Manufacturer

KonnnectONE, LLC  
40 Lake Bellevue Drive, Suite 350, Bellevue, Washington 98005, U.S.A

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Home Phone
Brand Name	moxee
Model Name	K500HPEL
FCC ID	2APQU-K500HPEL
EUT supports Radios application	LTE/GNSS
IMEI Code	Conduction: 358621100009191 Radiation: N/A
HW Version	EN_K500HPEL_MB_C
SW Version	EN_K500HPELV1.0.0B02
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a change ID report for K500HPEL, all the test results are leveraged from original report FC971908.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5MHz
<b>Rx Frequency</b>	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz LTE Band 66 : 2110.7 MHz~ 2179.3 MHz LTE Band 71: 619.5 MHz ~ 649.5MHz GNSS : 1559 MHz ~ 1610 MHz
<b>Antenna Type</b>	WWAN : Fixed External Antenna GNSS: FPC Antenna
<b>Type of Modulation</b>	LTE: QPSK / 16QAM GNSS : BPSK

Note : GNSS Rx = GLONASS + GPS

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6. Test Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	CN1256	421272

### 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1 : LTE Band 2 Idle(Middle) + GNSS Rx + telephone load + Adapter Mode 2 : LTE Band 4 Idle(Middle) + GNSS Rx + telephone load + Adapter Mode 3 : LTE Band 5 Idle(Low) + GNSS Rx + telephone load + Adapter Mode 4 : LTE Band 12 Idle(High) + GNSS Rx + telephone load + Adapter Mode 5 : LTE Band 13 Idle(High) + GNSS Rx + telephone load + Adapter Mode 6 : LTE Band 25 Idle(High) + GNSS Rx + telephone load + Adapter Mode 7 : LTE Band 26 Idle(High) + GNSS Rx + telephone load + Adapter Mode 8 : LTE Band 41 Idle(High) + GNSS Rx + telephone load + Adapter Mode 9 : LTE Band 66 Idle(High) + GNSS Rx + telephone load + Adapter Mode 10 : LTE Band 71 Idle(High) + GNSS Rx + telephone load + Adapter
Radiated Emissions	Mode 1 : LTE Band 2 Idle(Middle) + GNSS Rx + telephone load + Adapter Mode 2 : LTE Band 4 Idle(Middle) + GNSS Rx + telephone load + Adapter Mode 3 : LTE Band 5 Idle(Low) + GNSS Rx + telephone load + Adapter Mode 4 : LTE Band 12 Idle(High) + GNSS Rx + telephone load + Adapter Mode 5 : LTE Band 13 Idle(High) + GNSS Rx + telephone load + Adapter Mode 6 : LTE Band 25 Idle(High) + GNSS Rx + telephone load + Adapter Mode 7 : LTE Band 26 Idle(High) + GNSS Rx + telephone load + Adapter Mode 8 : LTE Band 41 Idle(High) + GNSS Rx + telephone load + Adapter Mode 9 : LTE Band 66 Idle(High) + GNSS Rx + telephone load + Adapter Mode 10 : LTE Band 71 Idle(High) + GNSS Rx + telephone load + Adapter
<b>Remark:</b> 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 7; only the test data of this mode is reported.	



## 2.2. Connection Diagram of Test System

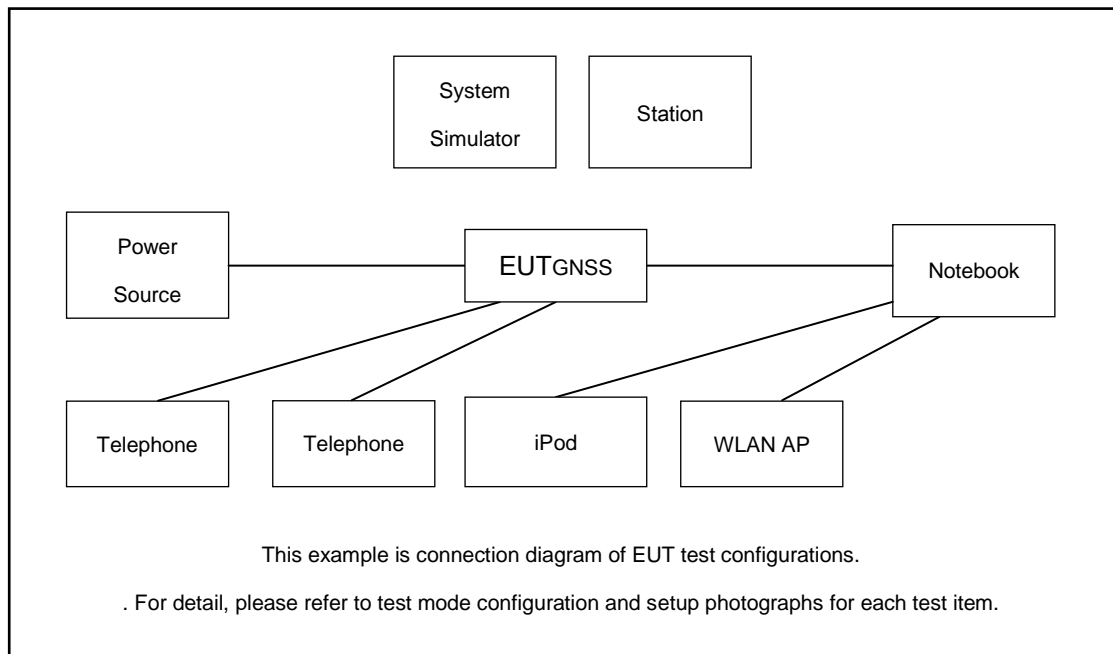

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	GNSS Station	RACELOGIC	18645	N/A	N/A	Unshielded,1.8m
3.	GNSS Station	RACELOGIC	RLLS03-2P	Fcc DoC	N/A	Unshielded,1.8m
4.	WLAN AP	D-link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
5.	WLAN AP	ASUSTek	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
6.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
7.	telephone	Bossini	HCD133TSD	N/A	N/A	N/A
8.	telephone	Bossini	HCD133TSDL	N/A	N/A	N/A
9.	iPod nano 8GB	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2m	N/A
10.	IPod	Apple	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

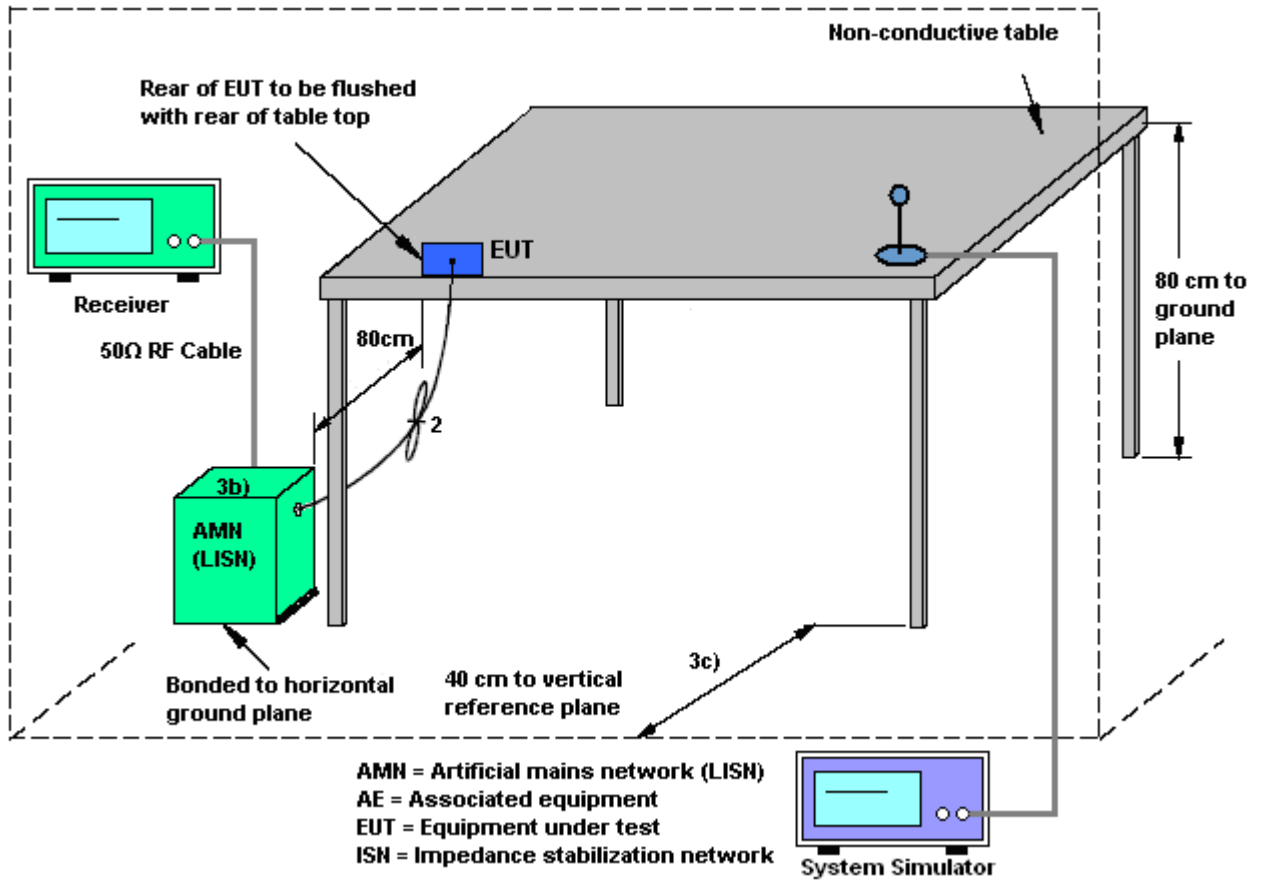



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Bear Xiong	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

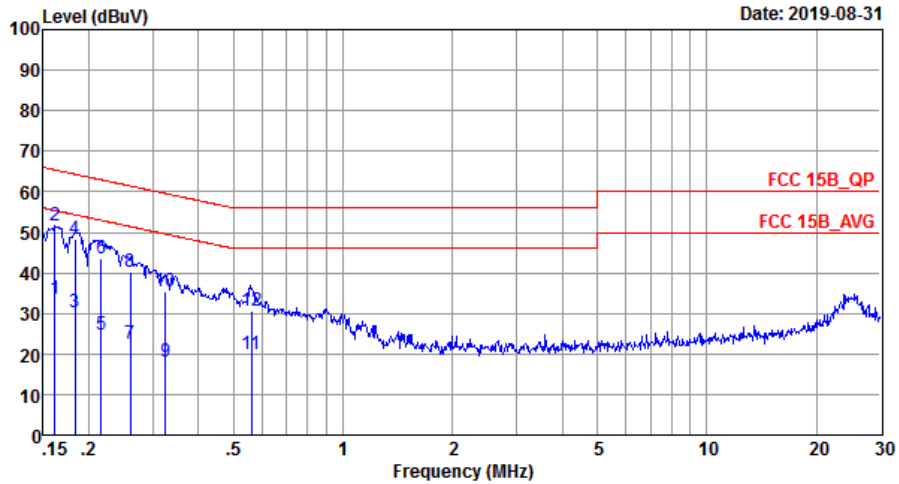


Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_20190719\_L LINE

Mode : Mode 1  
 IMEI : 358621100009191

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	33.49	-21.89	55.38	23.30	0.03	10.16	Average
2 *	0.16	51.49	-13.89	65.38	41.30	0.03	10.16	QP
3	0.18	30.19	-24.14	54.33	20.00	0.03	10.16	Average
4	0.18	48.19	-16.14	64.33	38.00	0.03	10.16	QP
5	0.22	24.89	-28.07	52.96	14.70	0.03	10.16	Average
6	0.22	43.69	-19.27	62.96	33.50	0.03	10.16	QP
7	0.26	22.40	-29.02	51.42	12.20	0.03	10.17	Average
8	0.26	40.40	-21.02	61.42	30.20	0.03	10.17	QP
9	0.33	18.00	-31.57	49.57	7.80	0.03	10.17	Average
10	0.33	35.50	-24.07	59.57	25.30	0.03	10.17	QP
11	0.56	19.90	-26.10	46.00	9.70	0.02	10.18	Average
12	0.56	30.60	-25.40	56.00	20.40	0.02	10.18	QP



Test Engineer :	Bear Xiong	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

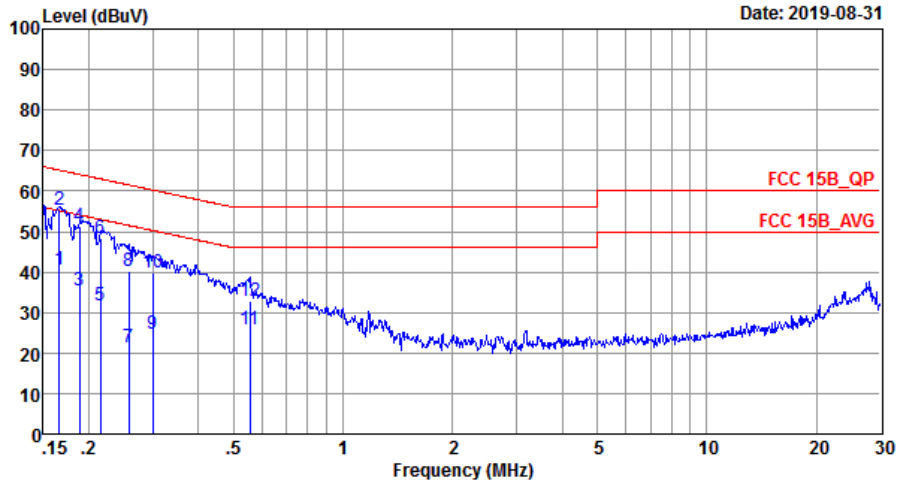

Site : CO01-SZ  
 Condition: FCC 15B\_QP LISN\_20190719\_N NEUTRAL

Mode : Mode 1  
 IMEI : 358621100009191

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	40.49	-14.67	55.16	30.30	0.03	10.16	Average
2 *	0.17	55.19	-9.97	65.16	45.00	0.03	10.16	QP
3	0.19	35.39	-18.72	54.11	25.20	0.03	10.16	Average
4	0.19	51.39	-12.72	64.11	41.20	0.03	10.16	QP
5	0.22	31.69	-21.32	53.01	21.50	0.03	10.16	Average
6	0.22	48.19	-14.82	63.01	38.00	0.03	10.16	QP
7	0.26	21.50	-30.01	51.51	11.30	0.03	10.17	Average
8	0.26	40.20	-21.31	61.51	30.00	0.03	10.17	QP
9	0.30	24.90	-25.34	50.24	14.70	0.03	10.17	Average
10	0.30	39.70	-20.54	60.24	29.50	0.03	10.17	QP
11	0.56	25.80	-20.20	46.00	15.60	0.02	10.18	Average
12	0.56	32.70	-23.30	56.00	22.50	0.02	10.18	QP



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### **3.2.3. Test Procedures**

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level




### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

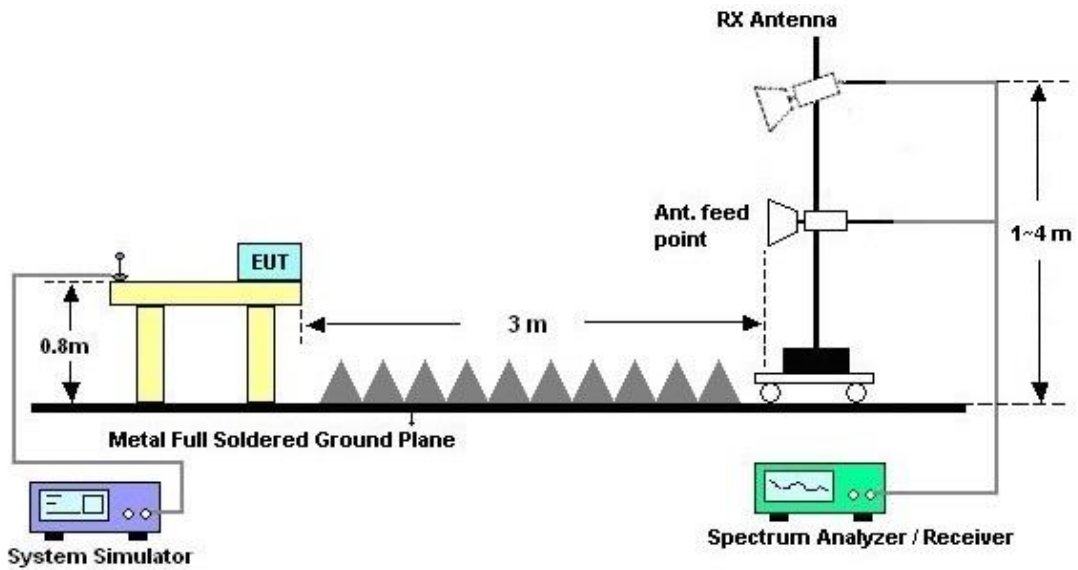



3.2.5. Test Result of Radiated Emission

Test Engineer :	Zhang Xu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

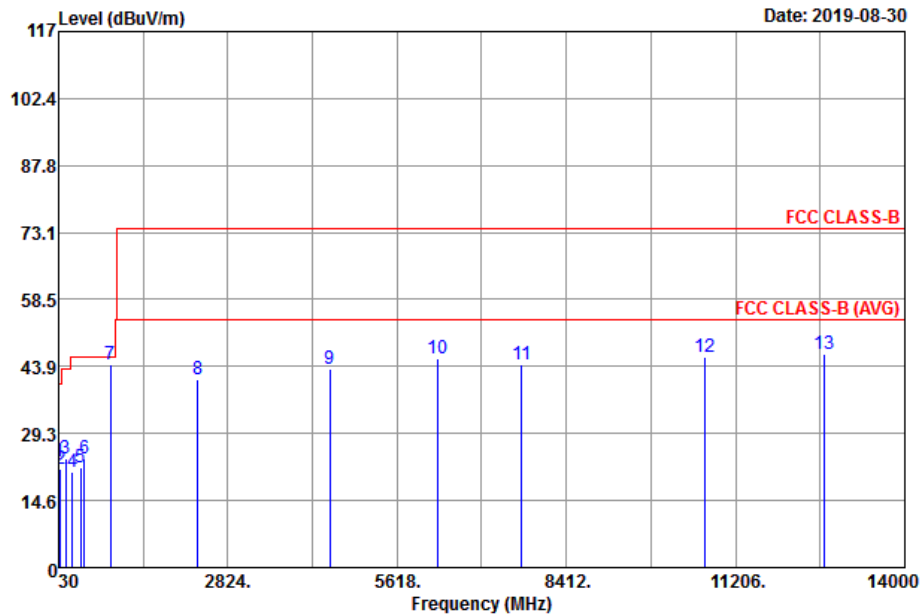


Site : 03CH04-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT41909\_18 HORIZONTAL

Plane : Y

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	23.01	-16.99	40.00	29.73	24.80	0.58	32.10	100	185	Peak
2	58.13	21.50	-18.50	40.00	40.13	12.28	0.79	31.70	---	---	Peak
3	146.40	23.77	-19.73	43.50	37.22	17.13	1.26	31.84	---	---	Peak
4	263.77	20.80	-25.20	46.00	30.81	20.13	1.68	31.82	---	---	Peak
5	397.63	21.94	-24.06	46.00	30.11	21.75	2.08	32.00	---	---	Peak
6	454.86	23.86	-22.14	46.00	30.38	22.95	2.22	31.69	---	---	Peak
7	889.00	44.33			43.25	28.95	3.15	31.02	---	---	Peak
8	2322.00	41.02	-32.98	74.00	41.90	27.77	4.66	33.31	---	---	Peak
9	4512.00	43.37	-30.63	74.00	39.70	31.04	5.23	32.60	---	---	Peak
10	6298.00	45.78	-28.22	74.00	38.45	33.66	6.47	32.80	---	---	Peak
11	7674.00	44.48	-29.52	74.00	33.59	37.45	7.14	33.70	---	---	Peak
12	10692.00	46.00	-28.00	74.00	31.38	38.54	9.32	33.24	---	---	Peak
13	12670.00	46.44	-27.56	74.00	31.18	39.70	9.80	34.24	100	199	Peak



Test Engineer :	Zhang Xu	Temperature :	24~25°C
		Relative Humidity :	48~49%
Test Distance :	3m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

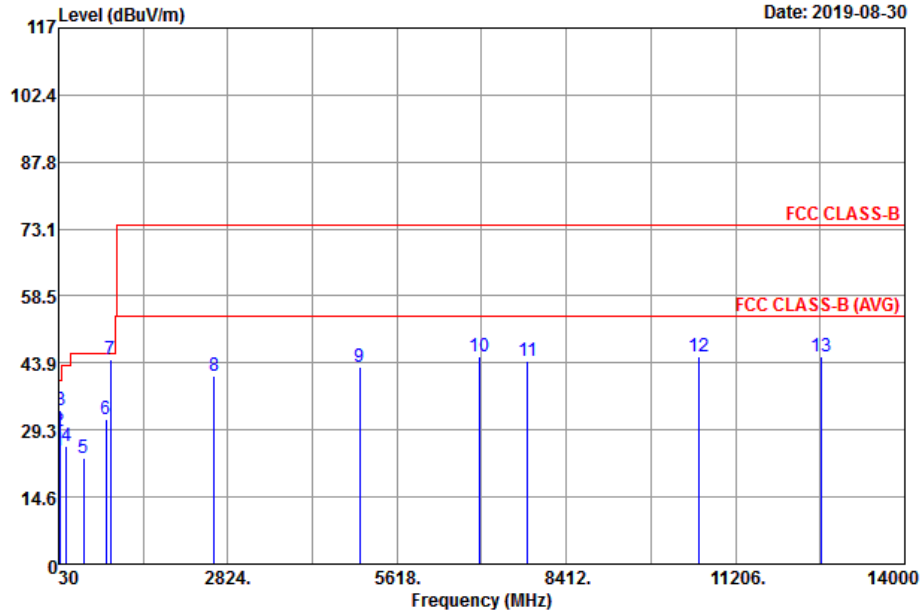

Site : 03CH04-SZ  
 Condition : FCC CLASS-B 3m LF\_ANT41909\_18 VERTICAL

Plane : Y

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.97	24.73	-15.27	40.00	31.91	24.33	0.59	32.10	---	---	Peak
2	46.49	29.12	-10.88	40.00	43.91	16.35	0.71	31.85	---	---	Peak
3	57.16	33.44	-6.56	40.00	51.83	12.52	0.79	31.70	100	65	Peak
4	155.13	25.71	-17.79	43.50	39.56	16.66	1.30	31.81	---	---	Peak
5	439.34	23.16	-22.84	46.00	30.03	22.63	2.18	31.68	---	---	Peak
6	813.76	31.61	-14.39	46.00	31.21	28.57	3.00	31.17	---	---	Peak
7	889.00	44.57			43.49	28.95	3.15	31.02	---	---	Peak
8	2604.00	40.98	-33.02	74.00	41.43	27.75	4.96	33.16	---	---	Peak
9	4998.00	43.07	-30.93	74.00	37.55	32.16	6.06	32.70	---	---	Peak
10	6980.00	45.32	-28.68	74.00	36.02	35.64	7.16	33.50	---	---	Peak
11	7772.00	44.27	-29.73	74.00	33.28	37.39	7.30	33.70	---	---	Peak
12	10610.00	45.38	-28.62	74.00	30.84	38.47	9.29	33.22	100	44	Peak
13	12630.00	45.22	-28.78	74.00	29.97	39.68	9.79	34.22	---	---	Peak



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 18, 2019	Aug. 30, 2019	Apr. 17, 2020	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 18, 2019	Aug. 30, 2019	Apr. 17, 2020	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Aug. 27, 2019	Aug. 30, 2019	Aug. 26, 2020	Radiation (03CH04-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2018	Aug. 30, 2019	Oct. 17, 2019	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Apr. 01, 2019	Aug. 30, 2019	Mar. 31, 2020	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2018	Aug. 30, 2019	Oct. 17, 2019	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Aug. 30, 2019	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 30, 2019	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 30, 2019	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 23, 2018	Aug. 31, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 18, 2018	Aug. 31, 2019	Oct. 17, 2019	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 23, 2018	Aug. 31, 2019	Dec. 22, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089 1	100Vac~250Vac	Jul. 23, 2019	Aug. 31, 2019	Jul. 22, 2020	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8dB
---	-------