



# TEST REPORT

**APPLICANT** : KonnectONE, LLC

**PRODUCT NAME** : Tablet

**MODEL NAME** : MT-T8B22

**BRAND NAME** : moxee

**FCC ID** : 2APQU-MT-T8B22

**STANDARD(S)** : 47 CFR Part 15 Subpart B

**RECEIPT DATE** : 2022-12-06

**TEST DATE** : 2022-12-06

**ISSUE DATE** : 2022-12-14

Edited by: Chen Bilian  
Chen Bilian(Rapporteur)

Approved by: Xiao Xiong  
Xiao Xiong(Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 2. Test Results ..... 6**
- 2.1. Applied Reference Documents ..... 6**
- 2.2. EUT Setup and Operating Conditions ..... 7**
- 3. 47 CFR Part 15B Requirements ..... 9**
- 3.1. Conducted Emission ..... 9**
- 3.2. Radiated Emission ..... 13**
- Annex A Test Uncertainty ..... 20**
- Annex B Testing Laboratory Information ..... 21**

Change History		
Version	Date	Reason for Change
1.0	2022-12-14	First edition



# 1. Technical Information

Note: Provide by applicant

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	KonnectONE, LLC
<b>Applicant Address:</b>	40 Lake Bellevue Drive, Suite 350, Bellevue, WA 98005
<b>Manufacturer:</b>	KonnectONE, LLC
<b>Manufacturer Address:</b>	40 Lake Bellevue Drive, Suite 350, Bellevue, WA 98005

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Tablet
<b>EUT IMEI:</b>	357612471873654
<b>Hardware Version:</b>	T8002_V1.1
<b>Software Version:</b>	MT8BV1.0.0B015
<b>Tx Frequency:</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2472 MHz 802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz
<b>Rx Frequency:</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV: 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2: 1930 MHz ~ 1990 MHz



	LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 25: 1930 MHz ~ 1995 MHz LTE Band 26: 859 MHz ~894 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 2110 MHz ~ 2200 MHz LTE Band 71: 617 MHz ~ 652 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2472 MHz 802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz GPS/GLONASS/BDS/Galileo: 1559 MHz ~ 1610 MHz	
<b>Accessory:</b>	<b>AC Adapter</b>	
	Brand Name:	Tianyin
	Model No.:	TPA-46050200UU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	100-240V~ 50/60Hz, 0.3A
	Rated Output:	5.0V=2000mA
	Manufacturer:	Shenzhen Tianyin Electronics Co., Ltd.
	<b>Battery</b>	
	Brand Name:	Fenghua
	Model No.:	BTE-4301
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4300mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
Manufacturer:	Guangdong Fenghua New Energy Co., Ltd.	

**Note:**

1. This test report is variant from the original report (Report No.: SZ22020126E01, FCC ID: 2ALZM-T8002; Change ID Report No.: SZ22050287E01, FCC ID: 2APQU-MT-T8B22) based on the similarity between before, only changed the screen supplier model consistency, changed the antenna switch, changed the vibrator wiring, changed the horn height, changed the battery FPC length, changed software and hardware version number. This test has been tested RE and CE. For RE and CE, only the worst case is recorded in this report. The others



REPORT No.: SZ22120060E01

are the same as before.

2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.107	Conducted Emission	2022.12.06	Fan Zehang	PASS	No deviation
2	15.109	Radiated Emission	2022.12.06	Yang Lian	PASS	No deviation

**Note 1:**The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

**Note 2:**Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:**When the test result is a critical value,we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2.2. EUT Setup and Operating Conditions

Test Item	
Mode 1	: GSM850 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 2	: GSM1900 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 3	: WCDMA Band II Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 4	: WCDMA Band IV Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 5	: WCDMA Band V Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 6	: LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 7	: LTE Band 4 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 8	: LTE Band 5 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 9	: LTE Band 12 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 10	: LTE Band 25 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 11	: LTE Band 26 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 12	: LTE Band 41 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 13	: LTE Band 66 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 14	: LTE Band 71 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 15	: GSM850 Idle + Bluetooth Idle + 5.8GHz SRD+ Adapter + Battery + USB Cable + Earphone + SIM Card
Mode 16	: WCDMA Band V Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card + GPS Rx
Mode 17	: LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card + GLONASS Rx
Mode 18	: LTE Band 26 Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card + Galileo Rx
Mode 19	: LTE Band 41 Idle + Bluetooth Idle + 5G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card + BDS Rx



<b>Mode 20 :</b>	<b>WCDMA Band II Idle + Bluetooth Idle + 2.4G WLAN Idle + Adapter + Battery + USB Cable + Earphone + SIM Card + Rear Camera + Recording Mode</b>
<b>Mode 21 :</b>	<b>LTE Band 71 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable + Earphone + SIM Card + PC + PC Adapter + Data Transfer Mode</b>
<b>Remark:</b> The above test mode in boldface (Mode 20) was the worst case of conducted emission test, only the test data of these modes were reported. The above test mode in boldface (Mode 21) was the worst case of radiated emission test, only the test data of these modes were reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106



## 3. 47 CFR Part 15B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

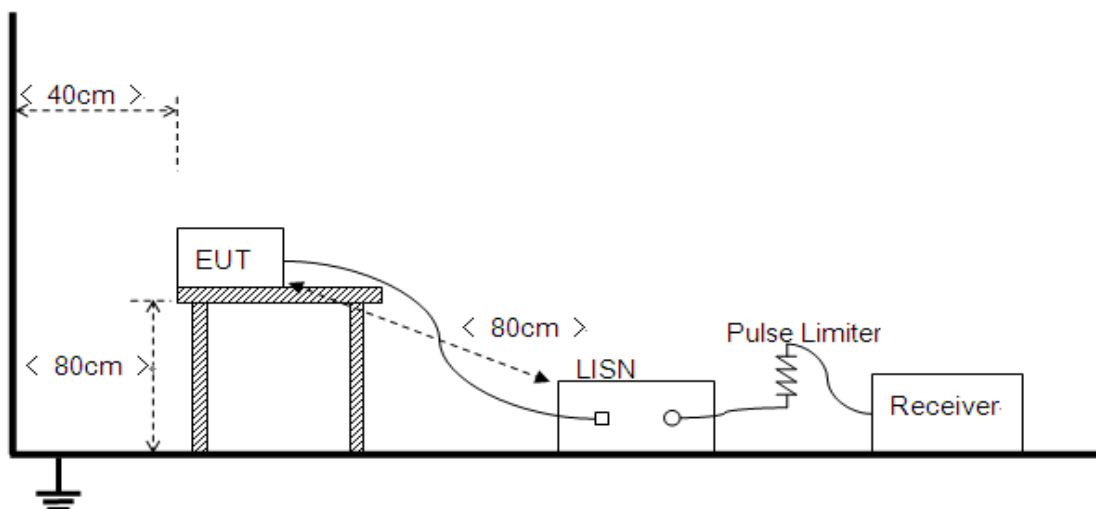




The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


### 3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**A. Test Plot and Suspicious Points:**

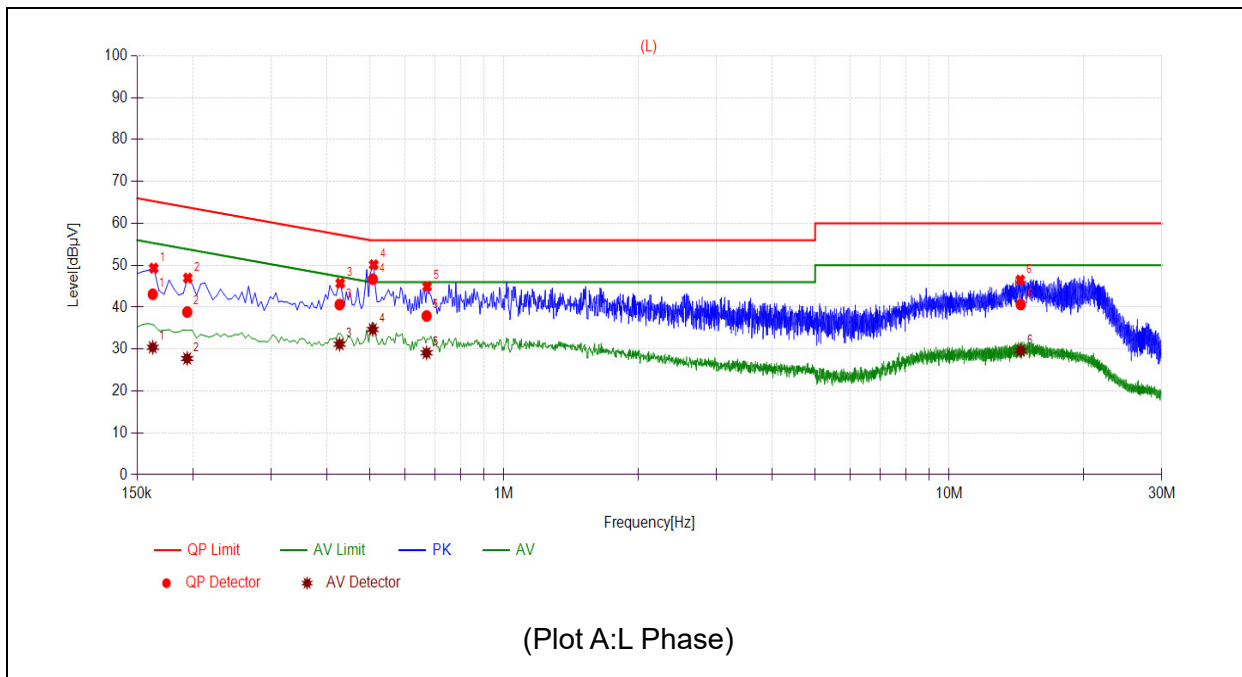

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1627	43.09	30.42	65.33	55.33	Line	PASS
2	0.1944	38.84	27.75	63.85	53.85		PASS
3	0.4275	40.62	31.17	57.30	47.30		PASS
4	0.5075	46.68	34.68	56.00	46.00		PASS
5	0.6703	37.89	29.09	56.00	46.00		PASS
6	14.4657	40.65	29.64	60.00	50.00		PASS

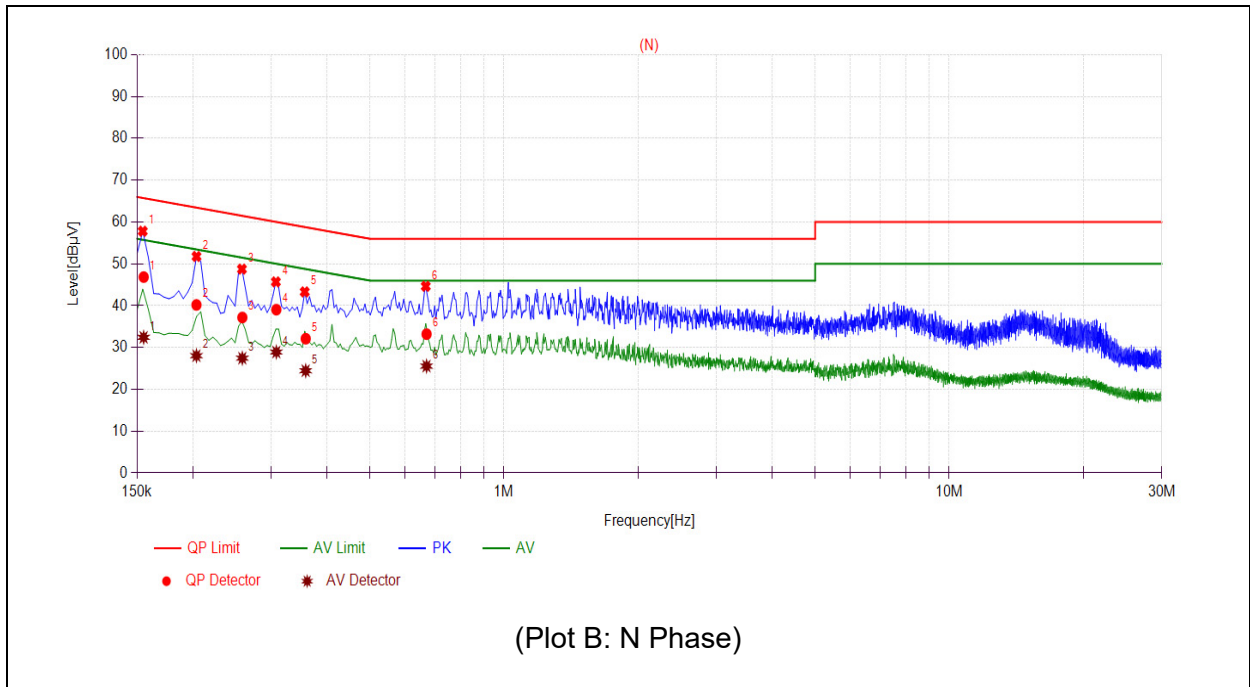

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1552	46.85	32.43	65.72	55.72	Neutral	PASS
2	0.2039	40.19	28.04	63.45	53.45		PASS
3	0.2585	37.18	27.45	61.48	51.48		PASS
4	0.3082	39.05	28.91	60.02	50.02		PASS
5	0.3587	32.10	24.45	58.76	48.76		PASS
6	0.6701	33.21	25.55	56.00	46.00		PASS



### 3.2. Radiated Emission

#### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dB}\mu\text{V/m}$  is calculated by  $20\log$  Emission Level( $\mu\text{V/m}$ ).


#### 3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705-108 .....	1000.
108-500 .....	2000.
500-1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

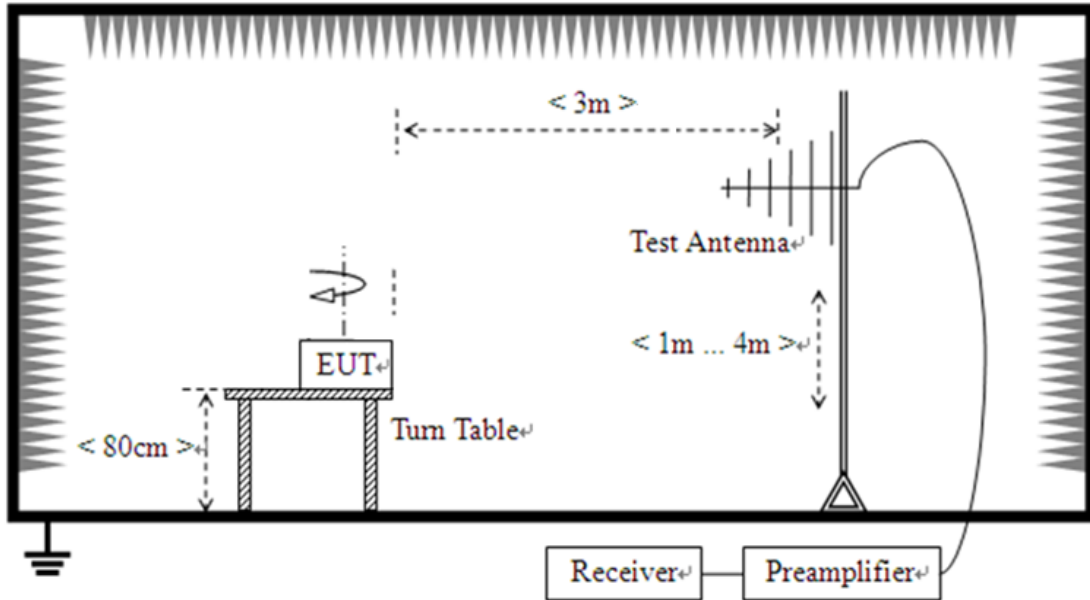

- 2) For radiated emissions above 1GHz

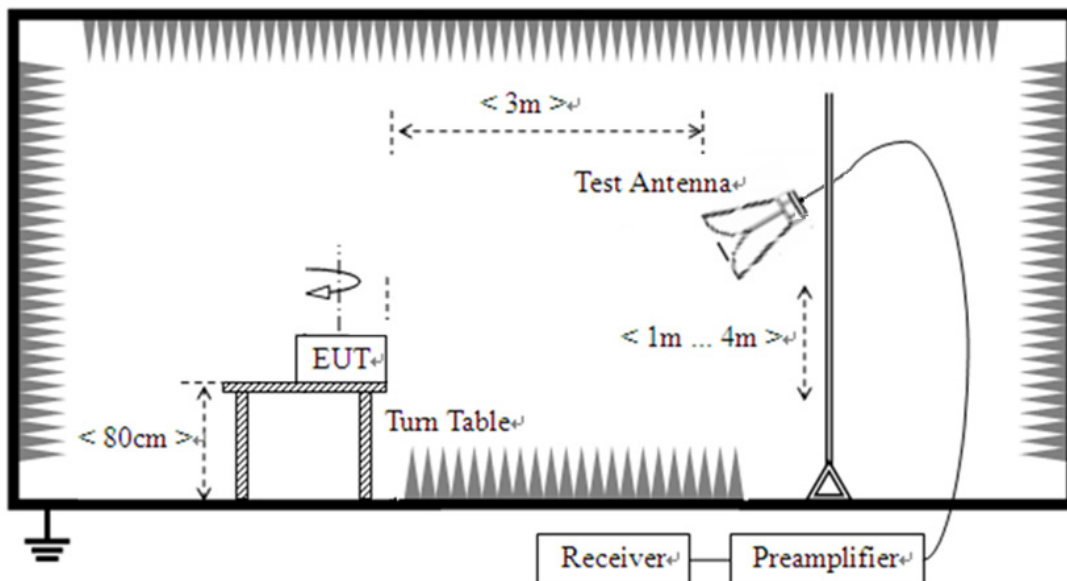



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.

#### **3.2.4. Test Result**

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of emissions (6GHz-30GHz) which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

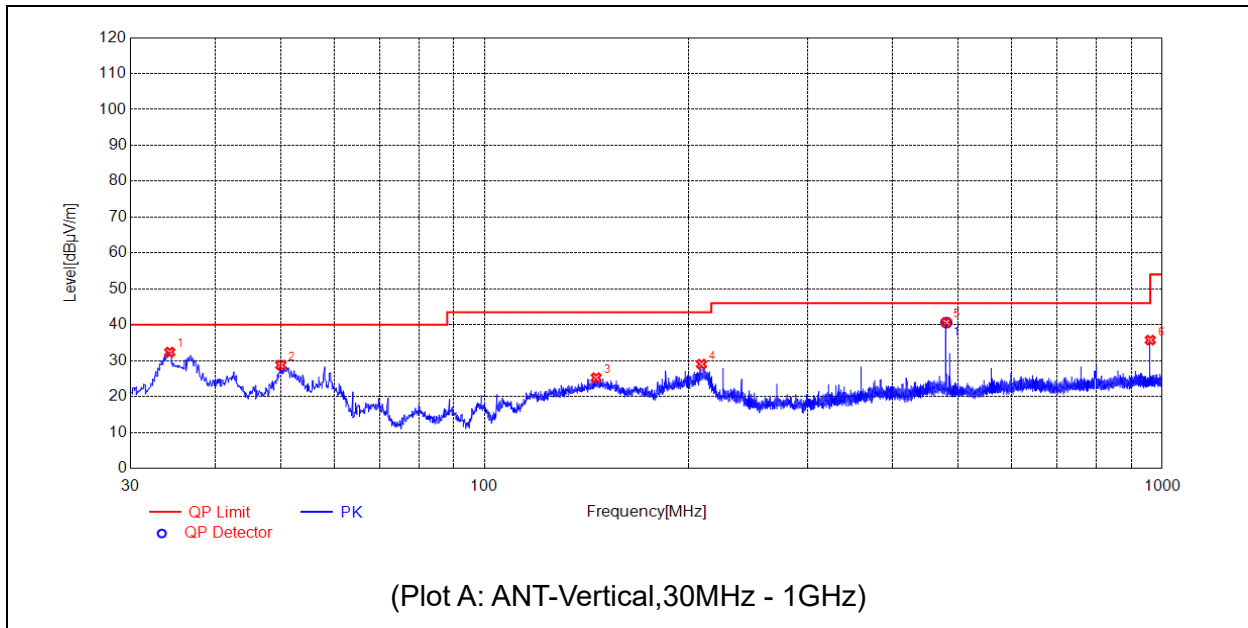


No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	34.2684	32.38	N.A	N.A	N.A	40.00	N.A	V	PASS
2	49.9840	28.77	N.A	N.A	N.A	40.00	N.A	V	PASS
3	146.0236	25.25	N.A	N.A	N.A	43.50	N.A	V	PASS
4	208.8859	29.03	N.A	N.A	N.A	43.50	N.A	V	PASS
5	480.0280	40.64	40.60	N.A	N.A	46.00	N.A	V	PASS
6	960.0320	35.73	N.A	N.A	N.A	54.00	N.A	V	PASS




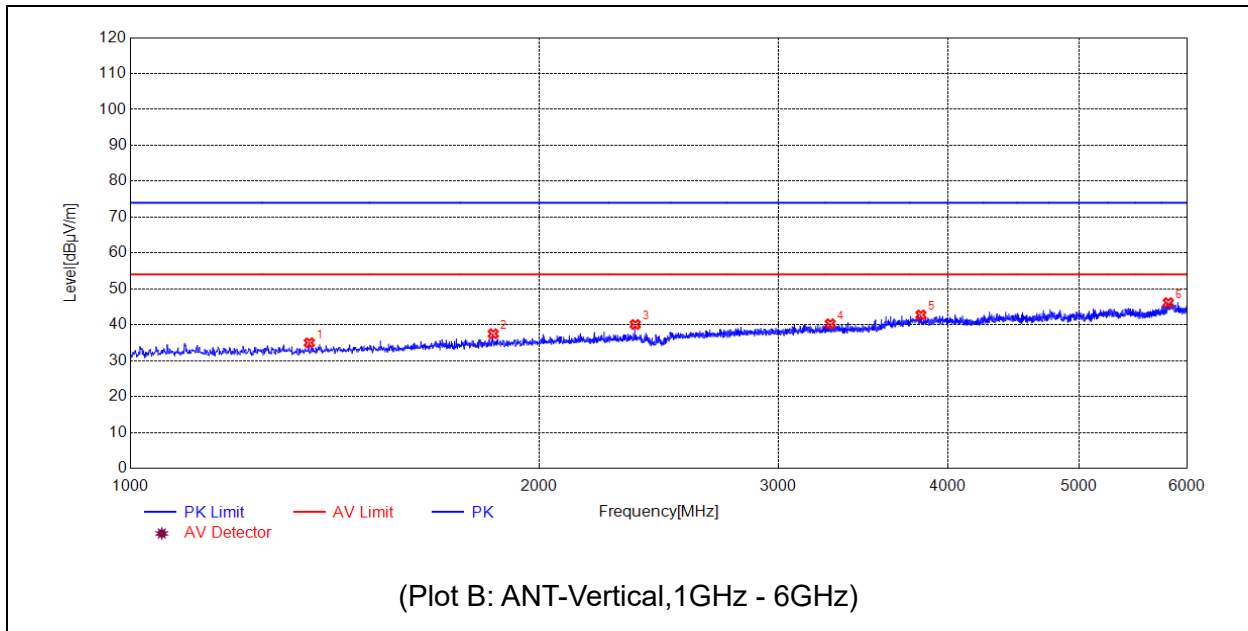

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1354.0708	34.98	N.A	N.A	74.00	N.A	54.00	V	PASS
2	1850.1700	37.49	N.A	N.A	74.00	N.A	54.00	V	PASS
3	2354.2709	40.09	N.A	N.A	74.00	N.A	54.00	V	PASS
4	3277.4555	40.28	N.A	N.A	74.00	N.A	54.00	V	PASS
5	3822.5645	42.76	N.A	N.A	74.00	N.A	54.00	V	PASS
6	5815.9632	46.17	N.A	N.A	74.00	N.A	54.00	V	PASS

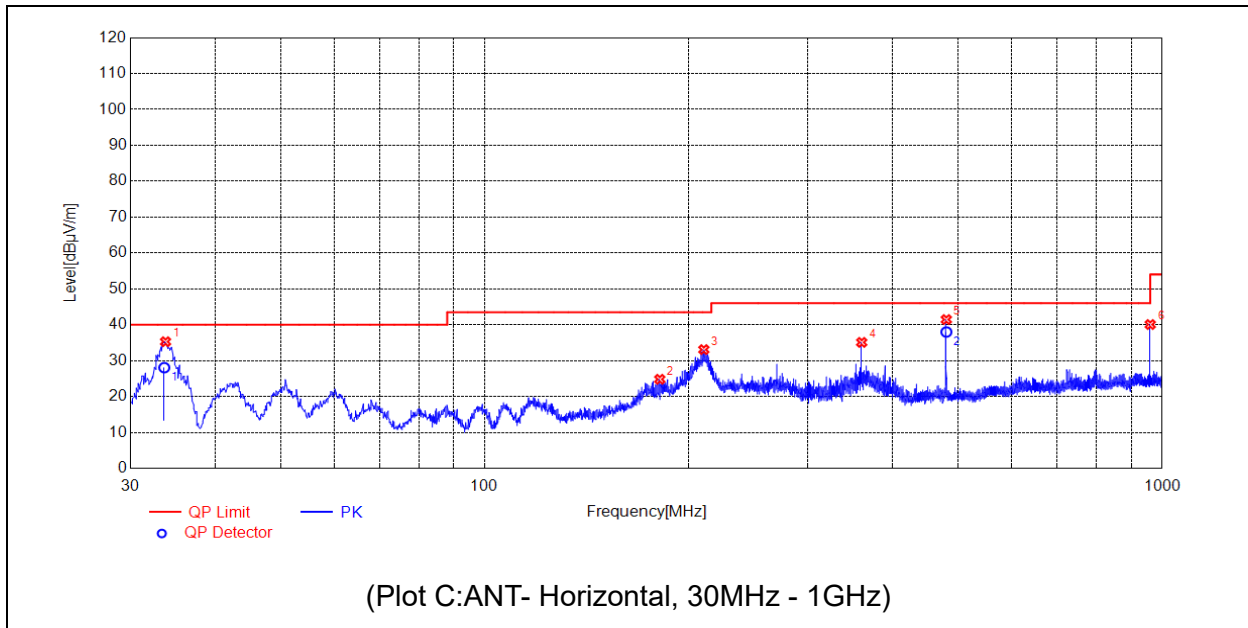

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	33.7834	35.28	28.06	N.A	N.A	40.00	N.A	H	PASS
2	181.2381	24.81	N.A	N.A	N.A	43.50	N.A	H	PASS
3	210.5351	33.08	N.A	N.A	N.A	43.50	N.A	H	PASS
4	360.0270	35.09	N.A	N.A	N.A	46.00	N.A	H	PASS
5	480.0280	41.45	37.99	N.A	N.A	46.00	N.A	H	PASS
6	960.0320	40.07	N.A	N.A	N.A	54.00	N.A	H	PASS

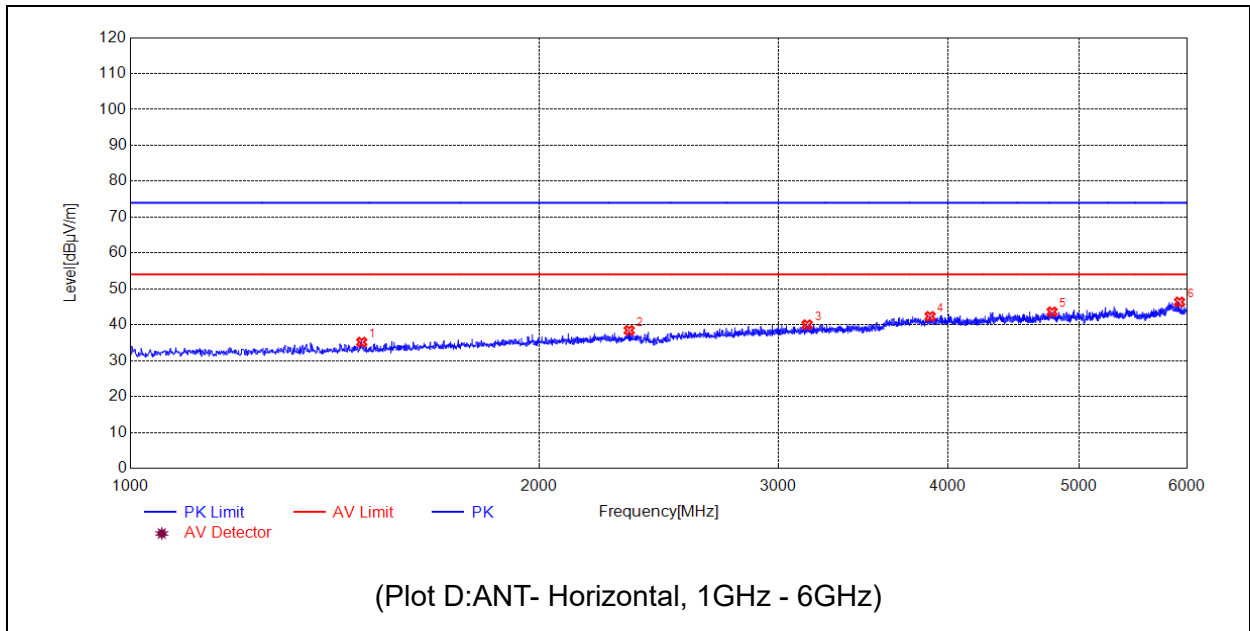

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1480.0960	35.16	N.A	N.A	74.00	N.A	54.00	H	PASS
2	2330.2661	38.43	N.A	N.A	74.00	N.A	54.00	H	PASS
3	3151.4303	40.00	N.A	N.A	74.00	N.A	54.00	H	PASS
4	3882.5765	42.34	N.A	N.A	74.00	N.A	54.00	H	PASS
5	4775.7552	43.61	N.A	N.A	74.00	N.A	54.00	H	PASS
6	5927.9856	46.35	N.A	N.A	74.00	N.A	54.00	H	PASS



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±3.3dB
	150kHz-30MHz	±2.8dB

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.04dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

### 4. Test Software Utilized

<b>Model</b>	<b>Version Number</b>	<b>Producer</b>
TS+ -[JS32-RE]	Version 2.5.0.6	Tonscend
TS+ -[JS32-CE]	Version 2.5.0.0	Tonscend

**5. Test Equipments Utilized**

Description	Model	Serial No.	Manufacturer	Cal. Date	Due. Date
Bi-Log Antenna	VULB 9163	9163-519	SCHWARZBECK	2022/5/25	2025/5/24
Horn Antenna	BBHA 9120D	9120D-963	SCHWARZBECK	2022/5/25	2025/5/24
Horn Antenna	BBHA 9120D	01774	SCHWARZBECK	2022/7/13	2025/7/12
Horn Antenna	BBHA9170	BBHA9170 #773	SCHWARZBECK	2022/7/14	2025/7/13
Receiver	N9038A	MY564000 93	KEYSIGHT	2022/3/3	2023/3/2
Receiver	N9038A	MY541300 16	Agilent	2022/7/7	2023/7/6
6db Attenuator	BW-N6W5+	E191001	Mini-circuits	2022/10/11	2023/10/10
Preamplifier	S020180L3203	61171/611 72	LUCIX CORP.	2022/7/8	2023/7/7
Preamplifier	S10M100L3802	46732	LUCIX CORP.	2022/7/8	2023/7/7
Preamplifier	DCLNA0118-40 C-S	DS77209	Decentest	2022/7/23	2023/7/22
Receiver	ESPI	101052	R&S	2022/7/7	2023/7/6
LISN	NSLK 8127	8127449	Schwarzbeck	2022/3/3	2023/3/2
10dB Pulse Limiter	VTSD 9561-F	VTSD 9561 F-B #206	SCHWARZBECK	2022/7/6	2023/7/5
RF Cable	PE330	MRE001	Pasternack	2022/7/8	2023/7/7
RF Cable	CLU18	MRE002	Pasternack	2022/7/8	2023/7/7
RF Cable	CLU18	MRE003	Pasternack	2022/7/8	2023/7/7
RF Cable	QA360-40-KK- 0.5	22290045	Qualwave	2022/7/8	2023/7/7
RF Cable	QA360-40-KKF -2	22290046	Qualwave	2022/7/8	2023/7/7
RF Cable	QA500-18-NN- 5	22120181	Qualwave	2022/7/8	2023/7/7

**6. Ancillary Equipment Utilized**

Description	Manufacturer	Model	Serial No.
earphone	OPPO	N/A	N/A

END OF REPORT