

FCC AND IC CERTIFICATION TEST REPORT

FOR

Applicant	:	Mercku Inc.
Address	:	51 Breithaupt Street, Suite 100 Kitchener, ON Canada, N2H 5G5
Equipment under Test	:	M6 Mesh Wi-Fi Router
Model No.	:	M6
Trade Mark	:	MERCKU
FCC ID	:	2APR4-M6
IC	:	23877-M6
Manufacturer	:	Mercku Technology (China), Inc.
Address	:	Block B1, Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	7
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test	8
2.5.	Deviations of test standard.....	9
2.6.	Test environment conditions	9
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
5.	6dB Bandwidth and 99% Bandwidth.....	12
5.1.	Block diagram of test setup.....	12
5.2.	Limits	12
5.3.	Test procedure	12
5.4.	Test result.....	13
5.5.	original test data	14
6.	Conducted peak Output Power.....	32
6.1.	Block diagram of test setup.....	32
6.2.	Limits	32
6.3.	Test procedure	32
6.4.	Test result.....	32
7.	Power Spectral Density.....	34
7.1.	Block diagram of test setup.....	34
7.2.	Limits	34
7.3.	Test procedure	34
7.4.	Test result.....	34
7.5.	original test data	35
8.	Band Edge and Spurious Emissions (Conducted)	44
8.1.	Block diagram of test setup.....	44
8.2.	Limits	44
8.3.	Test procedure	44
8.4.	Test result.....	45
8.5.	original test data	45
9.	Radiated Spurious Emissions	76
9.1.	Block diagram of test setup.....	76

9.2.	Limit	77
9.3.	Test procedure	78
9.4.	Test result	80
10.	Radiated Band Edge Compliance	84
10.1.	Block diagram of test setup	84
10.2.	Limit	84
10.3.	Test procedure	84
10.4.	Test result	84
11.	Power Line Conducted Emission	109
11.1.	Block diagram of test setup	109
11.2.	Power Line Conducted Emission Limits (Class B)	109
11.3.	Test procedure	109
11.4.	Test result	110
12.	Antenna Requirements	113
12.1.	Limit	113
12.2.	Result	113

Test Report Declare

Applicant	:	Mercku Inc.
Address	:	51 Breithaupt Street, Suite 100 Kitchener, ON Canada, N2H 5G5
Equipment under Test	:	M6 Mesh Wi-Fi Router
Model No.	:	M6
Trade Mark	:	MERCKU
Manufacturer	:	Mercku Technology (China), Inc.
Address	:	Block B1, Southern Software Park No.1 Software Road, Tangjia Zhuhai, Guangdong, China

Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test procedure used: ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&IC standards.

Report No:	DDT-R20110315-1E3		
Date of Receipt:	Nov. 11, 2020	Date of Test:	Nov. 11, 2020 ~ Feb. 07, 2021

Prepared By:

Talent Zhang

Talent Zhang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Feb. 07, 2021	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	Pass
Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (e)	Pass
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	Pass
Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: M6 Mesh Wi-Fi Router
Model Number	: M6
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 12V, 1.5A from external AC Adapter
Radio Technology	: IEEE 802.11b/g/n
FCC Operation Frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter Rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20, HT40: 6.5, 13, 19.5, 26, 39, 52, 58.5, 65 Mbps
Antenna Type	: Dedicated antenna, maximum PK gain: 3.5 dBi
Sample Type	: Series production
Serial Number	: N/A

Note: EUT is the ab. of equipment under test.

Antenna information			
	Ant1 gain	Ant2 gain	MIMO
IEEE 802.11b	3.5	3.5	/
IEEE 802.11g	3.5	3.5	/
IEEE 802.11n HT20	3.5	3.5	6.5
IEEE 802.11n HT40	3.5	3.5	6.5

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT


Description of Accessories	Manufacturer	Model number	Description	Remark
AC/DC ADAPTER	Shenzhen Keyu Power Supply Technology Co., Ltd.	KA1801A-1201500BS	N/A	INPUT: 100 – 240V ~ 50/60 Hz 0.55A OUTPUT: 12V 1.5A 18.0W

AC/DC ADAPTER	Shenzhen Keyu Power Supply Technology Co., Ltd.	KA1801A-1201500US	N/A	INPUT: 100 – 240V ~ 50/60 Hz 0.55A OUTPUT: 12V 1.5A 18.0W
AC/DC ADAPTER	Shenzhen Keyu Power Supply Technology Co., Ltd.	KA1801A-1201500EU	N/AS	INPUT: 100 – 240V ~ 50/60 Hz 0.55A OUTPUT: 12V 1.5A 18.0W

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	Lenovo Beijing Co. Ltd.	ThinkPad	FCC/CE	TP00015A

2.4. Block diagram of EUT configuration for test



EUT was connected to control to provide by manufacturer which has a standard LAN PORT connector to connect to Notebook, and the Notebook will run a special test software “QRCT.exe” provided by manufacturer to control EUT work in Continuous Tx mode (>98% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information					
Mode	Setting Tx Power		data rate (Mbps) (see Note)	Channel	Frequency (MHz)
	Ant1	Ant2			
IEEE 802.11b	16	16	11	LCH: CH1	2412
	16	16	11	MCH: CH6	2437
	16	16	11	HCH: CH11	2462
IEEE 802.11g	10	11	54	LCH: CH1	2412
	10	11	54	MCH: CH6	2437
	10	11	54	HCH: CH11	2462
IEEE 802.11n HT20	9	9	MCS 15	LCH: CH1	2412
	9	9	MCS 15	MCH: CH6	2437
	9	9	MCS 15	HCH: CH11	2462
IEEE 802.11n HT40	7	7	MCS 15	LCH: CH3	2422
	7	7	MCS 15	MCH: CH6	2437
	7	7	MCS 15	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com

CNAS Registration No. CNAS L6451; A2LA Certificate Number: 3870.01;

FCC Designation Number: CN1182; FCC Test Firm Registration Number: 540522

Industry Canada Site Registration Number: 10288A-1

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5 x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW<20 kHz)	3x10 ⁻⁸
Temperature	0.4°C
Humidity	2%
Uncertainty for Radiation Emission test (30 MHz-1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz-40 GHz)	4.10 dB (1-6 GHz)
	4.40 dB (6 GHz-18 GHz)
	3.54 dB (18 GHz-26 GHz)
	4.30 dB (26 GHz-40 GHz)

Uncertainty for Power line conduction emission test	3.32 dB (150 kHz-30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

4. Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	101272	Jul. 01, 2020	1 Year
Spectrum analyzer	Agilent	N9020D	MY49100362	Sep. 28, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150010	Jul. 01, 2020	1 Year
Power Sensor	Agilent	U2021XA	MY55150011	Jul. 01, 2020	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Apr. 25, 2020	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jul. 01, 2020	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
<input checked="" type="checkbox"/> RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Spectrum analyzer	Agilent	N9020D	MY49100362	Sep. 28, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jul. 01, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jul. 01, 2020	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jul. 01, 2020	1 Year
DC Power Source	MATRIS	MPS-3005L-3	D813058W	Apr. 25, 2020	1 Year
RF Cable	Micable	C10-01-01-1	100309	Sep. 28, 2020	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jul. 01, 2020	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
<input type="checkbox"/> Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year

Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 11, 2020	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1 M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
<input checked="" type="checkbox"/> Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jul. 01, 2020	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 11, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	Apr. 11, 2020	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
<input checked="" type="checkbox"/> Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
<input type="checkbox"/> Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jul. 01, 2020	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

5. 6dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

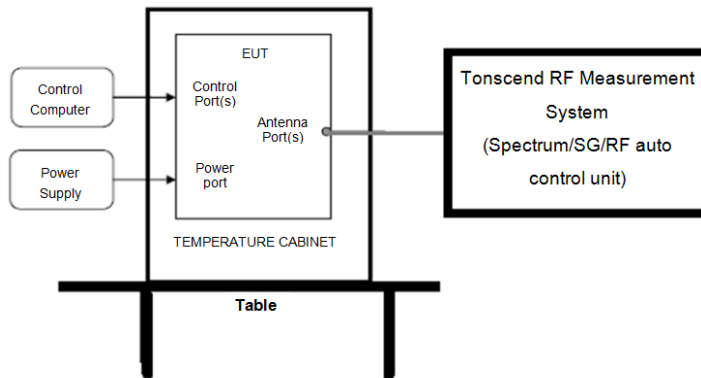

5.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

5.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW:	300 kHz
VBW:	1 MHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4. Test result


Test Mode	Test	Ant	6dB Bandwidth (MHz)	Limit (MHz)	Verdict
11B	2412	Ant1	7.12	0.5	Pass
11B	2412	Ant2	7.68	0.5	Pass
11B	2437	Ant1	7.44	0.5	Pass
11B	2437	Ant2	7.40	0.5	Pass
11B	2462	Ant1	7.40	0.5	Pass
11B	2462	Ant2	7.36	0.5	Pass
11G	2412	Ant1	16.56	0.5	Pass
11G	2412	Ant2	16.56	0.5	Pass
11G	2437	Ant1	16.56	0.5	Pass
11G	2437	Ant2	16.56	0.5	Pass
11G	2462	Ant1	16.60	0.5	Pass
11G	2462	Ant2	16.52	0.5	Pass
11N20MIMO	2412	Ant1	17.68	0.5	Pass
11N20MIMO	2412	Ant2	17.24	0.5	Pass
11N20MIMO	2437	Ant1	16.40	0.5	Pass
11N20MIMO	2437	Ant2	17.28	0.5	Pass
11N20MIMO	2462	Ant1	17.08	0.5	Pass
11N20MIMO	2462	Ant2	17.60	0.5	Pass
11N40MIMO	2422	Ant1	36.48	0.5	Pass
11N40MIMO	2422	Ant2	36.48	0.5	Pass
11N40MIMO	2437	Ant1	36.00	0.5	Pass
11N40MIMO	2437	Ant2	36.48	0.5	Pass
11N40MIMO	2452	Ant1	36.00	0.5	Pass
11N40MIMO	2452	Ant2	36.48	0.5	Pass

Test Mode	Test	Ant	99% OBW (MHz)	Limit (MHz)	Verdict
11B	2412	Ant1	12.92	---	Pass
11B	2412	Ant2	12.84	---	Pass
11B	2437	Ant1	12.84	---	Pass
11B	2437	Ant2	12.80	---	Pass
11B	2462	Ant1	12.80	---	Pass
11B	2462	Ant2	12.84	---	Pass
11G	2412	Ant1	16.84	---	Pass
11G	2412	Ant2	16.76	---	Pass
11G	2437	Ant1	16.80	---	Pass
11G	2437	Ant2	16.76	---	Pass


11G	2462	Ant1	16.84	---	Pass
11G	2462	Ant2	16.76	---	Pass
11N20MIMO	2412	Ant1	17.68	---	Pass
11N20MIMO	2412	Ant2	17.72	---	Pass
11N20MIMO	2437	Ant1	17.72	---	Pass
11N20MIMO	2437	Ant2	17.72	---	Pass
11N20MIMO	2462	Ant1	17.76	---	Pass
11N20MIMO	2462	Ant2	17.68	---	Pass
11N40MIMO	2422	Ant1	36.48	---	Pass
11N40MIMO	2422	Ant2	36.40	---	Pass
11N40MIMO	2437	Ant1	36.48	---	Pass
11N40MIMO	2437	Ant2	36.48	---	Pass
11N40MIMO	2452	Ant1	36.48	---	Pass
11N40MIMO	2452	Ant2	36.40	---	Pass

5.5. original test data


6dB Bandwidth:

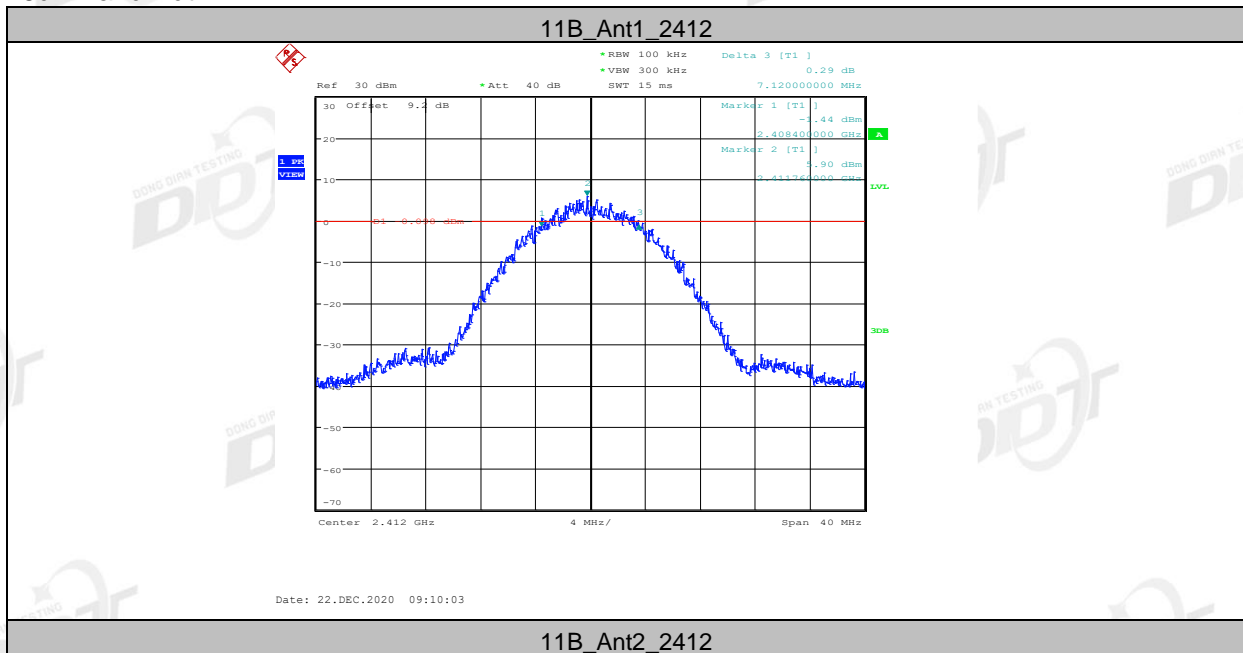


11B_Ant2_2412

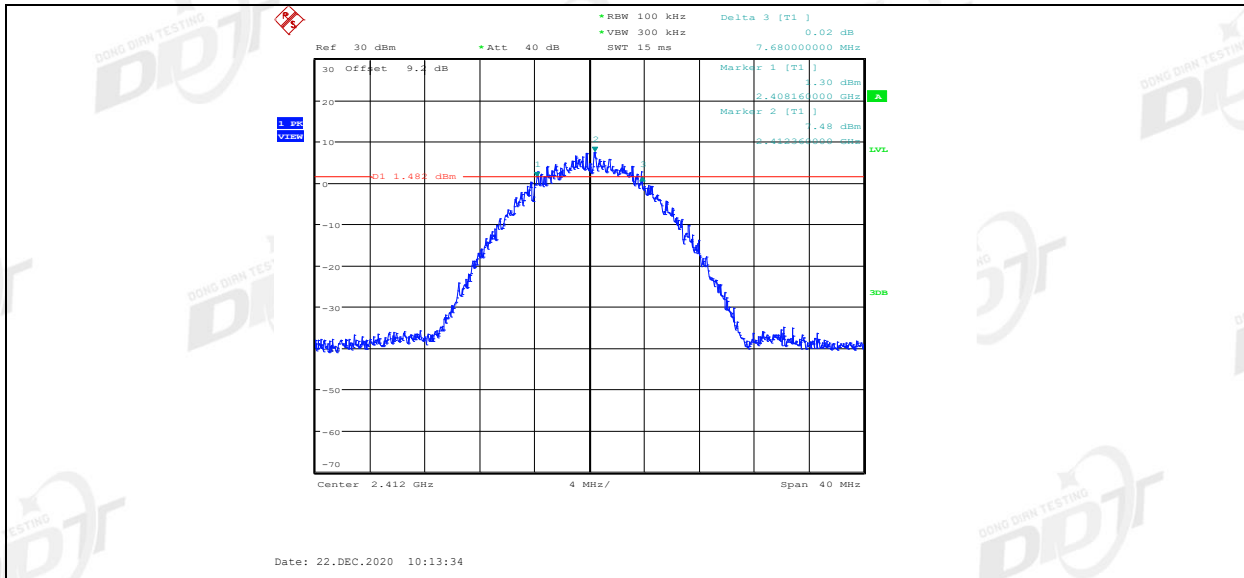


11B_Ant1_2437

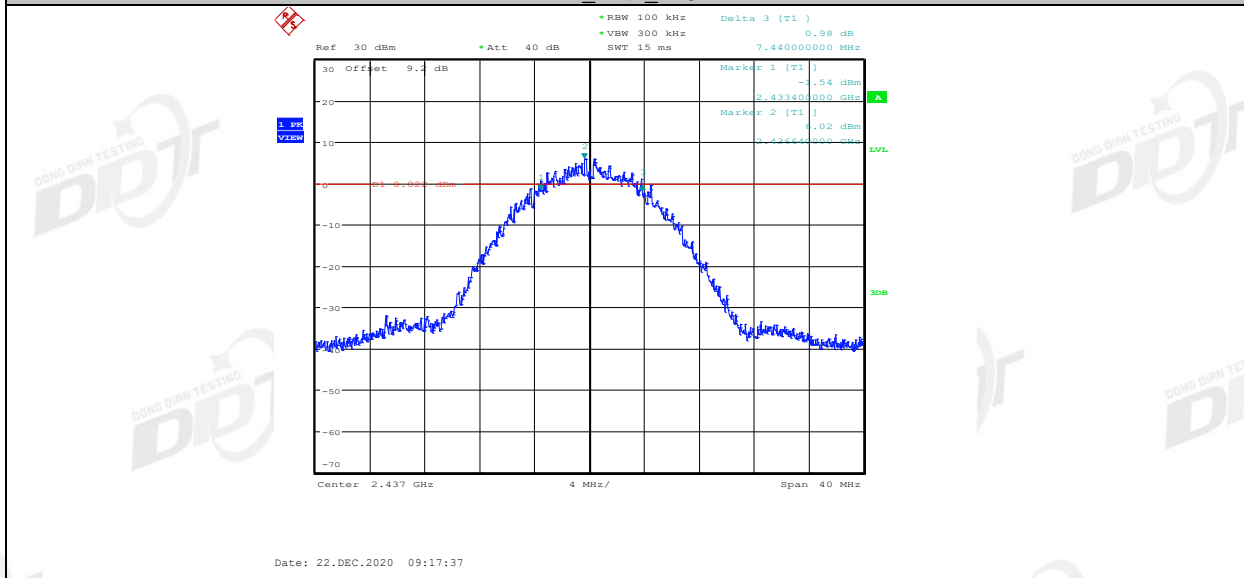


11B_Ant2_2437

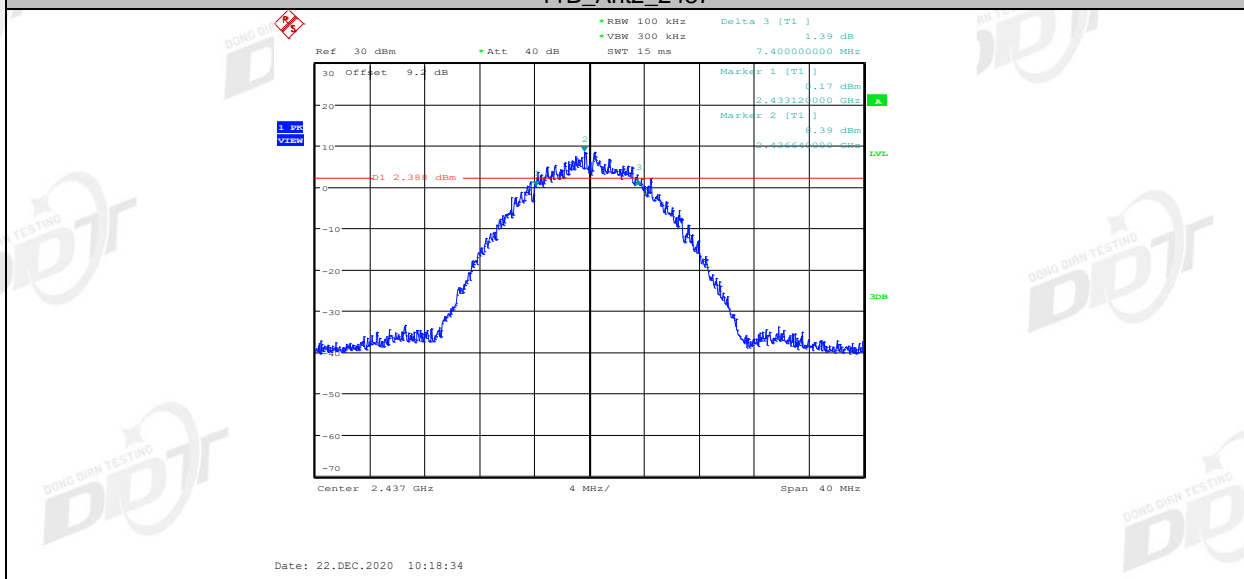


11B_Ant1_2462

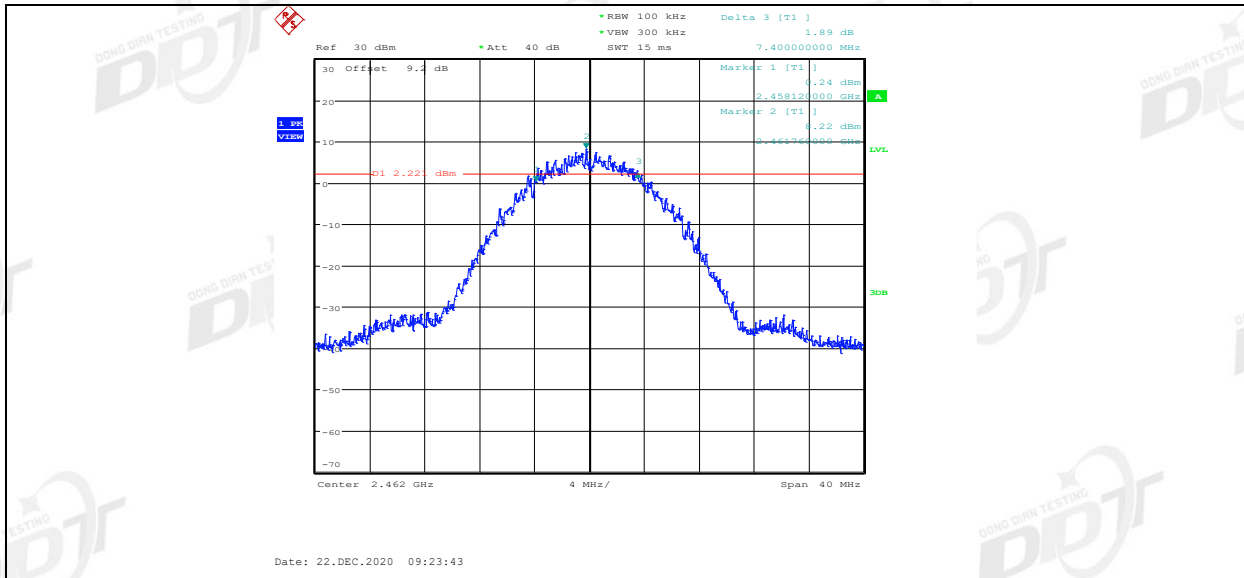


11B_Ant2_2462

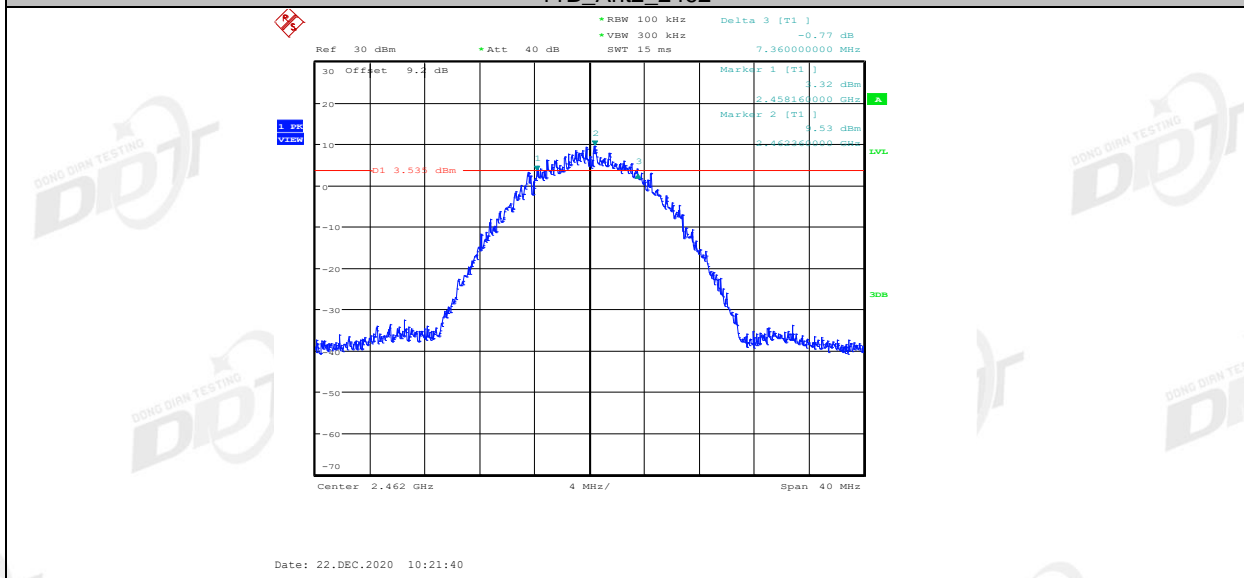


11G_Ant1_2412

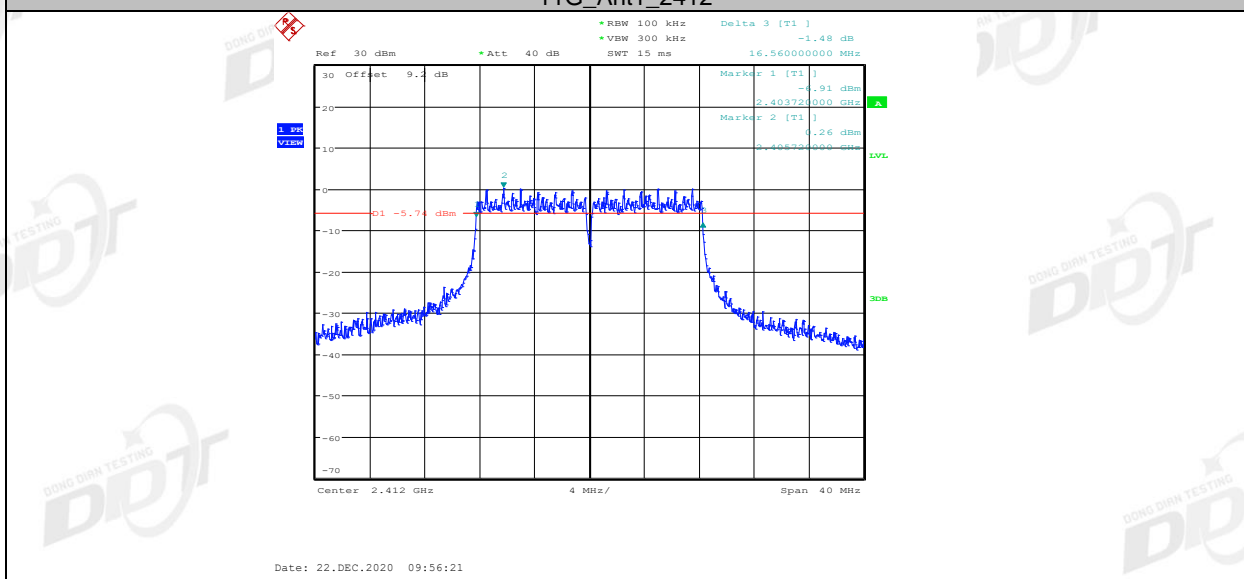


11G_Ant2_2412

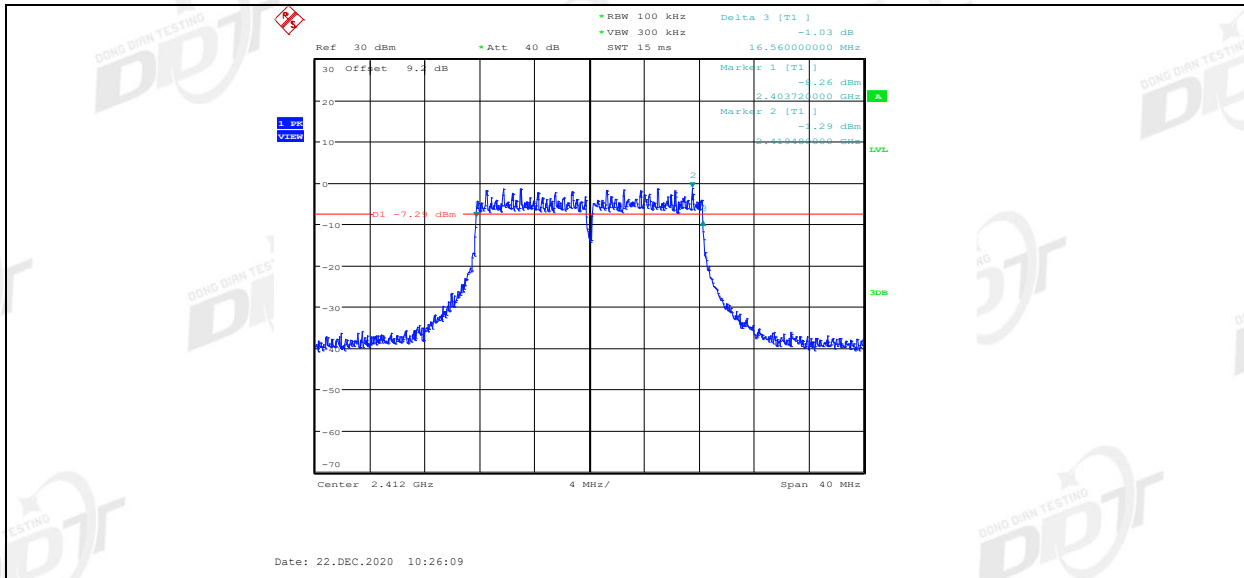


11G_Ant1_2437

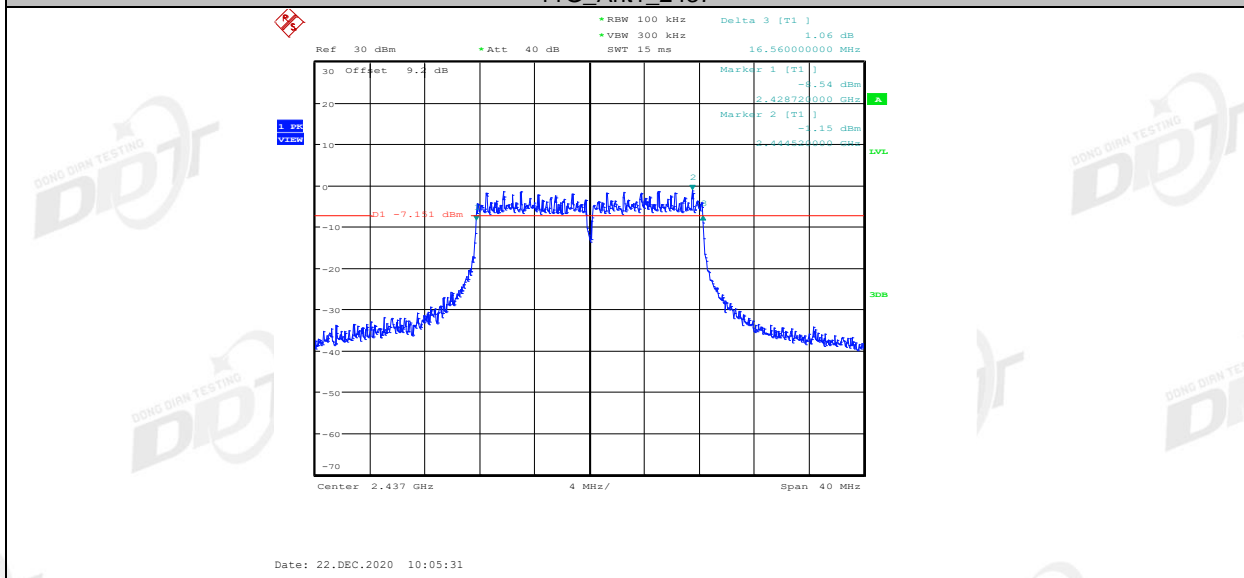


11G_Ant2_2437

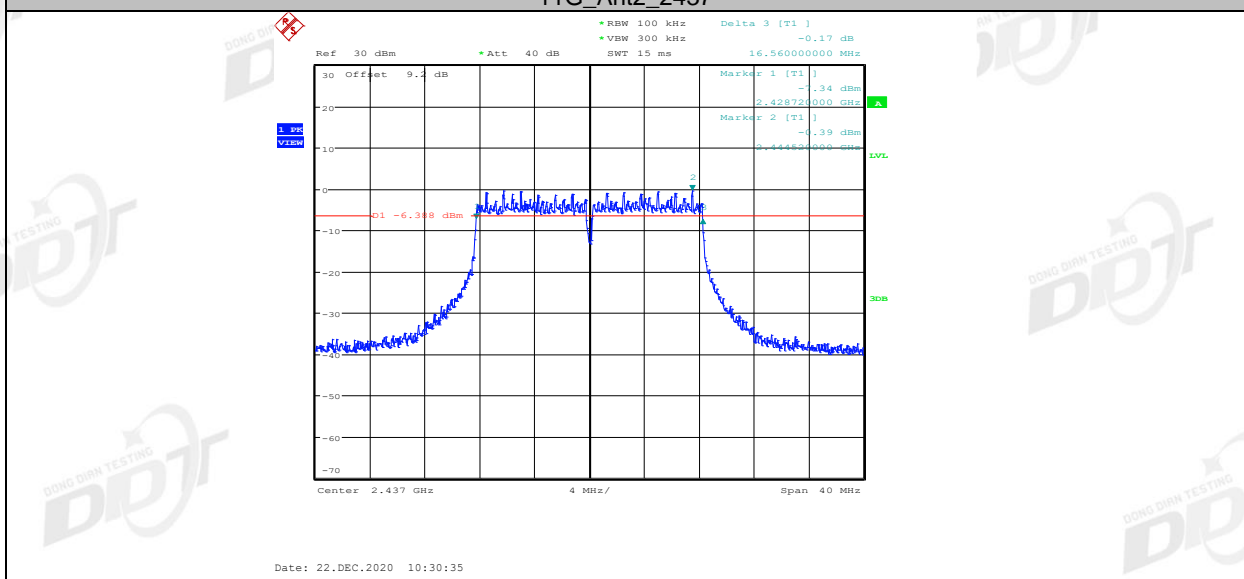


11G_Ant1_2462

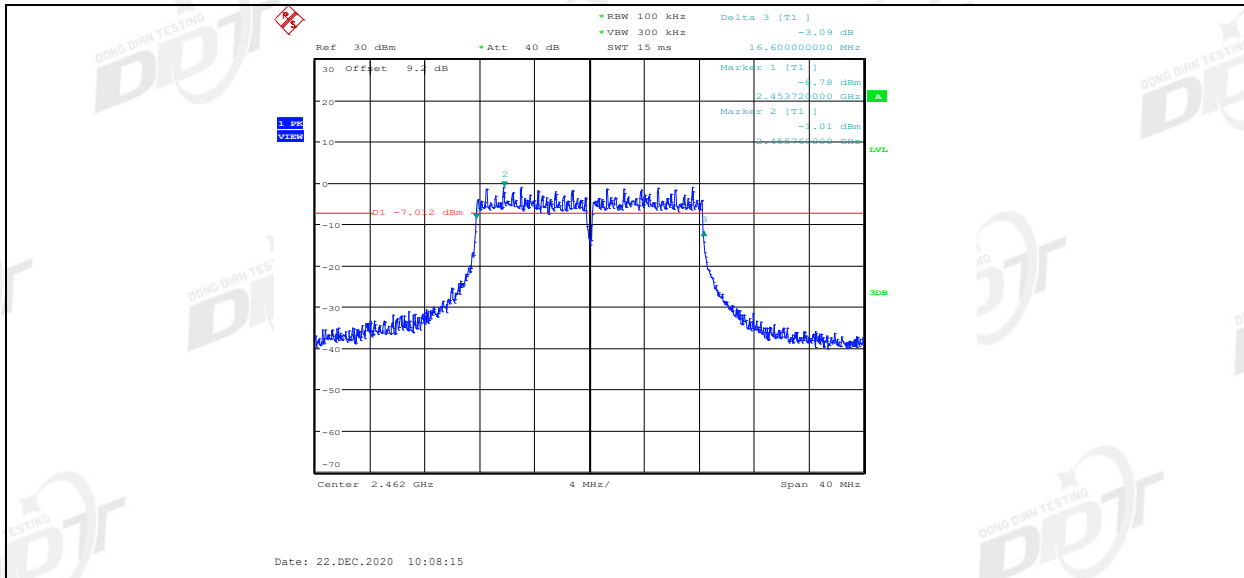


11G_Ant2_2462

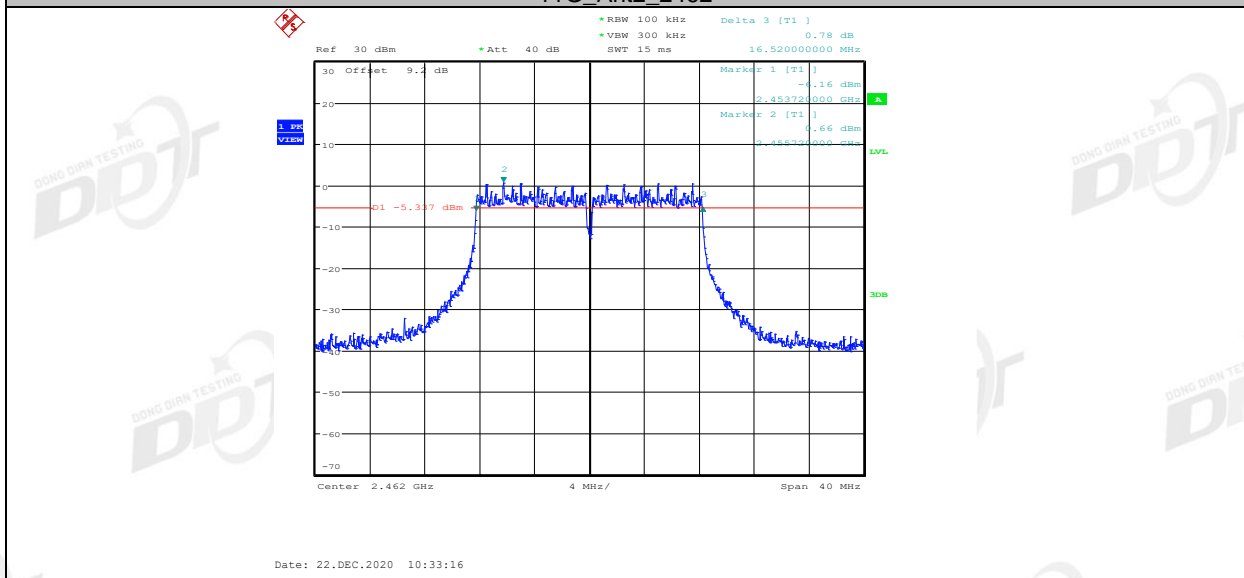


11N20MIMO_Ant1_2412

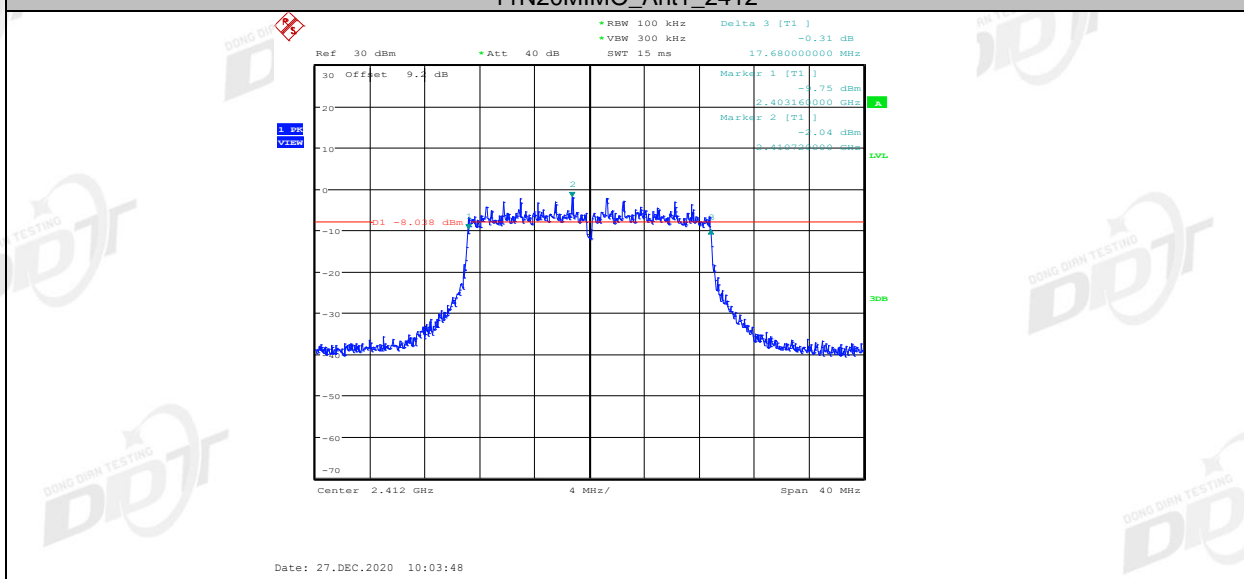


11N20MIMO_Ant2_2412

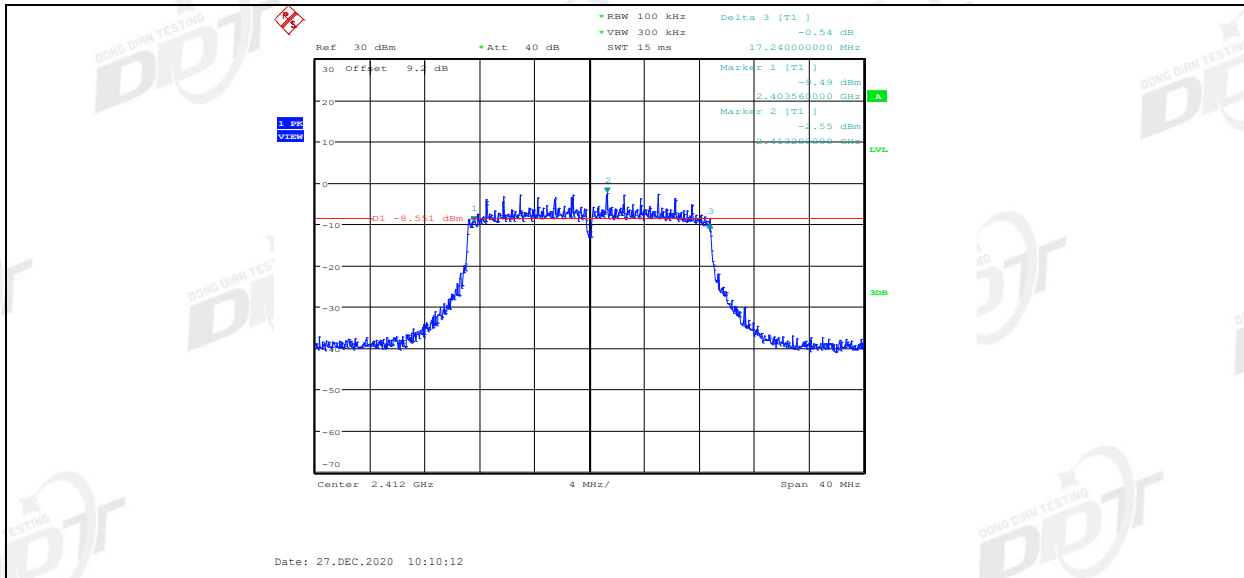


11N20MIMO_Ant1_2437

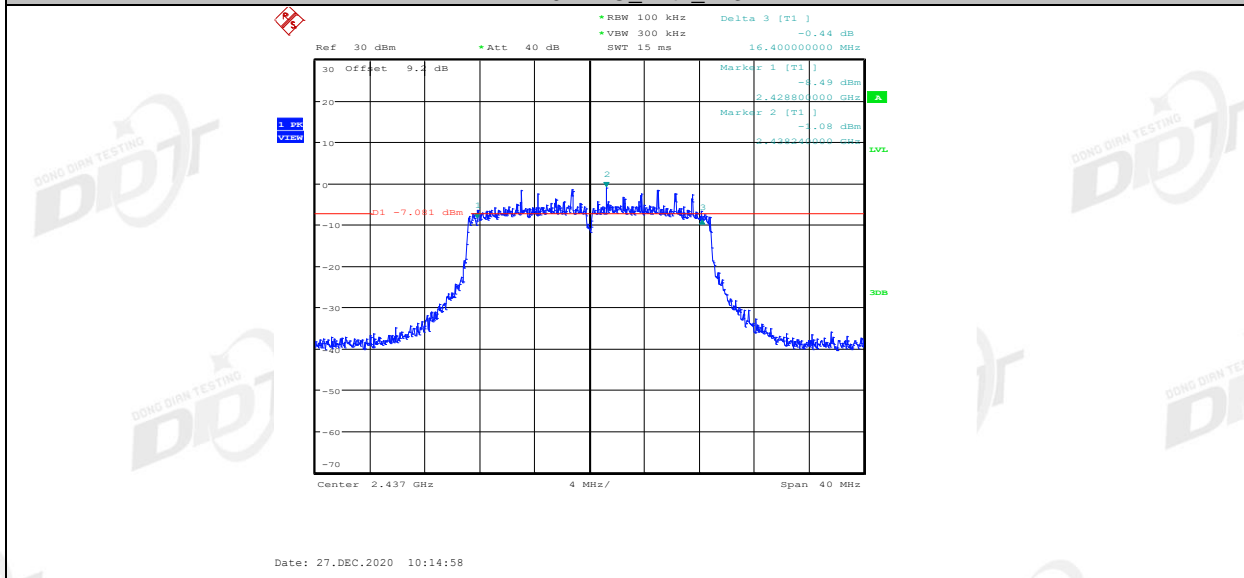


11N20MIMO_Ant2_2437

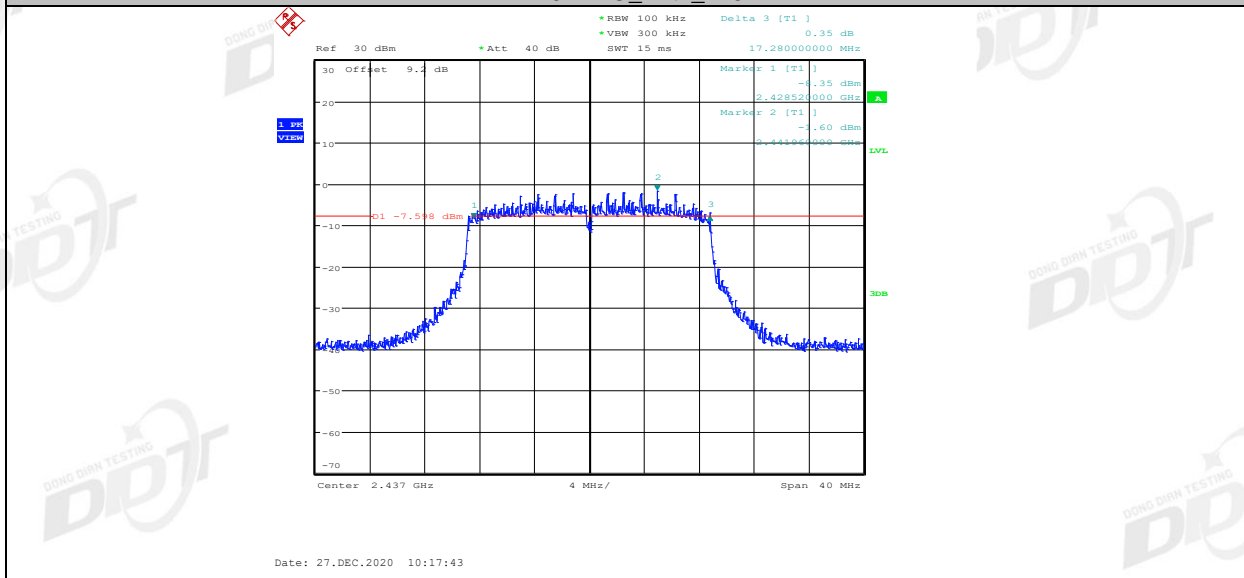


11N20MIMO_Ant1_2462

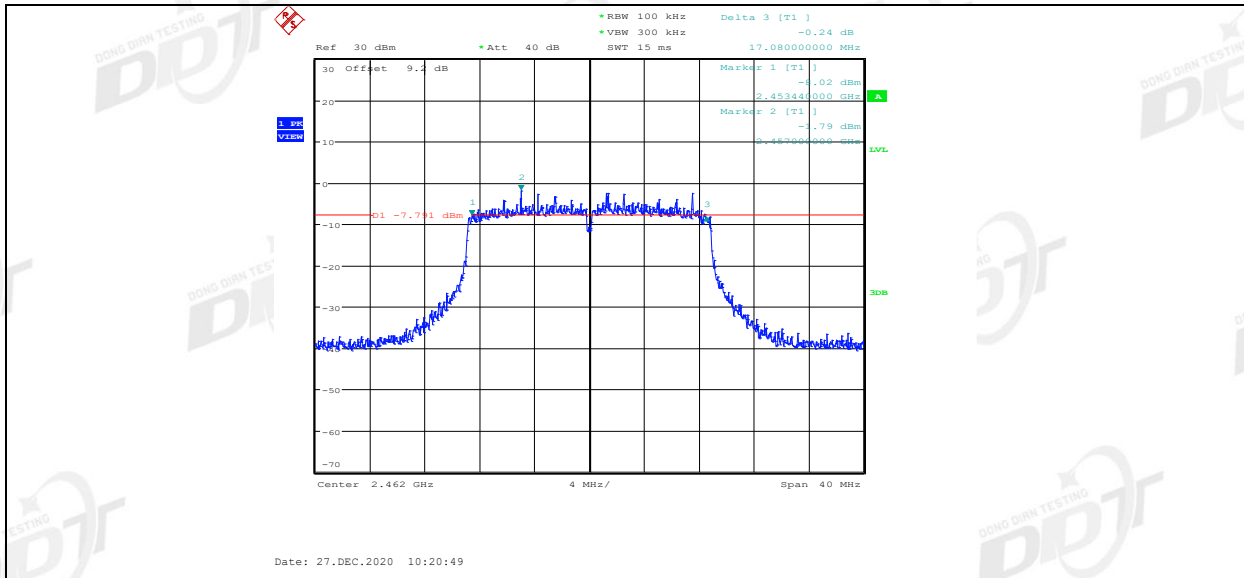


11N20MIMO_Ant2_2462

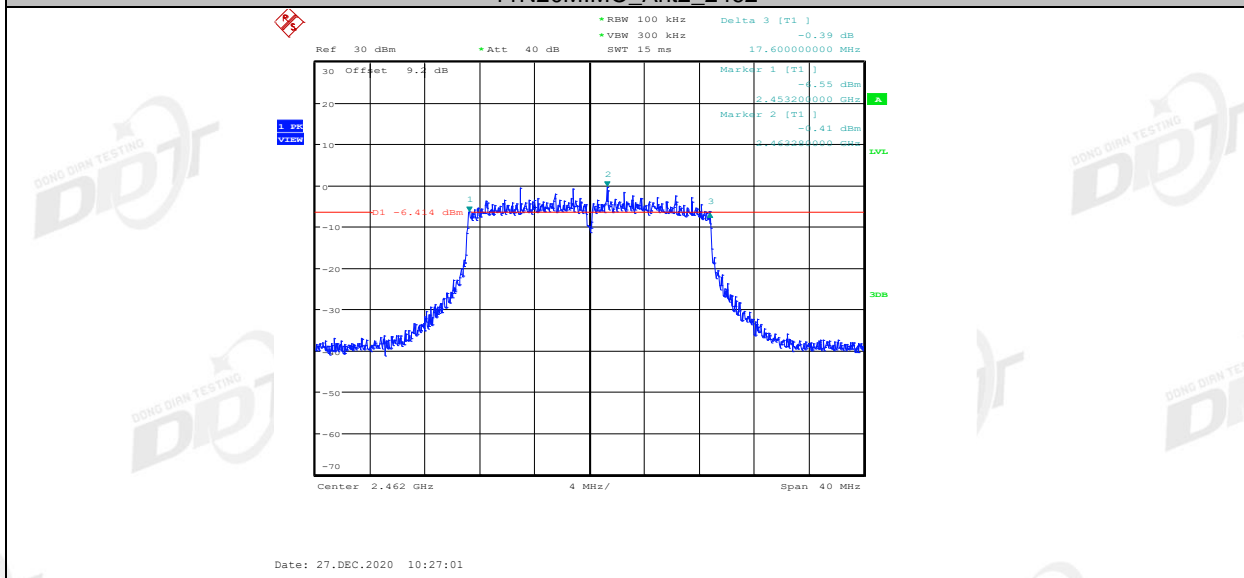


11N40MIMO_Ant1_2422

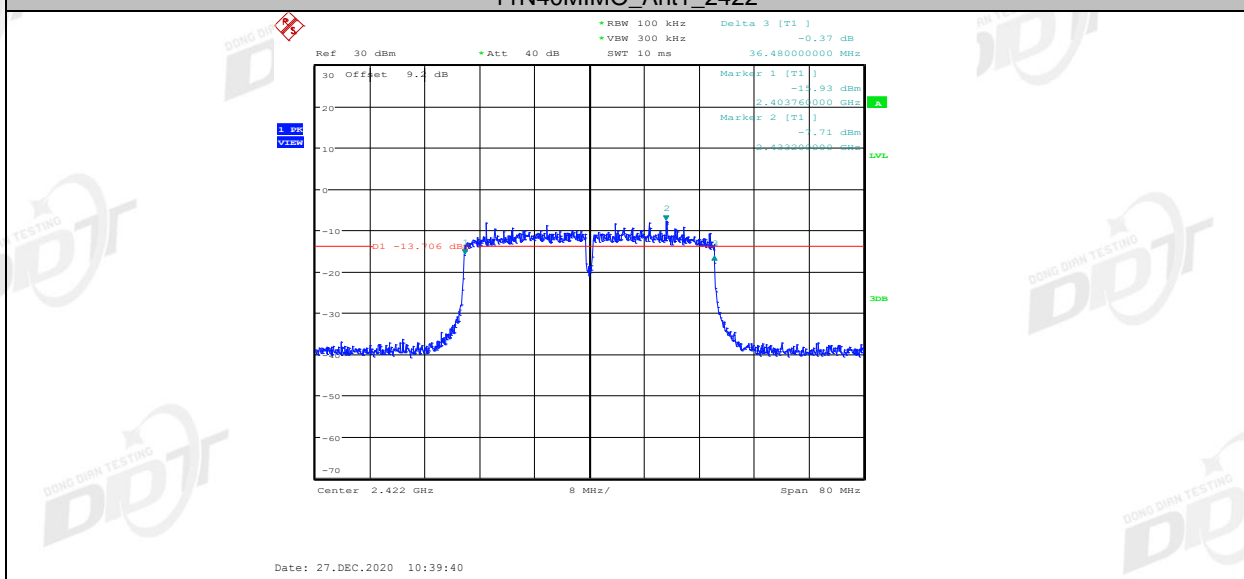


11N40MIMO_Ant2_2422

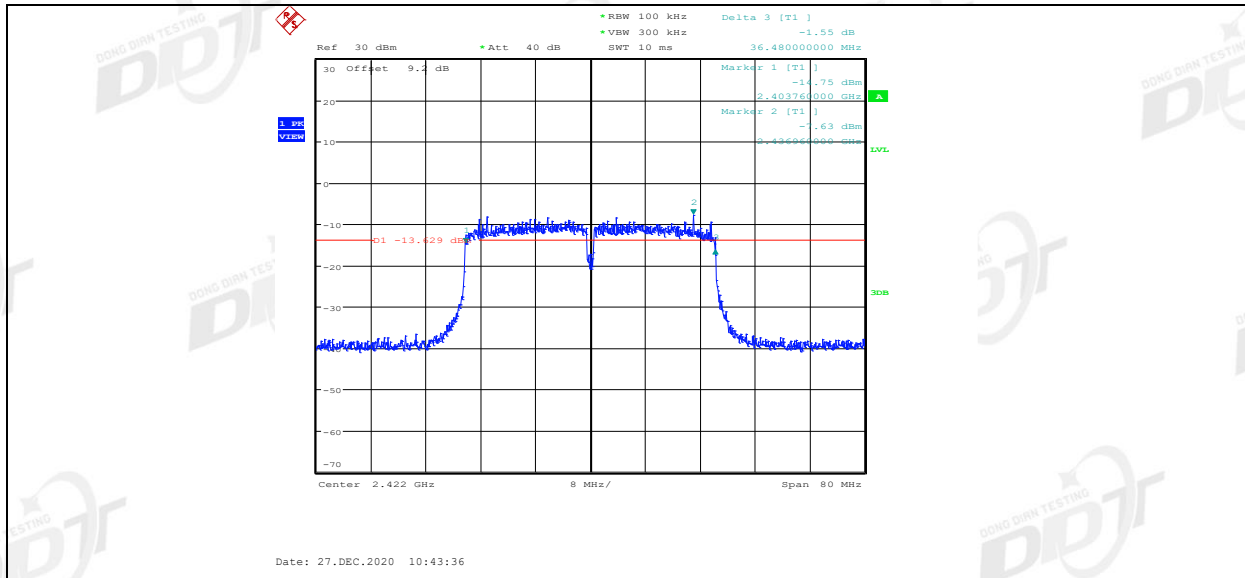


11N40MIMO_Ant1_2437

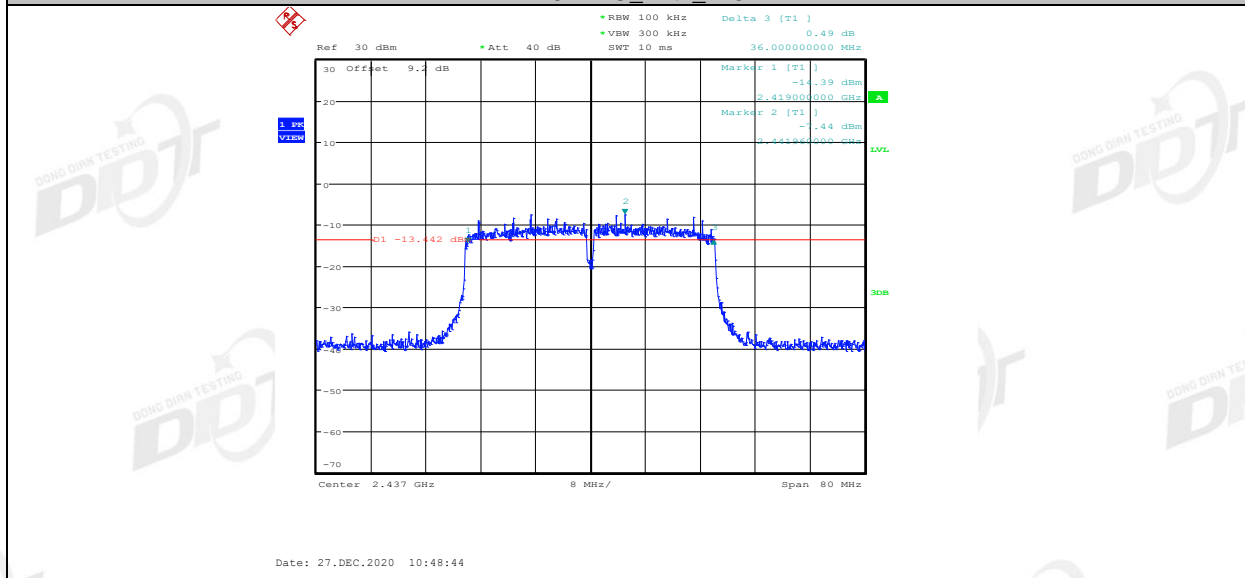


11N40MIMO_Ant2_2437

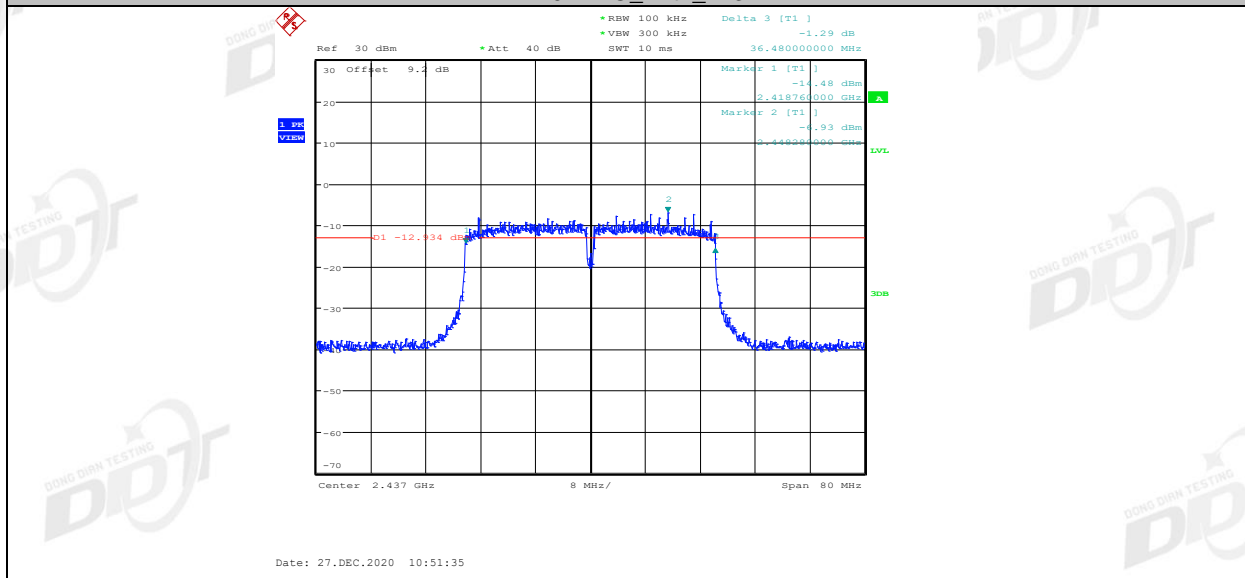


11N40MIMO_Ant1_2452

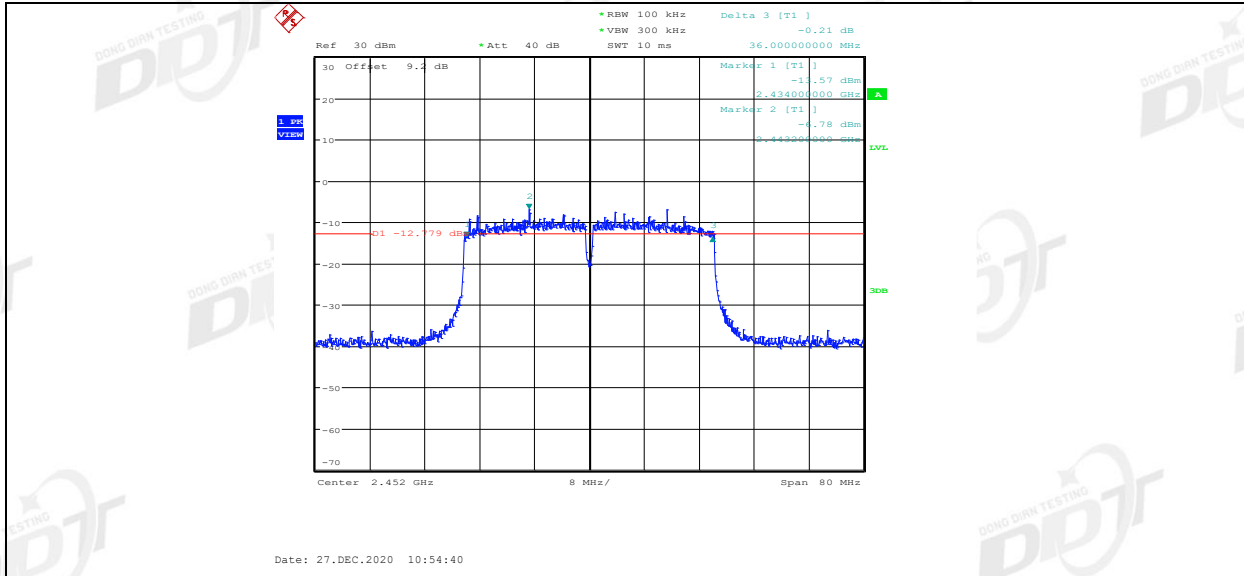


11N40MIMO_Ant2_2452

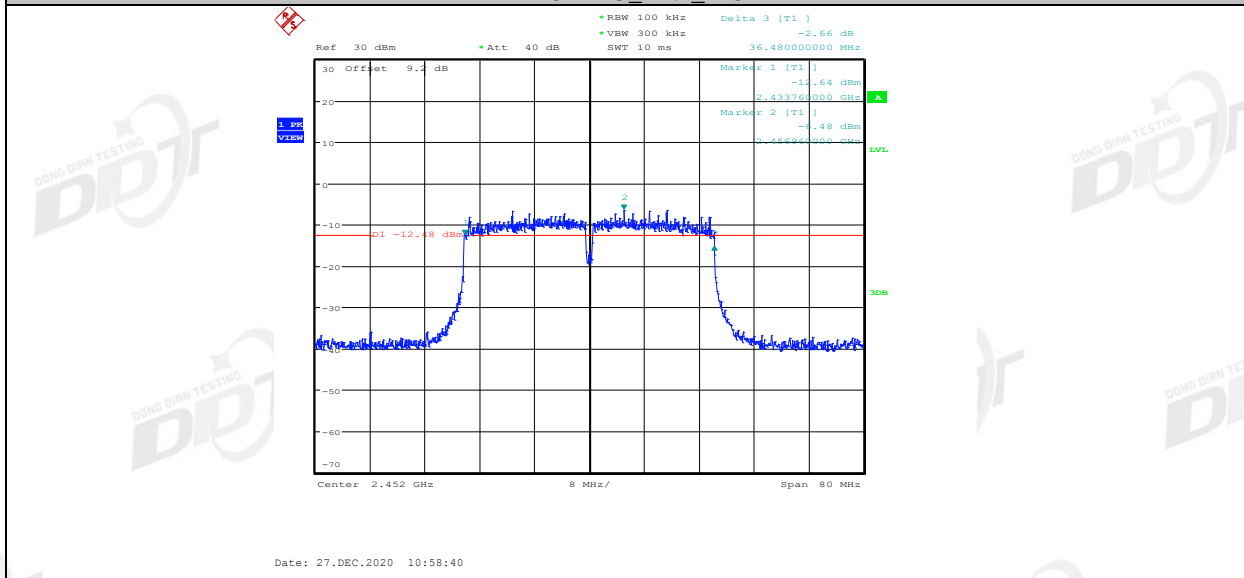


99% Bandwidth

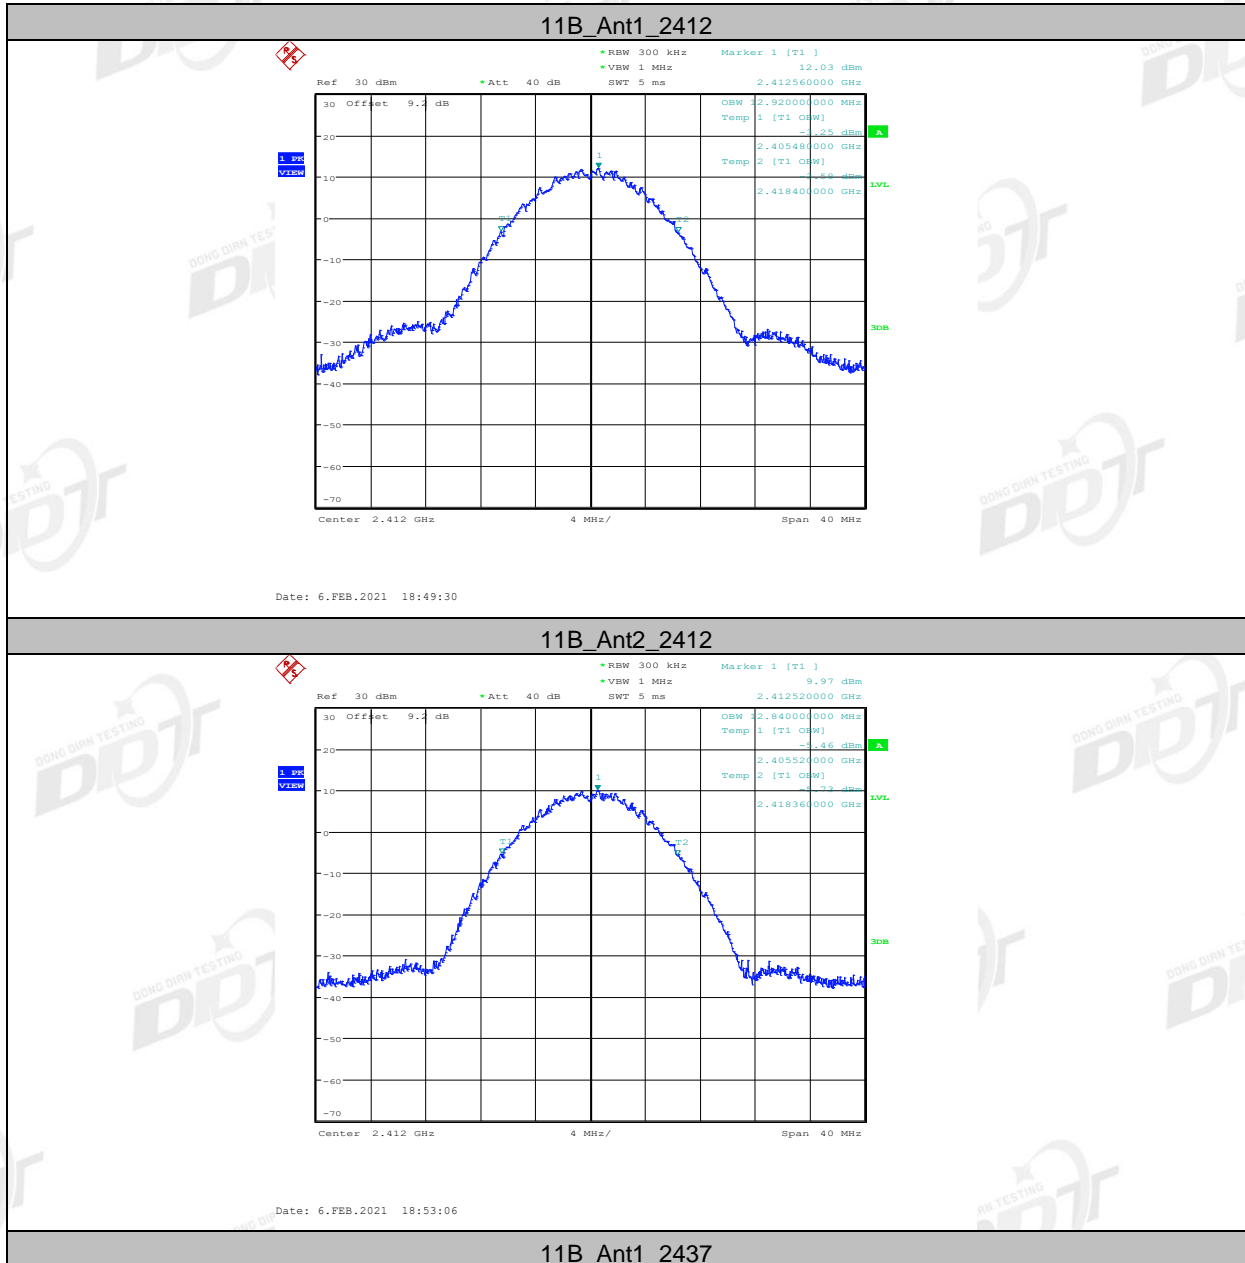


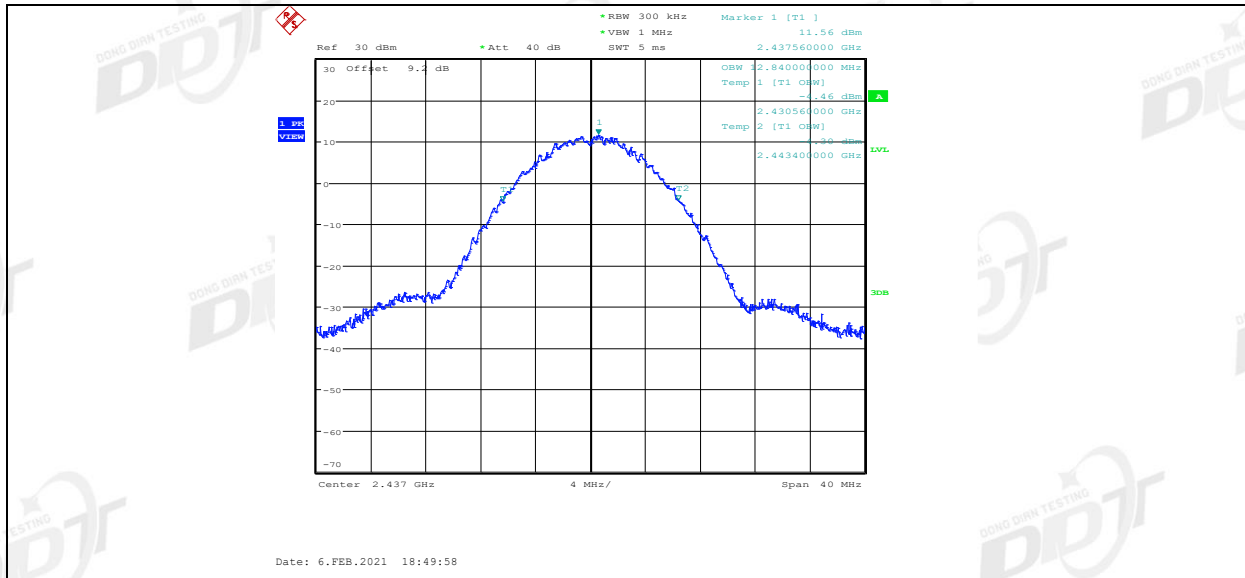


11B_Ant2_2437

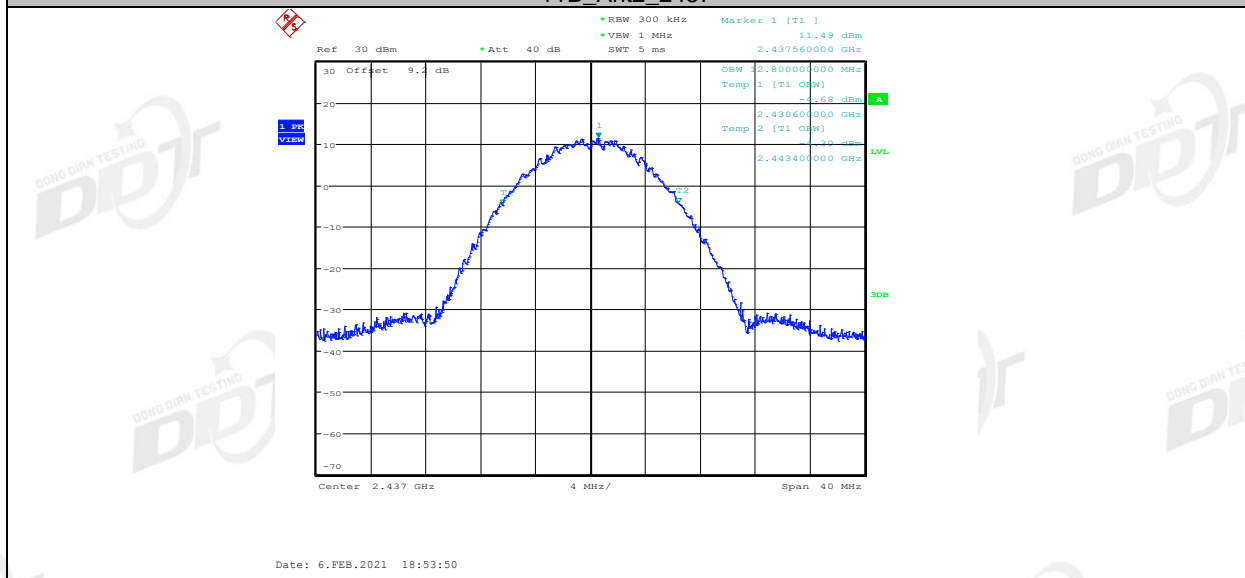


11B_Ant1_2462

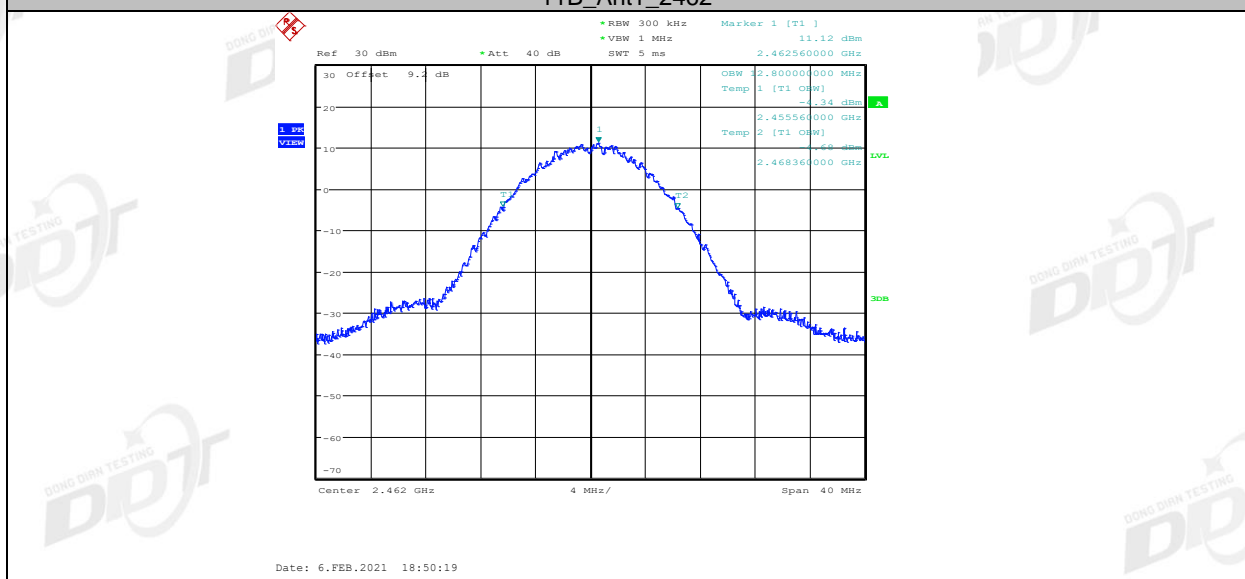


11B_Ant2_2462

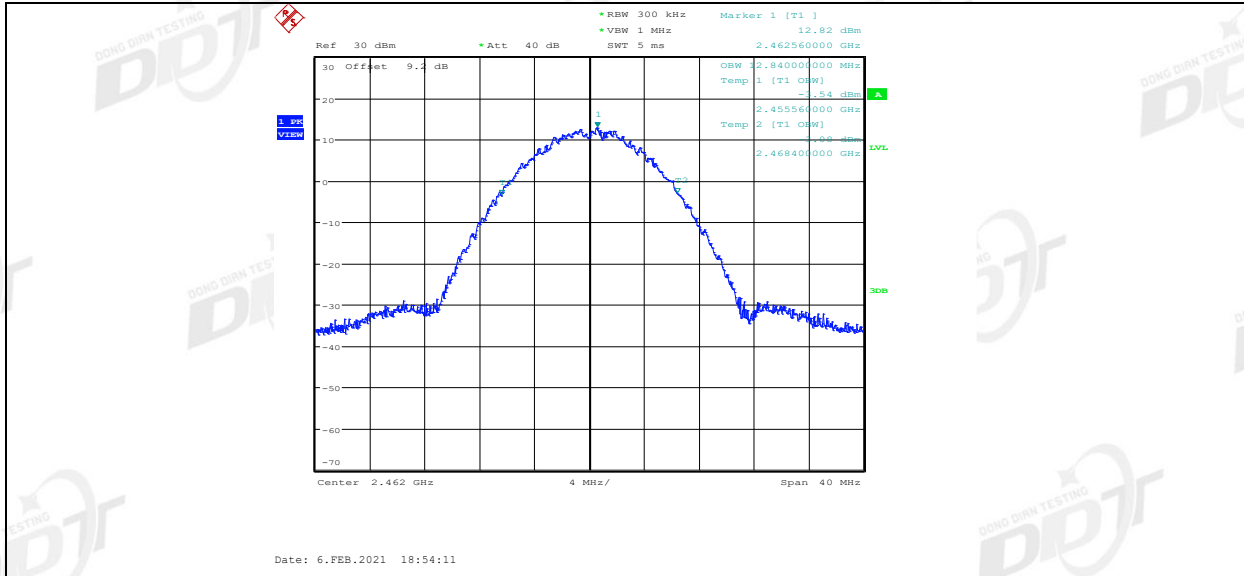


11G_Ant1_2412

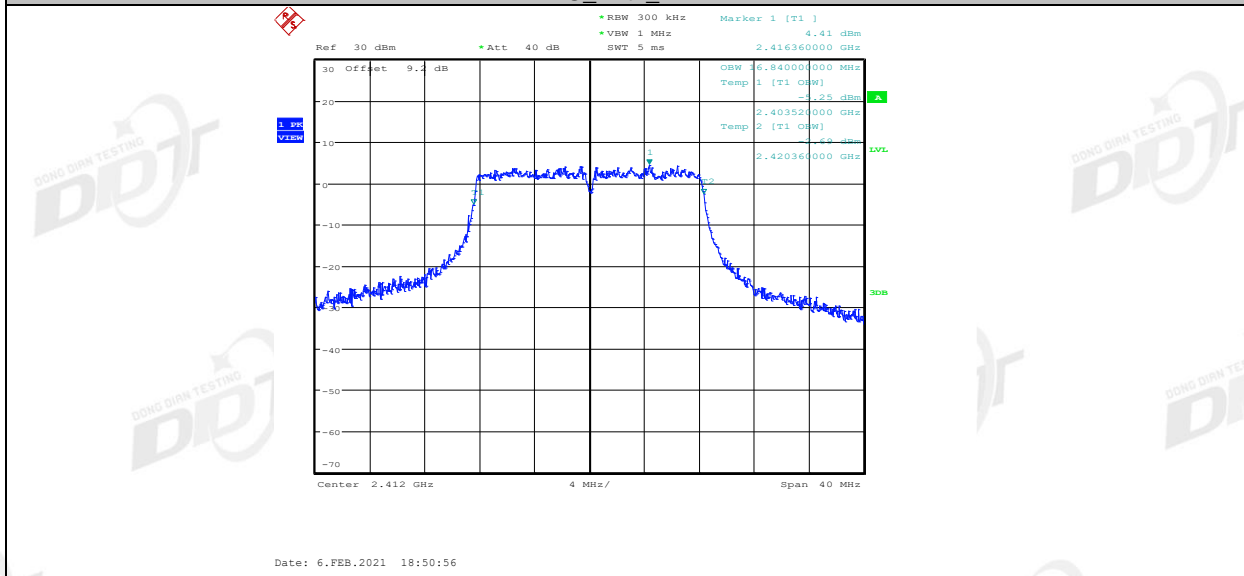


11G_Ant2_2412

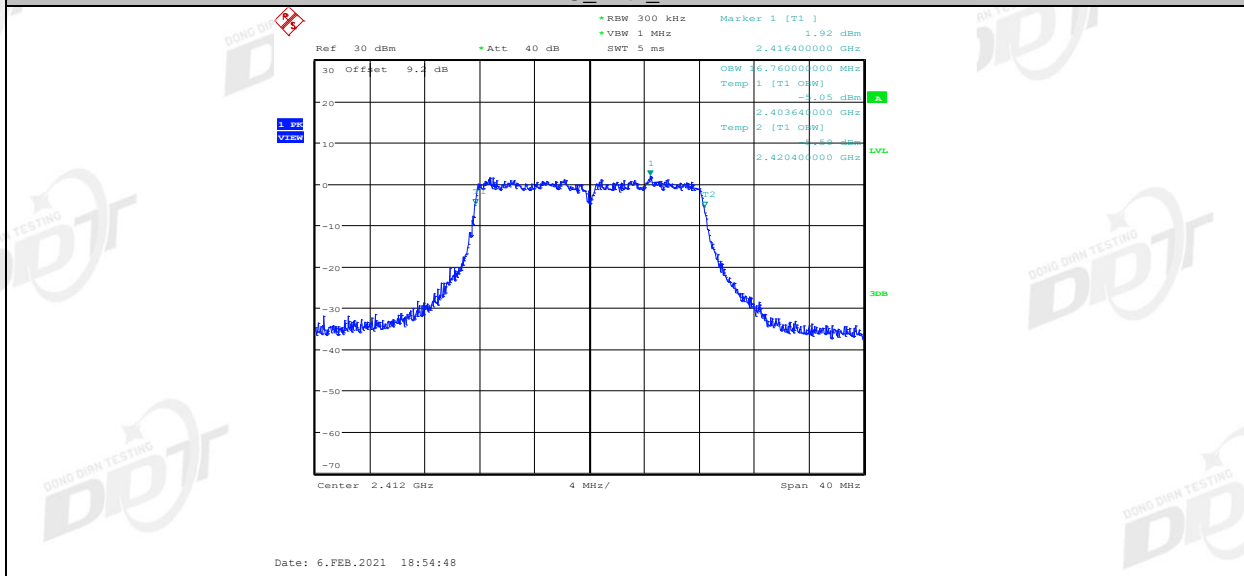


11G_Ant1_2437

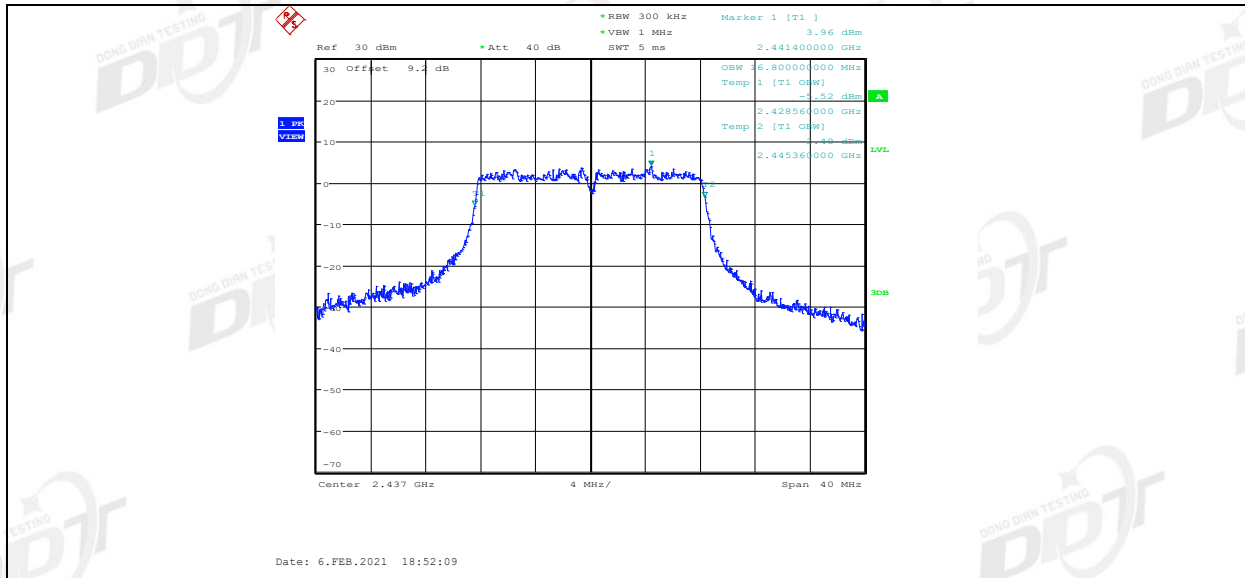


11G_Ant2_2437

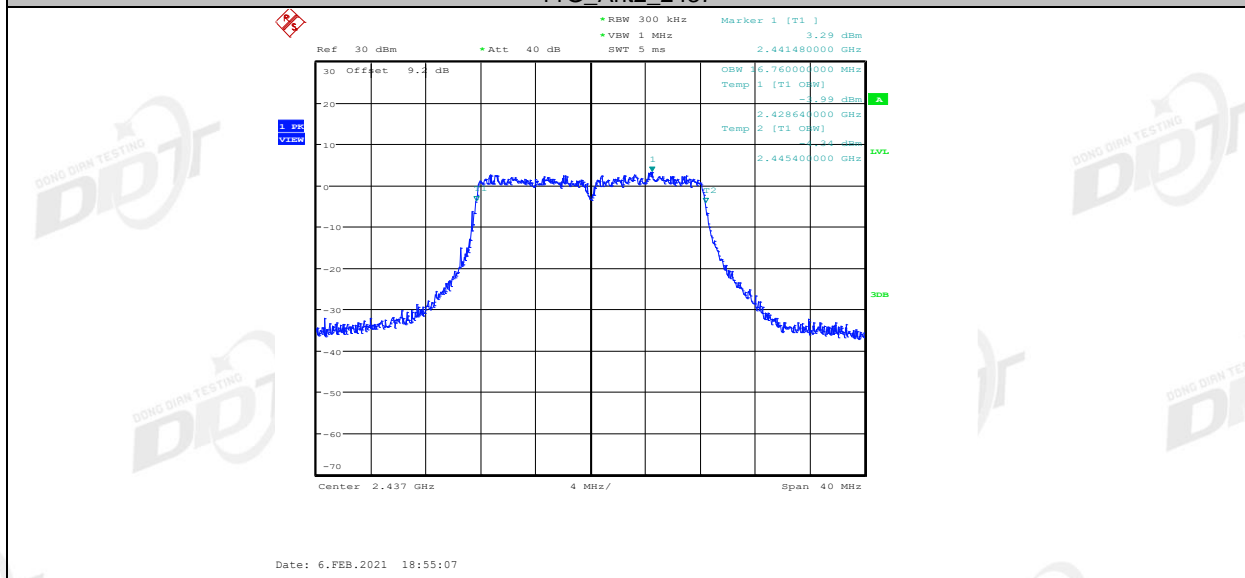


11G_Ant1_2462

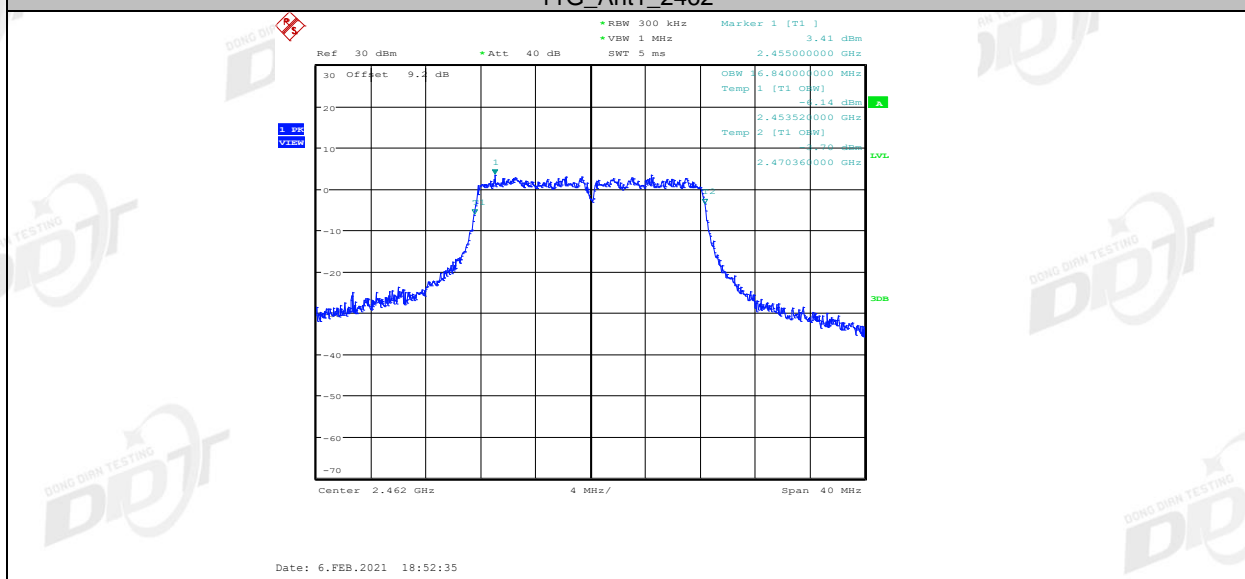


11G_Ant2_2462

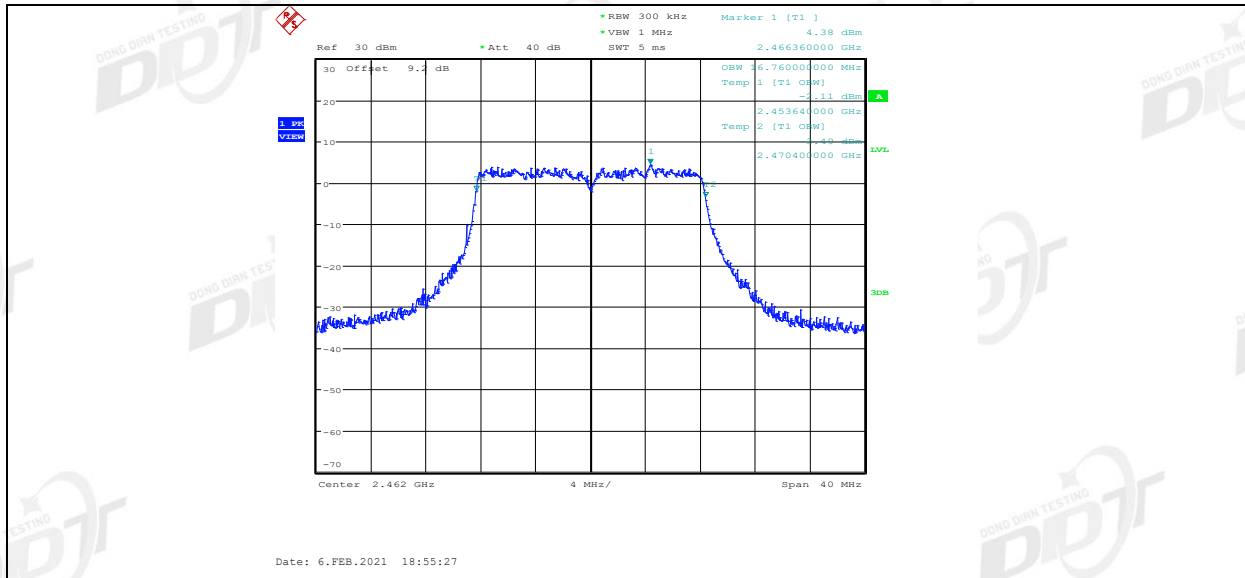


11N20MIMO_Ant1_2412

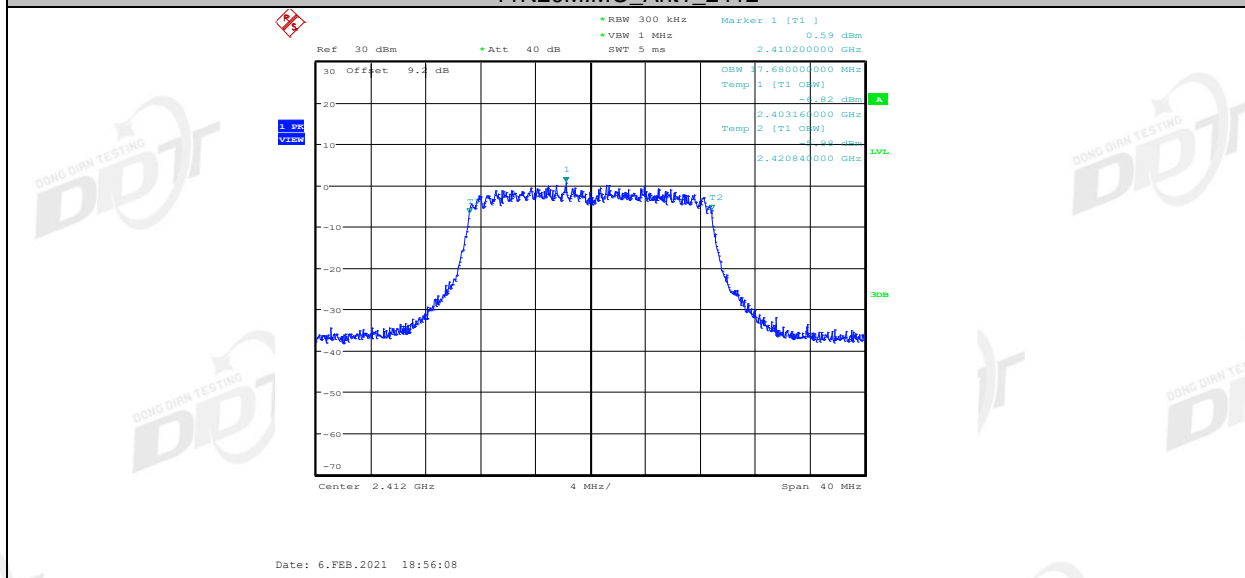


11N20MIMO_Ant2_2412

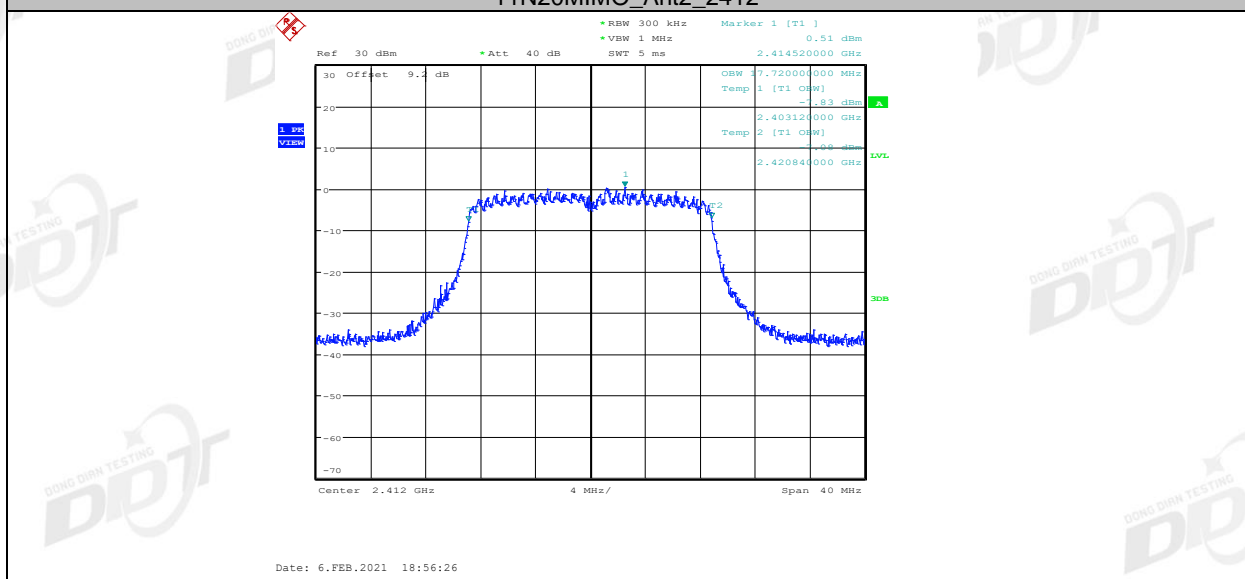


11N20MIMO_Ant1_2437

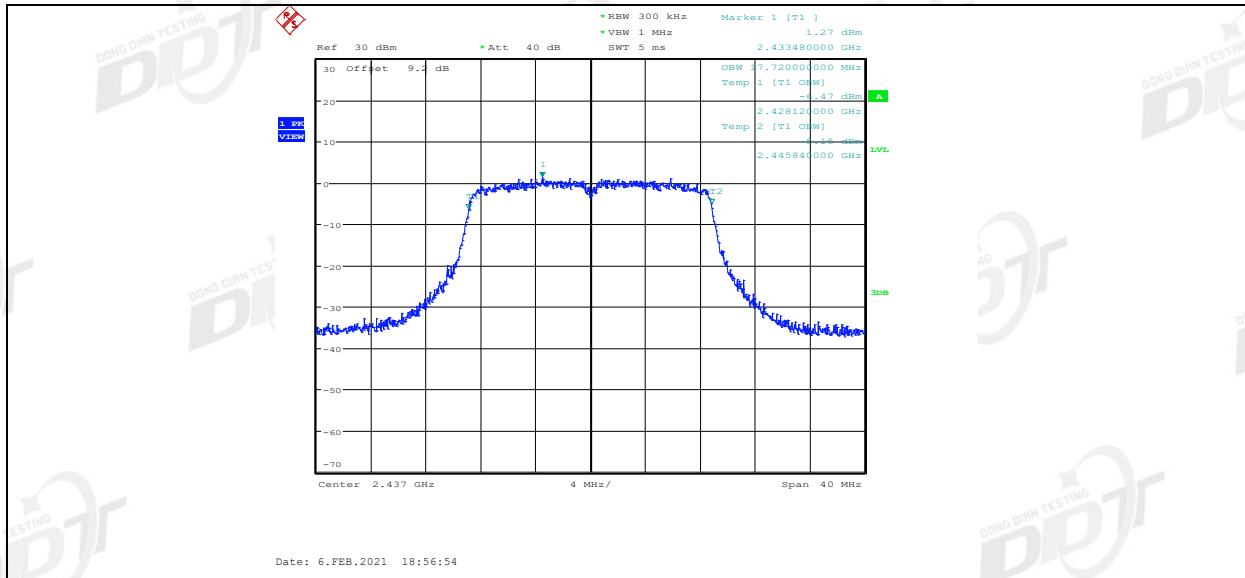


11N20MIMO_Ant2_2437

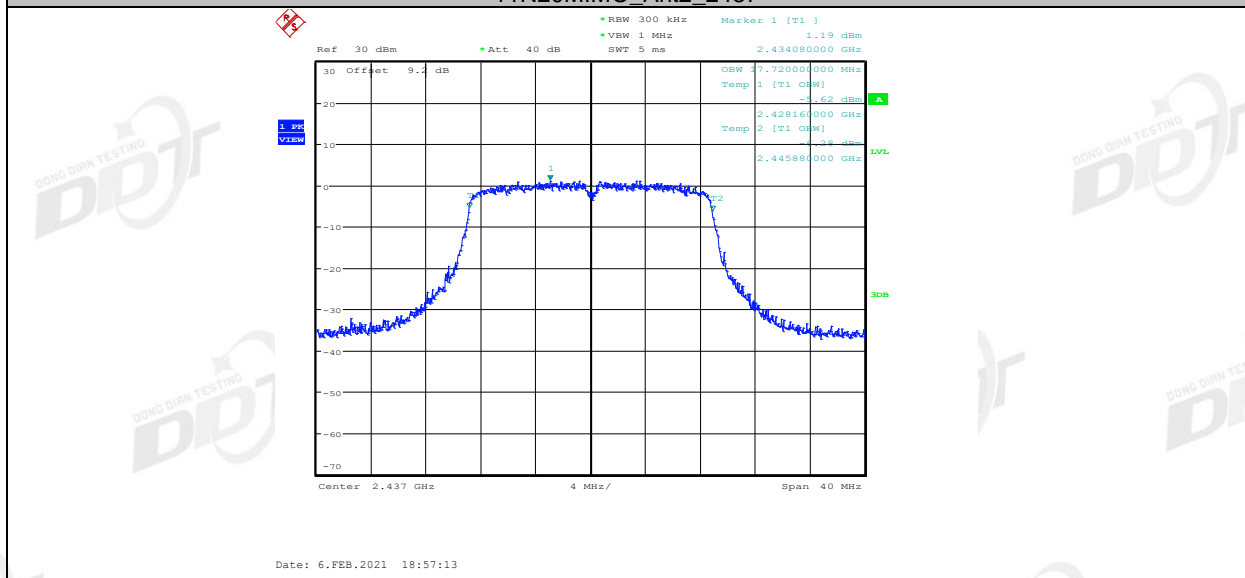


11N20MIMO_Ant1_2462

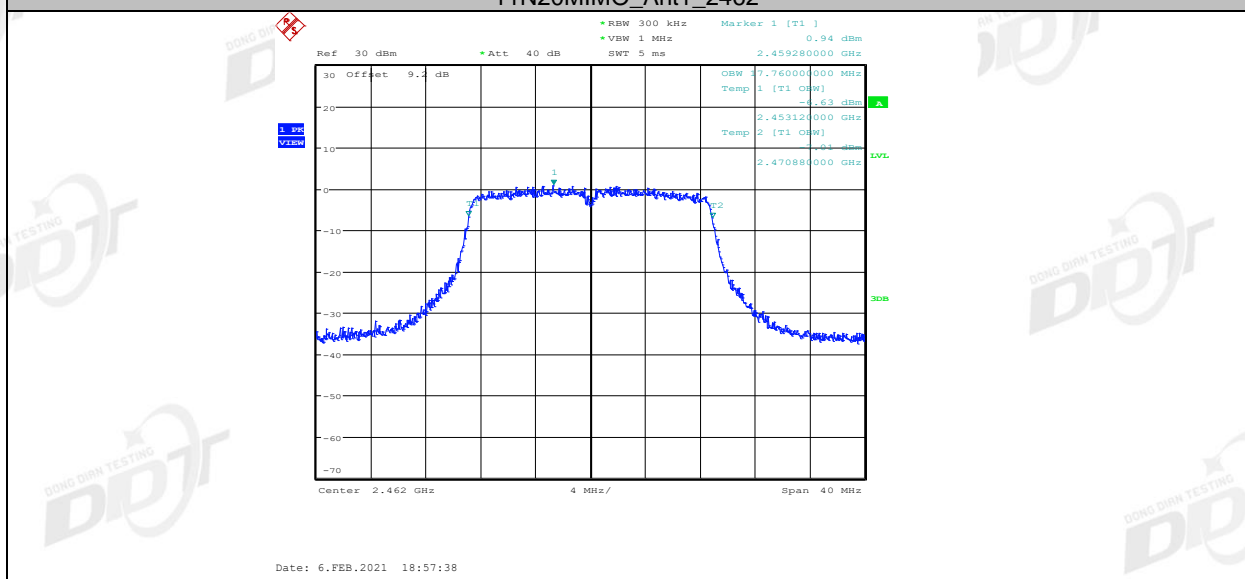


11N20MIMO_Ant2_2462

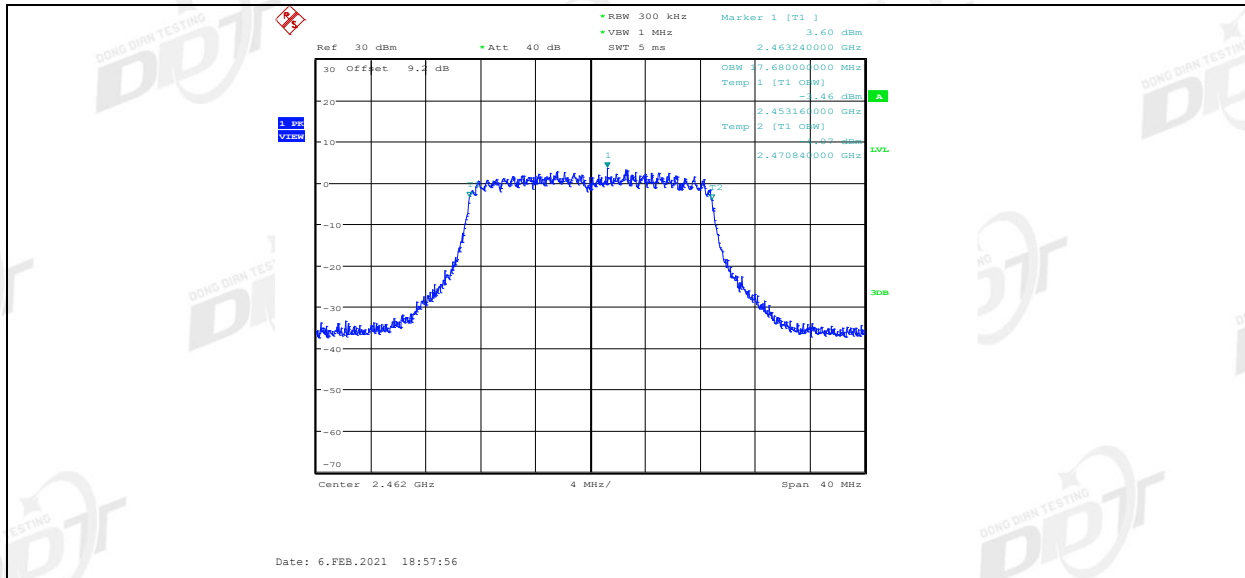


11N40MIMO_Ant1_2422

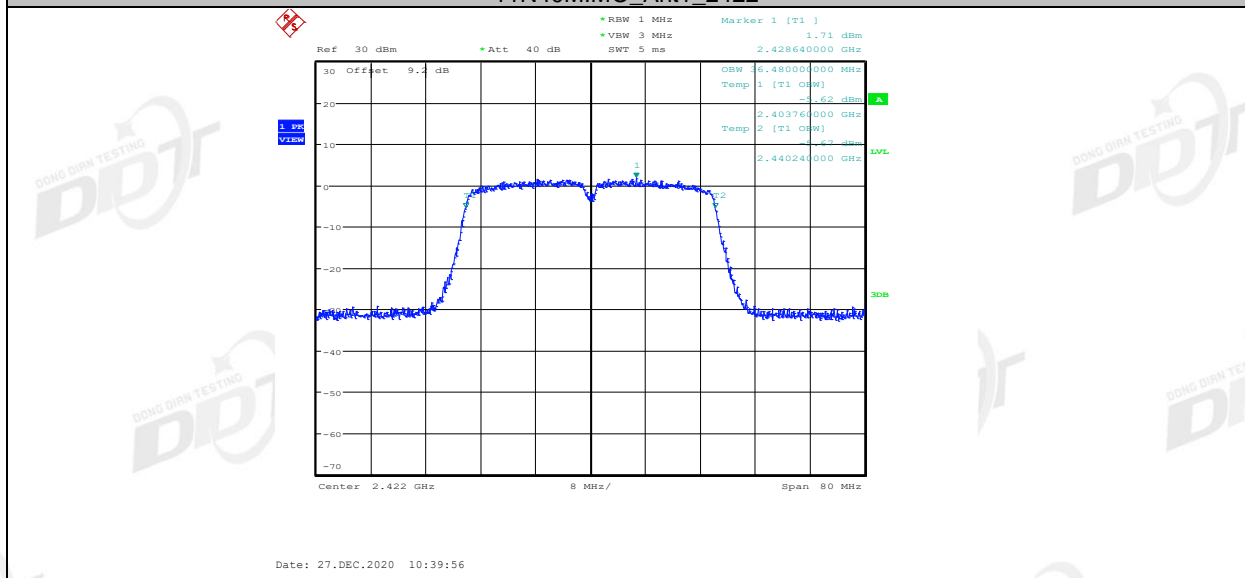


11N40MIMO_Ant2_2422

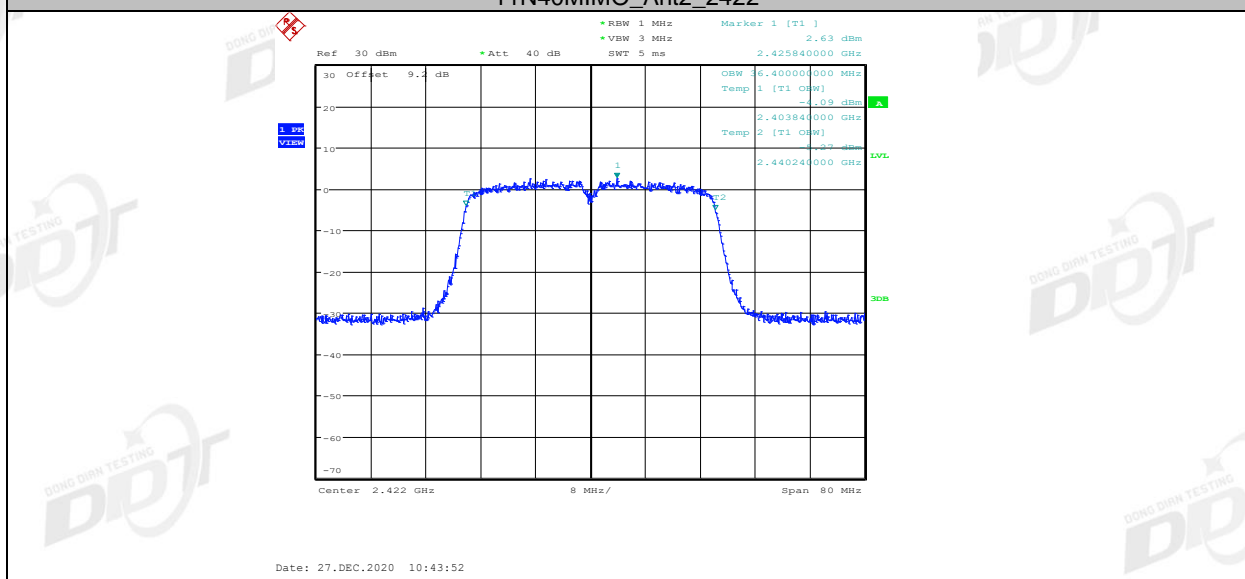


11N40MIMO_Ant1_2437

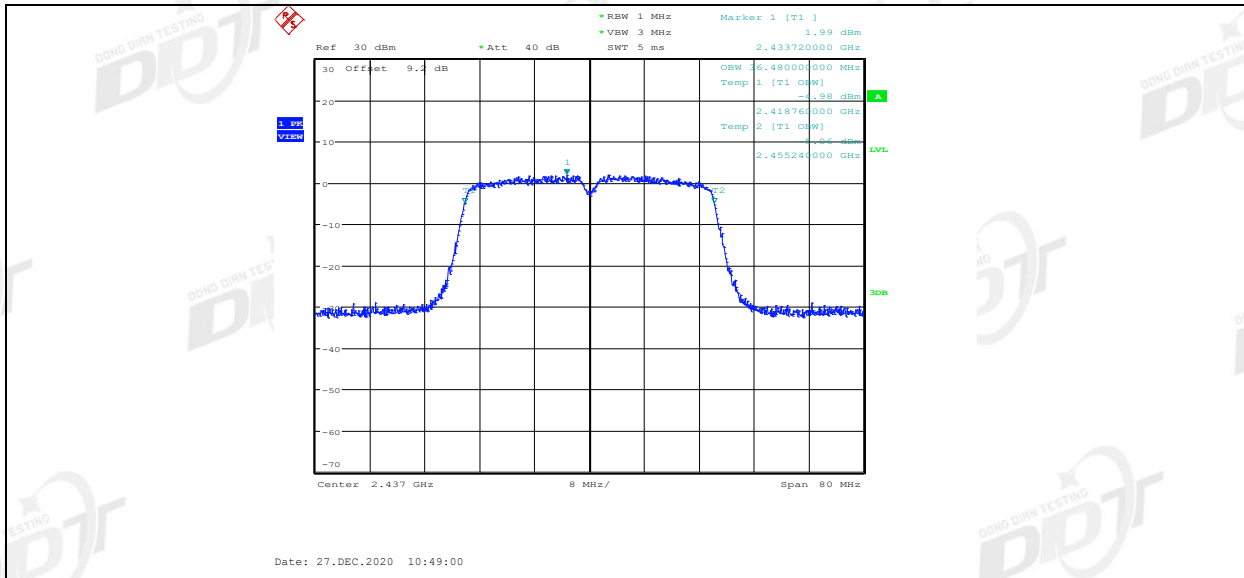


11N40MIMO_Ant2_2437

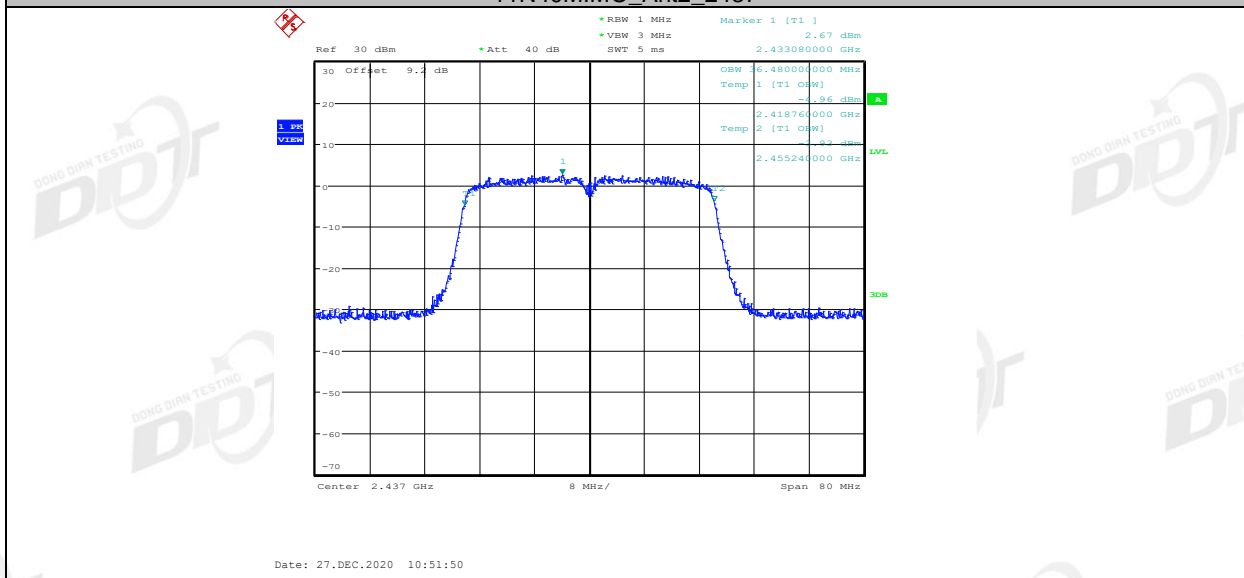

11N40MIMO_Ant1_2452

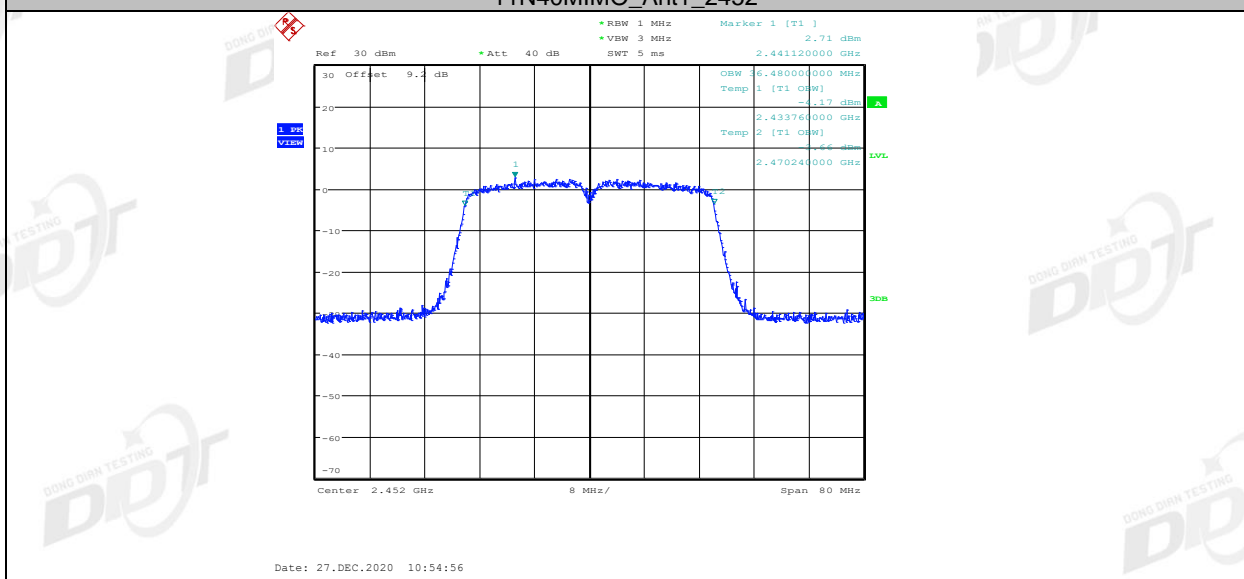

11N40MIMO_Ant2_2452

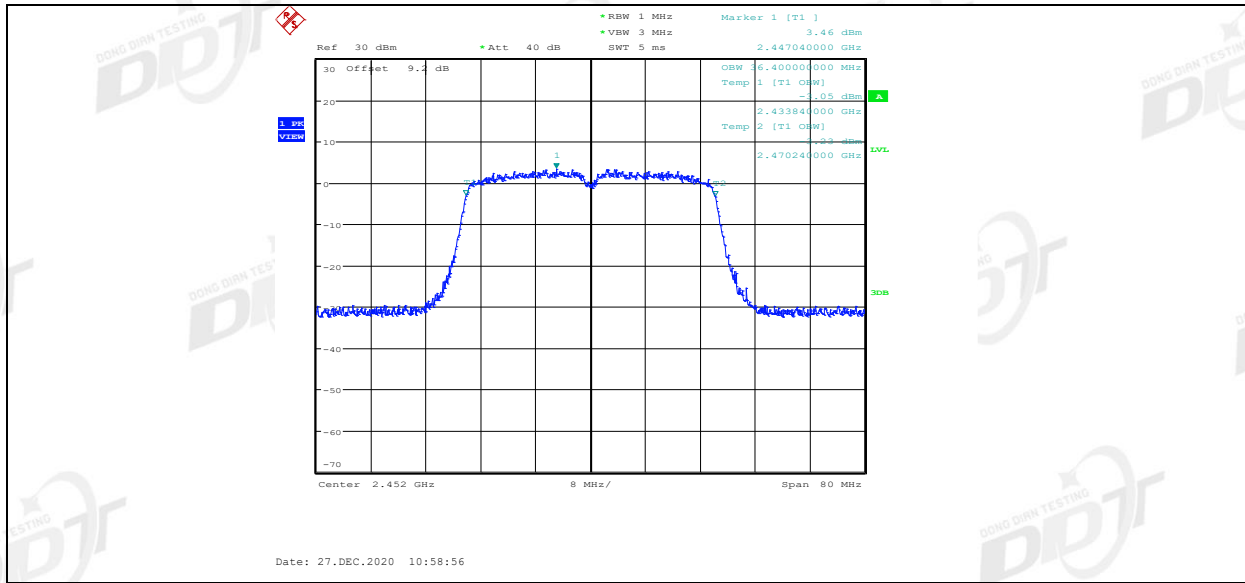

6. Conducted peak Output Power

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power meter.

6.4. Test result

Test Mode	Test Channel	Ant	Power(dBm)	Limit(dBm)	Verdict
11B	2412	ANT1	17.02	30	Pass
11B	2412	ANT2	16.09	30	Pass
11B	2437	ANT1	17.13	30	Pass
11B	2437	ANT2	17.02	30	Pass
11B	2462	ANT1	17.01	30	Pass
11B	2462	ANT2	17.85	30	Pass
11G	2412	ANT1	11.60	30	Pass
11G	2412	ANT2	11.01	30	Pass
11G	2437	ANT1	10.87	30	Pass
11G	2437	ANT2	10.86	30	Pass
11G	2462	ANT1	10.07	30	Pass
11G	2462	ANT2	13.29	30	Pass
11N20MIMO	2412	ANT1	9.61	30	Pass
11N20MIMO	2412	ANT2	8.43	30	Pass
11N20MIMO	2412	total	12.07	30	Pass
11N20MIMO	2437	ANT1	9.34	30	Pass
11N20MIMO	2437	ANT2	9.67	30	Pass
11N20MIMO	2437	total	12.52	30	Pass
11N20MIMO	2462	ANT1	9.43	30	Pass
11N20MIMO	2462	ANT2	10.61	30	Pass
11N20MIMO	2462	total	13.07	30	Pass

1N40MIMO	2422	ANT1	7.27	30	Pass
11N40MIMO	2422	ANT2	7.66	30	Pass
11N40MIMO	2422	total	10.48	30	Pass
11N40MIMO	2437	ANT1	7.89	30	Pass
11N40MIMO	2437	ANT2	8.07	30	Pass
11N40MIMO	2437	total	10.99	30	Pass
11N40MIMO	2452	ANT1	8.07	30	Pass
11N40MIMO	2452	ANT2	8.63	30	Pass
11N40MIMO	2452	total	11.37	30	Pass

7. Power Spectral Density

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold


- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
- (4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.4. Test result


Test Mode	Test Channel	Ant	PSD (dBm)	Limit(dBm/kHz)	Verdict
11B	2412	ANT1	-6.19	8.00	Pass
11B	2412	ANT2	-7.42	8.00	Pass
11B	2437	ANT1	-9.52	8.00	Pass
11B	2437	ANT2	-4.85	8.00	Pass
11B	2462	ANT1	-6.77	8.00	Pass
11B	2462	ANT2	-1.71	8.00	Pass
11G	2412	ANT1	-16.77	8.00	Pass
11G	2412	ANT2	-14.49	8.00	Pass
11G	2437	ANT1	-14.73	8.00	Pass
11G	2437	ANT2	-15.29	8.00	Pass
11G	2462	ANT1	-17.11	8.00	Pass
11G	2462	ANT2	-13.01	8.00	Pass

11N20MIMO	2412	ANT1	-10.32	7.50	Pass
11N20MIMO	2412	ANT2	-18.68	7.50	Pass
11N20MIMO	2412	total	-10.00	7.50	Pass
11N20MIMO	2437	ANT1	-17.48	7.50	Pass
11N20MIMO	2437	ANT2	-8.47	7.50	Pass
11N20MIMO	2437	total	-7.98	7.50	Pass
11N20MIMO	2462	ANT1	-18.03	7.50	Pass
11N20MIMO	2462	ANT2	-15.67	7.50	Pass
11N20MIMO	2462	total	-13.68	7.50	Pass
11N40MIMO	2422	ANT1	-23.57	7.50	Pass
11N40MIMO	2422	ANT2	-21.32	7.50	Pass
11N40MIMO	2422	total	-19.29	7.50	Pass
11N40MIMO	2437	ANT1	-22.74	7.50	Pass
11N40MIMO	2437	ANT2	-22.06	7.50	Pass
11N40MIMO	2437	total	-19.38	7.50	Pass
11N40MIMO	2452	ANT1	-22.78	7.50	Pass
11N40MIMO	2452	ANT2	-22.29	7.50	Pass
11N40MIMO	2452	total	-19.52	7.50	Pass


7.5. original test data

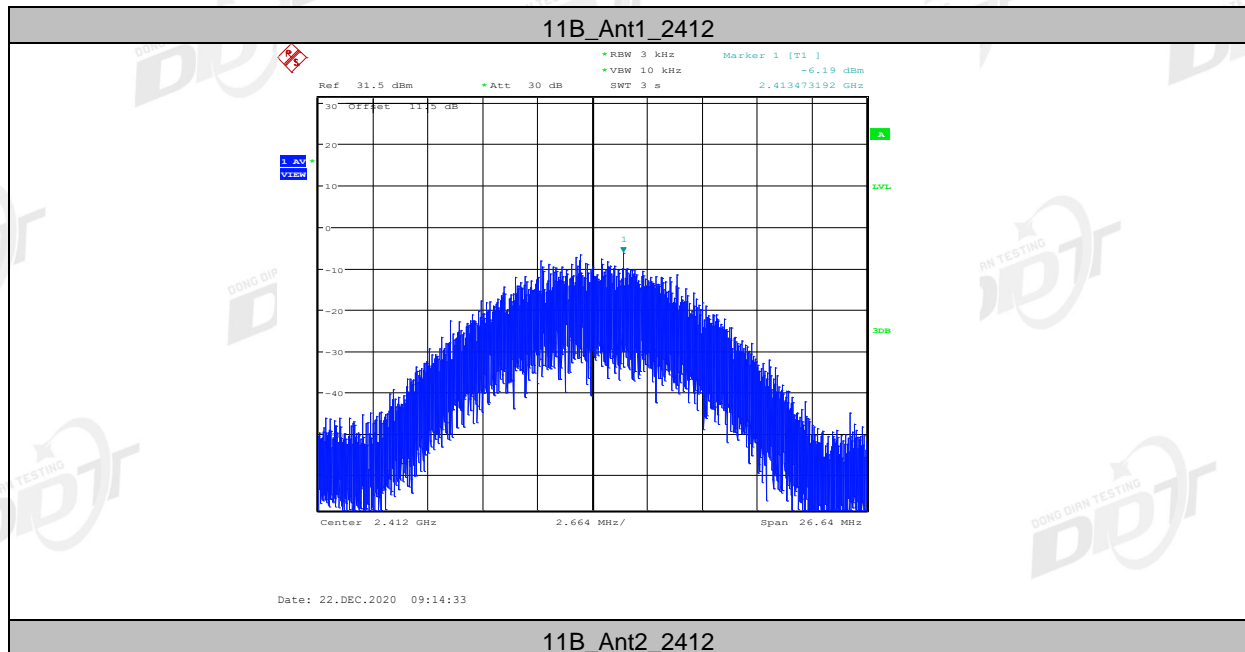


11B_Ant2_2412

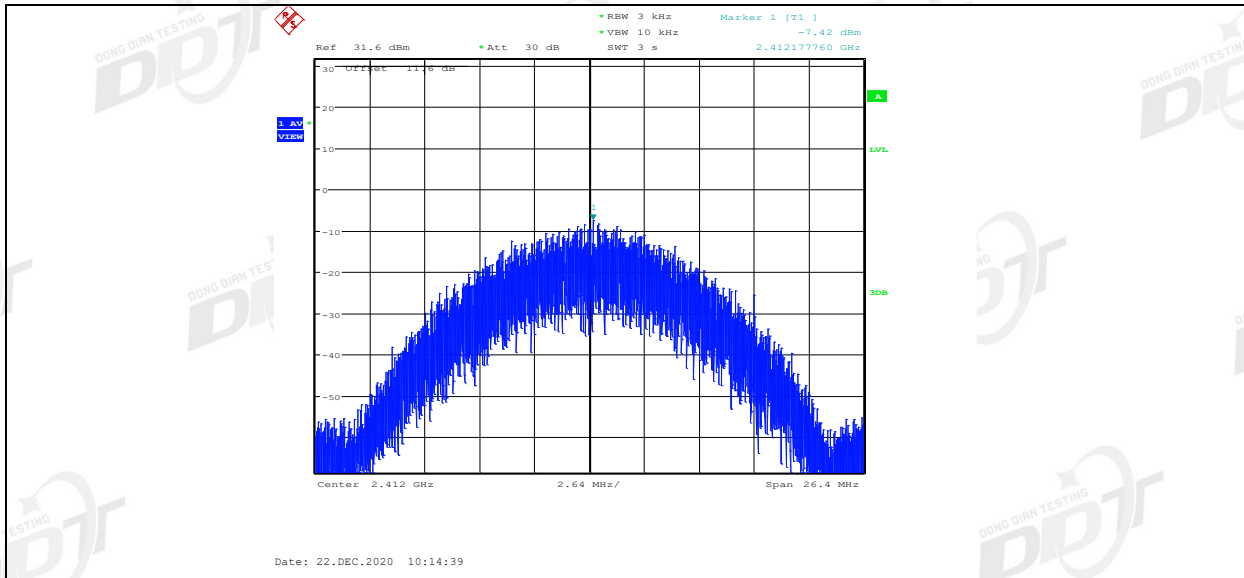


11B_Ant1_2437

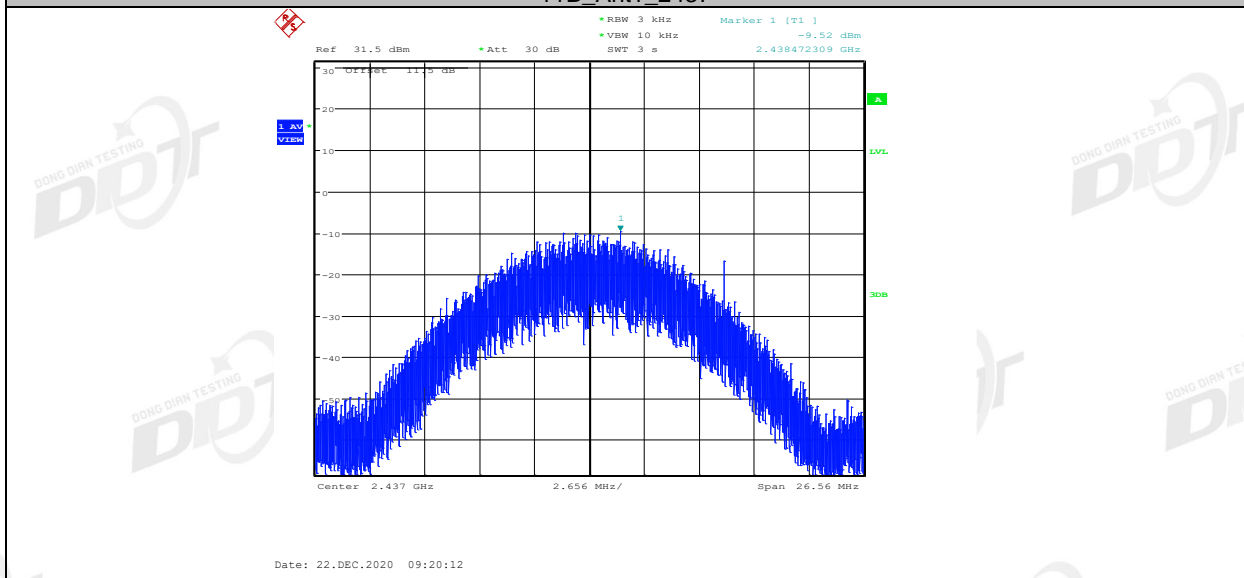


11B_Ant2_2437

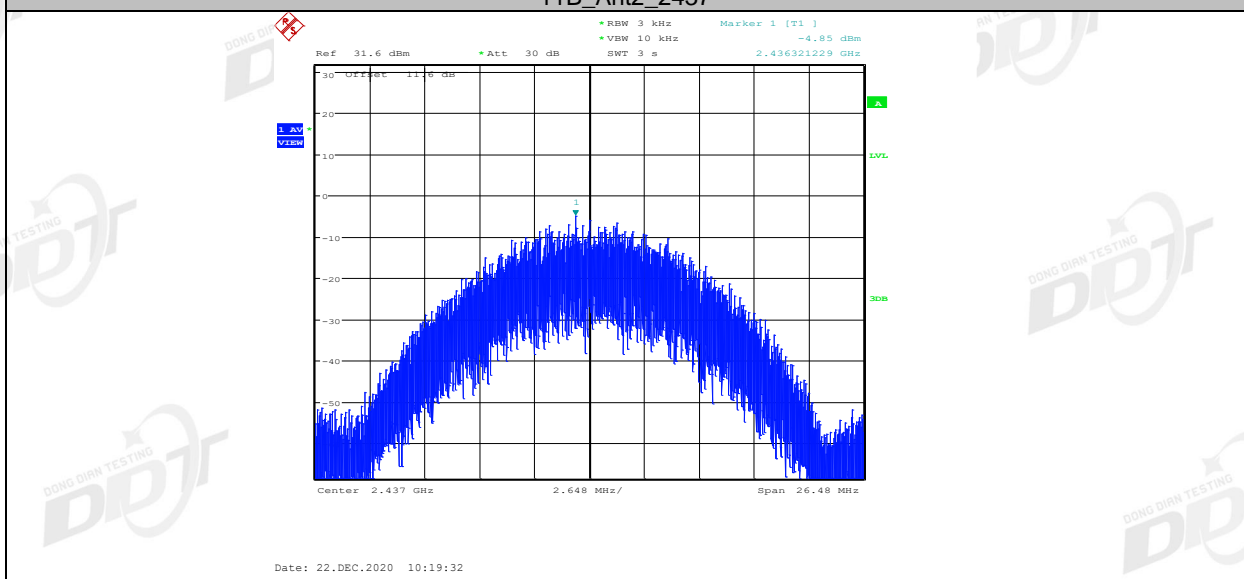


11B_Ant1_2462

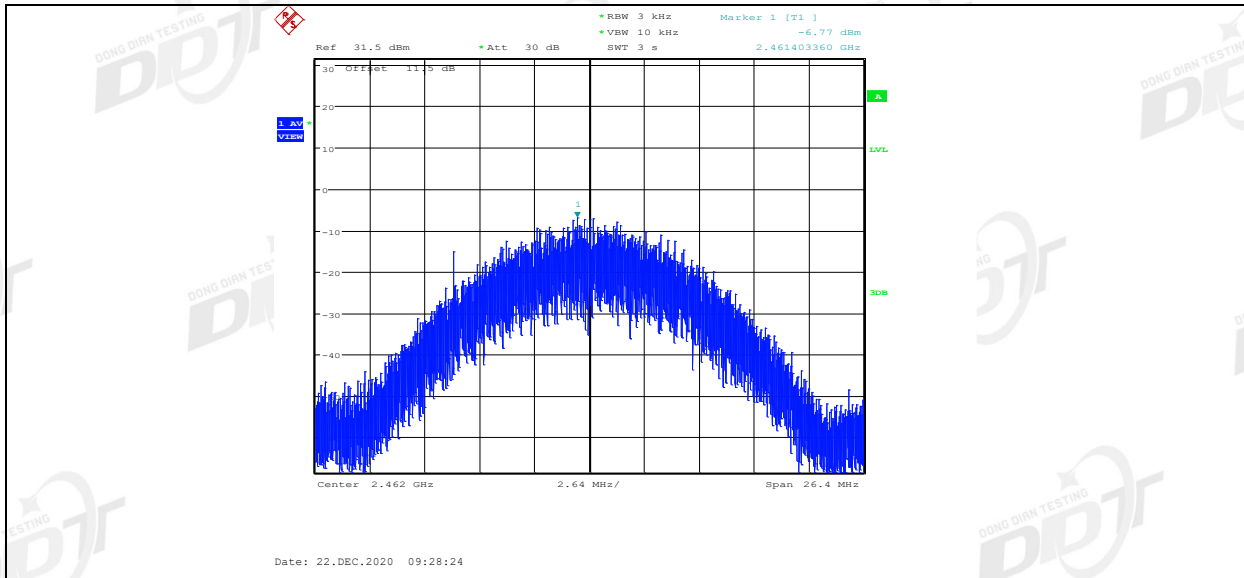


11B_Ant2_2462

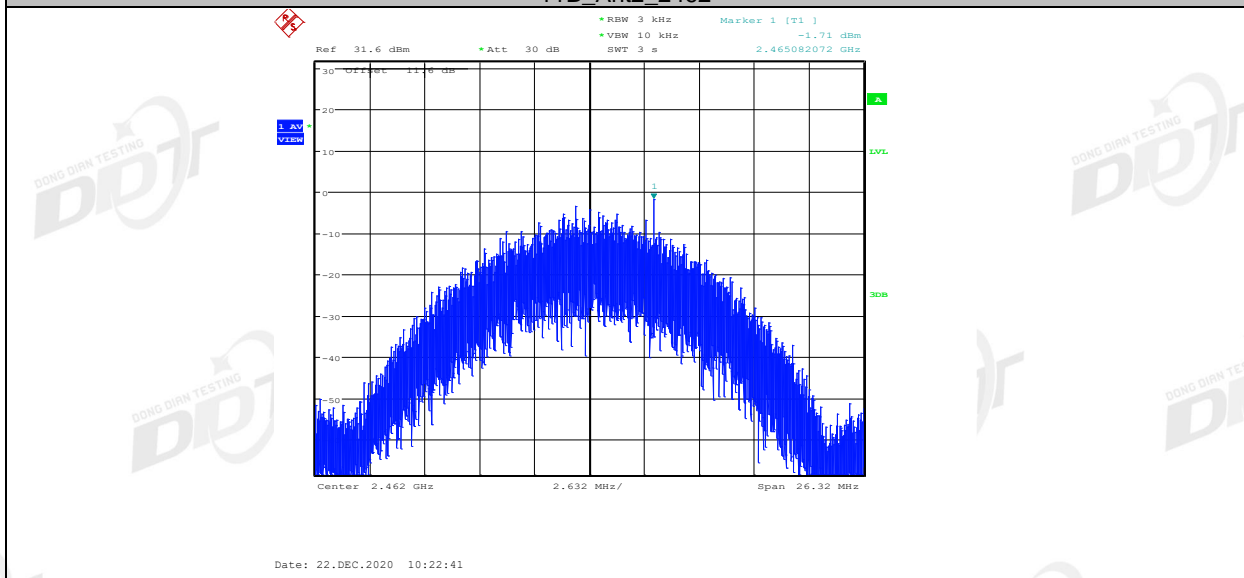


11G_Ant1_2412

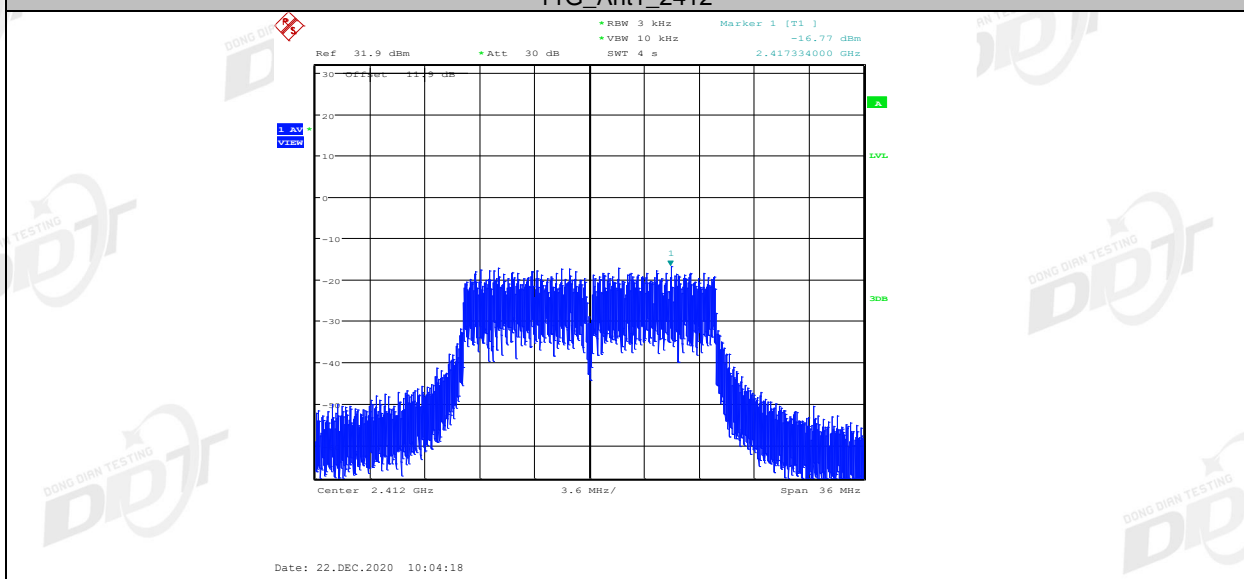


11G_Ant2_2412

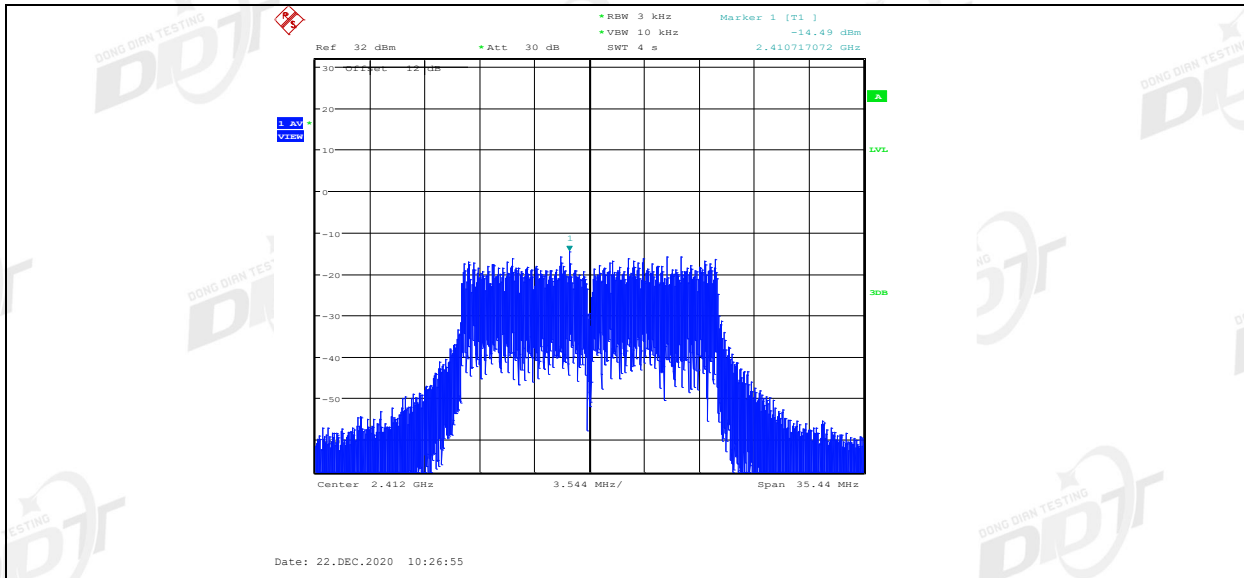


11G_Ant1_2437

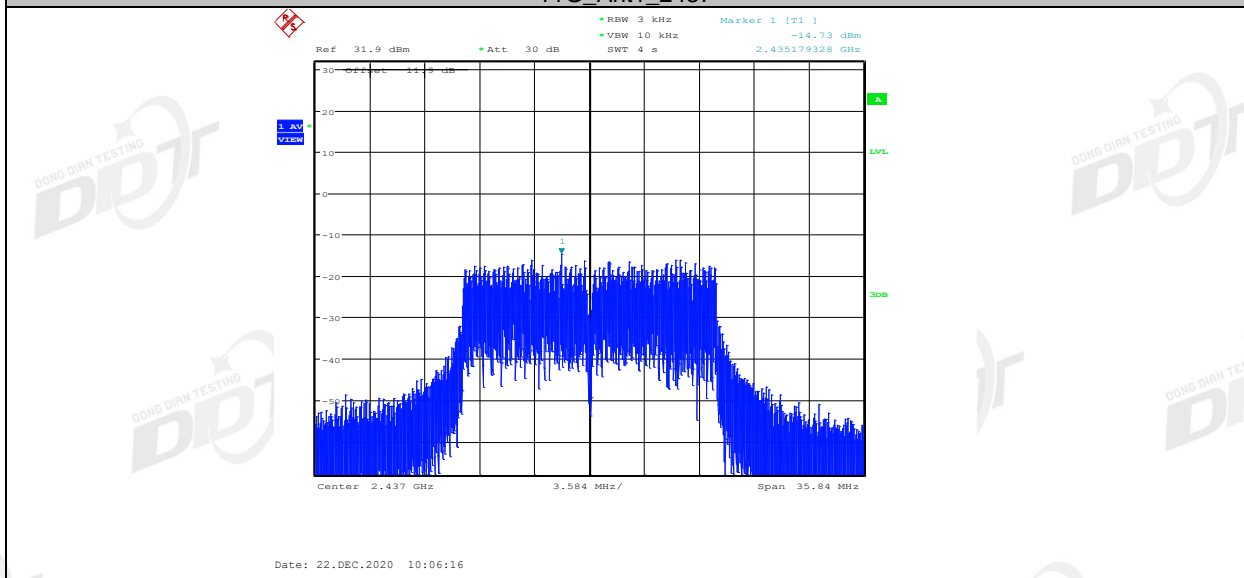


11G_Ant2_2437

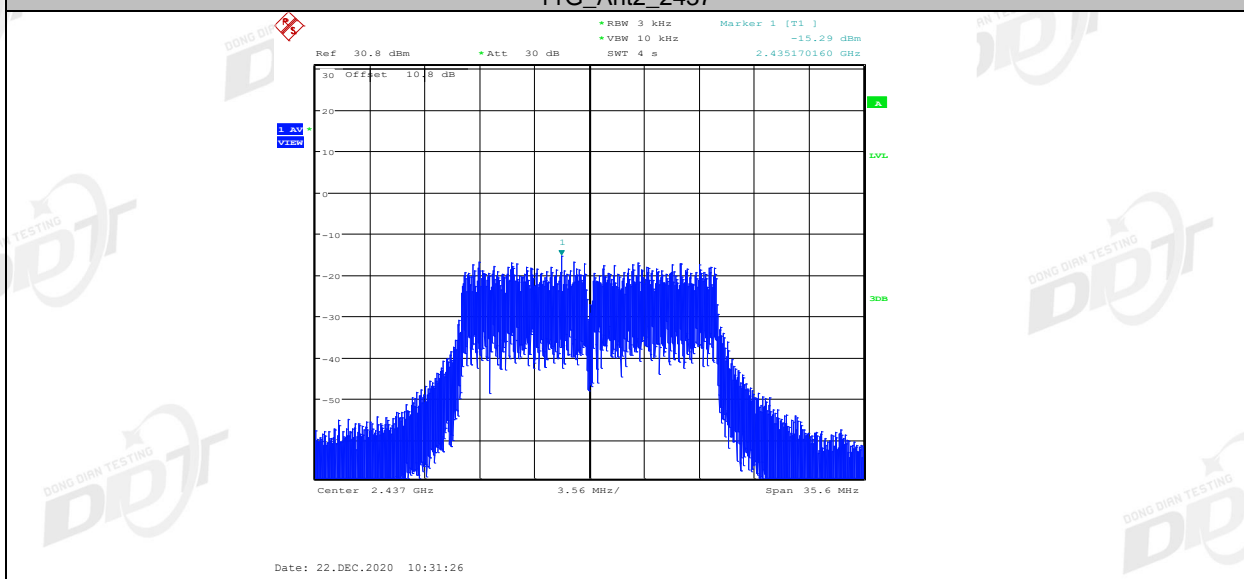


11G_Ant1_2462

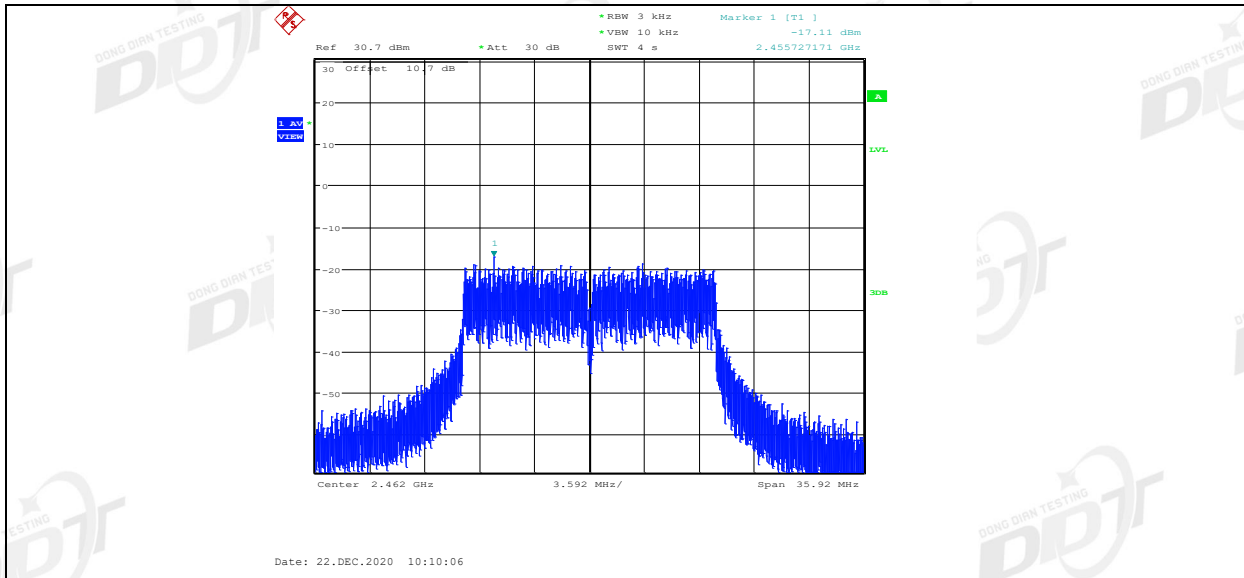


11G_Ant2_2462

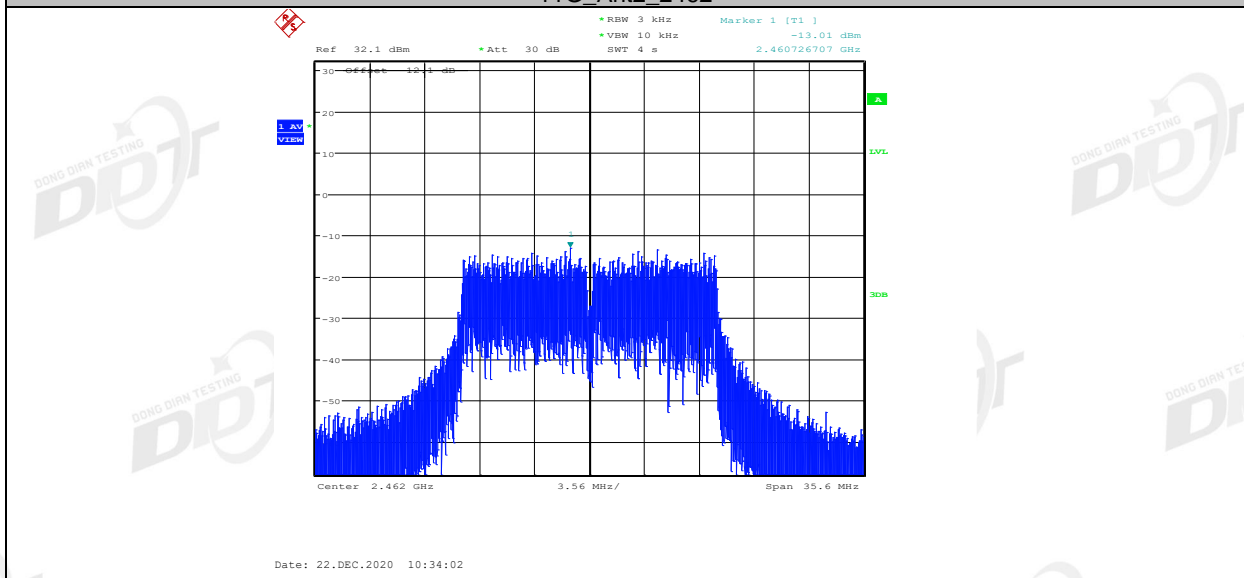


11N20MIMO_Ant1_2412

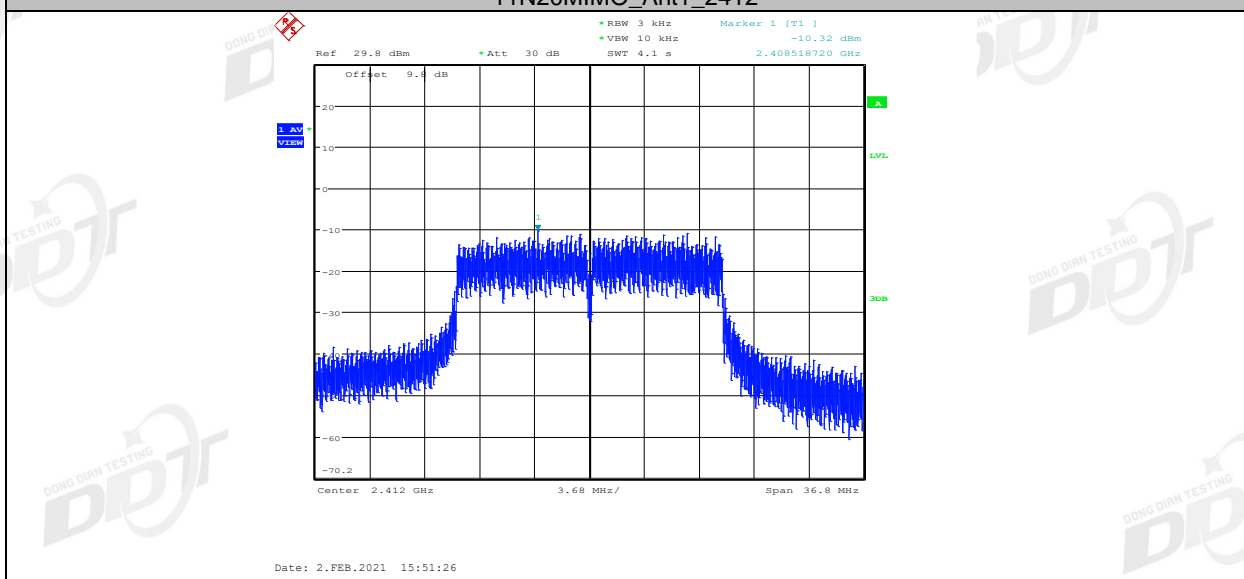


11N20MIMO_Ant2_2412

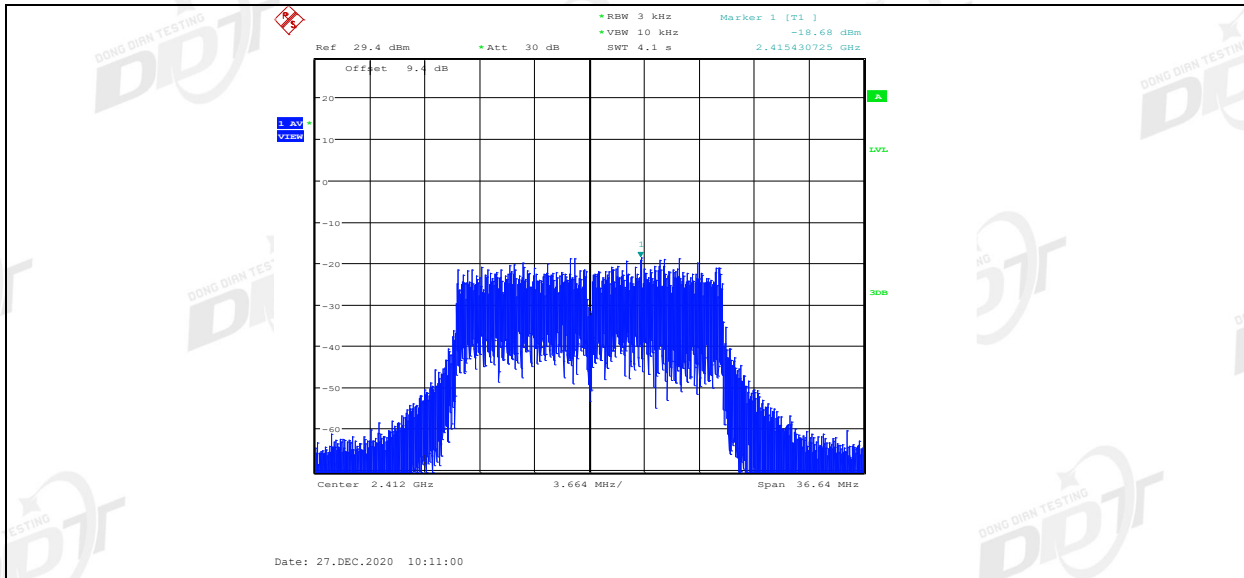


11N20MIMO_Ant1_2437

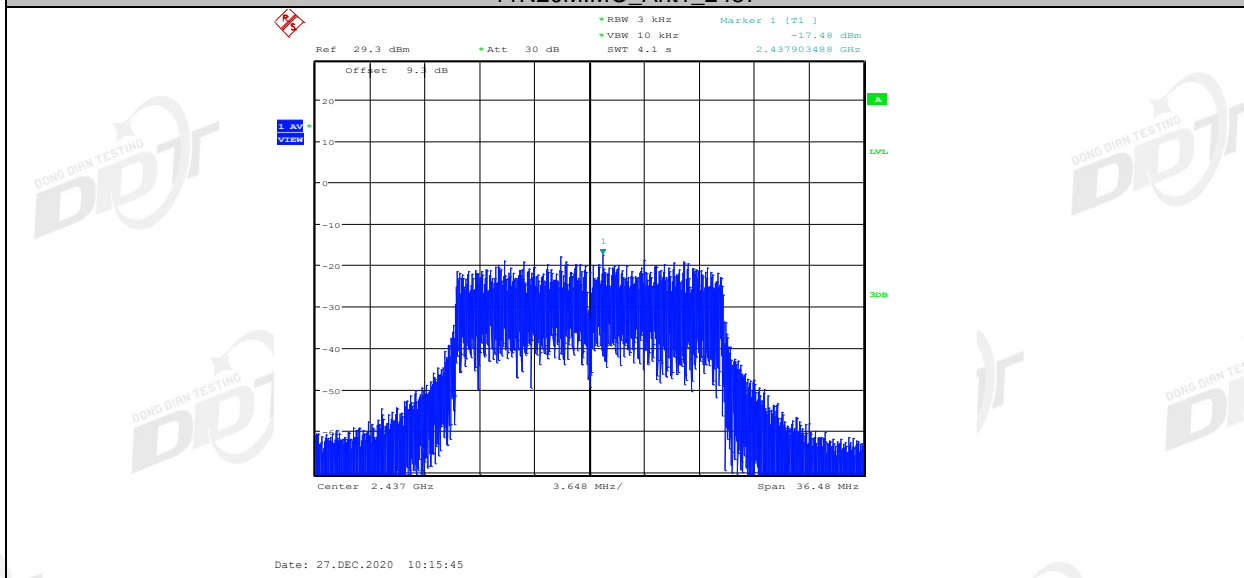


11N20MIMO_Ant2_2437

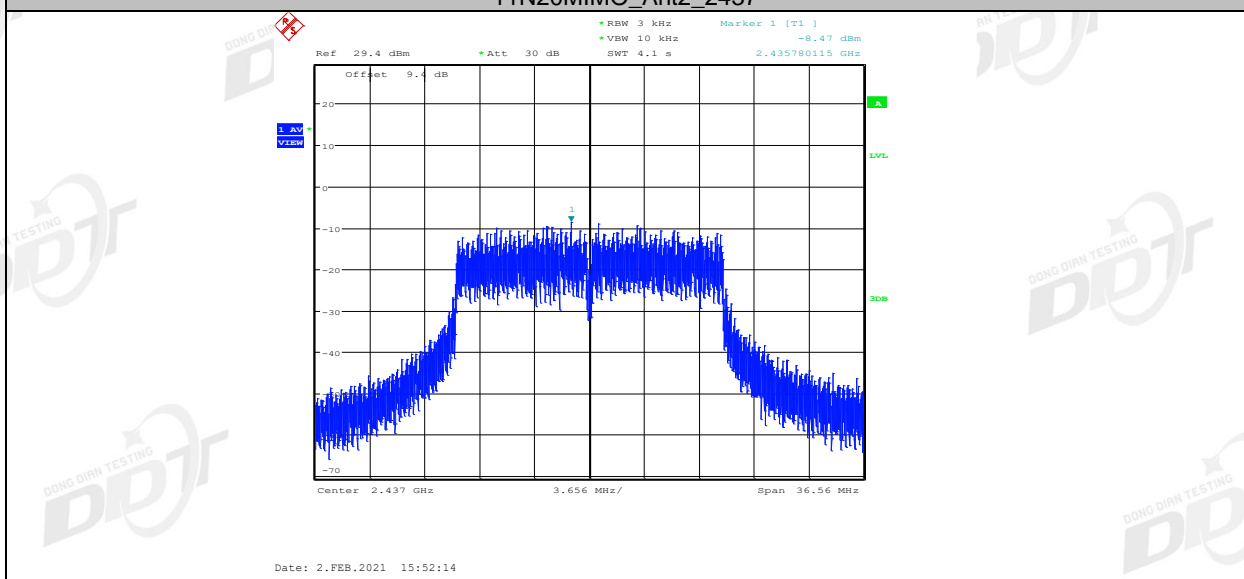


11N20MIMO_Ant1_2462

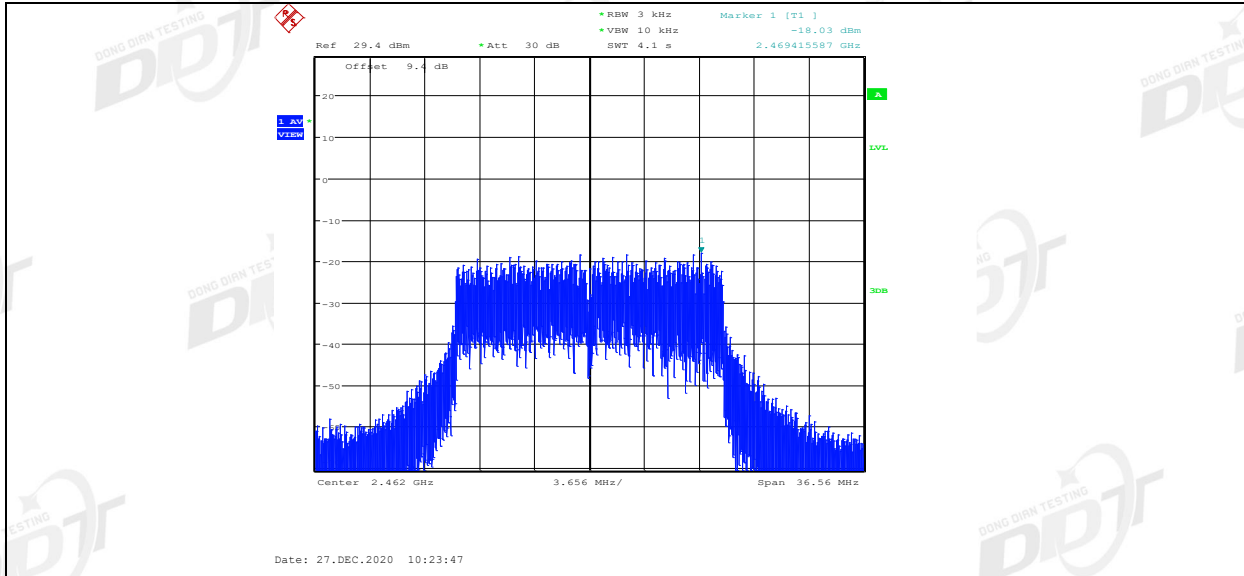


11N20MIMO_Ant2_2462

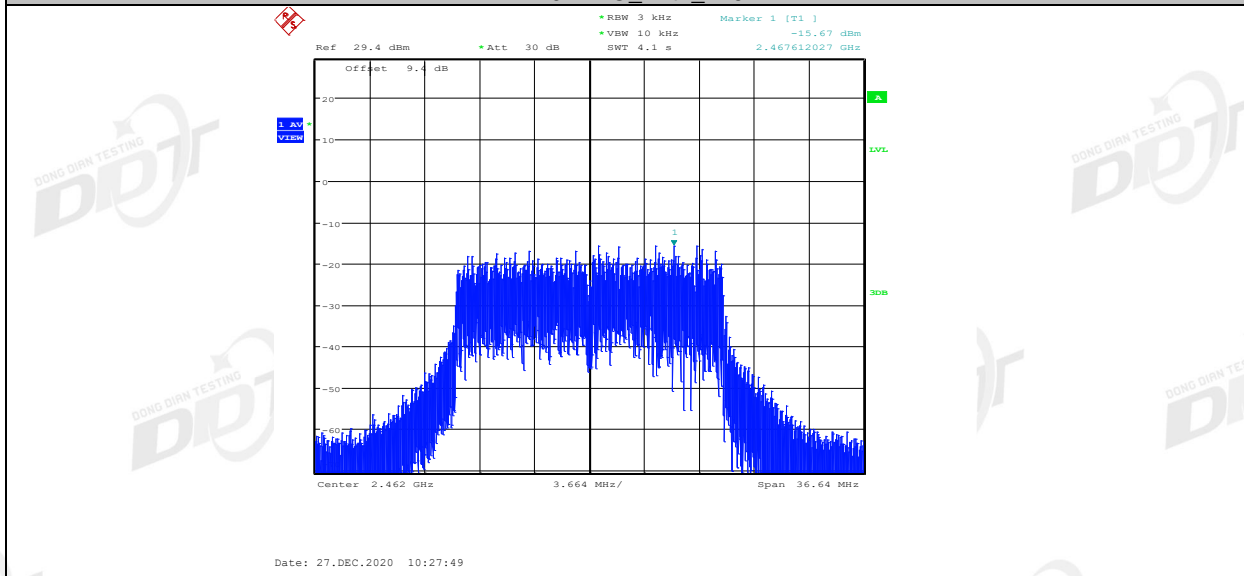


11N40MIMO_Ant1_2422

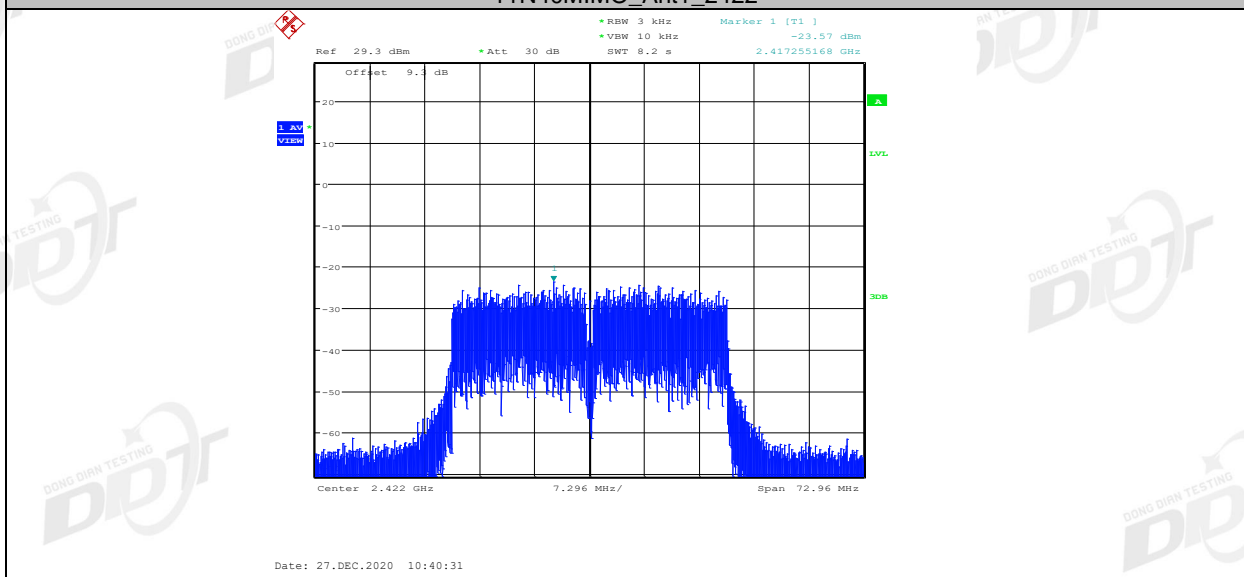


11N40MIMO_Ant2_2422

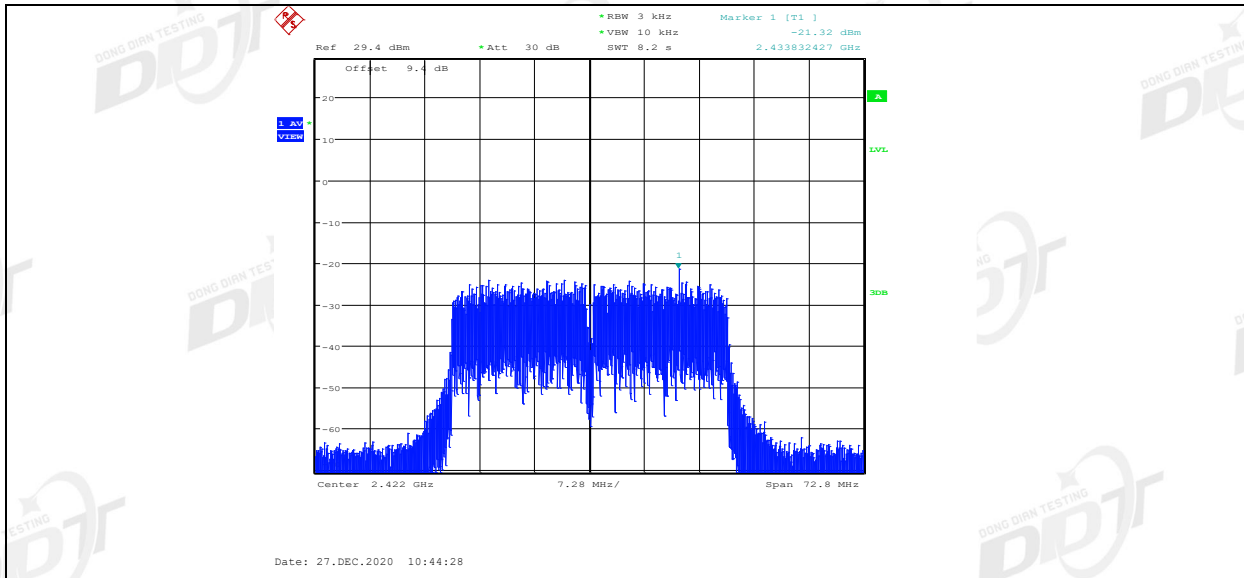


11N40MIMO_Ant1_2437

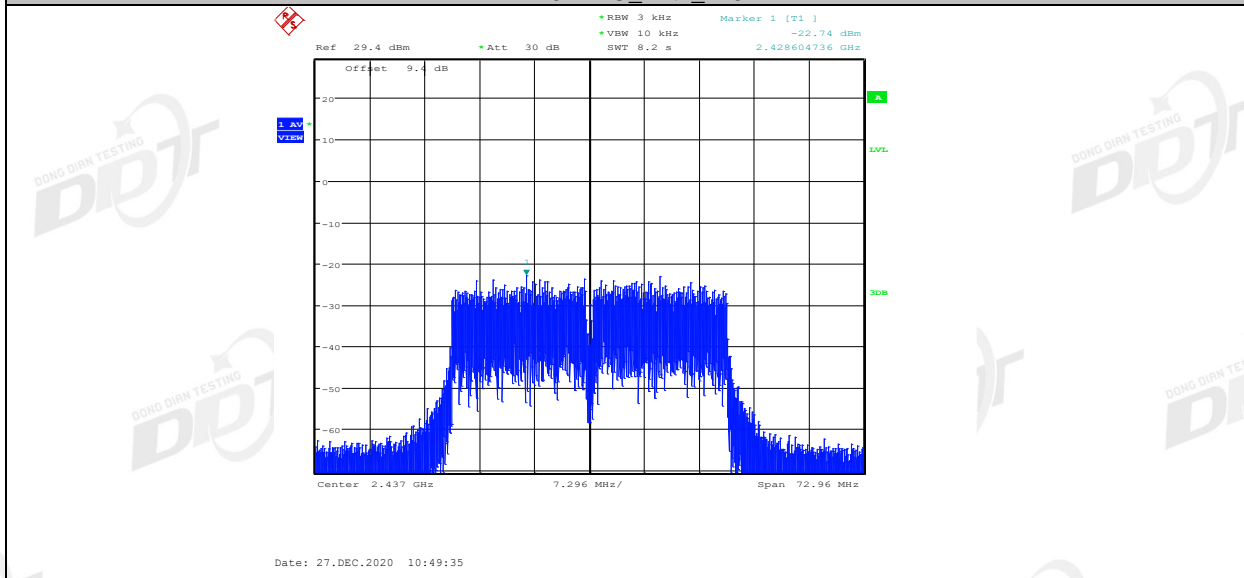


11N40MIMO_Ant2_2437

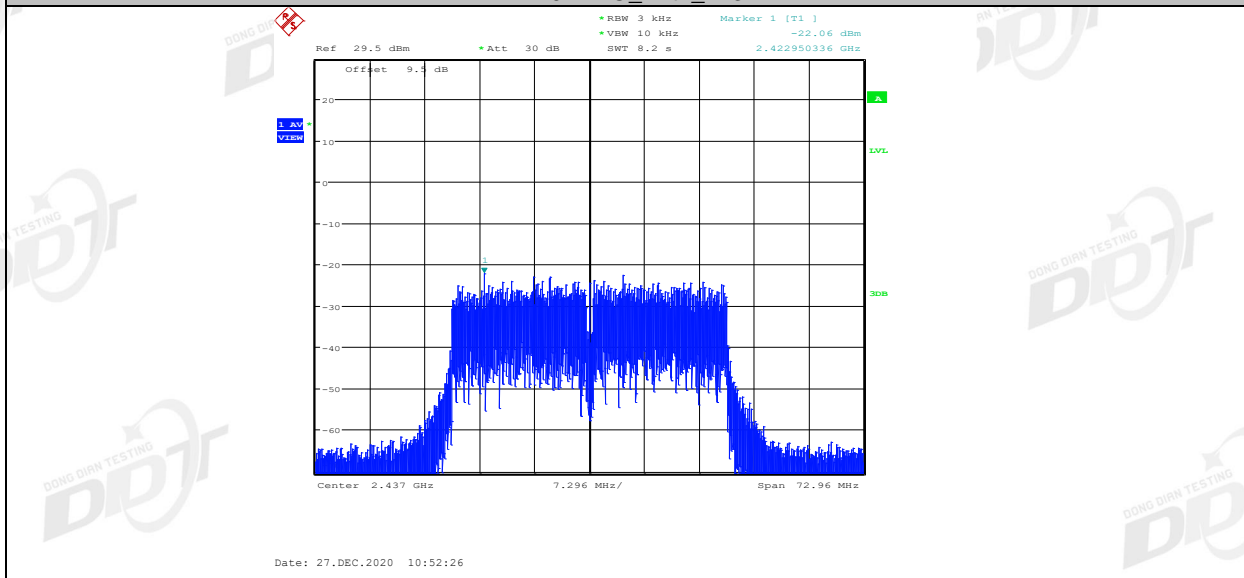

11N40MIMO_Ant1_2452

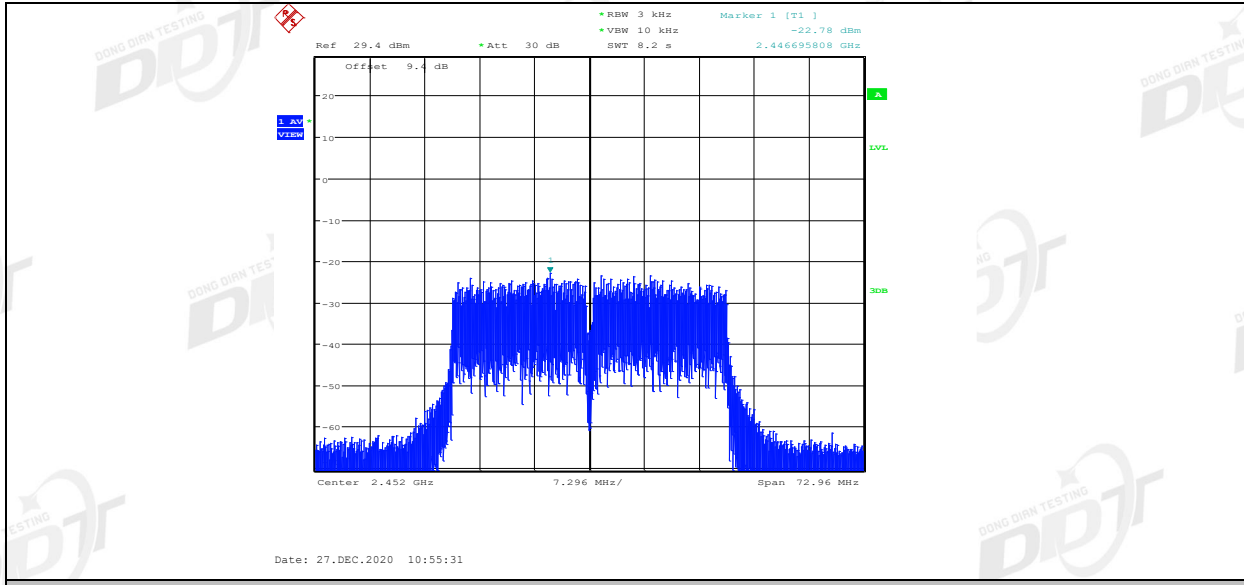

11N40MIMO_Ant2_2452

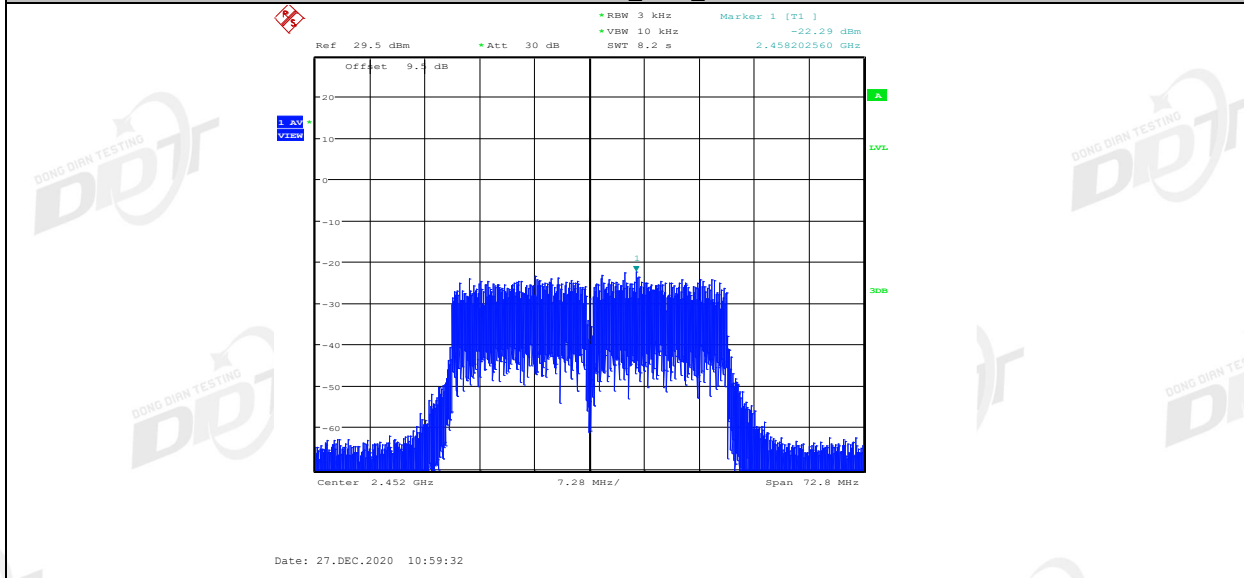

8. Band Edge and Spurious Emissions (Conducted)

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


8.4. Test result


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

EUT Set Mode	CH or Frequency	Ant2 Result (dBm)	EUT Set Mode	CH or Frequency	Ant2 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass


8.5. original test data

Band Edge

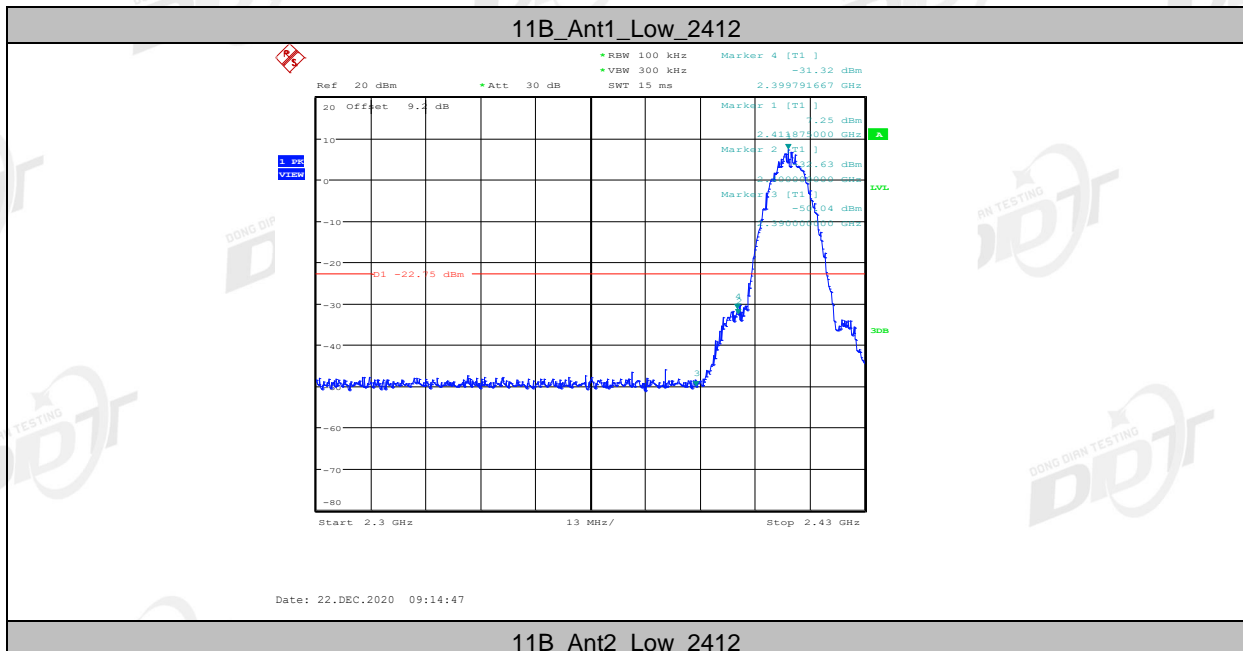


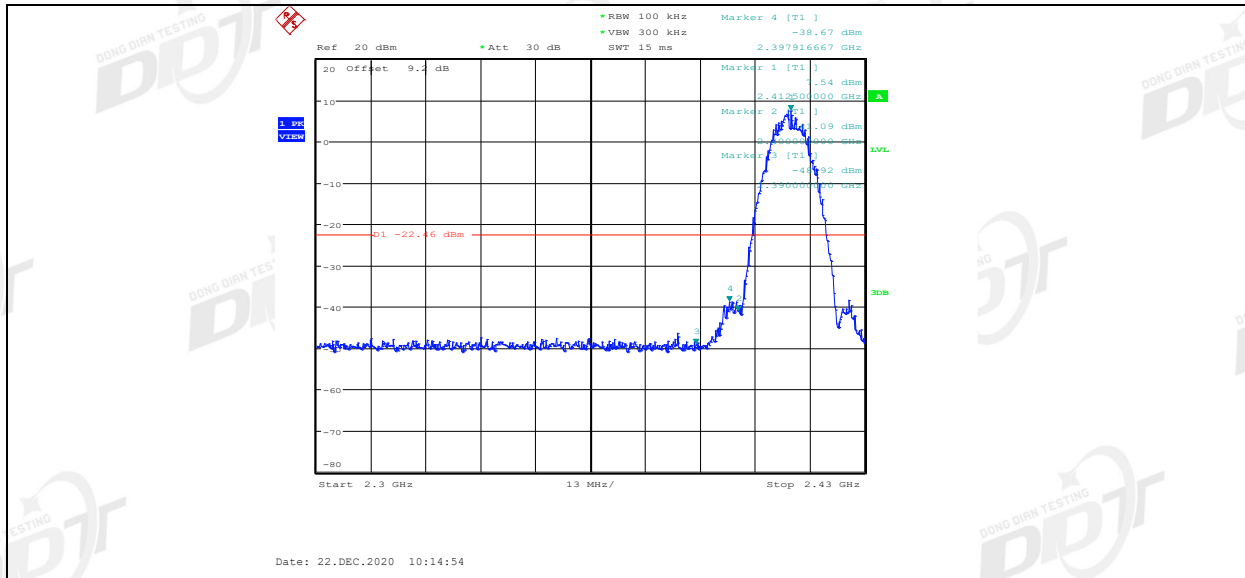


11B_Ant1_High_2462

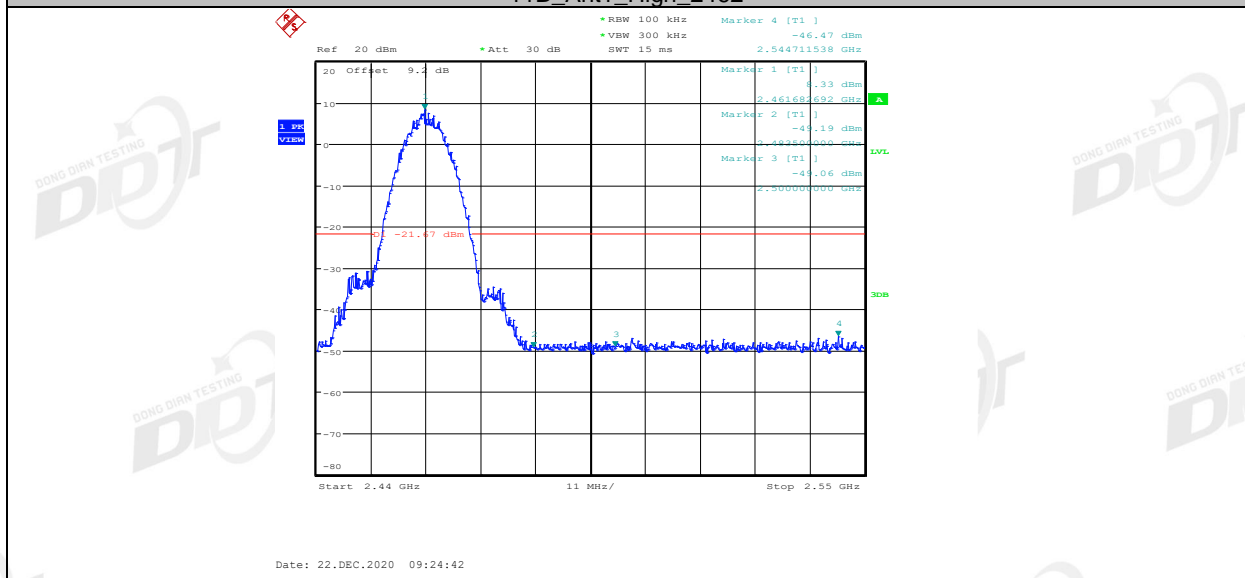


11B_Ant2_High_2462

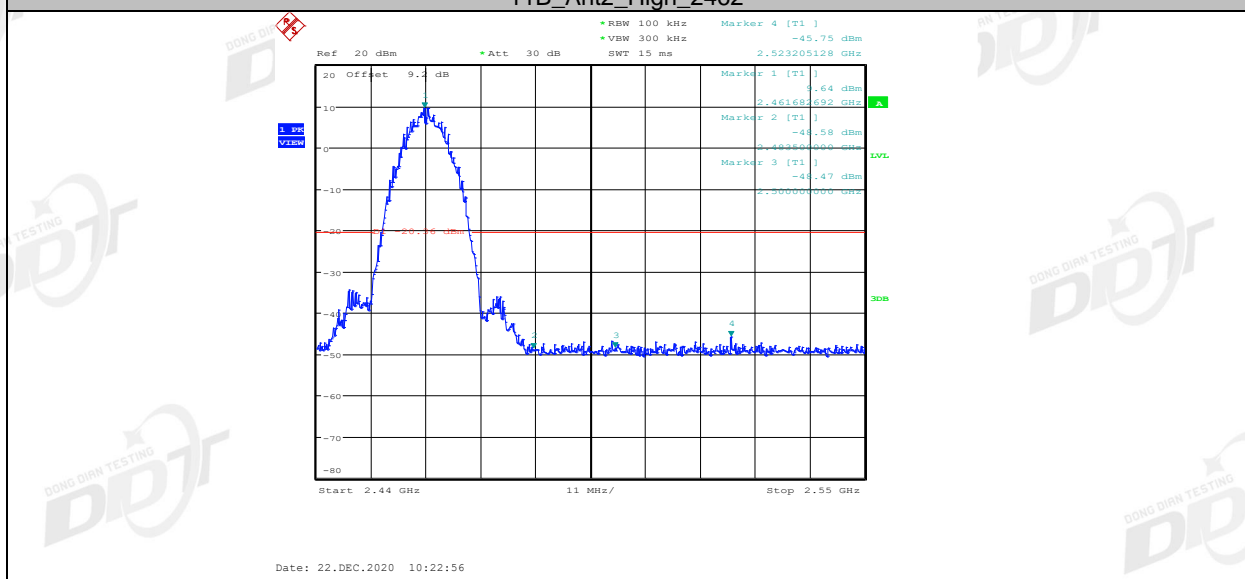


11G_Ant1_Low_2412

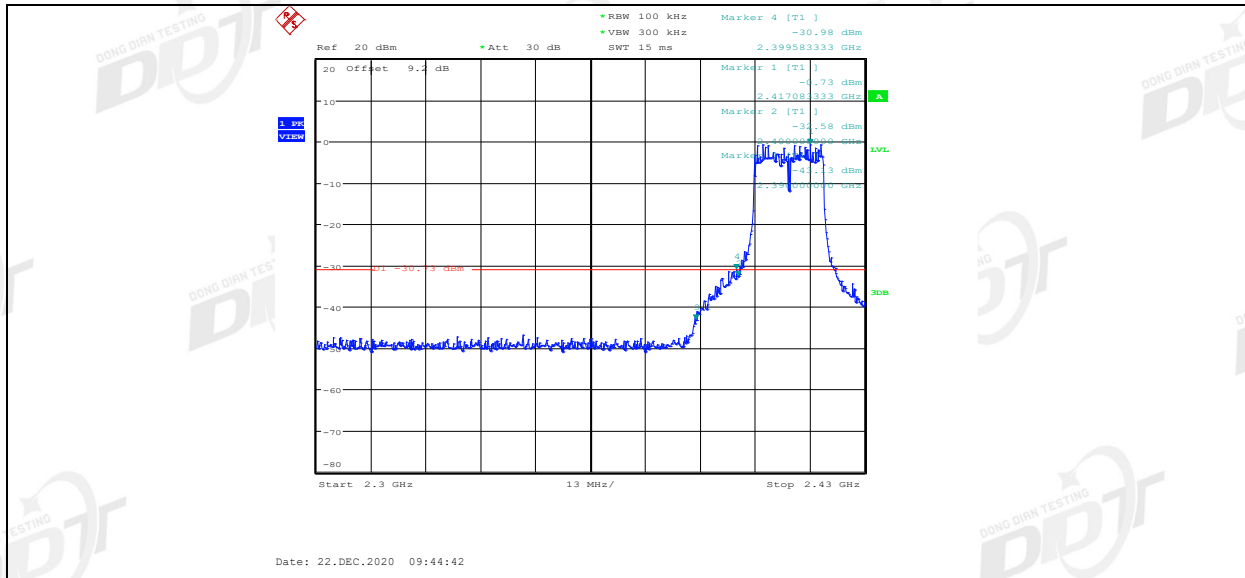


11G_Ant2_Low_2412

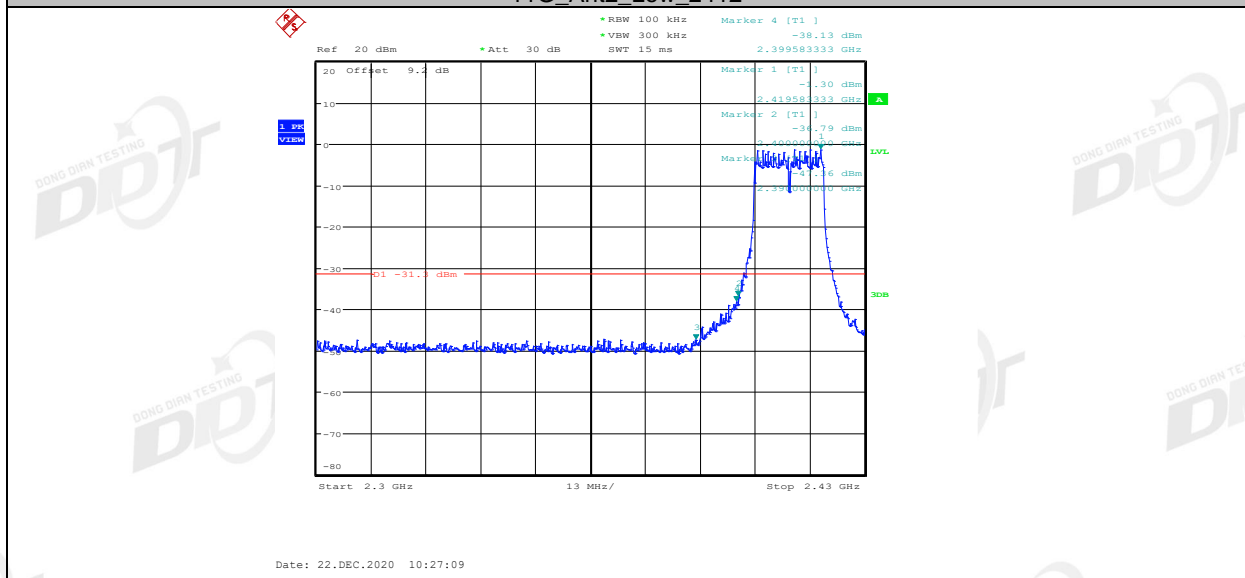


11G_Ant1_High_2462

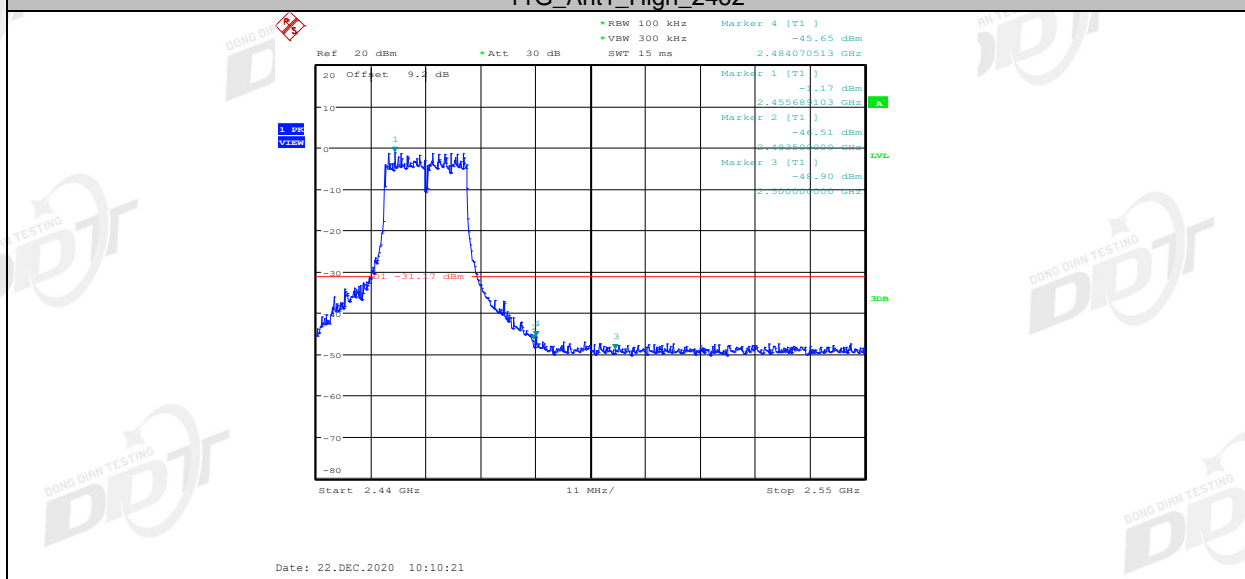


11G_Ant2_High_2462

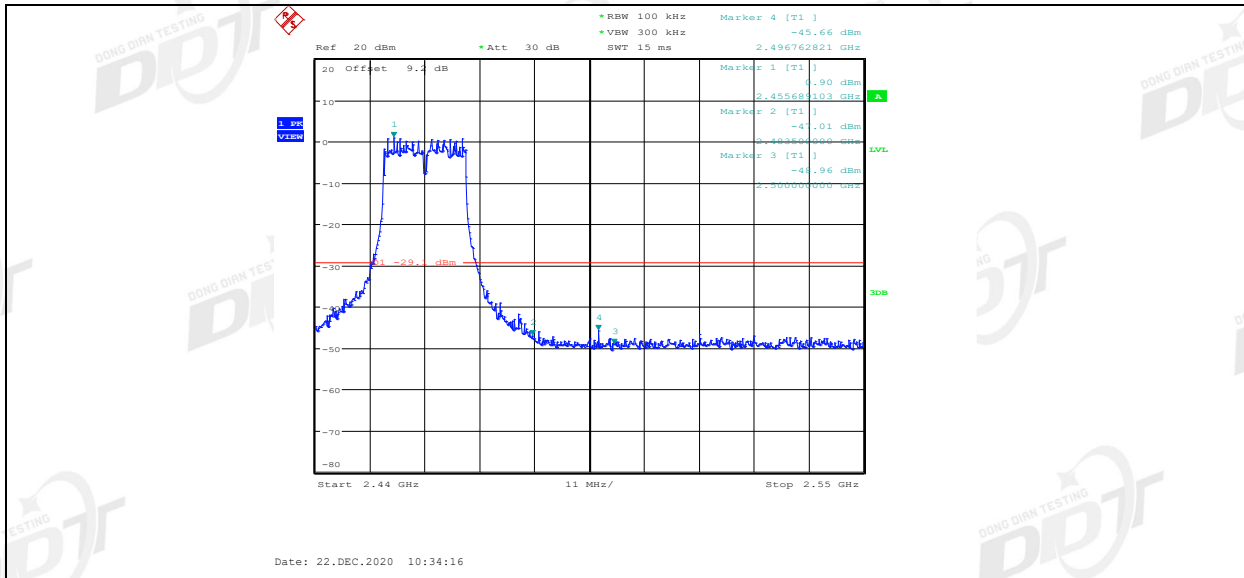


11N20MIMO_Ant1_Low_2412

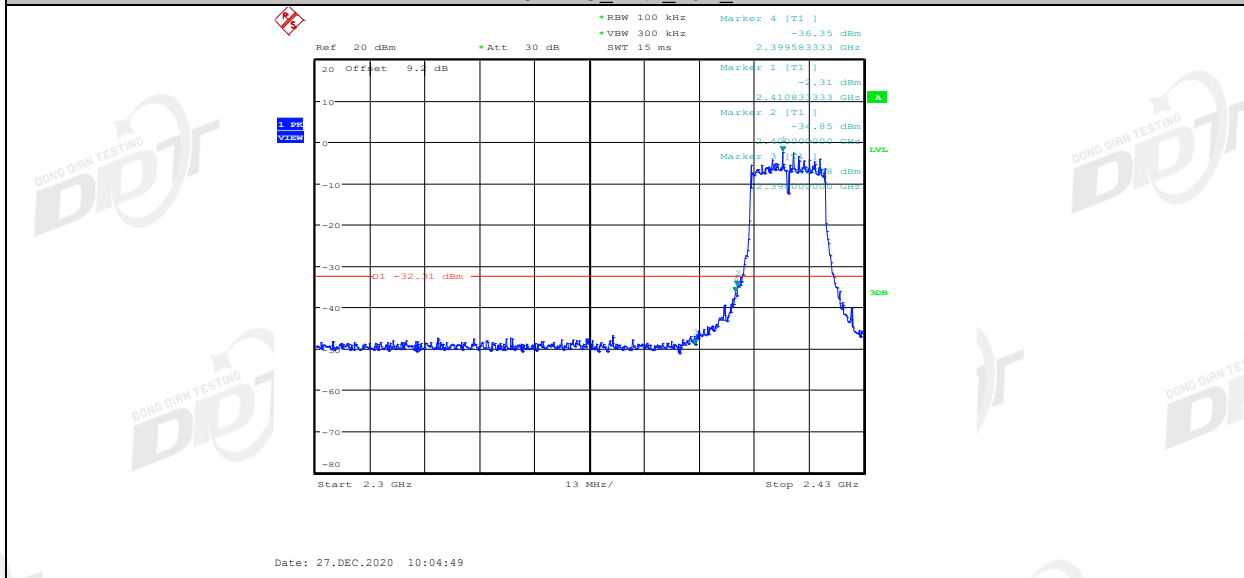


11N20MIMO_Ant2_Low_2412

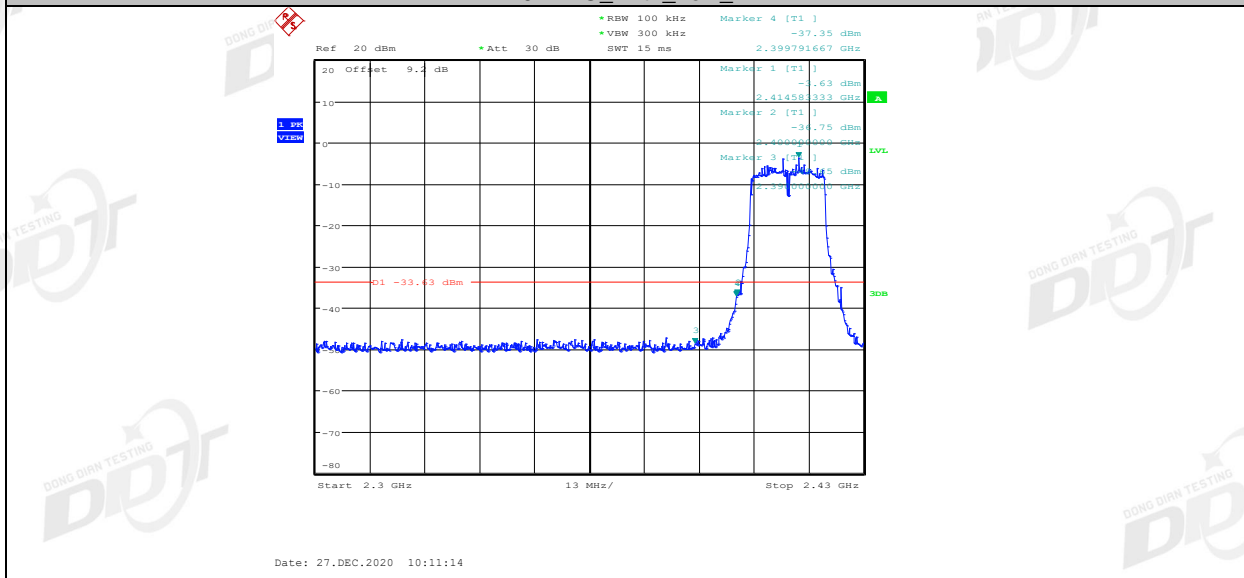


11N20MIMO_Ant1_High_2462

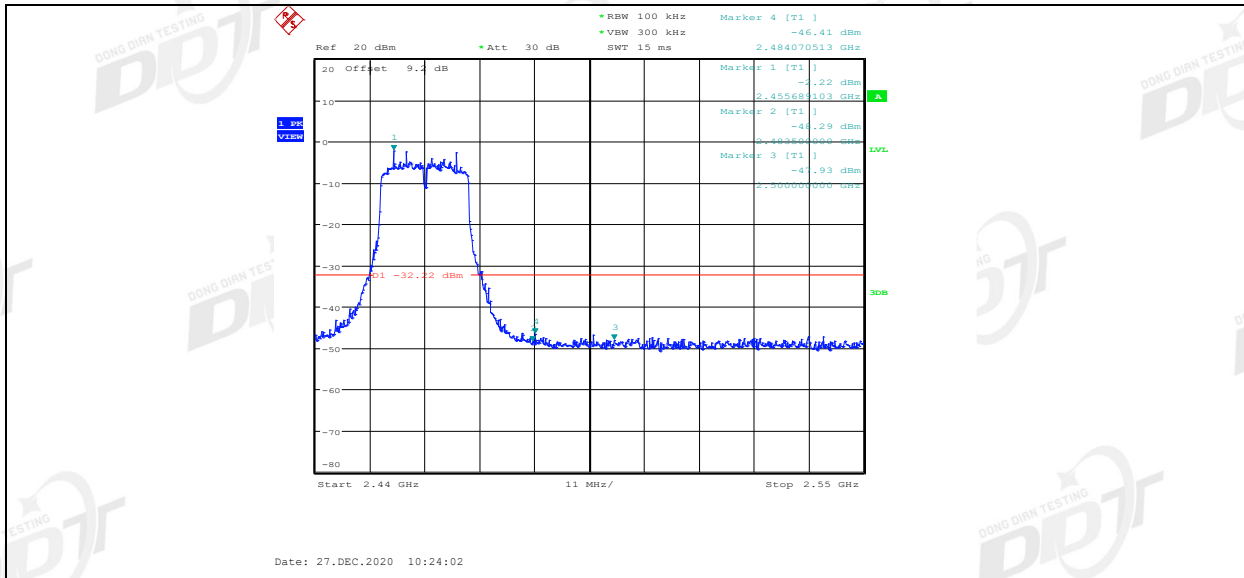


11N20MIMO_Ant2_High_2462

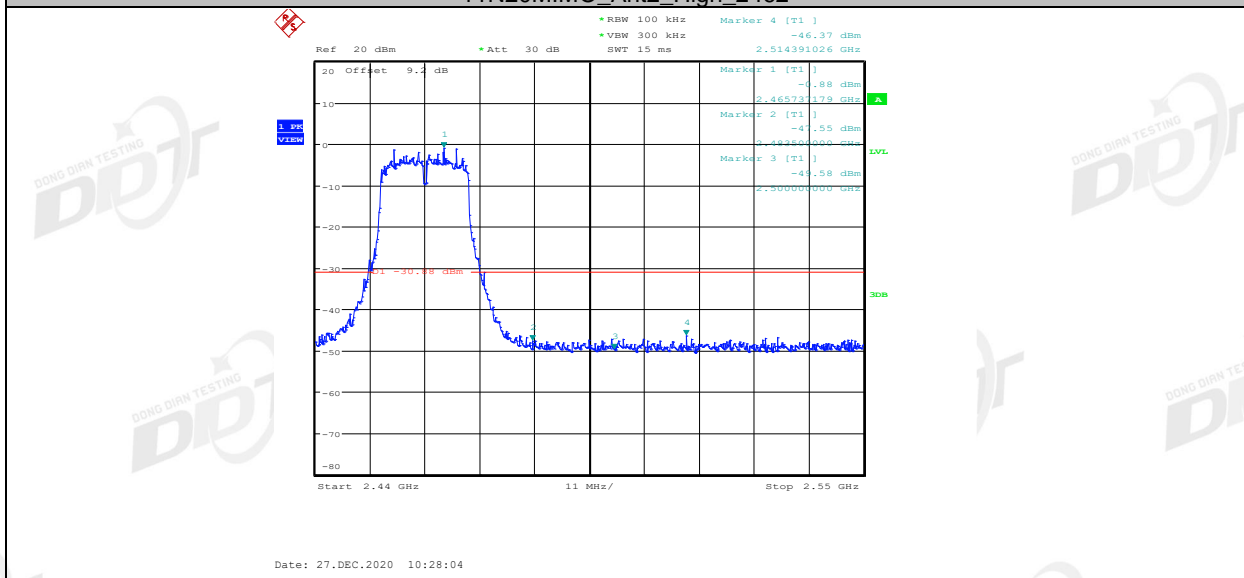


11N40MIMO_Ant1_Low_2422

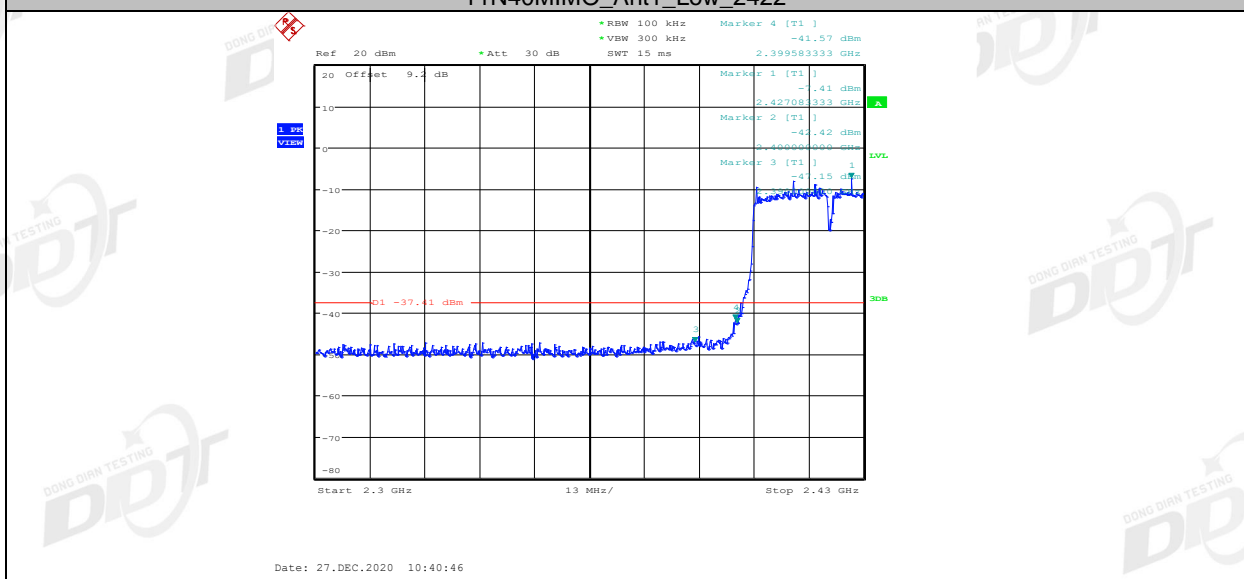


11N40MIMO_Ant2_Low_2422

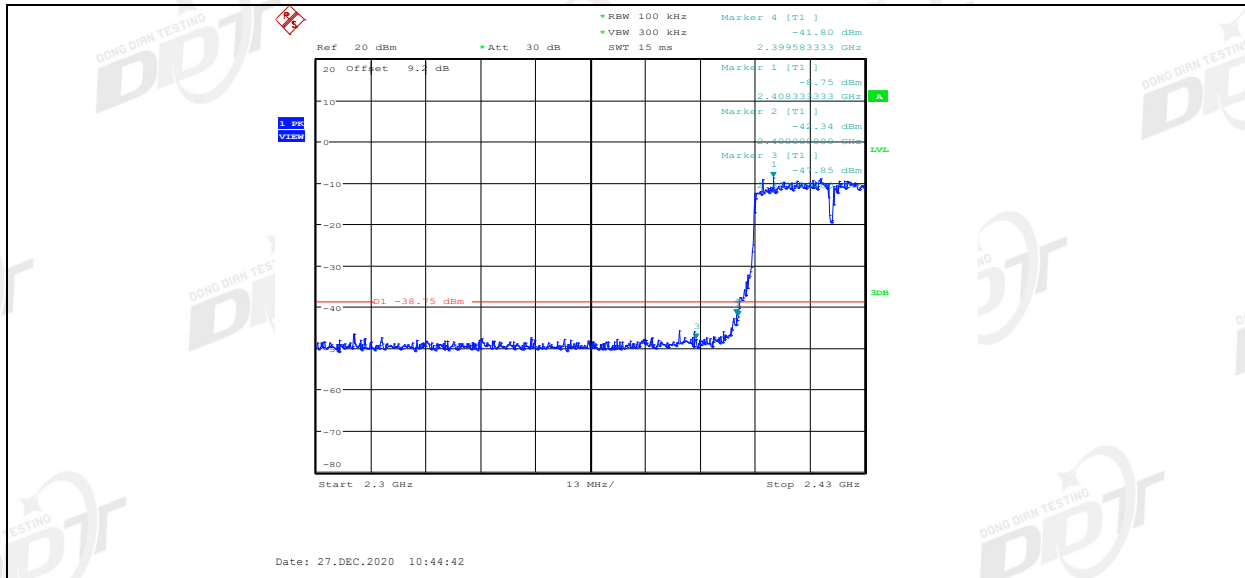

11N40MIMO_Ant1_High_2452

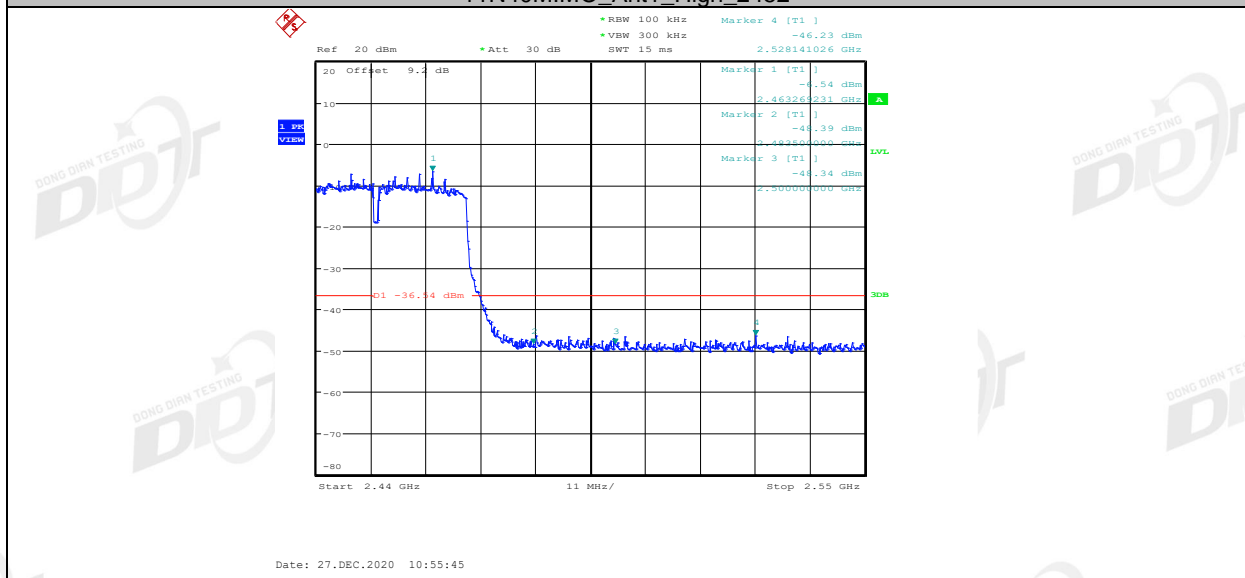


11N40MIMO_Ant2_High_2452

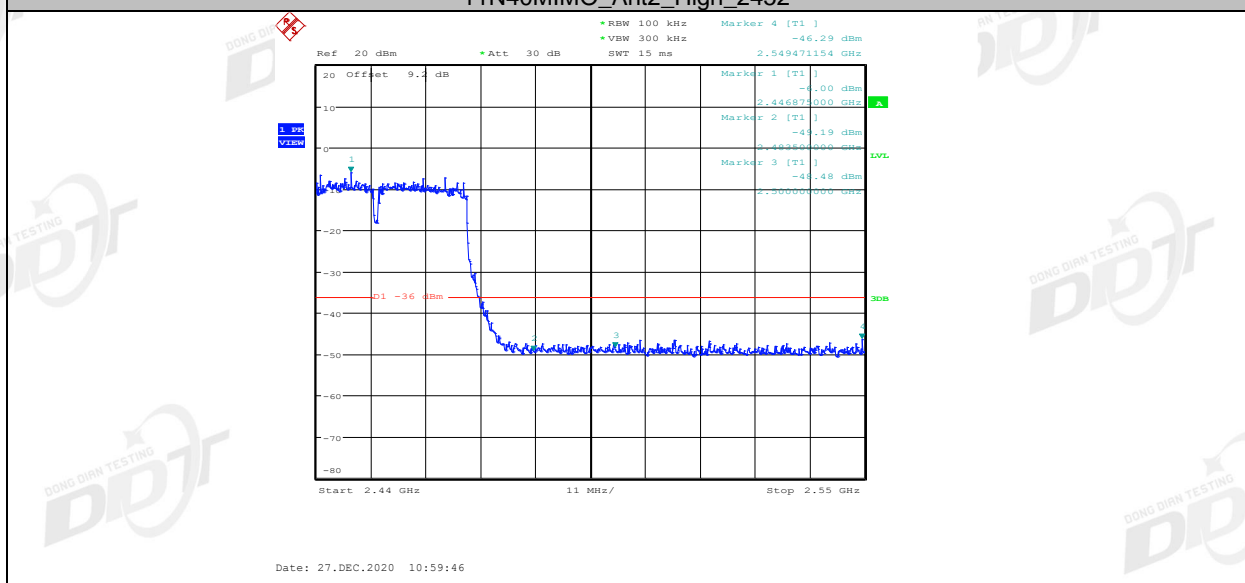


Spurious Emissions




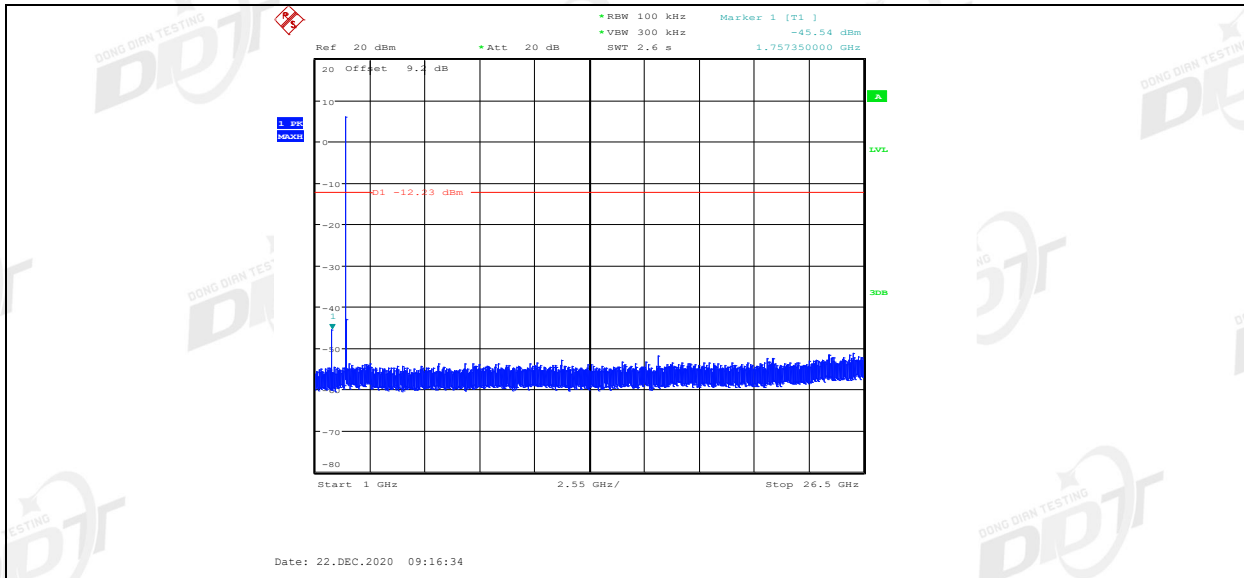


11B_Ant2_2412_0~Reference

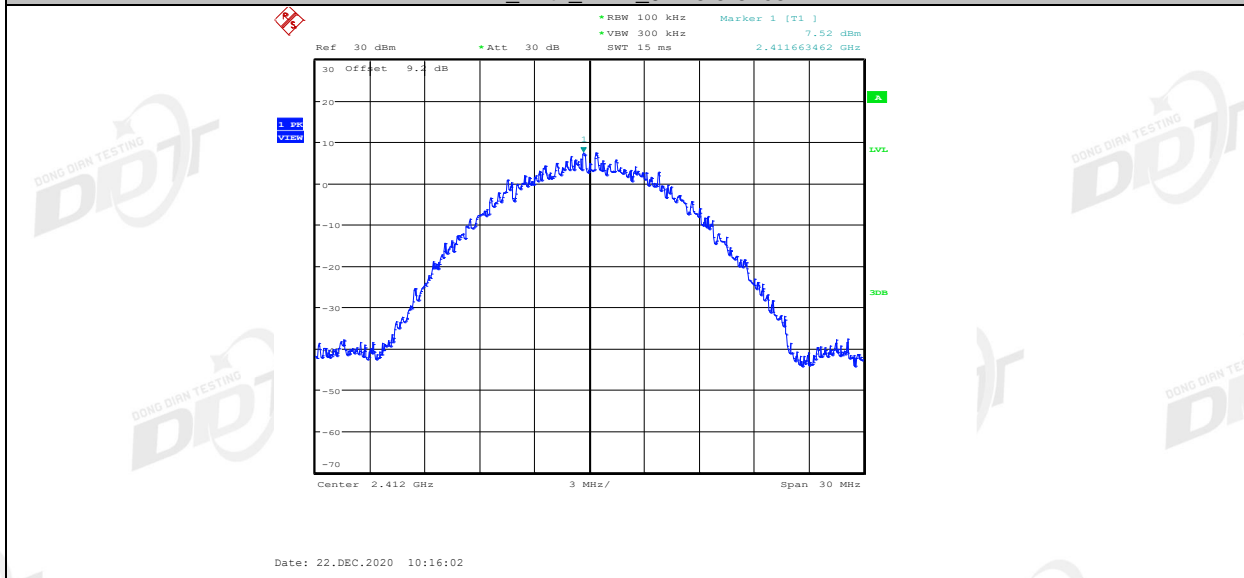


11B_Ant2_2412_30~1000

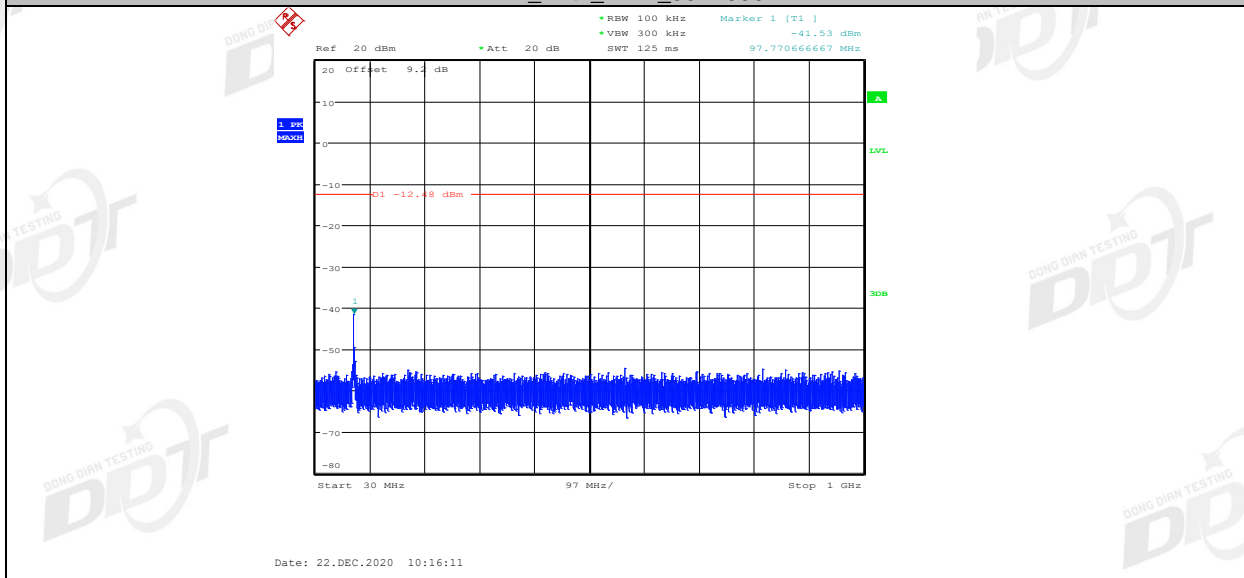


11B_Ant2_2412_1000~26500

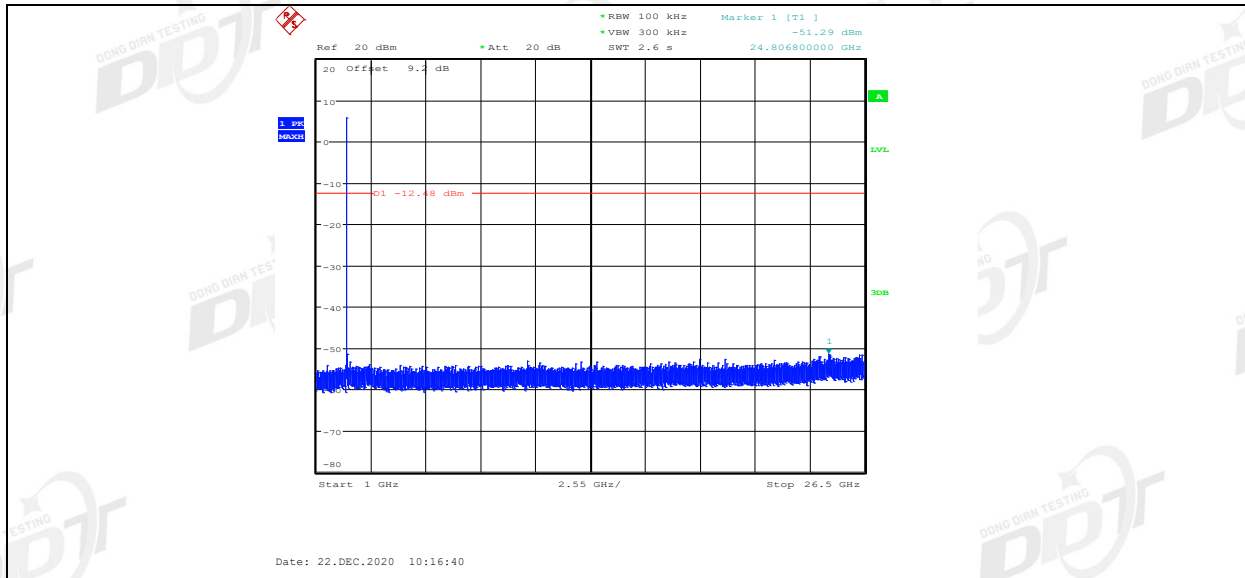


11B_Ant1_2437_0~Reference

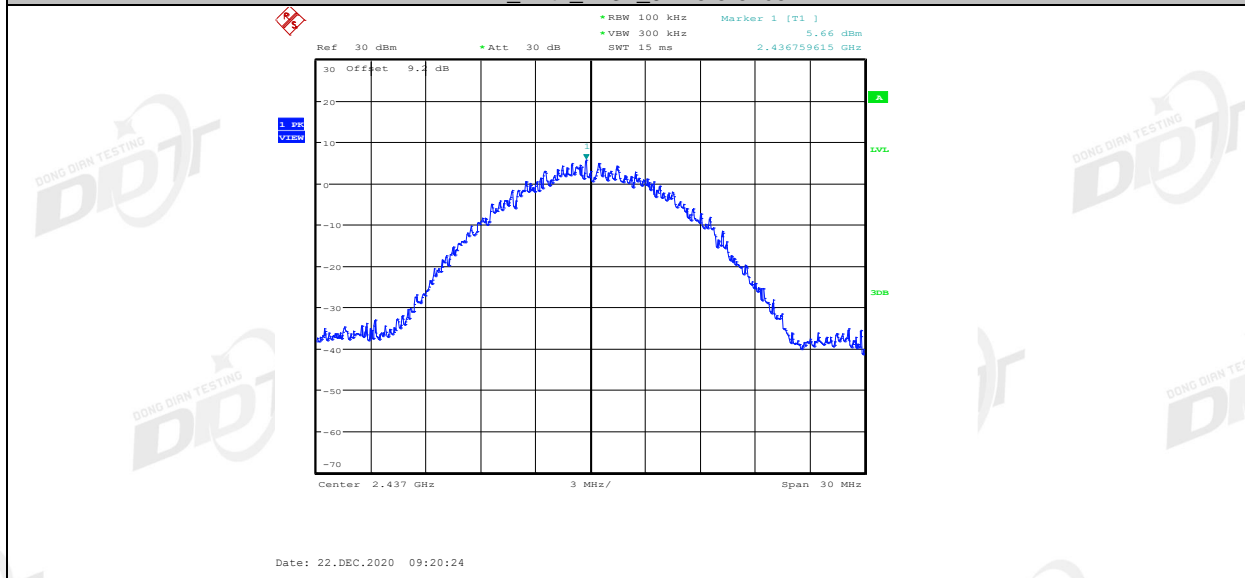


11B_Ant1_2437_30~1000

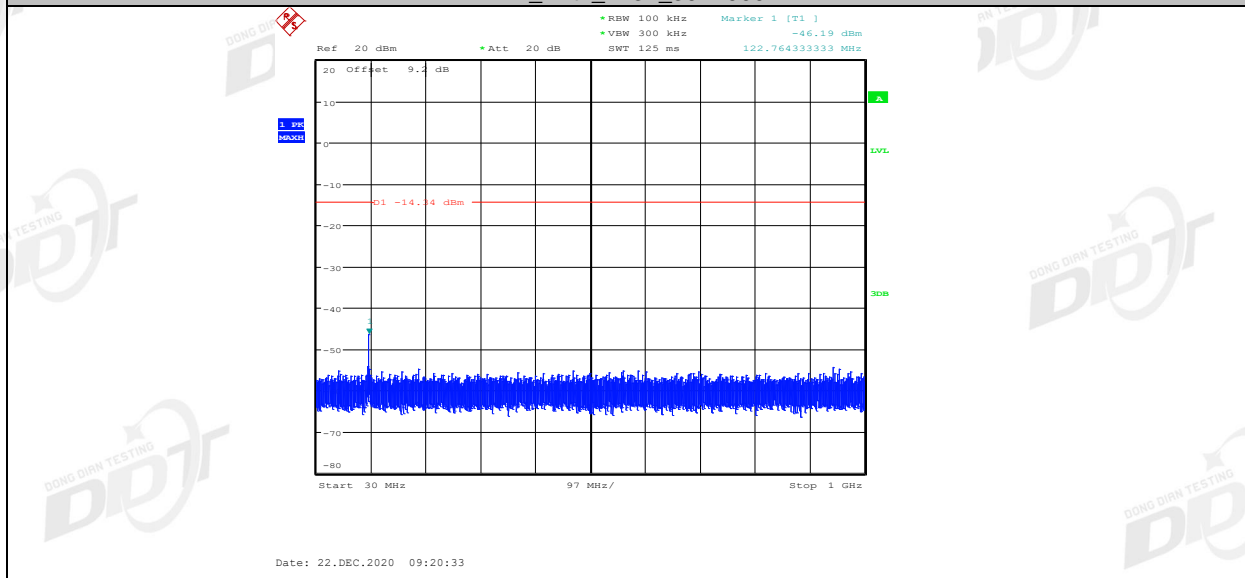


11B_Ant1_2437_1000~26500

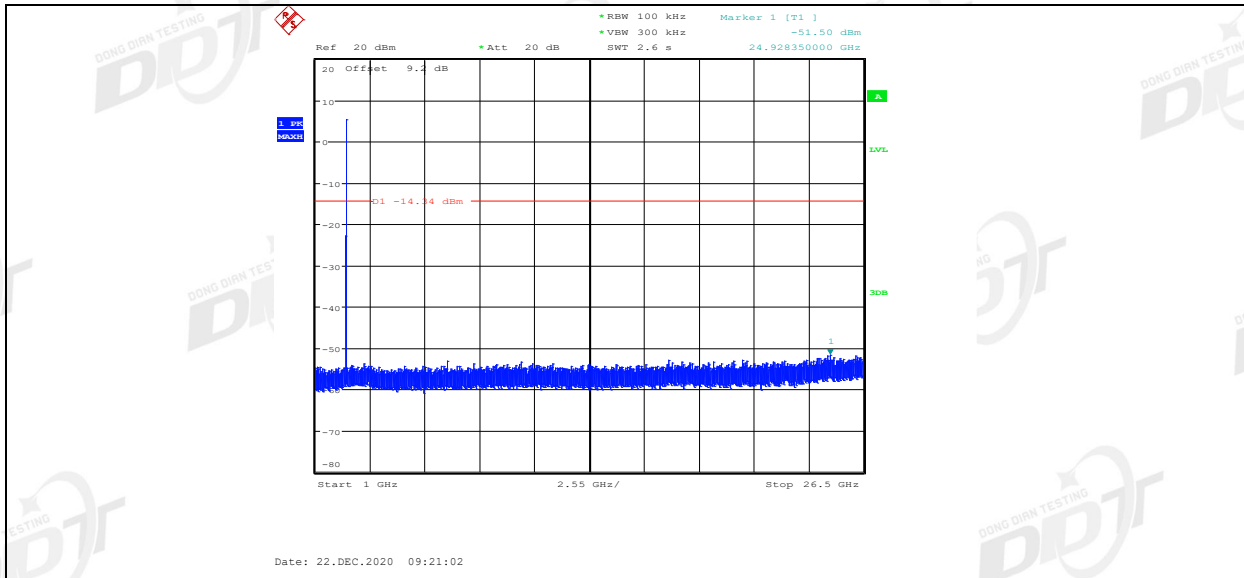


11B_Ant2_2437_0~Reference

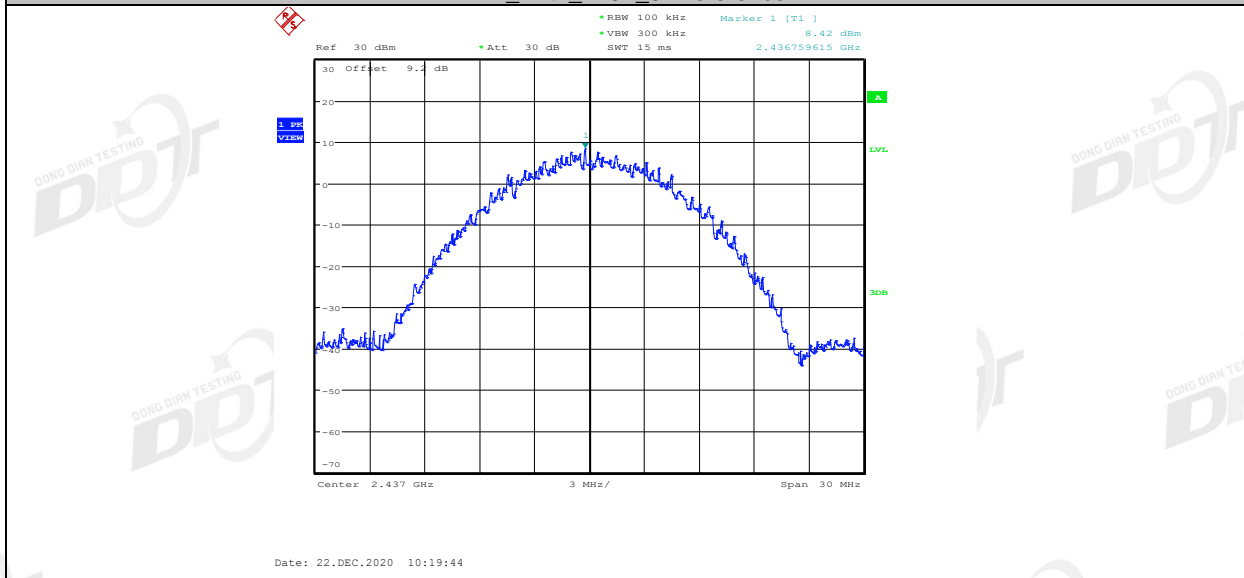


11B_Ant2_2437_30~1000

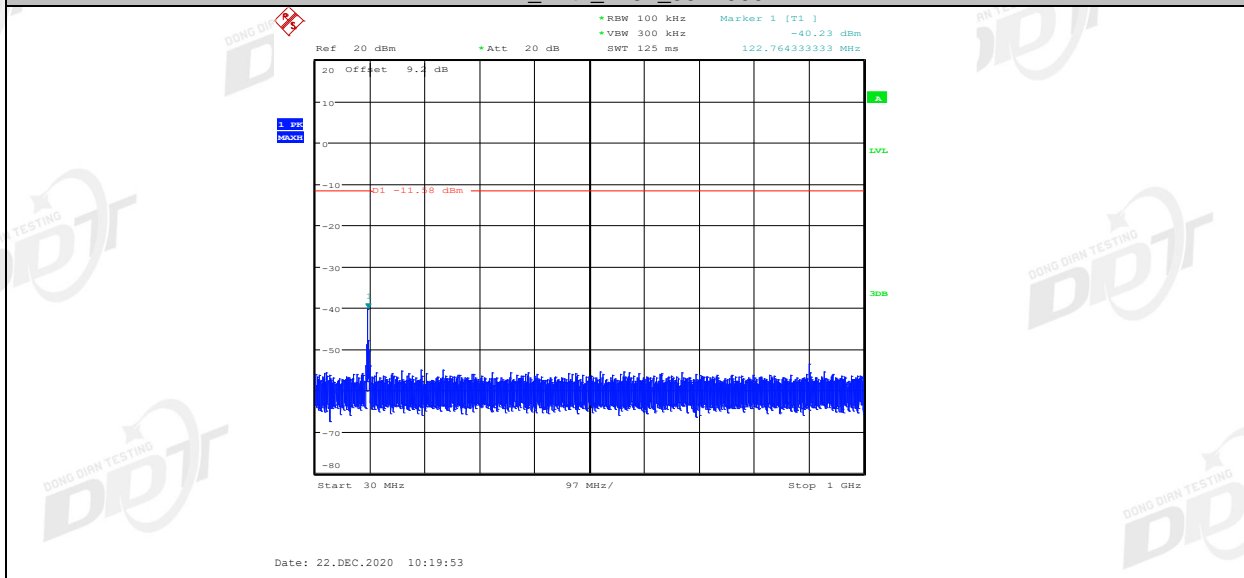


11B_Ant2_2437_1000~26500

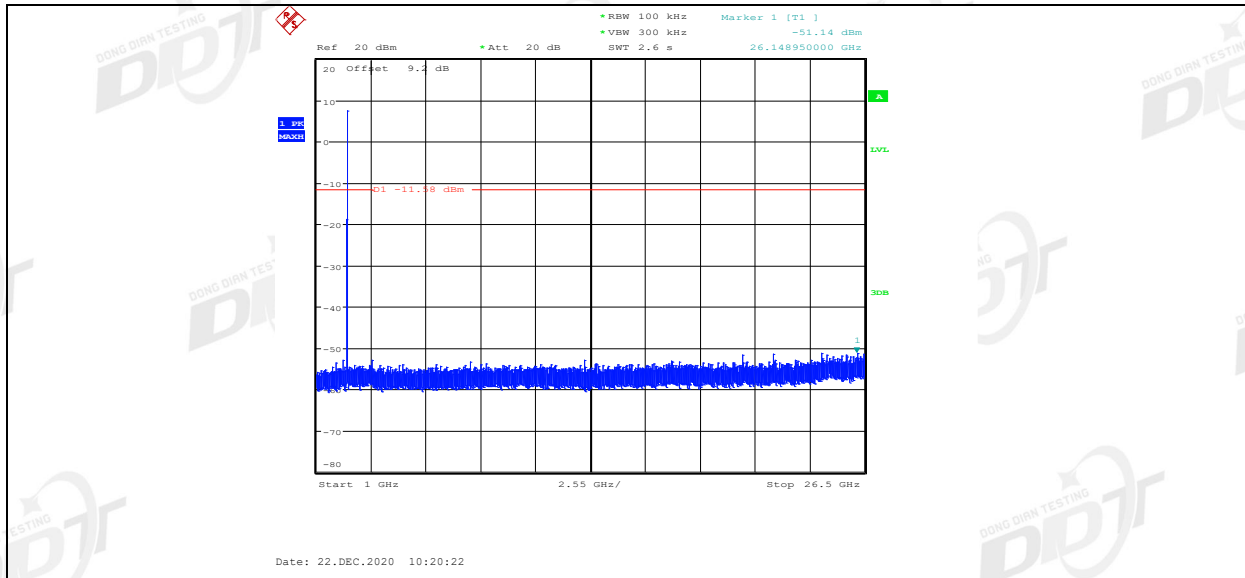


11B_Ant1_2462_0~Reference

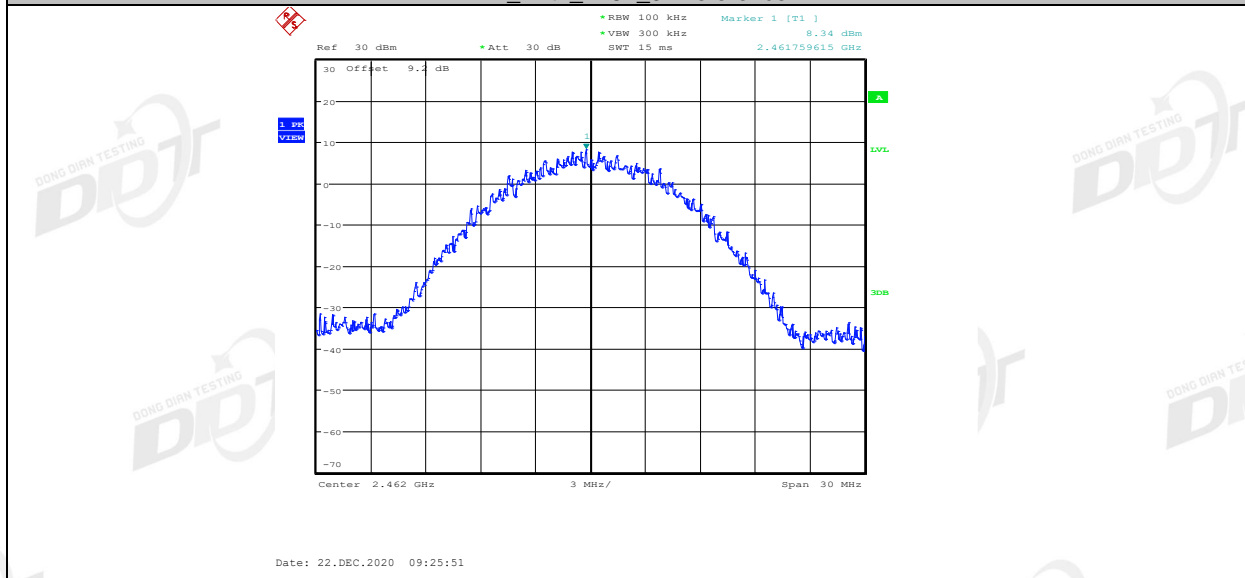


11B_Ant1_2462_30~1000

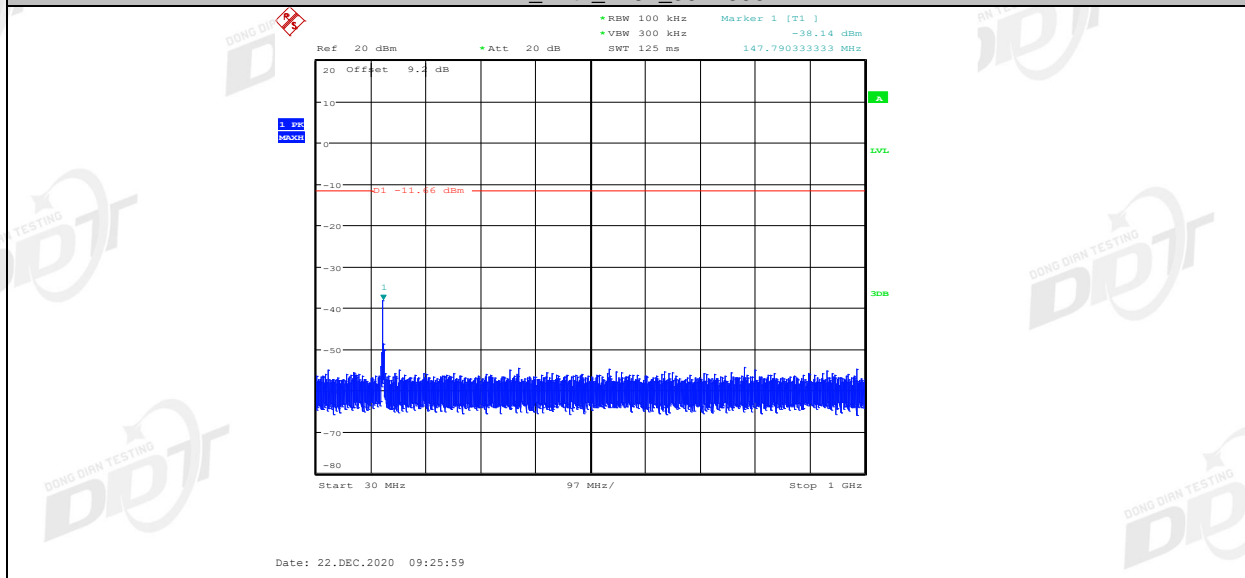


11B_Ant1_2462_1000~26500

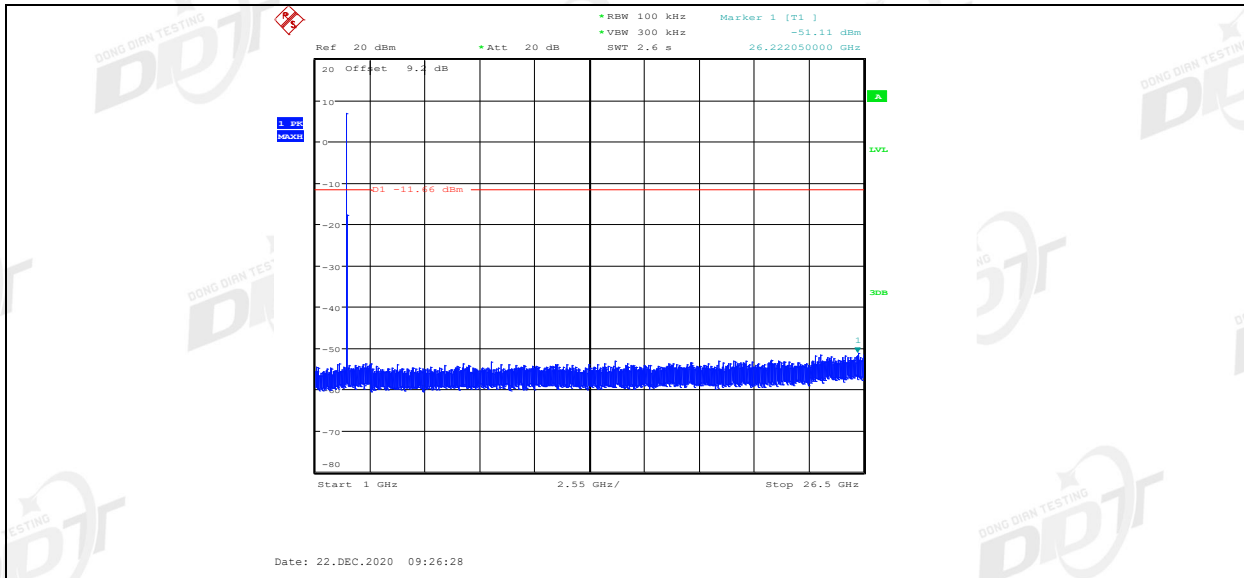


11B_Ant2_2462_0~Reference

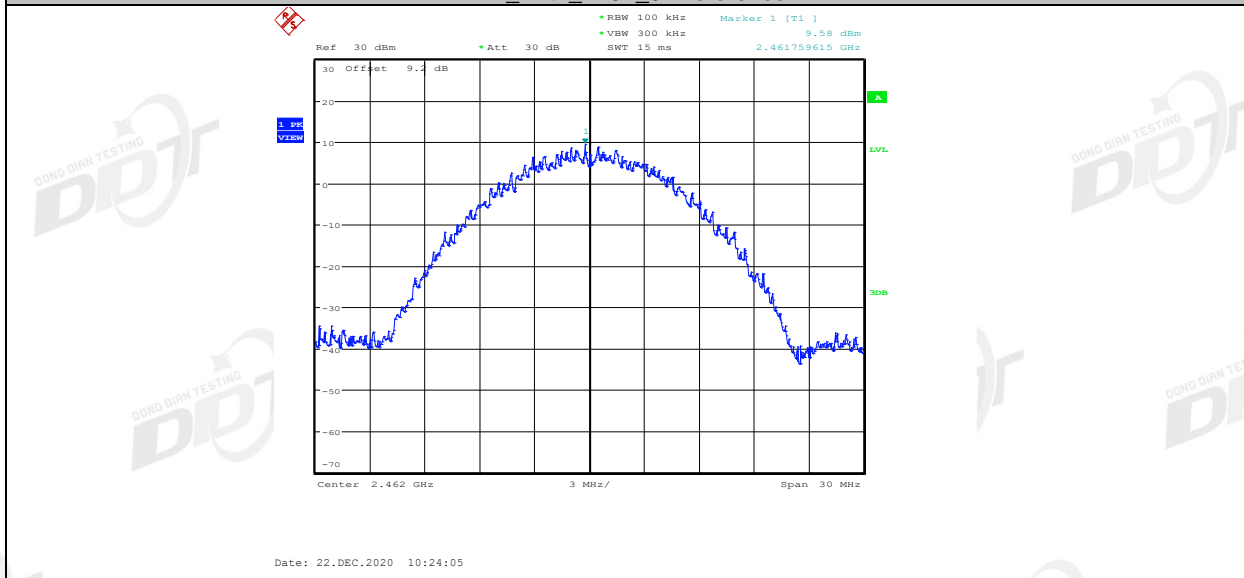


11B_Ant2_2462_30~1000

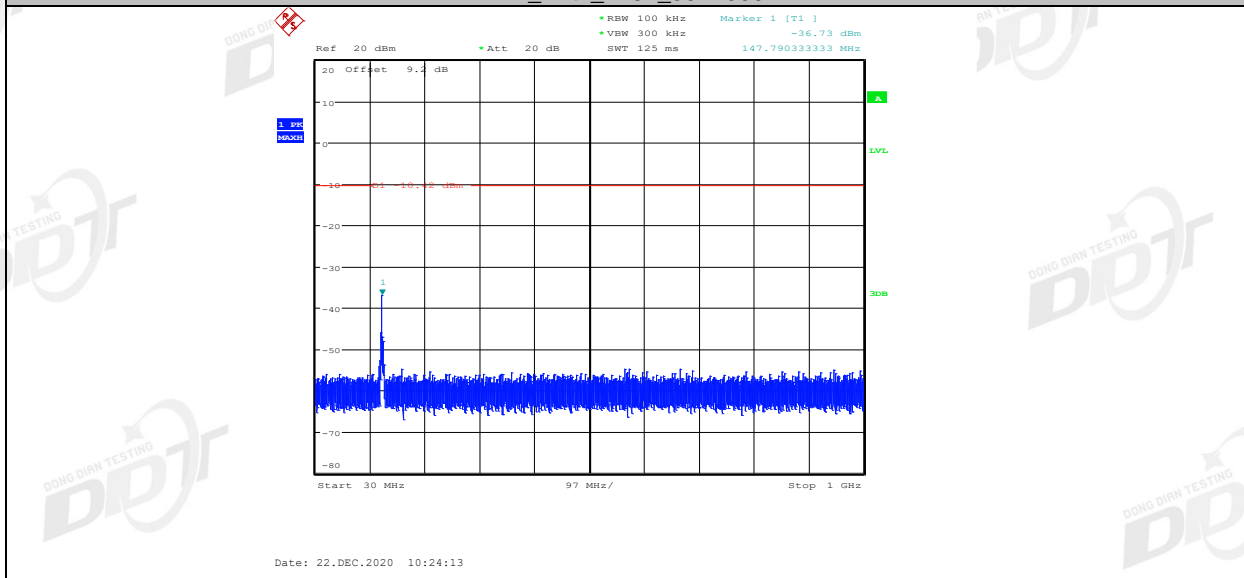


11B_Ant2_2462_1000~26500

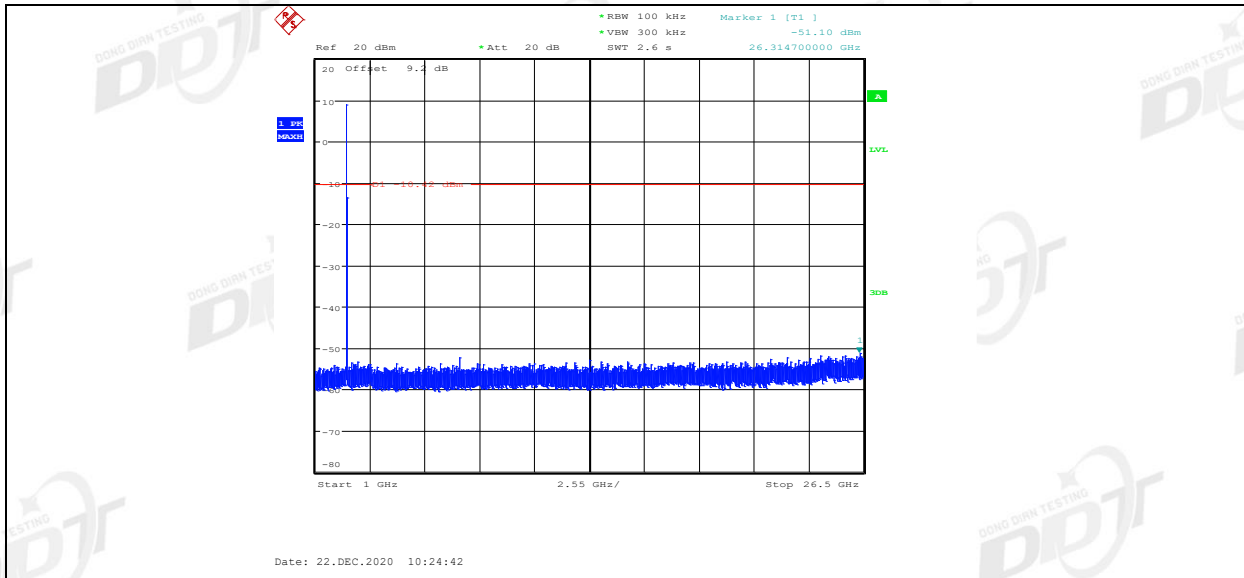


11G_Ant1_2412_0~Reference

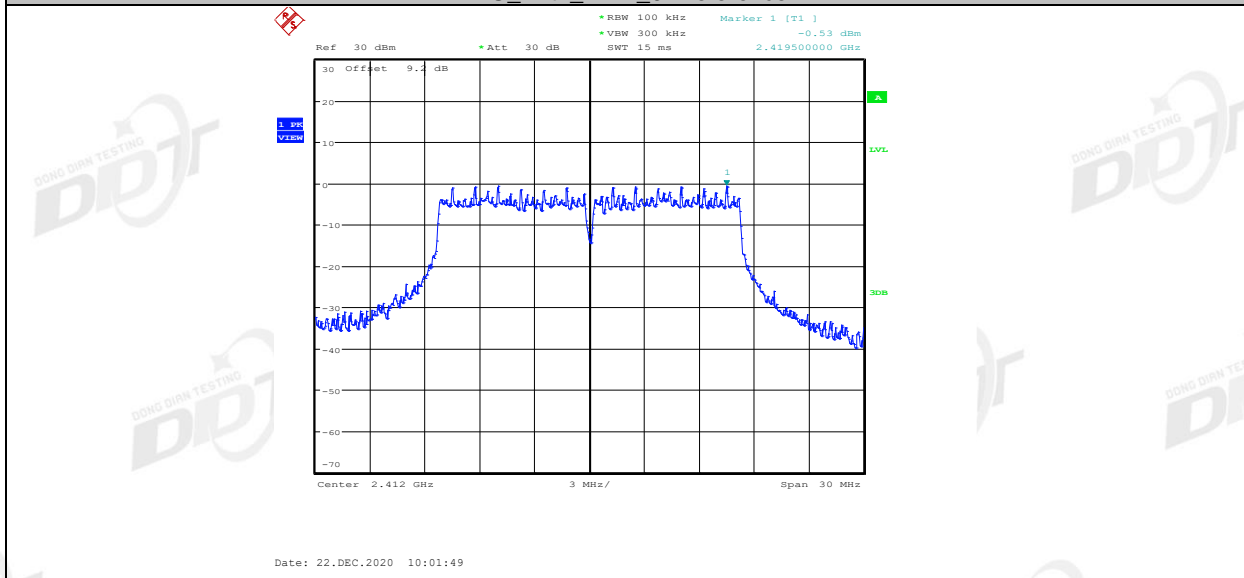


11G_Ant1_2412_30~1000

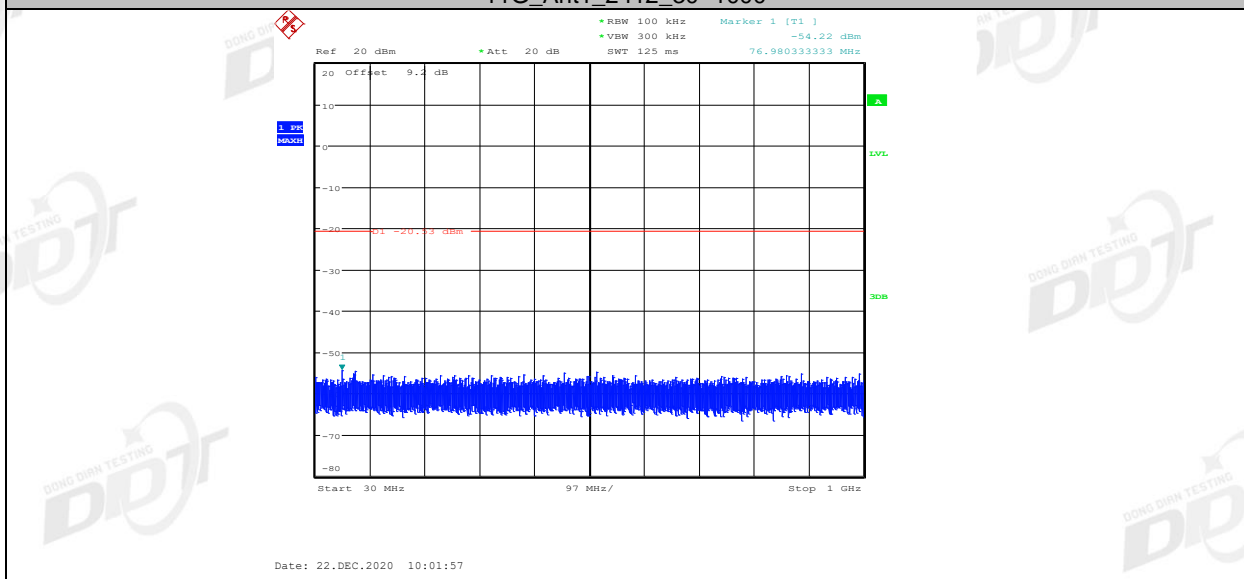


11G_Ant1_2412_1000~26500

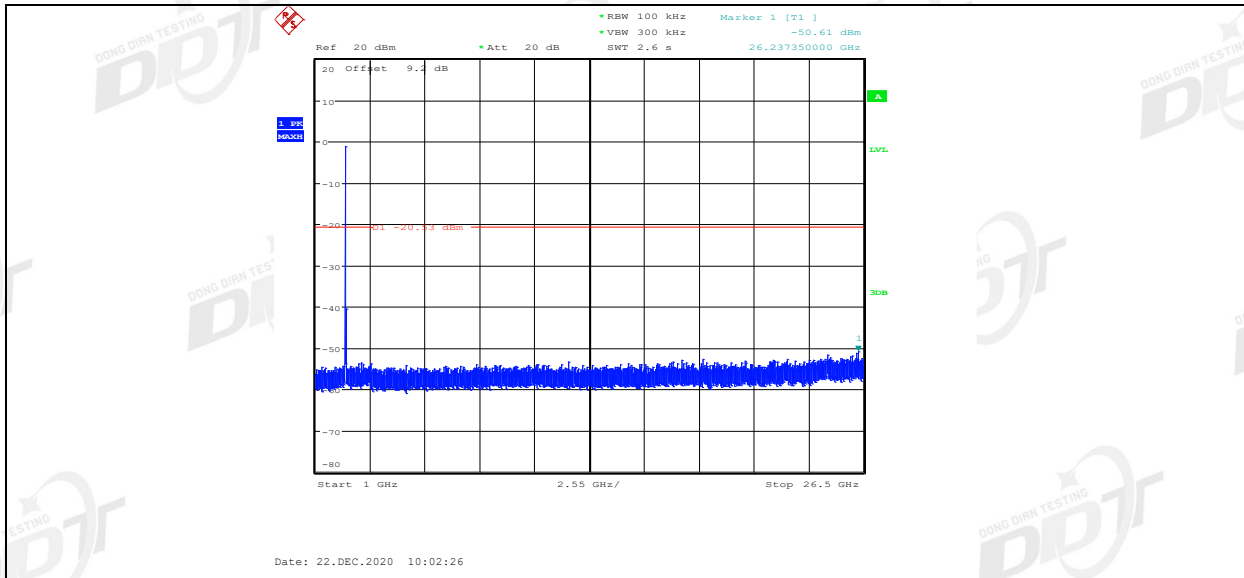


11G_Ant2_2412_0~Reference

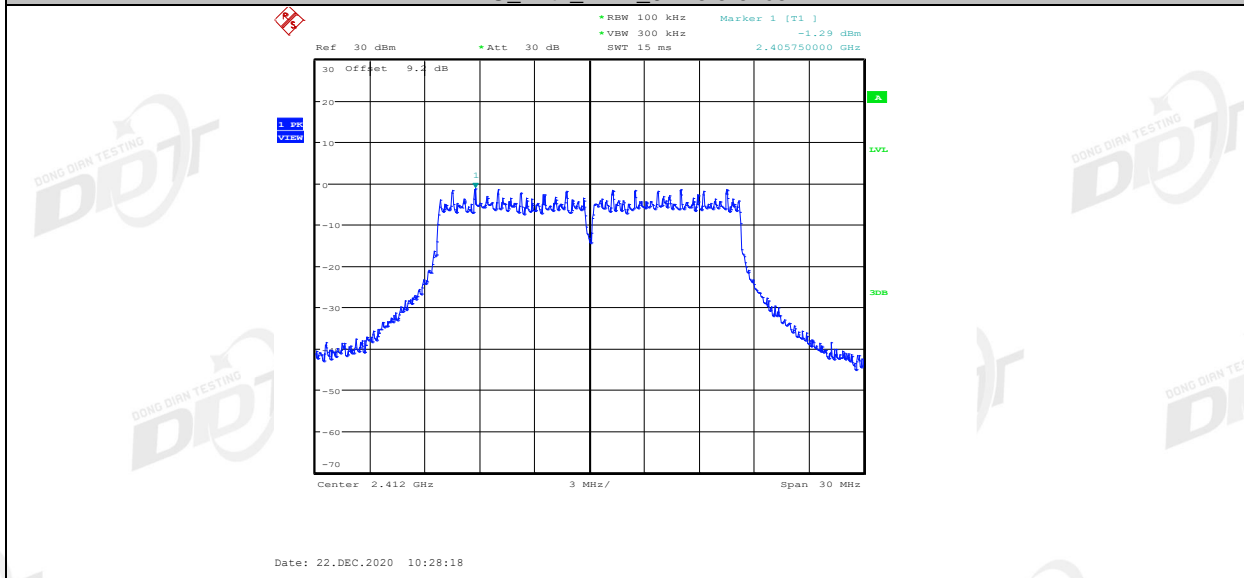


11G_Ant2_2412_30~1000

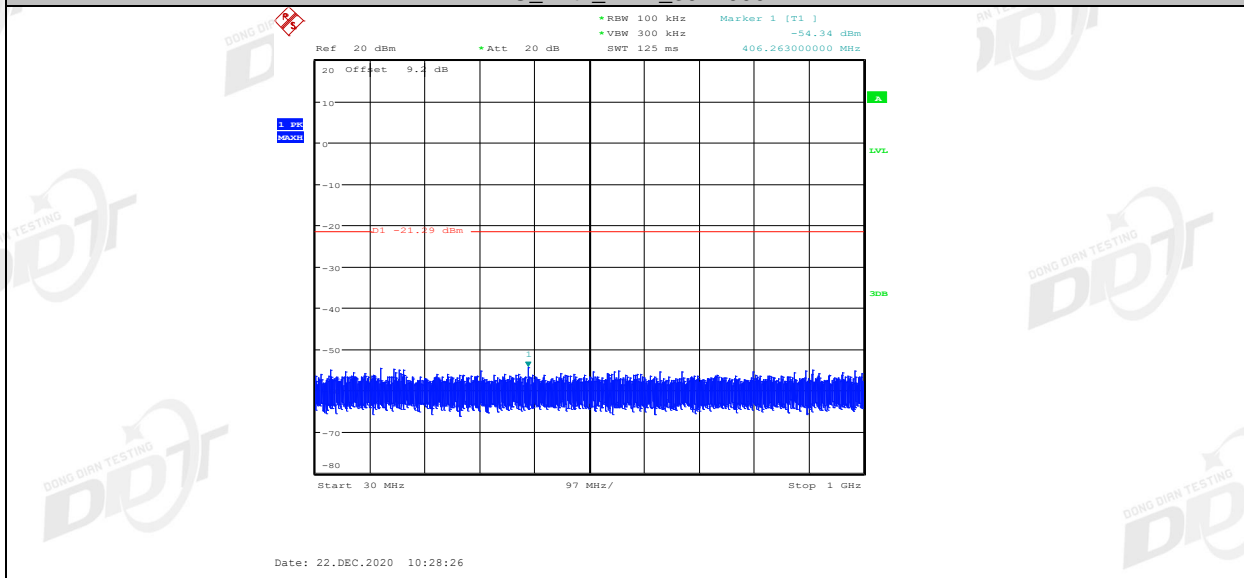


11G_Ant2_2412_1000~26500

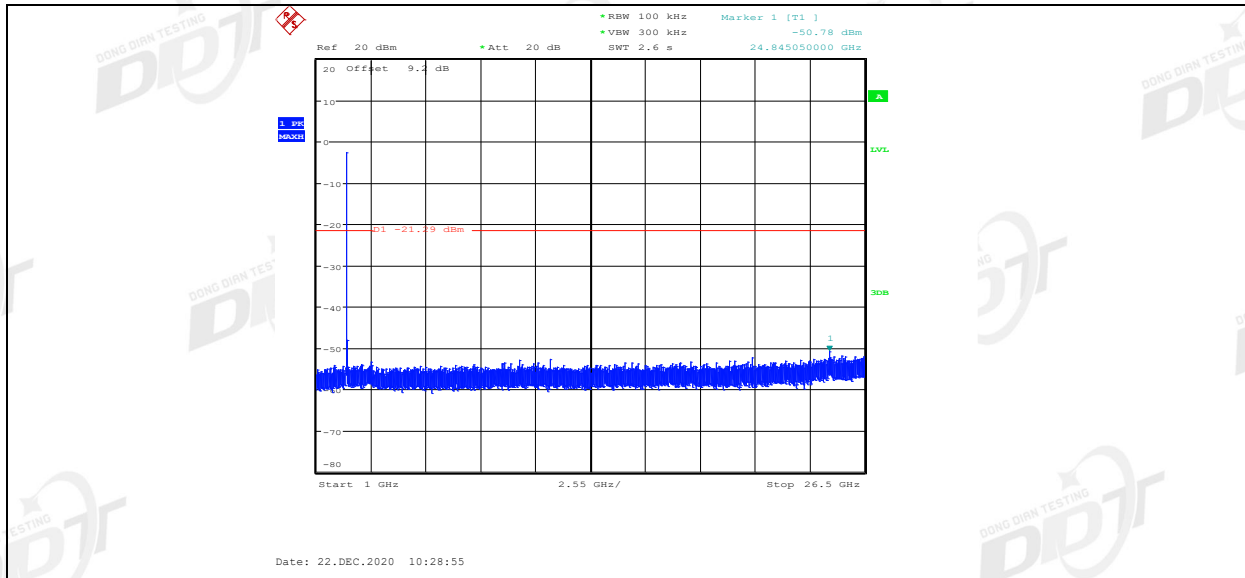


11G_Ant1_2437_0~Reference

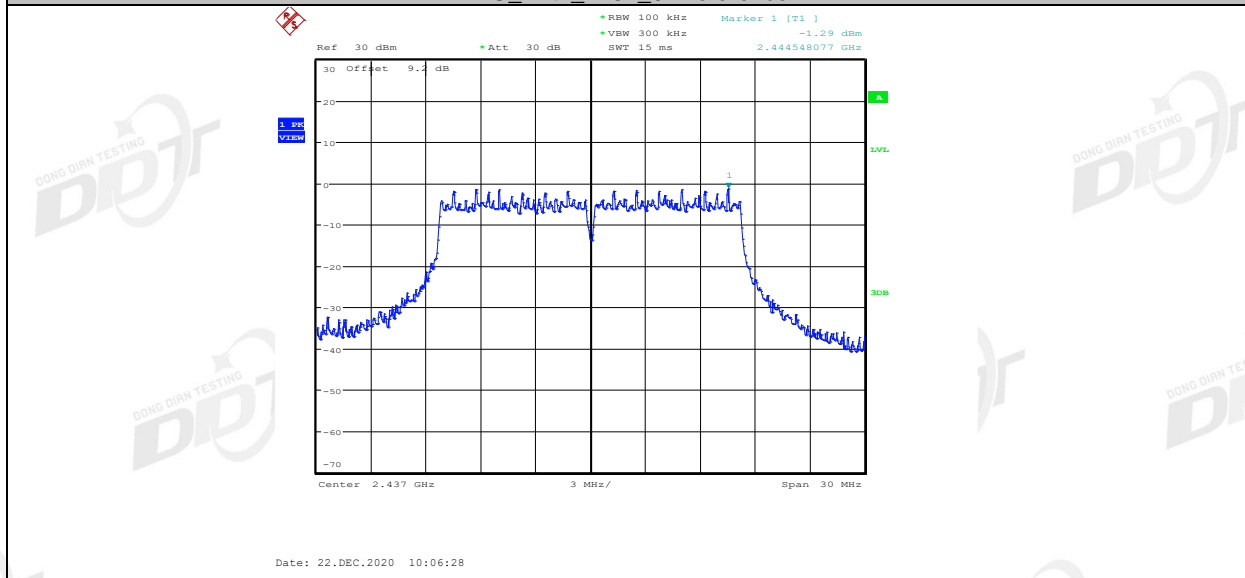


11G_Ant1_2437_30~1000

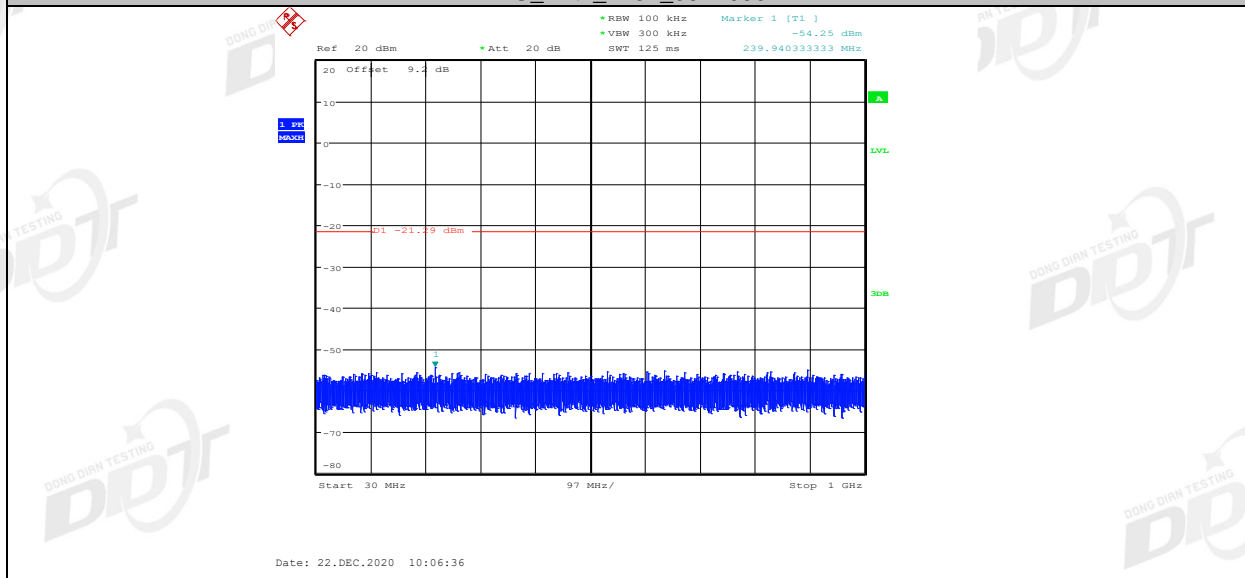


11G_Ant1_2437_1000~26500

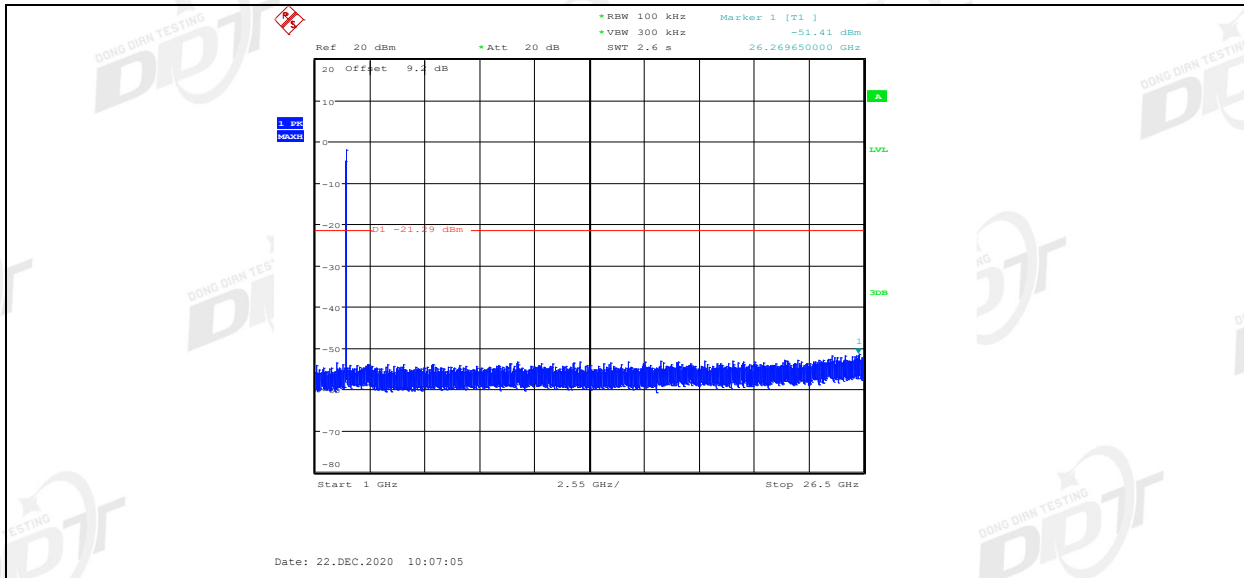


11G_Ant2_2437_0~Reference

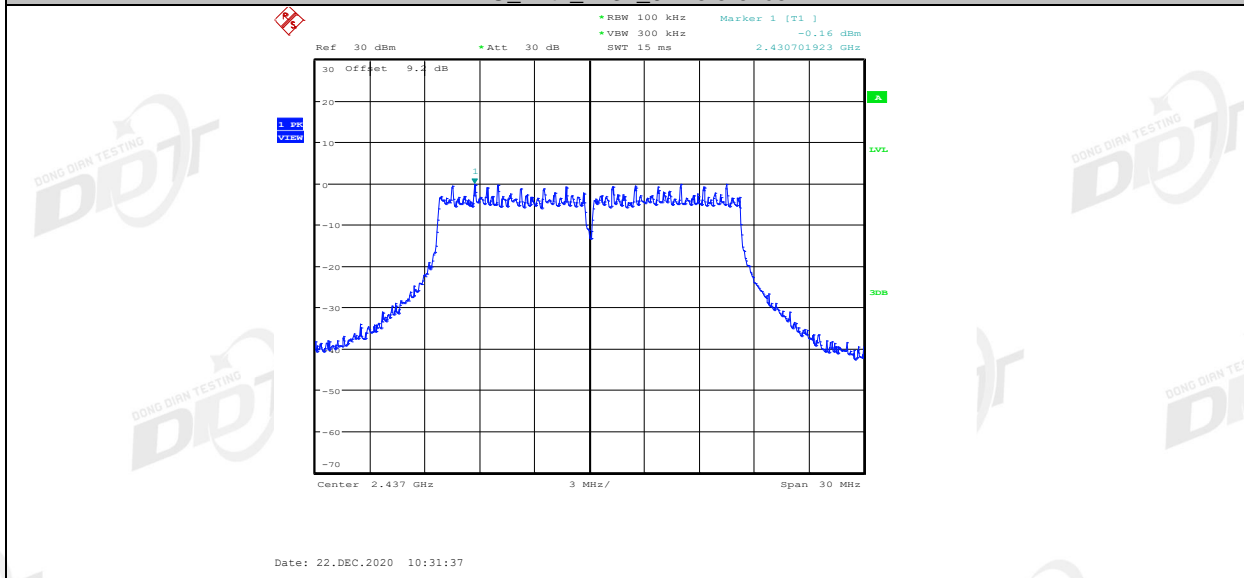


11G_Ant2_2437_30~1000

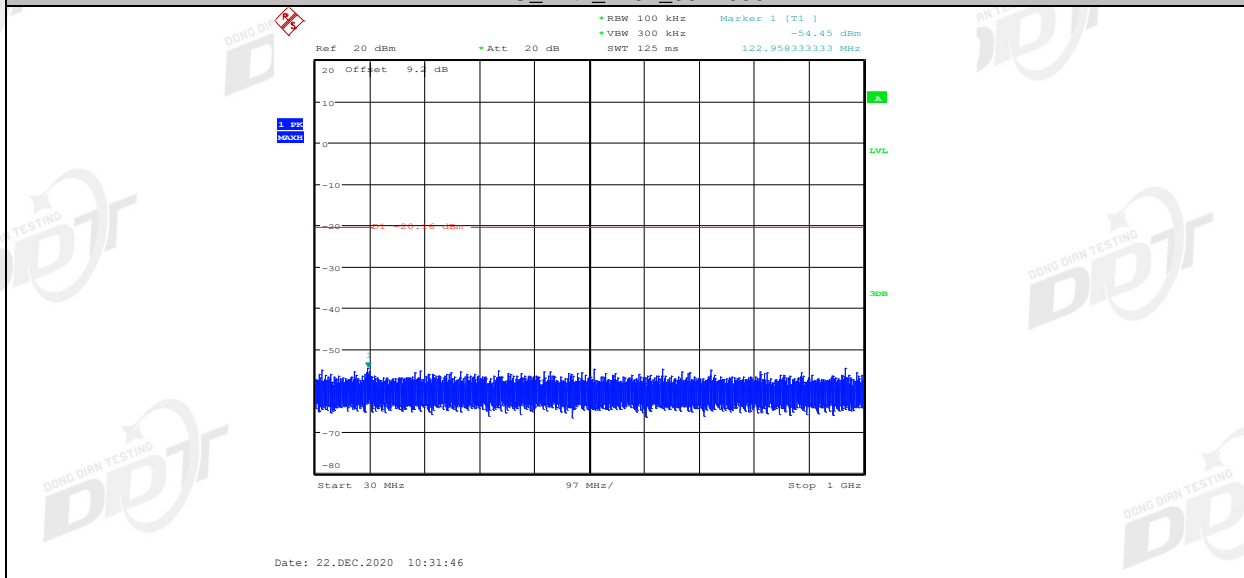


11G_Ant2_2437_1000~26500

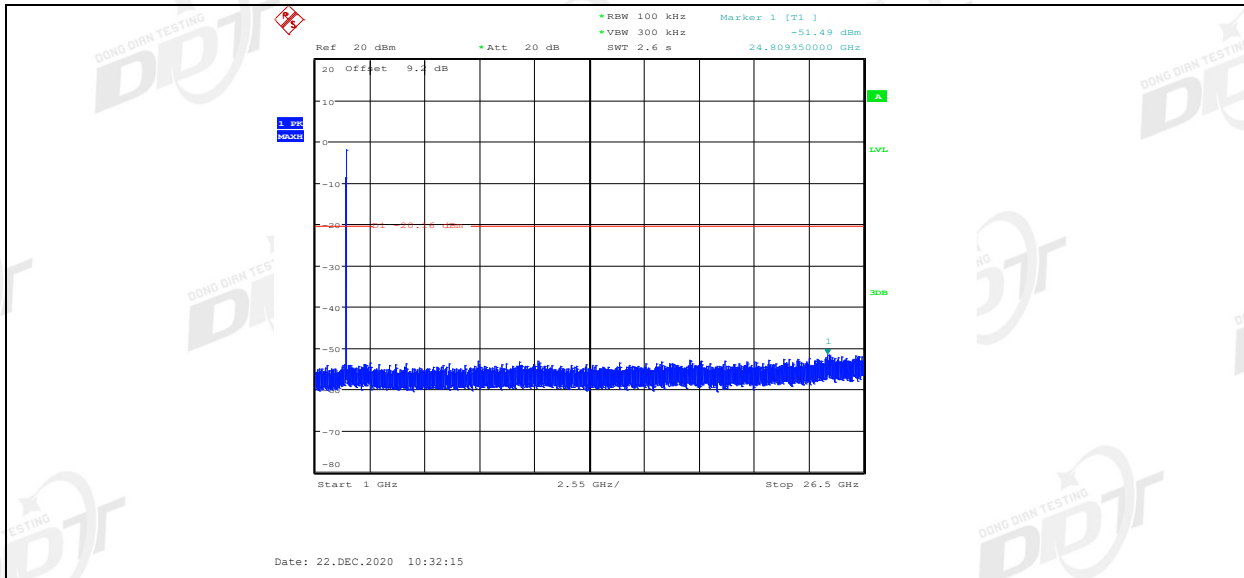


11G_Ant1_2462_0~Reference

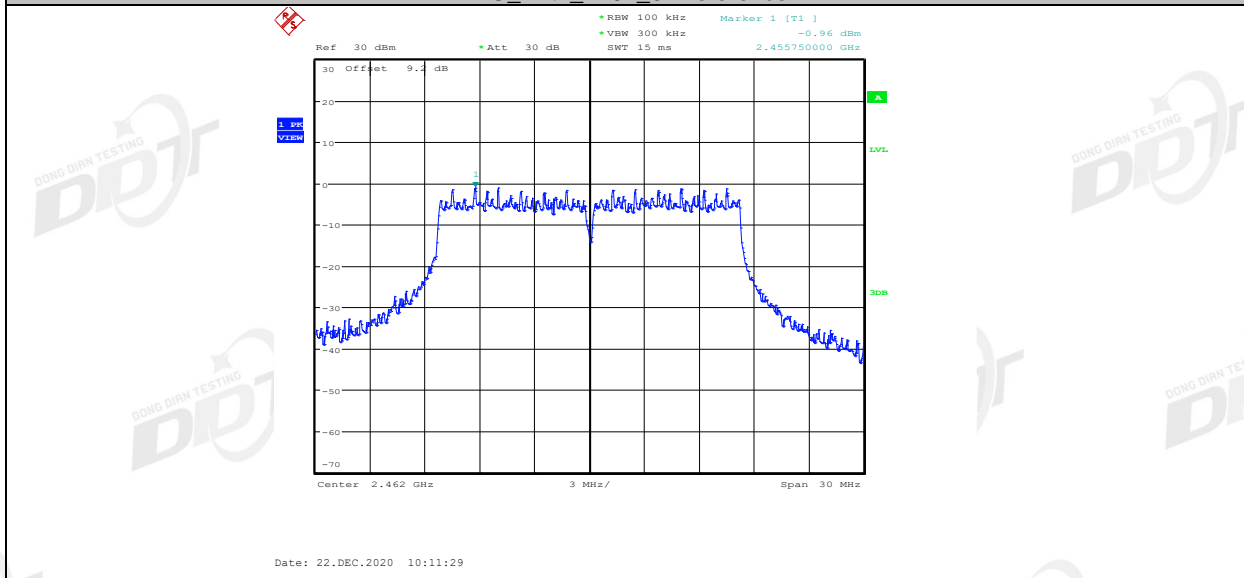


11G_Ant1_2462_30~1000

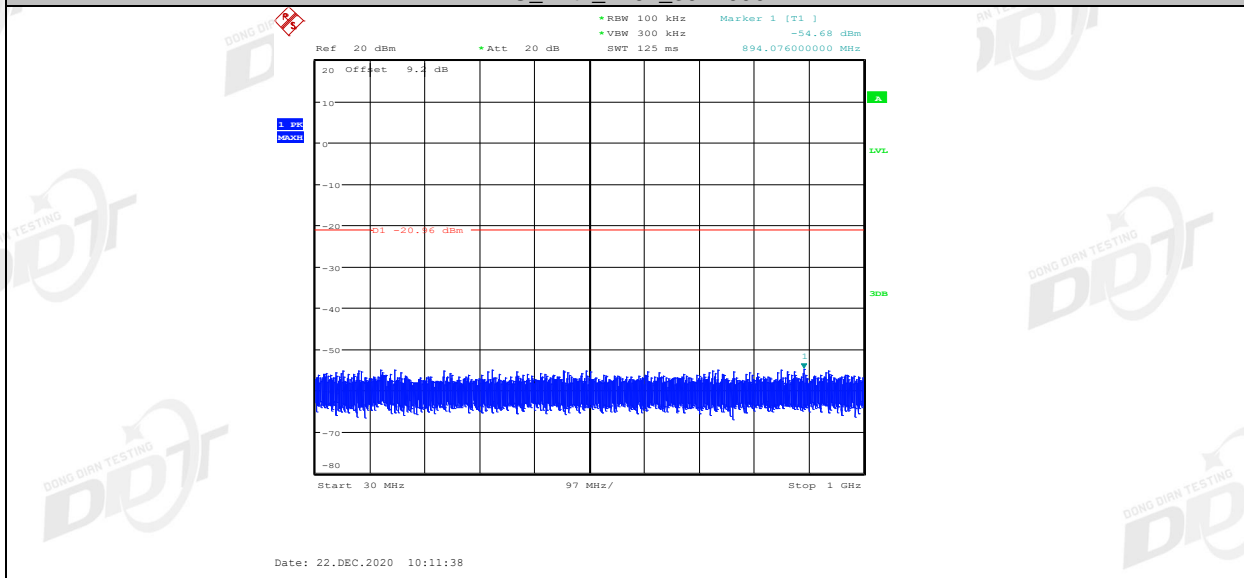


11G_Ant1_2462_1000~26500

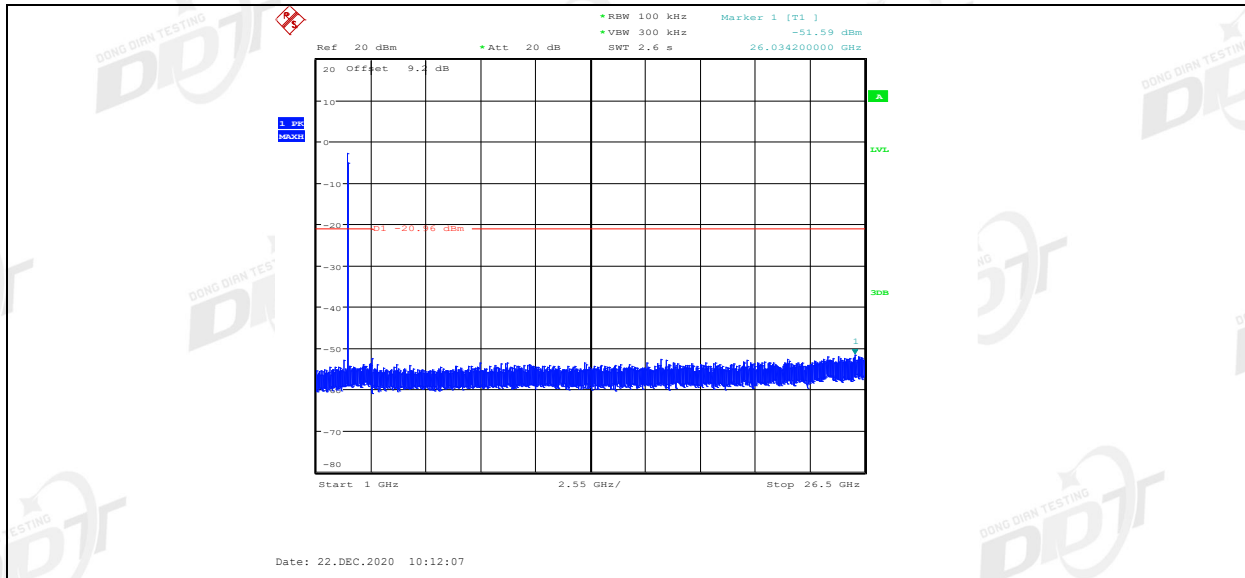


11G_Ant2_2462_0~Reference

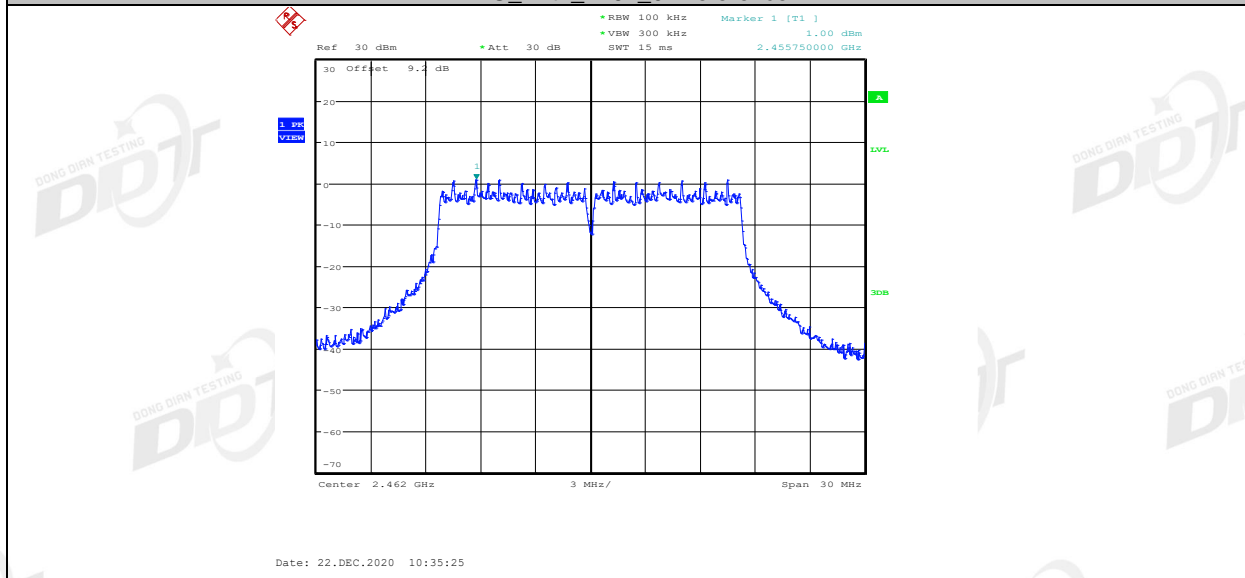


11G_Ant2_2462_30~1000

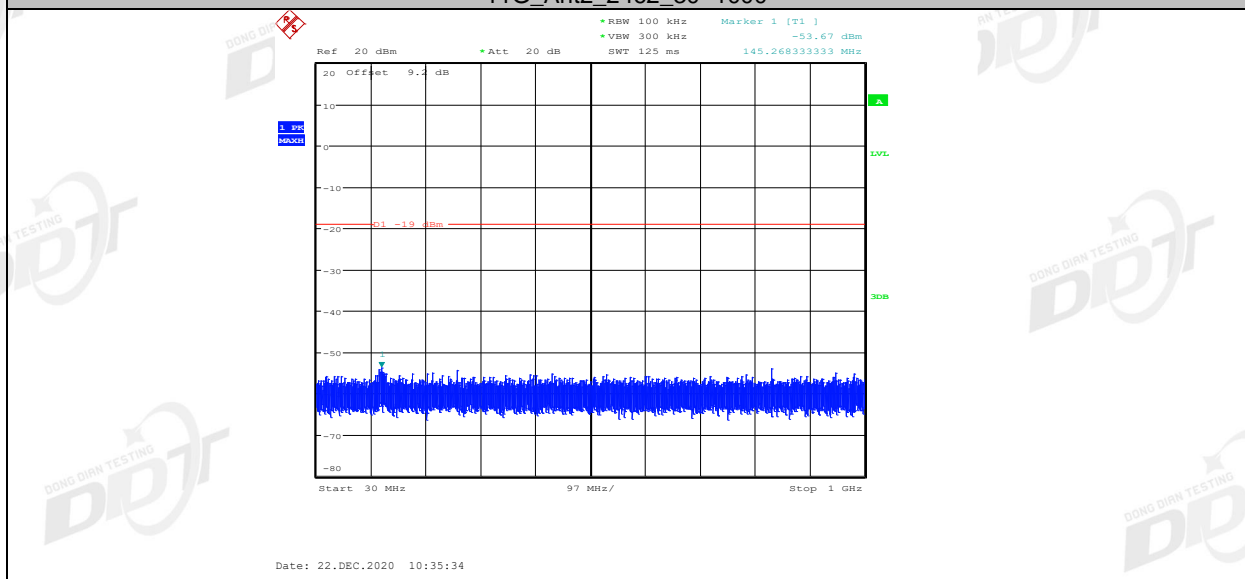


11G_Ant2_2462_1000~26500

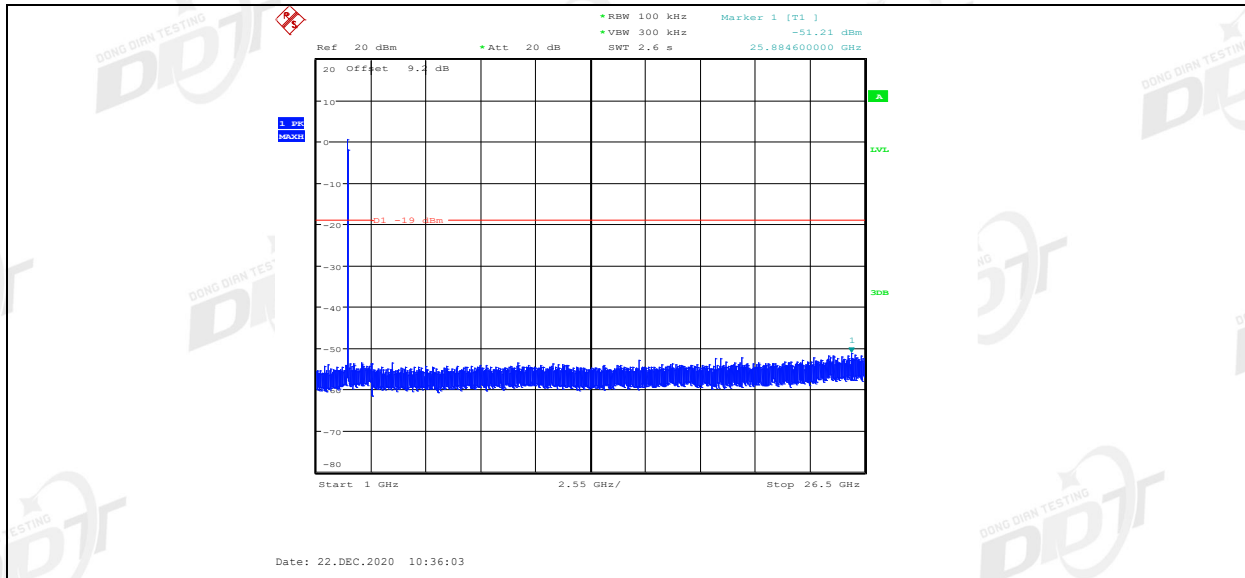


11N20MIMO_Ant1_2412_0~Reference

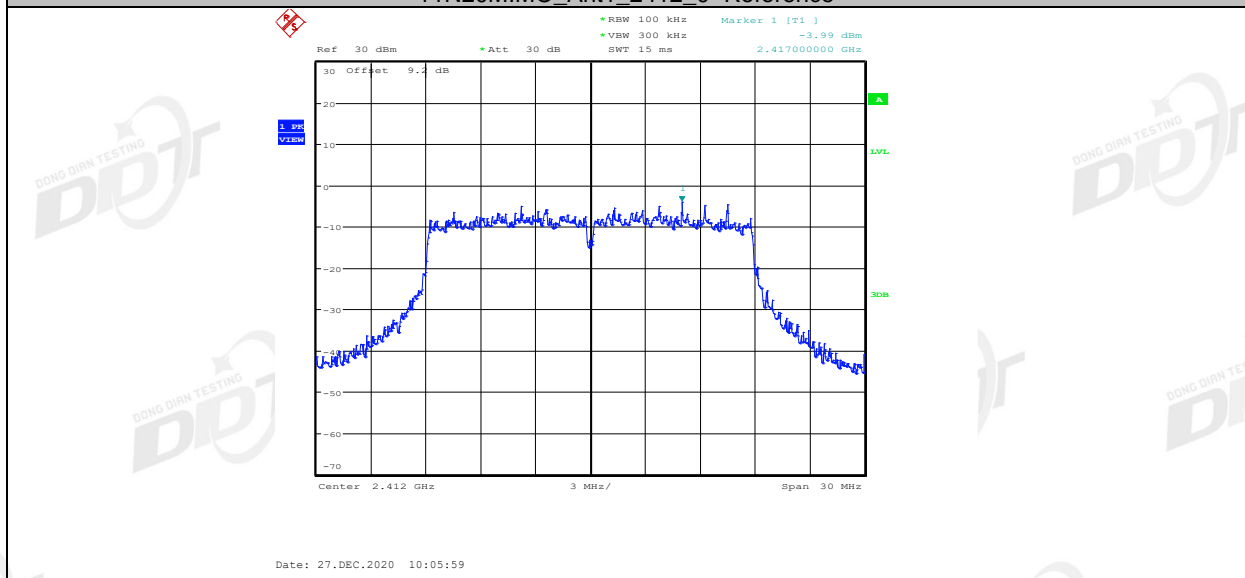


11N20MIMO_Ant1_2412_30~1000

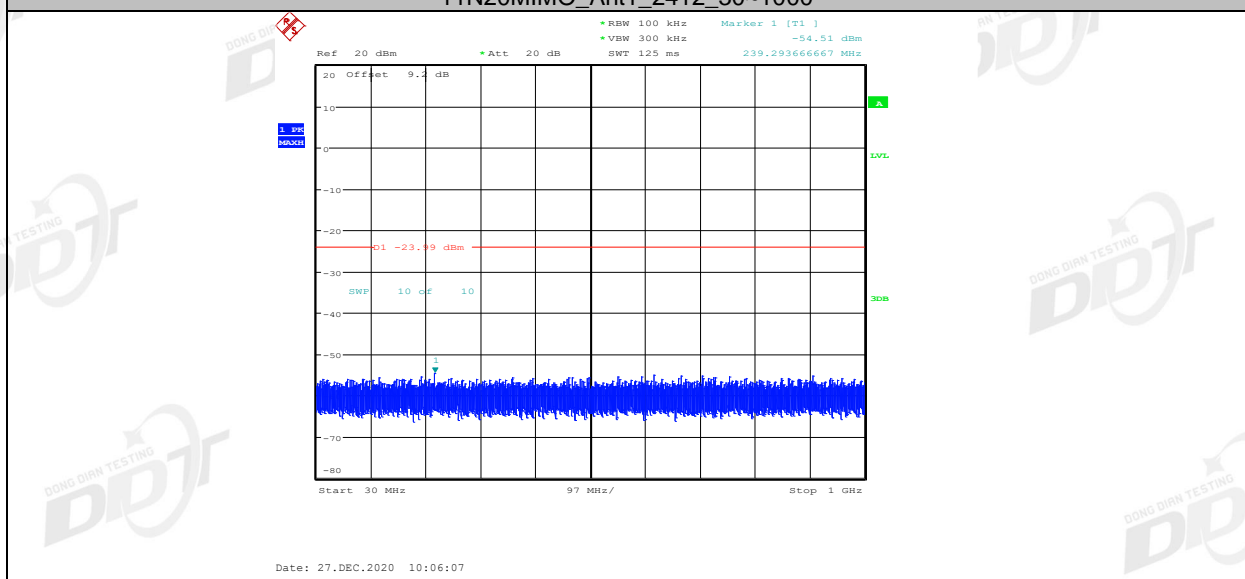


11N20MIMO_Ant1_2412_1000~26500

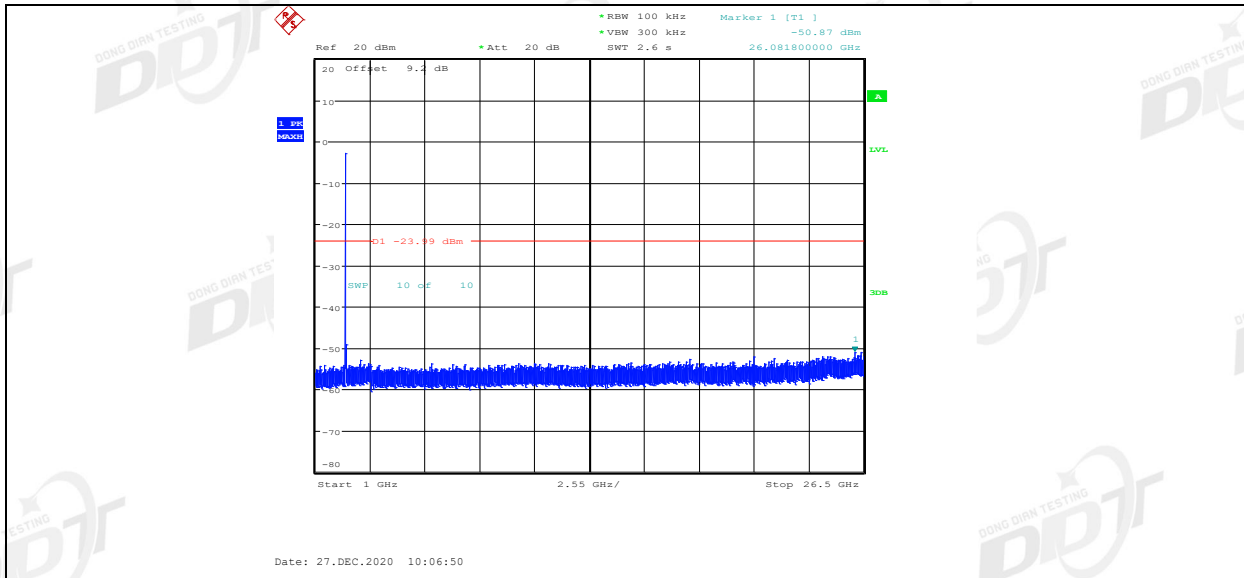


11N20MIMO_Ant2_2412_0~Reference

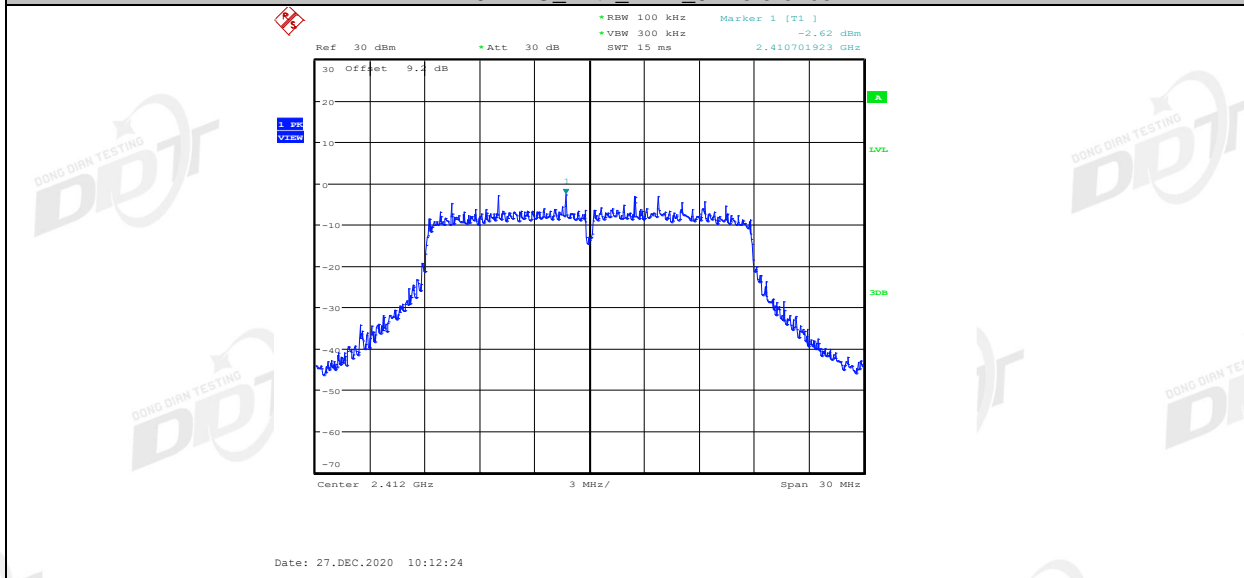


11N20MIMO_Ant2_2412_30~1000

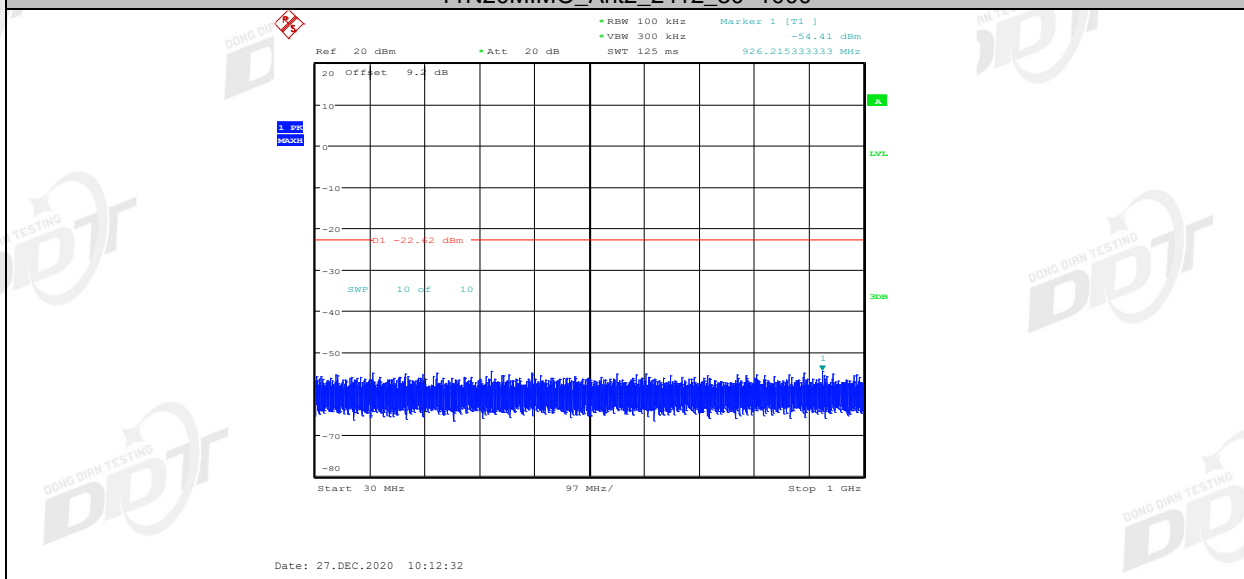


11N20MIMO_Ant2_2412_1000~26500

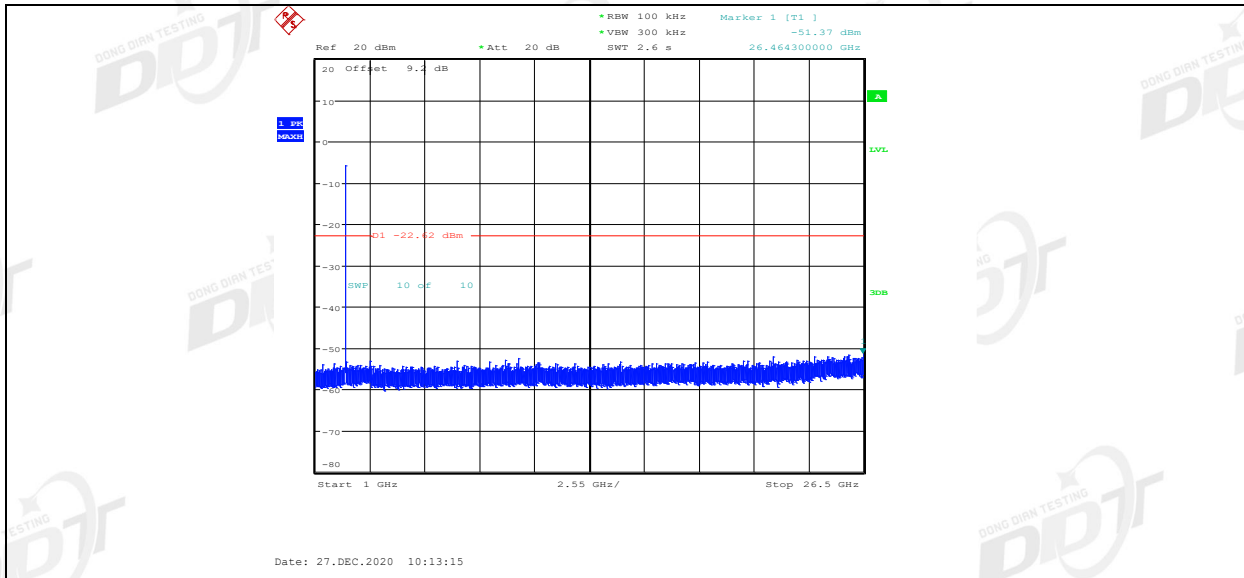


11N20MIMO_Ant1_2437_0~Reference

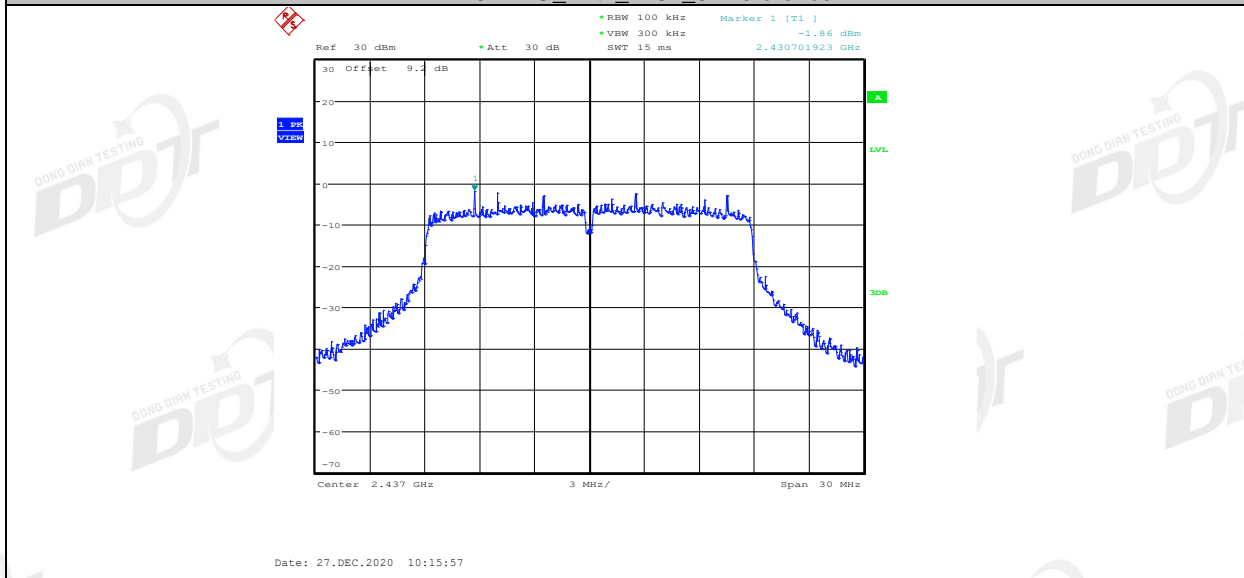


11N20MIMO_Ant1_2437_30~1000

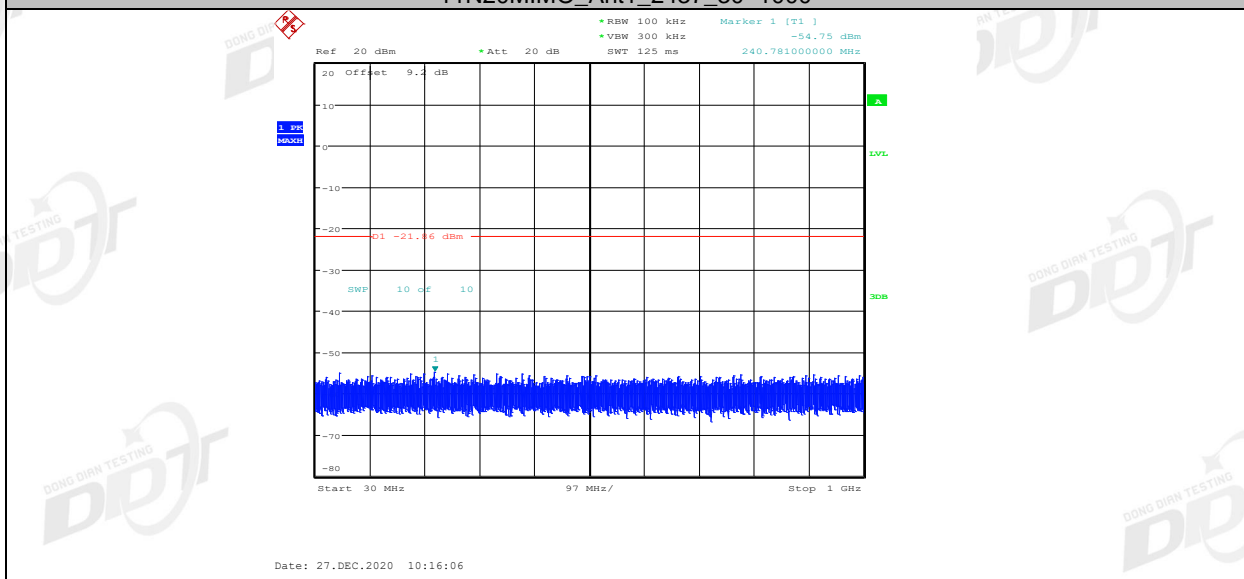


11N20MIMO_Ant1_2437_1000~26500

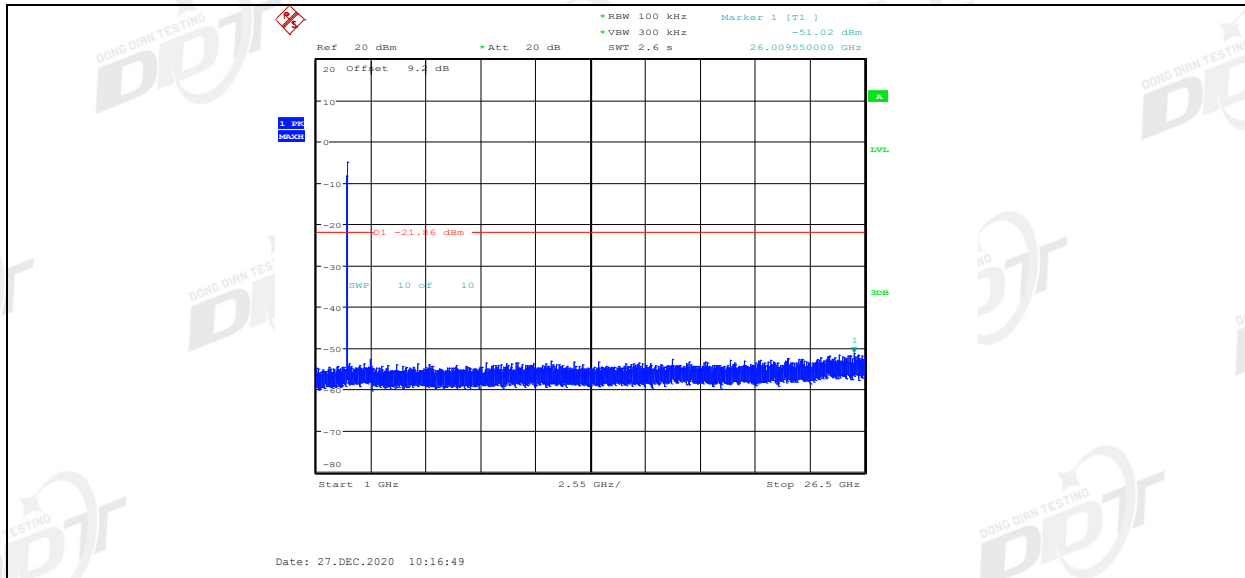


11N20MIMO_Ant2_2437_0~Reference

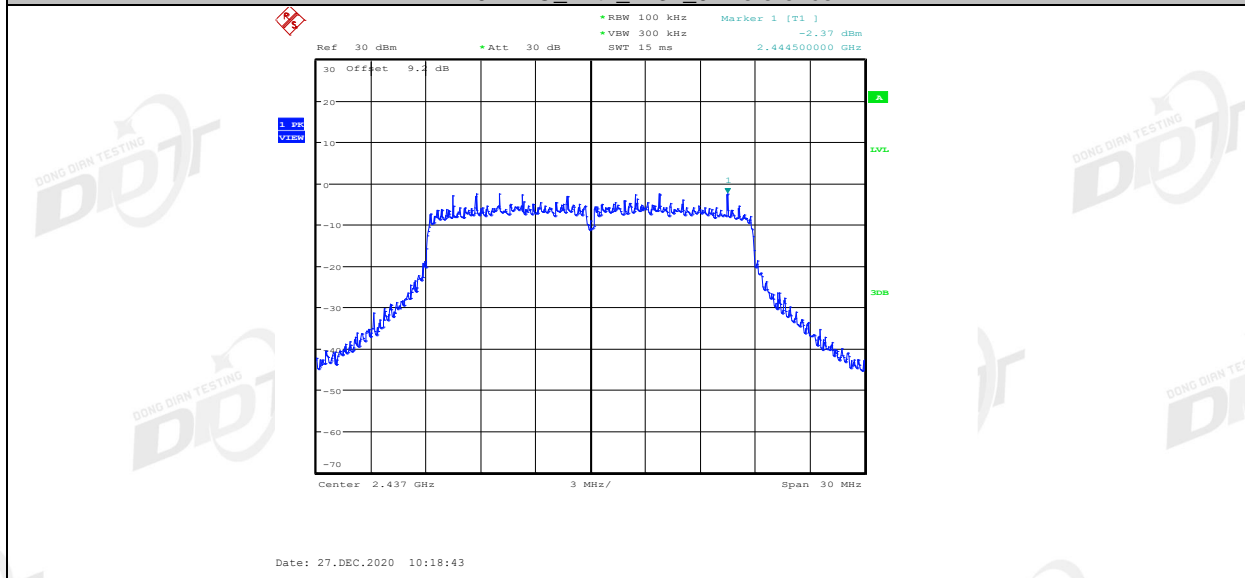


11N20MIMO_Ant2_2437_30~1000

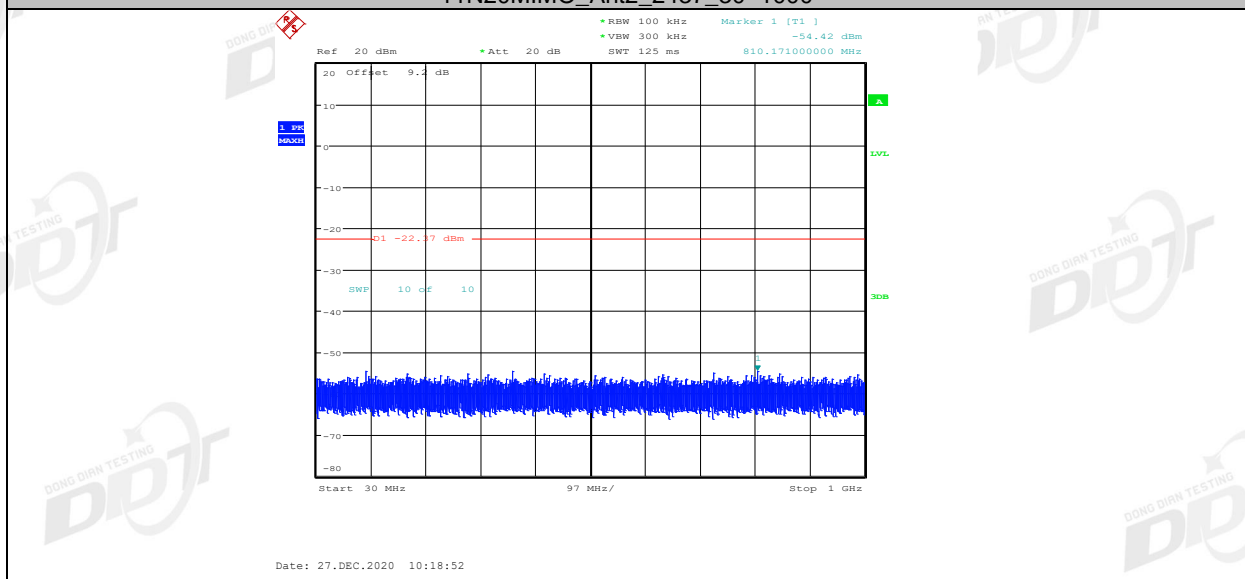


11N20MIMO_Ant2_2437_1000~26500

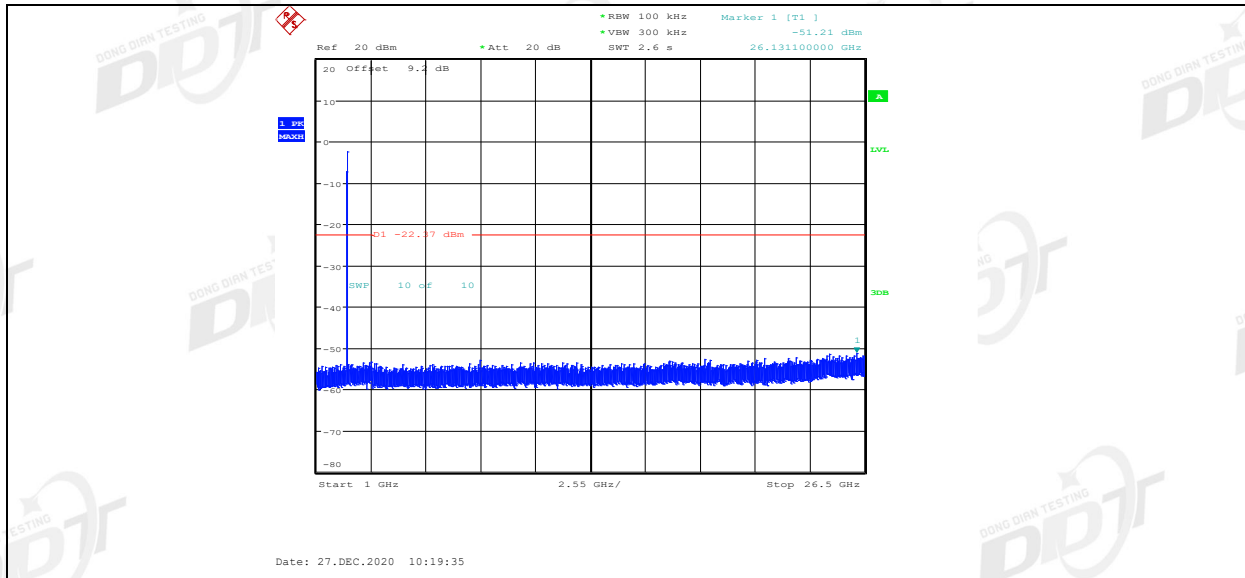


11N20MIMO_Ant1_2462_0~Reference

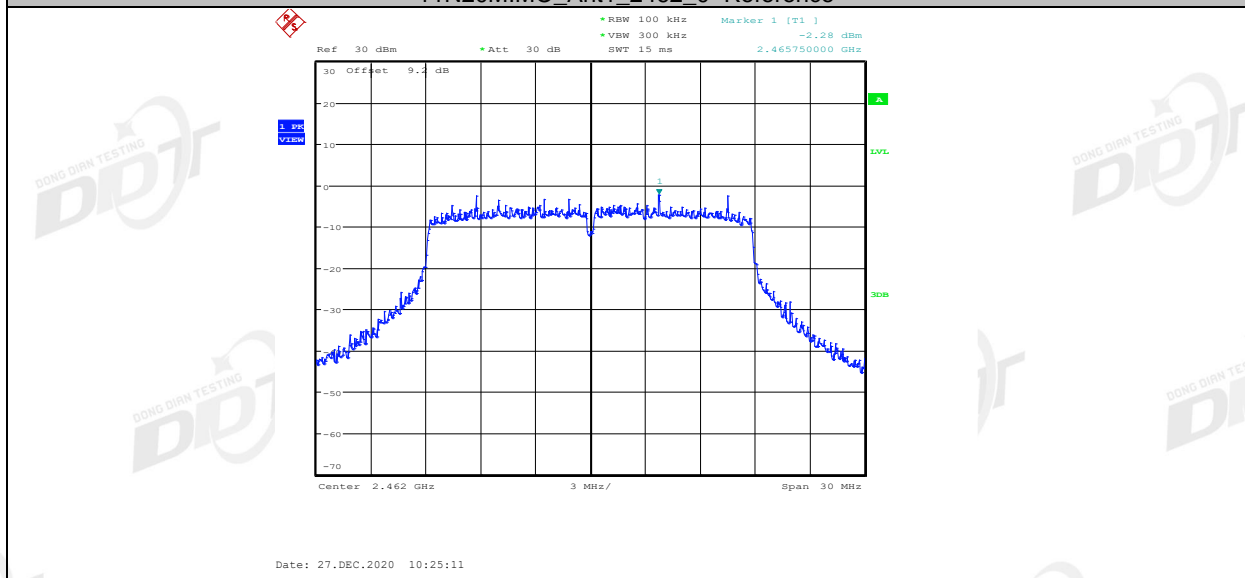


11N20MIMO_Ant1_2462_30~1000

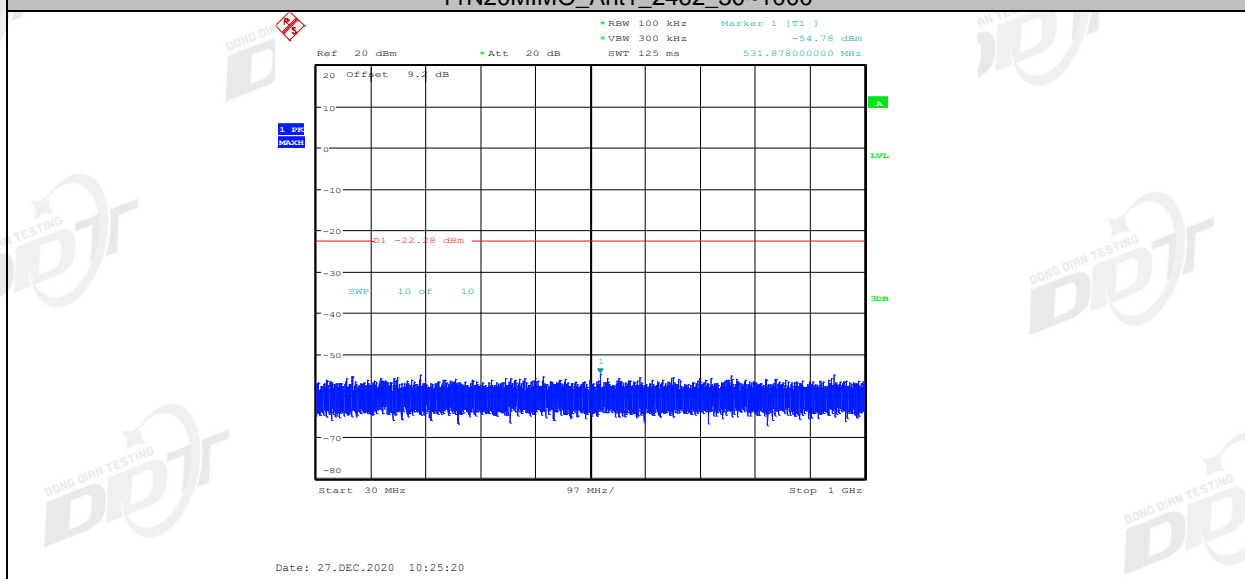


11N20MIMO_Ant1_2462_1000~26500

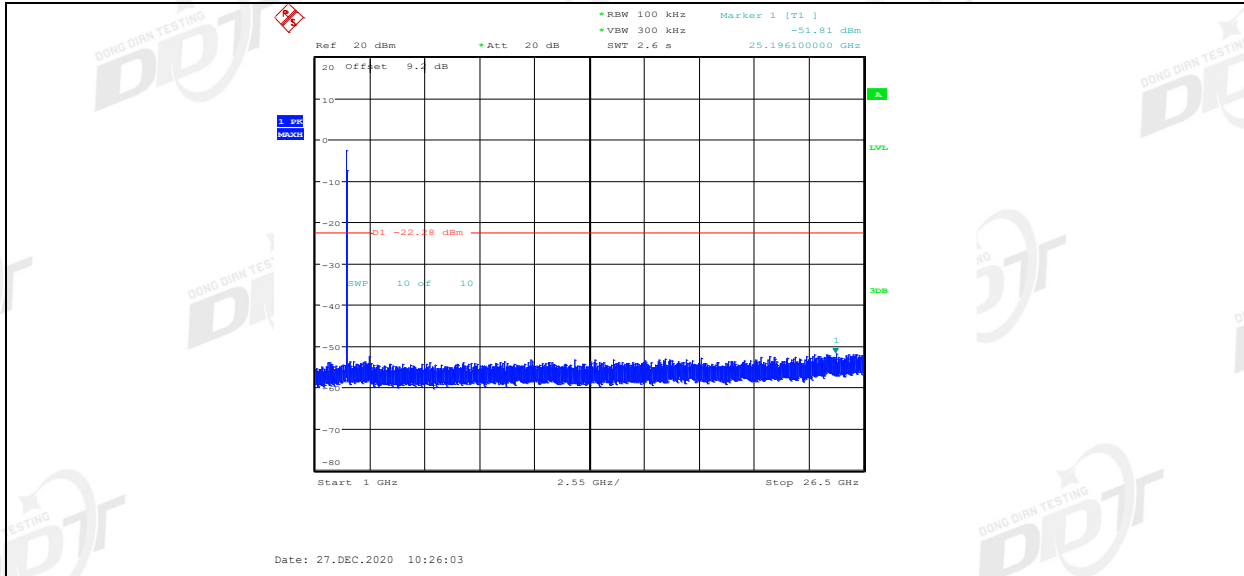


11N20MIMO_Ant2_2462_0~Reference

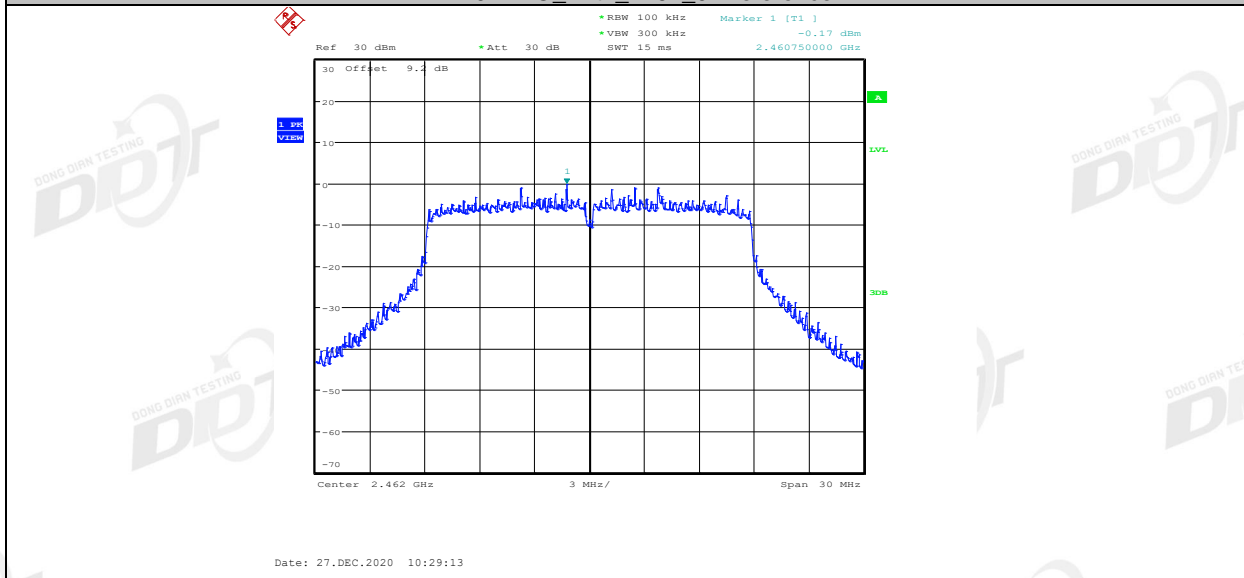


11N20MIMO_Ant2_2462_30~1000

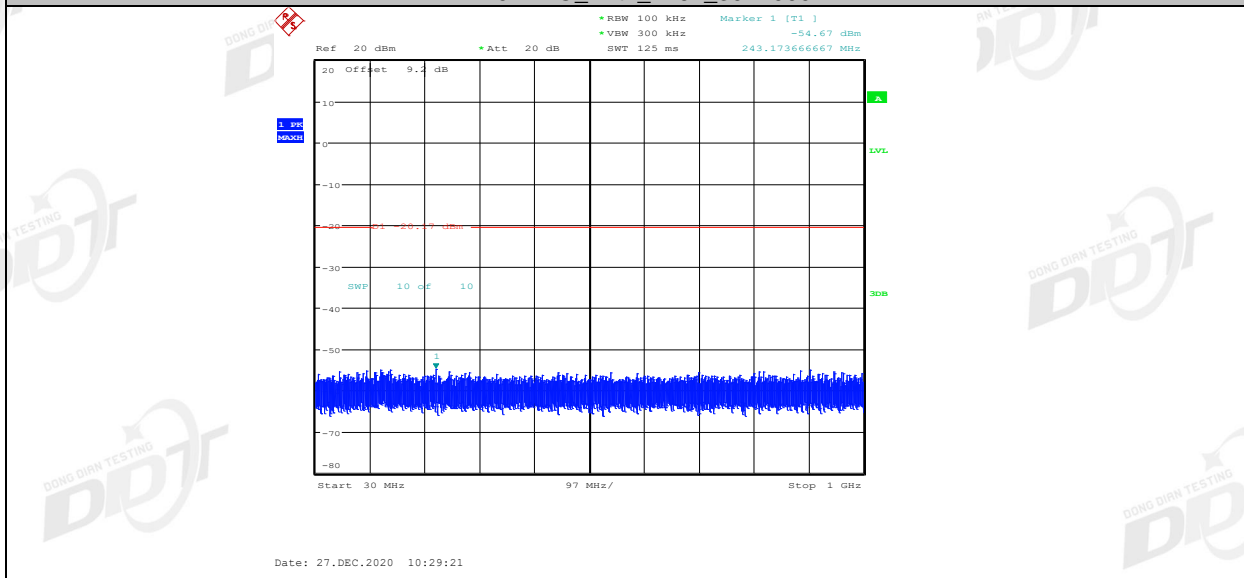


11N20MIMO_Ant2_2462_1000~26500

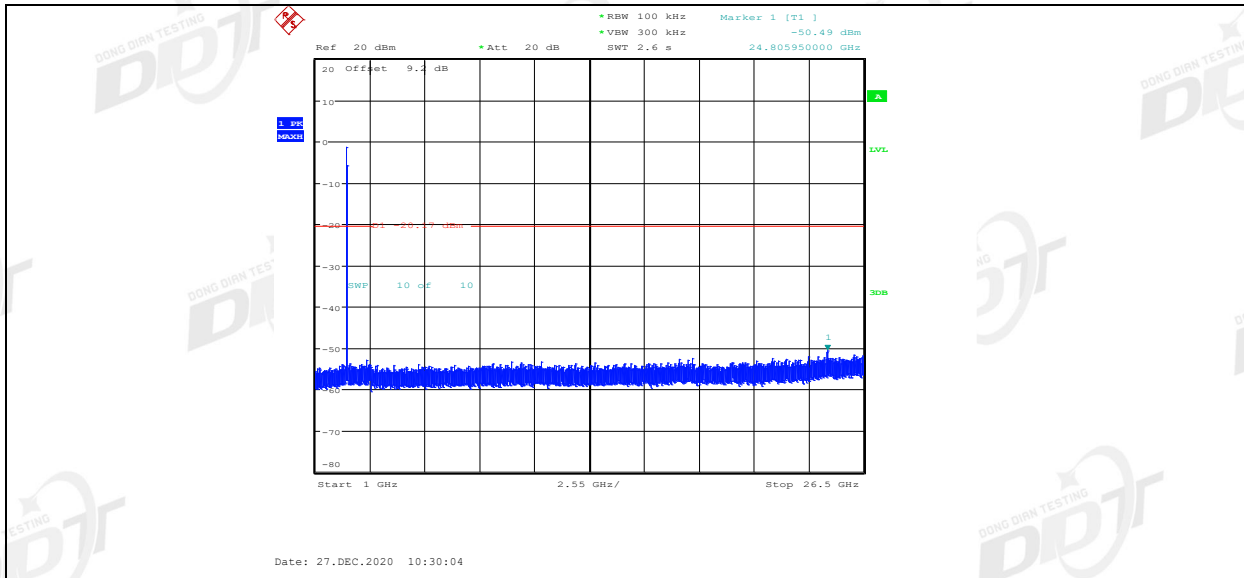


11N40MIMO_Ant1_2422_0~Reference

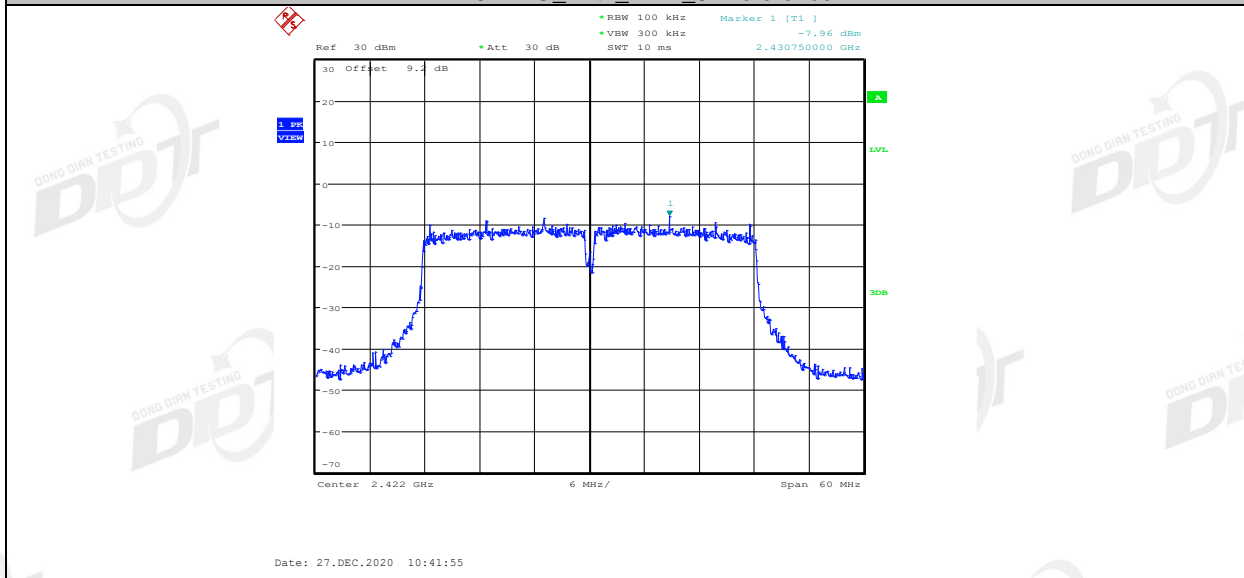


11N40MIMO_Ant1_2422_30~1000

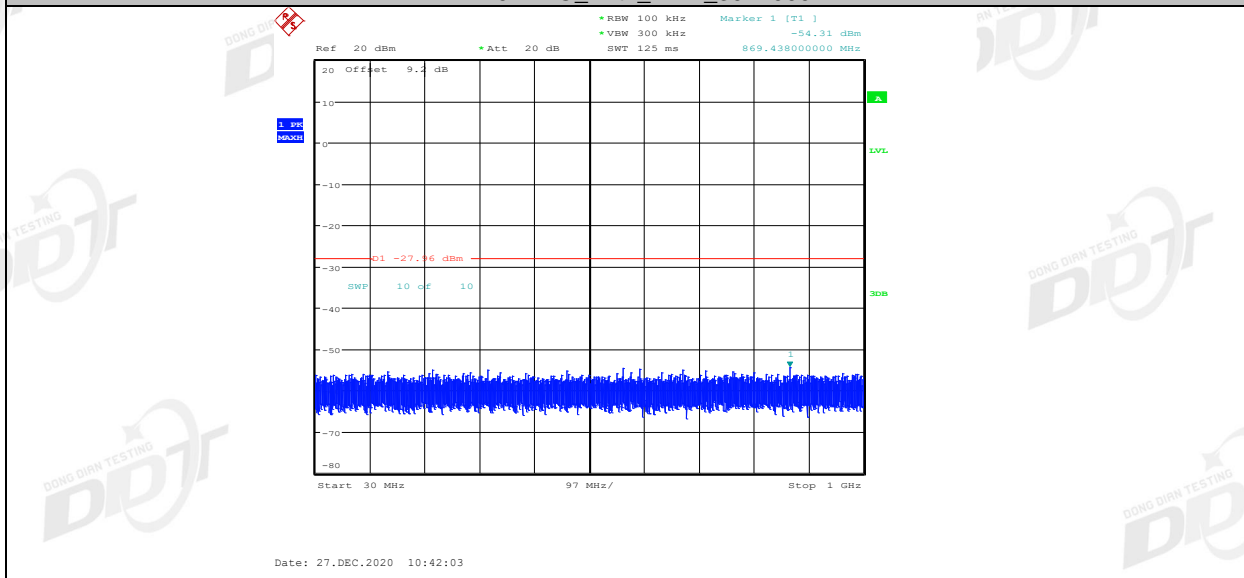


11N40MIMO_Ant1_2422_1000~26500

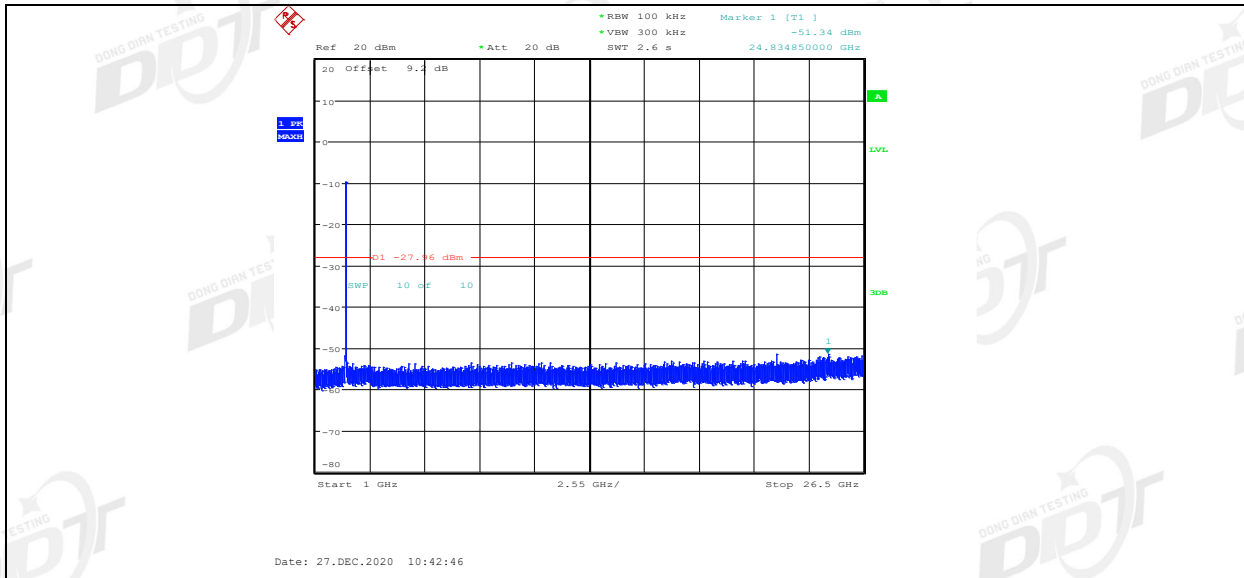


11N40MIMO_Ant2_2422_0~Reference

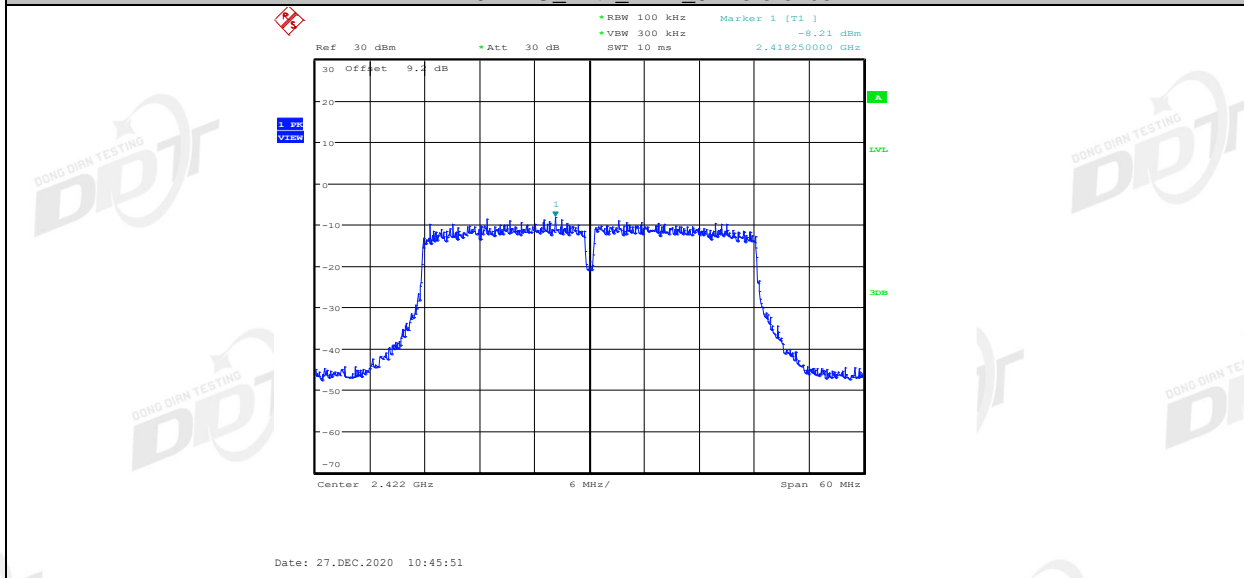


11N40MIMO_Ant2_2422_30~1000

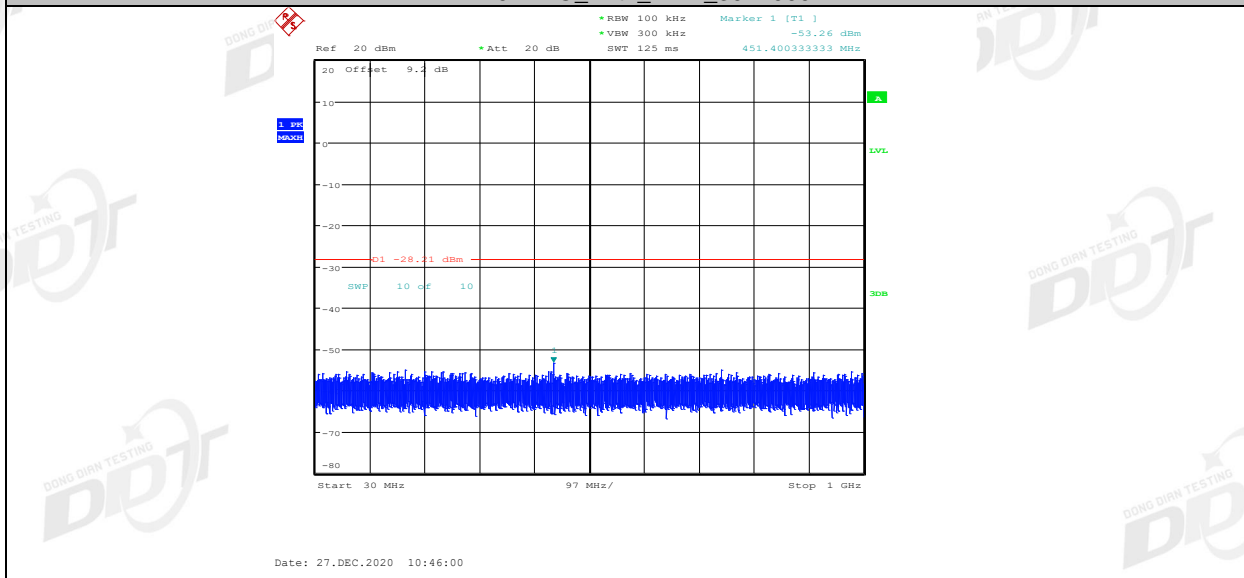


11N40MIMO_Ant2_2422_1000~26500

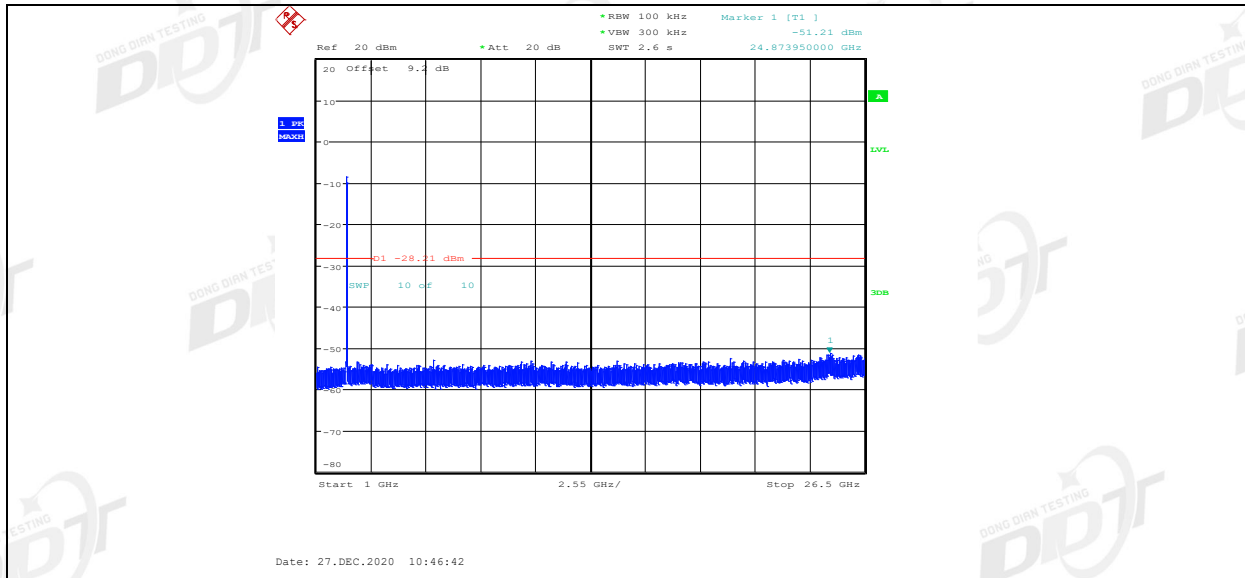


11N40MIMO_Ant1_2437_0~Reference

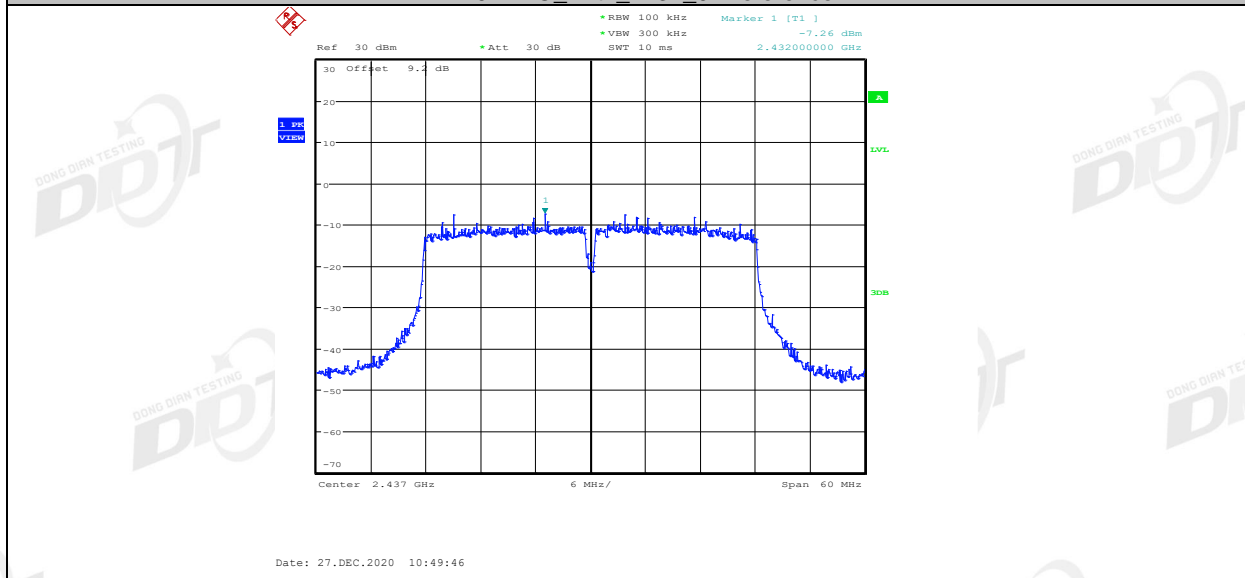


11N40MIMO_Ant1_2437_30~1000

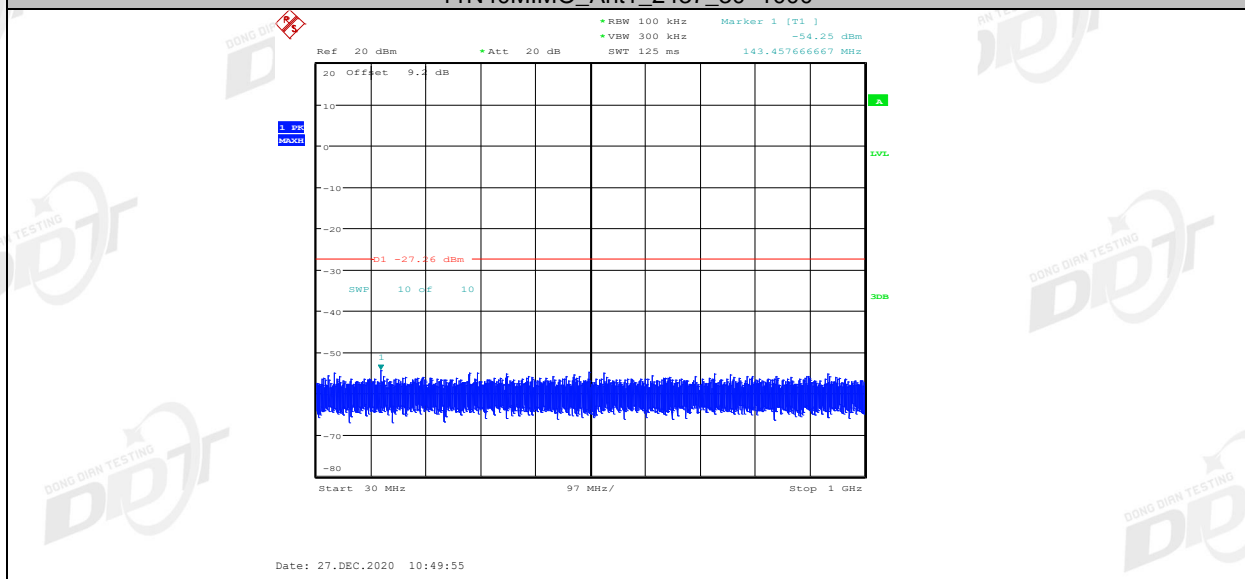


11N40MIMO_Ant1_2437_1000~26500

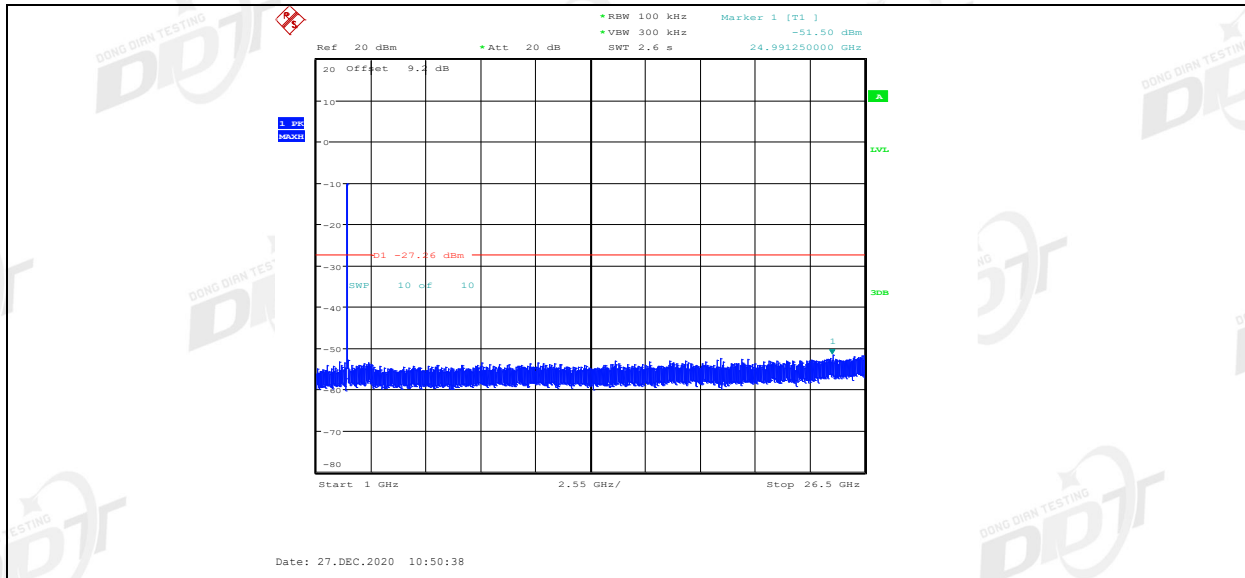


11N40MIMO_Ant2_2437_0~Reference

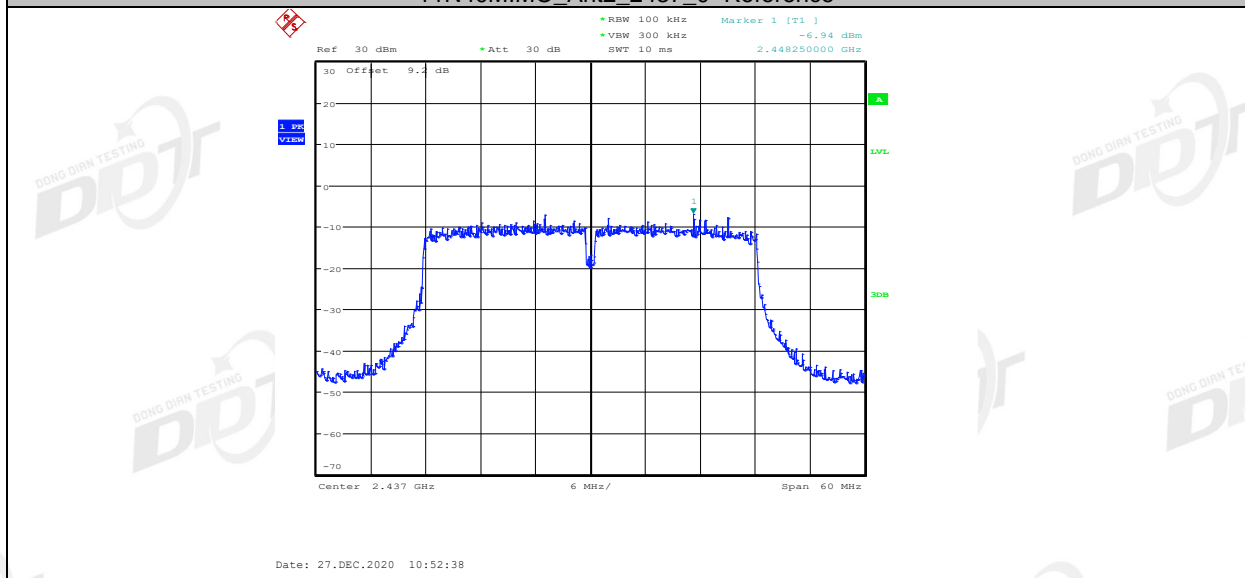


11N40MIMO_Ant2_2437_30~1000

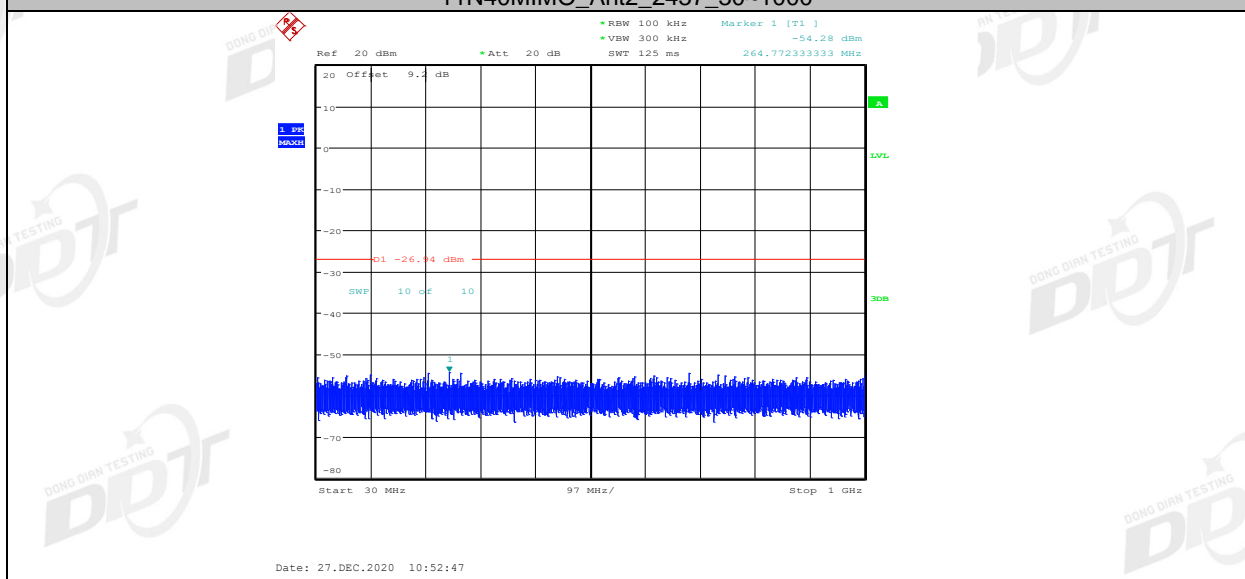


11N40MIMO_Ant2_2437_1000~26500

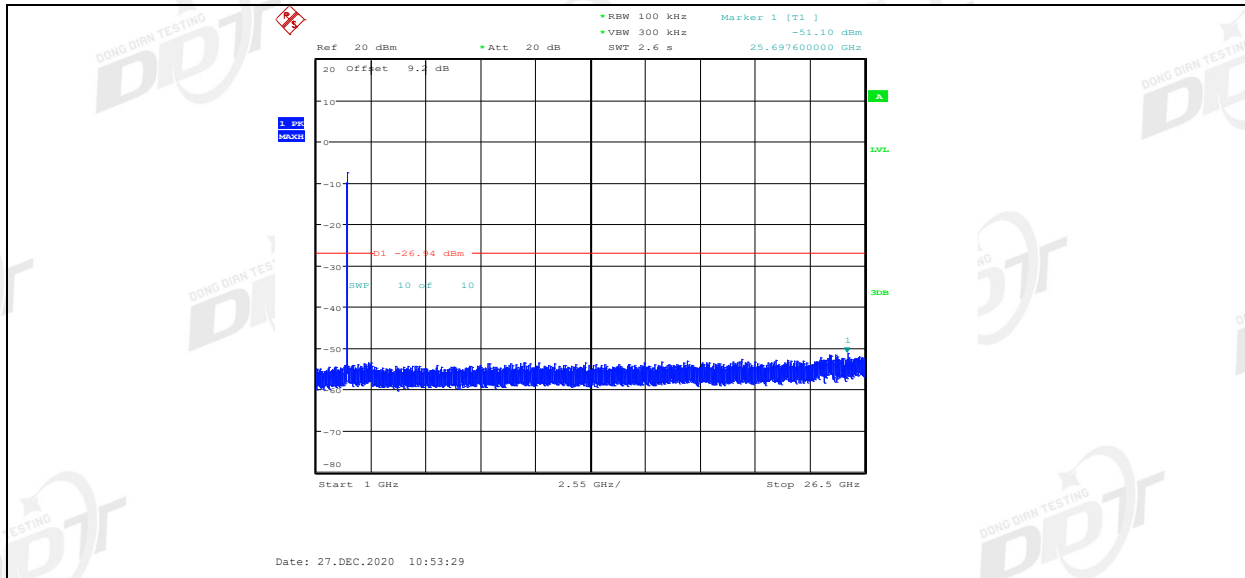


11N40MIMO_Ant1_2452_0~Reference

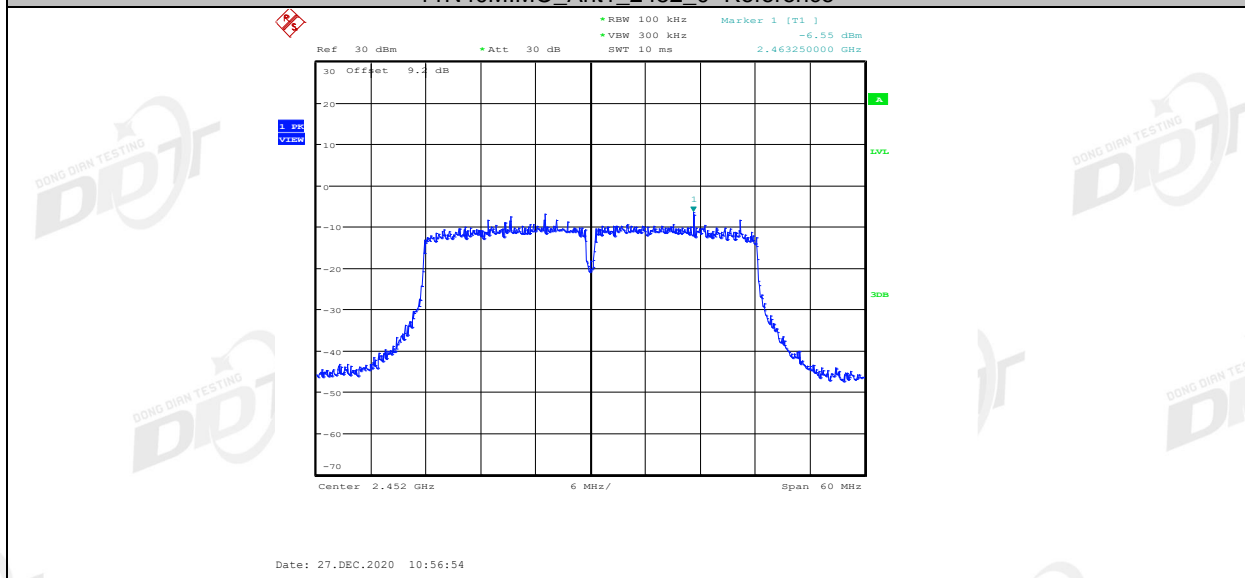


11N40MIMO_Ant1_2452_30~1000

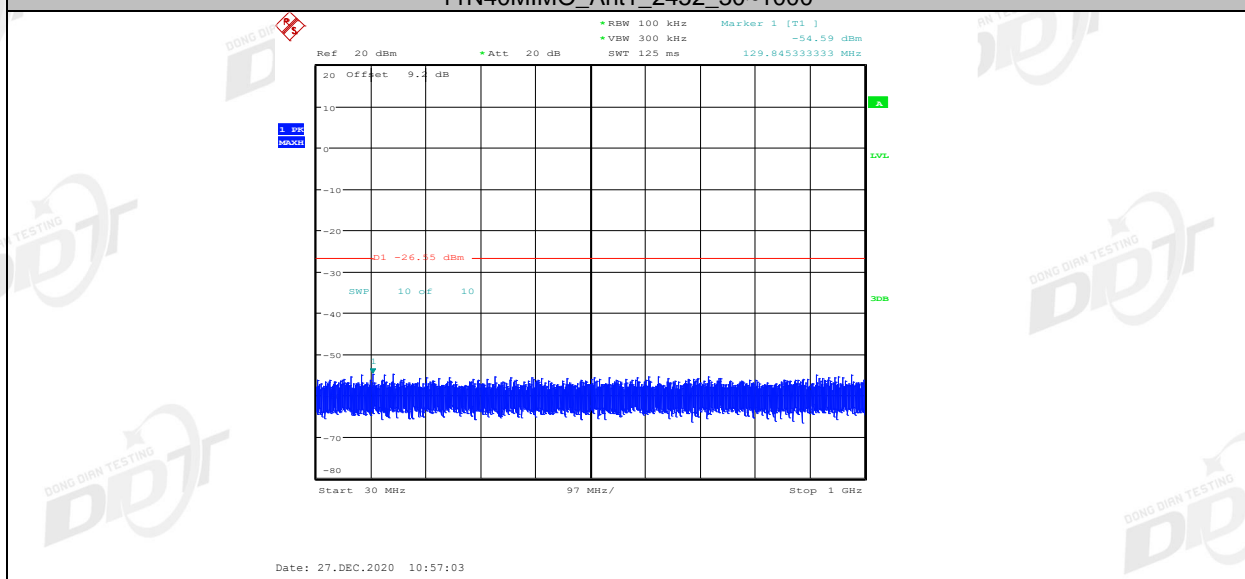


11N40MIMO_Ant1_2452_1000~26500

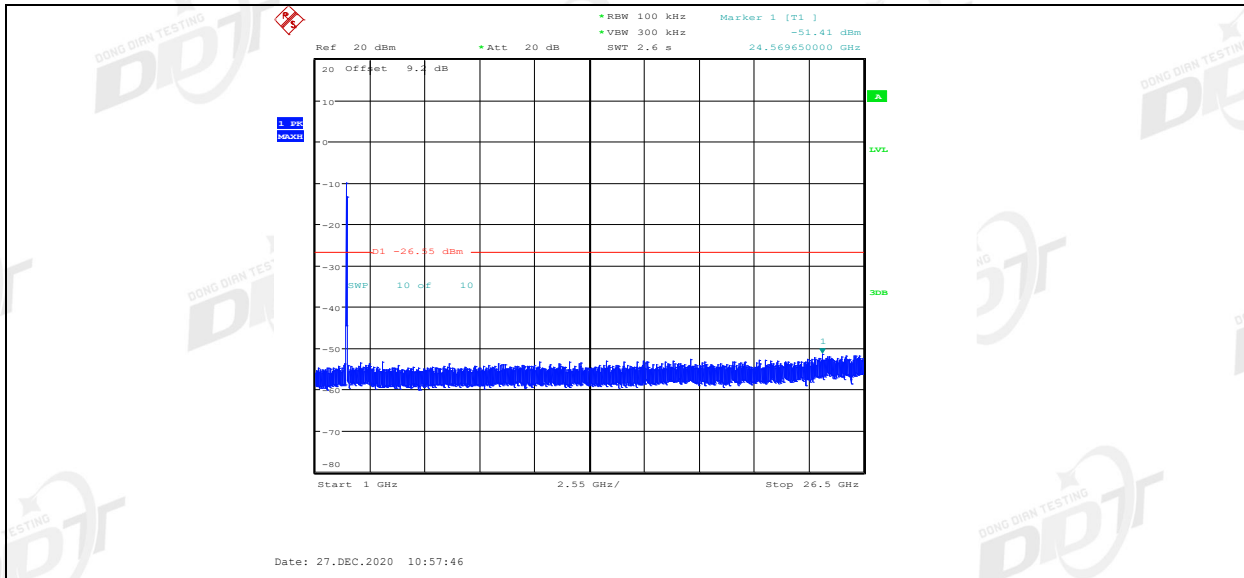


11N40MIMO_Ant2_2452_0~Reference

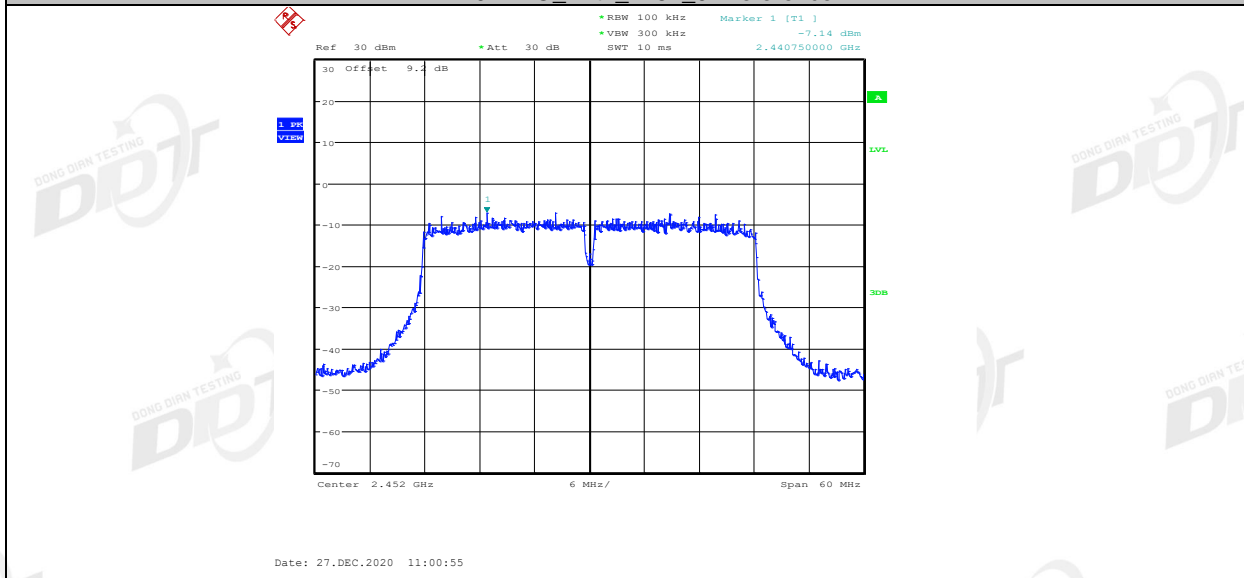

11N40MIMO_Ant2_2452_30~1000

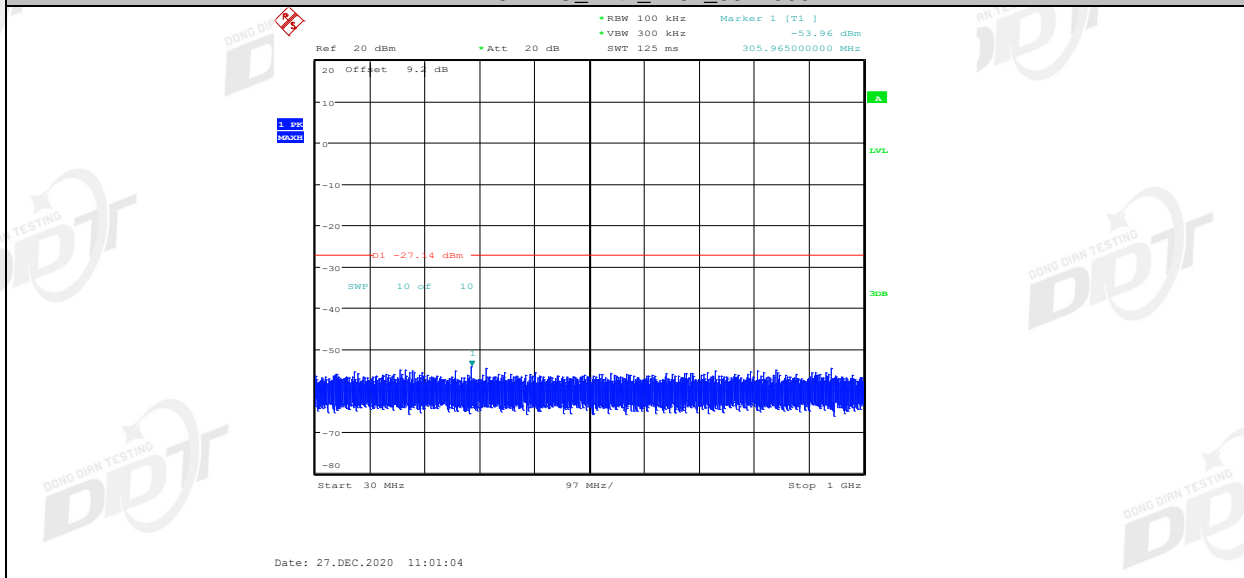


11N40MIMO_Ant2_2452_1000~26500

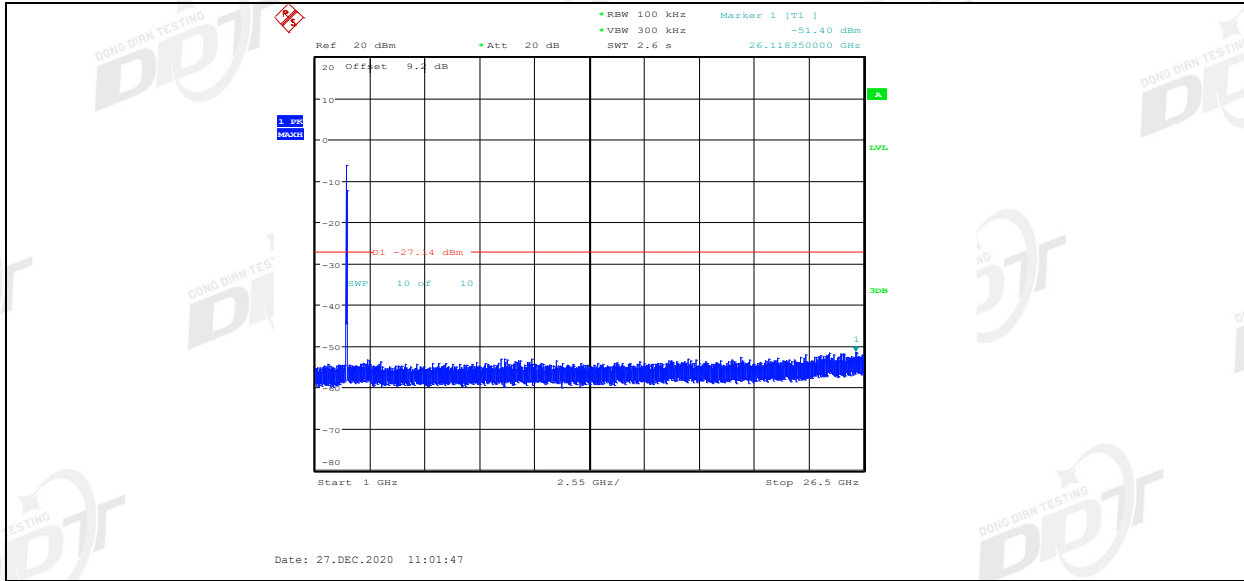


9. Radiated Spurious Emissions

9.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

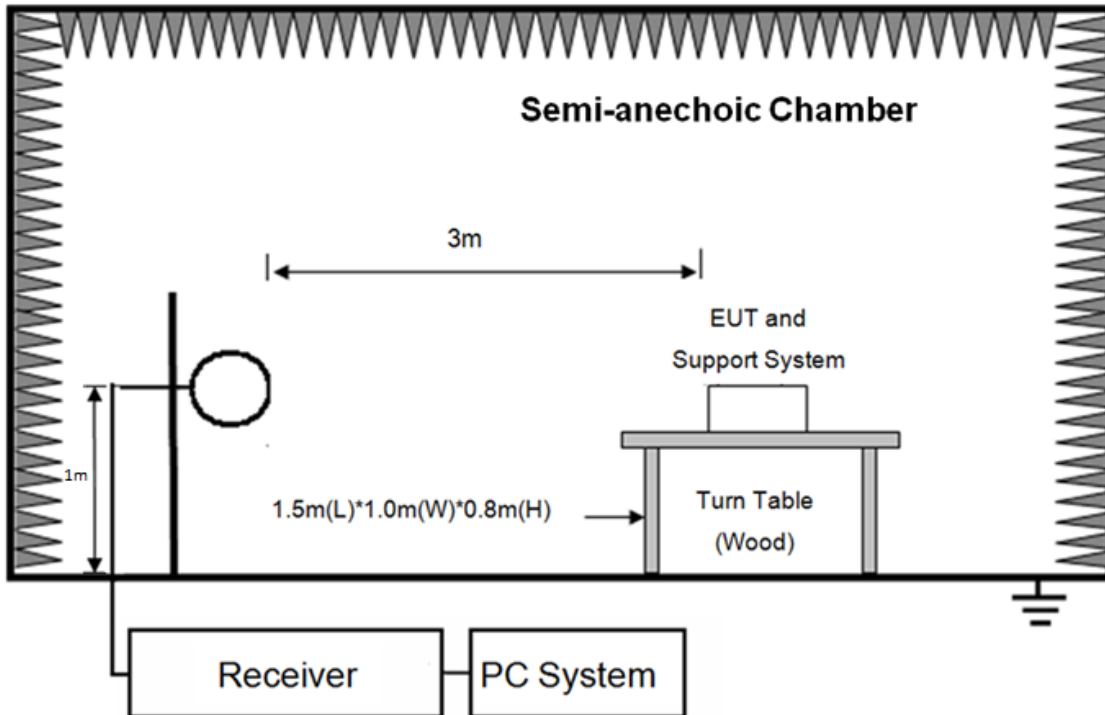

In 3 m Anechoic Chamber, test setup diagram for 30 MHz – 1 GHz:

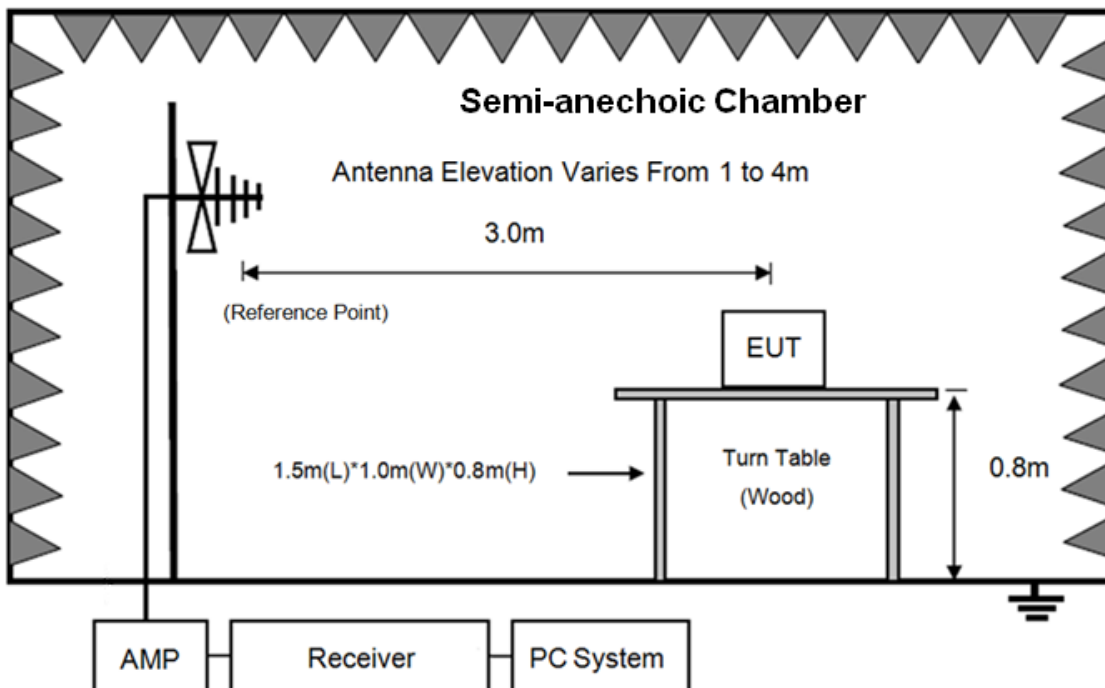

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

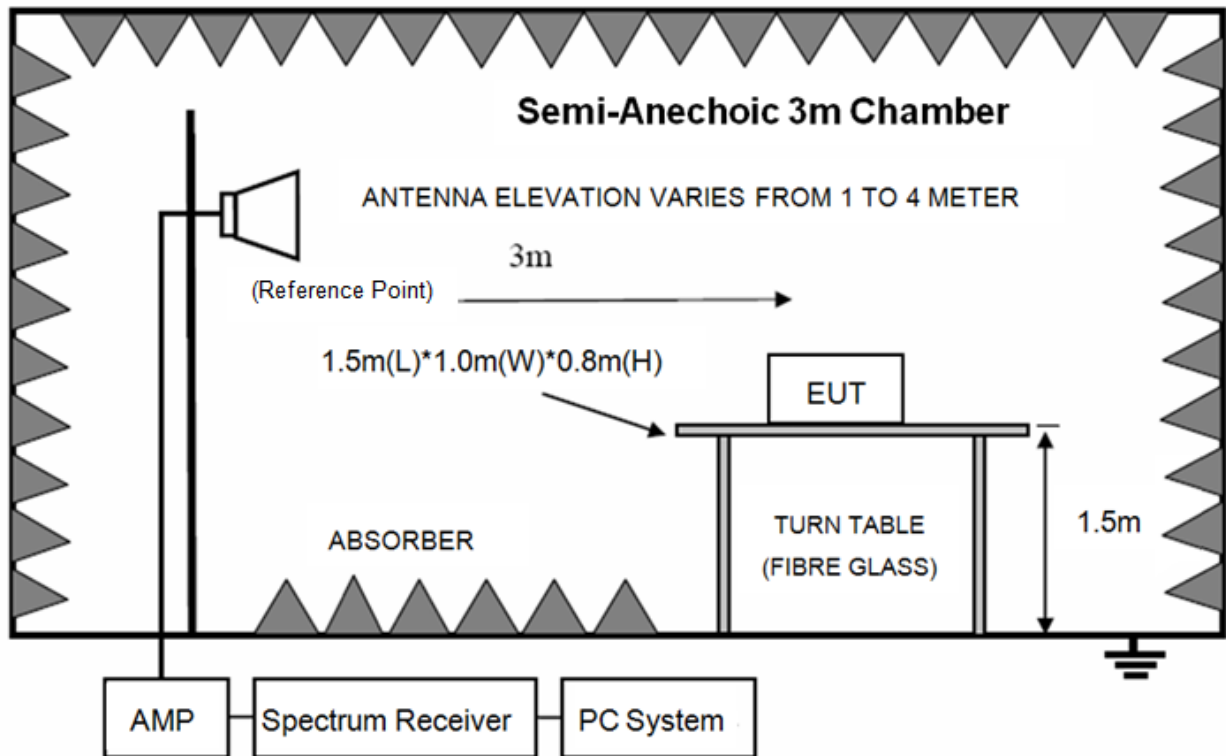

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

9.2. Limit

8.2.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.1775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.2075	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

8.2.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.2.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

9.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the

loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

9.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in ANT2, 11B, Tx CH11 mode.