

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2506.02	20	25	12	17.05	17.06	20.07	22.14	< 33.01
		1	1	17.06	17.01	20.05	22.12	< 33.01
		1	49	16.89	16.96	19.94	22.01	< 33.01
		51	0	17.06	17.12	20.10	22.17	< 33.01
		1	0	17.03	16.96	20.00	22.07	< 33.01
		1	50	17.03	16.91	19.98	22.05	< 33.01
2592.99	20	25	12	16.64	16.72	19.69	21.76	< 33.01
		1	1	16.78	16.77	19.79	21.86	< 33.01
		1	49	16.74	16.71	19.74	21.81	< 33.01
		51	0	16.72	16.71	19.72	21.79	< 33.01
		1	0	16.57	16.71	19.65	21.72	< 33.01
		1	50	16.81	16.77	19.80	21.87	< 33.01
2679.99	20	25	12	16.98	17.08	20.04	22.11	< 33.01
		1	1	16.89	17.08	20.00	22.07	< 33.01
		1	49	17.03	17.01	20.03	22.10	< 33.01
		51	0	17.10	17.11	20.11	22.18	< 33.01
		1	0	16.97	16.89	19.94	22.01	< 33.01
		1	50	17.08	17.08	20.09	22.16	< 33.01
2511.0	30	36	79	16.97	16.97	19.98	22.05	< 33.01
		1	1	16.94	17.05	20.01	22.08	< 33.01
		1	76	17.06	17.26	20.17	22.24	< 33.01
		78	0	17.02	17.02	20.03	22.10	< 33.01
		1	0	17.24	17.03	20.15	22.22	< 33.01
		1	77	17.05	16.87	19.97	22.04	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2592.99	30	36	79	16.82	16.72	19.78	21.85	< 33.01
		1	1	16.81	16.78	19.81	21.88	< 33.01
		1	76	16.93	16.85	19.90	21.97	< 33.01
		78	0	16.82	16.72	19.78	21.85	< 33.01
		1	0	16.61	16.82	19.73	21.80	< 33.01
		1	77	16.89	16.89	19.90	21.97	< 33.01
2674.98	30	36	79	17.01	16.95	19.99	22.06	< 33.01
		1	1	17.09	16.98	20.05	22.12	< 33.01
		1	76	17.22	17.33	20.29	22.36	< 33.01
		78	0	16.99	17.00	20.00	22.07	< 33.01
		1	0	17.01	17.01	20.02	22.09	< 33.01
		1	77	17.05	17.15	20.11	22.18	< 33.01
2516.01	40	53	26	17.06	16.95	20.02	22.09	< 33.01
		1	1	17.13	17.11	20.13	22.20	< 33.01
		1	104	17.21	17.24	20.24	22.31	< 33.01
		106	0	17.11	17.21	20.17	22.24	< 33.01
		1	0	17.25	17.14	20.21	22.28	< 33.01
		1	105	16.96	17.09	20.04	22.11	< 33.01
2592.99	40	53	26	16.73	16.74	19.75	21.82	< 33.01
		1	1	16.82	16.81	19.83	21.90	< 33.01
		1	104	16.96	17.02	20.00	22.07	< 33.01
		106	0	16.77	16.80	19.80	21.87	< 33.01
		1	0	16.83	16.82	19.84	21.91	< 33.01
		1	105	16.93	16.93	19.94	22.01	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2670.0	40	53	26	17.08	17.07	20.08	22.15	< 33.01
		1	1	17.14	17.06	20.11	22.18	< 33.01
		1	104	17.07	17.10	20.09	22.16	< 33.01
		106	0	17.16	17.07	20.13	22.20	< 33.01
		1	0	17.11	17.03	20.08	22.15	< 33.01
		1	105	17.25	17.14	20.20	22.27	< 33.01
2521.02	50	67	33	17.09	16.99	20.05	22.12	< 33.01
		1	1	16.81	16.99	19.91	21.98	< 33.01
		1	131	17.11	17.22	20.18	22.25	< 33.01
		133	0	17.27	17.05	20.17	22.24	< 33.01
		1	0	16.99	16.92	19.97	22.04	< 33.01
		1	132	17.15	17.08	20.13	22.20	< 33.01
2592.99	50	67	33	16.71	16.71	19.72	21.79	< 33.01
		1	1	16.68	16.61	19.66	21.73	< 33.01
		1	131	16.99	17.03	20.02	22.09	< 33.01
		133	0	16.69	16.69	19.70	21.77	< 33.01
		1	0	16.78	16.70	19.75	21.82	< 33.01
		1	132	16.94	17.01	19.99	22.06	< 33.01
2664.99	50	67	33	17.04	17.03	20.05	22.12	< 33.01
		1	1	16.92	17.11	20.02	22.09	< 33.01
		1	131	17.00	17.00	20.01	22.08	< 33.01
		133	0	16.76	16.99	19.89	21.96	< 33.01
		1	0	17.11	17.10	20.11	22.18	< 33.01
		1	132	16.98	17.12	20.06	22.13	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2526.00	60	81	40	17.00	17.01	20.01	22.08	< 33.01
		1	1	16.77	16.85	19.82	21.89	< 33.01
		1	131	16.91	16.77	19.85	21.92	< 33.01
		128	0	16.97	16.98	19.99	22.06	< 33.01
		1	0	16.84	16.99	19.93	22.00	< 33.01
		1	132	16.89	16.76	19.83	21.90	< 33.01
2592.99	60	81	40	16.79	16.80	19.81	21.88	< 33.01
		1	1	16.74	16.70	19.73	21.80	< 33.01
		1	131	16.87	16.74	19.81	21.88	< 33.01
		128	0	16.73	16.73	19.74	21.81	< 33.01
		1	0	16.48	16.50	19.50	21.57	< 33.01
		1	132	16.96	16.76	19.87	21.94	< 33.01
2659.98	60	81	40	17.11	17.21	20.17	22.24	< 33.01
		1	1	17.11	17.06	20.10	22.17	< 33.01
		1	131	16.98	16.90	19.95	22.02	< 33.01
		128	0	17.07	17.07	20.08	22.15	< 33.01
		1	0	17.03	16.94	20.00	22.07	< 33.01
		1	132	16.93	16.83	19.89	21.96	< 33.01
2531.01	70	95	47	16.36	16.46	19.42	21.49	< 33.01
		1	1	16.33	16.13	19.24	21.31	< 33.01
		1	187	16.48	16.36	19.43	21.50	< 33.01
		189	0	16.38	16.62	19.52	21.59	< 33.01
		1	0	16.34	16.24	19.30	21.37	< 33.01
		1	188	16.41	16.47	19.45	21.52	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2592.99	70	95	47	16.50	16.38	19.45	21.52	< 33.01
		1	1	16.51	15.91	19.23	21.30	< 33.01
		1	187	16.86	16.67	19.78	21.85	< 33.01
		189	0	16.56	16.54	19.56	21.63	< 33.01
		1	0	16.59	15.99	19.31	21.38	< 33.01
		1	188	16.83	16.45	19.65	21.72	< 33.01
2655.00	70	95	47	16.61	16.47	19.55	21.62	< 33.01
		1	1	16.72	16.10	19.43	21.50	< 33.01
		1	187	16.81	16.65	19.74	21.81	< 33.01
		189	0	16.63	16.49	19.57	21.64	< 33.01
		1	0	16.70	16.07	19.41	21.48	< 33.01
		1	188	16.87	16.46	19.68	21.75	< 33.01
2536.02	80	109	54	16.89	16.81	19.86	21.93	< 33.01
		1	1	16.61	16.75	19.69	21.76	< 33.01
		1	215	16.82	16.81	19.82	21.89	< 33.01
		217	0	16.80	16.80	19.81	21.88	< 33.01
		1	0	16.81	16.81	19.82	21.89	< 33.01
		1	216	16.69	16.83	19.77	21.84	< 33.01
2592.99	80	109	54	16.66	16.67	19.68	21.75	< 33.01
		1	1	16.63	16.45	19.55	21.62	< 33.01
		1	215	16.97	16.86	19.92	21.99	< 33.01
		217	0	16.63	16.62	19.64	21.71	< 33.01
		1	0	16.48	16.47	19.49	21.56	< 33.01
		1	216	16.83	16.85	19.85	21.92	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2649.99	80	109	54	16.79	16.77	19.79	21.86	< 33.01
		1	1	16.69	16.79	19.75	21.82	< 33.01
		1	215	16.95	16.85	19.91	21.98	< 33.01
		217	0	16.87	16.86	19.88	21.95	< 33.01
		1	0	16.74	16.67	19.72	21.79	< 33.01
		1	216	16.70	16.82	19.77	21.84	< 33.01
2541.02	90	123	61	16.83	16.82	19.84	21.91	< 33.01
		1	1	16.94	16.93	19.95	22.02	< 33.01
		1	243	16.93	16.91	19.93	22.00	< 33.01
		245	0	16.92	16.93	19.93	22.00	< 33.01
		1	0	16.81	16.56	19.69	21.76	< 33.01
		1	244	16.89	16.88	19.89	21.96	< 33.01
2592.99	90	123	61	16.64	16.63	19.64	21.71	< 33.01
		1	1	16.66	16.65	19.67	21.74	< 33.01
		1	243	16.85	16.84	19.85	21.92	< 33.01
		245	0	16.63	16.62	19.63	21.70	< 33.01
		1	0	16.47	16.40	19.44	21.51	< 33.01
		1	244	16.76	16.68	19.73	21.80	< 33.01
2664.98	90	123	61	16.75	16.75	19.76	21.83	< 33.01
		1	1	16.58	16.52	19.56	21.63	< 33.01
		1	243	16.76	16.95	19.86	21.93	< 33.01
		245	0	16.95	16.73	19.85	21.92	< 33.01
		1	0	16.42	16.68	19.56	21.63	< 33.01
		1	244	16.76	16.89	19.84	21.91	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2546.01	100	137	68	16.86	16.84	19.86	21.93	< 33.01
		1	1	16.76	16.75	19.77	21.84	< 33.01
		1	271	17.08	17.08	20.09	22.16	< 33.01
		273	0	17.00	17.12	20.07	22.14	< 33.01
		1	0	16.69	16.72	19.71	21.78	< 33.01
		1	272	16.86	16.84	19.86	21.93	< 33.01
2592.99	100	137	68	16.67	16.57	19.63	21.70	< 33.01
		1	1	16.52	16.48	19.51	21.58	< 33.01
		1	271	16.90	16.95	19.93	22.00	< 33.01
		273	0	16.64	16.64	19.65	21.72	< 33.01
		1	0	16.24	16.36	19.31	21.38	< 33.01
		1	272	16.75	16.57	19.67	21.74	< 33.01
2640.00	100	137	68	16.77	16.79	19.79	21.86	< 33.01
		1	1	16.52	16.59	19.57	21.64	< 33.01
		1	271	17.04	17.00	20.03	22.10	< 33.01
		273	0	16.80	16.78	19.80	21.87	< 33.01
		1	0	16.40	16.54	19.48	21.55	< 33.01
		1	272	16.81	16.77	19.80	21.87	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Test Site	SIP-SR1	Test Engineer	Cloud Guo
Test Date	2022/05/25 ~ 2022/07/10	Test Band	HPUE n41_UL MIMO

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2506.02	20	25	12	21.71	22.05	24.89	26.96	< 33.01
		1	1	21.80	21.91	24.86	26.93	< 33.01
		1	49	21.72	21.99	24.87	26.94	< 33.01
		51	0	20.30	20.43	23.37	25.44	< 33.01
		1	0	19.87	19.93	22.91	24.98	< 33.01
		1	50	19.66	20.01	22.85	24.92	< 33.01
2592.99	20	25	12	22.01	21.80	24.92	26.99	< 33.01
		1	1	22.10	21.81	24.97	27.04	< 33.01
		1	49	22.06	21.77	24.93	27.00	< 33.01
		51	0	20.47	20.20	23.35	25.42	< 33.01
		1	0	20.09	19.64	22.88	24.95	< 33.01
		1	50	20.07	19.72	22.91	24.98	< 33.01
2679.99	20	25	12	21.97	22.05	25.02	27.09	< 33.01
		1	1	22.01	21.99	25.01	27.08	< 33.01
		1	49	22.04	22.05	25.06	27.13	< 33.01
		51	0	20.40	20.48	23.45	25.52	< 33.01
		1	0	20.11	20.04	23.08	25.15	< 33.01
		1	50	20.03	20.12	23.08	25.15	< 33.01
2511.0	30	36	79	21.78	21.99	24.90	26.97	< 33.01
		1	1	21.88	21.99	24.95	27.02	< 33.01
		1	76	22.03	22.03	25.04	27.11	< 33.01
		78	0	20.31	20.40	23.37	25.44	< 33.01
		1	0	19.89	19.97	22.94	25.01	< 33.01
		1	77	19.93	20.09	23.02	25.09	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2592.99	30	36	79	22.02	21.73	24.89	26.96	< 33.01
		1	1	22.01	21.87	24.95	27.02	< 33.01
		1	76	22.15	22.06	25.12	27.19	< 33.01
		78	0	20.49	20.33	23.42	25.49	< 33.01
		1	0	19.88	19.76	22.83	24.90	< 33.01
		1	77	20.15	19.84	23.01	25.08	< 33.01
2674.98	30	36	79	21.97	21.92	24.95	27.02	< 33.01
		1	1	22.05	21.91	24.99	27.06	< 33.01
		1	76	22.16	22.04	25.11	27.18	< 33.01
		78	0	20.46	20.44	23.46	25.53	< 33.01
		1	0	20.15	20.10	23.13	25.20	< 33.01
		1	77	20.01	20.11	23.07	25.14	< 33.01
2516.01	40	53	26	21.74	21.92	24.84	26.91	< 33.01
		1	1	21.91	22.06	25.00	27.07	< 33.01
		1	104	21.99	21.99	25.00	27.07	< 33.01
		106	0	20.28	20.61	23.46	25.53	< 33.01
		1	0	19.91	20.08	23.00	25.07	< 33.01
		1	105	19.93	20.15	23.05	25.12	< 33.01
2592.99	40	53	26	22.01	21.72	24.88	26.95	< 33.01
		1	1	22.13	21.95	25.05	27.12	< 33.01
		1	104	22.21	21.98	25.11	27.18	< 33.01
		106	0	20.53	20.31	23.43	25.50	< 33.01
		1	0	20.10	19.90	23.01	25.08	< 33.01
		1	105	20.08	19.95	23.03	25.10	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2670.0	40	53	26	21.96	21.97	24.97	27.04	< 33.01
		1	1	22.30	22.25	25.29	27.36	< 33.01
		1	104	22.34	21.99	25.18	27.25	< 33.01
		106	0	20.50	20.59	23.55	25.62	< 33.01
		1	0	20.14	20.22	23.19	25.26	< 33.01
		1	105	20.19	20.09	23.15	25.22	< 33.01
2521.02	50	67	33	21.83	21.98	24.91	26.98	< 33.01
		1	1	21.83	21.84	24.85	26.92	< 33.01
		1	131	21.90	22.11	25.02	27.09	< 33.01
		133	0	20.39	20.48	23.45	25.52	< 33.01
		1	0	19.85	19.93	22.90	24.97	< 33.01
		1	132	19.85	20.31	23.09	25.16	< 33.01
2592.99	50	67	33	21.95	21.76	24.87	26.94	< 33.01
		1	1	21.98	21.78	24.89	26.96	< 33.01
		1	131	22.17	21.97	25.08	27.15	< 33.01
		133	0	20.46	20.23	23.36	25.43	< 33.01
		1	0	20.10	20.07	23.09	25.16	< 33.01
		1	132	20.12	20.07	23.11	25.18	< 33.01
2664.99	50	67	33	21.90	22.01	24.97	27.04	< 33.01
		1	1	21.84	21.99	24.92	26.99	< 33.01
		1	131	22.01	22.08	25.06	27.13	< 33.01
		133	0	20.36	20.46	23.42	25.49	< 33.01
		1	0	20.02	20.15	23.09	25.16	< 33.01
		1	132	19.96	20.10	23.04	25.11	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2526.00	60	81	40	21.44	21.86	24.66	26.73	< 33.01
		1	1	21.18	21.63	24.42	26.49	< 33.01
		1	131	21.32	21.68	24.51	26.58	< 33.01
		128	0	19.89	20.40	23.16	25.23	< 33.01
		1	0	19.34	19.70	22.54	24.61	< 33.01
		1	132	19.33	20.24	22.82	24.89	< 33.01
2592.99	60	81	40	21.81	21.74	24.78	26.85	< 33.01
		1	1	21.68	21.58	24.64	26.71	< 33.01
		1	131	22.00	21.96	24.99	27.06	< 33.01
		128	0	20.23	20.22	23.24	25.31	< 33.01
		1	0	19.65	19.55	22.61	24.68	< 33.01
		1	132	19.91	19.91	22.92	24.99	< 33.01
2659.98	60	81	40	22.00	22.00	25.01	27.08	< 33.01
		1	1	21.87	21.87	24.88	26.95	< 33.01
		1	131	22.04	21.97	25.01	27.08	< 33.01
		128	0	20.54	20.51	23.54	25.61	< 33.01
		1	0	19.99	19.98	22.99	25.06	< 33.01
		1	132	19.96	19.88	22.93	25.00	< 33.01
2531.01	70	95	47	21.32	21.41	24.38	26.45	< 33.01
		1	1	21.28	20.98	24.15	26.22	< 33.01
		1	187	21.58	21.49	24.54	26.61	< 33.01
		189	0	19.82	19.89	22.86	24.93	< 33.01
		1	0	19.37	18.83	22.12	24.19	< 33.01
		1	188	19.60	19.48	22.55	24.62	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2592.99	70	95	47	21.34	21.38	24.37	26.44	< 33.01
		1	1	21.56	21.06	24.33	26.40	< 33.01
		1	187	21.80	21.47	24.65	26.72	< 33.01
		189	0	19.92	19.84	22.89	24.96	< 33.01
		1	0	19.58	19.03	22.32	24.39	< 33.01
		1	188	19.79	19.57	22.69	24.76	< 33.01
2655.00	70	95	47	21.44	21.46	24.46	26.53	< 33.01
		1	1	21.88	21.11	24.52	26.59	< 33.01
		1	187	21.77	21.47	24.63	26.70	< 33.01
		189	0	20.05	19.89	22.98	25.05	< 33.01
		1	0	19.71	19.30	22.52	24.59	< 33.01
		1	188	19.90	19.68	22.80	24.87	< 33.01
2536.02	80	109	54	21.78	21.79	24.80	26.87	< 33.01
		1	1	21.60	21.66	24.64	26.71	< 33.01
		1	215	22.07	21.73	24.91	26.98	< 33.01
		217	0	20.25	20.25	23.26	25.33	< 33.01
		1	0	19.72	19.68	22.71	24.78	< 33.01
		1	216	19.72	19.71	22.73	24.80	< 33.01
2592.99	80	109	54	21.62	21.63	24.64	26.71	< 33.01
		1	1	21.59	21.49	24.55	26.62	< 33.01
		1	215	21.78	21.81	24.80	26.87	< 33.01
		217	0	20.12	20.09	23.12	25.19	< 33.01
		1	0	19.44	19.44	22.45	24.52	< 33.01
		1	216	20.08	19.68	22.89	24.96	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2649.99	80	109	54	21.81	21.81	24.82	26.89	< 33.01
		1	1	21.73	21.74	24.75	26.82	< 33.01
		1	215	22.15	22.15	25.16	27.23	< 33.01
		217	0	20.24	20.23	23.25	25.32	< 33.01
		1	0	19.75	19.75	22.76	24.83	< 33.01
		1	216	20.03	19.82	22.93	25.00	< 33.01
2541.02	90	123	61	21.75	21.75	24.76	26.83	< 33.01
		1	1	21.75	22.12	24.95	27.02	< 33.01
		1	243	21.89	21.92	24.92	26.99	< 33.01
		245	0	20.31	20.31	23.32	25.39	< 33.01
		1	0	19.59	19.60	22.61	24.68	< 33.01
		1	244	19.86	19.75	22.81	24.88	< 33.01
2592.99	90	123	61	21.70	21.70	24.71	26.78	< 33.01
		1	1	21.45	21.43	24.45	26.52	< 33.01
		1	243	21.80	21.80	24.81	26.88	< 33.01
		245	0	20.09	20.16	23.13	25.20	< 33.01
		1	0	19.43	19.42	22.43	24.50	< 33.01
		1	244	19.78	19.76	22.78	24.85	< 33.01
2664.98	90	123	61	21.74	21.88	24.82	26.89	< 33.01
		1	1	21.64	21.70	24.68	26.75	< 33.01
		1	243	22.01	21.94	24.98	27.05	< 33.01
		245	0	20.23	20.24	23.25	25.32	< 33.01
		1	0	19.55	19.54	22.55	24.62	< 33.01
		1	244	19.77	19.77	22.78	24.85	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM QPSK								
2546.01	100	137	68	21.78	21.79	24.80	26.87	< 33.01
		1	1	22.15	21.66	24.92	26.99	< 33.01
		1	271	22.05	22.15	25.11	27.18	< 33.01
		273	0	20.37	20.36	23.37	25.44	< 33.01
		1	0	19.54	19.39	22.47	24.54	< 33.01
		1	272	19.84	19.83	22.84	24.91	< 33.01
2592.99	100	137	68	21.64	21.66	24.66	26.73	< 33.01
		1	1	21.44	21.43	24.44	26.51	< 33.01
		1	271	21.95	21.83	24.90	26.97	< 33.01
		273	0	20.11	20.11	23.12	25.19	< 33.01
		1	0	19.29	19.31	22.31	24.38	< 33.01
		1	272	19.57	19.68	22.63	24.70	< 33.01
2640.00	100	137	68	21.81	21.81	24.82	26.89	< 33.01
		1	1	21.62	21.61	24.63	26.70	< 33.01
		1	271	21.75	21.74	24.76	26.83	< 33.01
		273	0	20.24	20.22	23.24	25.31	< 33.01
		1	0	19.41	19.54	22.49	24.56	< 33.01
		1	272	19.77	19.66	22.72	24.79	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$								
Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2506.02	20	25	12	24.37	21.29	21.43	23.50	< 33.01
		1	1	24.43	21.46	21.37	23.44	< 33.01
		1	49	23.38	20.29	20.46	22.53	< 33.01
		51	0	22.75	19.80	19.67	21.74	< 33.01
		1	0	22.81	19.89	19.72	21.79	< 33.01
		1	50	24.40	21.52	21.26	23.33	< 33.01
2592.99	20	25	12	24.47	21.51	21.41	23.48	< 33.01
		1	1	24.42	21.53	21.29	23.36	< 33.01
		1	49	23.43	20.59	20.24	22.31	< 33.01
		51	0	22.84	20.02	19.62	21.69	< 33.01
		1	0	22.83	19.95	19.68	21.75	< 33.01
		1	50	24.42	21.33	21.49	23.56	< 33.01
2679.99	20	25	12	24.54	21.47	21.59	23.66	< 33.01
		1	1	24.45	21.23	21.65	23.72	< 33.01
		1	49	23.47	20.43	20.48	22.55	< 33.01
		51	0	23.01	19.93	20.07	22.14	< 33.01
		1	0	22.94	19.84	20.02	22.09	< 33.01
		1	50	24.41	21.36	21.43	23.50	< 33.01
2511.0	30	36	79	24.35	21.34	21.34	23.41	< 33.01
		1	1	24.46	21.48	21.42	23.49	< 33.01
		1	76	23.41	20.28	20.52	22.59	< 33.01
		78	0	22.91	19.66	20.13	22.20	< 33.01
		1	0	23.03	19.91	20.12	22.19	< 33.01
		1	77	24.37	21.29	21.43	23.50	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2592.99	30	36	79	24.38	21.53	21.20	23.27	< 33.01
		1	1	24.42	21.49	21.33	23.40	< 33.01
		1	76	24.54	21.71	21.35	23.42	< 33.01
		78	0	23.44	20.57	20.28	22.35	< 33.01
		1	0	22.80	19.93	19.65	21.72	< 33.01
		1	77	22.96	20.06	19.83	21.90	< 33.01
2674.98	30	36	79	24.48	21.47	21.46	23.53	< 33.01
		1	1	24.69	21.67	21.69	23.76	< 33.01
		1	76	24.76	21.58	21.91	23.98	< 33.01
		78	0	23.45	20.42	20.46	22.53	< 33.01
		1	0	22.99	20.07	19.88	21.95	< 33.01
		1	77	23.07	20.02	20.10	22.17	< 33.01
2516.01	40	53	26	24.45	21.36	21.52	23.59	< 33.01
		1	1	24.55	21.40	21.68	23.75	< 33.01
		1	104	24.60	21.49	21.69	23.76	< 33.01
		106	0	23.42	20.31	20.51	22.58	< 33.01
		1	0	22.99	19.95	20.00	22.07	< 33.01
		1	105	23.09	20.13	20.03	22.10	< 33.01
2592.99	40	53	26	24.45	21.54	21.33	23.40	< 33.01
		1	1	24.55	21.59	21.49	23.56	< 33.01
		1	104	24.59	21.64	21.52	23.59	< 33.01
		106	0	23.36	20.49	20.21	22.28	< 33.01
		1	0	22.94	19.87	19.99	22.06	< 33.01
		1	105	23.17	20.22	20.11	22.18	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2670.0	40	53	26	24.57	21.45	21.67	23.74	< 33.01
		1	1	24.73	21.81	21.63	23.70	< 33.01
		1	104	24.72	21.70	21.72	23.79	< 33.01
		106	0	23.58	20.57	20.58	22.65	< 33.01
		1	0	23.14	20.21	20.04	22.11	< 33.01
		1	105	23.17	20.03	20.29	22.36	< 33.01
2521.02	50	67	33	24.38	21.33	21.41	23.48	< 33.01
		1	1	24.42	21.37	21.46	23.53	< 33.01
		1	131	24.55	21.44	21.63	23.70	< 33.01
		133	0	23.43	20.31	20.52	22.59	< 33.01
		1	0	22.86	19.84	19.87	21.94	< 33.01
		1	132	22.96	19.94	19.95	22.02	< 33.01
2592.99	50	67	33	24.42	21.51	21.30	23.37	< 33.01
		1	1	24.34	21.53	21.12	23.19	< 33.01
		1	131	24.47	21.45	21.47	23.54	< 33.01
		133	0	23.36	20.48	20.21	22.28	< 33.01
		1	0	22.77	19.95	19.57	21.64	< 33.01
		1	132	22.95	20.02	19.87	21.94	< 33.01
2664.99	50	67	33	24.47	21.49	21.43	23.50	< 33.01
		1	1	24.51	21.50	21.49	23.56	< 33.01
		1	131	24.54	21.48	21.58	23.65	< 33.01
		133	0	23.43	20.40	20.45	22.52	< 33.01
		1	0	23.05	19.85	20.23	22.30	< 33.01
		1	132	23.03	19.87	20.17	22.24	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2526.00	60	81	40	20.96	21.39	24.19	26.26	< 33.01
		1	1	20.83	21.23	24.04	26.11	< 33.01
		1	131	20.85	21.19	24.04	26.11	< 33.01
		128	0	19.92	20.46	23.21	25.28	< 33.01
		1	0	19.38	19.62	22.51	24.58	< 33.01
		1	132	19.52	19.51	22.52	24.59	< 33.01
2592.99	60	81	40	24.24	21.25	21.21	23.28	< 33.01
		1	1	24.33	21.18	21.44	23.51	< 33.01
		1	131	24.30	21.37	21.20	23.27	< 33.01
		128	0	23.25	20.23	20.25	22.32	< 33.01
		1	0	22.62	19.70	19.52	21.59	< 33.01
		1	132	22.76	19.79	19.71	21.78	< 33.01
2659.98	60	81	40	24.49	21.53	21.43	23.50	< 33.01
		1	1	24.46	21.53	21.37	23.44	< 33.01
		1	131	24.55	21.52	21.55	23.62	< 33.01
		128	0	23.53	20.52	20.53	22.60	< 33.01
		1	0	22.90	19.84	19.95	22.02	< 33.01
		1	132	22.84	19.78	19.88	21.95	< 33.01
2531.01	70	95	47	20.86	20.94	23.91	25.98	< 33.01
		1	1	20.73	20.36	23.56	25.63	< 33.01
		1	187	20.79	21.29	24.06	26.13	< 33.01
		189	0	19.84	19.82	22.84	24.91	< 33.01
		1	0	19.28	19.40	22.35	24.42	< 33.01
		1	188	19.24	19.30	22.28	24.35	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2592.99	70	95	47	20.95	20.95	23.96	26.03	< 33.01
		1	1	20.69	20.31	23.51	25.58	< 33.01
		1	187	21.29	20.75	24.04	26.11	< 33.01
		189	0	19.90	19.86	22.89	24.96	< 33.01
		1	0	19.37	18.70	22.06	24.13	< 33.01
		1	188	19.69	19.76	22.74	24.81	< 33.01
2655.00	70	95	47	21.06	20.98	24.03	26.10	< 33.01
		1	1	20.95	20.84	23.91	25.98	< 33.01
		1	187	21.26	21.24	24.26	26.33	< 33.01
		189	0	20.14	19.91	23.04	25.11	< 33.01
		1	0	19.52	19.44	22.49	24.56	< 33.01
		1	188	19.71	19.18	22.46	24.53	< 33.01
2536.02	80	109	54	24.31	21.34	21.26	23.33	< 33.01
		1	1	24.23	21.26	21.18	23.25	< 33.01
		1	215	24.49	21.29	21.65	23.72	< 33.01
		217	0	23.40	20.35	20.43	22.50	< 33.01
		1	0	22.53	19.53	19.52	21.59	< 33.01
		1	216	22.60	19.59	19.59	21.66	< 33.01
2592.99	80	109	54	24.19	21.18	21.18	23.25	< 33.01
		1	1	23.91	20.89	20.91	22.98	< 33.01
		1	215	24.29	21.37	21.19	23.26	< 33.01
		217	0	23.16	20.16	20.14	22.21	< 33.01
		1	0	22.41	19.50	19.29	21.36	< 33.01
		1	216	22.65	19.52	19.76	21.83	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2649.99	80	109	54	24.41	21.48	21.32	23.39	< 33.01
		1	1	24.38	21.38	21.37	23.44	< 33.01
		1	215	24.31	21.31	21.29	23.36	< 33.01
		217	0	23.33	20.32	20.32	22.39	< 33.01
		1	0	22.62	19.55	19.67	21.74	< 33.01
		1	216	22.75	19.76	19.71	21.78	< 33.01
2541.02	90	123	61	24.30	21.30	21.29	23.36	< 33.01
		1	1	24.26	21.28	21.23	23.30	< 33.01
		1	243	24.48	21.48	21.45	23.52	< 33.01
		245	0	23.34	20.32	20.33	22.40	< 33.01
		1	0	22.53	19.55	19.50	21.57	< 33.01
		1	244	22.77	19.76	19.76	21.83	< 33.01
2592.99	90	123	61	24.16	21.16	21.14	23.21	< 33.01
		1	1	23.96	20.97	20.92	22.99	< 33.01
		1	243	24.35	21.36	21.32	23.39	< 33.01
		245	0	23.10	20.04	20.14	22.21	< 33.01
		1	0	22.35	19.44	19.25	21.32	< 33.01
		1	244	22.64	19.58	19.68	21.75	< 33.01
2664.98	90	123	61	24.34	21.33	21.33	23.40	< 33.01
		1	1	24.06	21.05	21.05	23.12	< 33.01
		1	243	24.26	21.26	21.24	23.31	< 33.01
		245	0	23.24	20.32	20.14	22.21	< 33.01
		1	0	22.51	19.64	19.35	21.42	< 33.01
		1	244	22.71	19.60	19.80	21.87	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 16QAM								
2546.01	100	137	68	24.28	21.27	21.26	23.33	< 33.01
		1	1	24.24	21.28	21.19	23.26	< 33.01
		1	271	24.48	21.55	21.40	23.47	< 33.01
		273	0	23.38	20.36	20.37	22.44	< 33.01
		1	0	22.73	19.87	19.56	21.63	< 33.01
		1	272	22.87	19.80	19.92	21.99	< 33.01
2592.99	100	137	68	24.10	21.04	21.13	23.20	< 33.01
		1	1	23.94	20.90	20.96	23.03	< 33.01
		1	271	24.35	21.34	21.34	23.41	< 33.01
		273	0	23.12	20.11	20.12	22.19	< 33.01
		1	0	22.26	19.35	19.15	21.22	< 33.01
		1	272	22.55	19.54	19.53	21.60	< 33.01
2640.00	100	137	68	24.31	21.29	21.30	23.37	< 33.01
		1	1	24.16	21.19	21.11	23.18	< 33.01
		1	271	24.40	21.39	21.38	23.45	< 33.01
		273	0	23.32	20.36	20.25	22.32	< 33.01
		1	0	22.34	19.33	19.33	21.40	< 33.01
		1	272	22.76	19.91	19.57	21.64	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2506.02	20	25	12	19.74	19.97	22.87	24.94	< 33.01
		1	1	19.94	19.92	22.94	25.01	< 33.01
		1	49	19.70	19.89	22.81	24.88	< 33.01
		51	0	19.90	19.98	22.95	25.02	< 33.01
		1	0	19.82	19.87	22.85	24.92	< 33.01
		1	50	20.13	20.05	23.10	25.17	< 33.01
2592.99	20	25	12	19.96	19.71	22.85	24.92	< 33.01
		1	1	20.10	19.65	22.89	24.96	< 33.01
		1	49	20.11	19.71	22.92	24.99	< 33.01
		51	0	20.03	19.74	22.90	24.97	< 33.01
		1	0	20.11	19.57	22.86	24.93	< 33.01
		1	50	19.95	19.71	22.84	24.91	< 33.01
2679.99	20	25	12	19.84	19.93	22.90	24.97	< 33.01
		1	1	20.00	19.94	22.98	25.05	< 33.01
		1	49	19.93	20.05	23.00	25.07	< 33.01
		51	0	20.03	20.08	23.07	25.14	< 33.01
		1	0	19.98	20.03	23.01	25.08	< 33.01
		1	50	20.01	20.00	23.02	25.09	< 33.01
2511.0	30	36	79	19.82	19.98	22.91	24.98	< 33.01
		1	1	19.90	20.05	22.99	25.06	< 33.01
		1	76	20.03	20.11	23.08	25.15	< 33.01
		78	0	19.76	20.06	22.92	24.99	< 33.01
		1	0	19.82	20.05	22.95	25.02	< 33.01
		1	77	19.84	20.14	23.00	25.07	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2592.99	30	36	79	20.09	19.64	22.88	24.95	< 33.01
		1	1	20.01	19.82	22.93	25.00	< 33.01
		1	76	20.08	19.87	22.99	25.06	< 33.01
		78	0	20.05	19.72	22.90	24.97	< 33.01
		1	0	19.97	19.68	22.84	24.91	< 33.01
		1	77	20.26	20.10	23.19	25.26	< 33.01
2674.98	30	36	79	19.96	20.03	23.01	25.08	< 33.01
		1	1	20.32	20.10	23.22	25.29	< 33.01
		1	76	20.42	20.32	23.39	25.46	< 33.01
		78	0	19.91	20.00	22.97	25.04	< 33.01
		1	0	20.32	20.09	23.21	25.28	< 33.01
		1	77	20.27	20.20	23.25	25.32	< 33.01
2516.01	40	53	26	19.82	20.11	22.98	25.05	< 33.01
		1	1	20.04	20.11	23.09	25.16	< 33.01
		1	104	20.13	20.08	23.12	25.19	< 33.01
		106	0	19.81	20.06	22.95	25.02	< 33.01
		1	0	19.93	20.19	23.07	25.14	< 33.01
		1	105	20.11	20.14	23.14	25.21	< 33.01
2592.99	40	53	26	20.01	19.73	22.88	24.95	< 33.01
		1	1	20.03	19.83	22.94	25.01	< 33.01
		1	104	19.99	20.12	23.06	25.13	< 33.01
		106	0	20.07	19.79	22.94	25.01	< 33.01
		1	0	19.99	20.15	23.08	25.15	< 33.01
		1	105	20.14	19.85	23.01	25.08	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2670.0	40	53	26	19.93	20.05	23.00	25.07	< 33.01
		1	1	20.30	20.13	23.23	25.30	< 33.01
		1	104	20.14	20.15	23.15	25.22	< 33.01
		106	0	19.98	20.06	23.03	25.10	< 33.01
		1	0	20.26	20.06	23.17	25.24	< 33.01
		1	105	20.16	20.23	23.20	25.27	< 33.01
2521.02	50	67	33	19.93	20.13	23.04	25.11	< 33.01
		1	1	19.94	19.91	22.93	25.00	< 33.01
		1	131	19.99	20.35	23.18	25.25	< 33.01
		133	0	19.81	20.03	22.93	25.00	< 33.01
		1	0	19.84	19.81	22.83	24.90	< 33.01
		1	132	20.00	20.08	23.05	25.12	< 33.01
2592.99	50	67	33	19.99	19.74	22.88	24.95	< 33.01
		1	1	20.04	19.77	22.91	24.98	< 33.01
		1	131	20.07	20.12	23.11	25.18	< 33.01
		133	0	20.00	19.73	22.88	24.95	< 33.01
		1	0	19.94	19.83	22.89	24.96	< 33.01
		1	132	20.10	19.97	23.04	25.11	< 33.01
2664.99	50	67	33	19.91	19.99	22.96	25.03	< 33.01
		1	1	20.08	20.12	23.11	25.18	< 33.01
		1	131	20.08	20.04	23.07	25.14	< 33.01
		133	0	19.93	20.00	22.97	25.04	< 33.01
		1	0	20.13	20.21	23.18	25.25	< 33.01
		1	132	19.97	19.97	22.98	25.05	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2526.00	60	81	40	19.42	19.89	22.68	24.75	< 33.01
		1	1	19.46	19.67	22.57	24.64	< 33.01
		1	131	19.50	19.80	22.66	24.73	< 33.01
		128	0	19.37	20.00	22.71	24.78	< 33.01
		1	0	19.36	19.76	22.58	24.65	< 33.01
		1	132	19.61	19.93	22.79	24.86	< 33.01
2592.99	60	81	40	19.74	19.72	22.74	24.81	< 33.01
		1	1	19.70	19.70	22.71	24.78	< 33.01
		1	131	19.90	19.97	22.95	25.02	< 33.01
		128	0	19.71	19.71	22.72	24.79	< 33.01
		1	0	19.42	19.67	22.56	24.63	< 33.01
		1	132	19.84	19.84	22.85	24.92	< 33.01
2659.98	60	81	40	19.98	20.10	23.05	25.12	< 33.01
		1	1	20.15	20.20	23.19	25.26	< 33.01
		1	131	20.28	20.12	23.21	25.28	< 33.01
		128	0	19.99	19.99	23.00	25.07	< 33.01
		1	0	20.49	20.44	23.47	25.54	< 33.01
		1	132	20.15	20.27	23.22	25.29	< 33.01
2531.01	70	95	47	19.35	19.36	22.37	24.44	< 33.01
		1	1	19.22	19.01	22.12	24.19	< 33.01
		1	187	19.55	19.50	22.54	24.61	< 33.01
		189	0	19.31	19.36	22.35	24.42	< 33.01
		1	0	19.23	19.03	22.14	24.21	< 33.01
		1	188	19.24	19.55	22.40	24.47	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2592.99	70	95	47	19.44	19.41	22.44	24.51	< 33.01
		1	1	19.51	18.99	22.27	24.34	< 33.01
		1	187	19.87	19.48	22.69	24.76	< 33.01
		189	0	19.48	19.34	22.42	24.49	< 33.01
		1	0	19.40	19.16	22.29	24.36	< 33.01
		1	188	19.81	19.78	22.80	24.87	< 33.01
2655.00	70	95	47	19.56	19.47	22.53	24.60	< 33.01
		1	1	19.66	19.44	22.56	24.63	< 33.01
		1	187	19.92	19.41	22.69	24.76	< 33.01
		189	0	19.61	19.57	22.60	24.67	< 33.01
		1	0	19.54	19.32	22.44	24.51	< 33.01
		1	188	19.86	19.51	22.70	24.77	< 33.01
2536.02	80	109	54	19.89	19.89	22.90	24.97	< 33.01
		1	1	19.85	20.33	23.11	25.18	< 33.01
		1	215	20.28	19.98	23.14	25.21	< 33.01
		217	0	19.83	19.81	22.83	24.90	< 33.01
		1	0	19.77	19.87	22.83	24.90	< 33.01
		1	216	19.98	19.97	22.98	25.05	< 33.01
2592.99	80	109	54	19.68	19.68	22.69	24.76	< 33.01
		1	1	19.56	19.75	22.66	24.73	< 33.01
		1	215	19.95	20.00	22.99	25.06	< 33.01
		217	0	19.61	19.62	22.63	24.70	< 33.01
		1	0	19.73	19.97	22.86	24.93	< 33.01
		1	216	19.88	19.80	22.85	24.92	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2649.99	80	109	54	19.83	19.84	22.84	24.91	< 33.01
		1	1	19.85	19.86	22.86	24.93	< 33.01
		1	215	19.88	19.94	22.92	24.99	< 33.01
		217	0	19.80	19.79	22.80	24.87	< 33.01
		1	0	19.90	19.91	22.91	24.98	< 33.01
		1	216	19.92	20.01	22.98	25.05	< 33.01
2541.02	90	123	61	19.84	19.73	22.80	24.87	< 33.01
		1	1	19.79	19.79	22.80	24.87	< 33.01
		1	243	20.13	20.12	23.13	25.20	< 33.01
		245	0	19.87	19.86	22.88	24.95	< 33.01
		1	0	19.85	19.85	22.86	24.93	< 33.01
		1	244	20.01	19.92	22.98	25.05	< 33.01
2592.99	90	123	61	19.69	19.69	22.70	24.77	< 33.01
		1	1	19.86	19.54	22.71	24.78	< 33.01
		1	243	19.80	19.83	22.82	24.89	< 33.01
		245	0	19.57	19.59	22.59	24.66	< 33.01
		1	0	19.47	19.85	22.68	24.75	< 33.01
		1	244	19.77	19.77	22.78	24.85	< 33.01
2664.98	90	123	61	19.80	19.80	22.81	24.88	< 33.01
		1	1	19.60	19.63	22.63	24.70	< 33.01
		1	243	19.89	20.10	23.01	25.08	< 33.01
		245	0	19.69	19.70	22.70	24.77	< 33.01
		1	0	19.55	19.62	22.59	24.66	< 33.01
		1	244	19.86	19.84	22.86	24.93	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 64QAM								
2546.01	100	137	68	19.82	19.80	22.82	24.89	< 33.01
		1	1	20.42	19.90	23.18	25.25	< 33.01
		1	271	20.25	20.18	23.23	25.30	< 33.01
		273	0	19.94	19.84	22.90	24.97	< 33.01
		1	0	19.49	19.81	22.66	24.73	< 33.01
		1	272	19.81	19.69	22.76	24.83	< 33.01
2592.99	100	137	68	19.51	19.52	22.53	24.60	< 33.01
		1	1	19.77	19.56	22.68	24.75	< 33.01
		1	271	19.89	19.88	22.89	24.96	< 33.01
		273	0	19.56	19.67	22.63	24.70	< 33.01
		1	0	19.47	19.38	22.44	24.51	< 33.01
		1	272	19.83	20.34	23.10	25.17	< 33.01
2640.00	100	137	68	19.77	19.88	22.84	24.91	< 33.01
		1	1	19.63	19.63	22.64	24.71	< 33.01
		1	271	19.82	19.95	22.90	24.97	< 33.01
		273	0	19.82	19.83	22.84	24.91	< 33.01
		1	0	19.42	19.42	22.43	24.50	< 33.01
		1	272	19.95	19.73	22.85	24.92	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2506.02	20	25	12	16.85	17.01	19.94	22.01	< 33.01
		1	1	16.52	16.94	19.75	21.82	< 33.01
		1	49	16.70	16.86	19.79	21.86	< 33.01
		51	0	16.79	17.00	19.91	21.98	< 33.01
		1	0	16.61	16.92	19.77	21.84	< 33.01
		1	50	16.68	17.07	19.89	21.96	< 33.01
2592.99	20	25	12	17.01	16.73	19.88	21.95	< 33.01
		1	1	16.88	16.59	19.75	21.82	< 33.01
		1	49	16.75	16.71	19.74	21.81	< 33.01
		51	0	17.05	16.77	19.92	21.99	< 33.01
		1	0	16.89	16.62	19.76	21.83	< 33.01
		1	50	16.80	16.60	19.71	21.78	< 33.01
2679.99	20	25	12	16.93	17.00	19.97	22.04	< 33.01
		1	1	16.69	17.10	19.91	21.98	< 33.01
		1	49	16.67	17.07	19.89	21.96	< 33.01
		51	0	17.03	17.04	20.05	22.12	< 33.01
		1	0	16.69	17.09	19.91	21.98	< 33.01
		1	50	16.80	17.00	19.91	21.98	< 33.01
2511.0	30	36	79	16.87	16.97	19.93	22.00	< 33.01
		1	1	16.62	17.05	19.85	21.92	< 33.01
		1	76	16.72	16.95	19.85	21.92	< 33.01
		78	0	16.94	17.02	19.99	22.06	< 33.01
		1	0	16.72	17.02	19.89	21.96	< 33.01
		1	77	16.76	16.96	19.87	21.94	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2592.99	30	36	79	17.08	16.71	19.91	21.98	< 33.01
		1	1	16.83	16.70	19.78	21.85	< 33.01
		1	76	16.89	17.01	19.96	22.03	< 33.01
		78	0	17.07	16.81	19.95	22.02	< 33.01
		1	0	16.77	16.68	19.73	21.80	< 33.01
		1	77	16.86	16.97	19.92	21.99	< 33.01
2674.98	30	36	79	16.97	16.92	19.95	22.02	< 33.01
		1	1	16.89	16.88	19.90	21.97	< 33.01
		1	76	17.02	17.02	20.03	22.10	< 33.01
		78	0	16.96	17.00	19.99	22.06	< 33.01
		1	0	16.85	17.11	19.99	22.06	< 33.01
		1	77	16.89	17.02	19.97	22.04	< 33.01
2516.01	40	53	26	16.90	17.04	19.98	22.05	< 33.01
		1	1	16.67	17.16	19.94	22.01	< 33.01
		1	104	16.88	17.19	20.05	22.12	< 33.01
		106	0	16.87	17.21	20.06	22.13	< 33.01
		1	0	16.84	16.99	19.93	22.00	< 33.01
		1	105	16.72	17.26	20.01	22.08	< 33.01
2592.99	40	53	26	17.04	16.71	19.89	21.96	< 33.01
		1	1	16.83	16.81	19.83	21.90	< 33.01
		1	104	16.95	17.03	20.00	22.07	< 33.01
		106	0	16.97	16.76	19.88	21.95	< 33.01
		1	0	16.82	16.80	19.82	21.89	< 33.01
		1	105	16.94	17.00	19.98	22.05	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2670.0	40	53	26	17.06	17.07	20.07	22.14	< 33.01
		1	1	16.92	17.13	20.04	22.11	< 33.01
		1	104	16.89	17.19	20.05	22.12	< 33.01
		106	0	16.99	17.08	20.05	22.12	< 33.01
		1	0	16.94	17.12	20.04	22.11	< 33.01
		1	105	16.85	17.11	20.00	22.07	< 33.01
2521.02	50	67	33	16.87	17.01	19.95	22.02	< 33.01
		1	1	16.50	16.76	19.65	21.72	< 33.01
		1	131	16.60	17.10	19.87	21.94	< 33.01
		133	0	16.84	17.03	19.95	22.02	< 33.01
		1	0	16.77	16.80	19.79	21.86	< 33.01
		1	132	16.69	17.15	19.94	22.01	< 33.01
2592.99	50	67	33	16.99	16.68	19.85	21.92	< 33.01
		1	1	16.75	16.60	19.69	21.76	< 33.01
		1	131	16.82	16.97	19.91	21.98	< 33.01
		133	0	16.95	16.75	19.86	21.93	< 33.01
		1	0	16.83	16.75	19.80	21.87	< 33.01
		1	132	16.91	16.83	19.88	21.95	< 33.01
2664.99	50	67	33	16.85	17.00	19.94	22.01	< 33.01
		1	1	16.78	17.00	19.90	21.97	< 33.01
		1	131	16.67	17.02	19.86	21.93	< 33.01
		133	0	16.82	17.05	19.95	22.02	< 33.01
		1	0	16.82	17.05	19.95	22.02	< 33.01
		1	132	16.65	16.95	19.81	21.88	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2526.00	60	81	40	16.44	16.95	19.71	21.78	< 33.01
		1	1	16.19	16.65	19.44	21.51	< 33.01
		1	131	16.33	16.81	19.59	21.66	< 33.01
		128	0	16.50	16.98	19.76	21.83	< 33.01
		1	0	16.25	16.74	19.51	21.58	< 33.01
		1	132	16.10	16.81	19.48	21.55	< 33.01
2592.99	60	81	40	16.83	16.83	19.84	21.91	< 33.01
		1	1	16.64	16.68	19.67	21.74	< 33.01
		1	131	16.87	17.01	19.95	22.02	< 33.01
		128	0	16.77	16.75	19.77	21.84	< 33.01
		1	0	16.55	16.45	19.51	21.58	< 33.01
		1	132	16.85	16.90	19.89	21.96	< 33.01
2659.98	60	81	40	16.93	17.04	20.00	22.07	< 33.01
		1	1	17.00	17.11	20.07	22.14	< 33.01
		1	131	17.06	16.97	20.03	22.10	< 33.01
		128	0	16.96	16.96	19.97	22.04	< 33.01
		1	0	16.90	16.99	19.95	22.02	< 33.01
		1	132	16.88	16.88	19.89	21.96	< 33.01
2531.01	70	95	47	16.37	16.38	19.39	21.46	< 33.01
		1	1	16.38	15.94	19.17	21.24	< 33.01
		1	187	16.42	16.53	19.49	21.56	< 33.01
		189	0	16.32	16.38	19.36	21.43	< 33.01
		1	0	16.32	16.15	19.24	21.31	< 33.01
		1	188	16.37	16.48	19.44	21.51	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2592.99	70	95	47	16.37	16.47	19.43	21.50	< 33.01
		1	1	16.64	15.95	19.32	21.39	< 33.01
		1	187	16.88	16.33	19.63	21.70	< 33.01
		189	0	16.43	16.39	19.42	21.49	< 33.01
		1	0	16.62	15.92	19.29	21.36	< 33.01
		1	188	16.86	16.47	19.68	21.75	< 33.01
2655.00	70	95	47	16.49	16.46	19.49	21.56	< 33.01
		1	1	16.57	16.21	19.41	21.48	< 33.01
		1	187	16.85	16.41	19.65	21.72	< 33.01
		189	0	16.58	16.50	19.55	21.62	< 33.01
		1	0	16.74	16.04	19.41	21.48	< 33.01
		1	188	16.81	16.41	19.62	21.69	< 33.01
2536.02	80	109	54	16.87	16.77	19.83	21.90	< 33.01
		1	1	16.63	19.04	21.01	23.08	< 33.01
		1	215	16.76	16.62	19.70	21.77	< 33.01
		217	0	16.77	16.86	19.83	21.90	< 33.01
		1	0	16.75	16.75	19.76	21.83	< 33.01
		1	216	16.77	16.83	19.81	21.88	< 33.01
2592.99	80	109	54	16.66	16.65	19.67	21.74	< 33.01
		1	1	16.58	16.58	19.59	21.66	< 33.01
		1	215	16.74	16.65	19.70	21.77	< 33.01
		217	0	16.59	16.68	19.65	21.72	< 33.01
		1	0	16.44	16.52	19.49	21.56	< 33.01
		1	216	16.65	16.81	19.74	21.81	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2649.99	80	109	54	16.96	16.86	19.92	21.99	< 33.01
		1	1	16.78	16.74	19.77	21.84	< 33.01
		1	215	16.84	16.89	19.87	21.94	< 33.01
		217	0	16.83	16.83	19.84	21.91	< 33.01
		1	0	16.71	16.70	19.71	21.78	< 33.01
		1	216	16.86	16.81	19.84	21.91	< 33.01
2541.02	90	123	61	16.81	16.91	19.87	21.94	< 33.01
		1	1	16.81	16.64	19.74	21.81	< 33.01
		1	243	16.96	17.00	19.99	22.06	< 33.01
		245	0	16.80	16.79	19.80	21.87	< 33.01
		1	0	16.69	16.60	19.66	21.73	< 33.01
		1	244	16.75	16.73	19.75	21.82	< 33.01
2592.99	90	123	61	16.64	16.64	19.65	21.72	< 33.01
		1	1	16.60	16.65	19.63	21.70	< 33.01
		1	243	16.88	16.82	19.86	21.93	< 33.01
		245	0	16.53	16.54	19.55	21.62	< 33.01
		1	0	16.34	16.36	19.36	21.43	< 33.01
		1	244	16.77	16.76	19.77	21.84	< 33.01
2664.98	90	123	61	16.95	16.82	19.89	21.96	< 33.01
		1	1	16.56	16.51	19.55	21.62	< 33.01
		1	243	16.89	16.87	19.89	21.96	< 33.01
		245	0	16.72	16.73	19.74	21.81	< 33.01
		1	0	16.42	16.44	19.44	21.51	< 33.01
		1	244	16.89	16.80	19.85	21.92	< 33.01
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 3	Port 0			
CP OFDM 256QAM								
2546.01	100	137	68	16.84	16.83	19.84	21.91	< 33.01
		1	1	16.77	16.74	19.76	21.83	< 33.01
		1	271	16.87	17.07	19.98	22.05	< 33.01
		273	0	16.80	17.01	19.92	21.99	< 33.01
		1	0	16.55	16.53	19.55	21.62	< 33.01
		1	272	16.78	16.86	19.83	21.90	< 33.01
2592.99	100	137	68	16.55	16.55	19.56	21.63	< 33.01
		1	1	16.50	16.51	19.52	21.59	< 33.01
		1	271	16.97	16.91	19.95	22.02	< 33.01
		273	0	16.63	16.62	19.64	21.71	< 33.01
		1	0	16.32	16.32	19.33	21.40	< 33.01
		1	272	16.72	16.71	19.72	21.79	< 33.01
2640.00	100	137	68	16.78	16.77	19.78	21.85	< 33.01
		1	1	16.61	16.57	19.60	21.67	< 33.01
		1	271	16.96	16.98	19.98	22.05	< 33.01
		273	0	16.76	16.76	19.77	21.84	< 33.01
		1	0	16.43	16.30	19.38	21.45	< 33.01
		1	272	16.79	16.67	19.74	21.81	< 33.01

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Test Site	SIP-SR1	Test Engineer	Cloud Guo
Test Date	2022/05/25 ~ 2022/07/10	Test Band	n77/n78_UL MIMO (3450 ~ 3550MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3455.00	10	12	6	20.97	20.22	23.62	24.20	< 30.00
		1	1	20.96	20.27	23.64	24.22	< 30.00
		1	22	21.10	20.55	23.84	24.42	< 30.00
		24	0	20.98	20.36	23.69	24.27	< 30.00
		1	0	20.42	19.78	23.12	23.70	< 30.00
		1	23	20.60	19.76	23.21	23.79	< 30.00
3500.01	10	12	6	20.71	20.29	23.52	24.10	< 30.00
		1	1	20.92	20.37	23.66	24.24	< 30.00
		1	22	20.59	20.62	23.61	24.19	< 30.00
		24	0	20.75	20.30	23.54	24.12	< 30.00
		1	0	20.32	20.01	23.18	23.76	< 30.00
		1	23	20.28	19.88	23.10	23.68	< 30.00
3544.98	10	12	6	20.72	20.30	23.53	24.11	< 30.00
		1	1	20.76	20.58	23.68	24.26	< 30.00
		1	22	20.89	20.62	23.77	24.35	< 30.00
		24	0	20.67	20.42	23.56	24.14	< 30.00
		1	0	20.38	19.98	23.19	23.77	< 30.00
		1	23	20.10	19.92	23.02	23.60	< 30.00
3457.50	15	19	9	21.20	20.36	23.81	24.39	< 30.00
		1	1	20.85	20.43	23.65	24.23	< 30.00
		1	36	21.10	20.60	23.87	24.45	< 30.00
		38	0	21.23	20.42	23.86	24.44	< 30.00
		1	0	20.68	19.85	23.29	23.87	< 30.00
		1	37	20.94	19.96	23.49	24.07	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	15	19	9	20.89	20.34	23.64	24.22	< 30.00
		1	1	21.06	20.45	23.78	24.36	< 30.00
		1	36	20.94	20.40	23.69	24.27	< 30.00
		38	0	20.80	20.49	23.66	24.24	< 30.00
		1	0	20.51	19.96	23.26	23.84	< 30.00
		1	37	20.22	19.89	23.07	23.65	< 30.00
3542.49	15	19	9	20.75	20.58	23.68	24.26	< 30.00
		1	1	20.71	20.65	23.69	24.27	< 30.00
		1	36	20.82	20.35	23.60	24.18	< 30.00
		38	0	20.73	20.55	23.65	24.23	< 30.00
		1	0	20.25	20.13	23.20	23.78	< 30.00
		1	37	20.41	19.97	23.21	23.79	< 30.00
3460.02	20	25	12	21.27	20.37	23.85	24.43	< 30.00
		1	1	20.99	20.42	23.72	24.30	< 30.00
		1	49	21.21	20.43	23.85	24.43	< 30.00
		51	0	21.24	20.40	23.85	24.43	< 30.00
		1	0	20.75	19.94	23.38	23.96	< 30.00
		1	50	20.83	19.98	23.43	24.01	< 30.00
3500.01	20	25	12	20.93	20.53	23.74	24.32	< 30.00
		1	1	21.21	20.26	23.77	24.35	< 30.00
		1	49	20.82	20.42	23.64	24.22	< 30.00
		51	0	20.90	20.43	23.68	24.26	< 30.00
		1	0	20.68	19.90	23.32	23.90	< 30.00
		1	50	20.15	20.00	23.09	23.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3540.00	20	25	12	20.76	20.71	23.74	24.32	< 30.00
		1	1	20.91	20.58	23.76	24.34	< 30.00
		1	49	20.91	20.40	23.67	24.25	< 30.00
		51	0	20.77	20.61	23.70	24.28	< 30.00
		1	0	20.10	20.20	23.16	23.74	< 30.00
		1	50	20.14	20.16	23.16	23.74	< 30.00
3465.00	30	36	79	21.19	20.53	23.88	24.46	< 30.00
		1	1	21.12	20.94	24.04	24.62	< 30.00
		1	76	21.49	20.72	24.13	24.71	< 30.00
		78	0	21.11	20.57	23.86	24.44	< 30.00
		1	0	20.55	20.11	23.35	23.93	< 30.00
		1	77	20.74	20.15	23.47	24.05	< 30.00
3500.01	30	36	79	20.84	20.47	23.67	24.25	< 30.00
		1	1	21.25	20.63	23.96	24.54	< 30.00
		1	76	20.79	20.75	23.78	24.36	< 30.00
		78	0	20.94	20.45	23.71	24.29	< 30.00
		1	0	20.83	20.13	23.51	24.09	< 30.00
		1	77	20.41	20.24	23.34	23.92	< 30.00
3534.99	30	36	79	20.88	20.74	23.82	24.40	< 30.00
		1	1	20.75	20.57	23.67	24.25	< 30.00
		1	76	21.11	20.79	23.96	24.54	< 30.00
		78	0	20.99	20.68	23.85	24.43	< 30.00
		1	0	20.44	20.24	23.35	23.93	< 30.00
		1	77	20.43	20.27	23.36	23.94	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3470.01	40	53	26	21.21	20.47	23.87	24.45	< 30.00
		1	1	21.30	20.56	23.96	24.54	< 30.00
		1	104	21.29	20.63	23.99	24.57	< 30.00
		106	0	21.25	20.57	23.94	24.52	< 30.00
		1	0	20.60	20.25	23.44	24.02	< 30.00
		1	105	20.64	19.97	23.33	23.91	< 30.00
3500.01	40	53	26	20.80	20.49	23.66	24.24	< 30.00
		1	1	21.38	20.68	24.06	24.64	< 30.00
		1	104	21.13	20.78	23.97	24.55	< 30.00
		106	0	20.85	20.54	23.71	24.29	< 30.00
		1	0	20.81	20.02	23.44	24.02	< 30.00
		1	105	20.32	20.15	23.25	23.83	< 30.00
3529.98	40	53	26	20.78	20.62	23.71	24.29	< 30.00
		1	1	21.07	20.49	23.80	24.38	< 30.00
		1	104	21.21	20.70	23.97	24.55	< 30.00
		106	0	20.91	20.59	23.76	24.34	< 30.00
		1	0	20.41	20.08	23.26	23.84	< 30.00
		1	105	20.35	20.08	23.23	23.81	< 30.00
3475.02	50	67	33	21.05	20.27	23.69	24.27	< 30.00
		1	1	21.07	20.46	23.79	24.37	< 30.00
		1	131	20.74	20.29	23.53	24.11	< 30.00
		133	0	21.06	20.31	23.71	24.29	< 30.00
		1	0	20.61	19.86	23.26	23.84	< 30.00
		1	132	20.41	20.16	23.30	23.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	50	67	33	20.79	20.29	23.56	24.14	< 30.00
		1	1	21.28	20.21	23.79	24.37	< 30.00
		1	131	20.74	20.76	23.76	24.34	< 30.00
		133	0	20.85	20.36	23.62	24.20	< 30.00
		1	0	20.76	19.80	23.32	23.90	< 30.00
		1	132	20.20	20.04	23.13	23.71	< 30.00
3525.00	50	67	33	20.62	20.42	23.53	24.11	< 30.00
		1	1	20.95	20.23	23.62	24.20	< 30.00
		1	131	20.68	20.36	23.53	24.11	< 30.00
		133	0	20.73	20.38	23.57	24.15	< 30.00
		1	0	20.25	19.93	23.10	23.68	< 30.00
		1	132	20.20	19.90	23.07	23.65	< 30.00
3480.00	60	81	40	21.15	20.34	23.77	24.35	< 30.00
		1	1	20.99	20.36	23.70	24.28	< 30.00
		1	131	20.63	20.20	23.43	24.01	< 30.00
		128	0	21.08	20.27	23.70	24.28	< 30.00
		1	0	20.39	19.78	23.11	23.69	< 30.00
		1	132	20.16	19.70	22.95	23.53	< 30.00
3500.01	60	81	40	20.76	20.29	23.54	24.12	< 30.00
		1	1	21.13	20.46	23.82	24.40	< 30.00
		1	131	20.71	20.31	23.52	24.10	< 30.00
		128	0	20.90	20.35	23.64	24.22	< 30.00
		1	0	20.52	20.00	23.28	23.86	< 30.00
		1	132	20.09	20.26	23.18	23.76	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3519.99	60	81	40	20.68	20.41	23.56	24.14	< 30.00
		1	1	20.84	20.06	23.48	24.06	< 30.00
		1	131	20.75	20.26	23.52	24.10	< 30.00
		128	0	20.66	20.33	23.51	24.09	< 30.00
		1	0	20.27	19.67	22.99	23.57	< 30.00
		1	132	20.10	19.71	22.92	23.50	< 30.00
3485.01	70	95	47	20.03	19.93	22.99	23.57	< 30.00
		1	1	20.17	19.92	23.06	23.64	< 30.00
		1	187	20.11	19.64	22.89	23.47	< 30.00
		189	0	20.05	19.86	22.97	23.55	< 30.00
		1	0	19.65	19.55	22.61	23.19	< 30.00
		1	188	19.39	19.11	22.26	22.84	< 30.00
3500.01	70	95	47	20.08	19.90	23.00	23.58	< 30.00
		1	1	20.49	19.89	23.21	23.79	< 30.00
		1	187	20.23	19.94	23.10	23.68	< 30.00
		189	0	20.12	20.01	23.08	23.66	< 30.00
		1	0	19.92	19.37	22.67	23.25	< 30.00
		1	188	19.46	19.28	22.38	22.96	< 30.00
3514.98	70	95	47	20.14	19.88	23.02	23.60	< 30.00
		1	1	20.29	20.10	23.21	23.79	< 30.00
		1	187	20.20	19.84	23.04	23.62	< 30.00
		189	0	20.20	19.93	23.07	23.65	< 30.00
		1	0	20.01	19.51	22.78	23.36	< 30.00
		1	188	19.61	19.31	22.47	23.05	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3490.02	80	109	54	20.75	20.10	23.45	24.03	< 30.00
		1	1	20.79	20.26	23.54	24.12	< 30.00
		1	215	20.51	20.43	23.48	24.06	< 30.00
		217	0	20.69	20.13	23.43	24.01	< 30.00
		1	0	20.21	19.51	22.88	23.46	< 30.00
		1	216	19.86	19.97	22.93	23.51	< 30.00
3500.01	80	109	54	20.57	20.09	23.35	23.93	< 30.00
		1	1	20.86	20.20	23.55	24.13	< 30.00
		1	215	20.61	20.40	23.52	24.10	< 30.00
		217	0	20.71	20.28	23.51	24.09	< 30.00
		1	0	20.42	19.61	23.04	23.62	< 30.00
		1	216	20.06	19.88	22.98	23.56	< 30.00
3510.00	80	109	54	20.51	20.24	23.38	23.96	< 30.00
		1	1	21.00	20.32	23.68	24.26	< 30.00
		1	215	20.51	20.57	23.55	24.13	< 30.00
		217	0	20.55	20.21	23.39	23.97	< 30.00
		1	0	20.36	19.79	23.10	23.68	< 30.00
		1	216	19.98	19.62	22.81	23.39	< 30.00
3495.00	90	123	61	20.58	20.08	23.35	23.93	< 30.00
		1	1	20.88	20.19	23.56	24.14	< 30.00
		1	243	20.66	20.46	23.57	24.15	< 30.00
		245	0	20.72	20.21	23.48	24.06	< 30.00
		1	0	20.26	19.50	22.91	23.49	< 30.00
		1	244	20.22	19.95	23.09	23.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	90	123	61	20.53	20.11	23.33	23.91	< 30.00
		1	1	20.87	20.11	23.52	24.10	< 30.00
		1	243	20.79	20.62	23.71	24.29	< 30.00
		245	0	20.70	20.18	23.46	24.04	< 30.00
		1	0	20.24	19.97	23.12	23.70	< 30.00
		1	244	20.11	19.79	22.96	23.54	< 30.00
3504.99	90	123	61	20.52	20.21	23.38	23.96	< 30.00
		1	1	20.80	20.15	23.50	24.08	< 30.00
		1	243	20.73	20.42	23.59	24.17	< 30.00
		245	0	20.58	20.30	23.45	24.03	< 30.00
		1	0	20.43	19.54	23.02	23.60	< 30.00
		1	244	20.13	19.71	22.94	23.52	< 30.00
3500.01	100	137	68	20.61	20.15	23.39	23.97	< 30.00
		1	1	20.66	20.21	23.45	24.03	< 30.00
		1	271	20.81	20.25	23.55	24.13	< 30.00
		273	0	20.78	20.25	23.53	24.11	< 30.00
		1	0	20.16	19.79	22.99	23.57	< 30.00
		1	272	20.06	19.74	22.91	23.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3455.00	10	12	6	20.97	20.45	23.73	24.31	< 30.00
		1	1	20.82	20.65	23.74	24.32	< 30.00
		1	22	21.08	20.39	23.76	24.34	< 30.00
		24	0	21.08	20.35	23.74	24.32	< 30.00
		1	0	20.43	19.94	23.20	23.78	< 30.00
		1	23	20.55	19.86	23.23	23.81	< 30.00
3500.01	10	12	6	20.83	20.38	23.62	24.20	< 30.00
		1	1	20.94	20.38	23.68	24.26	< 30.00
		1	22	20.72	20.34	23.54	24.12	< 30.00
		24	0	20.78	20.32	23.57	24.15	< 30.00
		1	0	20.46	19.75	23.13	23.71	< 30.00
		1	23	20.20	19.85	23.04	23.62	< 30.00
3544.98	10	12	6	20.68	20.48	23.60	24.18	< 30.00
		1	1	20.82	20.45	23.65	24.23	< 30.00
		1	22	20.80	20.28	23.56	24.14	< 30.00
		24	0	20.81	20.35	23.59	24.17	< 30.00
		1	0	20.33	19.91	23.13	23.71	< 30.00
		1	23	20.24	19.85	23.06	23.64	< 30.00
3457.50	15	19	9	21.09	20.33	23.74	24.32	< 30.00
		1	1	21.08	20.29	23.71	24.29	< 30.00
		1	36	21.24	20.45	23.87	24.45	< 30.00
		38	0	21.12	20.51	23.84	24.42	< 30.00
		1	0	20.75	19.86	23.34	23.92	< 30.00
		1	37	20.93	19.83	23.42	24.00	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	15	19	9	20.76	20.31	23.55	24.13	< 30.00
		1	1	21.07	20.29	23.71	24.29	< 30.00
		1	36	20.81	20.33	23.59	24.17	< 30.00
		38	0	20.80	20.43	23.63	24.21	< 30.00
		1	0	20.39	19.99	23.20	23.78	< 30.00
		1	37	20.32	19.87	23.11	23.69	< 30.00
3542.49	15	19	9	20.77	20.54	23.67	24.25	< 30.00
		1	1	20.79	20.66	23.74	24.32	< 30.00
		1	36	20.85	20.32	23.61	24.19	< 30.00
		38	0	20.82	20.63	23.74	24.32	< 30.00
		1	0	20.57	20.09	23.34	23.92	< 30.00
		1	37	20.38	19.99	23.20	23.78	< 30.00
3460.02	20	25	12	21.19	20.52	23.88	24.46	< 30.00
		1	1	21.14	20.54	23.86	24.44	< 30.00
		1	49	21.28	20.40	23.87	24.45	< 30.00
		51	0	21.22	20.51	23.89	24.47	< 30.00
		1	0	20.58	19.90	23.26	23.84	< 30.00
		1	50	20.87	20.00	23.47	24.05	< 30.00
3500.01	20	25	12	20.93	20.46	23.71	24.29	< 30.00
		1	1	21.11	20.48	23.82	24.40	< 30.00
		1	49	20.83	20.47	23.66	24.24	< 30.00
		51	0	20.92	20.39	23.68	24.26	< 30.00
		1	0	20.58	19.94	23.28	23.86	< 30.00
		1	50	20.22	20.00	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3540.00	20	25	12	20.85	20.66	23.77	24.35	< 30.00
		1	1	20.93	20.79	23.87	24.45	< 30.00
		1	49	21.00	20.51	23.77	24.35	< 30.00
		51	0	20.84	20.65	23.76	24.34	< 30.00
		1	0	20.32	20.22	23.28	23.86	< 30.00
		1	50	20.51	19.95	23.25	23.83	< 30.00
3465.00	30	36	79	21.22	20.54	23.90	24.48	< 30.00
		1	1	21.09	20.49	23.81	24.39	< 30.00
		1	76	21.29	20.50	23.93	24.51	< 30.00
		78	0	21.21	20.53	23.89	24.47	< 30.00
		1	0	20.73	20.02	23.40	23.98	< 30.00
		1	77	20.96	19.86	23.45	24.03	< 30.00
3500.01	30	36	79	20.85	20.47	23.68	24.26	< 30.00
		1	1	21.17	20.46	23.84	24.42	< 30.00
		1	76	20.82	20.52	23.68	24.26	< 30.00
		78	0	20.84	20.48	23.67	24.25	< 30.00
		1	0	20.83	19.93	23.41	23.99	< 30.00
		1	77	20.35	20.02	23.20	23.78	< 30.00
3534.99	30	36	79	20.97	20.77	23.88	24.46	< 30.00
		1	1	21.05	20.70	23.89	24.47	< 30.00
		1	76	20.94	20.60	23.78	24.36	< 30.00
		78	0	20.92	20.72	23.83	24.41	< 30.00
		1	0	20.52	20.13	23.34	23.92	< 30.00
		1	77	20.46	20.02	23.26	23.84	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3470.01	40	53	26	21.31	20.61	23.98	24.56	< 30.00
		1	1	21.31	20.81	24.08	24.66	< 30.00
		1	104	21.19	20.39	23.82	24.40	< 30.00
		106	0	21.19	20.48	23.86	24.44	< 30.00
		1	0	20.69	20.32	23.52	24.10	< 30.00
		1	105	20.56	20.18	23.39	23.97	< 30.00
3500.01	40	53	26	20.90	20.57	23.75	24.33	< 30.00
		1	1	21.30	20.72	24.03	24.61	< 30.00
		1	104	21.14	20.63	23.90	24.48	< 30.00
		106	0	20.87	20.44	23.67	24.25	< 30.00
		1	0	20.74	20.03	23.41	23.99	< 30.00
		1	105	20.23	20.39	23.32	23.90	< 30.00
3529.98	40	53	26	20.90	20.67	23.80	24.38	< 30.00
		1	1	20.89	20.86	23.89	24.47	< 30.00
		1	104	21.00	20.59	23.81	24.39	< 30.00
		106	0	20.85	20.71	23.79	24.37	< 30.00
		1	0	20.21	20.21	23.22	23.80	< 30.00
		1	105	20.38	20.00	23.20	23.78	< 30.00
3475.02	50	67	33	21.02	20.26	23.67	24.25	< 30.00
		1	1	21.00	20.36	23.70	24.28	< 30.00
		1	131	21.08	20.16	23.66	24.24	< 30.00
		133	0	20.93	20.36	23.67	24.25	< 30.00
		1	0	20.44	20.02	23.25	23.83	< 30.00
		1	132	20.31	19.83	23.09	23.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	50	67	33	20.82	20.24	23.55	24.13	< 30.00
		1	1	21.34	20.28	23.85	24.43	< 30.00
		1	131	20.69	20.39	23.55	24.13	< 30.00
		133	0	20.85	20.34	23.61	24.19	< 30.00
		1	0	20.71	20.00	23.38	23.96	< 30.00
		1	132	20.35	19.85	23.12	23.70	< 30.00
3525.00	50	67	33	20.72	20.47	23.61	24.19	< 30.00
		1	1	20.92	20.34	23.65	24.23	< 30.00
		1	131	20.76	20.19	23.49	24.07	< 30.00
		133	0	20.74	20.50	23.63	24.21	< 30.00
		1	0	20.24	20.00	23.13	23.71	< 30.00
		1	132	20.31	19.71	23.03	23.61	< 30.00
3480.00	60	81	40	21.07	20.33	23.73	24.31	< 30.00
		1	1	20.88	20.74	23.82	24.40	< 30.00
		1	131	20.57	20.35	23.47	24.05	< 30.00
		128	0	20.99	20.28	23.66	24.24	< 30.00
		1	0	20.33	20.01	23.18	23.76	< 30.00
		1	132	20.09	19.78	22.95	23.53	< 30.00
3500.01	60	81	40	20.74	20.27	23.52	24.10	< 30.00
		1	1	21.10	20.34	23.75	24.33	< 30.00
		1	131	20.96	20.48	23.74	24.32	< 30.00
		128	0	20.82	20.37	23.61	24.19	< 30.00
		1	0	20.66	20.05	23.38	23.96	< 30.00
		1	132	20.21	20.01	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3519.99	60	81	40	20.62	20.35	23.50	24.08	< 30.00
		1	1	20.79	20.21	23.52	24.10	< 30.00
		1	131	20.95	20.11	23.56	24.14	< 30.00
		128	0	20.69	20.34	23.53	24.11	< 30.00
		1	0	20.47	19.68	23.10	23.68	< 30.00
		1	132	20.30	19.71	23.02	23.60	< 30.00
3485.01	70	95	47	19.98	19.88	22.94	23.52	< 30.00
		1	1	20.06	20.10	23.09	23.67	< 30.00
		1	187	19.92	19.57	22.76	23.34	< 30.00
		189	0	20.03	19.94	22.99	23.57	< 30.00
		1	0	19.76	19.68	22.73	23.31	< 30.00
		1	188	19.42	19.18	22.31	22.89	< 30.00
3500.01	70	95	47	20.15	19.93	23.05	23.63	< 30.00
		1	1	20.34	20.15	23.25	23.83	< 30.00
		1	187	19.97	20.20	23.10	23.68	< 30.00
		189	0	20.18	19.96	23.08	23.66	< 30.00
		1	0	19.86	19.97	22.93	23.51	< 30.00
		1	188	19.28	19.40	22.35	22.93	< 30.00
3514.98	70	95	47	20.18	20.05	23.12	23.70	< 30.00
		1	1	20.24	20.15	23.20	23.78	< 30.00
		1	187	19.96	20.04	23.01	23.59	< 30.00
		189	0	20.18	19.87	23.04	23.62	< 30.00
		1	0	19.83	19.35	22.60	23.18	< 30.00
		1	188	19.48	19.55	22.53	23.11	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3490.02	80	109	54	20.67	20.15	23.43	24.01	< 30.00
		1	1	20.87	20.09	23.51	24.09	< 30.00
		1	215	20.84	20.42	23.65	24.23	< 30.00
		217	0	20.66	20.22	23.45	24.03	< 30.00
		1	0	20.17	19.41	22.82	23.40	< 30.00
		1	216	19.93	19.76	22.86	23.44	< 30.00
3500.01	80	109	54	20.49	20.19	23.35	23.93	< 30.00
		1	1	21.09	20.08	23.62	24.20	< 30.00
		1	215	20.67	20.40	23.55	24.13	< 30.00
		217	0	20.71	20.08	23.42	24.00	< 30.00
		1	0	20.33	19.85	23.11	23.69	< 30.00
		1	216	19.96	20.01	22.99	23.57	< 30.00
3510.00	80	109	54	20.43	20.24	23.35	23.93	< 30.00
		1	1	20.85	20.27	23.58	24.16	< 30.00
		1	215	20.78	20.10	23.46	24.04	< 30.00
		217	0	20.54	20.24	23.41	23.99	< 30.00
		1	0	20.40	19.70	23.08	23.66	< 30.00
		1	216	20.01	19.87	22.95	23.53	< 30.00
3495.00	90	123	61	20.63	20.16	23.41	23.99	< 30.00
		1	1	20.85	20.21	23.55	24.13	< 30.00
		1	243	20.51	20.39	23.46	24.04	< 30.00
		245	0	20.62	20.24	23.44	24.02	< 30.00
		1	0	20.19	19.60	22.91	23.49	< 30.00
		1	244	20.14	19.83	23.00	23.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	90	123	61	20.58	20.20	23.41	23.99	< 30.00
		1	1	20.78	20.20	23.51	24.09	< 30.00
		1	243	20.58	20.37	23.48	24.06	< 30.00
		245	0	20.72	20.23	23.49	24.07	< 30.00
		1	0	20.23	19.54	22.91	23.49	< 30.00
		1	244	19.97	19.70	22.85	23.43	< 30.00
3504.99	90	123	61	20.51	20.23	23.38	23.96	< 30.00
		1	1	20.79	20.06	23.45	24.03	< 30.00
		1	243	20.53	20.20	23.38	23.96	< 30.00
		245	0	20.62	20.22	23.43	24.01	< 30.00
		1	0	20.37	20.07	23.23	23.81	< 30.00
		1	244	19.92	19.93	22.94	23.52	< 30.00
3500.01	100	137	68	20.55	20.16	23.37	23.95	< 30.00
		1	1	20.78	20.15	23.49	24.07	< 30.00
		1	271	20.54	20.38	23.47	24.05	< 30.00
		273	0	20.77	20.15	23.48	24.06	< 30.00
		1	0	20.08	19.47	22.80	23.38	< 30.00
		1	272	20.16	19.50	22.85	23.43	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3455.00	10	12	6	20.42	20.00	23.23	23.81	< 30.00
		1	1	20.87	19.89	23.42	24.00	< 30.00
		1	22	20.75	19.86	23.34	23.92	< 30.00
		24	0	20.56	19.90	23.25	23.83	< 30.00
		1	0	20.85	19.99	23.46	24.04	< 30.00
		1	23	20.97	19.91	23.48	24.06	< 30.00
3500.01	10	12	6	20.33	19.97	23.17	23.75	< 30.00
		1	1	20.37	20.01	23.21	23.79	< 30.00
		1	22	20.24	19.73	23.00	23.58	< 30.00
		24	0	20.28	19.97	23.13	23.71	< 30.00
		1	0	20.42	20.03	23.24	23.82	< 30.00
		1	23	20.30	19.82	23.08	23.66	< 30.00
3544.98	10	12	6	20.23	20.05	23.15	23.73	< 30.00
		1	1	20.41	19.87	23.16	23.74	< 30.00
		1	22	20.41	19.70	23.08	23.66	< 30.00
		24	0	20.27	19.94	23.12	23.70	< 30.00
		1	0	20.24	19.93	23.10	23.68	< 30.00
		1	23	20.16	19.77	22.98	23.56	< 30.00
3457.50	15	19	9	20.69	20.05	23.39	23.97	< 30.00
		1	1	20.62	19.93	23.30	23.88	< 30.00
		1	36	20.76	20.02	23.41	23.99	< 30.00
		38	0	20.73	19.97	23.38	23.96	< 30.00
		1	0	20.68	19.94	23.34	23.92	< 30.00
		1	37	20.76	19.86	23.34	23.92	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	15	19	9	20.36	19.90	23.15	23.73	< 30.00
		1	1	20.63	20.06	23.36	23.94	< 30.00
		1	36	20.31	20.08	23.21	23.79	< 30.00
		38	0	20.39	19.91	23.17	23.75	< 30.00
		1	0	20.48	20.04	23.28	23.86	< 30.00
		1	37	20.49	20.00	23.26	23.84	< 30.00
3542.49	15	19	9	20.32	20.05	23.20	23.78	< 30.00
		1	1	20.46	20.19	23.34	23.92	< 30.00
		1	36	20.37	20.08	23.24	23.82	< 30.00
		38	0	20.34	20.12	23.25	23.83	< 30.00
		1	0	20.33	20.17	23.26	23.84	< 30.00
		1	37	20.23	19.97	23.11	23.69	< 30.00
3460.02	20	25	12	20.61	19.97	23.31	23.89	< 30.00
		1	1	20.58	19.98	23.30	23.88	< 30.00
		1	49	20.89	20.02	23.49	24.07	< 30.00
		51	0	20.78	20.04	23.43	24.01	< 30.00
		1	0	20.60	19.84	23.25	23.83	< 30.00
		1	50	20.84	19.97	23.44	24.02	< 30.00
3500.01	20	25	12	20.29	19.86	23.09	23.67	< 30.00
		1	1	20.66	20.00	23.35	23.93	< 30.00
		1	49	20.27	19.86	23.08	23.66	< 30.00
		51	0	20.43	19.98	23.22	23.80	< 30.00
		1	0	20.51	20.04	23.29	23.87	< 30.00
		1	50	20.30	20.05	23.19	23.77	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3540.00	20	25	12	20.28	20.11	23.21	23.79	< 30.00
		1	1	20.41	20.18	23.31	23.89	< 30.00
		1	49	20.40	20.10	23.26	23.84	< 30.00
		51	0	20.39	20.13	23.27	23.85	< 30.00
		1	0	20.36	20.13	23.26	23.84	< 30.00
		1	50	20.27	19.97	23.13	23.71	< 30.00
3465.00	30	36	79	20.70	20.02	23.38	23.96	< 30.00
		1	1	20.63	20.04	23.36	23.94	< 30.00
		1	76	20.79	20.34	23.58	24.16	< 30.00
		78	0	20.68	20.07	23.39	23.97	< 30.00
		1	0	20.54	20.15	23.36	23.94	< 30.00
		1	77	20.76	19.97	23.39	23.97	< 30.00
3500.01	30	36	79	20.42	19.99	23.22	23.80	< 30.00
		1	1	21.16	20.33	23.78	24.36	< 30.00
		1	76	20.49	20.27	23.39	23.97	< 30.00
		78	0	20.41	19.94	23.19	23.77	< 30.00
		1	0	20.87	20.13	23.53	24.11	< 30.00
		1	77	20.49	20.07	23.29	23.87	< 30.00
3534.99	30	36	79	20.31	20.25	23.29	23.87	< 30.00
		1	1	20.74	20.43	23.60	24.18	< 30.00
		1	76	20.75	20.24	23.51	24.09	< 30.00
		78	0	20.30	20.13	23.23	23.81	< 30.00
		1	0	20.44	20.23	23.35	23.93	< 30.00
		1	77	20.41	20.15	23.29	23.87	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3470.01	40	53	26	20.73	19.98	23.38	23.96	< 30.00
		1	1	20.81	20.26	23.55	24.13	< 30.00
		1	104	20.72	20.09	23.43	24.01	< 30.00
		106	0	20.78	20.06	23.44	24.02	< 30.00
		1	0	20.76	20.27	23.53	24.11	< 30.00
		1	105	20.70	20.16	23.45	24.03	< 30.00
3500.01	40	53	26	20.45	19.97	23.23	23.81	< 30.00
		1	1	20.87	20.31	23.61	24.19	< 30.00
		1	104	20.37	20.15	23.27	23.85	< 30.00
		106	0	20.45	20.03	23.26	23.84	< 30.00
		1	0	20.88	20.44	23.68	24.26	< 30.00
		1	105	20.38	20.18	23.29	23.87	< 30.00
3529.98	40	53	26	20.35	20.15	23.26	23.84	< 30.00
		1	1	20.36	20.24	23.31	23.89	< 30.00
		1	104	20.41	20.19	23.31	23.89	< 30.00
		106	0	20.41	20.18	23.30	23.88	< 30.00
		1	0	20.36	20.02	23.20	23.78	< 30.00
		1	105	20.59	20.14	23.38	23.96	< 30.00
3475.02	50	67	33	20.57	19.84	23.23	23.81	< 30.00
		1	1	20.48	19.93	23.22	23.80	< 30.00
		1	131	20.25	19.98	23.13	23.71	< 30.00
		133	0	20.46	19.76	23.14	23.72	< 30.00
		1	0	20.60	20.08	23.36	23.94	< 30.00
		1	132	20.24	19.78	23.02	23.60	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	50	67	33	20.33	19.83	23.10	23.68	< 30.00
		1	1	20.71	19.78	23.28	23.86	< 30.00
		1	131	20.23	19.93	23.09	23.67	< 30.00
		133	0	20.35	19.90	23.14	23.72	< 30.00
		1	0	20.78	19.69	23.28	23.86	< 30.00
		1	132	20.18	20.14	23.17	23.75	< 30.00
3525.00	50	67	33	20.24	20.01	23.13	23.71	< 30.00
		1	1	20.35	19.90	23.14	23.72	< 30.00
		1	131	20.34	19.91	23.14	23.72	< 30.00
		133	0	20.22	19.91	23.08	23.66	< 30.00
		1	0	20.33	19.70	23.04	23.62	< 30.00
		1	132	20.18	19.79	23.00	23.58	< 30.00
3480.00	60	81	40	20.60	19.90	23.28	23.86	< 30.00
		1	1	20.51	19.98	23.26	23.84	< 30.00
		1	131	20.27	19.89	23.09	23.67	< 30.00
		128	0	20.49	19.83	23.18	23.76	< 30.00
		1	0	20.47	20.20	23.34	23.92	< 30.00
		1	132	20.40	19.59	23.02	23.60	< 30.00
3500.01	60	81	40	20.26	19.80	23.05	23.63	< 30.00
		1	1	20.83	19.87	23.39	23.97	< 30.00
		1	131	20.26	19.94	23.11	23.69	< 30.00
		128	0	20.28	19.86	23.09	23.67	< 30.00
		1	0	20.62	19.77	23.23	23.81	< 30.00
		1	132	20.38	20.05	23.23	23.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3519.99	60	81	40	20.14	19.89	23.03	23.61	< 30.00
		1	1	20.69	19.66	23.21	23.79	< 30.00
		1	131	20.66	19.83	23.27	23.85	< 30.00
		128	0	20.14	19.84	23.01	23.59	< 30.00
		1	0	20.55	19.98	23.29	23.87	< 30.00
		1	132	20.36	19.69	23.05	23.63	< 30.00
3485.01	70	95	47	19.50	19.44	22.48	23.06	< 30.00
		1	1	19.76	19.45	22.62	23.20	< 30.00
		1	187	19.59	19.26	22.44	23.02	< 30.00
		189	0	19.50	19.39	22.46	23.04	< 30.00
		1	0	19.73	19.63	22.69	23.27	< 30.00
		1	188	19.26	19.02	22.15	22.73	< 30.00
3500.01	70	95	47	19.62	19.34	22.50	23.08	< 30.00
		1	1	19.82	19.61	22.73	23.31	< 30.00
		1	187	19.63	19.35	22.50	23.08	< 30.00
		189	0	19.64	19.33	22.50	23.08	< 30.00
		1	0	19.89	19.39	22.66	23.24	< 30.00
		1	188	19.44	19.29	22.38	22.96	< 30.00
3514.98	70	95	47	19.61	19.47	22.55	23.13	< 30.00
		1	1	19.77	19.43	22.61	23.19	< 30.00
		1	187	19.40	19.09	22.26	22.84	< 30.00
		189	0	19.63	19.35	22.51	23.09	< 30.00
		1	0	19.79	19.42	22.62	23.20	< 30.00
		1	188	19.34	19.09	22.23	22.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3490.02	80	109	54	20.11	19.73	22.94	23.52	< 30.00
		1	1	20.60	19.90	23.27	23.85	< 30.00
		1	215	20.14	20.04	23.10	23.68	< 30.00
		217	0	20.17	19.69	22.95	23.53	< 30.00
		1	0	20.40	19.77	23.11	23.69	< 30.00
		1	216	20.43	20.41	23.43	24.01	< 30.00
3500.01	80	109	54	20.09	19.70	22.91	23.49	< 30.00
		1	1	20.46	20.11	23.30	23.88	< 30.00
		1	215	20.11	19.89	23.01	23.59	< 30.00
		217	0	20.11	19.76	22.95	23.53	< 30.00
		1	0	20.31	19.75	23.05	23.63	< 30.00
		1	216	20.09	20.23	23.17	23.75	< 30.00
3510.00	80	109	54	19.99	19.64	22.83	23.41	< 30.00
		1	1	20.58	19.76	23.20	23.78	< 30.00
		1	215	19.98	20.15	23.08	23.66	< 30.00
		217	0	20.08	19.74	22.93	23.51	< 30.00
		1	0	20.36	20.02	23.21	23.79	< 30.00
		1	216	20.00	19.53	22.78	23.36	< 30.00
3495.00	90	123	61	20.11	19.70	22.92	23.50	< 30.00
		1	1	20.40	19.83	23.13	23.71	< 30.00
		1	243	20.19	20.05	23.13	23.71	< 30.00
		245	0	20.19	19.65	22.94	23.52	< 30.00
		1	0	20.17	19.67	22.94	23.52	< 30.00
		1	244	20.25	19.84	23.06	23.64	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	90	123	61	20.12	19.66	22.90	23.48	< 30.00
		1	1	20.45	19.81	23.15	23.73	< 30.00
		1	243	20.17	19.84	23.02	23.60	< 30.00
		245	0	20.19	19.57	22.90	23.48	< 30.00
		1	0	20.19	19.70	22.97	23.55	< 30.00
		1	244	20.12	19.86	23.00	23.58	< 30.00
3504.99	90	123	61	20.06	19.68	22.89	23.47	< 30.00
		1	1	20.48	19.92	23.22	23.80	< 30.00
		1	243	20.20	19.83	23.03	23.61	< 30.00
		245	0	20.20	19.70	22.96	23.54	< 30.00
		1	0	20.33	19.58	22.98	23.56	< 30.00
		1	244	19.99	19.65	22.83	23.41	< 30.00
3500.01	100	137	68	20.09	19.70	22.91	23.49	< 30.00
		1	1	20.33	19.74	23.06	23.64	< 30.00
		1	271	20.24	19.82	23.04	23.62	< 30.00
		273	0	20.13	19.69	22.93	23.51	< 30.00
		1	0	20.19	19.56	22.90	23.48	< 30.00
		1	272	20.16	19.62	22.91	23.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3455.00	10	12	6	17.46	16.76	20.13	20.71	< 30.00
		1	1	17.23	16.75	20.01	20.59	< 30.00
		1	22	17.32	16.70	20.03	20.61	< 30.00
		24	0	17.51	16.86	20.21	20.79	< 30.00
		1	0	17.25	16.79	20.04	20.62	< 30.00
		1	23	17.27	16.71	20.01	20.59	< 30.00
3500.01	10	12	6	17.23	16.79	20.02	20.60	< 30.00
		1	1	17.10	16.60	19.86	20.44	< 30.00
		1	22	17.03	16.97	20.01	20.59	< 30.00
		24	0	17.24	16.83	20.05	20.63	< 30.00
		1	0	17.25	16.78	20.03	20.61	< 30.00
		1	23	17.07	16.79	19.94	20.52	< 30.00
3544.98	10	12	6	17.16	16.88	20.03	20.61	< 30.00
		1	1	17.08	16.93	20.02	20.60	< 30.00
		1	22	17.03	16.75	19.90	20.48	< 30.00
		24	0	17.26	16.93	20.11	20.69	< 30.00
		1	0	17.11	17.06	20.09	20.67	< 30.00
		1	23	17.08	16.90	20.00	20.58	< 30.00
3457.50	15	19	9	17.60	17.02	20.33	20.91	< 30.00
		1	1	17.45	16.84	20.17	20.75	< 30.00
		1	36	17.36	17.00	20.19	20.77	< 30.00
		38	0	17.66	16.94	20.32	20.90	< 30.00
		1	0	17.44	16.92	20.20	20.78	< 30.00
		1	37	17.59	16.99	20.31	20.89	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	15	19	9	17.30	17.03	20.18	20.76	< 30.00
		1	1	17.19	16.86	20.04	20.62	< 30.00
		1	36	17.10	16.91	20.01	20.59	< 30.00
		38	0	17.40	16.92	20.17	20.75	< 30.00
		1	0	17.26	16.93	20.11	20.69	< 30.00
		1	37	17.06	16.86	19.97	20.55	< 30.00
3542.49	15	19	9	17.37	17.12	20.26	20.84	< 30.00
		1	1	17.08	17.13	20.11	20.69	< 30.00
		1	36	17.24	16.99	20.13	20.71	< 30.00
		38	0	17.32	17.07	20.21	20.79	< 30.00
		1	0	17.13	17.06	20.10	20.68	< 30.00
		1	37	17.18	17.08	20.14	20.72	< 30.00
3460.02	20	25	12	17.77	16.96	20.39	20.97	< 30.00
		1	1	17.57	16.97	20.29	20.87	< 30.00
		1	49	17.71	16.76	20.27	20.85	< 30.00
		51	0	17.79	17.05	20.45	21.03	< 30.00
		1	0	17.51	16.92	20.24	20.82	< 30.00
		1	50	17.64	16.85	20.27	20.85	< 30.00
3500.01	20	25	12	17.40	16.94	20.19	20.77	< 30.00
		1	1	17.35	16.88	20.13	20.71	< 30.00
		1	49	17.14	17.02	20.09	20.67	< 30.00
		51	0	17.43	16.95	20.21	20.79	< 30.00
		1	0	17.44	16.99	20.23	20.81	< 30.00
		1	50	17.05	16.93	20.00	20.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3540.00	20	25	12	17.42	17.08	20.26	20.84	< 30.00
		1	1	17.11	17.24	20.18	20.76	< 30.00
		1	49	17.46	16.90	20.20	20.78	< 30.00
		51	0	17.27	17.17	20.23	20.81	< 30.00
		1	0	17.19	17.24	20.22	20.80	< 30.00
		1	50	17.10	16.92	20.02	20.60	< 30.00
3465.00	30	36	79	17.69	16.95	20.34	20.92	< 30.00
		1	1	17.46	16.94	20.22	20.80	< 30.00
		1	76	17.54	17.14	20.35	20.93	< 30.00
		78	0	17.75	17.07	20.44	21.02	< 30.00
		1	0	17.47	16.95	20.23	20.81	< 30.00
		1	77	17.63	16.98	20.33	20.91	< 30.00
3500.01	30	36	79	17.44	16.94	20.20	20.78	< 30.00
		1	1	17.49	17.08	20.30	20.88	< 30.00
		1	76	17.11	17.21	20.17	20.75	< 30.00
		78	0	17.40	17.13	20.28	20.86	< 30.00
		1	0	17.45	17.01	20.24	20.82	< 30.00
		1	77	17.12	16.90	20.02	20.60	< 30.00
3534.99	30	36	79	17.38	17.20	20.30	20.88	< 30.00
		1	1	17.19	17.14	20.17	20.75	< 30.00
		1	76	17.01	17.11	20.07	20.65	< 30.00
		78	0	17.40	17.21	20.32	20.90	< 30.00
		1	0	17.13	17.23	20.19	20.77	< 30.00
		1	77	17.12	17.05	20.10	20.68	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3470.01	40	53	26	17.81	16.95	20.41	20.99	< 30.00
		1	1	17.17	17.11	20.15	20.73	< 30.00
		1	104	17.53	16.97	20.27	20.85	< 30.00
		106	0	17.68	17.10	20.41	20.99	< 30.00
		1	0	17.46	17.15	20.32	20.90	< 30.00
		1	105	17.49	17.09	20.31	20.89	< 30.00
3500.01	40	53	26	17.42	16.93	20.19	20.77	< 30.00
		1	1	17.59	17.04	20.33	20.91	< 30.00
		1	104	17.10	17.27	20.20	20.78	< 30.00
		106	0	17.44	16.98	20.23	20.81	< 30.00
		1	0	17.65	17.10	20.40	20.98	< 30.00
		1	105	17.26	17.11	20.20	20.78	< 30.00
3529.98	40	53	26	17.31	17.18	20.25	20.83	< 30.00
		1	1	17.02	17.13	20.09	20.67	< 30.00
		1	104	17.45	17.10	20.29	20.87	< 30.00
		106	0	17.30	17.21	20.26	20.84	< 30.00
		1	0	17.26	17.08	20.18	20.76	< 30.00
		1	105	17.35	17.07	20.22	20.80	< 30.00
3475.02	50	67	33	17.50	16.91	20.23	20.81	< 30.00
		1	1	17.53	16.85	20.21	20.79	< 30.00
		1	131	17.19	16.84	20.03	20.61	< 30.00
		133	0	17.61	16.76	20.21	20.79	< 30.00
		1	0	17.33	16.95	20.15	20.73	< 30.00
		1	132	17.09	16.77	19.94	20.52	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	50	67	33	17.28	16.89	20.10	20.68	< 30.00
		1	1	17.51	16.79	20.17	20.75	< 30.00
		1	131	17.05	16.97	20.02	20.60	< 30.00
		133	0	17.27	16.89	20.10	20.68	< 30.00
		1	0	17.70	16.98	20.37	20.95	< 30.00
		1	132	17.09	16.89	20.00	20.58	< 30.00
3525.00	50	67	33	17.18	16.99	20.09	20.67	< 30.00
		1	1	17.23	16.82	20.04	20.62	< 30.00
		1	131	17.04	16.84	19.95	20.53	< 30.00
		133	0	17.24	16.94	20.10	20.68	< 30.00
		1	0	17.11	16.88	20.01	20.59	< 30.00
		1	132	17.11	16.71	19.93	20.51	< 30.00
3480.00	60	81	40	17.59	16.94	20.29	20.87	< 30.00
		1	1	17.39	16.84	20.14	20.72	< 30.00
		1	131	16.82	16.66	19.75	20.33	< 30.00
		128	0	17.53	16.93	20.25	20.83	< 30.00
		1	0	17.25	16.85	20.07	20.65	< 30.00
		1	132	16.68	16.72	19.71	20.29	< 30.00
3500.01	60	81	40	17.33	16.80	20.09	20.67	< 30.00
		1	1	17.52	16.73	20.16	20.74	< 30.00
		1	131	17.22	17.01	20.13	20.71	< 30.00
		128	0	17.30	16.76	20.05	20.63	< 30.00
		1	0	17.38	16.88	20.15	20.73	< 30.00
		1	132	17.13	16.84	20.00	20.58	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3519.99	60	81	40	17.07	16.89	19.99	20.57	< 30.00
		1	1	17.14	16.69	19.93	20.51	< 30.00
		1	131	16.98	16.65	19.83	20.41	< 30.00
		128	0	17.16	16.78	19.98	20.56	< 30.00
		1	0	17.16	16.77	19.98	20.56	< 30.00
		1	132	16.87	16.67	19.78	20.36	< 30.00
3485.01	70	95	47	16.41	16.35	19.39	19.97	< 30.00
		1	1	16.70	16.41	19.57	20.15	< 30.00
		1	187	16.38	16.16	19.28	19.86	< 30.00
		189	0	16.44	16.42	19.44	20.02	< 30.00
		1	0	16.72	16.46	19.60	20.18	< 30.00
		1	188	16.55	16.09	19.33	19.91	< 30.00
3500.01	70	95	47	16.63	16.45	19.55	20.13	< 30.00
		1	1	16.74	16.44	19.60	20.18	< 30.00
		1	187	16.50	16.26	19.39	19.97	< 30.00
		189	0	16.63	16.42	19.54	20.12	< 30.00
		1	0	16.81	16.27	19.56	20.14	< 30.00
		1	188	16.51	16.10	19.32	19.90	< 30.00
3514.98	70	95	47	16.70	16.45	19.59	20.17	< 30.00
		1	1	16.76	16.49	19.64	20.22	< 30.00
		1	187	16.46	15.94	19.22	19.80	< 30.00
		189	0	16.66	16.43	19.55	20.13	< 30.00
		1	0	16.75	16.60	19.69	20.27	< 30.00
		1	188	16.50	16.05	19.29	19.87	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3490.02	80	109	54	17.18	16.65	19.93	20.51	< 30.00
		1	1	17.10	16.72	19.93	20.51	< 30.00
		1	215	17.01	16.83	19.93	20.51	< 30.00
		217	0	17.10	16.71	19.92	20.50	< 30.00
		1	0	17.05	16.54	19.81	20.39	< 30.00
		1	216	16.78	16.80	19.80	20.38	< 30.00
3500.01	80	109	54	17.02	16.65	19.85	20.43	< 30.00
		1	1	17.21	16.63	19.94	20.52	< 30.00
		1	215	16.75	16.80	19.79	20.37	< 30.00
		217	0	17.14	16.69	19.93	20.51	< 30.00
		1	0	17.14	16.63	19.90	20.48	< 30.00
		1	216	16.91	16.87	19.90	20.48	< 30.00
3510.00	80	109	54	17.01	16.82	19.93	20.51	< 30.00
		1	1	17.32	16.68	20.02	20.60	< 30.00
		1	215	16.89	16.64	19.78	20.36	< 30.00
		217	0	17.08	16.79	19.95	20.53	< 30.00
		1	0	17.20	16.50	19.87	20.45	< 30.00
		1	216	16.92	16.71	19.83	20.41	< 30.00
3495.00	90	123	61	17.15	16.61	19.90	20.48	< 30.00
		1	1	16.98	16.75	19.88	20.46	< 30.00
		1	243	16.94	17.01	19.98	20.56	< 30.00
		245	0	17.12	16.69	19.92	20.50	< 30.00
		1	0	17.09	16.75	19.93	20.51	< 30.00
		1	244	16.72	16.76	19.75	20.33	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	90	123	61	17.17	16.64	19.92	20.50	< 30.00
		1	1	17.19	16.76	19.99	20.57	< 30.00
		1	243	17.06	17.01	20.04	20.62	< 30.00
		245	0	17.14	16.71	19.94	20.52	< 30.00
		1	0	17.02	16.46	19.75	20.33	< 30.00
		1	244	16.93	16.71	19.83	20.41	< 30.00
3504.99	90	123	61	17.02	16.67	19.86	20.44	< 30.00
		1	1	17.21	16.59	19.92	20.50	< 30.00
		1	243	17.01	16.82	19.93	20.51	< 30.00
		245	0	17.10	16.64	19.89	20.47	< 30.00
		1	0	17.20	16.78	20.01	20.59	< 30.00
		1	244	16.82	16.63	19.73	20.31	< 30.00
3500.01	100	137	68	17.07	16.69	19.89	20.47	< 30.00
		1	1	17.18	16.71	19.96	20.54	< 30.00
		1	271	17.05	16.76	19.92	20.50	< 30.00
		273	0	17.13	16.73	19.95	20.53	< 30.00
		1	0	16.85	16.32	19.61	20.19	< 30.00
		1	272	16.70	16.69	19.71	20.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	SIP-SR1	Test Engineer	Cloud Guo
Test Date	2022/05/25 ~ 2022/07/10	Test Band	HPUE n77/n78_UL MIMO (3450 ~ 3550MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3455.00	10	12	6	22.55	21.76	25.19	25.77	< 30.00
		1	1	22.48	21.74	25.14	25.72	< 30.00
		1	22	22.67	22.02	25.37	25.95	< 30.00
		24	0	21.09	20.46	23.79	24.37	< 30.00
		1	0	20.56	19.88	23.24	23.82	< 30.00
		1	23	20.55	19.81	23.20	23.78	< 30.00
3500.01	10	12	6	22.29	21.80	25.06	25.64	< 30.00
		1	1	22.45	21.83	25.16	25.74	< 30.00
		1	22	22.13	21.76	24.96	25.54	< 30.00
		24	0	20.72	20.26	23.51	24.09	< 30.00
		1	0	20.28	20.08	23.19	23.77	< 30.00
		1	23	20.34	19.80	23.09	23.67	< 30.00
3544.98	10	12	6	22.15	21.85	25.01	25.59	< 30.00
		1	1	22.26	21.93	25.11	25.69	< 30.00
		1	22	22.36	22.13	25.26	25.84	< 30.00
		24	0	20.72	20.47	23.61	24.19	< 30.00
		1	0	20.28	20.06	23.18	23.76	< 30.00
		1	23	20.27	19.89	23.09	23.67	< 30.00
3457.50	15	19	9	22.77	21.89	25.36	25.94	< 30.00
		1	1	22.60	21.97	25.31	25.89	< 30.00
		1	36	22.77	22.10	25.46	26.04	< 30.00
		38	0	21.14	20.43	23.81	24.39	< 30.00
		1	0	20.63	19.94	23.31	23.89	< 30.00
		1	37	21.10	19.96	23.58	24.16	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	15	19	9	22.38	21.86	25.14	25.72	< 30.00
		1	1	22.50	21.97	25.25	25.83	< 30.00
		1	36	22.31	22.18	25.26	25.84	< 30.00
		38	0	20.74	20.50	23.63	24.21	< 30.00
		1	0	20.58	19.89	23.26	23.84	< 30.00
		1	37	20.22	19.91	23.08	23.66	< 30.00
3542.49	15	19	9	22.24	22.04	25.15	25.73	< 30.00
		1	1	22.40	22.24	25.33	25.91	< 30.00
		1	36	22.34	21.95	25.16	25.74	< 30.00
		38	0	20.79	20.59	23.70	24.28	< 30.00
		1	0	20.38	20.13	23.26	23.84	< 30.00
		1	37	20.25	19.91	23.09	23.67	< 30.00
3460.02	20	25	12	22.57	21.90	25.26	25.84	< 30.00
		1	1	22.73	21.94	25.36	25.94	< 30.00
		1	49	22.94	21.85	25.44	26.02	< 30.00
		51	0	21.27	20.37	23.85	24.43	< 30.00
		1	0	20.50	19.76	23.15	23.73	< 30.00
		1	50	20.86	20.18	23.54	24.12	< 30.00
3500.01	20	25	12	22.29	21.90	25.11	25.69	< 30.00
		1	1	22.54	21.85	25.22	25.80	< 30.00
		1	49	22.24	21.86	25.07	25.65	< 30.00
		51	0	20.86	20.43	23.66	24.24	< 30.00
		1	0	20.57	19.86	23.24	23.82	< 30.00
		1	50	20.12	20.11	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3540.00	20	25	12	22.24	22.18	25.22	25.80	< 30.00
		1	1	22.14	21.99	25.08	25.66	< 30.00
		1	49	22.40	21.88	25.16	25.74	< 30.00
		51	0	20.71	20.57	23.65	24.23	< 30.00
		1	0	20.41	20.18	23.31	23.89	< 30.00
		1	50	20.18	20.00	23.10	23.68	< 30.00
3465.00	30	36	79	22.61	21.96	25.31	25.89	< 30.00
		1	1	22.67	22.16	25.43	26.01	< 30.00
		1	76	22.87	22.21	25.56	26.14	< 30.00
		78	0	21.08	20.44	23.78	24.36	< 30.00
		1	0	20.60	19.99	23.32	23.90	< 30.00
		1	77	20.74	20.11	23.44	24.02	< 30.00
3500.01	30	36	79	22.27	21.83	25.07	25.65	< 30.00
		1	1	22.84	21.99	25.45	26.03	< 30.00
		1	76	22.27	22.21	25.25	25.83	< 30.00
		78	0	20.87	20.42	23.66	24.24	< 30.00
		1	0	20.51	20.02	23.28	23.86	< 30.00
		1	77	20.27	20.16	23.23	23.81	< 30.00
3534.99	30	36	79	22.29	22.14	25.23	25.81	< 30.00
		1	1	22.34	22.25	25.31	25.89	< 30.00
		1	76	22.44	22.15	25.31	25.89	< 30.00
		78	0	20.94	20.61	23.79	24.37	< 30.00
		1	0	20.28	20.27	23.28	23.86	< 30.00
		1	77	20.49	20.07	23.30	23.88	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3470.01	40	53	26	22.69	21.93	25.34	25.92	< 30.00
		1	1	22.74	22.20	25.49	26.07	< 30.00
		1	104	22.62	21.98	25.32	25.90	< 30.00
		106	0	21.15	20.51	23.85	24.43	< 30.00
		1	0	20.87	20.09	23.51	24.09	< 30.00
		1	105	20.67	20.08	23.40	23.98	< 30.00
3500.01	40	53	26	22.33	21.94	25.15	25.73	< 30.00
		1	1	22.76	21.94	25.38	25.96	< 30.00
		1	104	22.48	22.03	25.27	25.85	< 30.00
		106	0	20.85	20.52	23.70	24.28	< 30.00
		1	0	20.80	20.10	23.47	24.05	< 30.00
		1	105	20.46	20.21	23.35	23.93	< 30.00
3529.98	40	53	26	22.30	22.10	25.21	25.79	< 30.00
		1	1	22.30	21.98	25.16	25.74	< 30.00
		1	104	22.47	22.08	25.29	25.87	< 30.00
		106	0	20.80	20.56	23.69	24.27	< 30.00
		1	0	20.44	20.05	23.26	23.84	< 30.00
		1	105	20.35	20.03	23.21	23.79	< 30.00
3475.02	50	67	33	22.56	21.72	25.17	25.75	< 30.00
		1	1	22.52	21.93	25.25	25.83	< 30.00
		1	131	22.13	22.11	25.13	25.71	< 30.00
		133	0	21.09	20.25	23.70	24.28	< 30.00
		1	0	20.64	19.89	23.29	23.87	< 30.00
		1	132	20.37	19.85	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	50	67	33	22.23	21.76	25.01	25.59	< 30.00
		1	1	22.84	21.73	25.33	25.91	< 30.00
		1	131	22.26	21.91	25.10	25.68	< 30.00
		133	0	20.87	20.27	23.59	24.17	< 30.00
		1	0	20.70	19.90	23.33	23.91	< 30.00
		1	132	20.13	19.92	23.04	23.62	< 30.00
3525.00	50	67	33	22.13	21.94	25.05	25.63	< 30.00
		1	1	22.50	21.79	25.17	25.75	< 30.00
		1	131	22.22	21.76	25.01	25.59	< 30.00
		133	0	20.65	20.43	23.55	24.13	< 30.00
		1	0	20.25	19.77	23.03	23.61	< 30.00
		1	132	20.28	19.97	23.14	23.72	< 30.00
3480.00	60	81	40	22.61	21.81	25.24	25.82	< 30.00
		1	1	22.64	21.86	25.28	25.86	< 30.00
		1	131	22.10	21.69	24.91	25.49	< 30.00
		128	0	21.03	20.30	23.69	24.27	< 30.00
		1	0	20.52	19.77	23.17	23.75	< 30.00
		1	132	19.91	19.58	22.76	23.34	< 30.00
3500.01	60	81	40	22.25	21.80	25.04	25.62	< 30.00
		1	1	22.84	21.97	25.43	26.01	< 30.00
		1	131	22.34	21.87	25.12	25.70	< 30.00
		128	0	20.84	20.31	23.59	24.17	< 30.00
		1	0	20.46	19.73	23.12	23.70	< 30.00
		1	132	20.03	20.08	23.07	23.65	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3519.99	60	81	40	22.27	21.81	25.06	25.64	< 30.00
		1	1	22.32	21.81	25.09	25.67	< 30.00
		1	131	22.20	21.78	25.00	25.58	< 30.00
		128	0	20.73	20.38	23.57	24.15	< 30.00
		1	0	20.43	19.73	23.11	23.69	< 30.00
		1	132	20.27	19.99	23.14	23.72	< 30.00
3485.01	70	95	47	21.50	21.42	24.47	25.05	< 30.00
		1	1	21.78	21.45	24.63	25.21	< 30.00
		1	187	21.58	21.41	24.51	25.09	< 30.00
		189	0	20.01	19.81	22.92	23.50	< 30.00
		1	0	19.55	19.45	22.51	23.09	< 30.00
		1	188	19.55	19.36	22.47	23.05	< 30.00
3500.01	70	95	47	21.50	21.38	24.45	25.03	< 30.00
		1	1	22.04	21.48	24.78	25.36	< 30.00
		1	187	21.60	21.24	24.44	25.02	< 30.00
		189	0	20.13	19.90	23.03	23.61	< 30.00
		1	0	19.85	19.60	22.74	23.32	< 30.00
		1	188	19.49	19.09	22.30	22.88	< 30.00
3514.98	70	95	47	21.55	21.39	24.48	25.06	< 30.00
		1	1	21.89	21.42	24.67	25.25	< 30.00
		1	187	21.36	21.18	24.28	24.86	< 30.00
		189	0	20.12	19.95	23.04	23.62	< 30.00
		1	0	20.03	19.59	22.83	23.41	< 30.00
		1	188	19.43	19.54	22.50	23.08	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3490.02	80	109	54	22.24	21.57	24.93	25.51	< 30.00
		1	1	22.08	21.56	24.84	25.42	< 30.00
		1	215	21.84	21.98	24.92	25.50	< 30.00
		217	0	20.74	20.19	23.49	24.07	< 30.00
		1	0	20.25	19.59	22.94	23.52	< 30.00
		1	216	20.09	19.95	23.03	23.61	< 30.00
3500.01	80	109	54	22.09	21.72	24.92	25.50	< 30.00
		1	1	22.42	21.73	25.10	25.68	< 30.00
		1	215	22.10	22.02	25.07	25.65	< 30.00
		217	0	20.66	20.23	23.46	24.04	< 30.00
		1	0	20.32	19.64	23.00	23.58	< 30.00
		1	216	20.01	19.77	22.90	23.48	< 30.00
3510.00	80	109	54	22.02	21.74	24.90	25.48	< 30.00
		1	1	22.56	21.81	25.21	25.79	< 30.00
		1	215	21.99	21.64	24.82	25.40	< 30.00
		217	0	20.60	20.26	23.44	24.02	< 30.00
		1	0	20.39	19.73	23.08	23.66	< 30.00
		1	216	19.93	19.61	22.78	23.36	< 30.00
3495.00	90	123	61	22.20	21.57	24.90	25.48	< 30.00
		1	1	22.27	21.87	25.08	25.66	< 30.00
		1	243	22.27	21.90	25.10	25.68	< 30.00
		245	0	20.70	20.27	23.50	24.08	< 30.00
		1	0	20.11	19.58	22.86	23.44	< 30.00
		1	244	20.12	20.03	23.08	23.66	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3500.01	90	123	61	22.15	21.54	24.86	25.44	< 30.00
		1	1	22.49	21.83	25.18	25.76	< 30.00
		1	243	22.21	22.06	25.15	25.73	< 30.00
		245	0	20.72	20.23	23.49	24.07	< 30.00
		1	0	20.42	19.67	23.07	23.65	< 30.00
		1	244	20.04	20.24	23.15	23.73	< 30.00
3504.99	90	123	61	22.07	21.64	24.87	25.45	< 30.00
		1	1	22.50	21.62	25.09	25.67	< 30.00
		1	243	22.37	21.71	25.06	25.64	< 30.00
		245	0	20.62	20.24	23.44	24.02	< 30.00
		1	0	20.24	19.61	22.95	23.53	< 30.00
		1	244	20.24	19.63	22.96	23.54	< 30.00
3500.01	100	137	68	22.11	21.65	24.90	25.48	< 30.00
		1	1	22.27	21.69	25.00	25.58	< 30.00
		1	271	22.23	21.75	25.00	25.58	< 30.00
		273	0	20.72	20.28	23.51	24.09	< 30.00
		1	0	19.94	19.52	22.74	23.32	< 30.00
		1	272	19.94	19.63	22.80	23.38	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3455.00	10	12	6	21.97	21.43	24.72	25.30	< 30.00
		1	1	21.99	21.26	24.65	25.23	< 30.00
		1	22	21.95	21.39	24.69	25.27	< 30.00
		24	0	21.05	20.37	23.74	24.32	< 30.00
		1	0	22.14	19.83	24.15	24.73	< 30.00
		1	23	20.55	19.75	23.18	23.76	< 30.00
3500.01	10	12	6	21.84	21.40	24.64	25.22	< 30.00
		1	1	21.75	21.33	24.55	25.13	< 30.00
		1	22	21.81	21.41	24.63	25.21	< 30.00
		24	0	20.82	20.37	23.61	24.19	< 30.00
		1	0	20.32	19.77	23.06	23.64	< 30.00
		1	23	20.09	19.75	22.94	23.52	< 30.00
3544.98	10	12	6	21.73	21.56	24.65	25.23	< 30.00
		1	1	21.74	21.28	24.53	25.11	< 30.00
		1	22	21.69	21.33	24.53	25.11	< 30.00
		24	0	20.78	20.50	23.66	24.24	< 30.00
		1	0	20.31	19.98	23.15	23.73	< 30.00
		1	23	20.25	20.16	23.21	23.79	< 30.00
3457.50	15	19	9	22.16	21.27	24.75	25.33	< 30.00
		1	1	22.16	21.26	24.74	25.32	< 30.00
		1	36	22.31	21.32	24.86	25.44	< 30.00
		38	0	21.07	20.50	23.81	24.39	< 30.00
		1	0	20.63	19.89	23.29	23.87	< 30.00
		1	37	20.74	19.88	23.34	23.92	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	15	19	9	21.77	21.35	24.58	25.16	< 30.00
		1	1	21.94	21.38	24.68	25.26	< 30.00
		1	36	21.96	21.36	24.68	25.26	< 30.00
		38	0	20.85	20.57	23.72	24.30	< 30.00
		1	0	20.39	20.03	23.23	23.81	< 30.00
		1	37	20.29	19.83	23.07	23.65	< 30.00
3542.49	15	19	9	21.74	21.45	24.61	25.19	< 30.00
		1	1	21.87	21.69	24.79	25.37	< 30.00
		1	36	21.79	21.62	24.72	25.30	< 30.00
		38	0	20.76	20.56	23.67	24.25	< 30.00
		1	0	20.32	20.08	23.21	23.79	< 30.00
		1	37	20.32	19.95	23.15	23.73	< 30.00
3460.02	20	25	12	22.13	21.40	24.79	25.37	< 30.00
		1	1	22.15	21.30	24.75	25.33	< 30.00
		1	49	22.36	21.24	24.85	25.43	< 30.00
		51	0	21.19	20.44	23.84	24.42	< 30.00
		1	0	20.58	19.79	23.21	23.79	< 30.00
		1	50	20.86	19.79	23.37	23.95	< 30.00
3500.01	20	25	12	21.82	21.32	24.59	25.17	< 30.00
		1	1	22.07	21.21	24.67	25.25	< 30.00
		1	49	21.69	21.32	24.52	25.10	< 30.00
		51	0	20.84	20.46	23.67	24.25	< 30.00
		1	0	20.56	19.82	23.22	23.80	< 30.00
		1	50	20.25	19.72	23.01	23.59	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3540.00	20	25	12	21.72	21.55	24.65	25.23	< 30.00
		1	1	21.79	21.58	24.70	25.28	< 30.00
		1	49	21.76	21.30	24.55	25.13	< 30.00
		51	0	20.79	20.61	23.71	24.29	< 30.00
		1	0	20.27	20.03	23.16	23.74	< 30.00
		1	50	20.34	19.94	23.15	23.73	< 30.00
3465.00	30	36	79	22.17	21.52	24.86	25.44	< 30.00
		1	1	22.10	21.46	24.80	25.38	< 30.00
		1	76	22.28	21.70	25.01	25.59	< 30.00
		78	0	21.16	20.44	23.83	24.41	< 30.00
		1	0	20.41	19.91	23.18	23.76	< 30.00
		1	77	20.78	20.14	23.48	24.06	< 30.00
3500.01	30	36	79	21.80	21.44	24.64	25.22	< 30.00
		1	1	22.05	21.58	24.83	25.41	< 30.00
		1	76	21.36	21.67	24.53	25.11	< 30.00
		78	0	20.87	20.42	23.66	24.24	< 30.00
		1	0	20.58	19.91	23.27	23.85	< 30.00
		1	77	20.18	20.03	23.12	23.70	< 30.00
3534.99	30	36	79	21.94	21.73	24.85	25.43	< 30.00
		1	1	21.77	21.63	24.71	25.29	< 30.00
		1	76	21.87	22.00	24.95	25.53	< 30.00
		78	0	20.85	20.64	23.75	24.33	< 30.00
		1	0	20.31	20.24	23.29	23.87	< 30.00
		1	77	20.12	20.21	23.17	23.75	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3470.01	40	53	26	22.25	21.57	24.93	25.51	< 30.00
		1	1	22.26	21.60	24.95	25.53	< 30.00
		1	104	22.16	21.41	24.81	25.39	< 30.00
		106	0	21.23	20.53	23.90	24.48	< 30.00
		1	0	20.61	20.04	23.34	23.92	< 30.00
		1	105	20.63	19.86	23.27	23.85	< 30.00
3500.01	40	53	26	21.90	21.49	24.71	25.29	< 30.00
		1	1	22.30	21.56	24.95	25.53	< 30.00
		1	104	21.87	21.65	24.77	25.35	< 30.00
		106	0	20.94	20.42	23.70	24.28	< 30.00
		1	0	20.71	19.97	23.36	23.94	< 30.00
		1	105	20.34	20.35	23.35	23.93	< 30.00
3529.98	40	53	26	21.75	21.74	24.75	25.33	< 30.00
		1	1	21.82	21.51	24.68	25.26	< 30.00
		1	104	22.14	21.61	24.89	25.47	< 30.00
		106	0	20.83	20.57	23.72	24.30	< 30.00
		1	0	20.46	20.29	23.38	23.96	< 30.00
		1	105	20.54	20.28	23.42	24.00	< 30.00
3475.02	50	67	33	22.02	21.15	24.62	25.20	< 30.00
		1	1	22.00	21.52	24.78	25.36	< 30.00
		1	131	21.84	21.37	24.62	25.20	< 30.00
		133	0	20.92	20.28	23.62	24.20	< 30.00
		1	0	20.56	19.80	23.21	23.79	< 30.00
		1	132	20.31	19.84	23.09	23.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	50	67	33	21.79	21.23	24.53	25.11	< 30.00
		1	1	22.14	21.45	24.82	25.40	< 30.00
		1	131	21.54	21.49	24.52	25.10	< 30.00
		133	0	20.84	20.34	23.61	24.19	< 30.00
		1	0	20.83	19.71	23.31	23.89	< 30.00
		1	132	20.26	19.80	23.04	23.62	< 30.00
3525.00	50	67	33	21.68	21.36	24.53	25.11	< 30.00
		1	1	21.88	21.37	24.65	25.23	< 30.00
		1	131	21.83	21.34	24.60	25.18	< 30.00
		133	0	20.63	20.38	23.52	24.10	< 30.00
		1	0	20.48	19.71	23.12	23.70	< 30.00
		1	132	20.28	19.70	23.01	23.59	< 30.00
3480.00	60	81	40	22.05	21.32	24.71	25.29	< 30.00
		1	1	21.85	21.22	24.56	25.14	< 30.00
		1	131	21.59	20.90	24.27	24.85	< 30.00
		128	0	21.08	20.19	23.67	24.25	< 30.00
		1	0	20.60	19.85	23.25	23.83	< 30.00
		1	132	20.12	19.55	22.85	23.43	< 30.00
3500.01	60	81	40	21.79	21.27	24.55	25.13	< 30.00
		1	1	21.99	21.36	24.70	25.28	< 30.00
		1	131	21.72	21.42	24.58	25.16	< 30.00
		128	0	20.85	20.30	23.59	24.17	< 30.00
		1	0	20.70	19.61	23.20	23.78	< 30.00
		1	132	20.35	19.85	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3519.99	60	81	40	21.61	21.37	24.50	25.08	< 30.00
		1	1	21.88	21.11	24.52	25.10	< 30.00
		1	131	21.62	21.28	24.46	25.04	< 30.00
		128	0	20.76	20.28	23.54	24.12	< 30.00
		1	0	20.38	19.61	23.02	23.60	< 30.00
		1	132	20.34	19.66	23.02	23.60	< 30.00
3485.01	70	95	47	21.04	20.80	23.94	24.52	< 30.00
		1	1	21.23	21.20	24.22	24.80	< 30.00
		1	187	20.89	20.49	23.70	24.28	< 30.00
		189	0	20.03	19.86	22.96	23.54	< 30.00
		1	0	19.61	19.31	22.48	23.06	< 30.00
		1	188	19.45	19.10	22.29	22.87	< 30.00
3500.01	70	95	47	21.09	20.91	24.01	24.59	< 30.00
		1	1	21.32	20.88	24.12	24.70	< 30.00
		1	187	21.04	20.53	23.80	24.38	< 30.00
		189	0	20.18	19.96	23.08	23.66	< 30.00
		1	0	19.78	19.36	22.59	23.17	< 30.00
		1	188	19.58	19.41	22.51	23.09	< 30.00
3514.98	70	95	47	21.13	20.87	24.01	24.59	< 30.00
		1	1	21.25	20.80	24.04	24.62	< 30.00
		1	187	20.76	20.91	23.84	24.42	< 30.00
		189	0	20.16	19.88	23.04	23.62	< 30.00
		1	0	19.68	19.68	22.69	23.27	< 30.00
		1	188	19.41	18.98	22.21	22.79	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3490.02	80	109	54	21.61	21.18	24.41	24.99	< 30.00
		1	1	21.70	21.26	24.49	25.07	< 30.00
		1	215	21.51	21.26	24.39	24.97	< 30.00
		217	0	20.67	20.07	23.39	23.97	< 30.00
		1	0	20.06	19.60	22.85	23.43	< 30.00
		1	216	19.96	19.72	22.85	23.43	< 30.00
3500.01	80	109	54	21.55	21.11	24.34	24.92	< 30.00
		1	1	21.86	21.31	24.60	25.18	< 30.00
		1	215	21.50	21.48	24.50	25.08	< 30.00
		217	0	20.64	20.22	23.44	24.02	< 30.00
		1	0	20.24	19.63	22.96	23.54	< 30.00
		1	216	20.13	19.97	23.06	23.64	< 30.00
3510.00	80	109	54	21.41	21.21	24.32	24.90	< 30.00
		1	1	21.96	21.48	24.74	25.32	< 30.00
		1	215	21.51	21.17	24.35	24.93	< 30.00
		217	0	20.48	20.18	23.34	23.92	< 30.00
		1	0	20.43	19.76	23.12	23.70	< 30.00
		1	216	19.89	19.55	22.74	23.32	< 30.00
3495.00	90	123	61	21.54	21.08	24.32	24.90	< 30.00
		1	1	21.70	21.14	24.44	25.02	< 30.00
		1	243	21.67	21.41	24.55	25.13	< 30.00
		245	0	20.67	20.18	23.44	24.02	< 30.00
		1	0	20.12	19.47	22.82	23.40	< 30.00
		1	244	20.04	20.22	23.14	23.72	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3500.01	90	123	61	21.63	21.13	24.40	24.98	< 30.00
		1	1	21.80	21.19	24.51	25.09	< 30.00
		1	243	21.64	21.68	24.67	25.25	< 30.00
		245	0	20.75	20.14	23.46	24.04	< 30.00
		1	0	20.10	19.70	22.92	23.50	< 30.00
		1	244	20.07	19.72	22.91	23.49	< 30.00
3504.99	90	123	61	21.50	21.22	24.37	24.95	< 30.00
		1	1	21.92	21.10	24.54	25.12	< 30.00
		1	243	21.59	21.22	24.42	25.00	< 30.00
		245	0	20.63	20.27	23.46	24.04	< 30.00
		1	0	20.32	19.45	22.92	23.50	< 30.00
		1	244	20.08	19.86	22.98	23.56	< 30.00
3500.01	100	137	68	21.59	21.21	24.41	24.99	< 30.00
		1	1	21.68	21.03	24.38	24.96	< 30.00
		1	271	21.63	21.26	24.46	25.04	< 30.00
		273	0	20.68	20.29	23.50	24.08	< 30.00
		1	0	20.10	19.38	22.77	23.35	< 30.00
		1	272	20.05	19.52	22.80	23.38	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3455.00	10	12	6	20.56	19.82	23.22	23.80	< 30.00
		1	1	20.58	20.02	23.32	23.90	< 30.00
		1	22	20.72	20.07	23.42	24.00	< 30.00
		24	0	20.45	19.89	23.19	23.77	< 30.00
		1	0	20.55	20.13	23.35	23.93	< 30.00
		1	23	20.74	20.05	23.42	24.00	< 30.00
3500.01	10	12	6	20.27	19.86	23.08	23.66	< 30.00
		1	1	20.66	19.97	23.34	23.92	< 30.00
		1	22	20.39	19.89	23.16	23.74	< 30.00
		24	0	20.30	19.97	23.15	23.73	< 30.00
		1	0	20.65	19.98	23.34	23.92	< 30.00
		1	23	20.49	20.08	23.30	23.88	< 30.00
3544.98	10	12	6	20.24	19.97	23.12	23.70	< 30.00
		1	1	20.40	20.16	23.30	23.88	< 30.00
		1	22	20.48	20.01	23.26	23.84	< 30.00
		24	0	20.23	19.98	23.11	23.69	< 30.00
		1	0	20.30	20.25	23.29	23.87	< 30.00
		1	23	20.52	20.10	23.32	23.90	< 30.00
3457.50	15	19	9	20.65	20.02	23.36	23.94	< 30.00
		1	1	20.75	19.86	23.34	23.92	< 30.00
		1	36	20.83	19.80	23.35	23.93	< 30.00
		38	0	20.66	20.08	23.39	23.97	< 30.00
		1	0	20.65	19.92	23.31	23.89	< 30.00
		1	37	20.80	19.85	23.36	23.94	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	15	19	9	20.32	19.86	23.10	23.68	< 30.00
		1	1	20.55	20.08	23.33	23.91	< 30.00
		1	36	20.32	19.88	23.12	23.70	< 30.00
		38	0	20.32	19.95	23.15	23.73	< 30.00
		1	0	20.51	19.95	23.25	23.83	< 30.00
		1	37	20.32	20.05	23.20	23.78	< 30.00
3542.49	15	19	9	20.32	20.11	23.23	23.81	< 30.00
		1	1	20.47	20.15	23.32	23.90	< 30.00
		1	36	20.39	19.88	23.16	23.74	< 30.00
		38	0	20.23	20.10	23.18	23.76	< 30.00
		1	0	20.38	20.13	23.27	23.85	< 30.00
		1	37	20.41	20.16	23.30	23.88	< 30.00
3460.02	20	25	12	20.59	19.89	23.26	23.84	< 30.00
		1	1	20.81	20.09	23.48	24.06	< 30.00
		1	49	20.94	19.94	23.48	24.06	< 30.00
		51	0	20.72	19.91	23.35	23.93	< 30.00
		1	0	20.65	19.85	23.28	23.86	< 30.00
		1	50	21.01	19.87	23.49	24.07	< 30.00
3500.01	20	25	12	20.25	19.81	23.04	23.62	< 30.00
		1	1	20.70	19.83	23.30	23.88	< 30.00
		1	49	20.36	19.91	23.15	23.73	< 30.00
		51	0	20.37	19.94	23.17	23.75	< 30.00
		1	0	20.60	19.91	23.28	23.86	< 30.00
		1	50	20.41	20.03	23.23	23.81	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3540.00	20	25	12	20.21	20.08	23.16	23.74	< 30.00
		1	1	20.57	20.23	23.42	24.00	< 30.00
		1	49	20.29	19.96	23.14	23.72	< 30.00
		51	0	20.33	20.07	23.21	23.79	< 30.00
		1	0	20.41	20.19	23.31	23.89	< 30.00
		1	50	20.45	19.93	23.21	23.79	< 30.00
3465.00	30	36	79	20.64	19.93	23.31	23.89	< 30.00
		1	1	20.74	20.06	23.43	24.01	< 30.00
		1	76	21.27	20.15	23.75	24.33	< 30.00
		78	0	20.61	19.99	23.32	23.90	< 30.00
		1	0	20.70	19.94	23.35	23.93	< 30.00
		1	77	21.16	20.19	23.71	24.29	< 30.00
3500.01	30	36	79	20.35	19.87	23.13	23.71	< 30.00
		1	1	20.98	20.27	23.65	24.23	< 30.00
		1	76	20.46	20.32	23.40	23.98	< 30.00
		78	0	20.36	20.02	23.20	23.78	< 30.00
		1	0	20.42	19.85	23.15	23.73	< 30.00
		1	77	20.29	20.06	23.19	23.77	< 30.00
3534.99	30	36	79	20.32	20.09	23.21	23.79	< 30.00
		1	1	20.58	20.24	23.42	24.00	< 30.00
		1	76	20.82	20.14	23.50	24.08	< 30.00
		78	0	20.32	20.18	23.26	23.84	< 30.00
		1	0	20.70	20.38	23.56	24.14	< 30.00
		1	77	20.47	20.00	23.25	23.83	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3470.01	40	53	26	20.72	19.95	23.36	23.94	< 30.00
		1	1	20.73	20.09	23.43	24.01	< 30.00
		1	104	20.64	20.01	23.34	23.92	< 30.00
		106	0	20.70	20.01	23.38	23.96	< 30.00
		1	0	20.74	20.07	23.43	24.01	< 30.00
		1	105	20.74	20.00	23.40	23.98	< 30.00
3500.01	40	53	26	20.42	19.95	23.20	23.78	< 30.00
		1	1	20.85	20.02	23.46	24.04	< 30.00
		1	104	20.37	20.34	23.36	23.94	< 30.00
		106	0	20.42	20.00	23.22	23.80	< 30.00
		1	0	20.88	20.29	23.61	24.19	< 30.00
		1	105	20.39	20.28	23.35	23.93	< 30.00
3529.98	40	53	26	20.27	20.15	23.22	23.80	< 30.00
		1	1	20.38	20.35	23.38	23.96	< 30.00
		1	104	20.52	19.93	23.24	23.82	< 30.00
		106	0	20.32	20.06	23.20	23.78	< 30.00
		1	0	20.37	20.01	23.21	23.79	< 30.00
		1	105	20.50	20.14	23.34	23.92	< 30.00
3475.02	50	67	33	20.56	19.86	23.24	23.82	< 30.00
		1	1	20.68	19.95	23.34	23.92	< 30.00
		1	131	20.41	19.73	23.10	23.68	< 30.00
		133	0	20.45	19.78	23.14	23.72	< 30.00
		1	0	20.55	19.94	23.27	23.85	< 30.00
		1	132	20.41	19.63	23.05	23.63	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	50	67	33	20.32	19.81	23.09	23.67	< 30.00
		1	1	20.91	20.22	23.59	24.17	< 30.00
		1	131	20.30	19.89	23.11	23.69	< 30.00
		133	0	20.34	19.78	23.08	23.66	< 30.00
		1	0	20.74	19.80	23.30	23.88	< 30.00
		1	132	20.28	19.79	23.05	23.63	< 30.00
3525.00	50	67	33	20.16	20.01	23.10	23.68	< 30.00
		1	1	20.42	20.13	23.29	23.87	< 30.00
		1	131	20.21	19.68	22.96	23.54	< 30.00
		133	0	20.22	19.98	23.11	23.69	< 30.00
		1	0	20.55	19.87	23.23	23.81	< 30.00
		1	132	20.24	19.82	23.04	23.62	< 30.00
3480.00	60	81	40	20.52	19.88	23.22	23.80	< 30.00
		1	1	20.58	20.11	23.36	23.94	< 30.00
		1	131	20.36	19.75	23.08	23.66	< 30.00
		128	0	20.39	19.79	23.11	23.69	< 30.00
		1	0	20.62	20.22	23.44	24.02	< 30.00
		1	132	20.38	19.90	23.16	23.74	< 30.00
3500.01	60	81	40	20.32	19.75	23.05	23.63	< 30.00
		1	1	20.92	20.14	23.56	24.14	< 30.00
		1	131	20.35	20.20	23.29	23.87	< 30.00
		128	0	20.42	19.77	23.12	23.70	< 30.00
		1	0	20.75	19.76	23.29	23.87	< 30.00
		1	132	20.40	19.88	23.16	23.74	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3519.99	60	81	40	20.11	19.86	23.00	23.58	< 30.00
		1	1	20.46	19.73	23.12	23.70	< 30.00
		1	131	20.31	19.78	23.07	23.65	< 30.00
		128	0	20.12	19.78	22.96	23.54	< 30.00
		1	0	20.47	19.64	23.09	23.67	< 30.00
		1	132	20.28	19.80	23.06	23.64	< 30.00
3485.01	70	95	47	19.51	19.44	22.48	23.06	< 30.00
		1	1	19.65	19.47	22.57	23.15	< 30.00
		1	187	19.49	19.33	22.42	23.00	< 30.00
		189	0	19.50	19.42	22.47	23.05	< 30.00
		1	0	19.50	19.43	22.47	23.05	< 30.00
		1	188	19.36	19.12	22.25	22.83	< 30.00
3500.01	70	95	47	19.61	19.41	22.52	23.10	< 30.00
		1	1	19.90	19.69	22.81	23.39	< 30.00
		1	187	19.70	19.23	22.48	23.06	< 30.00
		189	0	19.64	19.41	22.53	23.11	< 30.00
		1	0	19.72	19.44	22.59	23.17	< 30.00
		1	188	19.61	19.21	22.42	23.00	< 30.00
3514.98	70	95	47	19.70	19.47	22.60	23.18	< 30.00
		1	1	19.90	19.44	22.68	23.26	< 30.00
		1	187	19.54	19.09	22.33	22.91	< 30.00
		189	0	19.63	19.44	22.55	23.13	< 30.00
		1	0	19.91	19.41	22.68	23.26	< 30.00
		1	188	19.28	19.26	22.28	22.86	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3490.02	80	109	54	20.15	19.67	22.93	23.51	< 30.00
		1	1	20.24	19.83	23.05	23.63	< 30.00
		1	215	19.96	19.72	22.85	23.43	< 30.00
		217	0	20.21	19.68	22.96	23.54	< 30.00
		1	0	20.23	19.56	22.92	23.50	< 30.00
		1	216	20.04	19.92	22.99	23.57	< 30.00
3500.01	80	109	54	20.02	19.63	22.84	23.42	< 30.00
		1	1	20.42	19.85	23.16	23.74	< 30.00
		1	215	20.06	19.94	23.01	23.59	< 30.00
		217	0	20.26	19.72	23.01	23.59	< 30.00
		1	0	20.35	19.58	22.99	23.57	< 30.00
		1	216	20.03	19.85	22.95	23.53	< 30.00
3510.00	80	109	54	20.01	19.78	22.91	23.49	< 30.00
		1	1	20.48	19.81	23.17	23.75	< 30.00
		1	215	19.92	19.64	22.79	23.37	< 30.00
		217	0	20.09	19.77	22.94	23.52	< 30.00
		1	0	20.32	20.00	23.17	23.75	< 30.00
		1	216	20.03	19.71	22.89	23.47	< 30.00
3495.00	90	123	61	20.06	19.65	22.87	23.45	< 30.00
		1	1	20.34	19.77	23.07	23.65	< 30.00
		1	243	20.02	20.05	23.05	23.63	< 30.00
		245	0	20.12	19.68	22.91	23.49	< 30.00
		1	0	20.21	19.55	22.90	23.48	< 30.00
		1	244	20.35	20.02	23.20	23.78	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3500.01	90	123	61	20.06	19.69	22.89	23.47	< 30.00
		1	1	20.49	19.76	23.15	23.73	< 30.00
		1	243	20.21	20.02	23.13	23.71	< 30.00
		245	0	20.13	19.69	22.93	23.51	< 30.00
		1	0	20.24	19.65	22.96	23.54	< 30.00
		1	244	20.24	19.76	23.02	23.60	< 30.00
3504.99	90	123	61	19.99	19.83	22.92	23.50	< 30.00
		1	1	20.52	19.74	23.15	23.73	< 30.00
		1	243	20.17	19.77	22.99	23.57	< 30.00
		245	0	20.12	19.71	22.93	23.51	< 30.00
		1	0	20.26	19.64	22.97	23.55	< 30.00
		1	244	20.21	19.80	23.02	23.60	< 30.00
3500.01	100	137	68	20.19	19.63	22.93	23.51	< 30.00
		1	1	20.41	19.64	23.05	23.63	< 30.00
		1	271	20.22	19.97	23.11	23.69	< 30.00
		273	0	20.25	19.75	23.02	23.60	< 30.00
		1	0	20.09	19.57	22.85	23.43	< 30.00
		1	272	20.13	19.72	22.94	23.52	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3455.00	10	12	6	17.40	16.79	20.12	20.70	< 30.00
		1	1	17.22	16.81	20.03	20.61	< 30.00
		1	22	17.35	16.74	20.07	20.65	< 30.00
		24	0	20.87	16.83	22.31	22.89	< 30.00
		1	0	17.18	16.91	20.06	20.64	< 30.00
		1	23	17.43	16.84	20.15	20.73	< 30.00
3500.01	10	12	6	17.28	16.83	20.07	20.65	< 30.00
		1	1	17.10	16.89	20.01	20.59	< 30.00
		1	22	16.92	16.82	19.88	20.46	< 30.00
		24	0	17.29	16.88	20.10	20.68	< 30.00
		1	0	17.23	16.81	20.04	20.62	< 30.00
		1	23	16.95	16.75	19.86	20.44	< 30.00
3544.98	10	12	6	17.22	16.83	20.04	20.62	< 30.00
		1	1	17.25	16.94	20.11	20.69	< 30.00
		1	22	17.02	16.69	19.87	20.45	< 30.00
		24	0	17.22	16.90	20.07	20.65	< 30.00
		1	0	17.24	16.96	20.11	20.69	< 30.00
		1	23	17.03	16.84	19.95	20.53	< 30.00
3457.50	15	19	9	17.66	16.93	20.32	20.90	< 30.00
		1	1	17.29	16.92	20.12	20.70	< 30.00
		1	36	17.32	16.91	20.13	20.71	< 30.00
		38	0	17.73	17.00	20.39	20.97	< 30.00
		1	0	17.27	16.87	20.09	20.67	< 30.00
		1	37	17.40	16.88	20.16	20.74	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	15	19	9	17.35	16.88	20.13	20.71	< 30.00
		1	1	17.36	16.83	20.12	20.70	< 30.00
		1	36	17.14	17.00	20.08	20.66	< 30.00
		38	0	17.40	16.84	20.14	20.72	< 30.00
		1	0	17.24	16.91	20.09	20.67	< 30.00
		1	37	17.02	16.90	19.97	20.55	< 30.00
3542.49	15	19	9	17.37	17.06	20.23	20.81	< 30.00
		1	1	17.20	17.07	20.15	20.73	< 30.00
		1	36	17.22	16.93	20.09	20.67	< 30.00
		38	0	17.34	17.08	20.22	20.80	< 30.00
		1	0	17.19	17.13	20.17	20.75	< 30.00
		1	37	17.20	16.92	20.07	20.65	< 30.00
3460.02	20	25	12	17.68	16.93	20.33	20.91	< 30.00
		1	1	17.52	16.96	20.26	20.84	< 30.00
		1	49	17.78	16.86	20.35	20.93	< 30.00
		51	0	17.65	16.97	20.33	20.91	< 30.00
		1	0	17.38	16.87	20.14	20.72	< 30.00
		1	50	17.59	16.95	20.29	20.87	< 30.00
3500.01	20	25	12	17.34	16.79	20.09	20.67	< 30.00
		1	1	17.33	16.85	20.11	20.69	< 30.00
		1	49	17.10	16.92	20.02	20.60	< 30.00
		51	0	17.35	16.90	20.14	20.72	< 30.00
		1	0	17.39	16.88	20.15	20.73	< 30.00
		1	50	17.08	16.94	20.02	20.60	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3540.00	20	25	12	17.34	17.14	20.25	20.83	< 30.00
		1	1	17.31	17.03	20.18	20.76	< 30.00
		1	49	17.07	16.89	19.99	20.57	< 30.00
		51	0	17.35	17.13	20.25	20.83	< 30.00
		1	0	17.37	17.08	20.24	20.82	< 30.00
		1	50	17.11	16.77	19.96	20.54	< 30.00
3465.00	30	36	79	17.72	16.83	20.31	20.89	< 30.00
		1	1	17.29	16.96	20.14	20.72	< 30.00
		1	76	17.48	17.05	20.28	20.86	< 30.00
		78	0	17.69	17.02	20.38	20.96	< 30.00
		1	0	17.35	16.94	20.16	20.74	< 30.00
		1	77	17.49	16.92	20.23	20.81	< 30.00
3500.01	30	36	79	17.38	16.81	20.11	20.69	< 30.00
		1	1	17.47	16.93	20.22	20.80	< 30.00
		1	76	17.03	17.18	20.12	20.70	< 30.00
		78	0	17.35	16.91	20.14	20.72	< 30.00
		1	0	17.45	17.04	20.26	20.84	< 30.00
		1	77	16.99	16.93	19.97	20.55	< 30.00
3534.99	30	36	79	17.35	17.05	20.21	20.79	< 30.00
		1	1	17.27	17.29	20.29	20.87	< 30.00
		1	76	17.21	17.04	20.13	20.71	< 30.00
		78	0	17.26	17.25	20.27	20.85	< 30.00
		1	0	17.28	17.17	20.24	20.82	< 30.00
		1	77	17.16	16.93	20.06	20.64	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3470.01	40	53	26	17.78	16.93	20.38	20.96	< 30.00
		1	1	17.57	17.14	20.37	20.95	< 30.00
		1	104	17.45	17.05	20.27	20.85	< 30.00
		106	0	17.75	17.03	20.41	20.99	< 30.00
		1	0	17.64	17.04	20.36	20.94	< 30.00
		1	105	17.48	17.04	20.27	20.85	< 30.00
3500.01	40	53	26	17.40	16.89	20.16	20.74	< 30.00
		1	1	17.58	17.08	20.35	20.93	< 30.00
		1	104	17.07	17.25	20.17	20.75	< 30.00
		106	0	17.42	16.94	20.20	20.78	< 30.00
		1	0	17.54	17.11	20.34	20.92	< 30.00
		1	105	17.29	17.18	20.25	20.83	< 30.00
3529.98	40	53	26	17.33	17.09	20.22	20.80	< 30.00
		1	1	17.16	17.16	20.17	20.75	< 30.00
		1	104	17.43	17.17	20.32	20.90	< 30.00
		106	0	17.32	17.09	20.22	20.80	< 30.00
		1	0	17.05	16.97	20.02	20.60	< 30.00
		1	105	17.36	17.14	20.26	20.84	< 30.00
3475.02	50	67	33	17.51	16.79	20.18	20.76	< 30.00
		1	1	17.54	16.94	20.26	20.84	< 30.00
		1	131	17.15	16.88	20.02	20.60	< 30.00
		133	0	17.49	16.75	20.15	20.73	< 30.00
		1	0	17.30	16.86	20.09	20.67	< 30.00
		1	132	17.09	16.88	20.00	20.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	50	67	33	17.29	16.76	20.04	20.62	< 30.00
		1	1	17.52	16.80	20.18	20.76	< 30.00
		1	131	17.03	16.71	19.88	20.46	< 30.00
		133	0	17.45	16.79	20.14	20.72	< 30.00
		1	0	17.49	16.89	20.21	20.79	< 30.00
		1	132	16.99	16.87	19.94	20.52	< 30.00
3525.00	50	67	33	17.20	17.00	20.11	20.69	< 30.00
		1	1	17.24	16.70	19.99	20.57	< 30.00
		1	131	17.05	16.77	19.92	20.50	< 30.00
		133	0	17.25	16.84	20.06	20.64	< 30.00
		1	0	17.35	16.81	20.10	20.68	< 30.00
		1	132	16.90	16.76	19.84	20.42	< 30.00
3480.00	60	81	40	17.61	16.86	20.26	20.84	< 30.00
		1	1	17.32	16.85	20.10	20.68	< 30.00
		1	131	16.94	16.70	19.83	20.41	< 30.00
		128	0	17.58	16.84	20.23	20.81	< 30.00
		1	0	17.39	16.92	20.17	20.75	< 30.00
		1	132	17.10	16.63	19.88	20.46	< 30.00
3500.01	60	81	40	17.28	16.85	20.08	20.66	< 30.00
		1	1	17.49	16.85	20.19	20.77	< 30.00
		1	131	17.06	16.98	20.03	20.61	< 30.00
		128	0	17.24	16.71	20.00	20.58	< 30.00
		1	0	17.32	16.79	20.07	20.65	< 30.00
		1	132	17.04	16.86	19.96	20.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3519.99	60	81	40	17.17	16.93	20.06	20.64	< 30.00
		1	1	17.23	16.68	19.97	20.55	< 30.00
		1	131	16.94	16.86	19.91	20.49	< 30.00
		128	0	17.16	16.94	20.06	20.64	< 30.00
		1	0	17.18	16.66	19.94	20.52	< 30.00
		1	132	16.98	16.71	19.86	20.44	< 30.00
3485.01	70	95	47	16.55	16.41	19.49	20.07	< 30.00
		1	1	16.71	16.24	19.49	20.07	< 30.00
		1	187	16.45	16.21	19.34	19.92	< 30.00
		189	0	16.58	16.37	19.48	20.06	< 30.00
		1	0	16.72	16.35	19.55	20.13	< 30.00
		1	188	16.31	16.30	19.32	19.90	< 30.00
3500.01	70	95	47	16.66	16.49	19.58	20.16	< 30.00
		1	1	16.87	16.23	19.57	20.15	< 30.00
		1	187	16.58	16.12	19.37	19.95	< 30.00
		189	0	16.66	16.57	19.62	20.20	< 30.00
		1	0	16.83	16.31	19.59	20.17	< 30.00
		1	188	16.43	16.33	19.39	19.97	< 30.00
3514.98	70	95	47	16.65	16.42	19.54	20.12	< 30.00
		1	1	16.79	16.47	19.64	20.22	< 30.00
		1	187	16.52	16.07	19.31	19.89	< 30.00
		189	0	16.68	16.39	19.55	20.13	< 30.00
		1	0	16.92	16.43	19.69	20.27	< 30.00
		1	188	16.47	16.18	19.33	19.91	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3490.02	80	109	54	17.11	16.60	19.87	20.45	< 30.00
		1	1	16.95	16.55	19.76	20.34	< 30.00
		1	215	16.98	16.76	19.88	20.46	< 30.00
		217	0	17.17	16.76	19.98	20.56	< 30.00
		1	0	17.10	16.58	19.86	20.44	< 30.00
		1	216	16.92	16.86	19.90	20.48	< 30.00
3500.01	80	109	54	16.95	16.61	19.80	20.38	< 30.00
		1	1	17.24	16.59	19.94	20.52	< 30.00
		1	215	16.78	16.85	19.82	20.40	< 30.00
		217	0	17.16	16.65	19.92	20.50	< 30.00
		1	0	17.08	16.53	19.83	20.41	< 30.00
		1	216	16.84	16.58	19.72	20.30	< 30.00
3510.00	80	109	54	16.94	16.76	19.86	20.44	< 30.00
		1	1	17.28	16.72	20.02	20.60	< 30.00
		1	215	16.76	16.58	19.68	20.26	< 30.00
		217	0	17.01	16.74	19.89	20.47	< 30.00
		1	0	17.23	16.84	20.05	20.63	< 30.00
		1	216	16.93	16.67	19.81	20.39	< 30.00
3495.00	90	123	61	17.18	16.67	19.95	20.53	< 30.00
		1	1	16.96	16.61	19.80	20.38	< 30.00
		1	243	17.07	17.06	20.07	20.65	< 30.00
		245	0	17.16	16.73	19.96	20.54	< 30.00
		1	0	17.07	16.69	19.90	20.48	< 30.00
		1	244	16.98	16.82	19.91	20.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3500.01	90	123	61	16.99	16.68	19.85	20.43	< 30.00
		1	1	17.18	16.69	19.95	20.53	< 30.00
		1	243	17.05	16.79	19.93	20.51	< 30.00
		245	0	17.17	16.64	19.92	20.50	< 30.00
		1	0	16.98	16.62	19.81	20.39	< 30.00
		1	244	16.87	16.67	19.78	20.36	< 30.00
3504.99	90	123	61	17.04	16.70	19.88	20.46	< 30.00
		1	1	17.29	16.48	19.91	20.49	< 30.00
		1	243	17.10	16.75	19.94	20.52	< 30.00
		245	0	17.10	16.67	19.90	20.48	< 30.00
		1	0	17.16	16.66	19.93	20.51	< 30.00
		1	244	16.91	16.72	19.83	20.41	< 30.00
3500.01	100	137	68	17.02	16.63	19.84	20.42	< 30.00
		1	1	17.03	16.66	19.86	20.44	< 30.00
		1	271	17.10	16.76	19.94	20.52	< 30.00
		273	0	17.05	16.76	19.92	20.50	< 30.00
		1	0	16.94	16.40	19.69	20.27	< 30.00
		1	272	16.85	16.56	19.72	20.30	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	SIP-SR1	Test Engineer	Cloud Guo
Test Date	2022/05/25 ~ 2022/07/10	Test Band	n77/n78_UL MIMO (3700 ~ 3980MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3705.00	10	12	6	20.77	20.65	23.72	24.30	< 30.00
		1	1	20.76	20.70	23.74	24.32	< 30.00
		1	22	20.74	20.61	23.69	24.27	< 30.00
		24	0	20.72	20.57	23.65	24.23	< 30.00
		1	0	20.42	20.13	23.29	23.87	< 30.00
		1	23	20.26	20.14	23.21	23.79	< 30.00
3840.00	10	12	6	20.87	20.67	23.78	24.36	< 30.00
		1	1	20.81	20.64	23.73	24.31	< 30.00
		1	22	21.16	20.95	24.06	24.64	< 30.00
		24	0	20.92	20.77	23.86	24.44	< 30.00
		1	0	20.28	20.14	23.22	23.80	< 30.00
		1	23	20.40	20.22	23.32	23.90	< 30.00
3975.00	10	12	6	21.07	20.70	23.90	24.48	< 30.00
		1	1	21.23	20.78	24.02	24.60	< 30.00
		1	22	21.32	20.83	24.09	24.67	< 30.00
		24	0	21.05	20.79	23.93	24.51	< 30.00
		1	0	20.58	20.41	23.51	24.09	< 30.00
		1	23	20.91	20.26	23.61	24.19	< 30.00
3707.52	15	19	9	20.60	20.62	23.62	24.20	< 30.00
		1	1	20.68	20.70	23.70	24.28	< 30.00
		1	36	20.60	20.67	23.65	24.23	< 30.00
		38	0	20.54	20.68	23.62	24.20	< 30.00
		1	0	20.36	20.08	23.23	23.81	< 30.00
		1	37	20.45	20.22	23.34	23.92	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	15	19	9	21.07	20.74	23.92	24.50	< 30.00
		1	1	20.97	20.86	23.92	24.50	< 30.00
		1	36	21.00	20.80	23.91	24.49	< 30.00
		38	0	21.10	20.76	23.94	24.52	< 30.00
		1	0	20.36	20.31	23.34	23.92	< 30.00
		1	37	20.41	20.26	23.35	23.93	< 30.00
3972.48	15	19	9	21.26	20.71	24.01	24.59	< 30.00
		1	1	21.03	20.70	23.88	24.46	< 30.00
		1	36	21.32	20.65	24.01	24.59	< 30.00
		38	0	21.23	20.77	24.01	24.59	< 30.00
		1	0	20.51	20.31	23.42	24.00	< 30.00
		1	37	20.68	20.52	23.61	24.19	< 30.00
3710.01	20	25	12	20.63	20.56	23.60	24.18	< 30.00
		1	1	20.80	20.44	23.63	24.21	< 30.00
		1	49	20.67	20.52	23.61	24.19	< 30.00
		51	0	20.56	20.58	23.58	24.16	< 30.00
		1	0	20.34	20.00	23.19	23.77	< 30.00
		1	50	20.19	20.08	23.14	23.72	< 30.00
3840.00	20	25	12	20.96	20.67	23.83	24.41	< 30.00
		1	1	20.93	20.73	23.84	24.42	< 30.00
		1	49	21.15	20.73	23.95	24.53	< 30.00
		51	0	21.06	20.71	23.89	24.47	< 30.00
		1	0	20.31	20.21	23.27	23.85	< 30.00
		1	50	20.33	20.20	23.27	23.85	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3969.99	20	25	12	21.11	20.81	23.97	24.55	< 30.00
		1	1	21.04	20.86	23.96	24.54	< 30.00
		1	49	21.22	20.85	24.05	24.63	< 30.00
		51	0	21.18	20.84	24.02	24.60	< 30.00
		1	0	20.56	20.34	23.47	24.05	< 30.00
		1	50	20.66	20.22	23.46	24.04	< 30.00
3715.02	30	36	79	20.53	20.66	23.61	24.19	< 30.00
		1	1	20.81	20.64	23.73	24.31	< 30.00
		1	76	20.74	20.85	23.80	24.38	< 30.00
		78	0	20.65	20.67	23.67	24.25	< 30.00
		1	0	20.24	20.06	23.17	23.75	< 30.00
		1	77	20.11	20.10	23.11	23.69	< 30.00
3840.00	30	36	79	20.93	20.73	23.84	24.42	< 30.00
		1	1	21.00	20.85	23.94	24.52	< 30.00
		1	76	21.02	20.88	23.96	24.54	< 30.00
		78	0	20.87	20.73	23.81	24.39	< 30.00
		1	0	20.52	20.11	23.33	23.91	< 30.00
		1	77	20.37	20.19	23.29	23.87	< 30.00
3964.98	30	36	79	21.06	20.82	23.95	24.53	< 30.00
		1	1	21.30	20.74	24.04	24.62	< 30.00
		1	76	21.30	20.98	24.15	24.73	< 30.00
		78	0	21.02	20.81	23.93	24.51	< 30.00
		1	0	20.69	20.33	23.53	24.11	< 30.00
		1	77	20.76	20.29	23.54	24.12	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3720.00	40	53	26	20.60	20.75	23.69	24.27	< 30.00
		1	1	20.88	20.85	23.87	24.45	< 30.00
		1	104	20.82	20.69	23.77	24.35	< 30.00
		106	0	20.63	20.66	23.65	24.23	< 30.00
		1	0	20.44	20.48	23.47	24.05	< 30.00
		1	105	20.18	20.23	23.21	23.79	< 30.00
3840.00	40	53	26	20.91	20.79	23.86	24.44	< 30.00
		1	1	21.12	20.81	23.98	24.56	< 30.00
		1	104	21.05	20.91	23.99	24.57	< 30.00
		106	0	20.80	20.83	23.82	24.40	< 30.00
		1	0	20.53	20.35	23.45	24.03	< 30.00
		1	105	20.59	20.27	23.44	24.02	< 30.00
3960.00	40	53	26	21.06	20.88	23.98	24.56	< 30.00
		1	1	20.79	21.03	23.92	24.50	< 30.00
		1	104	21.32	20.89	24.12	24.70	< 30.00
		106	0	21.07	20.82	23.96	24.54	< 30.00
		1	0	20.58	20.31	23.46	24.04	< 30.00
		1	105	20.85	20.57	23.73	24.31	< 30.00
3720.00	50	67	33	20.45	20.42	23.44	24.02	< 30.00
		1	1	20.70	20.53	23.63	24.21	< 30.00
		1	131	20.55	20.52	23.55	24.13	< 30.00
		133	0	20.49	20.48	23.50	24.08	< 30.00
		1	0	20.12	20.03	23.09	23.67	< 30.00
		1	132	20.16	19.88	23.04	23.62	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	50	67	33	20.79	20.66	23.74	24.32	< 30.00
		1	1	20.62	20.45	23.54	24.12	< 30.00
		1	131	20.98	20.69	23.85	24.43	< 30.00
		133	0	20.83	20.73	23.79	24.37	< 30.00
		1	0	20.08	20.20	23.15	23.73	< 30.00
		1	132	20.21	20.63	23.43	24.01	< 30.00
3954.99	50	67	33	20.82	20.70	23.77	24.35	< 30.00
		1	1	20.80	20.86	23.84	24.42	< 30.00
		1	131	21.31	20.86	24.10	24.68	< 30.00
		133	0	20.84	20.74	23.80	24.38	< 30.00
		1	0	20.46	20.37	23.42	24.00	< 30.00
		1	132	20.73	20.35	23.55	24.13	< 30.00
3730.02	60	81	40	20.46	20.39	23.44	24.02	< 30.00
		1	1	20.60	20.48	23.55	24.13	< 30.00
		1	131	20.50	20.39	23.45	24.03	< 30.00
		128	0	20.44	20.39	23.43	24.01	< 30.00
		1	0	20.05	20.02	23.05	23.63	< 30.00
		1	132	19.91	20.01	22.97	23.55	< 30.00
3840.00	60	81	40	20.74	20.66	23.71	24.29	< 30.00
		1	1	20.52	20.51	23.52	24.10	< 30.00
		1	131	20.65	20.61	23.64	24.22	< 30.00
		128	0	20.70	20.71	23.71	24.29	< 30.00
		1	0	20.17	19.99	23.09	23.67	< 30.00
		1	132	20.10	20.42	23.27	23.85	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3949.98	60	81	40	20.77	20.47	23.63	24.21	< 30.00
		1	1	20.88	20.60	23.75	24.33	< 30.00
		1	131	20.84	20.31	23.59	24.17	< 30.00
		128	0	20.82	20.50	23.67	24.25	< 30.00
		1	0	20.26	20.36	23.32	23.90	< 30.00
		1	132	20.39	20.12	23.27	23.85	< 30.00
3735.00	70	95	47	19.85	19.63	22.75	23.33	< 30.00
		1	1	19.68	19.54	22.62	23.20	< 30.00
		1	187	19.69	19.64	22.67	23.25	< 30.00
		189	0	19.75	19.59	22.68	23.26	< 30.00
		1	0	19.26	19.19	22.23	22.81	< 30.00
		1	188	19.33	19.12	22.24	22.82	< 30.00
3840.00	70	95	47	19.96	19.75	22.87	23.45	< 30.00
		1	1	20.27	19.84	23.07	23.65	< 30.00
		1	187	19.94	19.54	22.76	23.34	< 30.00
		189	0	20.04	19.66	22.86	23.44	< 30.00
		1	0	19.72	19.29	22.52	23.10	< 30.00
		1	188	19.51	19.22	22.38	22.96	< 30.00
3945.00	70	95	47	20.21	19.93	23.08	23.66	< 30.00
		1	1	20.56	19.78	23.20	23.78	< 30.00
		1	187	20.12	19.84	23.00	23.58	< 30.00
		189	0	20.10	19.92	23.02	23.60	< 30.00
		1	0	20.05	19.60	22.84	23.42	< 30.00
		1	188	19.40	19.26	22.34	22.92	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3740.01	80	109	54	20.32	20.44	23.39	23.97	< 30.00
		1	1	20.43	20.41	23.43	24.01	< 30.00
		1	215	20.20	20.33	23.27	23.85	< 30.00
		217	0	20.31	20.36	23.35	23.93	< 30.00
		1	0	20.09	19.95	23.03	23.61	< 30.00
		1	216	19.69	19.87	22.79	23.37	< 30.00
3840.00	80	109	54	20.53	20.49	23.52	24.10	< 30.00
		1	1	20.27	20.47	23.38	23.96	< 30.00
		1	215	20.36	20.57	23.48	24.06	< 30.00
		217	0	20.56	20.44	23.51	24.09	< 30.00
		1	0	20.02	19.87	22.96	23.54	< 30.00
		1	216	20.09	19.90	23.01	23.59	< 30.00
3939.99	80	109	54	20.64	20.48	23.57	24.15	< 30.00
		1	1	20.77	20.72	23.75	24.33	< 30.00
		1	215	20.91	20.67	23.80	24.38	< 30.00
		217	0	20.68	20.53	23.62	24.20	< 30.00
		1	0	20.47	20.11	23.31	23.89	< 30.00
		1	216	20.37	19.75	23.08	23.66	< 30.00
3745.02	90	123	61	20.33	20.41	23.38	23.96	< 30.00
		1	1	20.45	20.40	23.43	24.01	< 30.00
		1	243	20.36	20.39	23.39	23.97	< 30.00
		245	0	20.28	20.43	23.36	23.94	< 30.00
		1	0	19.97	19.97	22.98	23.56	< 30.00
		1	244	19.77	19.69	22.74	23.32	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	90	123	61	20.60	20.53	23.57	24.15	< 30.00
		1	1	20.15	20.40	23.29	23.87	< 30.00
		1	243	20.33	20.63	23.49	24.07	< 30.00
		245	0	20.52	20.53	23.54	24.12	< 30.00
		1	0	19.80	19.73	22.77	23.35	< 30.00
		1	244	20.11	20.26	23.19	23.77	< 30.00
3934.98	90	123	61	20.68	20.54	23.62	24.20	< 30.00
		1	1	20.70	20.72	23.72	24.30	< 30.00
		1	243	20.65	20.45	23.56	24.14	< 30.00
		245	0	20.72	20.47	23.61	24.19	< 30.00
		1	0	19.95	20.04	23.01	23.59	< 30.00
		1	244	20.21	20.10	23.16	23.74	< 30.00
3750.00	100	137	68	20.33	20.38	23.37	23.95	< 30.00
		1	1	20.34	20.57	23.47	24.05	< 30.00
		1	271	20.19	20.56	23.39	23.97	< 30.00
		273	0	20.31	20.36	23.34	23.92	< 30.00
		1	0	19.72	19.79	22.77	23.35	< 30.00
		1	272	19.56	19.85	22.72	23.30	< 30.00
3840.00	100	137	68	20.56	20.47	23.52	24.10	< 30.00
		1	1	20.64	20.34	23.50	24.08	< 30.00
		1	271	20.52	20.68	23.61	24.19	< 30.00
		273	0	20.60	20.56	23.59	24.17	< 30.00
		1	0	19.66	19.64	22.66	23.24	< 30.00
		1	272	19.81	20.11	22.98	23.56	< 30.00
3930.00	100	137	68	20.73	20.58	23.66	24.24	< 30.00
		1	1	20.53	20.66	23.60	24.18	< 30.00
		1	271	20.92	20.41	23.68	24.26	< 30.00
		273	0	20.74	20.51	23.64	24.22	< 30.00
		1	0	20.04	20.20	23.13	23.71	< 30.00
		1	272	20.29	19.77	23.05	23.63	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3705.00	10	12	6	20.74	20.75	23.76	24.34	< 30.00
		1	1	20.74	20.91	23.83	24.41	< 30.00
		1	22	20.66	20.68	23.68	24.26	< 30.00
		24	0	20.72	20.65	23.70	24.28	< 30.00
		1	0	20.35	20.13	23.25	23.83	< 30.00
		1	23	20.24	20.09	23.18	23.76	< 30.00
3840.00	10	12	6	20.85	20.72	23.80	24.38	< 30.00
		1	1	20.93	21.03	23.99	24.57	< 30.00
		1	22	20.64	20.69	23.68	24.26	< 30.00
		24	0	20.96	20.70	23.84	24.42	< 30.00
		1	0	20.37	20.01	23.21	23.79	< 30.00
		1	23	20.33	19.96	23.16	23.74	< 30.00
3975.00	10	12	6	21.17	20.88	24.04	24.62	< 30.00
		1	1	21.15	20.88	24.03	24.61	< 30.00
		1	22	21.16	21.01	24.10	24.68	< 30.00
		24	0	21.21	20.84	24.04	24.62	< 30.00
		1	0	20.76	20.34	23.56	24.14	< 30.00
		1	23	20.79	20.14	23.49	24.07	< 30.00
3707.52	15	19	9	20.52	20.66	23.60	24.18	< 30.00
		1	1	20.62	20.57	23.61	24.19	< 30.00
		1	36	20.61	20.62	23.63	24.21	< 30.00
		38	0	20.55	20.77	23.67	24.25	< 30.00
		1	0	20.16	20.28	23.23	23.81	< 30.00
		1	37	20.20	19.99	23.10	23.68	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	15	19	9	20.97	20.73	23.86	24.44	< 30.00
		1	1	20.89	20.77	23.84	24.42	< 30.00
		1	36	20.85	20.68	23.78	24.36	< 30.00
		38	0	21.00	20.76	23.89	24.47	< 30.00
		1	0	20.58	20.13	23.37	23.95	< 30.00
		1	37	20.60	20.25	23.44	24.02	< 30.00
3972.48	15	19	9	21.12	20.67	23.91	24.49	< 30.00
		1	1	20.98	20.72	23.86	24.44	< 30.00
		1	36	21.17	20.79	24.00	24.58	< 30.00
		38	0	21.14	20.77	23.97	24.55	< 30.00
		1	0	20.62	20.32	23.48	24.06	< 30.00
		1	37	20.84	20.33	23.60	24.18	< 30.00
3710.01	20	25	12	20.54	20.57	23.57	24.15	< 30.00
		1	1	20.71	20.73	23.73	24.31	< 30.00
		1	49	20.72	20.62	23.68	24.26	< 30.00
		51	0	20.50	20.56	23.54	24.12	< 30.00
		1	0	20.23	20.12	23.19	23.77	< 30.00
		1	50	20.09	20.12	23.12	23.70	< 30.00
3840.00	20	25	12	20.88	20.81	23.86	24.44	< 30.00
		1	1	20.92	20.62	23.79	24.37	< 30.00
		1	49	20.89	20.66	23.79	24.37	< 30.00
		51	0	21.00	20.77	23.90	24.48	< 30.00
		1	0	20.52	20.11	23.33	23.91	< 30.00
		1	50	20.41	19.92	23.18	23.76	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3969.99	20	25	12	21.09	20.79	23.96	24.54	< 30.00
		1	1	20.96	20.83	23.90	24.48	< 30.00
		1	49	21.15	20.73	23.95	24.53	< 30.00
		51	0	21.06	20.81	23.94	24.52	< 30.00
		1	0	20.49	20.27	23.40	23.98	< 30.00
		1	50	20.78	20.43	23.62	24.20	< 30.00
3715.02	30	36	79	20.64	20.66	23.66	24.24	< 30.00
		1	1	20.68	20.67	23.68	24.26	< 30.00
		1	76	20.62	20.81	23.73	24.31	< 30.00
		78	0	20.67	20.50	23.60	24.18	< 30.00
		1	0	20.25	20.36	23.31	23.89	< 30.00
		1	77	20.11	20.17	23.15	23.73	< 30.00
3840.00	30	36	79	20.85	20.75	23.81	24.39	< 30.00
		1	1	20.94	20.81	23.89	24.47	< 30.00
		1	76	20.99	20.91	23.96	24.54	< 30.00
		78	0	20.93	20.79	23.87	24.45	< 30.00
		1	0	20.64	20.27	23.47	24.05	< 30.00
		1	77	20.53	20.29	23.42	24.00	< 30.00
3964.98	30	36	79	21.12	20.90	24.02	24.60	< 30.00
		1	1	21.01	20.95	23.99	24.57	< 30.00
		1	76	21.38	21.02	24.22	24.80	< 30.00
		78	0	21.08	20.85	23.98	24.56	< 30.00
		1	0	20.66	20.45	23.57	24.15	< 30.00
		1	77	20.92	20.18	23.58	24.16	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3720.00	40	53	26	20.68	20.82	23.76	24.34	< 30.00
		1	1	20.97	20.81	23.90	24.48	< 30.00
		1	104	20.75	20.87	23.82	24.40	< 30.00
		106	0	20.60	20.80	23.71	24.29	< 30.00
		1	0	20.35	20.58	23.48	24.06	< 30.00
		1	105	20.26	20.35	23.31	23.89	< 30.00
3840.00	40	53	26	20.97	20.86	23.93	24.51	< 30.00
		1	1	20.94	20.73	23.85	24.43	< 30.00
		1	104	20.88	20.60	23.75	24.33	< 30.00
		106	0	20.96	20.79	23.89	24.47	< 30.00
		1	0	20.38	20.55	23.47	24.05	< 30.00
		1	105	20.48	20.59	23.54	24.12	< 30.00
3960.00	40	53	26	21.06	20.96	24.02	24.60	< 30.00
		1	1	20.96	20.84	23.91	24.49	< 30.00
		1	104	21.30	20.73	24.04	24.62	< 30.00
		106	0	21.12	20.87	24.00	24.58	< 30.00
		1	0	20.38	20.67	23.54	24.12	< 30.00
		1	105	20.73	20.49	23.62	24.20	< 30.00
3720.00	50	67	33	20.45	20.47	23.47	24.05	< 30.00
		1	1	20.65	20.63	23.65	24.23	< 30.00
		1	131	20.47	20.38	23.43	24.01	< 30.00
		133	0	20.49	20.48	23.50	24.08	< 30.00
		1	0	20.12	20.16	23.15	23.73	< 30.00
		1	132	19.88	20.04	22.97	23.55	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	50	67	33	20.78	20.65	23.72	24.30	< 30.00
		1	1	20.79	20.59	23.70	24.28	< 30.00
		1	131	20.87	20.59	23.74	24.32	< 30.00
		133	0	20.77	20.61	23.70	24.28	< 30.00
		1	0	20.17	20.06	23.12	23.70	< 30.00
		1	132	20.23	20.24	23.24	23.82	< 30.00
3954.99	50	67	33	20.95	20.68	23.82	24.40	< 30.00
		1	1	20.81	20.79	23.81	24.39	< 30.00
		1	131	21.11	20.62	23.88	24.46	< 30.00
		133	0	20.86	20.74	23.81	24.39	< 30.00
		1	0	20.32	20.47	23.40	23.98	< 30.00
		1	132	20.56	20.37	23.47	24.05	< 30.00
3730.02	60	81	40	20.46	20.45	23.46	24.04	< 30.00
		1	1	20.44	20.60	23.53	24.11	< 30.00
		1	131	20.52	20.81	23.68	24.26	< 30.00
		128	0	20.46	20.44	23.46	24.04	< 30.00
		1	0	19.93	20.17	23.06	23.64	< 30.00
		1	132	19.87	19.86	22.88	23.46	< 30.00
3840.00	60	81	40	20.85	20.68	23.78	24.36	< 30.00
		1	1	20.66	20.55	23.61	24.19	< 30.00
		1	131	20.64	21.03	23.85	24.43	< 30.00
		128	0	20.75	20.65	23.71	24.29	< 30.00
		1	0	20.20	20.18	23.20	23.78	< 30.00
		1	132	20.22	20.27	23.26	23.84	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3949.98	60	81	40	20.83	20.50	23.68	24.26	< 30.00
		1	1	20.73	20.55	23.65	24.23	< 30.00
		1	131	20.78	20.19	23.51	24.09	< 30.00
		128	0	20.74	20.50	23.63	24.21	< 30.00
		1	0	20.20	20.13	23.17	23.75	< 30.00
		1	132	20.36	19.74	23.07	23.65	< 30.00
3735.00	70	95	47	19.90	19.69	22.80	23.38	< 30.00
		1	1	19.96	19.73	22.86	23.44	< 30.00
		1	187	19.84	19.75	22.81	23.39	< 30.00
		189	0	19.72	19.65	22.70	23.28	< 30.00
		1	0	19.13	18.73	21.95	22.53	< 30.00
		1	188	19.16	19.15	22.17	22.75	< 30.00
3840.00	70	95	47	20.06	19.72	22.91	23.49	< 30.00
		1	1	19.95	19.94	22.96	23.54	< 30.00
		1	187	19.81	19.74	22.79	23.37	< 30.00
		189	0	20.01	19.74	22.88	23.46	< 30.00
		1	0	19.43	19.10	22.28	22.86	< 30.00
		1	188	19.30	18.85	22.09	22.67	< 30.00
3945.00	70	95	47	20.17	20.00	23.10	23.68	< 30.00
		1	1	20.35	20.00	23.19	23.77	< 30.00
		1	187	19.88	20.00	22.95	23.53	< 30.00
		189	0	20.16	19.95	23.07	23.65	< 30.00
		1	0	19.74	19.79	22.78	23.36	< 30.00
		1	188	19.45	19.01	22.25	22.83	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3740.01	80	109	54	20.34	20.37	23.37	23.95	< 30.00
		1	1	20.39	20.40	23.41	23.99	< 30.00
		1	215	20.15	20.37	23.27	23.85	< 30.00
		217	0	20.36	20.40	23.39	23.97	< 30.00
		1	0	20.06	19.98	23.03	23.61	< 30.00
		1	216	19.72	19.67	22.71	23.29	< 30.00
3840.00	80	109	54	20.57	20.55	23.57	24.15	< 30.00
		1	1	20.33	20.40	23.37	23.95	< 30.00
		1	215	20.51	20.43	23.48	24.06	< 30.00
		217	0	20.50	20.46	23.49	24.07	< 30.00
		1	0	19.99	19.90	22.95	23.53	< 30.00
		1	216	19.94	20.16	23.06	23.64	< 30.00
3939.99	80	109	54	20.74	20.50	23.63	24.21	< 30.00
		1	1	20.79	20.65	23.73	24.31	< 30.00
		1	215	20.87	20.19	23.55	24.13	< 30.00
		217	0	20.69	20.54	23.62	24.20	< 30.00
		1	0	20.12	20.23	23.18	23.76	< 30.00
		1	216	20.36	19.70	23.05	23.63	< 30.00
3745.02	90	123	61	20.40	20.42	23.42	24.00	< 30.00
		1	1	20.42	20.52	23.48	24.06	< 30.00
		1	243	20.25	20.34	23.31	23.89	< 30.00
		245	0	20.30	20.38	23.35	23.93	< 30.00
		1	0	19.79	20.20	23.01	23.59	< 30.00
		1	244	19.56	19.83	22.71	23.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	90	123	61	20.60	20.53	23.57	24.15	< 30.00
		1	1	20.31	20.30	23.32	23.90	< 30.00
		1	243	20.58	20.63	23.62	24.20	< 30.00
		245	0	20.58	20.50	23.55	24.13	< 30.00
		1	0	19.76	19.92	22.85	23.43	< 30.00
		1	244	19.92	20.24	23.09	23.67	< 30.00
3934.98	90	123	61	20.73	20.58	23.66	24.24	< 30.00
		1	1	20.54	20.59	23.57	24.15	< 30.00
		1	243	20.72	20.37	23.56	24.14	< 30.00
		245	0	20.77	20.54	23.67	24.25	< 30.00
		1	0	20.05	19.97	23.02	23.60	< 30.00
		1	244	20.21	19.72	22.98	23.56	< 30.00
3750.00	100	137	68	20.35	20.40	23.39	23.97	< 30.00
		1	1	20.44	20.63	23.54	24.12	< 30.00
		1	271	20.25	20.28	23.28	23.86	< 30.00
		273	0	20.34	20.41	23.38	23.96	< 30.00
		1	0	19.79	19.79	22.80	23.38	< 30.00
		1	272	19.74	19.60	22.68	23.26	< 30.00
3840.00	100	137	68	20.67	20.53	23.61	24.19	< 30.00
		1	1	20.25	20.44	23.35	23.93	< 30.00
		1	271	20.48	20.61	23.55	24.13	< 30.00
		273	0	20.54	20.61	23.59	24.17	< 30.00
		1	0	19.74	19.55	22.65	23.23	< 30.00
		1	272	20.03	19.88	22.97	23.55	< 30.00
3930.00	100	137	68	20.68	20.68	23.69	24.27	< 30.00
		1	1	20.52	20.57	23.56	24.14	< 30.00
		1	271	20.93	20.48	23.72	24.30	< 30.00
		273	0	20.76	20.53	23.65	24.23	< 30.00
		1	0	19.91	19.86	22.89	23.47	< 30.00
		1	272	20.30	19.72	23.03	23.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3705.00	10	12	6	20.32	20.28	23.31	23.89	< 30.00
		1	1	20.57	20.33	23.46	24.04	< 30.00
		1	22	20.43	20.29	23.37	23.95	< 30.00
		24	0	20.19	20.29	23.25	23.83	< 30.00
		1	0	20.35	20.10	23.24	23.82	< 30.00
		1	23	20.30	20.10	23.21	23.79	< 30.00
3840.00	10	12	6	20.44	20.18	23.32	23.90	< 30.00
		1	1	20.70	20.27	23.50	24.08	< 30.00
		1	22	20.64	20.10	23.39	23.97	< 30.00
		24	0	20.33	20.11	23.23	23.81	< 30.00
		1	0	20.52	20.29	23.41	23.99	< 30.00
		1	23	20.53	20.28	23.42	24.00	< 30.00
3975.00	10	12	6	20.65	20.37	23.52	24.10	< 30.00
		1	1	20.94	20.23	23.61	24.19	< 30.00
		1	22	21.04	20.29	23.69	24.27	< 30.00
		24	0	20.66	20.39	23.54	24.12	< 30.00
		1	0	21.10	20.42	23.78	24.36	< 30.00
		1	23	21.11	20.28	23.73	24.31	< 30.00
3707.52	15	19	9	20.10	20.21	23.17	23.75	< 30.00
		1	1	20.17	20.15	23.17	23.75	< 30.00
		1	36	20.13	20.29	23.22	23.80	< 30.00
		38	0	20.15	20.31	23.24	23.82	< 30.00
		1	0	20.12	20.15	23.14	23.72	< 30.00
		1	37	20.13	20.33	23.24	23.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	15	19	9	20.49	20.28	23.40	23.98	< 30.00
		1	1	20.63	20.23	23.44	24.02	< 30.00
		1	36	20.48	20.49	23.50	24.08	< 30.00
		38	0	20.52	20.35	23.44	24.02	< 30.00
		1	0	20.59	20.41	23.51	24.09	< 30.00
		1	37	20.60	20.33	23.48	24.06	< 30.00
3972.48	15	19	9	20.65	20.20	23.44	24.02	< 30.00
		1	1	20.62	20.41	23.52	24.10	< 30.00
		1	36	20.70	20.33	23.53	24.11	< 30.00
		38	0	20.59	20.39	23.50	24.08	< 30.00
		1	0	20.55	20.28	23.43	24.01	< 30.00
		1	37	20.80	20.26	23.55	24.13	< 30.00
3710.01	20	25	12	19.99	20.03	23.02	23.60	< 30.00
		1	1	20.29	19.98	23.15	23.73	< 30.00
		1	49	20.15	20.11	23.14	23.72	< 30.00
		51	0	20.14	20.17	23.16	23.74	< 30.00
		1	0	20.13	20.15	23.15	23.73	< 30.00
		1	50	20.36	20.20	23.29	23.87	< 30.00
3840.00	20	25	12	20.45	20.26	23.37	23.95	< 30.00
		1	1	20.58	20.37	23.48	24.06	< 30.00
		1	49	20.54	20.31	23.44	24.02	< 30.00
		51	0	20.41	20.26	23.35	23.93	< 30.00
		1	0	20.51	20.32	23.42	24.00	< 30.00
		1	50	20.61	20.25	23.44	24.02	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3969.99	20	25	12	20.47	20.25	23.37	23.95	< 30.00
		1	1	20.69	20.53	23.62	24.20	< 30.00
		1	49	20.79	20.35	23.59	24.17	< 30.00
		51	0	20.60	20.31	23.47	24.05	< 30.00
		1	0	20.62	20.51	23.57	24.15	< 30.00
		1	50	20.80	20.35	23.59	24.17	< 30.00
3715.02	30	36	79	20.13	20.15	23.15	23.73	< 30.00
		1	1	20.53	20.18	23.37	23.95	< 30.00
		1	76	20.30	20.24	23.28	23.86	< 30.00
		78	0	20.14	20.09	23.13	23.71	< 30.00
		1	0	20.67	20.28	23.49	24.07	< 30.00
		1	77	20.33	20.28	23.32	23.90	< 30.00
3840.00	30	36	79	20.46	20.28	23.38	23.96	< 30.00
		1	1	20.77	20.25	23.53	24.11	< 30.00
		1	76	20.96	20.40	23.70	24.28	< 30.00
		78	0	20.40	20.23	23.33	23.91	< 30.00
		1	0	20.75	20.33	23.56	24.14	< 30.00
		1	77	20.72	20.27	23.51	24.09	< 30.00
3964.98	30	36	79	20.61	20.28	23.46	24.04	< 30.00
		1	1	20.92	20.47	23.71	24.29	< 30.00
		1	76	21.17	20.34	23.78	24.36	< 30.00
		78	0	20.57	20.35	23.47	24.05	< 30.00
		1	0	20.96	20.46	23.73	24.31	< 30.00
		1	77	20.96	20.35	23.68	24.26	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3720.00	40	53	26	20.10	20.23	23.18	23.76	< 30.00
		1	1	20.57	20.45	23.52	24.10	< 30.00
		1	104	20.28	20.19	23.24	23.82	< 30.00
		106	0	20.15	20.31	23.24	23.82	< 30.00
		1	0	20.58	20.36	23.48	24.06	< 30.00
		1	105	20.28	20.39	23.34	23.92	< 30.00
3840.00	40	53	26	20.50	20.36	23.45	24.03	< 30.00
		1	1	20.55	20.38	23.47	24.05	< 30.00
		1	104	20.55	20.25	23.41	23.99	< 30.00
		106	0	20.42	20.27	23.36	23.94	< 30.00
		1	0	20.59	20.45	23.53	24.11	< 30.00
		1	105	20.55	20.37	23.47	24.05	< 30.00
3960.00	40	53	26	20.60	20.35	23.49	24.07	< 30.00
		1	1	20.65	20.69	23.68	24.26	< 30.00
		1	104	20.83	20.34	23.60	24.18	< 30.00
		106	0	20.63	20.40	23.53	24.11	< 30.00
		1	0	20.51	20.46	23.49	24.07	< 30.00
		1	105	20.87	20.45	23.67	24.25	< 30.00
3720.00	50	67	33	20.01	20.07	23.05	23.63	< 30.00
		1	1	20.12	20.02	23.08	23.66	< 30.00
		1	131	20.01	19.87	22.95	23.53	< 30.00
		133	0	19.97	19.97	22.98	23.56	< 30.00
		1	0	20.15	20.03	23.10	23.68	< 30.00
		1	132	19.90	19.85	22.89	23.47	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	50	67	33	20.33	20.23	23.29	23.87	< 30.00
		1	1	20.25	20.17	23.22	23.80	< 30.00
		1	131	20.40	20.24	23.33	23.91	< 30.00
		133	0	20.18	20.19	23.20	23.78	< 30.00
		1	0	20.21	20.07	23.15	23.73	< 30.00
		1	132	20.16	20.23	23.21	23.79	< 30.00
3954.99	50	67	33	20.34	20.30	23.33	23.91	< 30.00
		1	1	20.23	20.28	23.27	23.85	< 30.00
		1	131	20.57	20.17	23.39	23.97	< 30.00
		133	0	20.38	20.24	23.32	23.90	< 30.00
		1	0	20.41	20.27	23.35	23.93	< 30.00
		1	132	20.65	20.14	23.41	23.99	< 30.00
3730.02	60	81	40	19.96	19.93	22.95	23.53	< 30.00
		1	1	20.35	20.11	23.24	23.82	< 30.00
		1	131	20.22	19.82	23.03	23.61	< 30.00
		128	0	19.93	19.96	22.96	23.54	< 30.00
		1	0	20.03	20.03	23.04	23.62	< 30.00
		1	132	19.90	19.82	22.87	23.45	< 30.00
3840.00	60	81	40	20.25	20.16	23.22	23.80	< 30.00
		1	1	20.46	19.93	23.21	23.79	< 30.00
		1	131	20.41	20.20	23.32	23.90	< 30.00
		128	0	20.24	20.13	23.20	23.78	< 30.00
		1	0	20.34	19.92	23.14	23.72	< 30.00
		1	132	20.18	20.29	23.25	23.83	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3949.98	60	81	40	20.31	19.95	23.14	23.72	< 30.00
		1	1	20.28	20.14	23.22	23.80	< 30.00
		1	131	20.61	19.71	23.19	23.77	< 30.00
		128	0	20.32	20.02	23.19	23.77	< 30.00
		1	0	20.33	20.10	23.23	23.81	< 30.00
		1	132	20.32	19.76	23.06	23.64	< 30.00
3735.00	70	95	47	19.35	19.16	22.27	22.85	< 30.00
		1	1	18.79	19.05	21.93	22.51	< 30.00
		1	187	19.49	19.17	22.35	22.93	< 30.00
		189	0	19.22	19.14	22.19	22.77	< 30.00
		1	0	19.21	19.16	22.20	22.78	< 30.00
		1	188	19.22	18.87	22.06	22.64	< 30.00
3840.00	70	95	47	19.51	19.27	22.40	22.98	< 30.00
		1	1	19.60	19.37	22.50	23.08	< 30.00
		1	187	19.52	19.06	22.31	22.89	< 30.00
		189	0	19.46	19.22	22.35	22.93	< 30.00
		1	0	19.57	19.36	22.48	23.06	< 30.00
		1	188	19.40	18.99	22.21	22.79	< 30.00
3945.00	70	95	47	19.69	19.48	22.60	23.18	< 30.00
		1	1	19.92	19.41	22.68	23.26	< 30.00
		1	187	19.37	19.21	22.30	22.88	< 30.00
		189	0	19.62	19.44	22.54	23.12	< 30.00
		1	0	19.92	19.42	22.69	23.27	< 30.00
		1	188	19.53	19.35	22.45	23.03	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3740.01	80	109	54	19.92	19.93	22.94	23.52	< 30.00
		1	1	20.03	19.96	23.00	23.58	< 30.00
		1	215	19.79	19.74	22.77	23.35	< 30.00
		217	0	19.88	19.84	22.87	23.45	< 30.00
		1	0	19.96	20.06	23.02	23.60	< 30.00
		1	216	19.80	19.70	22.76	23.34	< 30.00
3840.00	80	109	54	20.13	20.03	23.09	23.67	< 30.00
		1	1	20.05	19.86	22.97	23.55	< 30.00
		1	215	20.06	20.13	23.10	23.68	< 30.00
		217	0	20.01	20.00	23.02	23.60	< 30.00
		1	0	19.94	19.72	22.84	23.42	< 30.00
		1	216	20.06	19.94	23.01	23.59	< 30.00
3939.99	80	109	54	20.15	20.12	23.15	23.73	< 30.00
		1	1	20.23	20.34	23.30	23.88	< 30.00
		1	215	20.34	19.89	23.13	23.71	< 30.00
		217	0	20.18	20.03	23.12	23.70	< 30.00
		1	0	20.21	20.20	23.22	23.80	< 30.00
		1	216	20.35	19.87	23.13	23.71	< 30.00
3745.02	90	123	61	19.91	19.92	22.92	23.50	< 30.00
		1	1	20.07	20.06	23.07	23.65	< 30.00
		1	243	19.84	19.95	22.91	23.49	< 30.00
		245	0	19.81	19.88	22.85	23.43	< 30.00
		1	0	19.84	19.92	22.89	23.47	< 30.00
		1	244	19.89	19.70	22.80	23.38	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	90	123	61	20.16	20.05	23.12	23.70	< 30.00
		1	1	20.07	19.83	22.96	23.54	< 30.00
		1	243	20.15	20.26	23.22	23.80	< 30.00
		245	0	19.99	19.97	22.99	23.57	< 30.00
		1	0	19.91	19.71	22.82	23.40	< 30.00
		1	244	20.11	20.19	23.16	23.74	< 30.00
3934.98	90	123	61	20.20	20.14	23.18	23.76	< 30.00
		1	1	20.13	20.12	23.14	23.72	< 30.00
		1	243	20.38	20.03	23.22	23.80	< 30.00
		245	0	20.22	20.01	23.13	23.71	< 30.00
		1	0	20.01	19.99	23.01	23.59	< 30.00
		1	244	20.44	19.75	23.12	23.70	< 30.00
3750.00	100	137	68	19.86	19.96	22.92	23.50	< 30.00
		1	1	20.12	20.13	23.13	23.71	< 30.00
		1	271	19.86	20.25	23.07	23.65	< 30.00
		273	0	19.81	19.95	22.89	23.47	< 30.00
		1	0	19.82	19.85	22.84	23.42	< 30.00
		1	272	19.81	19.77	22.80	23.38	< 30.00
3840.00	100	137	68	20.16	20.11	23.14	23.72	< 30.00
		1	1	20.03	20.01	23.03	23.61	< 30.00
		1	271	20.21	20.33	23.28	23.86	< 30.00
		273	0	20.04	20.09	23.08	23.66	< 30.00
		1	0	19.81	19.68	22.75	23.33	< 30.00
		1	272	20.14	20.18	23.17	23.75	< 30.00
3930.00	100	137	68	20.24	20.09	23.17	23.75	< 30.00
		1	1	20.20	20.21	23.21	23.79	< 30.00
		1	271	20.69	19.94	23.34	23.92	< 30.00
		273	0	20.11	20.11	23.12	23.70	< 30.00
		1	0	20.02	20.00	23.02	23.60	< 30.00
		1	272	20.45	19.67	23.09	23.67	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3705.00	10	12	6	17.15	17.08	20.13	20.71	< 30.00
		1	1	17.07	17.11	20.10	20.68	< 30.00
		1	22	17.00	17.12	20.07	20.65	< 30.00
		24	0	17.20	17.12	20.17	20.75	< 30.00
		1	0	16.95	17.13	20.05	20.63	< 30.00
		1	23	16.91	17.16	20.05	20.63	< 30.00
3840.00	10	12	6	17.40	17.04	20.23	20.81	< 30.00
		1	1	17.24	17.09	20.17	20.75	< 30.00
		1	22	17.16	17.08	20.13	20.71	< 30.00
		24	0	17.38	17.10	20.25	20.83	< 30.00
		1	0	17.26	16.98	20.13	20.71	< 30.00
		1	23	17.15	16.93	20.05	20.63	< 30.00
3975.00	10	12	6	17.63	17.19	20.42	21.00	< 30.00
		1	1	17.53	17.09	20.33	20.91	< 30.00
		1	22	17.34	17.25	20.31	20.89	< 30.00
		24	0	17.61	17.21	20.42	21.00	< 30.00
		1	0	17.49	17.04	20.28	20.86	< 30.00
		1	23	17.48	17.10	20.31	20.89	< 30.00
3707.52	15	19	9	17.11	17.15	20.14	20.72	< 30.00
		1	1	16.84	17.02	19.94	20.52	< 30.00
		1	36	16.72	17.11	19.93	20.51	< 30.00
		38	0	17.15	17.13	20.15	20.73	< 30.00
		1	0	17.07	17.00	20.04	20.62	< 30.00
		1	37	16.90	17.08	20.00	20.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	15	19	9	17.38	17.25	20.32	20.90	< 30.00
		1	1	17.30	17.23	20.27	20.85	< 30.00
		1	36	17.27	17.30	20.30	20.88	< 30.00
		38	0	17.57	17.16	20.38	20.96	< 30.00
		1	0	17.16	17.20	20.19	20.77	< 30.00
		1	37	17.41	17.15	20.29	20.87	< 30.00
3972.48	15	19	9	17.61	17.31	20.47	21.05	< 30.00
		1	1	17.58	17.29	20.45	21.03	< 30.00
		1	36	17.53	17.18	20.37	20.95	< 30.00
		38	0	17.80	17.18	20.51	21.09	< 30.00
		1	0	17.43	17.27	20.37	20.95	< 30.00
		1	37	17.55	17.15	20.36	20.94	< 30.00
3710.01	20	25	12	17.08	17.03	20.06	20.64	< 30.00
		1	1	16.98	17.07	20.04	20.62	< 30.00
		1	49	17.07	17.04	20.06	20.64	< 30.00
		51	0	17.08	17.08	20.09	20.67	< 30.00
		1	0	17.03	17.00	20.03	20.61	< 30.00
		1	50	16.87	16.99	19.94	20.52	< 30.00
3840.00	20	25	12	17.36	17.33	20.36	20.94	< 30.00
		1	1	17.42	17.09	20.27	20.85	< 30.00
		1	49	17.39	17.29	20.35	20.93	< 30.00
		51	0	17.40	17.27	20.35	20.93	< 30.00
		1	0	17.31	17.11	20.22	20.80	< 30.00
		1	50	17.41	17.28	20.36	20.94	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3969.99	20	25	12	17.59	17.37	20.49	21.07	< 30.00
		1	1	17.46	17.37	20.43	21.01	< 30.00
		1	49	17.63	17.23	20.45	21.03	< 30.00
		51	0	17.55	17.30	20.43	21.01	< 30.00
		1	0	17.48	17.33	20.41	20.99	< 30.00
		1	50	17.59	17.27	20.45	21.03	< 30.00
3715.02	30	36	79	17.12	17.03	20.08	20.66	< 30.00
		1	1	17.20	17.14	20.18	20.76	< 30.00
		1	76	16.91	17.02	19.98	20.56	< 30.00
		78	0	17.13	17.14	20.14	20.72	< 30.00
		1	0	17.02	17.19	20.12	20.70	< 30.00
		1	77	17.02	17.03	20.04	20.62	< 30.00
3840.00	30	36	79	17.46	17.20	20.34	20.92	< 30.00
		1	1	17.24	17.13	20.20	20.78	< 30.00
		1	76	17.30	17.29	20.31	20.89	< 30.00
		78	0	17.41	17.23	20.33	20.91	< 30.00
		1	0	17.22	17.16	20.20	20.78	< 30.00
		1	77	17.32	17.22	20.28	20.86	< 30.00
3964.98	30	36	79	17.60	17.21	20.42	21.00	< 30.00
		1	1	17.41	17.49	20.46	21.04	< 30.00
		1	76	17.67	17.29	20.49	21.07	< 30.00
		78	0	17.60	17.37	20.50	21.08	< 30.00
		1	0	17.44	17.34	20.40	20.98	< 30.00
		1	77	17.69	17.24	20.48	21.06	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3720.00	40	53	26	17.18	17.21	20.21	20.79	< 30.00
		1	1	17.25	17.38	20.33	20.91	< 30.00
		1	104	17.09	17.34	20.23	20.81	< 30.00
		106	0	17.19	17.23	20.22	20.80	< 30.00
		1	0	17.25	17.30	20.29	20.87	< 30.00
		1	105	17.01	17.21	20.13	20.71	< 30.00
3840.00	40	53	26	17.43	17.14	20.30	20.88	< 30.00
		1	1	17.48	17.39	20.44	21.02	< 30.00
		1	104	17.26	17.35	20.31	20.89	< 30.00
		106	0	17.39	17.36	20.39	20.97	< 30.00
		1	0	17.30	17.20	20.26	20.84	< 30.00
		1	105	17.35	17.35	20.36	20.94	< 30.00
3960.00	40	53	26	17.61	17.30	20.47	21.05	< 30.00
		1	1	17.37	17.37	20.38	20.96	< 30.00
		1	104	17.79	17.37	20.60	21.18	< 30.00
		106	0	17.56	17.50	20.54	21.12	< 30.00
		1	0	17.44	17.47	20.47	21.05	< 30.00
		1	105	17.68	17.26	20.48	21.06	< 30.00
3720.00	50	67	33	17.06	16.96	20.02	20.60	< 30.00
		1	1	17.04	17.08	20.07	20.65	< 30.00
		1	131	16.81	16.73	19.78	20.36	< 30.00
		133	0	16.98	16.90	19.95	20.53	< 30.00
		1	0	17.03	16.98	20.02	20.60	< 30.00
		1	132	16.78	16.84	19.82	20.40	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	50	67	33	17.28	17.20	20.25	20.83	< 30.00
		1	1	17.02	16.96	20.00	20.58	< 30.00
		1	131	17.09	17.09	20.10	20.68	< 30.00
		133	0	17.23	17.12	20.19	20.77	< 30.00
		1	0	16.99	17.14	20.07	20.65	< 30.00
		1	132	17.06	17.29	20.19	20.77	< 30.00
3954.99	50	67	33	17.44	17.27	20.37	20.95	< 30.00
		1	1	17.16	17.31	20.25	20.83	< 30.00
		1	131	17.37	16.99	20.20	20.78	< 30.00
		133	0	17.42	17.29	20.37	20.95	< 30.00
		1	0	17.14	17.20	20.18	20.76	< 30.00
		1	132	17.30	17.21	20.26	20.84	< 30.00
3730.02	60	81	40	17.02	17.00	20.02	20.60	< 30.00
		1	1	16.94	17.07	20.02	20.60	< 30.00
		1	131	16.69	16.94	19.83	20.41	< 30.00
		128	0	16.94	16.96	19.96	20.54	< 30.00
		1	0	16.69	17.09	19.90	20.48	< 30.00
		1	132	16.74	16.81	19.79	20.37	< 30.00
3840.00	60	81	40	17.30	17.21	20.27	20.85	< 30.00
		1	1	17.01	16.94	19.99	20.57	< 30.00
		1	131	16.73	17.09	19.92	20.50	< 30.00
		128	0	17.30	17.11	20.22	20.80	< 30.00
		1	0	16.89	16.96	19.93	20.51	< 30.00
		1	132	17.05	17.01	20.04	20.62	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3949.98	60	81	40	17.23	17.02	20.14	20.72	< 30.00
		1	1	17.09	17.15	20.13	20.71	< 30.00
		1	131	17.17	16.73	19.97	20.55	< 30.00
		128	0	17.30	17.04	20.18	20.76	< 30.00
		1	0	17.24	16.99	20.13	20.71	< 30.00
		1	132	17.32	16.77	20.06	20.64	< 30.00
3735.00	70	95	47	16.41	16.14	19.29	19.87	< 30.00
		1	1	15.92	15.83	18.89	19.47	< 30.00
		1	187	15.99	15.70	18.86	19.44	< 30.00
		189	0	16.33	16.10	19.23	19.81	< 30.00
		1	0	16.07	16.05	19.07	19.65	< 30.00
		1	188	16.35	16.29	19.33	19.91	< 30.00
3840.00	70	95	47	16.52	16.18	19.36	19.94	< 30.00
		1	1	16.44	16.36	19.41	19.99	< 30.00
		1	187	16.53	16.10	19.33	19.91	< 30.00
		189	0	16.52	16.29	19.42	20.00	< 30.00
		1	0	16.71	16.25	19.50	20.08	< 30.00
		1	188	16.36	16.11	19.25	19.83	< 30.00
3945.00	70	95	47	16.68	16.41	19.56	20.14	< 30.00
		1	1	16.86	16.43	19.66	20.24	< 30.00
		1	187	16.40	16.36	19.39	19.97	< 30.00
		189	0	16.61	16.43	19.53	20.11	< 30.00
		1	0	17.06	16.34	19.72	20.30	< 30.00
		1	188	16.40	16.23	19.33	19.91	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3740.01	80	109	54	16.86	16.84	19.86	20.44	< 30.00
		1	1	16.68	16.87	19.79	20.37	< 30.00
		1	215	16.53	16.74	19.64	20.22	< 30.00
		217	0	16.83	16.92	19.88	20.46	< 30.00
		1	0	16.64	16.92	19.80	20.38	< 30.00
		1	216	16.57	16.74	19.67	20.25	< 30.00
3840.00	80	109	54	17.10	17.00	20.06	20.64	< 30.00
		1	1	16.77	16.64	19.71	20.29	< 30.00
		1	215	16.96	16.98	19.98	20.56	< 30.00
		217	0	17.10	16.98	20.05	20.63	< 30.00
		1	0	16.64	16.84	19.75	20.33	< 30.00
		1	216	16.95	16.89	19.93	20.51	< 30.00
3939.99	80	109	54	17.18	17.04	20.12	20.70	< 30.00
		1	1	20.18	17.29	21.98	22.56	< 30.00
		1	215	17.35	16.69	20.04	20.62	< 30.00
		217	0	17.29	17.06	20.19	20.77	< 30.00
		1	0	17.10	17.17	20.14	20.72	< 30.00
		1	216	17.18	16.65	19.94	20.52	< 30.00
3745.02	90	123	61	16.85	16.92	19.89	20.47	< 30.00
		1	1	16.88	17.00	19.95	20.53	< 30.00
		1	243	16.50	16.79	19.66	20.24	< 30.00
		245	0	16.83	16.91	19.88	20.46	< 30.00
		1	0	16.65	16.80	19.73	20.31	< 30.00
		1	244	16.63	16.71	19.68	20.26	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	90	123	61	17.13	17.09	20.12	20.70	< 30.00
		1	1	16.75	16.84	19.80	20.38	< 30.00
		1	243	17.03	17.09	20.07	20.65	< 30.00
		245	0	17.00	16.98	20.00	20.58	< 30.00
		1	0	16.72	16.70	19.72	20.30	< 30.00
		1	244	16.87	17.06	19.98	20.56	< 30.00
3934.98	90	123	61	17.26	16.97	20.13	20.71	< 30.00
		1	1	17.15	17.18	20.18	20.76	< 30.00
		1	243	17.28	16.80	20.06	20.64	< 30.00
		245	0	17.25	16.94	20.11	20.69	< 30.00
		1	0	16.96	16.95	19.96	20.54	< 30.00
		1	244	17.12	16.71	19.93	20.51	< 30.00
3750.00	100	137	68	16.89	16.93	19.92	20.50	< 30.00
		1	1	16.68	16.90	19.80	20.38	< 30.00
		1	271	16.53	16.87	19.71	20.29	< 30.00
		273	0	16.83	16.88	19.86	20.44	< 30.00
		1	0	16.58	16.76	19.68	20.26	< 30.00
		1	272	16.36	16.61	19.50	20.08	< 30.00
3840.00	100	137	68	17.10	17.03	20.08	20.66	< 30.00
		1	1	16.66	16.80	19.74	20.32	< 30.00
		1	271	17.16	17.16	20.17	20.75	< 30.00
		273	0	17.05	17.06	20.06	20.64	< 30.00
		1	0	16.55	16.74	19.65	20.23	< 30.00
		1	272	16.78	17.01	19.91	20.49	< 30.00
3930.00	100	137	68	17.26	17.05	20.16	20.74	< 30.00
		1	1	17.05	16.99	20.03	20.61	< 30.00
		1	271	17.36	16.92	20.15	20.73	< 30.00
		273	0	17.13	17.03	20.09	20.67	< 30.00
		1	0	16.74	17.05	19.91	20.49	< 30.00
		1	272	17.10	16.78	19.96	20.54	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Test Site	SIP-SR1	Test Engineer	Cloud Guo
Test Date	2022/05/25 ~ 2022/07/10	Test Band	HPUE n77/n78_UL MIMO (3700 ~ 3980MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3705.00	10	12	6	22.06	21.88	24.98	25.56	< 30.00
		1	1	21.89	21.92	24.91	25.49	< 30.00
		1	22	21.79	22.18	25.00	25.58	< 30.00
		24	0	20.50	20.40	23.46	24.04	< 30.00
		1	0	20.28	19.83	23.07	23.65	< 30.00
		1	23	19.77	19.95	22.87	23.45	< 30.00
3840.00	10	12	6	22.30	22.06	25.19	25.77	< 30.00
		1	1	22.30	22.02	25.17	25.75	< 30.00
		1	22	22.28	22.33	25.32	25.90	< 30.00
		24	0	20.79	20.55	23.68	24.26	< 30.00
		1	0	20.24	19.94	23.10	23.68	< 30.00
		1	23	20.24	20.04	23.15	23.73	< 30.00
3975.00	10	12	6	22.48	22.01	25.26	25.84	< 30.00
		1	1	22.40	22.13	25.27	25.85	< 30.00
		1	22	22.66	22.32	25.50	26.08	< 30.00
		24	0	21.05	20.59	23.83	24.41	< 30.00
		1	0	20.54	20.15	23.36	23.94	< 30.00
		1	23	20.55	19.95	23.27	23.85	< 30.00
3707.52	15	19	9	21.99	21.96	24.99	25.57	< 30.00
		1	1	22.15	22.06	25.12	25.70	< 30.00
		1	36	22.08	22.07	25.09	25.67	< 30.00
		38	0	20.53	20.53	23.54	24.12	< 30.00
		1	0	20.15	20.02	23.10	23.68	< 30.00
		1	37	20.15	20.07	23.12	23.70	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{\text{Port 0 Output Power} / 10} + 10^{\text{Port 1 Output Power} / 10}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	15	19	9	22.34	22.13	25.25	25.83	< 30.00
		1	1	22.38	22.10	25.25	25.83	< 30.00
		1	36	22.39	22.25	25.33	25.91	< 30.00
		38	0	20.82	20.68	23.76	24.34	< 30.00
		1	0	20.46	20.20	23.34	23.92	< 30.00
		1	37	20.53	20.19	23.37	23.95	< 30.00
3972.48	15	19	9	22.40	22.13	25.28	25.86	< 30.00
		1	1	22.50	22.08	25.31	25.89	< 30.00
		1	36	22.64	22.22	25.44	26.02	< 30.00
		38	0	20.91	20.54	23.74	24.32	< 30.00
		1	0	20.50	20.17	23.35	23.93	< 30.00
		1	37	20.79	20.22	23.53	24.11	< 30.00
3710.01	20	25	12	22.04	22.21	25.13	25.71	< 30.00
		1	1	22.10	22.05	25.08	25.66	< 30.00
		1	49	22.02	21.91	24.97	25.55	< 30.00
		51	0	20.43	20.57	23.51	24.09	< 30.00
		1	0	19.99	20.02	23.02	23.60	< 30.00
		1	50	19.94	19.98	22.97	23.55	< 30.00
3840.00	20	25	12	22.22	22.14	25.19	25.77	< 30.00
		1	1	22.47	22.06	25.28	25.86	< 30.00
		1	49	22.40	22.13	25.28	25.86	< 30.00
		51	0	20.83	20.67	23.76	24.34	< 30.00
		1	0	20.35	20.16	23.27	23.85	< 30.00
		1	50	20.29	20.08	23.20	23.78	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3969.99	20	25	12	22.41	22.03	25.23	25.81	< 30.00
		1	1	22.49	22.23	25.37	25.95	< 30.00
		1	49	22.54	22.19	25.38	25.96	< 30.00
		51	0	20.96	20.61	23.80	24.38	< 30.00
		1	0	20.42	20.15	23.29	23.87	< 30.00
		1	50	20.60	19.95	23.30	23.88	< 30.00
3715.02	30	36	79	22.03	22.13	25.09	25.67	< 30.00
		1	1	22.16	22.19	25.19	25.77	< 30.00
		1	76	22.23	22.41	25.33	25.91	< 30.00
		78	0	20.59	20.64	23.63	24.21	< 30.00
		1	0	20.18	20.19	23.19	23.77	< 30.00
		1	77	20.08	20.15	23.13	23.71	< 30.00
3840.00	30	36	79	22.42	22.26	25.35	25.93	< 30.00
		1	1	22.44	22.16	25.31	25.89	< 30.00
		1	76	22.63	22.28	25.47	26.05	< 30.00
		78	0	20.99	20.71	23.86	24.44	< 30.00
		1	0	20.41	20.34	23.38	23.96	< 30.00
		1	77	20.48	20.15	23.32	23.90	< 30.00
3964.98	30	36	79	22.47	22.21	25.36	25.94	< 30.00
		1	1	22.38	22.32	25.36	25.94	< 30.00
		1	76	22.71	22.30	25.52	26.10	< 30.00
		78	0	20.87	20.76	23.83	24.41	< 30.00
		1	0	20.62	20.41	23.53	24.11	< 30.00
		1	77	20.74	20.55	23.66	24.24	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3720.00	40	53	26	22.03	22.12	25.08	25.66	< 30.00
		1	1	22.36	22.42	25.40	25.98	< 30.00
		1	104	22.19	22.17	25.19	25.77	< 30.00
		106	0	20.62	20.66	23.65	24.23	< 30.00
		1	0	20.25	20.19	23.23	23.81	< 30.00
		1	105	20.12	20.17	23.16	23.74	< 30.00
3840.00	40	53	26	22.29	22.15	25.23	25.81	< 30.00
		1	1	22.42	22.26	25.36	25.94	< 30.00
		1	104	22.43	22.42	25.43	26.01	< 30.00
		106	0	20.87	20.71	23.80	24.38	< 30.00
		1	0	20.36	20.24	23.31	23.89	< 30.00
		1	105	20.28	20.33	23.31	23.89	< 30.00
3960.00	40	53	26	22.26	22.20	25.24	25.82	< 30.00
		1	1	22.52	22.69	25.62	26.20	< 30.00
		1	104	22.67	22.28	25.49	26.07	< 30.00
		106	0	20.84	20.66	23.76	24.34	< 30.00
		1	0	20.39	20.47	23.44	24.02	< 30.00
		1	105	20.60	20.30	23.46	24.04	< 30.00
3720.00	50	67	33	21.81	21.85	24.84	25.42	< 30.00
		1	1	22.04	21.86	24.96	25.54	< 30.00
		1	131	21.82	21.82	24.83	25.41	< 30.00
		133	0	20.28	20.39	23.35	23.93	< 30.00
		1	0	19.95	19.93	22.95	23.53	< 30.00
		1	132	19.86	19.86	22.87	23.45	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	50	67	33	22.14	22.01	25.09	25.67	< 30.00
		1	1	22.24	21.96	25.11	25.69	< 30.00
		1	131	22.22	22.21	25.22	25.80	< 30.00
		133	0	20.64	20.54	23.60	24.18	< 30.00
		1	0	20.25	19.92	23.10	23.68	< 30.00
		1	132	20.37	20.23	23.31	23.89	< 30.00
3954.99	50	67	33	22.22	22.06	25.15	25.73	< 30.00
		1	1	22.27	22.36	25.32	25.90	< 30.00
		1	131	22.54	21.92	25.25	25.83	< 30.00
		133	0	20.71	20.65	23.69	24.27	< 30.00
		1	0	20.20	20.32	23.27	23.85	< 30.00
		1	132	20.58	19.90	23.26	23.84	< 30.00
3730.02	60	81	40	21.77	21.85	24.82	25.40	< 30.00
		1	1	21.89	21.88	24.89	25.47	< 30.00
		1	131	21.81	21.90	24.87	25.45	< 30.00
		128	0	20.29	20.31	23.31	23.89	< 30.00
		1	0	19.95	19.80	22.89	23.47	< 30.00
		1	132	19.79	19.77	22.79	23.37	< 30.00
3840.00	60	81	40	22.14	22.04	25.10	25.68	< 30.00
		1	1	22.09	21.89	25.00	25.58	< 30.00
		1	131	22.18	21.99	25.10	25.68	< 30.00
		128	0	20.66	20.54	23.61	24.19	< 30.00
		1	0	20.07	19.88	22.99	23.57	< 30.00
		1	132	19.98	19.90	22.95	23.53	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3949.98	60	81	40	22.08	21.96	25.03	25.61	< 30.00
		1	1	22.26	22.04	25.16	25.74	< 30.00
		1	131	22.26	22.06	25.17	25.75	< 30.00
		128	0	20.57	20.36	23.47	24.05	< 30.00
		1	0	20.09	20.08	23.10	23.68	< 30.00
		1	132	20.30	19.55	22.95	23.53	< 30.00
3735.00	70	95	47	20.28	20.27	23.28	23.86	< 30.00
		1	1	20.16	20.26	23.22	23.80	< 30.00
		1	187	20.24	20.23	23.24	23.82	< 30.00
		189	0	20.23	20.33	23.29	23.87	< 30.00
		1	0	20.12	20.33	23.24	23.82	< 30.00
		1	188	20.20	20.31	23.27	23.85	< 30.00
3840.00	70	95	47	20.43	20.32	23.38	23.96	< 30.00
		1	1	20.51	20.30	23.41	23.99	< 30.00
		1	187	20.48	20.38	23.44	24.02	< 30.00
		189	0	20.48	20.37	23.44	24.02	< 30.00
		1	0	20.47	20.36	23.43	24.01	< 30.00
		1	188	20.45	20.37	23.42	24.00	< 30.00
3945.00	70	95	47	20.50	20.32	23.42	24.00	< 30.00
		1	1	20.45	20.39	23.43	24.01	< 30.00
		1	187	20.44	20.38	23.42	24.00	< 30.00
		189	0	20.43	20.36	23.40	23.98	< 30.00
		1	0	20.48	20.35	23.43	24.01	< 30.00
		1	188	20.50	20.33	23.43	24.01	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3740.01	80	109	54	21.79	21.76	24.78	25.36	< 30.00
		1	1	21.76	21.78	24.78	25.36	< 30.00
		1	215	21.62	21.84	24.74	25.32	< 30.00
		217	0	20.16	20.25	23.22	23.80	< 30.00
		1	0	19.78	19.82	22.81	23.39	< 30.00
		1	216	19.56	19.68	22.63	23.21	< 30.00
3840.00	80	109	54	21.99	21.82	24.91	25.49	< 30.00
		1	1	21.87	21.95	24.92	25.50	< 30.00
		1	215	21.70	21.67	24.70	25.28	< 30.00
		217	0	20.45	20.34	23.40	23.98	< 30.00
		1	0	19.87	19.69	22.79	23.37	< 30.00
		1	216	19.80	19.82	22.82	23.40	< 30.00
3939.99	80	109	54	21.96	21.89	24.94	25.52	< 30.00
		1	1	21.88	21.99	24.94	25.52	< 30.00
		1	215	22.30	21.63	24.98	25.56	< 30.00
		217	0	20.44	20.36	23.41	23.99	< 30.00
		1	0	19.84	19.93	22.89	23.47	< 30.00
		1	216	20.19	19.53	22.89	23.47	< 30.00
3745.02	90	123	61	21.73	21.72	24.73	25.31	< 30.00
		1	1	21.89	21.90	24.90	25.48	< 30.00
		1	243	21.67	21.97	24.83	25.41	< 30.00
		245	0	20.18	20.22	23.21	23.79	< 30.00
		1	0	19.80	19.75	22.78	23.36	< 30.00
		1	244	19.66	19.75	22.71	23.29	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM QPSK								
3840.00	90	123	61	22.01	21.86	24.95	25.53	< 30.00
		1	1	22.00	22.04	25.03	25.61	< 30.00
		1	243	21.86	22.36	25.13	25.71	< 30.00
		245	0	20.42	20.34	23.39	23.97	< 30.00
		1	0	19.86	19.68	22.78	23.36	< 30.00
		1	244	19.79	19.85	22.83	23.41	< 30.00
3934.98	90	123	61	21.92	21.95	24.94	25.52	< 30.00
		1	1	22.14	22.22	25.19	25.77	< 30.00
		1	243	22.58	21.70	25.17	25.75	< 30.00
		245	0	20.39	20.42	23.42	24.00	< 30.00
		1	0	19.86	20.05	22.97	23.55	< 30.00
		1	244	20.23	19.45	22.87	23.45	< 30.00
3750.00	100	137	68	21.73	21.80	24.77	25.35	< 30.00
		1	1	21.85	21.81	24.84	25.42	< 30.00
		1	271	21.72	21.73	24.74	25.32	< 30.00
		273	0	20.12	20.18	23.16	23.74	< 30.00
		1	0	19.66	19.70	22.69	23.27	< 30.00
		1	272	19.52	19.79	22.67	23.25	< 30.00
3840.00	100	137	68	21.99	21.88	24.94	25.52	< 30.00
		1	1	21.76	21.67	24.73	25.31	< 30.00
		1	271	21.77	21.98	24.89	25.47	< 30.00
		273	0	20.39	20.40	23.41	23.99	< 30.00
		1	0	19.49	19.39	22.45	23.03	< 30.00
		1	272	19.72	19.82	22.78	23.36	< 30.00
3930.00	100	137	68	21.90	21.99	24.96	25.54	< 30.00
		1	1	21.90	21.85	24.89	25.47	< 30.00
		1	271	22.21	21.64	24.95	25.53	< 30.00
		273	0	20.43	20.43	23.44	24.02	< 30.00
		1	0	19.62	19.65	22.64	23.22	< 30.00
		1	272	19.95	19.47	22.73	23.31	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3705.00	10	12	6	21.57	21.57	24.58	25.16	< 30.00
		1	1	21.48	21.48	24.49	25.07	< 30.00
		1	22	21.44	21.50	24.48	25.06	< 30.00
		24	0	20.52	20.44	23.49	24.07	< 30.00
		1	0	19.73	20.32	23.05	23.63	< 30.00
		1	23	19.95	20.10	23.04	23.62	< 30.00
3840.00	10	12	6	21.73	21.71	24.73	25.31	< 30.00
		1	1	21.65	21.54	24.61	25.19	< 30.00
		1	22	21.70	21.42	24.57	25.15	< 30.00
		24	0	20.64	20.56	23.61	24.19	< 30.00
		1	0	20.28	20.14	23.22	23.80	< 30.00
		1	23	20.17	20.16	23.18	23.76	< 30.00
3975.00	10	12	6	21.93	21.67	24.81	25.39	< 30.00
		1	1	21.90	21.48	24.70	25.28	< 30.00
		1	22	22.07	21.41	24.76	25.34	< 30.00
		24	0	21.10	20.62	23.88	24.46	< 30.00
		1	0	20.39	20.32	23.36	23.94	< 30.00
		1	23	20.56	20.16	23.37	23.95	< 30.00
3707.52	15	19	9	21.40	21.49	24.46	25.04	< 30.00
		1	1	21.55	21.76	24.67	25.25	< 30.00
		1	36	21.58	21.78	24.69	25.27	< 30.00
		38	0	20.38	20.54	23.47	24.05	< 30.00
		1	0	20.05	20.13	23.10	23.68	< 30.00
		1	37	19.90	20.07	23.00	23.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	15	19	9	21.84	21.69	24.78	25.36	< 30.00
		1	1	21.89	21.77	24.84	25.42	< 30.00
		1	36	21.82	21.97	24.90	25.48	< 30.00
		38	0	20.87	20.59	23.74	24.32	< 30.00
		1	0	20.18	20.15	23.18	23.76	< 30.00
		1	37	20.35	20.00	23.19	23.77	< 30.00
3972.48	15	19	9	21.97	21.63	24.81	25.39	< 30.00
		1	1	22.02	21.76	24.90	25.48	< 30.00
		1	36	22.02	21.57	24.81	25.39	< 30.00
		38	0	21.00	20.58	23.80	24.38	< 30.00
		1	0	20.41	20.10	23.27	23.85	< 30.00
		1	37	20.52	20.12	23.34	23.92	< 30.00
3710.01	20	25	12	21.37	21.64	24.52	25.10	< 30.00
		1	1	21.46	21.88	24.68	25.26	< 30.00
		1	49	21.52	21.44	24.49	25.07	< 30.00
		51	0	20.39	20.56	23.48	24.06	< 30.00
		1	0	19.91	20.28	23.11	23.69	< 30.00
		1	50	19.88	20.12	23.01	23.59	< 30.00
3840.00	20	25	12	21.81	21.72	24.78	25.36	< 30.00
		1	1	21.74	21.73	24.74	25.32	< 30.00
		1	49	21.81	21.68	24.76	25.34	< 30.00
		51	0	20.85	20.65	23.76	24.34	< 30.00
		1	0	20.28	20.17	23.24	23.82	< 30.00
		1	50	20.31	20.18	23.26	23.84	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3969.99	20	25	12	21.91	21.64	24.79	25.37	< 30.00
		1	1	21.85	21.73	24.80	25.38	< 30.00
		1	49	22.01	21.63	24.83	25.41	< 30.00
		51	0	20.92	20.59	23.77	24.35	< 30.00
		1	0	20.22	20.35	23.29	23.87	< 30.00
		1	50	20.58	20.26	23.43	24.01	< 30.00
3715.02	30	36	79	21.58	21.79	24.70	25.28	< 30.00
		1	1	21.64	21.52	24.59	25.17	< 30.00
		1	76	21.65	21.60	24.63	25.21	< 30.00
		78	0	20.57	20.74	23.67	24.25	< 30.00
		1	0	20.18	20.37	23.29	23.87	< 30.00
		1	77	20.05	20.18	23.13	23.71	< 30.00
3840.00	30	36	79	21.80	21.72	24.77	25.35	< 30.00
		1	1	21.95	21.42	24.70	25.28	< 30.00
		1	76	21.86	21.85	24.86	25.44	< 30.00
		78	0	20.85	20.75	23.81	24.39	< 30.00
		1	0	20.50	20.05	23.29	23.87	< 30.00
		1	77	20.41	20.68	23.56	24.14	< 30.00
3964.98	30	36	79	22.04	21.73	24.90	25.48	< 30.00
		1	1	21.81	21.90	24.87	25.45	< 30.00
		1	76	22.01	21.79	24.91	25.49	< 30.00
		78	0	20.94	20.72	23.84	24.42	< 30.00
		1	0	20.35	20.40	23.39	23.97	< 30.00
		1	77	20.47	20.06	23.28	23.86	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3720.00	40	53	26	21.65	21.75	24.71	25.29	< 30.00
		1	1	21.77	21.80	24.80	25.38	< 30.00
		1	104	21.50	21.64	24.58	25.16	< 30.00
		106	0	20.60	20.63	23.62	24.20	< 30.00
		1	0	20.16	20.22	23.20	23.78	< 30.00
		1	105	19.96	20.38	23.18	23.76	< 30.00
3840.00	40	53	26	21.81	21.72	24.78	25.36	< 30.00
		1	1	21.93	21.82	24.88	25.46	< 30.00
		1	104	21.81	21.58	24.71	25.29	< 30.00
		106	0	20.86	20.66	23.77	24.35	< 30.00
		1	0	20.27	20.15	23.22	23.80	< 30.00
		1	105	20.13	20.33	23.24	23.82	< 30.00
3960.00	40	53	26	21.93	21.82	24.89	25.47	< 30.00
		1	1	21.85	21.85	24.86	25.44	< 30.00
		1	104	22.13	21.84	24.99	25.57	< 30.00
		106	0	20.82	20.80	23.82	24.40	< 30.00
		1	0	20.45	20.58	23.52	24.10	< 30.00
		1	105	20.48	20.13	23.32	23.90	< 30.00
3720.00	50	67	33	21.40	21.37	24.40	24.98	< 30.00
		1	1	21.59	21.54	24.57	25.15	< 30.00
		1	131	21.34	21.47	24.41	24.99	< 30.00
		133	0	20.33	20.47	23.41	23.99	< 30.00
		1	0	19.78	20.21	23.01	23.59	< 30.00
		1	132	19.74	20.06	22.91	23.49	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	50	67	33	21.71	21.49	24.61	25.19	< 30.00
		1	1	21.54	21.38	24.47	25.05	< 30.00
		1	131	21.54	21.60	24.58	25.16	< 30.00
		133	0	20.68	20.57	23.64	24.22	< 30.00
		1	0	20.05	19.90	22.99	23.57	< 30.00
		1	132	20.29	19.91	23.11	23.69	< 30.00
3954.99	50	67	33	21.64	21.59	24.62	25.20	< 30.00
		1	1	21.50	21.94	24.74	25.32	< 30.00
		1	131	21.80	21.54	24.68	25.26	< 30.00
		133	0	20.68	20.67	23.68	24.26	< 30.00
		1	0	20.12	20.30	23.23	23.81	< 30.00
		1	132	20.39	19.94	23.18	23.76	< 30.00
3730.02	60	81	40	21.27	21.34	24.32	24.90	< 30.00
		1	1	21.39	21.51	24.46	25.04	< 30.00
		1	131	21.32	21.40	24.37	24.95	< 30.00
		128	0	20.16	20.36	23.27	23.85	< 30.00
		1	0	19.90	19.76	22.84	23.42	< 30.00
		1	132	19.73	19.95	22.85	23.43	< 30.00
3840.00	60	81	40	21.71	21.57	24.65	25.23	< 30.00
		1	1	21.26	21.50	24.39	24.97	< 30.00
		1	131	21.43	21.62	24.54	25.12	< 30.00
		128	0	20.60	20.53	23.57	24.15	< 30.00
		1	0	19.88	19.83	22.86	23.44	< 30.00
		1	132	19.99	19.86	22.94	23.52	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3949.98	60	81	40	21.66	21.40	24.54	25.12	< 30.00
		1	1	21.68	21.54	24.62	25.20	< 30.00
		1	131	21.75	20.78	24.30	24.88	< 30.00
		128	0	20.52	20.39	23.46	24.04	< 30.00
		1	0	19.88	19.99	22.95	23.53	< 30.00
		1	132	20.17	19.47	22.85	23.43	< 30.00
3735.00	70	95	47	20.20	20.31	23.26	23.84	< 30.00
		1	1	20.18	20.28	23.24	23.82	< 30.00
		1	187	20.19	20.27	23.24	23.82	< 30.00
		189	0	20.25	20.26	23.27	23.85	< 30.00
		1	0	20.26	20.35	23.31	23.89	< 30.00
		1	188	20.26	20.24	23.26	23.84	< 30.00
3840.00	70	95	47	20.47	20.35	23.42	24.00	< 30.00
		1	1	20.47	20.35	23.42	24.00	< 30.00
		1	187	20.45	20.33	23.40	23.98	< 30.00
		189	0	20.45	20.33	23.40	23.98	< 30.00
		1	0	20.54	20.33	23.45	24.03	< 30.00
		1	188	20.52	20.33	23.44	24.02	< 30.00
3945.00	70	95	47	20.50	20.42	23.47	24.05	< 30.00
		1	1	20.50	20.42	23.47	24.05	< 30.00
		1	187	20.48	20.41	23.46	24.04	< 30.00
		189	0	20.47	20.40	23.44	24.02	< 30.00
		1	0	20.48	20.39	23.44	24.02	< 30.00
		1	188	20.45	20.38	23.42	24.00	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3740.01	80	109	54	21.24	21.23	24.25	24.83	< 30.00
		1	1	21.24	21.35	24.30	24.88	< 30.00
		1	215	21.06	21.12	24.10	24.68	< 30.00
		217	0	20.20	20.20	23.21	23.79	< 30.00
		1	0	19.85	19.87	22.87	23.45	< 30.00
		1	216	19.59	19.82	22.72	23.30	< 30.00
3840.00	80	109	54	21.49	21.42	24.47	25.05	< 30.00
		1	1	21.39	21.18	24.30	24.88	< 30.00
		1	215	21.31	21.32	24.32	24.90	< 30.00
		217	0	20.40	20.30	23.36	23.94	< 30.00
		1	0	19.64	19.83	22.75	23.33	< 30.00
		1	216	19.79	19.97	22.89	23.47	< 30.00
3939.99	80	109	54	21.45	21.45	24.46	25.04	< 30.00
		1	1	21.24	21.60	24.44	25.02	< 30.00
		1	215	21.44	21.11	24.29	24.87	< 30.00
		217	0	20.35	20.39	23.38	23.96	< 30.00
		1	0	19.82	20.02	22.93	23.51	< 30.00
		1	216	20.03	19.32	22.70	23.28	< 30.00
3745.02	90	123	61	21.17	21.29	24.24	24.82	< 30.00
		1	1	21.35	21.45	24.41	24.99	< 30.00
		1	243	21.18	21.31	24.25	24.83	< 30.00
		245	0	20.17	20.29	23.24	23.82	< 30.00
		1	0	19.77	19.91	22.85	23.43	< 30.00
		1	244	19.59	19.68	22.65	23.23	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 16QAM								
3840.00	90	123	61	21.53	21.41	24.48	25.06	< 30.00
		1	1	21.28	21.32	24.31	24.89	< 30.00
		1	243	21.50	21.41	24.47	25.05	< 30.00
		245	0	20.48	20.34	23.42	24.00	< 30.00
		1	0	19.47	19.69	22.59	23.17	< 30.00
		1	244	19.80	19.96	22.89	23.47	< 30.00
3934.98	90	123	61	21.37	21.53	24.46	25.04	< 30.00
		1	1	21.49	21.43	24.47	25.05	< 30.00
		1	243	21.87	21.23	24.57	25.15	< 30.00
		245	0	20.46	20.48	23.48	24.06	< 30.00
		1	0	19.85	19.74	22.81	23.39	< 30.00
		1	244	20.01	19.51	22.78	23.36	< 30.00
3750.00	100	137	68	21.22	21.28	24.26	24.84	< 30.00
		1	1	21.34	21.34	24.35	24.93	< 30.00
		1	271	21.12	21.27	24.21	24.79	< 30.00
		273	0	20.09	20.24	23.17	23.75	< 30.00
		1	0	19.54	19.70	22.63	23.21	< 30.00
		1	272	19.52	19.55	22.55	23.13	< 30.00
3840.00	100	137	68	21.42	21.39	24.41	24.99	< 30.00
		1	1	21.14	21.21	24.18	24.76	< 30.00
		1	271	21.25	21.46	24.37	24.95	< 30.00
		273	0	20.37	20.35	23.37	23.95	< 30.00
		1	0	19.50	19.51	22.52	23.10	< 30.00
		1	272	19.67	19.60	22.65	23.23	< 30.00
3930.00	100	137	68	21.41	21.44	24.43	25.01	< 30.00
		1	1	21.23	21.44	24.34	24.92	< 30.00
		1	271	21.50	21.22	24.37	24.95	< 30.00
		273	0	20.50	20.38	23.45	24.03	< 30.00
		1	0	19.57	19.66	22.62	23.20	< 30.00
		1	272	20.01	19.32	22.69	23.27	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3705.00	10	12	6	20.08	20.03	23.06	23.64	< 30.00
		1	1	20.29	20.05	23.18	23.76	< 30.00
		1	22	20.17	20.17	23.18	23.76	< 30.00
		24	0	19.90	20.04	22.98	23.56	< 30.00
		1	0	20.11	20.07	23.10	23.68	< 30.00
		1	23	20.10	20.01	23.07	23.65	< 30.00
3840.00	10	12	6	20.18	20.06	23.13	23.71	< 30.00
		1	1	20.33	20.09	23.22	23.80	< 30.00
		1	22	20.43	20.02	23.24	23.82	< 30.00
		24	0	20.20	20.17	23.20	23.78	< 30.00
		1	0	20.49	20.18	23.35	23.93	< 30.00
		1	23	20.41	20.24	23.33	23.91	< 30.00
3975.00	10	12	6	20.46	20.14	23.31	23.89	< 30.00
		1	1	20.57	20.29	23.44	24.02	< 30.00
		1	22	20.64	20.14	23.41	23.99	< 30.00
		24	0	20.46	20.23	23.36	23.94	< 30.00
		1	0	20.43	20.30	23.38	23.96	< 30.00
		1	23	20.67	20.32	23.51	24.09	< 30.00
3707.52	15	19	9	19.98	20.13	23.06	23.64	< 30.00
		1	1	20.03	20.08	23.06	23.64	< 30.00
		1	36	20.08	20.06	23.08	23.66	< 30.00
		38	0	19.90	20.11	23.02	23.60	< 30.00
		1	0	20.09	20.04	23.07	23.65	< 30.00
		1	37	20.11	20.07	23.10	23.68	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	15	19	9	20.41	20.26	23.34	23.92	< 30.00
		1	1	20.60	20.16	23.39	23.97	< 30.00
		1	36	20.43	20.29	23.37	23.95	< 30.00
		38	0	20.38	20.26	23.33	23.91	< 30.00
		1	0	20.43	20.12	23.29	23.87	< 30.00
		1	37	20.48	20.22	23.37	23.95	< 30.00
3972.48	15	19	9	20.51	20.13	23.34	23.92	< 30.00
		1	1	20.58	20.16	23.39	23.97	< 30.00
		1	36	20.62	20.16	23.40	23.98	< 30.00
		38	0	20.43	20.08	23.27	23.85	< 30.00
		1	0	20.69	20.38	23.55	24.13	< 30.00
		1	37	20.74	20.43	23.60	24.18	< 30.00
3710.01	20	25	12	19.83	20.04	22.95	23.53	< 30.00
		1	1	20.23	20.19	23.22	23.80	< 30.00
		1	49	20.06	20.21	23.14	23.72	< 30.00
		51	0	19.95	20.08	23.03	23.61	< 30.00
		1	0	20.10	20.25	23.18	23.76	< 30.00
		1	50	20.15	20.16	23.16	23.74	< 30.00
3840.00	20	25	12	20.36	20.22	23.30	23.88	< 30.00
		1	1	20.41	20.11	23.27	23.85	< 30.00
		1	49	20.44	20.04	23.26	23.84	< 30.00
		51	0	20.40	20.26	23.34	23.92	< 30.00
		1	0	20.36	20.08	23.23	23.81	< 30.00
		1	50	20.40	20.01	23.22	23.80	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3969.99	20	25	12	20.38	20.11	23.25	23.83	< 30.00
		1	1	20.48	20.30	23.40	23.98	< 30.00
		1	49	20.58	20.23	23.42	24.00	< 30.00
		51	0	20.48	20.19	23.35	23.93	< 30.00
		1	0	20.38	20.15	23.28	23.86	< 30.00
		1	50	20.57	20.13	23.37	23.95	< 30.00
3715.02	30	36	79	20.03	20.08	23.06	23.64	< 30.00
		1	1	20.36	20.40	23.39	23.97	< 30.00
		1	76	20.39	20.37	23.39	23.97	< 30.00
		78	0	20.07	20.13	23.11	23.69	< 30.00
		1	0	20.47	20.43	23.46	24.04	< 30.00
		1	77	20.22	20.33	23.29	23.87	< 30.00
3840.00	30	36	79	20.38	20.23	23.32	23.90	< 30.00
		1	1	20.67	20.43	23.56	24.14	< 30.00
		1	76	20.44	20.41	23.44	24.02	< 30.00
		78	0	20.27	20.26	23.27	23.85	< 30.00
		1	0	20.64	20.35	23.51	24.09	< 30.00
		1	77	20.44	20.39	23.42	24.00	< 30.00
3964.98	30	36	79	20.44	20.31	23.39	23.97	< 30.00
		1	1	20.72	20.60	23.67	24.25	< 30.00
		1	76	20.79	20.31	23.57	24.15	< 30.00
		78	0	20.44	20.22	23.34	23.92	< 30.00
		1	0	20.60	20.71	23.67	24.25	< 30.00
		1	77	20.86	20.29	23.59	24.17	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3720.00	40	53	26	20.05	20.14	23.10	23.68	< 30.00
		1	1	20.31	20.39	23.36	23.94	< 30.00
		1	104	20.10	20.19	23.15	23.73	< 30.00
		106	0	20.08	20.13	23.12	23.70	< 30.00
		1	0	20.28	20.30	23.30	23.88	< 30.00
		1	105	20.07	20.27	23.18	23.76	< 30.00
3840.00	40	53	26	20.36	20.28	23.33	23.91	< 30.00
		1	1	20.48	20.29	23.40	23.98	< 30.00
		1	104	20.34	20.14	23.25	23.83	< 30.00
		106	0	20.35	20.24	23.31	23.89	< 30.00
		1	0	20.42	20.33	23.39	23.97	< 30.00
		1	105	20.35	20.18	23.28	23.86	< 30.00
3960.00	40	53	26	20.30	20.33	23.33	23.91	< 30.00
		1	1	20.49	20.46	23.49	24.07	< 30.00
		1	104	20.69	20.17	23.45	24.03	< 30.00
		106	0	20.34	20.23	23.30	23.88	< 30.00
		1	0	20.35	20.45	23.41	23.99	< 30.00
		1	105	20.68	20.08	23.40	23.98	< 30.00
3720.00	50	67	33	19.82	19.99	22.92	23.50	< 30.00
		1	1	20.22	20.24	23.24	23.82	< 30.00
		1	131	19.90	20.08	23.00	23.58	< 30.00
		133	0	19.87	19.90	22.90	23.48	< 30.00
		1	0	19.90	20.26	23.09	23.67	< 30.00
		1	132	19.95	19.95	22.96	23.54	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	50	67	33	20.19	20.09	23.15	23.73	< 30.00
		1	1	20.17	19.88	23.04	23.62	< 30.00
		1	131	20.18	19.94	23.07	23.65	< 30.00
		133	0	20.12	20.08	23.11	23.69	< 30.00
		1	0	20.30	20.07	23.20	23.78	< 30.00
		1	132	20.15	19.90	23.04	23.62	< 30.00
3954.99	50	67	33	20.08	20.15	23.13	23.71	< 30.00
		1	1	20.25	20.27	23.27	23.85	< 30.00
		1	131	20.44	20.01	23.24	23.82	< 30.00
		133	0	20.21	20.14	23.19	23.77	< 30.00
		1	0	20.17	20.34	23.27	23.85	< 30.00
		1	132	20.50	19.92	23.23	23.81	< 30.00
3730.02	60	81	40	19.73	19.88	22.82	23.40	< 30.00
		1	1	19.96	19.98	22.98	23.56	< 30.00
		1	131	19.88	19.85	22.87	23.45	< 30.00
		128	0	19.79	19.79	22.80	23.38	< 30.00
		1	0	19.95	20.11	23.04	23.62	< 30.00
		1	132	19.85	20.06	22.96	23.54	< 30.00
3840.00	60	81	40	20.17	20.01	23.10	23.68	< 30.00
		1	1	20.09	20.06	23.08	23.66	< 30.00
		1	131	20.27	20.15	23.22	23.80	< 30.00
		128	0	20.12	20.02	23.08	23.66	< 30.00
		1	0	20.21	20.15	23.19	23.77	< 30.00
		1	132	20.35	20.11	23.24	23.82	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3949.98	60	81	40	20.01	19.94	22.98	23.56	< 30.00
		1	1	20.16	20.25	23.21	23.79	< 30.00
		1	131	20.62	19.80	23.24	23.82	< 30.00
		128	0	20.00	19.90	22.96	23.54	< 30.00
		1	0	20.26	20.25	23.27	23.85	< 30.00
		1	132	20.31	19.81	23.08	23.66	< 30.00
3735.00	70	95	47	19.78	19.75	22.77	23.35	< 30.00
		1	1	19.66	19.75	22.71	23.29	< 30.00
		1	187	19.75	19.84	22.80	23.38	< 30.00
		189	0	19.74	19.84	22.80	23.38	< 30.00
		1	0	19.75	19.83	22.80	23.38	< 30.00
		1	188	19.75	19.74	22.75	23.33	< 30.00
3840.00	70	95	47	19.91	19.82	22.88	23.46	< 30.00
		1	1	19.93	19.83	22.89	23.47	< 30.00
		1	187	20.01	19.81	22.92	23.50	< 30.00
		189	0	20.02	19.82	22.93	23.51	< 30.00
		1	0	19.92	19.82	22.88	23.46	< 30.00
		1	188	20.01	19.82	22.93	23.51	< 30.00
3945.00	70	95	47	20.02	19.88	22.96	23.54	< 30.00
		1	1	20.02	19.87	22.95	23.53	< 30.00
		1	187	20.01	19.85	22.94	23.52	< 30.00
		189	0	20.01	19.85	22.94	23.52	< 30.00
		1	0	19.99	19.95	22.98	23.56	< 30.00
		1	188	20.01	19.84	22.94	23.52	< 30.00

Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$

Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3740.01	80	109	54	19.70	19.82	22.77	23.35	< 30.00
		1	1	20.15	20.08	23.13	23.71	< 30.00
		1	215	19.69	20.12	22.92	23.50	< 30.00
		217	0	19.66	19.81	22.75	23.33	< 30.00
		1	0	19.81	20.12	22.98	23.56	< 30.00
		1	216	19.70	20.07	22.90	23.48	< 30.00
3840.00	80	109	54	20.00	19.84	22.93	23.51	< 30.00
		1	1	19.86	19.79	22.83	23.41	< 30.00
		1	215	19.78	19.80	22.80	23.38	< 30.00
		217	0	19.96	19.82	22.90	23.48	< 30.00
		1	0	19.76	19.72	22.75	23.33	< 30.00
		1	216	19.85	20.05	22.96	23.54	< 30.00
3939.99	80	109	54	19.96	19.99	22.98	23.56	< 30.00
		1	1	20.06	20.05	23.06	23.64	< 30.00
		1	215	20.15	19.58	22.88	23.46	< 30.00
		217	0	19.99	19.98	23.00	23.58	< 30.00
		1	0	19.95	19.99	22.98	23.56	< 30.00
		1	216	20.10	19.41	22.78	23.36	< 30.00
3745.02	90	123	61	19.66	19.83	22.76	23.34	< 30.00
		1	1	19.95	19.93	22.95	23.53	< 30.00
		1	243	19.57	19.95	22.77	23.35	< 30.00
		245	0	19.64	19.78	22.72	23.30	< 30.00
		1	0	19.68	19.94	22.82	23.40	< 30.00
		1	244	19.70	19.85	22.79	23.37	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 64QAM								
3840.00	90	123	61	20.00	19.95	22.98	23.56	< 30.00
		1	1	19.80	19.73	22.78	23.36	< 30.00
		1	243	19.94	19.96	22.96	23.54	< 30.00
		245	0	19.81	19.90	22.87	23.45	< 30.00
		1	0	19.65	19.73	22.70	23.28	< 30.00
		1	244	19.89	19.75	22.83	23.41	< 30.00
3934.98	90	123	61	19.93	20.02	22.98	23.56	< 30.00
		1	1	19.99	19.98	22.99	23.57	< 30.00
		1	243	20.27	19.75	23.03	23.61	< 30.00
		245	0	20.05	19.94	23.01	23.59	< 30.00
		1	0	19.91	19.83	22.88	23.46	< 30.00
		1	244	20.12	19.66	22.90	23.48	< 30.00
3750.00	100	137	68	19.73	19.79	22.77	23.35	< 30.00
		1	1	19.84	19.94	22.90	23.48	< 30.00
		1	271	19.74	19.87	22.82	23.40	< 30.00
		273	0	19.57	19.74	22.67	23.25	< 30.00
		1	0	19.60	19.70	22.66	23.24	< 30.00
		1	272	19.52	19.72	22.63	23.21	< 30.00
3840.00	100	137	68	19.93	19.93	22.94	23.52	< 30.00
		1	1	19.83	19.57	22.71	23.29	< 30.00
		1	271	19.89	20.03	22.97	23.55	< 30.00
		273	0	19.77	19.85	22.82	23.40	< 30.00
		1	0	19.64	19.30	22.49	23.07	< 30.00
		1	272	19.74	19.73	22.75	23.33	< 30.00
3930.00	100	137	68	19.99	20.07	23.04	23.62	< 30.00
		1	1	19.99	20.10	23.06	23.64	< 30.00
		1	271	20.36	19.56	22.98	23.56	< 30.00
		273	0	19.97	19.86	22.93	23.51	< 30.00
		1	0	19.75	19.70	22.73	23.31	< 30.00
		1	272	20.11	19.37	22.76	23.34	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3705.00	10	12	6	17.00	16.84	19.93	20.51	< 30.00
		1	1	16.88	16.96	19.93	20.51	< 30.00
		1	22	16.83	16.87	19.86	20.44	< 30.00
		24	0	17.01	16.94	19.99	20.57	< 30.00
		1	0	16.85	16.92	19.90	20.48	< 30.00
		1	23	16.72	16.86	19.80	20.38	< 30.00
3840.00	10	12	6	17.23	16.93	20.10	20.68	< 30.00
		1	1	17.00	16.99	20.00	20.58	< 30.00
		1	22	16.95	16.95	19.96	20.54	< 30.00
		24	0	17.18	16.92	20.07	20.65	< 30.00
		1	0	17.01	17.03	20.03	20.61	< 30.00
		1	23	16.96	16.89	19.93	20.51	< 30.00
3975.00	10	12	6	17.36	16.97	20.18	20.76	< 30.00
		1	1	17.27	17.00	20.15	20.73	< 30.00
		1	22	17.21	17.00	20.12	20.70	< 30.00
		24	0	17.43	17.09	20.28	20.86	< 30.00
		1	0	17.31	17.08	20.21	20.79	< 30.00
		1	23	17.25	16.99	20.13	20.71	< 30.00
3707.52	15	19	9	16.94	17.14	20.05	20.63	< 30.00
		1	1	16.85	16.88	19.88	20.46	< 30.00
		1	36	16.67	17.02	19.86	20.44	< 30.00
		38	0	17.01	17.09	20.06	20.64	< 30.00
		1	0	16.82	16.95	19.89	20.47	< 30.00
		1	37	16.97	17.04	20.01	20.59	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	15	19	9	17.36	17.20	20.30	20.88	< 30.00
		1	1	17.26	17.08	20.18	20.76	< 30.00
		1	36	17.04	17.27	20.17	20.75	< 30.00
		38	0	17.33	17.22	20.29	20.87	< 30.00
		1	0	17.26	17.08	20.18	20.76	< 30.00
		1	37	17.28	17.00	20.15	20.73	< 30.00
3972.48	15	19	9	17.48	17.03	20.27	20.85	< 30.00
		1	1	17.29	16.97	20.15	20.73	< 30.00
		1	36	17.47	16.96	20.23	20.81	< 30.00
		38	0	17.46	17.02	20.25	20.83	< 30.00
		1	0	17.40	17.09	20.26	20.84	< 30.00
		1	37	17.36	17.09	20.23	20.81	< 30.00
3710.01	20	25	12	16.91	17.07	20.00	20.58	< 30.00
		1	1	16.73	17.09	19.92	20.50	< 30.00
		1	49	17.00	16.89	19.96	20.54	< 30.00
		51	0	16.94	17.06	20.01	20.59	< 30.00
		1	0	16.73	17.18	19.97	20.55	< 30.00
		1	50	16.82	16.96	19.90	20.48	< 30.00
3840.00	20	25	12	17.38	17.21	20.31	20.89	< 30.00
		1	1	17.04	17.03	20.04	20.62	< 30.00
		1	49	17.49	16.96	20.24	20.82	< 30.00
		51	0	17.33	17.16	20.26	20.84	< 30.00
		1	0	17.19	17.15	20.18	20.76	< 30.00
		1	50	17.02	16.91	19.98	20.56	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3969.99	20	25	12	17.51	17.20	20.37	20.95	< 30.00
		1	1	17.28	17.18	20.24	20.82	< 30.00
		1	49	17.29	17.00	20.16	20.74	< 30.00
		51	0	17.47	17.18	20.34	20.92	< 30.00
		1	0	17.21	17.16	20.20	20.78	< 30.00
		1	50	17.35	17.16	20.27	20.85	< 30.00
3715.02	30	36	79	17.05	17.06	20.06	20.64	< 30.00
		1	1	17.02	17.11	20.08	20.66	< 30.00
		1	76	16.74	17.12	19.94	20.52	< 30.00
		78	0	17.03	17.13	20.09	20.67	< 30.00
		1	0	16.90	17.08	20.00	20.58	< 30.00
		1	77	16.90	17.03	19.98	20.56	< 30.00
3840.00	30	36	79	17.31	17.16	20.24	20.82	< 30.00
		1	1	17.37	17.08	20.24	20.82	< 30.00
		1	76	17.40	17.19	20.31	20.89	< 30.00
		78	0	17.32	17.28	20.31	20.89	< 30.00
		1	0	17.28	17.12	20.21	20.79	< 30.00
		1	77	17.40	17.29	20.36	20.94	< 30.00
3964.98	30	36	79	17.47	17.18	20.34	20.92	< 30.00
		1	1	17.31	17.37	20.35	20.93	< 30.00
		1	76	17.41	16.89	20.17	20.75	< 30.00
		78	0	17.50	17.34	20.43	21.01	< 30.00
		1	0	17.55	17.37	20.47	21.05	< 30.00
		1	77	17.66	17.16	20.43	21.01	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3720.00	40	53	26	17.11	17.13	20.13	20.71	< 30.00
		1	1	16.96	17.37	20.18	20.76	< 30.00
		1	104	16.90	16.98	19.95	20.53	< 30.00
		106	0	17.02	17.14	20.09	20.67	< 30.00
		1	0	16.97	17.26	20.13	20.71	< 30.00
		1	105	16.78	16.97	19.89	20.47	< 30.00
3840.00	40	53	26	17.37	17.15	20.27	20.85	< 30.00
		1	1	17.55	17.11	20.34	20.92	< 30.00
		1	104	17.25	17.25	20.26	20.84	< 30.00
		106	0	17.26	17.27	20.28	20.86	< 30.00
		1	0	17.33	17.26	20.31	20.89	< 30.00
		1	105	17.29	17.13	20.22	20.80	< 30.00
3960.00	40	53	26	17.39	17.20	20.30	20.88	< 30.00
		1	1	17.18	17.53	20.37	20.95	< 30.00
		1	104	17.65	17.29	20.48	21.06	< 30.00
		106	0	17.31	17.35	20.34	20.92	< 30.00
		1	0	17.35	17.27	20.32	20.90	< 30.00
		1	105	17.33	17.09	20.22	20.80	< 30.00
3720.00	50	67	33	16.74	16.91	19.83	20.41	< 30.00
		1	1	16.85	17.06	19.97	20.55	< 30.00
		1	131	16.62	16.87	19.76	20.34	< 30.00
		133	0	16.83	16.83	19.84	20.42	< 30.00
		1	0	16.58	16.85	19.73	20.31	< 30.00
		1	132	16.50	16.80	19.66	20.24	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	50	67	33	17.03	17.00	20.02	20.60	< 30.00
		1	1	16.82	17.01	19.93	20.51	< 30.00
		1	131	16.92	17.16	20.05	20.63	< 30.00
		133	0	17.18	17.03	20.11	20.69	< 30.00
		1	0	16.64	16.86	19.76	20.34	< 30.00
		1	132	17.02	17.13	20.09	20.67	< 30.00
3954.99	50	67	33	17.12	17.12	20.13	20.71	< 30.00
		1	1	17.10	17.35	20.24	20.82	< 30.00
		1	131	17.59	16.98	20.30	20.88	< 30.00
		133	0	17.17	17.10	20.14	20.72	< 30.00
		1	0	16.93	17.41	20.19	20.77	< 30.00
		1	132	17.44	16.95	20.22	20.80	< 30.00
3730.02	60	81	40	16.79	16.91	19.86	20.44	< 30.00
		1	1	16.71	17.00	19.87	20.45	< 30.00
		1	131	16.61	16.77	19.70	20.28	< 30.00
		128	0	16.76	16.87	19.83	20.41	< 30.00
		1	0	16.68	16.82	19.76	20.34	< 30.00
		1	132	16.46	16.84	19.66	20.24	< 30.00
3840.00	60	81	40	17.17	16.99	20.09	20.67	< 30.00
		1	1	16.85	16.94	19.90	20.48	< 30.00
		1	131	16.69	17.00	19.86	20.44	< 30.00
		128	0	17.18	17.01	20.11	20.69	< 30.00
		1	0	16.76	16.70	19.74	20.32	< 30.00
		1	132	16.90	17.07	20.00	20.58	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3949.98	60	81	40	17.06	16.94	20.01	20.59	< 30.00
		1	1	16.64	17.00	19.83	20.41	< 30.00
		1	131	17.11	16.50	19.83	20.41	< 30.00
		128	0	17.00	16.82	19.92	20.50	< 30.00
		1	0	16.98	16.98	19.99	20.57	< 30.00
		1	132	17.21	16.52	19.89	20.47	< 30.00
3735.00	70	95	47	16.78	16.84	19.82	20.40	< 30.00
		1	1	16.78	16.83	19.82	20.40	< 30.00
		1	187	16.78	16.82	19.81	20.39	< 30.00
		189	0	16.69	16.81	19.76	20.34	< 30.00
		1	0	16.78	16.82	19.81	20.39	< 30.00
		1	188	16.68	16.83	19.77	20.35	< 30.00
3840.00	70	95	47	17.01	16.91	19.97	20.55	< 30.00
		1	1	16.93	16.90	19.92	20.50	< 30.00
		1	187	16.94	16.91	19.93	20.51	< 30.00
		189	0	16.93	16.91	19.93	20.51	< 30.00
		1	0	16.93	16.91	19.93	20.51	< 30.00
		1	188	16.94	16.89	19.92	20.50	< 30.00
3945.00	70	95	47	16.95	16.97	19.97	20.55	< 30.00
		1	1	16.96	16.86	19.92	20.50	< 30.00
		1	187	16.97	16.86	19.93	20.51	< 30.00
		189	0	16.97	16.85	19.92	20.50	< 30.00
		1	0	17.08	16.97	20.04	20.62	< 30.00
		1	188	17.08	16.97	20.03	20.61	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								


Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3740.01	80	109	54	16.65	16.70	19.69	20.27	< 30.00
		1	1	16.48	16.89	19.70	20.28	< 30.00
		1	215	16.32	16.60	19.47	20.05	< 30.00
		217	0	16.69	16.80	19.76	20.34	< 30.00
		1	0	16.46	16.86	19.68	20.26	< 30.00
		1	216	16.19	16.56	19.39	19.97	< 30.00
3840.00	80	109	54	17.04	16.86	19.96	20.54	< 30.00
		1	1	16.53	16.82	19.69	20.27	< 30.00
		1	215	16.54	16.46	19.51	20.09	< 30.00
		217	0	16.93	16.80	19.88	20.46	< 30.00
		1	0	16.56	16.78	19.68	20.26	< 30.00
		1	216	16.49	16.91	19.71	20.29	< 30.00
3939.99	80	109	54	16.96	16.80	19.89	20.47	< 30.00
		1	1	16.62	16.69	19.66	20.24	< 30.00
		1	215	16.71	16.39	19.56	20.14	< 30.00
		217	0	16.91	16.94	19.93	20.51	< 30.00
		1	0	16.78	16.77	19.79	20.37	< 30.00
		1	216	16.78	16.63	19.72	20.30	< 30.00
3745.02	90	123	61	16.70	16.73	19.72	20.30	< 30.00
		1	1	16.57	16.90	19.75	20.33	< 30.00
		1	243	16.48	16.61	19.56	20.14	< 30.00
		245	0	16.69	16.77	19.74	20.32	< 30.00
		1	0	16.58	16.81	19.71	20.29	< 30.00
		1	244	16.31	16.59	19.46	20.04	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)		Total Power (dBm)	EIRP (dBm)	Limit (dBm)
				Port 0	Port 3			
CP OFDM 256QAM								
3840.00	90	123	61	16.96	16.89	19.93	20.51	< 30.00
		1	1	16.82	16.82	19.83	20.41	< 30.00
		1	243	16.56	16.97	19.78	20.36	< 30.00
		245	0	16.83	16.80	19.82	20.40	< 30.00
		1	0	16.64	16.57	19.61	20.19	< 30.00
		1	244	16.60	16.91	19.77	20.35	< 30.00
3934.98	90	123	61	16.93	16.94	19.95	20.53	< 30.00
		1	1	16.58	16.76	19.68	20.26	< 30.00
		1	243	16.99	16.55	19.79	20.37	< 30.00
		245	0	17.01	16.98	20.00	20.58	< 30.00
		1	0	16.76	16.74	19.76	20.34	< 30.00
		1	244	16.77	16.62	19.71	20.29	< 30.00
3750.00	100	137	68	16.65	16.83	19.75	20.33	< 30.00
		1	1	16.57	16.81	19.70	20.28	< 30.00
		1	271	16.33	16.66	19.51	20.09	< 30.00
		273	0	16.63	16.75	19.70	20.28	< 30.00
		1	0	16.35	16.73	19.55	20.13	< 30.00
		1	272	16.16	16.58	19.38	19.96	< 30.00
3840.00	100	137	68	16.86	16.92	19.90	20.48	< 30.00
		1	1	16.55	16.69	19.63	20.21	< 30.00
		1	271	16.89	16.97	19.94	20.52	< 30.00
		273	0	16.82	16.80	19.82	20.40	< 30.00
		1	0	16.44	16.32	19.39	19.97	< 30.00
		1	272	16.58	16.55	19.57	20.15	< 30.00
3930.00	100	137	68	16.89	17.03	19.97	20.55	< 30.00
		1	1	16.84	16.95	19.91	20.49	< 30.00
		1	271	16.90	16.65	19.79	20.37	< 30.00
		273	0	16.94	16.81	19.89	20.47	< 30.00
		1	0	16.37	16.69	19.54	20.12	< 30.00
		1	272	16.63	16.34	19.50	20.08	< 30.00
Note 1: Total Power (dBm) = $10 \cdot \log\{10^{(\text{Port 0 Output Power} / 10)} + 10^{(\text{Port 1 Output Power} / 10)}\}$ Note 2: The EIRP (dBm) = Total Power (dBm) + Antenna Gain (dBi)								

A.4 Peak to Average Ratio Test Result


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n2_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
1880.0	20	6.57	≤ 13.00	Pass
16QAM				
1880.0	20	6.54	≤ 13.00	Pass
64QAM				
1880.0	20	6.89	≤ 13.00	Pass
256QAM				
1880.0	20	8.41	≤ 13.00	Pass

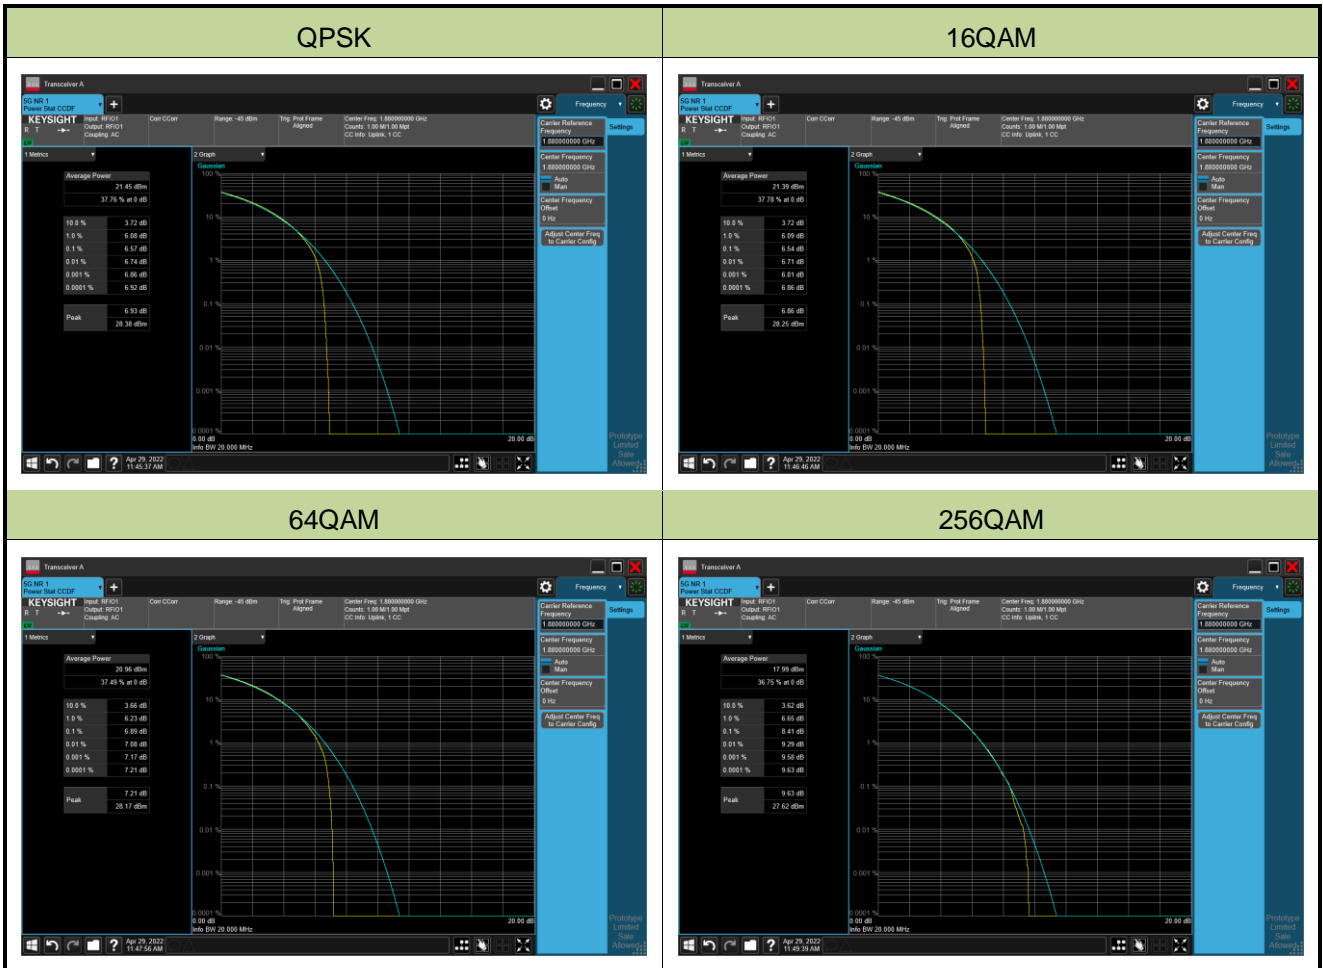


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n5_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
836.5	20	7.42	≤ 13.00	Pass
16QAM				
836.5	20	7.28	≤ 13.00	Pass
64QAM				
836.5	20	7.59	≤ 13.00	Pass
256QAM				
836.5	20	7.29	≤ 13.00	Pass

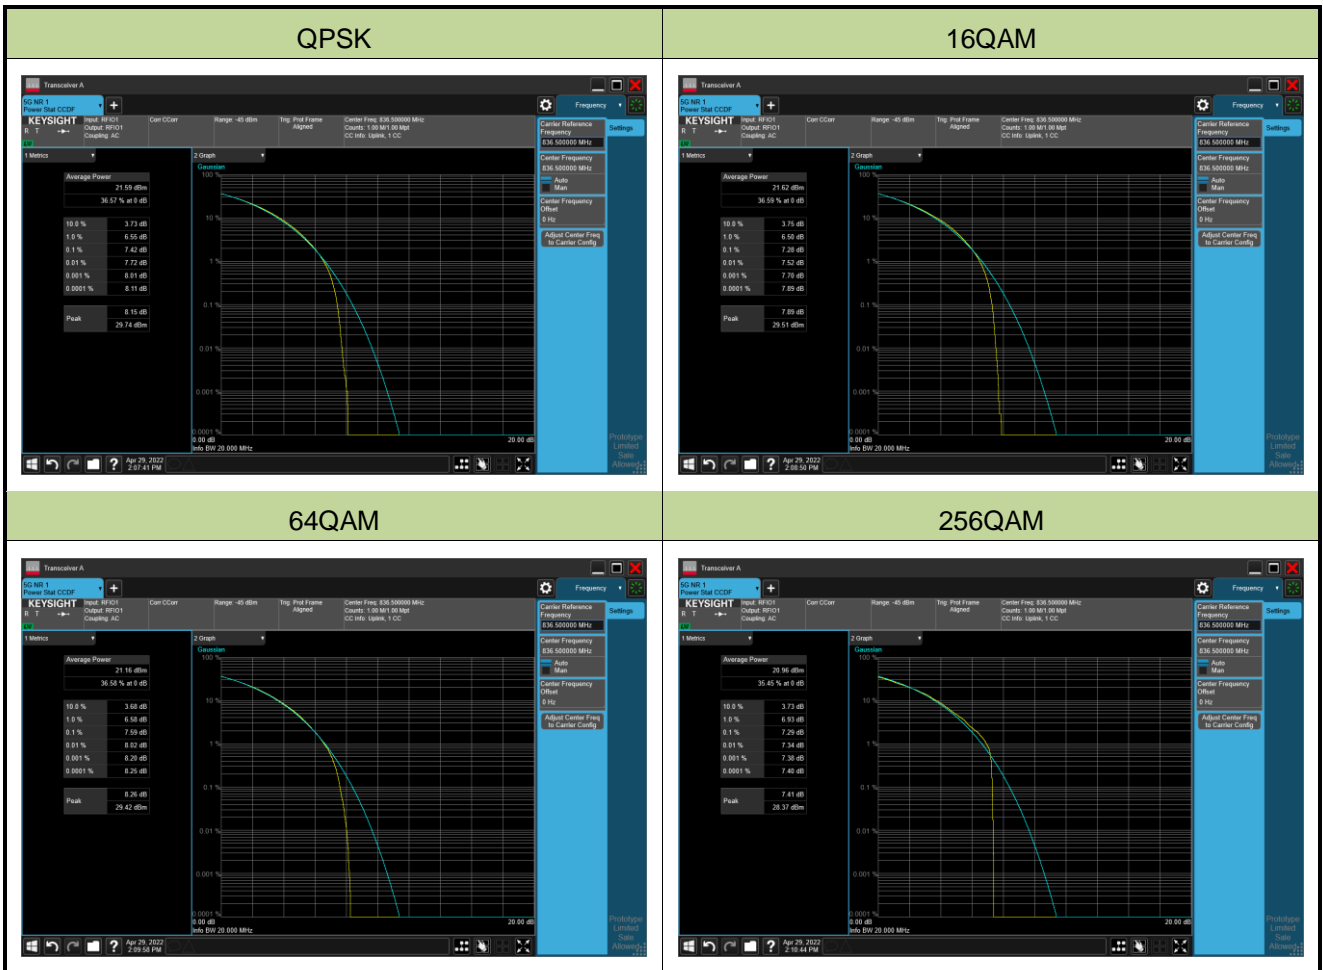


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/01	Test Band	n7_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
2535.0	40	6.84	≤ 13.00	Pass
16QAM				
2535.0	40	6.72	≤ 13.00	Pass
64QAM				
2535.0	40	7.12	≤ 13.00	Pass
256QAM				
2535.0	40	8.11	≤ 13.00	Pass

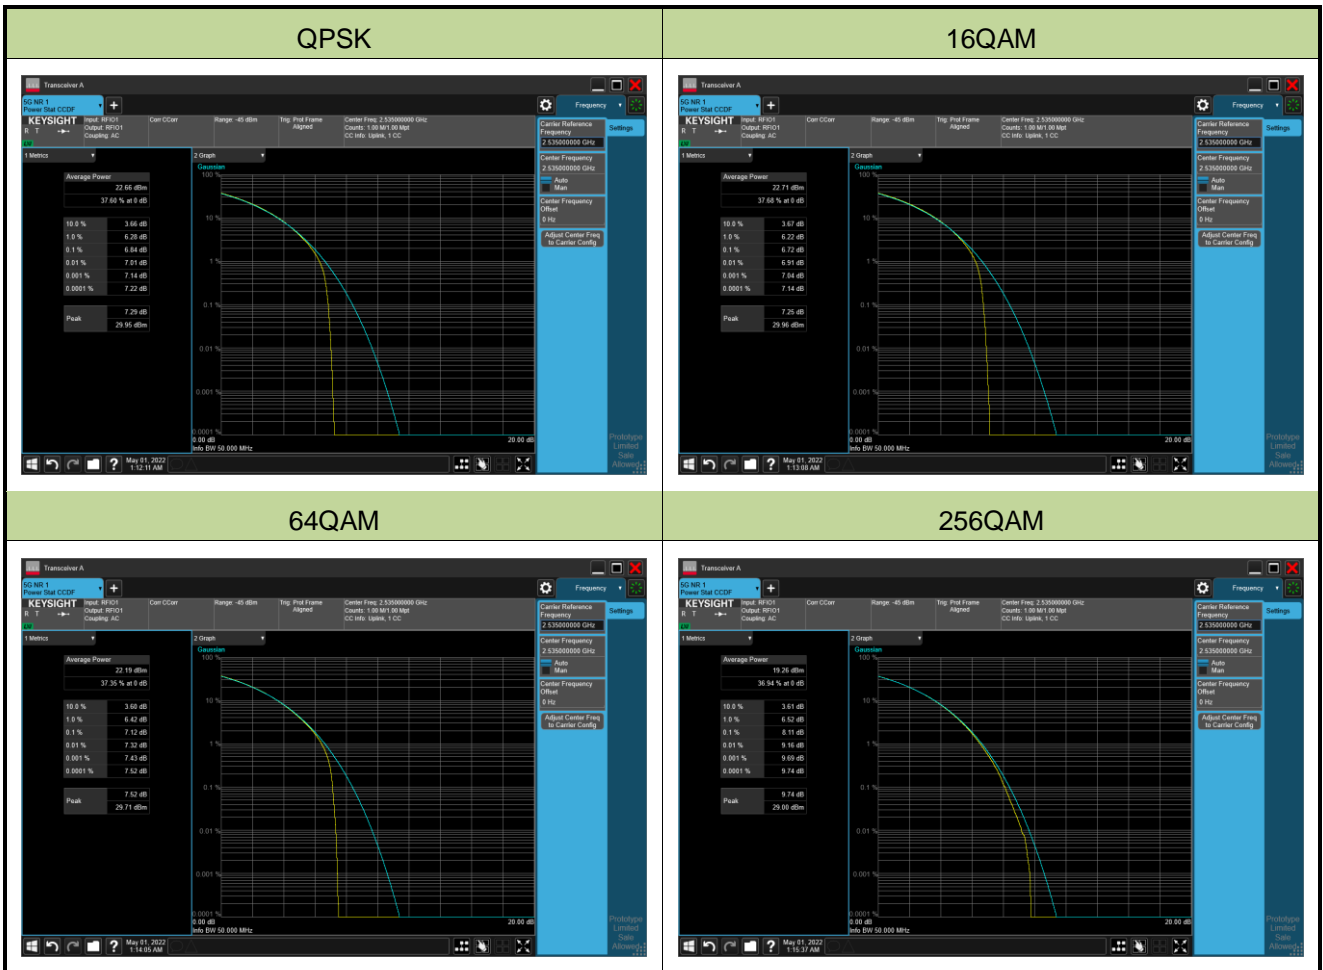


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n12_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
707.5	15	6.74	≤ 13.00	Pass
16QAM				
707.5	15	6.64	≤ 13.00	Pass
64QAM				
707.5	15	7.19	≤ 13.00	Pass
256QAM				
707.5	15	8.20	≤ 13.00	Pass

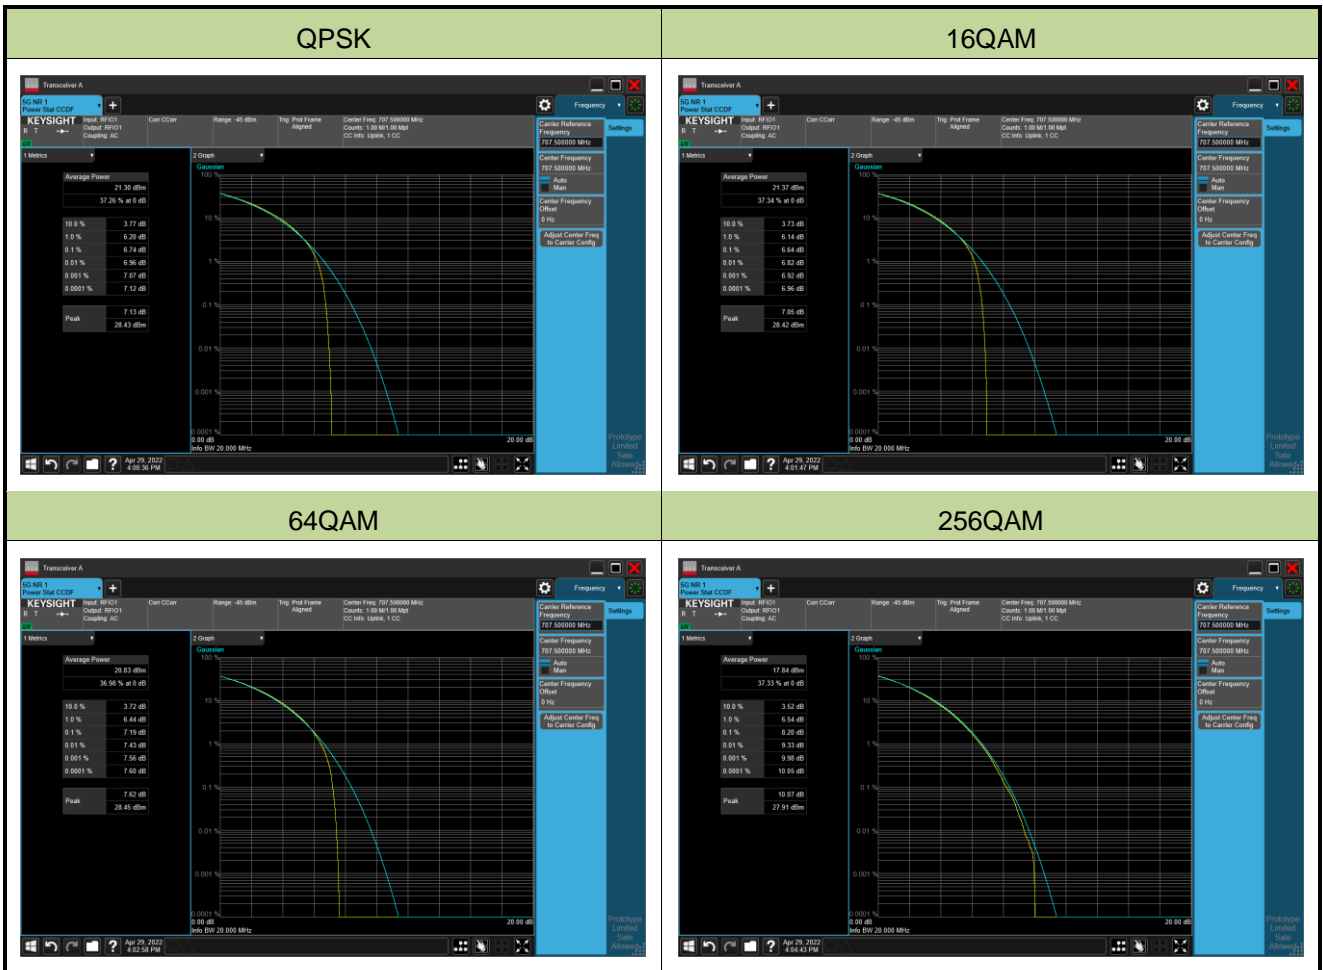


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/19	Test Band	n13_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
782.0	10	7.66	≤ 13.00	Pass
16QAM				
782.0	10	7.55	≤ 13.00	Pass
64QAM				
782.0	10	7.99	≤ 13.00	Pass
256QAM				
782.0	10	8.50	≤ 13.00	Pass

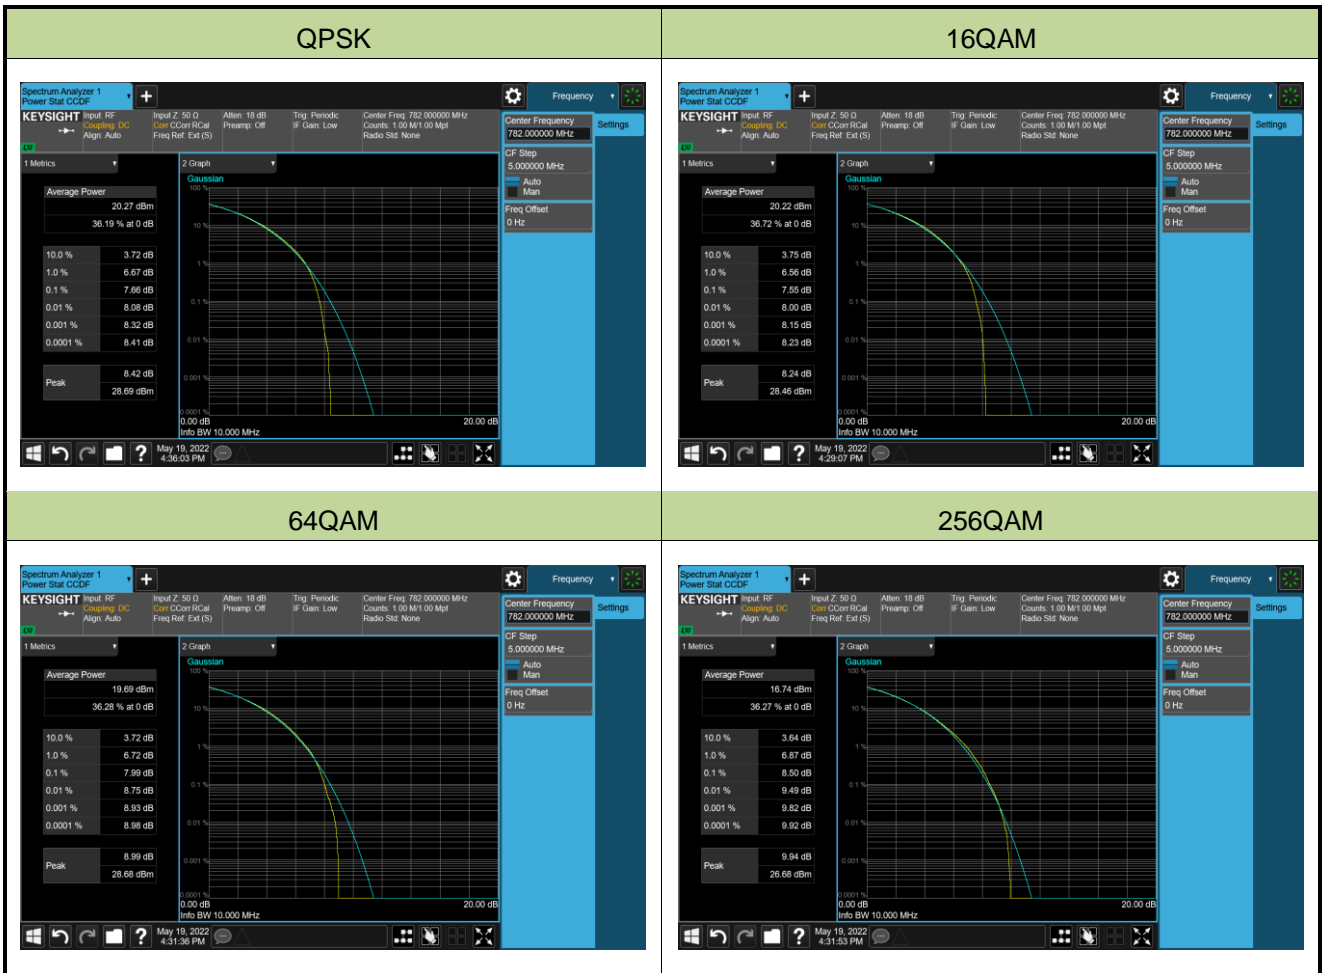


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/12	Test Band	n25_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
1882.5	40	4.91	≤ 13.00	Pass
16QAM5				
1882.5	40	5.26	≤ 13.00	Pass
64QAM				
1882.5	40	5.30	≤ 13.00	Pass
256QAM				
1882.5	40	5.84	≤ 13.00	Pass

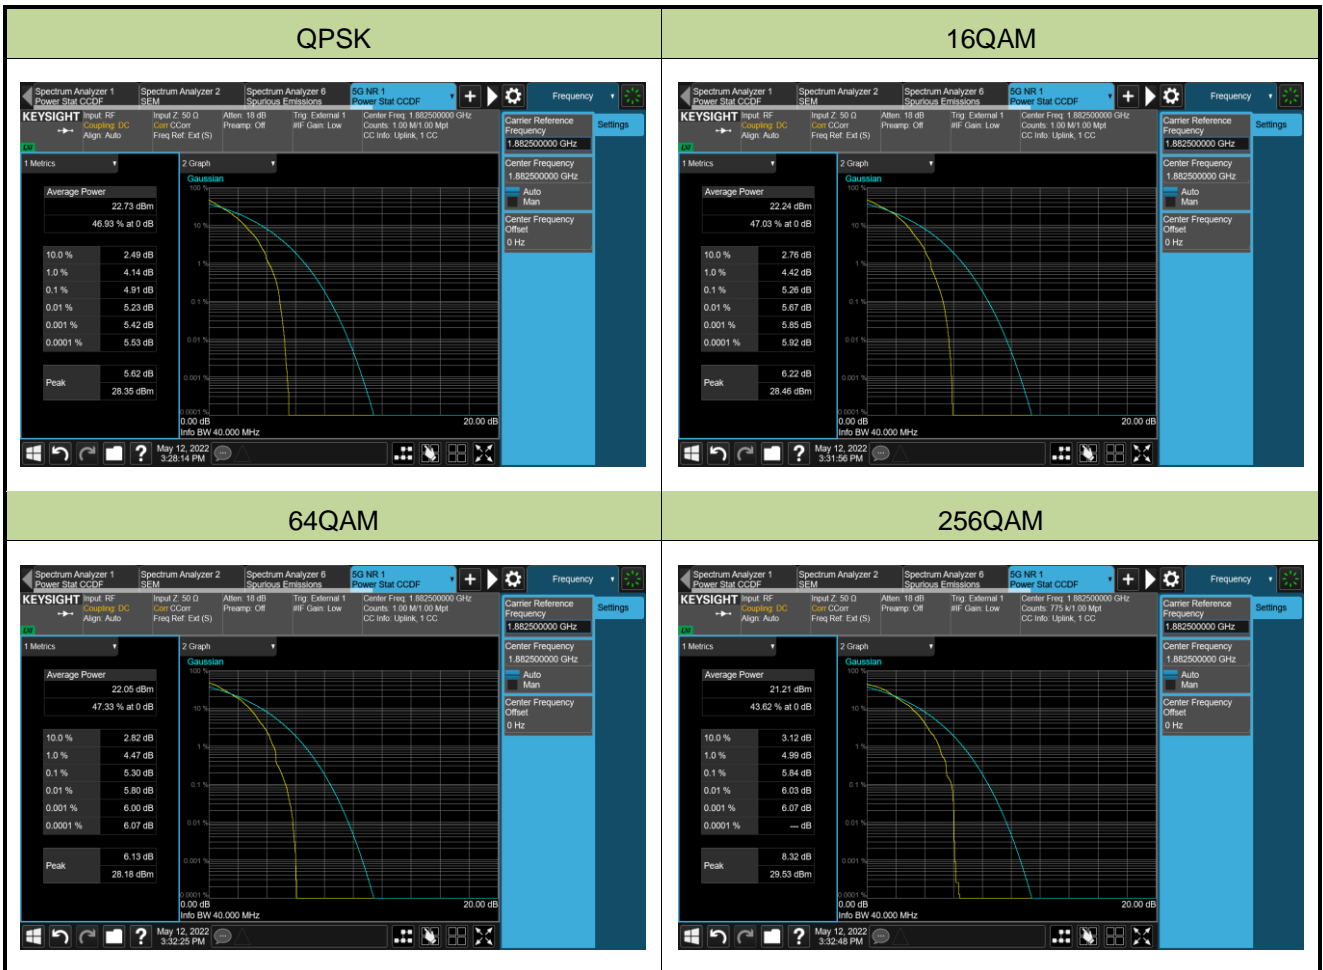


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n66_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
1745.0	40	6.62	≤ 13.00	Pass
16QAM				
1745.0	40	6.65	≤ 13.00	Pass
64QAM				
1745.0	40	7.52	≤ 13.00	Pass
256QAM				
1745.0	40	8.36	≤ 13.00	Pass

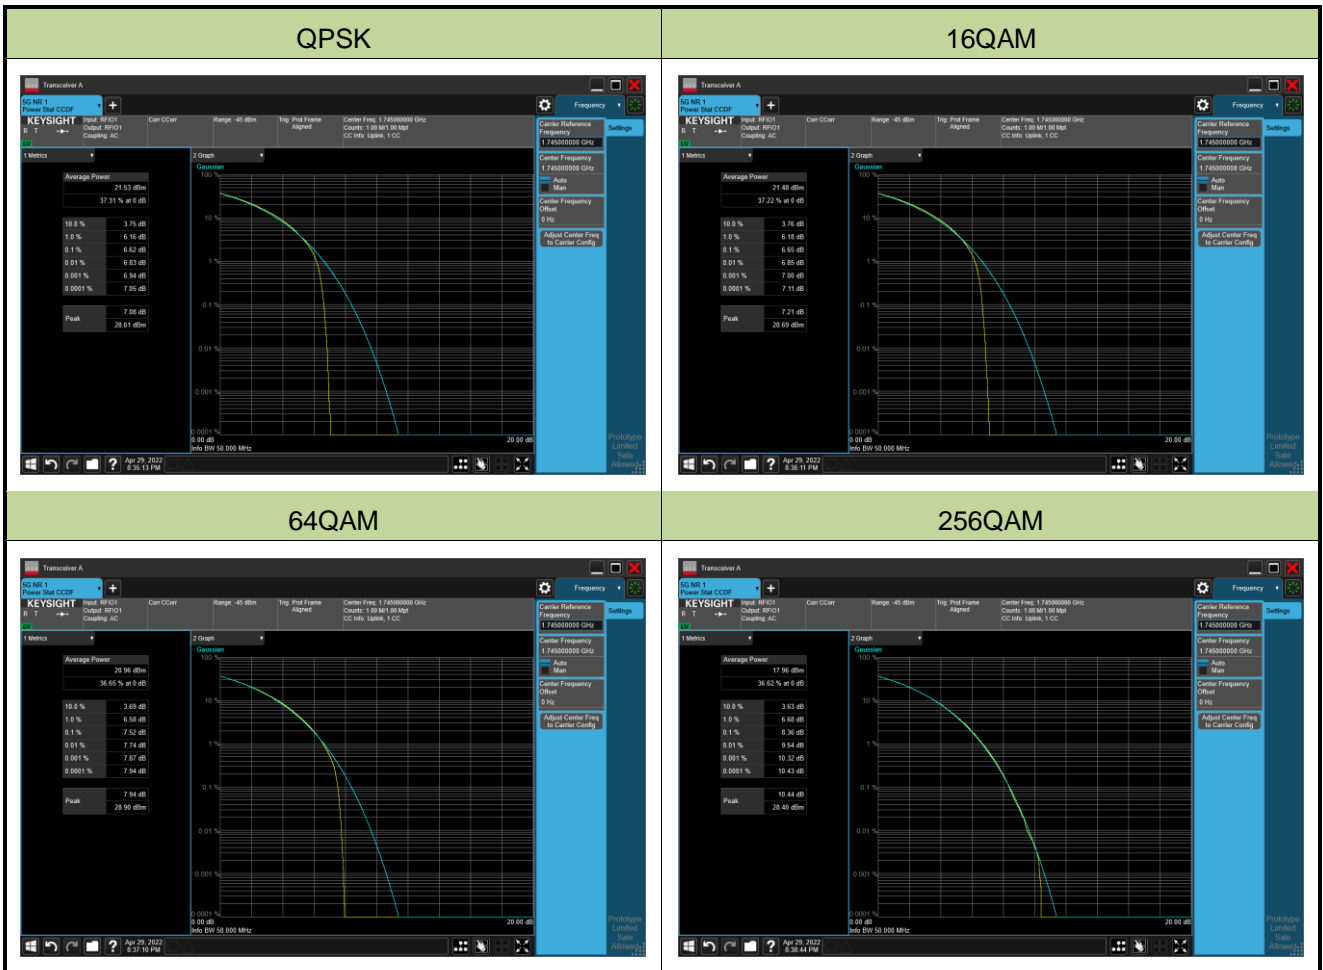


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n71_SA

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
680.5	20	7.18	≤ 13.00	Pass
16QAM				
680.5	20	7.11	≤ 13.00	Pass
64QAM				
680.5	20	7.44	≤ 13.00	Pass
256QAM				
680.5	20	8.37	≤ 13.00	Pass

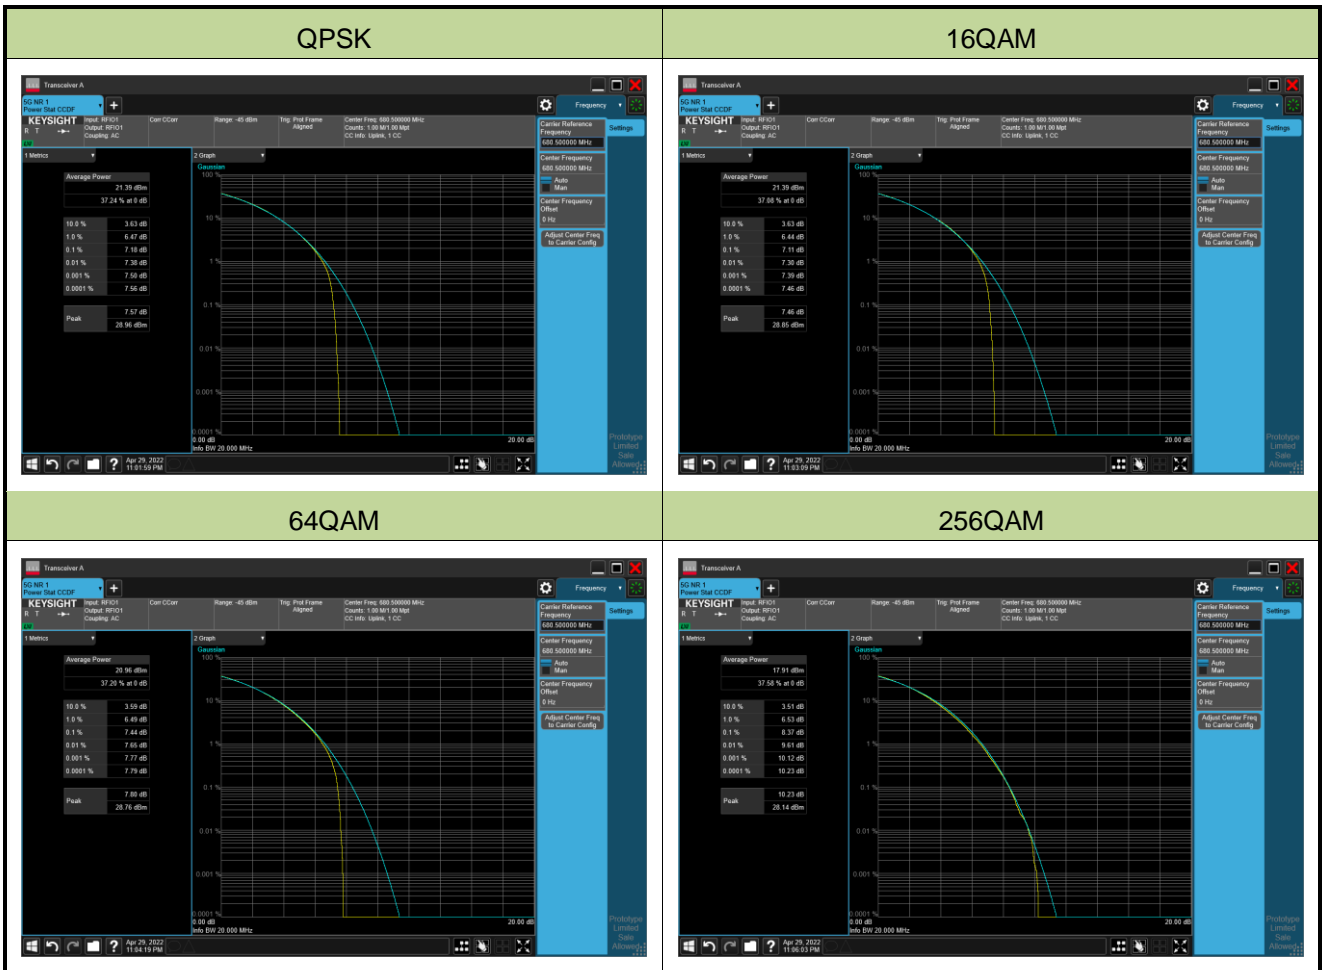


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/19	Test Band	n38_SA_HPUE

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
2595.0	40	6.28	≤ 13.00	Pass
16QAM				
2595.0	40	6.42	≤ 13.00	Pass
64QAM				
2595.0	40	6.84	≤ 13.00	Pass
256QAM				
2595.0	40	8.32	≤ 13.00	Pass

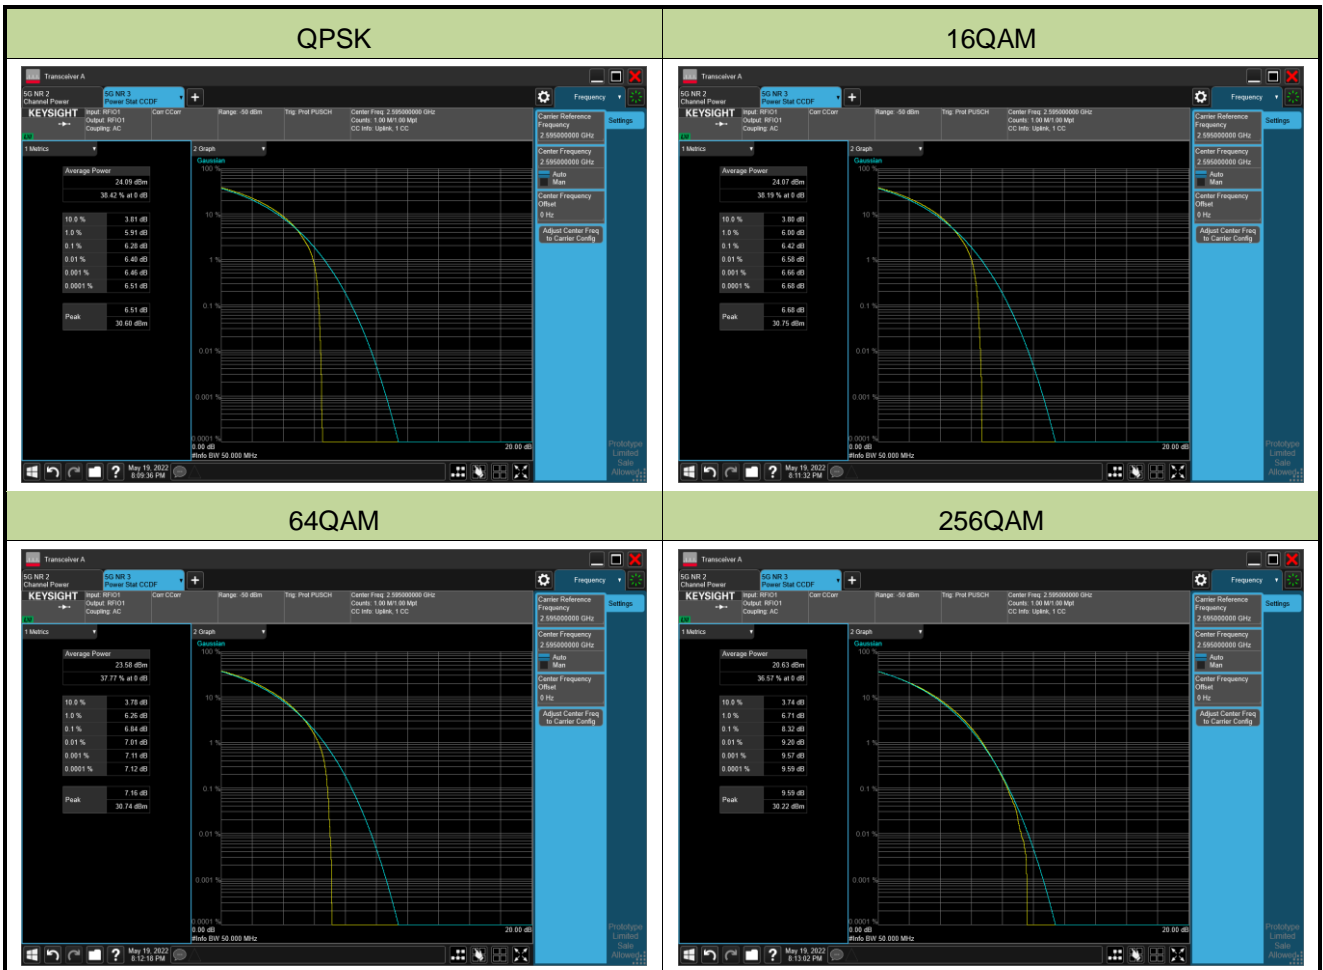


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/30	Test Band	n41_SA_HPUE

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
2592.99	100	7.08	≤ 13.00	Pass
16QAM				
2592.99	100	6.74	≤ 13.00	Pass
64QAM				
2592.99	100	7.29	≤ 13.00	Pass
256QAM				
2592.99	100	8.51	≤ 13.00	Pass

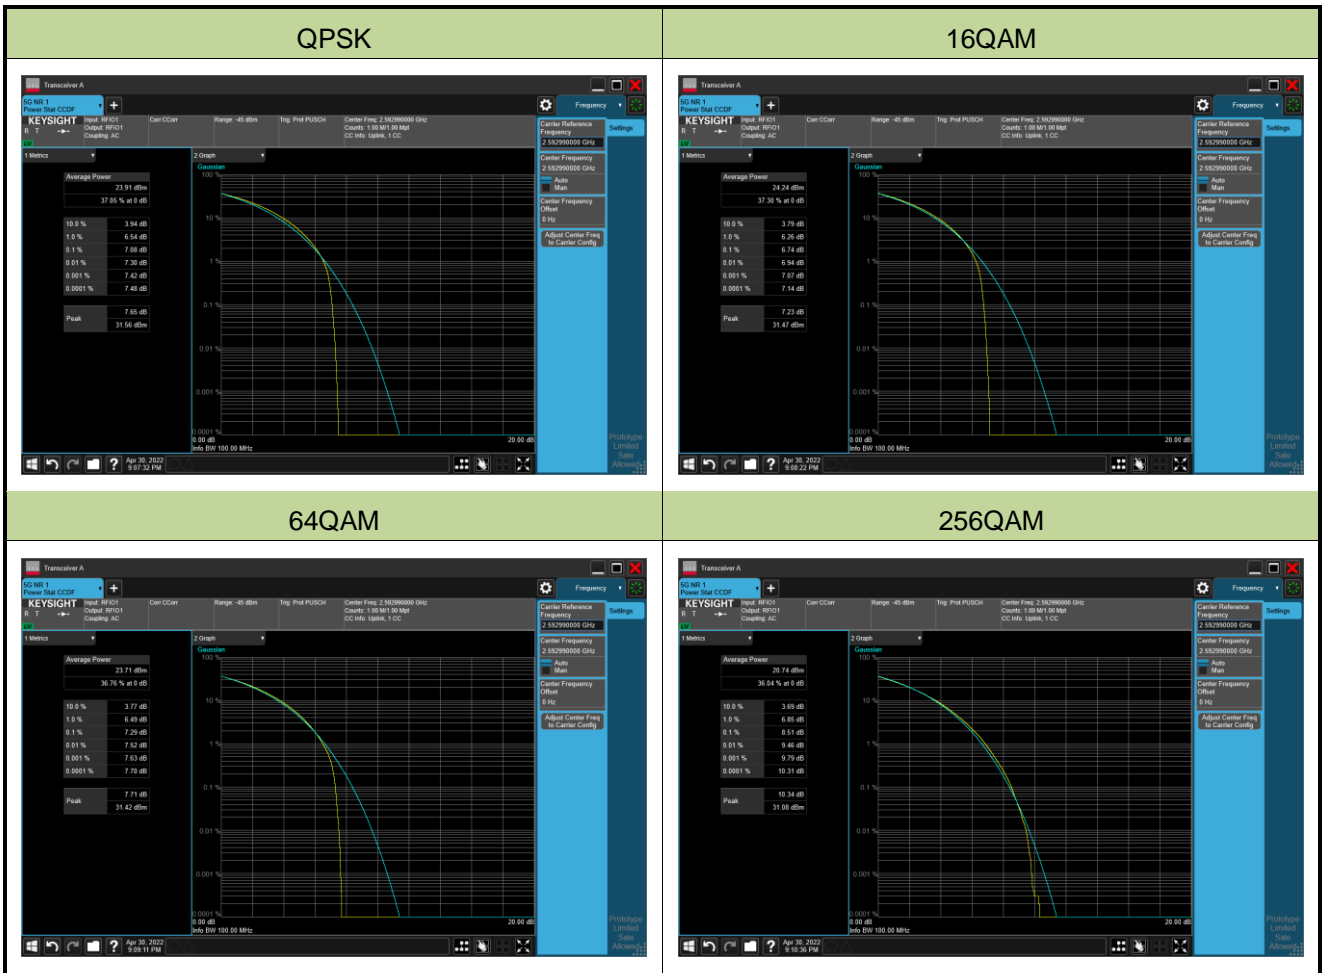


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/20	Test Band	n77/n78_SA_HPUE (3450~3550MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3500.01	100	6.75	≤ 13.00	Pass
16QAM				
3500.01	100	7.08	≤ 13.00	Pass
64QAM				
3500.01	100	7.27	≤ 13.00	Pass
256QAM				
3500.01	100	8.50	≤ 13.00	Pass

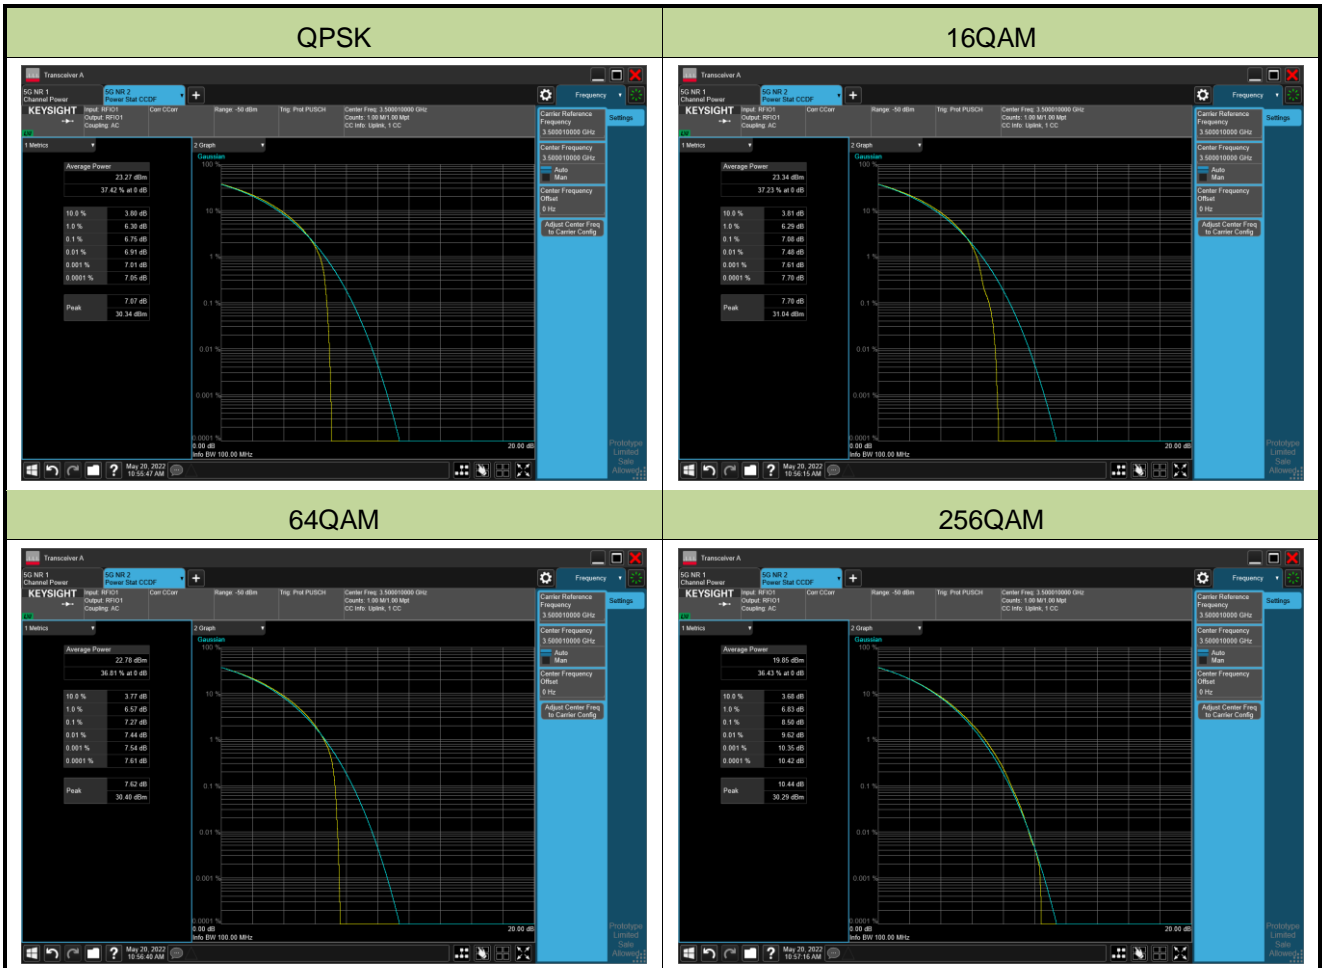

Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/05/20	Test Band	n77/n78_SA_HPUE (3700~3980MHz)

Frequency (MHz)	Channel Bandwidth (MHz)	Peak to Average Ratio (dB)	Limit (dB)	Result
QPSK				
3840.00	100	7.14	≤ 13.00	Pass
16QAM				
3840.00	100	7.09	≤ 13.00	Pass
64QAM				
3840.00	100	7.65	≤ 13.00	Pass
256QAM				
3840.00	100	8.50	≤ 13.00	Pass

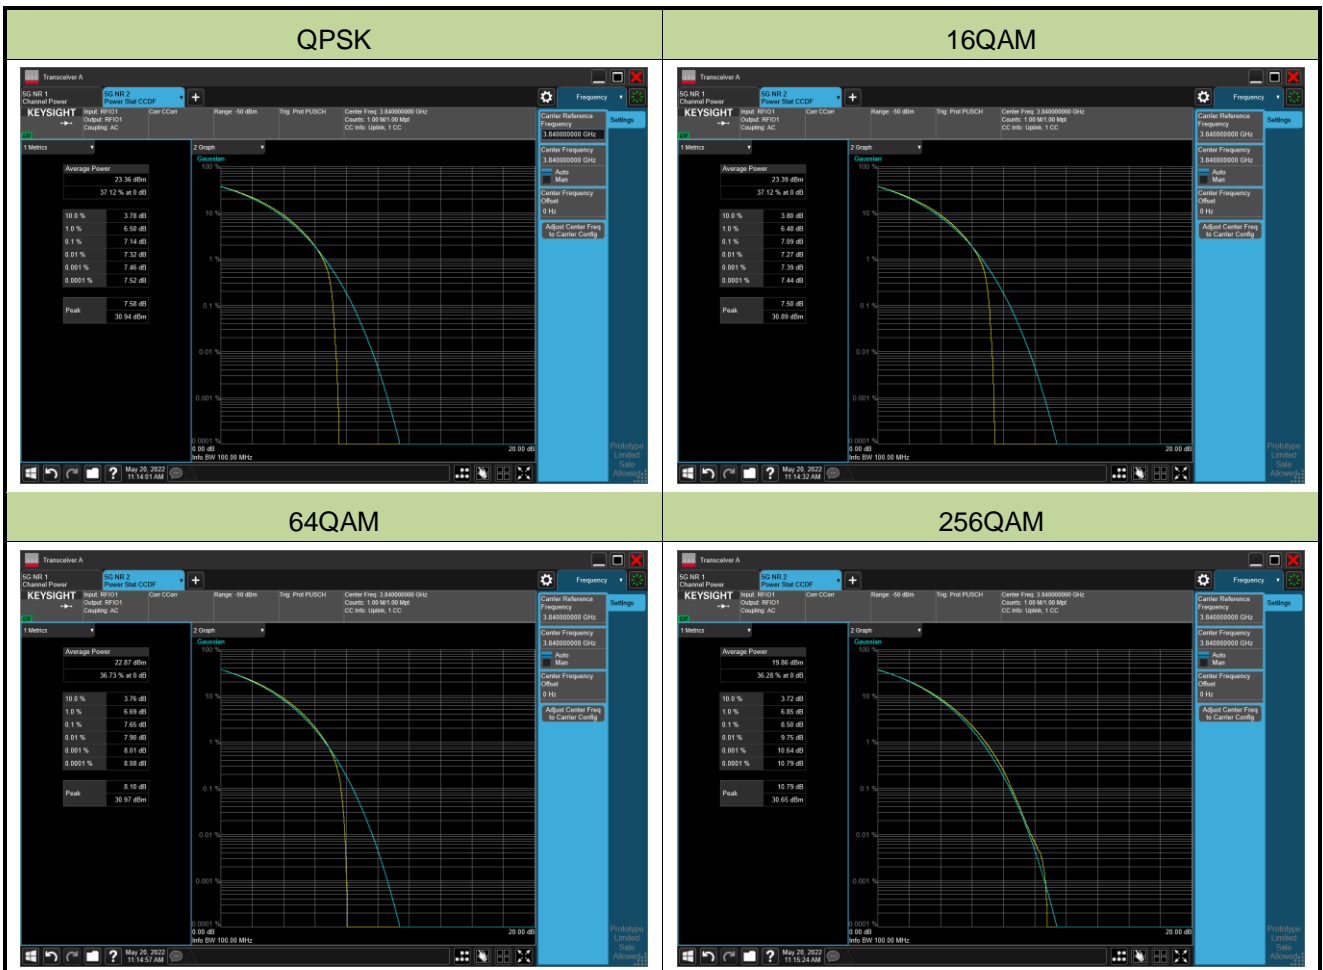

A.5 Band Edge Test Result


Test Site	SIP-SR1	Test Engineer	Candy Luo
Test Date	2022/04/29	Test Band	n2_SA

5MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge

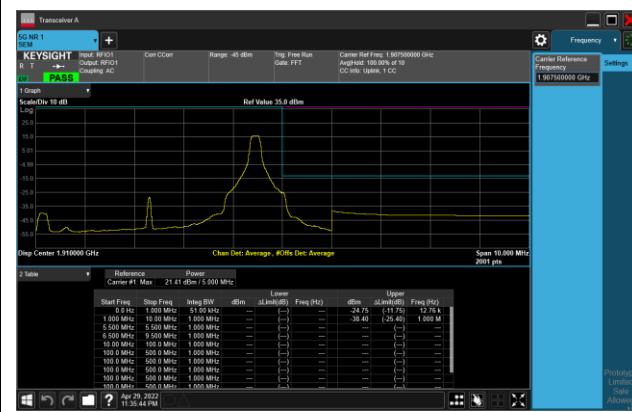


10MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge

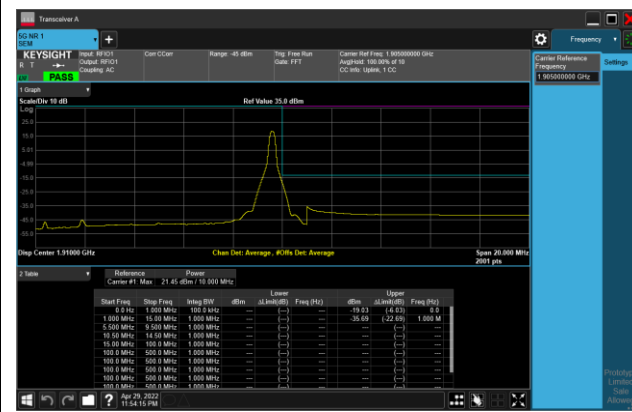


15MHz Channel Bandwidth - 1RB

Lower Band Edge



Upper Band Edge

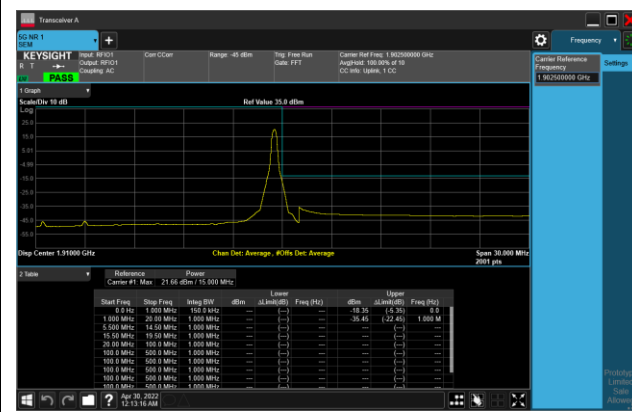

5MHz Channel Bandwidth - Full RB

Lower Band Edge




Upper Band Edge




10MHz Channel Bandwidth - Full RB

Lower Band Edge

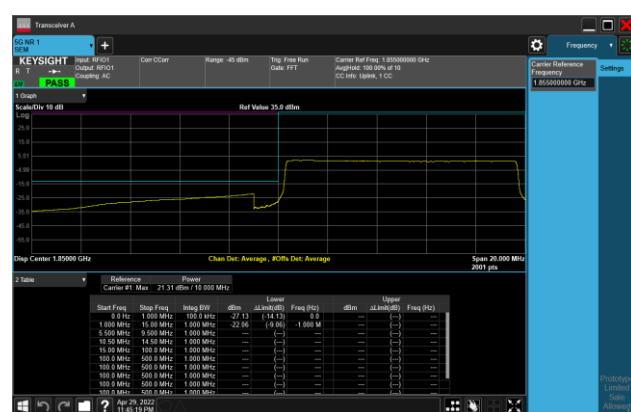


Upper Band Edge

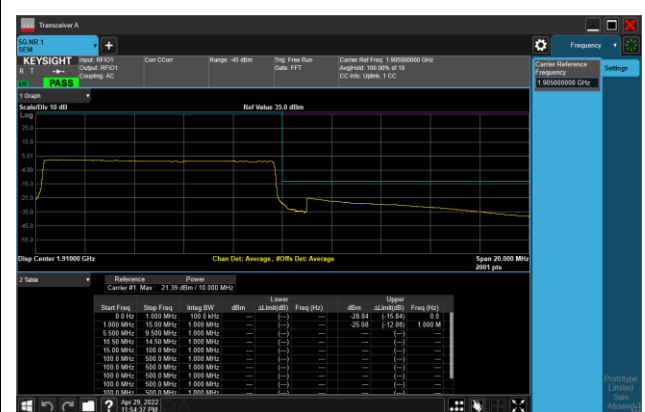


15MHz Channel Bandwidth - Full RB

Lower Band Edge

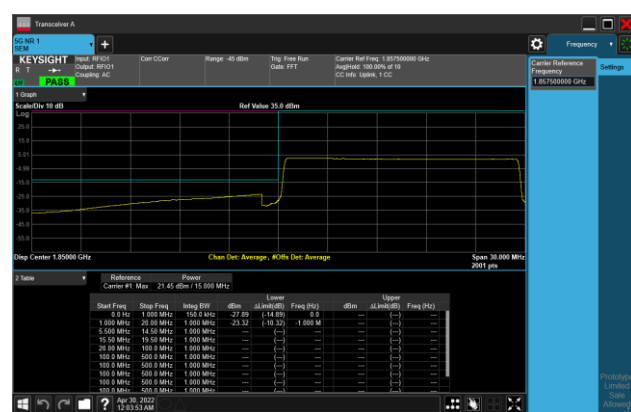

Upper Band Edge

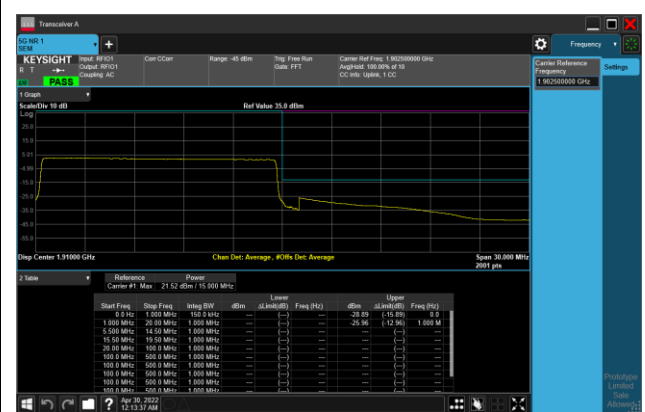

20MHz Channel Bandwidth - Full RB

Lower Band Edge

Upper Band Edge

