

FCC Part 15C Measurement and Test Report

For

Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd

No.2 Plant, West of Shanxi country, Dashi street, Panyu District,

Guangzhou, China

FCC ID: 2APRB-K8204-W

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Network Video Recorder</u>
Tested Model:	<u>K8204-W</u>
Report No.:	<u>STR18048247I</u>
Sample Receipt Date:	<u>2018-04-24</u>
Tested Date:	<u>2018-04-25 to 2018-08-13</u>
Issued Date:	<u>2018-09-13</u>
Tested By:	<u>Jason Su / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Jason Su
Silin Chen
Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	6
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	8
3. RF EXPOSURE	9
3.1 STANDARD APPLICABLE	9
3.2 TEST RESULT	9
4. ANTENNA REQUIREMENT	10
4.1 STANDARD APPLICABLE	10
4.2 EVALUATION INFORMATION	10
5. POWER SPECTRAL DENSITY	11
5.1 STANDARD APPLICABLE	11
5.2 TEST PROCEDURE	11
5.3 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	20
6.1 STANDARD APPLICABLE	20
6.2 TEST PROCEDURE	20
6.3 SUMMARY OF TEST RESULTS/PLOTS	20
7. RF OUTPUT POWER	29
7.1 STANDARD APPLICABLE	29
7.2 TEST PROCEDURE	29
7.3 SUMMARY OF TEST RESULTS/PLOTS	29
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	39
8.1 STANDARD APPLICABLE	39
8.2 TEST PROCEDURE	39
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	41
8.4 SUMMARY OF TEST RESULTS/PLOTS	41
9. OUT OF BAND EMISSIONS	58
9.1 STANDARD APPLICABLE	58
9.2 TEST PROCEDURE	58
9.3 SUMMARY OF TEST RESULTS/PLOTS	59
10. CONDUCTED EMISSIONS	91
10.1 TEST PROCEDURE	91
10.2 BASIC TEST SETUP BLOCK DIAGRAM	91
10.3 TEST RECEIVER SETUP	91
10.4 SUMMARY OF TEST RESULTS/PLOTS	91

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
Address of applicant: No.2 Plant, West of Shanxi country, Dashi street, Panyu district, Guangzhou, China
Manufacturer: Guangzhou Juan Intelligent Tech Joint Stock Co.,Ltd
Address of manufacturer: No.2 Plant, West of Shanxi country, Dashi street, Panyu district, Guangzhou, China

General Description of EUT	
Product Name:	Network Video Recorder
Trade Name:	/
Model No.:	K8204-W
Adding Model(s):	K8208-W, K8204H-W, K8208H-W, K8304H-W, K8304-W, T8204-W, T8208-W, ZR04JB/00, ZR04JB/10, ZR08KB/00, ZR08KB/10, ZR08QB/00, ZR08QB/10, ZR08QB/20, ZHS-A212, ZHR-A2200
Rated Voltage:	DC 12V adapter
Power Adapter Model:	/
Software Version:	v2.8.7.0
Hardware Version:	HI3536D_V123_NVR040816
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model K8204-W, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	16.52dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Undetachable External Antenna
Antenna Gain:	5.0dBi
Lowest Internal Frequency of EUT:	32.768kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	AOYUAN	AY030A-BF122-CH	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable



3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two Undetachable External Antennas, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 V04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total (dBm/3kHz)	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b	2412	-16.68	-21.00	/	8
	2437	-16.81	-20.45	/	8
	2462	-16.90	-20.50	/	8
802.11g	2412	-21.45	-25.67	/	8
	2437	-21.79	-26.00	/	8
	2462	-21.45	-26.35	/	8
802.11n HT20	2412	-21.93	-25.09	-20.42	8
	2437	-22.09	-25.39	-20.57	8
	2462	-21.98	-26.13	-24.50	8
802.11n HT40	2422	-26.20	-29.39	-24.50	8
	2437	-26.33	-29.15	-24.69	8
	2452	-26.27	-29.85	-20.42	8




Please refer to the following test plots:

➤ Antenna 1

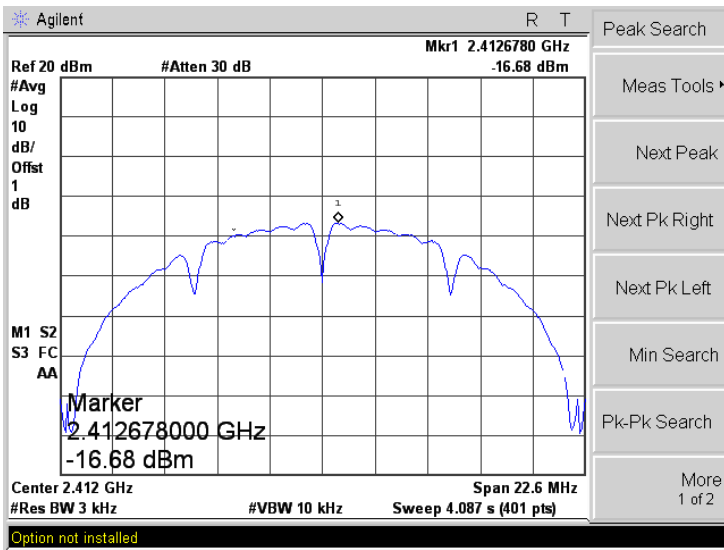
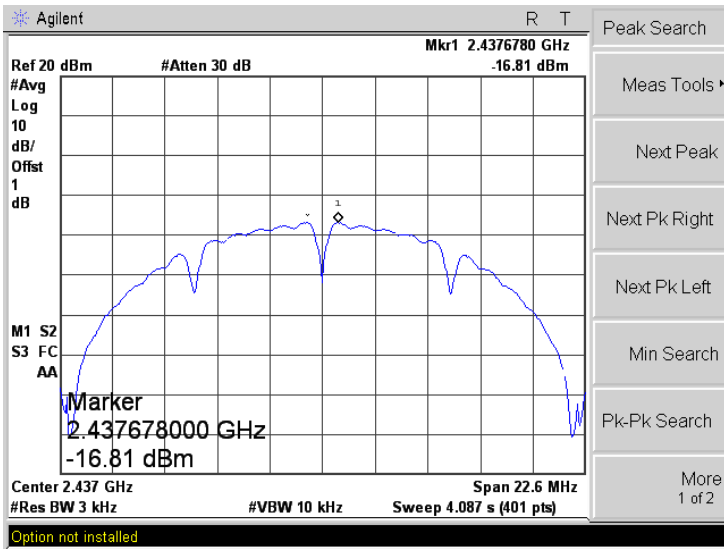
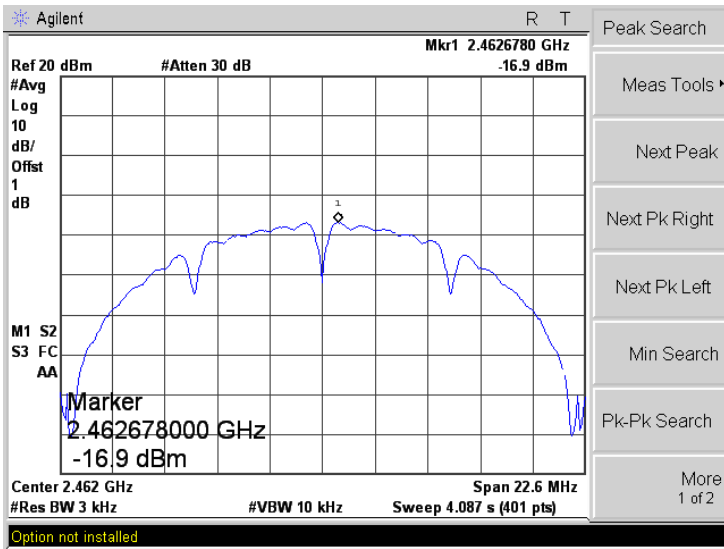
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

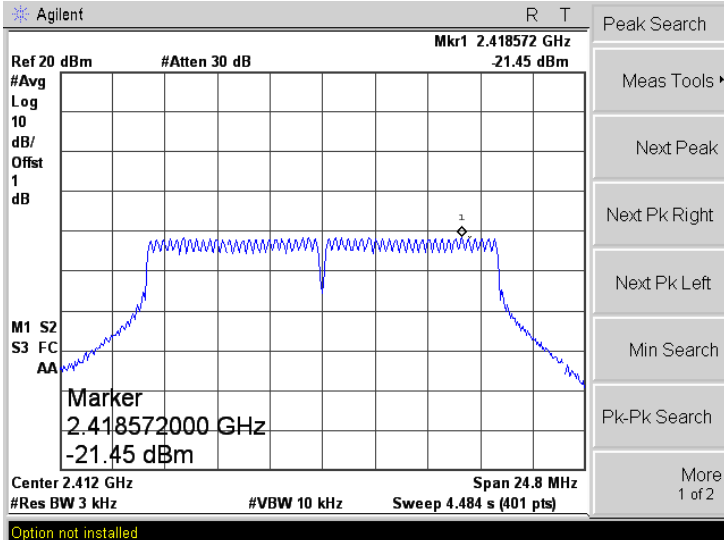
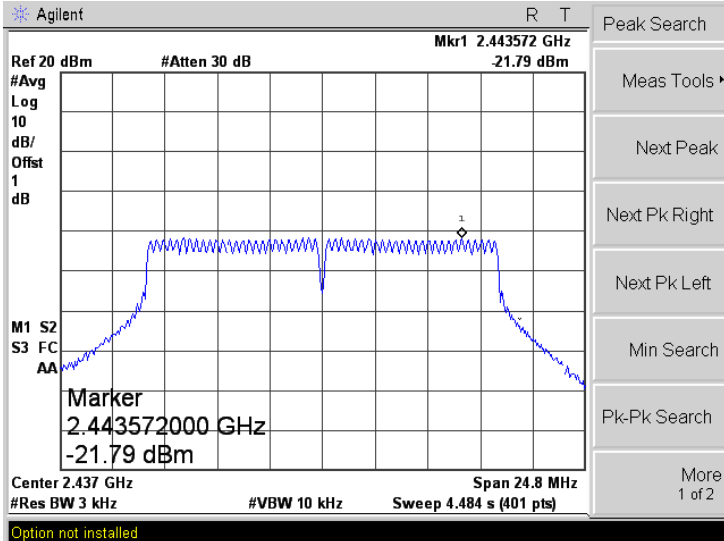
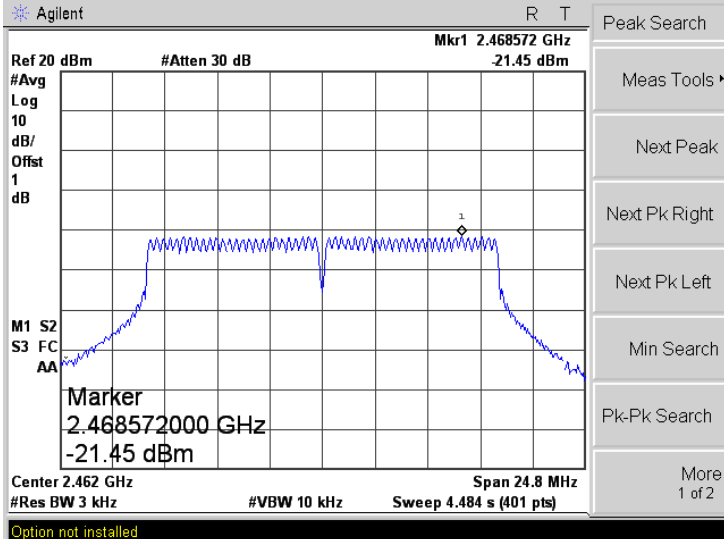
<p>802.11g-Low</p>	 <p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.418572 GHz -21.45 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.418572000 GHz -21.45 dBm Center 2.412 GHz Span 24.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.484 s (401 pts) Option not installed</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.443572 GHz -21.79 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.443572000 GHz -21.79 dBm Center 2.437 GHz Span 24.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.484 s (401 pts) Option not installed</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.468572 GHz -21.45 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.468572000 GHz -21.45 dBm Center 2.462 GHz Span 24.8 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.484 s (401 pts) Option not installed</p>

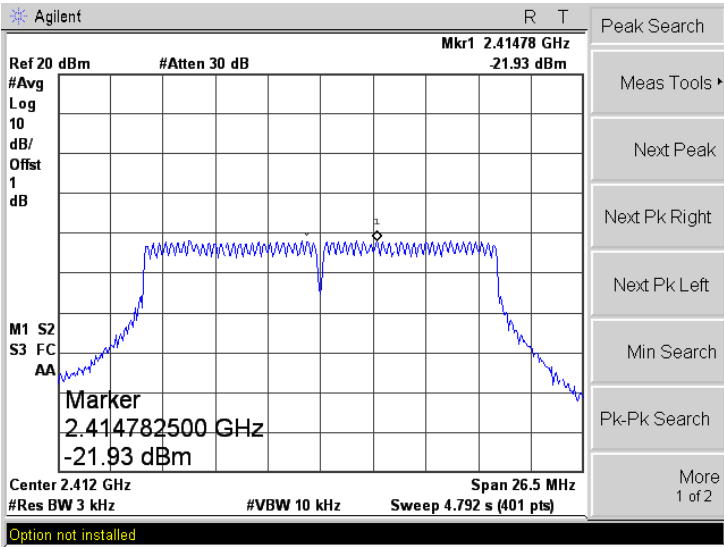
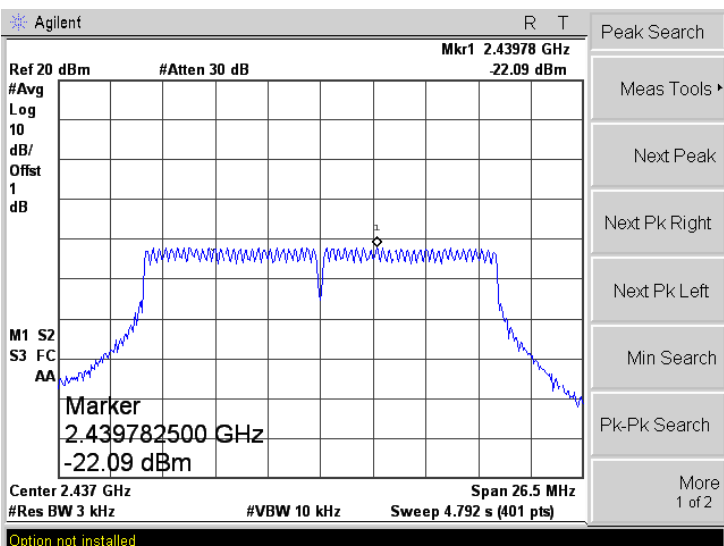
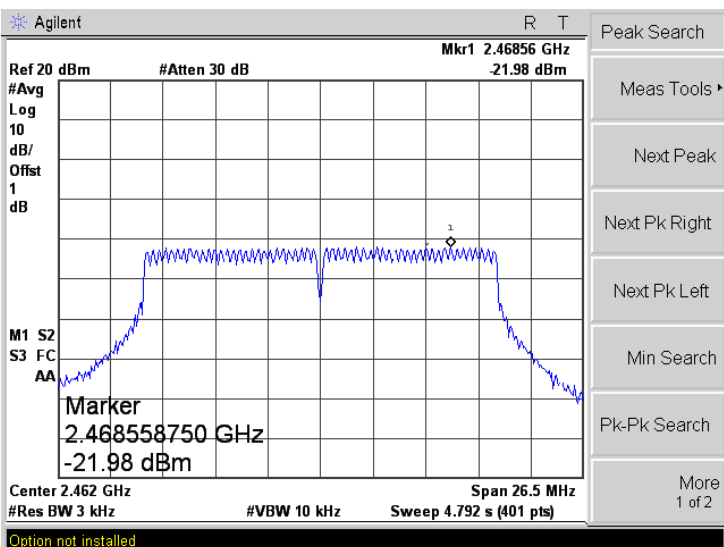
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

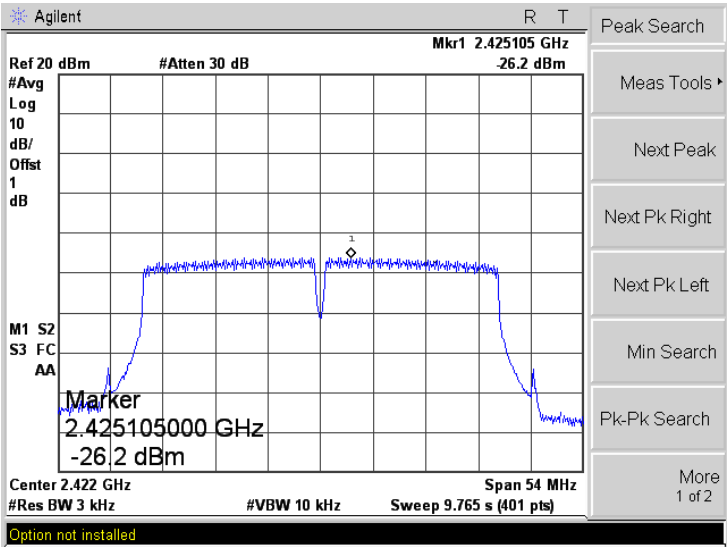
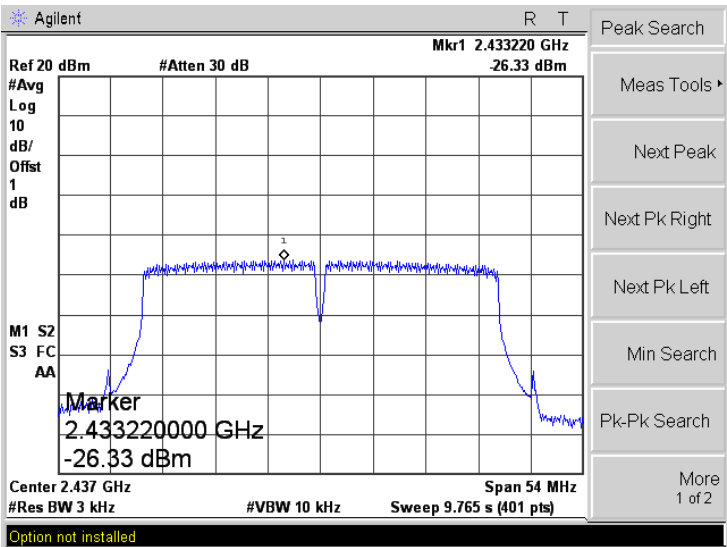
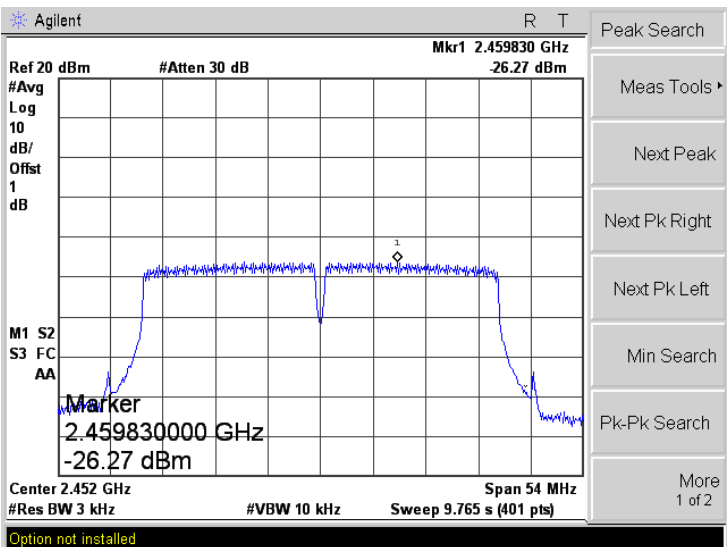
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

➤ Antenna 2
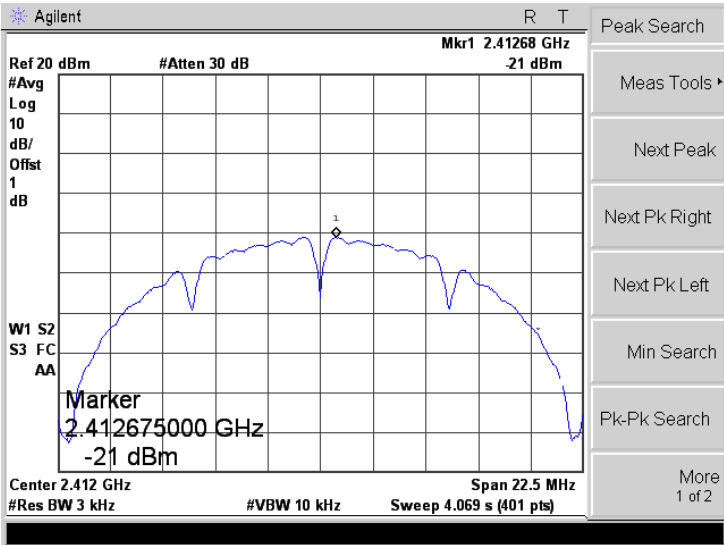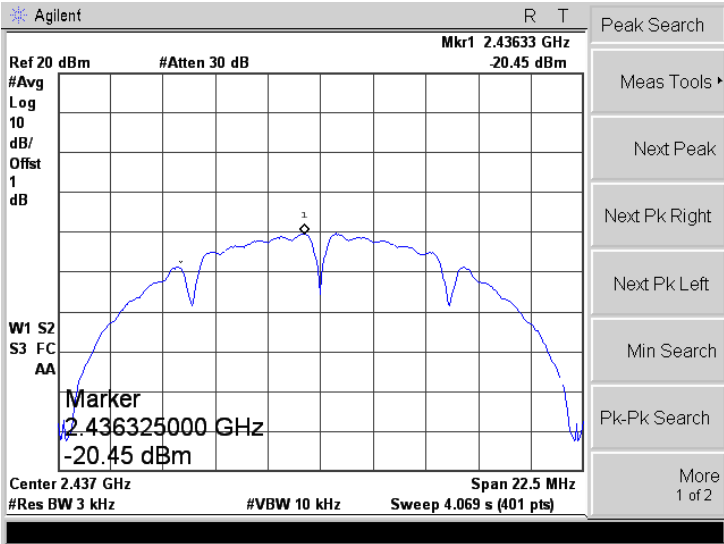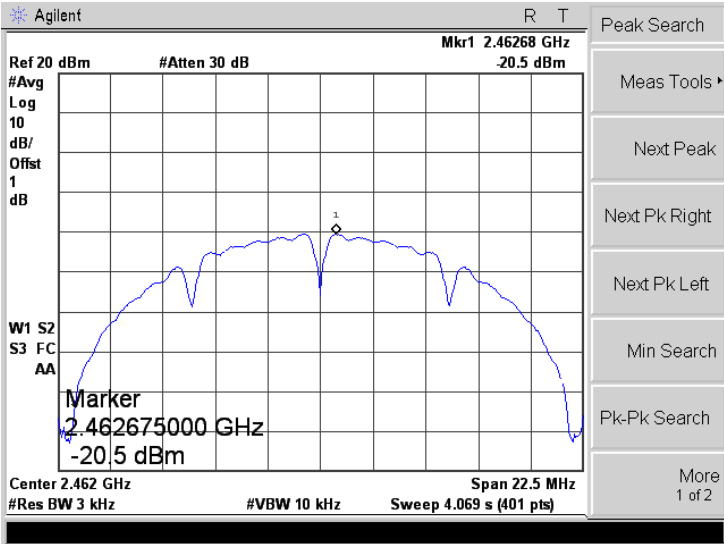
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

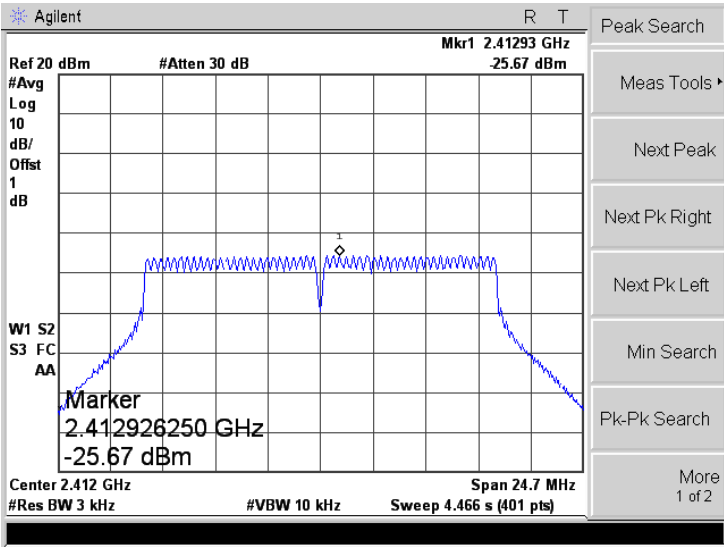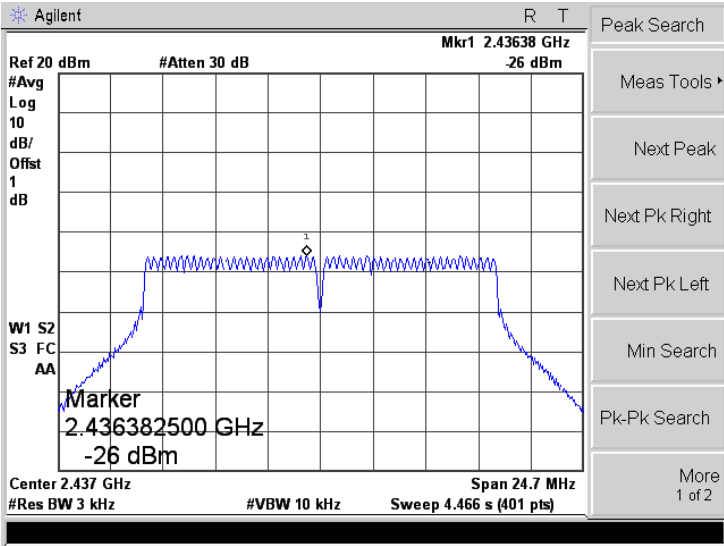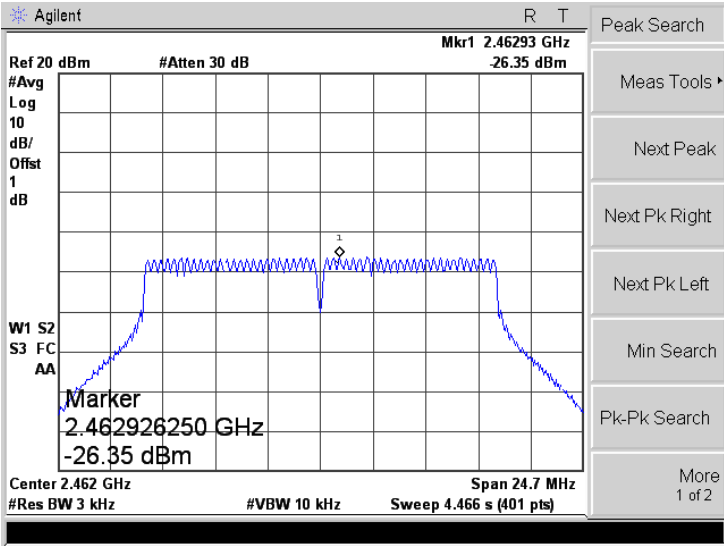802.11g-Low	
802.11g-Middle	
802.11g-High	
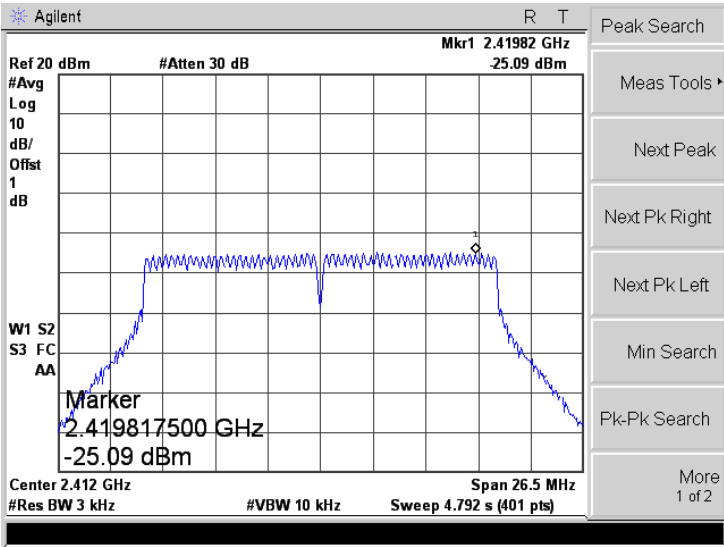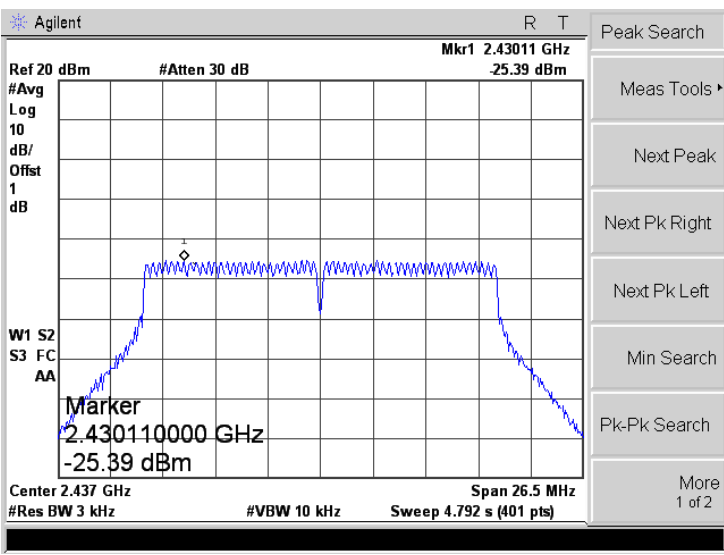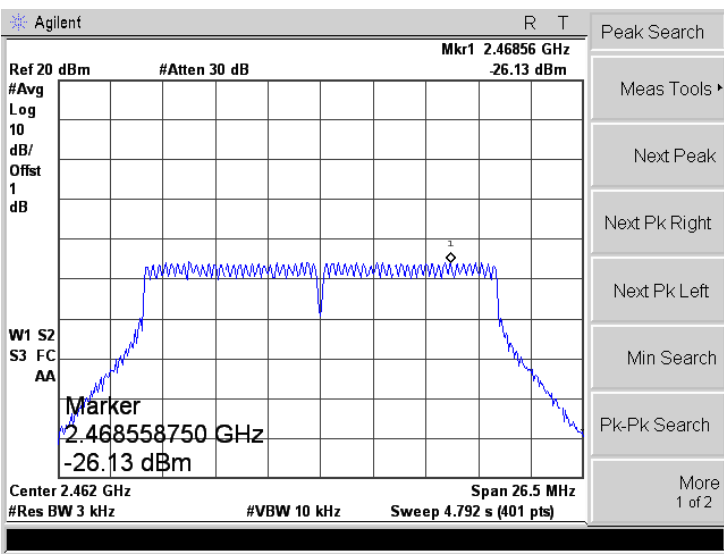
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
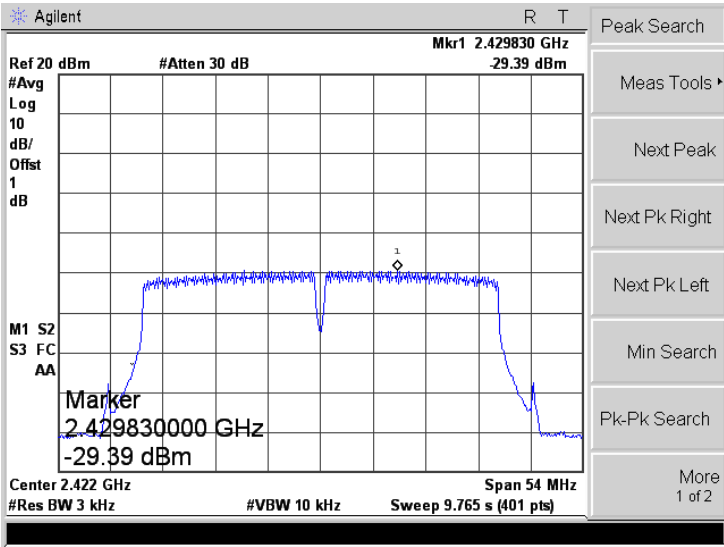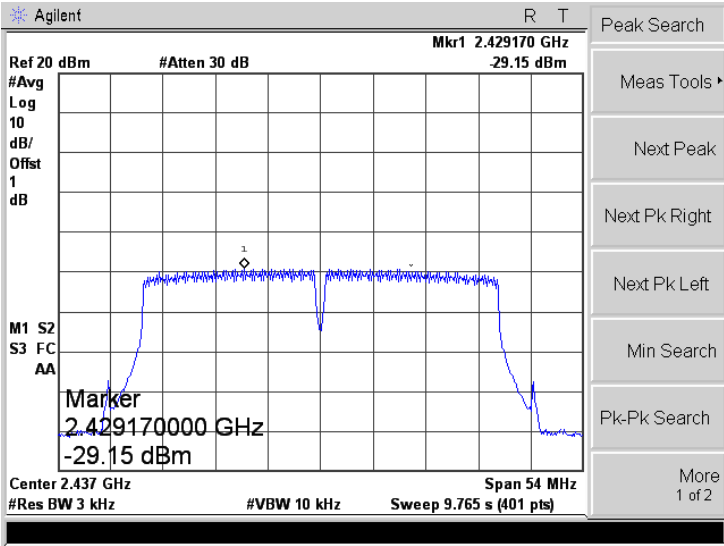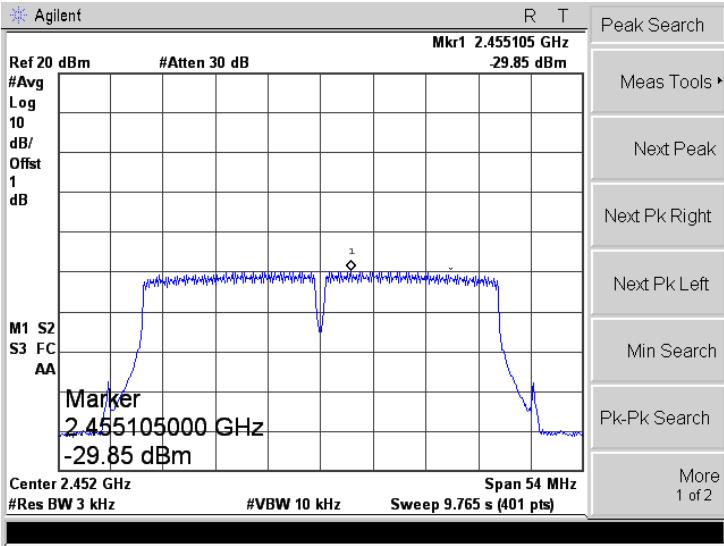
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




6.3 Summary of Test Results/Plots




Test Mode	Test Channel MHz	6dB Bandwidth(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b	2412	10.093	10.067	≥ 500
	2437	10.105	9.586	≥ 500
	2462	10.097	9.612	≥ 500
802.11g	2412	16.577	16.560	≥ 500
	2437	16.601	16.541	≥ 500
	2462	16.536	16.558	≥ 500
802.11n HT20	2412	17.833	17.841	≥ 500
	2437	17.818	17.848	≥ 500
	2462	17.791	17.818	≥ 500
802.11n HT40	2422	36.500	36.447	≥ 500
	2437	36.503	36.518	≥ 500
	2452	36.543	36.557	≥ 500

Please refer to the following test plots:

➤ Antenna 1

<p>802.11b-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 15.0759 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -26.095 kHz x dB Bandwidth 10.093 MHz</p> <p>Option not installed</p>
<p>802.11b-Middle</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 15.0780 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -69.765 kHz x dB Bandwidth 10.105 MHz</p> <p>Option not installed</p>
<p>802.11b-High</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 15.1006 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -27.962 kHz x dB Bandwidth 10.097 MHz</p> <p>Option not installed</p>

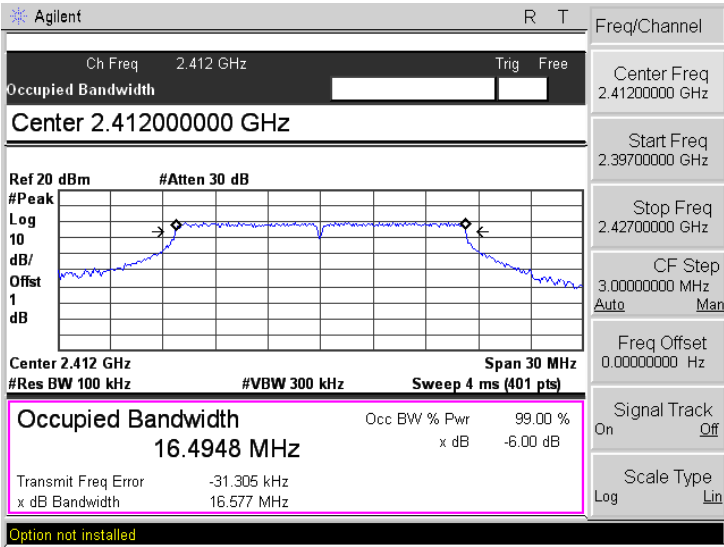
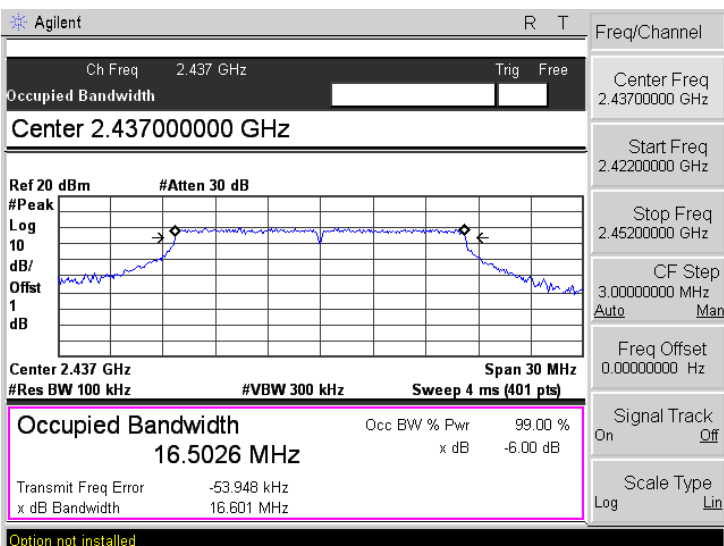
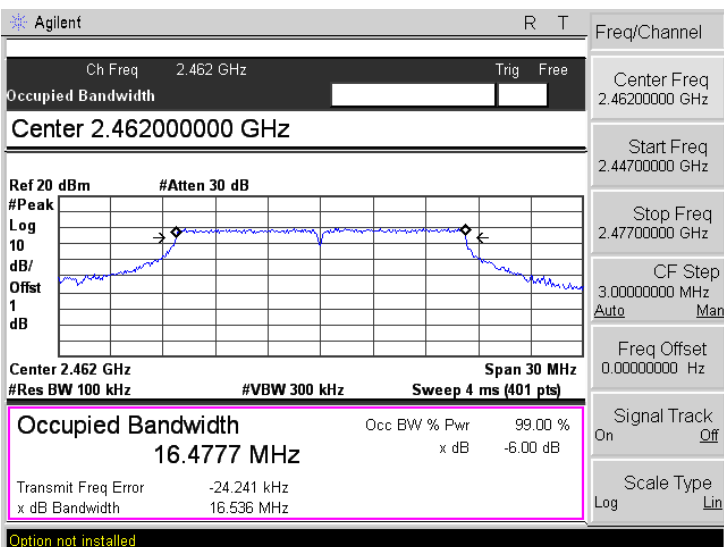
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4948 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -31.305 kHz x dB Bandwidth 16.577 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.5026 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -53.948 kHz x dB Bandwidth 16.601 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4777 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -24.241 kHz x dB Bandwidth 16.536 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

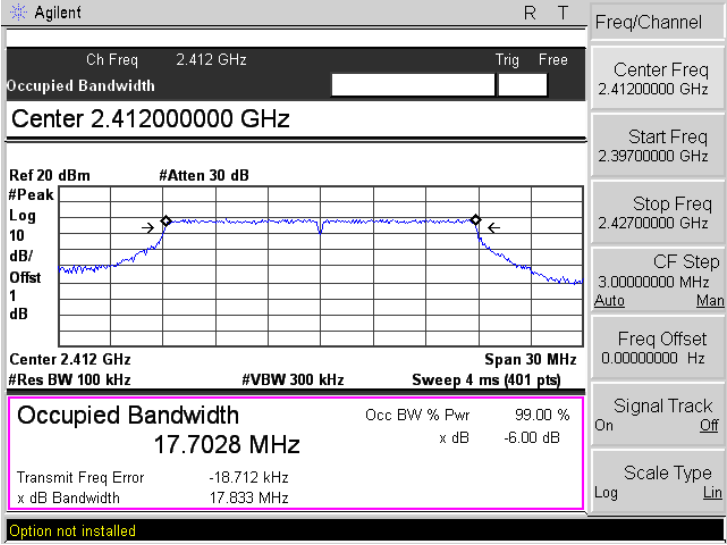
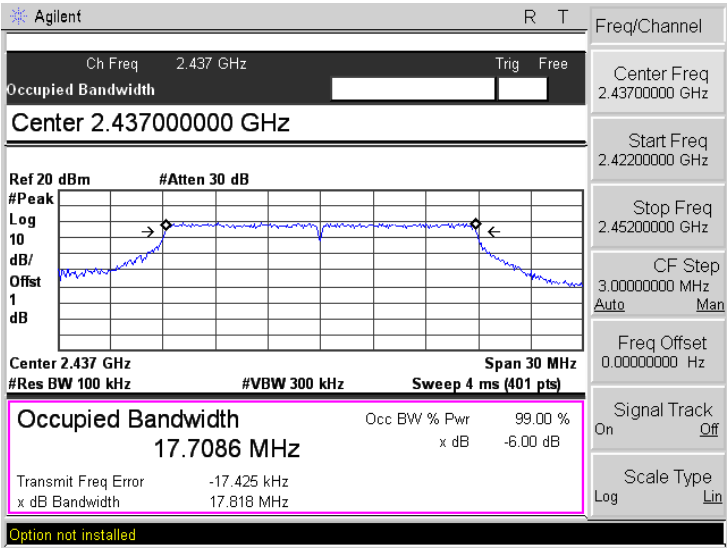
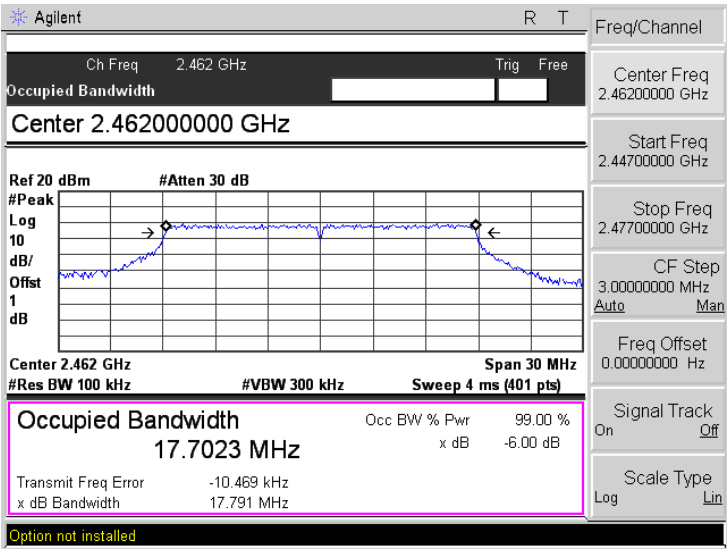
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>17.7028 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -18.712 kHz</p> <p>x dB Bandwidth 17.833 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>17.7086 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -17.425 kHz</p> <p>x dB Bandwidth 17.818 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>17.7023 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -10.469 kHz</p> <p>x dB Bandwidth 17.791 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>




<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>35.9920 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -16.192 kHz</p> <p>x dB Bandwidth 36.500 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>36.0241 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -14.543 kHz</p> <p>x dB Bandwidth 36.503 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>36.0453 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -7.208 kHz</p> <p>x dB Bandwidth 36.543 MHz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

➤ Antenna 2

802.11b-Low	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9774 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 17.167 kHz x dB Bandwidth 10.067 MHz</p> <p>Freq/Channel: Center Freq 2.41200000 GHz, Start Freq 2.39700000 GHz, Stop Freq 2.42700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
802.11b-Middle	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9986 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -20.092 kHz x dB Bandwidth 9.586 MHz</p> <p>Freq/Channel: Center Freq 2.43700000 GHz, Start Freq 2.42200000 GHz, Stop Freq 2.45200000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
802.11b-High	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 14.9891 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.287 kHz x dB Bandwidth 9.612 MHz</p> <p>Freq/Channel: Center Freq 2.46200000 GHz, Start Freq 2.44700000 GHz, Stop Freq 2.47700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
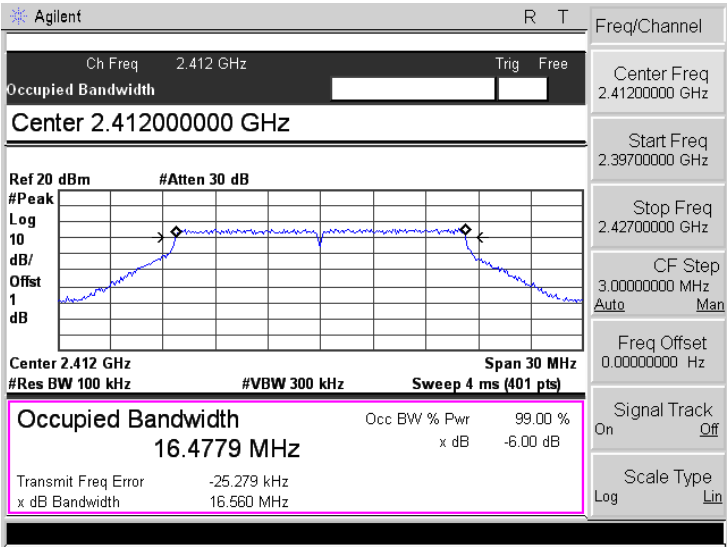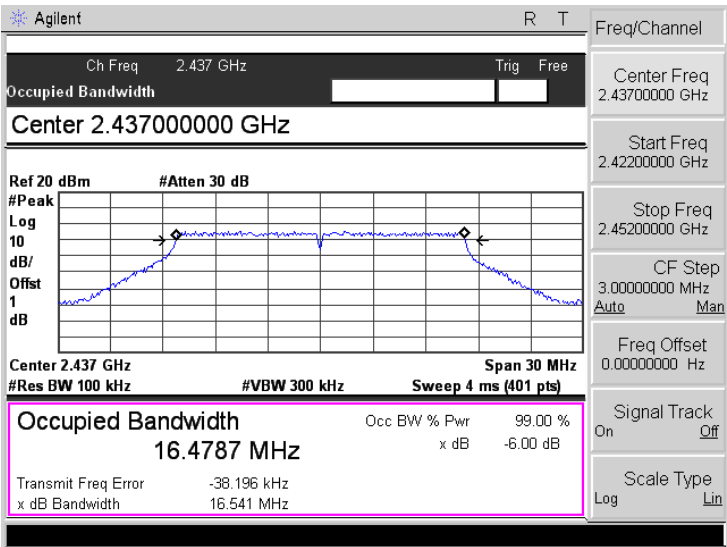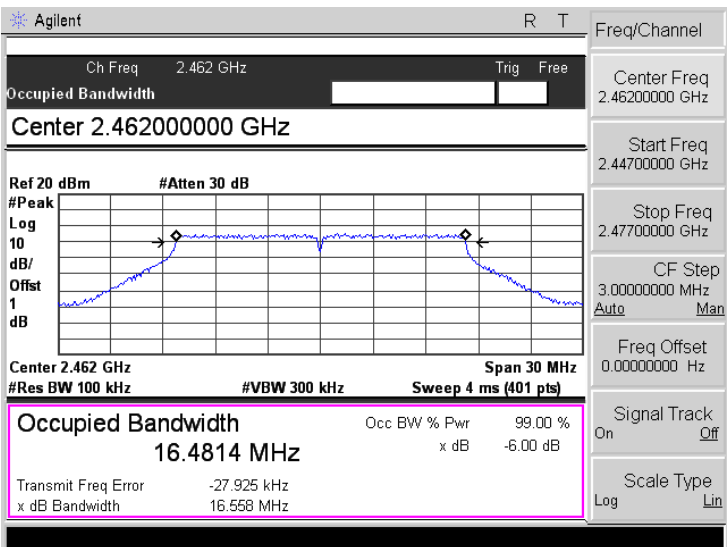
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4779 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -25.279 kHz x dB Bandwidth 16.560 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4787 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -38.196 kHz x dB Bandwidth 16.541 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4814 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -27.925 kHz x dB Bandwidth 16.558 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
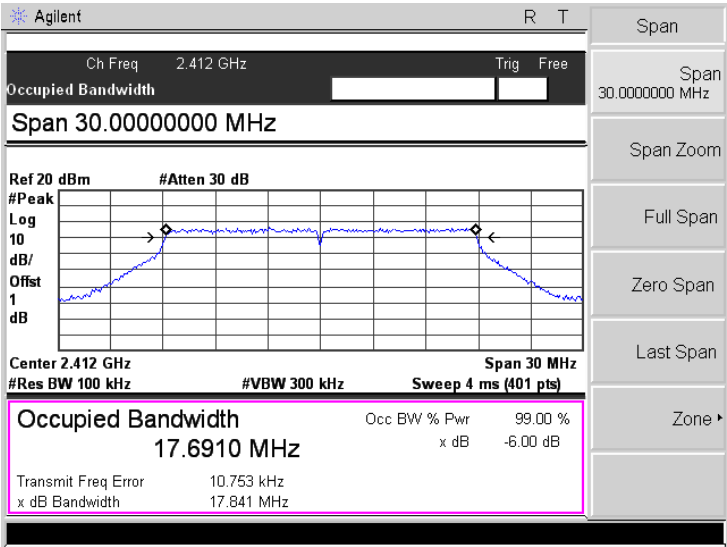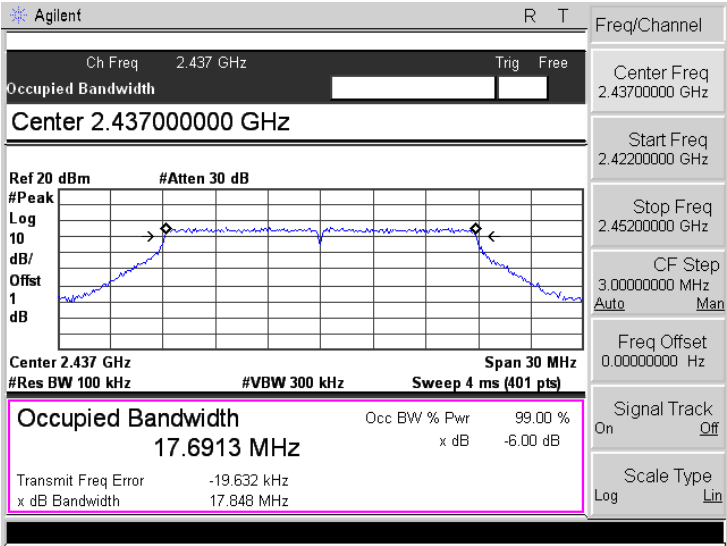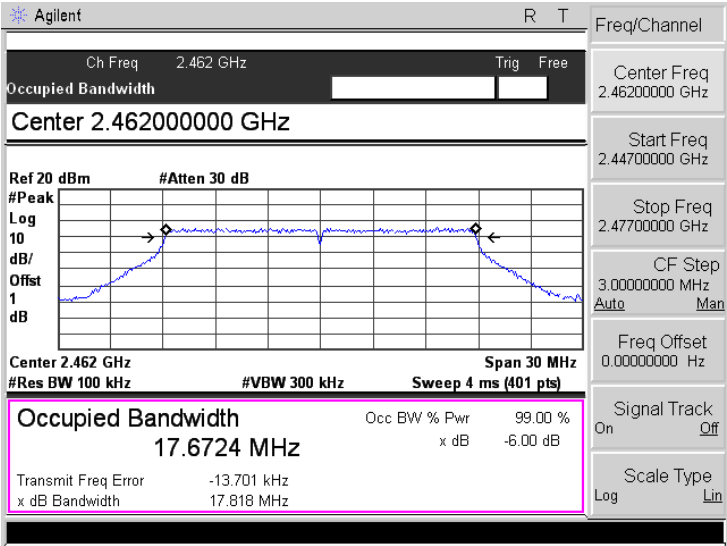
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 30.00000000 MHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6910 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 10.753 kHz x dB Bandwidth 17.841 MHz</p> <p>Span</p> <p>Span 30.00000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6913 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -19.632 kHz x dB Bandwidth 17.848 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6724 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.701 kHz x dB Bandwidth 17.818 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
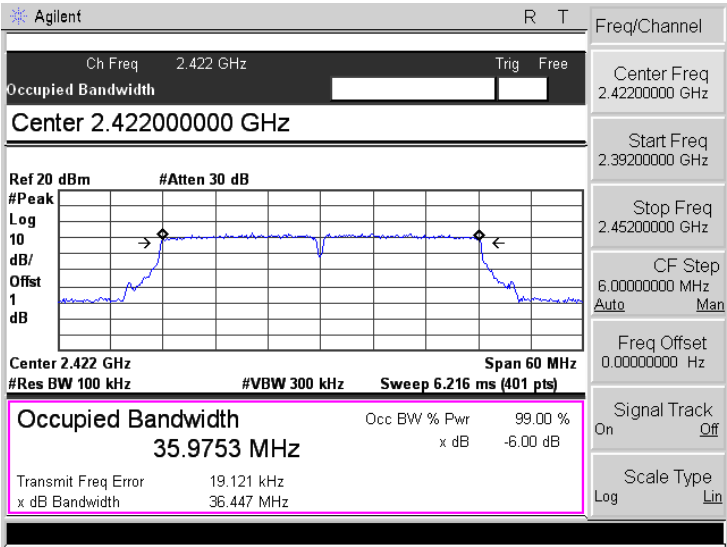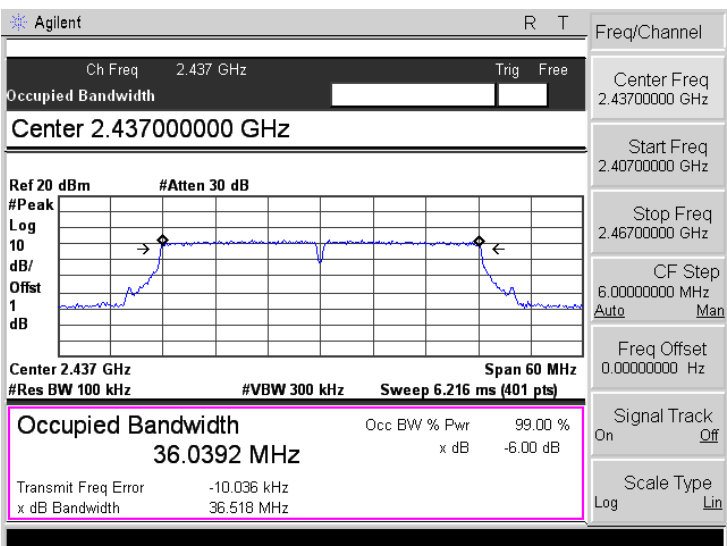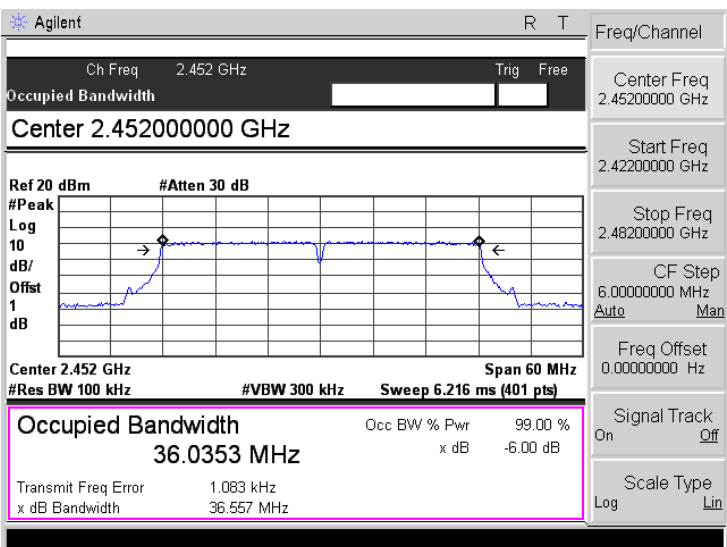
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth 35.9753 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 19.121 kHz</p> <p>x dB Bandwidth 36.447 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth 36.0392 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -10.036 kHz</p> <p>x dB Bandwidth 36.518 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth 36.0353 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 1.083 kHz</p> <p>x dB Bandwidth 36.557 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to KDB-558074 D01 V04, (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.3 Summary of Test Results/Plots




Test Mode	Test CH MHz	Test Result(dBm)		Test Result(mW)		Total Pow. dBm	Total Pow. mW	Limit mW
		Ant 1	Ant 2	Ant 1	Ant 2			
802.11b	2412	16.00	11.78	39.81	15.07	/	/	1000
	2437	16.11	11.66	40.83	14.66	/	/	1000
	2462	16.52	12.09	44.87	16.18	/	/	1000
802.11g	2412	14.12	9.13	25.82	8.18	/	/	1000
	2437	14.32	9.49	27.04	8.89	/	/	1000
	2462	14.24	8.87	26.55	7.71	/	/	1000
802.11n HT20	2412	13.28	10.36	21.28	10.86	15.33	32.67	1000
	2437	13.72	9.60	23.55	9.12	15.03	31.85	1000
	2462	13.64	9.41	23.12	8.73	13.85	24.29	1000
802.11n HT40	2422	12.48	8.19	17.70	6.59	13.65	23.17	1000
	2437	12.26	8.02	16.83	6.34	13.57	22.73	1000
	2452	12.17	7.96	16.48	6.25	15.33	32.67	1000




Please refer to the following test plots:

➤ Antenna 1
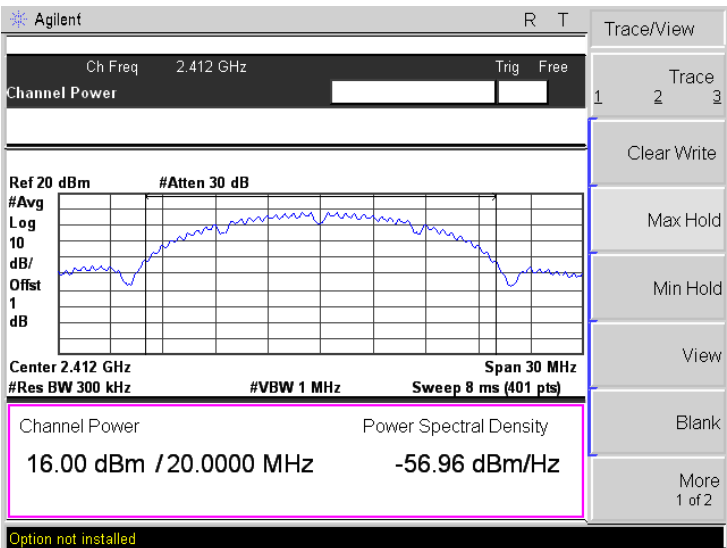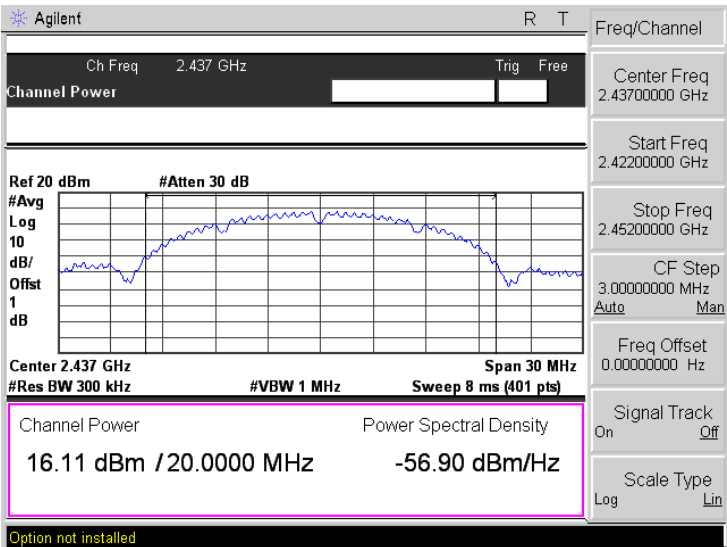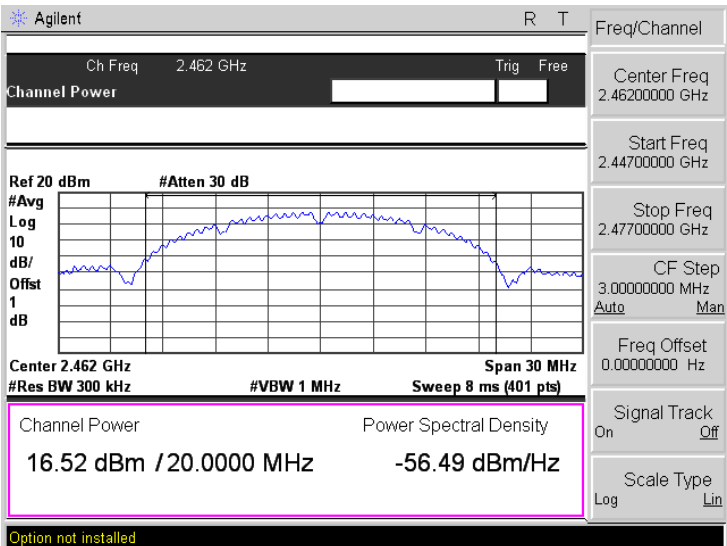
<p>802.11b-Low 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 16.00 dBm / 20.0000 MHz -56.96 dBm/Hz</p> <p>Option not installed</p>
<p>802.11b-Middle 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 16.11 dBm / 20.0000 MHz -56.90 dBm/Hz</p> <p>Option not installed</p>
<p>802.11b-High 11Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 16.52 dBm / 20.0000 MHz -56.49 dBm/Hz</p> <p>Option not installed</p>

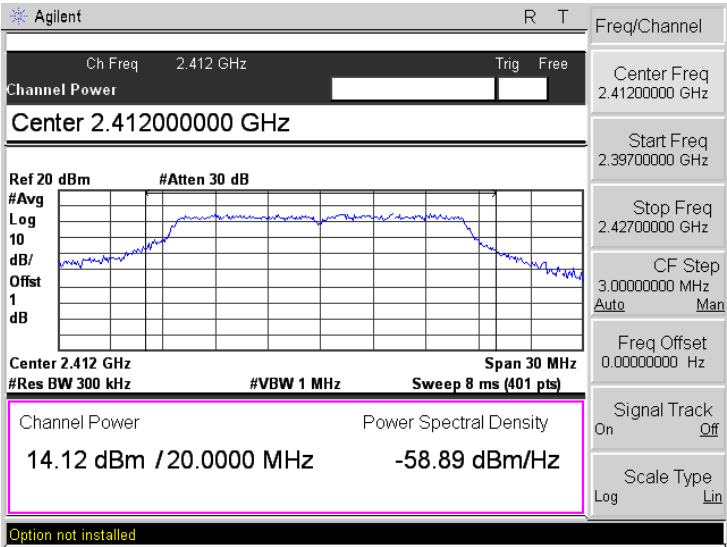
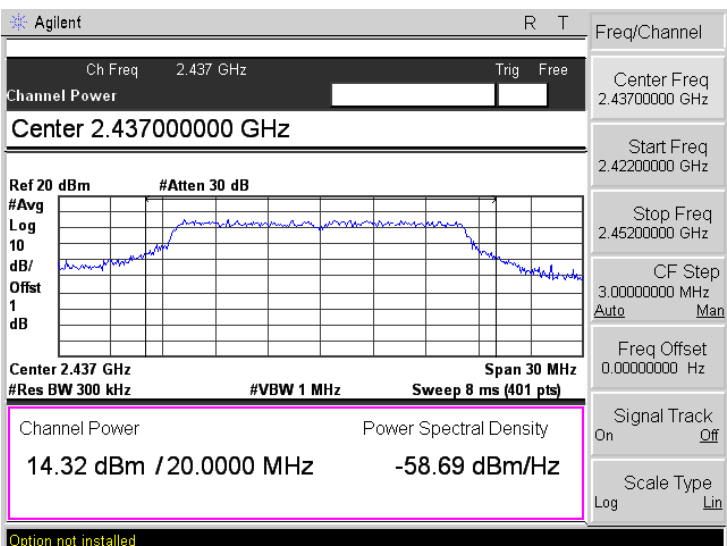
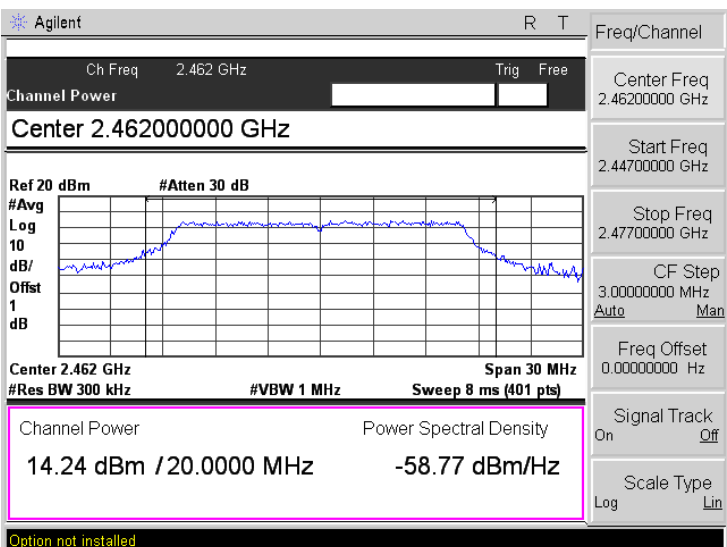
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 14.12 dBm / 20.000 MHz -58.89 dBm/Hz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 14.32 dBm / 20.000 MHz -58.69 dBm/Hz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 14.24 dBm / 20.000 MHz -58.77 dBm/Hz</p> <p>Option not installed</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

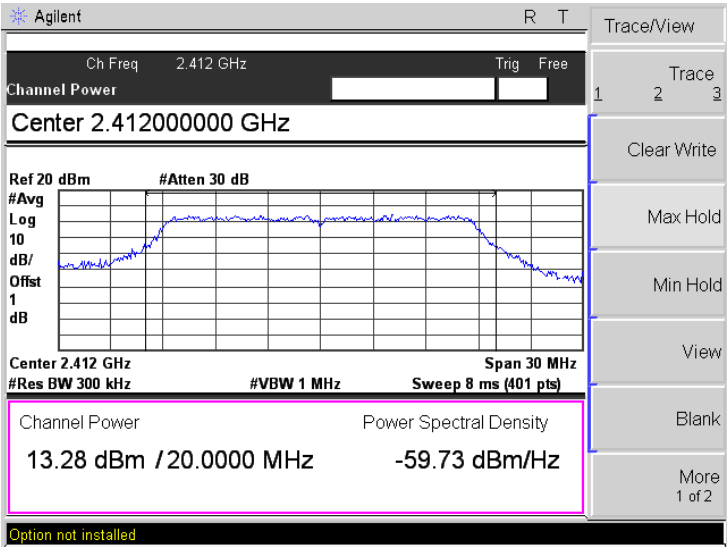
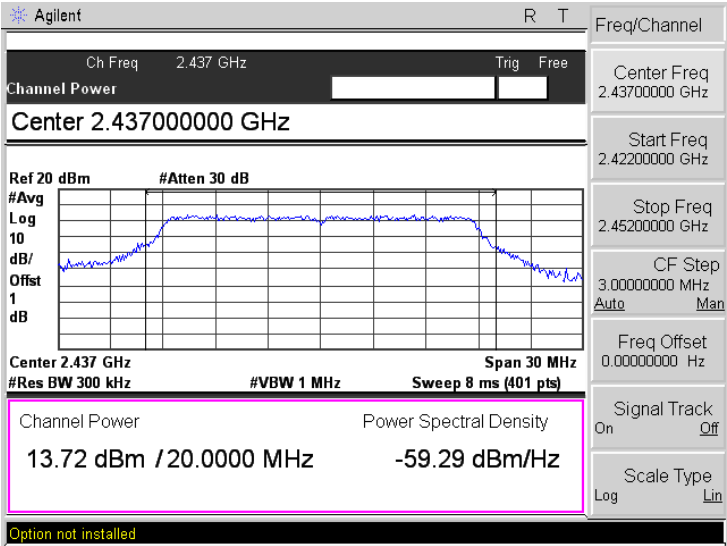
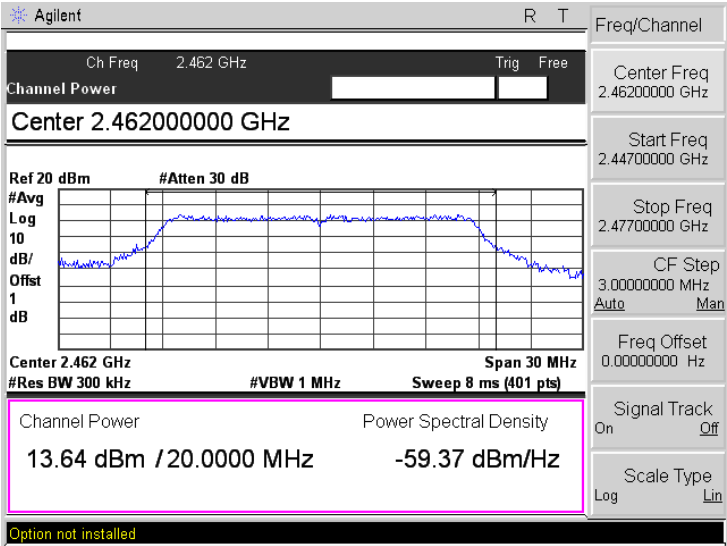
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.28 dBm / 20.0000 MHz -59.73 dBm/Hz</p> <p>Option not installed</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.72 dBm / 20.0000 MHz -59.29 dBm/Hz</p> <p>Option not installed</p> <p>Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 13.64 dBm / 20.0000 MHz -59.37 dBm/Hz</p> <p>Option not installed</p> <p>Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

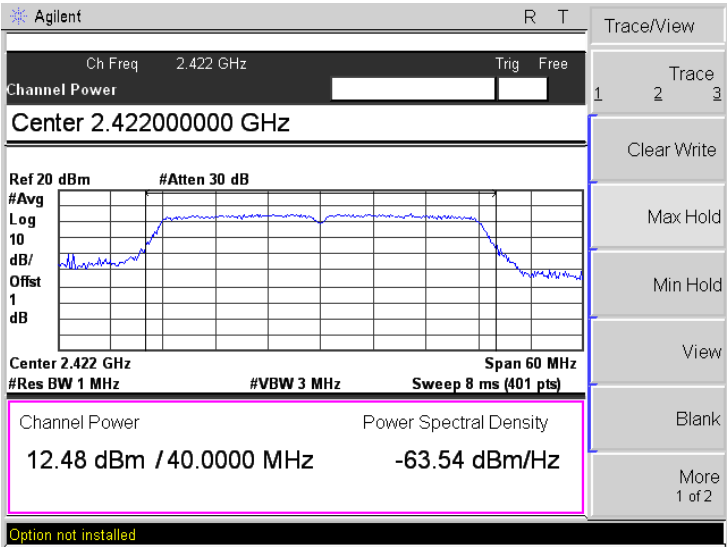
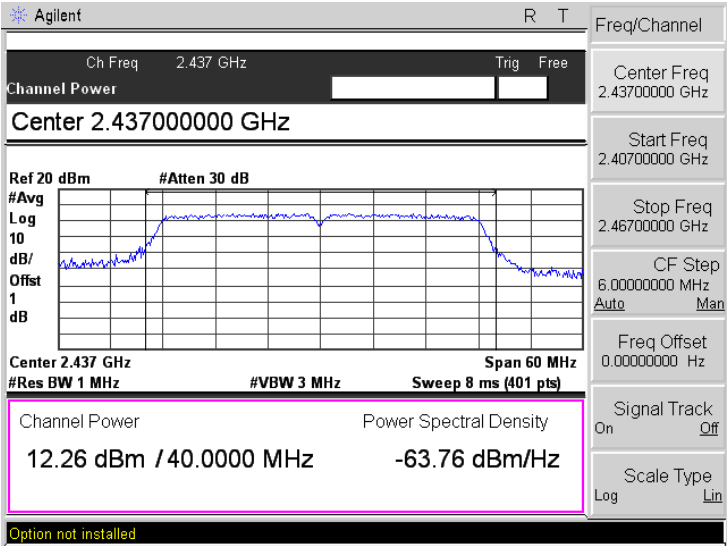
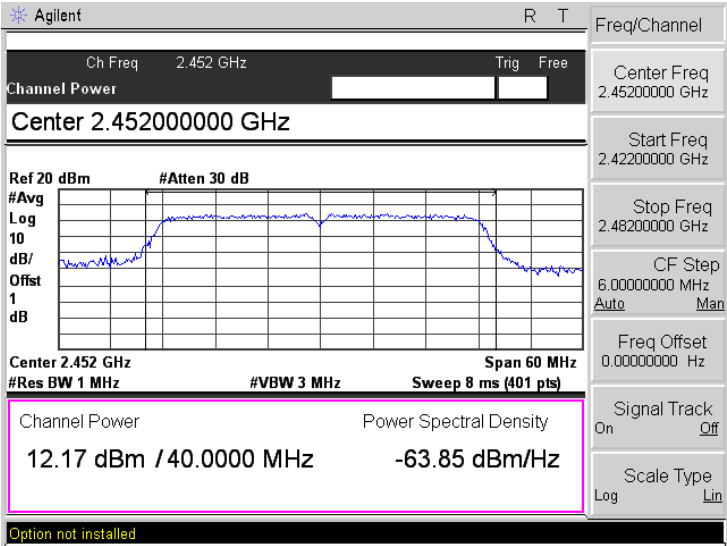
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T Trace/View</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.48 dBm / 40.0000 MHz -63.54 dBm/Hz</p> <p>Option not installed</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.26 dBm / 40.0000 MHz -63.76 dBm/Hz</p> <p>Option not installed</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.17 dBm / 40.0000 MHz -63.85 dBm/Hz</p> <p>Option not installed</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

➤ Antenna 2

<p>802.11b-Low 11Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 11.78 dBm / 20.0000 MHz -61.23 dBm/Hz</p> <p>Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11b-Middle 11Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 11.66 dBm / 20.0000 MHz -61.35 dBm/Hz</p> <p>Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11b-High 11Mbps</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 12.09 dBm / 20.0000 MHz -60.92 dBm/Hz</p> <p>Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
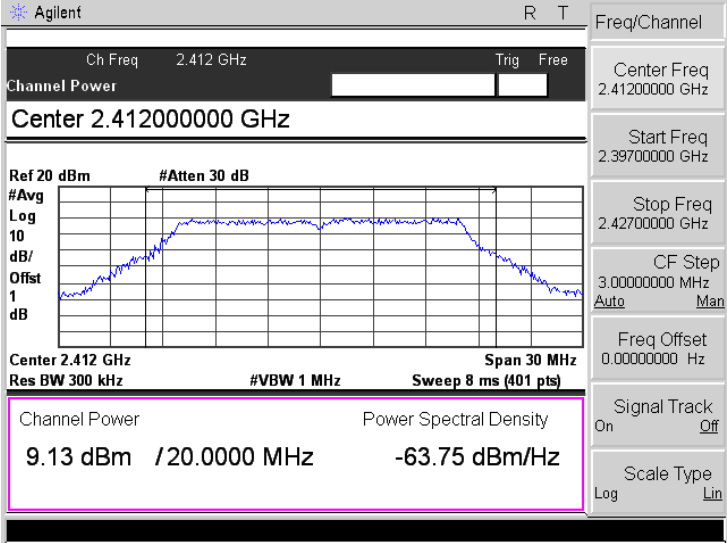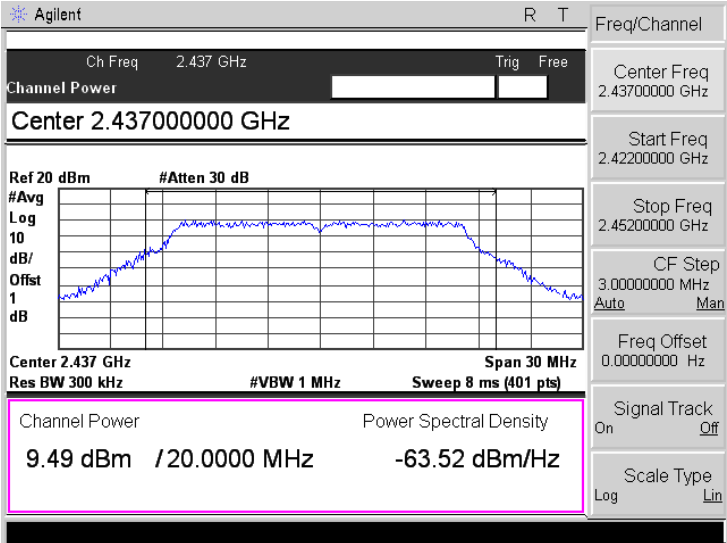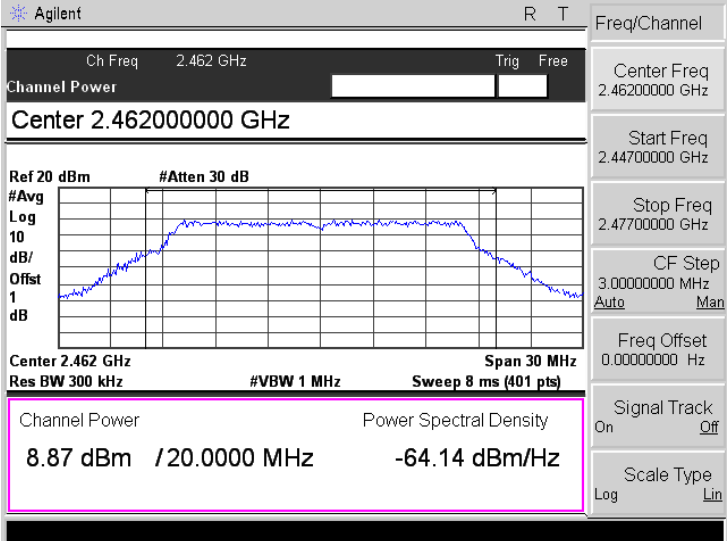
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.13 dBm /20.0000 MHz -63.75 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.49 dBm /20.0000 MHz -63.52 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.87 dBm /20.0000 MHz -64.14 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
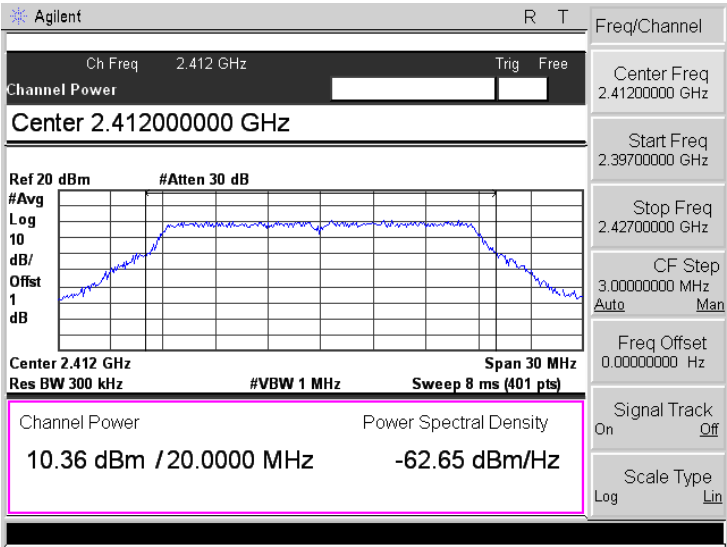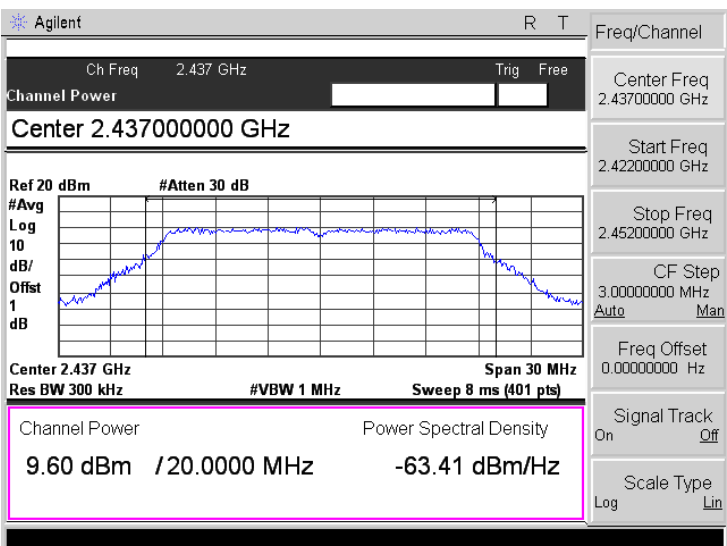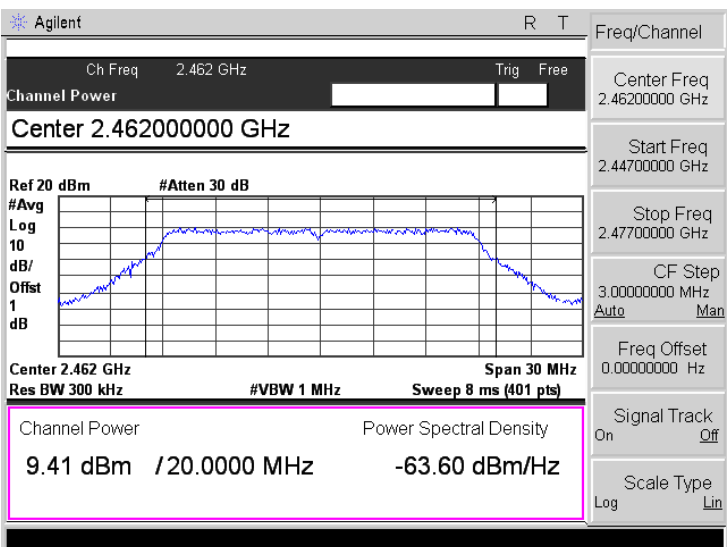
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 10.36 dBm / 20.000 MHz -62.65 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 9.60 dBm / 20.000 MHz -63.41 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 9.41 dBm / 20.000 MHz -63.60 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
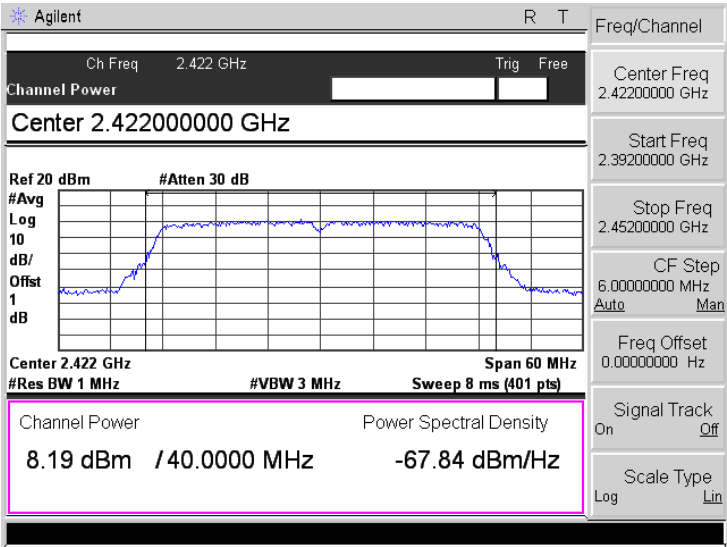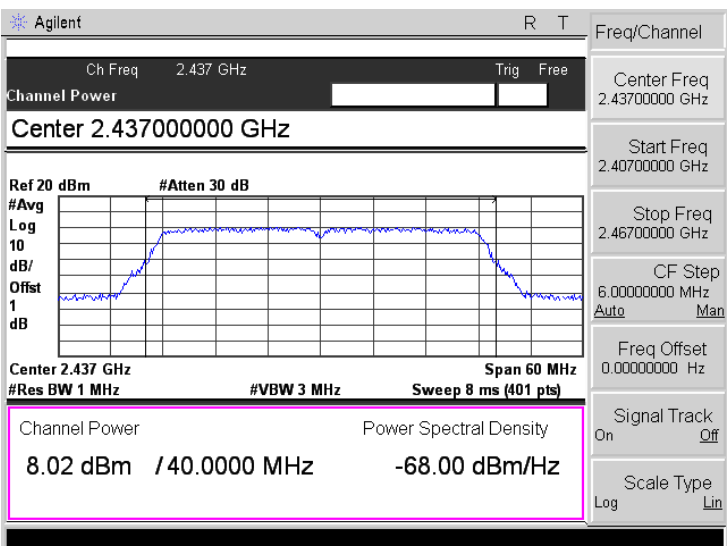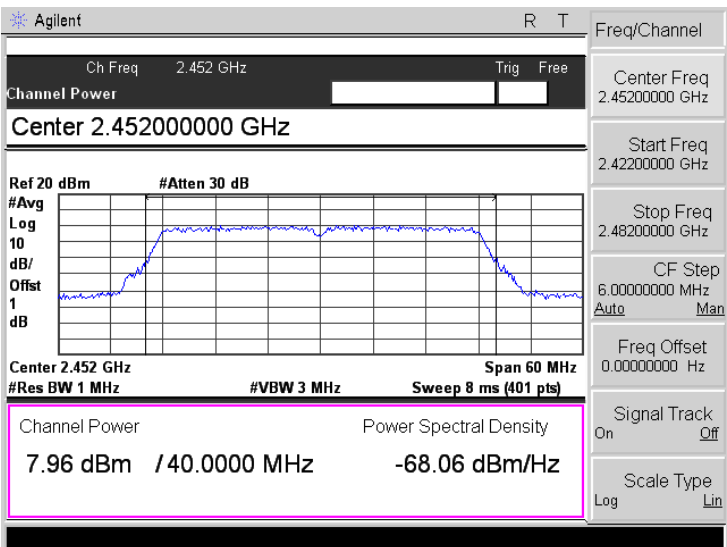
<p>802.11n-HT40-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.19 dBm / 40.0000 MHz -67.84 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.02 dBm / 40.0000 MHz -68.00 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.96 dBm / 40.0000 MHz -68.06 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable



According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

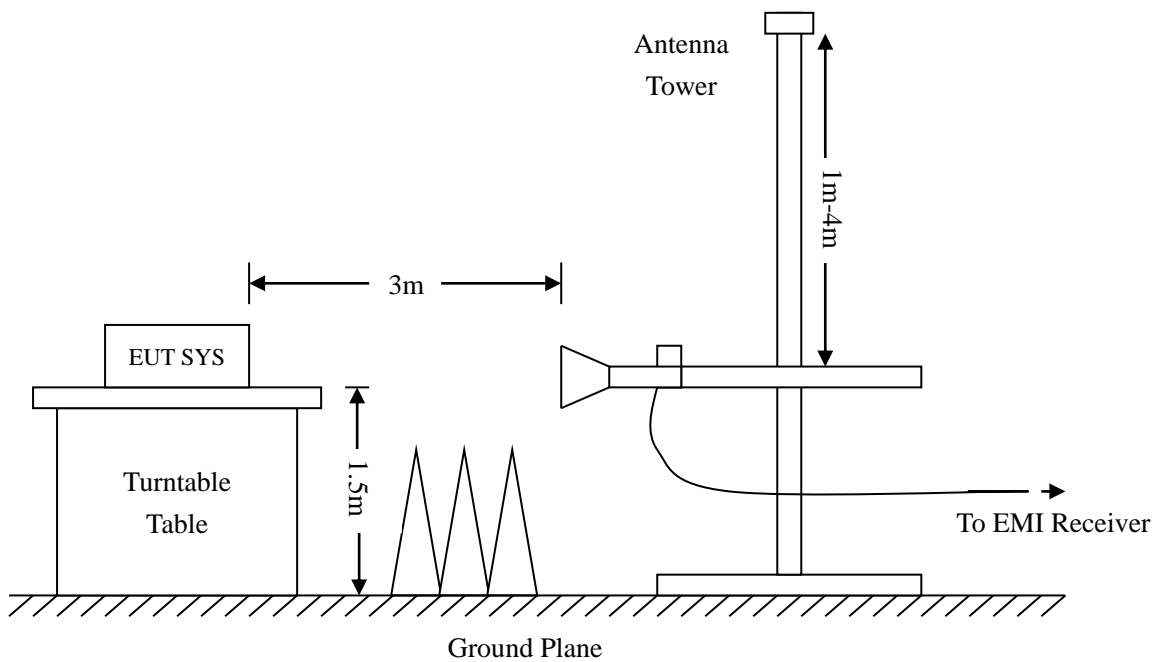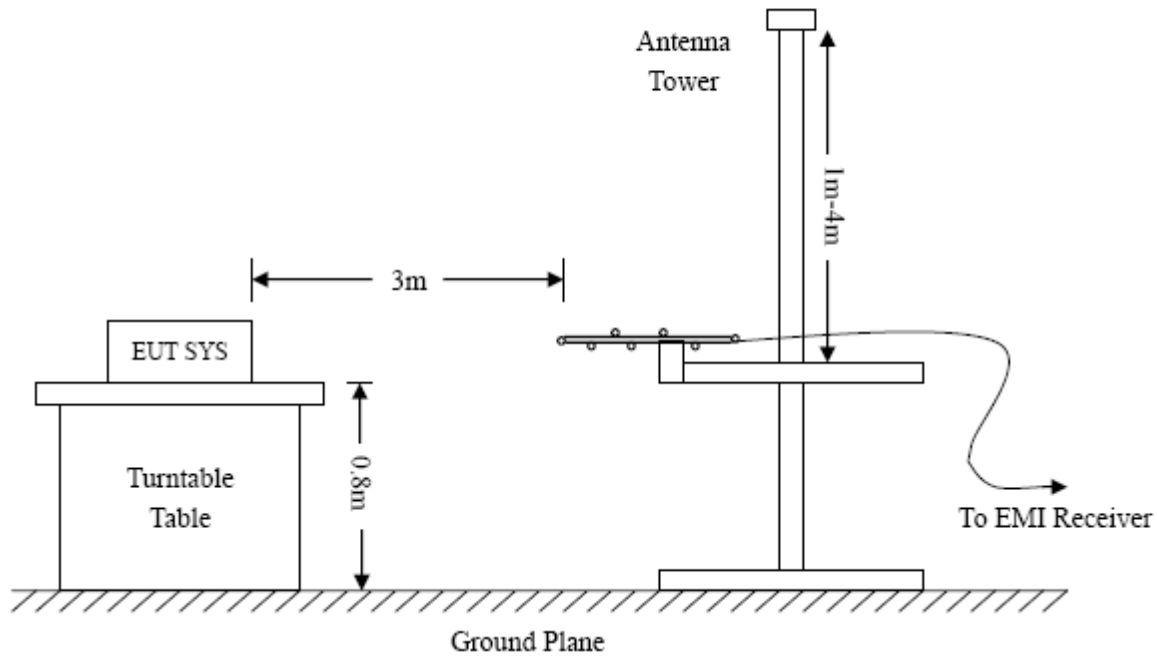

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.


- Spurious Emissions Below 1GHz
- Worst case Antenna 1

802.11b			
Test Channel	Low	Polarity:	Horizontal

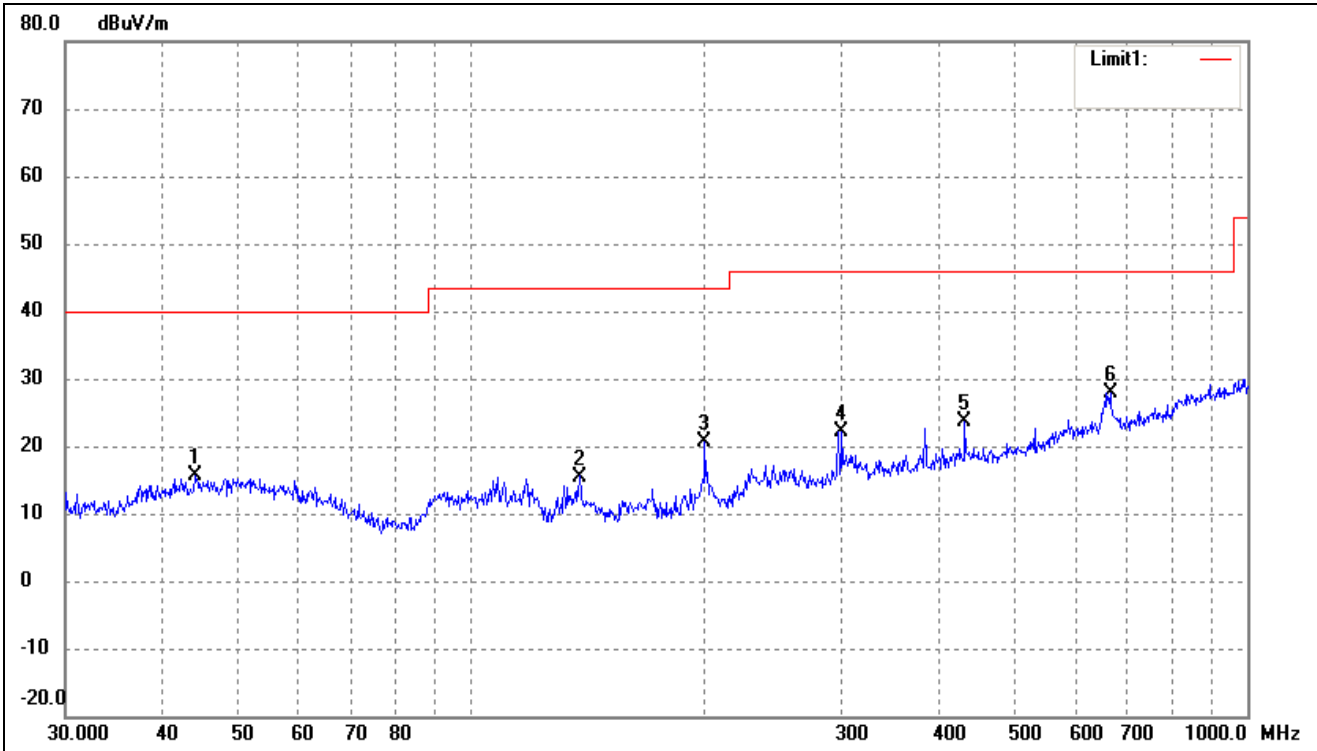


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.1202	27.75	-12.03	15.72	40.00	-24.28	273	100	peak
2	137.9029	32.75	-17.25	15.50	43.50	-28.00	187	100	peak
3	199.9856	33.87	-13.20	20.67	43.50	-22.83	64	100	peak
4	300.3673	32.30	-10.15	22.15	46.00	-23.85	123	100	peak
5	432.5457	31.65	-8.06	23.59	46.00	-22.41	175	100	peak
6	665.8035	32.39	-4.59	27.80	46.00	-18.20	343	100	peak

802.11b			
Test Channel	Low	Polarity:	Vertical

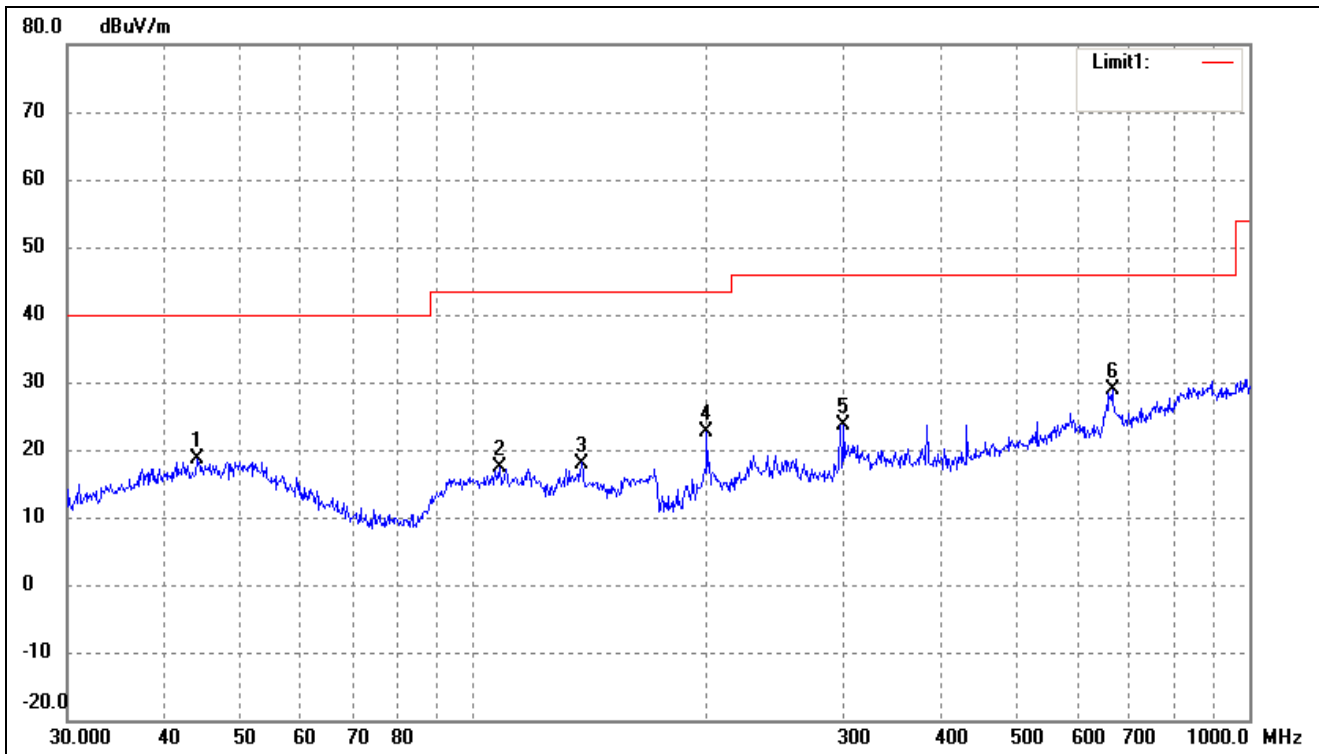


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.1201	30.75	-12.03	18.72	40.00	-21.28	334	100	peak
2	108.2667	31.04	-13.70	17.34	43.50	-26.16	98	100	peak
3	137.9028	35.25	-17.25	18.00	43.50	-25.50	227	100	peak
4	199.9856	35.87	-13.20	22.67	43.50	-20.83	102	100	peak
5	300.3673	33.80	-10.15	23.65	46.00	-22.35	95	100	peak
6	665.8034	33.39	-4.59	28.80	46.00	-17.20	322	100	peak

802.11b			
Test Channel	Middle	Polarity:	Horizontal

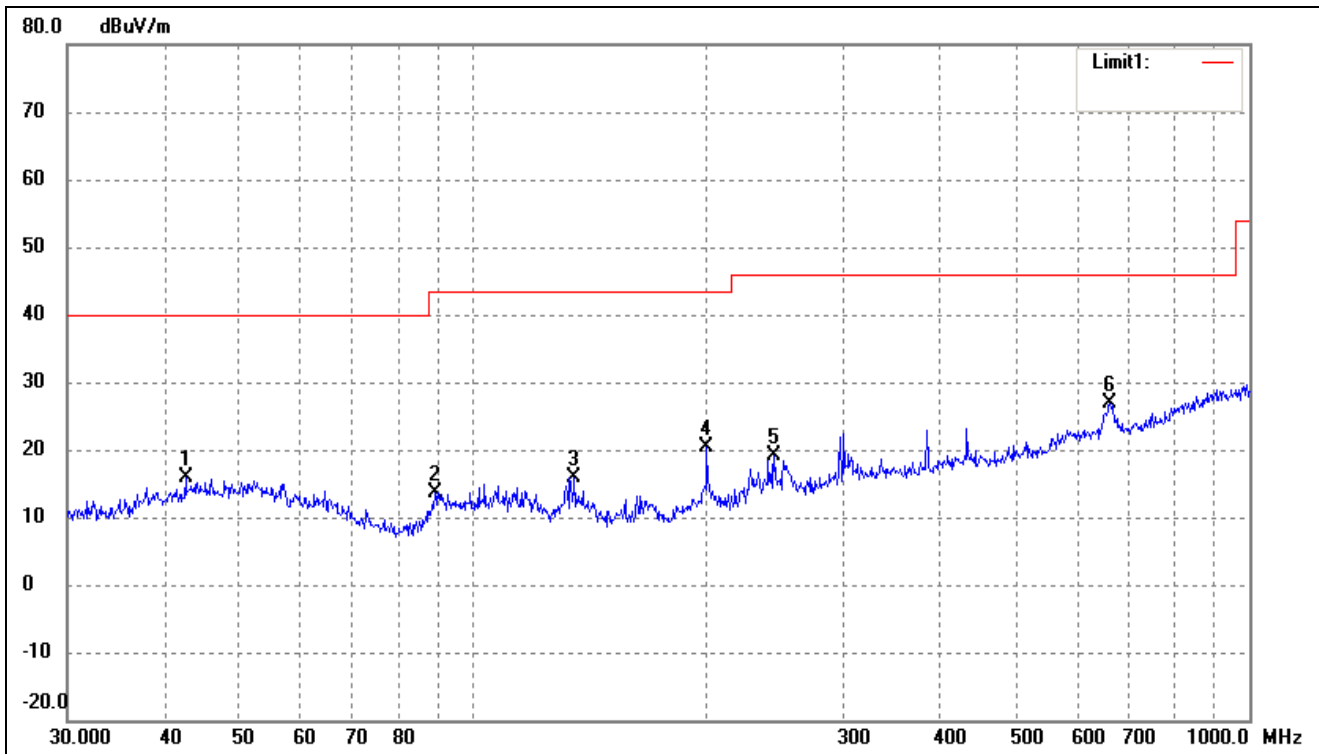


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.6000	28.06	-12.20	15.86	40.00	-24.14	49	100	peak
2	89.2764	27.59	-13.96	13.63	43.50	-29.87	98	100	peak
3	135.0319	33.20	-17.26	15.94	43.50	-27.56	101	100	peak
4	199.9856	33.56	-13.20	20.36	43.50	-23.14	109	100	peak
5	244.2321	31.07	-11.88	19.19	46.00	-26.81	144	100	peak
6	661.1505	31.59	-4.61	26.98	46.00	-19.02	293	100	peak

802.11b			
Test Channel	Middle	Polarity:	Vertical

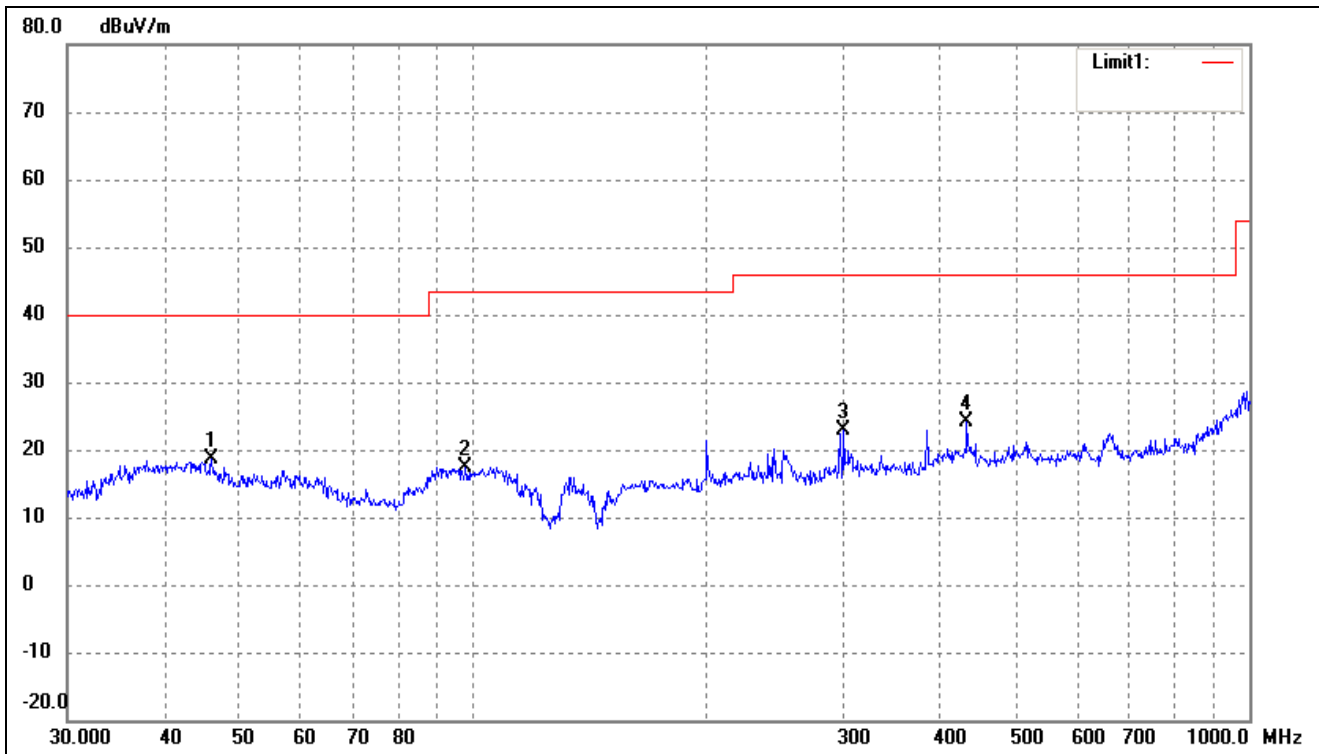


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0163	30.49	-11.81	18.68	40.00	-21.32	77	100	peak
2	97.7981	31.52	-14.06	17.46	43.50	-26.04	228	100	peak
3	300.3673	33.13	-10.15	22.98	46.00	-23.02	67	100	peak
4	432.5457	32.22	-8.06	24.16	46.00	-21.84	285	100	peak

802.11b			
Test Channel	High	Polarity:	Horizontal

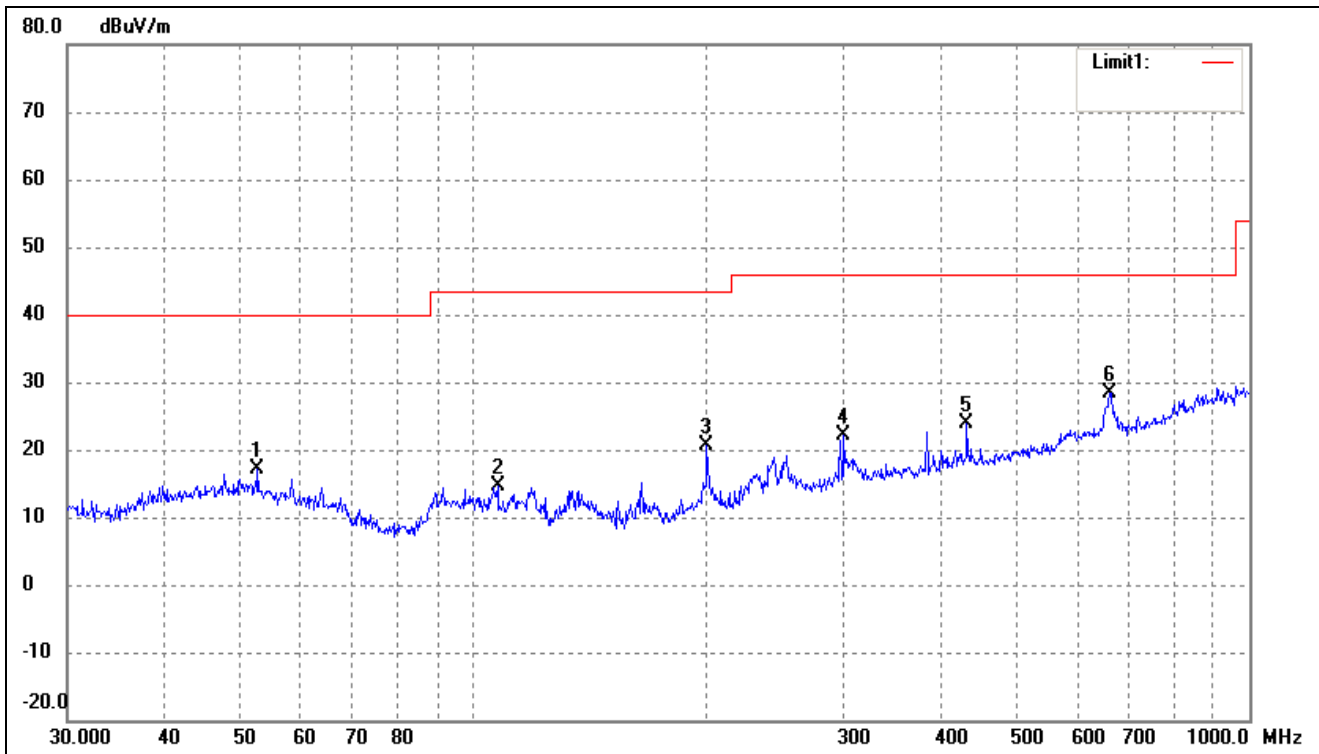

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.7600	28.85	-11.69	17.16	40.00	-22.84	208	100	peak
2	107.5101	28.33	-13.62	14.71	43.50	-28.79	98	100	peak
3	199.9856	33.94	-13.20	20.74	43.50	-22.76	132	100	peak
4	300.3672	32.23	-10.15	22.08	46.00	-23.92	97	100	peak
5	432.5457	31.89	-8.06	23.83	46.00	-22.17	156	100	peak
6	661.1505	33.01	-4.61	28.40	46.00	-17.60	303	100	peak


802.11b			
Test Channel	High	Polarity:	Vertical

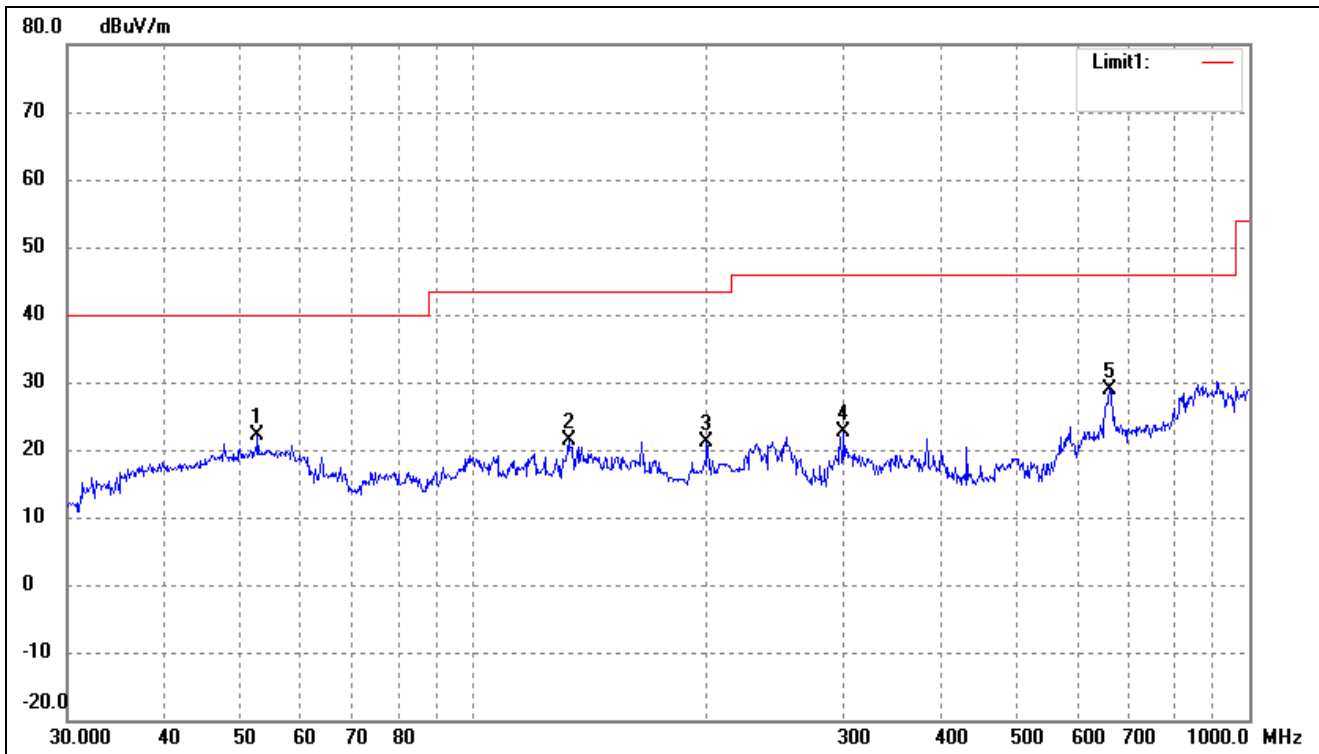

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	52.7599	33.85	-11.69	22.16	40.00	-17.84	90	100	peak
2	132.6850	38.40	-17.08	21.32	43.50	-22.18	112	100	peak
3	199.9856	34.44	-13.20	21.24	43.50	-22.26	145	100	peak
4	300.3673	32.73	-10.15	22.58	46.00	-23.42	143	100	peak
5	661.1503	33.51	-4.61	28.90	46.00	-17.10	198	100	peak


➤ Worst case Antenna 2

802.11b			
Test Channel	Low	Polarity:	Horizontal

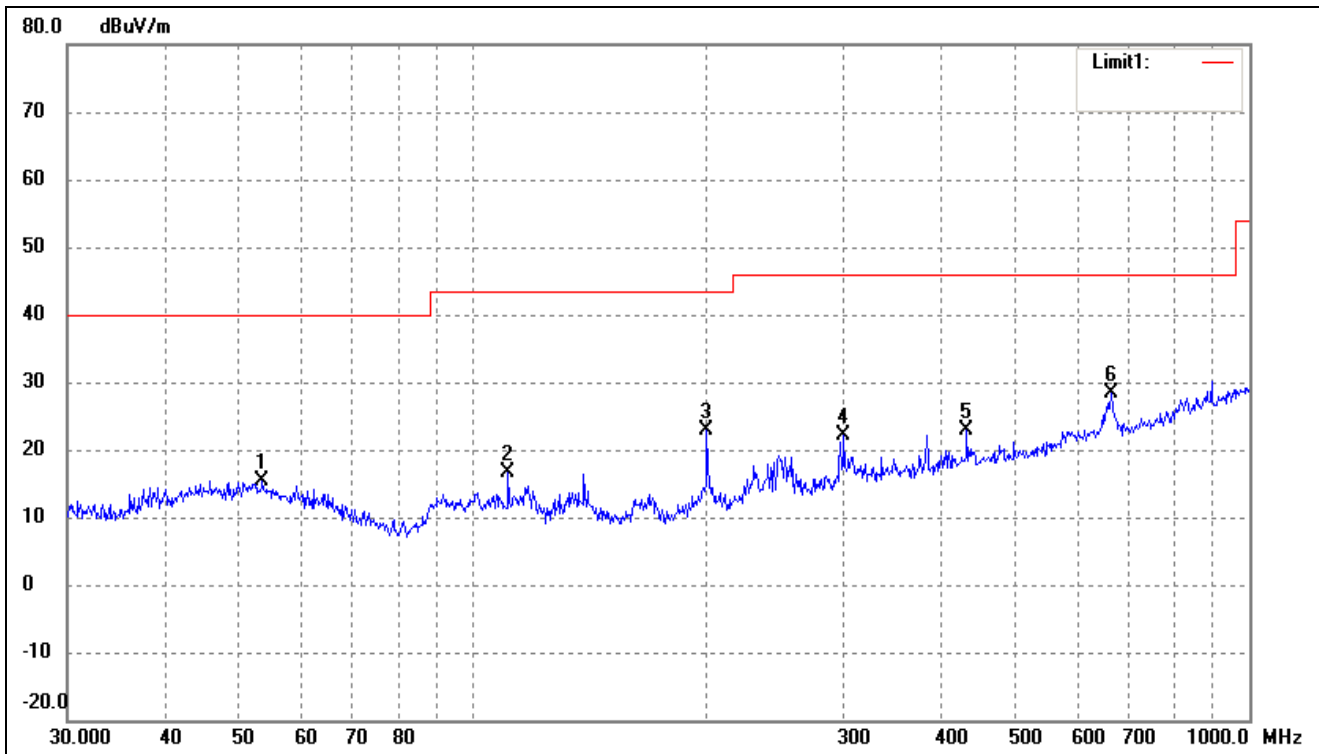


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	27.10	-11.81	15.29	40.00	-24.71	248	100	peak
2	110.9571	30.59	-14.05	16.54	43.50	-26.96	292	100	peak
3	199.9856	36.00	-13.20	22.80	43.50	-20.70	63	100	peak
4	300.3673	32.19	-10.15	22.04	46.00	-23.96	245	100	peak
5	432.5457	30.82	-8.06	22.76	46.00	-23.24	164	100	peak
6	663.4729	32.98	-4.60	28.38	46.00	-17.62	248	100	peak

802.11b			
Test Channel	Low	Polarity:	Vertical

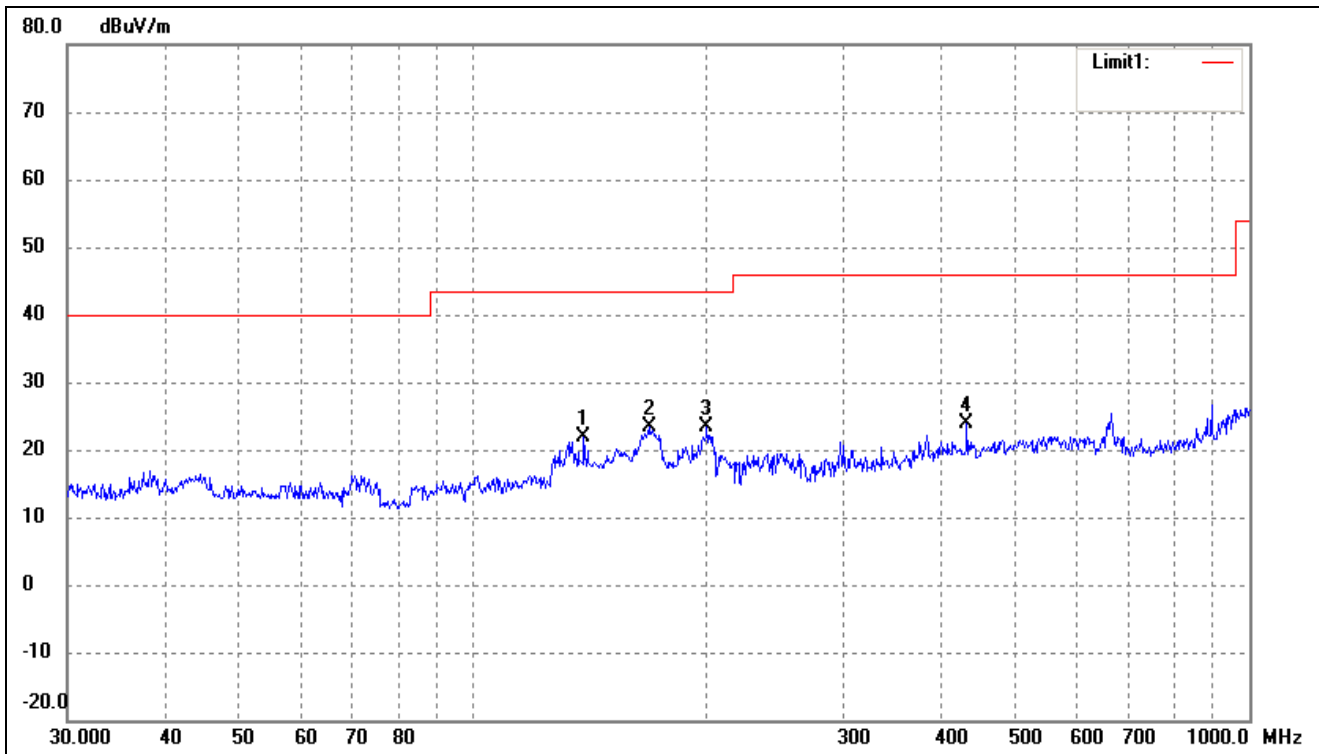


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	138.8735	39.07	-17.24	21.83	43.50	-21.67	233	100	peak
2	168.4138	39.47	-16.19	23.28	43.50	-20.22	94	100	peak
3	199.9856	36.50	-13.20	23.30	43.50	-20.20	297	100	peak
4	432.5457	31.82	-8.06	23.76	46.00	-22.24	95	100	peak

802.11b			
Test Channel	Middle	Polarity:	Horizontal

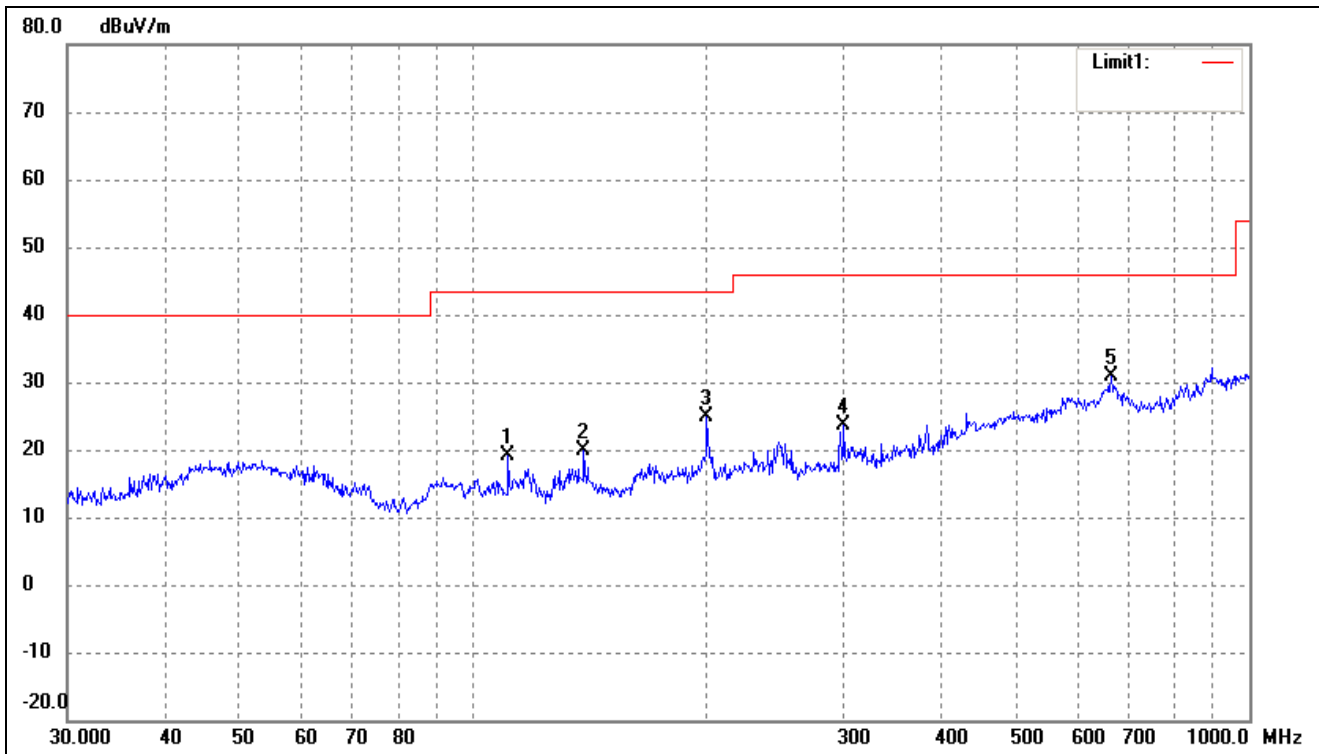


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	110.9569	33.09	-14.05	19.04	43.50	-24.46	332	100	peak
2	138.8735	37.07	-17.24	19.83	43.50	-23.67	145	100	peak
3	199.9856	38.00	-13.20	24.80	43.50	-18.70	66	100	peak
4	300.3673	33.69	-10.15	23.54	46.00	-22.46	134	100	peak
5	663.4728	35.48	-4.60	30.88	46.00	-15.12	156	100	peak

802.11b			
Test Channel	Middle	Polarity:	Vertical

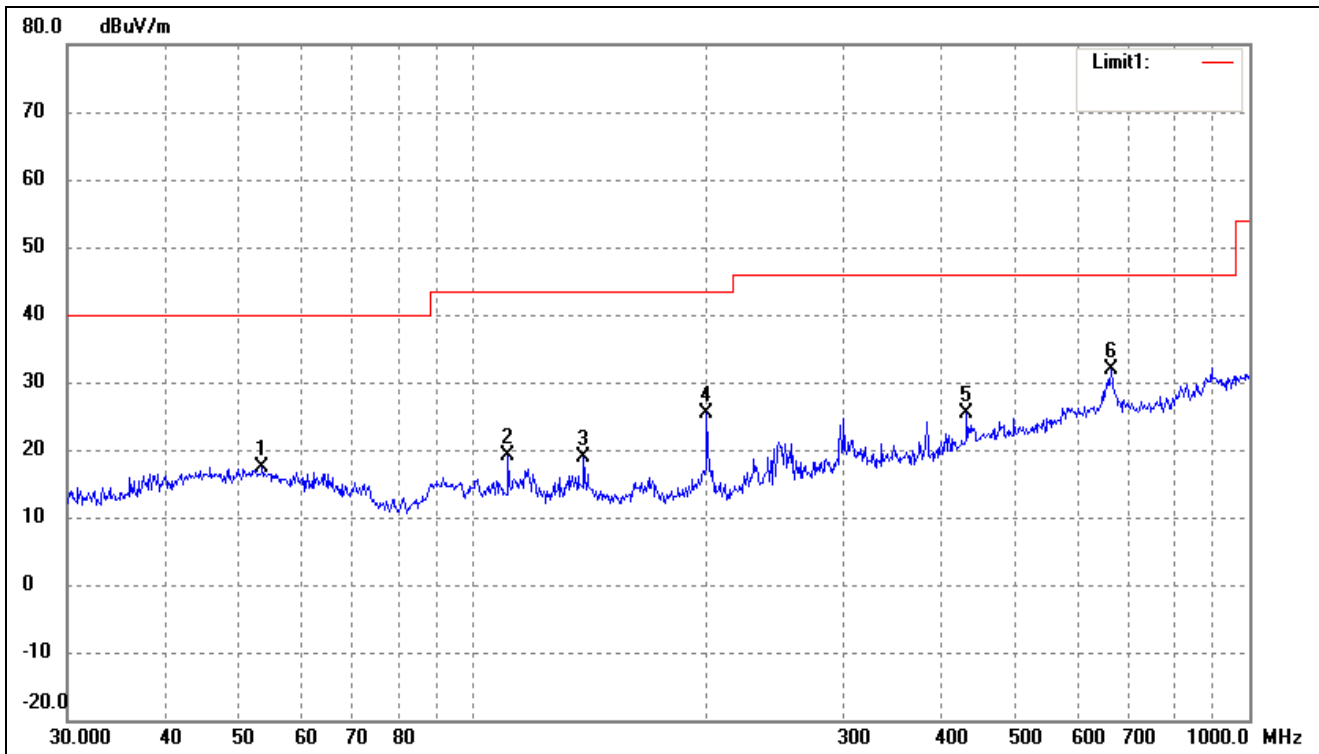


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	29.10	-11.81	17.29	40.00	-22.71	310	100	peak
2	110.9570	33.09	-14.05	19.04	43.50	-24.46	238	100	peak
3	138.8735	36.07	-17.24	18.83	43.50	-24.67	66	100	peak
4	199.9856	38.50	-13.20	25.30	43.50	-18.20	208	100	peak
5	432.5457	33.32	-8.06	25.26	46.00	-20.74	51	100	peak
6	663.4728	36.48	-4.60	31.88	46.00	-14.12	235	100	peak

802.11b			
Test Channel	High	Polarity:	Horizontal

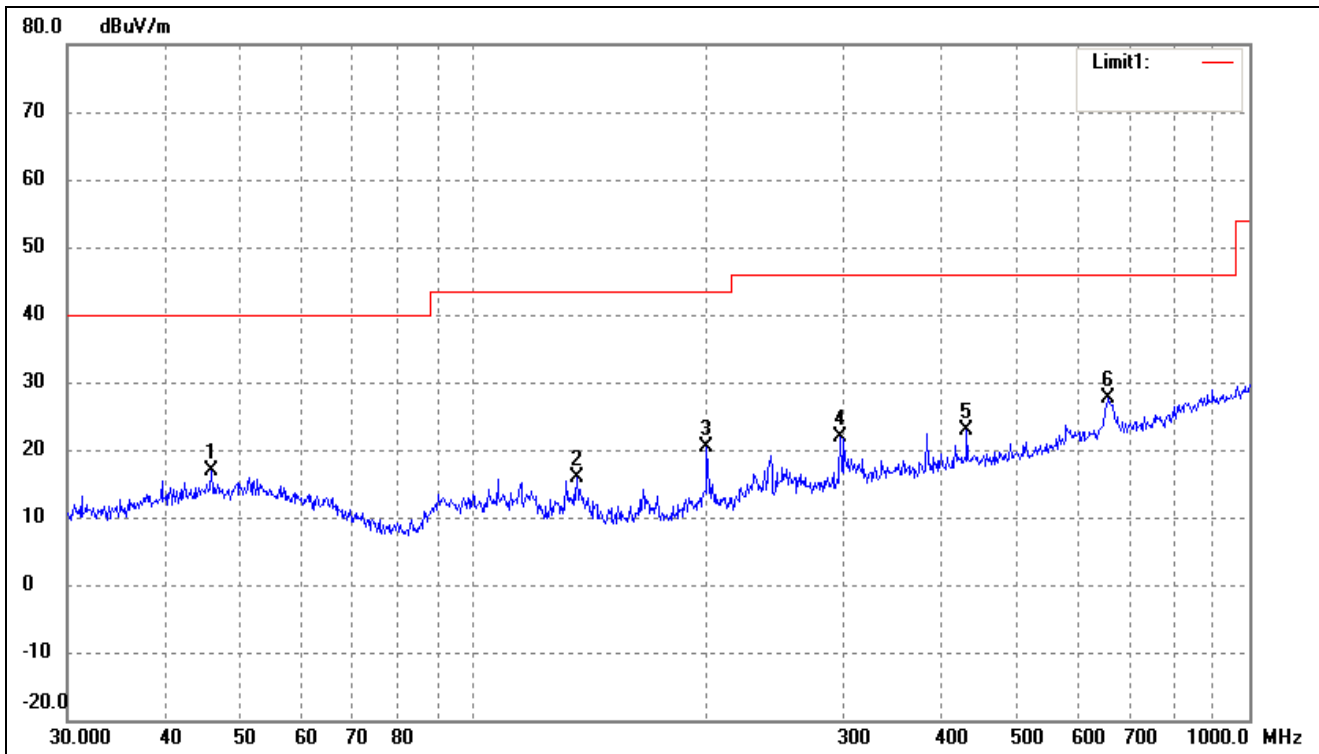

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0164	28.60	-11.81	16.79	40.00	-23.21	233	100	peak
2	135.9822	33.13	-17.26	15.87	43.50	-27.63	94	100	peak
3	199.9856	33.51	-13.20	20.31	43.50	-23.19	297	100	peak
4	297.2241	32.00	-10.16	21.84	46.00	-24.16	95	100	peak
5	432.5457	31.06	-8.06	23.00	46.00	-23.00	130	100	peak
6	656.5300	32.23	-4.56	27.67	46.00	-18.33	263	100	peak

802.11b			
Test Channel	High	Polarity:	Vertical

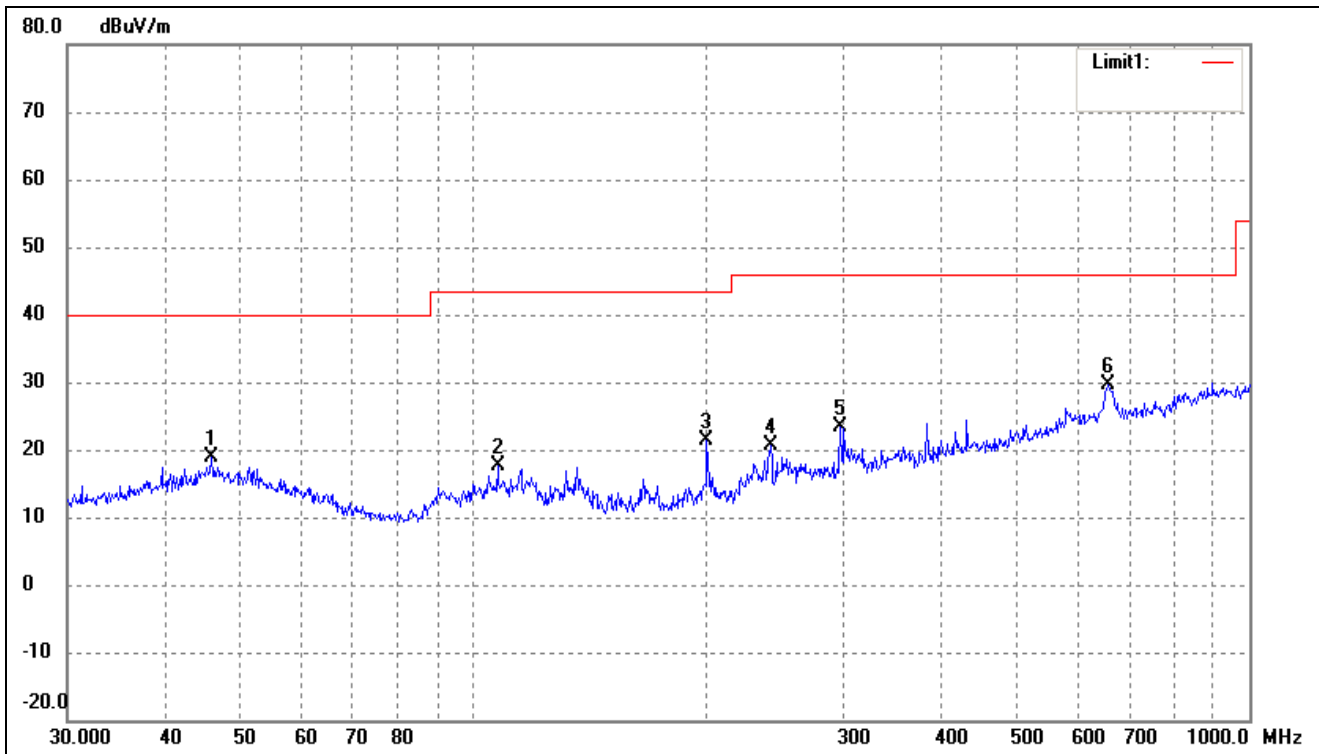

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0163	30.60	-11.81	18.79	40.00	-21.21	296	100	peak
2	107.5100	31.13	-13.62	17.51	43.50	-25.99	95	100	peak
3	199.9856	34.51	-13.20	21.31	43.50	-22.19	307	100	peak
4	241.6762	32.23	-11.69	20.54	46.00	-25.46	90	100	peak
5	297.2241	33.50	-10.16	23.34	46.00	-22.66	202	100	peak
6	656.5299	34.23	-4.56	29.67	46.00	-16.33	221	100	peak

- Spurious Emissions Below 1GHz
- Worst case Antenna 1
- Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	59.67	-3.86	55.81	74	-18.19	H	PK
4824.000	43.77	-3.86	39.91	54	-14.09	H	AV
7236.000	52.77	1.1	53.87	74	-20.13	H	PK
7236.000	39.81	1.1	40.91	54	-13.09	H	AV
4824.000	60.37	-3.86	56.51	74	-17.49	V	PK
4824.000	41.24	-3.86	37.38	54	-16.62	V	AV
7236.000	52.63	1.1	53.73	74	-20.27	V	PK
7236.000	40.79	1.1	41.89	54	-12.11	V	AV
Middle Channel-2437MHz							
4874.000	61.92	-3.74	58.18	74	-15.82	H	PK
4874.000	43.36	-3.74	39.62	54	-14.38	H	AV
7311.000	54.58	1.47	56.05	74	-17.95	H	PK
7311.000	39.56	1.47	41.03	54	-12.97	H	AV
4874.000	60.95	-3.74	57.21	74	-16.79	V	PK
4874.000	42.15	-3.74	38.41	54	-15.59	V	AV
7311.000	54.79	1.47	56.26	74	-17.74	V	PK
7311.000	39.07	1.47	40.54	54	-13.46	V	AV
High Channel-2462MHz							
4924.000	61.11	-3.63	57.48	74	-16.52	H	PK
4924.000	42.42	-3.63	38.79	54	-15.21	H	AV
7386.000	55.22	1.62	56.84	74	-17.16	H	PK
7386.000	40.98	1.62	42.6	54	-11.4	H	AV
4924.000	59.61	-3.63	55.98	74	-18.02	V	PK
4924.000	43.25	-3.63	39.62	54	-14.38	V	AV
7386.000	54.22	1.62	55.84	74	-18.16	V	PK
7386.000	40.19	1.62	41.81	54	-12.19	V	AV

- Worst case Antenna 1
- Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	59.91	-3.86	56.05	74	-17.95	H	PK
4824.000	42.61	-3.86	38.75	54	-15.25	H	AV
7236.000	53.1	1.1	54.2	74	-19.8	H	PK
7236.000	39.99	1.1	41.09	54	-12.91	H	AV
4824.000	61.16	-3.86	57.3	74	-16.7	V	PK
4824.000	41.74	-3.86	37.88	54	-16.12	V	AV
7236.000	53.31	1.1	54.41	74	-19.59	V	PK
7236.000	38.26	1.1	39.36	54	-14.64	V	AV
Middle Channel-2437MHz							
4874.000	58.07	-3.74	54.33	74	-19.67	H	PK
4874.000	43.37	-3.74	39.63	54	-14.37	H	AV
7311.000	53.1	1.47	54.57	74	-19.43	H	PK
7311.000	38.16	1.47	39.63	54	-14.37	H	AV
4874.000	61.67	-3.74	57.93	74	-16.07	V	PK
4874.000	42.92	-3.74	39.18	54	-14.82	V	AV
7311.000	54.77	1.47	56.24	74	-17.76	V	PK
7311.000	38.62	1.47	40.09	54	-13.91	V	AV
High Channel-2462MHz							
4924.000	58.95	-3.63	55.32	74	-18.68	H	PK
4924.000	43.96	-3.63	40.33	54	-13.67	H	AV
7386.000	53.45	1.62	55.07	74	-18.93	H	PK
7386.000	38.3	1.62	39.92	54	-14.08	H	AV
4924.000	61.72	-3.63	58.09	74	-15.91	V	PK
4924.000	41.28	-3.63	37.65	54	-16.35	V	AV
7386.000	53.55	1.62	55.17	74	-18.83	V	PK
7386.000	40.72	1.62	42.34	54	-11.66	V	AV

- Antenna 1+2
- Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	59.88	-3.86	56.02	74	-17.98	H	PK
4824.000	43.08	-3.86	39.22	54	-14.78	H	AV
7236.000	55.16	1.1	56.26	74	-17.74	H	PK
7236.000	38.9	1.1	40	54	-14	H	AV
4824.000	61.14	-3.86	57.28	74	-16.72	V	PK
4824.000	42.65	-3.86	38.79	54	-15.21	V	AV
7236.000	54.37	1.1	55.47	74	-18.53	V	PK
7236.000	38.91	1.1	40.01	54	-13.99	V	AV
Middle Channel-2437MHz							
4874.000	60.54	-3.74	56.8	74	-17.2	H	PK
4874.000	43.44	-3.74	39.7	54	-14.3	H	AV
7311.000	55.93	1.47	57.4	74	-16.6	H	PK
7311.000	39.81	1.47	41.28	54	-12.72	H	AV
4874.000	59.56	-3.74	55.82	74	-18.18	V	PK
4874.000	43.51	-3.74	39.77	54	-14.23	V	AV
7311.000	55.4	1.47	56.87	74	-17.13	V	PK
7311.000	40.29	1.47	41.76	54	-12.24	V	AV
High Channel-2462MHz							
4924.000	60.34	-3.63	56.71	74	-17.29	H	PK
4924.000	43.24	-3.63	39.61	54	-14.39	H	AV
7386.000	54.1	1.62	55.72	74	-18.28	H	PK
7386.000	40.66	1.62	42.28	54	-11.72	H	AV
4924.000	59.56	-3.63	55.93	74	-18.07	V	PK
4924.000	43.52	-3.63	39.89	54	-14.11	V	AV
7386.000	52.67	1.62	54.29	74	-19.71	V	PK
7386.000	40	1.62	41.62	54	-12.38	V	AV

- Antenna 1+2
- Test Mode: 802.11n-HT40

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2422MHz							
4844.000	59.39	-3.9	55.49	74	-18.51	H	PK
4824.000	42.44	-3.9	38.54	54	-15.46	H	AV
7266.000	53.54	1.06	54.6	74	-19.40	H	PK
7266.000	39.43	1.06	40.49	54	-13.51	H	AV
4844.000	57.54	-3.9	53.64	74	-20.36	V	PK
4824.000	42.65	-3.9	38.75	54	-15.25	V	AV
7266.000	52.22	1.06	53.28	74	-20.72	V	PK
7266.000	38.99	1.06	40.05	54	-13.95	V	AV
Middle Channel-2437MHz							
4874.000	57.24	-3.74	53.5	74	-20.5	H	PK
4874.000	42.08	-3.74	38.34	54	-15.66	H	AV
7311.000	51.23	1.47	52.7	74	-21.3	H	PK
7311.000	39.77	1.47	41.24	54	-12.76	H	AV
4874.000	58.8	-3.74	55.06	74	-18.94	V	PK
4874.000	41.88	-3.74	38.14	54	-15.86	V	AV
7311.000	51.06	1.47	52.53	74	-21.47	V	PK
7311.000	40.59	1.47	42.06	54	-11.94	V	AV
High Channel-2452MHz							
4904.000	59.64	-3.63	56.01	74	-17.99	H	PK
4904.000	41.04	-3.63	37.41	54	-16.59	H	AV
7356.000	52.5	1.62	54.12	74	-19.88	H	PK
7356.000	39.49	1.62	41.11	54	-12.89	H	AV
4904.000	58.83	-3.63	55.2	74	-18.8	V	PK
4904.000	42.76	-3.63	39.13	54	-14.87	V	AV
7356.000	51.28	1.62	52.9	74	-21.1	V	PK
7356.000	38.41	1.62	40.03	54	-13.97	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


- Radiated test
- Antenna 1

802.11b			
Test Channel	Low	Polarity:	Vertical(worst case)

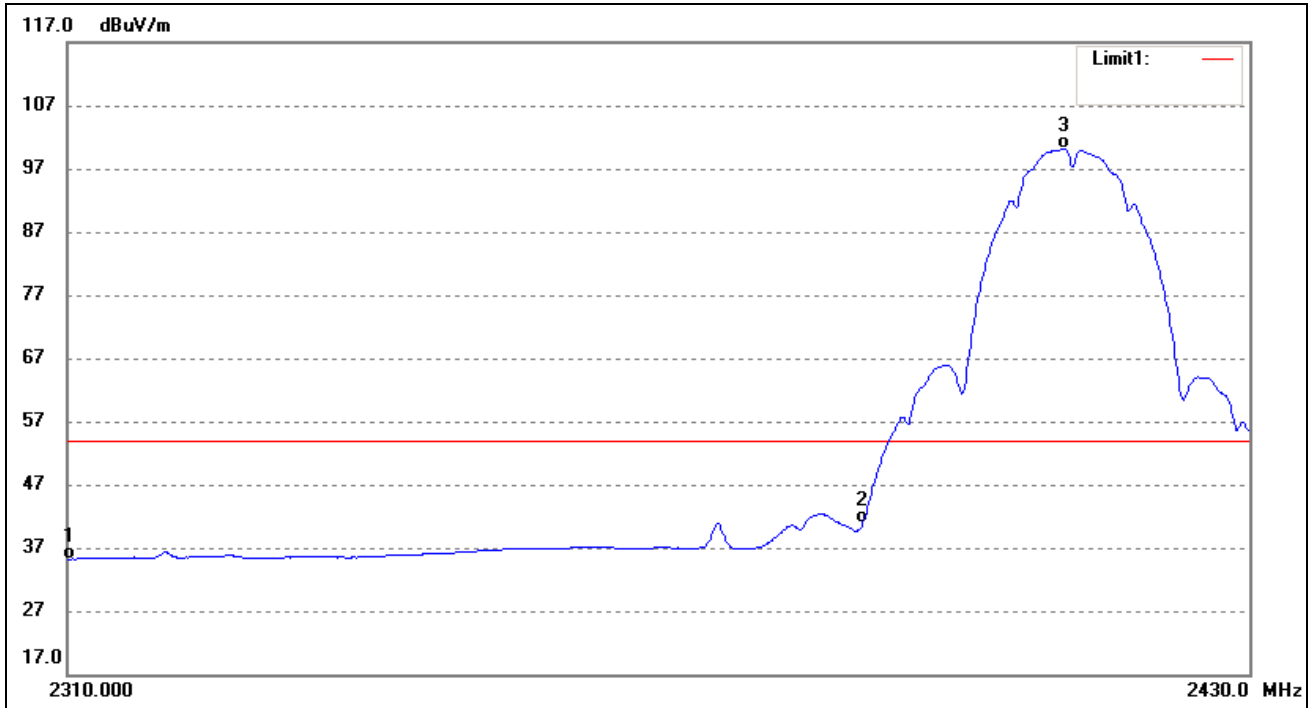


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.99	-7.78	35.21	54.00	-18.79	Average Detector
	2310.000	56.15	-7.78	48.37	74.00	-25.63	Peak Detector
2	2390.000	48.12	-7.32	40.80	54.00	-13.20	Average Detector
	2390.000	59.76	-7.32	52.44	74.00	-21.56	Peak Detector
3	2410.756	107.44	-7.19	100.25	/	/	Average Detector
	2410.511	112.27	-7.19	105.08	/	/	Peak Detector

802.11b			
Test Channel	High	Polarity:	Vertical(worst case)

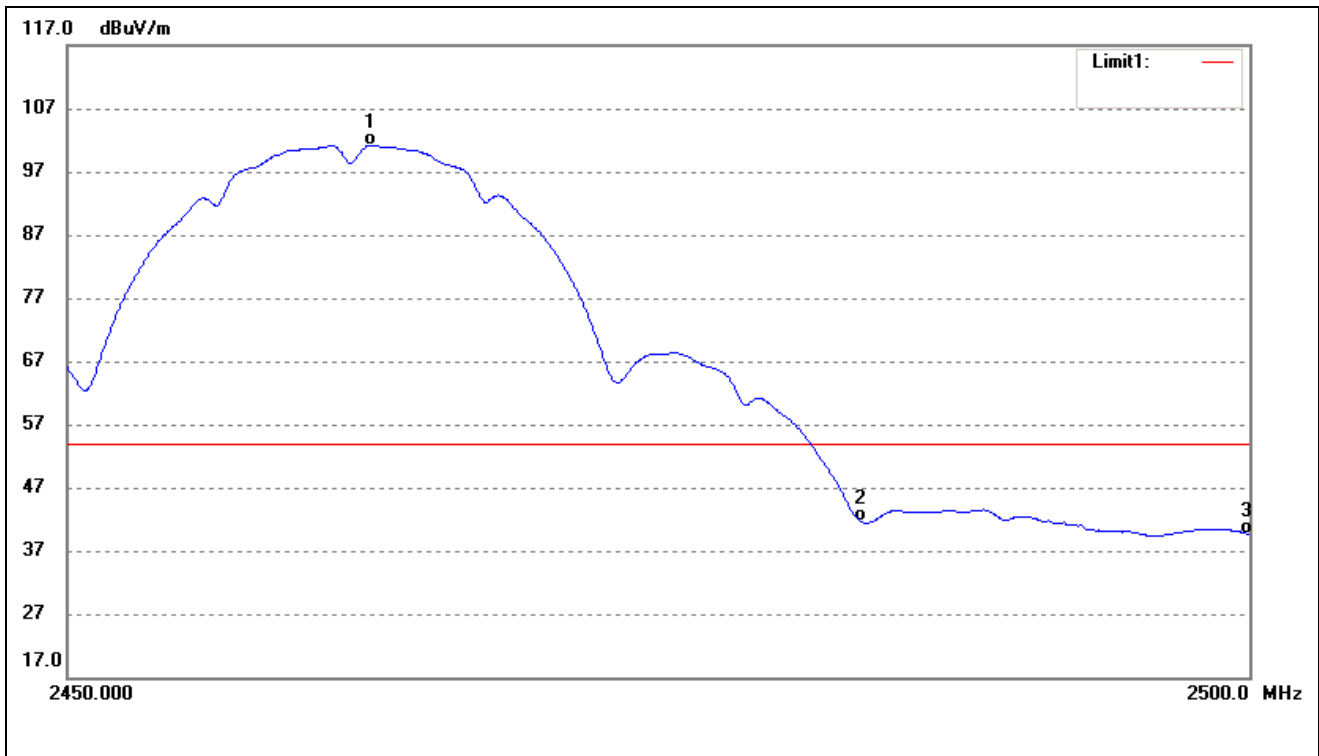


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.704	108.04	-6.89	101.15	/	/	Average Detector
	2462.903	112.95	-6.89	106.06	/	/	Peak Detector
2	2483.500	48.30	-6.77	41.53	54.00	-12.47	Average Detector
	2483.500	60.90	-6.77	54.13	74.00	-19.87	Peak Detector
3	2500.000	46.31	-6.67	39.64	54.00	-14.36	Average Detector
	2500.000	58.45	-6.67	51.78	74.00	-22.22	Peak Detector

802.11g			
Test Channel	Low	Polarity:	Vertical(worst case)

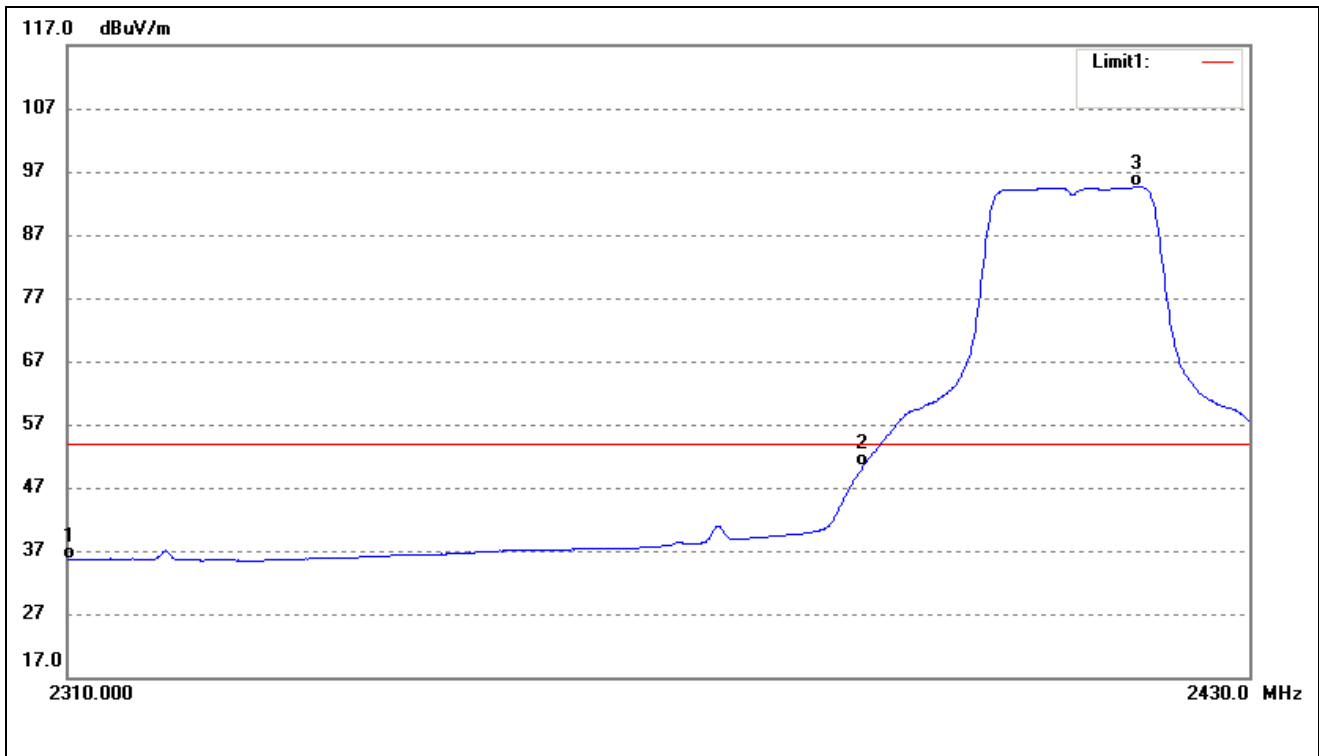

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.49	-7.78	35.71	54.00	-18.29	Average Detector
	2310.000	54.47	-7.78	46.69	74.00	-27.31	Peak Detector
2	2390.000	57.58	-7.32	50.26	54.00	-3.74	Average Detector
	2390.000	76.46	-7.32	69.14	74.00	-4.86	Peak Detector
3	2418.337	101.70	-7.15	94.55	/	/	Average Detector
	2418.092	111.06	-7.15	103.91	/	/	Peak Detector


802.11g			
Test Channel	High	Polarity:	Vertical(worst case)

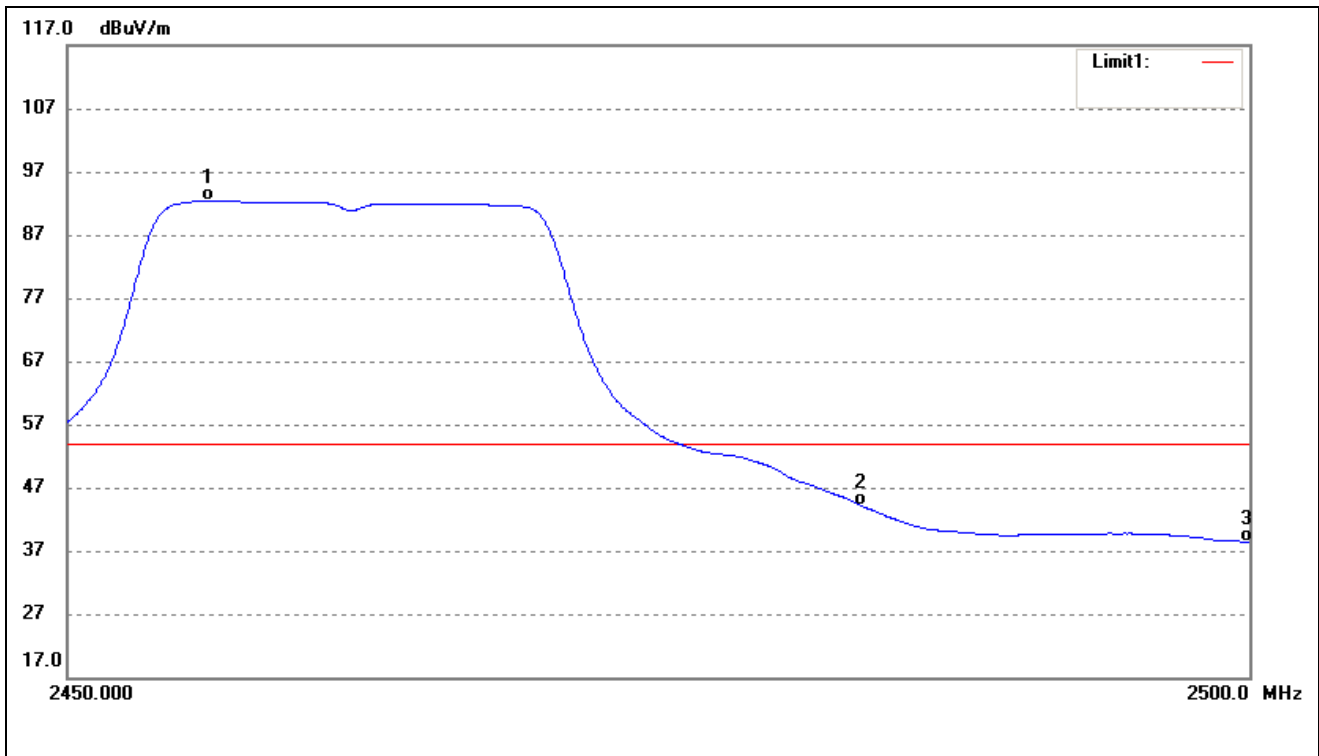

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2455.848	99.26	-6.92	92.34	/	/	Average Detector
	2468.233	112.03	-6.85	105.18	/	/	Peak Detector
1	2483.500	50.84	-6.77	44.07	54.00	-9.93	Average Detector
	2483.500	77.62	-6.77	70.85	74.00	-3.15	Peak Detector
3	2500.000	45.12	-6.67	38.45	54.00	-15.55	Average Detector
	2500.000	58.76	-6.67	52.09	74.00	-21.91	Peak Detector


➤ Antenna 1+Antenna2

802.11n-HT20			
Test Channel	Low	Polarity:	Vertical(worst case)

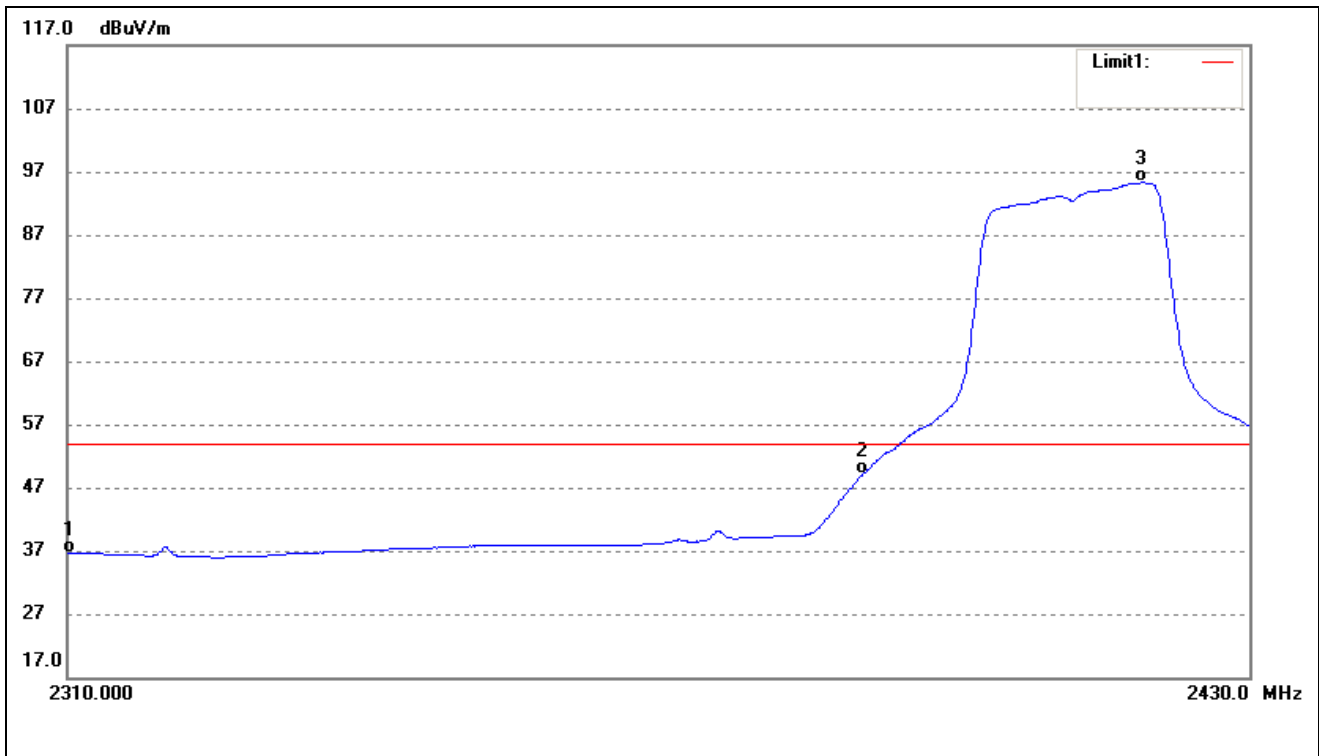


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.43	-7.78	36.65	54.00	-17.35	Average Detector
	2310.000	55.10	-7.78	47.32	74.00	-26.68	Peak Detector
2	2390.000	56.42	-7.32	49.10	54.00	-4.90	Average Detector
	2390.000	76.81	-7.32	69.49	74.00	-4.51	Peak Detector
3	2418.827	102.42	-7.14	95.28	/	/	Average Detector
	2418.949	111.78	-7.14	104.64	/	/	Peak Detector

802.11n-HT20			
Test Channel	High	Polarity:	Vertical(worst case)

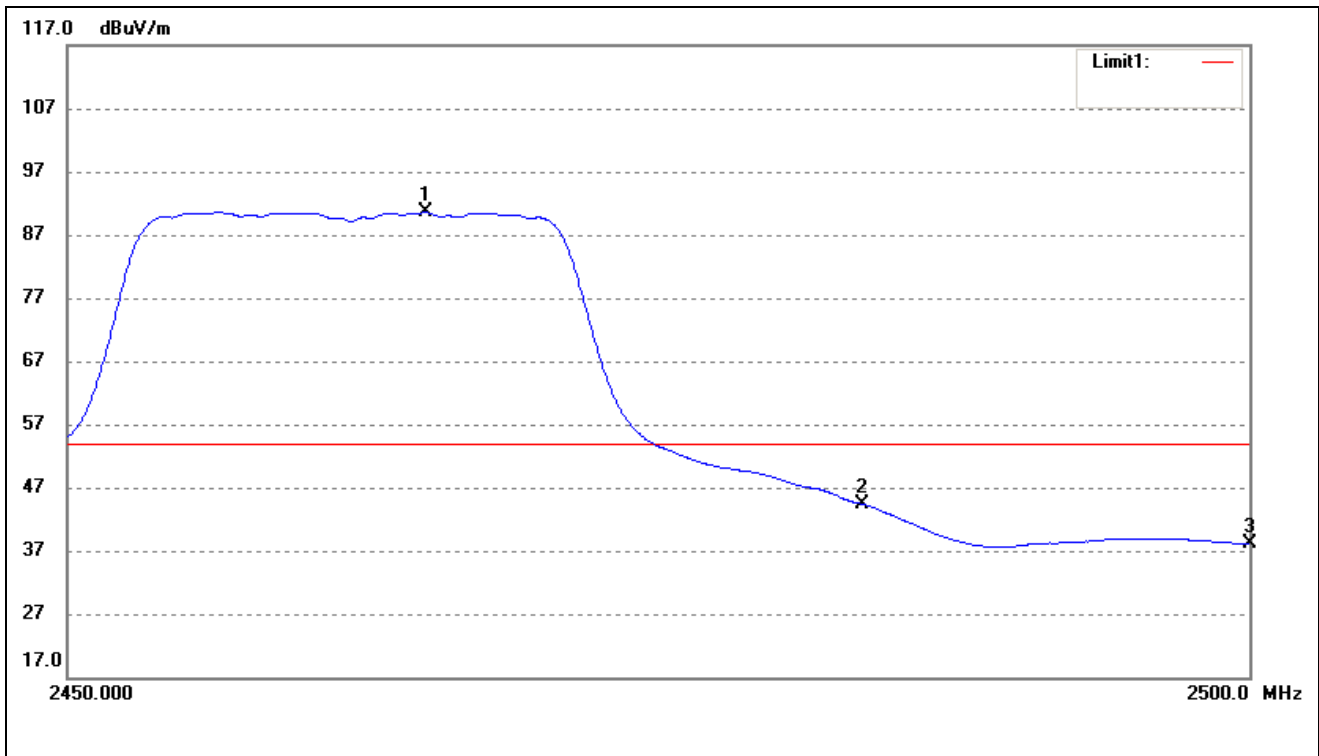


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.044	97.39	-6.87	90.52	/	/	Average Detector
	2458.727	108.71	-6.91	101.80	/	/	Peak Detector
2	2483.500	51.14	-6.77	44.37	54.00	-9.63	Average Detector
	2483.500	71.55	-6.77	64.78	74.00	-9.22	Peak Detector
3	2500.000	44.74	-6.67	38.07	54.00	-15.93	Average Detector
	2500.000	58.39	-6.67	51.72	74.00	-22.28	Peak Detector

802.11n-HT40			
Test Channel	Low	Polarity:	Vertical(worst case)

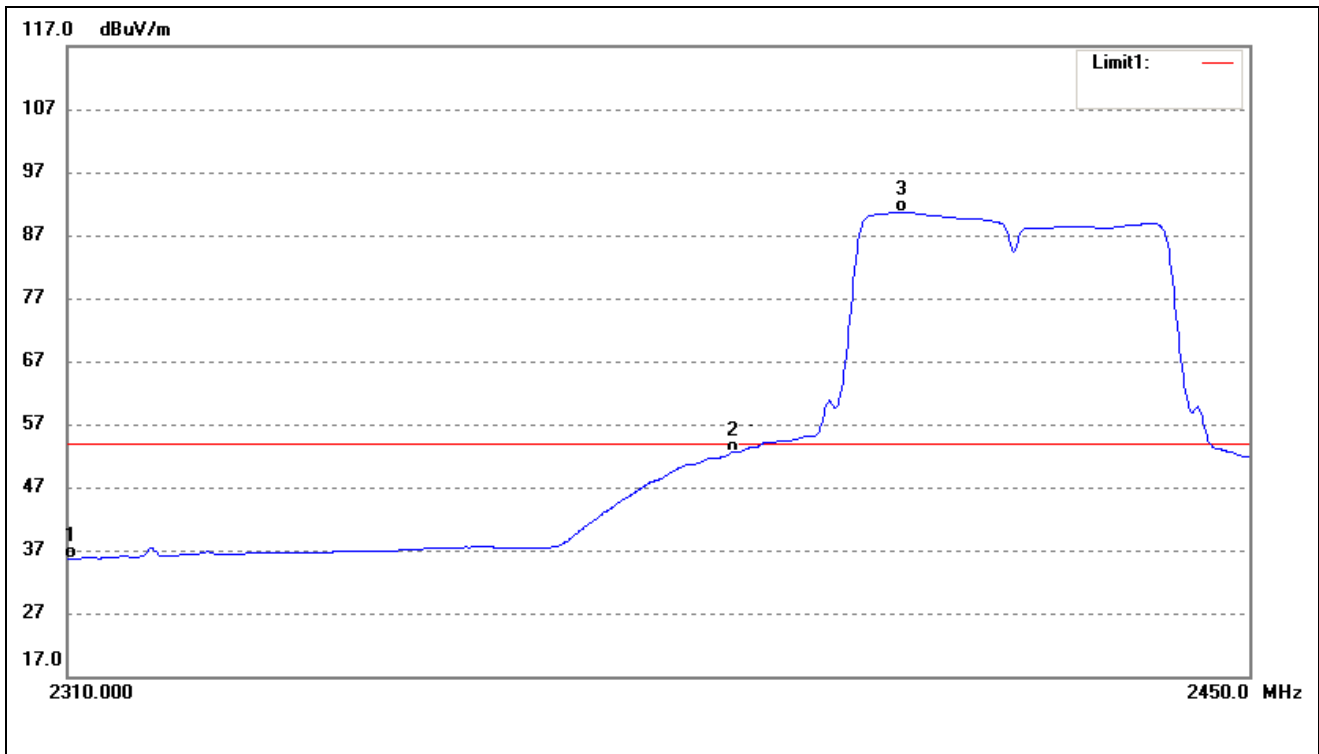

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.42	-7.78	35.64	54.00	-18.36	Average Detector
	2310.000	54.15	-7.78	46.37	74.00	-27.63	Peak Detector
2	2390.000	59.63	-7.32	52.31	54.00	-1.69	Average Detector
	2390.000	75.02	-7.32	67.70	74.00	-6.30	Peak Detector
3	2407.982	97.94	-7.21	90.73	/	/	Average Detector
	2408.123	107.27	-7.21	100.06	/	/	Peak Detector

802.11n-HT40			
Test Channel	High	Polarity:	Vertical(worst case)


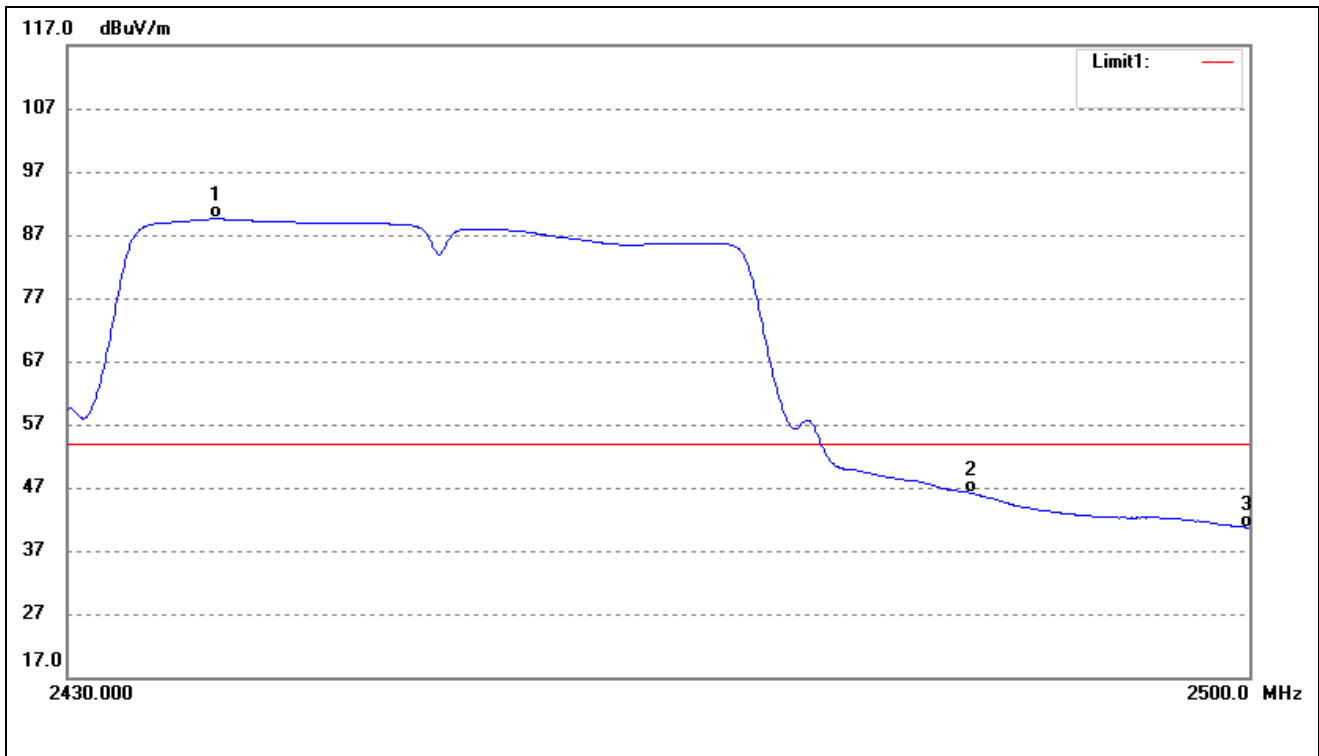


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2438.711	96.57	-7.03	89.54	/	/	Average Detector
	2456.087	108.95	-6.92	102.03	/	/	Peak Detector
2	2483.500	52.82	-6.77	46.05	54.00	-7.95	Average Detector
	2483.500	77.28	-6.77	70.51	74.00	-3.49	Peak Detector
3	2500.000	47.25	-6.67	40.58	54.00	-13.42	Average Detector
	2500.000	68.55	-6.67	61.88	74.00	-12.12	Peak Detector

➤ Antenna 1



802.11b

Low

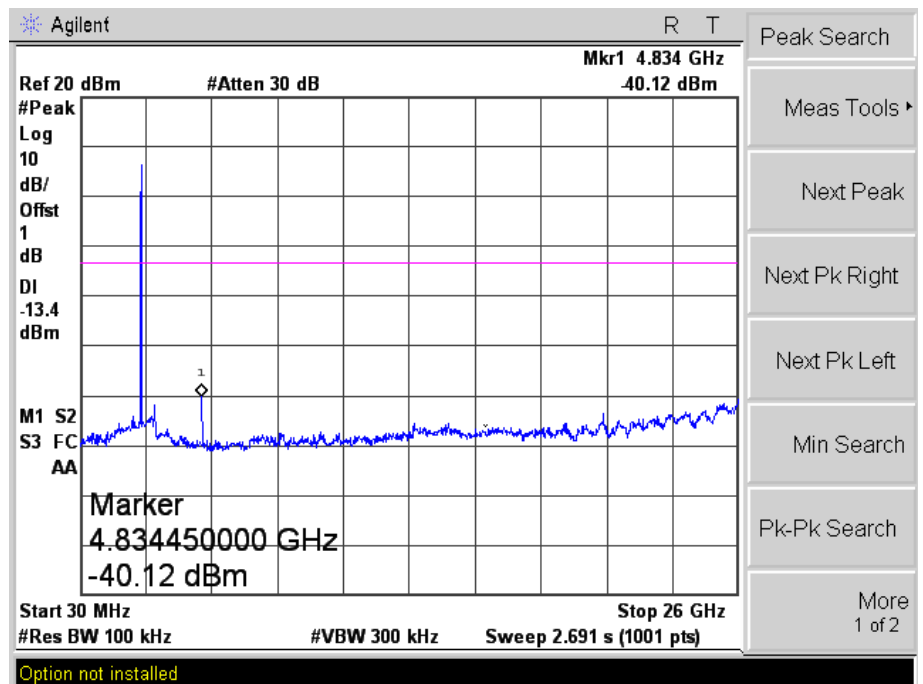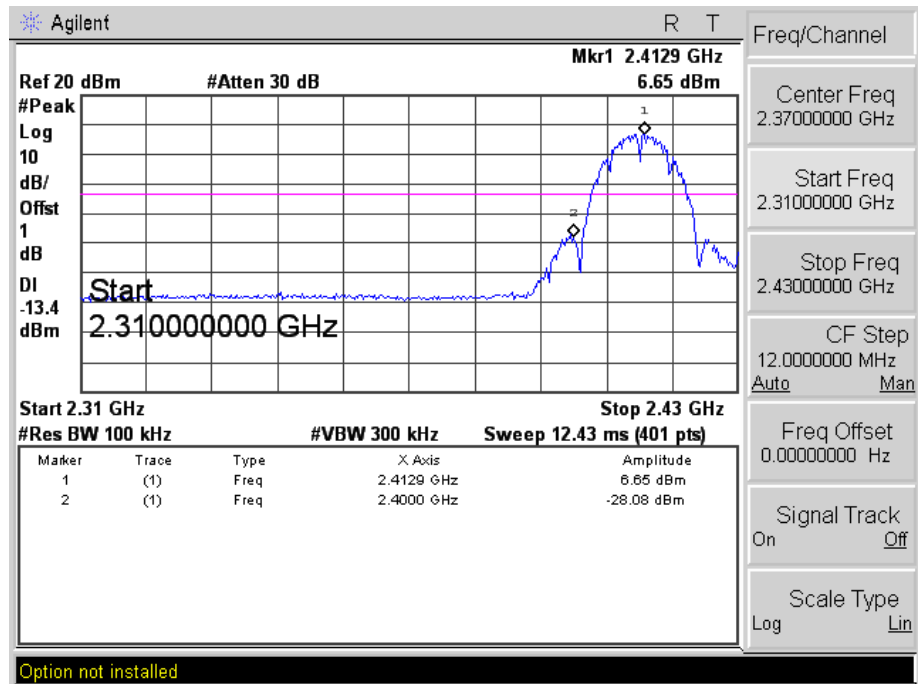



802.11b

Middle

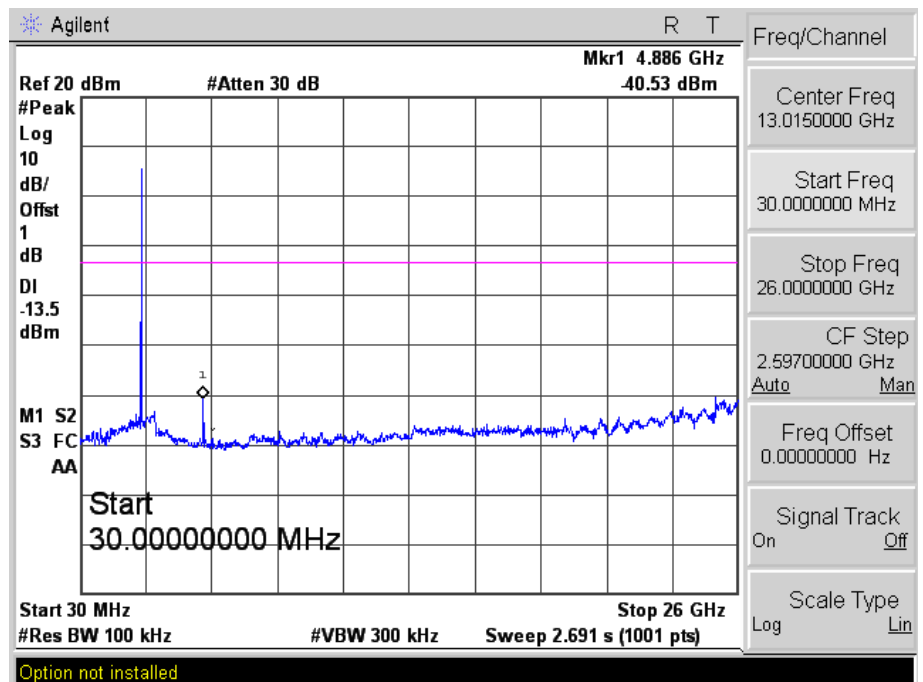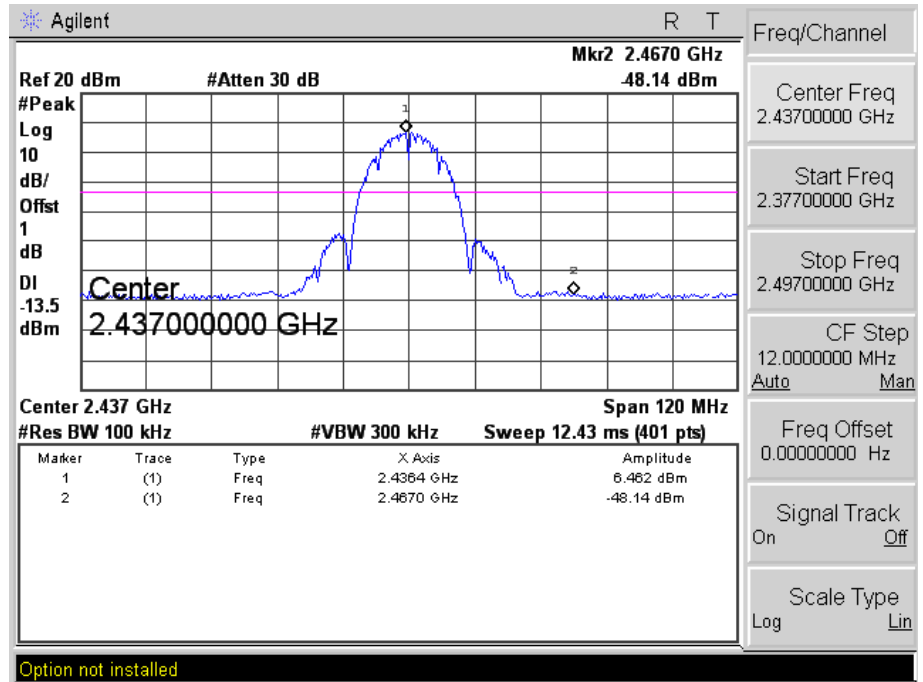



802.11b

High

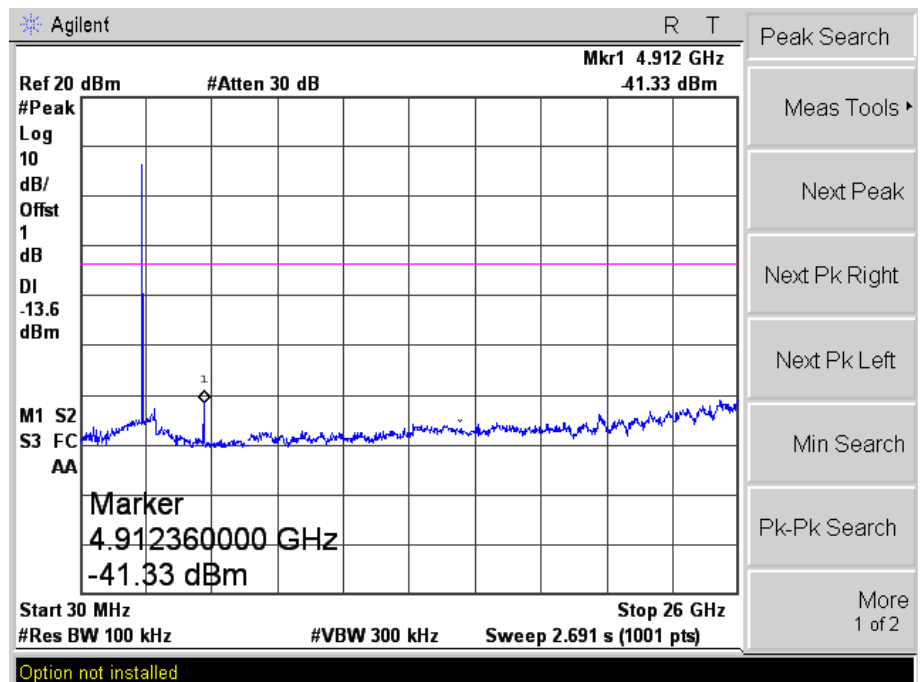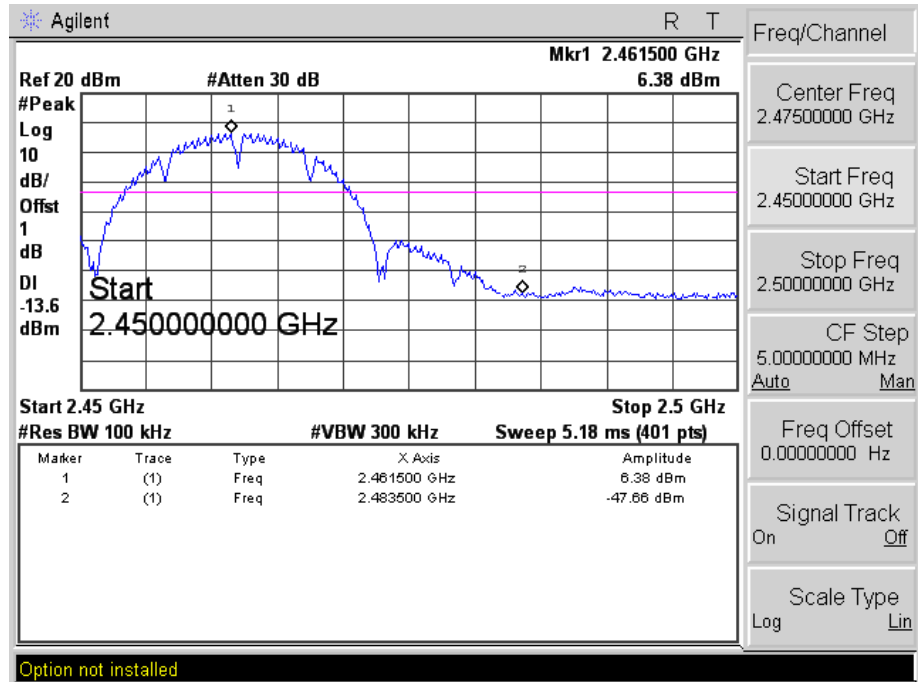



802.11g

Low

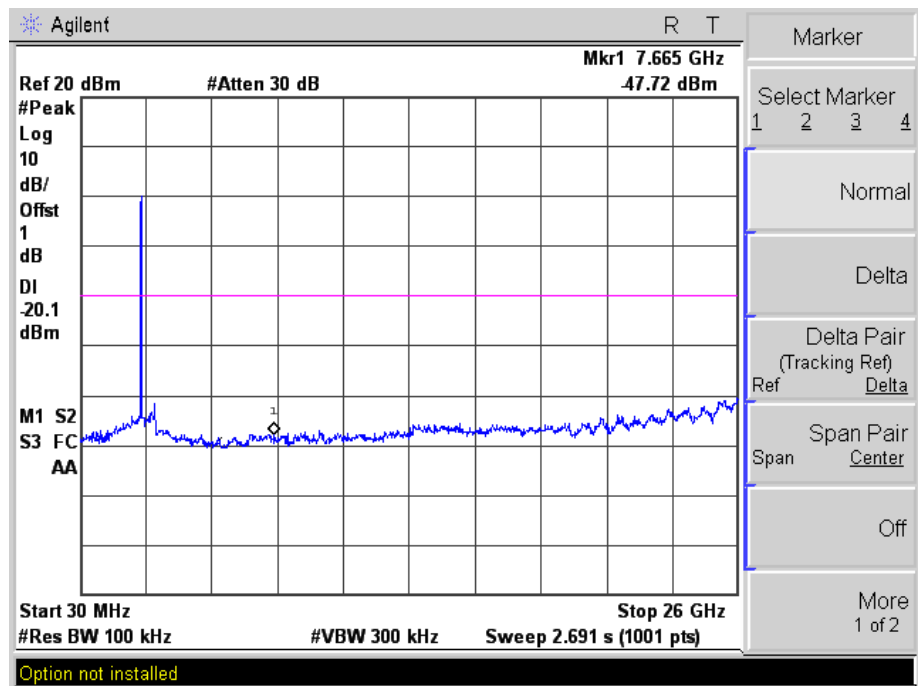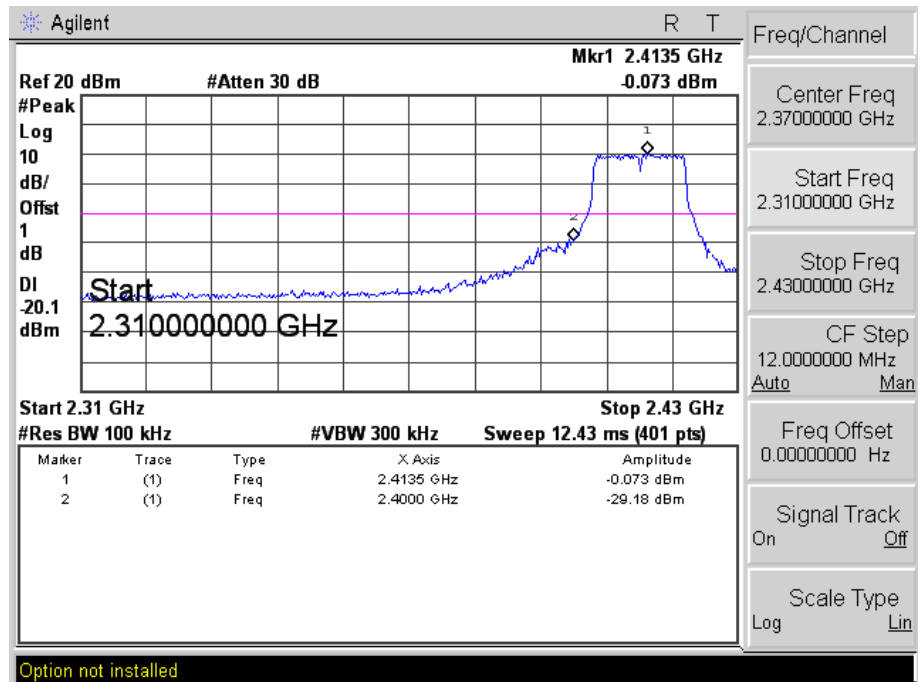



802.11g

Middle

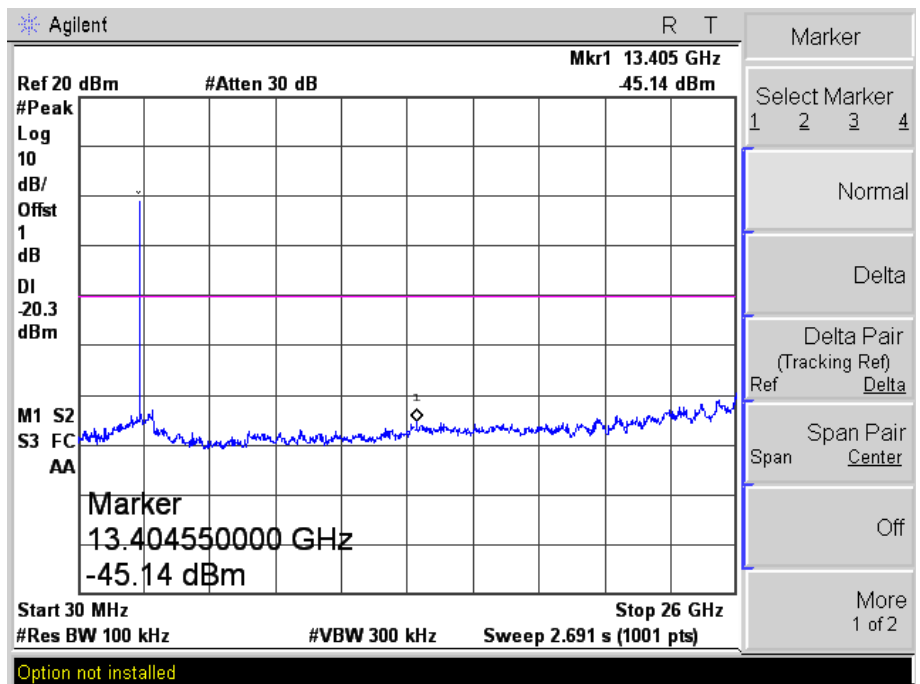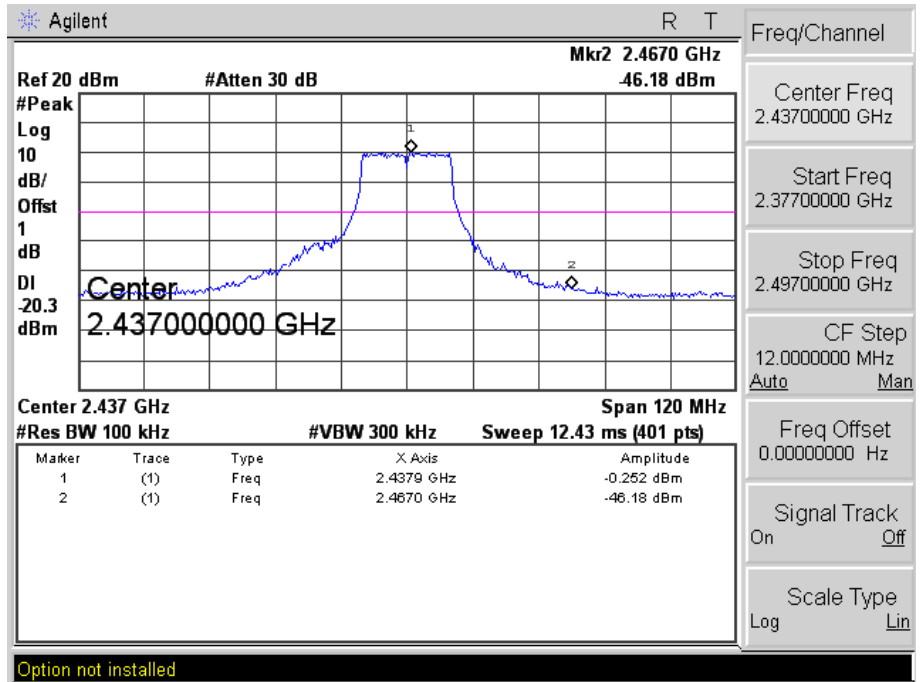



802.11g

High

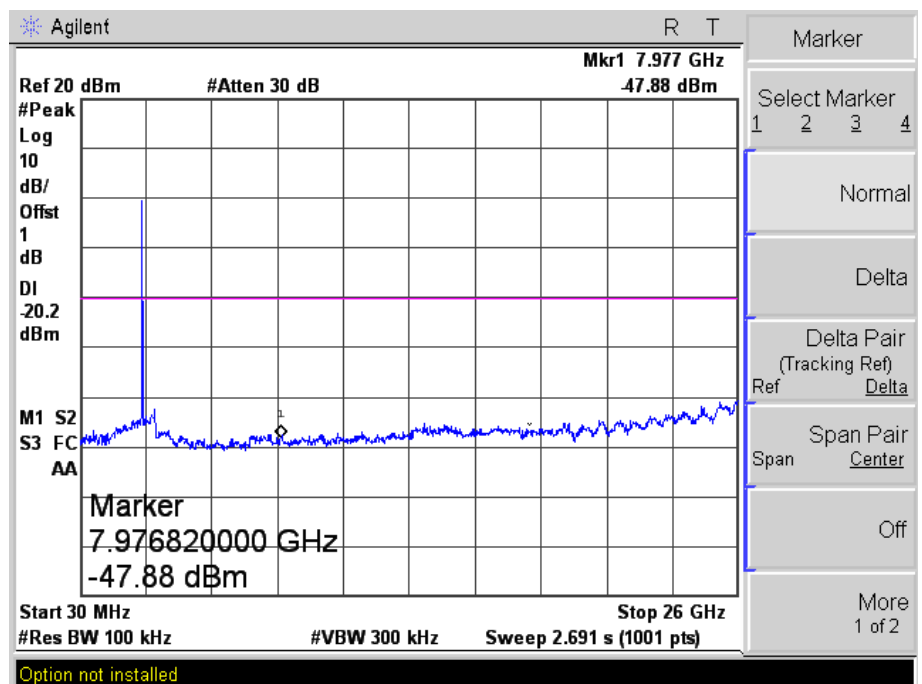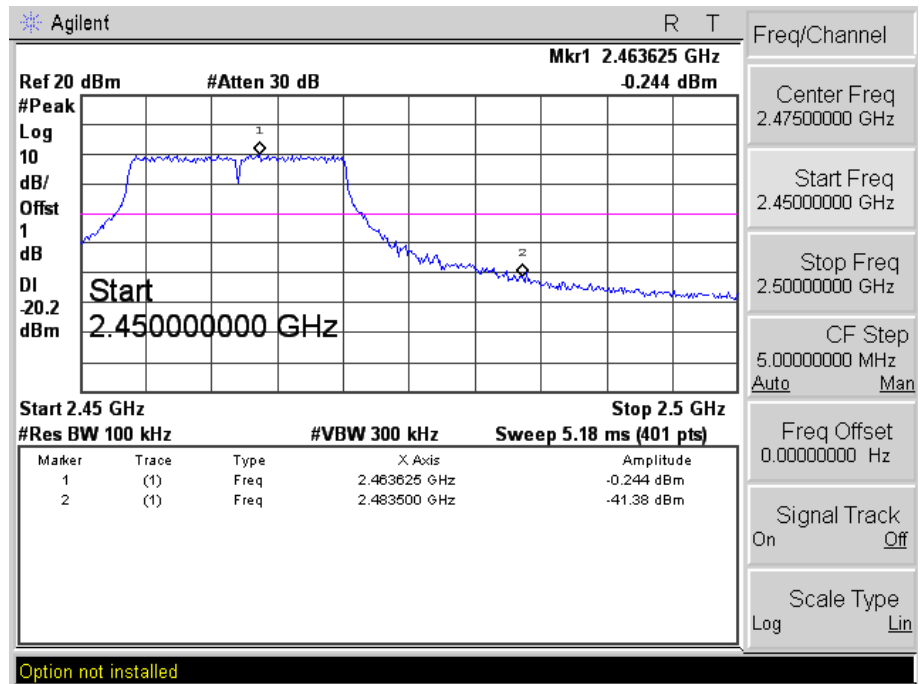



802.11n-HT20

Low

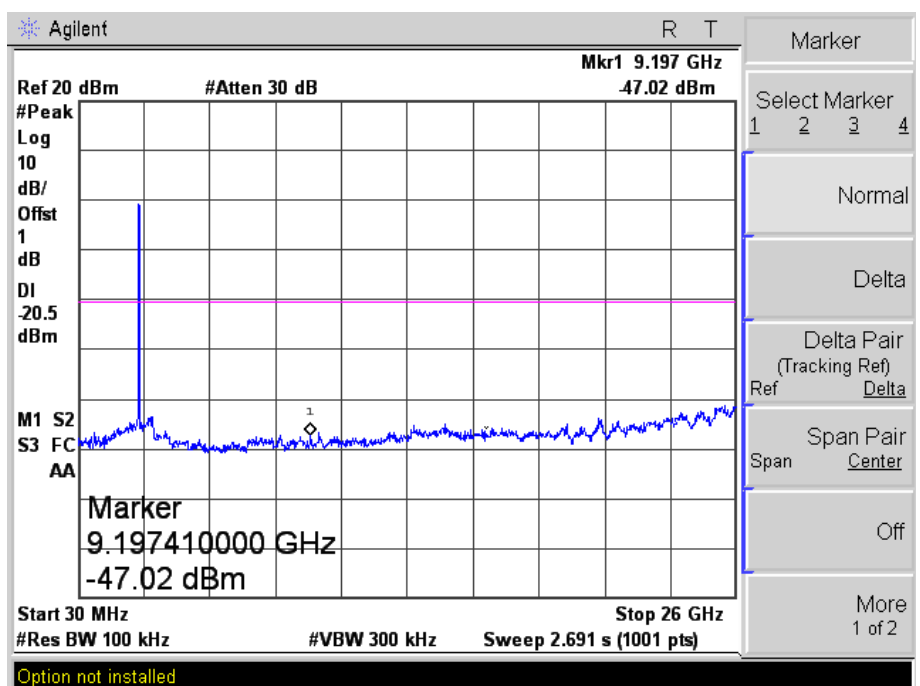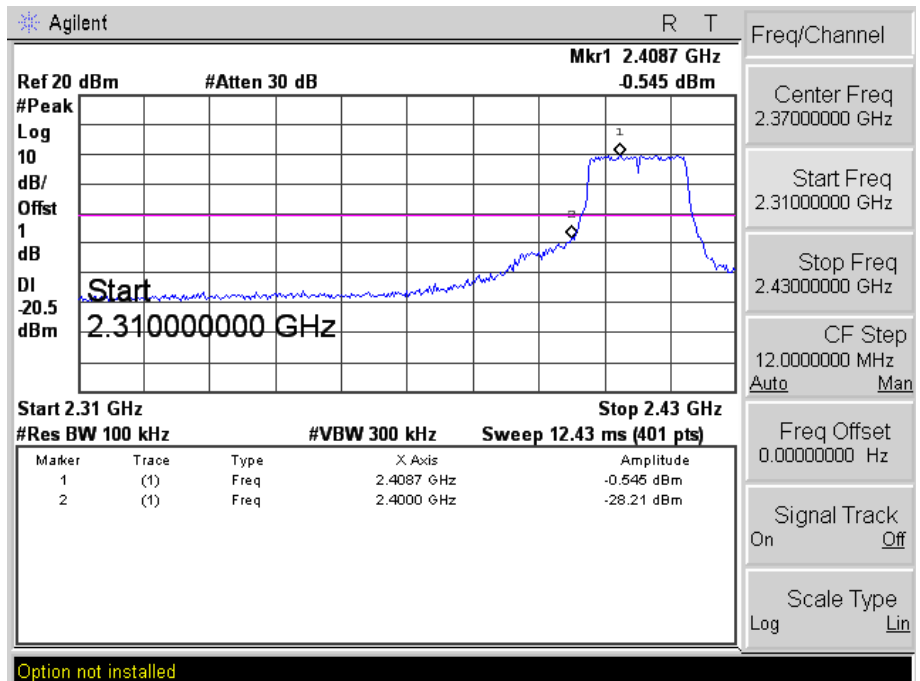



802.11n-HT20

Middle

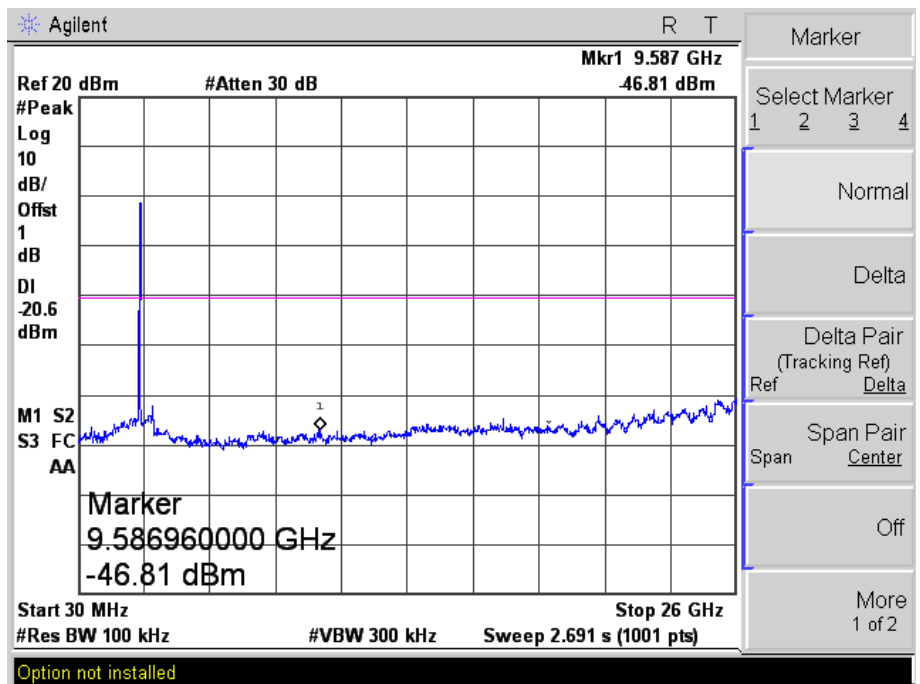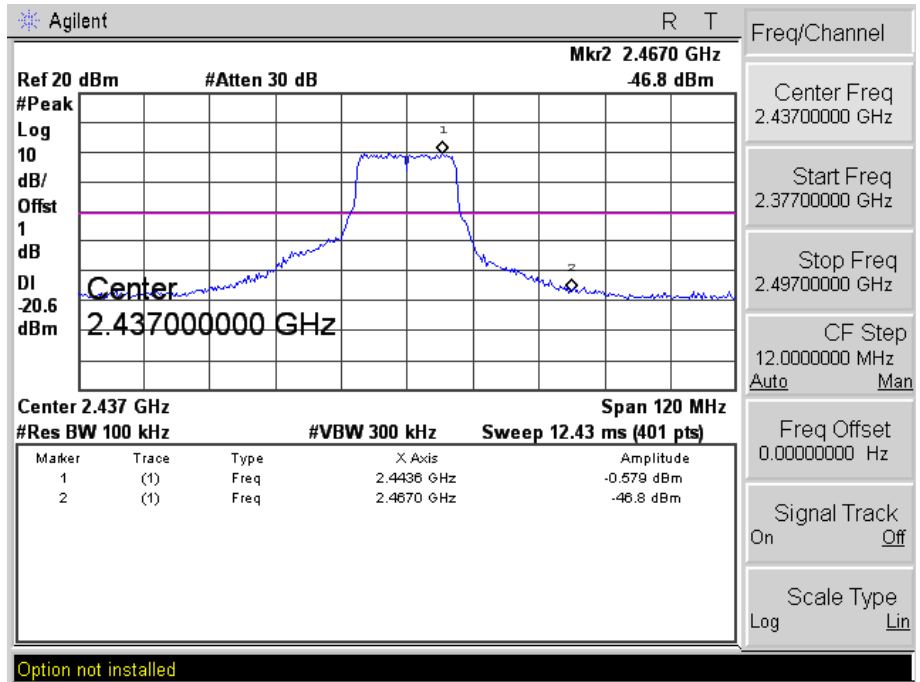



802.11n-HT20

High

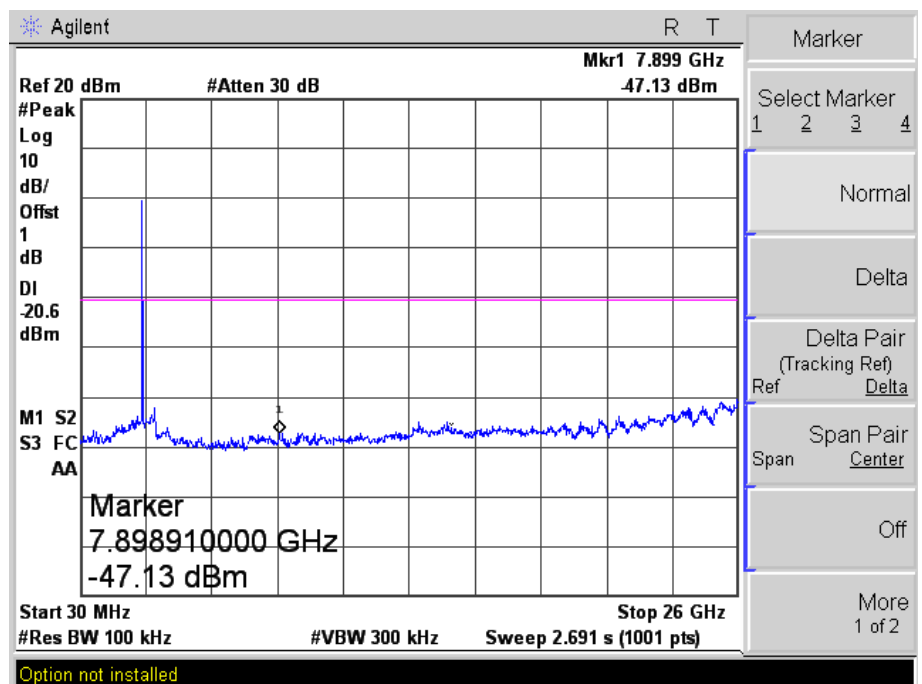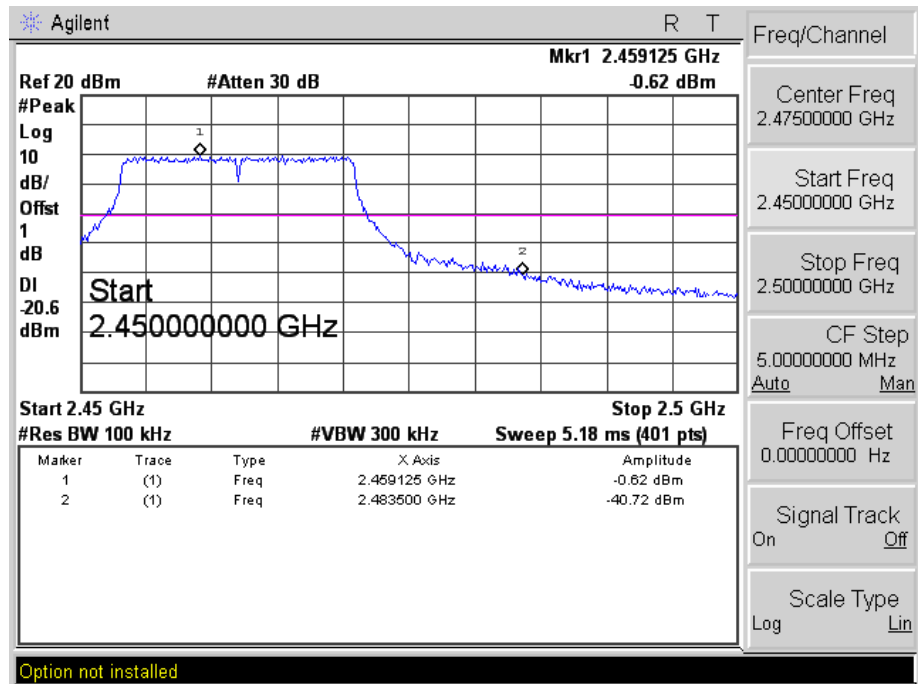



802.11n-HT40

Low

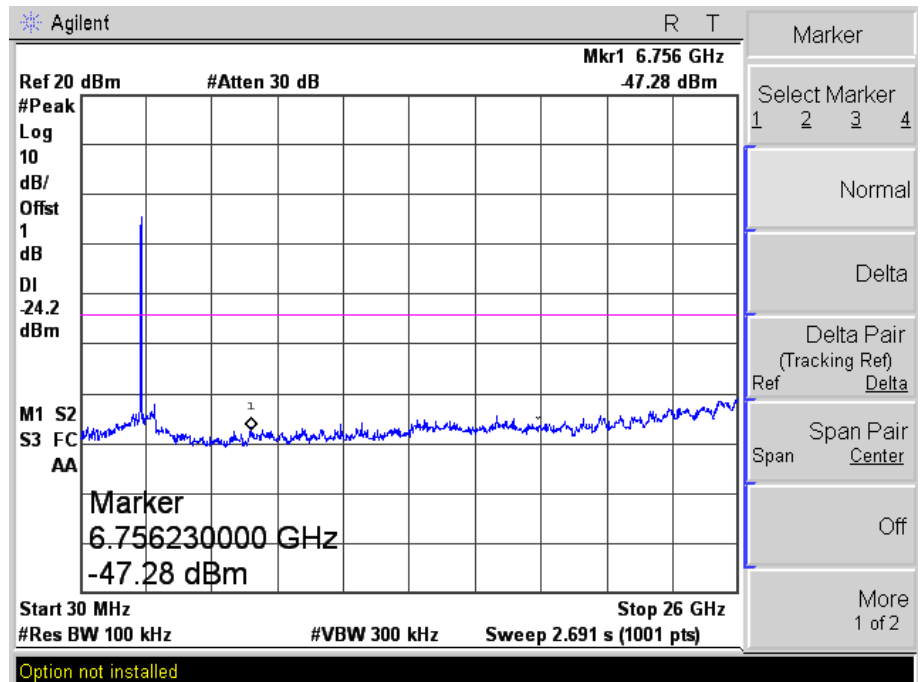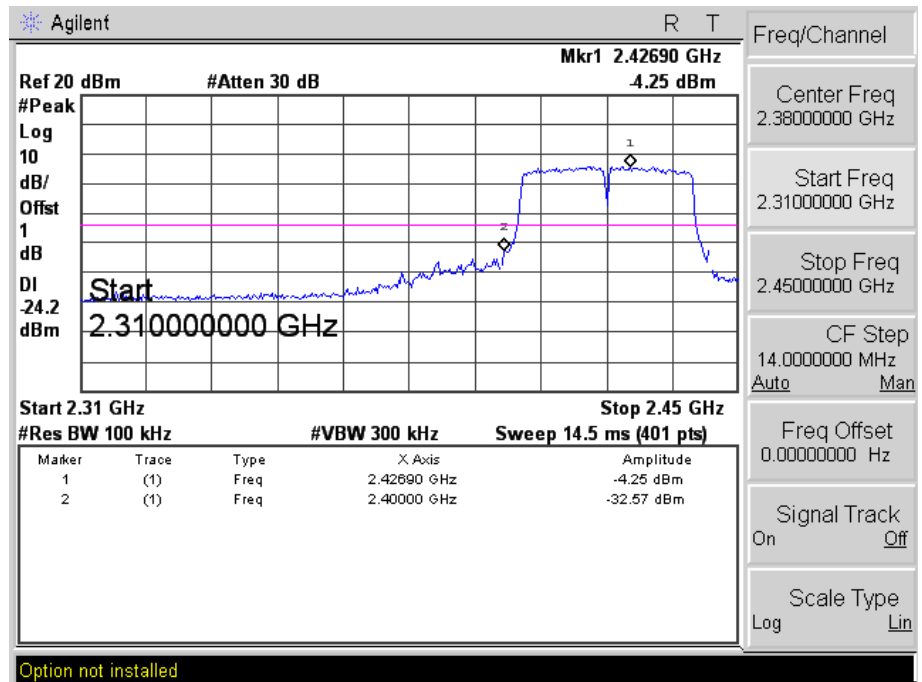



802.11n-HT40

Middle

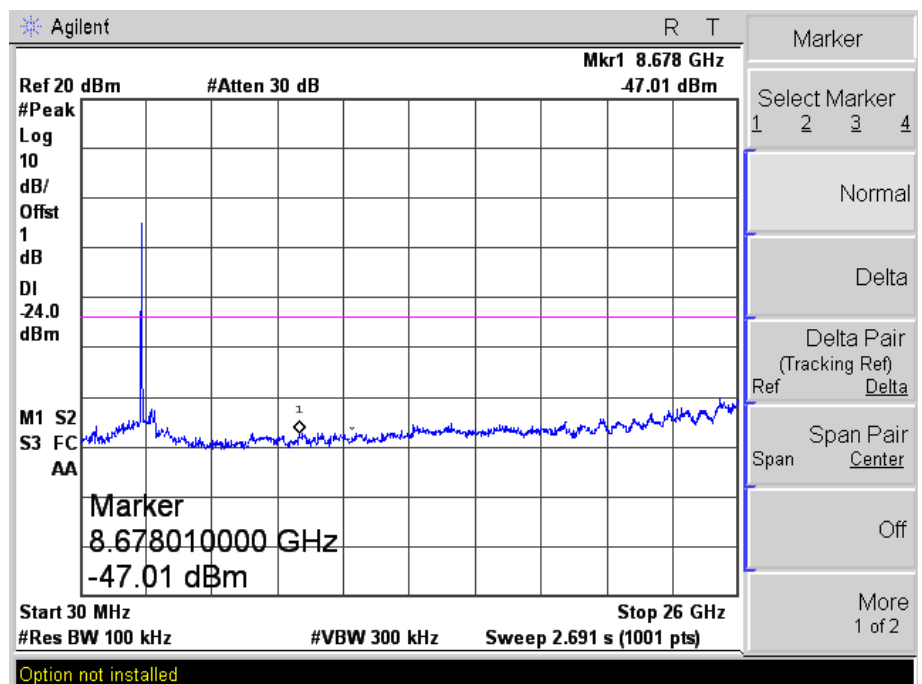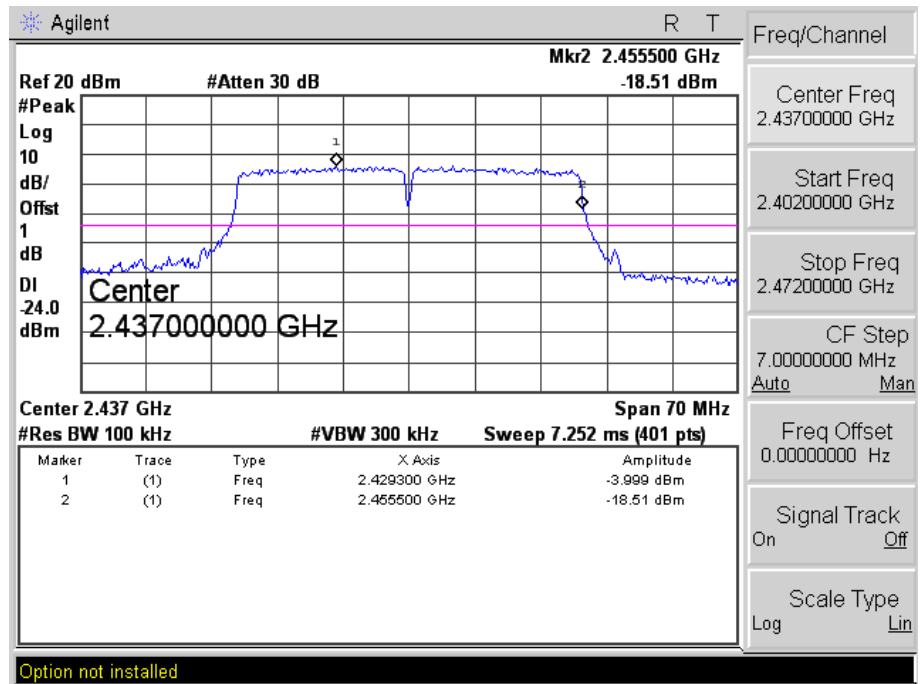

802.11n-HT40



High

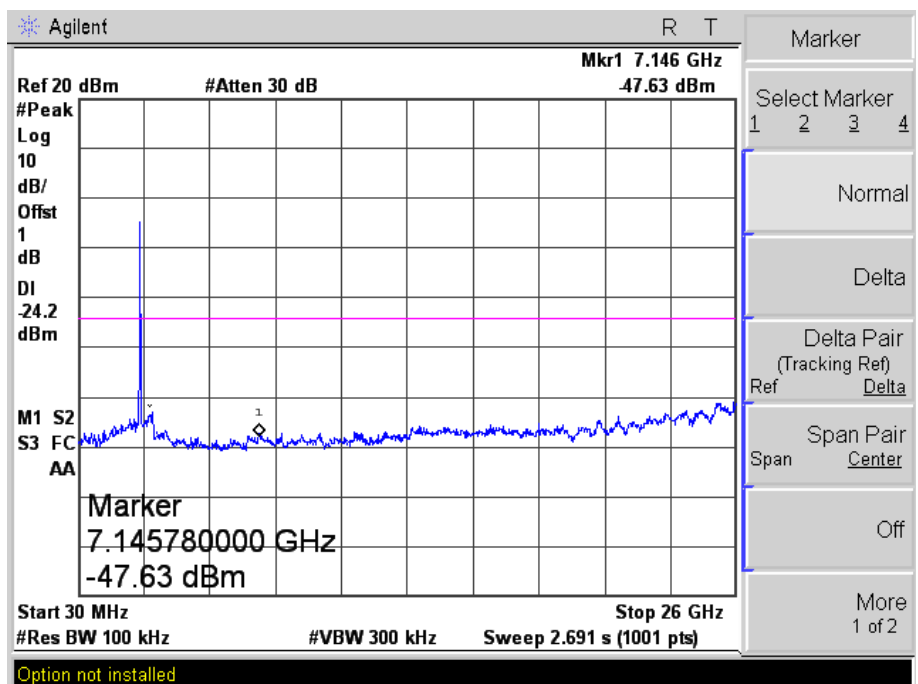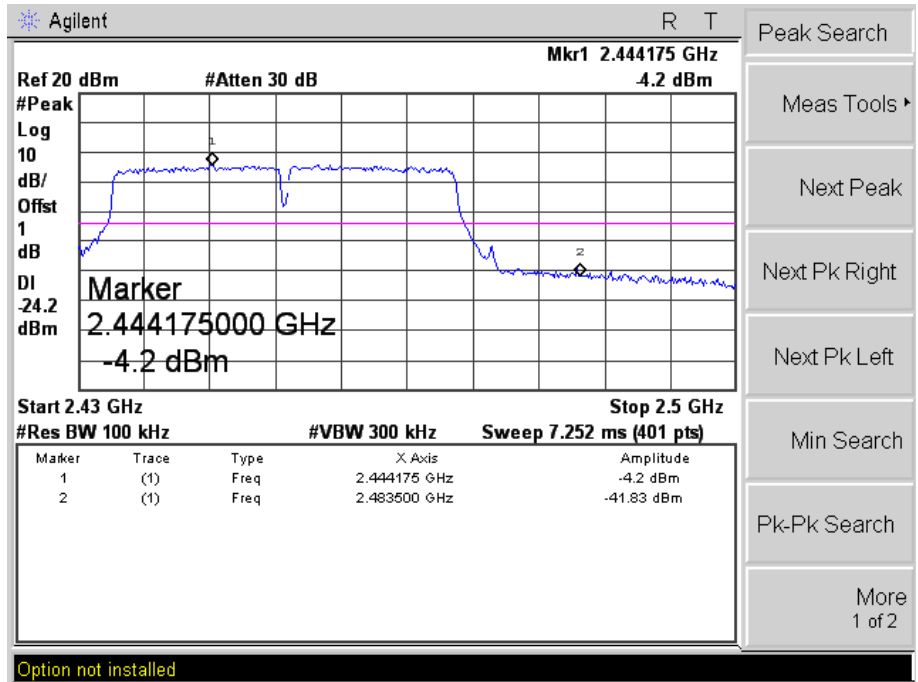

➤ Antenna 2



802.11b

Low

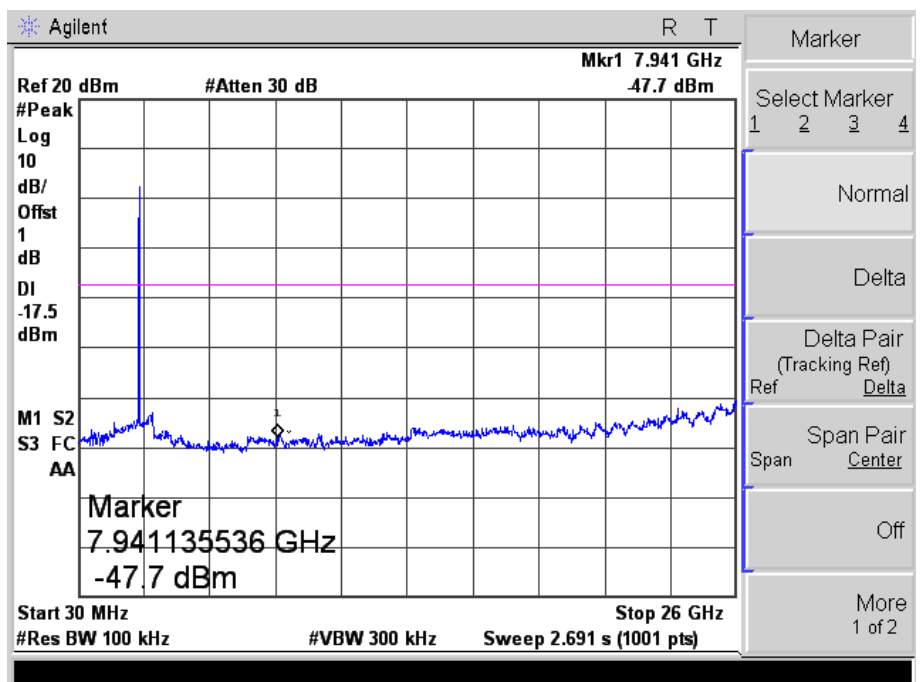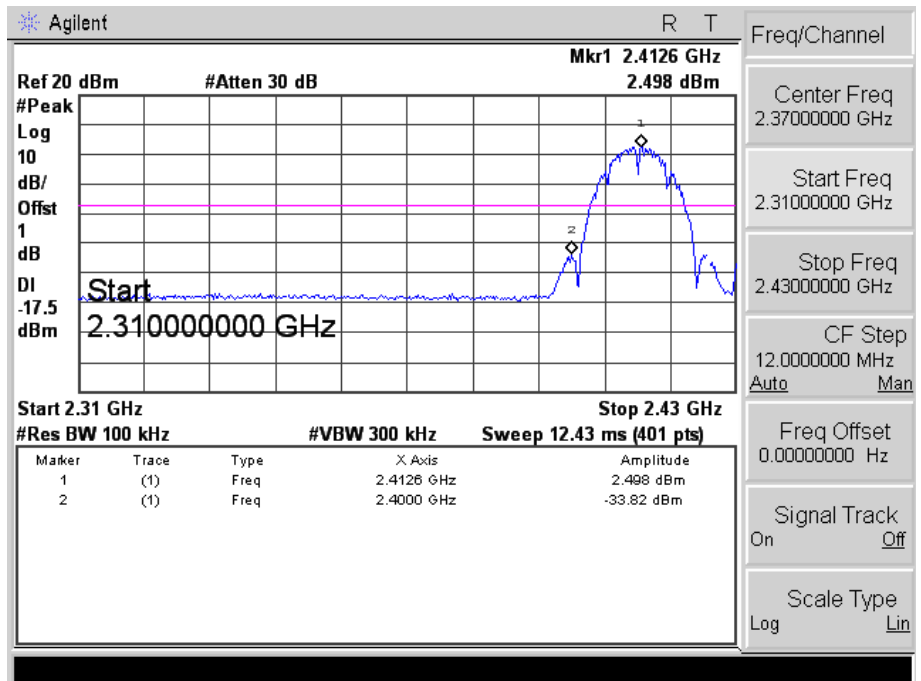



802.11b

Middle

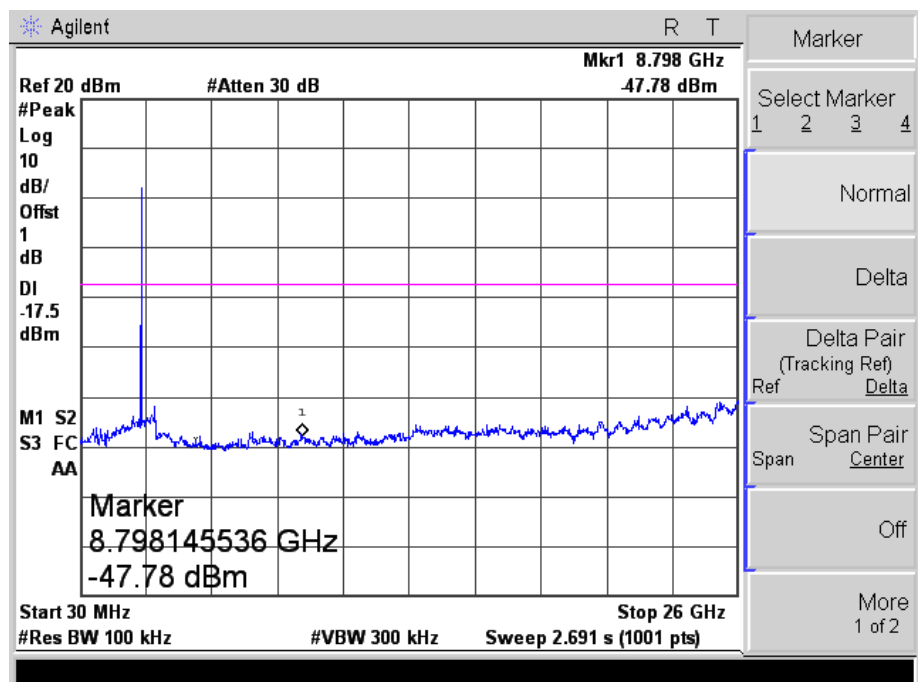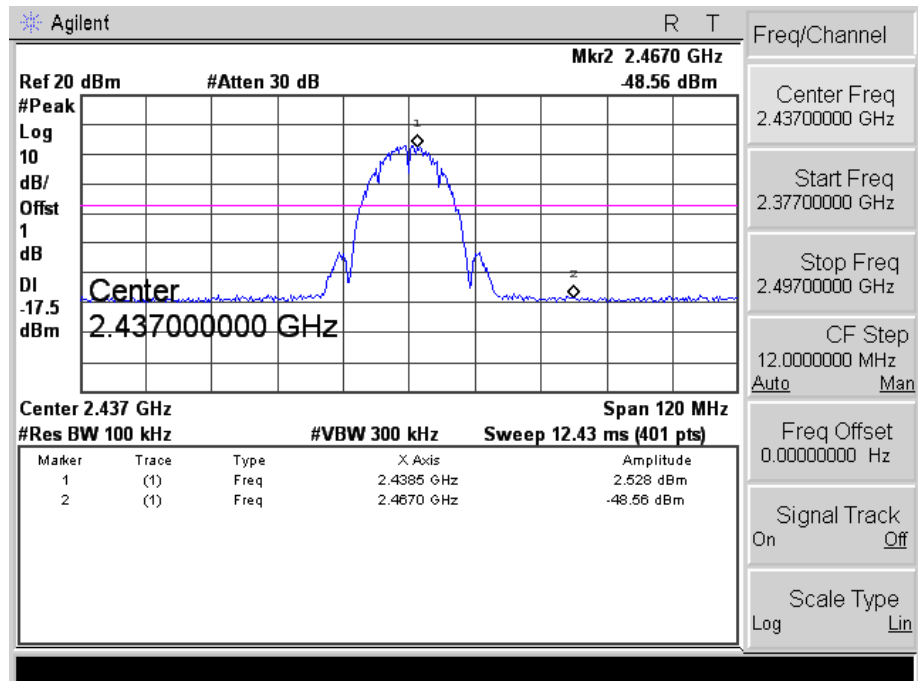



802.11b

High

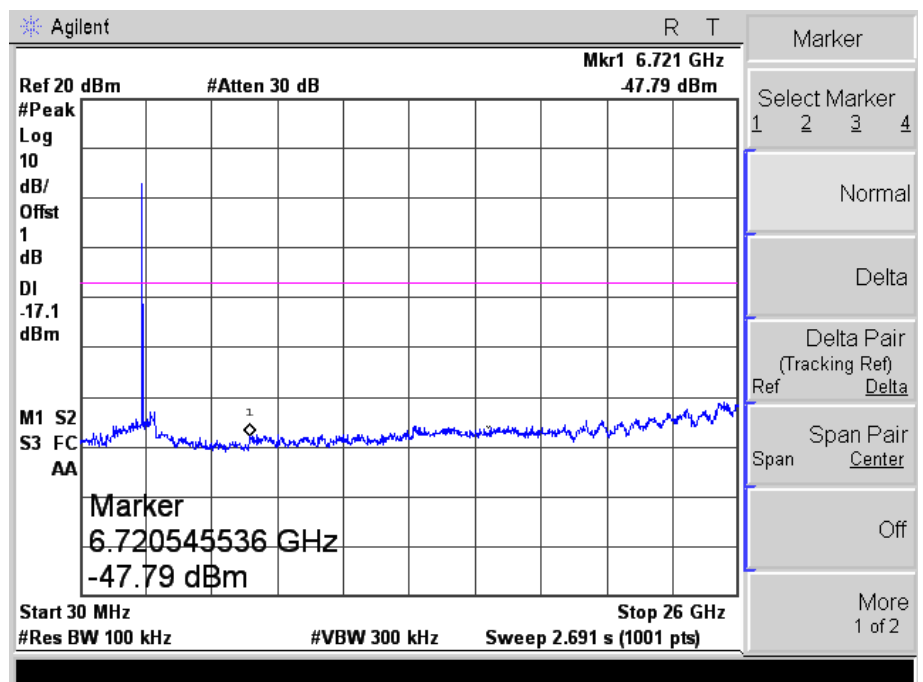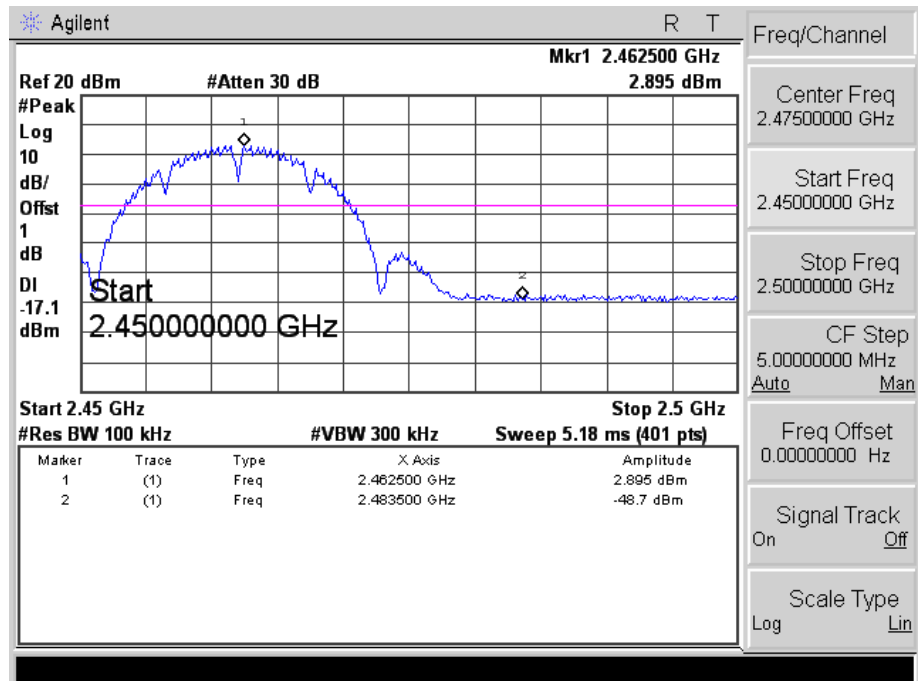


802.11g

Low

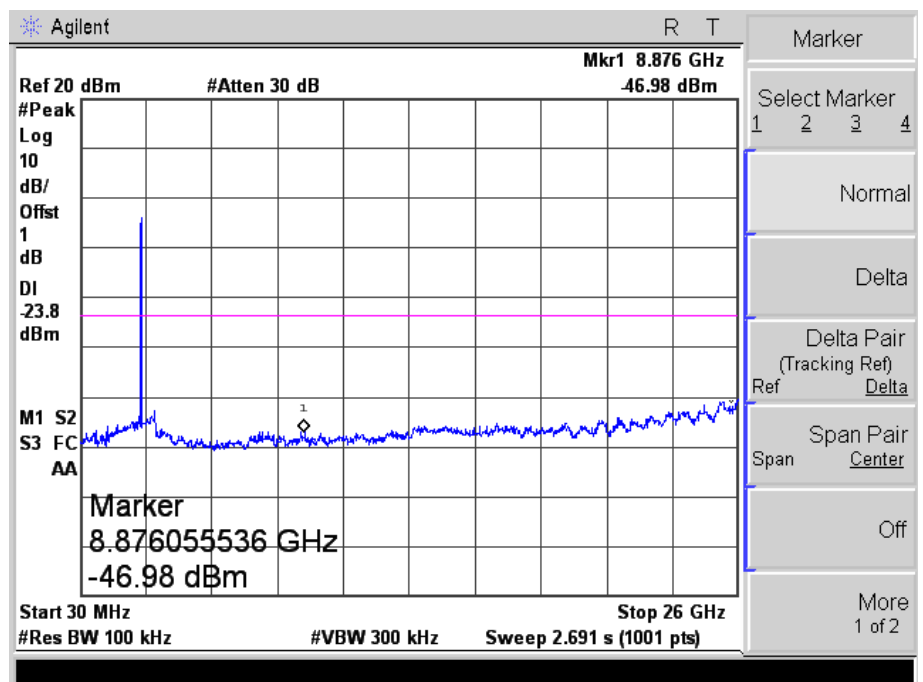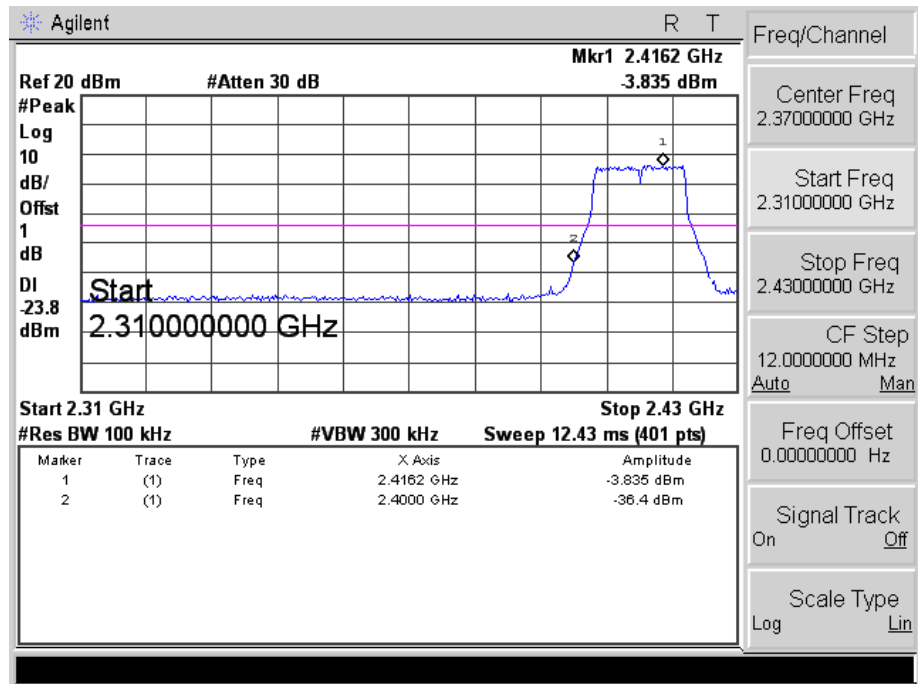



802.11g

Middle

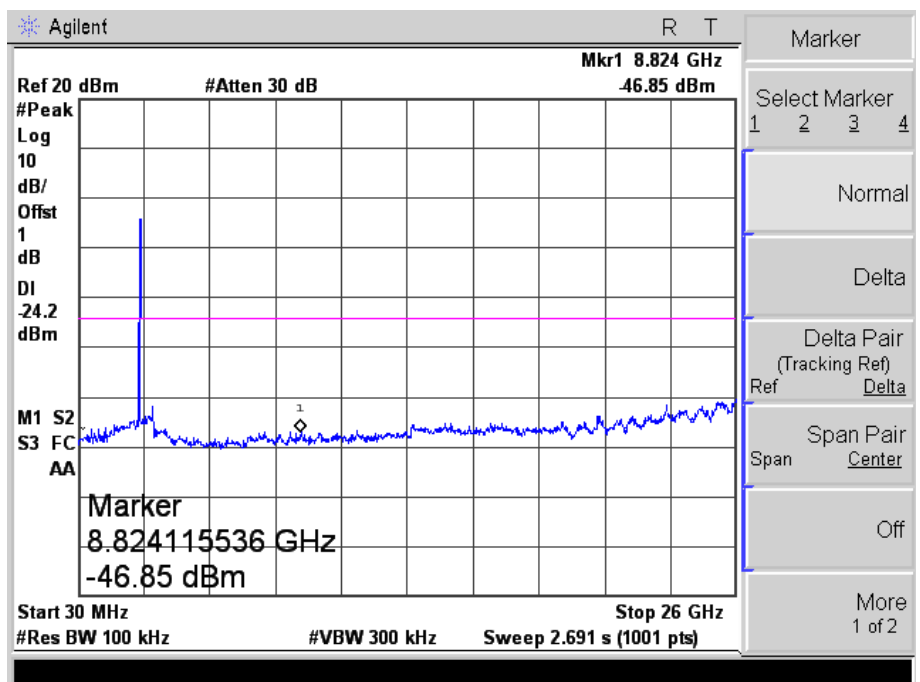



802.11g

High

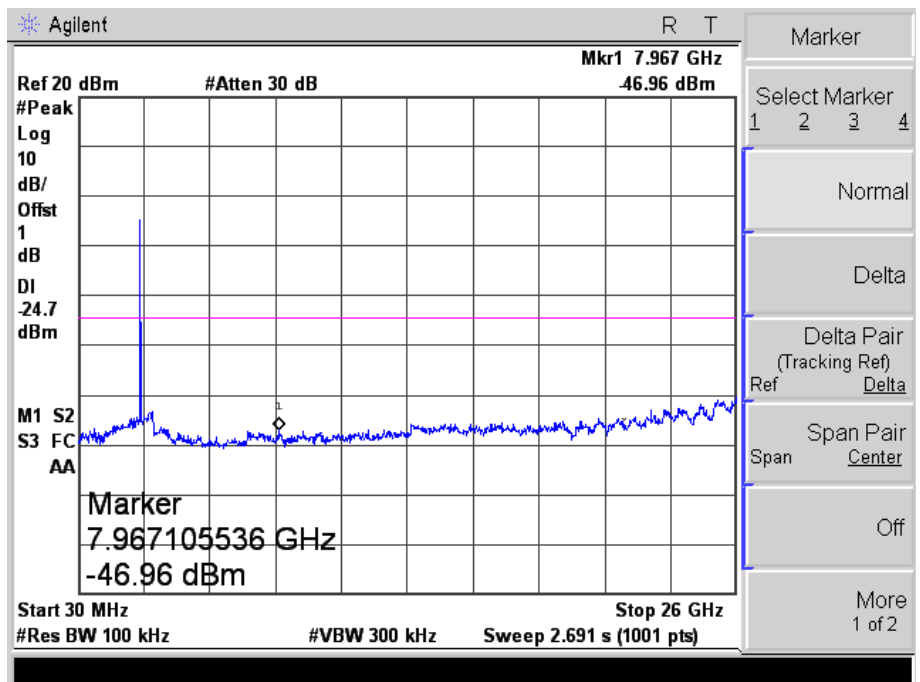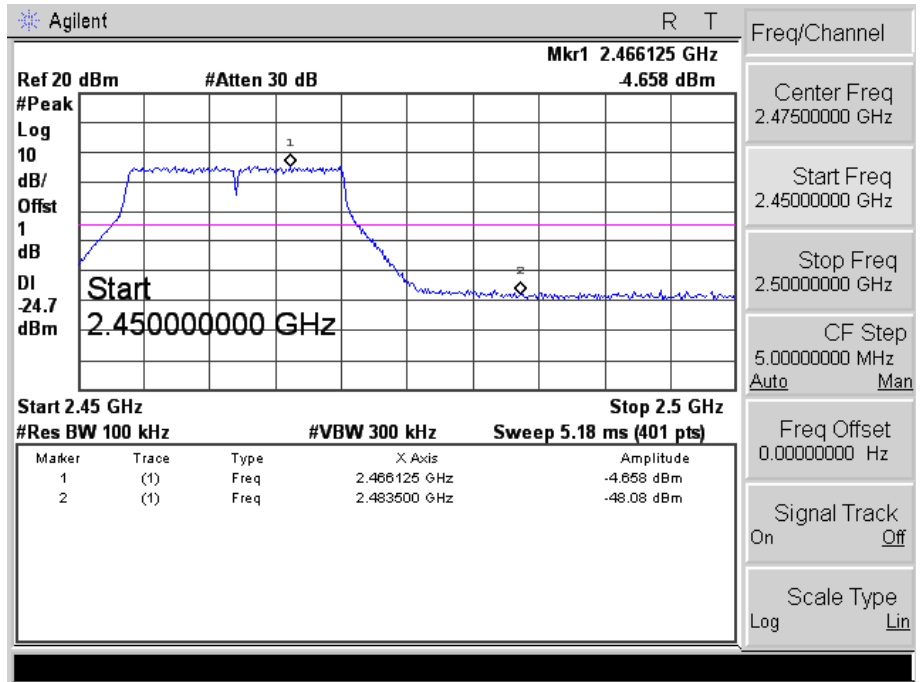



802.11n-HT20

Low

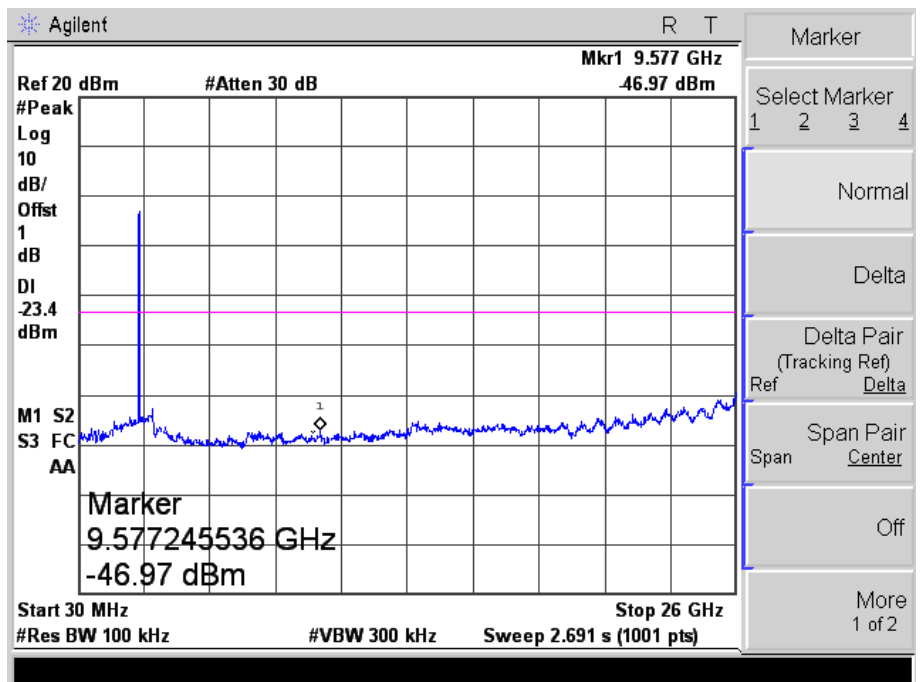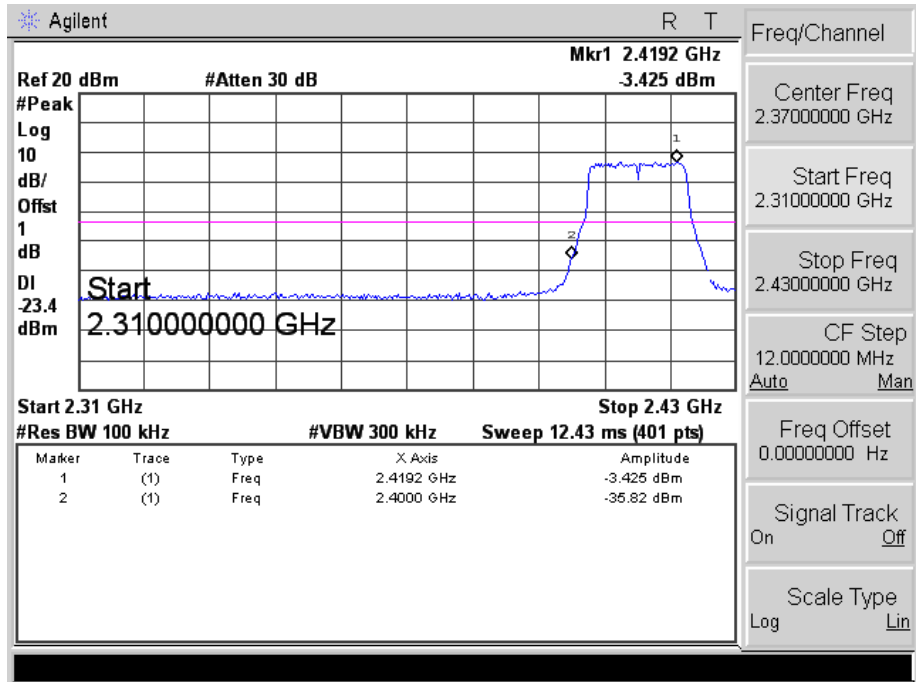



802.11n-HT20

Middle

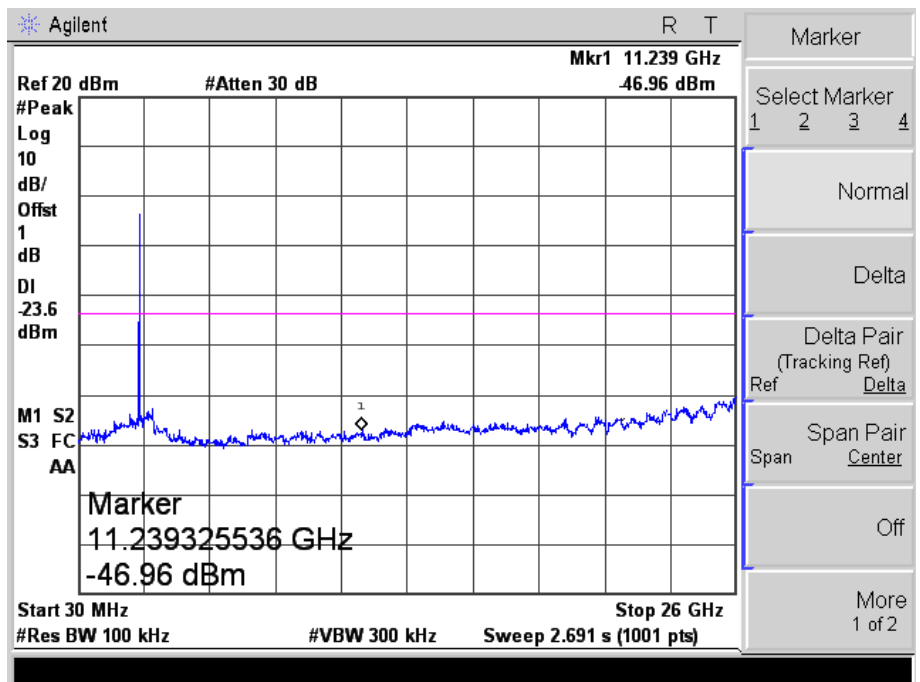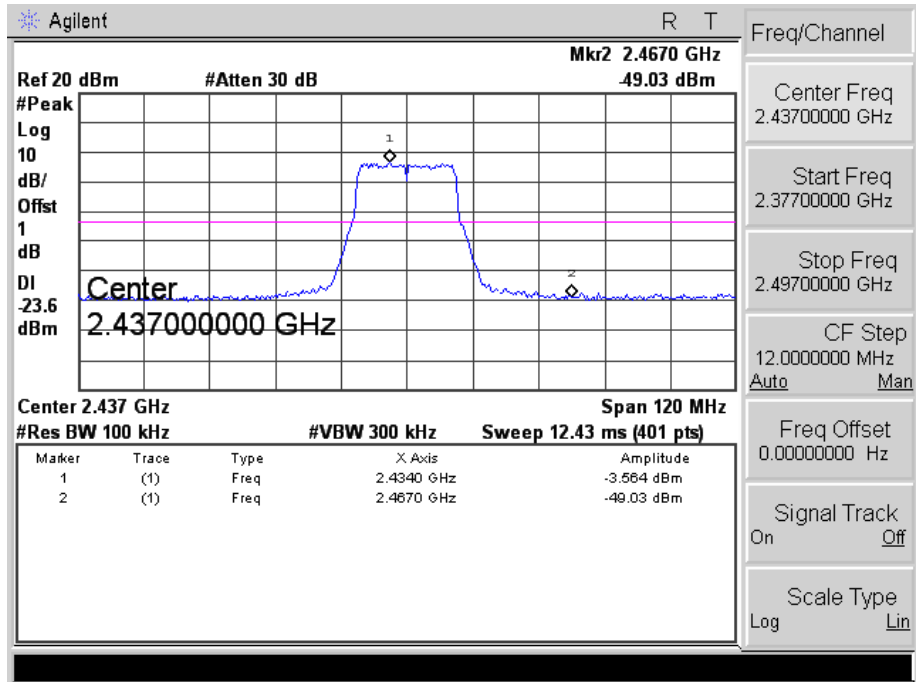



802.11n-HT20

High

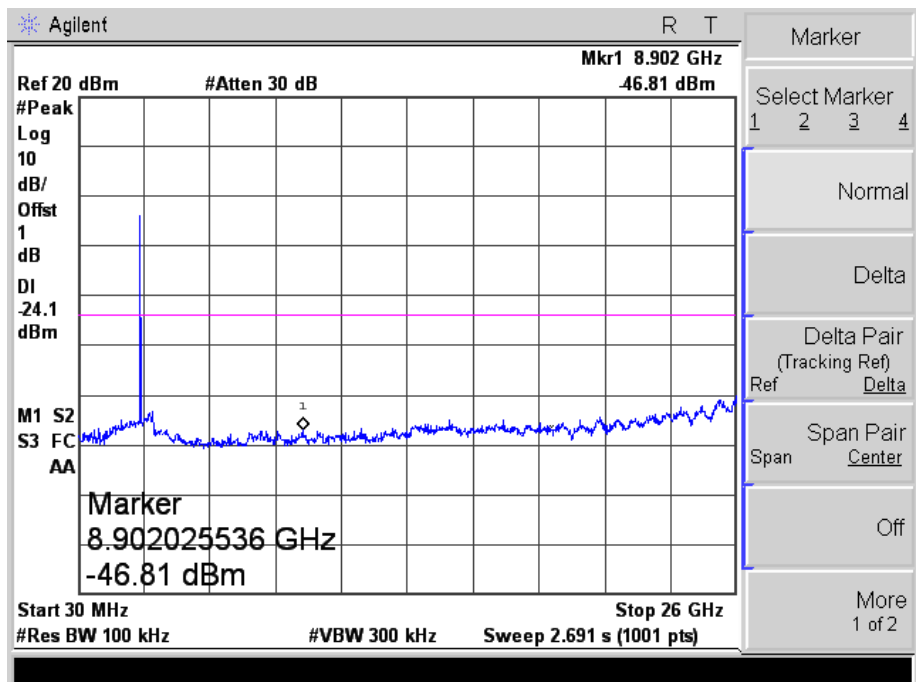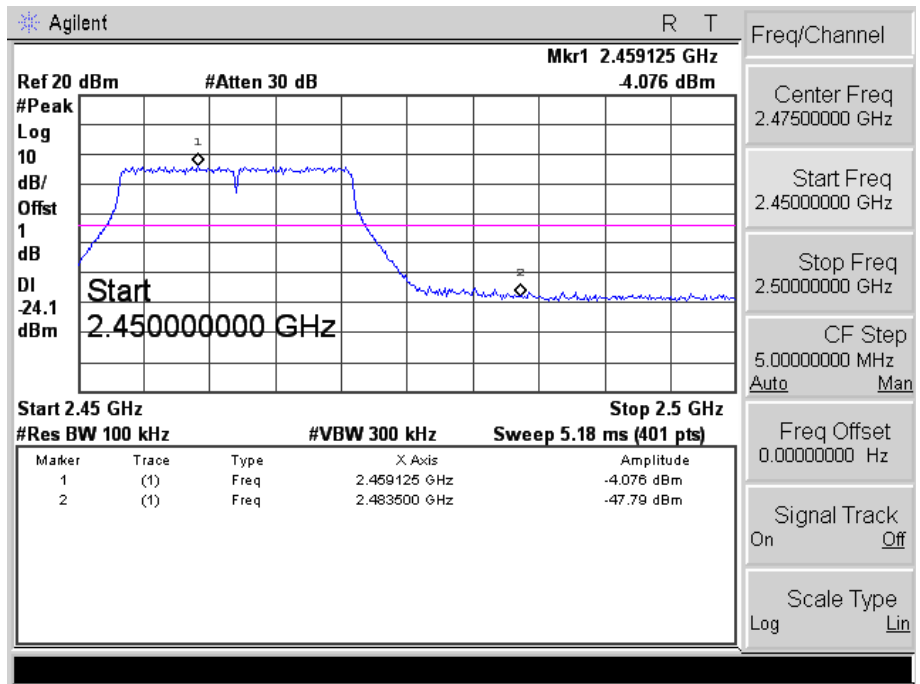



802.11n-HT40

Low

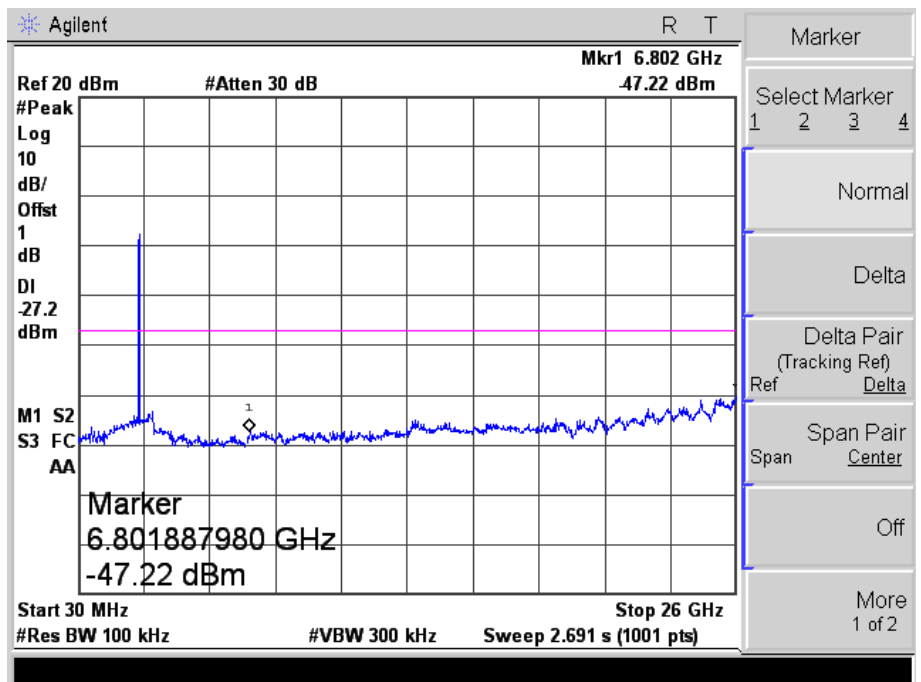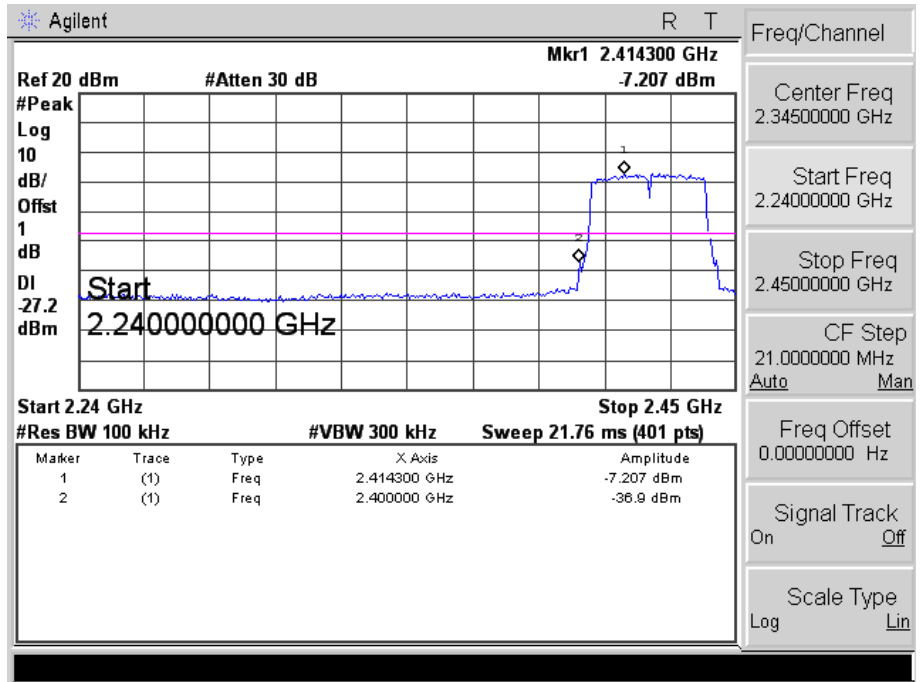



802.11n-HT40

Middle

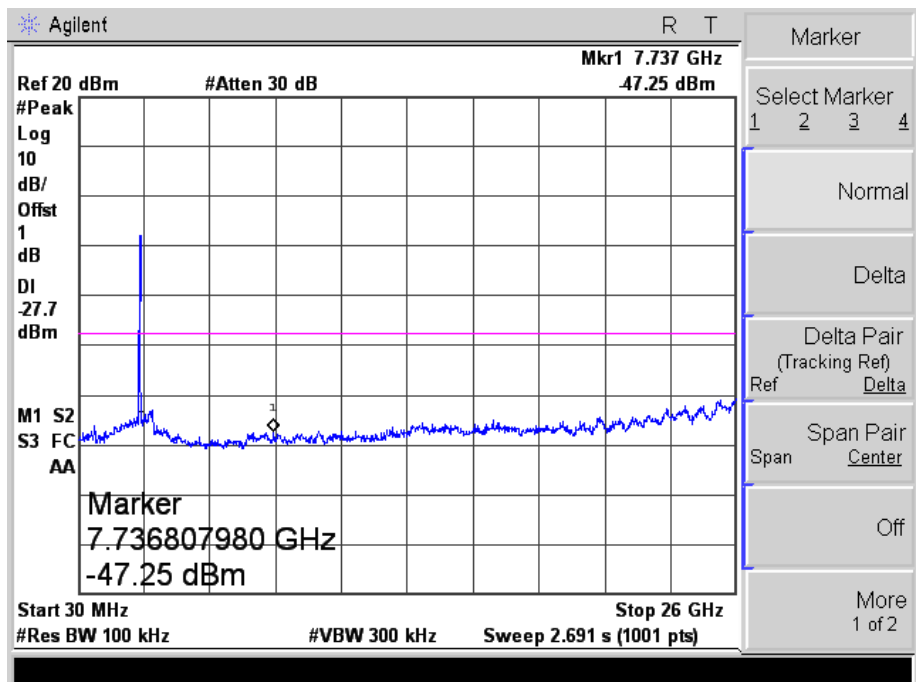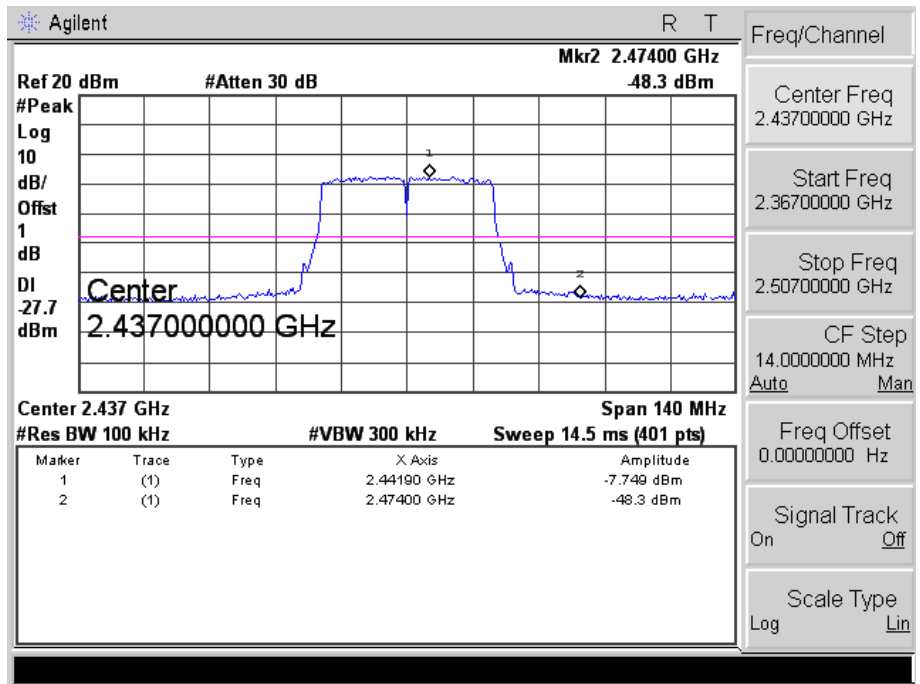

802.11n-HT40

High

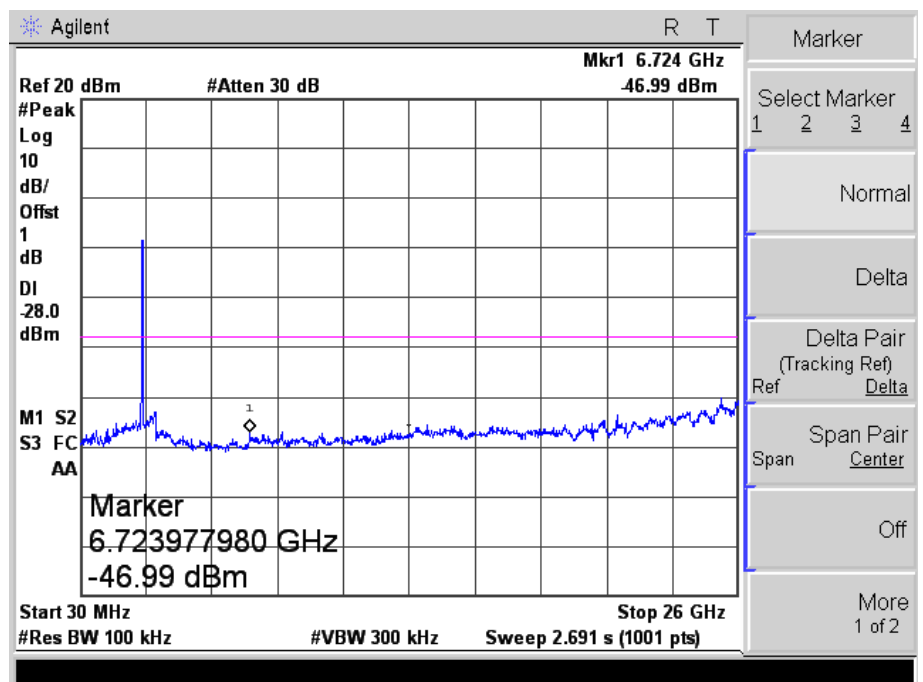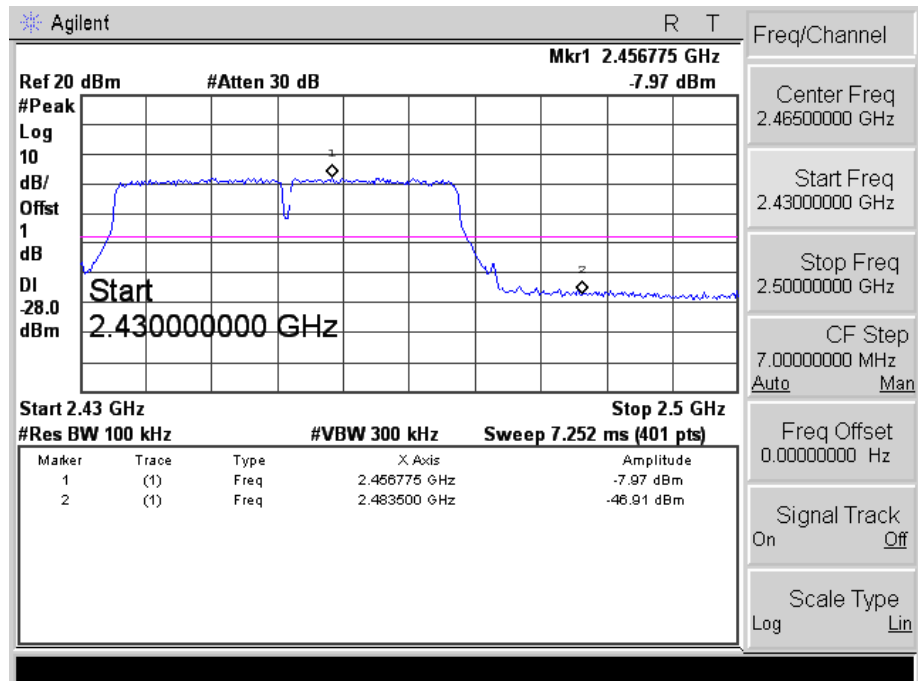


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

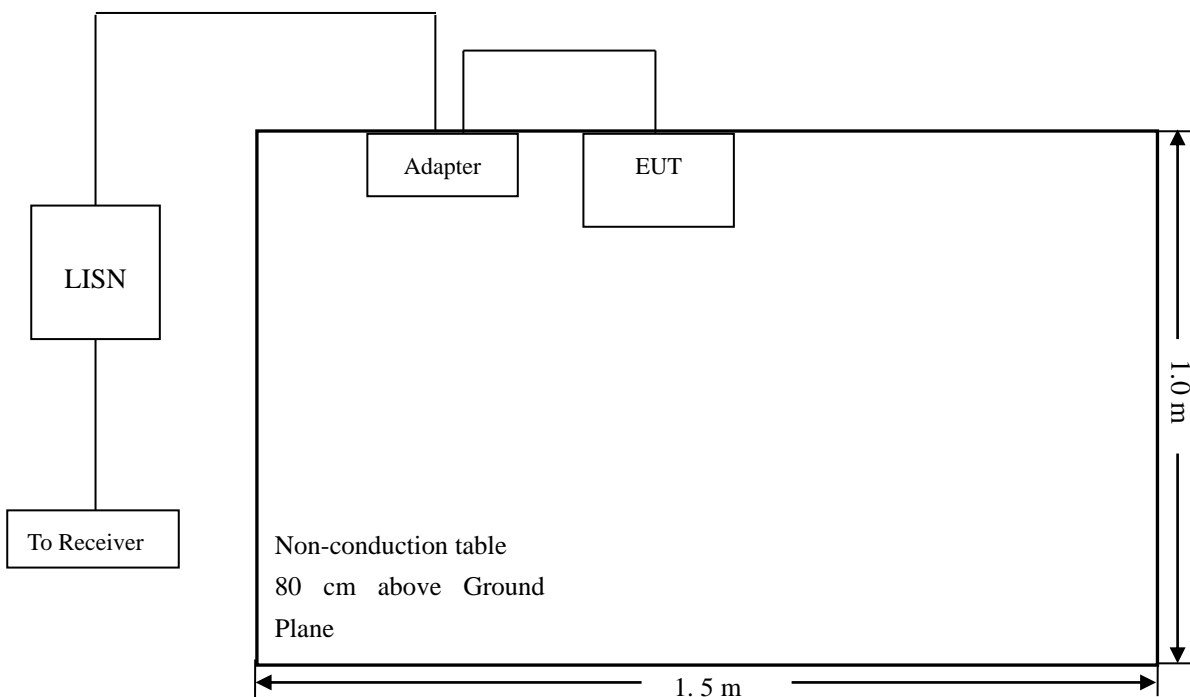


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

- Start Frequency 150 kHz
- Stop Frequency 30 MHz
- Sweep Speed Auto
- IF Bandwidth..... 10 kHz
- Quasi-Peak Adapter Bandwidth 9 kHz
- Quasi-Peak Adapter Mode Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

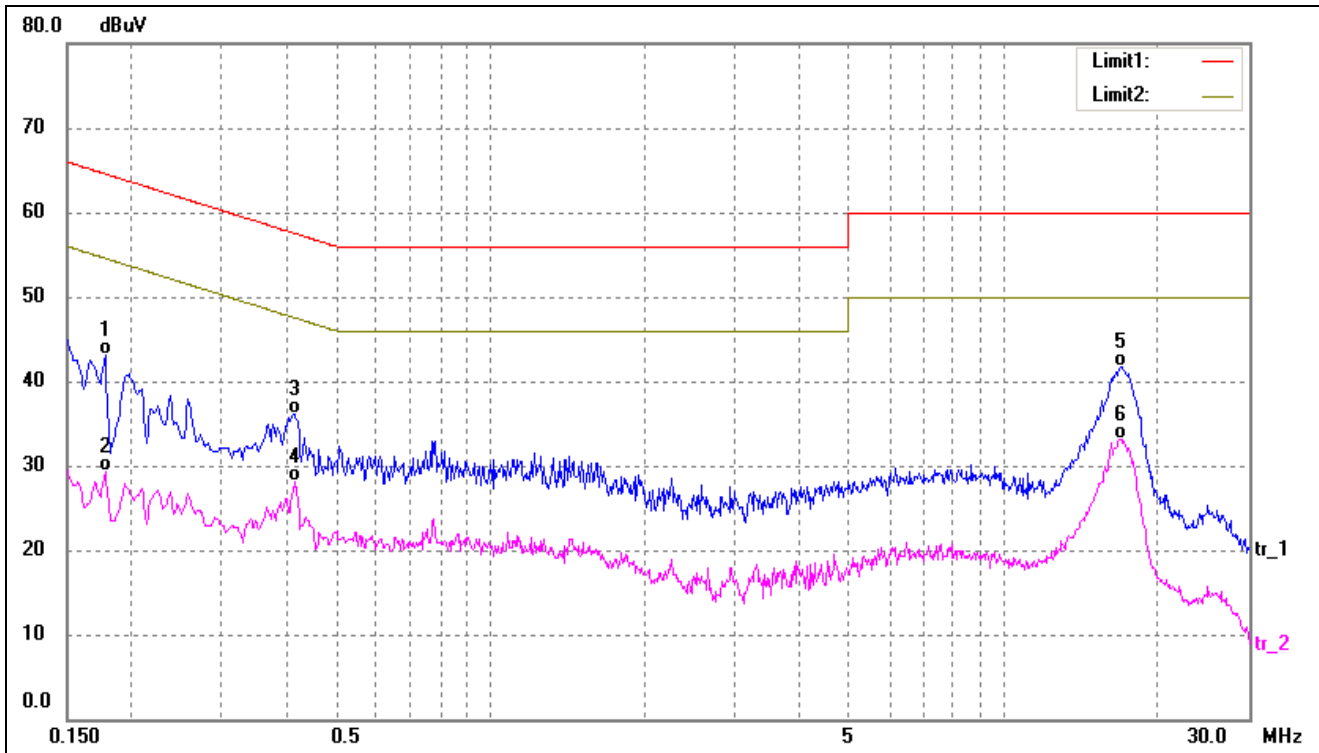

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1780	33.02	10.11	43.13	64.58	-21.45	QP
2	0.1780	19.23	10.11	29.34	54.58	-25.24	AVG
3	0.4140	25.91	10.26	36.17	57.57	-21.40	QP
4	0.4180	17.77	10.26	28.03	47.49	-19.46	AVG
5	16.8580	30.59	11.08	41.67	60.00	-18.33	QP
6*	16.8580	22.02	11.08	33.10	50.00	-16.90	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

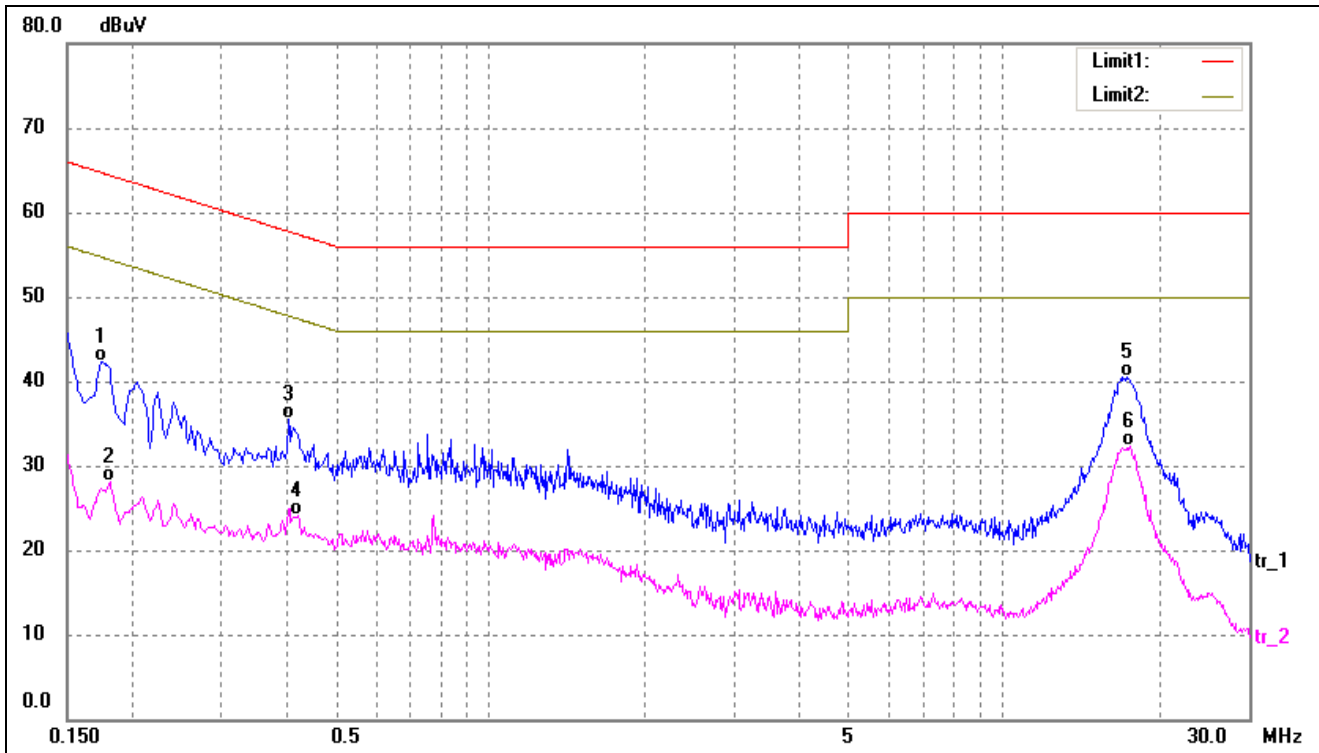

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	32.29	10.11	42.40	64.77	-22.37	QP
2	0.1820	17.91	10.11	28.02	54.39	-26.37	AVG
3	0.4060	25.18	10.25	35.43	57.73	-22.30	QP
4	0.4220	13.84	10.26	24.10	47.41	-23.31	AVG
5	17.3620	29.41	11.10	40.51	60.00	-19.49	QP
6*	17.5940	21.23	11.10	32.33	50.00	-17.67	AVG

***** END OF REPORT *****