


REV	DATE	DESCRIPTION
A	2022-11-25	NEW ISSUE

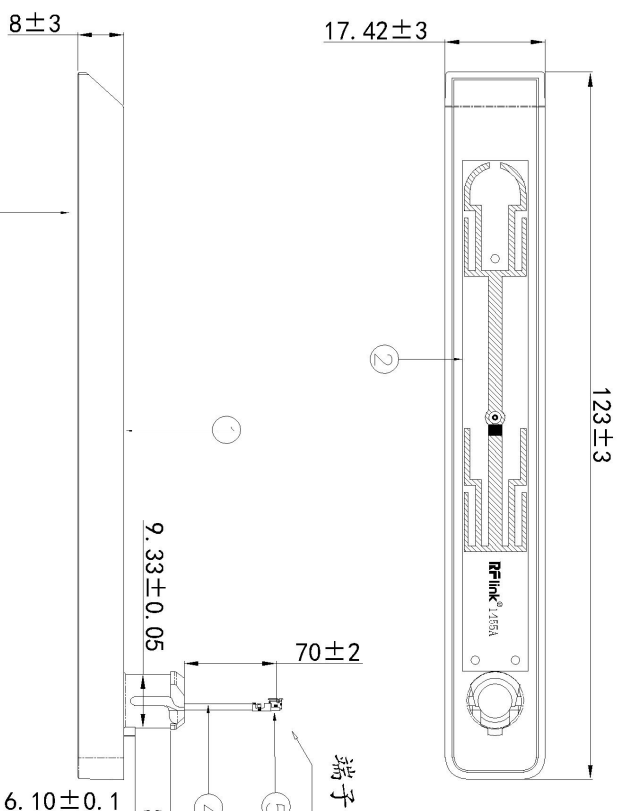











规格Specification:
 频率Frequency Range : 2.4~2.5GHz
 5.15~5.85GHz
 驻波比VSWR: 2.0max

5	端子	1	Copper																		
4	线材	1	Ø1.37 Gray																		
3	下盖	1	PO+ABS;Black																		
2	POB	1	FR-4																		
1	上盖	1	PO+ABS;Black																		
NO.	DESCRIPTION	QTY	REMARK																		
带公差尺寸为检验尺寸																					
产品符合环保RoHS2.0之要求																					

APPROVED	CHECKED	DRAWING



CUSTOMER:	PART NO.:	SCALE	SIZE	SHEET
		1:1	A4	10/1








RFlink
 东莞市仁丰电子科技有限公司
 RenFeng Electronic technology
 Co., LTD.

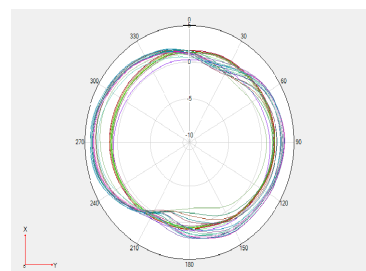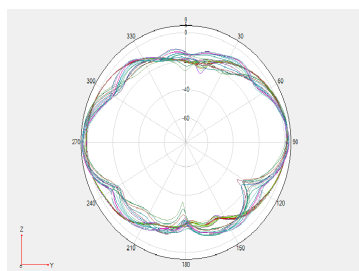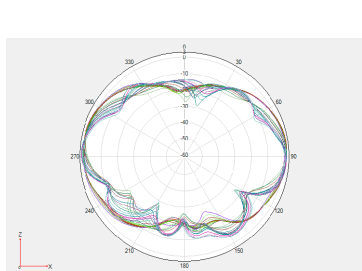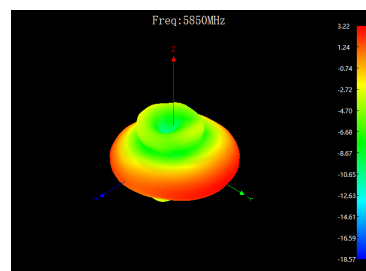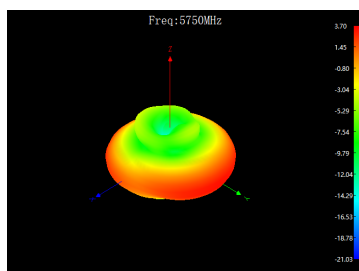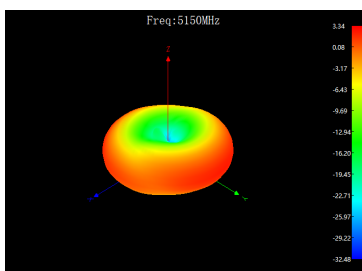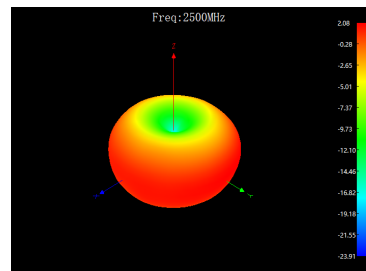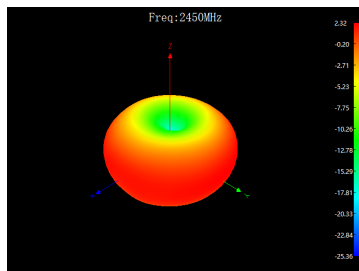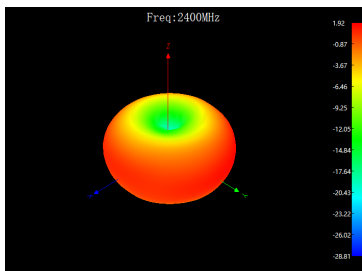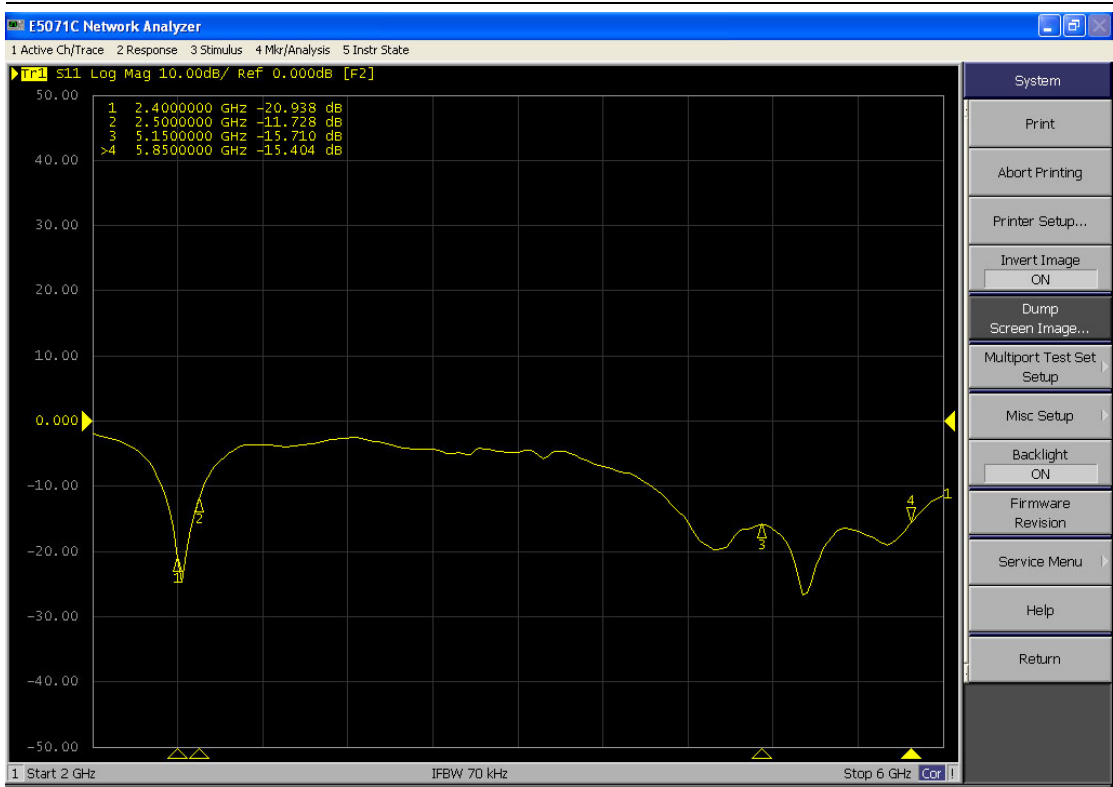



Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	1.92	69.18
2410	1.99	72.11
2420	2.12	73.28
2430	2.03	66.83
2440	2.19	65.61
2450	2.32	67.92
2460	2.35	63.1
2470	2.27	60.53
2480	2.21	59.29
2490	2.19	58.75
2500	2.08	57.54
5150	3.34	56.36
5200	3.68	58.48
5250	3.54	56.75
5300	3.91	58.61
5350	3.87	58.88
5400	4.1	59.16
5450	3.83	56.1
5500	3.78	57.81
5550	3.97	59.16
5600	4.29	59.29
5650	4.03	59.16
5700	3.83	60.67
5750	3.7	58.48
5800	3.92	59.43
5850	3.22	59.43

2.4G 外露L=150MM+端子 2.4G-TX0

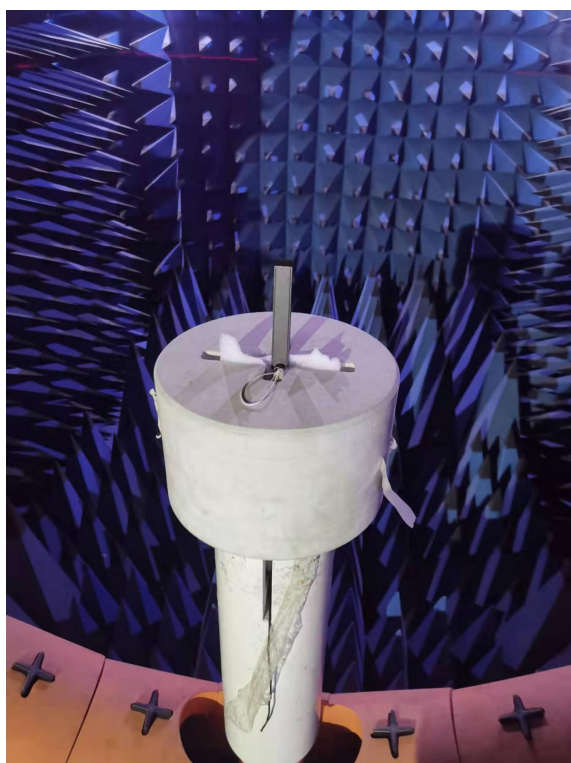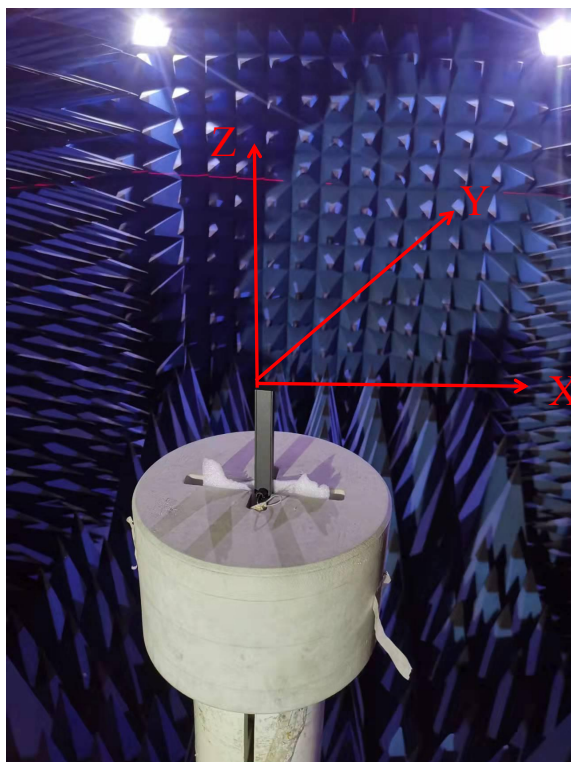


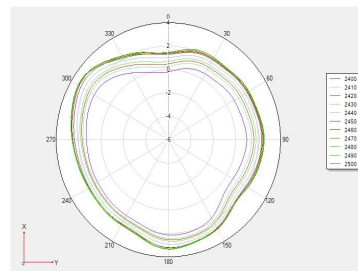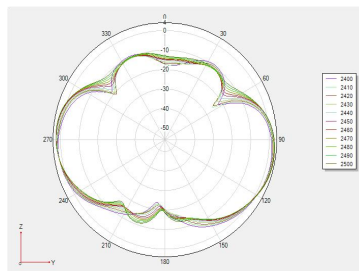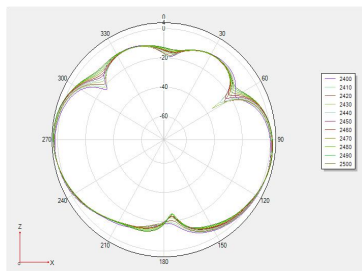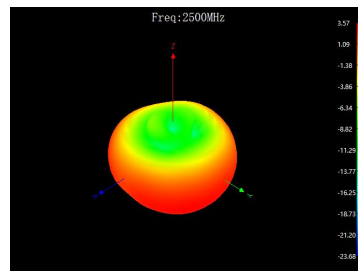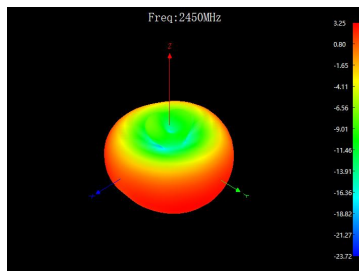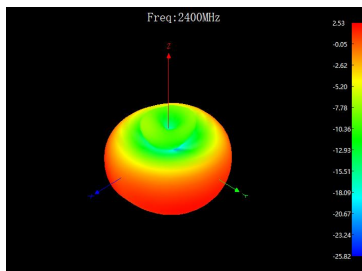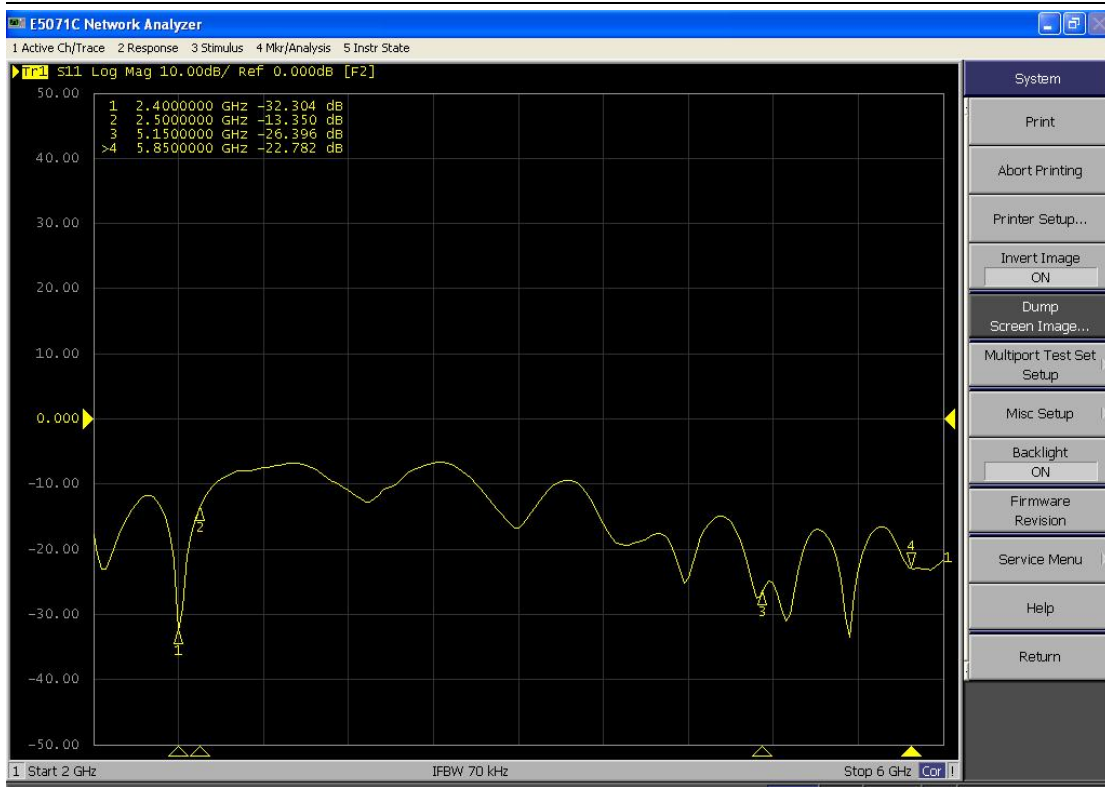

Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	2.53	69.82
2410	2.56	72.61
2420	2.64	73.96
2430	2.74	69.66
2440	2.99	69.5
2450	3.25	73.11
2460	3.36	69.82
2470	3.45	69.34
2480	3.55	69.18
2490	3.61	69.5
2500	3.57	68.87

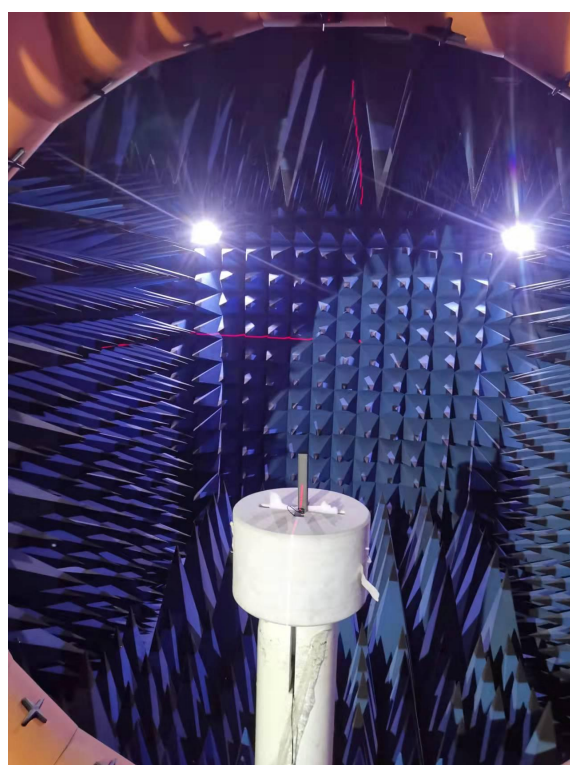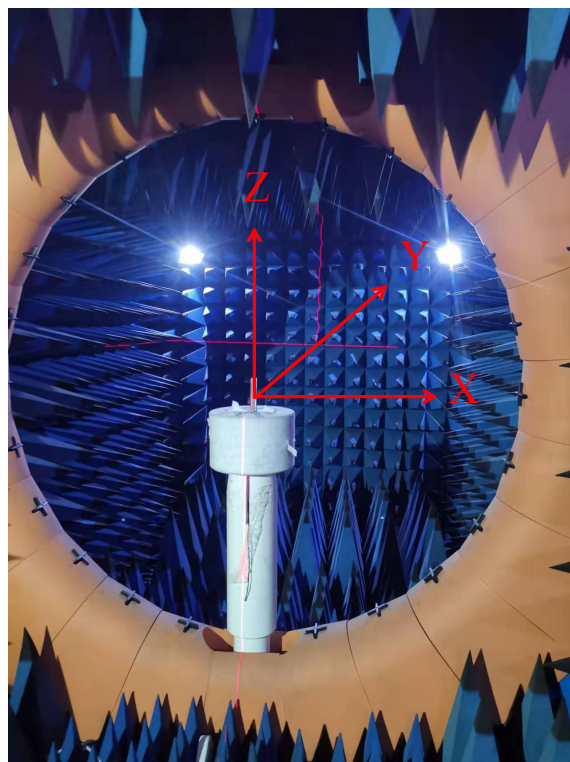

REV	DATE	DESCRIPTION
A	2022-11-25	NEW ISSUE

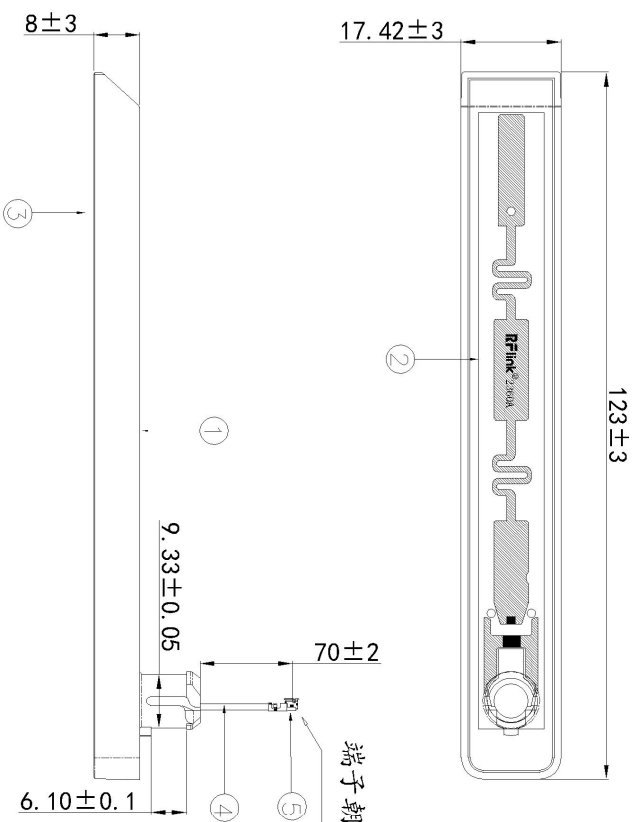

规格Specification:
 频率Frequency Range : 5.15~5.85GHz
 驻波比VSWR: 2.0max

5	端子	1	Copper;																
4	线材	1	Ø1.37 Black																
3	下盖	1	PO+ABS;Black																
2	POB	1	FR-4																
1	上盖	1	PO+ABS;Black																
NO.	DESCRIPTION	QTY	REMARK																
带公差尺寸为检验尺寸																			
产品符合环保RoHS2.0之要求																			

NO.	DESCRIPTION	QTY	REMARK
1	上盖	1	PO+ABS;Black
2	POB	1	FR-4
3	下盖	1	PO+ABS;Black
4	线材	1	Ø1.37 Black
5	端子	1	Copper;








REV	UNIT	SCALE	SIZE	SHEET
A	mm	1:1	A4	10F1

NO.	DESCRIPTION	QTY	REMARK
1	上盖	1	PO+ABS;Black
2	POB	1	FR-4
3	下盖	1	PO+ABS;Black
4	线材	1	Ø1.37 Black
5	端子	1	Copper;

NO.	DESCRIPTION	QTY	REMARK
1	上盖	1	PO+ABS;Black
2	POB	1	FR-4
3	下盖	1	PO+ABS;Black
4	线材	1	Ø1.37 Black
5	端子	1	Copper;

REV	UNIT	SCALE	SIZE	SHEET
A	mm	1:1	A4	10F1



RFlink
 东莞市仁丰电子科技有限公司
 RenFeng Electronic technology
 Co., LTD.

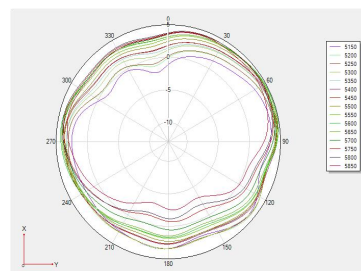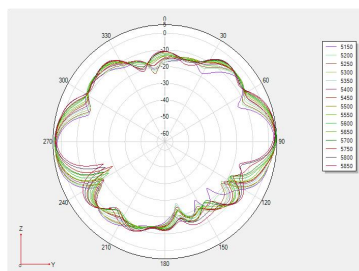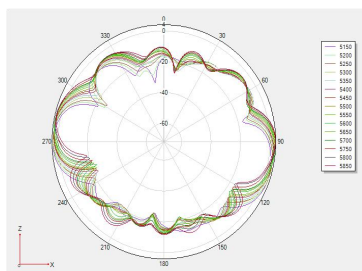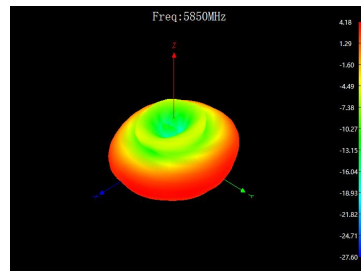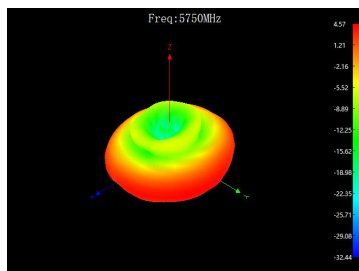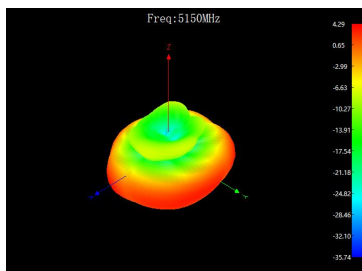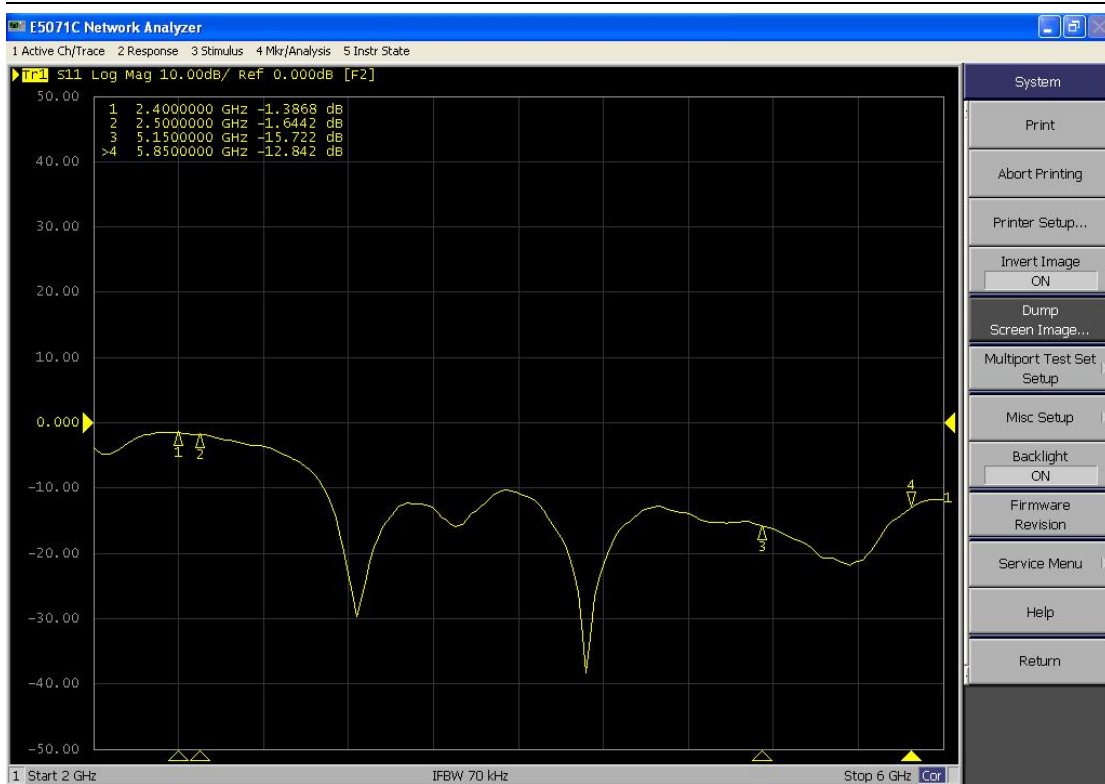


Frequency/Mhz	MaxGain/dBi	Efficiency / %
5150	4.29	68.71
5200	4.43	71.45
5250	4.3	69.66
5300	4.5	71.61
5350	4.33	71.94
5400	4.65	72.44
5450	4.44	69.34
5500	4.62	70.96
5550	4.83	71.78
5600	4.87	72.44
5650	4.64	72.95
5700	4.66	69.98
5750	4.57	67.45
5800	4.5	69.82
5850	4.18	71.29

5G 外露L=155MM+端子

5.0G-TX2

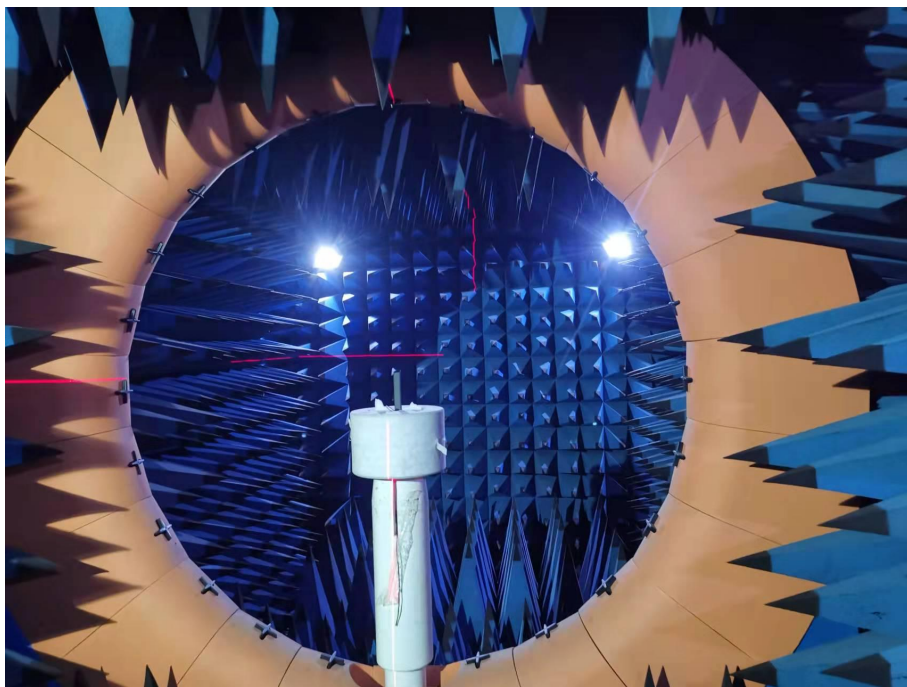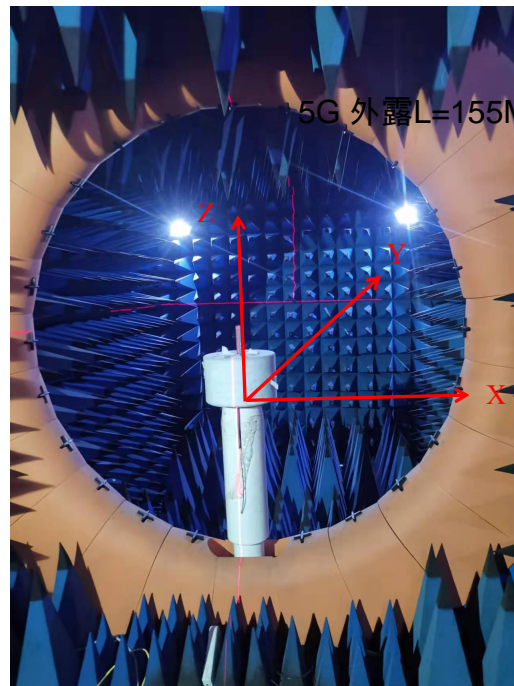

REV	DATE	DESCRIPTION
A	2022-11-25	NEW ISSUE

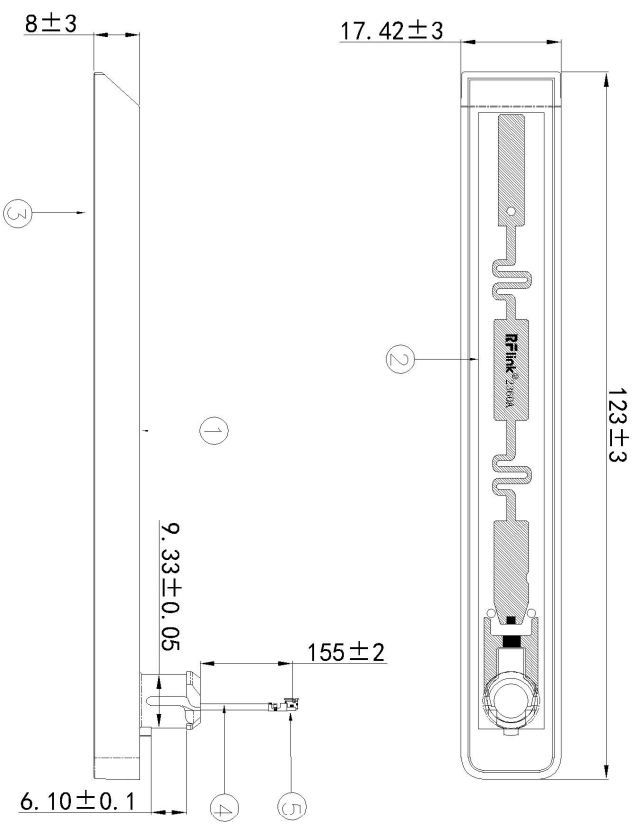

规格Specification:
 频率Frequency Range : 5.15~5.85GHz
 驻波比VSWR: 2.0max







5	端子	1	Copper;																	
4	线材	1	Ø1.37 Black																	
3	下盖	1	PO+ABS;Black																	
2	POB	1	FR-4																	
1	上盖	1	PO+ABS;Black																	
NO.	DESCRIPTION	QTY	REMARK																	
带公差尺寸为检验尺寸																				
产品符合环保RoHS2.0之要求																				

APPROVED	CHECKED	DRAWING

APPROVED	CHECKED	DRAWING

REV	UNIT	SCALE	SIZE	SHEET
A	mm	1:1	A4	10/1

RFlink
 东莞市仁丰电子科技有限公司
 RenFeng Electronic technology
 Co., LTD.

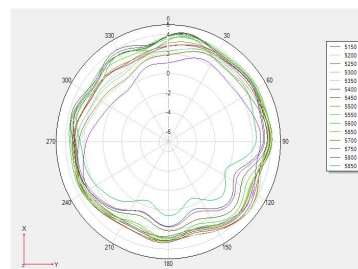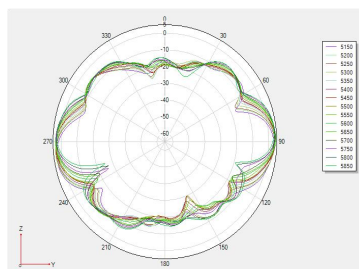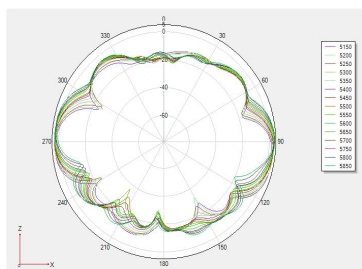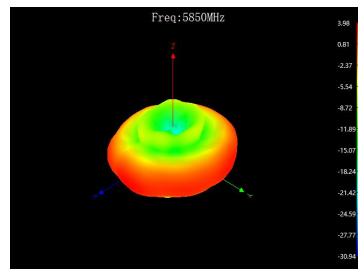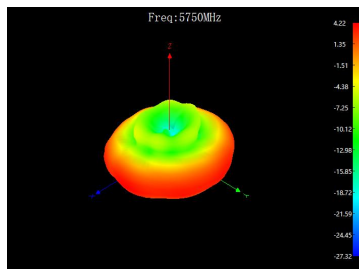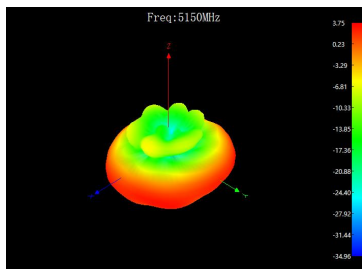

Frequency/Mhz	MaxGain/dBi	Efficiency / %
5150	3.75	65.61
5200	4.26	68.71
5250	4.16	66.83
5300	4.13	67.92
5350	3.75	67.61
5400	4.08	67.61
5450	3.85	63.39
5500	3.96	63.53
5550	4.2	64.86
5600	4.24	64.86
5650	4.11	65.01
5700	4.22	62.81
5750	4.22	60.81
5800	4.3	63.53
5850	3.98	64.42