

FCC

RF

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**LAPTOP**

ISSUED TO  
HUNAN GREATWALL COMPUTER SYSTEM CO., LTD

Tianyi Science and Technology Town, Xiangyun Road, Tianyuan District,  
Zhuzhou, Hunan, P.R. China



Tested by:

Ye Hongji

Date

Oct. 16, 2020

Approved by:

Wei Yanquan  
(Chief Engineer)

Date

Oct. 16, 2020

Report No.: BL-SZ2090561-603

EUT Name: LAPTOP

Model Name: EVC156-1 (refer section 2.4)

Brand Name: EVOO

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2APUQ-EVC156

Test Conclusion: Pass

Test Date: Sep. 21, 2020 ~ Sep. 30, 2020

Date of Issue: Oct. 16, 2020

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

### Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Oct. 16, 2020</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	6
2	PRODUCT INFORMATION.....	7
2.1	Applicant Information.....	7
2.2	Manufacturer Information .....	7
2.3	Factory Information .....	7
2.4	General Description for Equipment under Test (EUT) .....	7
2.5	Technical Information .....	8
2.6	Additional Instructions .....	11
3	SUMMARY OF TEST RESULTS.....	12
3.1	Test Standards .....	12
3.2	Verdict .....	12
4	GENERAL TEST CONFIGURATIONS.....	13
4.1	Test Environments .....	13
4.2	Test Equipment List.....	13
4.3	Measurement Uncertainty .....	14
4.4	Description of Test Setup .....	15
4.4.1	For Antenna Port Test .....	15
4.4.2	For AC Power Supply Port Test .....	15
4.4.3	For Radiated Test (Below 30 MHz) .....	16
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	16
4.4.5	For Radiated Test (Above 1 GHz).....	17
4.5	Measurement Results Explanation Example.....	18

4.5.1	For conducted test items: .....	18
4.5.2	For radiated band edges and spurious emission test:.....	18
5	TEST ITEMS.....	19
5.1	Antenna Requirements.....	19
5.1.1	Relevant Standards.....	19
5.1.2	Antenna Anti-Replacement Construction .....	19
5.1.3	Antenna Gain .....	19
5.2	Output Power .....	20
5.2.1	Test Limit.....	20
5.2.2	Test Setup .....	20
5.2.3	Test Procedure .....	20
5.2.4	Test Result .....	21
5.3	6dB Bandwidth .....	22
5.3.1	Limit.....	22
5.3.2	Test Setup .....	22
5.3.3	Test Procedure .....	22
5.3.4	Test Result .....	22
5.4	Conducted Spurious Emission .....	23
5.4.1	Limit.....	23
5.4.2	Test Setup .....	23
5.4.3	Test Procedure .....	23
5.4.4	Test Result .....	24
5.5	Band Edge (Authorized-band band-edge).....	25
5.5.1	Limit.....	25
5.5.2	Test Setup .....	25
5.5.3	Test Procedure .....	25
5.5.4	Test Result .....	26
5.6	Conducted Emission .....	27
5.6.1	Limit.....	27
5.6.2	Test Setup .....	27
5.6.3	Test Procedure .....	27
5.6.4	Test Result .....	27

5.7	Radiated Spurious Emission .....	28
5.7.1	Limit.....	28
5.7.2	Test Setup .....	28
5.7.3	Test Procedure .....	28
5.7.4	Test Result .....	31
5.8	Band Edge (Restricted-band band-edge).....	32
5.8.1	Limit.....	32
5.8.2	Test Setup .....	32
5.8.3	Test Procedure .....	32
5.8.4	Test Result .....	32
5.9	Power Spectral density (PSD).....	33
5.9.1	Limit.....	33
5.9.2	Test Setup .....	33
5.9.3	Test Procedure .....	33
5.9.4	Test Result .....	33
ANNEX A	TEST RESULT .....	34
A.1	Output Power .....	34
A.2	Bandwidth.....	38
A.3	Conducted Spurious Emissions .....	48
A.4	Band Edge (Authorized-band band-edge).....	66
A.5	Conducted Emissions.....	74
A.6	Radiated Emission .....	76
A.7	Band Edge (Restricted-band band-edge).....	102
A.8	Power Spectral Density (PSD) .....	113
ANNEX B	TEST SETUP PHOTOS .....	119
ANNEX C	EUT EXTERNAL PHOTOS .....	119
ANNEX D	EUT INTERNAL PHOTOS .....	119

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.4.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.



## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	HUNAN GREATWALL COMPUTER SYSTEM CO., LTD
Address	Tianyi Science and Technology Town, Xiangyun Road, Tianyuan District, Zhuzhou, Hunan, P.R. China

### 2.2 Manufacturer Information

Manufacturer	HUNAN GREATWALL COMPUTER SYSTEM CO., LTD
Address	Tianyi Science and Technology Town, Xiangyun Road, Tianyuan District, Zhuzhou, Hunan, P.R. China

### 2.3 Factory Information

Factory	HUNAN GREATWALL COMPUTER SYSTEM CO., LTD
Address	Tianyi Science and Technology Town, Xiangyun Road, Tianyuan District, Zhuzhou, Hunan, P.R. China

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	LAPTOP
Model Name Under Test	EVC156-1
Series Model Name	EVC156-2
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only different on model name.
Serial Number	N/A
Hardware Version	XU133SR400
Software Version	OS Name: Microsoft Windows 10 Home 2004 Versios: 20H1
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth 4.2 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac Band 1/3 SRD
-----------------------------------	-------------------------------------------------------------------------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1) \times 5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1) \times 5 \text{ MHz}$ , where - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number" with the range from 3 to 9.	
Modulation Type	DSSS, OFDM	
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Antenna System (eg., MIMO, Smart Antenna)	Cyclic Delay Diversity (CDD) for 802.11n Basic methodology with $N_{ANT}$ transmit antennas, each with the same directional gain $G_{ANT}$ dBi for 802.11b/g	
Categorization as Correlated or Completely Uncorrelated	Categorization as Correlated	
Antenna Type	Main Antenna Aux. Antenna	FPC Antenna
Antenna Gain	Main Antenna Aux. Antenna	2 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Total directional gain for 802.11n	For power spectral density(PSD) measurements	5 dBi Formulas: Directional gain = $G_{ANT} + \text{Array Gain}$ , $\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}) \text{ dB}$ . $N_{SS} = 1$ , $G_{ANT}$ set equal to the gain of the antenna having the highest gain.
	For power measurements	5 dBi Formulas: Directional gain = $G_{ANT} + \text{Array Gain}$ , $\text{Array Gain} = 0$ , $G_{ANT}$ set equal to the gain of the antenna having the highest gain.
	For Conducted Out-of-Band and Spurious Measurements	5 dBi Formulas: Directional gain = $G_{ANT} + \text{Array Gain}$ , $\text{Array Gain} = 10 \log(N_{ANT}/N_{SS}) \text{ dB}$ . $N_{SS} = 1$ , $G_{ANT}$ set equal to the gain of the antenna having the highest gain.
Total directional gain for 802.11b/g	For power spectral density(PSD) measurements	5 dBi Formulas: Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$
	For power measurements	5 dBi Formulas: Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$



	For Conducted Out-of-Band and Spurious Measurements	5 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi
About the Product		Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.

Mode	Antenna	
	Main Antenna	Aux. Antenna
802.11b	√	√
802.11g	√	√
802.11n20	√	√
802.11n40	√	√

Note: All the configurations were tested, but only the worst data was shown in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

## 2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	MPTool		
Mode	Channel	Soft Set	
		Main Antenna	Aux. Antenna
802.11b	1	41	37
	6	41	40
	11	43	43
802.11g	1	46	46
	6	47	47
	11	47	49
802.11n20	1	44	44
	6	45	45
	11	46	46
802.11n40	3	44	43
	6	45	45
	9	45	46

Run software:

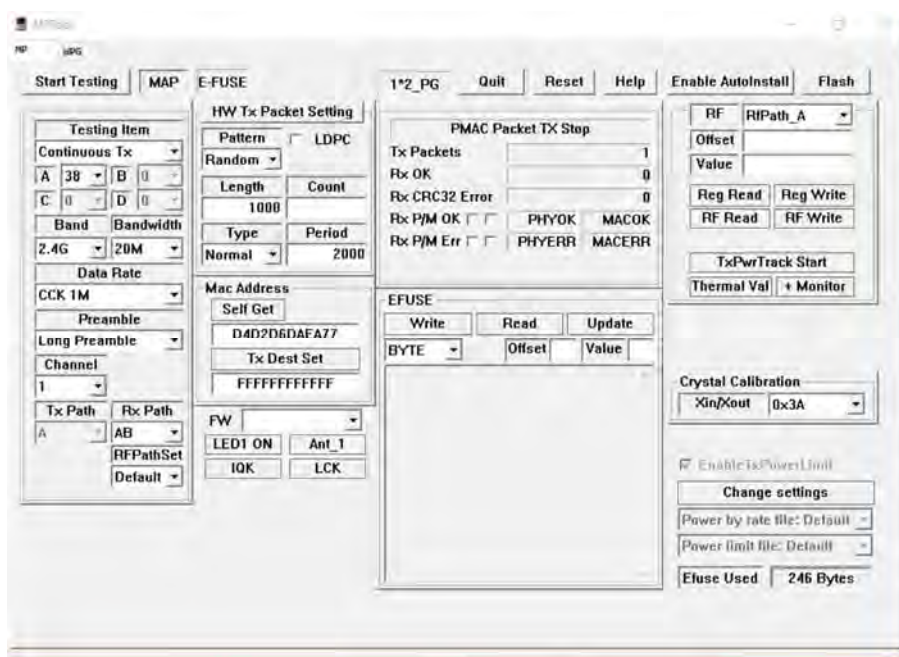

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	N/A	Pass <sup>Note 1</sup>
2	Output Power	15.247(b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A <sup>Note 2</sup>

Note 1: Please refer to section 5.1.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	11.40 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	$\pm 1.4$ dB
Power Spectral Density, conducted	$\pm 2.5$ dB
Unwanted Emissions, conducted	$\pm 2.8$ dB
All emissions, radiated	$\pm 5.4$ dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$




## 4.4 Description of Test Setup

### 4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

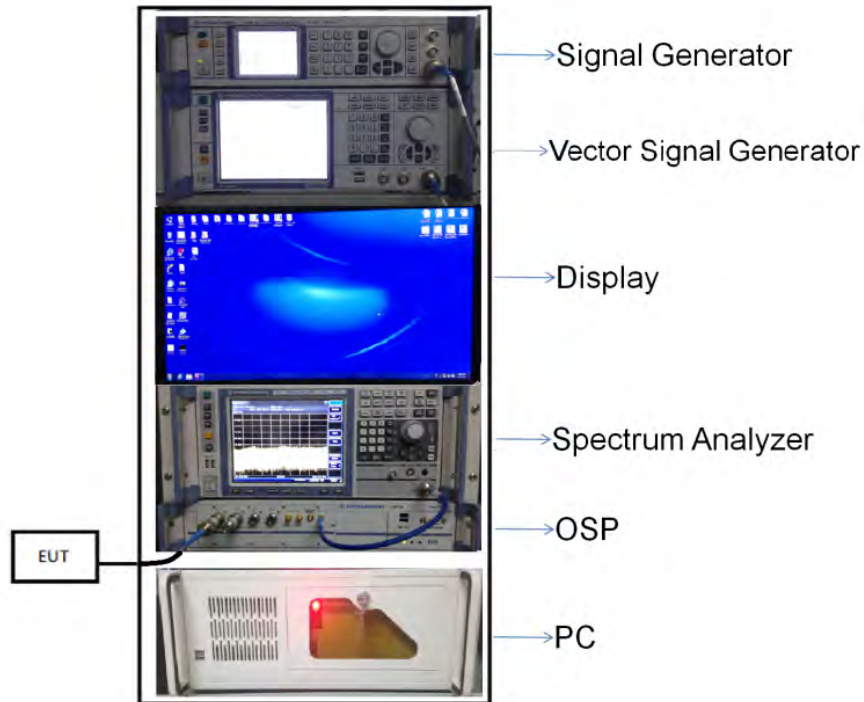


(Diagram 1)

### 4.4.2 For AC Power Supply Port Test

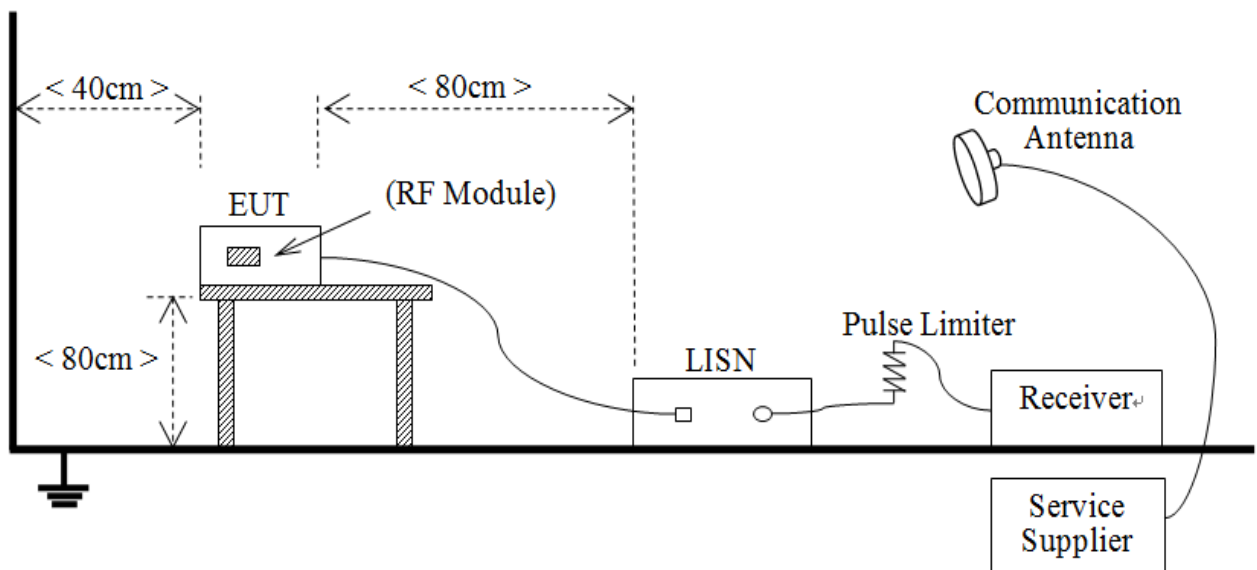


(Diagram 2)

#### 4.4.3 For Radiated Test (Below 30 MHz)

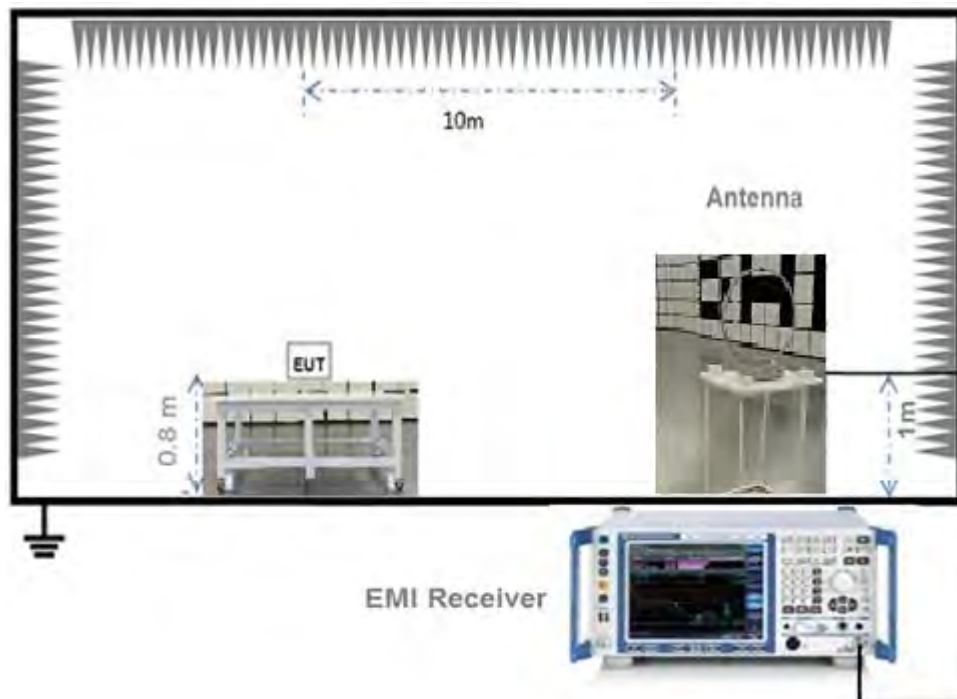


(Diagram 3)

#### 4.4.4 For Radiated Test (30 MHz-1 GHz)

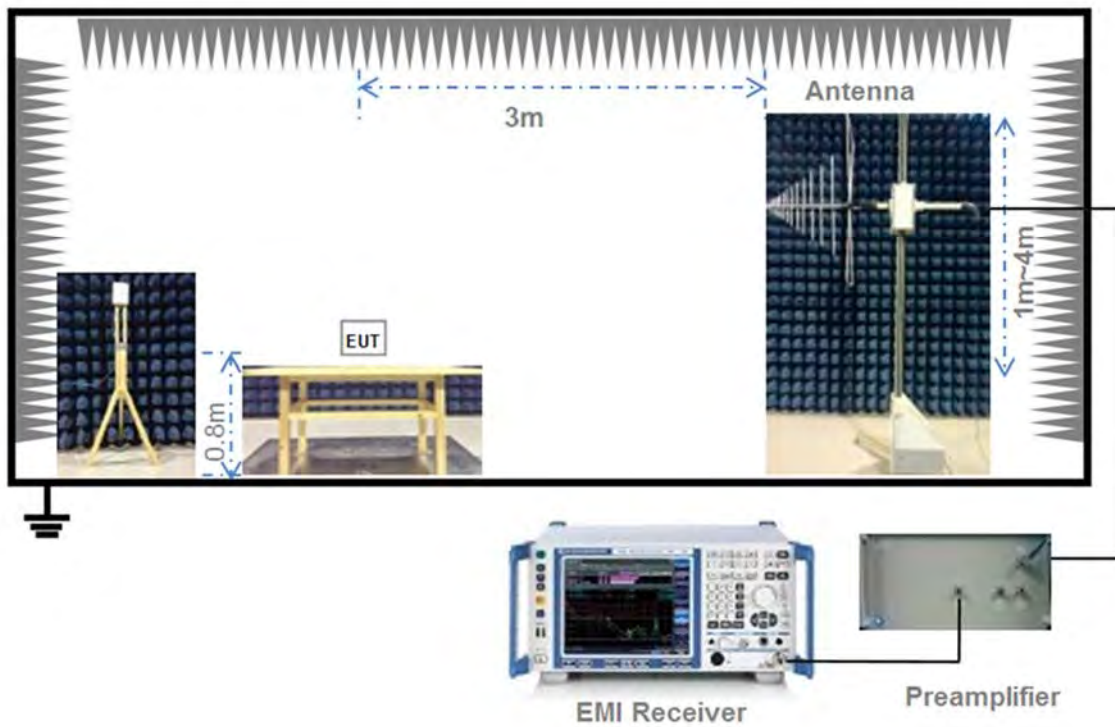

(Diagram 4)

#### 4.4.5 For Radiated Test (Above 1 GHz)

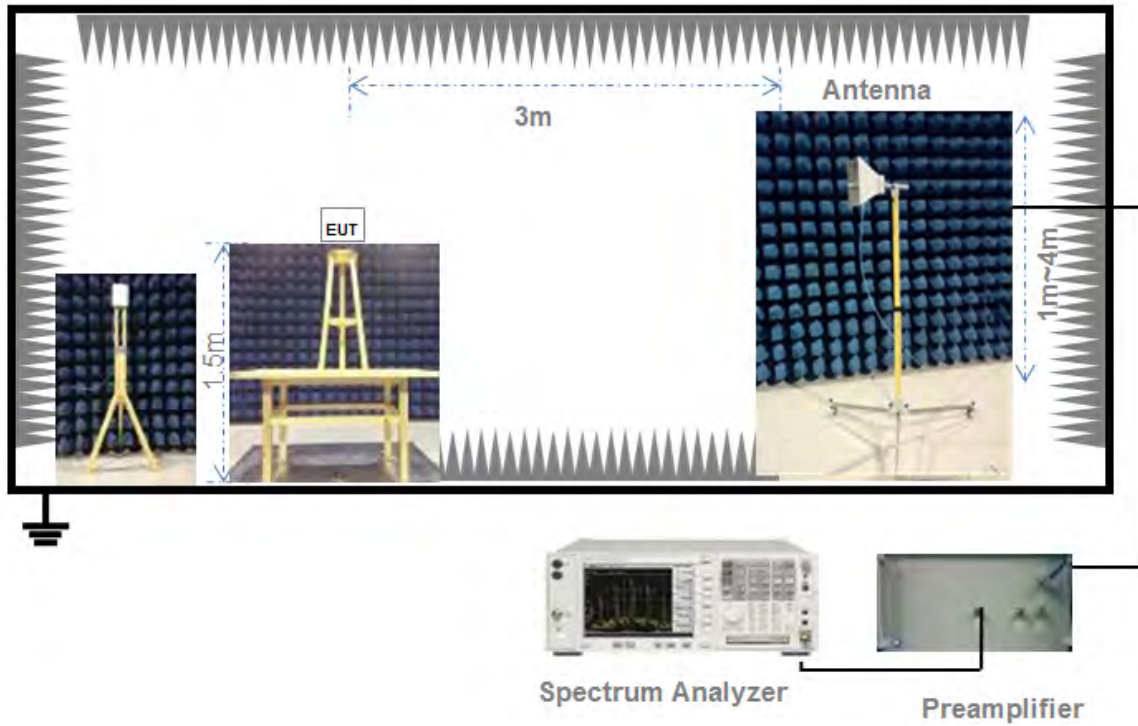

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding  $10\log(1/x)$ , where x is the duty cycle to the measurement result.

#### Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.



Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.

Set  $VBW \geq RBW$ . Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 6dB Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

#### Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

### Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm 0.5$  MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

#### 5.5.4 Test Result

Please refer to ANNEX A.4.



## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.

- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

#### Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle  $\geq 98$  percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq 3 \times$  RBW.
- e) Detector = RMS, if  $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

#### Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 5.8.4 Test Result

Please refer to ANNEX A.7.



## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.8.

## ANNEX A TEST RESULT

### A.1 Output Power

#### Duty Cycle

Test Mode	Duty Cycle	T (ms)	1/T(kHz)
802.11b	100.00%	50	0.02
802.11g	100.00%	50	0.02
802.11n-20 MHz	100.00%	50	0.02
802.11n-40 MHz	100.00%	50	0.02

#### Peak Power Test Data

##### Main Antenna

##### 802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	20.09	102.09	30	1000	Pass
Middle	19.83	96.16			Pass
High	20.33	107.89			Pass

##### 802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.69	185.78	30	1000	Pass
Middle	22.89	194.54			Pass
High	22.55	179.89			Pass

##### 802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.50	177.83	30	1000	Pass
Middle	22.17	164.82			Pass
High	22.29	169.43			Pass

##### 802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.94	156.31	30	1000	Pass
Middle	22.21	166.34			Pass
High	22.03	159.59			Pass

### Aux. Antenna

#### 802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.41	69.34	30	1000	Pass
Middle	18.98	79.07			Pass
High	20.28	106.66			Pass

#### 802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.83	191.87	30	1000	Pass
Middle	22.86	193.20			Pass
High	23.35	216.27			Pass

#### 802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	22.02	159.22	30	1000	Pass
Middle	22.12	162.93			Pass
High	22.26	168.27			Pass

#### 802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	21.16	130.62	30	1000	Pass
Middle	22.22	166.72			Pass
High	22.44	175.39			Pass

# Average Power Test Data

## Main Antenna

### 802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	18.26	66.99	30	1000	Pass
Middle	18.15	65.31			Pass
High	18.22	66.37			Pass

### 802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.20	41.69	30	1000	Pass
Middle	16.18	41.50			Pass
High	16.11	40.83			Pass

### 802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.16	32.81	30	1000	Pass
Middle	15.23	33.34			Pass
High	15.16	32.81			Pass

### 802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.17	32.89	30	1000	Pass
Middle	15.07	32.14			Pass
High	15.27	33.65			Pass

# Aux. Antenna

## 802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.24	42.07	30	1000	Pass
Middle	17.27	53.33			Pass
High	18.15	65.31			Pass

## 802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	16.21	41.78	30	1000	Pass
Middle	16.07	40.46			Pass
High	16.33	42.95			Pass

## 802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	15.37	34.43	30	1000	Pass
Middle	15.14	32.66			Pass
High	15.20	33.11			Pass

## 802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	14.56	28.58	30	1000	Pass
Middle	15.14	32.66			Pass
High	15.21	33.19			Pass

## A.2 Bandwidth

### Test Data

#### Main Antenna

##### 802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	10.162598	14.934877	$\geq 500$
Middle	10.162598	14.934877	$\geq 500$
High	10.162598	14.934877	$\geq 500$

##### 802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.570801	17.192475	$\geq 500$
Middle	16.570801	17.018813	$\geq 500$
High	16.570801	17.134588	$\geq 500$

##### 802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	17.721924	18.002894	$\geq 500$
Middle	17.671875	18.002894	$\geq 500$
High	17.671875	18.002894	$\geq 500$

##### 802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	36.472656	36.200000	$\geq 500$
Middle	36.472656	36.200000	$\geq 500$
High	36.472656	36.200000	$\geq 500$

### Aux. Antenna

#### 802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	10.162598	14.934877	$\geq 500$
Middle	10.162598	14.934877	$\geq 500$
High	10.162598	14.934877	$\geq 500$

#### 802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	16.570801	17.192475	$\geq 500$
Middle	16.570801	17.018813	$\geq 500$
High	16.570801	17.076700	$\geq 500$

#### 802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	17.671875	18.060781	$\geq 500$
Middle	17.671875	18.060781	$\geq 500$
High	17.671875	18.060781	$\geq 500$

#### 802.11n-40MHz Mode:


Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low	36.472656	36.200000	$\geq 500$
Middle	36.472656	36.200000	$\geq 500$
High	36.472656	36.200000	$\geq 500$

## Test plots


### Main Antenna

### 6 dB Bandwidth


#### 802.11b LOW CHANNEL

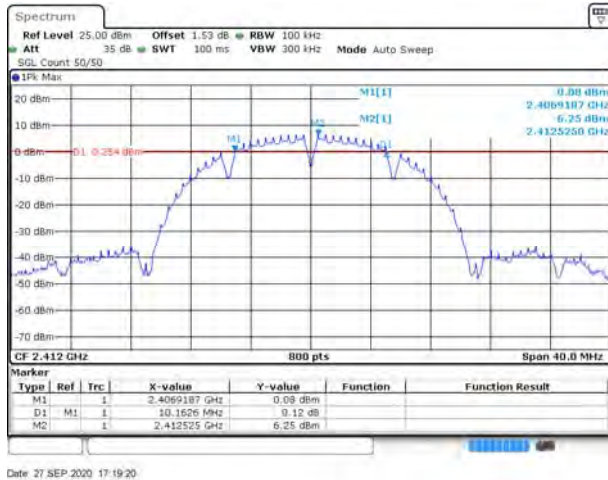


#### 802.11b MIDDLE CHANNEL

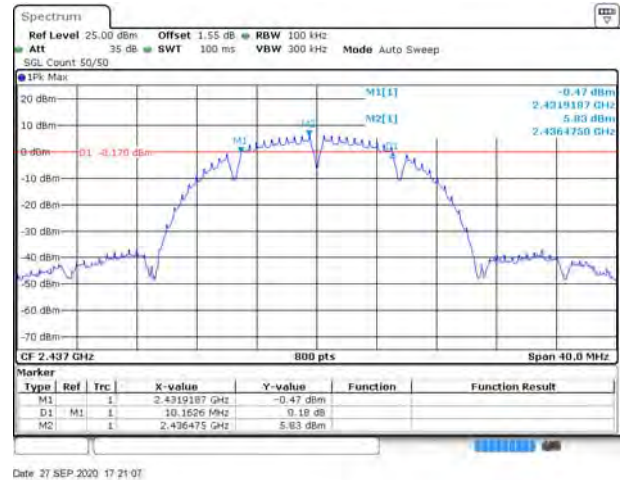


#### 802.11b HIGH CHANNEL

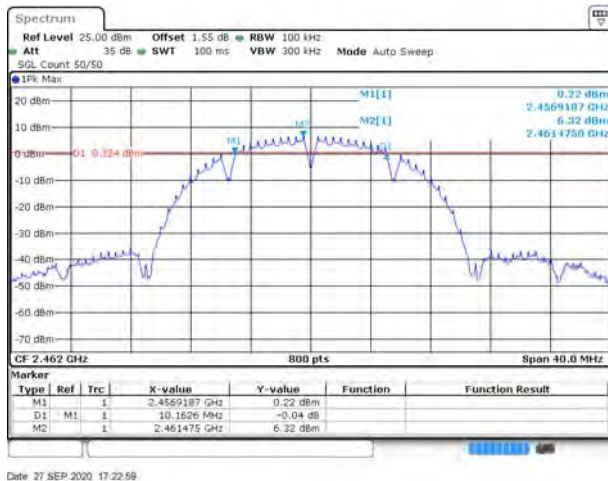


#### 802.11g LOW CHANNEL

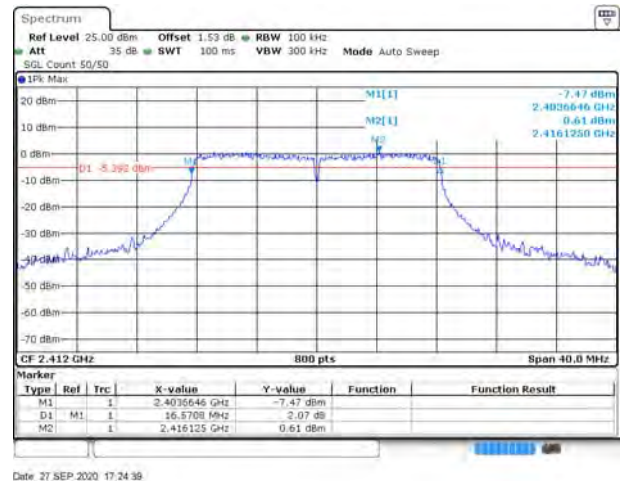

#### 802.11g MIDDLE CHANNEL

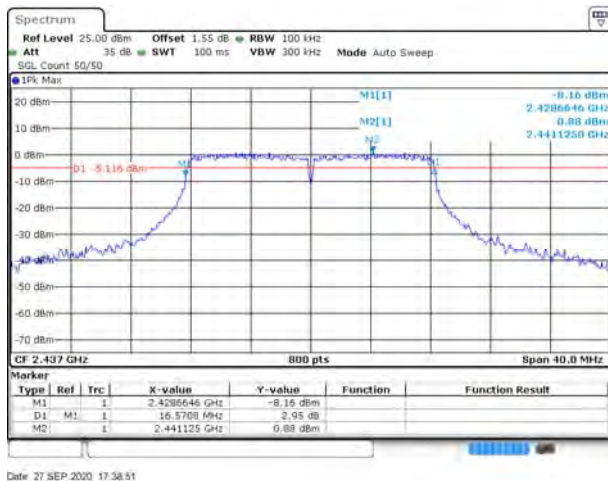


#### 802.11g HIGH CHANNEL

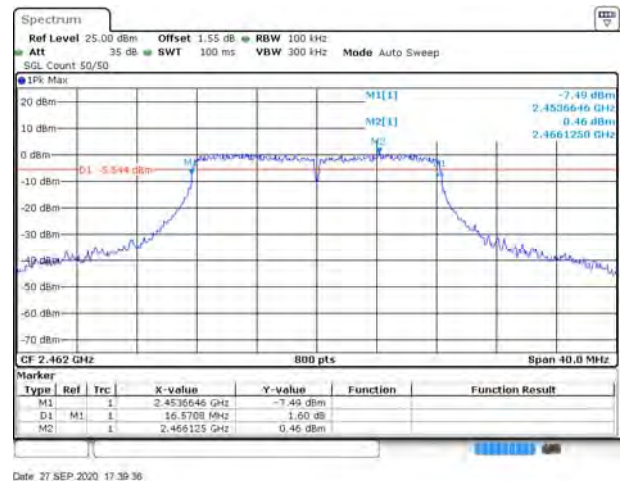




## 802.11n-20 MHz LOW CHANNEL

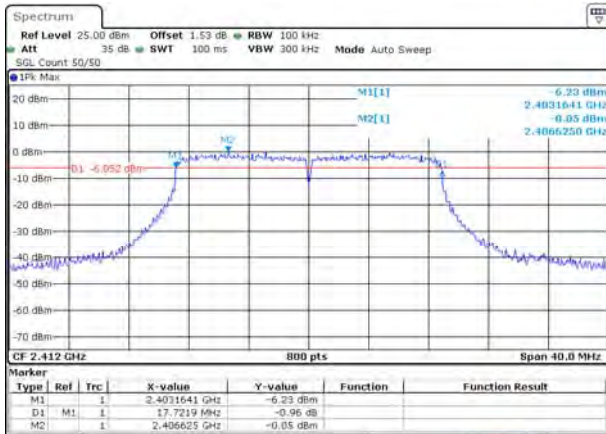


Date 27 SEP 2020 17:40:18

## 802.11 n-20 MHz MIDDLE CHANNEL

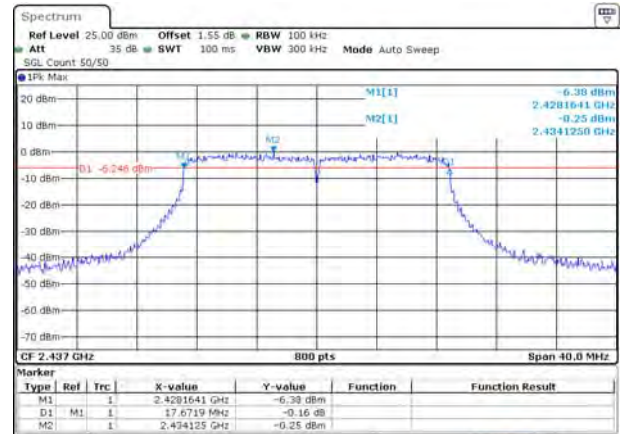


Date 27 SEP 2020 17:30:23

## 802.11n-20 MHz HIGH CHANNEL

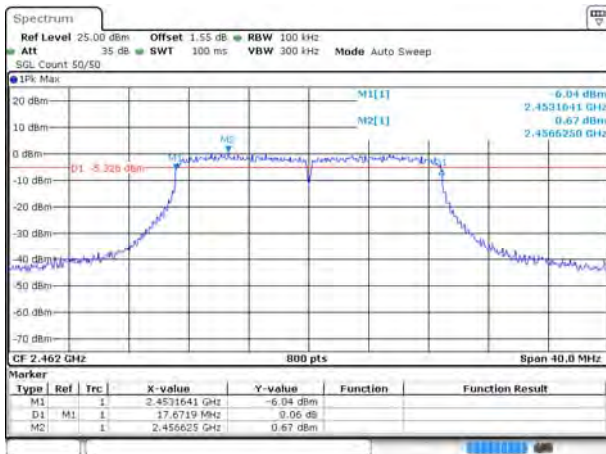


Date 27 SEP 2020 17:32:16

## 802.11n-40 MHz LOW CHANNEL

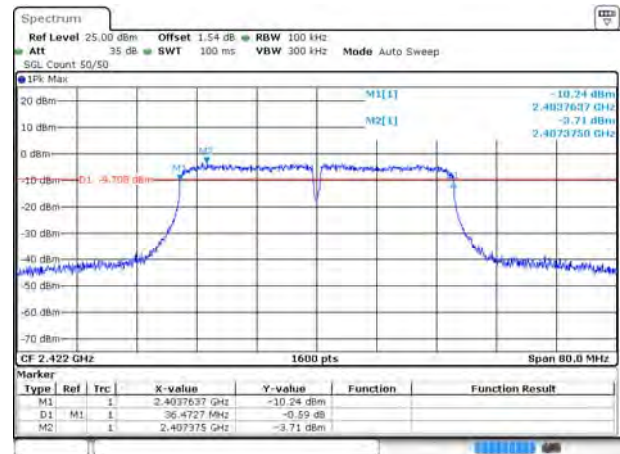


Date 27 SEP 2020 17:33:31

## 802.11n-40 MHz MIDDLE CHANNEL

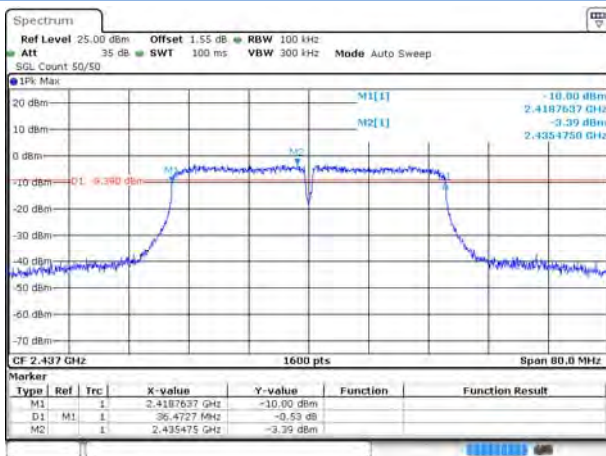

Date 27 SEP 2020 17:35:08


## 802.11n-40 MHz HIGH CHANNEL

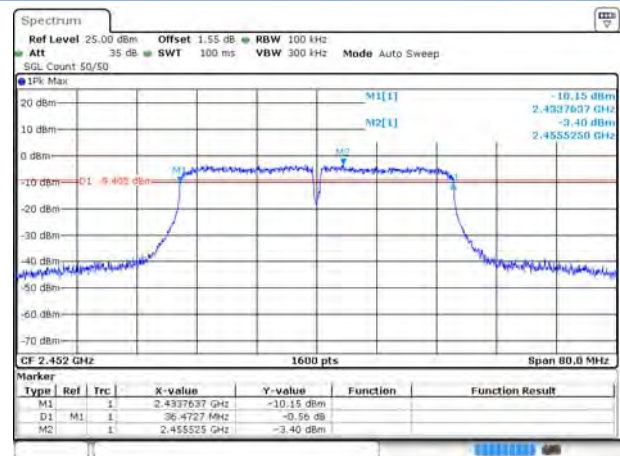

Date 27 SEP 2020 17:36:32

## 99% Bandwidth


### 802.11b LOW CHANNEL

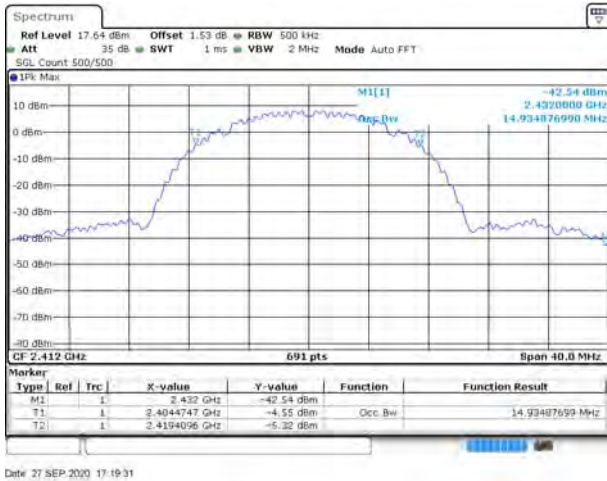


### 802.11b MIDDLE CHANNEL




### 802.11b HIGH CHANNEL

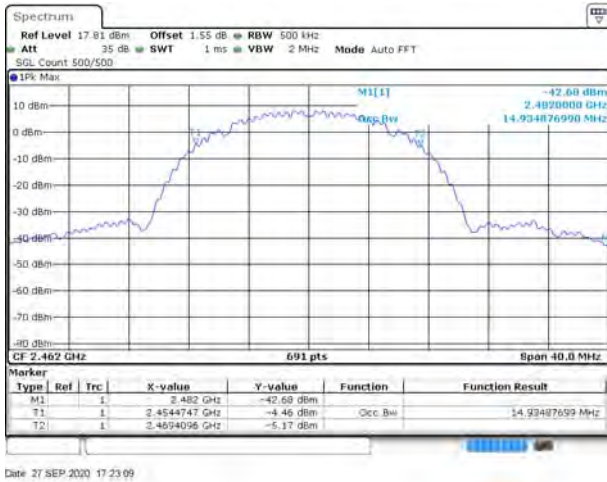


### 802.11g LOW CHANNEL

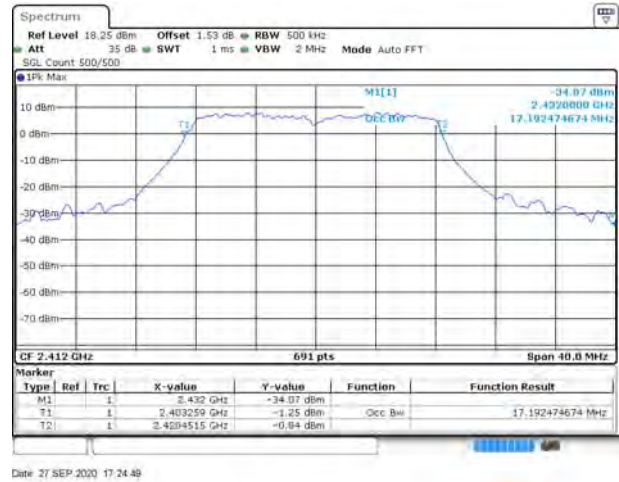

### 802.11g MIDDLE CHANNEL

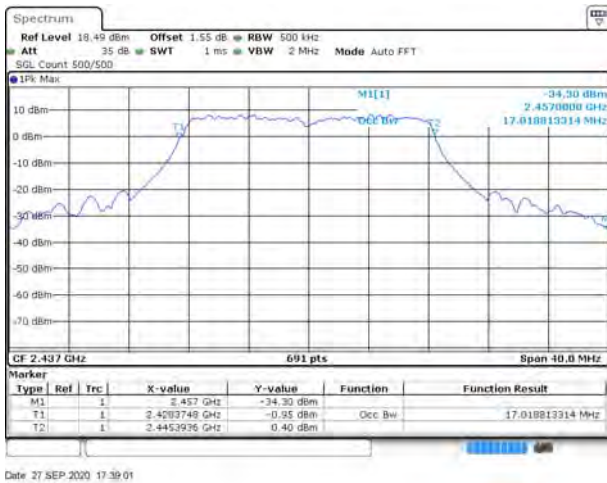

### 802.11g HIGH CHANNEL

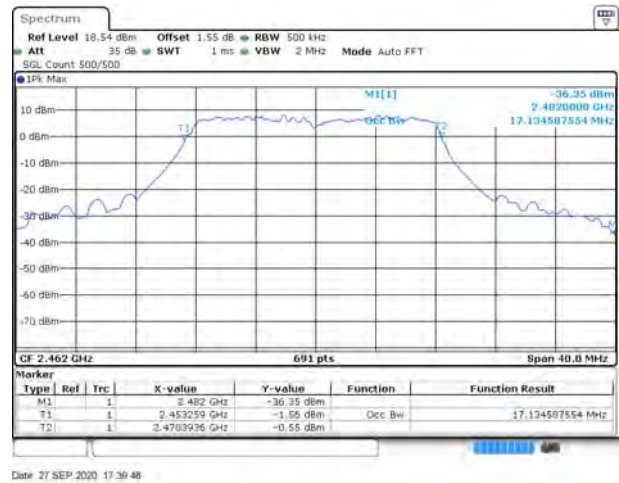



## 802.11n-20 MHz LOW CHANNEL




## 802.11 n-20 MHz MIDDLE CHANNEL



## 802.11n-20 MHz HIGH CHANNEL



## 802.11n-40 MHz LOW CHANNEL

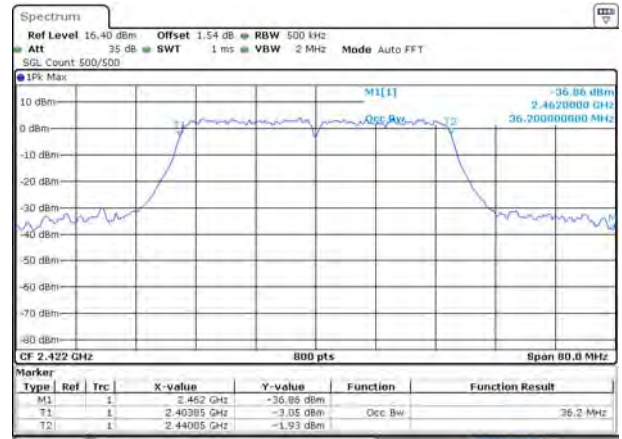

## 802.11n-40 MHz MIDDLE CHANNEL




## 802.11n-40 MHz HIGH CHANNEL




## Aux. Antenna

### 6 dB Bandwidth


#### 802.11b LOW CHANNEL

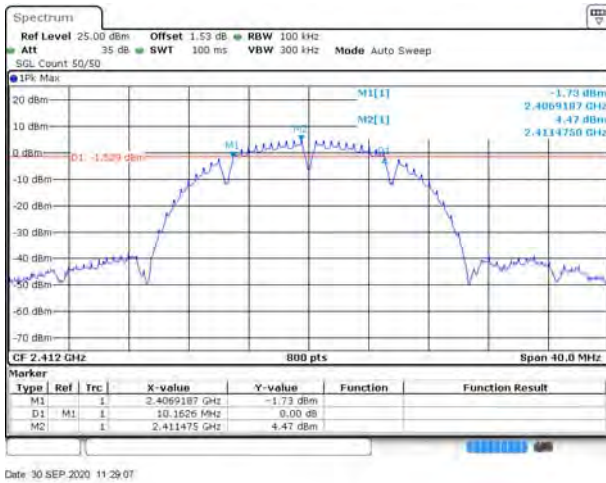


#### 802.11b MIDDLE CHANNEL

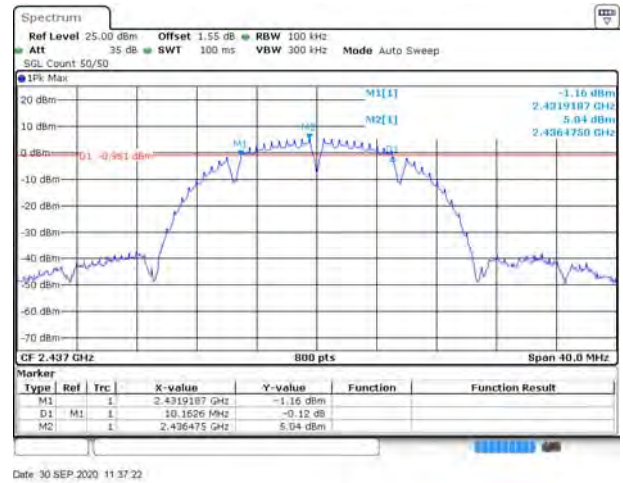


#### 802.11b HIGH CHANNEL

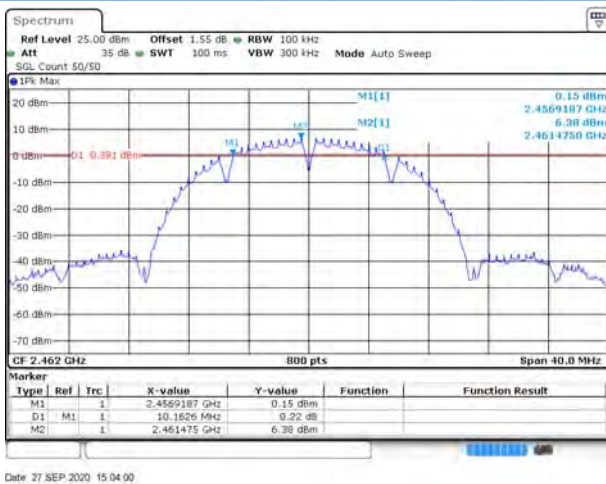


#### 802.11g LOW CHANNEL

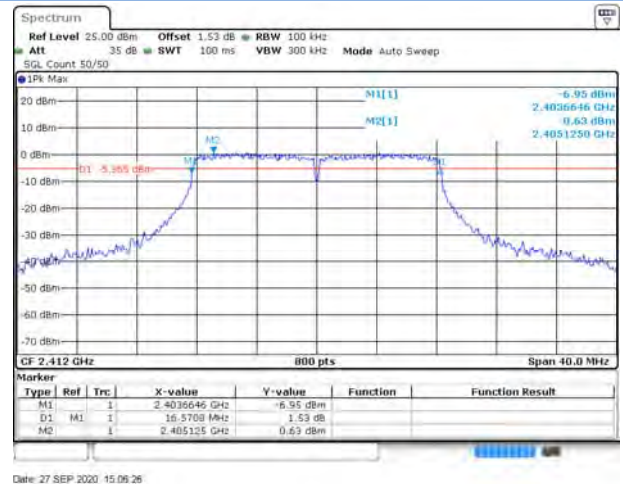

#### 802.11g MIDDLE CHANNEL

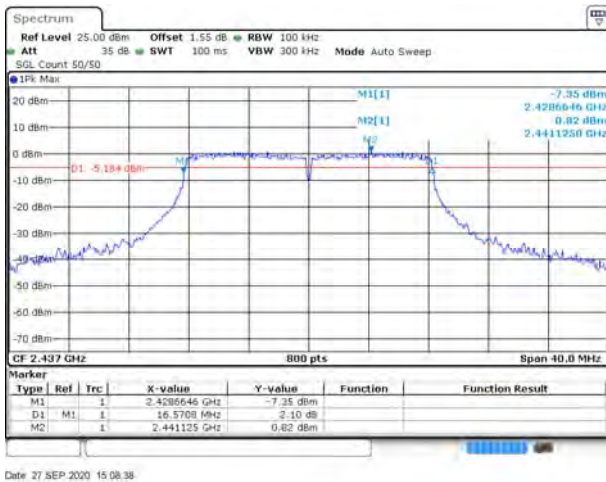

#### 802.11g HIGH CHANNEL

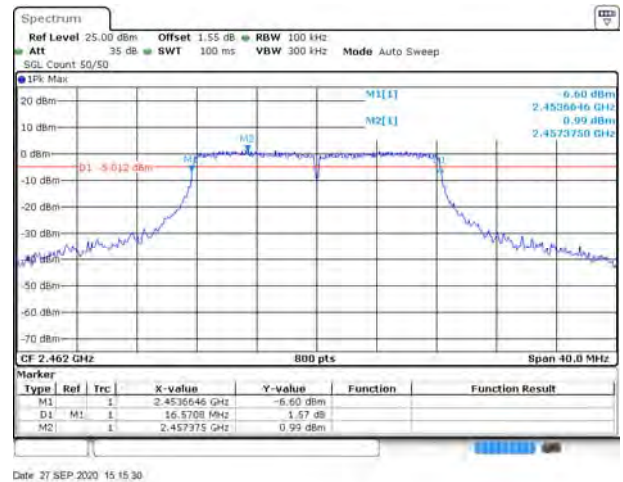





## 802.11n-20 MHz LOW CHANNEL




## 802.11 n-20 MHz MIDDLE CHANNEL

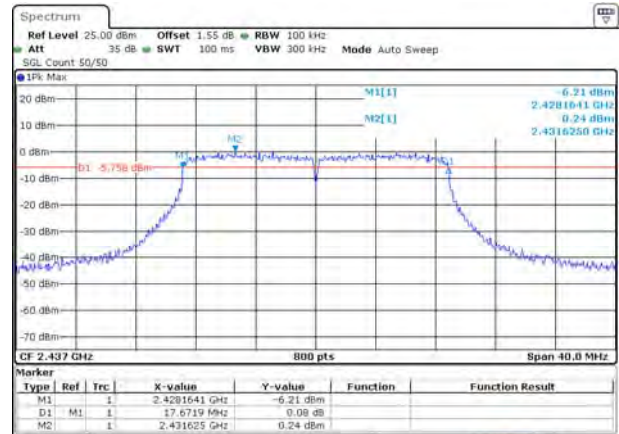


## 802.11n-20 MHz HIGH CHANNEL

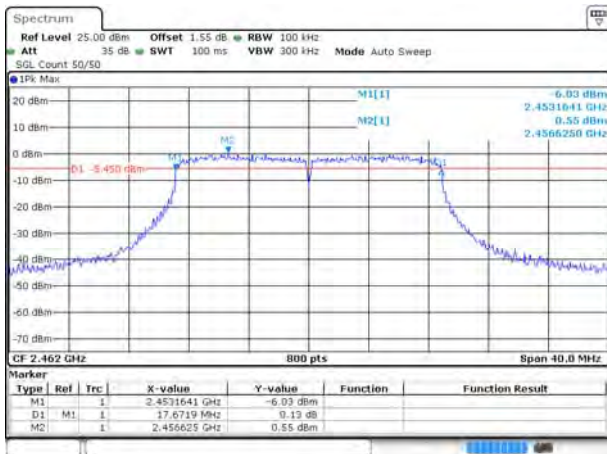


## 802.11n-40 MHz LOW CHANNEL

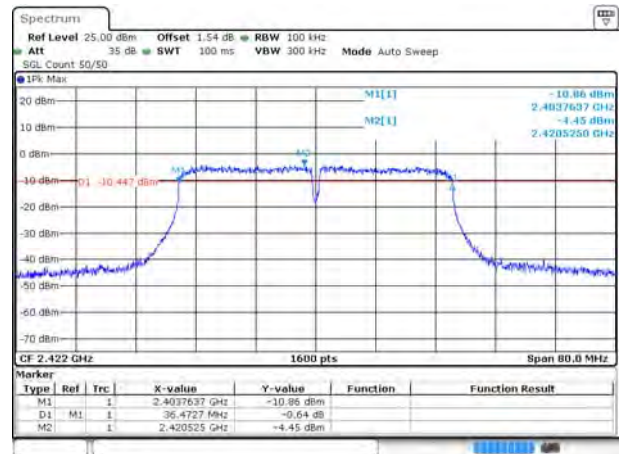

## 802.11n-40 MHz MIDDLE CHANNEL

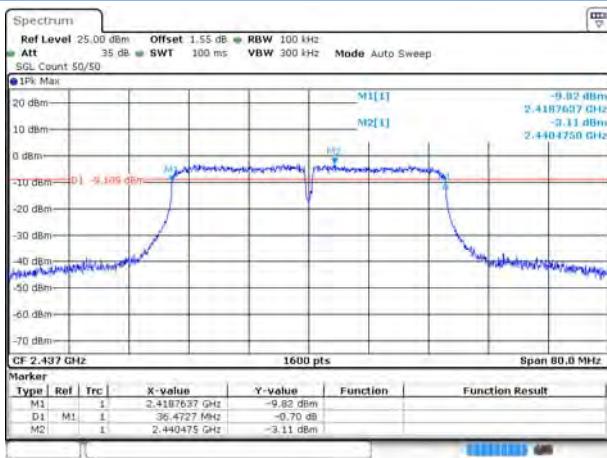


## 802.11n-40 MHz HIGH CHANNEL

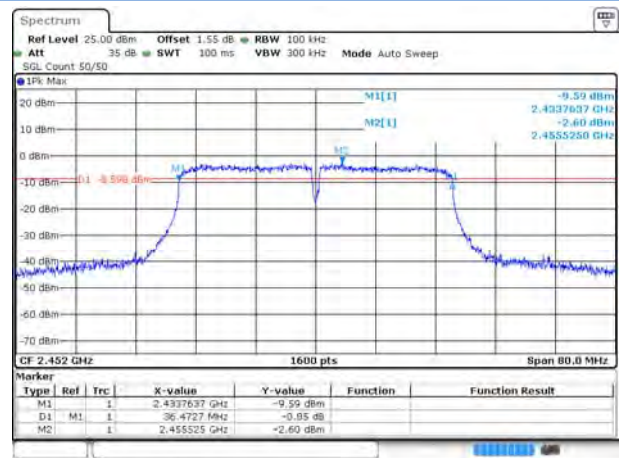


## 99% Bandwidth


### 802.11b LOW CHANNEL

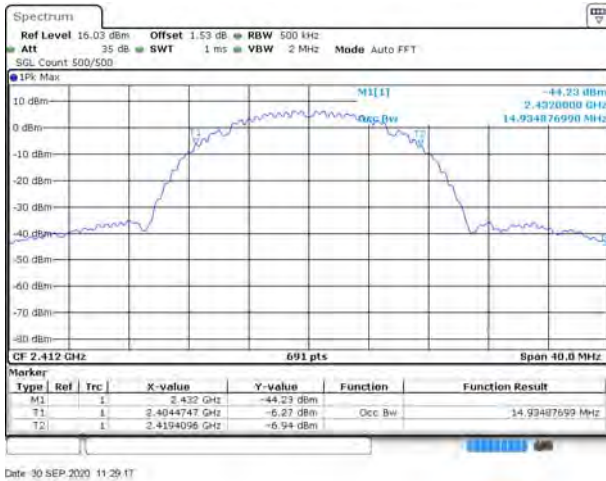


### 802.11b MIDDLE CHANNEL

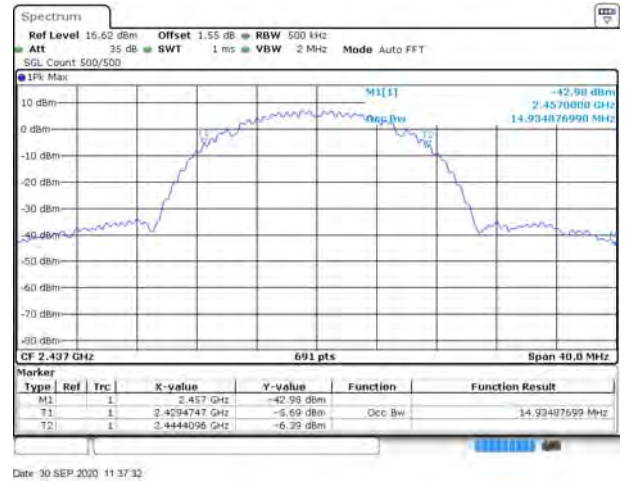


### 802.11b HIGH CHANNEL

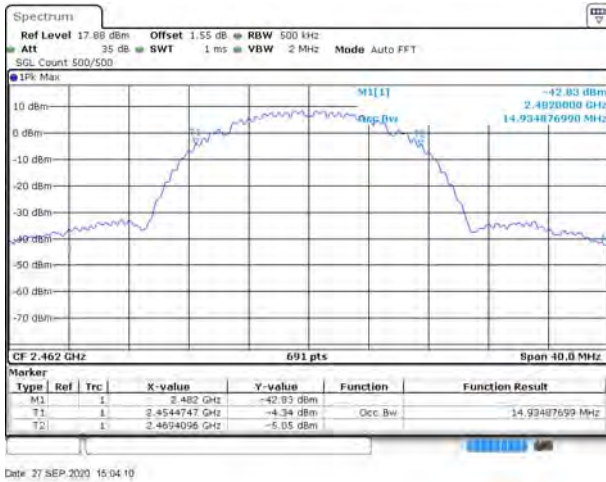


### 802.11g LOW CHANNEL

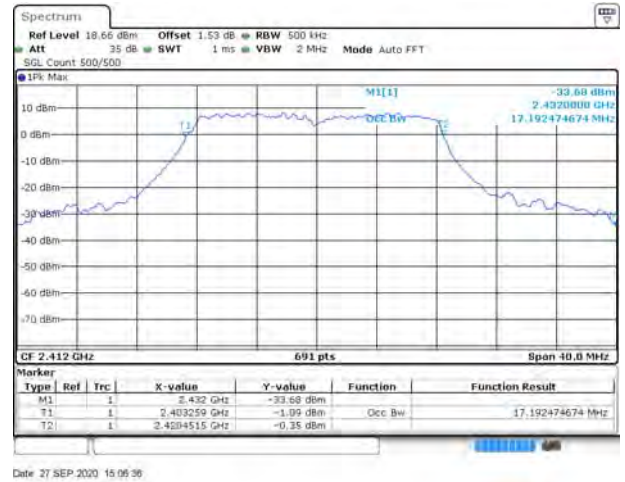

### 802.11g MIDDLE CHANNEL

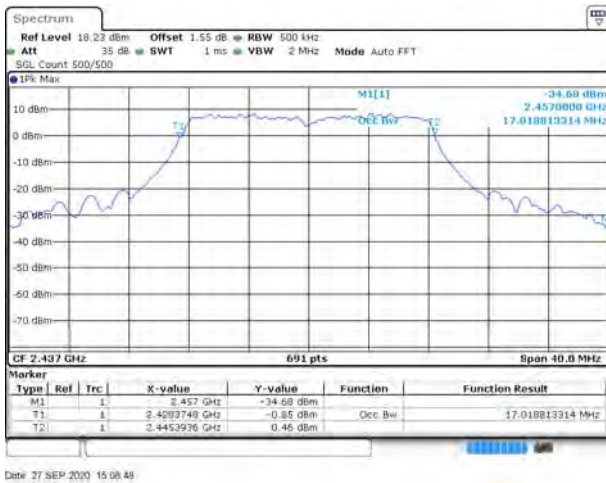


### 802.11g HIGH CHANNEL

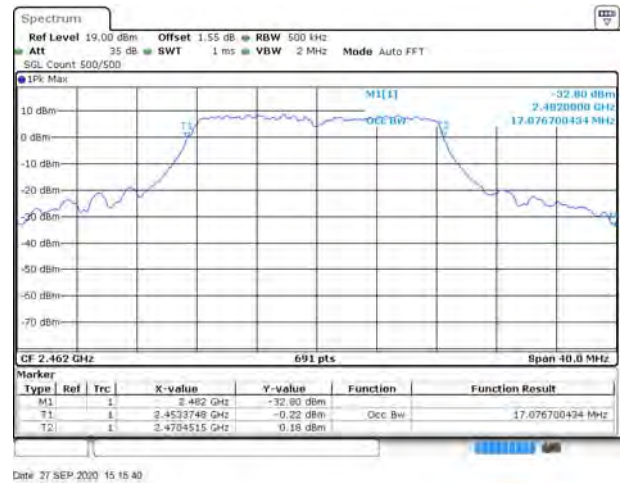




## 802.11n-20 MHz LOW CHANNEL

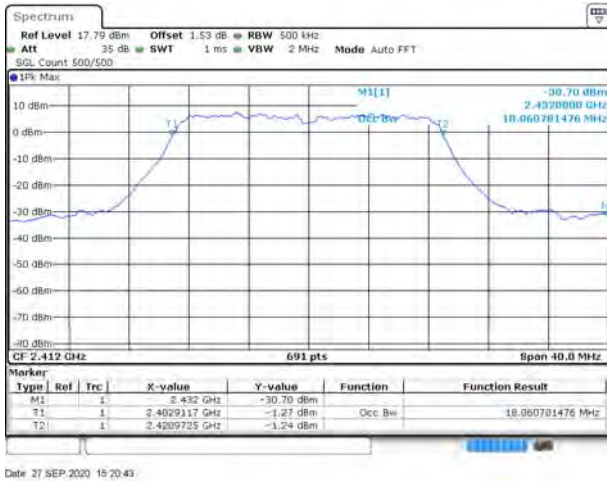


## 802.11 n-20 MHz MIDDLE CHANNEL




## 802.11n-20 MHz HIGH CHANNEL

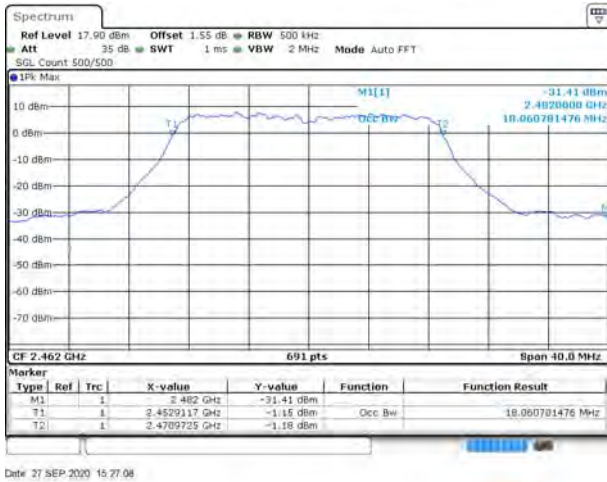


## 802.11n-40 MHz LOW CHANNEL

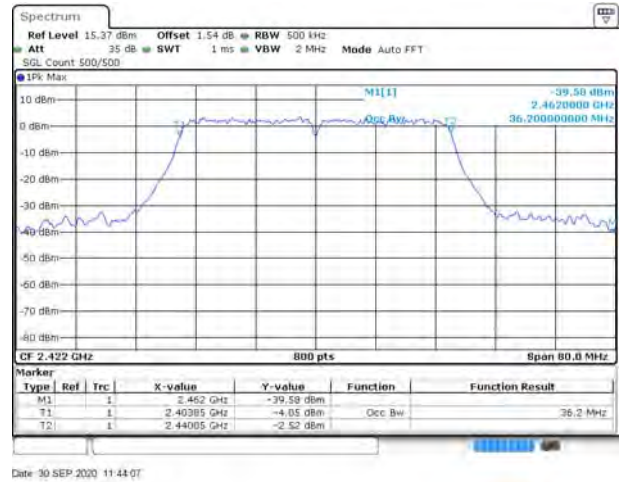

## 802.11n-40 MHz MIDDLE CHANNEL

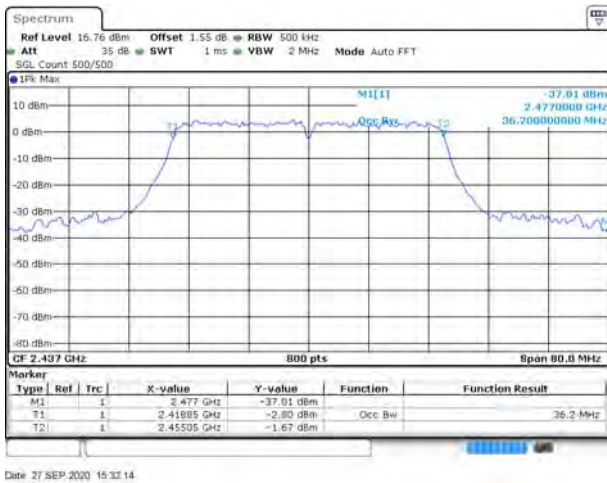

## 802.11n-40 MHz HIGH CHANNEL

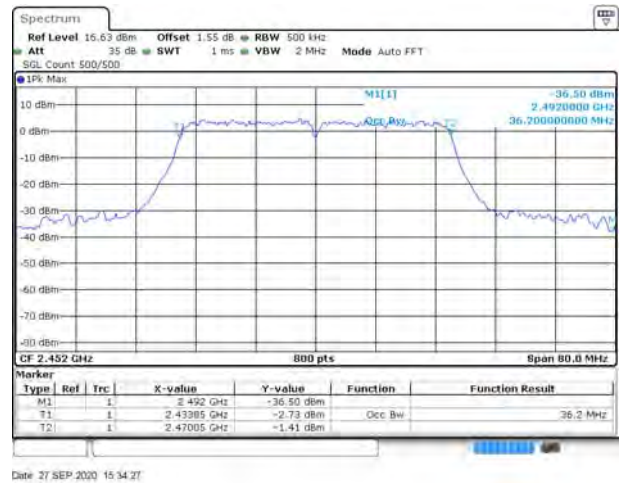

### A.3 Conducted Spurious Emissions

#### Test Data

##### Main Antenna

##### 802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-41.45	6.18	-13.82	Pass
Middle	-43.12	5.87	-14.13	Pass
High	-41.62	6.26	-13.74	Pass

##### 802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-51.41	0.56	-19.44	Pass
Middle	-49.83	0.47	-19.53	Pass
High	-50.02	0.42	-19.58	Pass

##### 802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.55	0.19	-19.81	Pass
Middle	-50.78	-0.01	-20.01	Pass
High	-50.79	0.55	-19.45	Pass

##### 802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.25	-3.72	-23.72	Pass
Middle	-51.08	-3.40	-23.40	Pass
High	-50.71	-3.44	-23.44	Pass



### Aux. Antenna

#### 802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-44.38	4.45	-15.55	Pass
Middle	-43.62	5.15	-14.85	Pass
High	-42.96	6.45	-13.55	Pass

#### 802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.60	0.61	-19.39	Pass
Middle	-49.23	0.79	-19.21	Pass
High	-49.35	1.10	-18.90	Pass

#### 802.11n-20MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.75	0.46	-19.54	Pass
Middle	-51.14	0.32	-19.68	Pass
High	-50.76	0.01	-19.99	Pass


#### 802.11n-40MHz Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-50.88	-4.27	-24.27	Pass
Middle	-50.79	-3.30	-23.30	Pass
High	-49.49	-3.09	-23.09	Pass


## Test Plots

### Main Antenna


#### 802.11b LOW CHANNEL CARRIER LEVEL

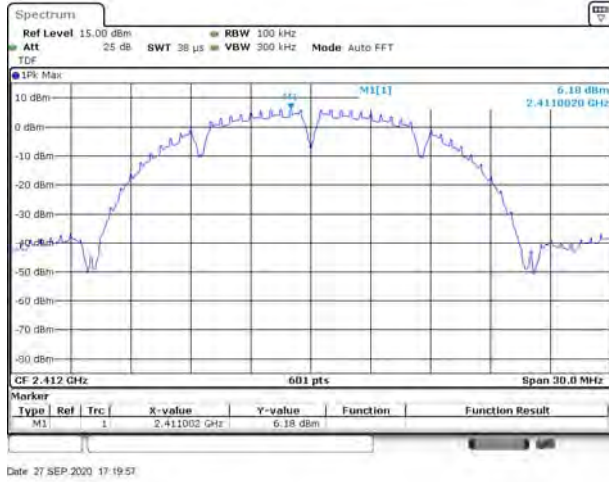


#### 802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

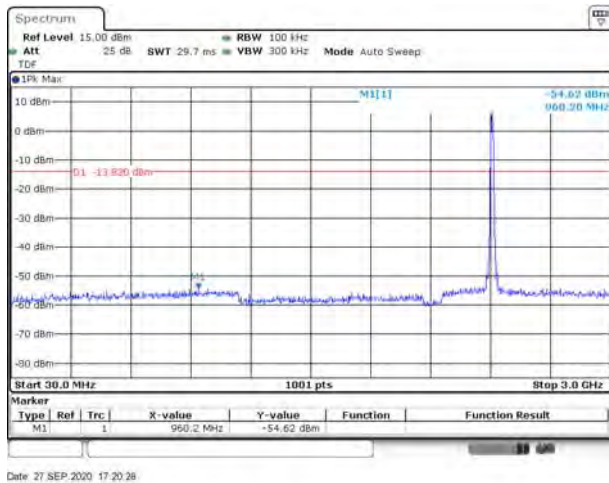


#### 802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

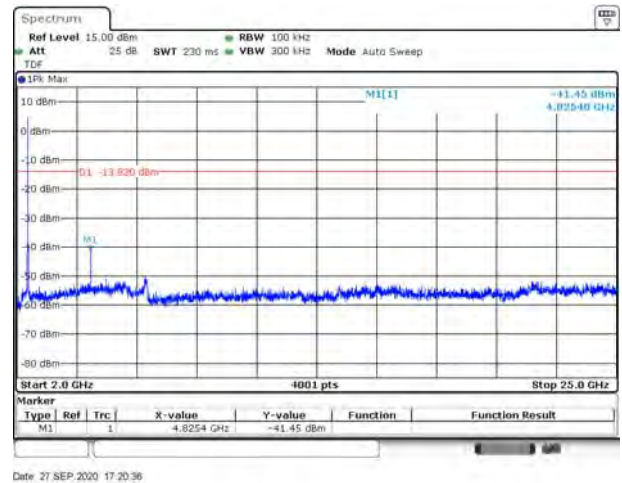


#### 802.11b MIDDLE CHANNEL CARRIER LEVEL

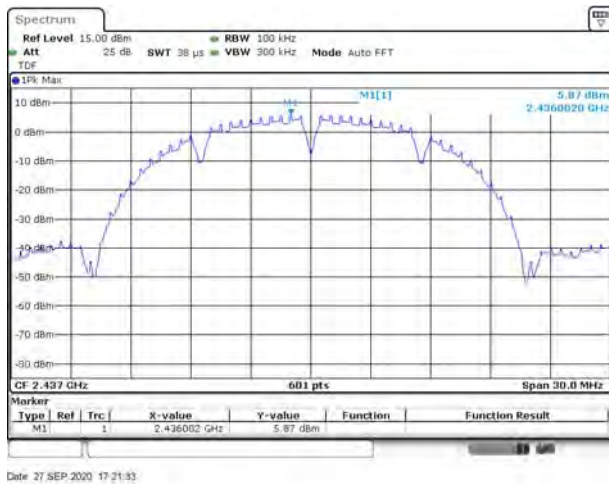


### 802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

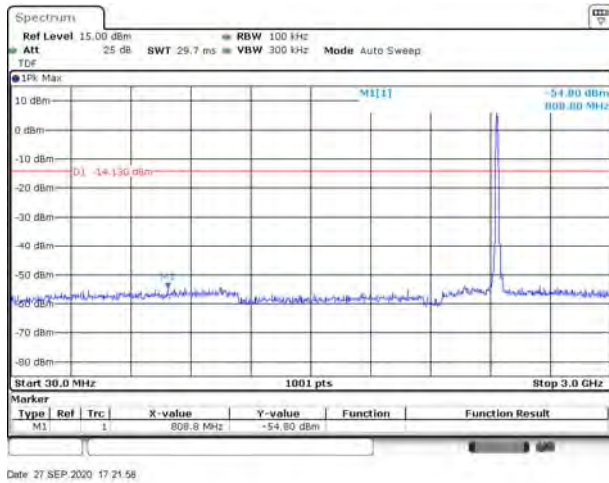


### 802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

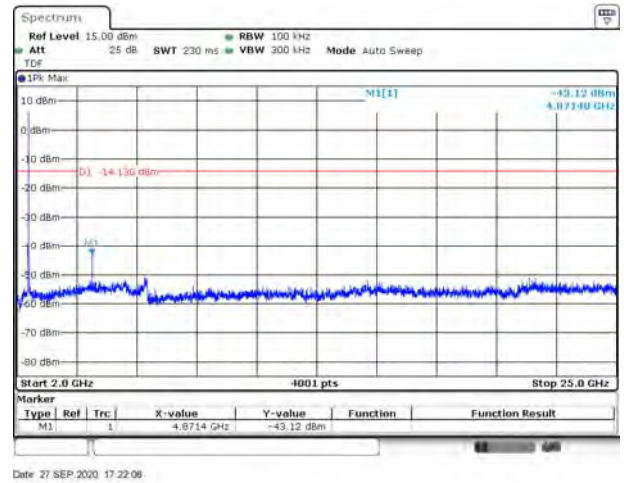


### 802.11b HIGH CHANNEL CARRIER LEVEL

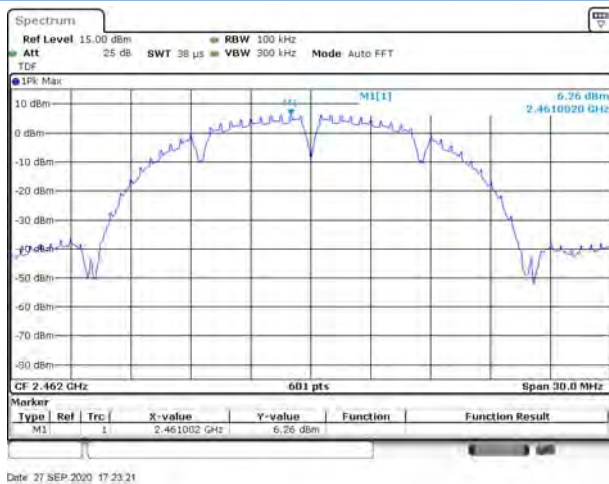


### 802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

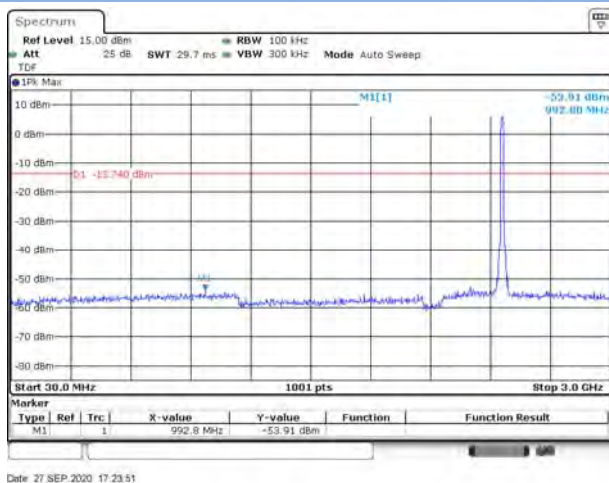

### 802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

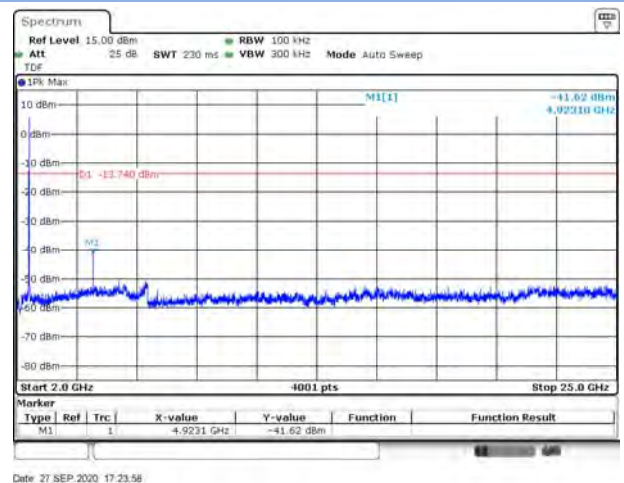


## 802.11g LOW CHANNEL CARRIER LEVEL

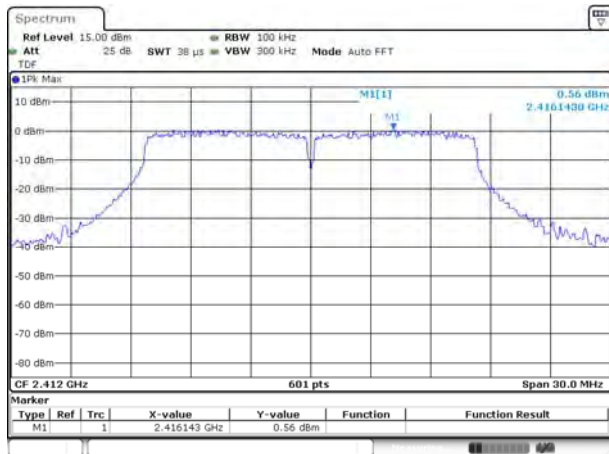


Date: 27 SEP 2020 17:25:19

## 802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

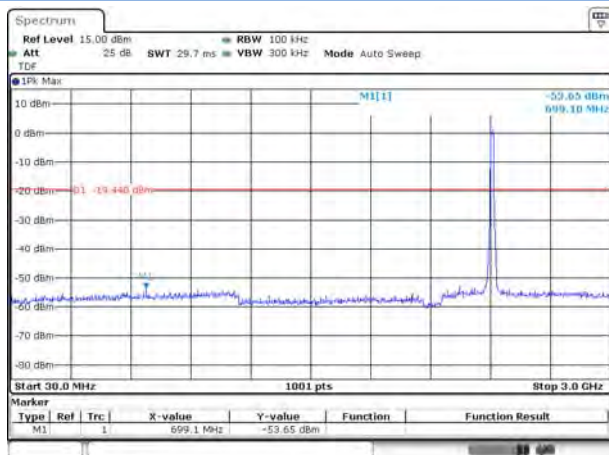


Date: 27 SEP 2020 17:25:45

## 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

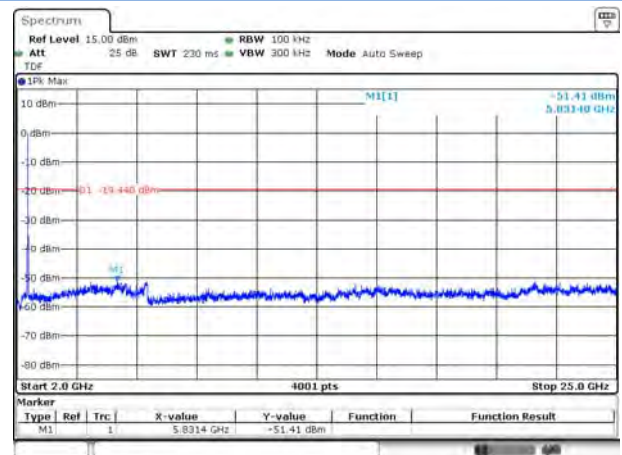

Date: 27 SEP 2020 17:25:58


## 802.11g MIDDLE CHANNEL CARRIER LEVEL

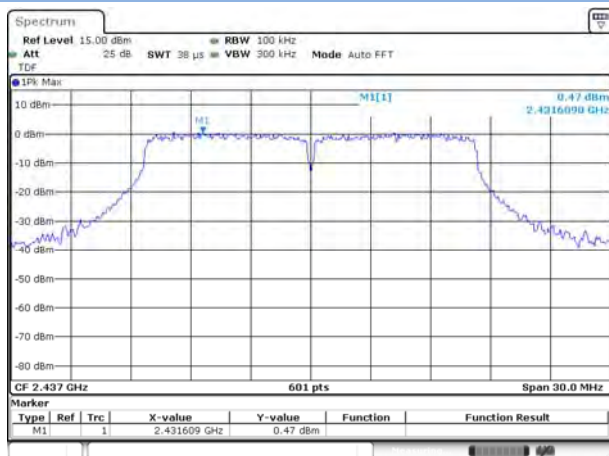


Date: 27 SEP 2020 17:26:44



### 802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

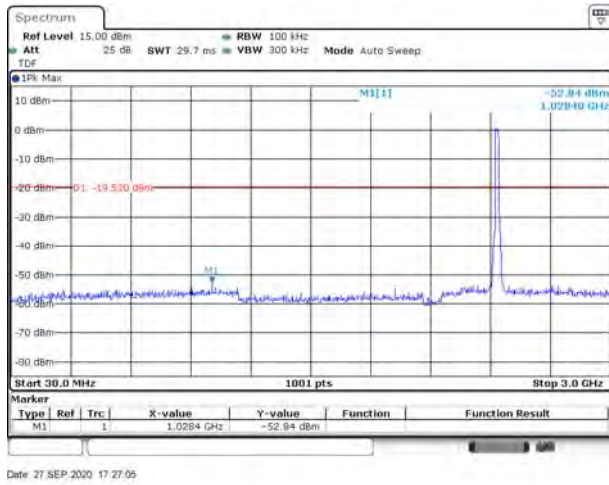


### 802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

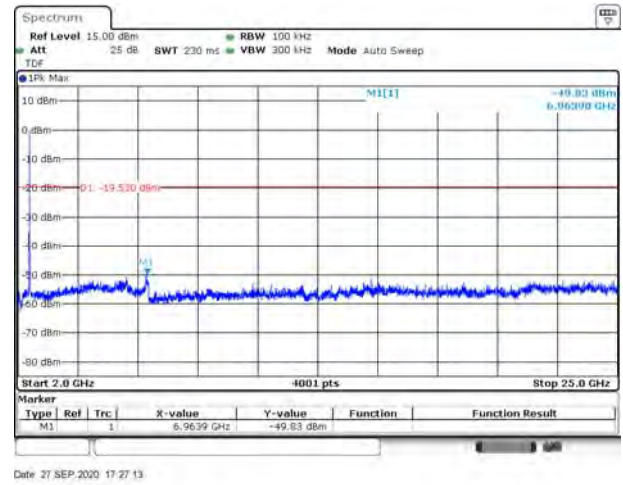


### 802.11g HIGH CHANNEL CARRIER LEVEL




### 802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

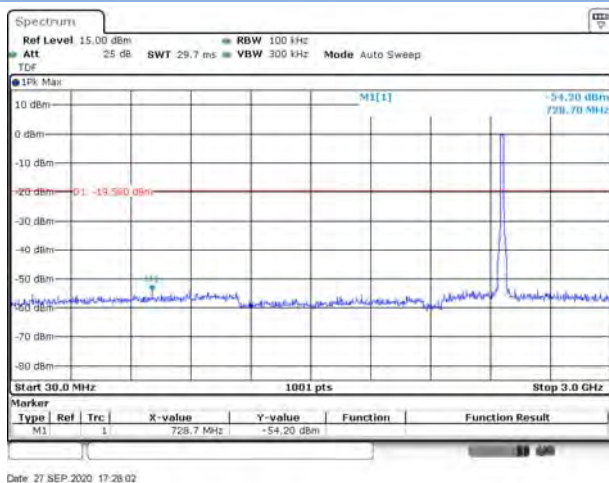


### 802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

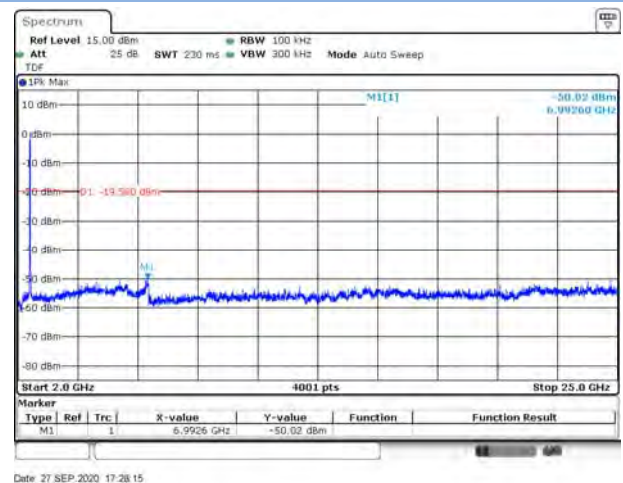


## 802.11n-20 LOW CHANNEL CARRIER LEVEL

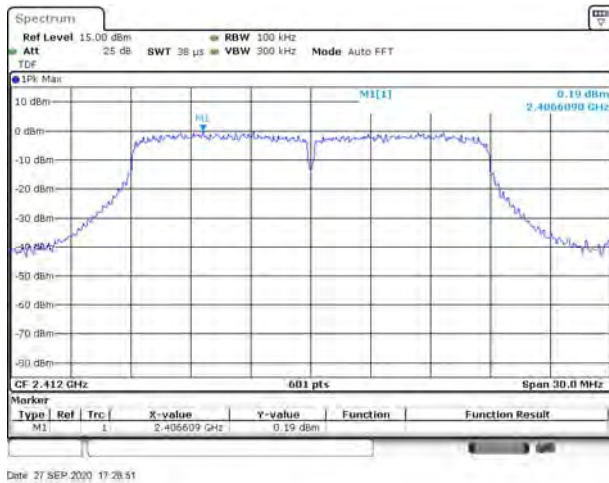


## 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

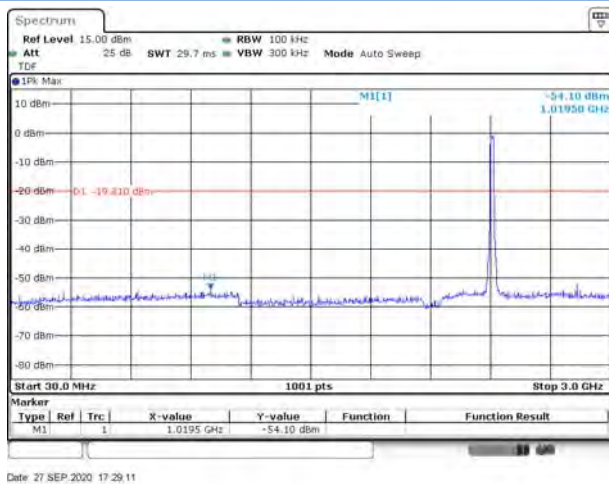


## 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

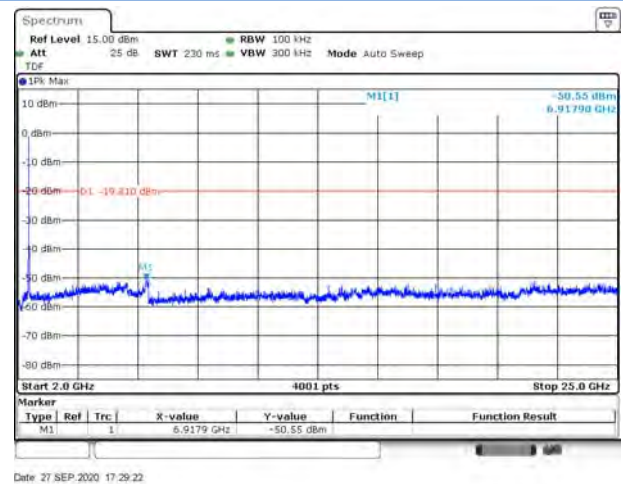


## 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

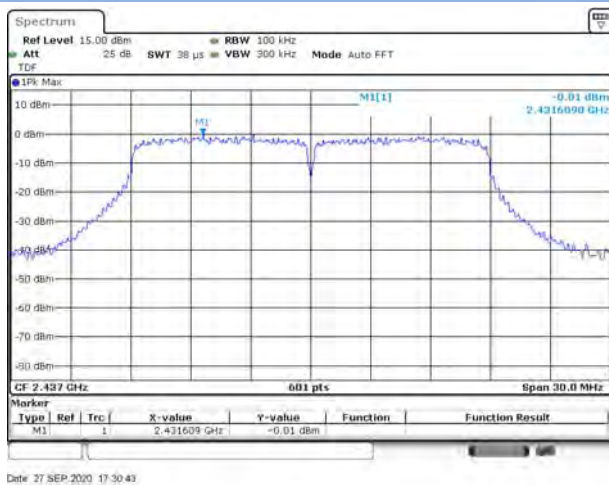


### 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

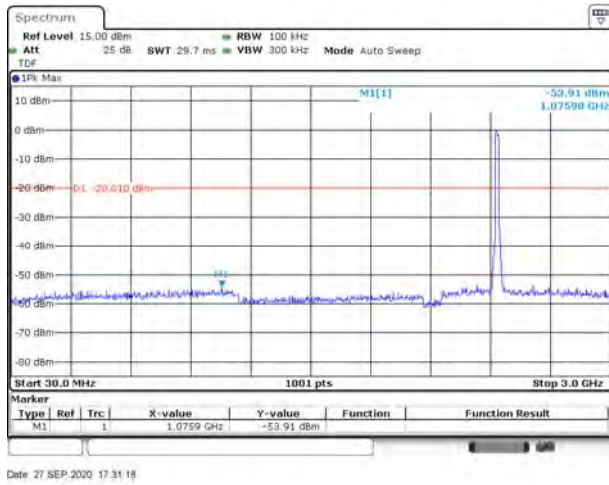


### 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

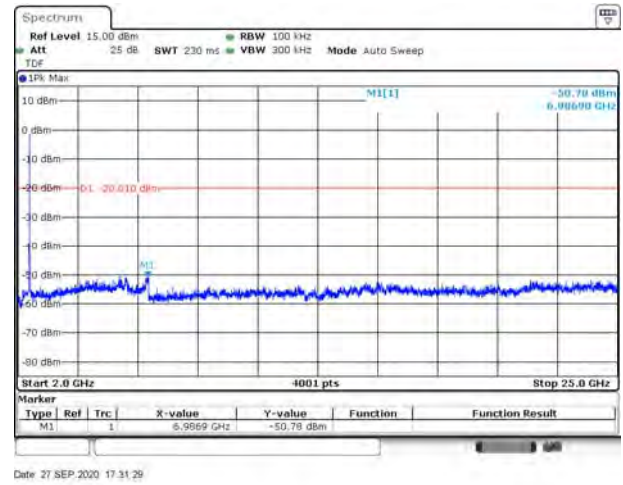


### 802.11n-20 HIGH CHANNEL CARRIER LEVEL

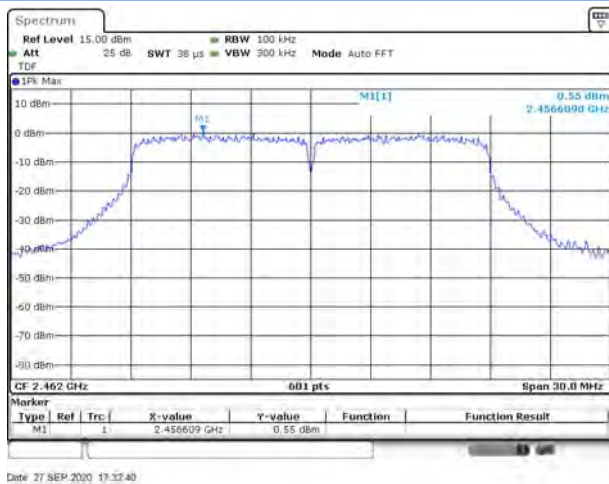

### 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

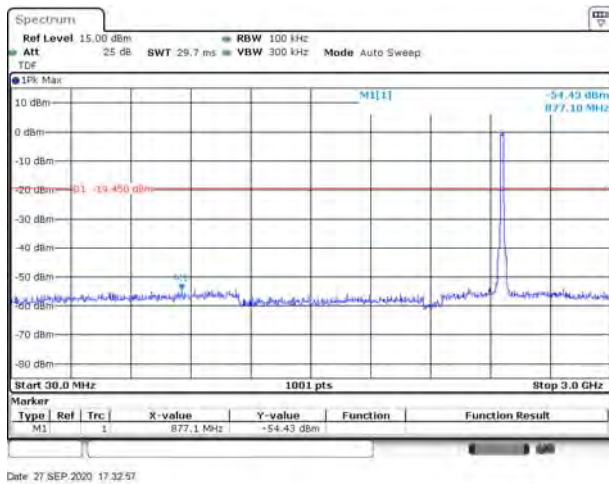


### 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

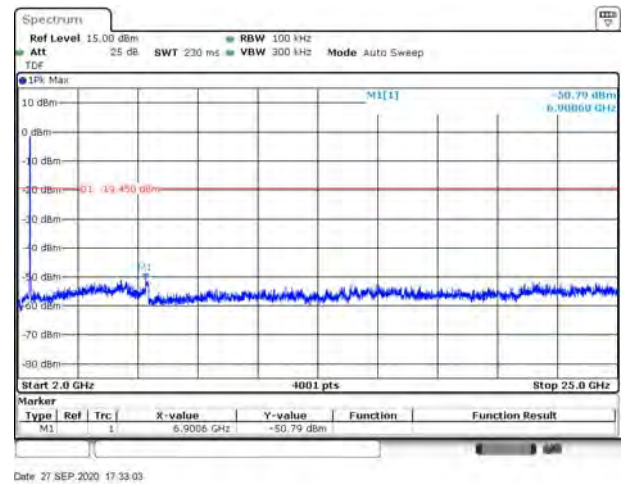





## 802.11n-40 LOW CHANNEL CARRIER LEVEL

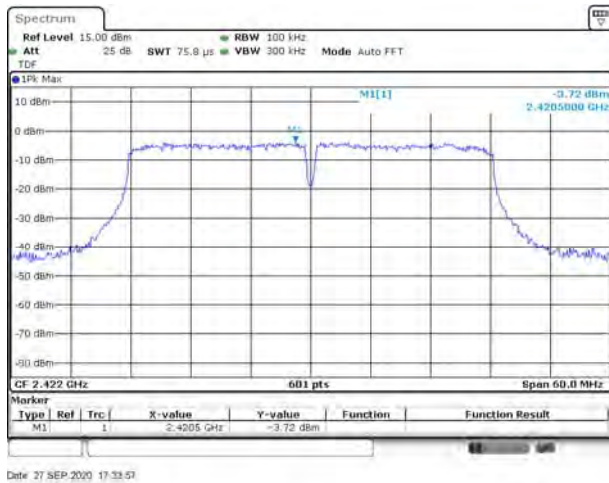


## 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

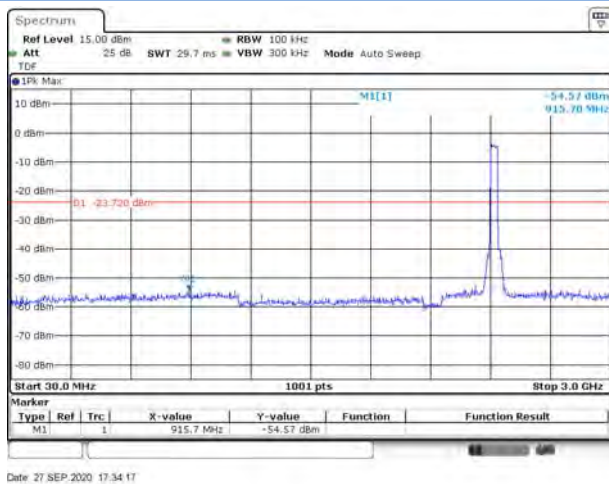

## 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

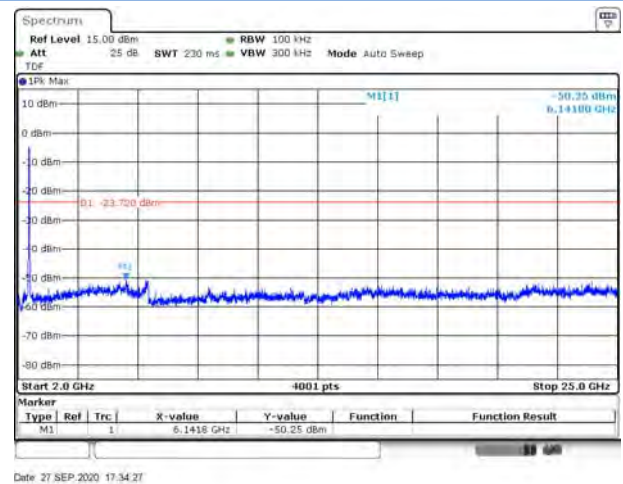


## 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

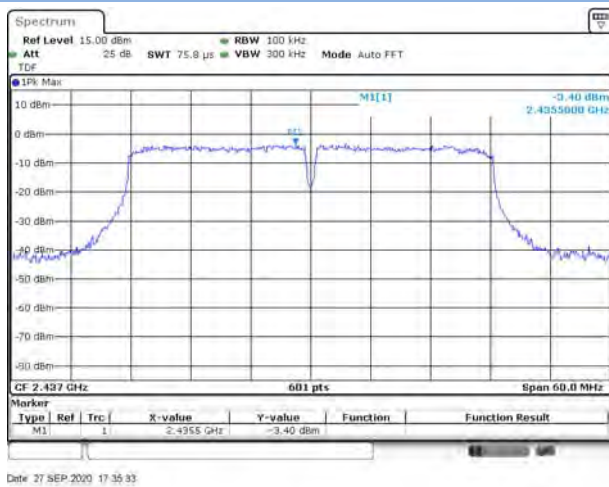





### 802.11n-40 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

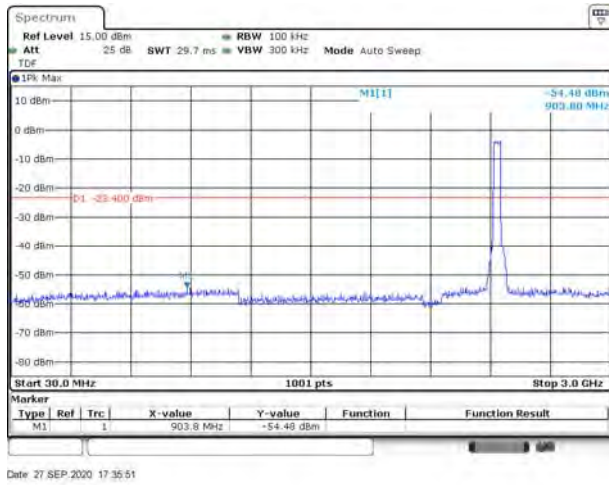


### 802.11n-40 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

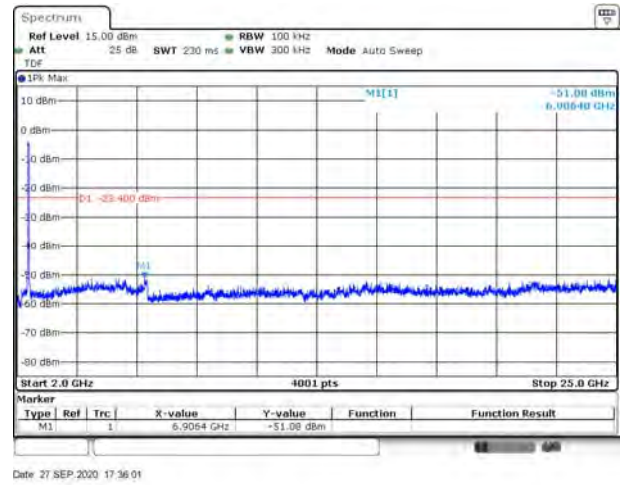


### 802.11n-40 HIGH CHANNEL CARRIER LEVEL

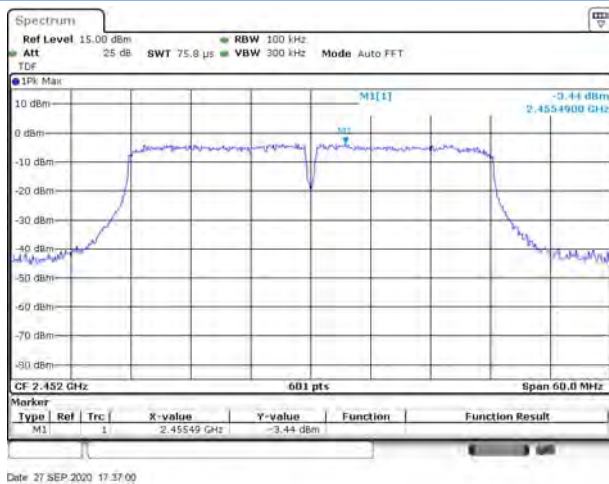

### 802.11n-40 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

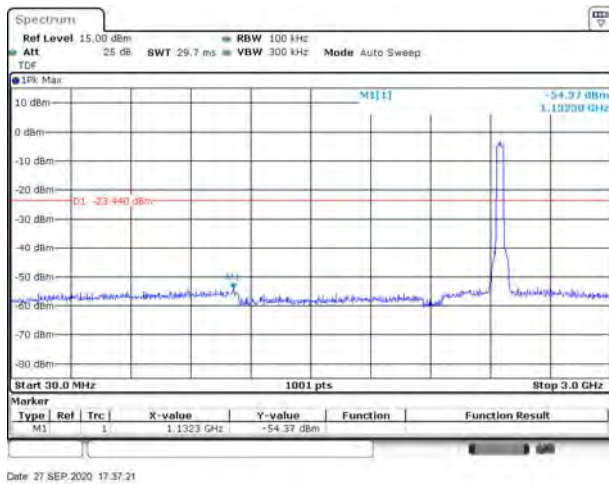


### 802.11n-40 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

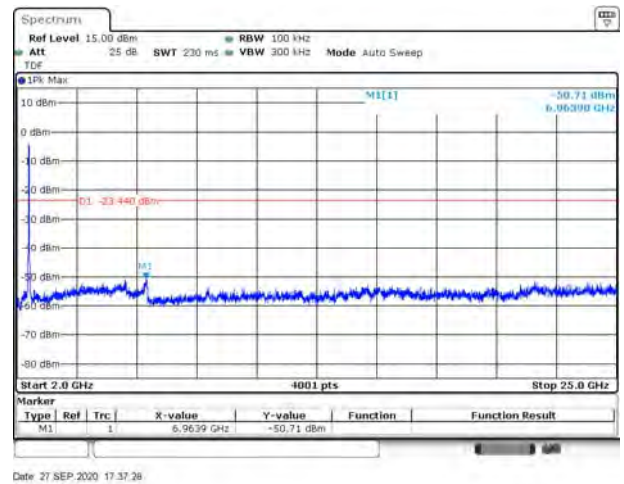


## Aux. Antenna


### 802.11b LOW CHANNEL CARRIER LEVEL

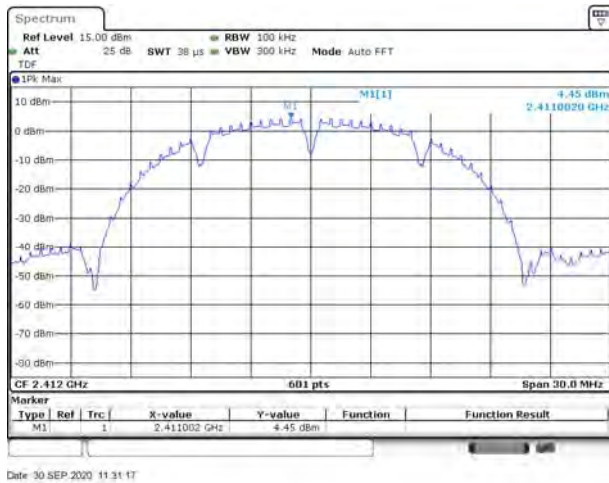


### 802.11b LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

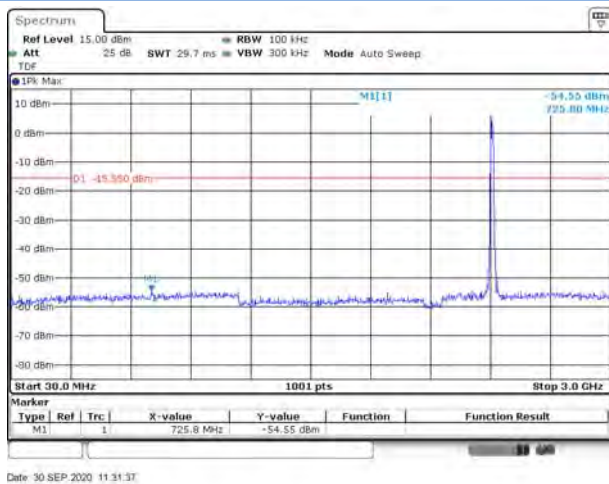


### 802.11b LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

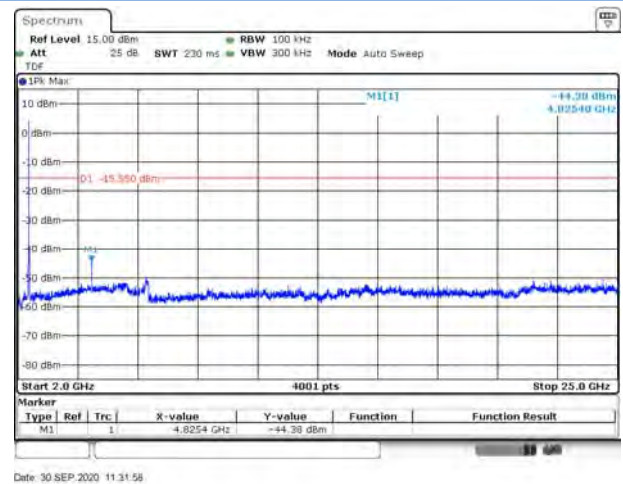


### 802.11b MIDDLE CHANNEL CARRIER LEVEL

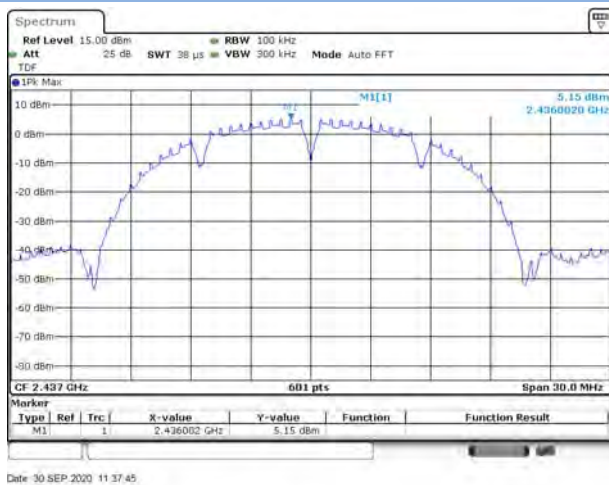


### 802.11b MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

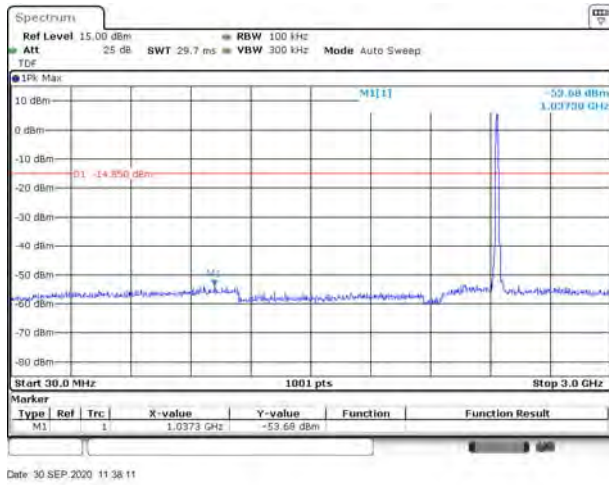


### 802.11b MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

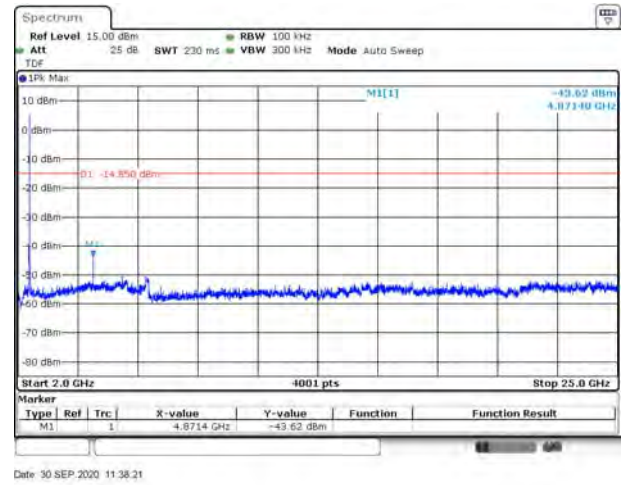


### 802.11b HIGH CHANNEL CARRIER LEVEL

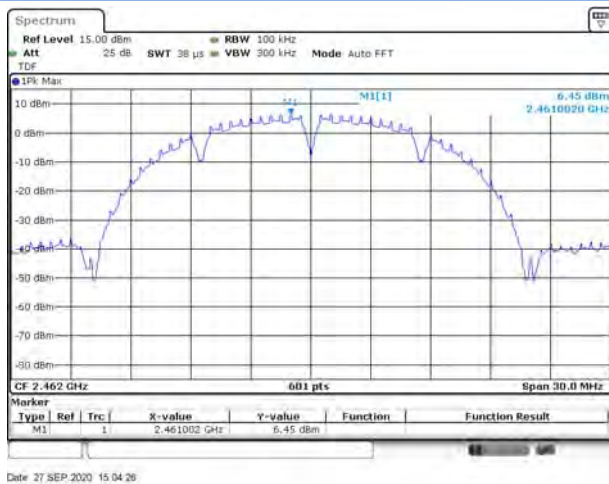

### 802.11b HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

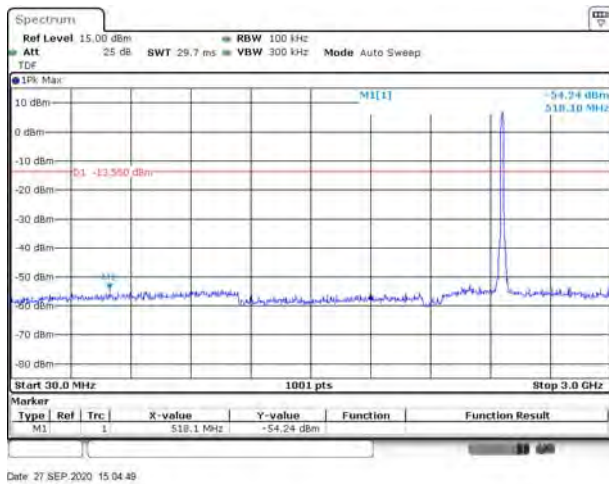


### 802.11b HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

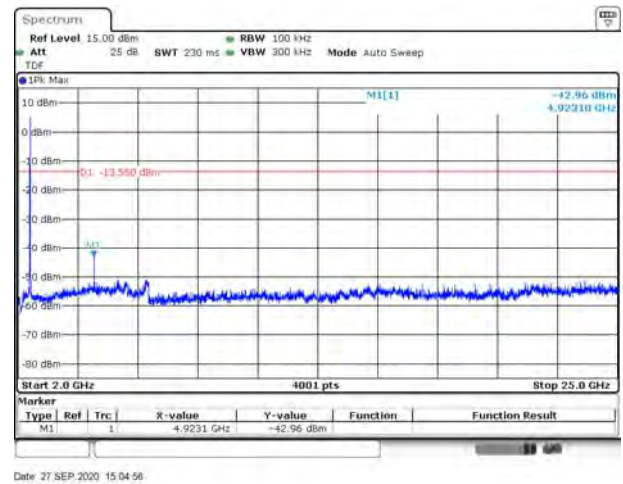




## 802.11g LOW CHANNEL CARRIER LEVEL

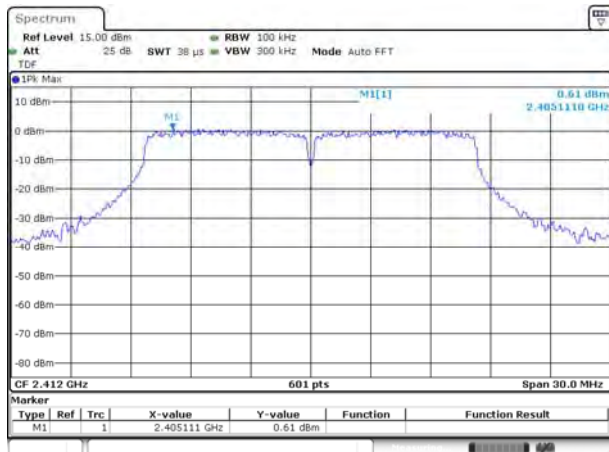


Date: 27 SEP 2020 15:06:54

## 802.11g LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

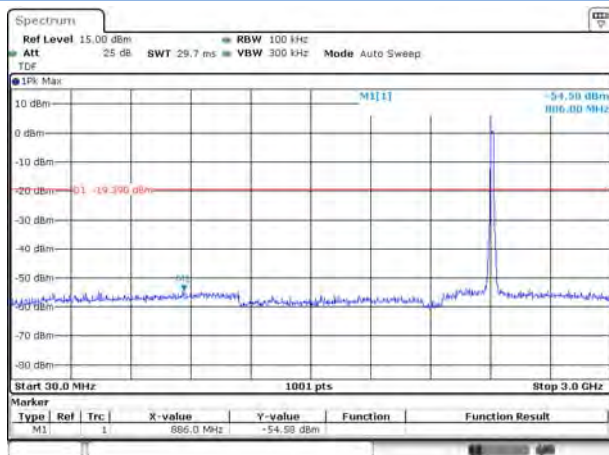


Date: 27 SEP 2020 15:07:18

## 802.11g LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

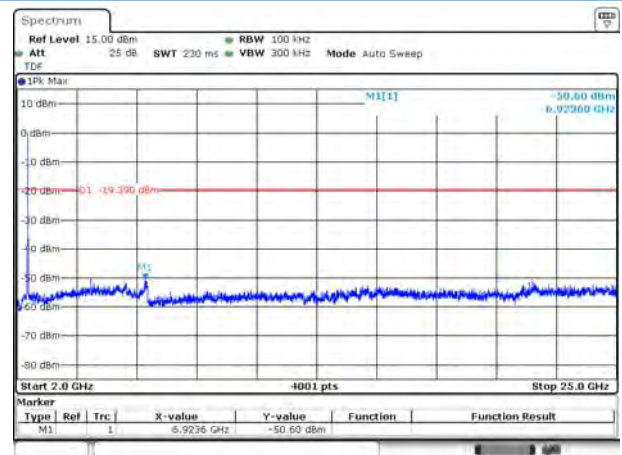


Date: 27 SEP 2020 15:07:27

## 802.11g MIDDLE CHANNEL CARRIER LEVEL

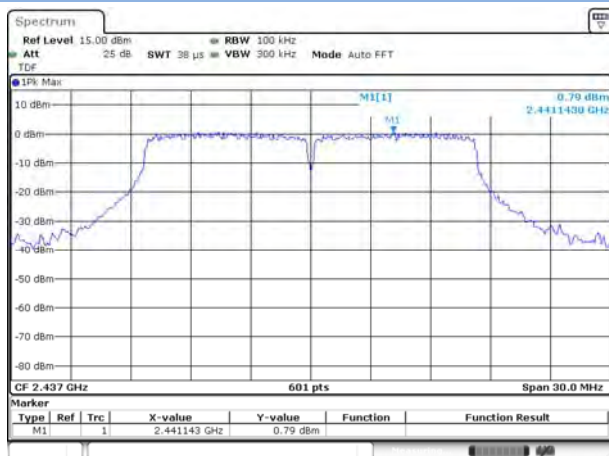


Date: 27 SEP 2020 15:09:02


### 802.11g MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

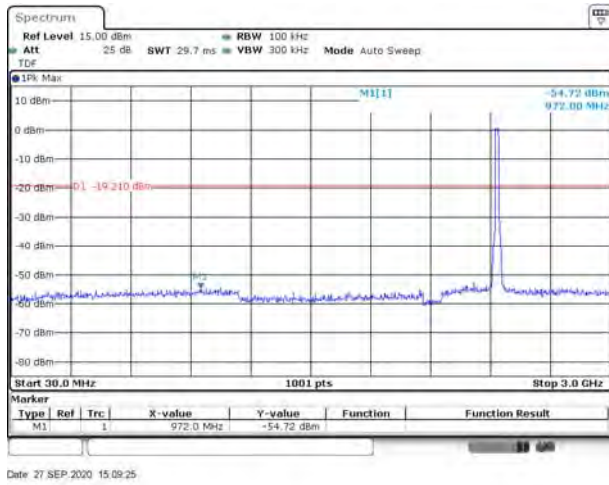


### 802.11g MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

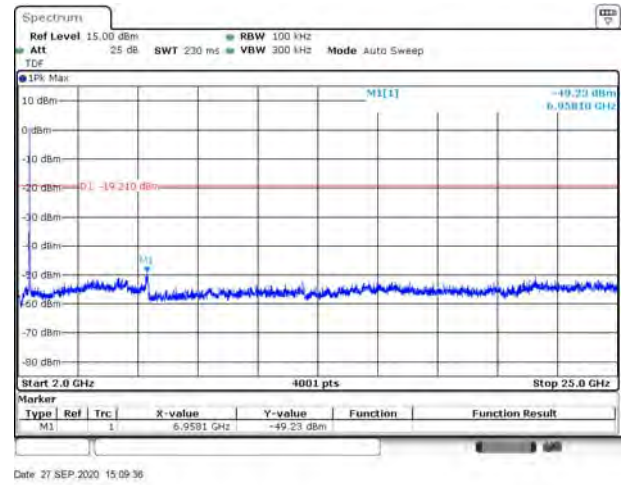


### 802.11g HIGH CHANNEL CARRIER LEVEL

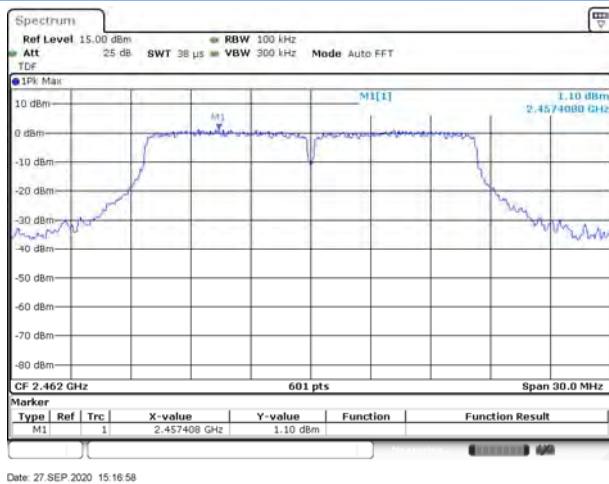


### 802.11g HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

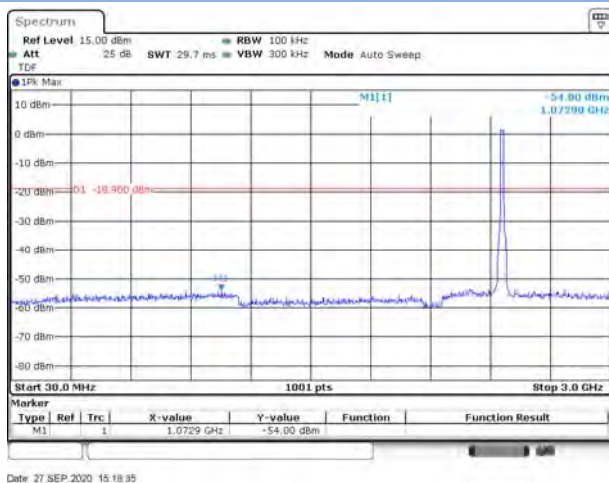


### 802.11g HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

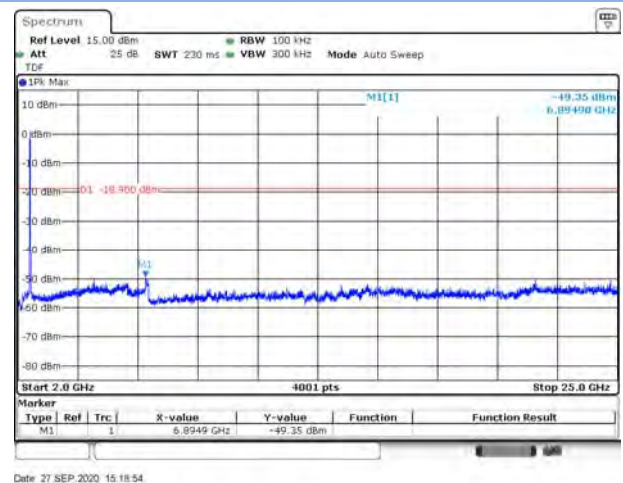


## 802.11n-20 LOW CHANNEL CARRIER LEVEL

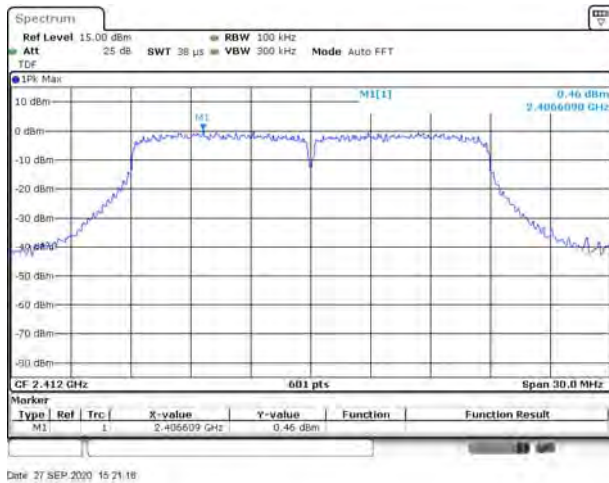


## 802.11n-20 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

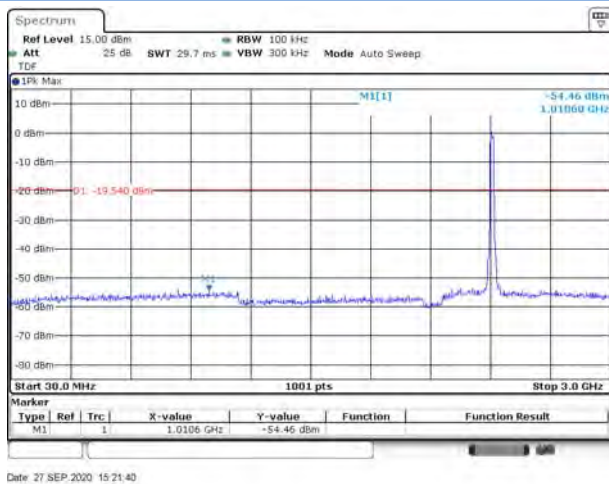

## 802.11n-20 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

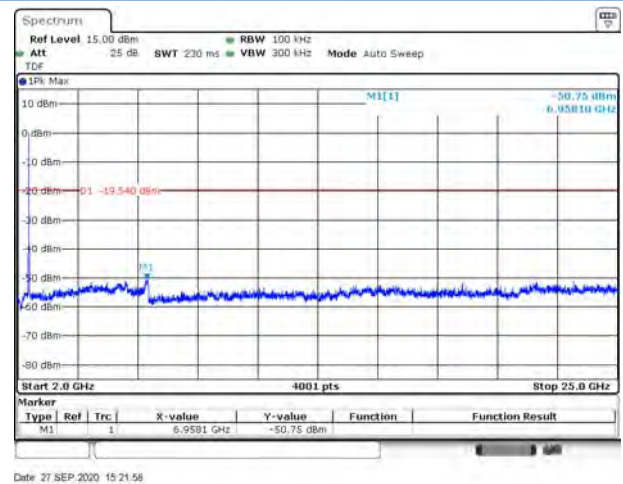


## 802.11n-20 MIDDLE CHANNEL CARRIER LEVEL

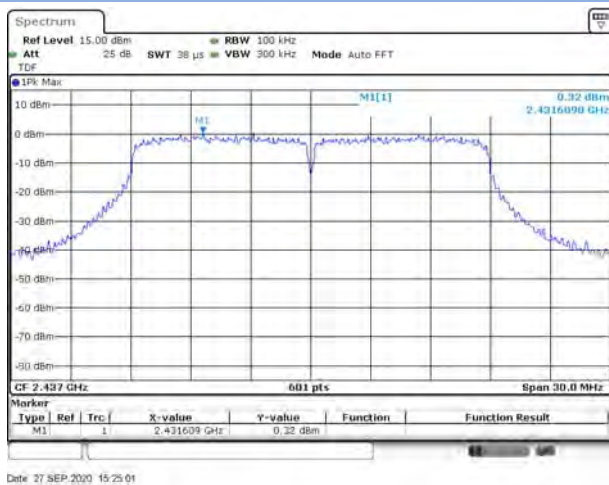





### 802.11n-20 MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

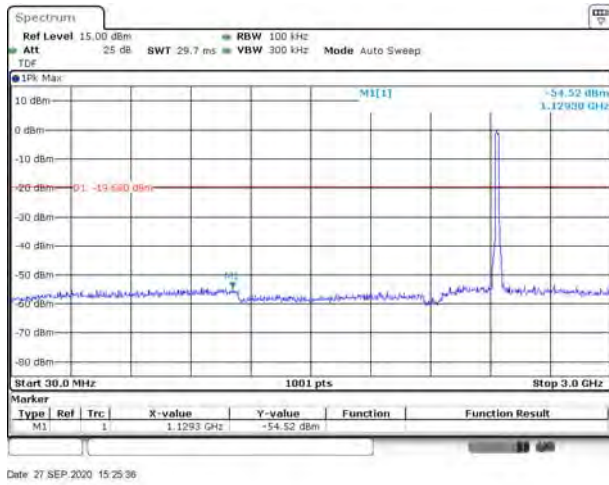


### 802.11n-20 MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

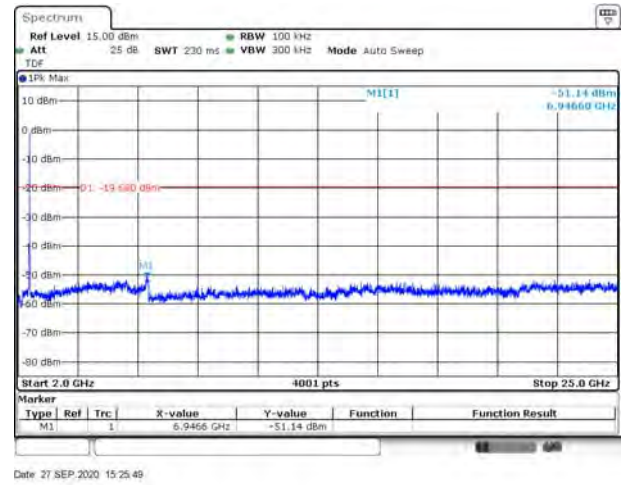


### 802.11n-20 HIGH CHANNEL CARRIER LEVEL

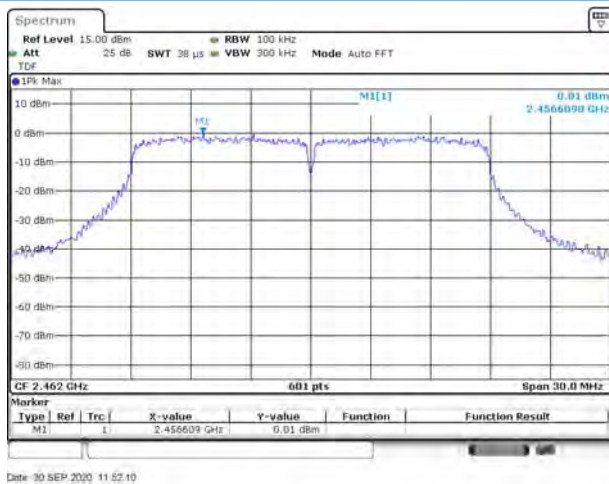


### 802.11n-20 HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

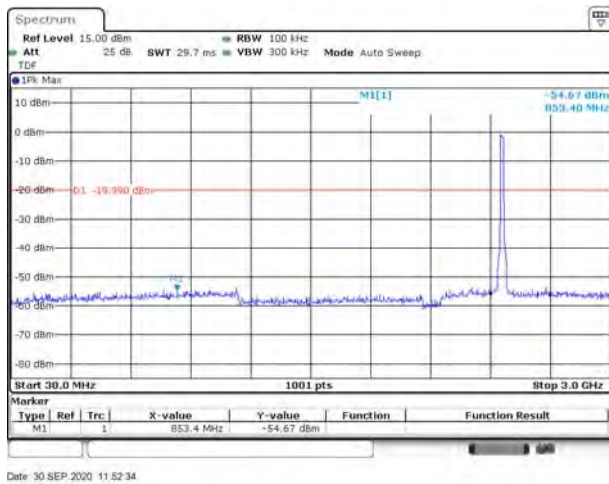


### 802.11n-20 HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

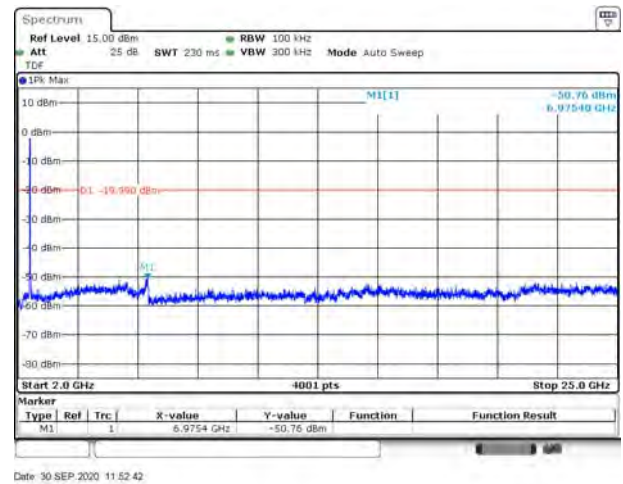


## 802.11n-40 LOW CHANNEL CARRIER LEVEL

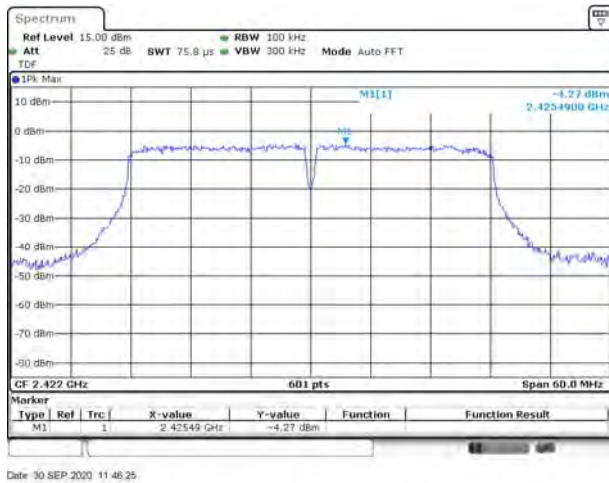


## 802.11n-40 LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

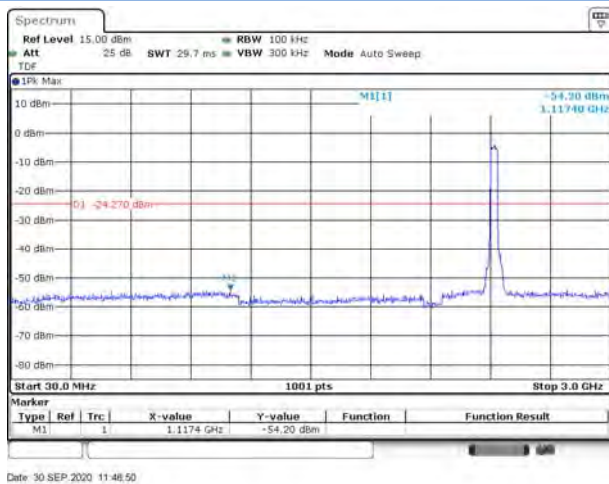



## 802.11n-40 LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

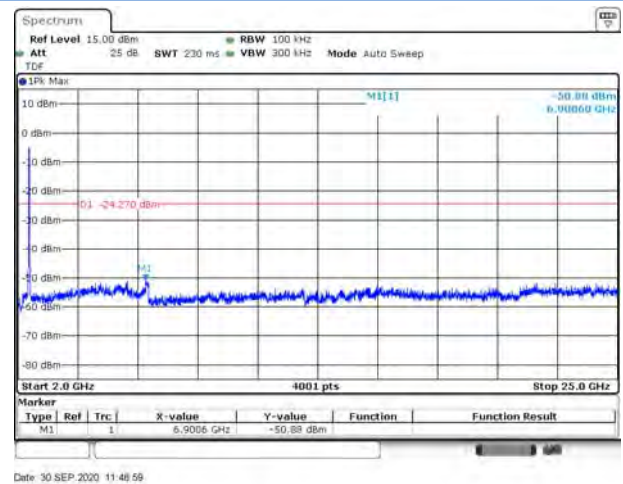




## 802.11n-40 MIDDLE CHANNEL CARRIER LEVEL

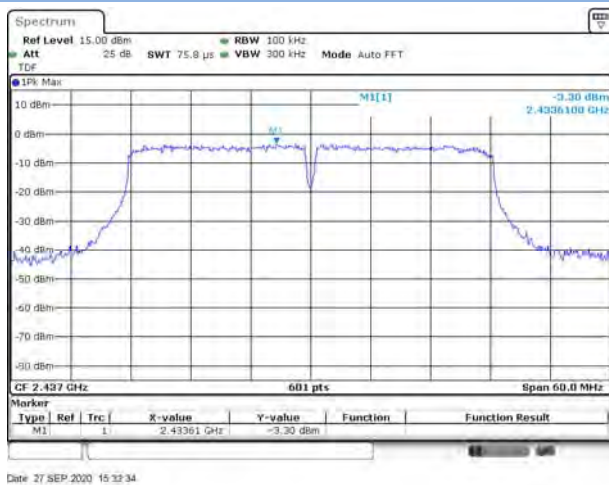

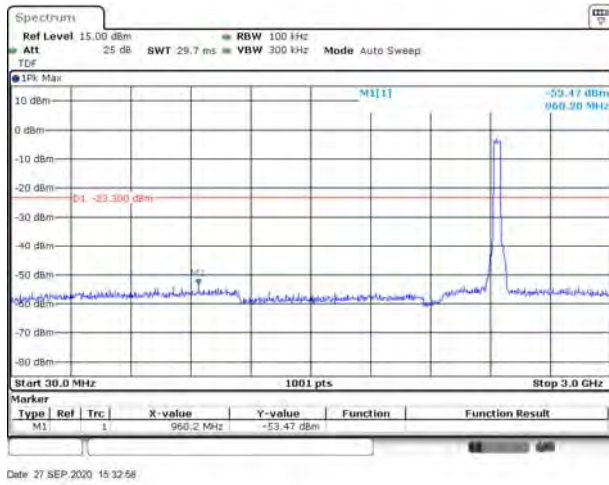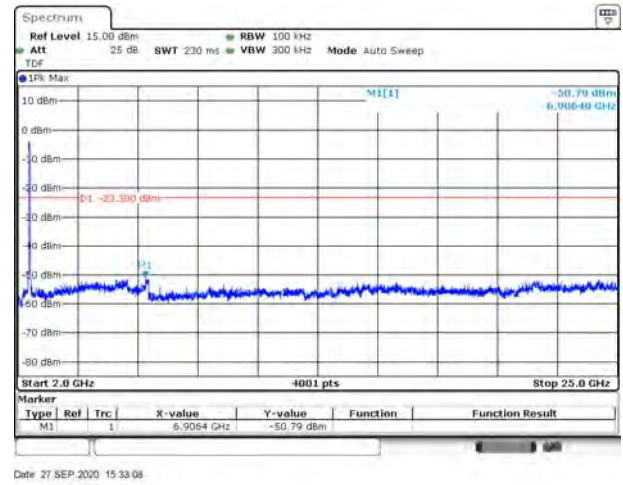

802.11n-40 MIDDLE CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

802.11n-40 MIDDLE CHANNEL, SPURIOUS  
2 GHz ~ 25 GHz

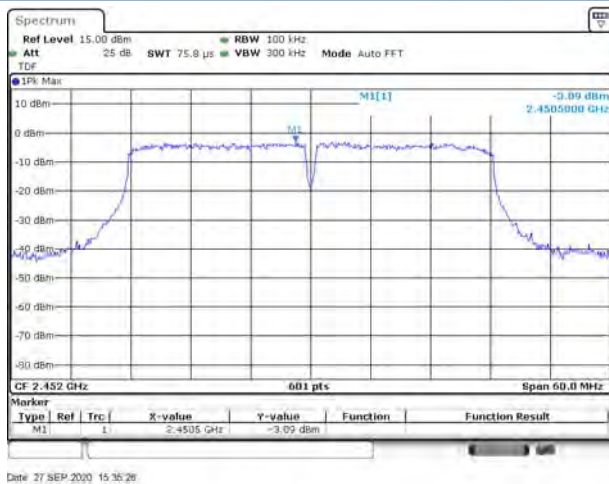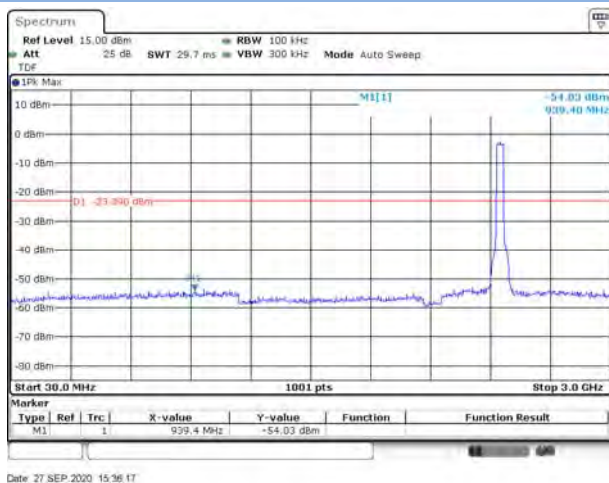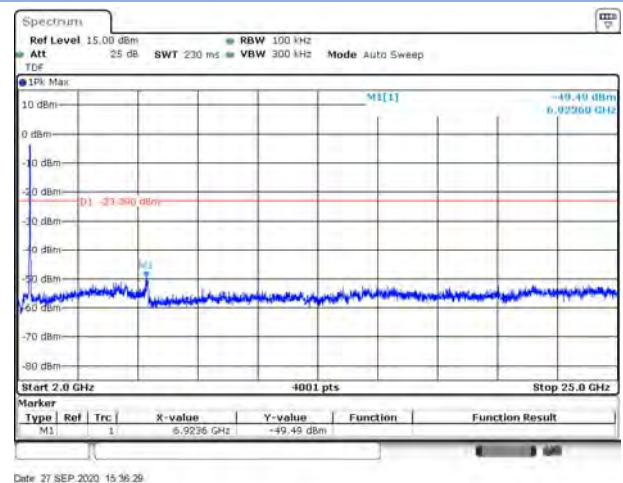
## 802.11n-40 HIGH CHANNEL CARRIER LEVEL


802.11n-40 HIGH CHANNEL, SPURIOUS  
30 MHz ~ 3 GHz

802.11n-40 HIGH CHANNEL, SPURIOUS  
2 GHz ~ 25 GHz


## A.4 Band Edge (Authorized-band band-edge)

### Test Data

Note: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

### Main Antenna

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.58	6.18	-13.82	Pass
High Channel	-44.31	6.26	-13.74	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-30.22	0.56	-19.44	Pass
High Channel	-43.52	0.42	-19.58	Pass

802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-34.63	0.19	-19.81	Pass
High Channel	-42.14	0.55	-19.45	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.91	-3.72	-23.72	Pass
High Channel	-38.98	-3.44	-23.44	Pass

### Aux. Antenna

#### 802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-38.08	4.45	-15.55	Pass
High Channel	-46.45	6.45	-13.55	Pass

#### 802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-31.56	0.61	-19.39	Pass
High Channel	-41.77	1.10	-18.90	Pass

#### 802.11n-20 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-35.18	0.46	-19.54	Pass
High Channel	-43.71	0.01	-19.99	Pass


#### 802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-38.43	-4.27	-24.27	Pass
High Channel	-38.93	-3.09	-23.09	Pass


## Test Plots

### Main Antenna


#### 802.11b LOW CHANNEL, Carrier level

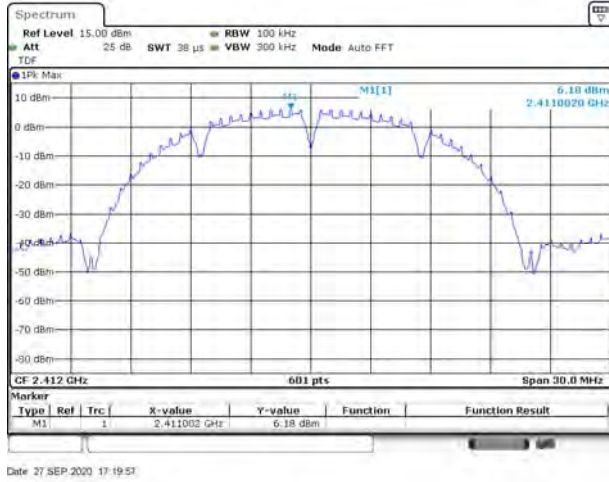


#### 802.11b LOW CHANNEL, Reference level

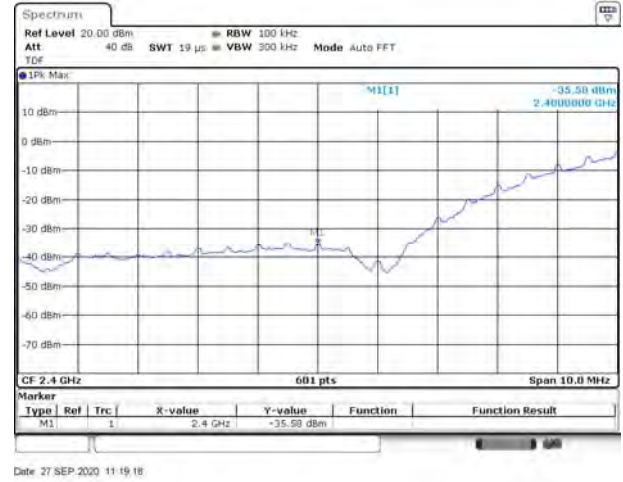


#### 802.11b HIGH CHANNEL, Carrier level

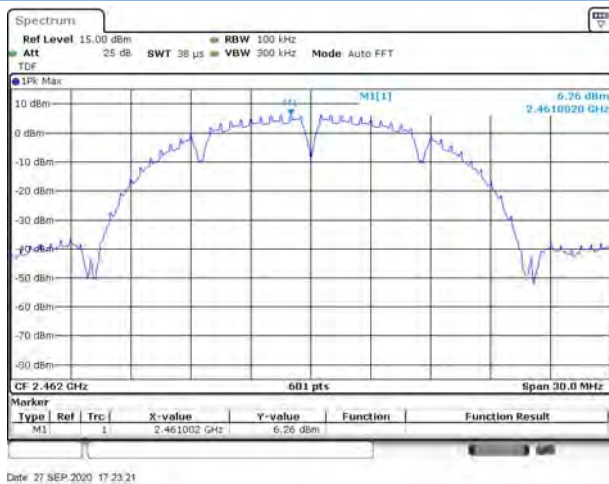

#### 802.11b HIGH CHANNEL, Reference level

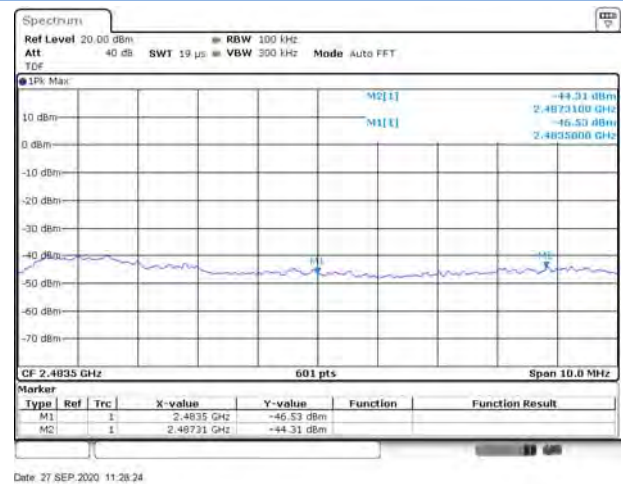

#### 802.11g LOW CHANNEL, Carrier level

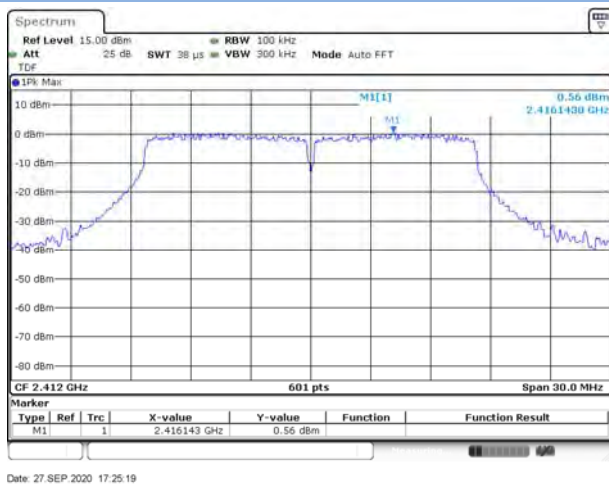


#### 802.11g LOW CHANNEL, Reference level






802.11g HIGH CHANNEL, Carrier level

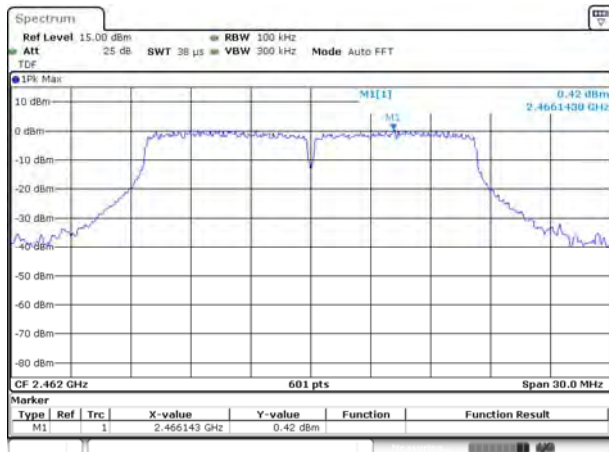


Date: 27 SEP 2020 17:27:45

802.11g HIGH CHANNEL, Reference level

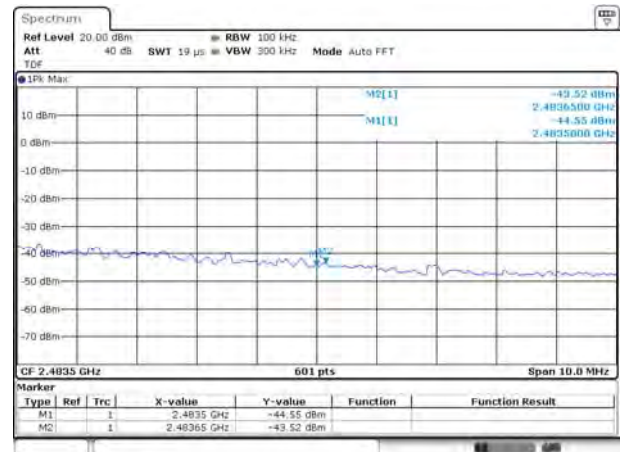


Date: 27 SEP 2020 11:49:30

802.11n-20 MHz LOW CHANNEL, Carrier level

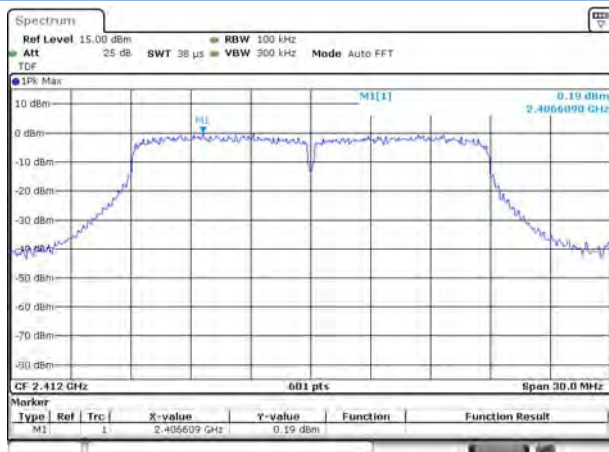


Date: 27 SEP 2020 17:28:51

802.11n-20 MHz LOW CHANNEL, Reference level

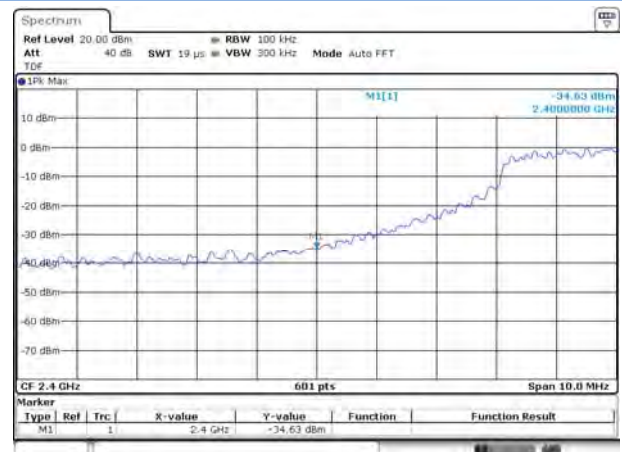


Date: 27 SEP 2020 11:51:57

802.11n-20 MHz HIGH CHANNEL, Carrier level

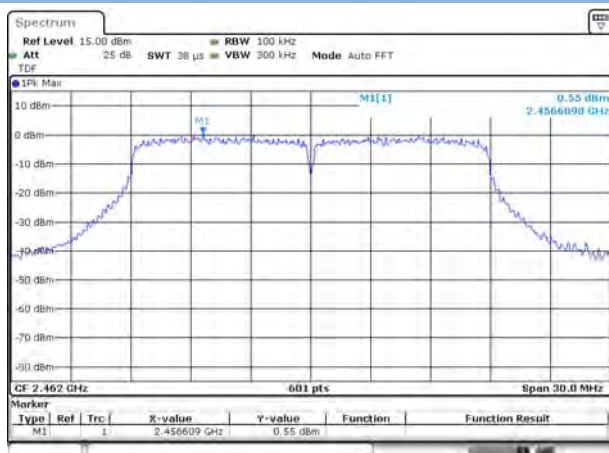


Date: 27 SEP 2020 17:33:40

802.11n-20 MHz HIGH CHANNEL, Reference level

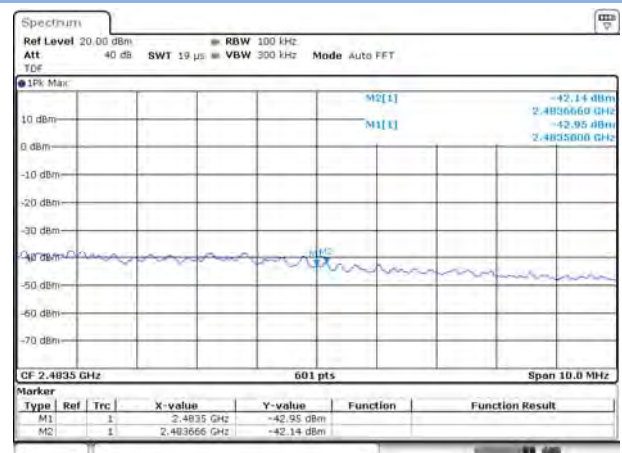


Date: 27 SEP 2020 11:57:35


802.11n-40 MHz LOW CHANNEL, Carrier level

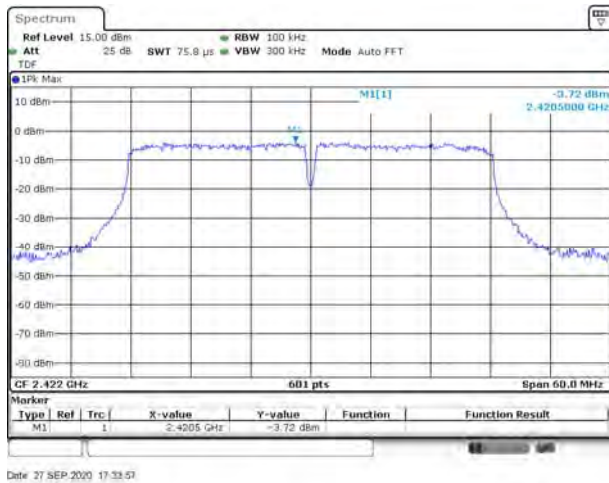


802.11n-40 MHz LOW CHANNEL, Reference level

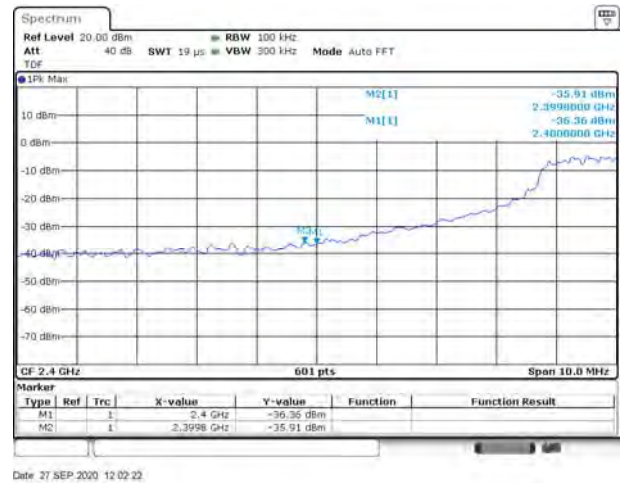

802.11n-40 MHz HIGH CHANNEL, Carrier level

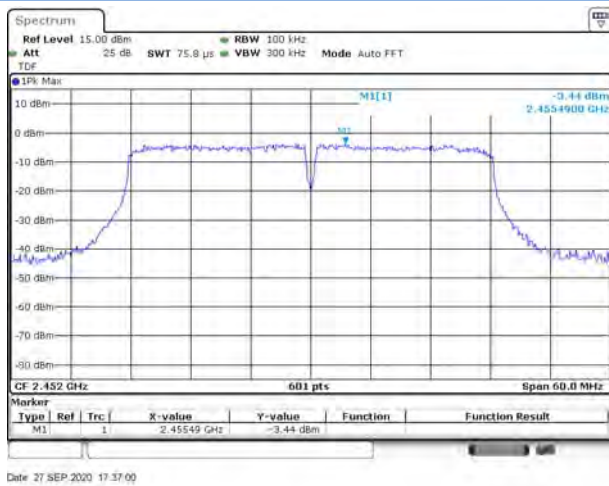


802.11n-40 MHz HIGH CHANNEL, Reference level

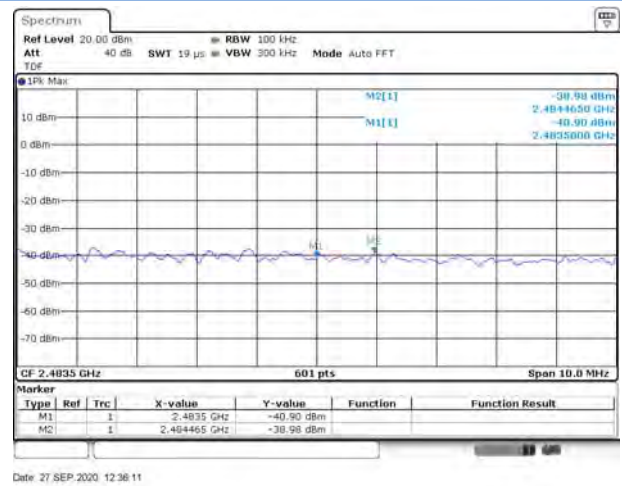

## Aux. Antenna


### 802.11b LOW CHANNEL, Carrier level

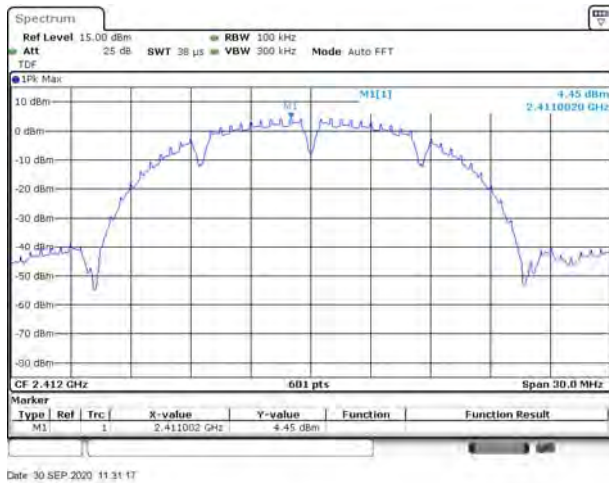


### 802.11b LOW CHANNEL, Reference level




### 802.11b HIGH CHANNEL, Carrier level

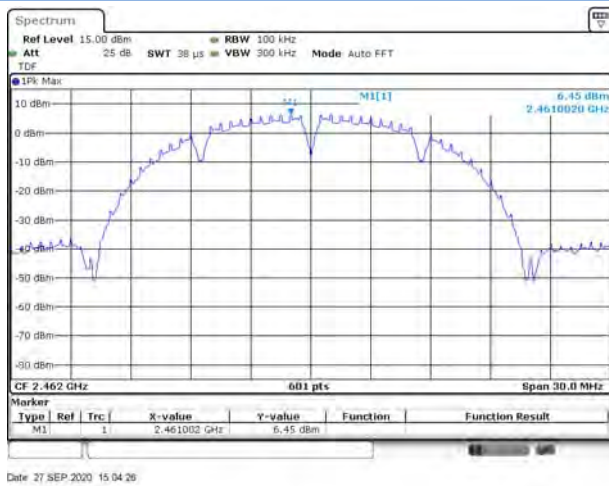

### 802.11b HIGH CHANNEL, Reference level

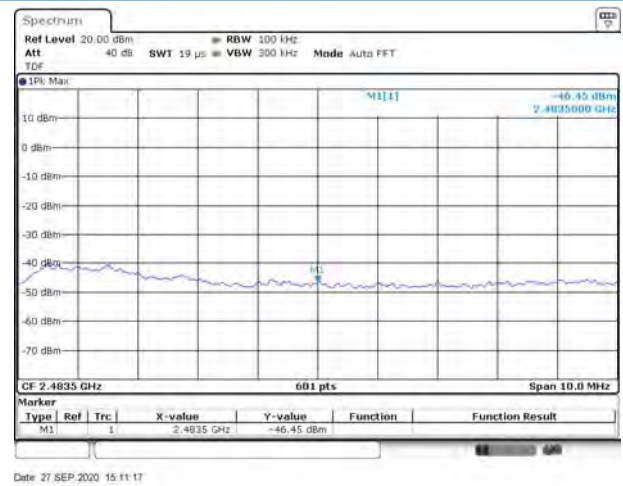

### 802.11g LOW CHANNEL, Carrier level

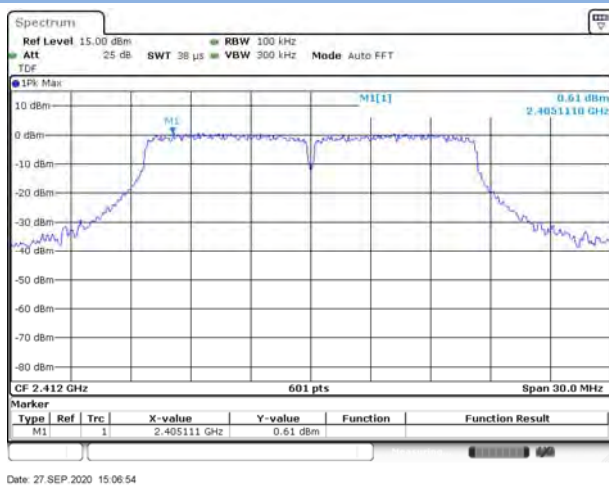


### 802.11g LOW CHANNEL, Reference level







802.11g HIGH CHANNEL, Carrier level

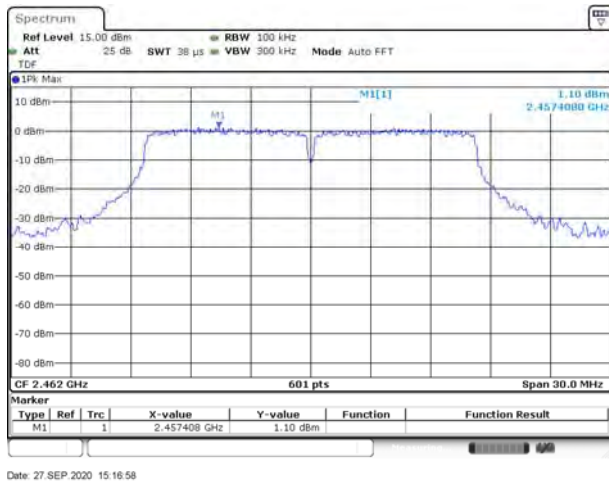

802.11g HIGH CHANNEL, Reference level

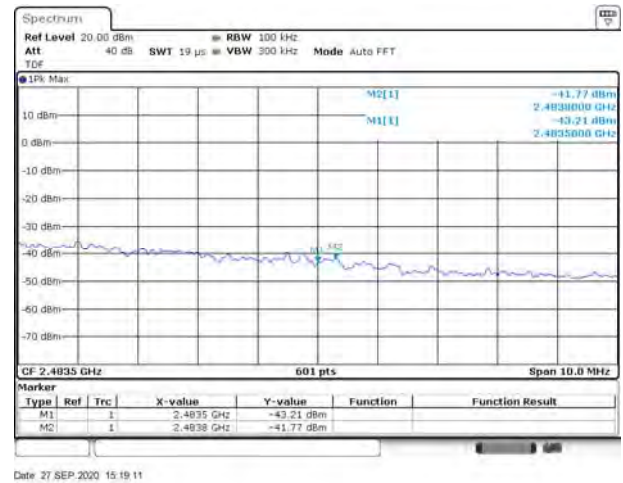


802.11n-20 MHz LOW CHANNEL, Carrier level

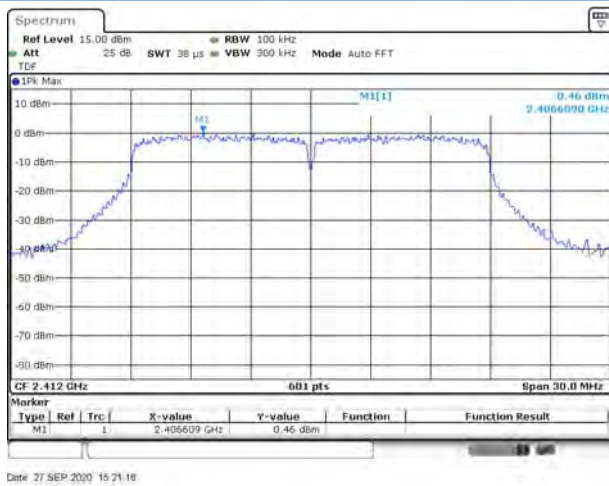


802.11n-20 MHz LOW CHANNEL, Reference level



802.11n-20 MHz HIGH CHANNEL, Carrier level

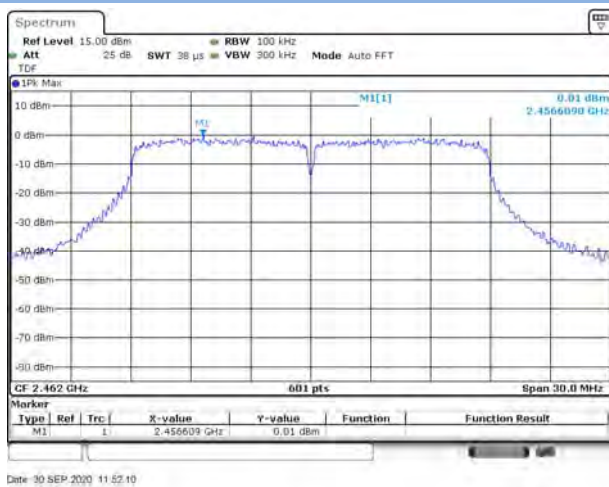


802.11n-20 MHz HIGH CHANNEL, Reference level

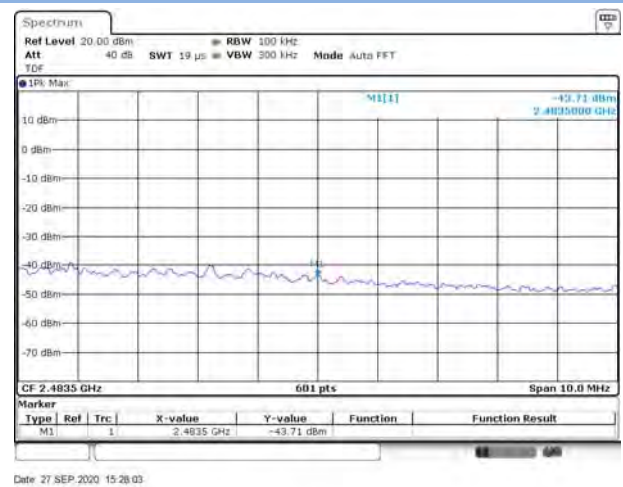




802.11n-40 MHz LOW CHANNEL, Carrier level

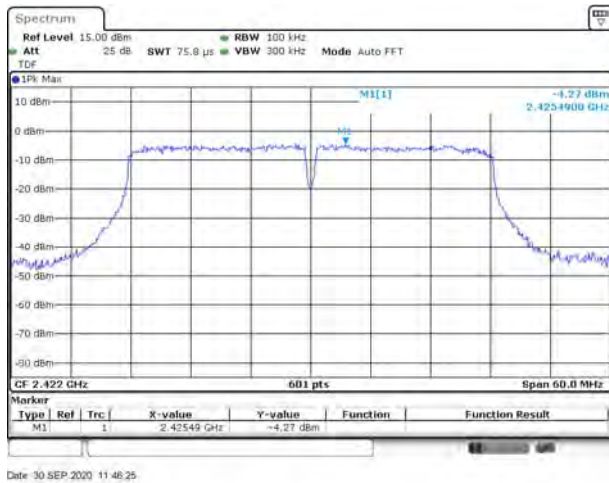


802.11n-40 MHz LOW CHANNEL, Reference level



802.11n-40 MHz HIGH CHANNEL, Carrier level

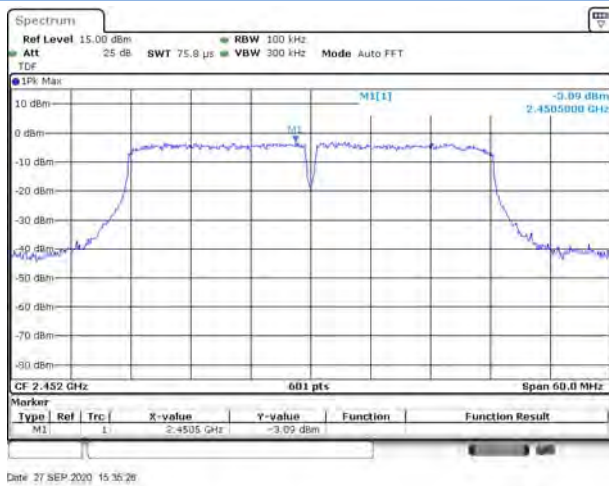

802.11n-40 MHz HIGH CHANNEL, Reference level

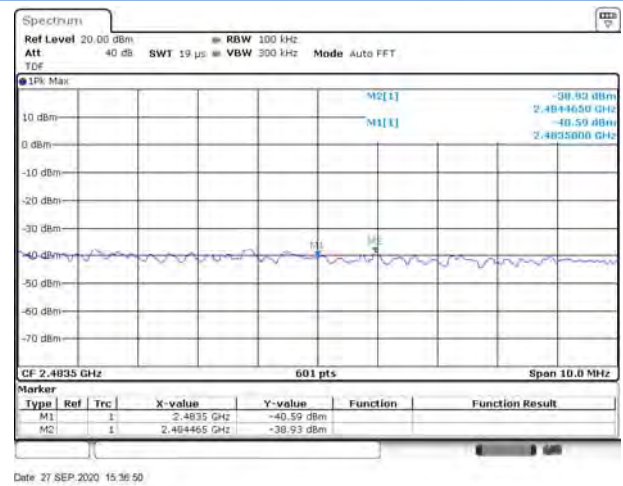

## A.5 Conducted Emissions


Note<sup>1</sup>: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note<sup>2</sup>: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.

### Test Data and Plots

#### PHASE L


CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

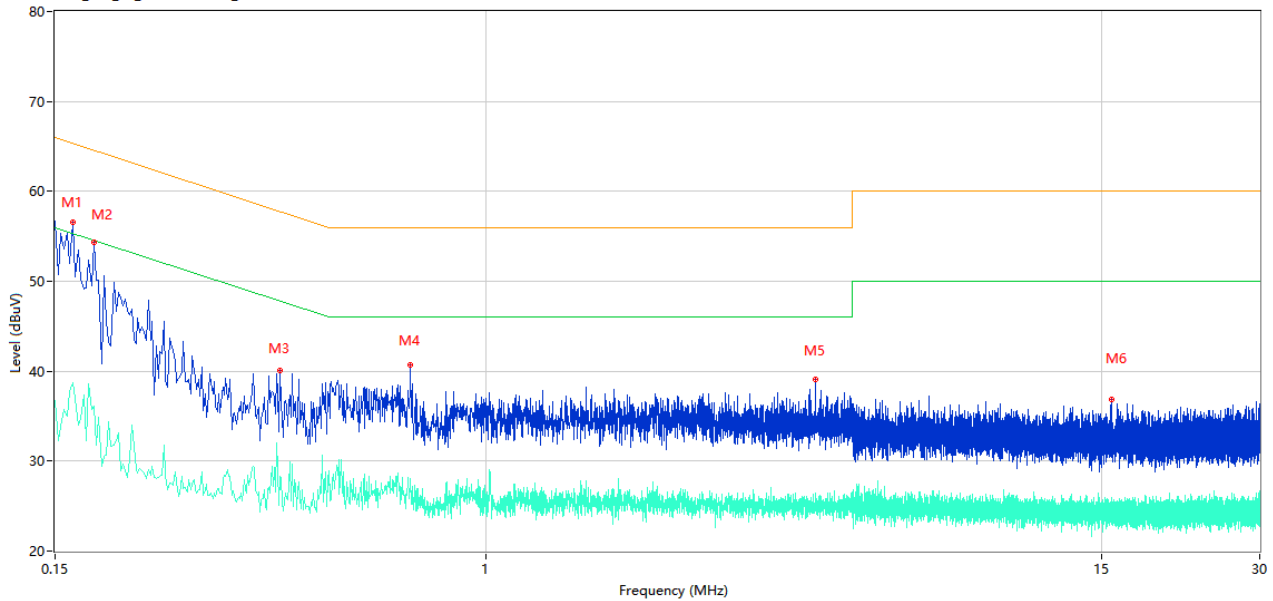

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	56.55	10.40	65.36	-8.81	Peak	L	Pass
1**	0.162	38.68	10.40	55.36	-16.68	AV	L	Pass
2	0.178	54.37	10.39	64.58	-10.21	Peak	L	Pass
2**	0.178	36.07	10.39	54.58	-18.51	AV	L	Pass
3	0.404	40.09	10.31	57.77	-17.68	Peak	L	Pass
3**	0.404	28.25	10.31	47.77	-19.52	AV	L	Pass
4	0.716	40.76	10.27	56.00	-15.24	Peak	L	Pass
4**	0.716	28.02	10.27	46.00	-17.98	AV	L	Pass
5	4.260	39.05	10.30	56.00	-16.95	Peak	L	Pass
5**	4.260	25.76	10.30	46.00	-20.24	AV	L	Pass
6	15.646	36.82	10.42	60.00	-23.18	Peak	L	Pass
6**	15.646	25.84	10.42	50.00	-24.16	AV	L	Pass

# PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

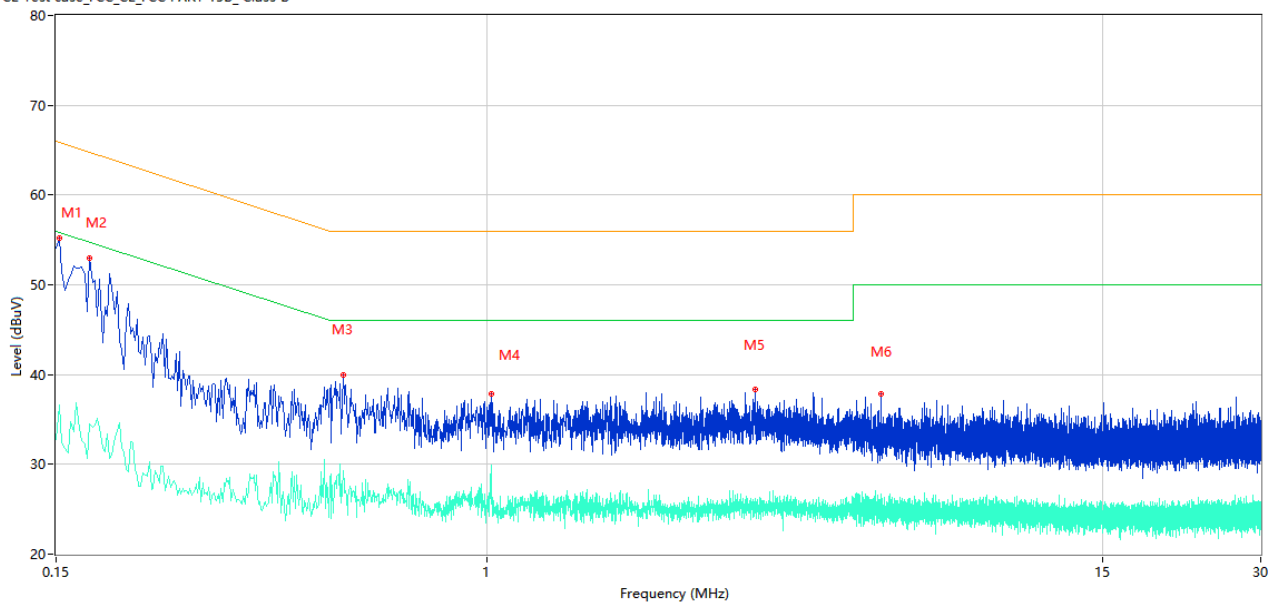

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	54.14	10.41	66.00	-11.86	Peak	N	Pass
1**	0.150	32.80	10.41	56.00	-23.20	AV	N	Pass
2	0.174	52.97	10.39	64.77	-11.80	Peak	N	Pass
2**	0.174	34.51	10.39	54.77	-20.26	AV	N	Pass
3	0.530	39.98	10.29	56.00	-16.02	Peak	N	Pass
3**	0.530	29.35	10.29	46.00	-16.65	AV	N	Pass
4	1.016	37.86	10.23	56.00	-18.14	Peak	N	Pass
4**	1.016	29.97	10.23	46.00	-16.03	AV	N	Pass
5	3.242	38.33	10.30	56.00	-17.67	Peak	N	Pass
5**	3.242	26.22	10.30	46.00	-19.78	AV	N	Pass
6	5.658	37.88	10.31	60.00	-22.12	Peak	N	Pass
6**	5.658	25.89	10.31	50.00	-24.11	AV	N	Pass

## A.6 Radiated Emission

Note<sup>1</sup>: The symbol of “--” in the table which means not application.


Note<sup>2</sup>: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note<sup>3</sup>: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note<sup>4</sup>: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

### Test Data and Plots


#### 30 MHz to 1 GHz, ANT H

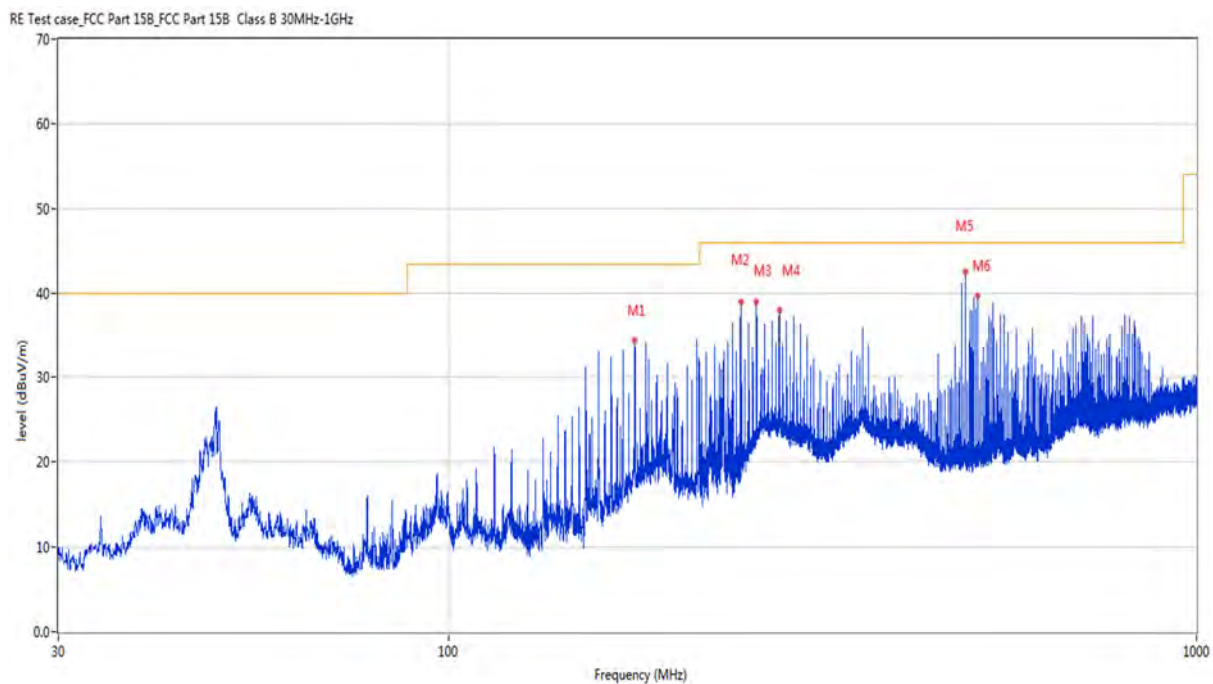

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	177.197	34.48	-26.24	43.5	-9.02	Peak	226.00	200	Horizontal	Pass
2	245.583	38.96	-23.02	46.0	-7.04	Peak	93.80	100	Horizontal	Pass
3	257.853	39.07	-22.75	46.0	-6.93	Peak	266.50	100	Horizontal	Pass
4	276.526	38.00	-21.96	46.0	-8.00	Peak	119.10	100	Horizontal	Pass
5	490.992	42.64	-17.06	46.0	-3.36	Peak	213.00	200	Horizontal	Pass
6	509.762	39.72	-16.46	46.0	-6.28	Peak	200.00	200	Horizontal	Pass

## 30 MHz to 1 GHz, ANT V

RE Test case\_FCC Part 15B\_FCC Part 15B Class B 30MHz-1GHz

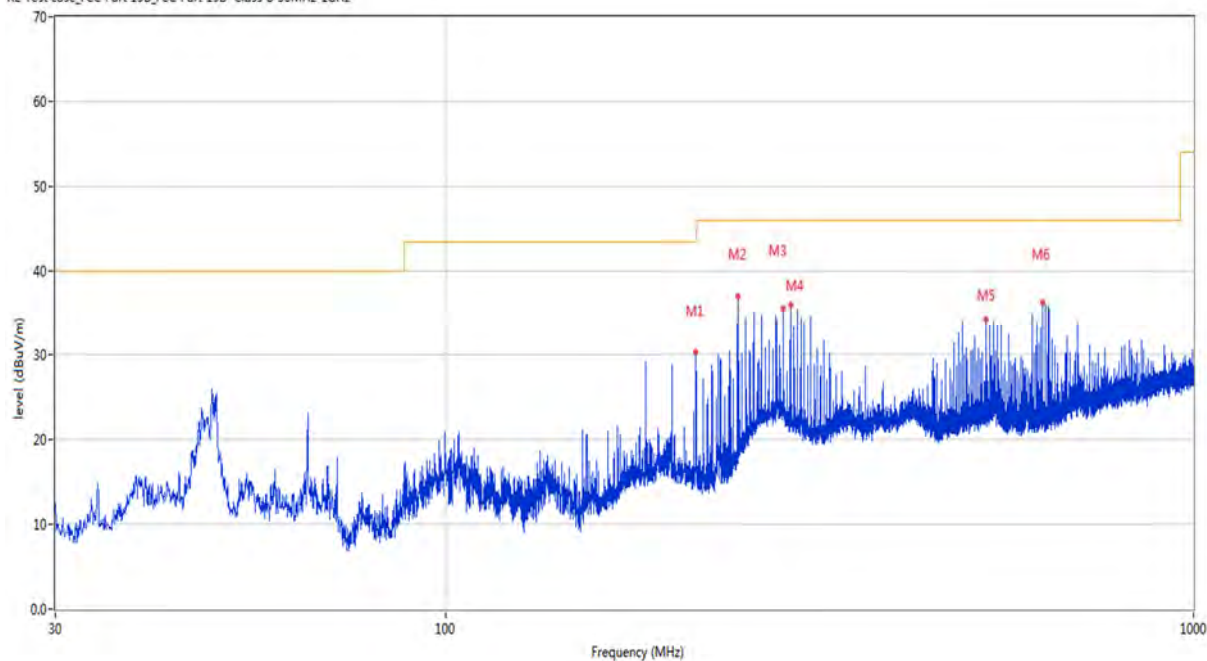

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	215.900	30.31	-23.90	43.5	-13.19	Peak	193.60	200	Vertical	Pass
2	245.534	36.96	-23.01	46.0	-9.04	Peak	189.40	200	Vertical	Pass
3	282.782	35.54	-21.81	46.0	-10.46	Peak	176.50	200	Vertical	Pass
4	288.893	35.96	-21.93	46.0	-10.04	Peak	244.50	200	Vertical	Pass
5	528.289	34.34	-15.94	46.0	-11.66	Peak	113.00	200	Vertical	Pass
6	627.569	36.28	-14.00	46.0	-9.72	Peak	358.10	100	Vertical	Pass



Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

### Main Antenna

#### 1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.200	40.11	-16.47	74.0	-33.89	Peak	252.00	150	Horizontal	Pass
1**	1861.200	30.59	-16.47	54.0	-23.41	AV	252.00	150	Horizontal	Pass
2	2414.800	97.01	-12.26	74.0	23.01	Peak	268.00	150	Horizontal	N/A
2**	2414.800	93.43	-12.26	54.0	39.43	AV	268.00	150	Horizontal	N/A
3	4824.200	49.86	-3.39	74.0	-24.14	Peak	42.00	150	Horizontal	Pass
3**	4824.200	47.20	-3.39	54.0	-6.80	AV	42.00	150	Horizontal	Pass
4	7234.600	47.68	-4.22	74.0	-26.32	Peak	334.00	150	Horizontal	Pass
4**	7234.600	44.56	-4.22	54.0	-9.44	AV	334.00	150	Horizontal	Pass
5	11920.275	49.61	1.50	74.0	-24.39	Peak	360.00	150	Horizontal	Pass
5**	11920.275	41.25	1.50	54.0	-12.75	AV	360.00	150	Horizontal	Pass
6	17425.125	54.47	3.62	74.0	-19.53	Peak	183.00	150	Horizontal	Pass
6**	17425.125	46.06	3.62	54.0	-7.94	AV	183.00	150	Horizontal	Pass

#### 1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1862.100	41.30	-16.46	74.0	-32.70	Peak	28.00	150	Vertical	Pass
1**	1862.100	29.93	-16.46	54.0	-24.07	AV	28.00	150	Vertical	Pass
2	2414.800	96.65	-12.26	74.0	22.65	Peak	185.00	150	Vertical	N/A
2**	2414.800	92.57	-12.26	54.0	38.57	AV	185.00	150	Vertical	N/A
3	4824.200	47.58	-3.39	74.0	-26.42	Peak	176.00	150	Vertical	Pass
3**	4824.200	44.28	-3.39	54.0	-9.72	AV	176.00	150	Vertical	Pass
4	6794.400	52.38	-0.92	74.0	-21.62	Peak	40.00	150	Vertical	Pass
4**	6794.400	42.48	-0.92	54.0	-11.52	AV	40.00	150	Vertical	Pass
5	11050.299	49.57	-0.63	74.0	-24.43	Peak	31.00	150	Vertical	Pass
5**	11050.299	39.78	-0.63	54.0	-14.22	AV	31.00	150	Vertical	Pass
6	16096.874	54.09	1.28	74.0	-19.91	Peak	240.00	150	Vertical	Pass
6**	16096.874	44.72	1.28	54.0	-9.28	AV	240.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.300	42.54	-16.56	74.0	-31.46	Peak	255.00	150	Horizontal	Pass
1**	1859.300	28.63	-16.56	54.0	-25.37	AV	255.00	150	Horizontal	Pass
2	2439.900	96.43	-12.67	74.0	22.43	Peak	301.00	150	Horizontal	N/A
2**	2439.900	93.27	-12.67	54.0	39.27	AV	301.00	150	Horizontal	N/A
3	4874.200	49.57	-3.35	74.0	-24.43	Peak	276.00	150	Horizontal	Pass
3**	4874.200	46.09	-3.35	54.0	-7.91	AV	276.00	150	Horizontal	Pass
4	6790.800	52.63	-0.66	74.0	-21.37	Peak	104.00	150	Horizontal	Pass
4**	6790.800	43.09	-0.66	54.0	-10.91	AV	104.00	150	Horizontal	Pass
5	11035.350	49.79	-0.57	74.0	-24.21	Peak	318.00	150	Horizontal	Pass
5**	11035.350	40.95	-0.57	54.0	-13.05	AV	318.00	150	Horizontal	Pass
6	17475.262	55.12	2.81	74.0	-18.88	Peak	337.00	150	Horizontal	Pass
6**	17475.262	45.29	2.81	54.0	-8.71	AV	337.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.000	42.57	-16.54	74.0	-31.43	Peak	36.00	150	Vertical	Pass
1**	1859.000	29.70	-16.54	54.0	-24.30	AV	36.00	150	Vertical	Pass
2	2439.800	95.33	-12.66	74.0	21.33	Peak	191.00	150	Vertical	N/A
2**	2439.800	92.27	-12.66	54.0	38.27	AV	191.00	150	Vertical	N/A
3	4914.400	48.95	-2.31	74.0	-25.05	Peak	35.00	150	Vertical	Pass
3**	4914.400	40.17	-2.31	54.0	-13.83	AV	35.00	150	Vertical	Pass
4	6684.200	53.46	-0.30	74.0	-20.54	Peak	0.00	150	Vertical	Pass
4**	6684.200	43.00	-0.30	54.0	-11.00	AV	0.00	150	Vertical	Pass
5	10538.263	49.69	-0.66	74.0	-24.31	Peak	341.00	150	Vertical	Pass
5**	10538.263	39.85	-0.66	54.0	-14.15	AV	341.00	150	Vertical	Pass
6	17420.663	55.41	3.74	74.0	-18.59	Peak	276.00	150	Vertical	Pass
6**	17420.663	45.91	3.74	54.0	-8.09	AV	276.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1860.900	44.12	-16.49	74.0	-29.88	Peak	279.00	150	Horizontal	Pass
1**	1860.900	30.13	-16.49	54.0	-23.87	AV	279.00	150	Horizontal	Pass
2	2464.800	96.22	-12.74	74.0	22.22	Peak	279.00	150	Horizontal	N/A
2**	2464.800	92.48	-12.74	54.0	38.48	AV	279.00	150	Horizontal	N/A
3	4923.600	49.25	-2.56	74.0	-24.75	Peak	326.00	150	Horizontal	Pass
3**	4923.600	40.00	-2.56	54.0	-14.00	AV	326.00	150	Horizontal	Pass
4	7385.538	50.28	-3.90	74.0	-23.72	Peak	360.00	150	Horizontal	Pass
4**	7385.538	45.45	-3.90	54.0	-8.55	AV	360.00	150	Horizontal	Pass
5	10944.213	49.94	-0.12	74.0	-24.06	Peak	217.00	150	Horizontal	Pass
5**	10944.213	40.78	-0.12	54.0	-13.22	AV	217.00	150	Horizontal	Pass
6	17477.626	54.46	2.78	74.0	-19.54	Peak	273.00	150	Horizontal	Pass
6**	17477.626	45.49	2.78	54.0	-8.51	AV	273.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.800	40.36	-16.56	74.0	-33.64	Peak	338.00	150	Vertical	Pass
1**	1859.800	31.73	-16.56	54.0	-22.27	AV	338.00	150	Vertical	Pass
2	2464.900	95.28	-12.74	74.0	21.28	Peak	187.00	150	Vertical	N/A
2**	2464.900	92.06	-12.74	54.0	38.06	AV	187.00	150	Vertical	N/A
3	4971.600	49.81	-3.15	74.0	-24.19	Peak	251.00	150	Vertical	Pass
3**	4971.600	39.30	-3.15	54.0	-14.70	AV	251.00	150	Vertical	Pass
4	6609.600	53.15	0.15	74.0	-20.85	Peak	42.00	150	Vertical	Pass
4**	6609.600	43.34	0.15	54.0	-10.66	AV	42.00	150	Vertical	Pass
5	11676.474	50.55	0.23	74.0	-23.45	Peak	324.00	150	Vertical	Pass
5**	11676.474	40.98	0.23	54.0	-13.02	AV	324.00	150	Vertical	Pass
6	17476.837	54.13	2.79	74.0	-19.87	Peak	84.00	150	Vertical	Pass
6**	17476.837	45.61	2.79	54.0	-8.39	AV	84.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.300	42.31	-16.47	74.0	-31.69	Peak	255.00	150	Horizontal	Pass
1**	1861.300	31.55	-16.47	54.0	-22.45	AV	255.00	150	Horizontal	Pass
2	2419.200	99.96	-12.30	74.0	25.96	Peak	281.00	150	Horizontal	N/A
2**	2419.200	92.90	-12.30	54.0	38.90	AV	281.00	150	Horizontal	N/A
3	4577.800	48.46	-3.81	74.0	-25.54	Peak	156.00	150	Horizontal	Pass
3**	4577.800	40.01	-3.81	54.0	-13.99	AV	156.00	150	Horizontal	Pass
4	7221.663	50.42	-4.39	74.0	-23.58	Peak	0.00	150	Horizontal	Pass
4**	7221.663	37.68	-4.39	54.0	-16.32	AV	0.00	150	Horizontal	Pass
5	11436.701	49.80	-0.08	74.0	-24.20	Peak	360.00	150	Horizontal	Pass
5**	11436.701	42.21	-0.08	54.0	-11.79	AV	360.00	150	Horizontal	Pass
6	15838.838	53.44	1.45	74.0	-20.56	Peak	305.00	150	Horizontal	Pass
6**	15838.838	44.54	1.45	54.0	-9.46	AV	305.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1866.500	40.85	-16.56	74.0	-33.15	Peak	28.00	150	Vertical	Pass
1**	1866.500	30.49	-16.56	54.0	-23.51	AV	28.00	150	Vertical	Pass
2	2419.400	98.19	-12.31	74.0	24.19	Peak	183.00	150	Vertical	N/A
2**	2419.400	91.87	-12.31	54.0	37.87	AV	183.00	150	Vertical	N/A
3	4220.400	47.20	-4.97	74.0	-26.80	Peak	350.00	150	Vertical	Pass
3**	4220.400	37.73	-4.97	54.0	-16.27	AV	350.00	150	Vertical	Pass
4	6269.600	52.01	-0.35	74.0	-21.99	Peak	151.00	150	Vertical	Pass
4**	6269.600	43.29	-0.35	54.0	-10.71	AV	151.00	150	Vertical	Pass
5	11505.700	50.51	-0.10	74.0	-23.49	Peak	356.00	150	Vertical	Pass
5**	11505.700	40.34	-0.10	54.0	-13.66	AV	356.00	150	Vertical	Pass
6	17412.526	54.26	3.54	74.0	-19.74	Peak	301.00	150	Vertical	Pass
6**	17412.526	44.79	3.54	54.0	-9.21	AV	301.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1860.300	43.33	-16.53	74.0	-30.67	Peak	253.00	150	Horizontal	Pass
1**	1860.300	31.42	-16.53	54.0	-22.58	AV	253.00	150	Horizontal	Pass
2	2430.400	99.67	-12.79	74.0	25.67	Peak	271.00	150	Horizontal	N/A
2**	2430.400	93.04	-12.79	54.0	39.04	AV	271.00	150	Horizontal	N/A
3	5104.000	50.67	-2.40	74.0	-23.33	Peak	0.00	150	Horizontal	Pass
3**	5104.000	41.13	-2.40	54.0	-12.87	AV	0.00	150	Horizontal	Pass
4	7312.513	49.94	-3.71	74.0	-24.06	Peak	360.00	150	Horizontal	Pass
4**	7312.513	41.84	-3.71	54.0	-12.16	AV	360.00	150	Horizontal	Pass
5	11364.537	49.85	-0.24	74.0	-24.15	Peak	334.00	150	Horizontal	Pass
5**	11364.537	41.40	-0.24	54.0	-12.60	AV	334.00	150	Horizontal	Pass
6	17467.650	54.54	2.90	74.0	-19.46	Peak	3.00	150	Horizontal	Pass
6**	17467.650	47.24	2.90	54.0	-6.76	AV	3.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1858.300	41.57	-16.51	74.0	-32.43	Peak	33.00	150	Vertical	Pass
1**	1858.300	30.20	-16.51	54.0	-23.80	AV	33.00	150	Vertical	Pass
2	2433.000	97.41	-12.87	74.0	23.41	Peak	189.00	150	Vertical	N/A
2**	2433.000	91.00	-12.87	54.0	37.00	AV	189.00	150	Vertical	N/A
3	4160.600	47.45	-4.92	74.0	-26.55	Peak	193.00	150	Vertical	Pass
3**	4160.600	37.47	-4.92	54.0	-16.53	AV	193.00	150	Vertical	Pass
4	6686.600	52.53	-0.21	74.0	-21.47	Peak	46.00	150	Vertical	Pass
4**	6686.600	43.98	-0.21	54.0	-10.02	AV	46.00	150	Vertical	Pass
5	10943.638	49.87	-0.11	74.0	-24.13	Peak	350.00	150	Vertical	Pass
5**	10943.638	41.53	-0.11	54.0	-12.47	AV	350.00	150	Vertical	Pass
6	17468.699	54.30	2.90	74.0	-19.70	Peak	306.00	150	Vertical	Pass
6**	17468.699	46.14	2.90	54.0	-7.86	AV	306.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1857.600	42.51	-16.48	74.0	-31.49	Peak	262.00	150	Horizontal	Pass
1**	1857.600	28.93	-16.48	54.0	-25.07	AV	262.00	150	Horizontal	Pass
2	2455.900	99.76	-12.71	74.0	25.76	Peak	262.00	150	Horizontal	N/A
2**	2455.900	91.53	-12.71	54.0	37.53	AV	262.00	150	Horizontal	N/A
3	5702.200	51.39	-2.15	74.0	-22.61	Peak	341.00	150	Horizontal	Pass
3**	5702.200	41.24	-2.15	54.0	-12.76	AV	341.00	150	Horizontal	Pass
4	7379.788	49.70	-3.61	74.0	-24.30	Peak	13.00	150	Horizontal	Pass
4**	7379.788	41.42	-3.61	54.0	-12.58	AV	13.00	150	Horizontal	Pass
5	10951.687	50.33	-0.29	74.0	-23.67	Peak	85.00	150	Horizontal	Pass
5**	10951.687	40.55	-0.29	54.0	-13.45	AV	85.00	150	Horizontal	Pass
6	17479.989	55.12	2.75	74.0	-18.88	Peak	151.00	150	Horizontal	Pass
6**	17479.989	45.33	2.75	54.0	-8.67	AV	151.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2012.700	51.26	-15.02	74.0	-22.74	Peak	0.00	150	Vertical	Pass
1**	2012.700	48.43	-15.02	54.0	-5.57	AV	0.00	150	Vertical	Pass
2	2455.400	97.17	-12.68	74.0	23.17	Peak	182.00	150	Vertical	N/A
2**	2455.400	91.13	-12.68	54.0	37.13	AV	182.00	150	Vertical	N/A
3	4580.400	48.95	-3.75	74.0	-25.05	Peak	339.00	150	Vertical	Pass
3**	4580.400	39.95	-3.75	54.0	-14.05	AV	339.00	150	Vertical	Pass
4	6976.600	53.85	0.79	74.0	-20.15	Peak	240.00	150	Vertical	Pass
4**	6976.600	43.20	0.79	54.0	-10.80	AV	240.00	150	Vertical	Pass
5	11072.437	49.83	-1.17	74.0	-24.17	Peak	279.00	150	Vertical	Pass
5**	11072.437	41.59	-1.17	54.0	-12.41	AV	279.00	150	Vertical	Pass
6	17515.162	55.06	2.19	74.0	-18.94	Peak	307.00	150	Vertical	Pass
6**	17515.162	44.35	2.19	54.0	-9.65	AV	307.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1865.100	43.39	-16.58	74.0	-30.61	Peak	251.00	150	Horizontal	Pass
1**	1865.100	28.80	-16.58	54.0	-25.20	AV	251.00	150	Horizontal	Pass
2	2418.200	99.98	-12.25	74.0	25.98	Peak	270.00	150	Horizontal	N/A
2**	2418.200	92.96	-12.25	54.0	38.96	AV	270.00	150	Horizontal	N/A
3	4661.600	49.26	-3.36	74.0	-24.74	Peak	141.00	150	Horizontal	Pass
3**	4661.600	39.23	-3.36	54.0	-14.77	AV	141.00	150	Horizontal	Pass
4	7253.000	49.64	-3.56	74.0	-24.36	Peak	360.00	150	Horizontal	Pass
4**	7253.000	38.08	-3.56	54.0	-15.92	AV	360.00	150	Horizontal	Pass
5	12283.963	51.20	1.78	74.0	-22.80	Peak	50.00	150	Horizontal	Pass
5**	12283.963	41.12	1.78	54.0	-12.88	AV	50.00	150	Horizontal	Pass
6	17013.526	54.05	1.64	74.0	-19.95	Peak	3.00	150	Horizontal	Pass
6**	17013.526	45.23	1.64	54.0	-8.77	AV	3.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1858.700	41.24	-16.53	74.0	-32.76	Peak	46.00	150	Vertical	Pass
1**	1858.700	32.36	-16.53	54.0	-21.64	AV	46.00	150	Vertical	Pass
2	2418.100	98.84	-12.25	74.0	24.84	Peak	184.00	150	Vertical	N/A
2**	2418.100	92.16	-12.25	54.0	38.16	AV	184.00	150	Vertical	N/A
3	4919.000	50.14	-2.39	74.0	-23.86	Peak	129.00	150	Vertical	Pass
3**	4919.000	39.83	-2.39	54.0	-14.17	AV	129.00	150	Vertical	Pass
4	6920.400	52.08	-0.73	74.0	-21.92	Peak	0.00	150	Vertical	Pass
4**	6920.400	42.22	-0.73	54.0	-11.78	AV	0.00	150	Vertical	Pass
5	12608.550	50.60	1.90	74.0	-23.40	Peak	14.00	150	Vertical	Pass
5**	12608.550	41.00	1.90	54.0	-13.00	AV	14.00	150	Vertical	Pass
6	16087.687	54.37	1.48	74.0	-19.63	Peak	271.00	150	Vertical	Pass
6**	16087.687	43.93	1.48	54.0	-10.07	AV	271.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.500	41.38	-16.57	74.0	-32.62	Peak	259.00	150	Horizontal	Pass
1**	1859.500	29.55	-16.57	54.0	-24.45	AV	259.00	150	Horizontal	Pass
2	2429.000	99.57	-12.80	74.0	25.57	Peak	259.00	150	Horizontal	N/A
2**	2429.000	92.91	-12.80	54.0	38.91	AV	259.00	150	Horizontal	N/A
3	5192.400	49.89	-2.70	74.0	-24.11	Peak	133.00	150	Horizontal	Pass
3**	5192.400	41.25	-2.70	54.0	-12.75	AV	133.00	150	Horizontal	Pass
4	7308.200	50.33	-3.50	74.0	-23.67	Peak	0.00	150	Horizontal	Pass
4**	7308.200	39.28	-3.50	54.0	-14.72	AV	0.00	150	Horizontal	Pass
5	11566.363	50.11	-0.41	74.0	-23.89	Peak	102.00	150	Horizontal	Pass
5**	11566.363	39.36	-0.41	54.0	-14.64	AV	102.00	150	Horizontal	Pass
6	17424.599	53.97	3.63	74.0	-20.03	Peak	2.00	150	Horizontal	Pass
6**	17424.599	46.31	3.63	54.0	-7.69	AV	2.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1862.500	41.82	-16.48	74.0	-32.18	Peak	36.00	150	Vertical	Pass
1**	1862.500	29.15	-16.48	54.0	-24.85	AV	36.00	150	Vertical	Pass
2	2429.300	96.70	-12.80	74.0	22.70	Peak	179.00	150	Vertical	N/A
2**	2429.300	89.46	-12.80	54.0	35.46	AV	179.00	150	Vertical	N/A
3	4307.800	47.54	-4.70	74.0	-26.46	Peak	341.00	150	Vertical	Pass
3**	4307.800	37.65	-4.70	54.0	-16.35	AV	341.00	150	Vertical	Pass
4	6738.000	52.69	-0.21	74.0	-21.31	Peak	302.00	150	Vertical	Pass
4**	6738.000	43.51	-0.21	54.0	-10.49	AV	302.00	150	Vertical	Pass
5	10738.076	49.38	-0.76	74.0	-24.62	Peak	351.00	150	Vertical	Pass
5**	10738.076	40.52	-0.76	54.0	-13.48	AV	351.00	150	Vertical	Pass
6	17466.599	54.65	2.89	74.0	-19.35	Peak	52.00	150	Vertical	Pass
6**	17466.599	45.81	2.89	54.0	-8.19	AV	52.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.600	41.81	-16.52	74.0	-32.19	Peak	248.00	150	Horizontal	Pass
1**	1863.600	33.94	-16.52	54.0	-20.06	AV	248.00	150	Horizontal	Pass
2	2454.400	99.05	-12.65	74.0	25.05	Peak	279.00	150	Horizontal	N/A
2**	2454.400	91.56	-12.65	54.0	37.56	AV	279.00	150	Horizontal	N/A
3	4597.200	48.73	-3.74	74.0	-25.27	Peak	314.00	150	Horizontal	Pass
3**	4597.200	39.20	-3.74	54.0	-14.80	AV	314.00	150	Horizontal	Pass
4	7377.487	48.83	-3.72	74.0	-25.17	Peak	360.00	150	Horizontal	Pass
4**	7377.487	40.00	-3.72	54.0	-14.00	AV	360.00	150	Horizontal	Pass
5	11537.037	50.40	-0.57	74.0	-23.60	Peak	264.00	150	Horizontal	Pass
5**	11537.037	39.84	-0.57	54.0	-14.16	AV	264.00	150	Horizontal	Pass
6	17423.286	54.44	3.67	74.0	-19.56	Peak	29.00	150	Horizontal	Pass
6**	17423.286	46.44	3.67	54.0	-7.56	AV	29.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.700	41.66	-17.56	74.0	-32.34	Peak	264.00	150	Vertical	Pass
1**	1500.700	35.84	-17.56	54.0	-18.16	AV	264.00	150	Vertical	Pass
2	2454.200	96.13	-12.66	74.0	22.13	Peak	188.00	150	Vertical	N/A
2**	2454.200	89.06	-12.66	54.0	35.06	AV	188.00	150	Vertical	N/A
3	5139.800	50.37	-2.43	74.0	-23.63	Peak	229.00	150	Vertical	Pass
3**	5139.800	41.05	-2.43	54.0	-12.95	AV	229.00	150	Vertical	Pass
4	6673.000	52.02	-0.78	74.0	-21.98	Peak	179.00	150	Vertical	Pass
4**	6673.000	43.58	-0.78	54.0	-10.42	AV	179.00	150	Vertical	Pass
5	11357.638	50.32	-0.20	74.0	-23.68	Peak	265.00	150	Vertical	Pass
5**	11357.638	40.09	-0.20	54.0	-13.91	AV	265.00	150	Vertical	Pass
6	17431.425	54.41	3.40	74.0	-19.59	Peak	276.00	150	Vertical	Pass
6**	17431.425	46.28	3.40	54.0	-7.72	AV	276.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1857.400	43.55	-16.47	74.0	-30.45	Peak	253.00	150	Horizontal	Pass
1**	1857.400	29.72	-16.47	54.0	-24.28	AV	253.00	150	Horizontal	Pass
2	2405.900	99.01	-12.32	74.0	25.01	Peak	286.00	150	Horizontal	N/A
2**	2405.900	91.25	-12.32	54.0	37.25	AV	286.00	150	Horizontal	N/A
3	4551.800	48.92	-3.87	74.0	-25.08	Peak	168.00	150	Horizontal	Pass
3**	4551.800	38.43	-3.87	54.0	-15.57	AV	168.00	150	Horizontal	Pass
4	6980.800	52.84	0.71	74.0	-21.16	Peak	360.00	150	Horizontal	Pass
4**	6980.800	43.56	0.71	54.0	-10.44	AV	360.00	150	Horizontal	Pass
5	11228.262	50.24	-0.26	74.0	-23.76	Peak	208.00	150	Horizontal	Pass
5**	11228.262	40.66	-0.26	54.0	-13.34	AV	208.00	150	Horizontal	Pass
6	17180.213	54.46	2.68	74.0	-19.54	Peak	86.00	150	Horizontal	Pass
6**	17180.213	45.49	2.68	54.0	-8.51	AV	86.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.000	41.49	-16.54	74.0	-32.51	Peak	344.00	150	Vertical	Pass
1**	1859.000	28.94	-16.54	54.0	-25.06	AV	344.00	150	Vertical	Pass
2	2418.600	95.76	-12.26	74.0	21.76	Peak	184.00	150	Vertical	N/A
2**	2418.600	89.29	-12.26	54.0	35.29	AV	184.00	150	Vertical	N/A
3	3654.600	46.26	-6.42	74.0	-27.74	Peak	87.00	150	Vertical	Pass
3**	3654.600	37.59	-6.42	54.0	-16.41	AV	87.00	150	Vertical	Pass
4	5542.800	51.62	-1.94	74.0	-22.38	Peak	337.00	150	Vertical	Pass
4**	5542.800	41.05	-1.94	54.0	-12.95	AV	337.00	150	Vertical	Pass
5	11896.988	50.06	1.71	74.0	-23.94	Peak	183.00	150	Vertical	Pass
5**	11896.988	40.60	1.71	54.0	-13.40	AV	183.00	150	Vertical	Pass
6	17420.663	54.64	3.74	74.0	-19.36	Peak	180.00	150	Vertical	Pass
6**	17420.663	45.75	3.74	54.0	-8.25	AV	180.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1860.100	43.31	-16.54	74.0	-30.69	Peak	290.00	150	Horizontal	Pass
1**	1860.100	33.21	-16.54	54.0	-20.79	AV	290.00	150	Horizontal	Pass
2	2420.400	98.81	-12.38	74.0	24.81	Peak	278.00	150	Horizontal	N/A
2**	2420.400	91.26	-12.38	54.0	37.26	AV	278.00	150	Horizontal	N/A
3	4588.600	49.25	-3.65	74.0	-24.75	Peak	266.00	150	Horizontal	Pass
3**	4588.600	39.89	-3.65	54.0	-14.11	AV	266.00	150	Horizontal	Pass
4	6612.200	52.73	0.19	74.0	-21.27	Peak	360.00	150	Horizontal	Pass
4**	6612.200	43.52	0.19	54.0	-10.48	AV	360.00	150	Horizontal	Pass
5	12855.262	51.13	1.42	74.0	-22.87	Peak	273.00	150	Horizontal	Pass
5**	12855.262	41.73	1.42	54.0	-12.27	AV	273.00	150	Horizontal	Pass
6	17027.175	54.29	1.49	74.0	-19.71	Peak	360.00	150	Horizontal	Pass
6**	17027.175	43.92	1.49	54.0	-10.08	AV	360.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.100	40.56	-16.55	74.0	-33.44	Peak	33.00	150	Vertical	Pass
1**	1859.100	28.77	-16.55	54.0	-25.23	AV	33.00	150	Vertical	Pass
2	2421.000	97.04	-12.44	74.0	23.04	Peak	193.00	150	Vertical	N/A
2**	2421.000	91.06	-12.44	54.0	37.06	AV	193.00	150	Vertical	N/A
3	4629.200	49.12	-3.66	74.0	-24.88	Peak	28.00	150	Vertical	Pass
3**	4629.200	39.92	-3.66	54.0	-14.08	AV	28.00	150	Vertical	Pass
4	6282.400	52.29	-0.23	74.0	-21.71	Peak	203.00	150	Vertical	Pass
4**	6282.400	42.90	-0.23	54.0	-11.10	AV	203.00	150	Vertical	Pass
5	11487.300	49.51	0.07	74.0	-24.49	Peak	135.00	150	Vertical	Pass
5**	11487.300	40.23	0.07	54.0	-13.77	AV	135.00	150	Vertical	Pass
6	17467.912	55.01	2.90	74.0	-18.99	Peak	116.00	150	Vertical	Pass
6**	17467.912	46.44	2.90	54.0	-7.56	AV	116.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1857.900	42.79	-16.49	74.0	-31.21	Peak	261.00	150	Horizontal	Pass
1**	1857.900	28.37	-16.49	54.0	-25.63	AV	261.00	150	Horizontal	Pass
2	2435.900	98.50	-12.77	74.0	24.50	Peak	285.00	150	Horizontal	N/A
2**	2435.900	91.14	-12.77	54.0	37.14	AV	285.00	150	Horizontal	N/A
3	3812.800	46.30	-5.46	74.0	-27.70	Peak	112.00	150	Horizontal	Pass
3**	3812.800	36.87	-5.46	54.0	-17.13	AV	112.00	150	Horizontal	Pass
4	6610.200	52.07	0.17	74.0	-21.93	Peak	214.00	150	Horizontal	Pass
4**	6610.200	43.43	0.17	54.0	-10.57	AV	214.00	150	Horizontal	Pass
5	10779.187	49.42	-0.49	74.0	-24.58	Peak	319.00	150	Horizontal	Pass
5**	10779.187	41.06	-0.49	54.0	-12.94	AV	319.00	150	Horizontal	Pass
6	17485.238	54.82	2.50	74.0	-19.18	Peak	304.00	150	Horizontal	Pass
6**	17485.238	45.01	2.50	54.0	-8.99	AV	304.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1865.100	39.94	-16.58	74.0	-34.06	Peak	351.00	150	Vertical	Pass
1**	1865.100	28.54	-16.58	54.0	-25.46	AV	351.00	150	Vertical	Pass
2	2437.200	94.41	-12.63	74.0	20.41	Peak	185.00	150	Vertical	N/A
2**	2437.200	88.16	-12.63	54.0	34.16	AV	185.00	150	Vertical	N/A
3	4260.400	48.21	-4.70	74.0	-25.79	Peak	152.00	150	Vertical	Pass
3**	4260.400	37.68	-4.70	54.0	-16.32	AV	152.00	150	Vertical	Pass
4	6681.200	52.39	-0.51	74.0	-21.61	Peak	360.00	150	Vertical	Pass
4**	6681.200	43.39	-0.51	54.0	-10.61	AV	360.00	150	Vertical	Pass
5	11219.925	49.61	-0.21	74.0	-24.39	Peak	219.00	150	Vertical	Pass
5**	11219.925	41.69	-0.21	54.0	-12.31	AV	219.00	150	Vertical	Pass
6	17438.251	55.74	3.10	74.0	-18.26	Peak	236.00	150	Vertical	Pass
6**	17438.251	45.83	3.10	54.0	-8.17	AV	236.00	150	Vertical	Pass

### Aux. Antenna

#### 1 GHz to 18 GHz, ANT H 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1857.600	42.19	-16.48	74.0	-31.81	Peak	254.00	150	Horizontal	Pass
1**	1857.600	31.91	-16.48	54.0	-22.09	AV	254.00	150	Horizontal	Pass
2	2414.800	97.07	-12.26	74.0	23.07	Peak	23.00	150	Horizontal	N/A
2**	2414.800	93.53	-12.26	54.0	39.53	AV	23.00	150	Horizontal	N/A
3	4824.400	51.47	-3.40	74.0	-22.53	Peak	49.00	150	Horizontal	Pass
3**	4824.400	50.77	-3.40	54.0	-3.23	AV	49.00	150	Horizontal	Pass
4	6966.400	53.20	0.43	74.0	-20.80	Peak	271.00	150	Horizontal	Pass
4**	6966.400	44.17	0.43	54.0	-9.83	AV	271.00	150	Horizontal	Pass
5	11837.475	50.26	1.14	74.0	-23.74	Peak	188.00	150	Horizontal	Pass
5**	11837.475	41.40	1.14	54.0	-12.60	AV	188.00	150	Horizontal	Pass
6	16084.799	54.28	1.53	74.0	-19.72	Peak	3.00	150	Horizontal	Pass
6**	16084.799	43.57	1.53	54.0	-10.43	AV	3.00	150	Horizontal	Pass

#### 1 GHz to 18 GHz, ANT V 802.11b Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1699.800	42.87	-17.32	74.0	-31.13	Peak	62.00	150	Vertical	Pass
1**	1699.800	35.37	-17.32	54.0	-18.63	AV	62.00	150	Vertical	Pass
2	2414.700	94.04	-12.26	74.0	20.04	Peak	350.00	150	Vertical	N/A
2**	2414.700	91.85	-12.26	54.0	37.85	AV	350.00	150	Vertical	N/A
3	4823.800	49.26	-3.37	74.0	-24.74	Peak	162.00	150	Vertical	Pass
3**	4823.800	41.48	-3.37	54.0	-12.52	AV	162.00	150	Vertical	Pass
4	6226.200	52.72	-1.94	74.0	-21.28	Peak	43.00	150	Vertical	Pass
4**	6226.200	41.73	-1.94	54.0	-12.27	AV	43.00	150	Vertical	Pass
5	12283.675	50.27	1.78	74.0	-23.73	Peak	363.00	150	Vertical	Pass
5**	12283.675	41.18	1.78	54.0	-12.82	AV	363.00	150	Vertical	Pass
6	16972.575	53.74	1.95	74.0	-20.26	Peak	57.00	150	Vertical	Pass
6**	16972.575	44.23	1.95	54.0	-9.77	AV	57.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.300	43.18	-16.51	74.0	-30.82	Peak	266.00	150	Horizontal	Pass
1**	1863.300	33.98	-16.51	54.0	-20.02	AV	266.00	150	Horizontal	Pass
2	2439.800	96.68	-12.66	74.0	22.68	Peak	64.00	150	Horizontal	N/A
2**	2439.800	93.15	-12.66	54.0	39.15	AV	64.00	150	Horizontal	N/A
3	4874.200	51.52	-3.35	74.0	-22.48	Peak	55.00	150	Horizontal	Pass
3**	4874.200	49.97	-3.35	54.0	-4.03	AV	55.00	150	Horizontal	Pass
4	6657.800	53.32	-1.09	74.0	-20.68	Peak	255.00	150	Horizontal	Pass
4**	6657.800	42.69	-1.09	54.0	-11.31	AV	255.00	150	Horizontal	Pass
5	10868.312	50.34	-0.19	74.0	-23.66	Peak	133.00	150	Horizontal	Pass
5**	10868.312	41.42	-0.19	54.0	-12.58	AV	133.00	150	Horizontal	Pass
6	17424.337	54.08	3.64	74.0	-19.92	Peak	204.00	150	Horizontal	Pass
6**	17424.337	45.97	3.64	54.0	-8.03	AV	204.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1866.400	41.97	-16.57	74.0	-32.03	Peak	38.00	150	Vertical	Pass
1**	1866.400	29.10	-16.57	54.0	-24.90	AV	38.00	150	Vertical	Pass
2	2439.800	94.65	-12.66	74.0	20.65	Peak	120.00	150	Vertical	N/A
2**	2439.800	91.51	-12.66	54.0	37.51	AV	120.00	150	Vertical	N/A
3	4874.200	49.90	-3.35	74.0	-24.10	Peak	155.00	150	Vertical	Pass
3**	4874.200	46.16	-3.35	54.0	-7.84	AV	155.00	150	Vertical	Pass
4	6684.400	53.10	-0.28	74.0	-20.90	Peak	100.00	150	Vertical	Pass
4**	6684.400	43.67	-0.28	54.0	-10.33	AV	100.00	150	Vertical	Pass
5	12119.224	49.87	0.56	74.0	-24.13	Peak	360.00	150	Vertical	Pass
5**	12119.224	40.46	0.56	54.0	-13.54	AV	360.00	150	Vertical	Pass
6	17424.337	54.61	3.64	74.0	-19.39	Peak	305.00	150	Vertical	Pass
6**	17424.337	45.61	3.64	54.0	-8.39	AV	305.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1699.500	42.82	-17.32	74.0	-31.18	Peak	222.00	150	Horizontal	Pass
1**	1699.500	35.13	-17.32	54.0	-18.87	AV	222.00	150	Horizontal	Pass
2	2464.900	96.49	-12.74	74.0	22.49	Peak	82.00	150	Horizontal	N/A
2**	2464.900	93.25	-12.74	54.0	39.25	AV	82.00	150	Horizontal	N/A
3	4924.200	52.29	-2.60	74.0	-21.71	Peak	319.00	150	Horizontal	Pass
3**	4924.200	48.34	-2.60	54.0	-5.66	AV	319.00	150	Horizontal	Pass
4	7386.400	49.37	-3.93	74.0	-24.63	Peak	360.00	150	Horizontal	Pass
4**	7386.400	40.08	-3.93	54.0	-13.92	AV	360.00	150	Horizontal	Pass
5	12265.562	49.98	1.31	74.0	-24.02	Peak	0.00	150	Horizontal	Pass
5**	12265.562	41.14	1.31	54.0	-12.86	AV	0.00	150	Horizontal	Pass
6	17422.238	54.35	3.70	74.0	-19.65	Peak	243.00	150	Horizontal	Pass
6**	17422.238	46.26	3.70	54.0	-7.74	AV	243.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11b High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.900	41.38	-16.45	74.0	-32.62	Peak	36.00	150	Vertical	Pass
1**	1861.900	29.44	-16.45	54.0	-24.56	AV	36.00	150	Vertical	Pass
2	2464.800	94.82	-12.74	74.0	20.82	Peak	119.00	150	Vertical	N/A
2**	2464.800	91.92	-12.74	54.0	37.92	AV	119.00	150	Vertical	N/A
3	4918.800	48.96	-2.37	74.0	-25.04	Peak	251.00	150	Vertical	Pass
3**	4918.800	40.29	-2.37	54.0	-13.71	AV	251.00	150	Vertical	Pass
4	6280.000	52.41	-0.21	74.0	-21.59	Peak	322.00	150	Vertical	Pass
4**	6280.000	42.99	-0.21	54.0	-11.01	AV	322.00	150	Vertical	Pass
5	10463.799	49.42	-0.89	74.0	-24.58	Peak	105.00	150	Vertical	Pass
5**	10463.799	40.12	-0.89	54.0	-13.88	AV	105.00	150	Vertical	Pass
6	17187.301	54.00	2.44	74.0	-20.00	Peak	336.00	150	Vertical	Pass
6**	17187.301	44.73	2.44	54.0	-9.27	AV	336.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.900	42.54	-16.54	74.0	-31.46	Peak	260.00	150	Horizontal	Pass
1**	1863.900	30.58	-16.54	54.0	-23.42	AV	260.00	150	Horizontal	Pass
2	2406.100	100.99	-12.32	74.0	26.99	Peak	25.00	150	Horizontal	N/A
2**	2406.100	93.73	-12.32	54.0	39.73	AV	25.00	150	Horizontal	N/A
3	4824.200	49.98	-3.39	74.0	-24.02	Peak	333.00	150	Horizontal	Pass
3**	4824.200	46.49	-3.39	54.0	-7.51	AV	333.00	150	Horizontal	Pass
4	6617.000	51.95	-0.05	74.0	-22.05	Peak	68.00	150	Horizontal	Pass
4**	6617.000	42.77	-0.05	54.0	-11.23	AV	68.00	150	Horizontal	Pass
5	12273.325	50.98	1.56	74.0	-23.02	Peak	212.00	150	Horizontal	Pass
5**	12273.325	41.92	1.56	54.0	-12.08	AV	212.00	150	Horizontal	Pass
6	17476.313	54.51	2.80	74.0	-19.49	Peak	1.00	150	Horizontal	Pass
6**	17476.313	46.41	2.80	54.0	-7.59	AV	1.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.300	41.58	-16.56	74.0	-32.42	Peak	342.00	150	Vertical	Pass
1**	1859.300	28.22	-16.56	54.0	-25.78	AV	342.00	150	Vertical	Pass
2	2419.000	97.04	-12.29	74.0	23.04	Peak	357.00	150	Vertical	N/A
2**	2419.000	90.40	-12.29	54.0	36.40	AV	357.00	150	Vertical	N/A
3	4816.600	50.38	-3.18	74.0	-23.62	Peak	174.00	150	Vertical	Pass
3**	4816.600	40.08	-3.18	54.0	-13.92	AV	174.00	150	Vertical	Pass
4	6694.400	51.99	-0.38	74.0	-22.01	Peak	304.00	150	Vertical	Pass
4**	6694.400	43.43	-0.38	54.0	-10.57	AV	304.00	150	Vertical	Pass
5	11348.437	49.68	0.02	74.0	-24.32	Peak	297.00	150	Vertical	Pass
5**	11348.437	39.96	0.02	54.0	-14.04	AV	297.00	150	Vertical	Pass
6	17641.949	54.67	2.11	74.0	-19.33	Peak	149.00	150	Vertical	Pass
6**	17641.949	44.80	2.11	54.0	-9.20	AV	149.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.500	44.23	-16.57	74.0	-29.77	Peak	260.00	150	Horizontal	Pass
1**	1859.500	32.46	-16.57	54.0	-21.54	AV	260.00	150	Horizontal	Pass
2	2431.900	100.13	-12.82	74.0	26.13	Peak	42.00	150	Horizontal	N/A
2**	2431.900	92.62	-12.82	54.0	38.62	AV	42.00	150	Horizontal	N/A
3	4874.400	50.31	-3.36	74.0	-23.69	Peak	360.00	150	Horizontal	Pass
3**	4874.400	42.45	-3.36	54.0	-11.55	AV	360.00	150	Horizontal	Pass
4	6610.800	52.31	0.19	74.0	-21.69	Peak	199.00	150	Horizontal	Pass
4**	6610.800	43.65	0.19	54.0	-10.35	AV	199.00	150	Horizontal	Pass
5	10902.237	50.06	0.16	74.0	-23.94	Peak	22.00	150	Horizontal	Pass
5**	10902.237	40.35	0.16	54.0	-13.65	AV	22.00	150	Horizontal	Pass
6	17424.337	54.06	3.64	74.0	-19.94	Peak	3.00	150	Horizontal	Pass
6**	17424.337	45.44	3.64	54.0	-8.56	AV	3.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.200	41.22	-16.51	74.0	-32.78	Peak	42.00	150	Vertical	Pass
1**	1863.200	29.79	-16.51	54.0	-24.21	AV	42.00	150	Vertical	Pass
2	2430.800	96.65	-12.78	74.0	22.65	Peak	359.00	150	Vertical	N/A
2**	2430.800	89.93	-12.78	54.0	35.93	AV	359.00	150	Vertical	N/A
3	4358.800	47.93	-3.79	74.0	-26.07	Peak	334.00	150	Vertical	Pass
3**	4358.800	38.38	-3.79	54.0	-15.62	AV	334.00	150	Vertical	Pass
4	6269.000	52.46	-0.36	74.0	-21.54	Peak	272.00	150	Vertical	Pass
4**	6269.000	42.37	-0.36	54.0	-11.63	AV	272.00	150	Vertical	Pass
5	11432.674	50.08	-0.08	74.0	-23.92	Peak	361.00	150	Vertical	Pass
5**	11432.674	41.23	-0.08	54.0	-12.77	AV	361.00	150	Vertical	Pass
6	17423.026	54.58	3.67	74.0	-19.42	Peak	1.00	150	Vertical	Pass
6**	17423.026	45.60	3.67	54.0	-8.40	AV	1.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1862.100	41.85	-16.46	74.0	-32.15	Peak	253.00	150	Horizontal	Pass
1**	1862.100	32.35	-16.46	54.0	-21.65	AV	253.00	150	Horizontal	Pass
2	2469.100	99.92	-12.58	74.0	25.92	Peak	73.00	150	Horizontal	N/A
2**	2469.100	92.91	-12.58	54.0	38.91	AV	73.00	150	Horizontal	N/A
3	4583.200	48.53	-3.70	74.0	-25.47	Peak	213.00	150	Horizontal	Pass
3**	4583.200	38.94	-3.70	54.0	-15.06	AV	213.00	150	Horizontal	Pass
4	6689.200	53.25	-0.26	74.0	-20.75	Peak	93.00	150	Horizontal	Pass
4**	6689.200	44.64	-0.26	54.0	-9.36	AV	93.00	150	Horizontal	Pass
5	11739.725	49.69	0.80	74.0	-24.31	Peak	293.00	150	Horizontal	Pass
5**	11739.725	40.32	0.80	54.0	-13.68	AV	293.00	150	Horizontal	Pass
6	17434.575	54.40	3.28	74.0	-19.60	Peak	335.00	150	Horizontal	Pass
6**	17434.575	45.30	3.28	54.0	-8.70	AV	335.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11g High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.300	42.78	-16.47	74.0	-31.22	Peak	43.00	150	Vertical	Pass
1**	1861.300	29.54	-16.47	54.0	-24.46	AV	43.00	150	Vertical	Pass
2	2455.000	97.01	-12.67	74.0	23.01	Peak	117.00	150	Vertical	N/A
2**	2455.000	90.58	-12.67	54.0	36.58	AV	117.00	150	Vertical	N/A
3	4036.800	46.55	-4.79	74.0	-27.45	Peak	349.00	150	Vertical	Pass
3**	4036.800	37.99	-4.79	54.0	-16.01	AV	349.00	150	Vertical	Pass
4	5981.600	51.92	-1.54	74.0	-22.08	Peak	218.00	150	Vertical	Pass
4**	5981.600	42.10	-1.54	54.0	-11.90	AV	218.00	150	Vertical	Pass
5	11305.026	49.26	0.28	74.0	-24.74	Peak	360.00	150	Vertical	Pass
5**	11305.026	39.87	0.28	54.0	-14.13	AV	360.00	150	Vertical	Pass
6	17417.251	54.26	3.69	74.0	-19.74	Peak	304.00	150	Vertical	Pass
6**	17417.251	46.52	3.69	54.0	-7.48	AV	304.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.600	42.74	-16.45	74.0	-31.26	Peak	274.00	150	Horizontal	Pass
1**	1861.600	30.04	-16.45	54.0	-23.96	AV	274.00	150	Horizontal	Pass
2	2418.700	100.40	-12.27	74.0	26.40	Peak	360.00	150	Horizontal	N/A
2**	2418.700	93.64	-12.27	54.0	39.64	AV	360.00	150	Horizontal	N/A
3	4815.400	52.07	-3.08	74.0	-21.93	Peak	332.00	150	Horizontal	Pass
3**	4815.400	40.20	-3.08	54.0	-13.80	AV	332.00	150	Horizontal	Pass
4	6691.800	51.96	-0.30	74.0	-22.04	Peak	36.00	150	Horizontal	Pass
4**	6691.800	43.69	-0.30	54.0	-10.31	AV	36.00	150	Horizontal	Pass
5	11763.299	49.93	1.28	74.0	-24.07	Peak	102.00	150	Horizontal	Pass
5**	11763.299	41.27	1.28	54.0	-12.73	AV	102.00	150	Horizontal	Pass
6	17234.287	54.33	1.55	74.0	-19.67	Peak	1.00	150	Horizontal	Pass
6**	17234.287	44.65	1.55	54.0	-9.35	AV	1.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.400	42.83	-16.46	74.0	-31.17	Peak	43.00	150	Vertical	Pass
1**	1861.400	31.84	-16.46	54.0	-22.16	AV	43.00	150	Vertical	Pass
2	2418.400	96.78	-12.25	74.0	22.78	Peak	359.00	150	Vertical	N/A
2**	2418.400	89.30	-12.25	54.0	35.30	AV	359.00	150	Vertical	N/A
3	4250.200	47.39	-4.78	74.0	-26.61	Peak	32.00	150	Vertical	Pass
3**	4250.200	38.01	-4.78	54.0	-15.99	AV	32.00	150	Vertical	Pass
4	6255.200	52.28	-1.71	74.0	-21.72	Peak	175.00	150	Vertical	Pass
4**	6255.200	42.68	-1.71	54.0	-11.32	AV	175.00	150	Vertical	Pass
5	11072.151	49.68	-1.16	74.0	-24.32	Peak	268.00	150	Vertical	Pass
5**	11072.151	40.40	-1.16	54.0	-13.60	AV	268.00	150	Vertical	Pass
6	16233.375	53.70	1.33	74.0	-20.30	Peak	1.00	150	Vertical	Pass
6**	16233.375	44.06	1.33	54.0	-9.94	AV	1.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1864.600	41.88	-16.56	74.0	-32.12	Peak	260.00	150	Horizontal	Pass
1**	1864.600	33.09	-16.56	54.0	-20.91	AV	260.00	150	Horizontal	Pass
2	2443.600	99.63	-12.80	74.0	25.63	Peak	29.00	150	Horizontal	N/A
2**	2443.600	92.87	-12.80	54.0	38.87	AV	29.00	150	Horizontal	N/A
3	4400.800	47.48	-4.91	74.0	-26.52	Peak	50.00	150	Horizontal	Pass
3**	4400.800	38.74	-4.91	54.0	-15.26	AV	50.00	150	Horizontal	Pass
4	6984.600	52.88	0.58	74.0	-21.12	Peak	175.00	150	Horizontal	Pass
4**	6984.600	43.96	0.58	54.0	-10.04	AV	175.00	150	Horizontal	Pass
5	12092.488	49.89	0.52	74.0	-24.11	Peak	295.00	150	Horizontal	Pass
5**	12092.488	41.24	0.52	54.0	-12.76	AV	295.00	150	Horizontal	Pass
6	17420.136	54.15	3.75	74.0	-19.85	Peak	58.00	150	Horizontal	Pass
6**	17420.136	46.19	3.75	54.0	-7.81	AV	58.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1862.300	40.89	-16.47	74.0	-33.11	Peak	46.00	150	Vertical	Pass
1**	1862.300	28.84	-16.47	54.0	-25.16	AV	46.00	150	Vertical	Pass
2	2441.100	95.72	-12.83	74.0	21.72	Peak	359.00	150	Vertical	N/A
2**	2441.100	88.67	-12.83	54.0	34.67	AV	359.00	150	Vertical	N/A
3	4054.600	46.47	-4.89	74.0	-27.53	Peak	212.00	150	Vertical	Pass
3**	4054.600	36.90	-4.89	54.0	-17.10	AV	212.00	150	Vertical	Pass
4	6999.400	53.31	0.24	74.0	-20.69	Peak	0.00	150	Vertical	Pass
4**	6999.400	43.59	0.24	54.0	-10.41	AV	0.00	150	Vertical	Pass
5	10947.088	49.68	-0.18	74.0	-24.32	Peak	134.00	150	Vertical	Pass
5**	10947.088	40.97	-0.18	54.0	-13.03	AV	134.00	150	Vertical	Pass
6	17473.950	54.38	2.84	74.0	-19.62	Peak	142.00	150	Vertical	Pass
6**	17473.950	45.77	2.84	54.0	-8.23	AV	142.00	150	Vertical	Pass



## 1 GHz to 18 GHz, ANT H 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1864.000	41.70	-16.54	74.0	-32.30	Peak	258.00	150	Horizontal	Pass
1**	1864.000	32.92	-16.54	54.0	-21.08	AV	258.00	150	Horizontal	Pass
2	2455.200	100.28	-12.68	74.0	26.28	Peak	62.00	150	Horizontal	N/A
2**	2455.200	92.52	-12.68	54.0	38.52	AV	62.00	150	Horizontal	N/A
3	3927.000	46.56	-5.50	74.0	-27.44	Peak	116.00	150	Horizontal	Pass
3**	3927.000	36.82	-5.50	54.0	-17.18	AV	116.00	150	Horizontal	Pass
4	6273.600	52.60	-0.20	74.0	-21.40	Peak	182.00	150	Horizontal	Pass
4**	6273.600	43.79	-0.20	54.0	-10.21	AV	182.00	150	Horizontal	Pass
5	11953.050	49.68	1.26	74.0	-24.32	Peak	304.00	150	Horizontal	Pass
5**	11953.050	40.50	1.26	54.0	-13.50	AV	304.00	150	Horizontal	Pass
6	17439.037	54.85	3.07	74.0	-19.15	Peak	271.00	150	Horizontal	Pass
6**	17439.037	46.63	3.07	54.0	-7.37	AV	271.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n20 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1860.600	41.86	-16.51	74.0	-32.14	Peak	46.00	150	Vertical	Pass
1**	1860.600	33.18	-16.51	54.0	-20.82	AV	46.00	150	Vertical	Pass
2	2458.600	95.57	-12.75	74.0	21.57	Peak	128.00	150	Vertical	N/A
2**	2458.600	88.31	-12.75	54.0	34.31	AV	128.00	150	Vertical	N/A
3	4063.600	46.69	-5.22	74.0	-27.31	Peak	299.00	150	Vertical	Pass
3**	4063.600	38.45	-5.22	54.0	-15.55	AV	299.00	150	Vertical	Pass
4	6684.000	52.65	-0.32	74.0	-21.35	Peak	265.00	150	Vertical	Pass
4**	6684.000	44.22	-0.32	54.0	-9.78	AV	265.00	150	Vertical	Pass
5	11268.513	49.83	-0.29	74.0	-24.17	Peak	49.00	150	Vertical	Pass
5**	11268.513	40.07	-0.29	54.0	-13.93	AV	49.00	150	Vertical	Pass
6	17422.500	54.42	3.69	74.0	-19.58	Peak	107.00	150	Vertical	Pass
6**	17422.500	46.43	3.69	54.0	-7.57	AV	107.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.300	42.32	-16.51	74.0	-31.68	Peak	272.00	150	Horizontal	Pass
1**	1863.300	33.70	-16.51	54.0	-20.30	AV	272.00	150	Horizontal	Pass
2	2405.300	98.92	-12.31	74.0	24.92	Peak	360.00	150	Horizontal	N/A
2**	2405.300	92.16	-12.31	54.0	38.16	AV	360.00	150	Horizontal	N/A
3	4042.600	46.62	-4.87	74.0	-27.38	Peak	118.00	150	Horizontal	Pass
3**	4042.600	37.33	-4.87	54.0	-16.67	AV	118.00	150	Horizontal	Pass
4	6272.800	53.24	-0.20	74.0	-20.76	Peak	101.00	150	Horizontal	Pass
4**	6272.800	43.28	-0.20	54.0	-10.72	AV	101.00	150	Horizontal	Pass
5	11065.825	49.54	-0.97	74.0	-24.46	Peak	173.00	150	Horizontal	Pass
5**	11065.825	40.46	-0.97	54.0	-13.54	AV	173.00	150	Horizontal	Pass
6	17189.663	54.28	2.35	74.0	-19.72	Peak	1.00	150	Horizontal	Pass
6**	17189.663	45.43	2.35	54.0	-8.57	AV	1.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Low Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1859.600	42.90	-16.57	74.0	-31.10	Peak	46.00	150	Vertical	Pass
1**	1859.600	29.11	-16.57	54.0	-24.89	AV	46.00	150	Vertical	Pass
2	2423.900	93.39	-12.78	74.0	19.39	Peak	357.00	150	Vertical	N/A
2**	2423.900	87.36	-12.78	54.0	33.36	AV	357.00	150	Vertical	N/A
3	4059.600	46.39	-4.95	74.0	-27.61	Peak	264.00	150	Vertical	Pass
3**	4059.600	37.63	-4.95	54.0	-16.37	AV	264.00	150	Vertical	Pass
4	6979.600	53.03	0.83	74.0	-20.97	Peak	132.00	150	Vertical	Pass
4**	6979.600	43.84	0.83	54.0	-10.16	AV	132.00	150	Vertical	Pass
5	11081.062	49.42	-1.36	74.0	-24.58	Peak	323.00	150	Vertical	Pass
5**	11081.062	39.89	-1.36	54.0	-14.11	AV	323.00	150	Vertical	Pass
6	17307.525	54.31	1.44	74.0	-19.69	Peak	273.00	150	Vertical	Pass
6**	17307.525	44.62	1.44	54.0	-9.38	AV	273.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.200	42.40	-16.51	74.0	-31.60	Peak	265.00	150	Horizontal	Pass
1**	1863.200	28.66	-16.51	54.0	-25.34	AV	265.00	150	Horizontal	Pass
2	2420.700	99.11	-12.40	74.0	25.11	Peak	49.00	150	Horizontal	N/A
2**	2420.700	91.99	-12.40	54.0	37.99	AV	49.00	150	Horizontal	N/A
3	4290.400	47.29	-4.97	74.0	-26.71	Peak	244.00	150	Horizontal	Pass
3**	4290.400	39.97	-4.97	54.0	-14.03	AV	244.00	150	Horizontal	Pass
4	6973.000	52.76	0.78	74.0	-21.24	Peak	261.00	150	Horizontal	Pass
4**	6973.000	43.06	0.78	54.0	-10.94	AV	261.00	150	Horizontal	Pass
5	10944.213	49.55	-0.12	74.0	-24.45	Peak	104.00	150	Horizontal	Pass
5**	10944.213	41.01	-0.12	54.0	-12.99	AV	104.00	150	Horizontal	Pass
6	16024.162	53.63	0.65	74.0	-20.37	Peak	273.00	150	Horizontal	Pass
6**	16024.162	45.53	0.65	54.0	-8.47	AV	273.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 Middle Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1862.800	39.75	-16.49	74.0	-34.25	Peak	30.00	150	Vertical	Pass
1**	1862.800	31.14	-16.49	54.0	-22.86	AV	30.00	150	Vertical	Pass
2	2422.100	94.35	-12.56	74.0	20.35	Peak	360.00	150	Vertical	N/A
2**	2422.100	87.40	-12.56	54.0	33.40	AV	360.00	150	Vertical	N/A
3	4139.400	46.97	-4.85	74.0	-27.03	Peak	330.00	150	Vertical	Pass
3**	4139.400	38.32	-4.85	54.0	-15.68	AV	330.00	150	Vertical	Pass
4	6262.600	51.93	-1.11	74.0	-22.07	Peak	146.00	150	Vertical	Pass
4**	6262.600	42.67	-1.11	54.0	-11.33	AV	146.00	150	Vertical	Pass
5	10938.750	50.05	-0.05	74.0	-23.95	Peak	75.00	150	Vertical	Pass
5**	10938.750	40.91	-0.05	54.0	-13.09	AV	75.00	150	Vertical	Pass
6	17471.850	54.70	2.88	74.0	-19.30	Peak	305.00	150	Vertical	Pass
6**	17471.850	45.39	2.88	54.0	-8.61	AV	305.00	150	Vertical	Pass

## 1 GHz to 18 GHz, ANT H 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1861.600	42.53	-16.45	74.0	-31.47	Peak	253.00	150	Horizontal	Pass
1**	1861.600	29.47	-16.45	54.0	-24.53	AV	253.00	150	Horizontal	Pass
2	2436.000	98.71	-12.76	74.0	24.71	Peak	48.00	150	Horizontal	N/A
2**	2436.000	92.38	-12.76	54.0	38.38	AV	48.00	150	Horizontal	N/A
3	4452.400	47.68	-3.73	74.0	-26.32	Peak	259.00	150	Horizontal	Pass
3**	4452.400	38.65	-3.73	54.0	-15.35	AV	259.00	150	Horizontal	Pass
4	6602.000	52.53	-0.19	74.0	-21.47	Peak	174.00	150	Horizontal	Pass
4**	6602.000	43.89	-0.19	54.0	-10.11	AV	174.00	150	Horizontal	Pass
5	11671.012	49.81	0.24	74.0	-24.19	Peak	245.00	150	Horizontal	Pass
5**	11671.012	40.69	0.24	54.0	-13.31	AV	245.00	150	Horizontal	Pass
6	17419.350	54.28	3.74	74.0	-19.72	Peak	17.00	150	Horizontal	Pass
6**	17419.350	45.23	3.74	54.0	-8.77	AV	17.00	150	Horizontal	Pass

## 1 GHz to 18 GHz, ANT V 802.11n40 High Channel

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1863.700	42.12	-16.53	74.0	-31.88	Peak	49.00	150	Vertical	Pass
1**	1863.700	28.94	-16.53	54.0	-25.06	AV	49.00	150	Vertical	Pass
2	2437.200	93.75	-12.63	74.0	19.75	Peak	121.00	150	Vertical	N/A
2**	2437.200	86.57	-12.63	54.0	32.57	AV	121.00	150	Vertical	N/A
3	4224.800	46.99	-4.79	74.0	-27.01	Peak	10.00	150	Vertical	Pass
3**	4224.800	37.86	-4.79	54.0	-16.14	AV	10.00	150	Vertical	Pass
4	6758.200	52.33	-1.08	74.0	-21.67	Peak	64.00	150	Vertical	Pass
4**	6758.200	45.20	-1.08	54.0	-8.80	AV	64.00	150	Vertical	Pass
5	11670.150	49.79	0.23	74.0	-24.21	Peak	193.00	150	Vertical	Pass
5**	11670.150	40.36	0.23	54.0	-13.64	AV	193.00	150	Vertical	Pass
6	17424.863	54.27	3.62	74.0	-19.73	Peak	204.00	150	Vertical	Pass
6**	17424.863	45.51	3.62	54.0	-8.49	AV	204.00	150	Vertical	Pass

## A.7 Band Edge (Restricted-band band-edge)

### Test Data

Note <sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note <sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note <sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

### Main Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	56.303	32.61	74	17.697	PEAK	Pass
		2390	47.005	32.61	54	6.995	AVERAGE	Pass
	HIGH	2483.5	54.254	32.54	74	19.746	PEAK	Pass
		2483.5	44.336	32.54	54	9.664	AVERAGE	Pass
802.11g	Low	2390	63.346	32.61	74	10.654	PEAK	Pass
		2390	48.883	32.61	54	5.117	AVERAGE	Pass
	HIGH	2483.5	56.796	32.54	74	17.204	PEAK	Pass
		2483.5	45.725	32.54	54	8.275	AVERAGE	Pass
802.11n20	Low	2390	64.364	32.61	74	9.636	PEAK	Pass
		2390	48.008	32.61	54	5.992	AVERAGE	Pass
	HIGH	2483.5	58.981	32.54	74	15.019	PEAK	Pass
		2483.5	45.670	32.54	54	8.330	AVERAGE	Pass
802.11n40	Low	2390	62.763	32.61	74	11.237	PEAK	Pass
		2390	49.259	32.61	54	4.741	AVERAGE	Pass
	HIGH	2483.5	60.520	32.54	74	13.480	PEAK	Pass
		2483.5	47.074	32.54	54	6.926	AVERAGE	Pass

Aux. Antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390	55.098	32.61	74	18.902	PEAK	Pass
		2390	46.183	32.61	54	7.817	AVERAGE	Pass
	HIGH	2483.5	54.907	32.54	74	19.093	PEAK	Pass
		2483.5	44.291	32.54	54	9.709	AVERAGE	Pass
802.11g	Low	2390	60.812	32.61	74	13.188	PEAK	Pass
		2390	47.986	32.61	54	6.014	AVERAGE	Pass
	HIGH	2483.5	59.437	32.54	74	14.563	PEAK	Pass
		2483.5	46.550	32.54	54	7.450	AVERAGE	Pass
802.11n20	Low	2390	64.117	32.61	74	9.883	PEAK	Pass
		2390	48.122	32.61	54	5.878	AVERAGE	Pass
	HIGH	2483.5	59.201	32.54	74	14.799	PEAK	Pass
		2483.5	46.009	32.54	54	7.991	AVERAGE	Pass
802.11n40	Low	2390	64.768	32.61	74	9.232	PEAK	Pass
		2390	49.728	32.61	54	4.272	AVERAGE	Pass
	HIGH	2483.5	65.959	32.61	74	8.041	PEAK	Pass
		2483.5	51.139	32.61	54	2.861	AVERAGE	Pass



## Test plots

### Main Antenna

802.11b Mode:

#### LOW CHANNEL, PEAK



#### HIGH CHANNEL, PEAK



#### LOW CHANNEL, AV



#### LOW CHANNEL, AV



#### HIGH CHANNEL, AV



## 802.11g Mode:

### LOW CHANNEL, PEAK



### HIGH CHANNEL, PEAK



### LOW CHANNEL, AV



### LOW CHANNEL, AV



### HIGH CHANNEL, AV



### HIGH CHANNEL, AV





802.11n-20 MHz Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



LOW CHANNEL, AV



HIGH CHANNEL, AV



HIGH CHANNEL, AV



802.11n-40 MHz Mode:

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK



LOW CHANNEL, AV



LOW CHANNEL, AV



HIGH CHANNEL, AV



HIGH CHANNEL, AV






## Aux. Antenna

### 802.11b Mode:

#### LOW CHANNEL, PEAK

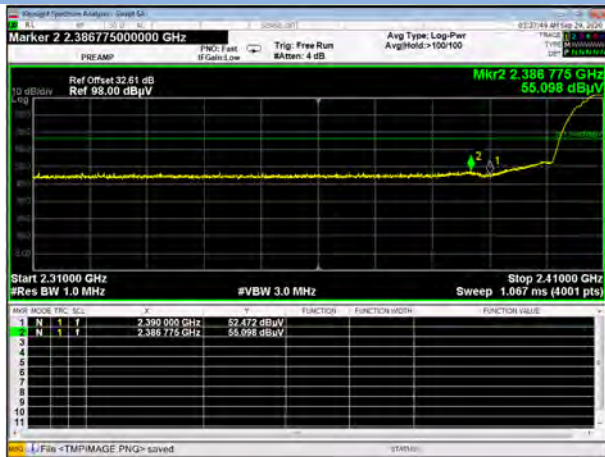

#### HIGH CHANNEL, PEAK



#### LOW CHANNEL, AV



#### HIGH CHANNEL, AV



### 802.11g Mode:

#### LOW CHANNEL, PEAK



#### HIGH CHANNEL, PEAK



## LOW CHANNEL, AV



## LOW CHANNEL, AV



## HIGH CHANNEL, AV



## HIGH CHANNEL, AV



## 802.11n-20 MHz Mode:

## LOW CHANNEL, PEAK



## HIGH CHANNEL, PEAK





## LOW CHANNEL, AV



## LOW CHANNEL, AV



## HIGH CHANNEL, AV



## HIGH CHANNEL, AV



## 802.11n-40 MHz Mode:

## LOW CHANNEL, PEAK



## LOW CHANNEL, AV



## LOW CHANNEL, AV



## LOW CHANNEL, PEAK



## LOW CHANNEL, AV



## LOW CHANNEL, AV



## HIGH CHANNEL, PEAK



## HIGH CHANNEL, AV



## HIGH CHANNEL, AV



## A.8 Power Spectral Density (PSD)

### Test Data

#### Main Antenna

##### 802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-16.34	8
Middle	-16.61	8
High	-16.13	8

##### 802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-19.73	8
Middle	-20.26	8
High	-20.14	8

##### 802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-20.74	8
Middle	-21.10	8
High	-20.90	8

##### 802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-24.86	8
Middle	-24.49	8
High	-24.74	8

Aux. Antenna

## 802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-18.20	8
Middle	-17.52	8
High	-16.09	8

## 802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-20.20	8
Middle	-19.86	8
High	-19.52	8

## 802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-21.11	8
Middle	-21.10	8
High	-20.99	8

## 802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
Low	-25.71	8
Middle	-24.60	8
High	-24.26	8



## Test plots

### Main Antenna

#### 802.11b LOW CHANNEL




#### 802.11b MIDDLE CHANNEL




#### 802.11b HIGH CHANNEL




#### 802.11g LOW CHANNEL

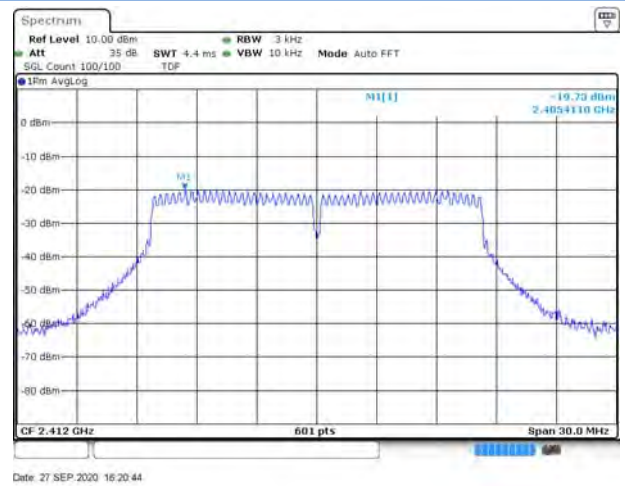


#### 802.11g MIDDLE CHANNEL

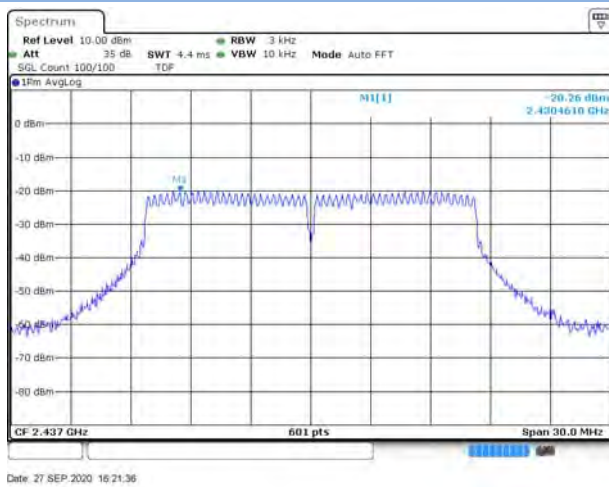


#### 802.11g HIGH CHANNEL

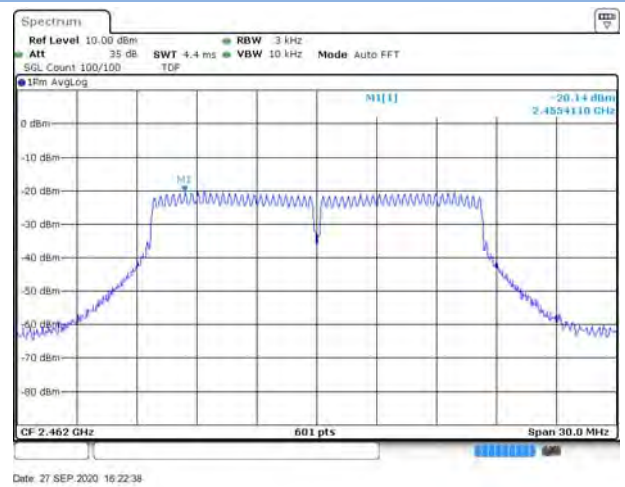


## 802.11n-20 MHz LOW CHANNEL

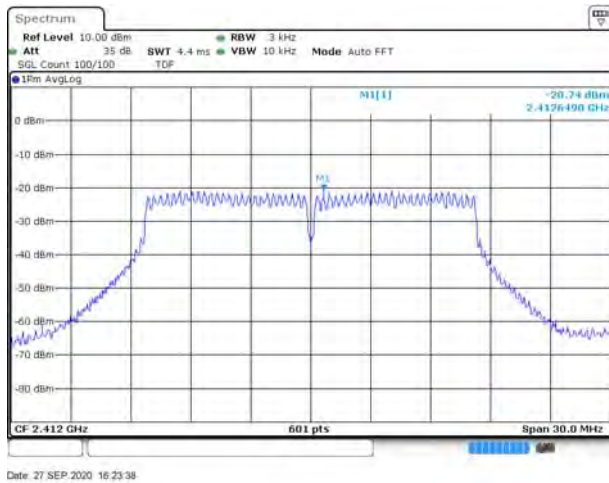


## 802.11 n-20 MHz MIDDLE CHANNEL

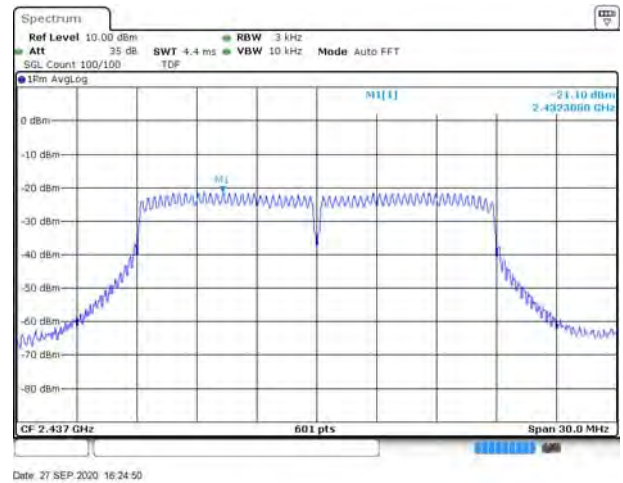


## 802.11n-20 MHz HIGH CHANNEL

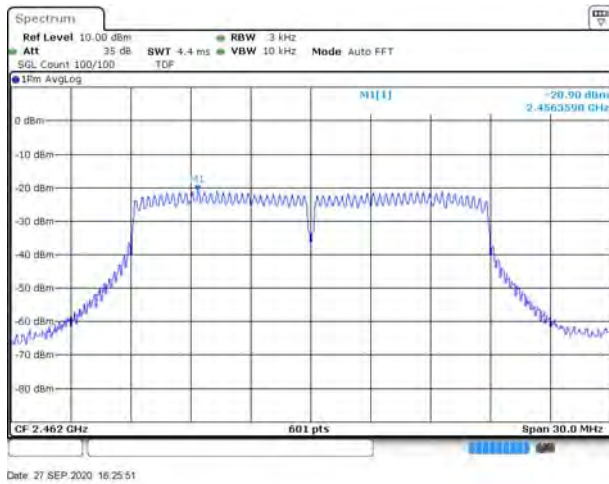


## 802.11n-40 MHz LOW CHANNEL

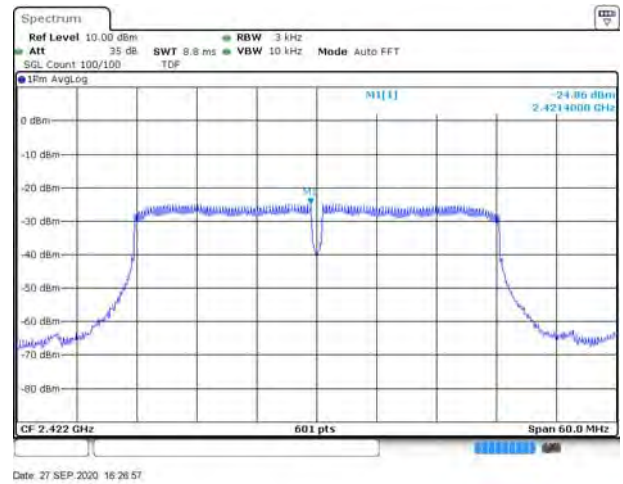

## 802.11n-40 MHz MIDDLE CHANNEL

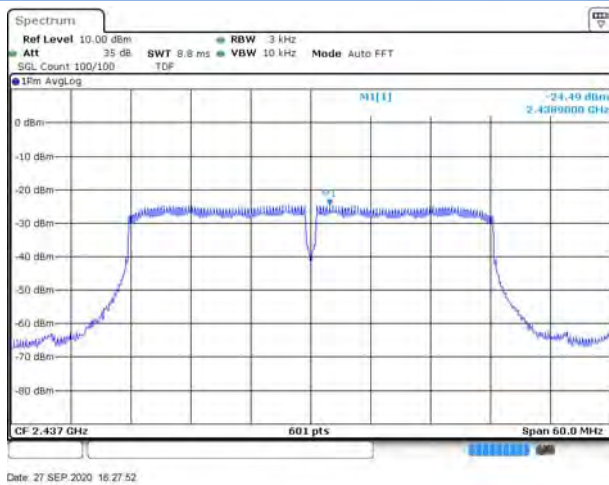

## 802.11n-40 MHz HIGH CHANNEL

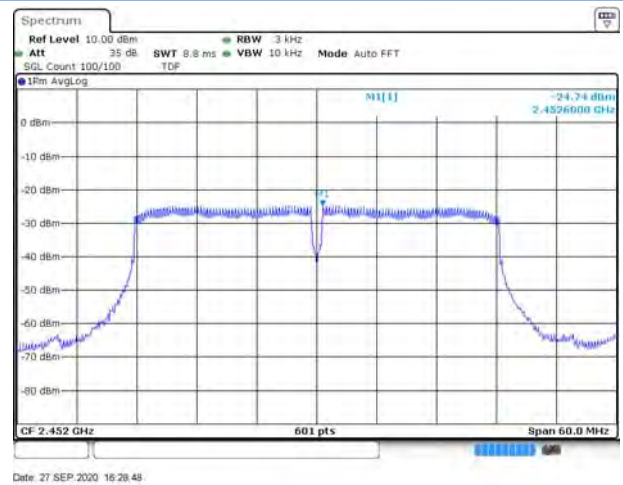

## Aux. Antenna

### 802.11b LOW CHANNEL




### 802.11b MIDDLE CHANNEL




### 802.11b HIGH CHANNEL




### 802.11g LOW CHANNEL

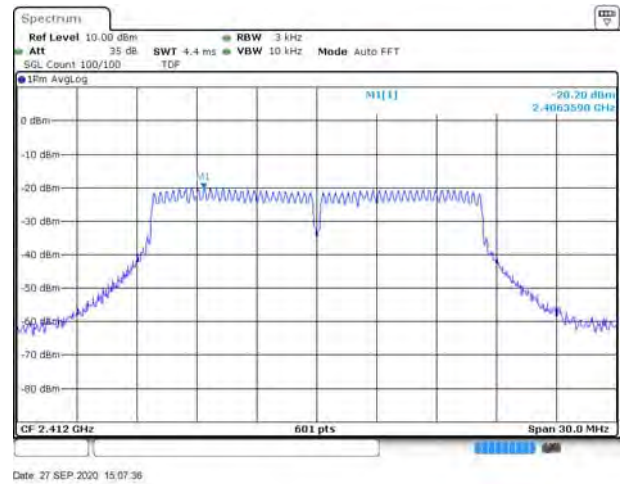

### 802.11g MIDDLE CHANNEL

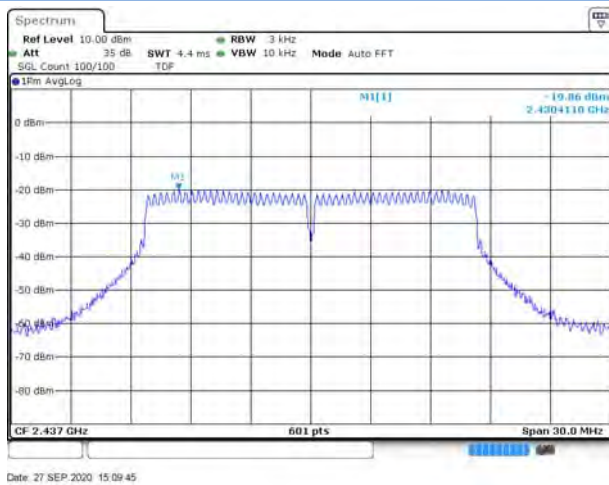


### 802.11g HIGH CHANNEL

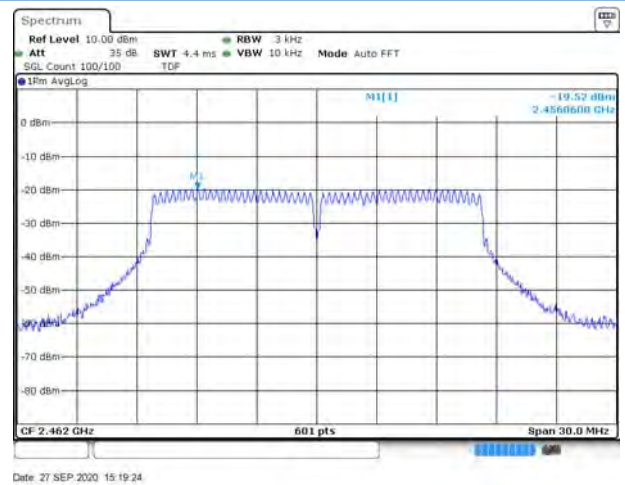





## 802.11n-20 MHz LOW CHANNEL

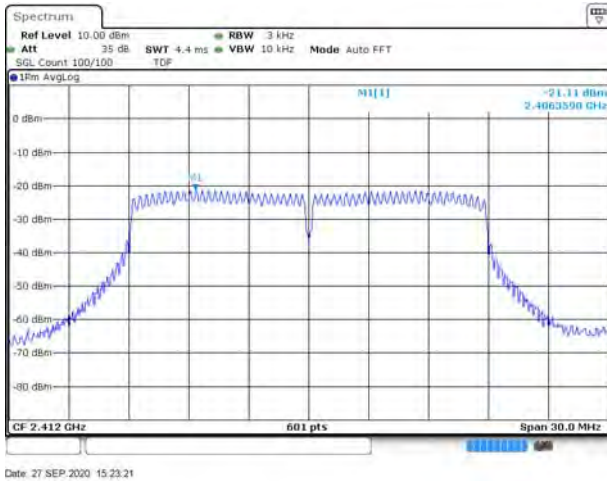


## 802.11 n-20 MHz MIDDLE CHANNEL

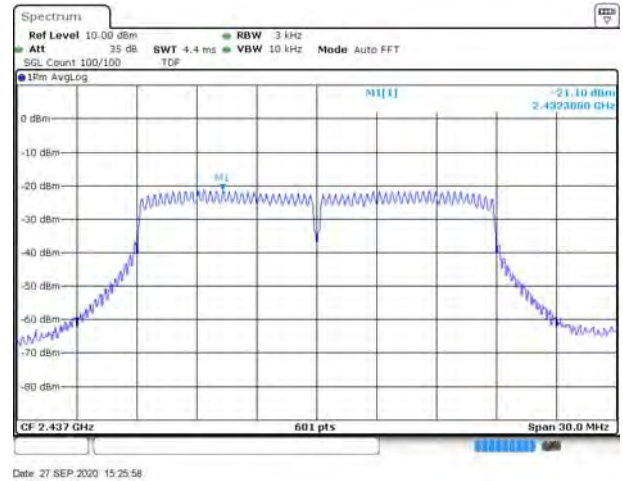


## 802.11n-20 MHz HIGH CHANNEL

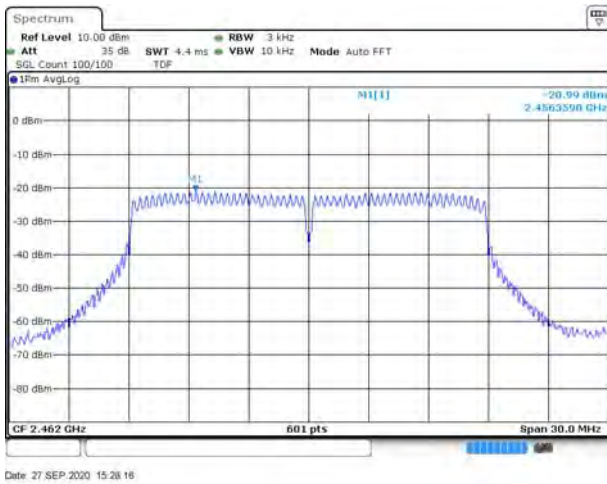


## 802.11n-40 MHz LOW CHANNEL

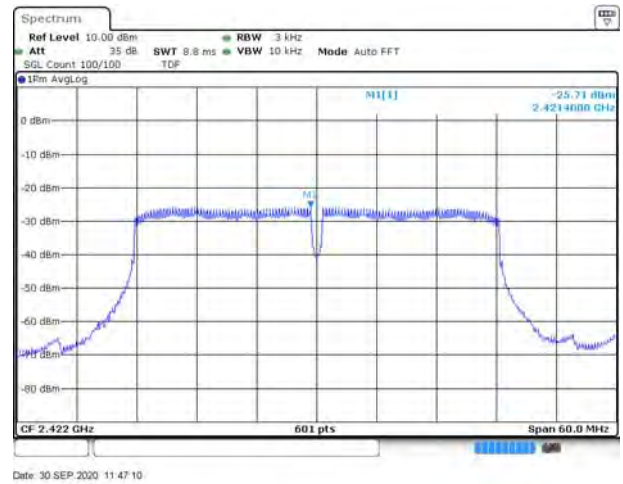

## 802.11n-40 MHz MIDDLE CHANNEL

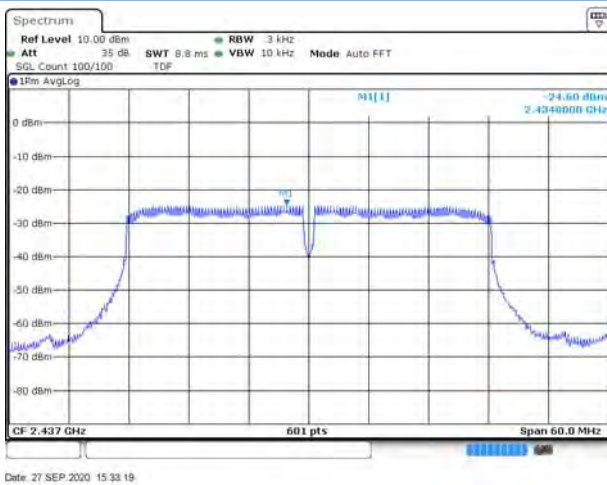

## 802.11n-40 MHz HIGH CHANNEL

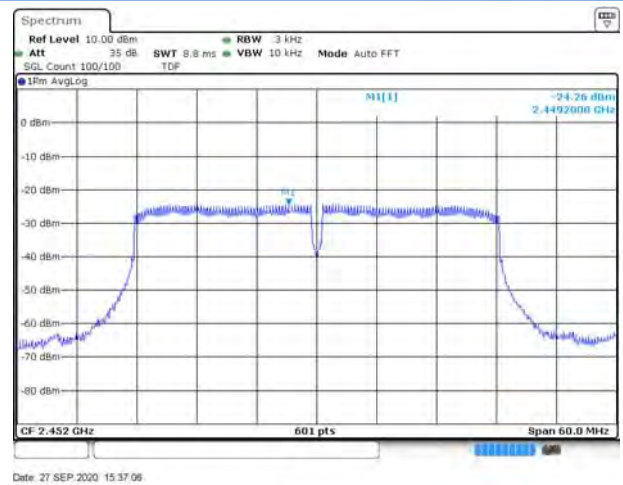

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2090561-AR.pdf".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2090561-AW.pdf".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2090561-AI.pdf".

--END OF REPORT--