



BT TEST REPORT

FCC ID: 2APV3-I9

Product: wireless earphone

Model No.: i9

Additional Model No.: i7,i7s,i9s,i8,i8X,MKJ-X7,MKJ-X8,
MKJ-X9,MKJ-X10

Trade Mark:N/A

Report No.: FCC18050338A

Issued Date: May 17, 2018

Issued for:

Shenzhen Maikejie Technology Co.,Ltd.Floor1,Bldg2,Shangweiyuan Xinyuan ind. Zone,Gushu Community,Xixiang
Street,Baoan Dist ,Shenzhen,Guangdong,China

Issued By:

World Standardization Certification & Testing Group Co.,Ltd.
Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.





Table of Contents

1. GENERAL INFORMATION	4
2. TEST DESCRIPTION	7
2.1 MEASUREMENT UNCERTAINTY	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	9
2.4 CONFIGURATION OF SYSTEM UNDER TEST	9
2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3. SUMMARY OF TEST RESULTS	11
4. MEASUREMENT INSTRUMENTS	12
5. EMC EMISSION TEST	13
5.1 CONDUCTED EMISSION MEASUREMENT	13
5.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
5.1.2 TEST PROCEDURE	14
5.1.3 DEVIATION FROM TEST STANDARD	14
5.1.4 TEST SETUP	14
5.1.5 EUT OPERATING CONDITIONS	14
5.1.6 TEST RESULTS	15
5.2 RADIATED EMISSION MEASUREMENT	16
5.2.1 RADIATED EMISSION LIMITS	16
5.2.2 TEST PROCEDURE	17
5.2.3 DEVIATION FROM TEST STANDARD	17
5.2.4 TEST SETUP	18
5.2.5 EUT OPERATING CONDITIONS	19
5.2.5.1 RESULTS (BELOW 30 MHZ)	20
5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)	21
5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)	23
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULTS	34
7. AVERAGE TIME OF OCCUPANCY	35
7.1 APPLIED PROCEDURES / LIMIT	35
7.2 TEST PROCEDURE	35
7.3 DEVIATION FROM STANDARD	35
7.4 TEST SETUP	36
7.5 EUT OPERATION CONDITIONS	36





7.6TEST RESULTS	37
8. HOPPING CHANNEL SEPARATION MEASUREMENT	43
8.1 APPLIED PROCEDURES / LIMIT	43
8.2 TEST PROCEDURE	43
8.3 DEVIATION FROM STANDARD	43
8.4 TEST SETUP	43
8.5 EUT OPERATION CONDITIONS	43
8.6TEST RESULTS	44
9. BANDWIDTH TEST	53
9.1 APPLIED PROCEDURES / LIMIT	53
9.2 TEST PROCEDURE	53
9.3 DEVIATION FROM STANDARD	53
9.4 TEST SETUP	53
9.5 EUT OPERATION CONDITIONS	53
9.6TEST RESULTS	54
10. PEAK OUTPUT POWER TEST	63
10.1 APPLIED PROCEDURES / LIMIT	63
10.2 TEST PROCEDURE	63
10.3 DEVIATION FROM STANDARD	63
10.4 TEST SETUP	63
10.5 EUT OPERATION CONDITIONS	63
10.6TEST RESULTS	64
11. 100KHZ BAND EDGES MEASUREMENT	69
11.1 APPLIED PROCEDURES / LIMIT	69
12. ANTENNA APPLICATION	80
13. EUT TEST PHOTO	81
14.PHOTOGRAPHS OF EUT	82





1. GENERAL INFORMATION

Product:	wireless earphone
Model No.:	i9
Additional Model:	i7,i7s,i9s,i8,i8X,MKJ-X7,MKJ-X8,MKJ-X9,MKJ-X10
Applicant:	Shenzhen Maikejie Technology Co.,Ltd.
Address:	Floor1,Bldg2,Shangweiyuan Xinyuan ind. Zone,Gushu Community,Xixiang Street,Baoan Dist ,Shenzhen,Guangdong,China
Manufacturer:	Shenzhen Maikejie Technology Co.,Ltd.
Address:	Floor1,Bldg2,Shangweiyuan Xinyuan ind. Zone,Gushu Community,Xixiang Street,Baoan Dist ,Shenzhen,Guangdong,China
Data of receipt:	April 17, 2018
Date of Test:	April 18, 2018 to May 16, 2018
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Pu Shixi
 (Pu Shixi)

Date: May 17, 2018

Check By: Qin Shuiquan
 (Qin Shuiquan)

Date: May 17, 2018

Approved By: Wang Fengbing
 (Wang Fengbing)

Date: May 17, 2018





GENERAL DESCRIPTION OF EUT:

Product	wireless earphone
Model No.	i9
Brand Name	N/A
Hardware version:	N/A
Software version:	N/A
Extreme Temp. Tolerance	-40°C to +85°C
Battery information:	Li-ion Battery:ZY 502035 Nominal voltage:3.7V Limited voltage:4.20 Rated Capacity:450mAh Containing Polymer Li-ion Battery:501015
Operating Frequency	2402-2480MHz
Channels	79
Channel Spacing	1MHz
Modulation Type	GFSK, π /4-DQPSK, 8-DPSK
Version	3.0
Antenna Type:	Integral Antenna
Antenna gain:	0.8dBi
Deviation	None
Condition of Test Sample	Normal

Model difference:

Only the model number is not same.





1.3. FACILITIES AND ACCREDITATIONS

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group CO., LTD, 518108**

FCC Registration Number: 366353

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.10:2013. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart C.

ALL the testing were referenced KDB NO.453039

The test results of this report relate only to the tested sample identified in this report.

1.3.1. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

- USA** NVLAP (The certificate registration number is NVLAP LAB CODE:600142-0)
- Japan** VCCI (The certificate registration number is C-4790, R-3684, G-837)
- Canada** INDUSTRY CANADA (The certificated registration number is 7700A-1)
- China** CNAS (The certificated registration number is L3732)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>





2. TEST DESCRIPTION

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$





2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Modulation type	Mode
1Mbps	Mode 1、 Mode 2、 Mode 3、 Mode 4
2Mbps	
3Mbps	

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Normal Hopping

For Conducted Emission	
Final Test Mode	Description
Mode 4	Normal Hopping

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	Normal Hopping

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The data rate was set in 1Mbps, 2 Mbps, 3 Mbps for radiated emission due to the highest RF output power.
- (3) Record the worst case of each test item in this report.





2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software Version	N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters(1Mbps)	DEF	DEF	DEF
Parameters(2Mbps)	DEF	DEF	DEF
Parameters(3Mbps)	DEF	DEF	DEF

2.4 CONFIGURATION OF SYSTEM UNDER TEST

EUT

(EUT: wireless earphone)





2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Earphone	/	N/A	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.





3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.247(d)	100kHz Band Edges	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The manufacture declare the equipment comply with the all the technical requirements in 15.247(g). 15.247(h).

The equipment are not required to employ all available hopping channels during each transmission.it can be presented with a continuous data (or information) stream. the equipment can recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels.





4. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
EMI Test Receiver	R&S	ESCI	100005	08/19/2017	08/18/2018
LISN	AFJ	LS16	16010222119	08/19/2017	08/18/2018
LISN(EUT)	Mestec	AN3016	04/10040	08/19/2017	08/18/2018
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	08/19/2017	08/18/2018
Coaxial cable	Megalon	LMR400	N/A	08/12/2017	08/11/2018
GPIO cable	Megalon	GPIO	N/A	08/12/2017	08/11/2018
Spectrum Analyzer	R&S	FSU	100114	08/19/2017	08/18/2018
Pre Amplifier	H.P.	HP8447E	2945A02715	10/13/2017	10/12/2018
Pre-Amplifier	CDSI	PAP-1G18-38	--	10/13/2017	10/12/2018
Bi-log Antenna	SUNOL Sciences	JB3	A021907	09/13/2017	09/12/2018
9*6*6 Anechoic	--	--	--	08/21/2017	08/20/2018
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	09/13/2017	09/12/2018
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	08/23/2017	08/22/2018
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	04/25/2017	04/24/2018
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	08/21/2017	08/20/2018
Loop Antenna	EMCO	6502	00042960	08/22/2017	08/21/2018
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	08/19/2017	08/18/2018
Power meter	Anritsu	ML2487A	6K00003613	08/23/2017	08/22/2018
Power sensor	Anritsu	MX248XD	--	08/19/2017	08/18/2018





5. EMC EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Conducted limit (dB μ V)		Conducted limit (dB μ V)
	Quasi-peak	Quasi-peak	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz






5.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

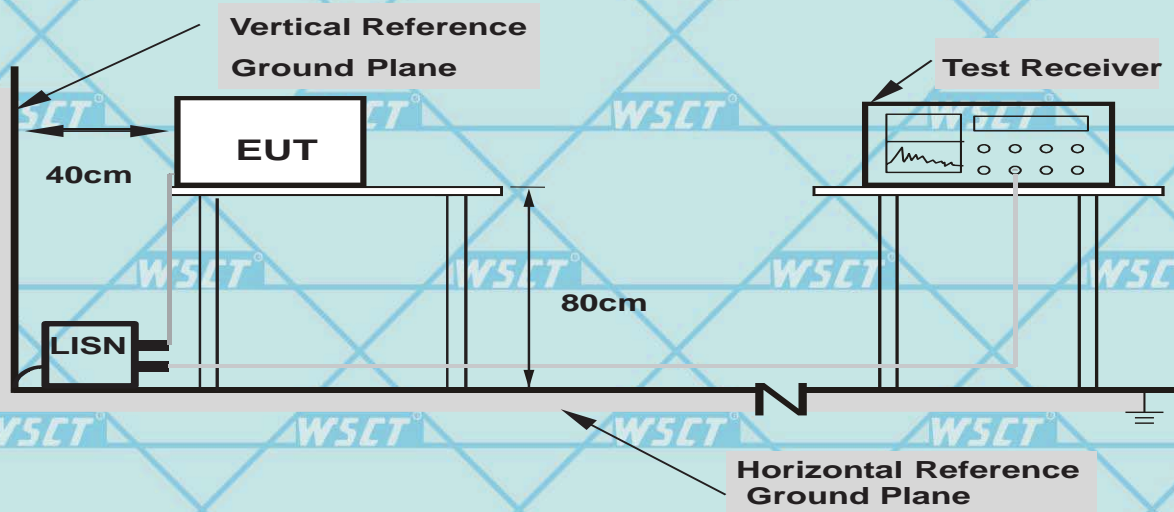

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.





For Question,
Please Contact with WSCT
www.wsct-cert.com

5.1.6 TEST RESULTS

Not applicable. Due to this product is supplied by battery.





5.2 RADIATED EMISSION MEASUREMENT

5.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP





5.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.3 DEVIATION FROM TEST STANDARD

No deviation







For Question,
Please Contact with WSCT
www.wsct-cert.com

5.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

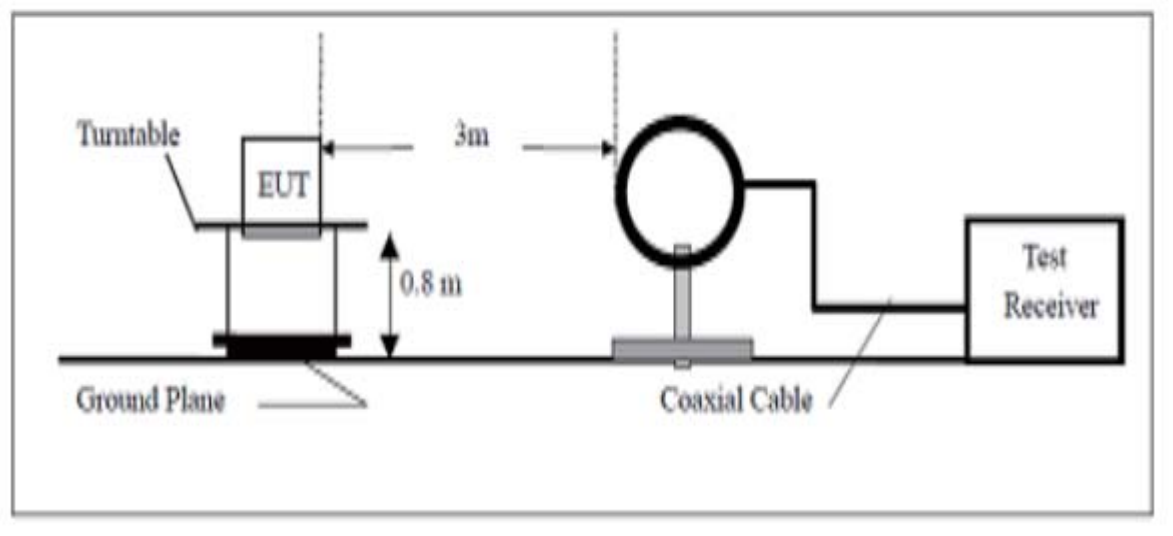


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

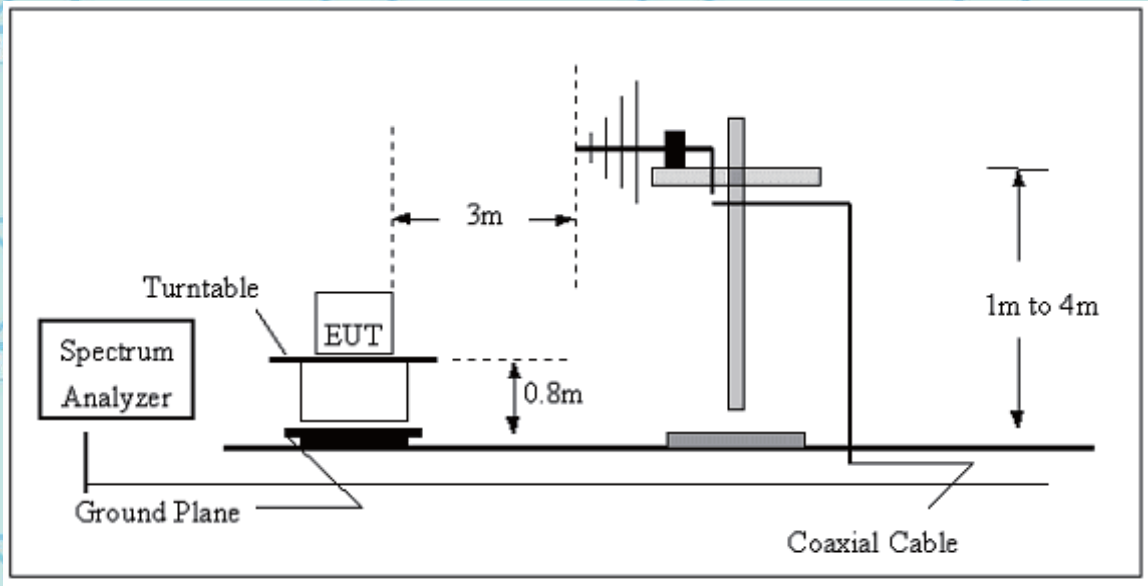



(C) Radiated Emission Test-Up Frequency Above 1GHz

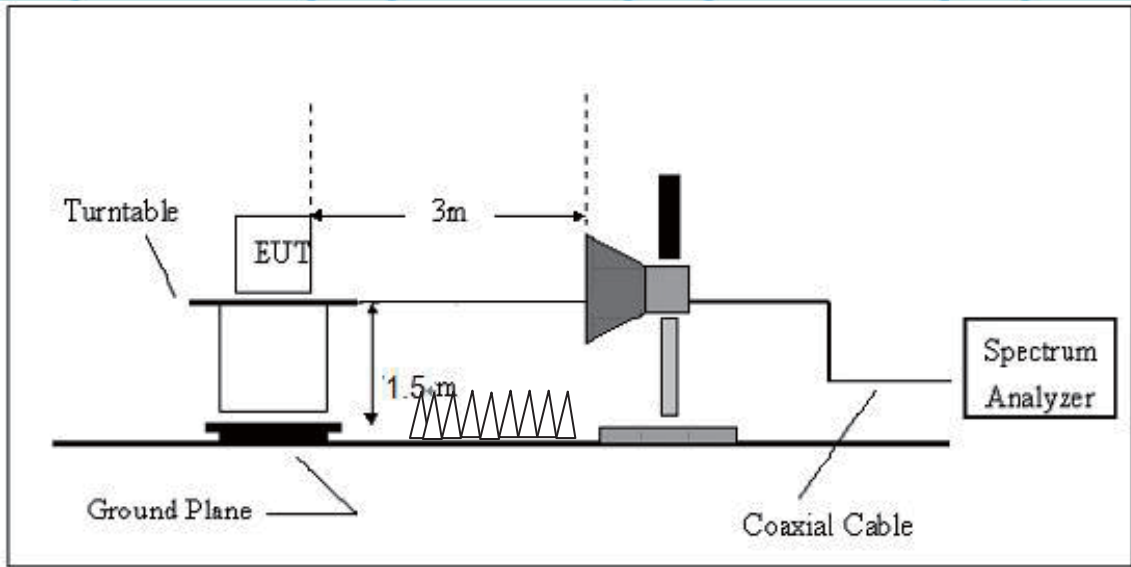

5.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





For Question,
Please Contact with WSCT
www.wsct-cert.com

5.2.5.1 RESULTS (BELOW 30 MHZ)

EUT	Wireless earphone	Model Name	i9
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal / Vertical
Test Mode	Mode 1/ Mode 2/ Mode 3		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

NOTE:

No result in this part for margin above 20dB.
 Distance extrapolation factor =40 log (specific distance/test distance)(dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor.
 All the x/y/z orientation has been investigated, and only worst case is presented in this report.






For Question,
Please Contact with WSCT
www.wsct-cert.com

5.2.5.2 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

EUT	Wireless earphone	Model Name	i9
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Horizontal
Test Mode	Mode 1 with GFSK modulation		

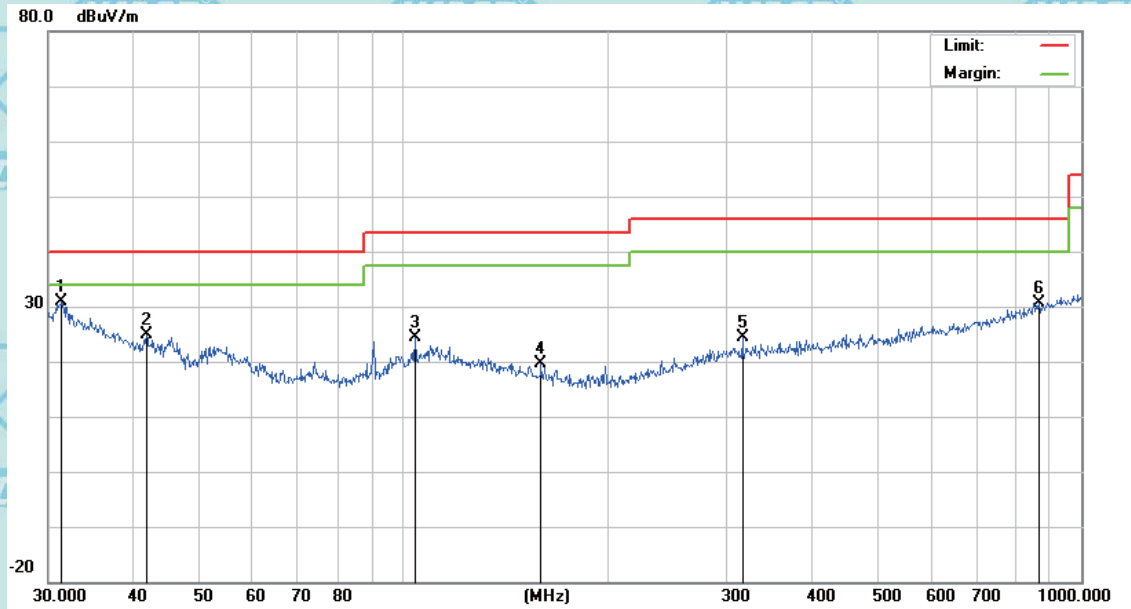


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	31.3992	26.57	4.26	30.83	40.00	-9.17	QP
2		41.8596	25.59	-0.80	24.79	40.00	-15.21	QP
3		104.1701	27.48	-3.01	24.47	43.50	-19.03	QP
4		159.7844	25.41	-5.77	19.64	43.50	-23.86	QP
5		316.5890	26.42	-2.12	24.30	46.00	-21.70	QP
6		866.0879	25.56	5.02	30.58	46.00	-15.42	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.





EUT	Wireless earphone	Model Name	i9
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization :	Vertical
Test Mode	Mode 1 with GFSK modulation		

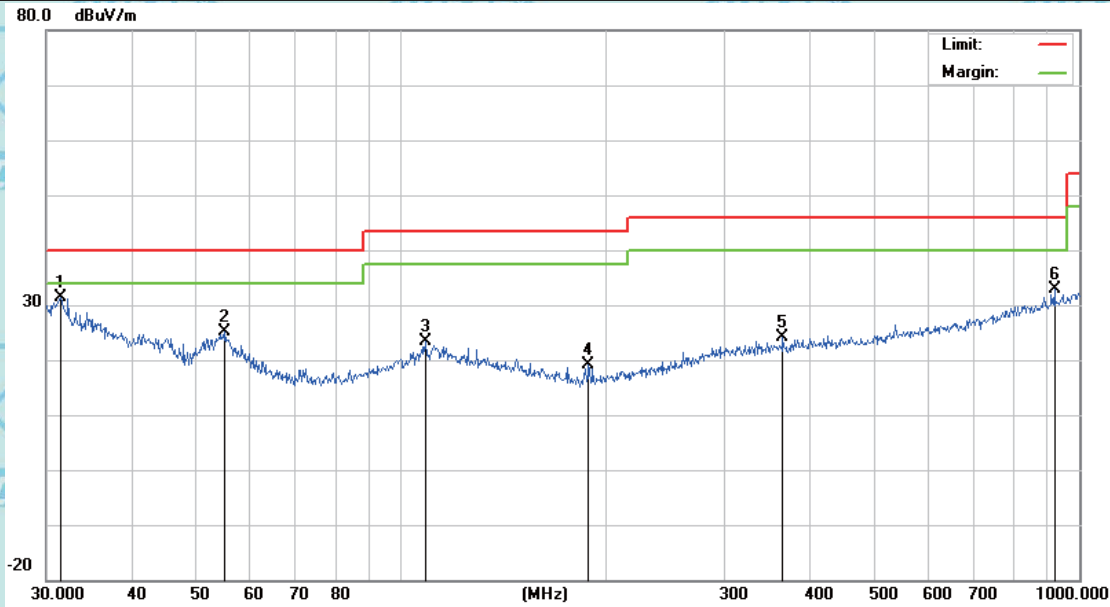

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	31.5095	27.06	4.22	31.28	40.00	-8.72	QP
2		55.0274	30.76	-5.62	25.14	40.00	-14.86	QP
3		108.6470	25.52	-2.13	23.39	43.50	-20.11	QP
4		189.0743	26.22	-7.18	19.04	43.50	-24.46	QP
5		365.5391	25.39	-1.37	24.02	46.00	-21.98	QP
6		919.2866	27.06	5.92	32.98	46.00	-13.02	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.





For Question,
Please Contact with WSCT
www.wsct-cert.com

5.2.5.3 TEST RESULTS(1GHZ TO 25GHZ)

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 1 TX(1Mbps)

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	59.61	40.10	74	54	-14.39	-13.90
7206	V	59.07	39.35	74	54	-14.93	-14.65
4804	H	59.62	40.51	74	54	-14.38	-13.49
7206	H	58.56	39.56	74	54	-15.44	-14.44

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.





Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 2 TX(1Mbps)

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	58.31	39.83	74	54	-15.69	-14.17
7323	V	58.62	40.71	74	54	-15.38	-13.29
4882	H	58.28	39.64	74	54	-15.72	-14.36
7323	H	58.35	39.35	74	54	-15.65	-14.65

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Test Mode	Mode 3 TX(1Mbps)

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	58.59	40.77	74	54	-15.41	-13.23
7440	V	58.96	39.96	74	54	-15.04	-14.04
4960	H	58.24	40.33	74	54	-15.76	-13.67
7440	H	58.71	39.71	74	54	-15.29	-14.29

Remark:

All emissions not reported were more than 20dB below the specified limit or in the noise floor.





5.2.5.4 TEST RESULTS (Restricted Bands Requirements)

Test result for 1Mbps Mode:

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical
Test Mode	TX /Mode1-1Mbps(CH0)		

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2387	64.80	-8.76	56.04	74	17.96	64.80
2387	54.07	-8.76	45.31	54	8.69	54.07
2390	60.43	-8.73	51.70	74	22.30	60.43
2390	56.16	-8.73	47.43	54	6.57	56.16

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal
Test Mode	TX /Mode1-1Mbps(CH0)		

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2384	64.90	-8.76	56.14	74	17.86	peak
2384	54.83	-8.76	46.07	54	7.93	AVG
2390	63.37	-8.73	54.64	74	19.36	peak
2390	56.58	-8.73	47.85	54	6.15	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Model Name	i9	Test Mode	TX /Mode 3-1Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	64.18	-8.17	56.01	74	17.99	peak
2483.5	54.25	-8.17	46.08	54	7.92	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	TX /Mode 3-1Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	64.83	-8.17	56.66	74	17.34	peak
2483.5	53.25	-8.17	45.08	54	8.92	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





For Question,
Please Contact with WSCT
www.wsct-cert.com

Test result for 2Mbps Mode:

Model Name	i9	Test Mode	TX /Mode1-2Mbps(CH0)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2387	61.27	-8.76	52.51	74	21.49	peak
2387	55.85	-8.76	47.09	54	6.91	AVG
2390	62.00	-8.73	53.27	74	20.73	peak
2390	55.33	-8.73	46.60	54	7.40	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	TX /Mode1-2Mbps(CH0)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2384	60.27	-8.76	51.51	74	22.49	peak
2384	56.06	-8.76	47.30	54	6.70	AVG
2390	63.65	-8.73	54.92	74	19.08	peak
2390	55.72	-8.73	46.99	54	7.01	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Model Name	i9	Test Mode	TX /Mode3-2Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	62.01	-8.17	53.84	74	20.16	peak
2483.5	54.82	-8.17	46.65	54	7.35	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	TX /Mode3-2Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	63.00	-8.17	54.83	74	19.17	peak
2483.5	54.65	-8.17	46.48	54	7.52	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Test result for 3Mbps Mode:

Model Name	i9	Test Mode	TX /Model 1-3Mbps(CH0)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2387	62.01	-8.76	53.25	74	20.75	peak
2387	54.82	-8.76	46.06	54	7.94	AVG
2390	59.56	-8.73	50.83	74	23.17	peak
2390	55.25	-8.73	46.52	54	7.48	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	TX /Mode 1-3Mbps(CH0)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2384	61.63	-8.76	52.87	74	21.13	peak
2384	54.27	-8.76	45.51	54	8.49	AVG
2390	61.06	-8.73	52.33	74	21.67	peak
2390	56.96	-8.73	48.23	54	5.77	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Model Name	i9	Test Mode	TX /Model 3-3Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	61.92	-8.17	53.75	74	20.25	peak
2483.5	53.38	-8.17	45.21	54	8.79	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	TX /Model 3-3Mbps(CH78)
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	62.47	-8.17	54.30	74	19.70	peak
2483.5	54.35	-8.17	46.18	54	7.82	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Test result for hopping mode:

Model Name	i9	Test Mode	hopping mode-1Mbps
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2387	63.66	-8.76	54.90	74	19.10	peak
2387	55.17	-8.76	46.41	54	7.59	AVG
2390	62.75	-8.73	54.02	74	19.98	peak
2390	56.57	-8.73	47.84	54	6.16	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	Hopping mode-1Mbps
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2387	61.60	-8.76	52.84	74	21.16	peak
2387	55.37	-8.76	46.61	54	7.39	AVG
2390	63.04	-8.73	54.31	74	19.69	peak
2390	57.66	-8.73	48.93	54	5.07	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





Model Name	i9	Test Mode	Hopping mode-1Mbps
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	60.71	-8.17	52.54	74	21.46	peak
2483.5	53.11	-8.17	44.94	54	9.06	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.

Model Name	i9	Test Mode	Hopping mode-1Mbps
Temperature	20 °C	Relative Humidity	48%
Pressure	1010 hPa	Polarization	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	63.02	-8.17	54.85	74	19.15	peak
2483.5	54.66	-8.17	46.49	54	7.51	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
All the x/y/z orientation has been investigated, and only worst case is presented in this report.





6. NUMBER OF HOPPING CHANNEL 6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz, VBW=3MHz, Sweep time = Auto.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

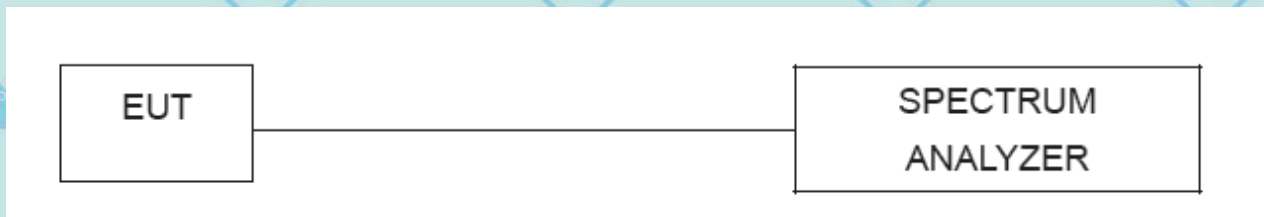

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





For Question,
 Please Contact with WSCT
 www.wsct-cert.com

6.6 TEST RESULTS

Model Name	i9	Test Mode	Hopping Mode
Temperature	25°C	Relative Humidity	60%
Pressure	1015 hPa	Number of Hopping Channel	79





7. AVERAGE TIME OF OCCUPANCY

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

7.2 TEST PROCEDURE

- The EUT test port was connected to the spectrum analyzer with RF cable and antenna connector.
- Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for DH5, DH3 and DH1 packet transmitting.
- Measure the maximum time duration of one single pulse.
- $DH1 \text{ Dwell time} = \text{Pulse time} * (1600/2/79) * 31.6S$
 $DH3 \text{ Dwell time} = \text{Pulse time} * (1600/4/79) * 31.6S$
 $DH5 \text{ Dwell time} = \text{Pulse time} * (1600/6/79) * 31.6S$


7.3 DEVIATION FROM STANDARD

No deviation.





7.4 TEST SETUP

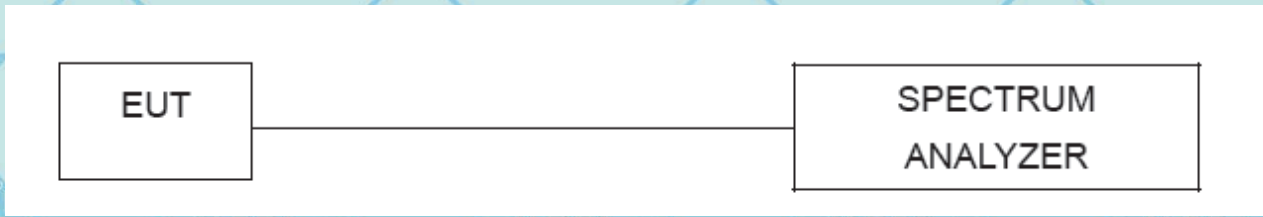

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.






For Question,
Please Contact with WSCT
www.wsct-cert.com

7.6 TEST RESULTS

Note: *the worst case is 1Mbps as result in this part.*

Model Name	i9	Test Mode	DH1-1Mbps
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		


Data Packet	Frequency	Pulse time(ms)	Dwell Time(S)	Limits (S)
DH1	2402MHz	0.563	0.180	0.4
DH1	2441MHz	0.563	0.180	0.4
DH1	2480MHz	0.563	0.180	0.4

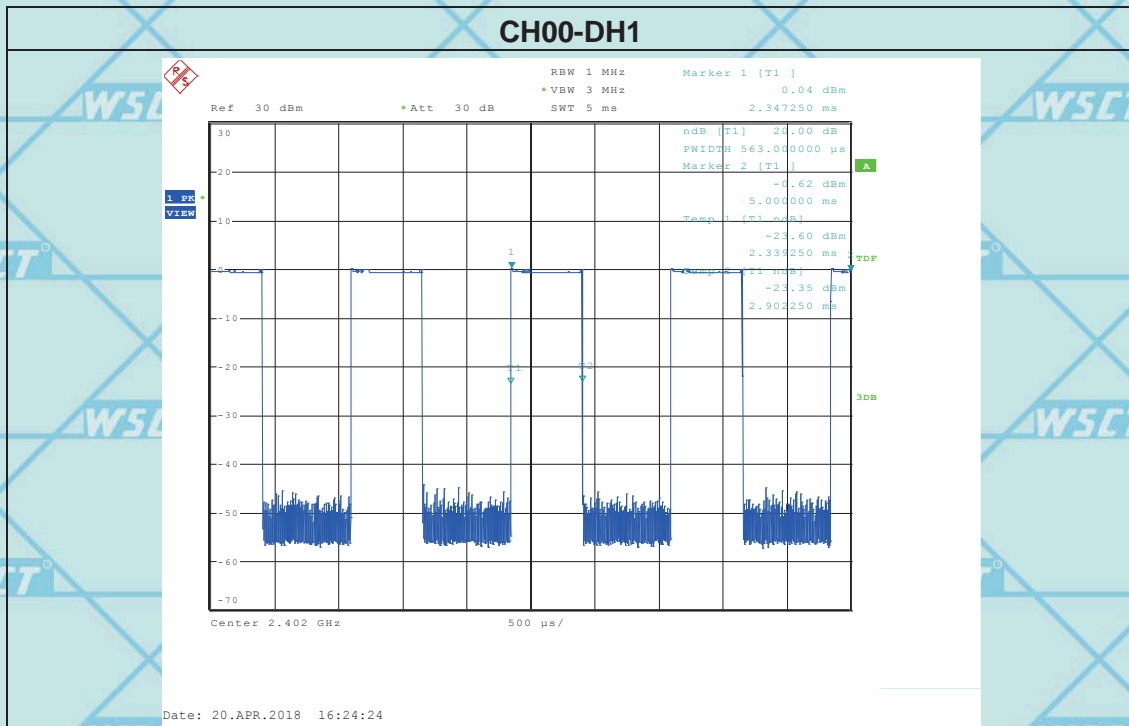




For Question,
Please Contact with WSCT
www.wsct-cert.com

CH39-DH1

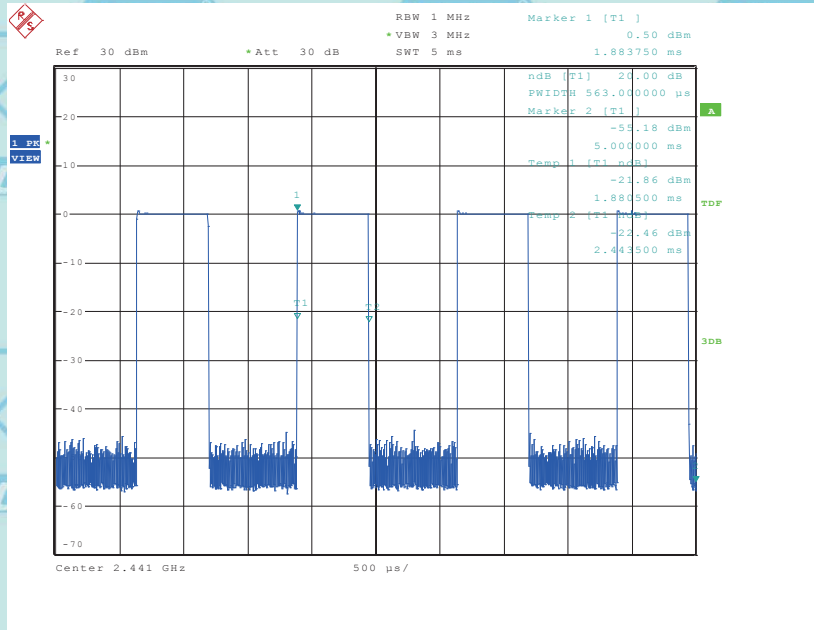


CH78-DH1

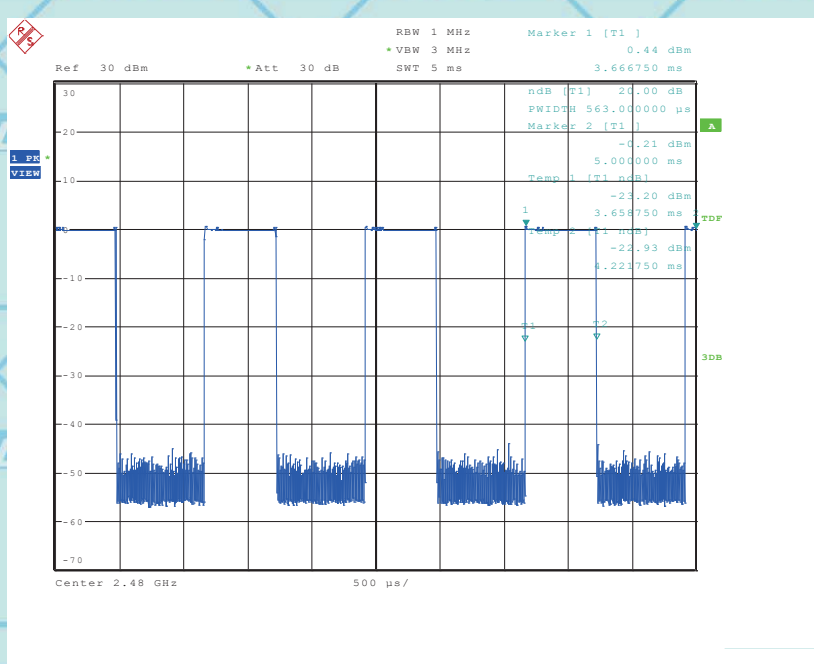



Model Name	i9	Test Mode	DH3-1Mbps
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		


Data Packet	Frequency	Pulse time(ms)	Dwell Time(S)	Limits (S)
DH3	2402MHz	1.771	0.283	0.4
DH3	2441MHz	1.771	0.283	0.4
DH3	2480MHz	1.771	0.283	0.4

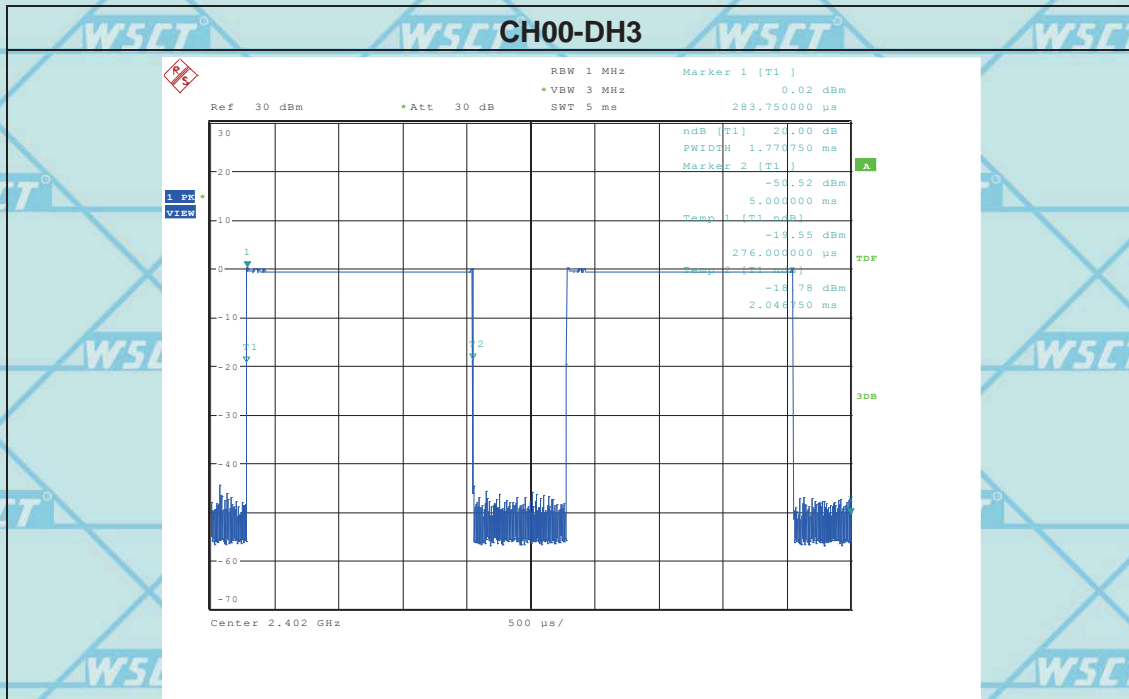




For Question,
Please Contact with WSCT
www.wsct-cert.com

CH39-DH3

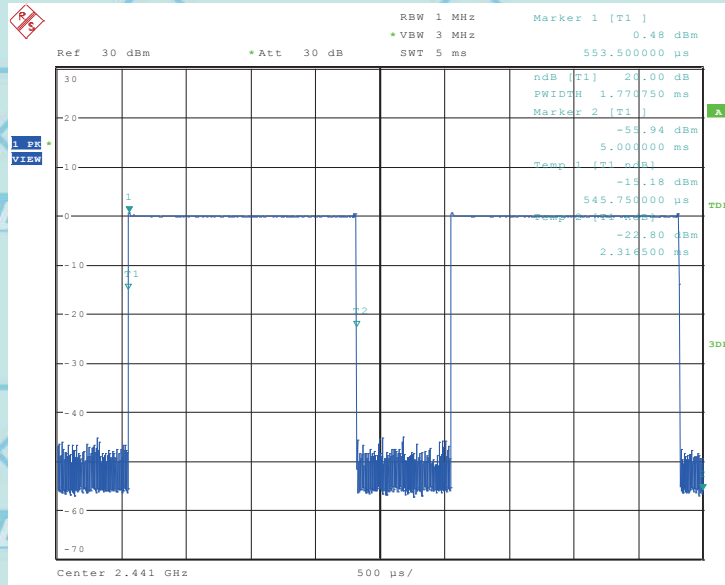

CH78-DH3

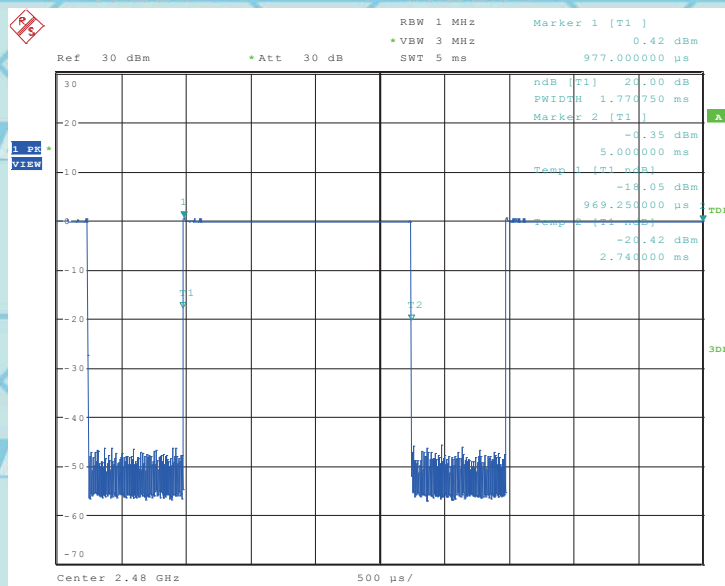




For Question,
Please Contact with WSCT
www.wsct-cert.com

Model Name	i9	Test Mode	DH5-1Mbps
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		


Data Packet	Frequency	Pulse time(ms)	Dwell Time(S)	Limits (S)
DH5	2402MHz	2.883	0.308	0.4
DH5	2441MHz	2.883	0.308	0.4
DH5	2480MHz	2.883	0.308	0.4

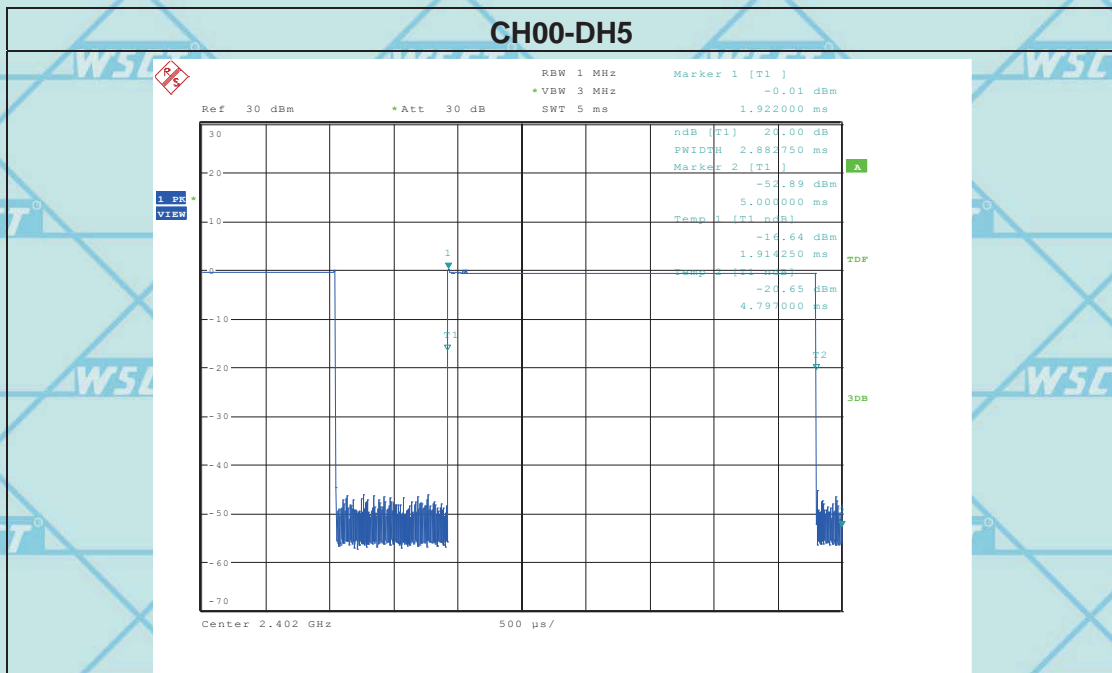




For Question, Please Contact with WSCT www.wsct-cert.com

CH39-DH5

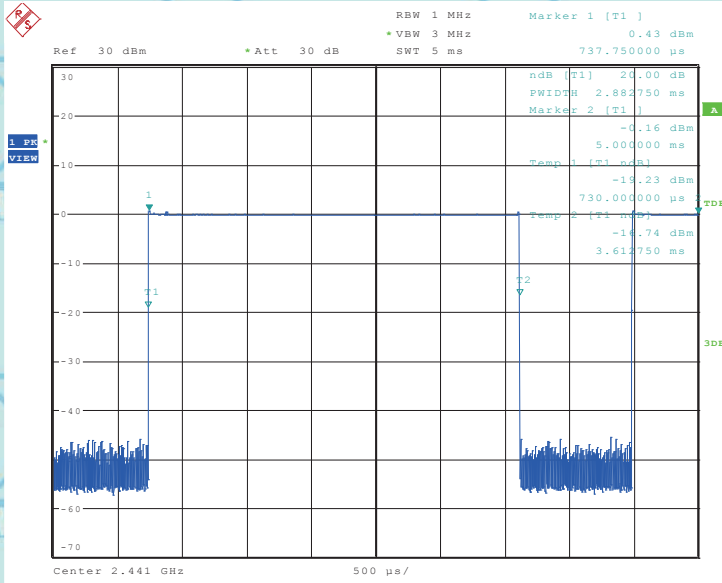

CH78-DH5

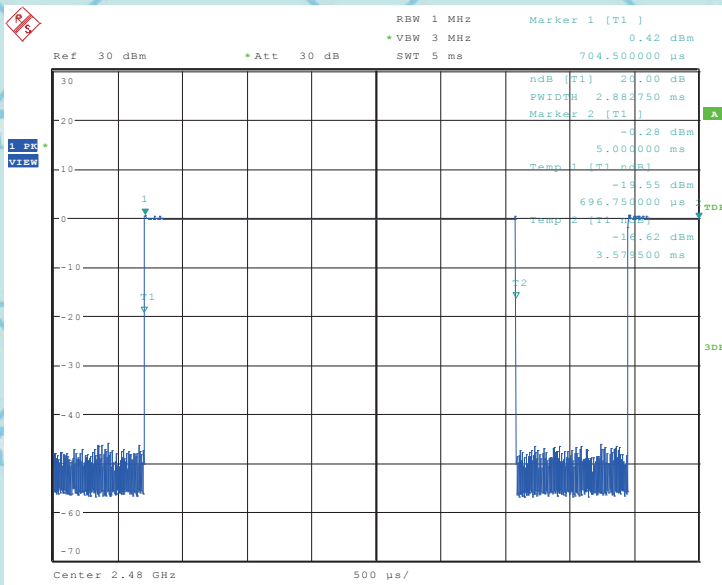



8. HOPPING CHANNEL SEPARATION MEASUREMENT

8.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
VB	Video (or Average) Bandwidth (VBW) \geq RBW
Detector	Peak
Trace	Max hold
Sweep Time	Auto


8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
4. Repeat above procedures until all frequencies measured were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

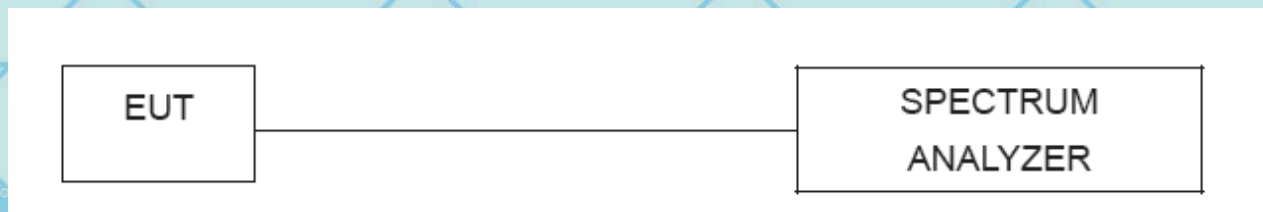

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.






8.6 TEST RESULTS

Model Name	i9	Test Mode	CH00 / CH39 / CH78 (1Mbps Mode)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit (KHz)
00	2402	1003	20dB BW
39	2441	1003	20dB BW
78	2480	1003	20dB BW


Note: 20db bandwidth refer to section 9.6

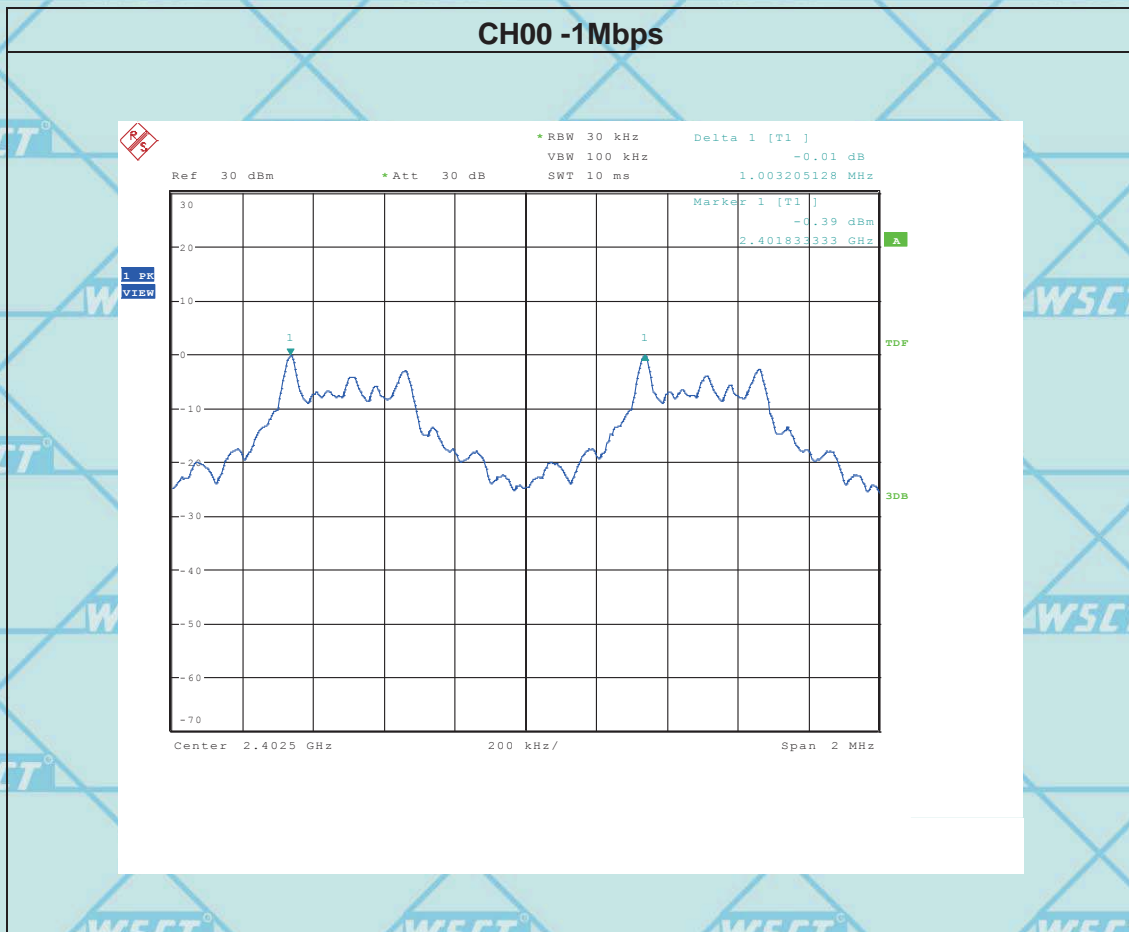



For Question, Please Contact with WSCT www.wsct-cert.com


CH39 -1Mbps

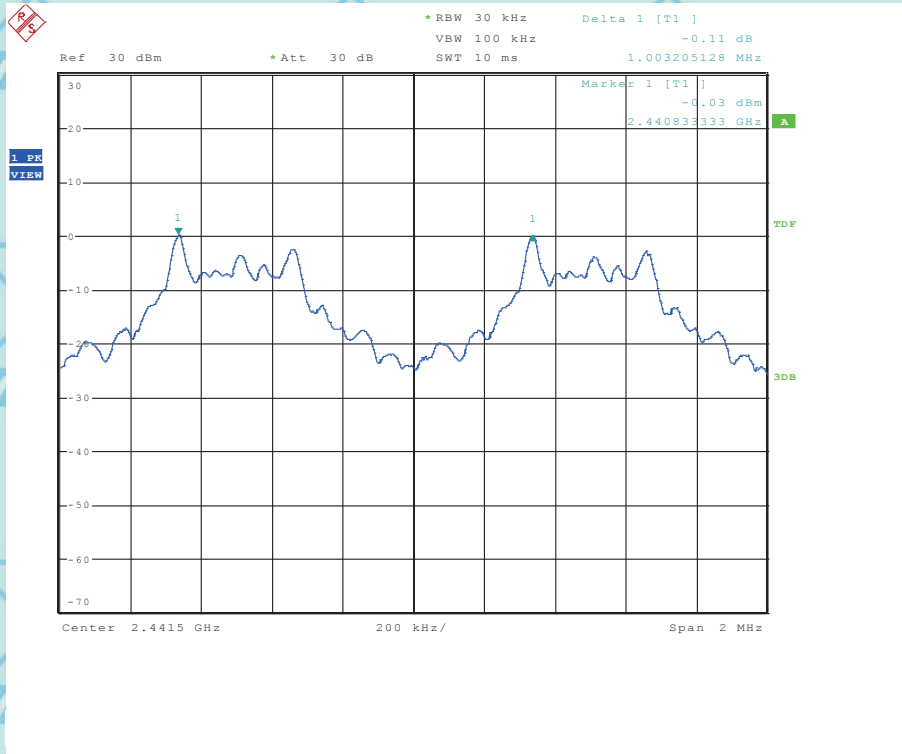



For Question,
Please Contact with WSCT
www.wsct-cert.com

CH78 -1Mbps

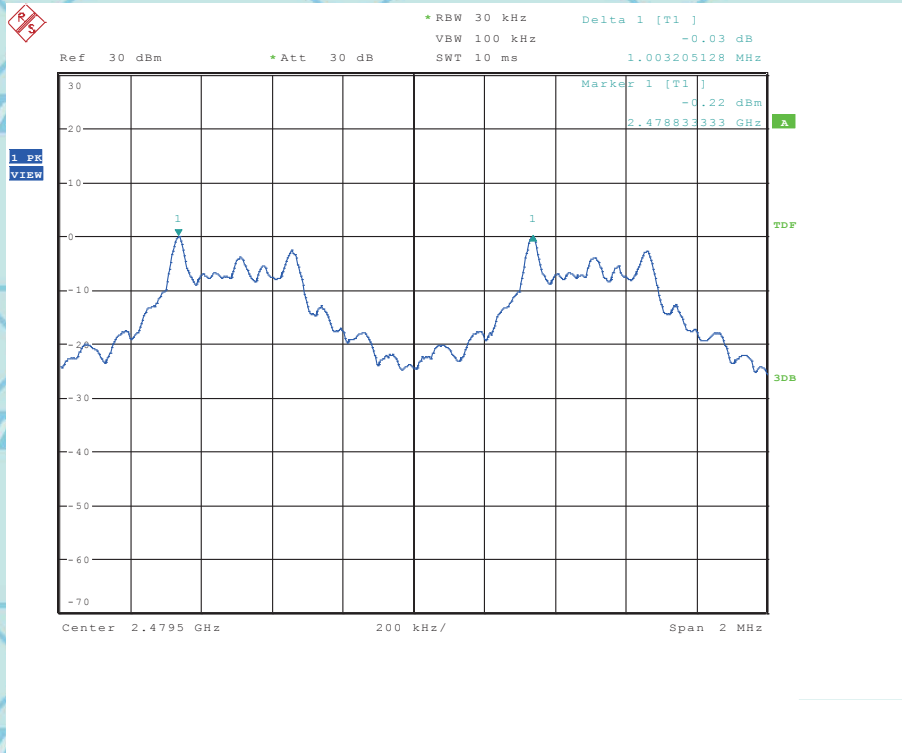




Model Name	i9	Test Mode	CH00 / CH39 /CH78 (2Mbps Mode)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit (KHz)
00	2402	1003	2/3 *20dB BW
39	2441	1003	2/3 *20dB BW
78	2480	1003	2/3 *20dB BW


Note: 20db bandwidth refer to section 9.6

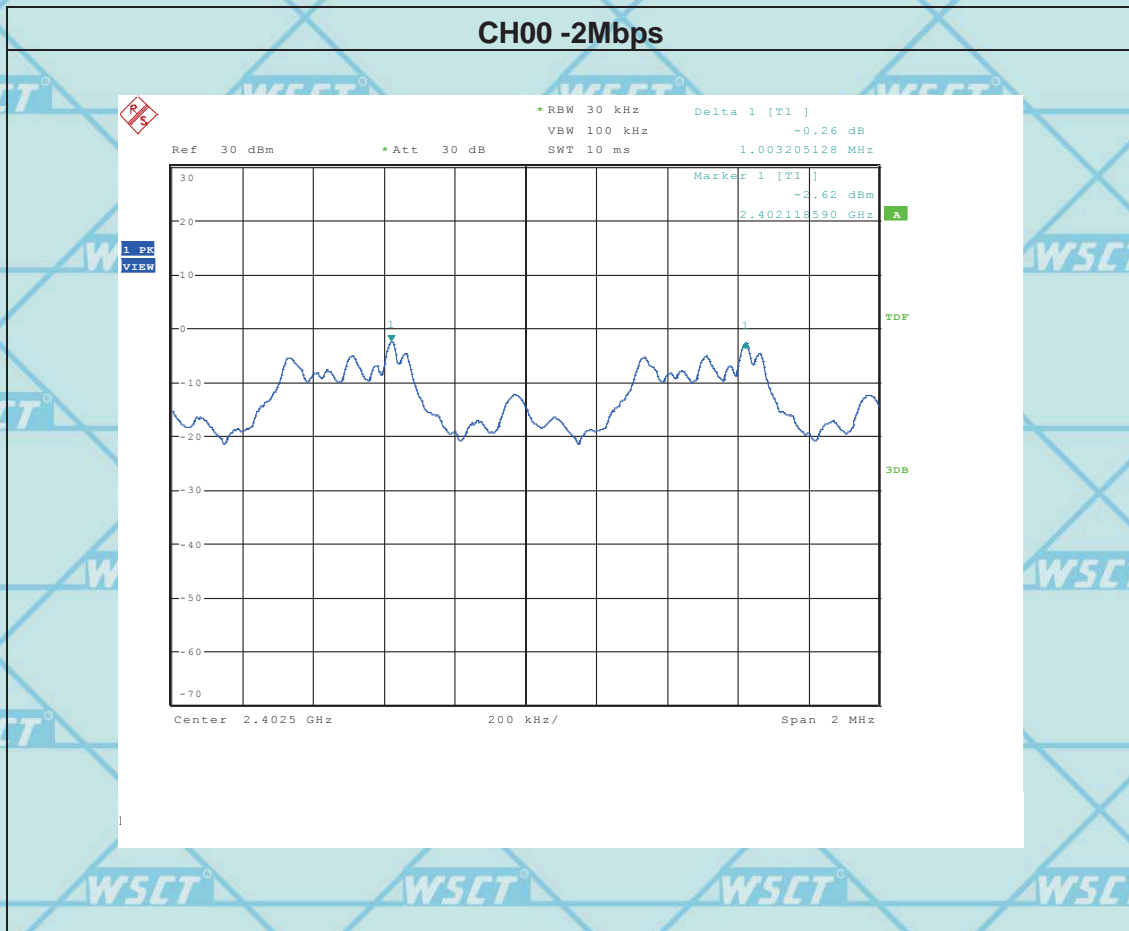



For Question, Please Contact with WSCT www.wsct-cert.com


CH39 -2Mbps

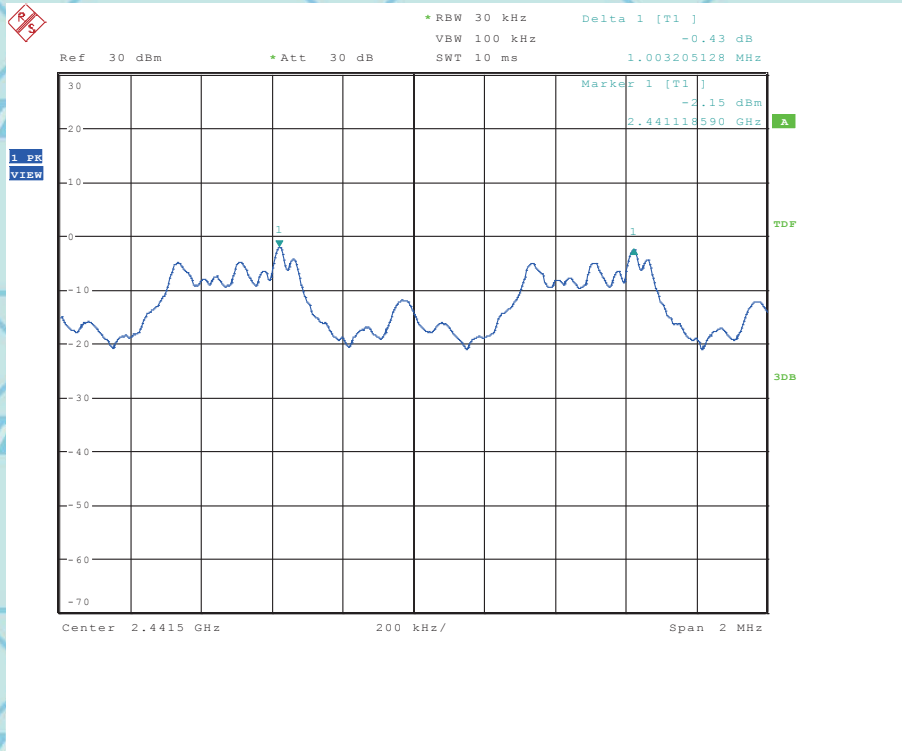



For Question,
Please Contact with WSCT
www.wsct-cert.com

CH78 -2Mbps

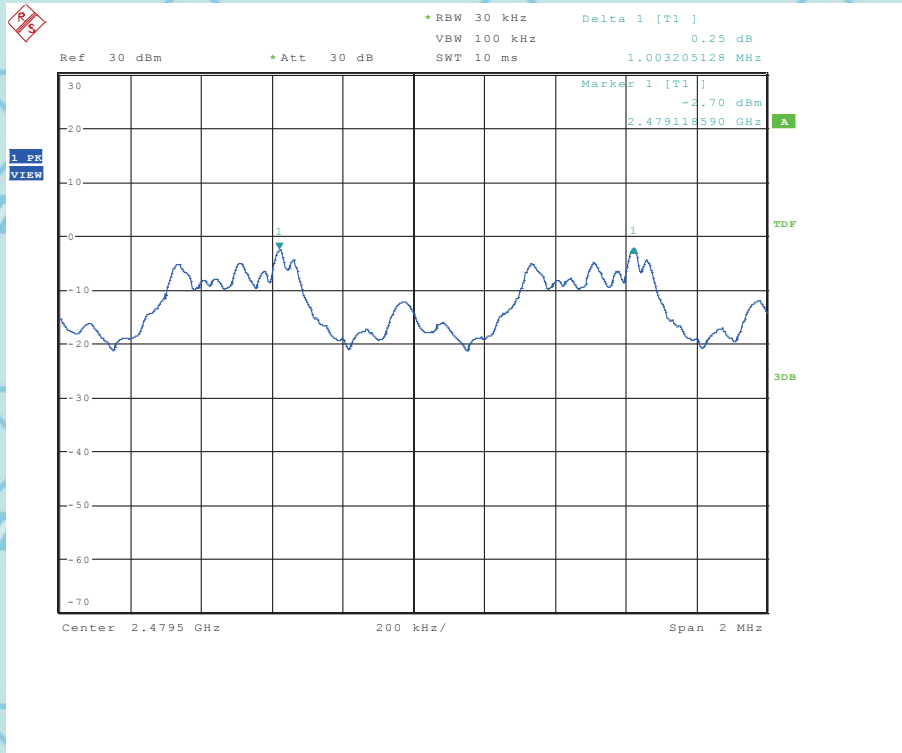




For Question,
Please Contact with WSCT
www.wsct-cert.com

Model Name	i9	Test Mode	CH00 / CH39 / CH78 (3Mbps Mode)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa	Test Result	Pass

Channel number	Channel frequency (MHz)	Separation Read value (KHz)	Separation limit (KHz)
00	2402	1003	2/3 *20dB BW
39	2441	1003	2/3 *20dB BW
78	2480	1000	2/3 *20dB BW


Note: 20db bandwidth refer to section 9.6

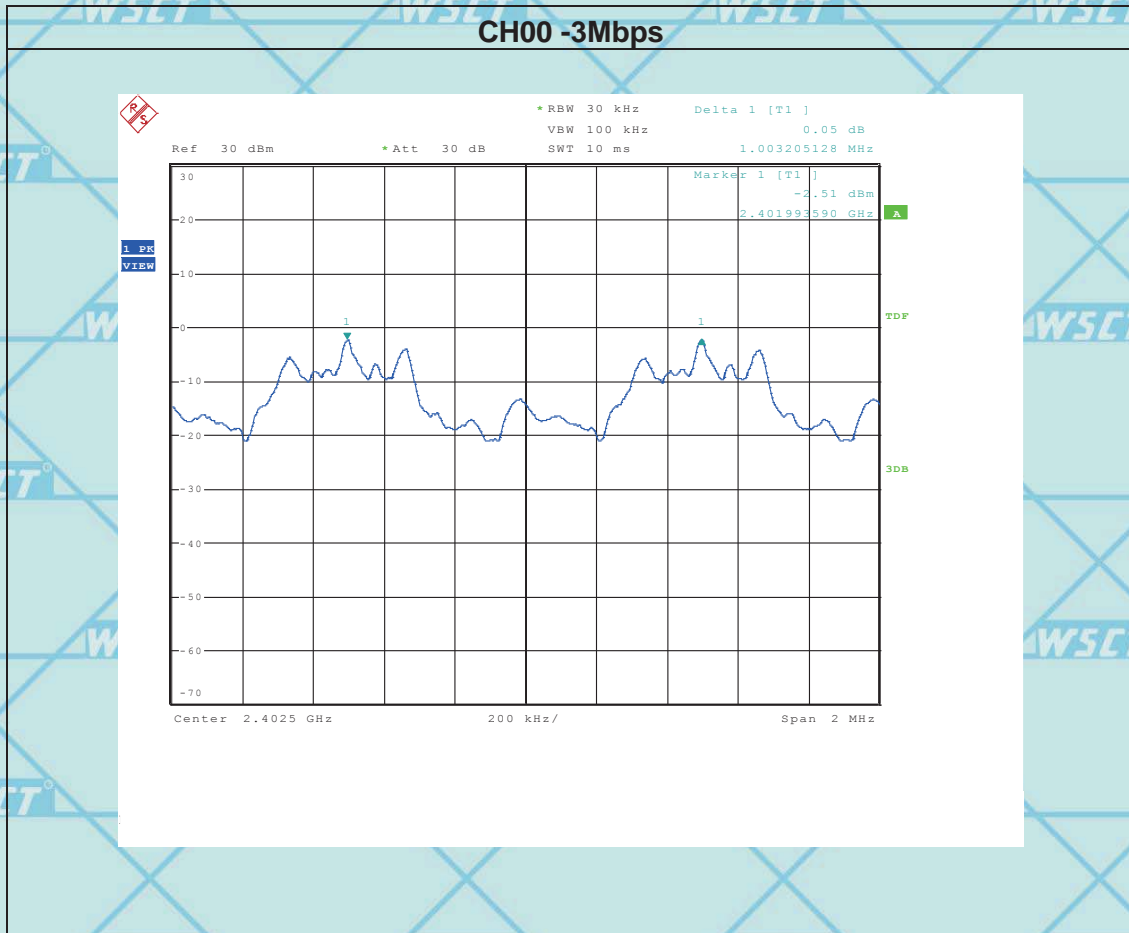



For Question,
Please Contact with WSCT
www.wsct-cert.com


CH39 -3Mbps

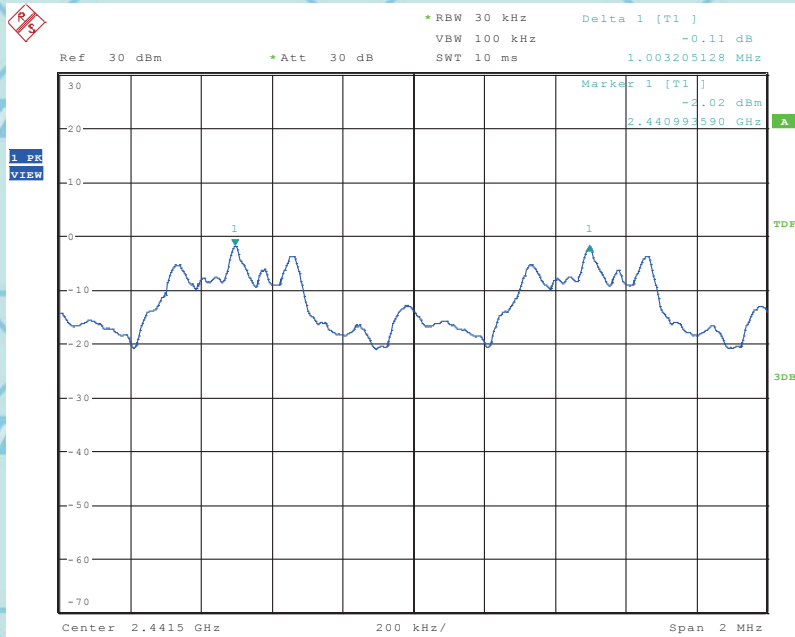



For Question, Please Contact with WSCT www.wsct-cert.com

CH78 -3Mbps

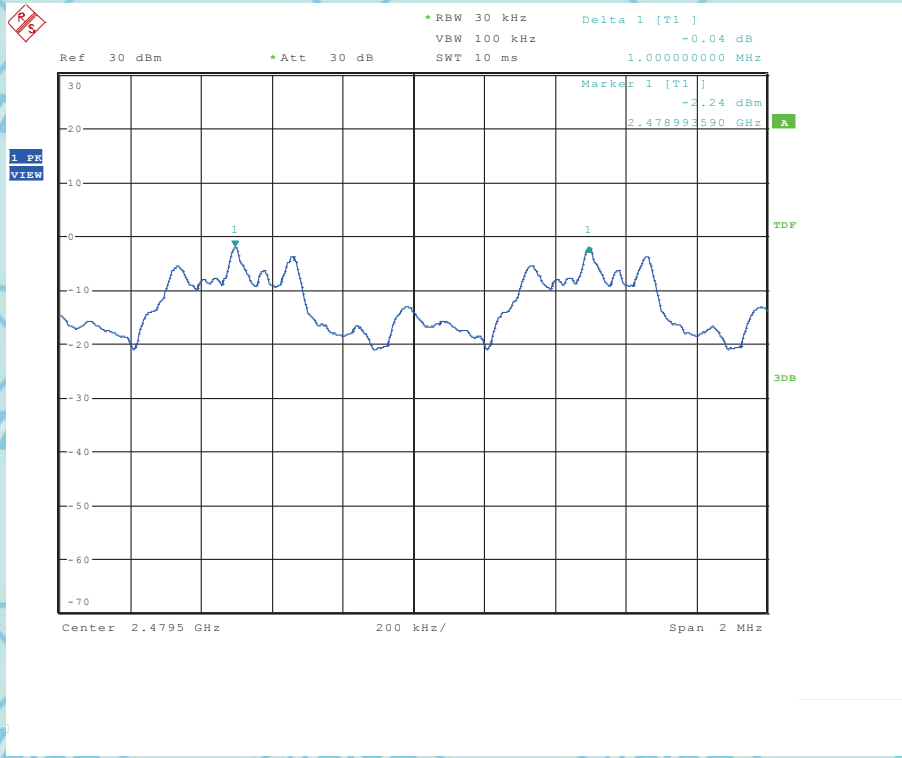



9. BANDWIDTH TEST

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30kHz
VB	100 kHz
Detector	Peak
Trace	Max hold
Sweep Time	Auto


9.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
2. Set the spectrum analyzer as follows: VBW =30kHz, RBW=100kHz, Sweep = auto Detector function = peak ,Trace = max hold
3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
4. Repeat above procedures until all frequencies measured were complete.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

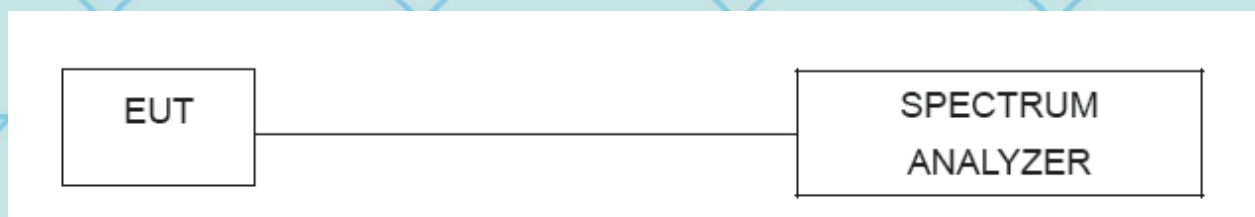

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





For Question,
Please Contact with WSCT
www.wsct-cert.com


9.6 TEST RESULTS

Note: **the worst case is DH5 as result in this part.**

Model Name	i9	Test Mode	CH00/CH39/C78(1Mbps)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	822	PASS
2441 MHz	827	PASS
2480 MHz	822	PASS


CH00 -1Mbps

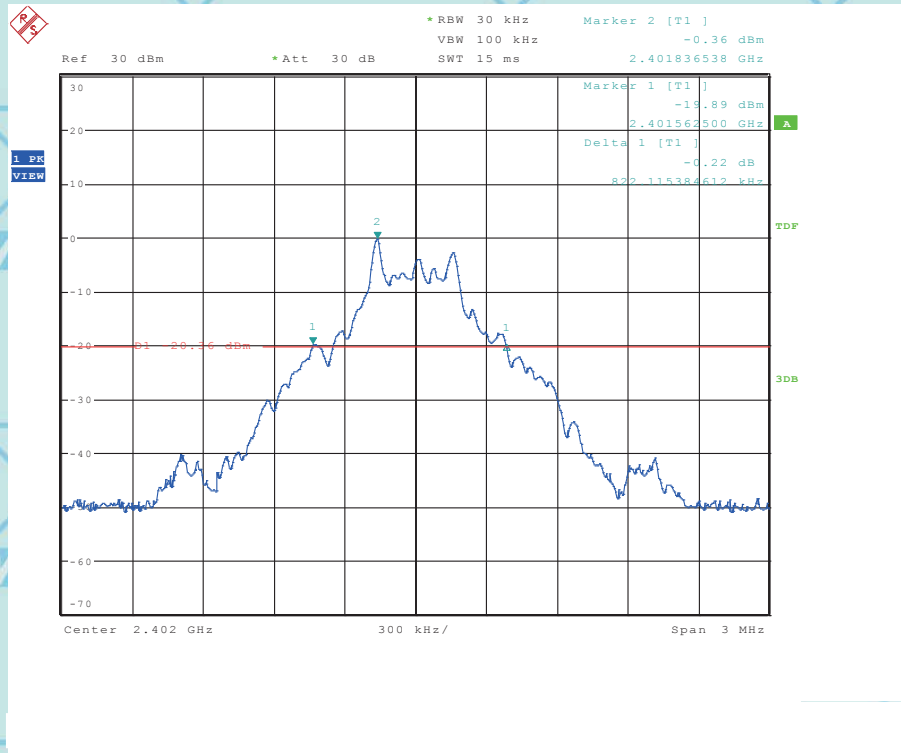



For Question,
Please Contact with WSCT
www.wsct-cert.com


CH39 -1Mbps

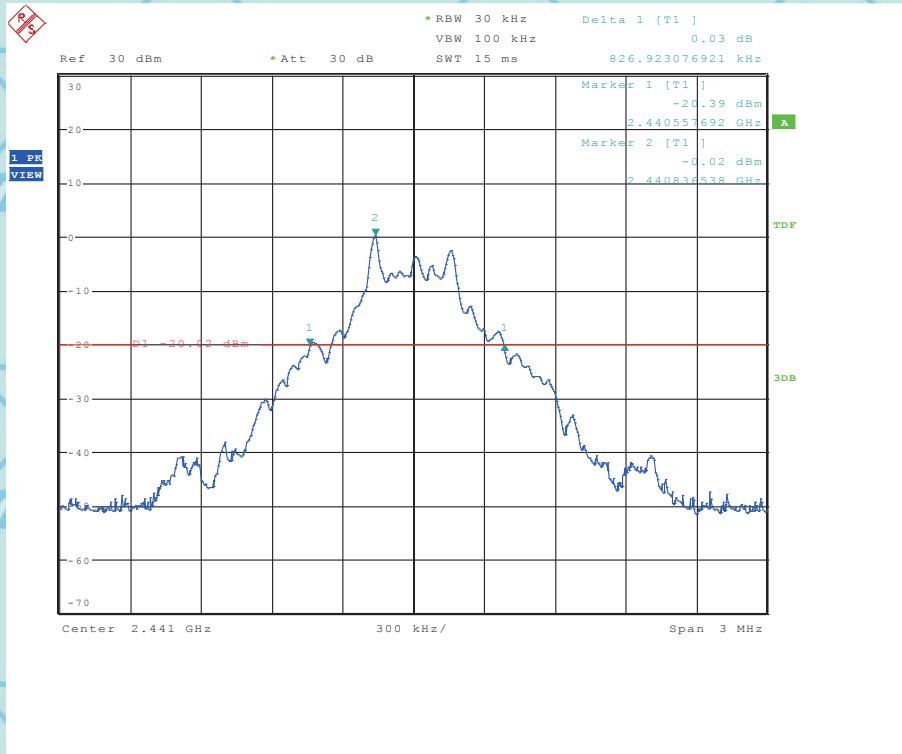



For Question,
Please Contact with WSCT
www.wsct-cert.com

CH78 -1Mbps

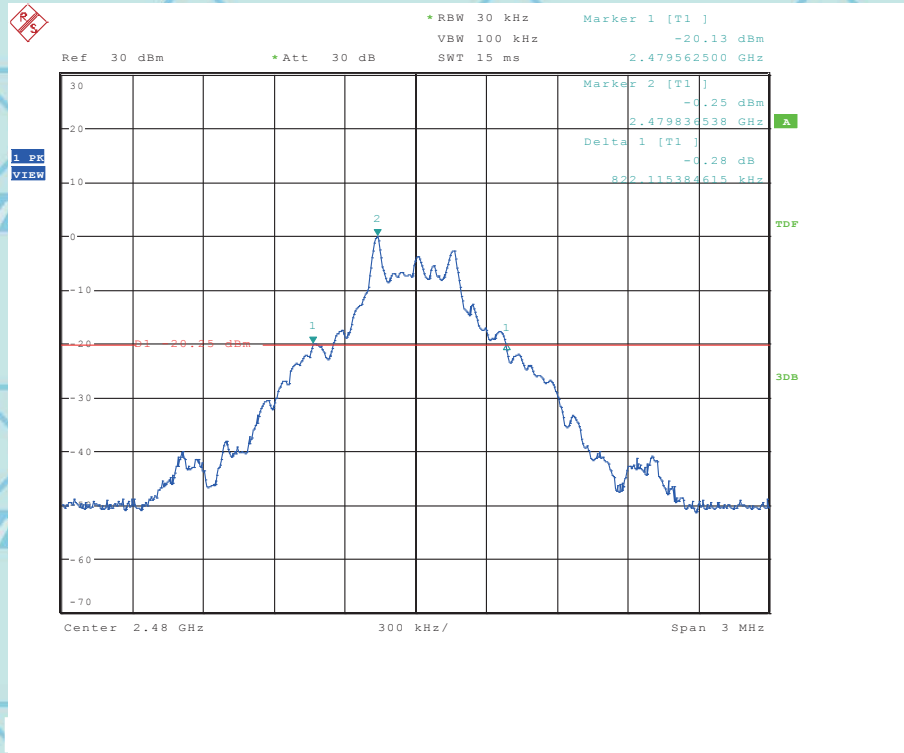




For Question,
 Please Contact with WSCT
 www.wsct-cert.com

Note: **the worst case is DH5as result in this part.**

Model Name	i9	Test Mode	CH00/CH39/C78(2Mbps)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1139	PASS
2441 MHz	1139	PASS
2480 MHz	1144	PASS


CH00 -2Mbps

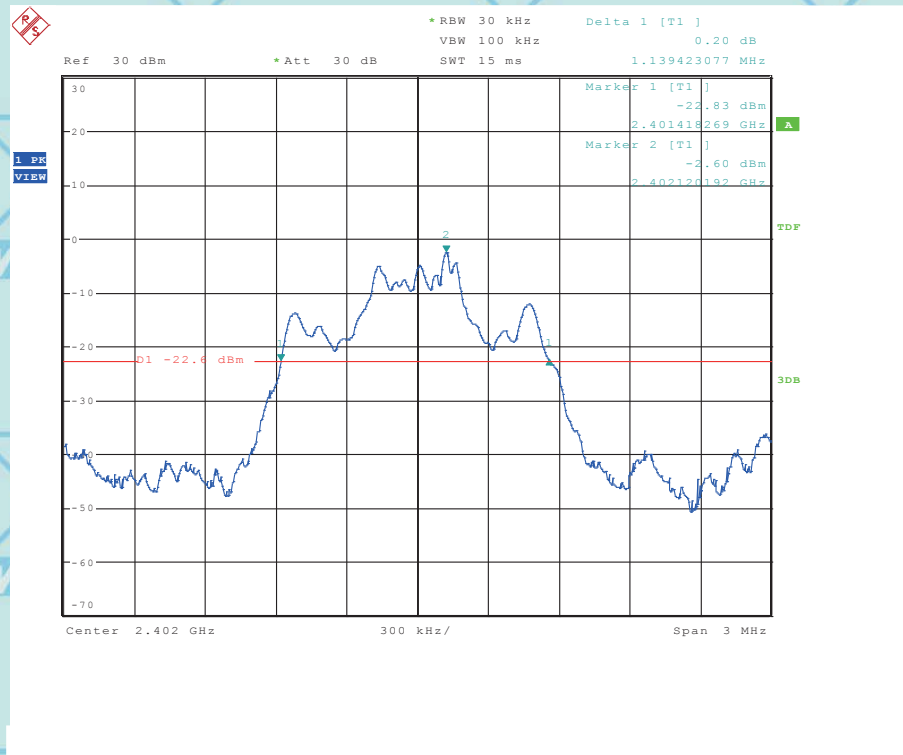



For Question,
Please Contact with WSCT
www.wsct-cert.com


CH39 -2Mbps

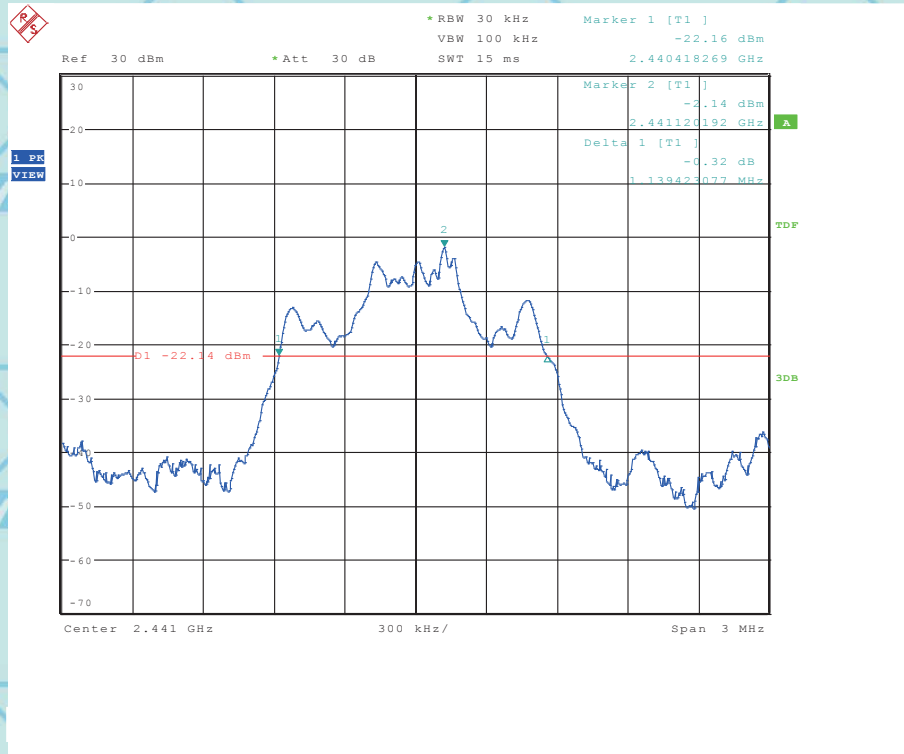



For Question,
Please Contact with WSCT
www.wsct-cert.com

CH78 -2Mbps

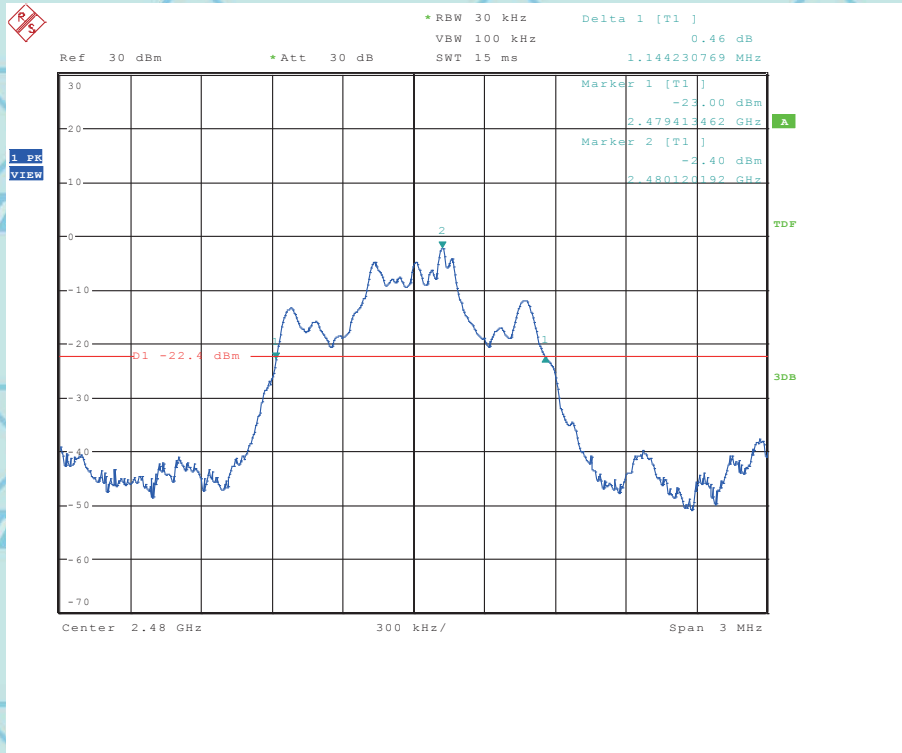




Note: **the worst case is DH5as result in this part.**

Model Name	i9	Test Mode	CH00/CH39/C78(3Mbps)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	1139	PASS
2441 MHz	1135	PASS
2480 MHz	1135	PASS


CH00 -3Mbps

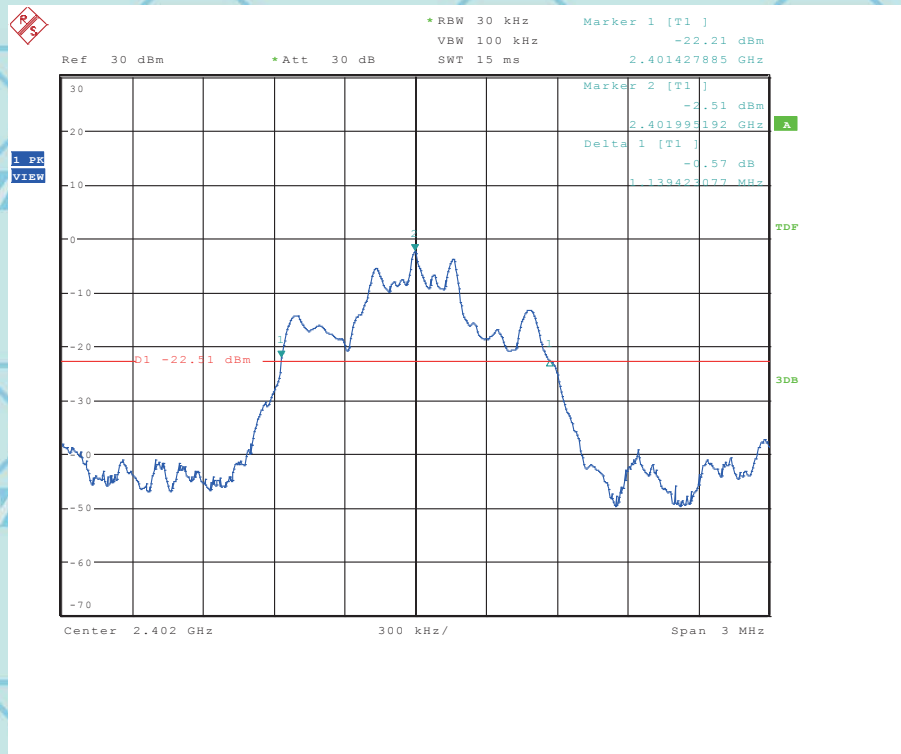



For Question,
Please Contact with WSCT
www.wsct-cert.com


CH39 -3Mbps

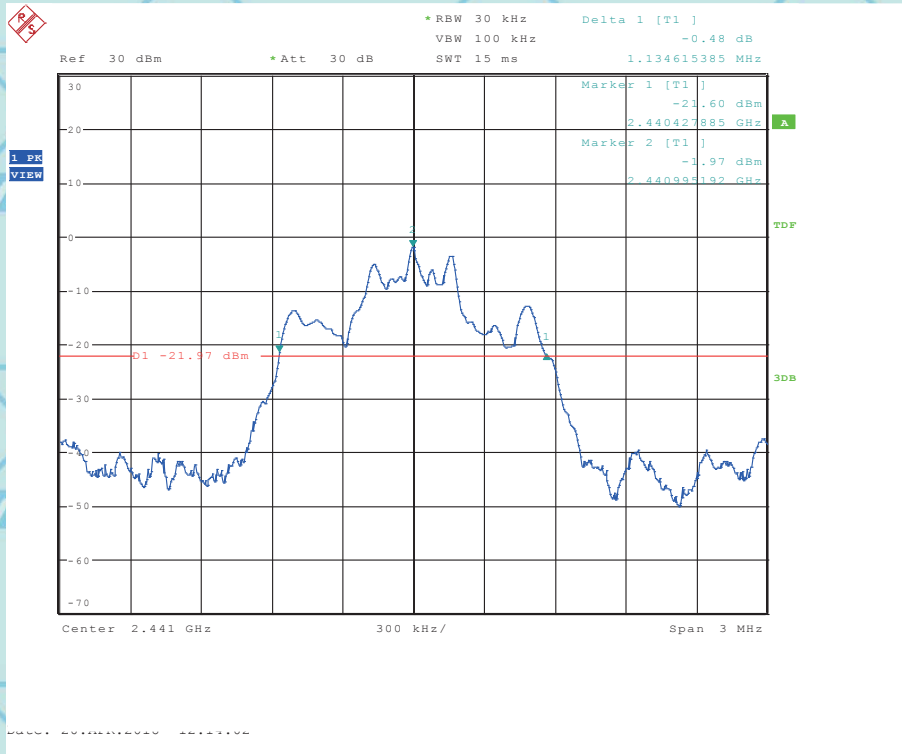



For Question,
Please Contact with WSCT
www.wsct-cert.com

CH78 -3Mbps

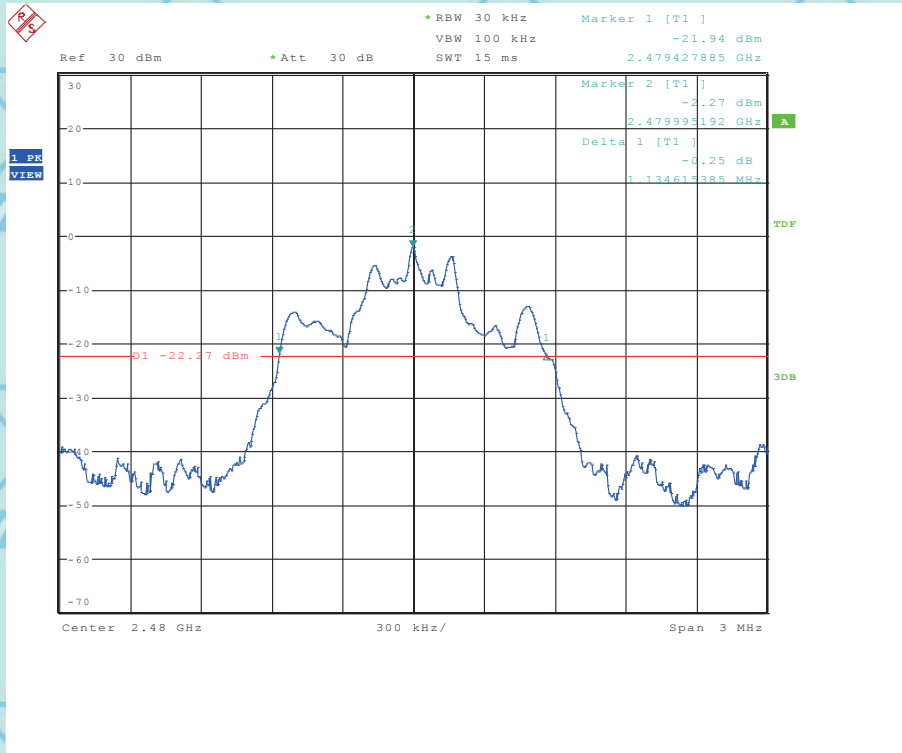



10. PEAK OUTPUT POWER TEST

10.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	1W for 1Mbps 0.125Wfor2/3Mbps	2400-2483.5	PASS

10.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Setting : RBW \geq the 20 dB bandwidth of the emission being measured
Span \geq approximately 3 times the 20 dB bandwidth, centered on a hopping channel
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP



10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.






For Question,
Please Contact with WSCT
www.wsct-cert.com

10.6 TEST RESULTS

Model Name	i9	Test Mode	CH00/ CH39 /CH78 (1M/2M/3Mbps Mode)
Temperature	25°C	Relative Humidity	60%
Pressure	1012 hPa		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT(dBm)	Result
1Mbps				
CH00	2402	-0.03	30	Pass
CH39	2441	0.30	30	Pass
CH78	2480	0.14	30	Pass
2Mbps				
CH00	2402	-1.07	20.97	Pass
CH39	2441	-0.67	20.97	Pass
CH78	2480	-0.90	20.97	Pass
3Mbps				
CH00	2402	-1.04	20.97	Pass
CH39	2441	-0.65	20.97	Pass
CH78	2480	-0.87	20.97	Pass


1Mbps
Channel: Low

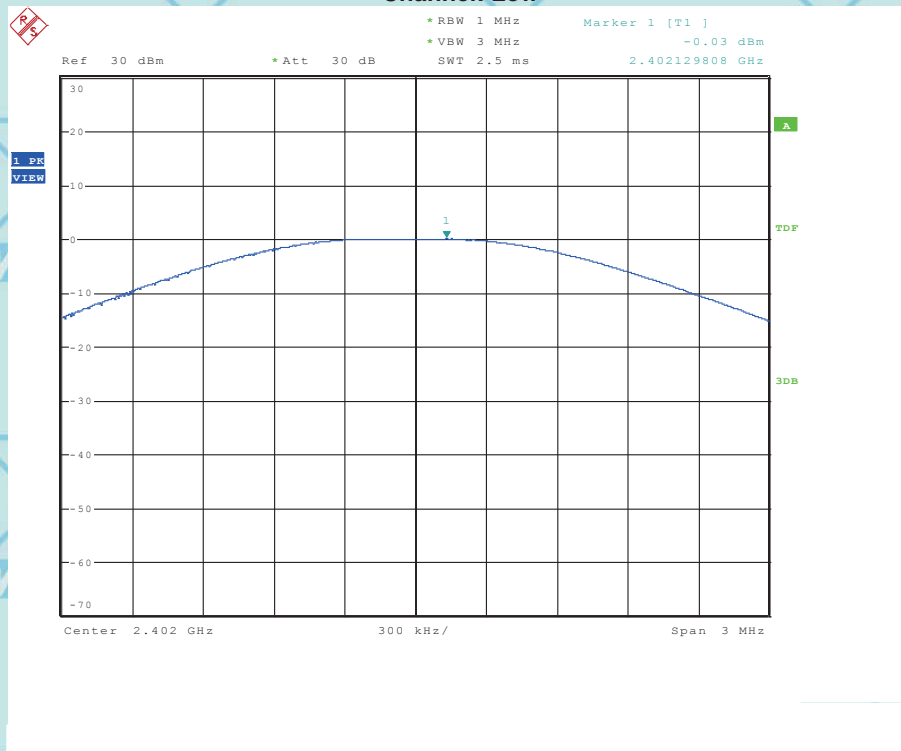




For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: Middle

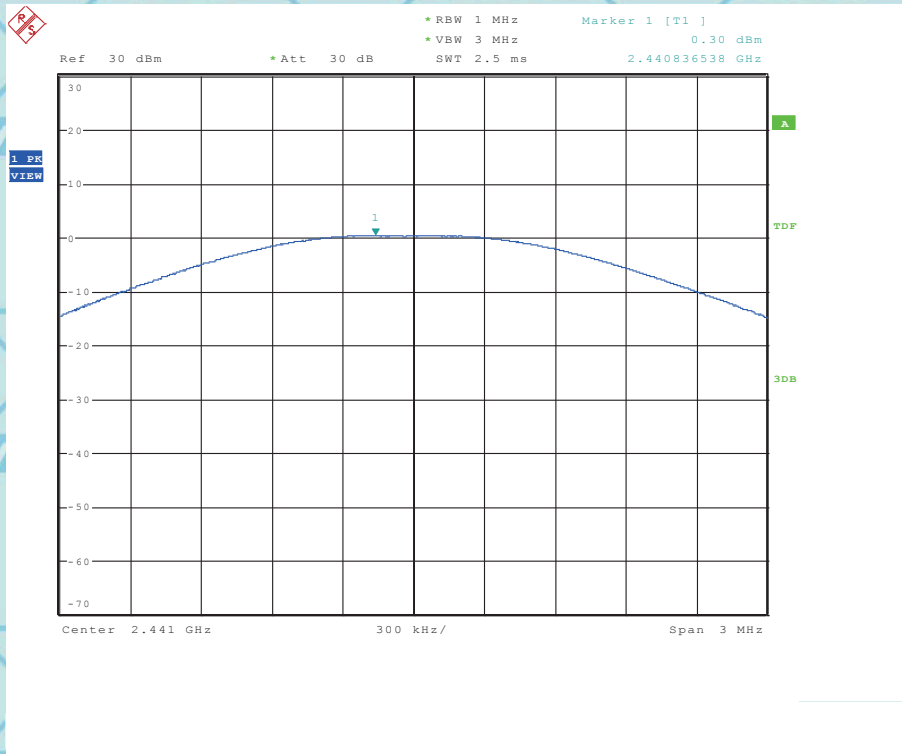


Channel: High

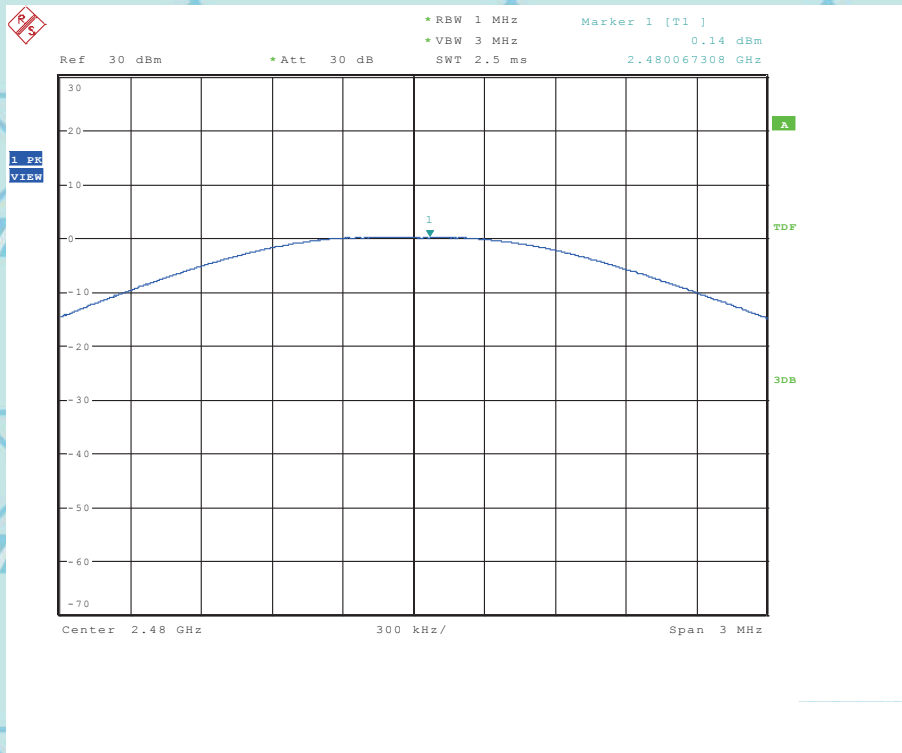




For Question,
Please Contact with WSCT
www.wsct-cert.com

2Mbps Channel: Low

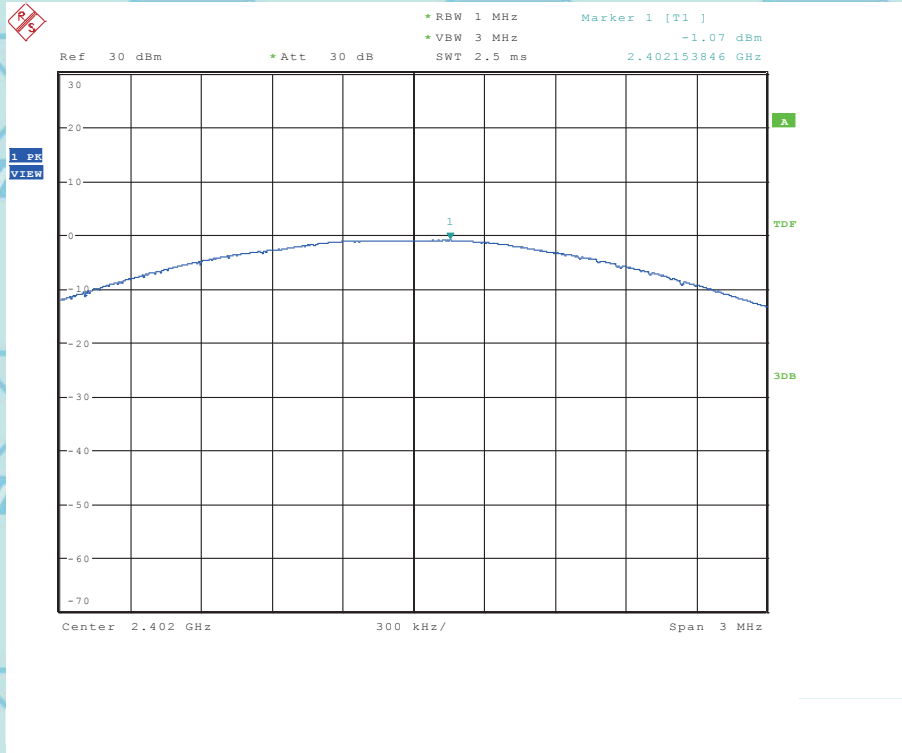


Channel: Middle

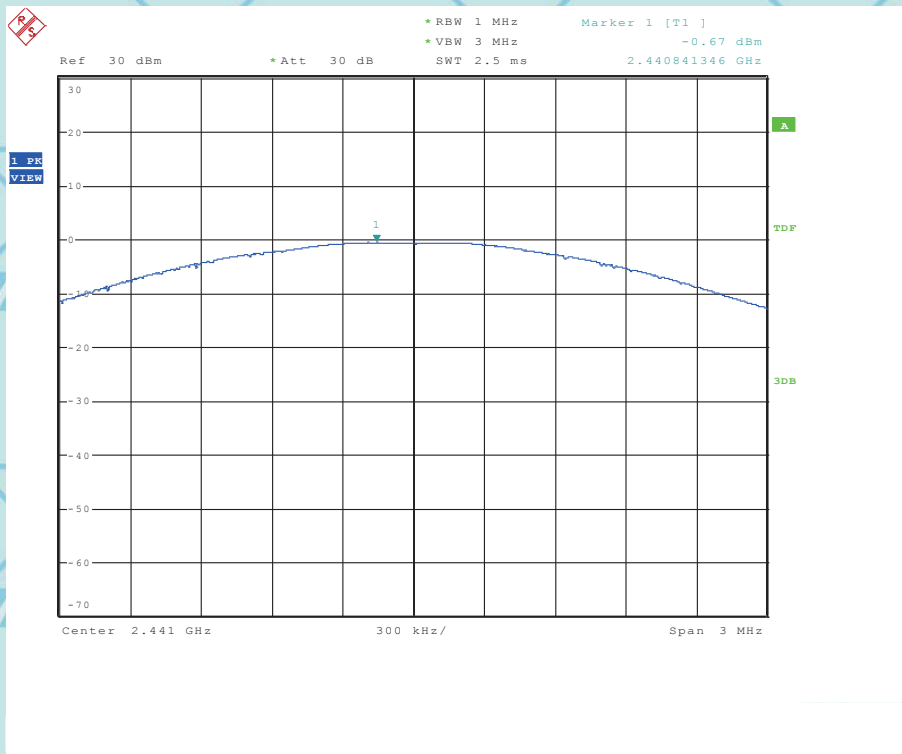




For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: High

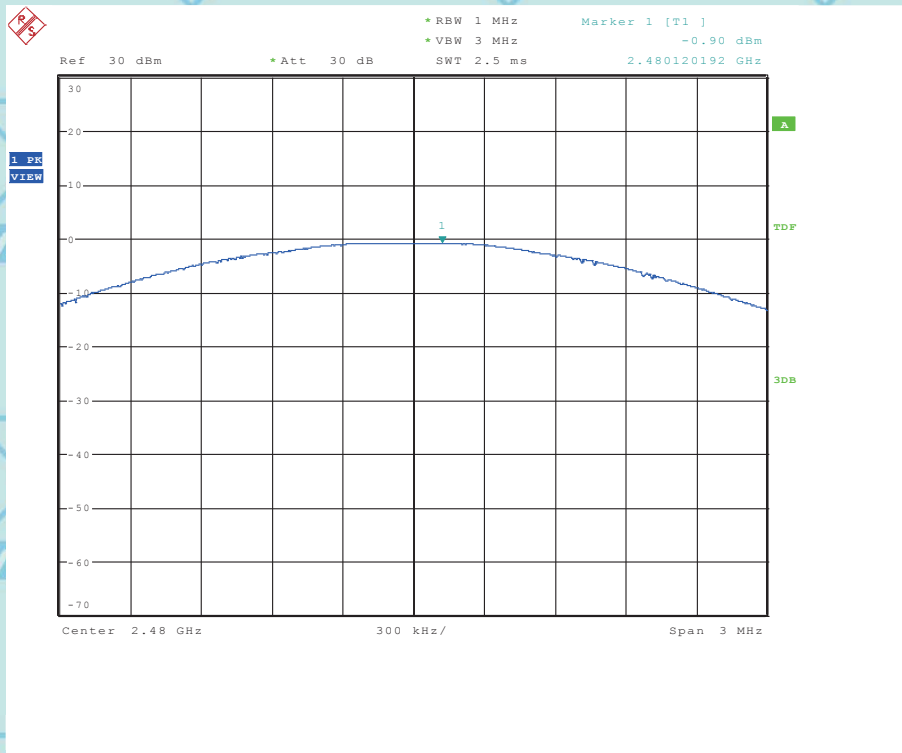


3Mbps
Channel: Low

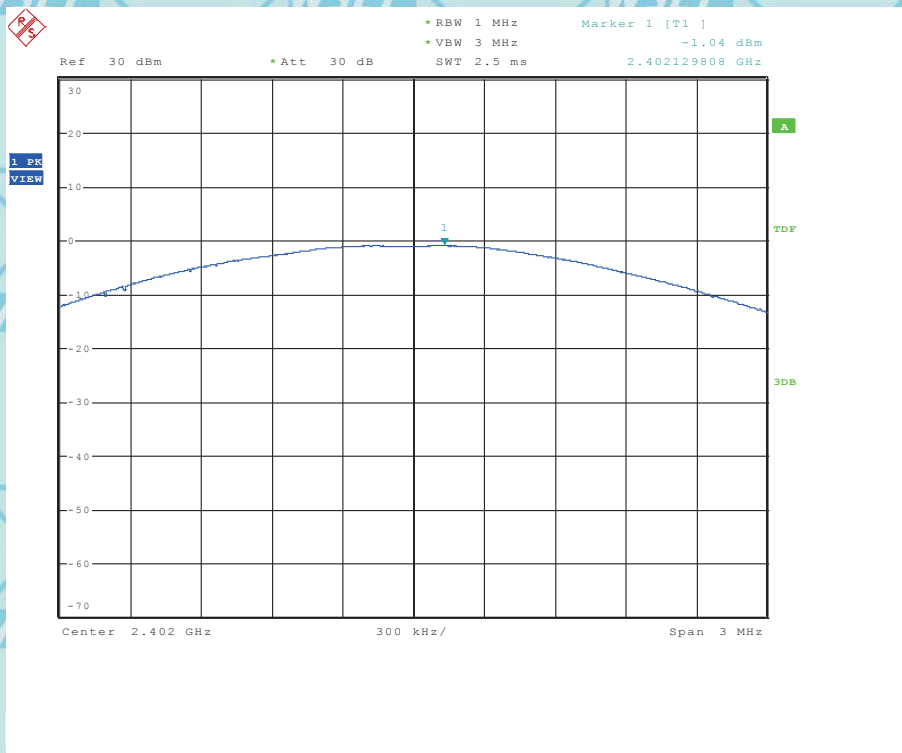




For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: Middle

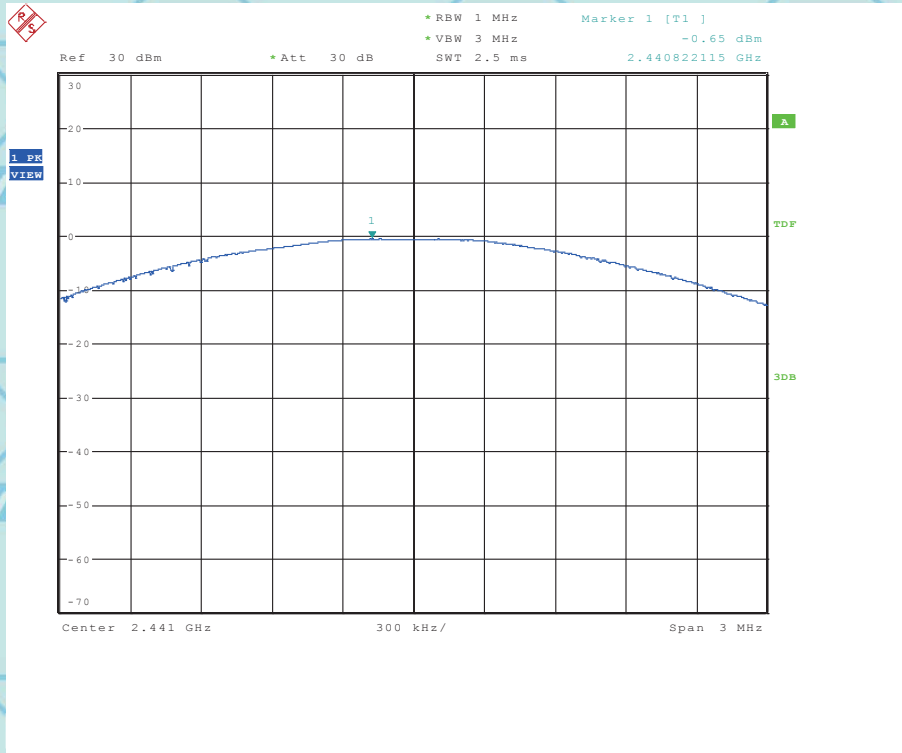

Channel: High


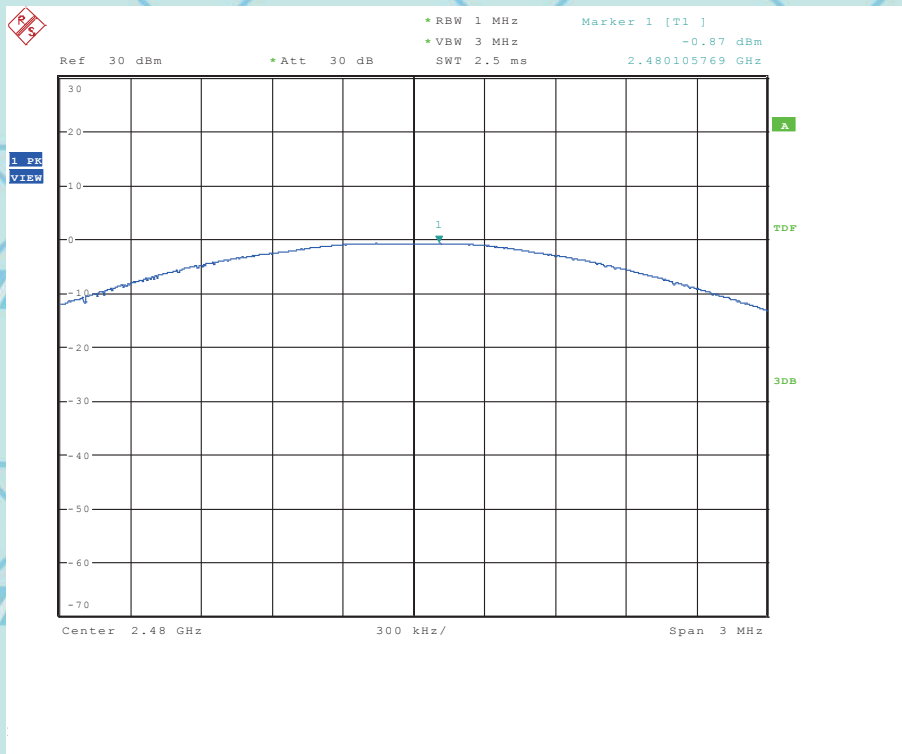




11. 100KHZ BAND EDGES MEASUREMENT 11.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (d)	Band Edges Measurement	(20dB bandwidth)	2400-2483.5	PASS



1Mbps
Channel: Low

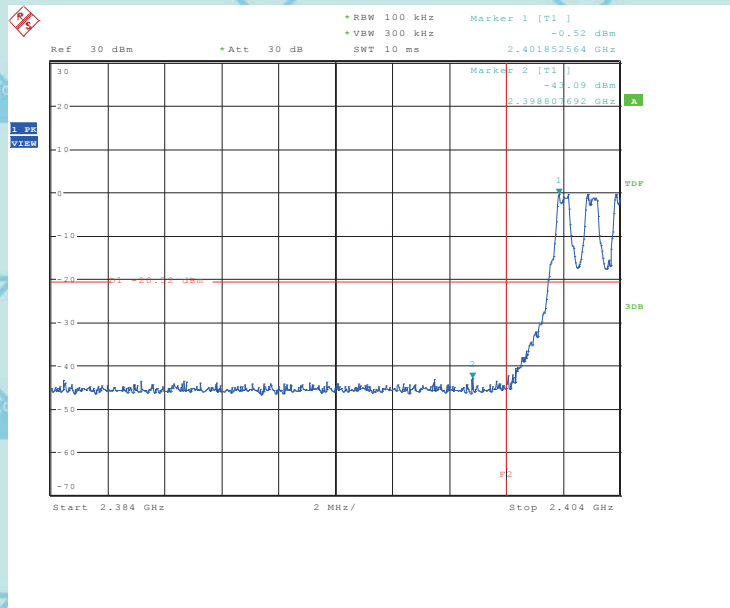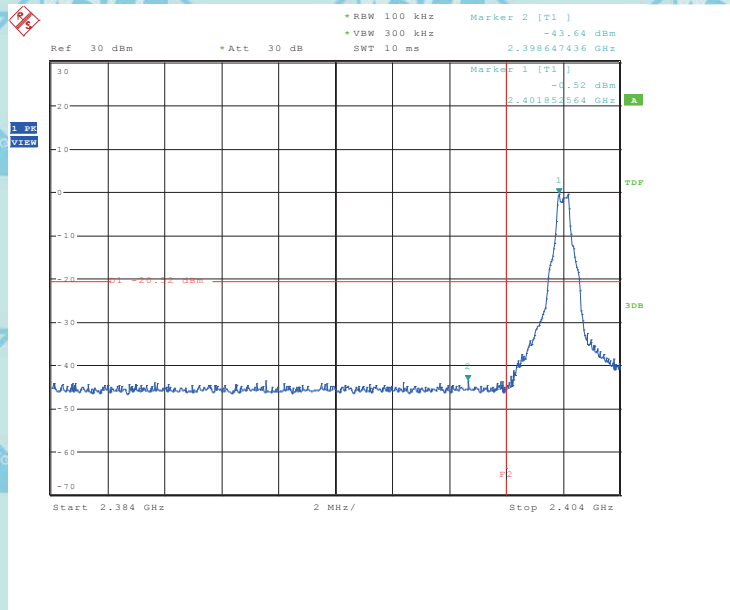



For Question,
Please Contact with WSCT
www.wsct-cert.com



Channel: High

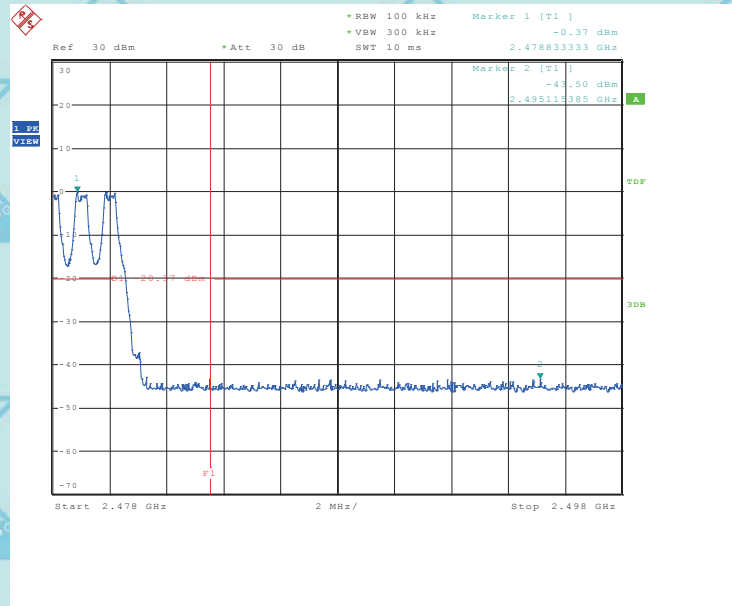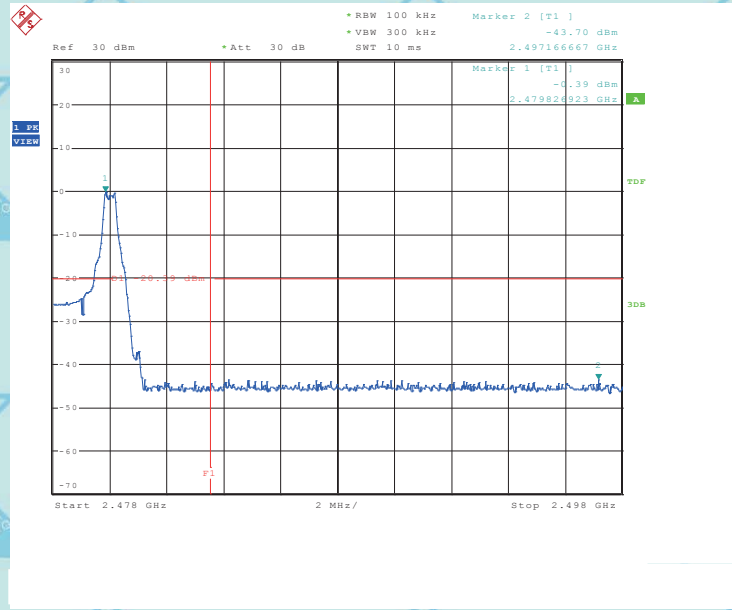



For Question,
Please Contact with WSCT
www.wsct-cert.com



2Mbps
Channel: Low

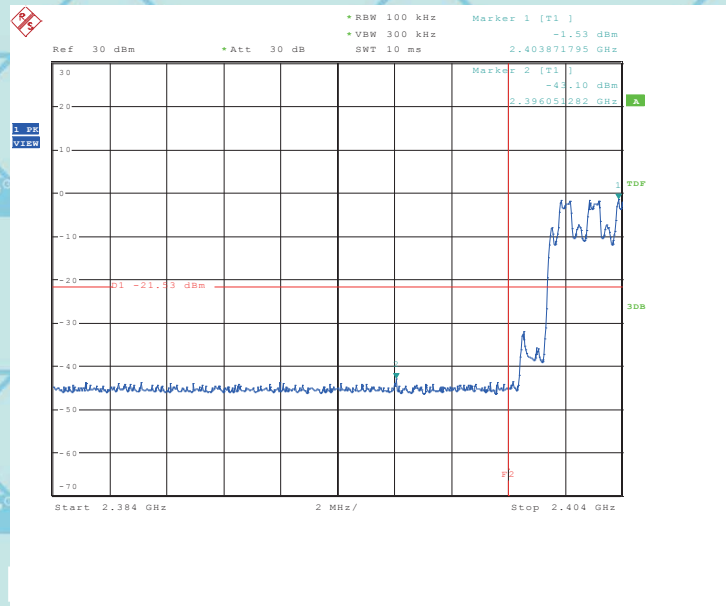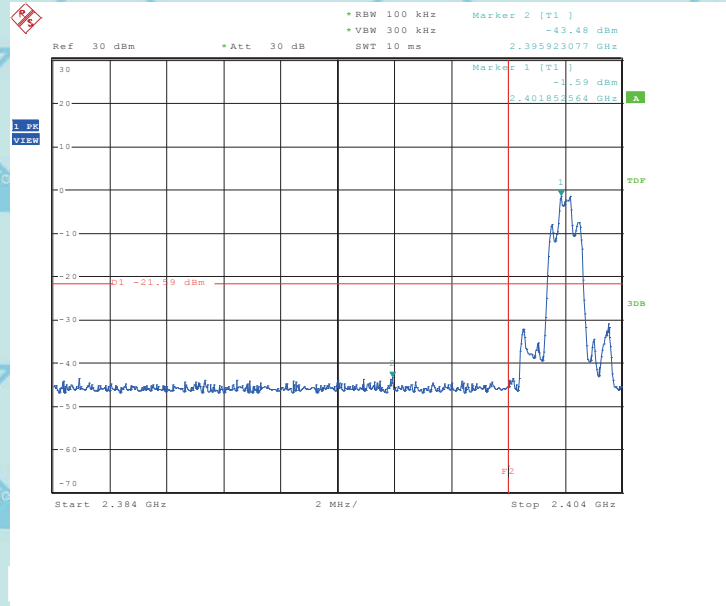



For Question, Please Contact with WSCT www.wsct-cert.com



Channel: High

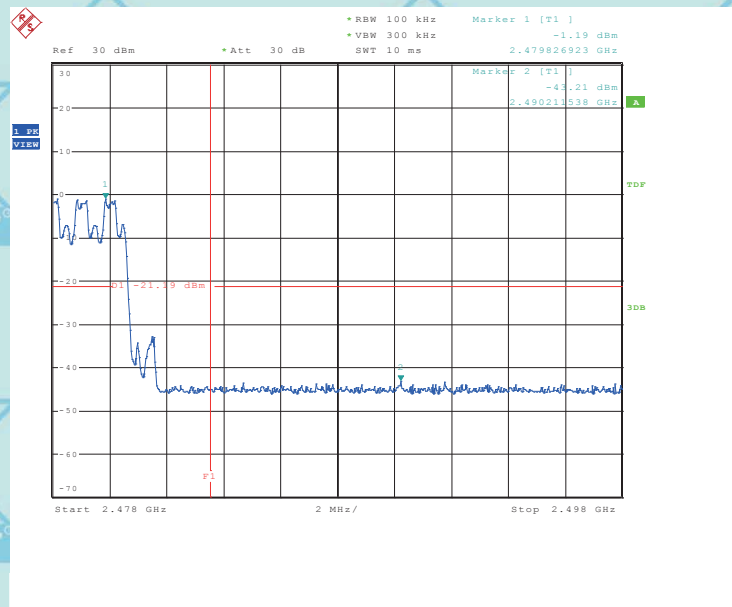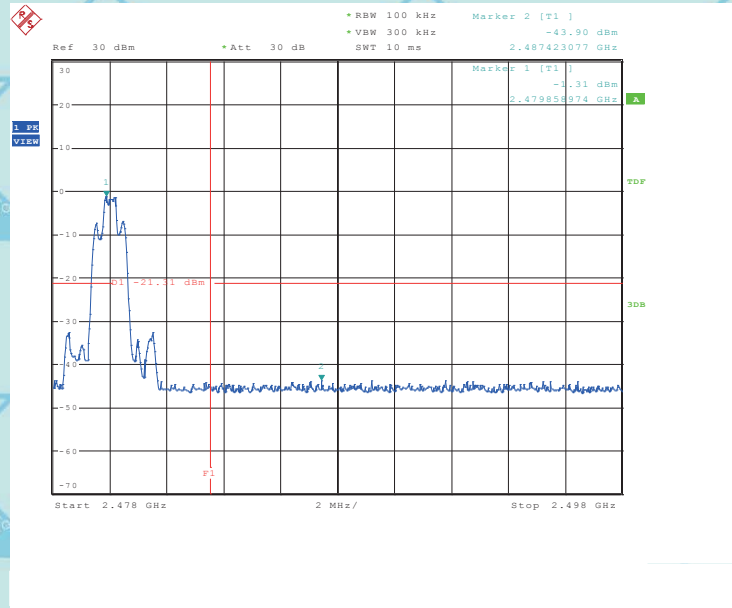



For Question, Please Contact with WSCT www.wsct-cert.com



3Mbps Channel: Low

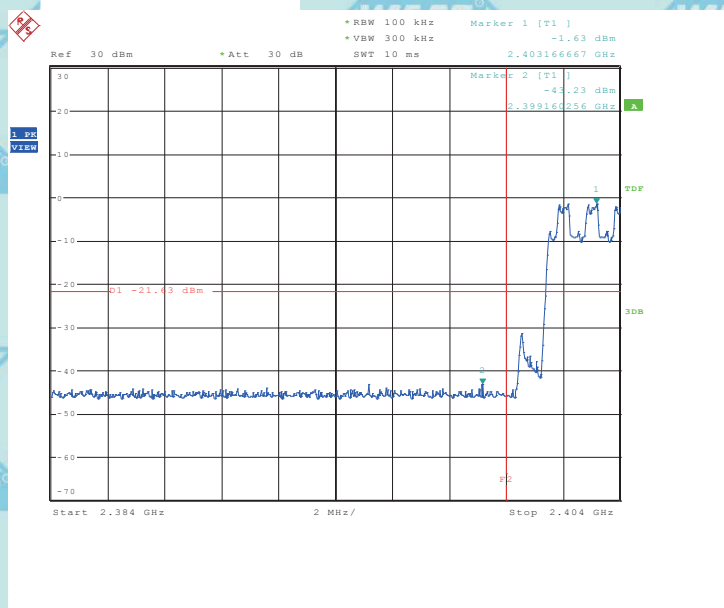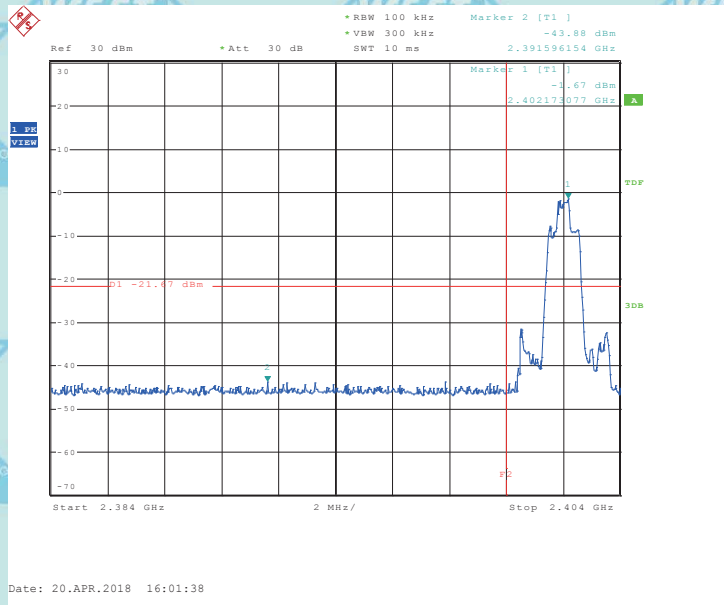



For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: High

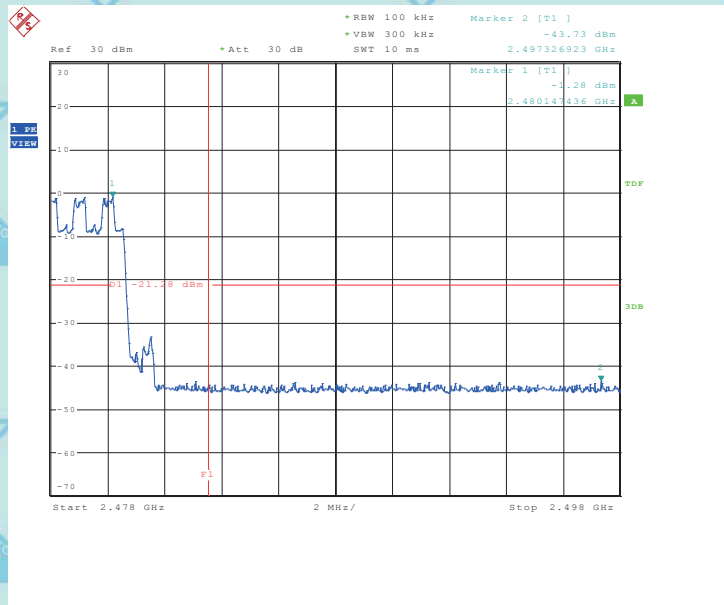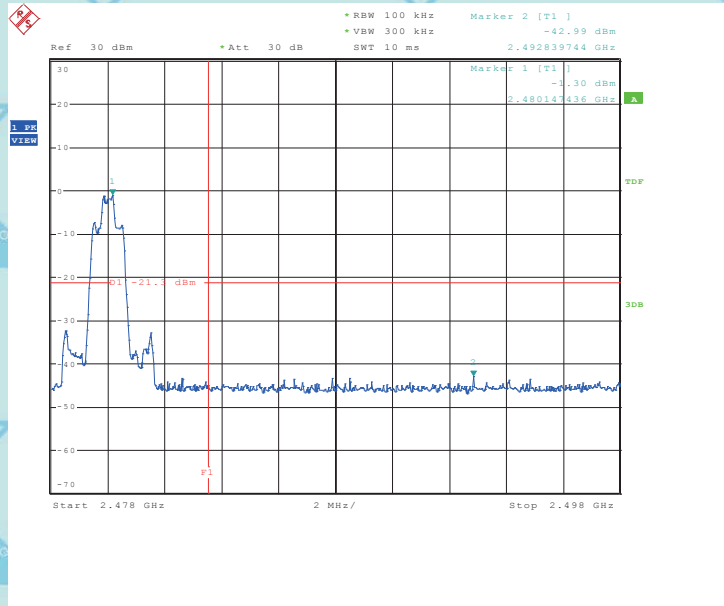





For Question, Please Contact with WSCT www.wsct-cert.com

1Mbps

Channel: Low

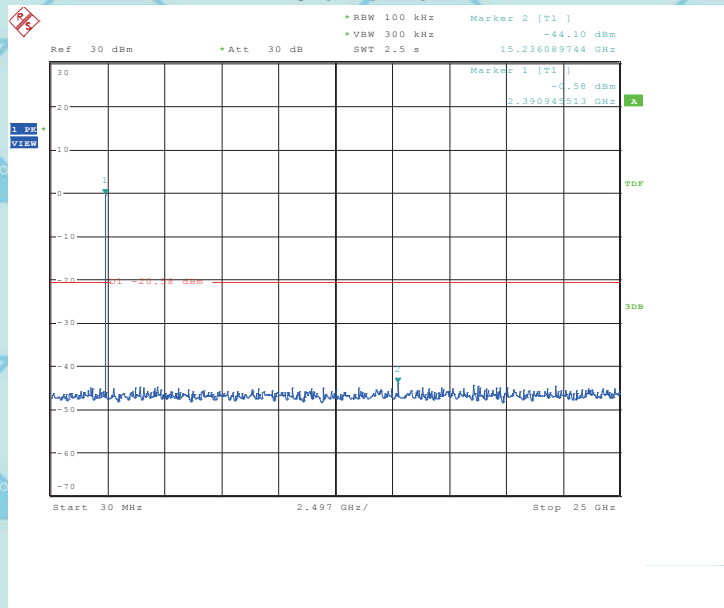


Channel: Middle

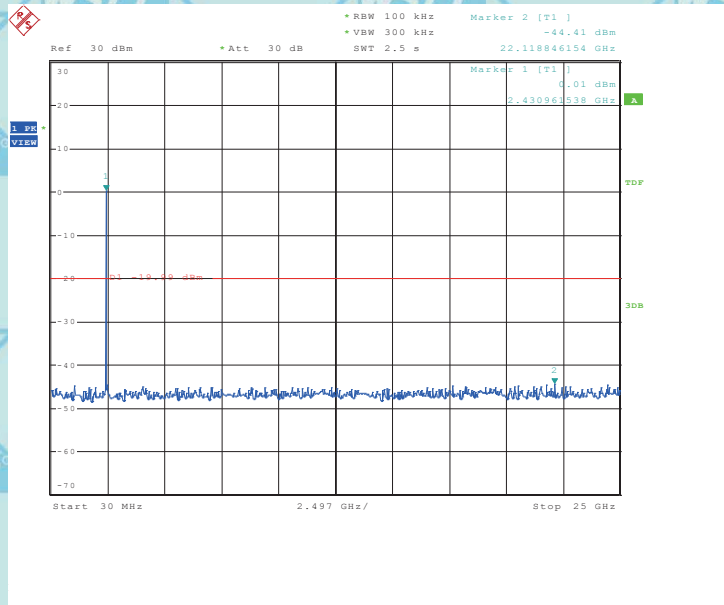




For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: High

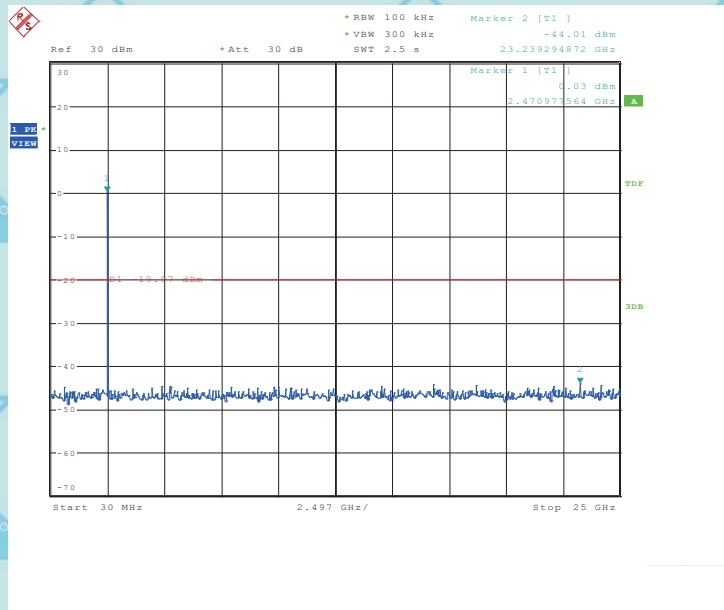

2Mbps


Channel: Low

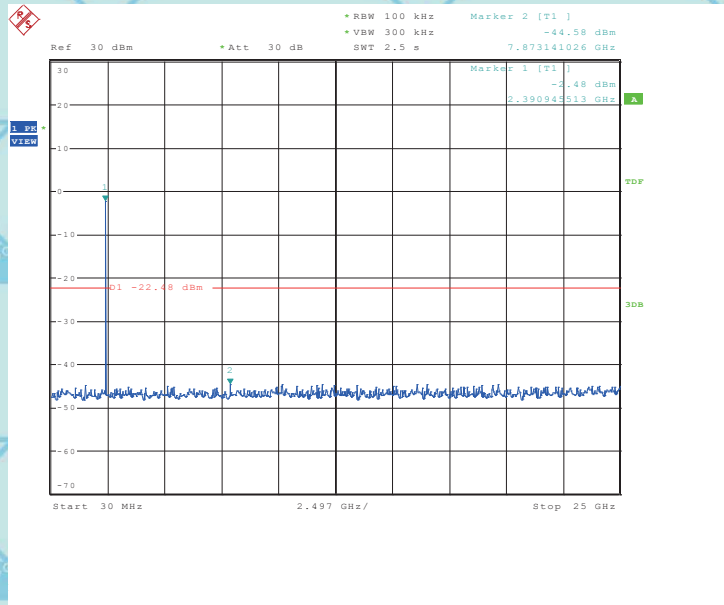




For Question, Please Contact with WSCT www.wsct-cert.com

Channel: Middle

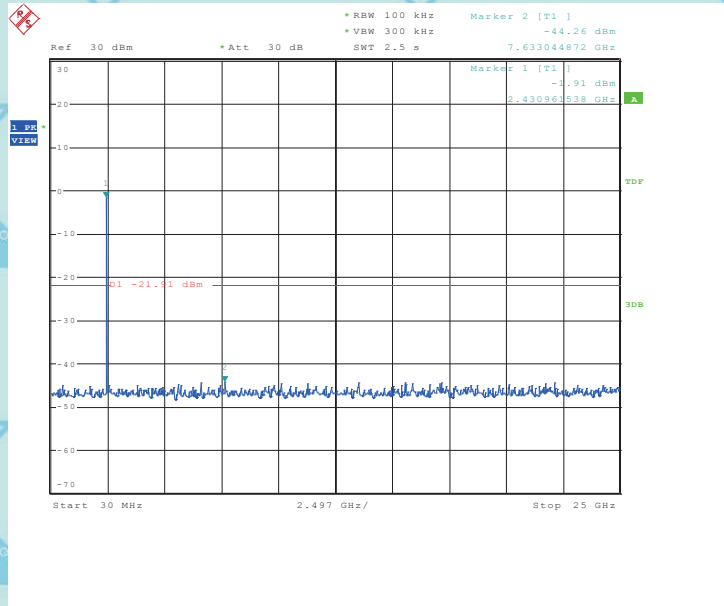

Channel: High

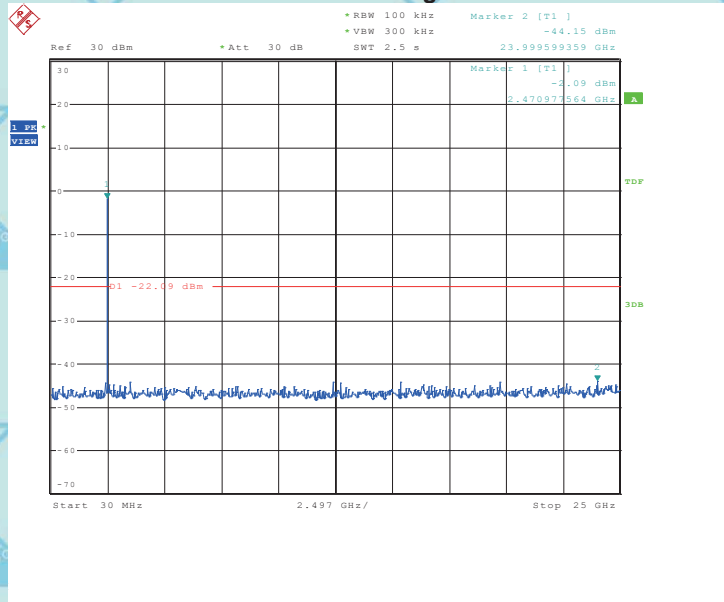





For Question, Please Contact with WSCT www.wsct-cert.com

3Mbps

Channel: Low

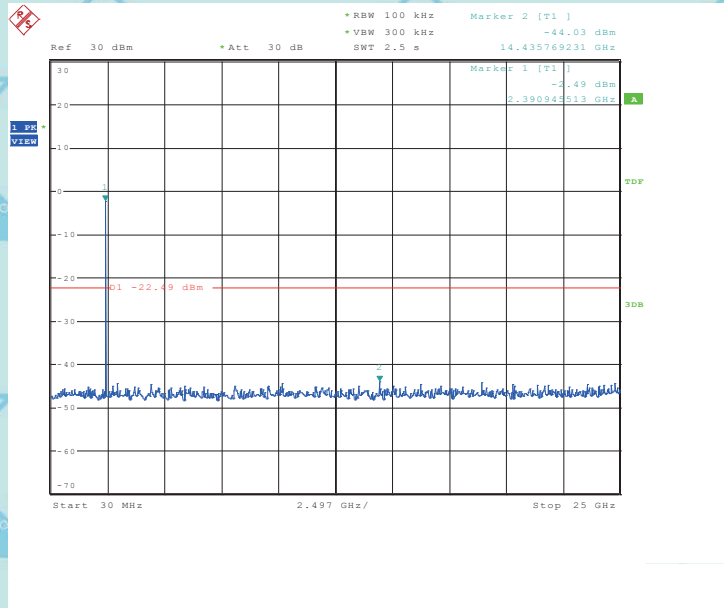


Channel: Middle

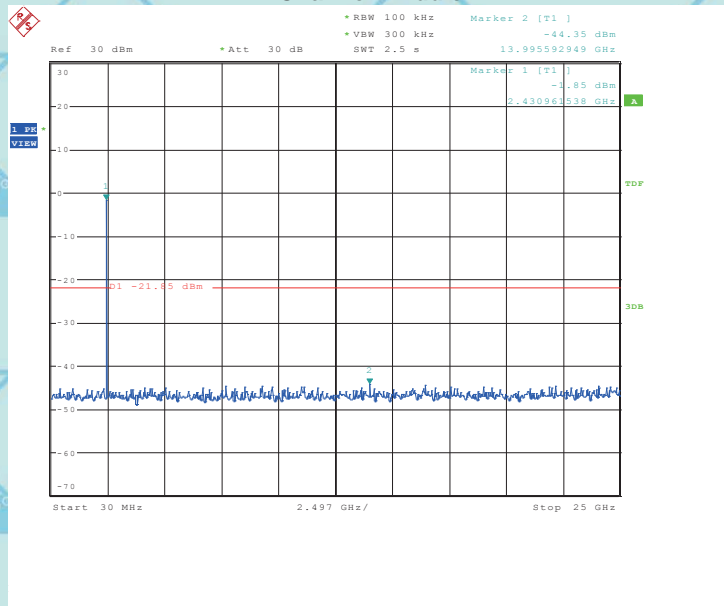



For Question,
Please Contact with WSCT
www.wsct-cert.com

Channel: High

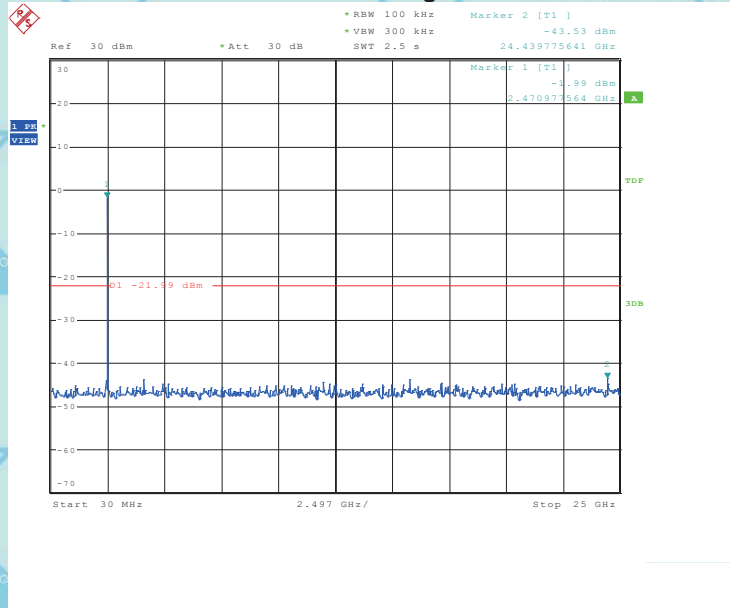



12. ANTENNA APPLICATION

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements: Systems operating in the 2402-2480MHz band that are used exclusively for fixed.


12.2 Result

The EUT's antenna integrated on PCB, The antenna's gain is 0.8dBi and meets the requirement.

The EUT's antenna integrated on PCB, The antenna's gain is 0.8dBi and meets the requirement.

BT Antenna

Internal photograph of EUT

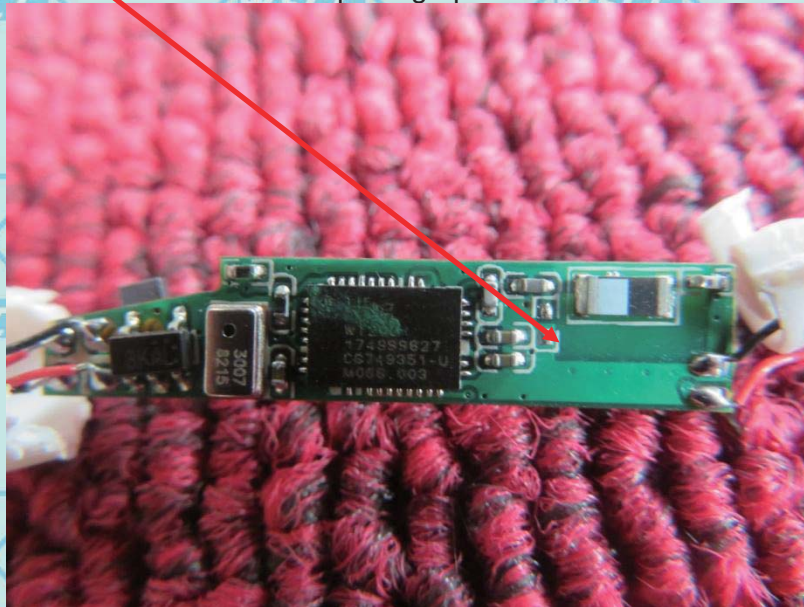





For Question,
Please Contact with WSCT
www.wsct-cert.com

13. EUT TEST PHOTO

RADIATED EMISSION TEST
(Frequency from 30MHz to 1GHz)

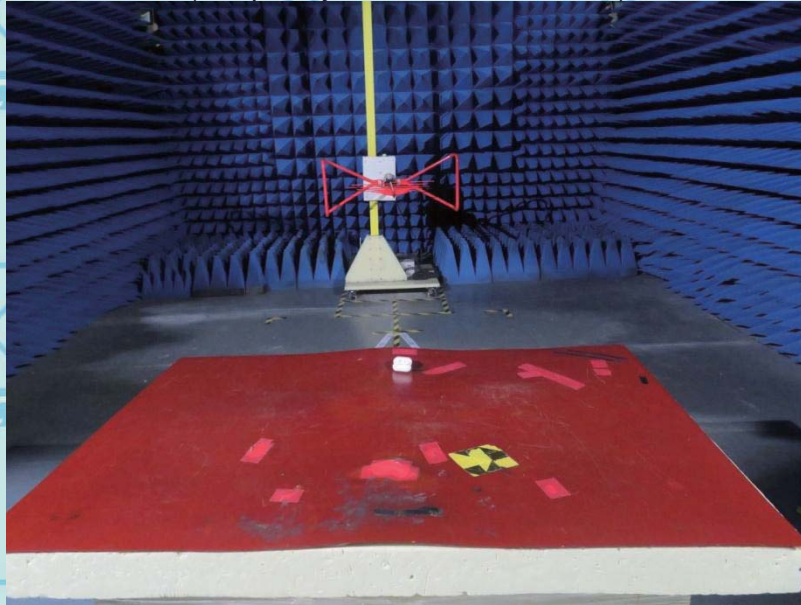

RADIATED EMISSION TEST
(Frequency above 1GHz)

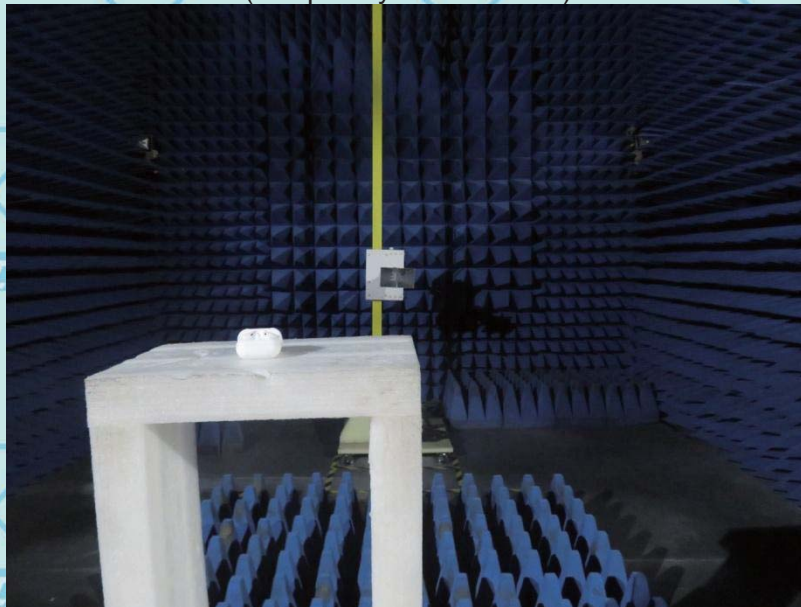



For Question,
Please Contact with WSCT
www.wsct-cert.com

14.PHOTOGRAPHS OF EUT

Appearance photograph of EUT



Appearance photograph of EUT





For Question,
Please Contact with WSCT
www.wsct-cert.com

Appearance photograph of EUT



Appearance photograph of EUT





For Question,
Please Contact with WSCT
www.wsct-cert.com

Appearance photograph of EUT



Appearance photograph of EUT





For Question,
Please Contact with WSCT
www.wsct-cert.com

Appearance photograph of EUT



Internal photograph of EUT





For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT



Internal photograph of EUT





For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT



Internal photograph of EUT






For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT




Internal photograph of EUT

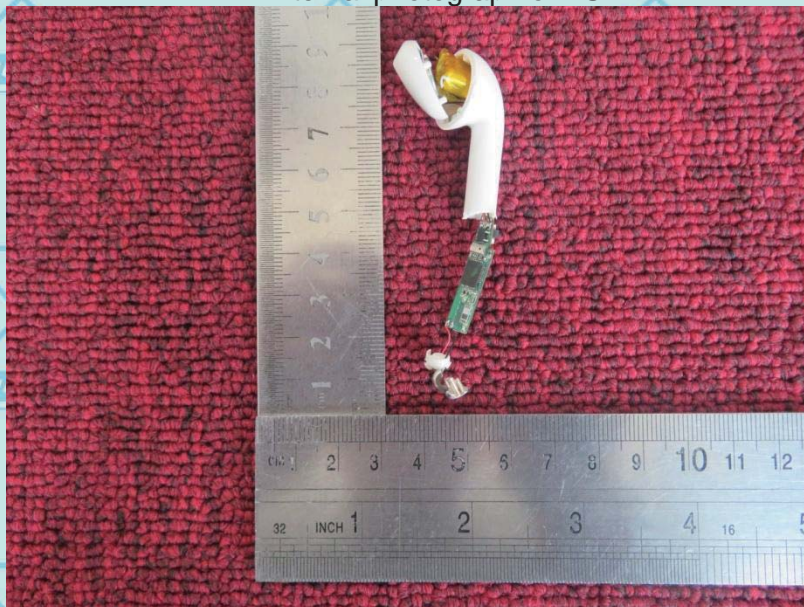




For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT

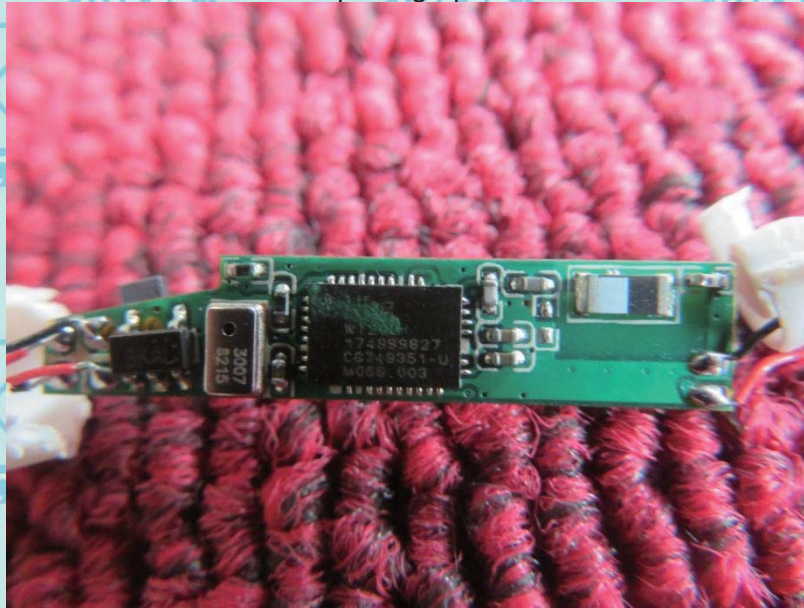

Internal photograph of EUT

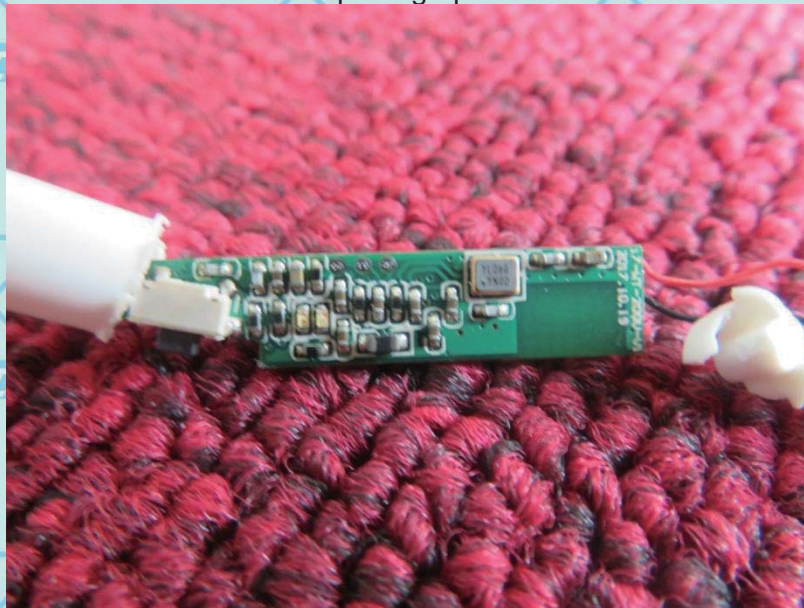




For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT




Internal photograph of EUT

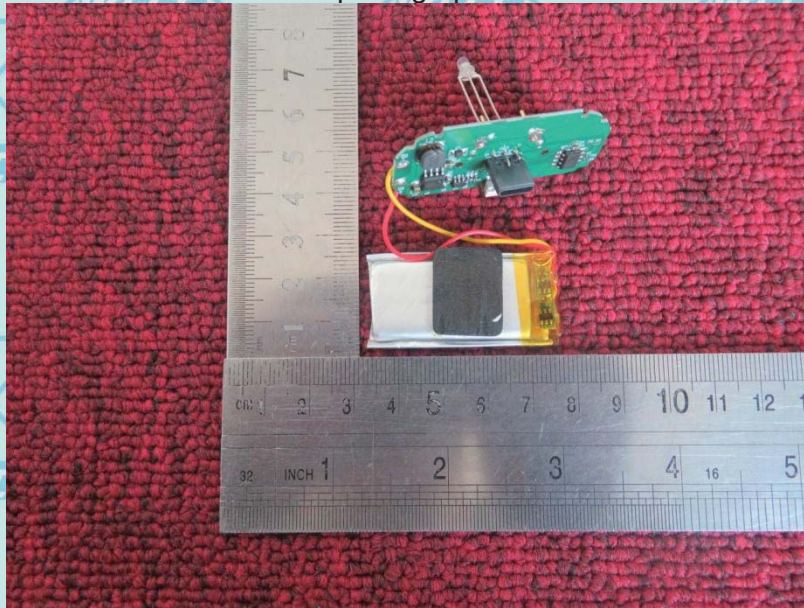




For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT

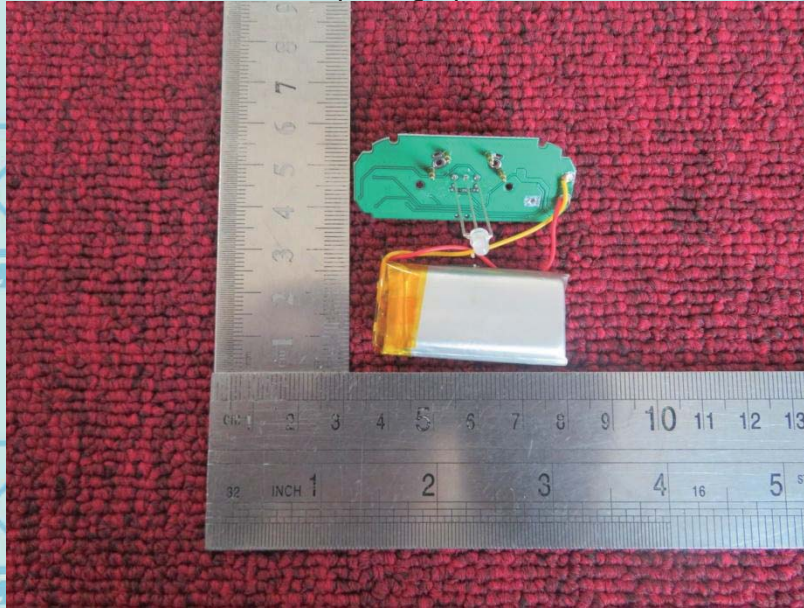


Internal photograph of EUT

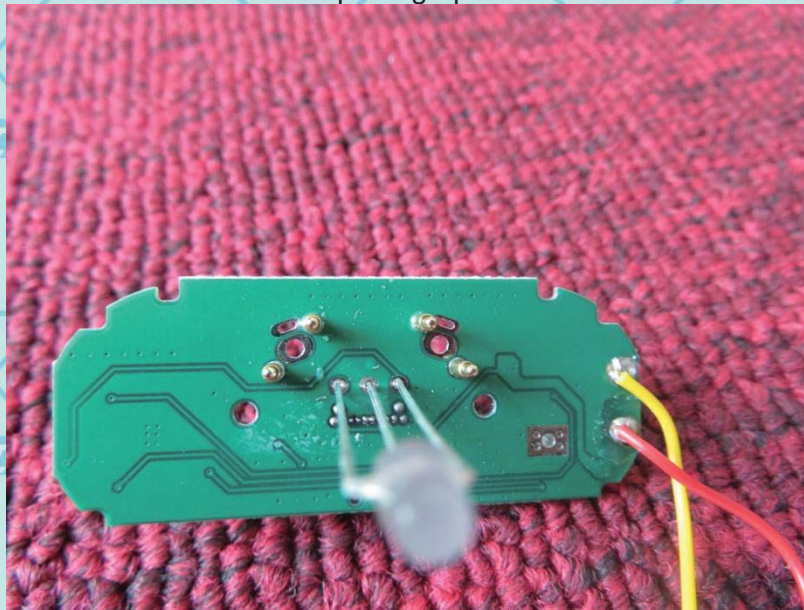



For Question,
Please Contact with WSCT
www.wsct-cert.com

Internal photograph of EUT

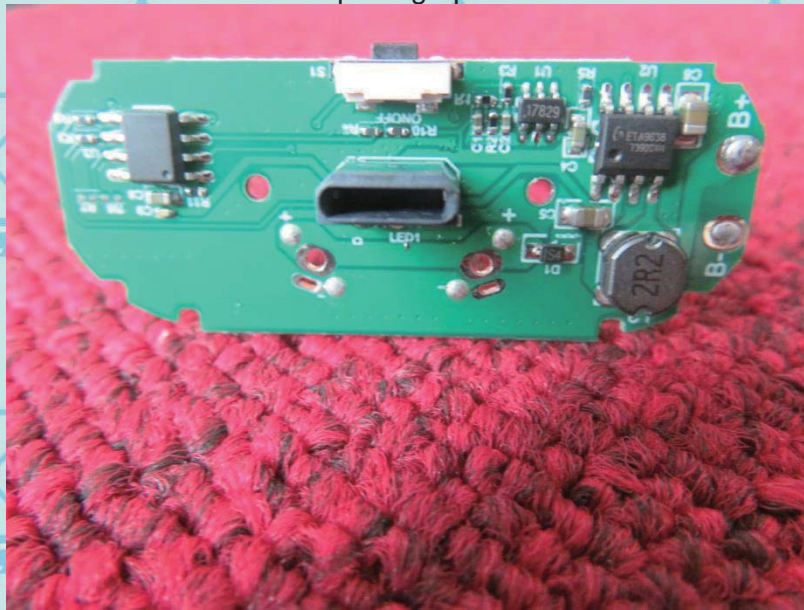

---END OF REPORT---

