






6 Conducted RF Spurious Emission



6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-45.54	-20	Pass
BLE 1M	2440	-46.42	-20	Pass
BLE 1M	2480	-45.77	-20	Pass
BLE 2M	2402	-44.71	-20	Pass
BLE 2M	2440	-45.77	-20	Pass
BLE 2M	2480	-45.09	-20	Pass



6.2 Test Graphs

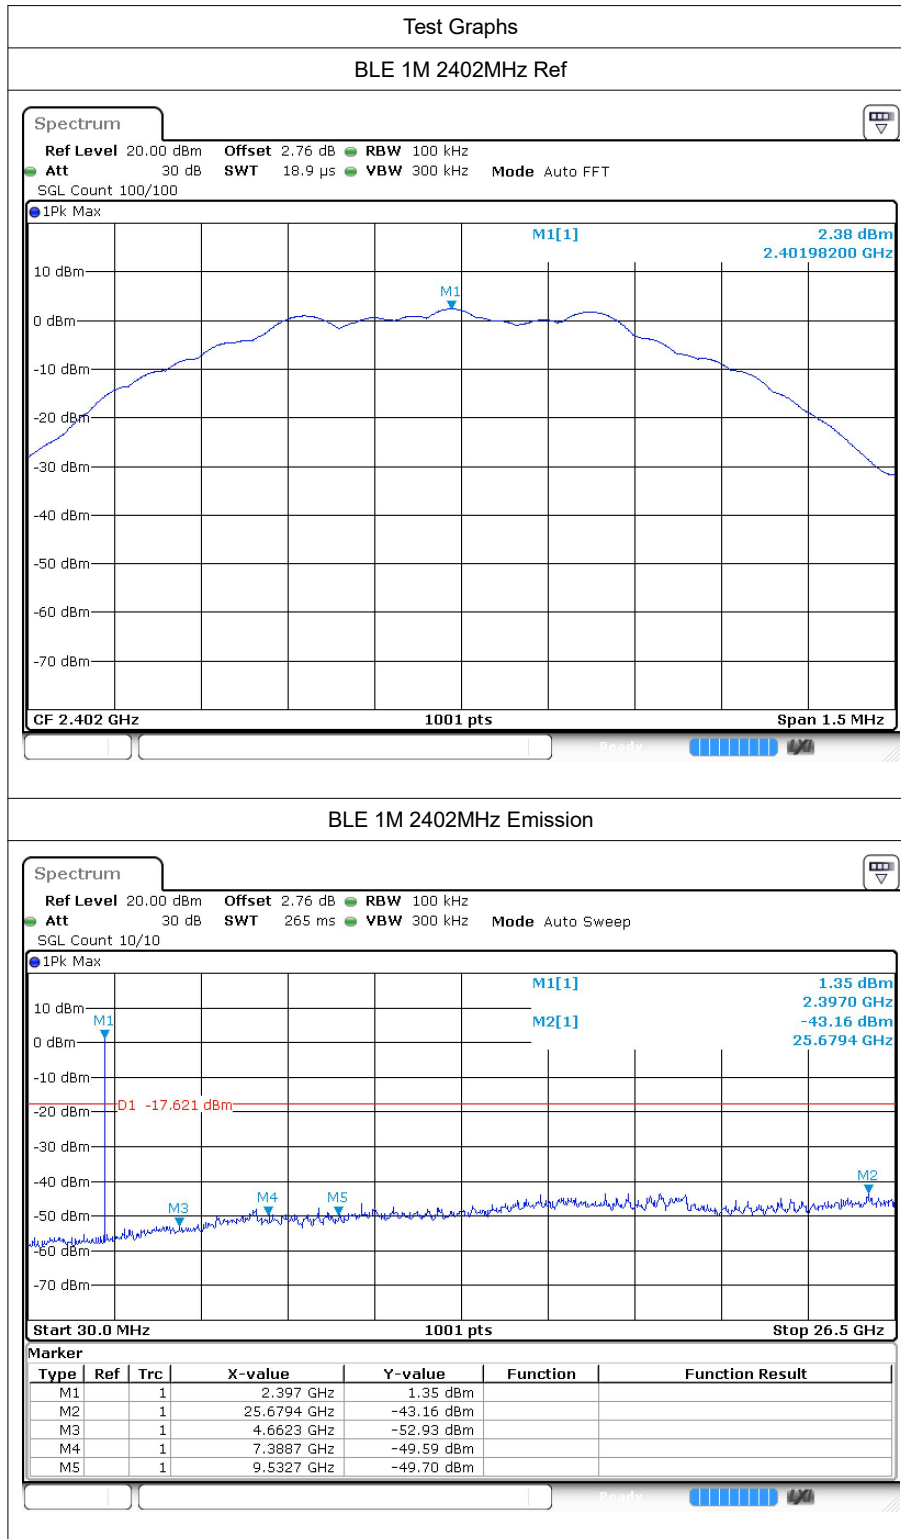

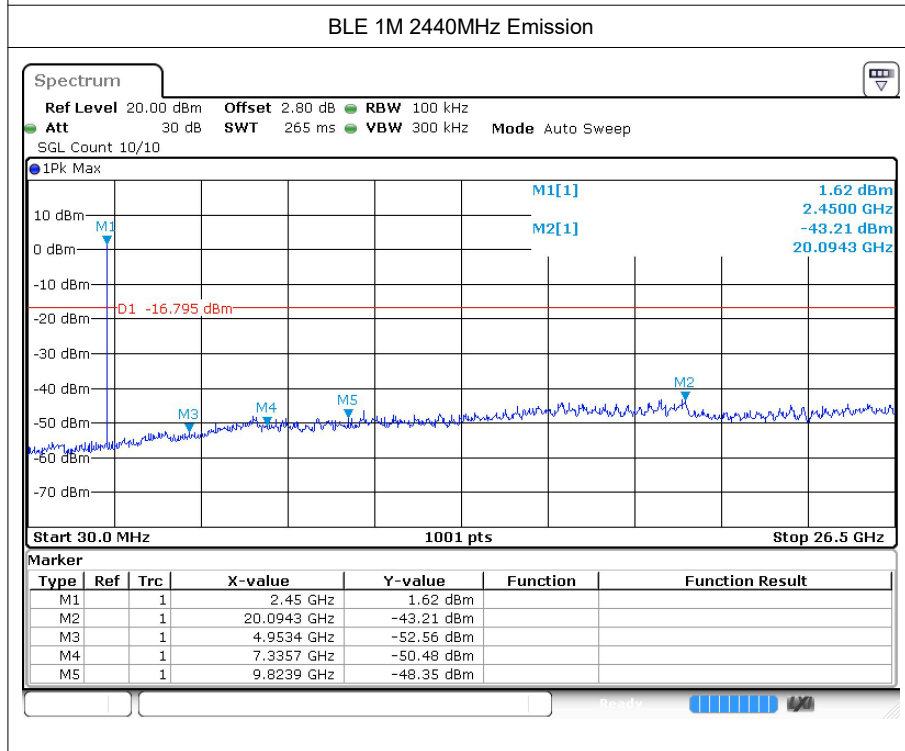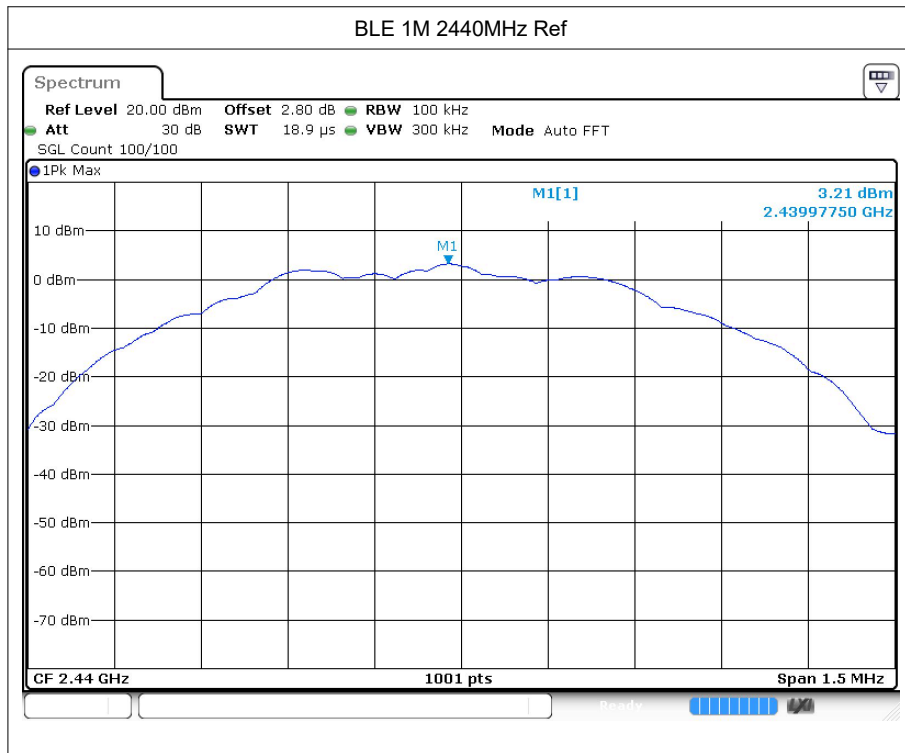

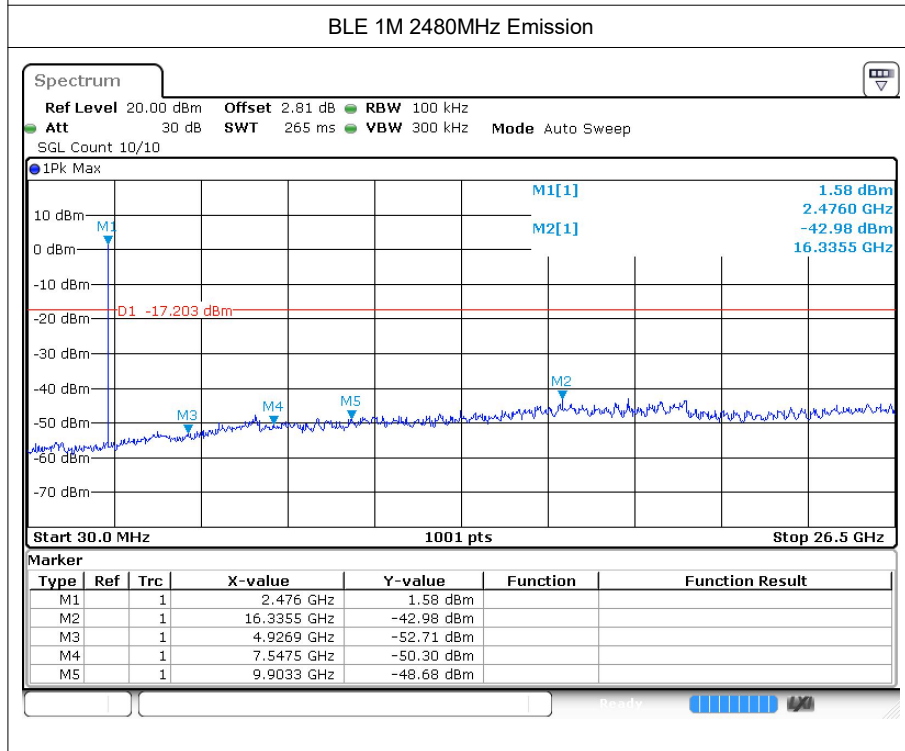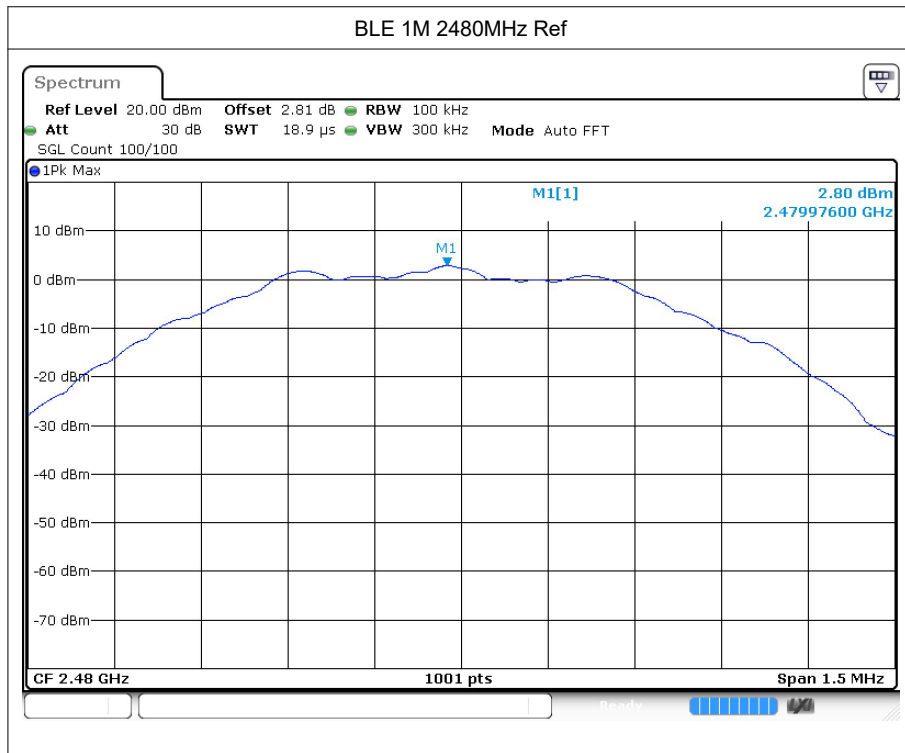



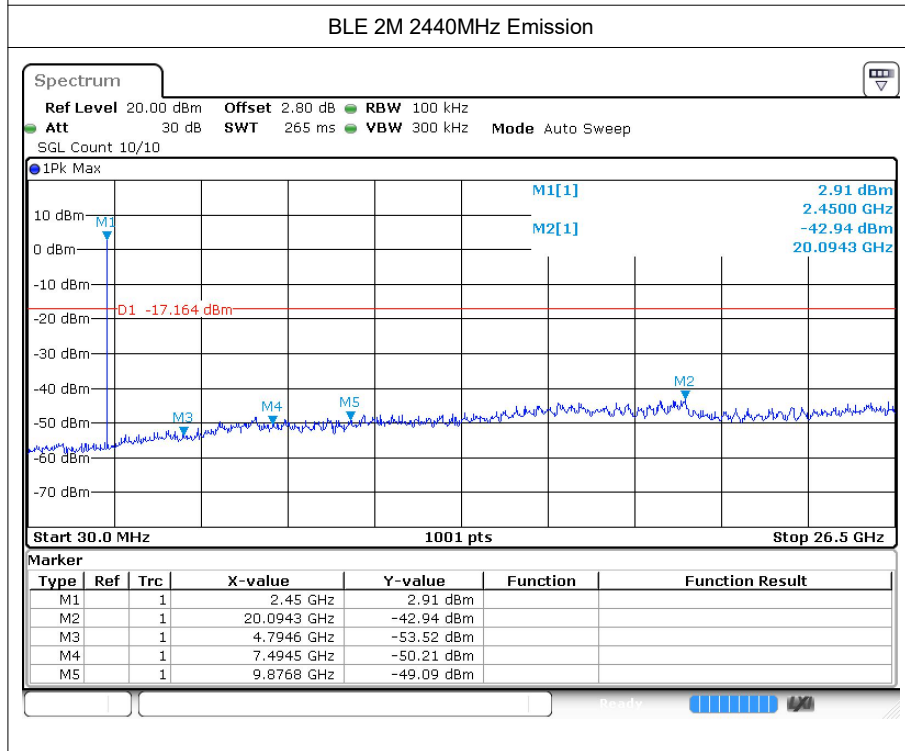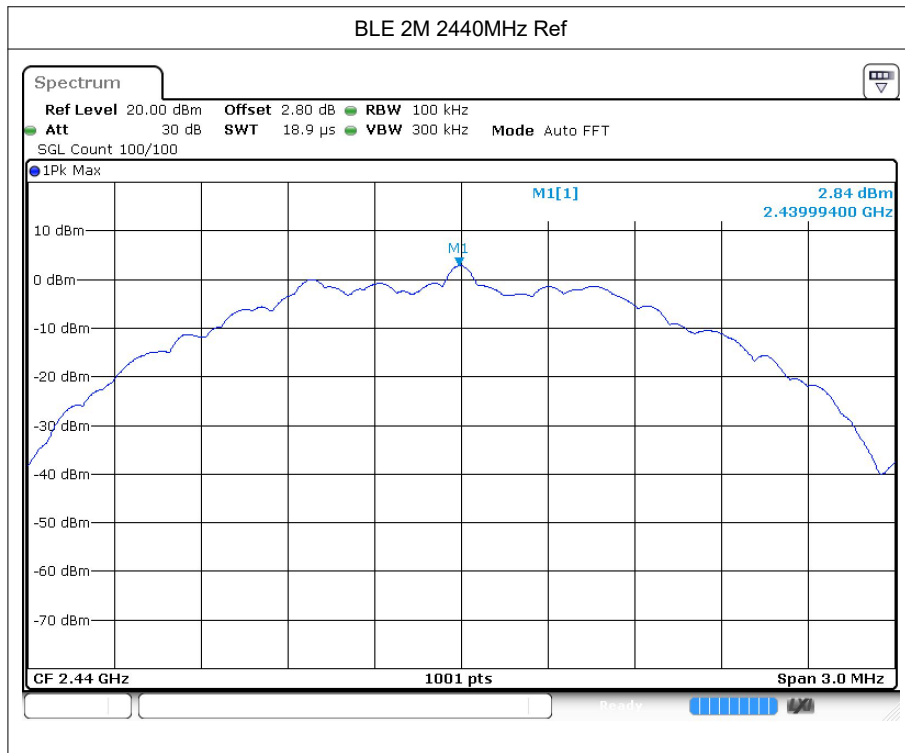





7 Restrict Band


7.1 Test Result



Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.93	2	47.33	Peak	74	Pass
BLE 1M	2402	2310	-57.64	2	39.62	Average	54	Pass
BLE 1M	2402	2340.816	-45.95	2	51.31	Peak	74	Pass
BLE 1M	2402	2341.968	-55.39	2	41.87	Average	54	Pass
BLE 1M	2402	2390	-48.8	2	48.46	Peak	74	Pass
BLE 1M	2402	2390	-58.33	2	38.93	Average	54	Pass
BLE 1M	2480	2483.5	-45.61	2	51.65	Peak	74	Pass
BLE 1M	2480	2483.5	-55.58	2	41.68	Average	54	Pass
BLE 1M	2480	2483.512	-45.61	2	51.65	Peak	74	Pass
BLE 1M	2480	2483.512	-55.58	2	41.68	Average	54	Pass
BLE 1M	2480	2500	-50.64	2	46.62	Peak	74	Pass
BLE 1M	2480	2500	-57.8	2	39.46	Average	54	Pass
BLE 2M	2402	2310	-49.56	2	47.7	Peak	74	Pass
BLE 2M	2402	2310	-57.05	2	40.21	Average	54	Pass
BLE 2M	2402	2332.944	-44.82	2	52.44	Peak	74	Pass
BLE 2M	2402	2341.776	-55.23	2	42.03	Average	54	Pass
BLE 2M	2402	2390	-48.7	2	48.56	Peak	74	Pass
BLE 2M	2402	2390	-57.59	2	39.67	Average	54	Pass







2M								
BLE 2M	2480	2483.5	-48.26	2	49	Peak	74	Pass
BLE 2M	2480	2483.5	-52.54	2	44.72	Average	54	Pass
BLE 2M	2480	2483.944	-46.33	2	50.93	Peak	74	Pass
BLE 2M	2480	2483.512	-52.54	2	44.72	Average	54	Pass
BLE 2M	2480	2500	-50.98	2	46.28	Peak	74	Pass
BLE 2M	2480	2500	-57.2	2	40.06	Average	54	Pass

7.2 Test Graphs

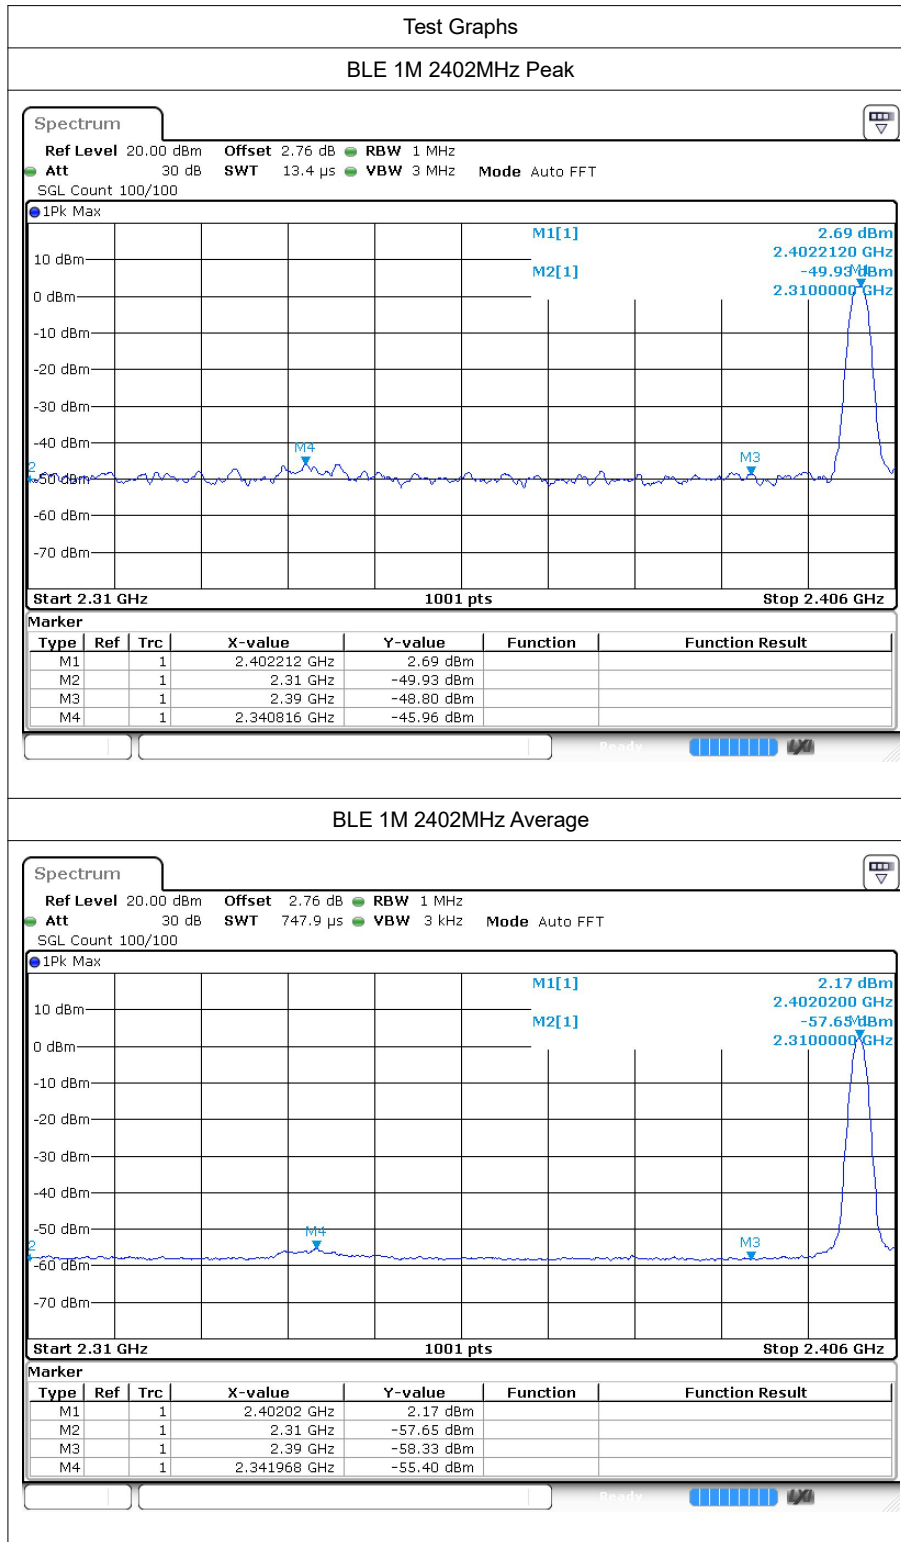

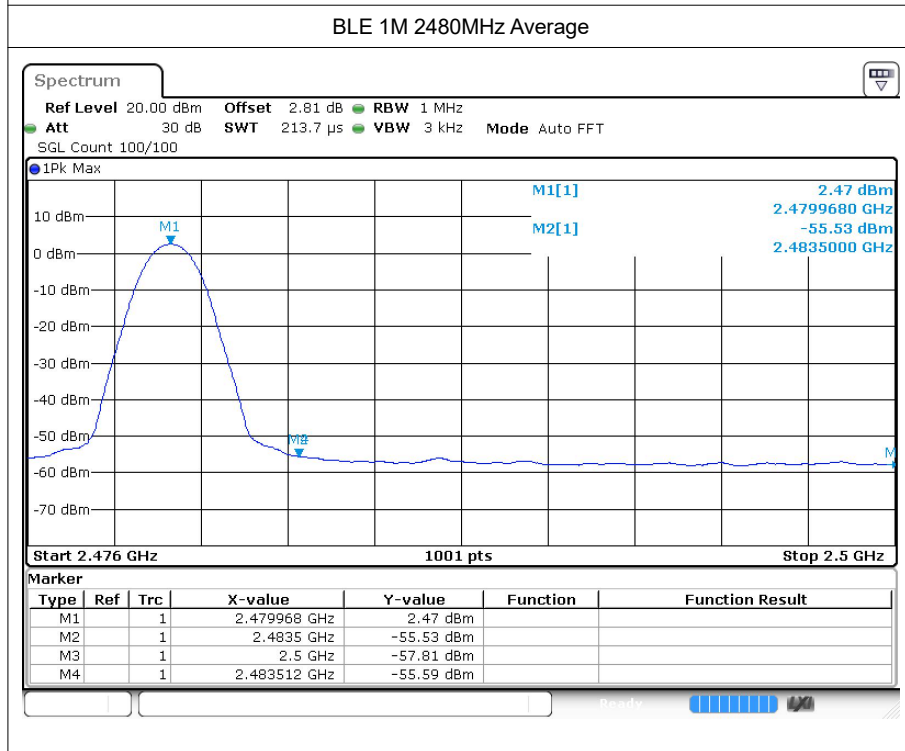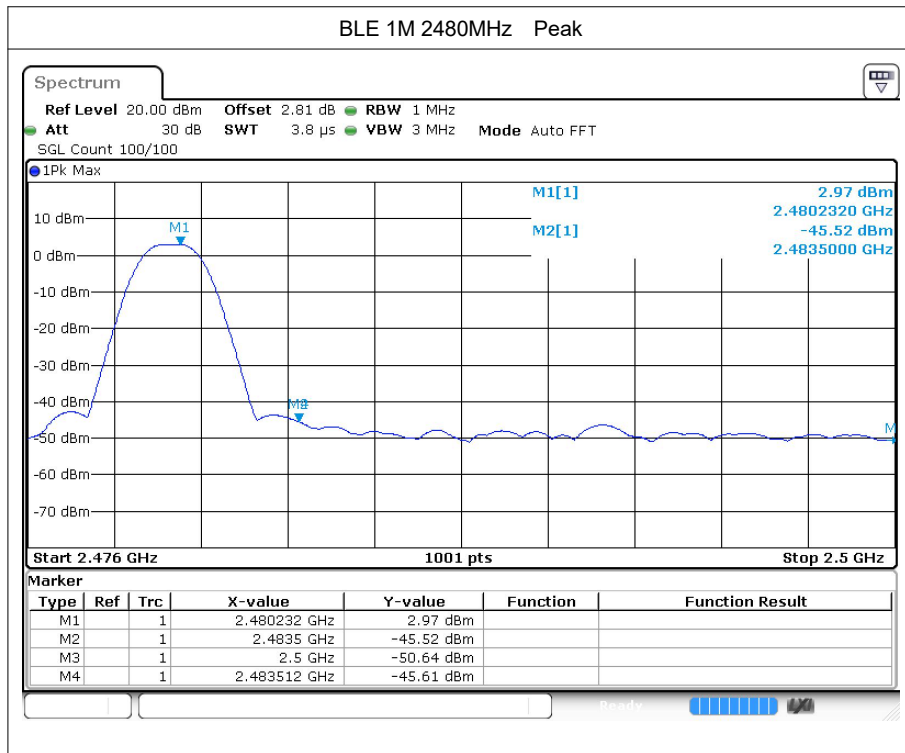

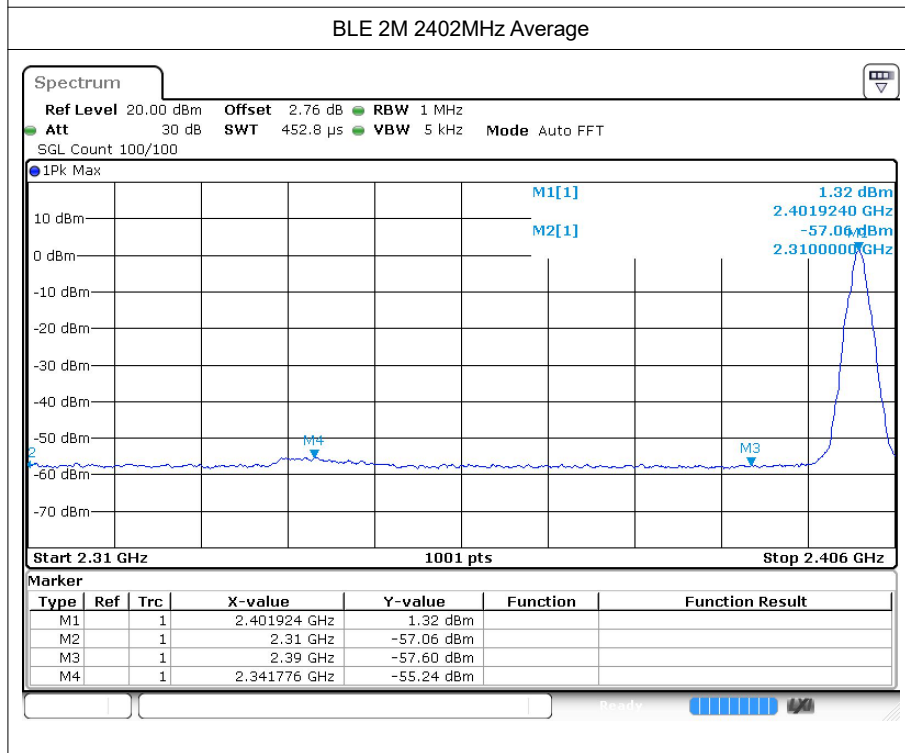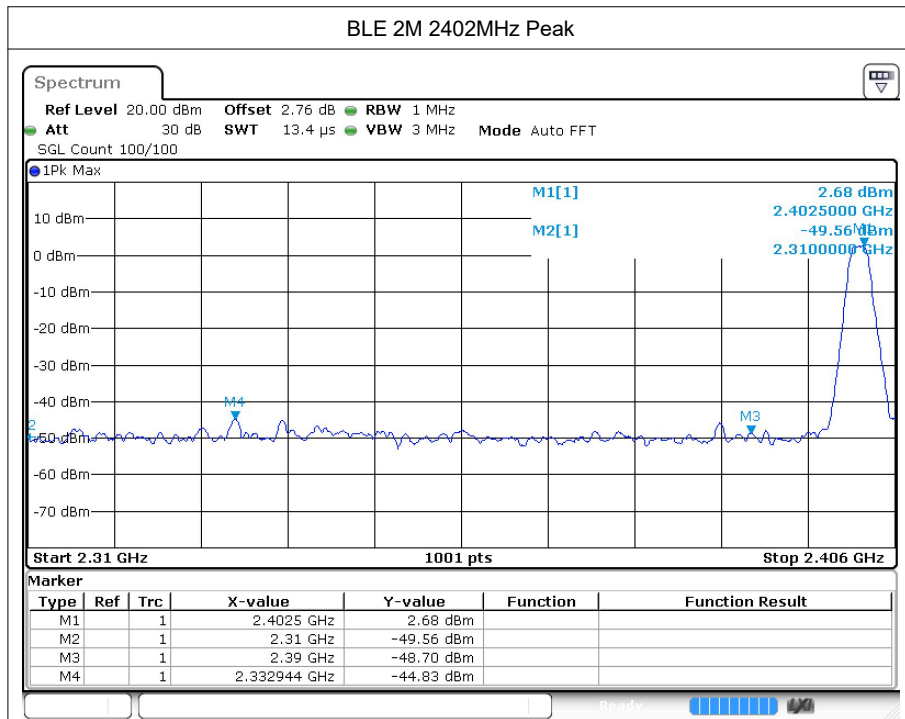

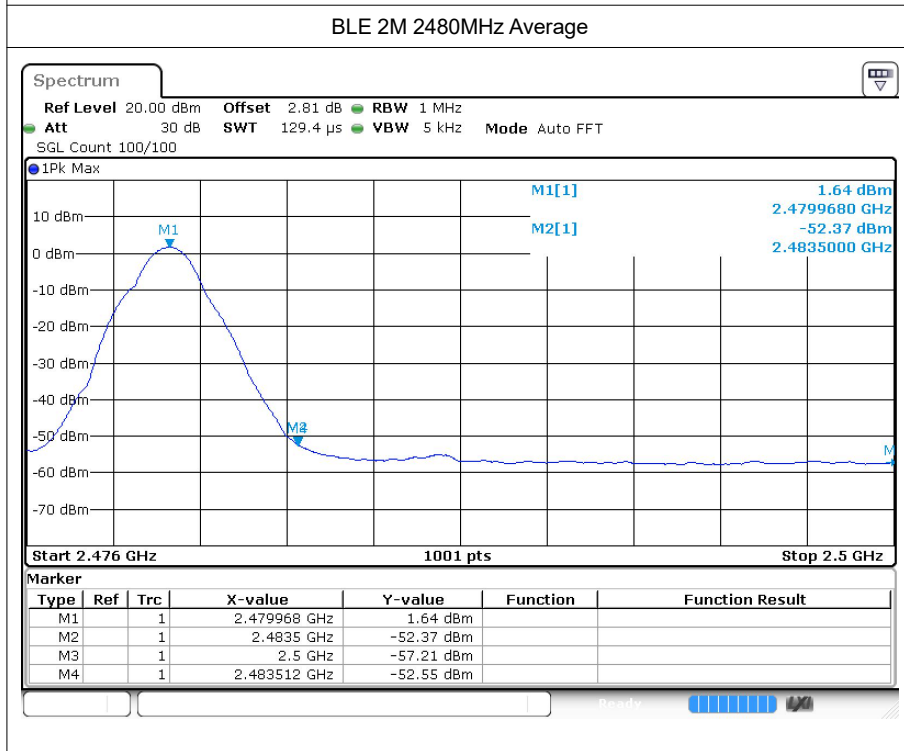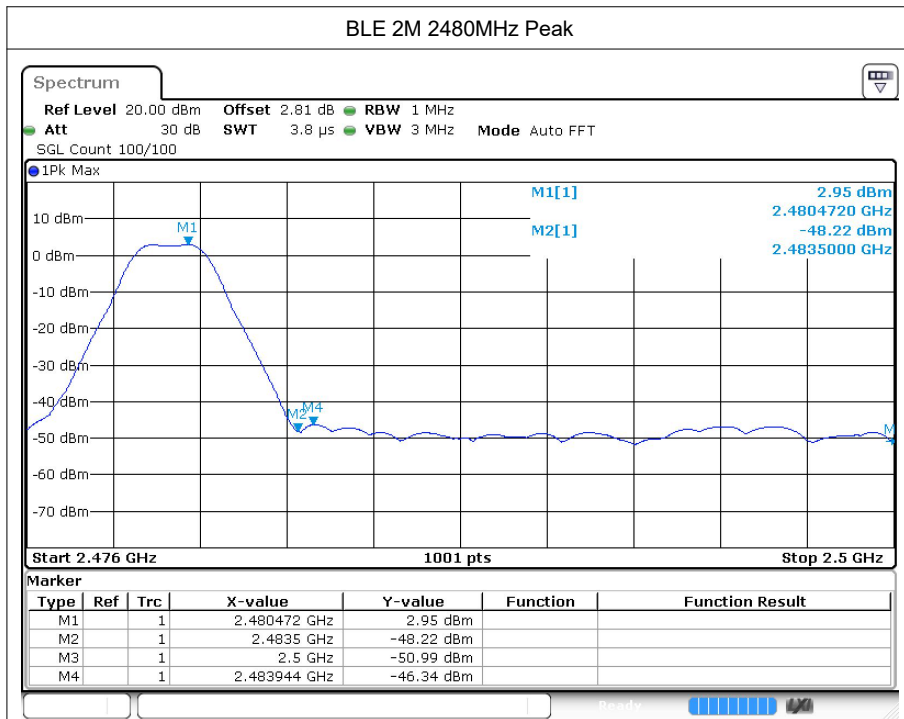

---The End---