

Test Plot 1#: GSM 850_Head Left Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00835 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4160 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0100 W/kg

SAR(1 g) = 0.00801 W/kg; SAR(10 g) = 0.00604 W/kg

Maximum value of SAR (measured) = 0.00844 W/kg

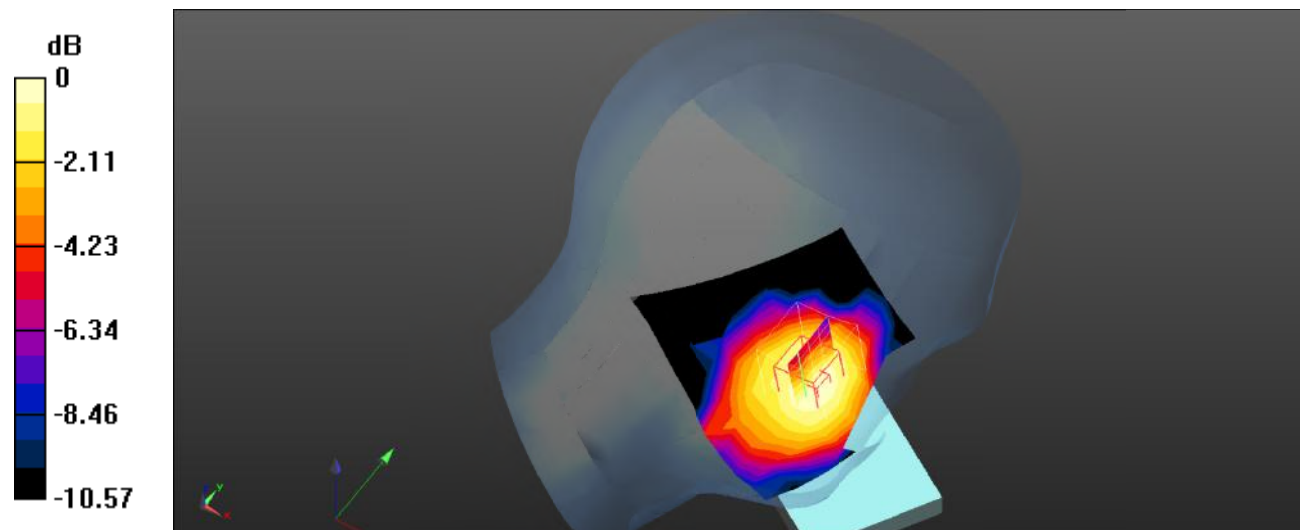

Test Plot 2#: GSM 850_Head Left Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00641 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.567 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.00671 W/kg

SAR(1 g) = 0.00533 W/kg; SAR(10 g) = 0.00379 W/kg

Maximum value of SAR (measured) = 0.00558 W/kg

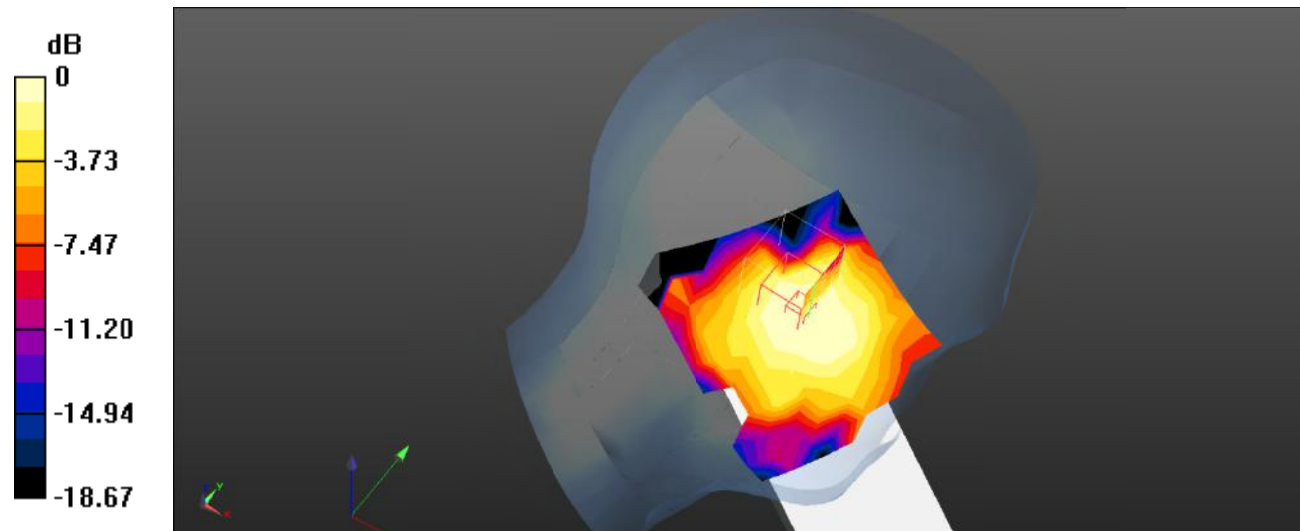

0 dB = 0.00558 W/kg = -22.53 dB dBW/kg

Test Plot 3#: GSM 850_Head Right Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0104 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.392 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00725 W/kg

Maximum value of SAR (measured) = 0.0113 W/kg

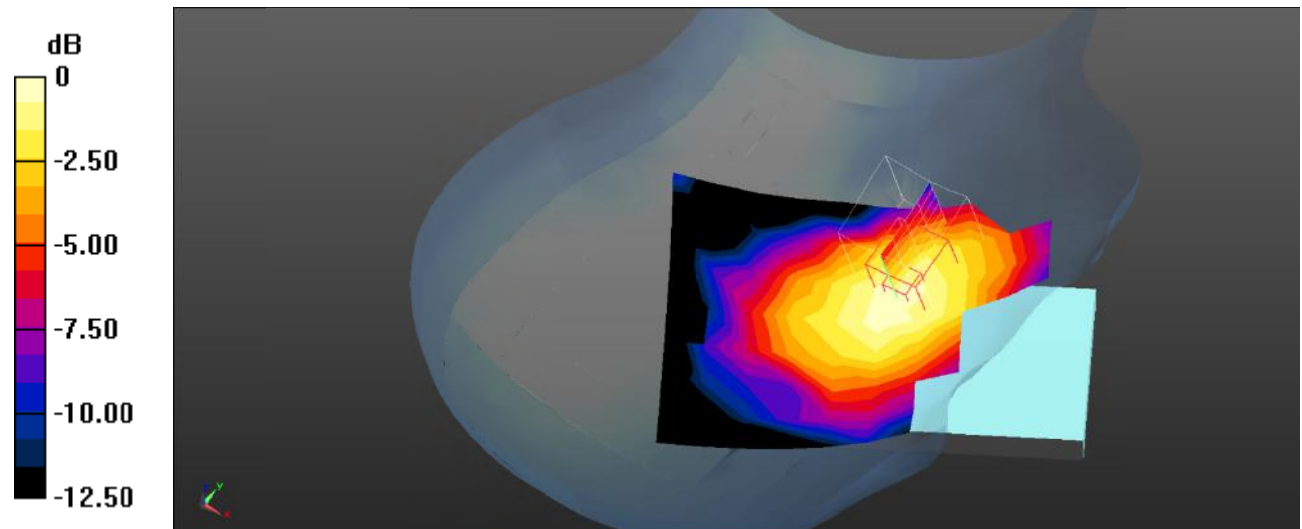

0 dB = 0.0113 W/kg = -19.47 dB dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00512 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.492 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.00623 W/kg

SAR(1 g) = 0.00465 W/kg; SAR(10 g) = 0.00356 W/kg

Maximum value of SAR (measured) = 0.00527 W/kg

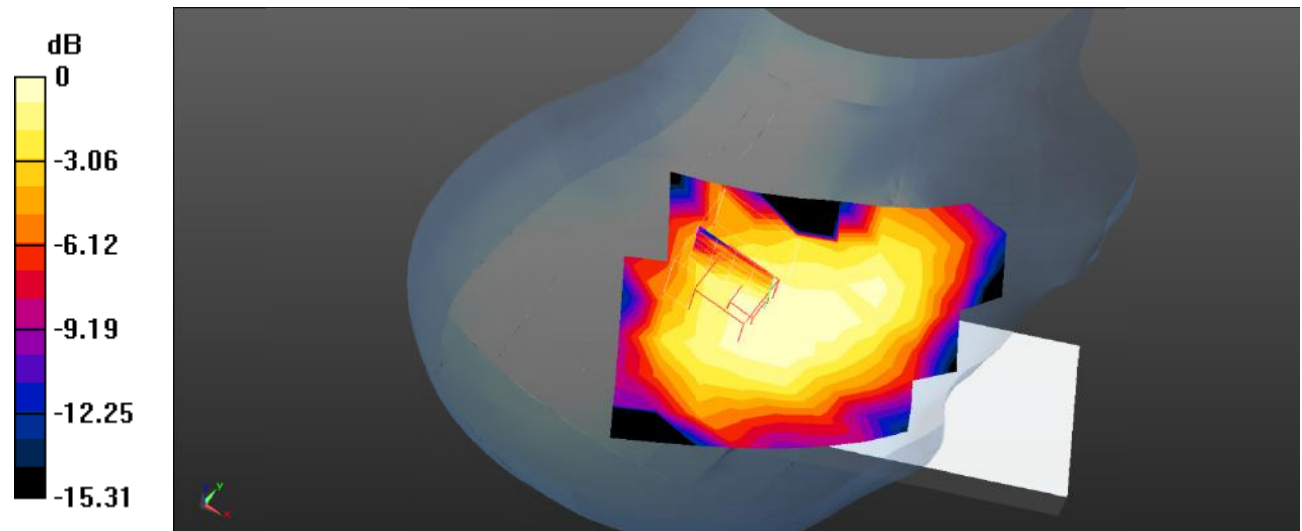

0 dB = 0.00527 W/kg = -22.78 dB dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0204 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.501 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0198 W/kg

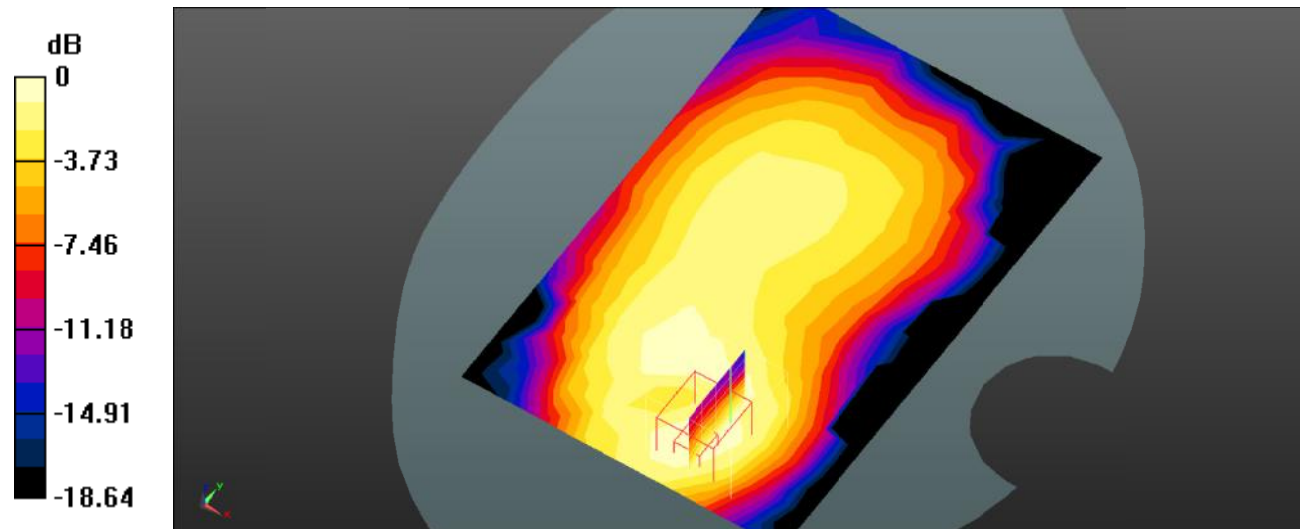

0 dB = 0.0198 W/kg = -17.03 dB dBW/kg

Test Plot 6#: GSM 850_Body Front_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00231 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.00508 W/kg

SAR(1 g) = 0.0013 W/kg; SAR(10 g) = 0.000497 W/kg

Maximum value of SAR (measured) = 0.00240 W/kg

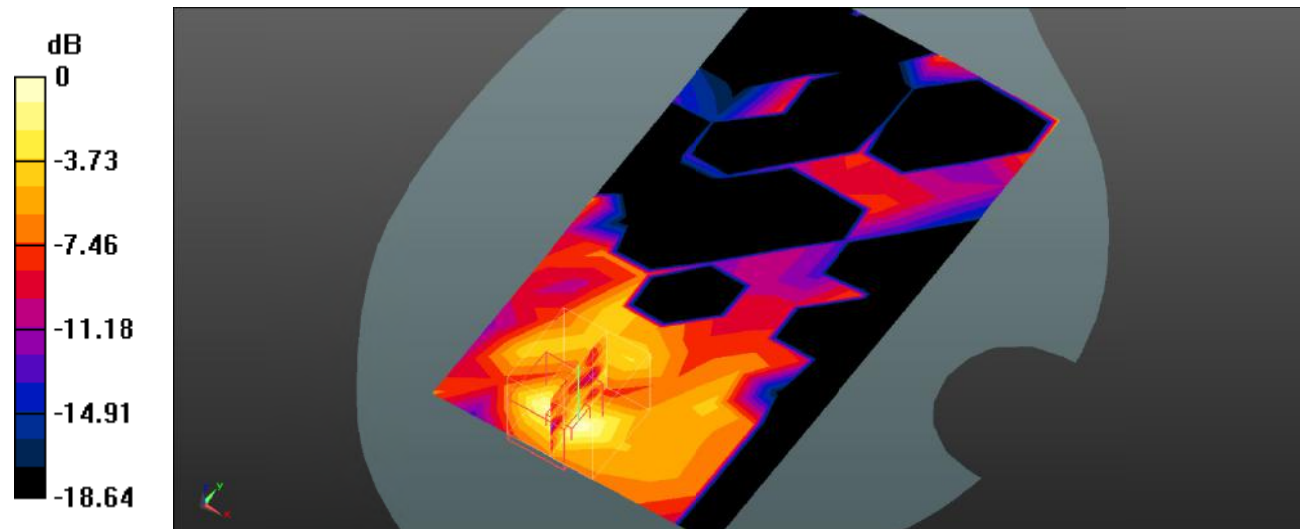

0 dB = 0.00240 W/kg = -26.20 dB dBW/kg

Test Plot 7#: GSM 850_Body Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0318 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.848 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0394 W/kg

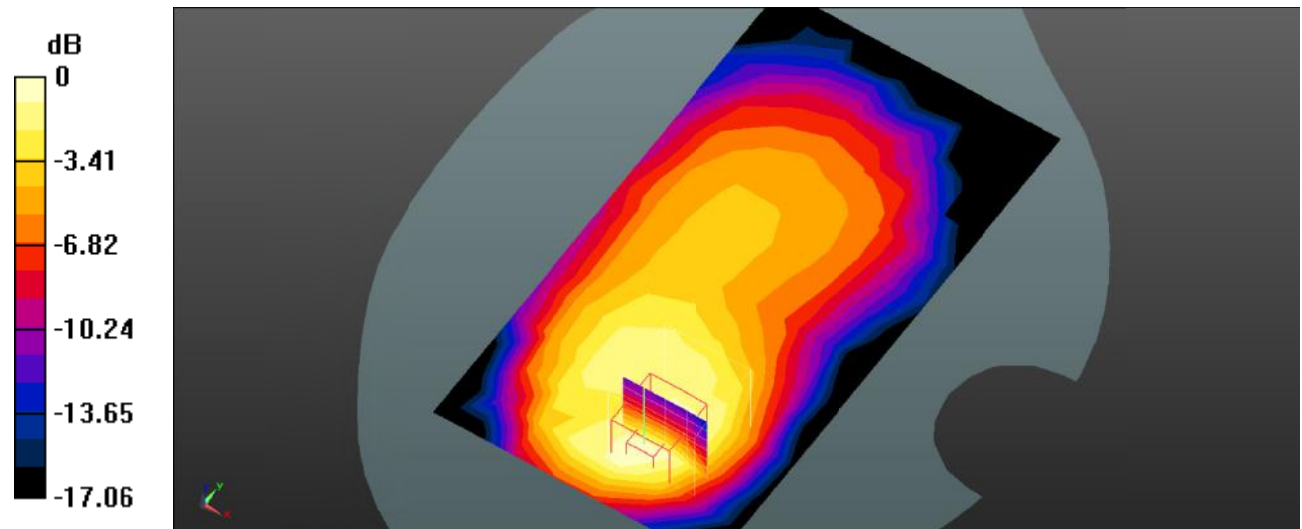

0 dB = 0.0394 W/kg = -14.05 dB dBW/kg

Test Plot 8#: GSM 850_Body Left_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7010 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.00404 W/kg

SAR(1 g) = 0.00273 W/kg; SAR(10 g) = 0.00181 W/kg

Maximum value of SAR (measured) = 0.00308 W/kg

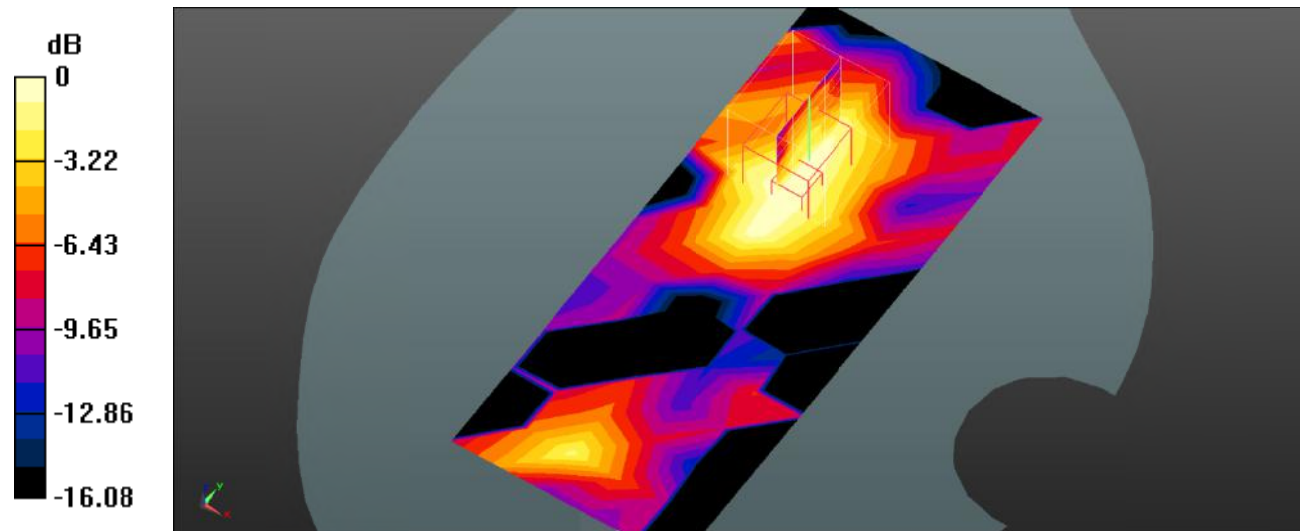

0 dB = 0.00308 W/kg = -25.11 dB dBW/kg

Test Plot 9#: GSM 850_Body Right_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0136 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.375 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00835 W/kg

Maximum value of SAR (measured) = 0.0134 W/kg

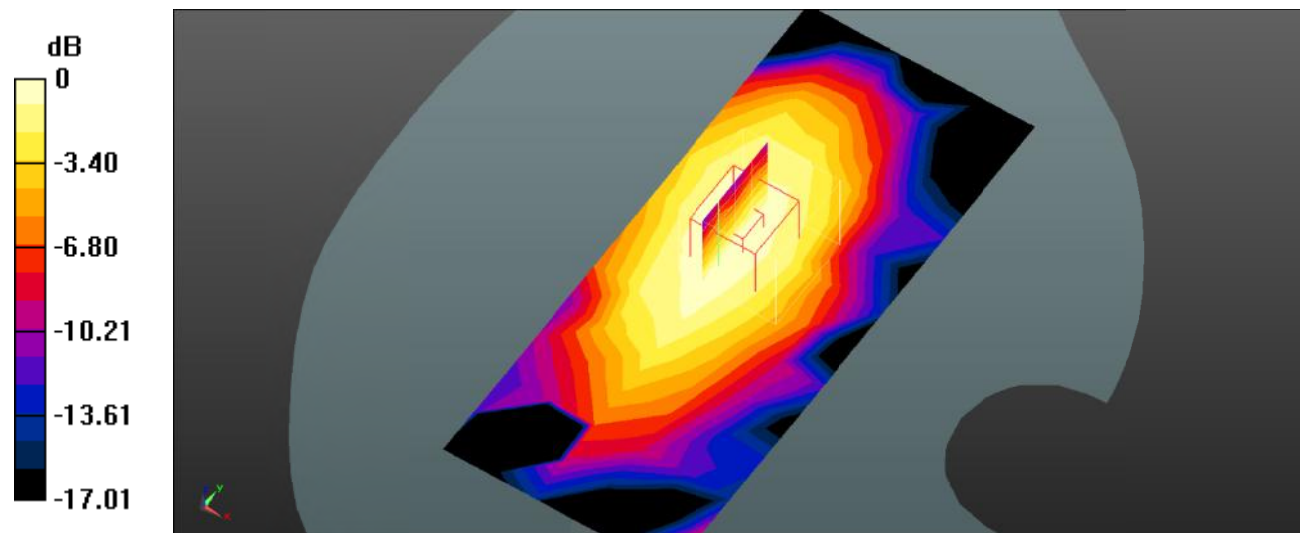

0 dB = 0.0134 W/kg = -18.73 dB dBW/kg

Test Plot 10#: GSM 850_Body Bottom_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0213 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.353 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0230 W/kg

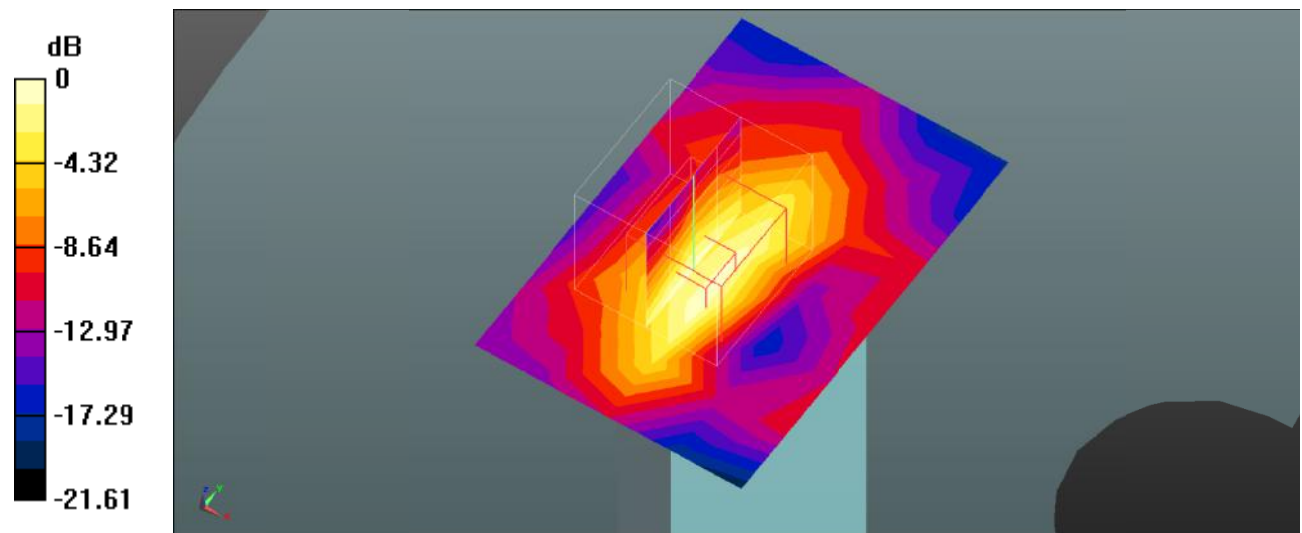

0 dB = 0.0230 W/kg = -16.38 dB dBW/kg

Test Plot 11#: PCS 1900_Head Left Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.170 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.141 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

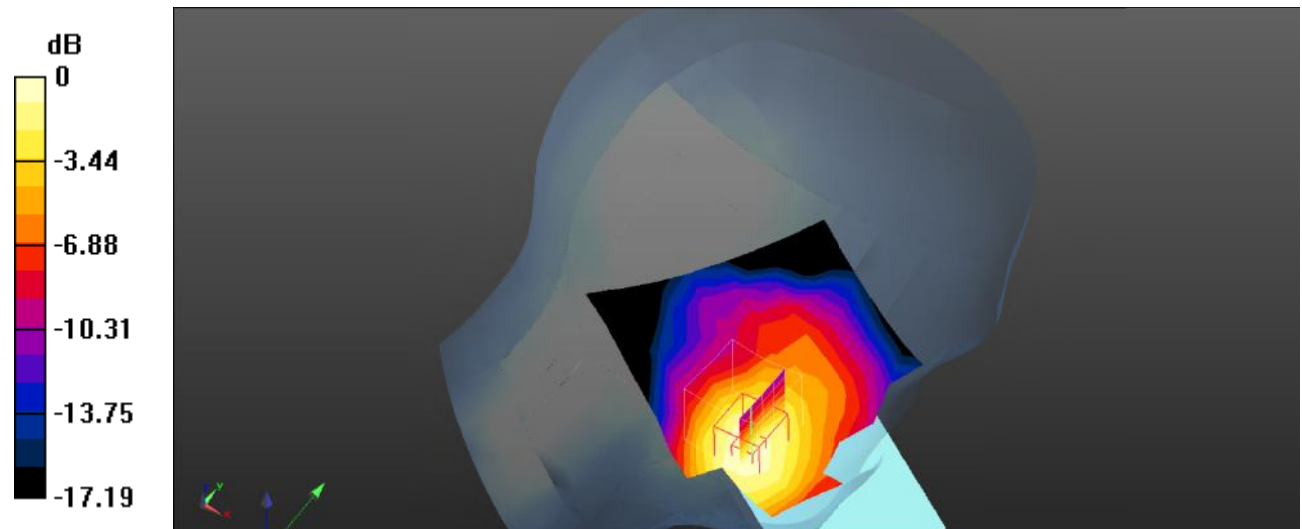

0 dB = 0.174 W/kg = -7.59 dB dBW/kg

Test Plot 12#: PCS 1900_Head Left Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0660 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.839 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0685 W/kg

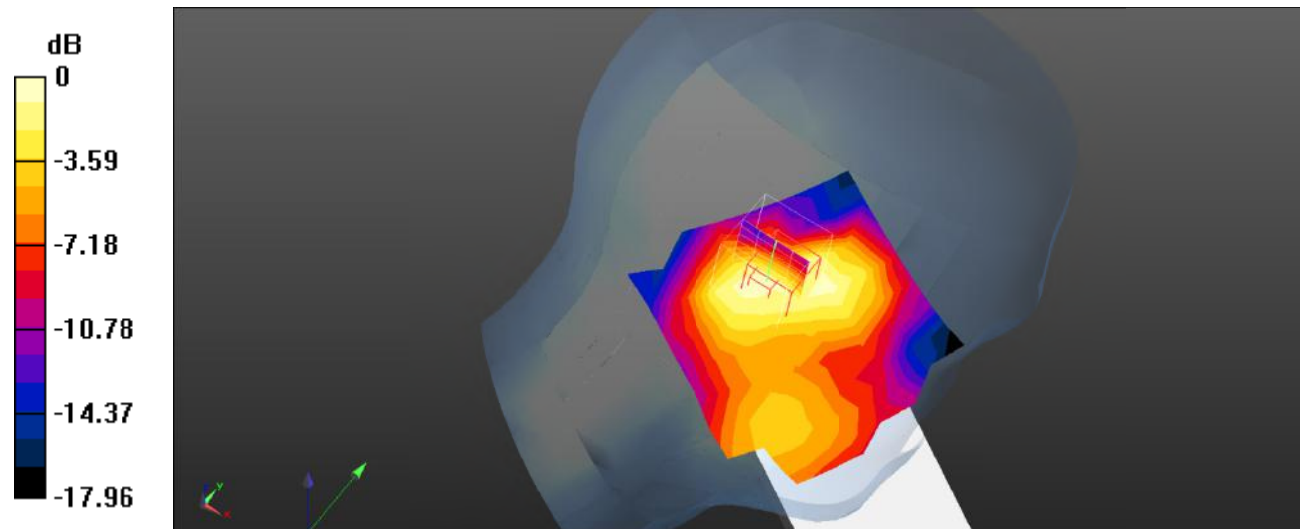

0 dB = 0.0685 W/kg = -11.64 dB dBW/kg

Test Plot 13#: PCS 1900_Head Right Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0910 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.892 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.0961 W/kg

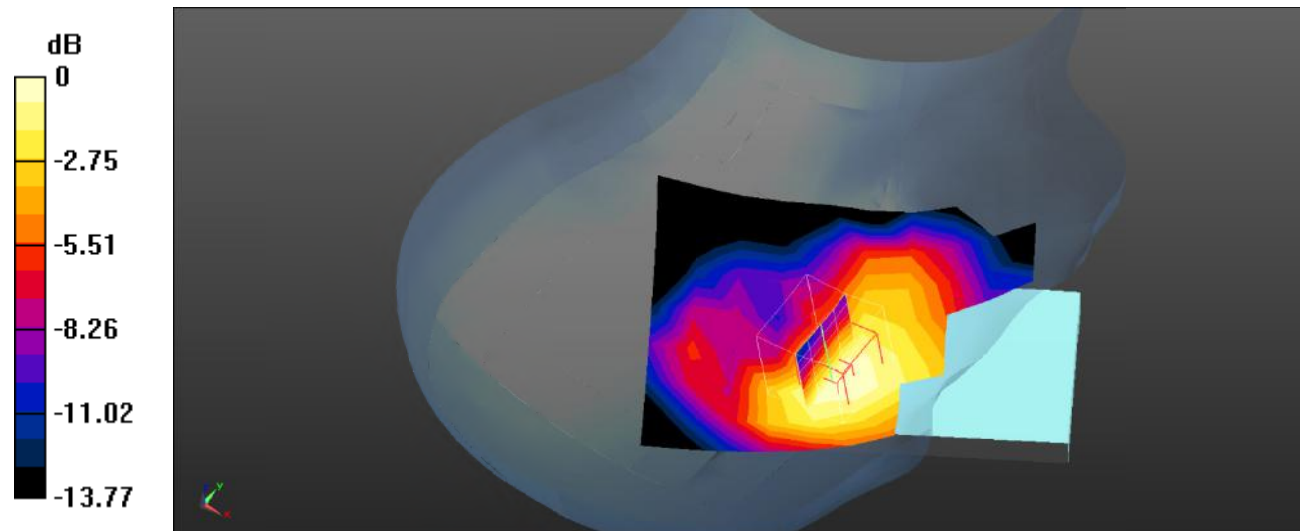

0 dB = 0.0961 W/kg = -10.17 dB dBW/kg

Test Plot 14#: PCS 1900_Head Right Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0690 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.429 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0753 W/kg

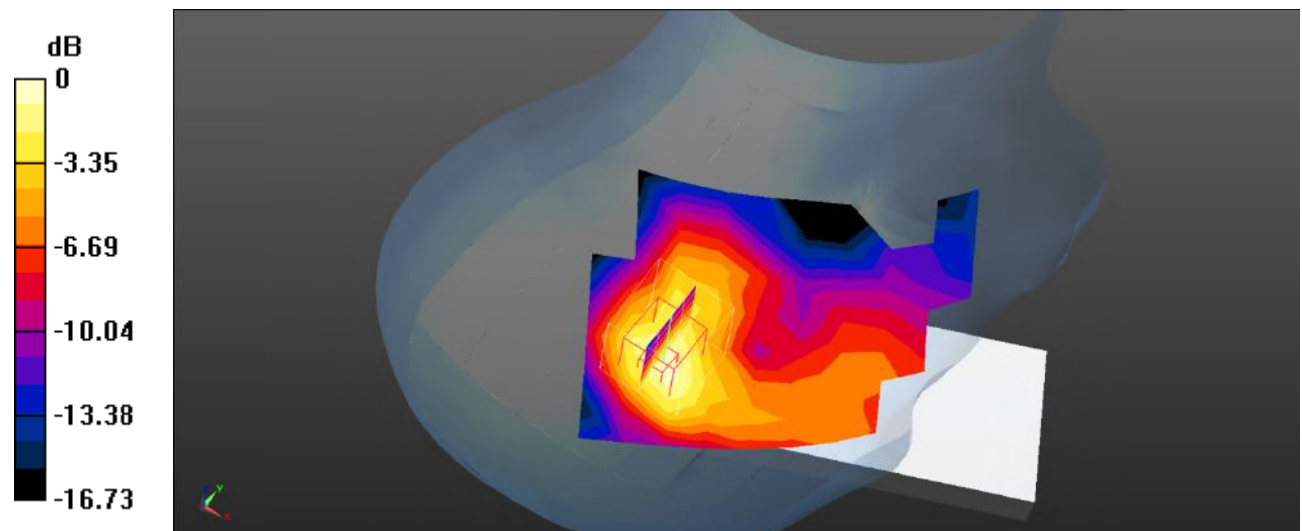

0 dB = 0.0753 W/kg = -11.23 dB dBW/kg

Test Plot 15#: PCS 1900_Body Worn Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.206 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.639 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.241 W/kg

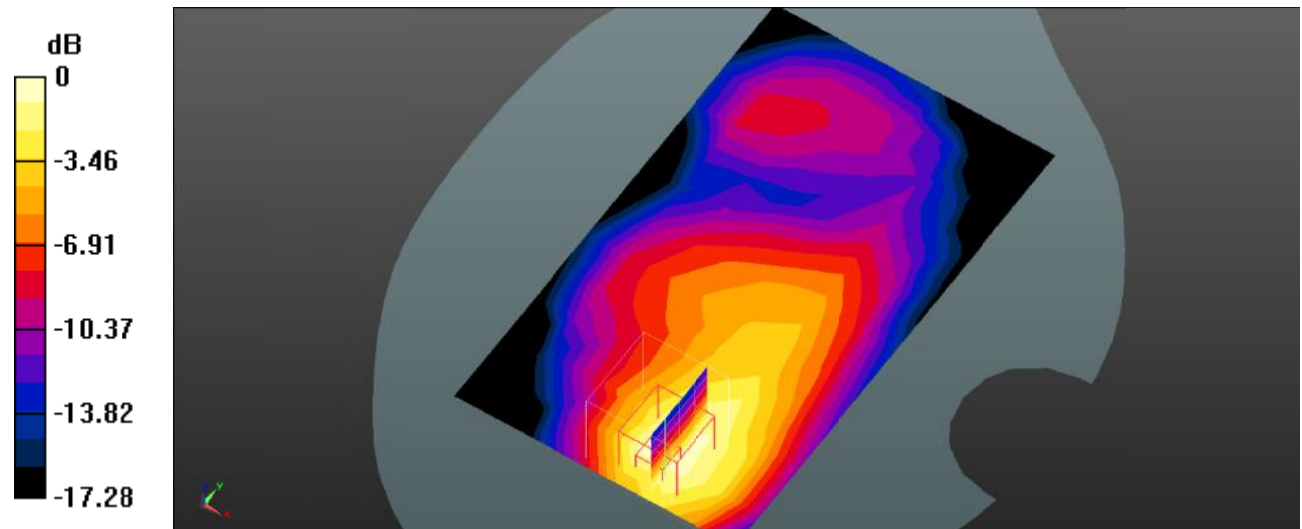

0 dB = 0.241 W/kg = -6.18 dB dBW/kg

Test Plot 16#: PCS 1900_Body Front_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.152 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.210 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

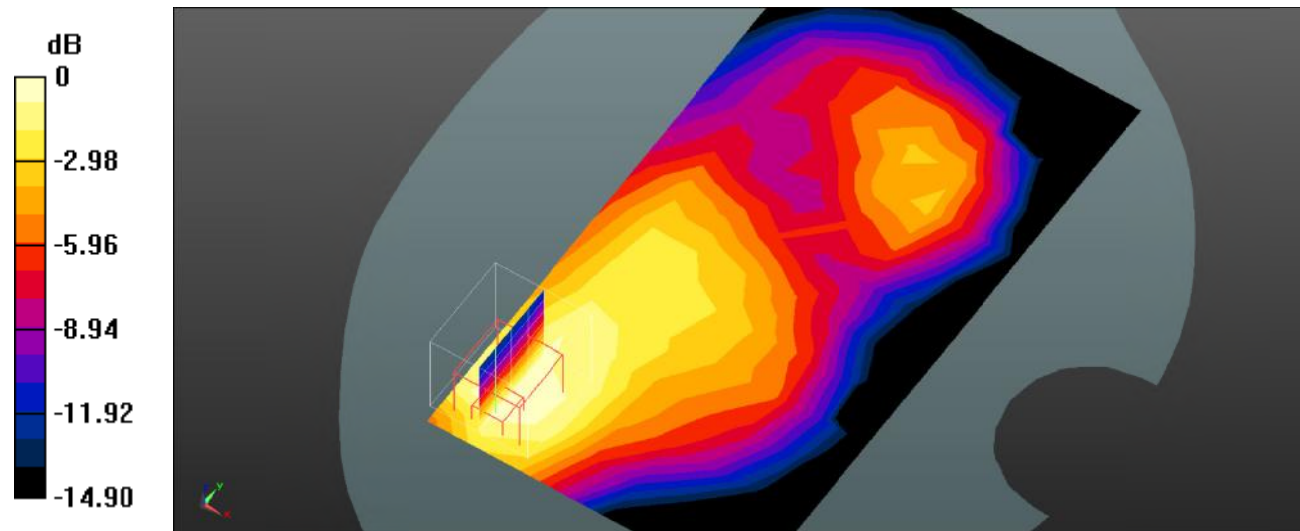

0 dB = 0.156 W/kg = -8.07 dB dBW/kg

Test Plot 17#: PCS 1900_Body Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.439 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

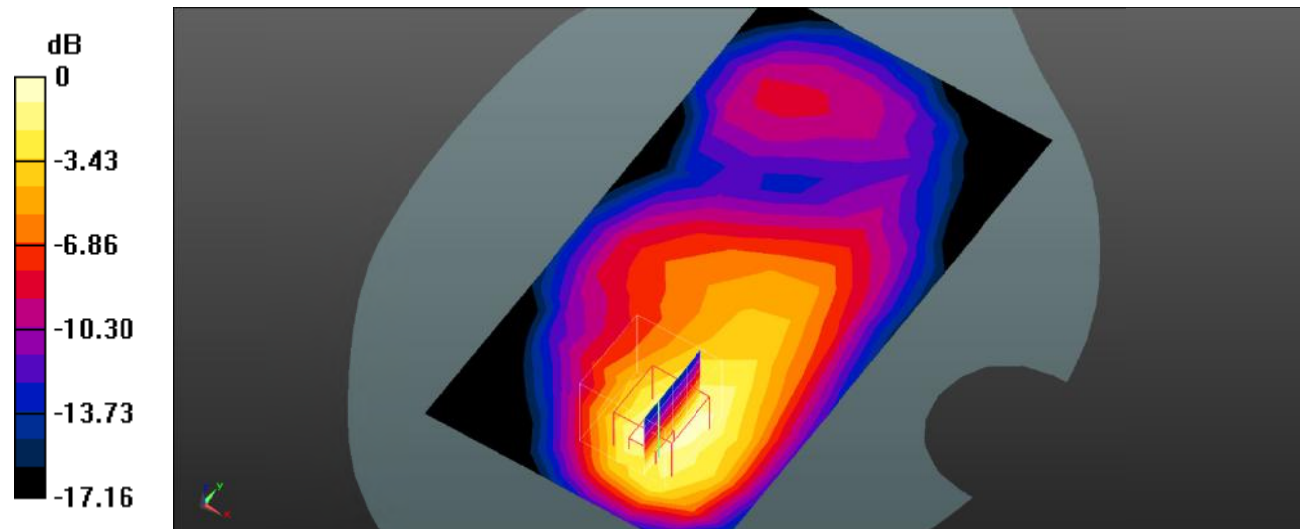

0 dB = 0.281 W/kg = -5.51 dB dBW/kg

Test Plot 18#: PCS 1900_Body Left_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.257 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.347 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

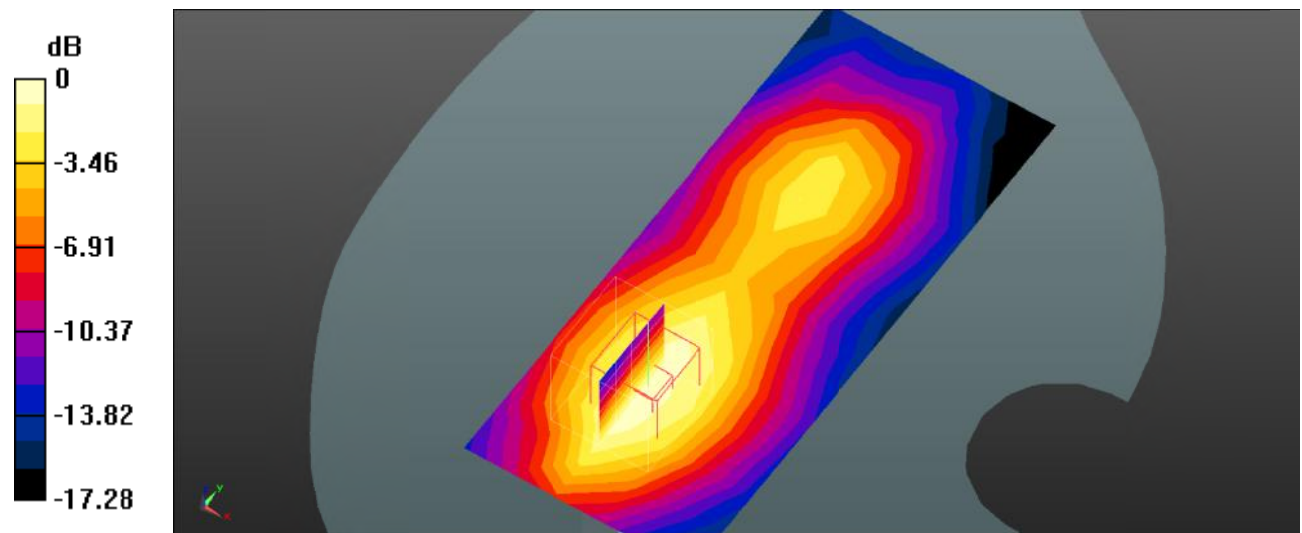

0 dB = 0.261 W/kg = -5.83 dB dBW/kg

Test Plot 19#: PCS 1900_Body Right_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0263 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.090 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0273 W/kg

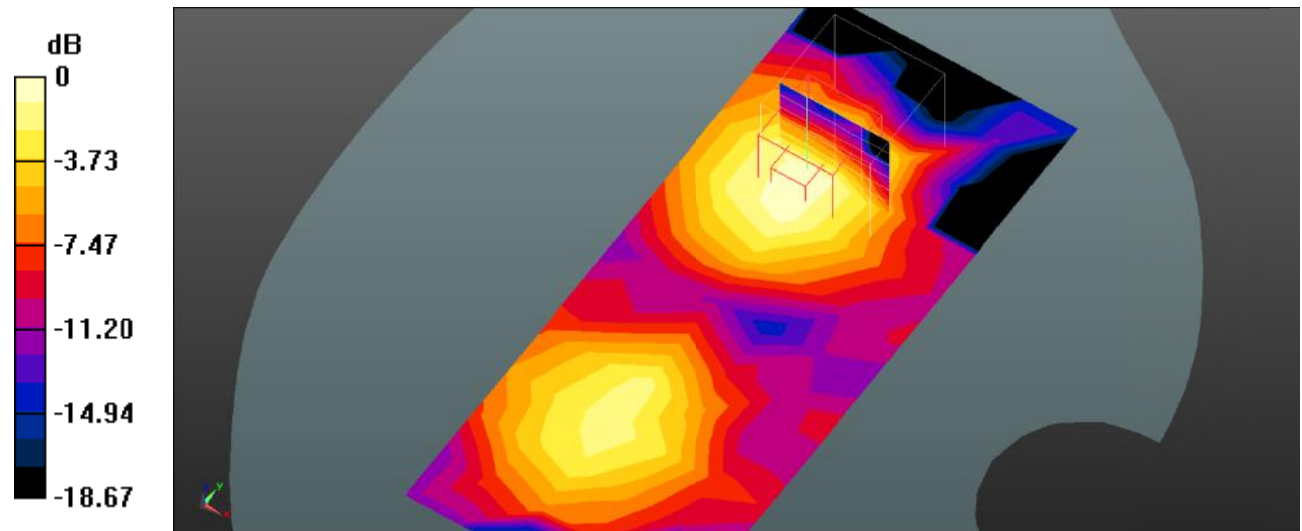

0 dB = 0.0273 W/kg = -15.64 dB dBW/kg

Test Plot 20#: PCS 1900_Body Bottom_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.239 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.570 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

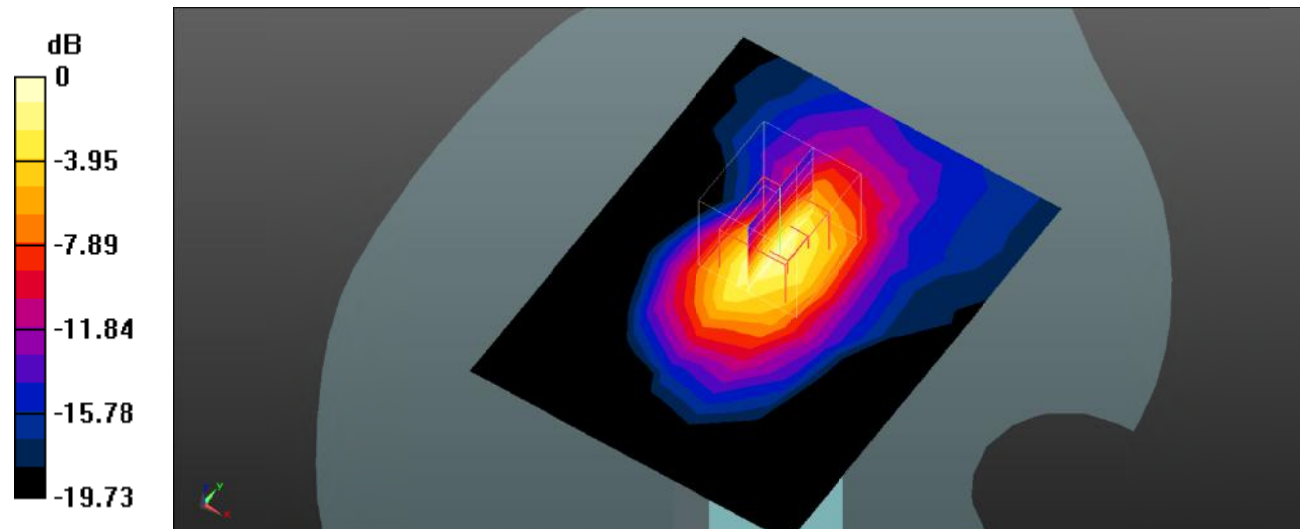

0 dB = 0.281 W/kg = -5.51 dB dBW/kg

Test Plot 21#: WCDMA Band 2_Head Left Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.258 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.496 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

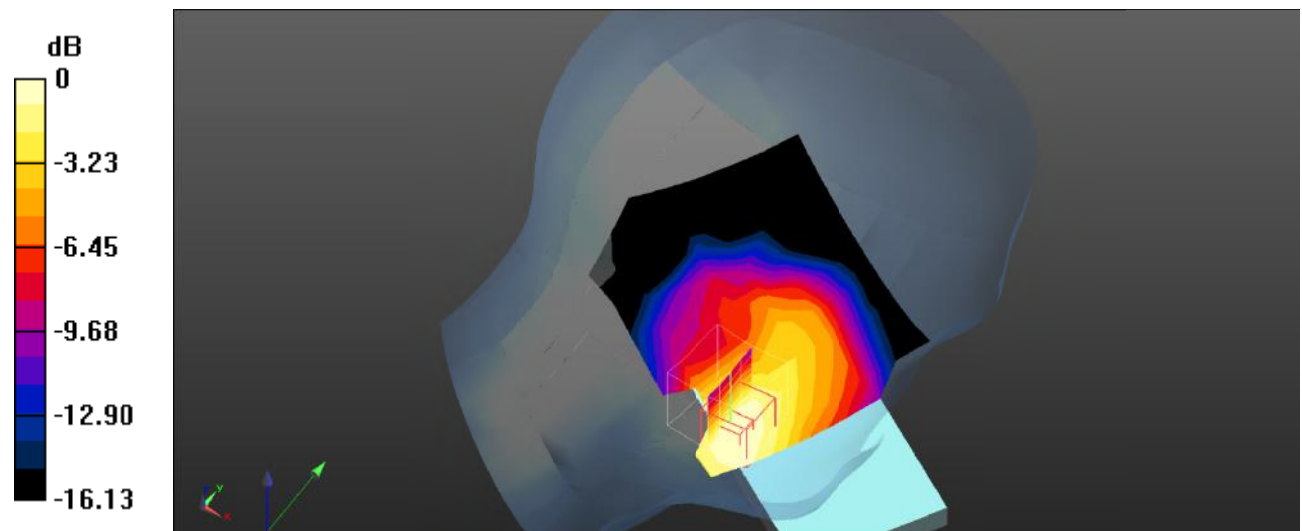

0 dB = 0.237 W/kg = -6.25 dB dBW/kg

Test Plot 22#: WCDMA Band 2_Head Left Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.111 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

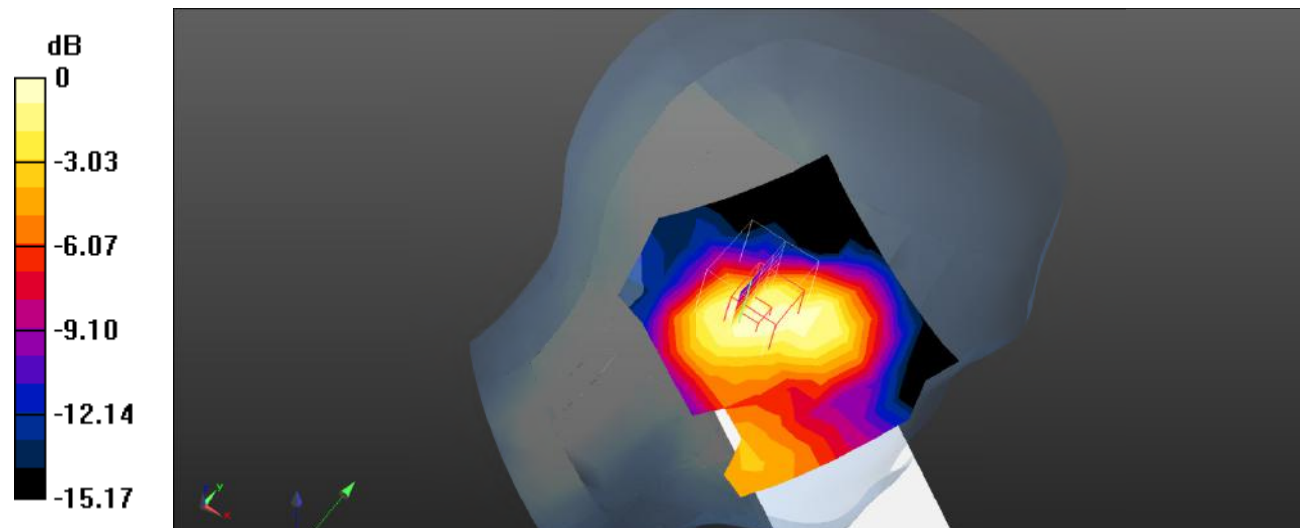

0 dB = 0.111 W/kg = -9.55 dB dBW/kg

Test Plot 23#: WCDMA Band 2_Head Right Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.746 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

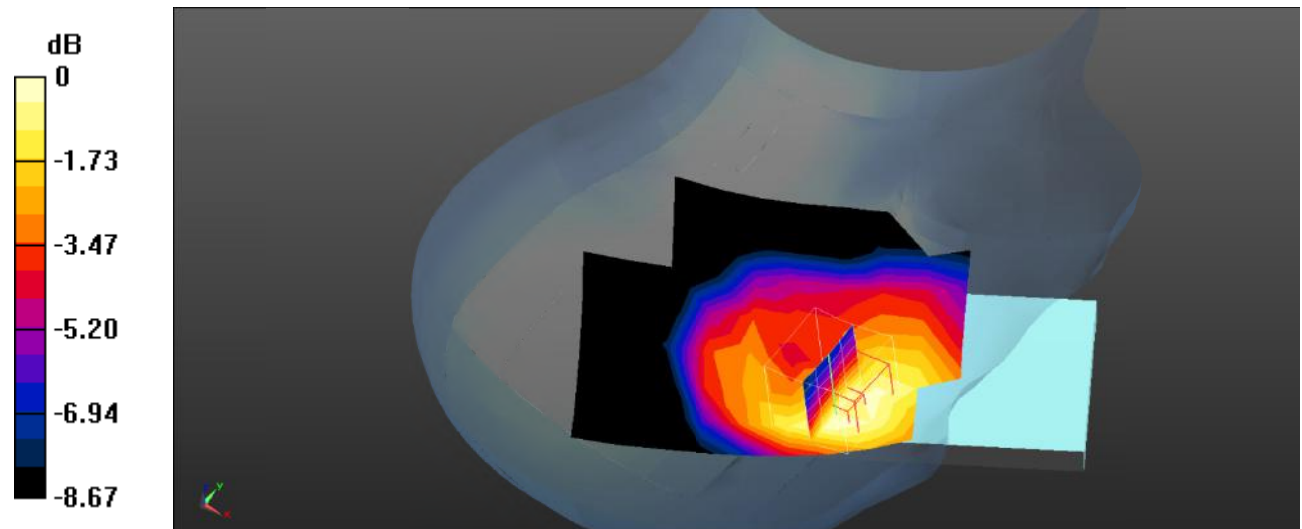

0 dB = 0.122 W/kg = -9.14 dB dBW/kg

Test Plot 24#: WCDMA Band 2_Head Right Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.111 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.326 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

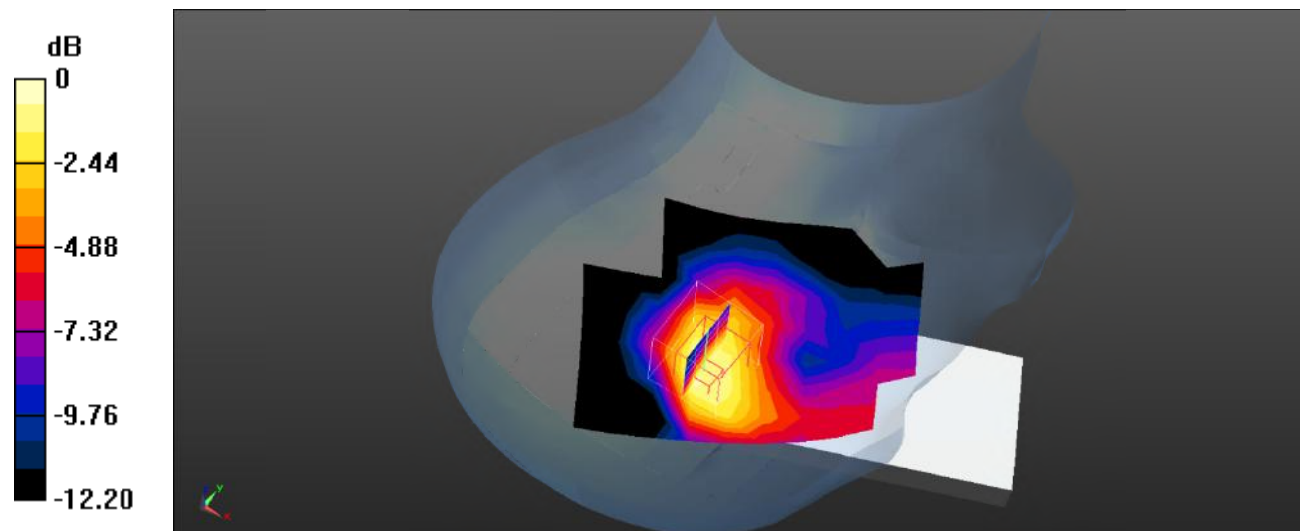

0 dB = 0.128 W/kg = -8.93 dB dBW/kg

Test Plot 25#: WCDMA Band 2_Body Front_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.287 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.653 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

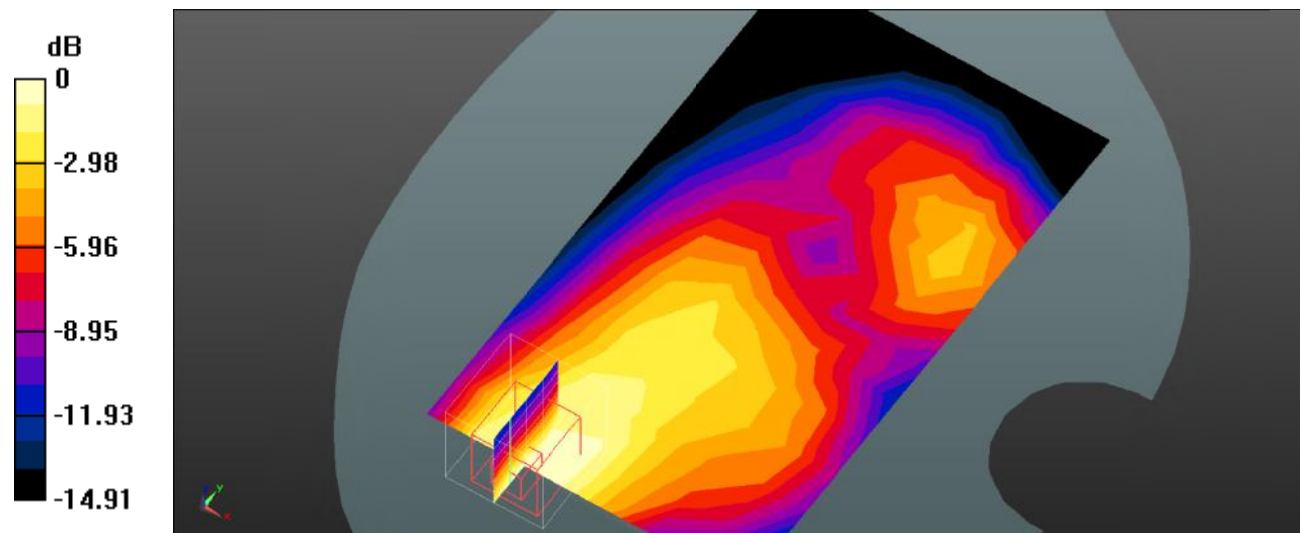

0 dB = 0.273 W/kg = -5.64 dB dBW/kg

Test Plot 26#: WCDMA Band 2_Body Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.770 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

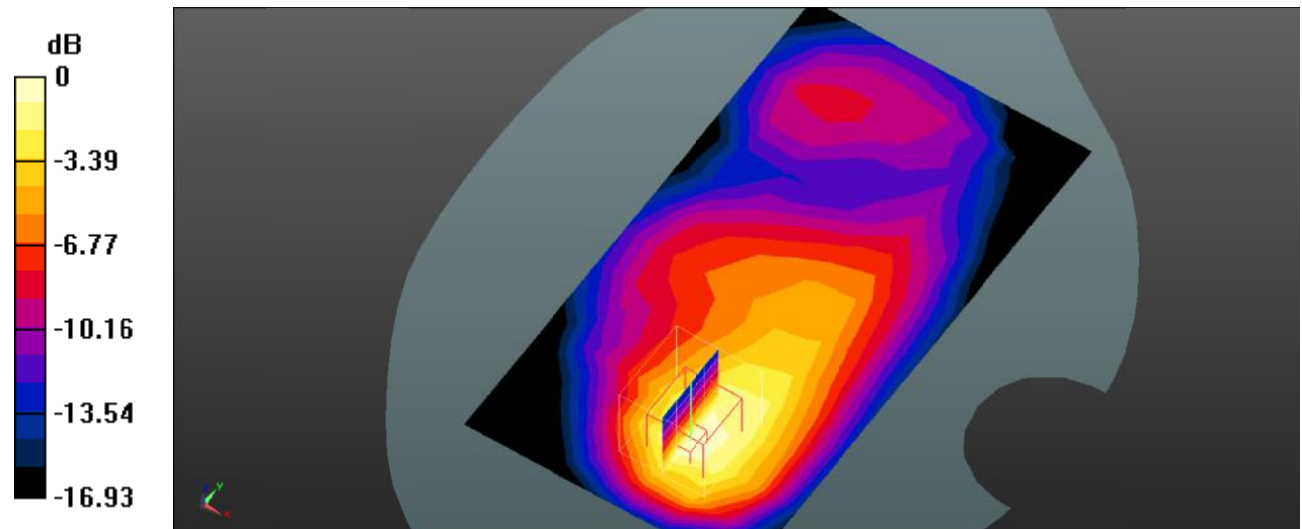

0 dB = 0.481 W/kg = -3.18 dB dBW/kg

Test Plot 27#: WCDMA Band 2_Body Left_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.480 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.96 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.467 W/kg

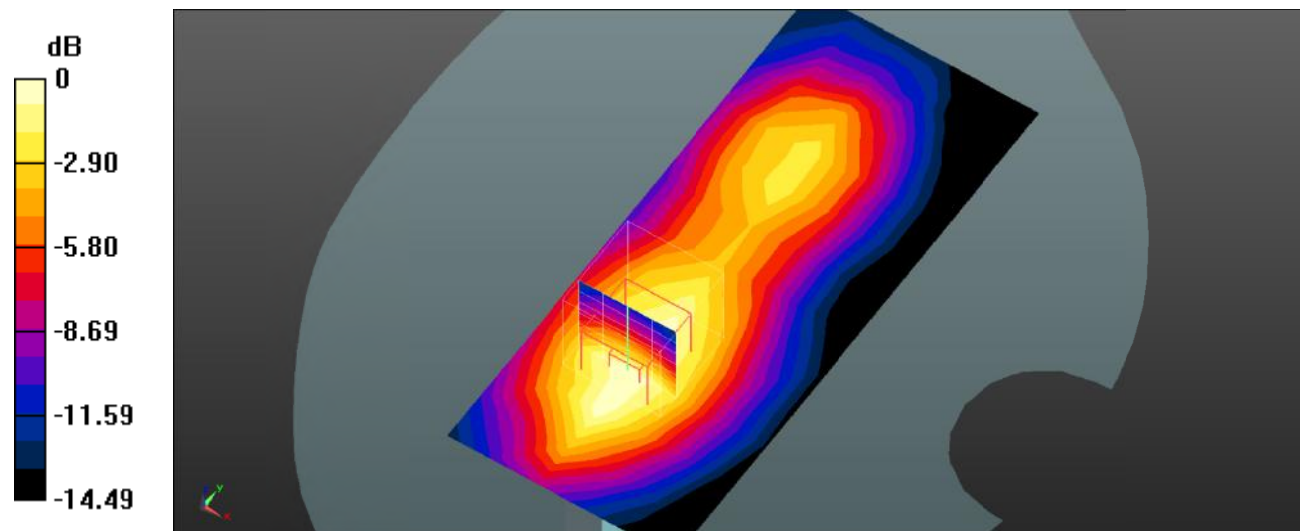

0 dB = 0.467 W/kg = -3.31 dB dBW/kg

Test Plot 28#: WCDMA Band 2_Body Right_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0479 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.026 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.0640 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0459 W/kg

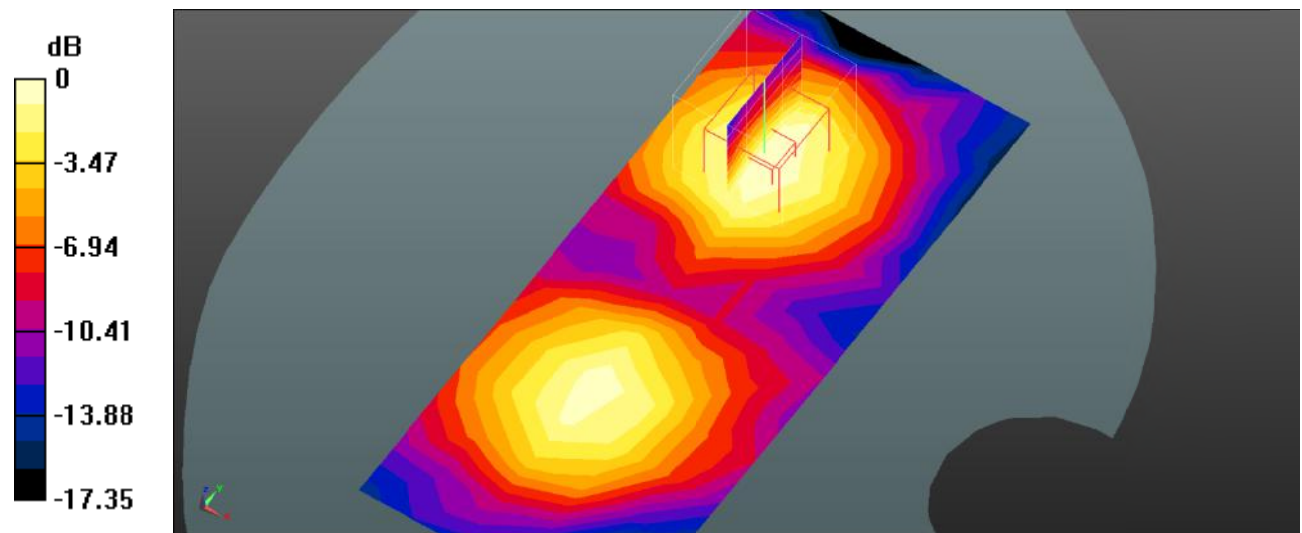

0 dB = 0.0459 W/kg = -13.38 dB dBW/kg

Test Plot 29#: WCDMA Band 2_Body Bottom_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.512 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.451 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.885 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.558 W/kg

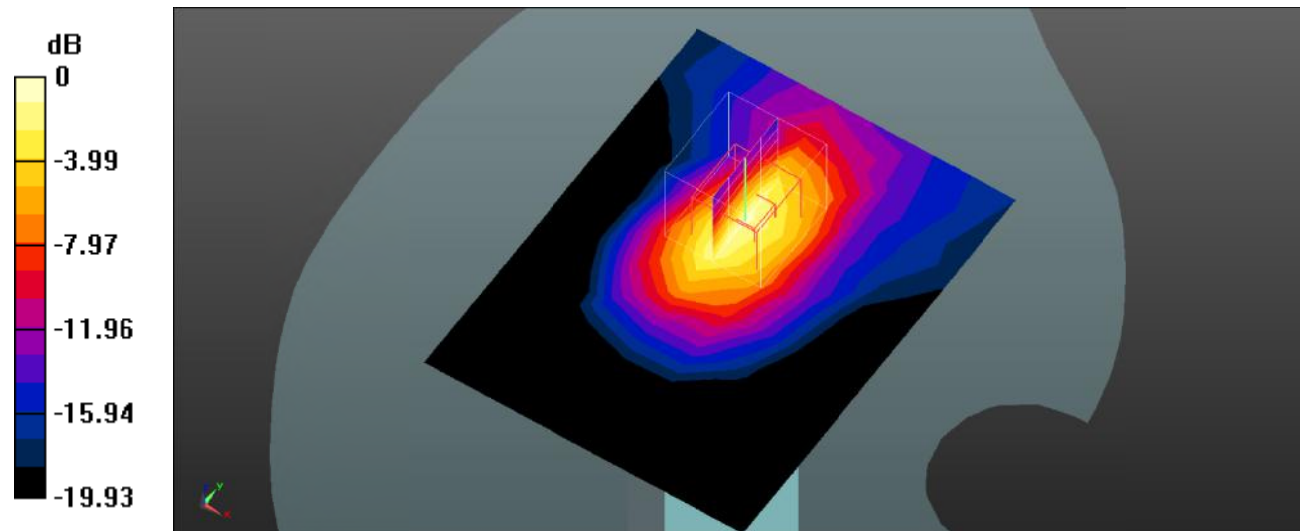

0 dB = 0.558 W/kg = -2.53 dB dBW/kg

Test Plot 30#: WCDMA Band 5_Head Left Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00754 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.00814 W/kg

SAR(1 g) = 0.0067 W/kg; SAR(10 g) = 0.00519 W/kg

Maximum value of SAR (measured) = 0.00700 W/kg

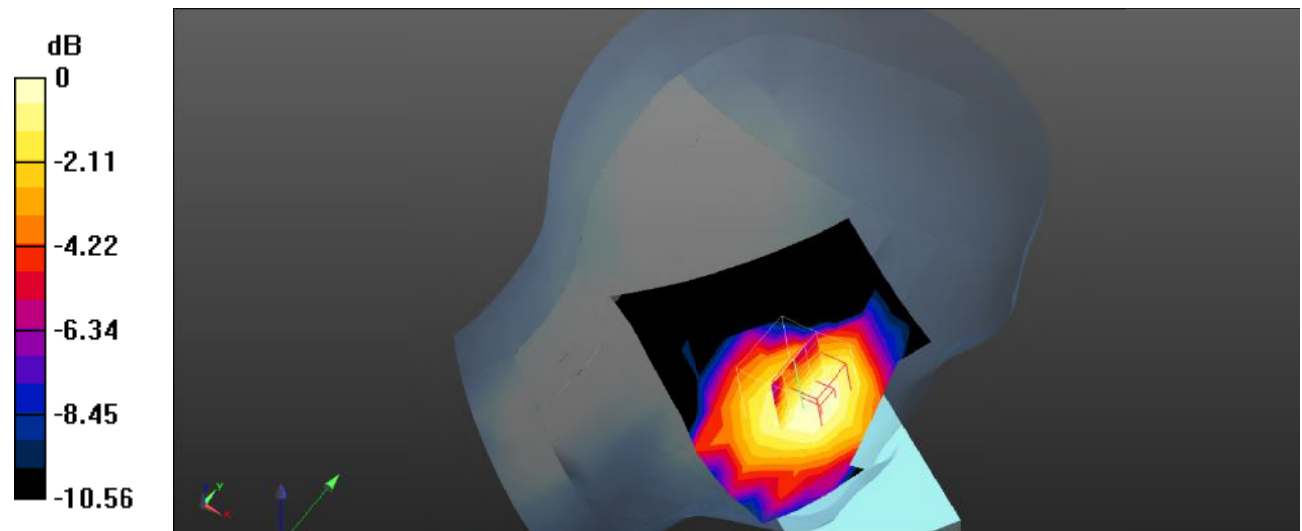

0 dB = 0.00700 W/kg = -21.55 dB dBW/kg

Test Plot 31#: WCDMA Band 5_Head Left Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00402 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.00475 W/kg

SAR(1 g) = 0.00289 W/kg; SAR(10 g) = 0.0022 W/kg

Maximum value of SAR (measured) = 0.00353 W/kg

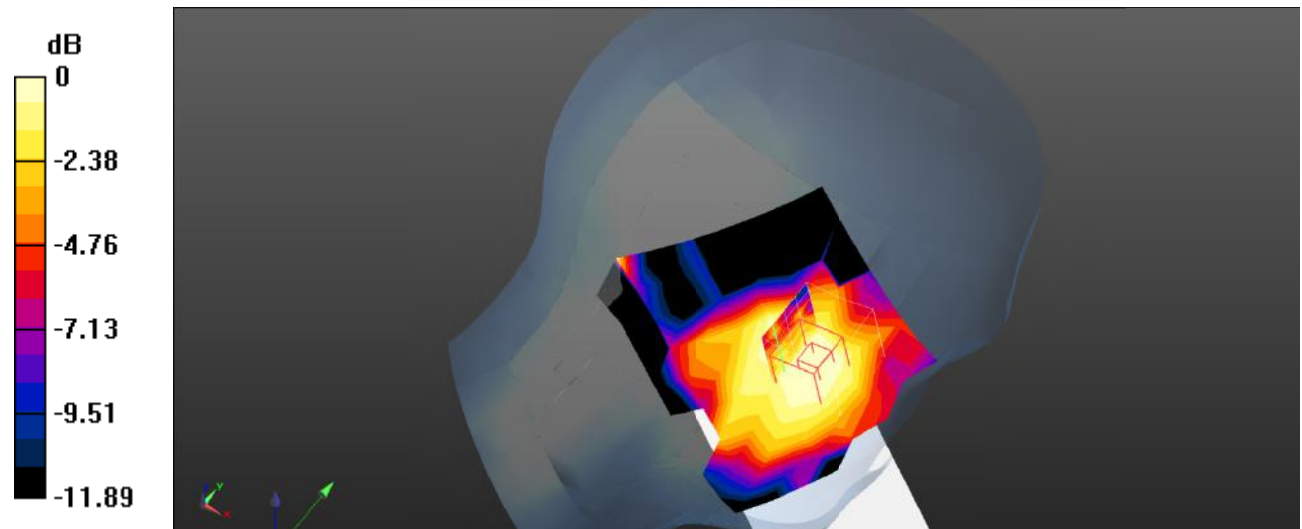

0 dB = 0.00353 W/kg = -24.52 dB dBW/kg

Test Plot 32#: WCDMA Band 5_Head Right Cheek_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00930 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.00962 W/kg

SAR(1 g) = 0.00777 W/kg; SAR(10 g) = 0.00532 W/kg

Maximum value of SAR (measured) = 0.00808 W/kg

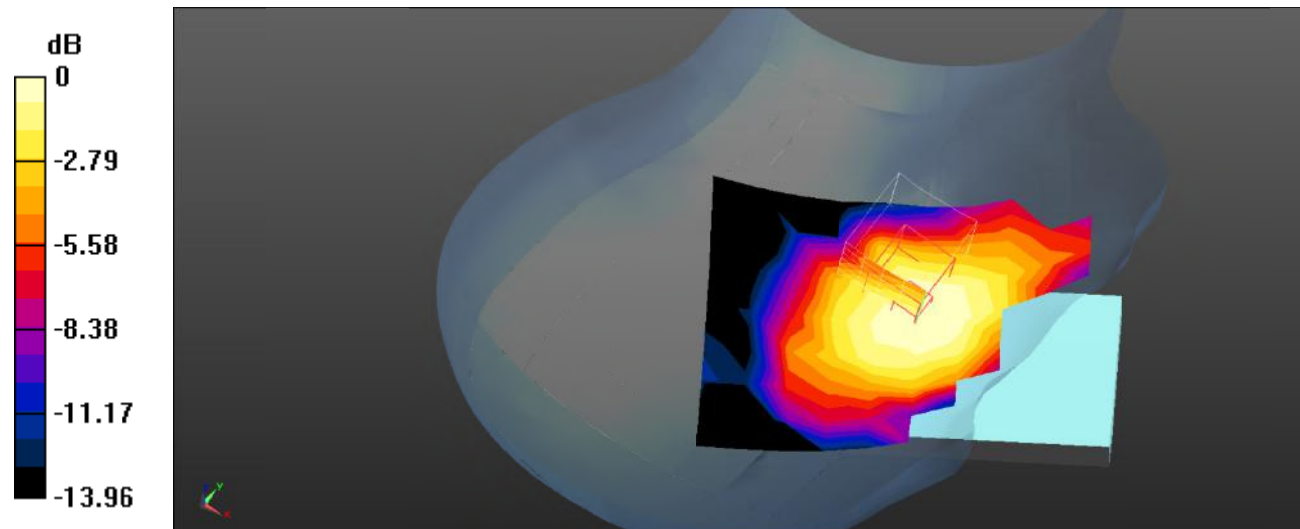

0 dB = 0.00808 W/kg = -20.93 dB dBW/kg

Test Plot 33#: WCDMA Band 5_Head Right Tilt_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00334 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7380 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.00347 W/kg

SAR(1 g) = 0.00301 W/kg; SAR(10 g) = 0.00223 W/kg

Maximum value of SAR (measured) = 0.00347 W/kg

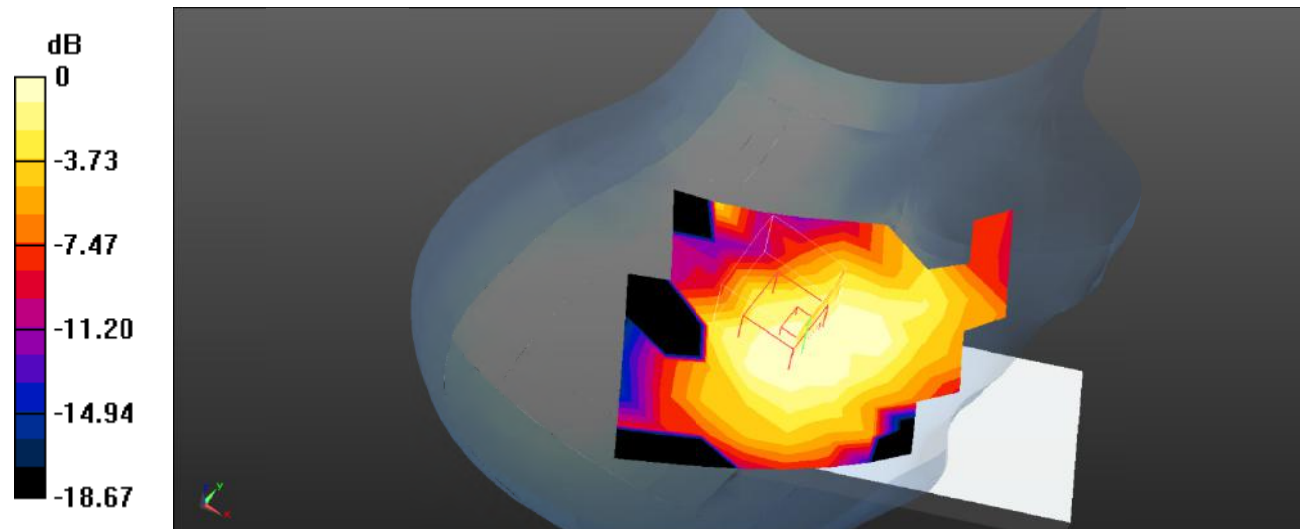

0 dB = 0.00347 W/kg = -24.60 dB dBW/kg

Test Plot 34#: WCDMA Band 5_Body Front_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0138 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.351 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00755 W/kg

Maximum value of SAR (measured) = 0.0137 W/kg

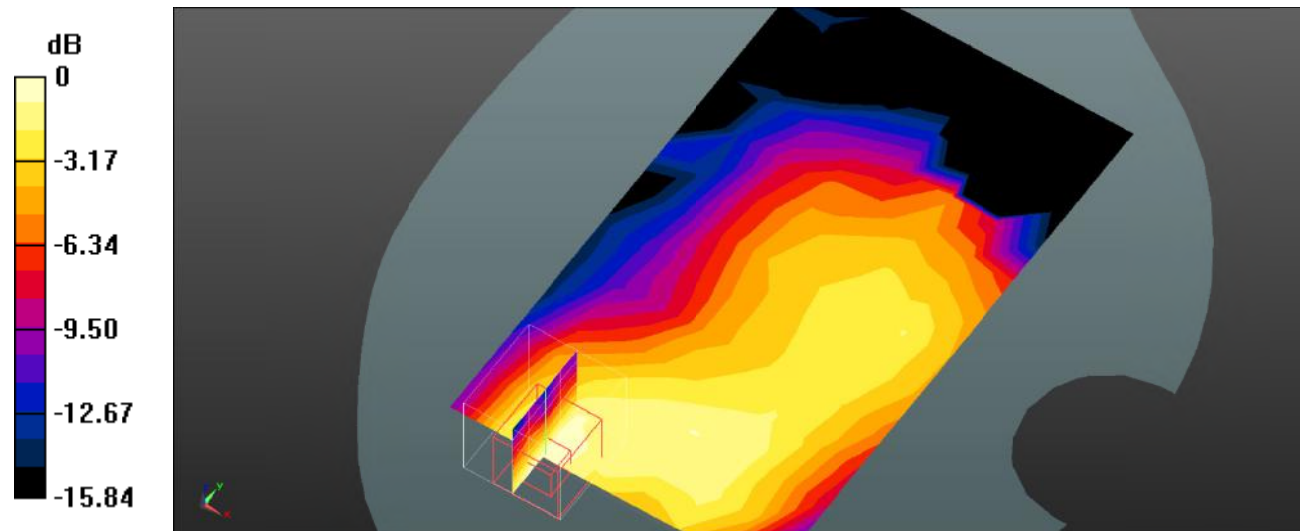

0 dB = 0.0137 W/kg = -18.63 dB dBW/kg

Test Plot 35#: WCDMA Band 5_Body Back_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0255 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.091 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0278 W/kg

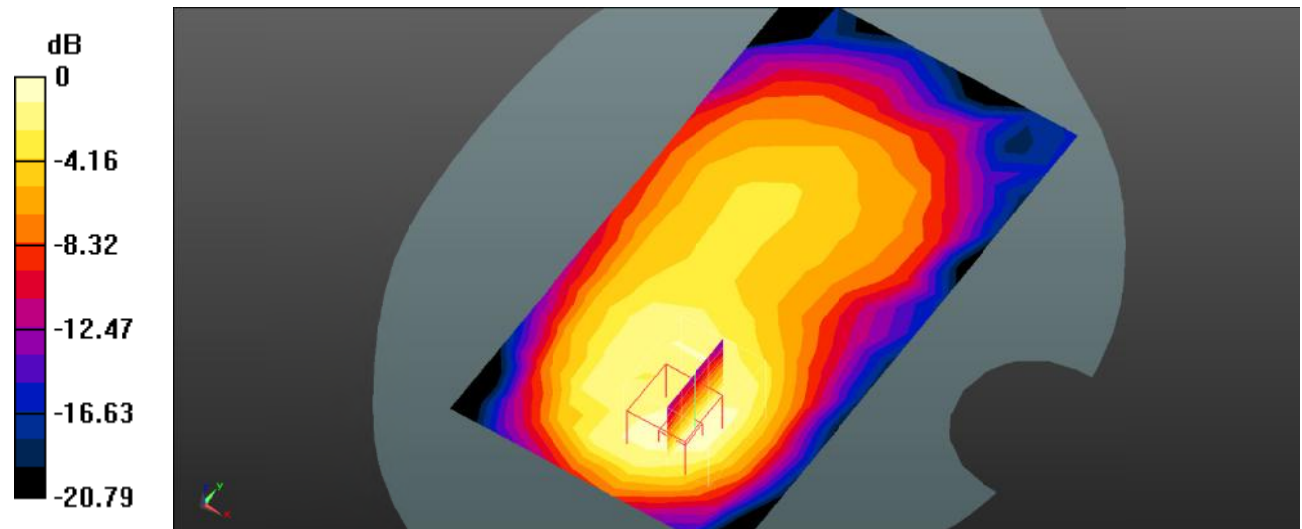

0 dB = 0.0278 W/kg = -15.56 dB dBW/kg

Test Plot 36#: WCDMA Band 5_Body Left_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0112 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.140 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00719 W/kg

Maximum value of SAR (measured) = 0.0114 W/kg

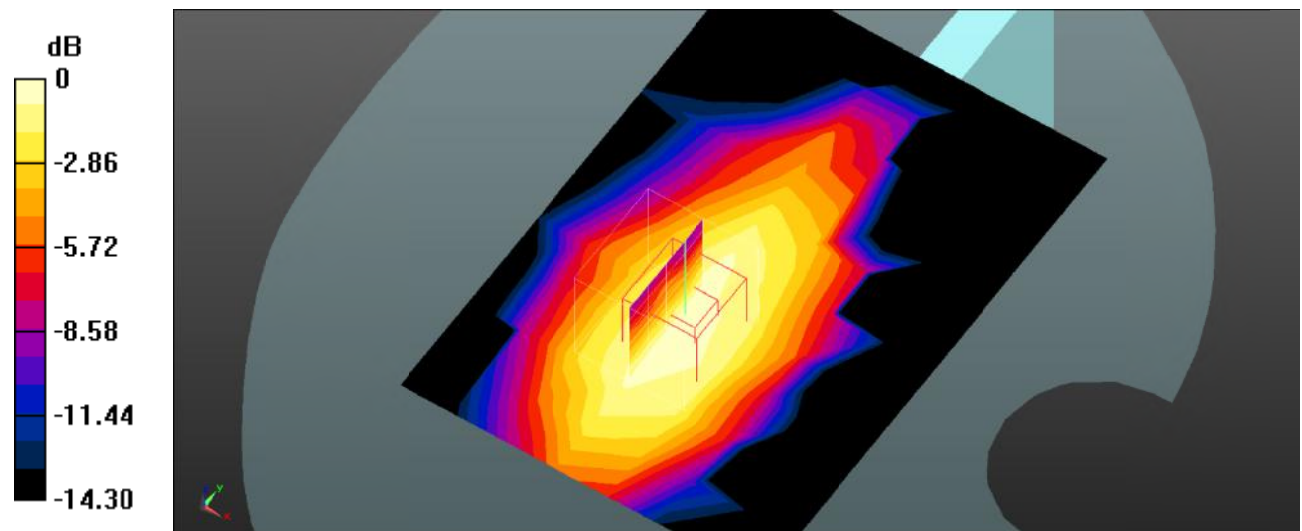

0 dB = 0.0114 W/kg = -19.43 dB dBW/kg

Test Plot 37#: WCDMA Band 5_Body Right_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0100 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.854 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00961 W/kg; SAR(10 g) = 0.00637 W/kg

Maximum value of SAR (measured) = 0.0104 W/kg

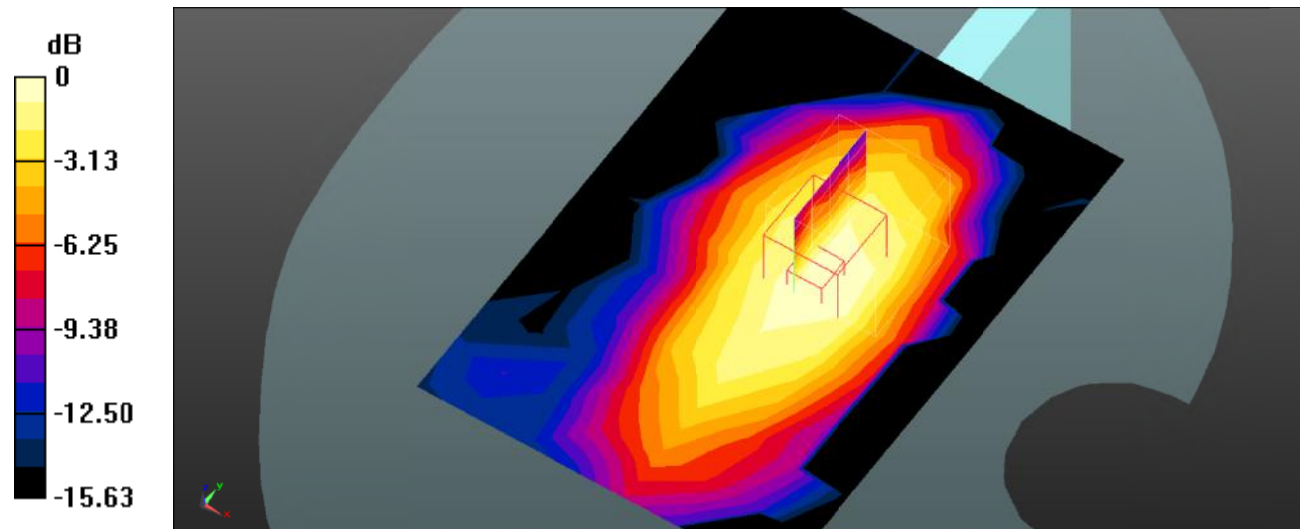

0 dB = 0.0104 W/kg = -19.83 dB dBW/kg

Test Plot 38#: WCDMA Band 5_Body Bottom_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 41.581$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0160 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.816 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00672 W/kg

Maximum value of SAR (measured) = 0.0153 W/kg

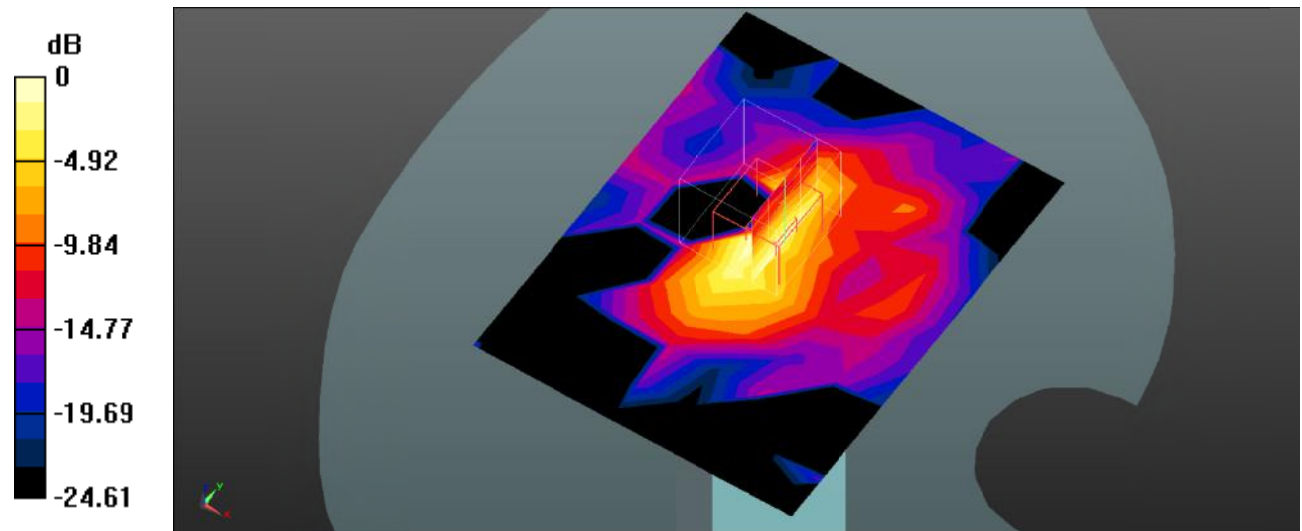

0 dB = 0.0153 W/kg = -18.15 dB dBW/kg

Test Plot 39#: LTE Band 2_Head Left Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.346 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.996 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.476 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

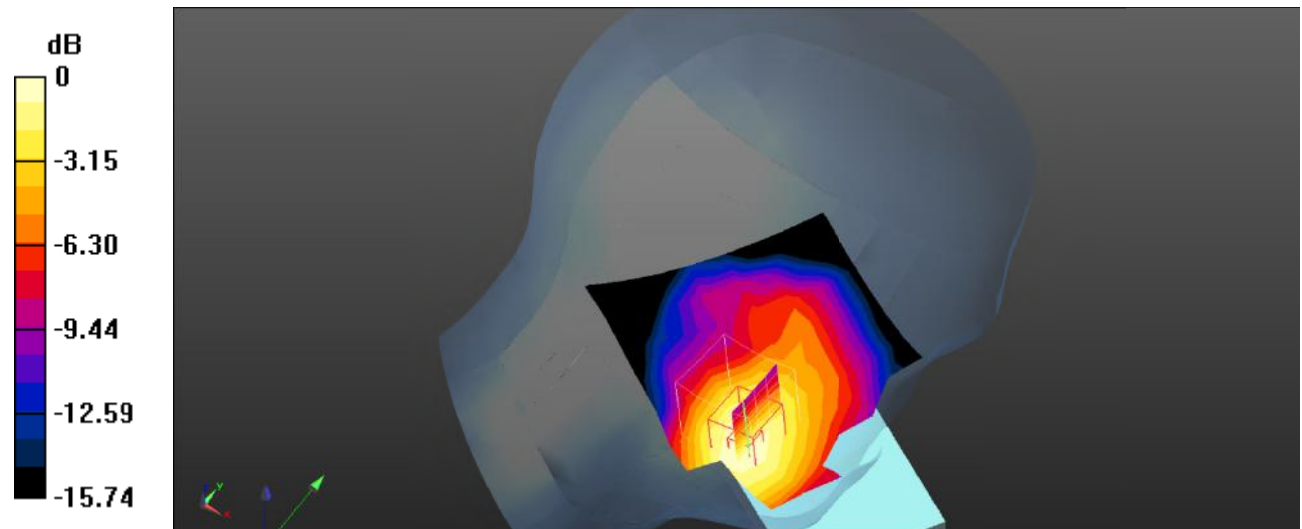

0 dB = 0.353 W/kg = -4.52 dB dBW/kg

Test Plot 40#: LTE Band 2_Head Left Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.274 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.274 W/kg

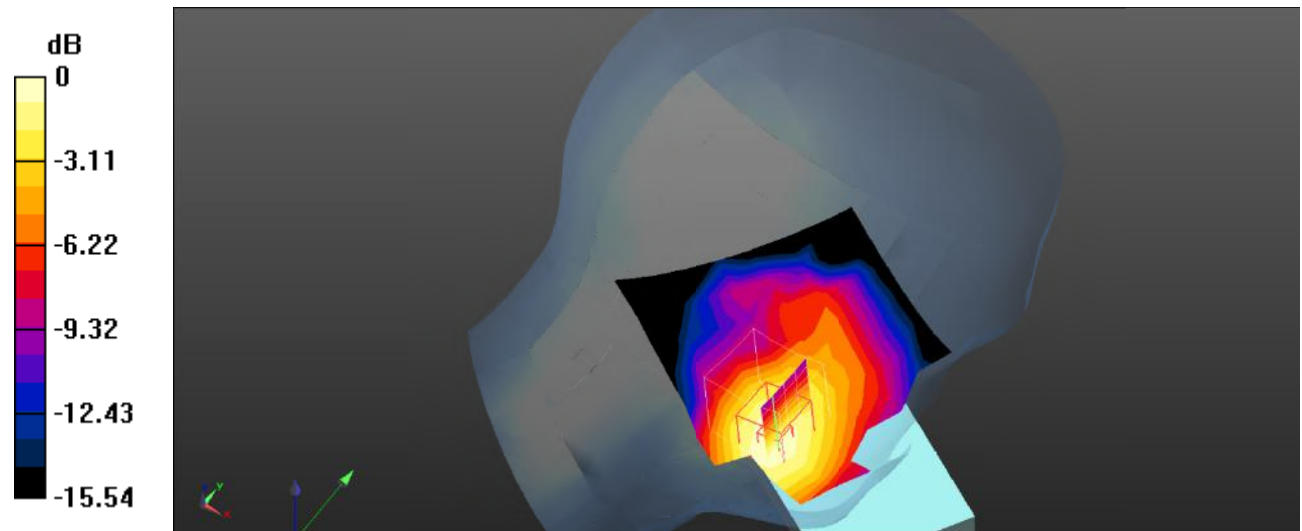

0 dB = 0.274 W/kg = -5.62 dB dBW/kg

Test Plot 41#: LTE Band 2_Head Left Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.158 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.34 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.157 W/kg

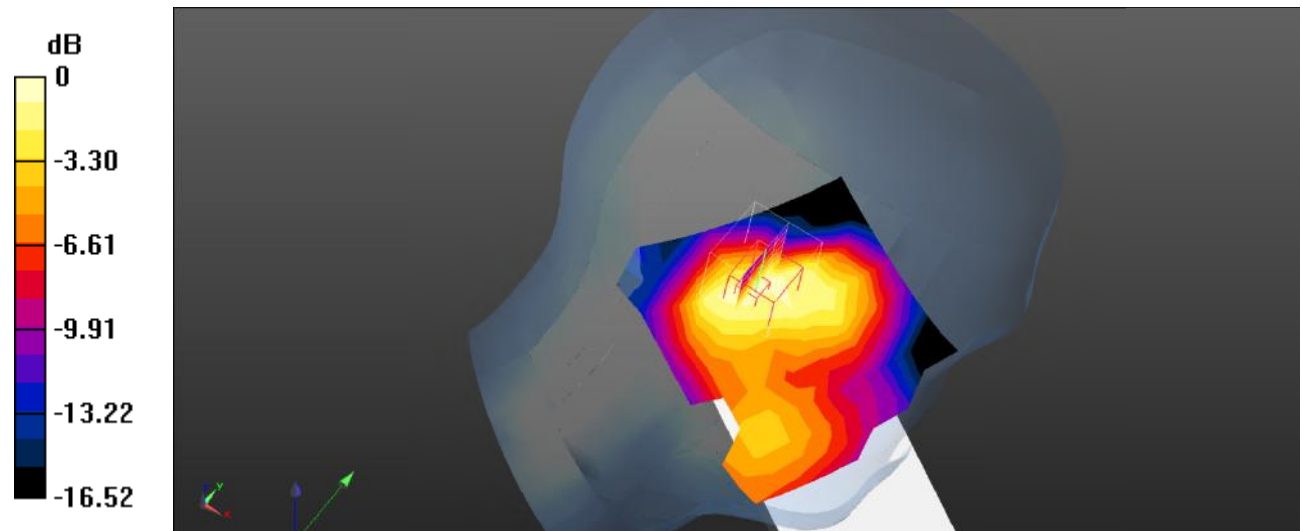

0 dB = 0.157 W/kg = -8.04 dB dBW/kg

Test Plot 42#: LTE Band 2_Head Left Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.120 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.033 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.117 W/kg

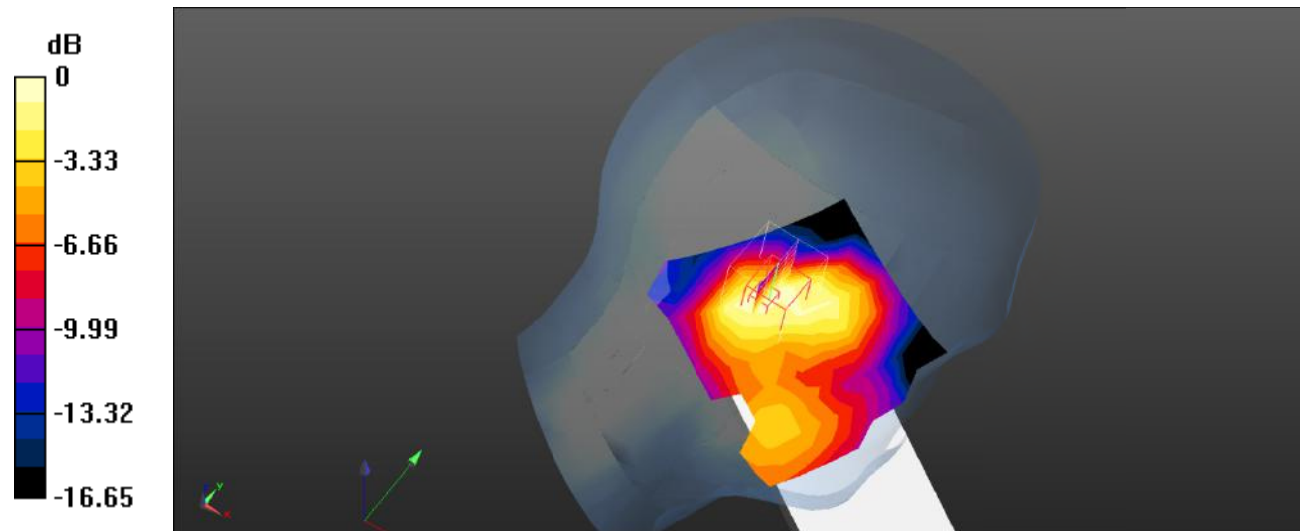

0 dB = 0.117 W/kg = -9.32 dB dBW/kg

Test Plot 43#: LTE Band 2_Head Right Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.127 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.290 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.140 W/kg

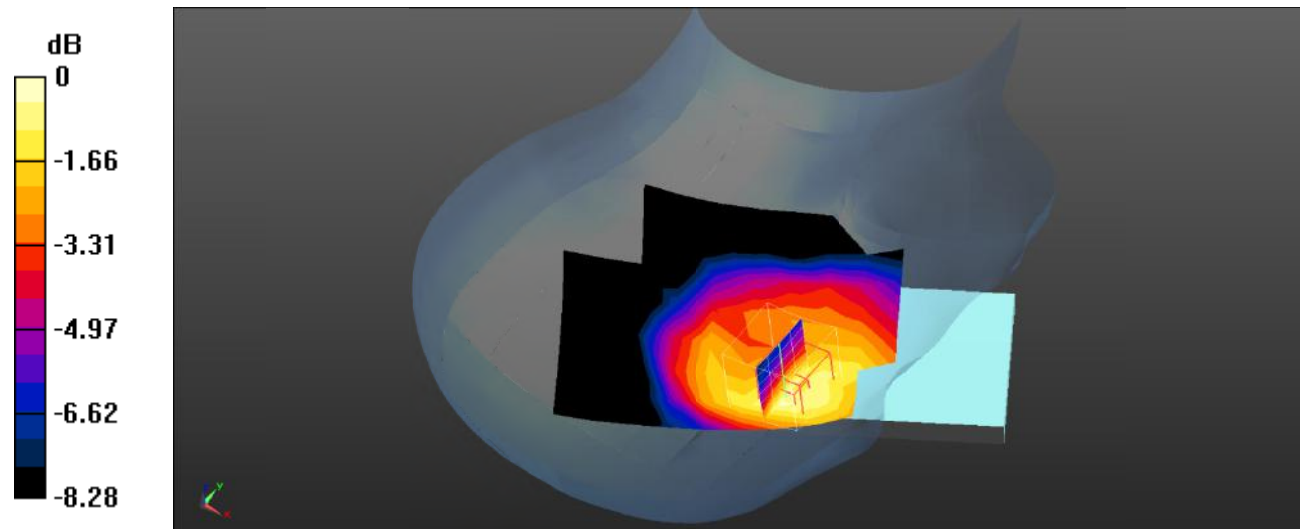

0 dB = 0.140 W/kg = -8.54 dB dBW/kg

Test Plot 44#: LTE Band 2_Head Right Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.204 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

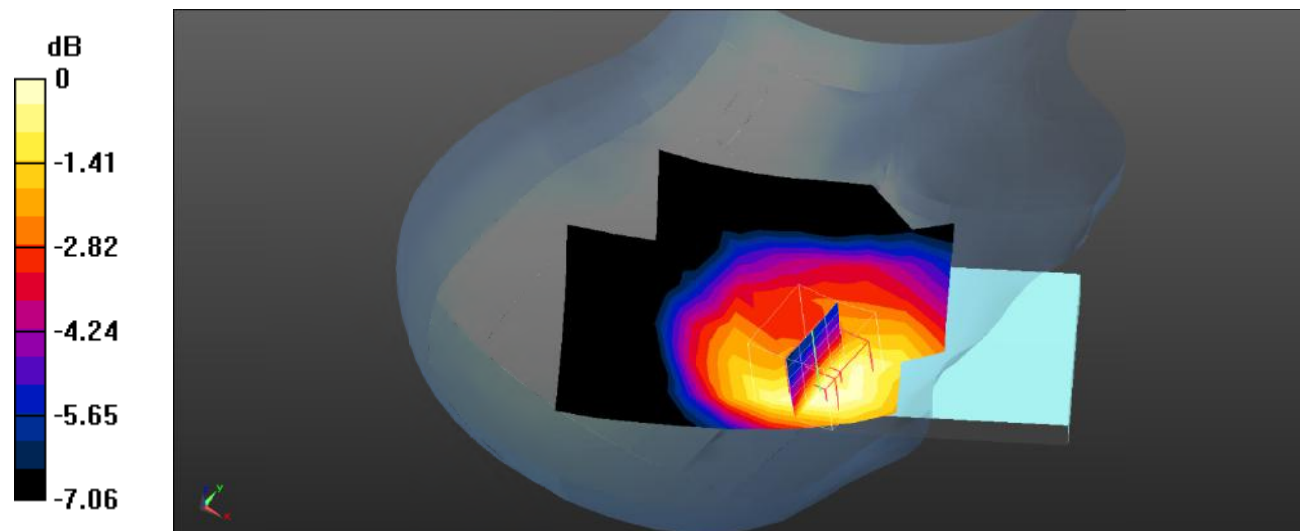

0 dB = 0.106 W/kg = -9.75 dB dBW/kg

Test Plot 45#: LTE Band 2_Head Right Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.148 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.966 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

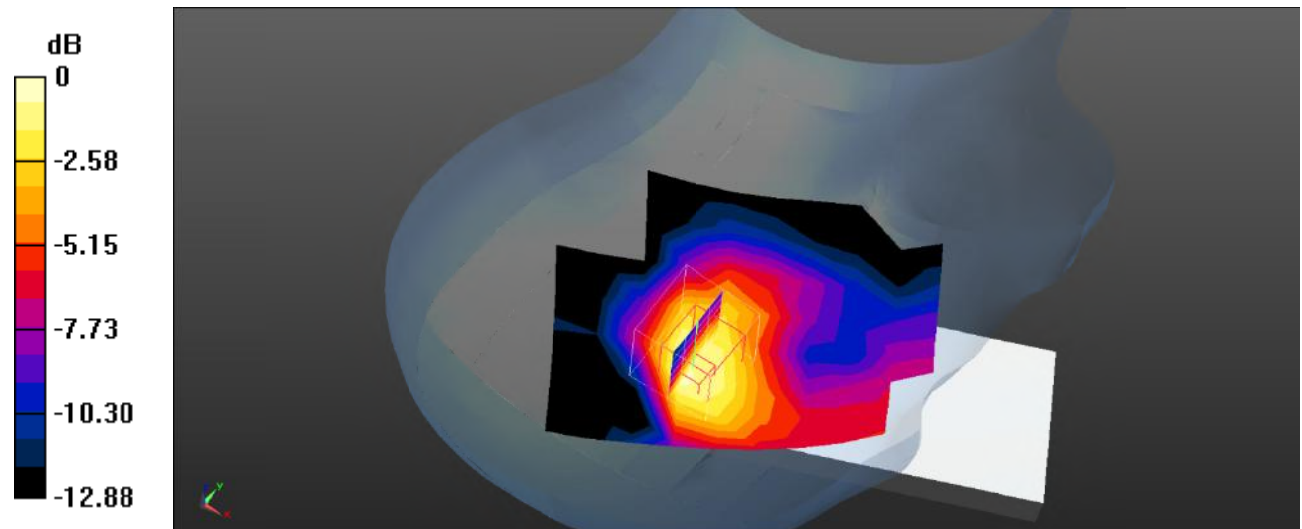

Test Plot 46#: LTE Band 2_Head Right Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.193 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

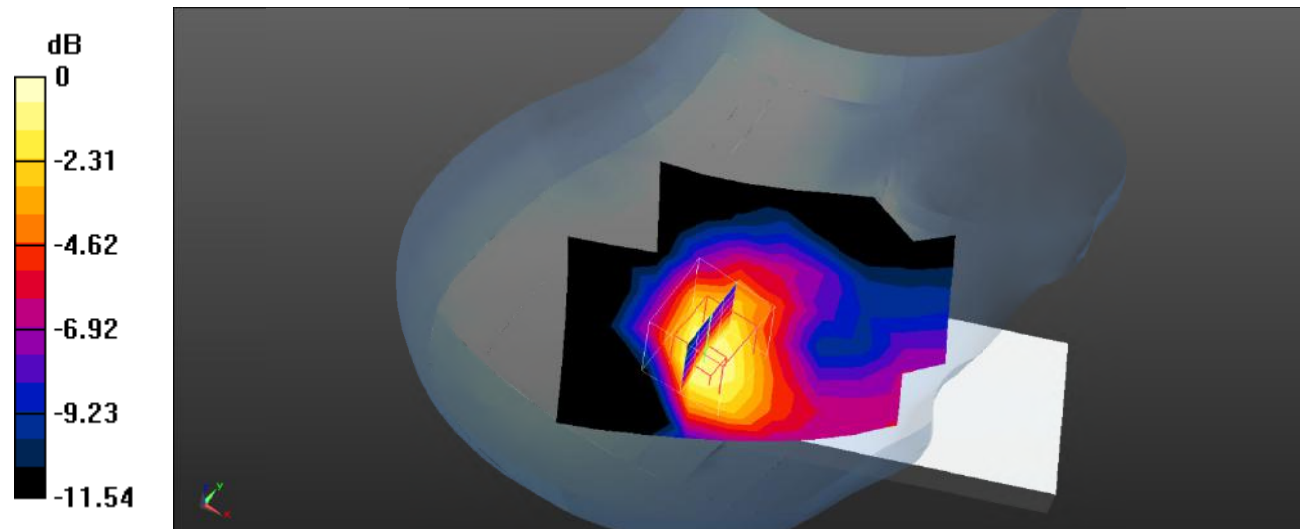

0 dB = 0.132 W/kg = -8.79 dB dBW/kg

Test Plot 47#: LTE Band 2_Body Front_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.300 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.949 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

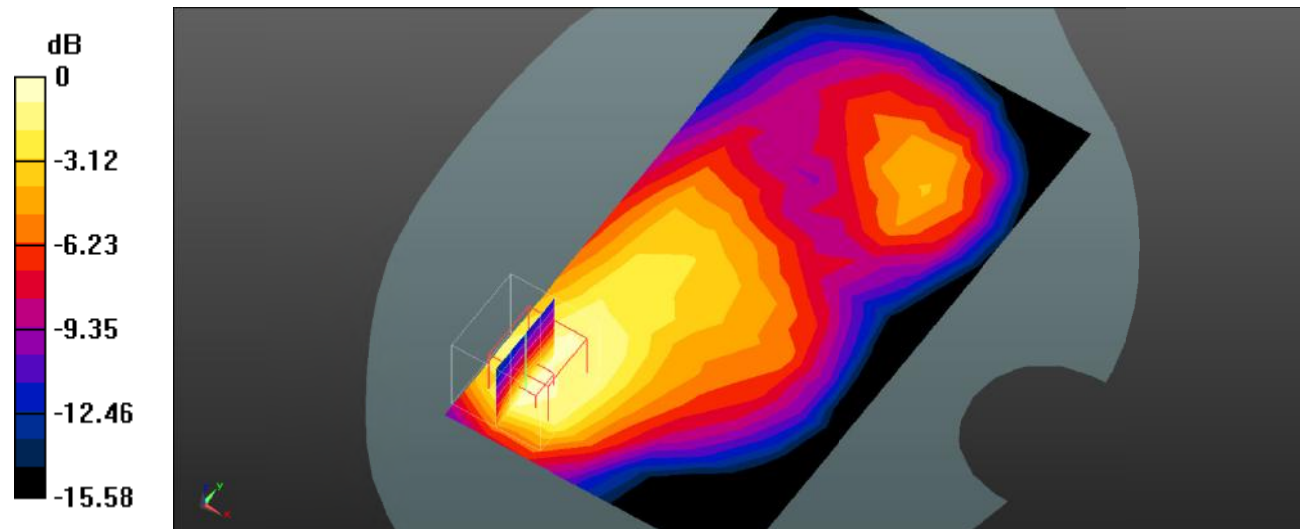

0 dB = 0.366 W/kg = -4.37 dB dBW/kg

Test Plot 48#: LTE Band 2_Body Front_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.227 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.930 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.270 W/kg

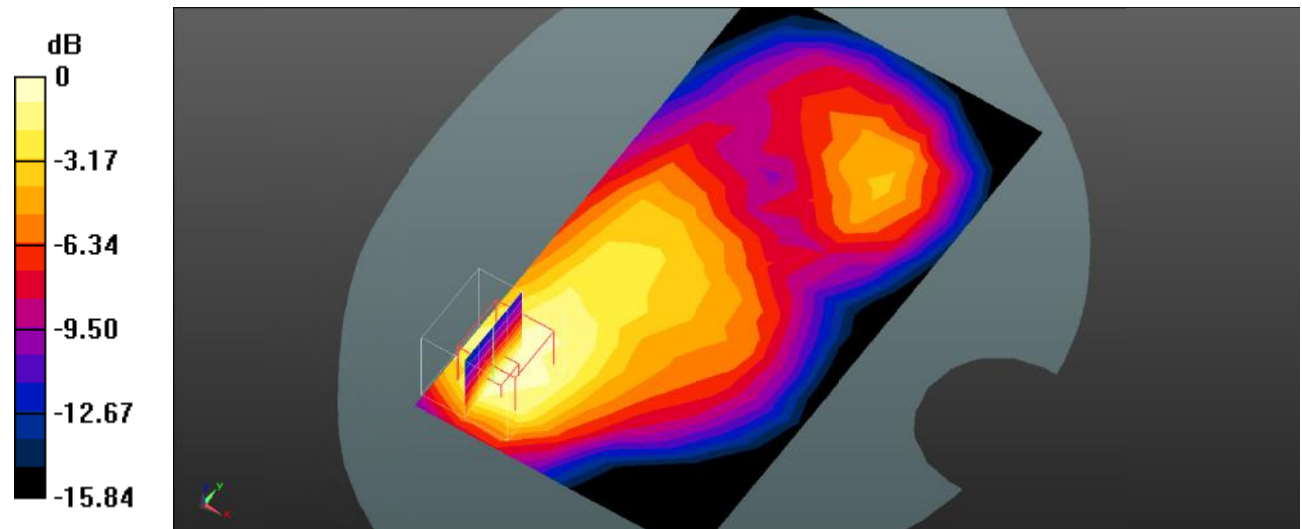

Test Plot 49#: LTE Band 2_Body Back_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.603 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.614 W/kg

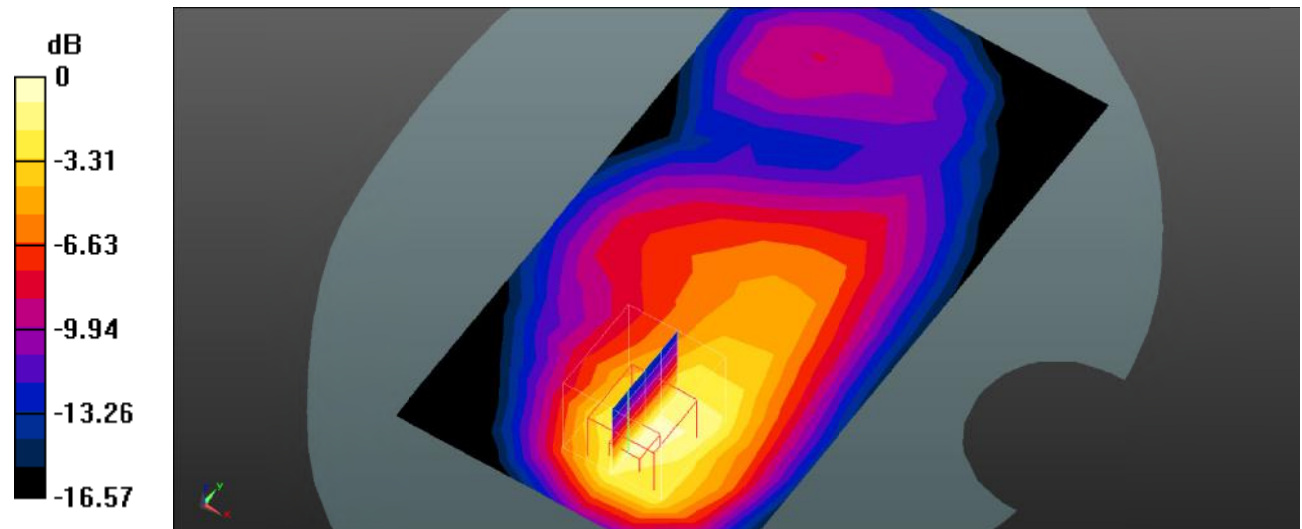

0 dB = 0.614 W/kg = -2.12 dB dBW/kg

Test Plot 50#: LTE Band 2_Body Back_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.452 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.359 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

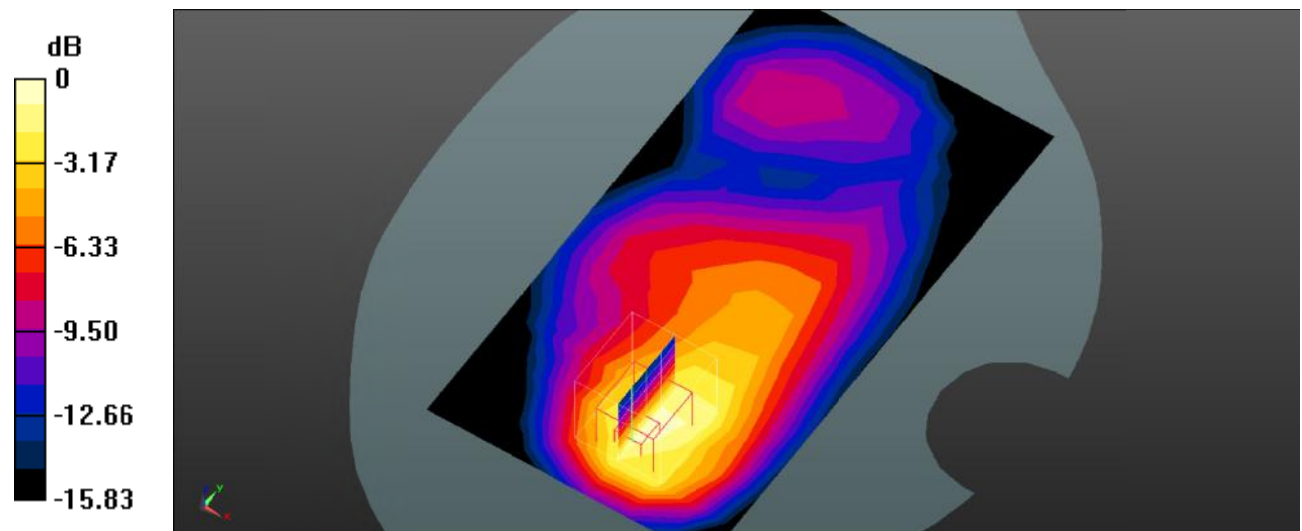

0 dB = 0.454 W/kg = -3.43 dB dBW/kg

Test Plot 51#: LTE Band 2_Body Left_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.673 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.26 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.920 W/kg

SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.367 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

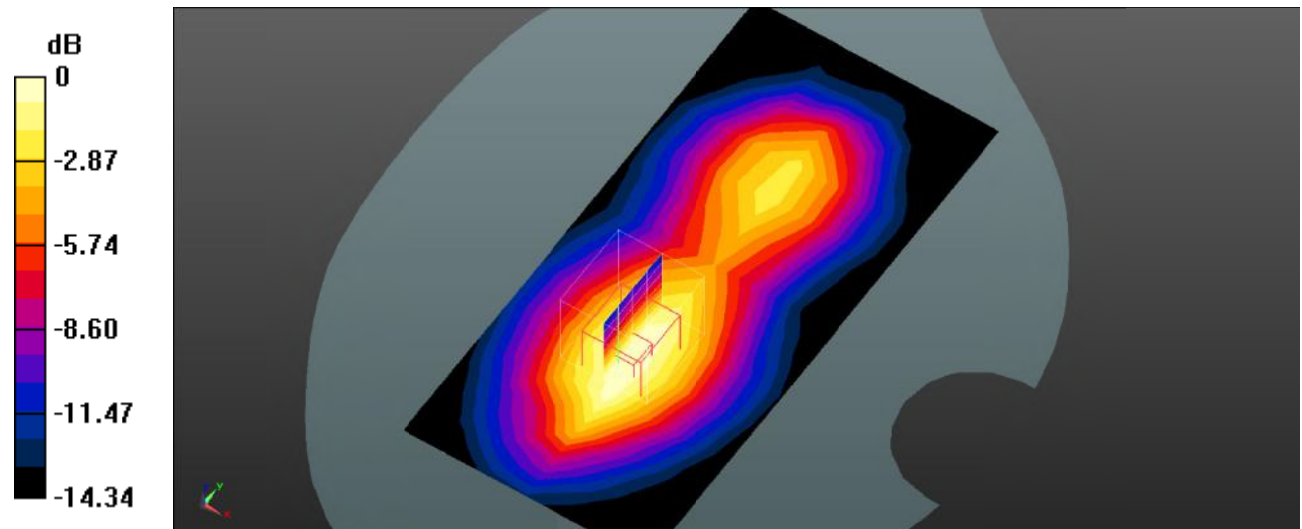

0 dB = 0.651 W/kg = -1.86 dB dBW/kg

Test Plot 52#: LTE Band 2_Body Left_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.494 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.06 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

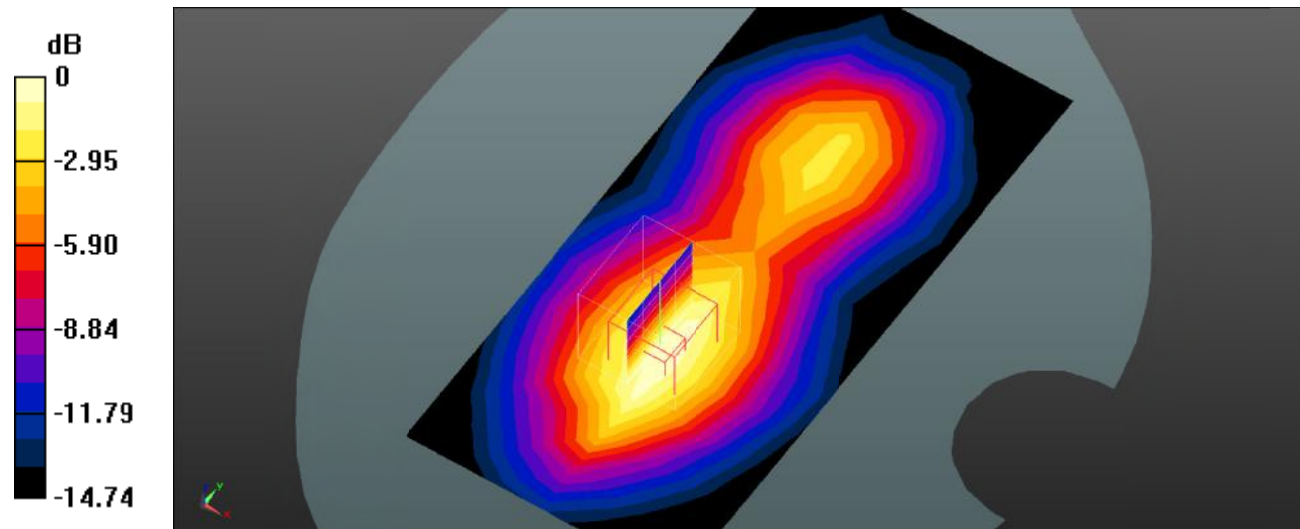

0 dB = 0.492 W/kg = -3.08 dB dBW/kg

Test Plot 53#: LTE Band 2_Body Right_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0589 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.590 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0830 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.0580 W/kg

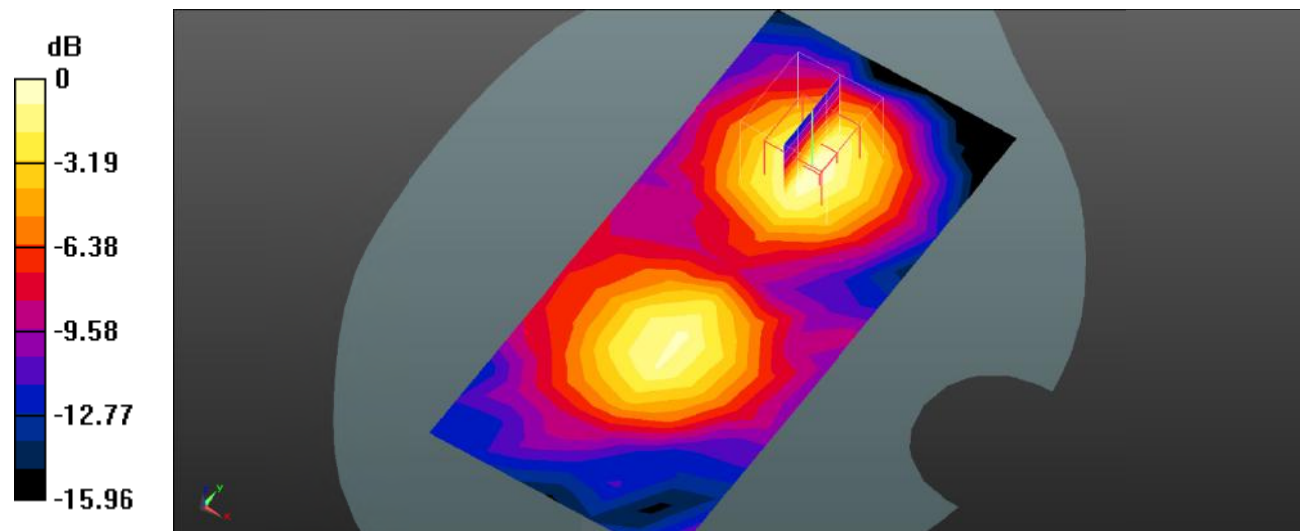

0 dB = 0.0580 W/kg = -12.37 dB dBW/kg

Test Plot 54#: LTE Band 2_Body Right_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0444 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.077 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0429 W/kg

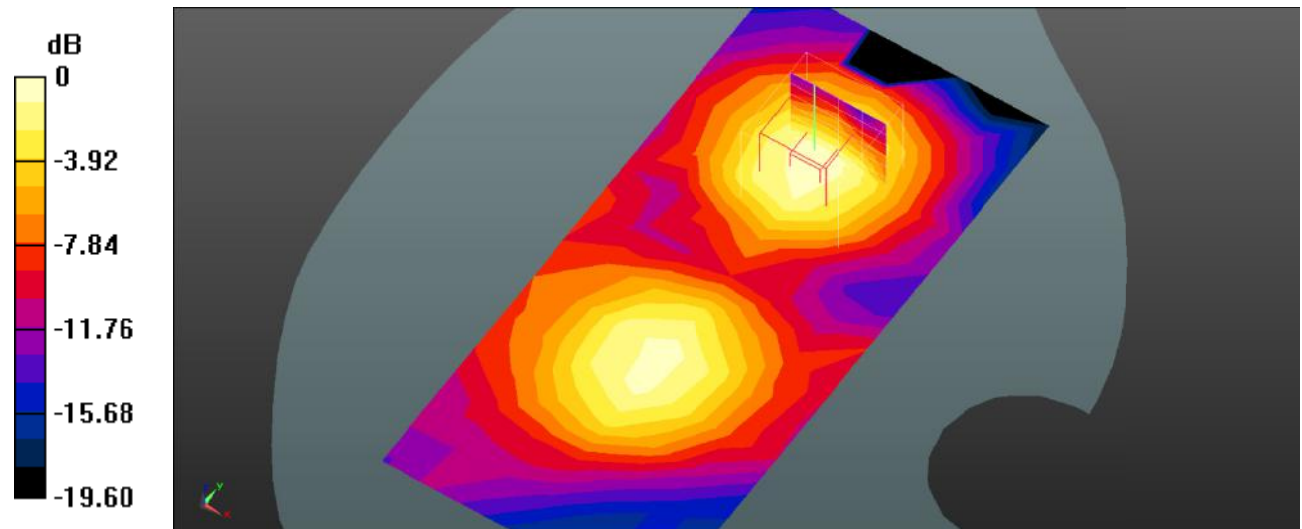

0 dB = 0.0429 W/kg = -13.68 dB dBW/kg

Test Plot 55#: LTE Band 2_Body Bottom_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.91 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.648 W/kg

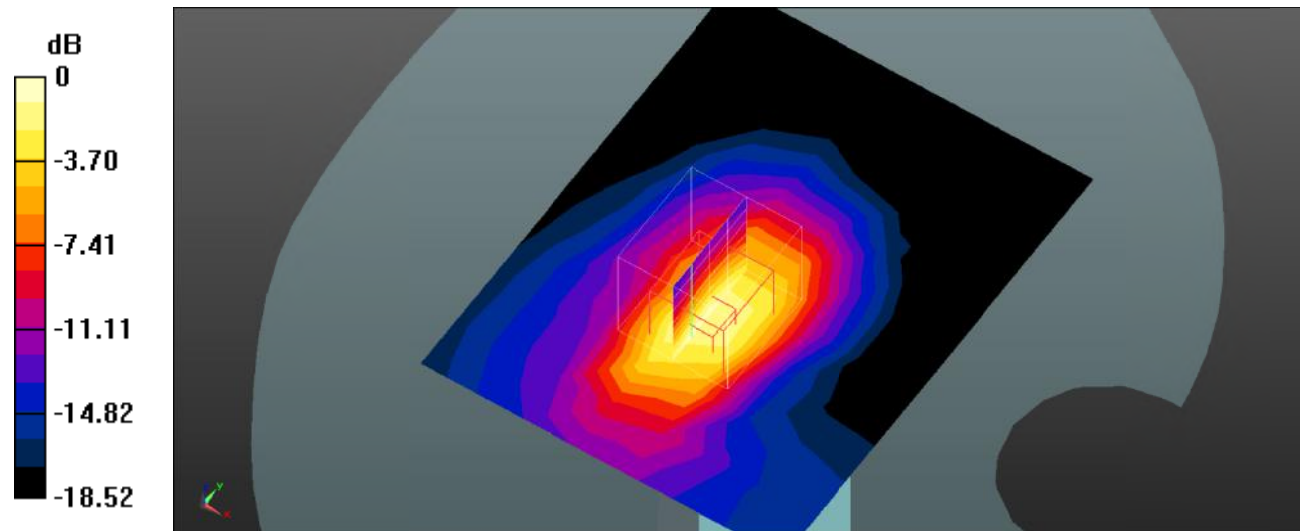

0 dB = 0.648 W/kg = -1.88 dB dBW/kg

Test Plot 56#: LTE Band 2_Body Bottom_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.179$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.94, 7.94, 7.94); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.364 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.36 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

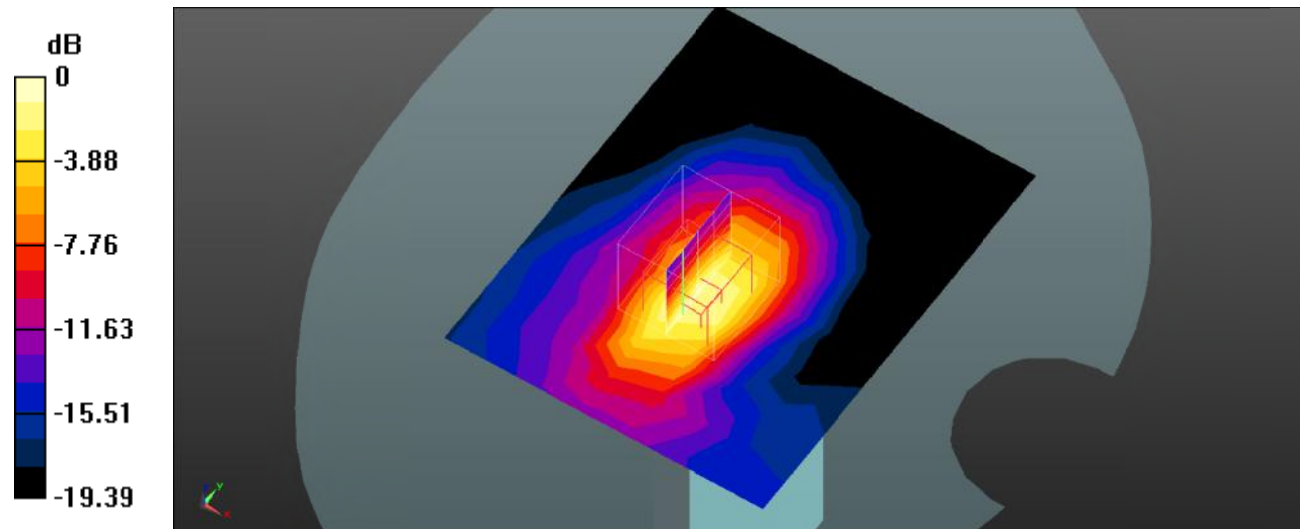

Test Plot 57#: LTE Band 4_Head Left Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0694 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.683 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0700 W/kg

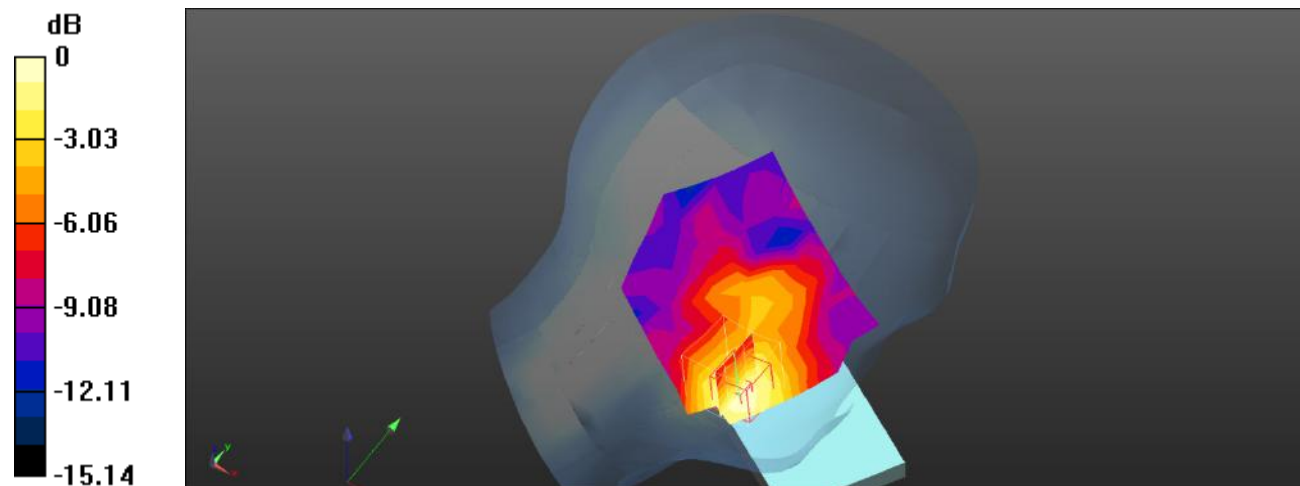

0 dB = 0.0700 W/kg = -11.55 dBW/kg

Test Plot 58#: LTE Band 4_Head Left Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0498 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.931 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0528 W/kg

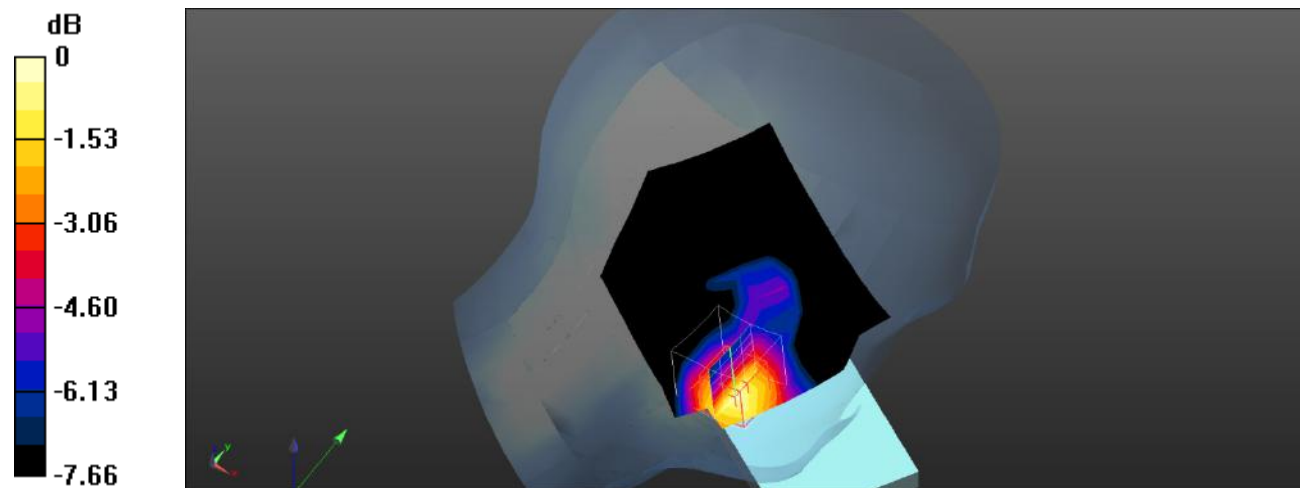

0 dB = 0.0528 W/kg = -12.77 dBW/kg

Test Plot 59#: LTE Band 4_Head Left Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0311 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.781 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0333 W/kg

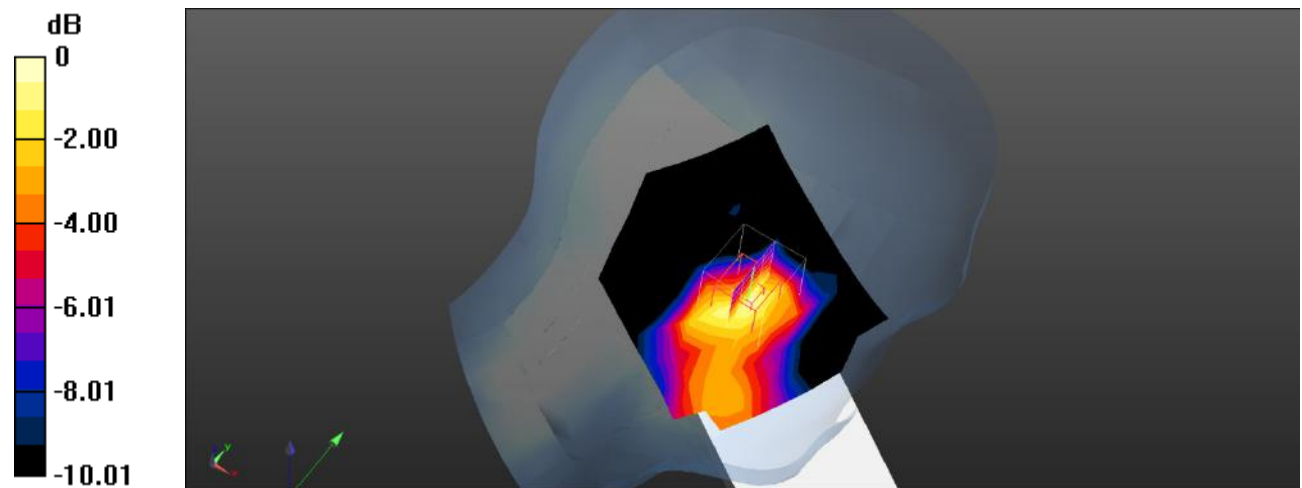

0 dB = 0.0333 W/kg = -14.78 dBW/kg

Test Plot 60#: LTE Band 4_Head Left Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0241 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.134 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0255 W/kg

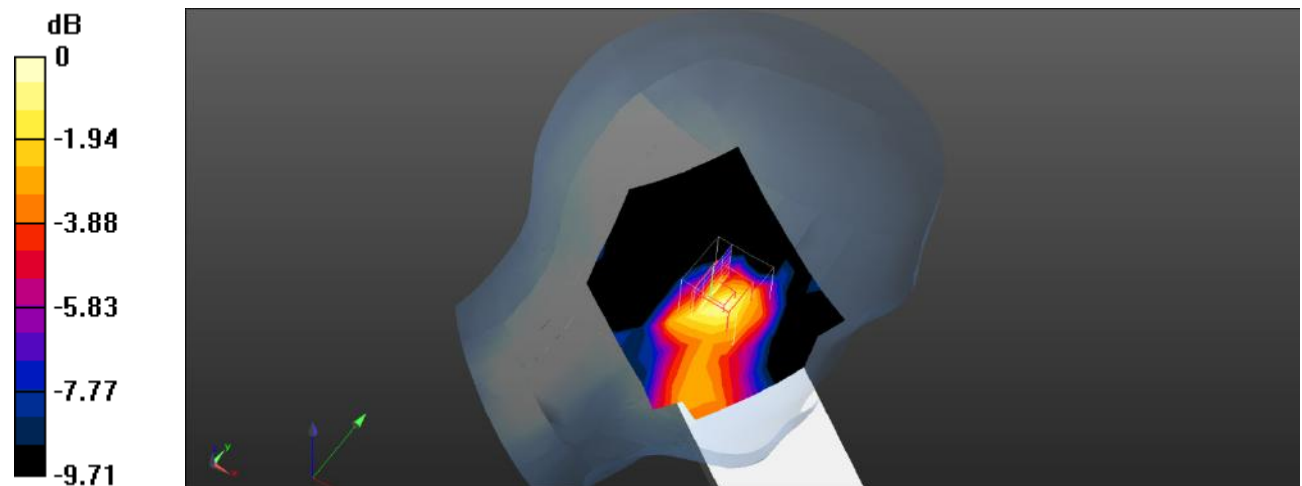

0 dB = 0.0255 W/kg = -15.93 dBW/kg

Test Plot 61#: LTE Band 4_Head Right Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0451 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.413 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0423 W/kg

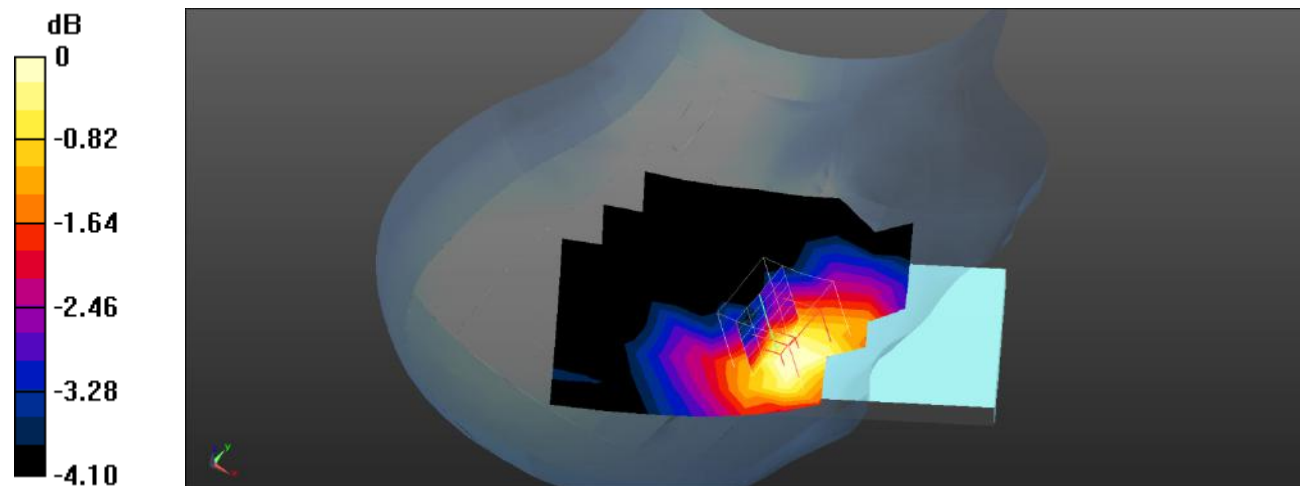

0 dB = 0.0423 W/kg = -13.74 dBW/kg

Test Plot 62#: LTE Band 4_Head Right Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0339 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.651 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

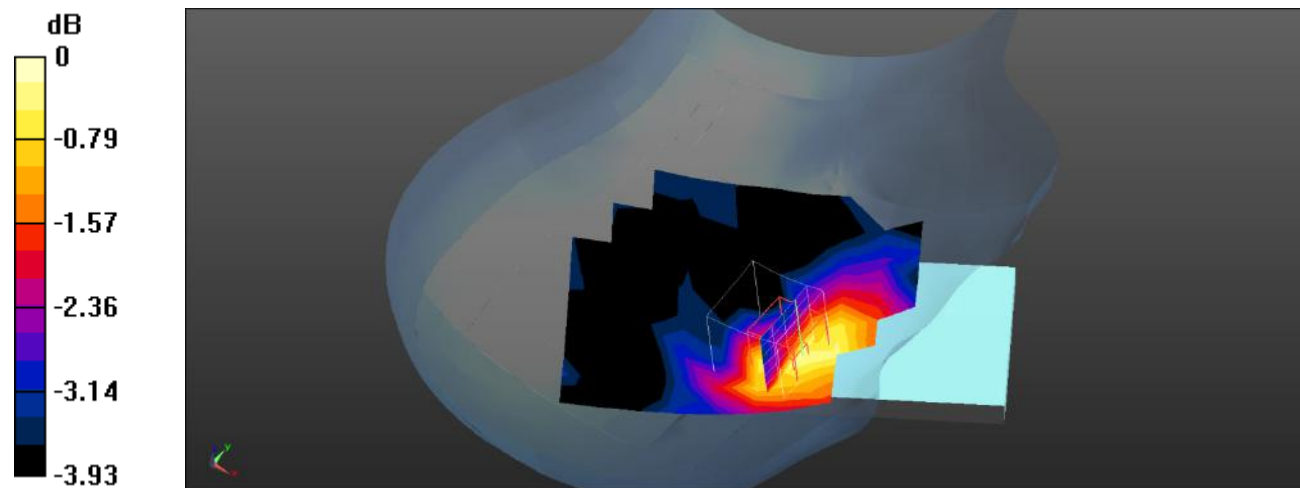

0 dB = 0.0359 W/kg = -14.45 dBW/kg

Test Plot 63#: LTE Band 4_Head Right Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0128 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.165 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00591 W/kg

Maximum value of SAR (measured) = 0.0135 W/kg

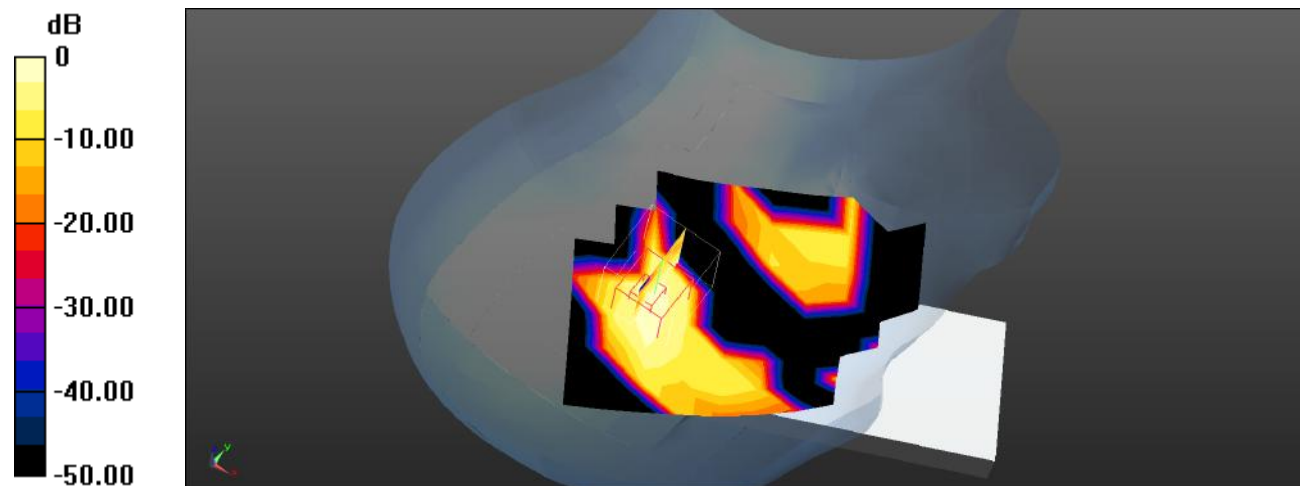

Test Plot 64#: LTE Band 4_Head Right Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00884 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.852 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00388 W/kg

Maximum value of SAR (measured) = 0.0125 W/kg

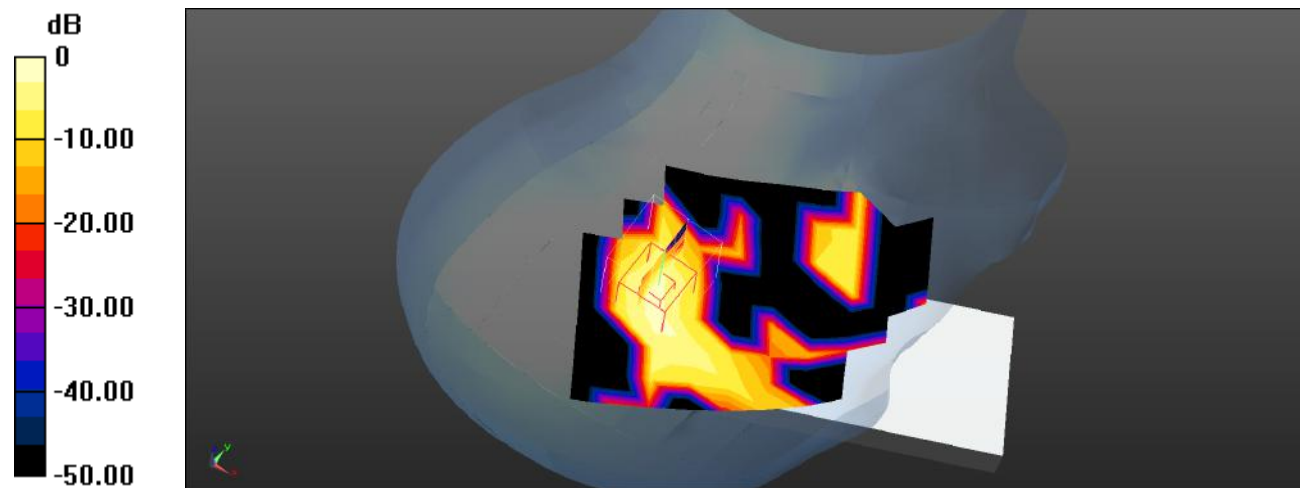

0 dB = 0.0125 W/kg = -19.03 dBW/kg

Test Plot 65#: LTE Band 4_Body Front_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.264 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.740 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.170 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

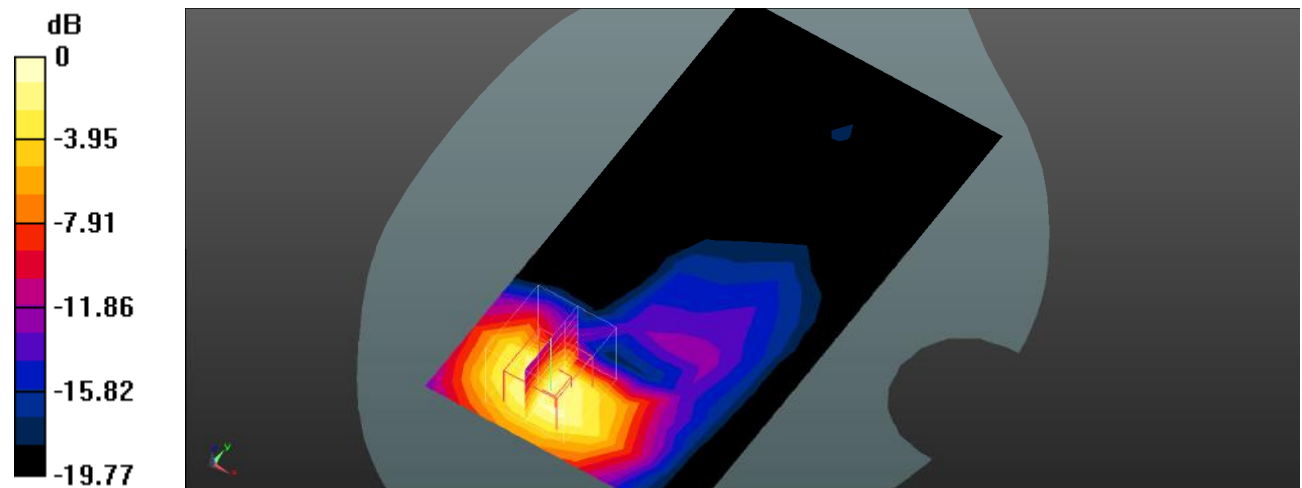

0 dB = 0.335 W/kg = -4.75 dBW/kg

Test Plot 66#: LTE Band 4_Body Front_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.233 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.859 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.265 W/kg

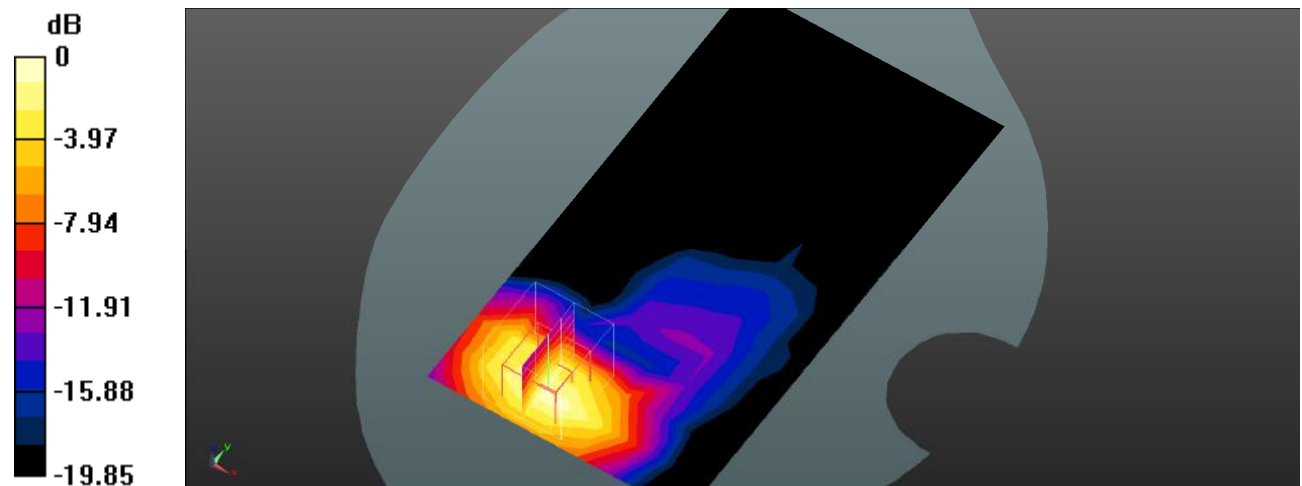

0 dB = 0.265 W/kg = -5.77 dBW/kg

Test Plot 67#: LTE Band 4_Body Back_1RB_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 41.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.899 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.059 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.519 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

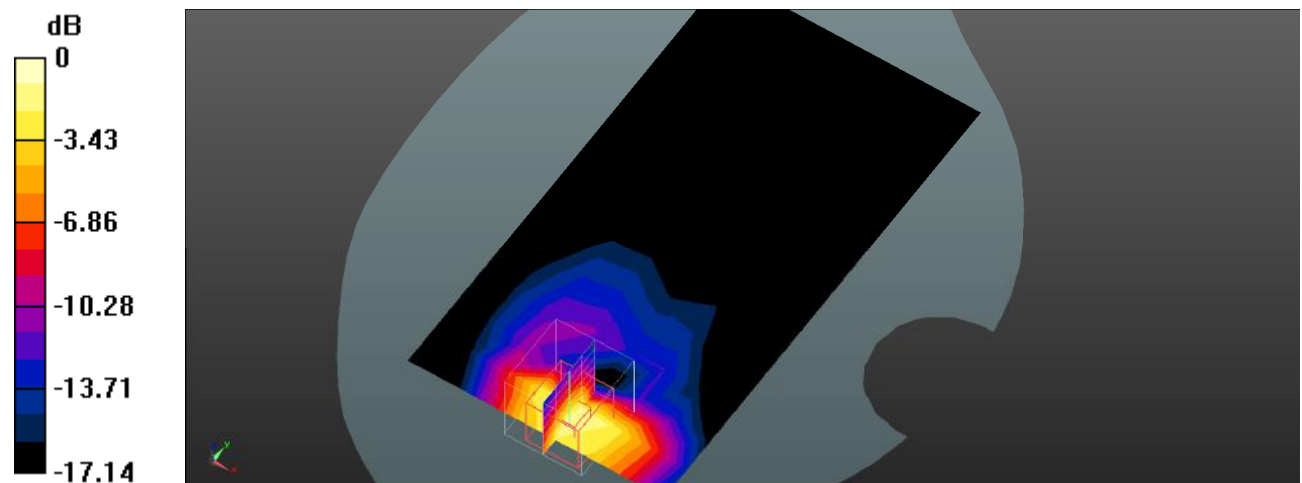

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Plot 68#: LTE Band 4_Body Back_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.798 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.897 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 0.838 W/kg

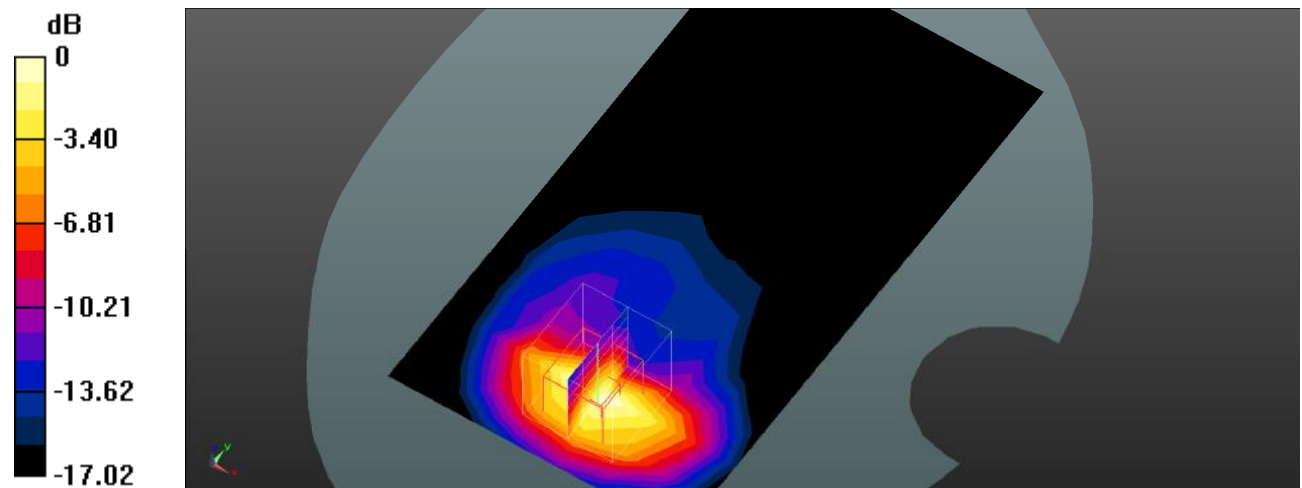

0 dB = 0.838 W/kg = -0.77 dBW/kg

Test Plot 69#: LTE Band 4_Body Back_1RB_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.898 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.921 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.530 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

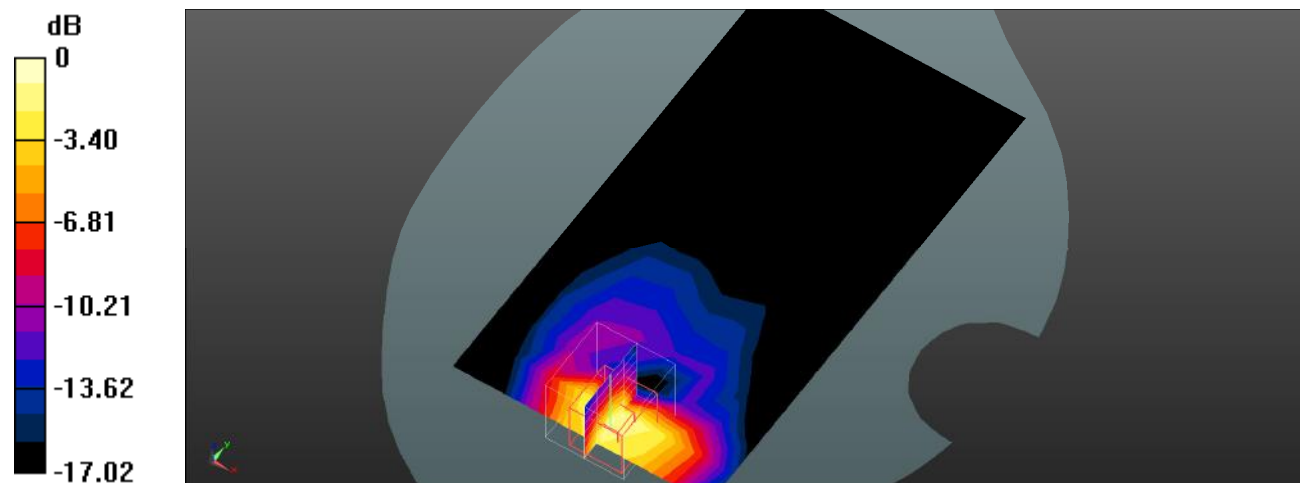

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Plot 70#: LTE Band 4_Body Back_50%RB_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 41.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.713 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.517 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 0.869 W/kg

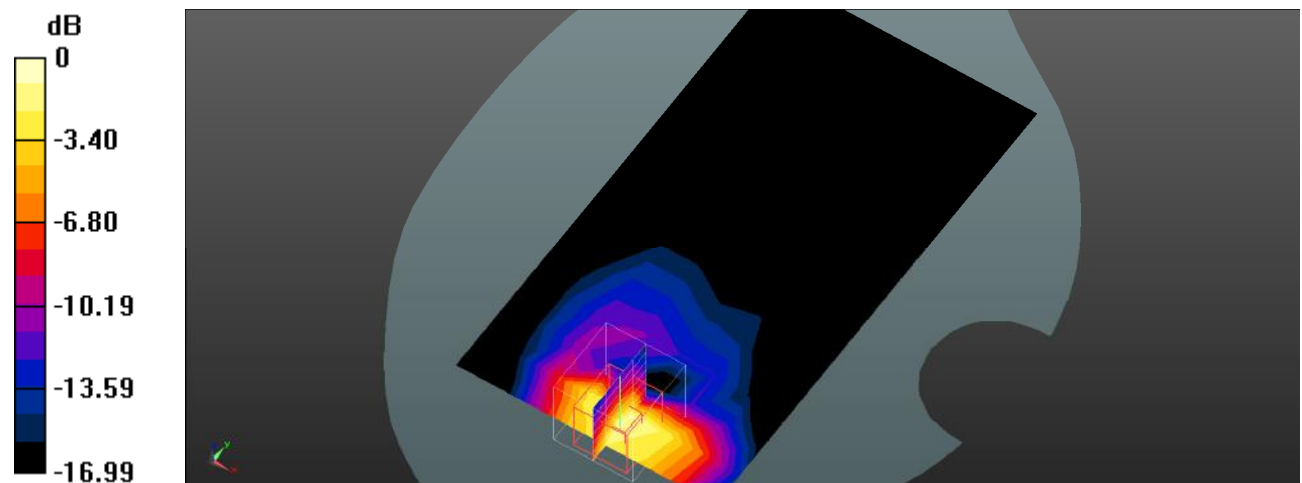

0 dB = 0.869 W/kg = -0.61 dBW/kg

Test Plot 71#: LTE Band 4_Body Back_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.619 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.612 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 0.668 W/kg

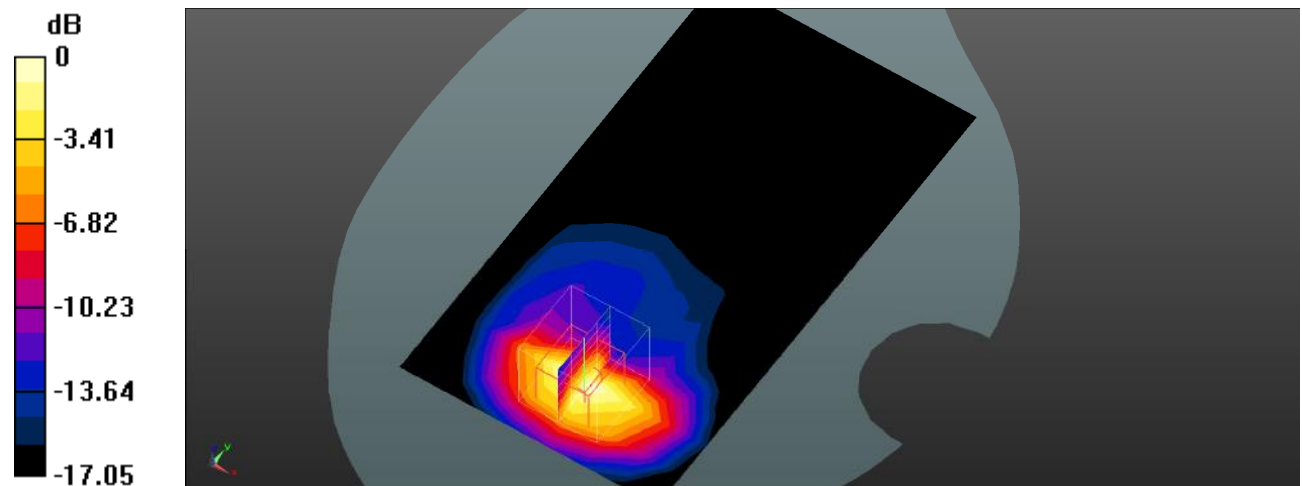

Test Plot 72#: LTE Band 4_Body Back_50%RB_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.696 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.583 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.409 W/kg

Maximum value of SAR (measured) = 0.870 W/kg

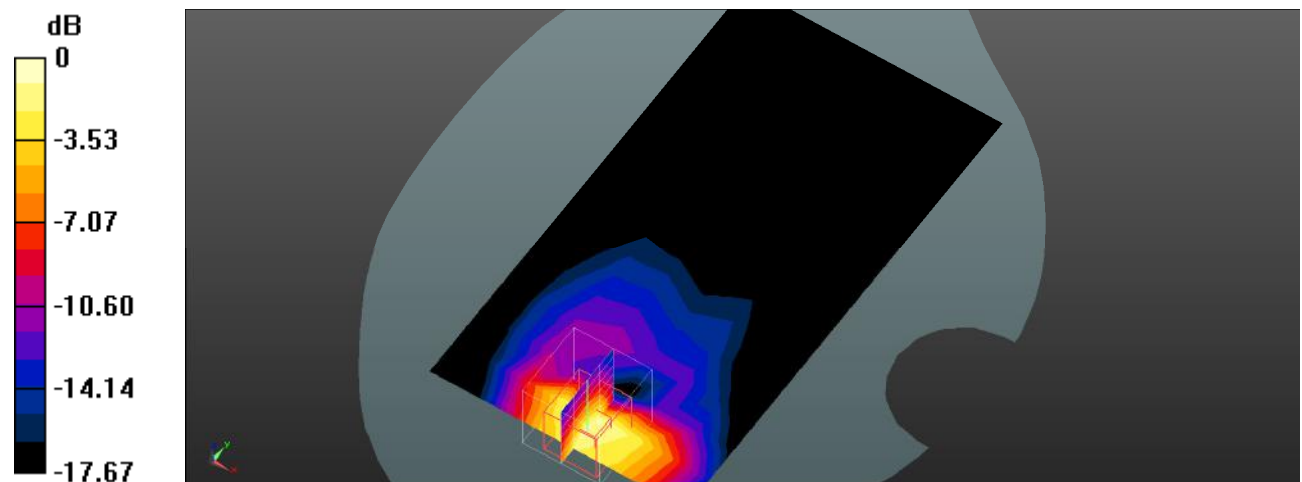

0 dB = 0.870 W/kg = -0.60 dBW/kg

Test Plot 73#: LTE Band 4_Body Back_100%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.688 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.565 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.407 W/kg

Maximum value of SAR (measured) = 0.871 W/kg

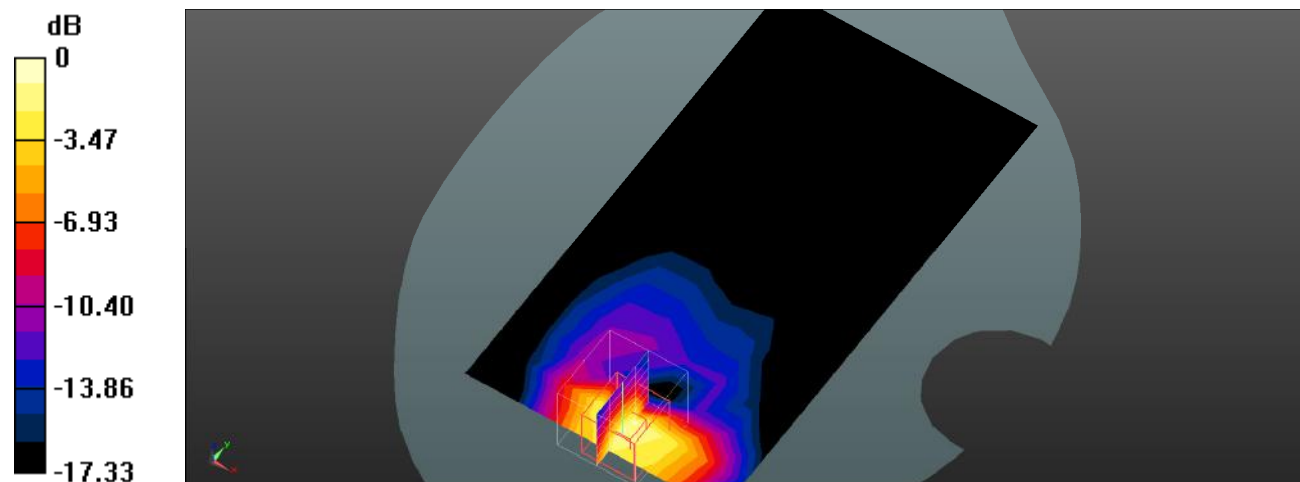

0 dB = 0.871 W/kg = -0.60 dBW/kg

Test Plot 74#: LTE Band 4_Body Left_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0837 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.110 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0849 W/kg

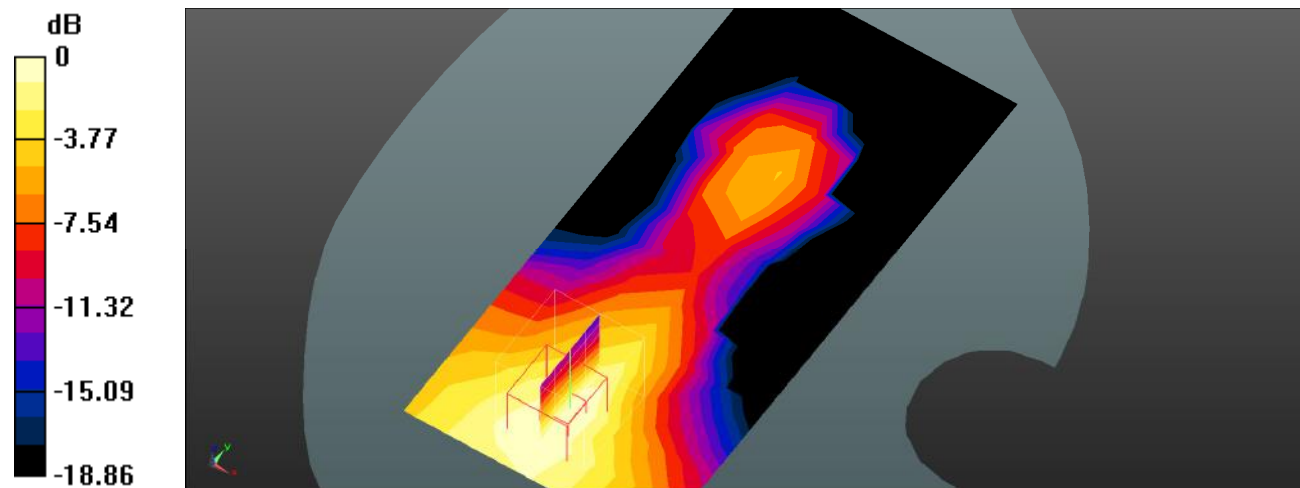

0 dB = 0.0849 W/kg = -10.71 dBW/kg

Test Plot 75#: LTE Band 4_Body Left_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0659 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.634 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0641 W/kg

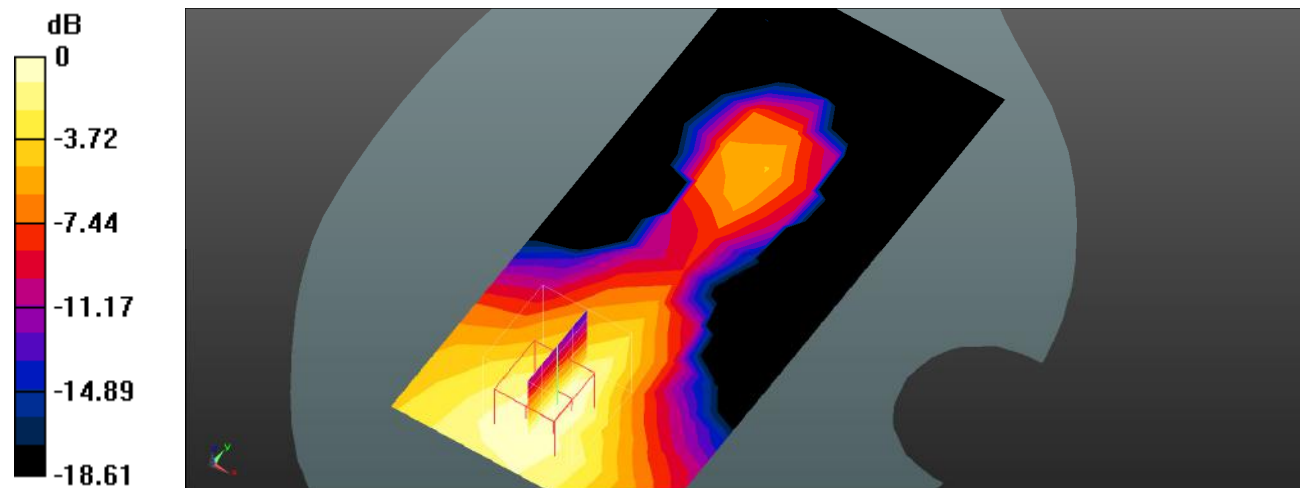

Test Plot 76#: LTE Band 4_Body Right_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0216 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.180 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0217 W/kg

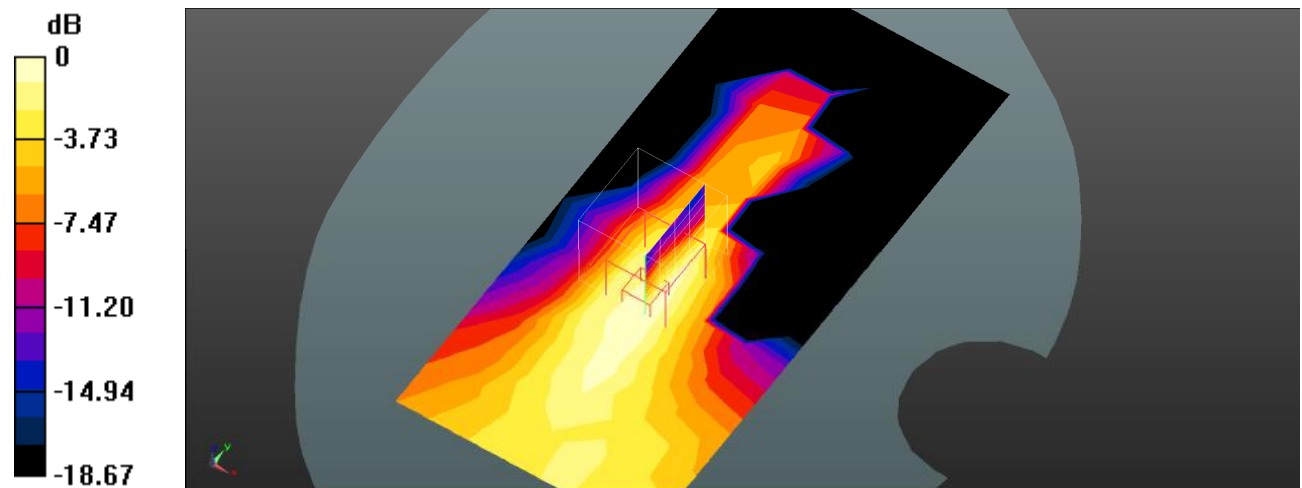

0 dB = 0.0217 W/kg = -16.64 dBW/kg

Test Plot 77#: LTE Band 4_Body Right_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.806 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00767 W/kg

Maximum value of SAR (measured) = 0.0152 W/kg

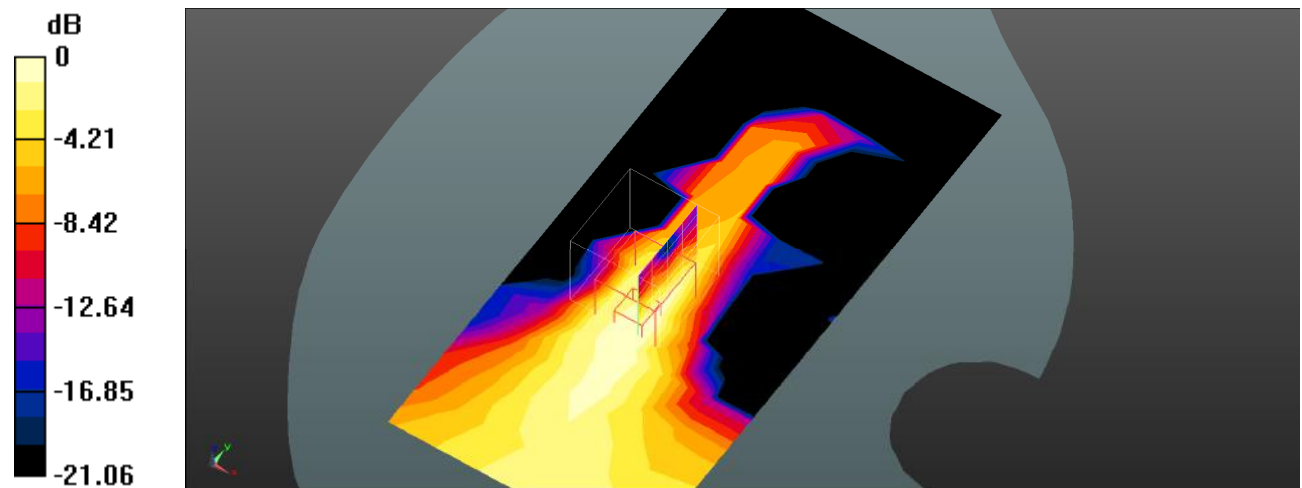

0 dB = 0.0152 W/kg = -18.18 dBW/kg

Test Plot 78#: LTE Band 4_Body Bottom_1RB_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 41.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.00 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.57 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.535 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

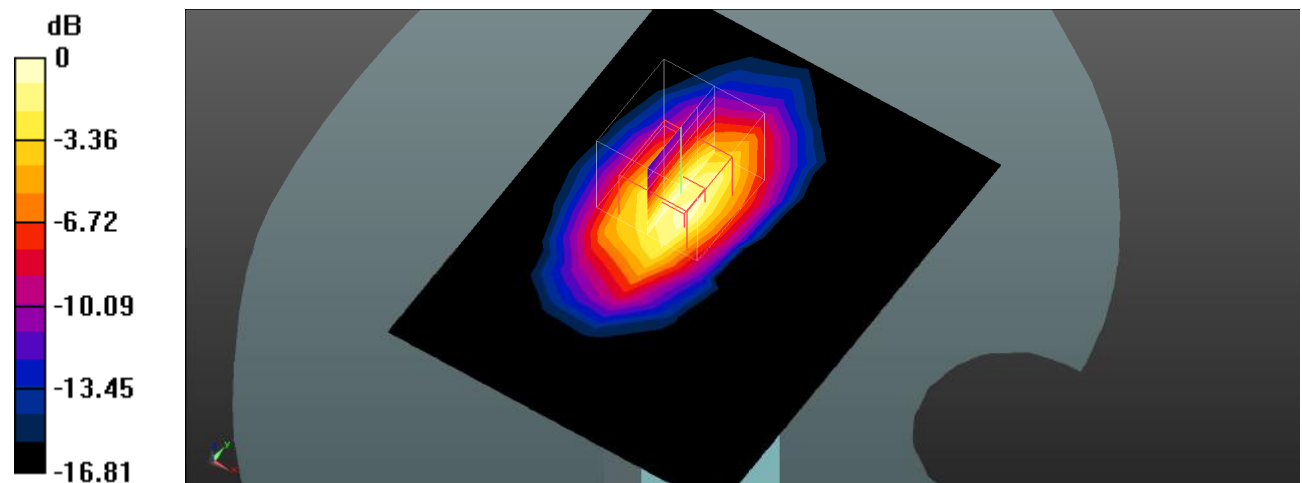

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Plot 79#: LTE Band 4_Body Bottom_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.777 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.83 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 0.800 W/kg

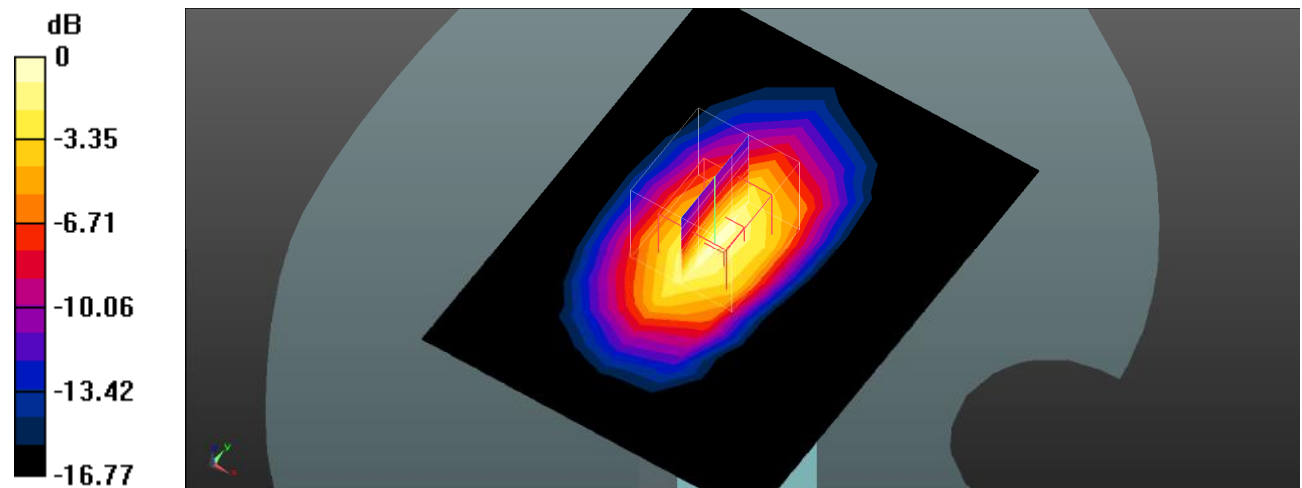

0 dB = 0.800 W/kg = -0.97 dBW/kg

Test Plot 80#: LTE Band 4_Body Bottom_1RB_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.583 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

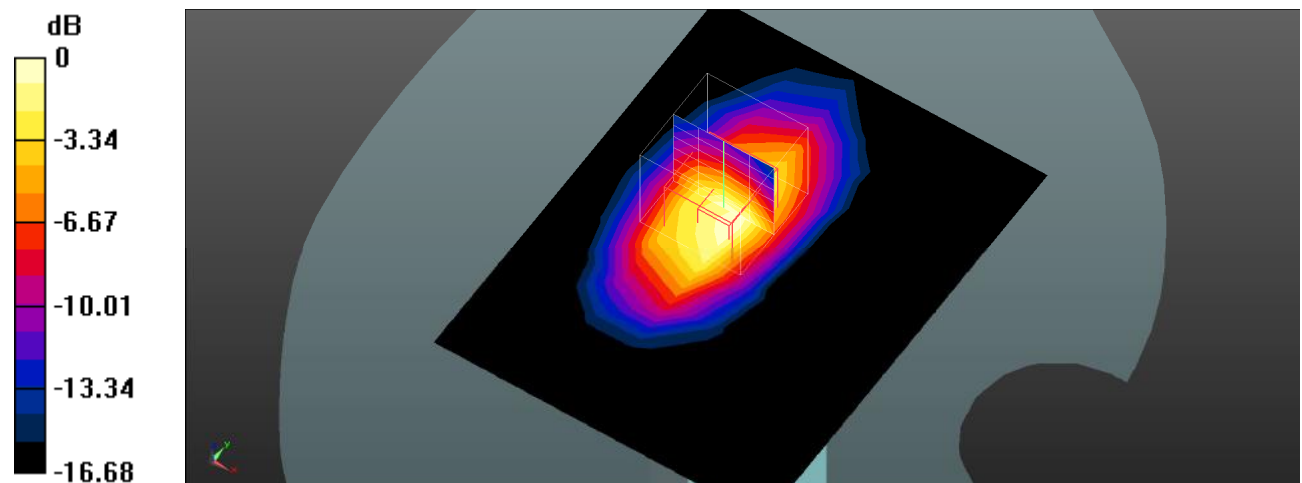

0 dB = 1.16 W/kg = 0.64 dBW/kg

Test Plot 81#: LTE Band 4_Body Bottom_50%RB_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 41.097$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.838 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.63 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 0.866 W/kg

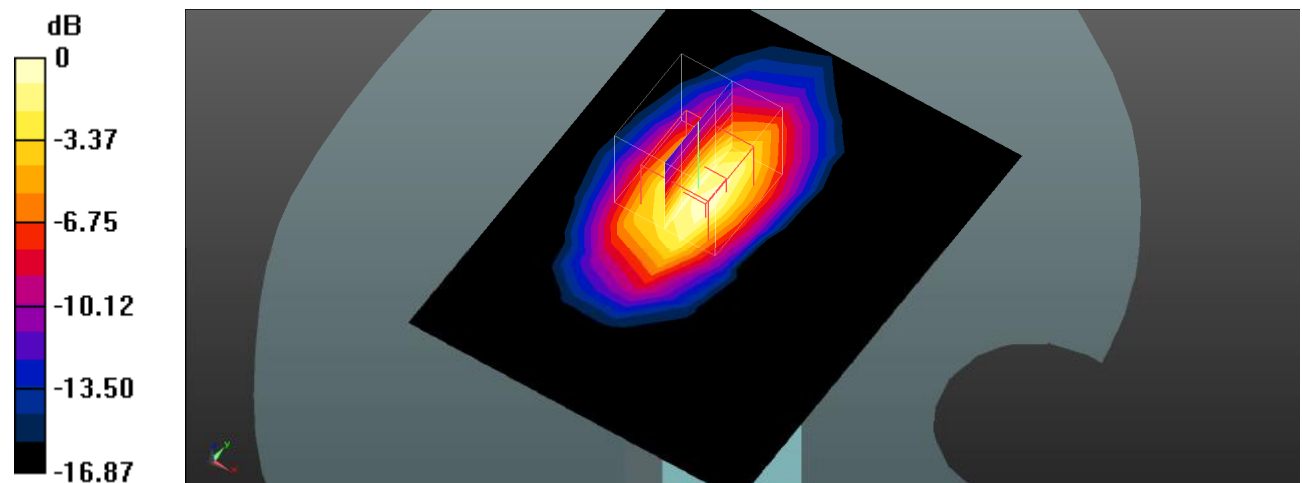

Test Plot 82#: LTE Band 4_Body Bottom_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.606 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.24 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.333 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

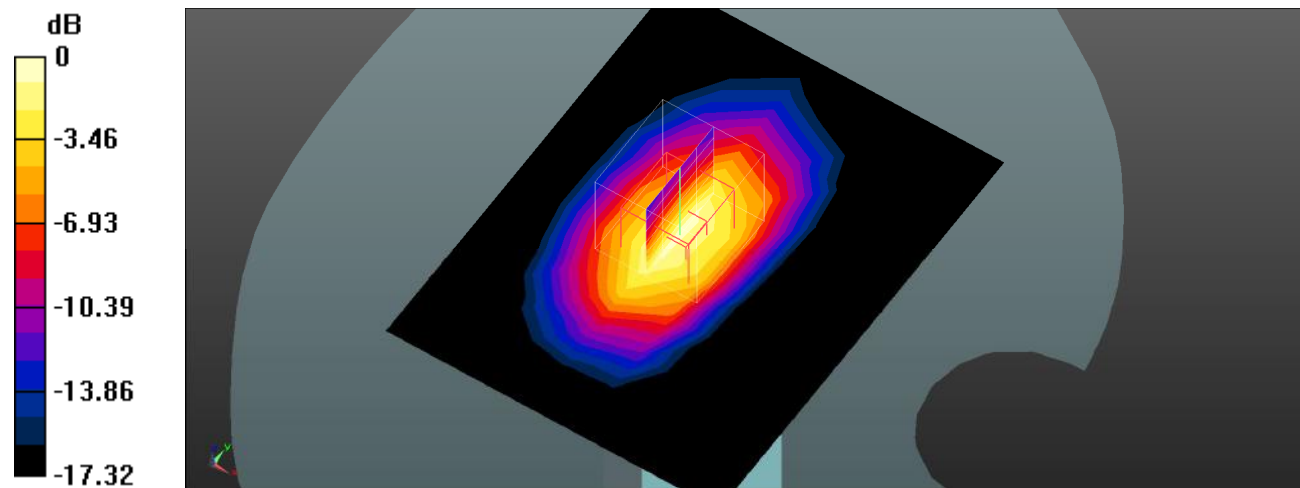

0 dB = 0.647 W/kg = -1.89 dBW/kg

Test Plot 83#: LTE Band 4_Body Bottom_50%RB_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 39.95$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.874 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.98 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.439 W/kg

Maximum value of SAR (measured) = 0.874 W/kg

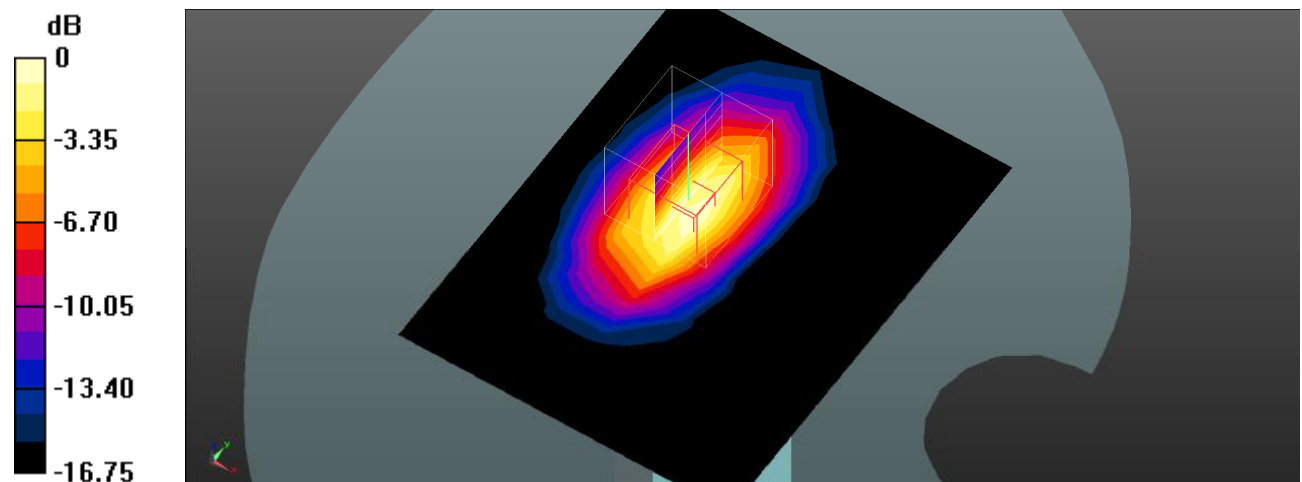

Test Plot 84#: LTE Band 4_Body Bottom_100%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 39.763$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(8.32, 8.32, 8.32); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.606 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.24 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.333 W/kg

Maximum value of SAR (measured) = 0.647 W/kg

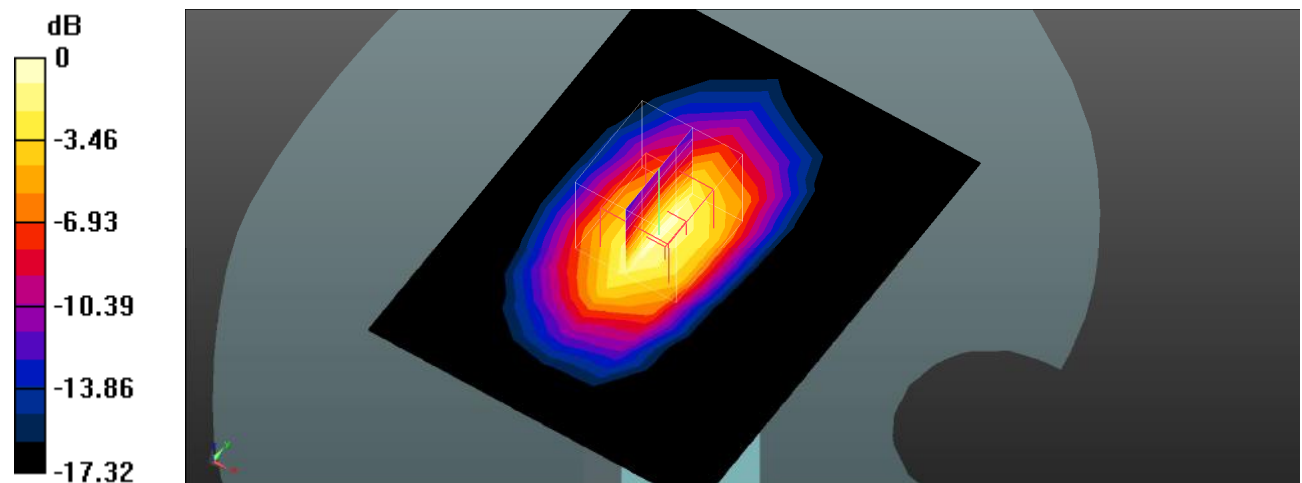

0 dB = 0.647 W/kg = -1.89 dBW/kg

Test Plot 85#: LTE Band 7_Head Left Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0468 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.2270 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0487 W/kg

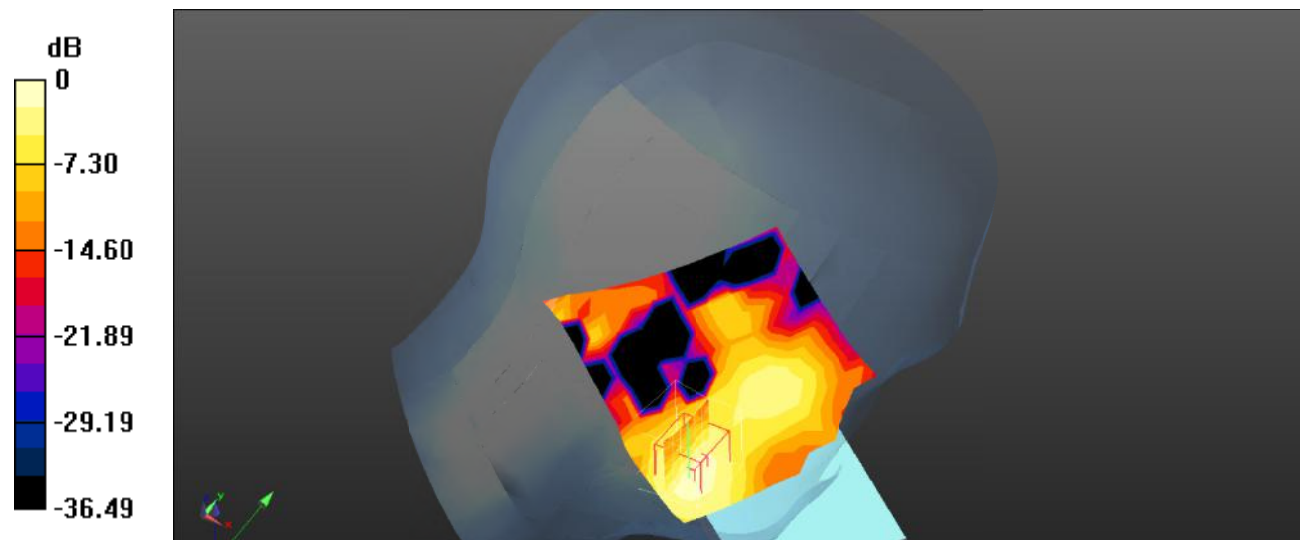

0 dB = 0.0487 W/kg = -13.12 dB dBW/kg

Test Plot 86#: LTE Band 7_Head Left Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0409 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0660 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0438 W/kg

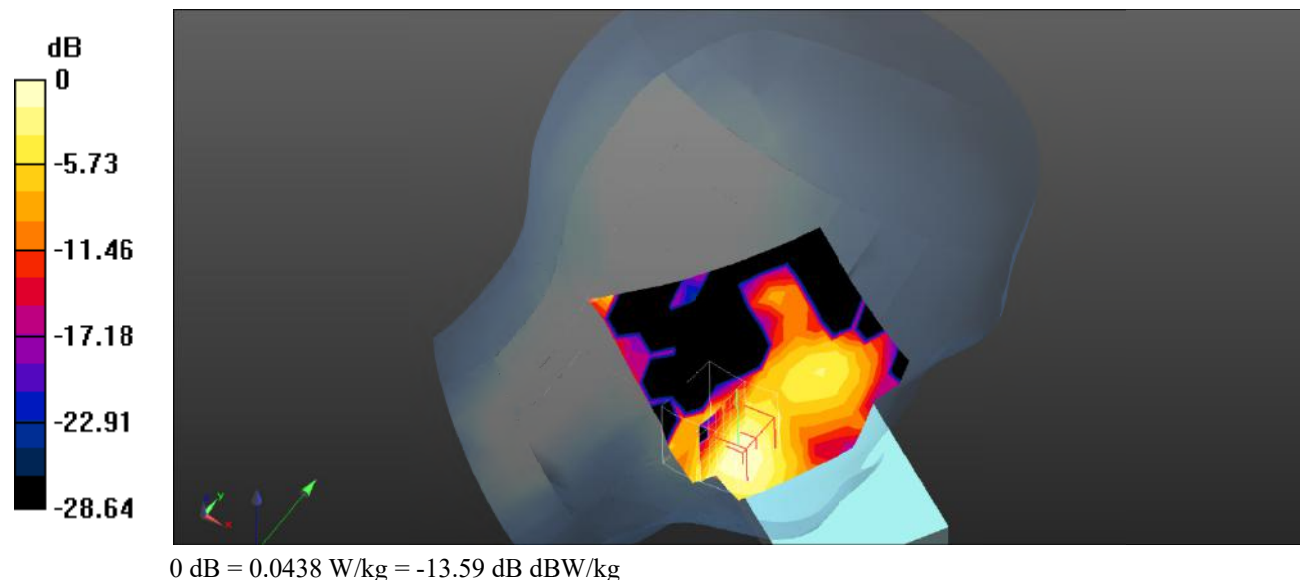

Test Plot 87#: LTE Band 7_Head Left Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0235 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.377 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0303 W/kg

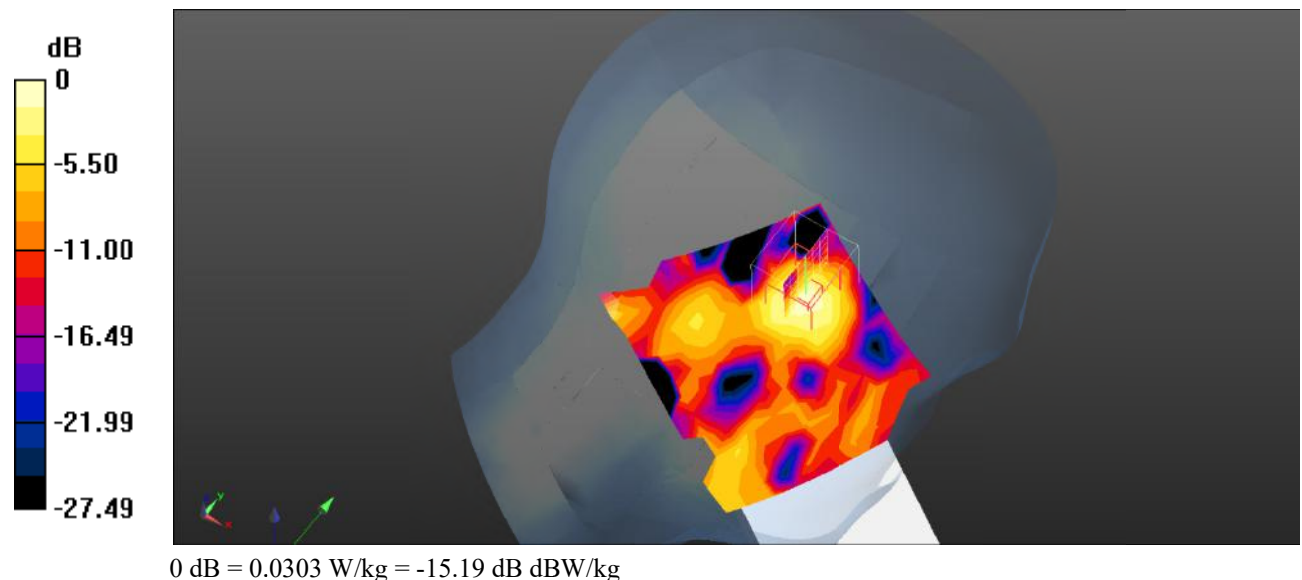

Test Plot 88#: LTE Band 7_Head Left Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0343 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.280 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00906 W/kg

Maximum value of SAR (measured) = 0.0246 W/kg

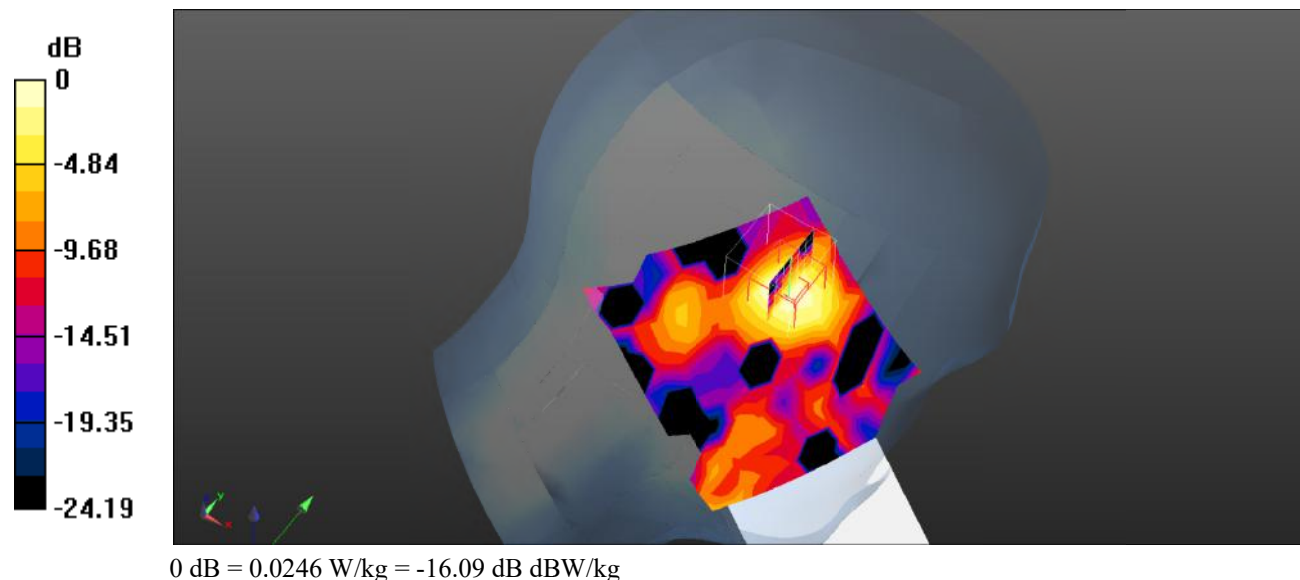

Test Plot 89#: LTE Band 7_Head Right Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0237 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.502 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00893 W/kg

Maximum value of SAR (measured) = 0.0232 W/kg

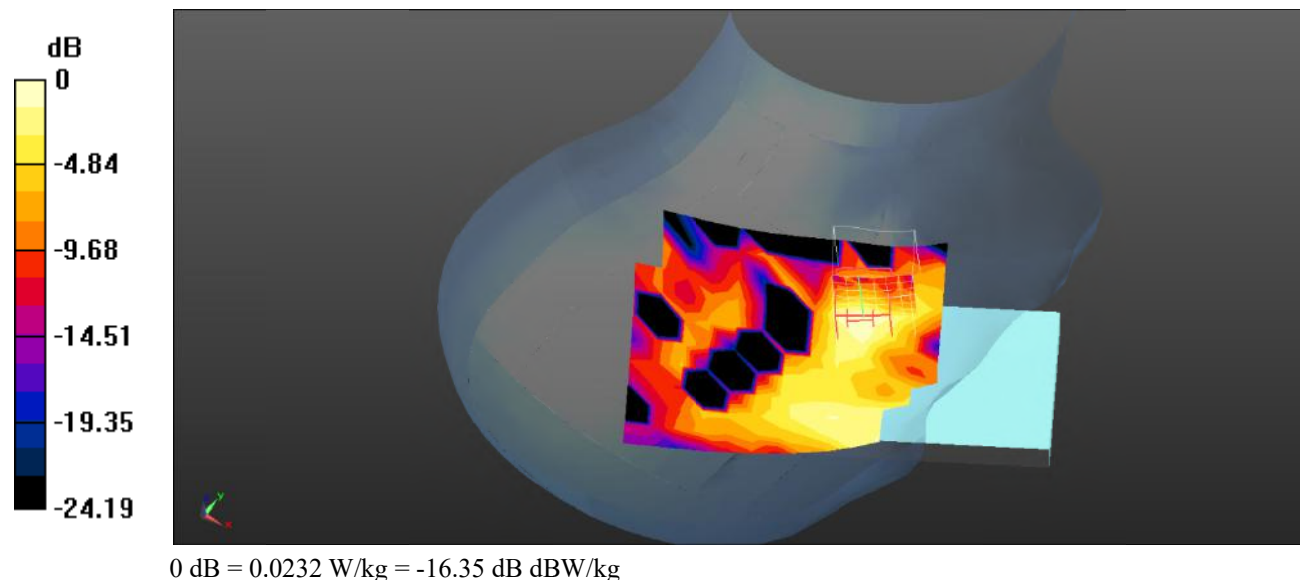

Test Plot 90#: LTE Band 7_Head Right Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0274 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.590 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0270 W/kg

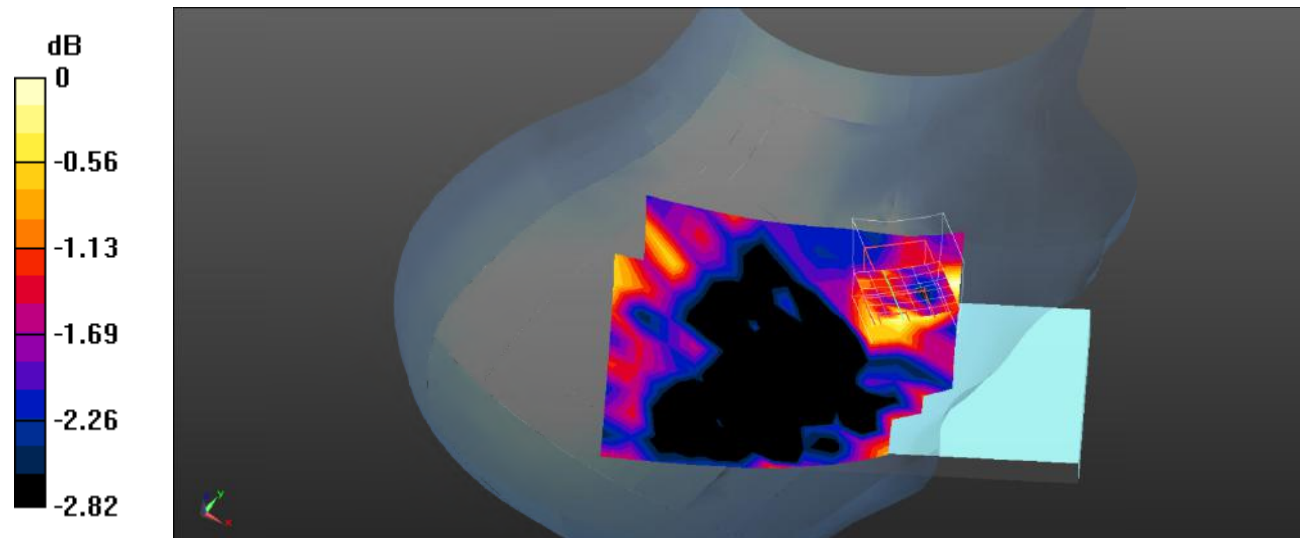

0 dB = 0.0270 W/kg = -15.69 dB dBW/kg

Test Plot 91#: LTE Band 7_Head Right Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0244 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.940 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0290 W/kg

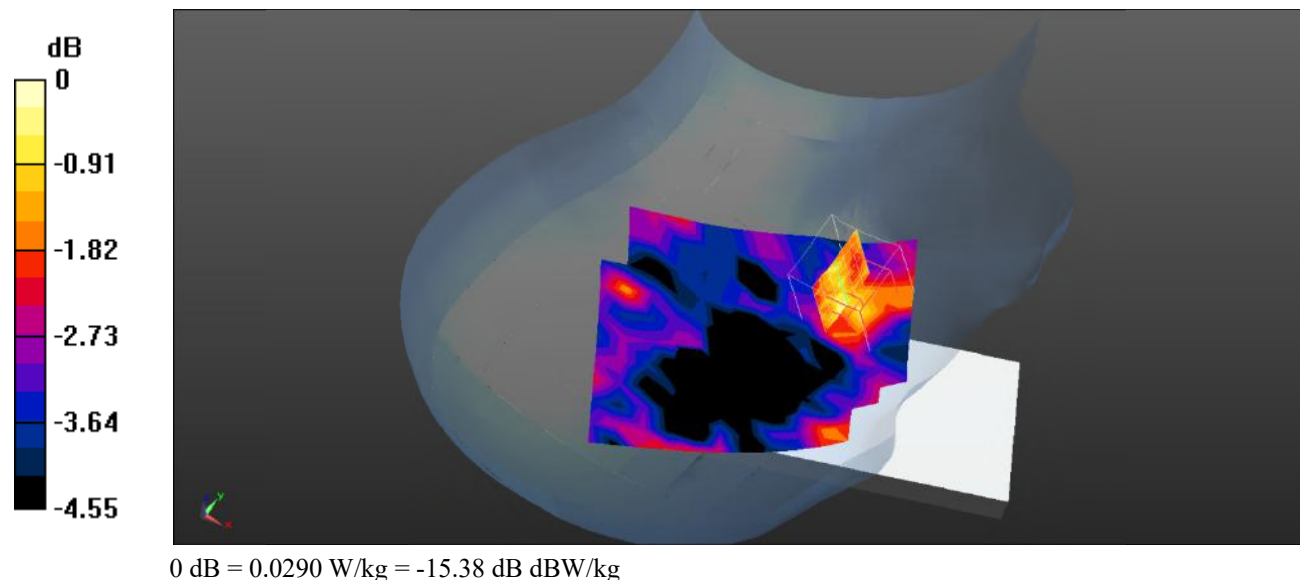

Test Plot 92#: LTE Band 7_Head Right Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0262 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.253 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0236 W/kg

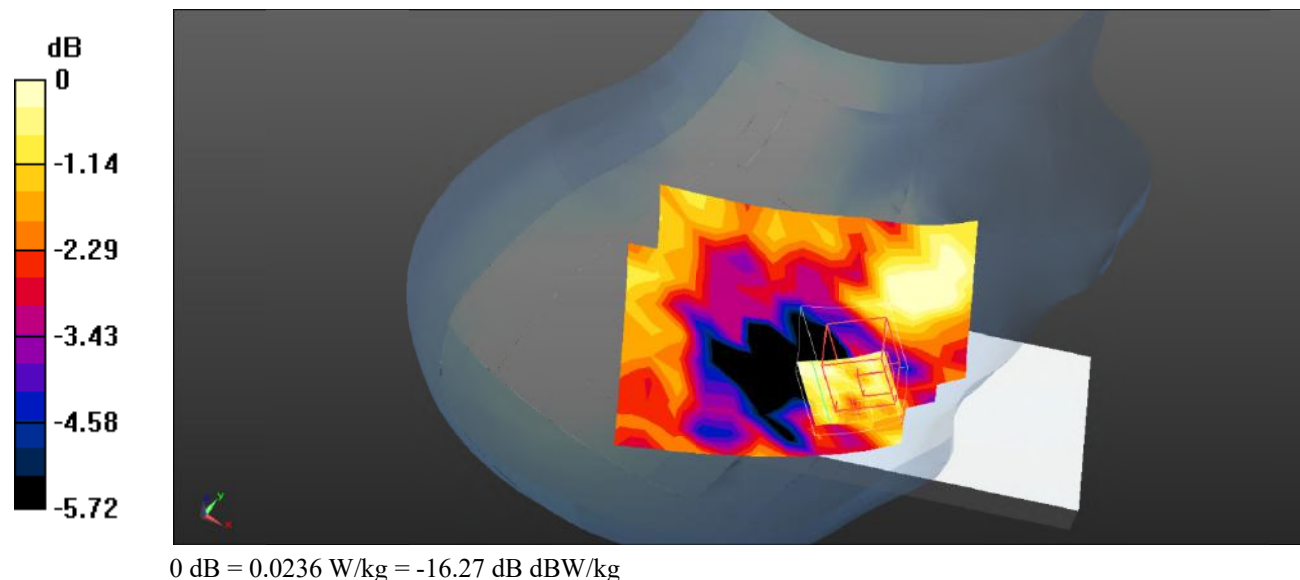

Test Plot 93#: LTE Band 7_Body Front_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.386 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.063 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

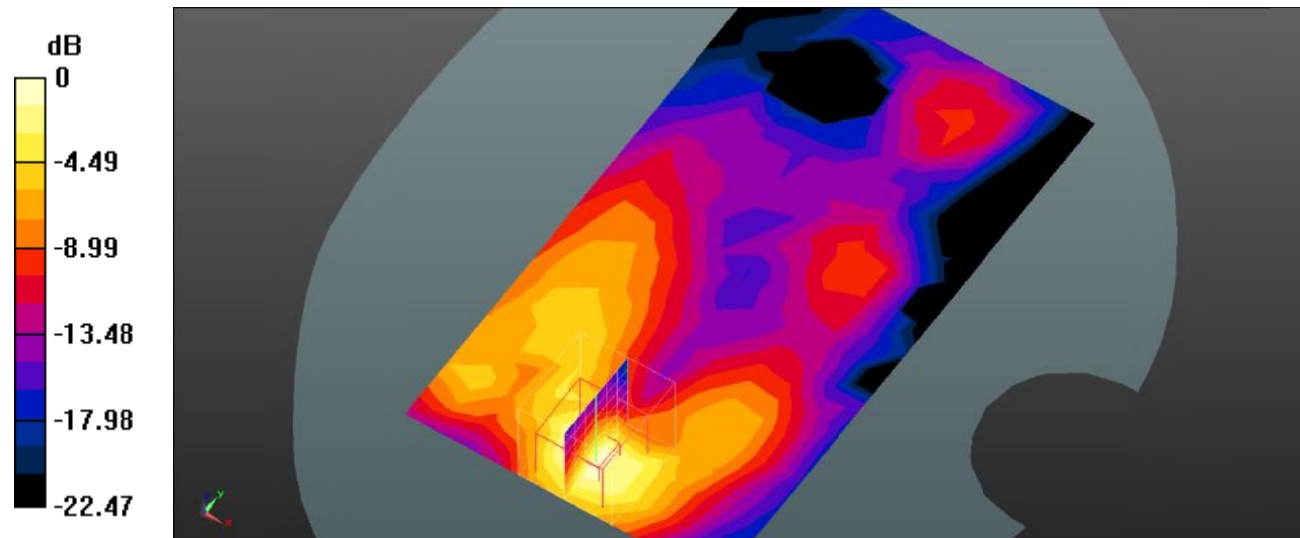

0 dB = 0.153 W/kg = -8.15 dB dBW/kg

Test Plot 94#: LTE Band 7_Body Front_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.106 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.306 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.126 W/kg

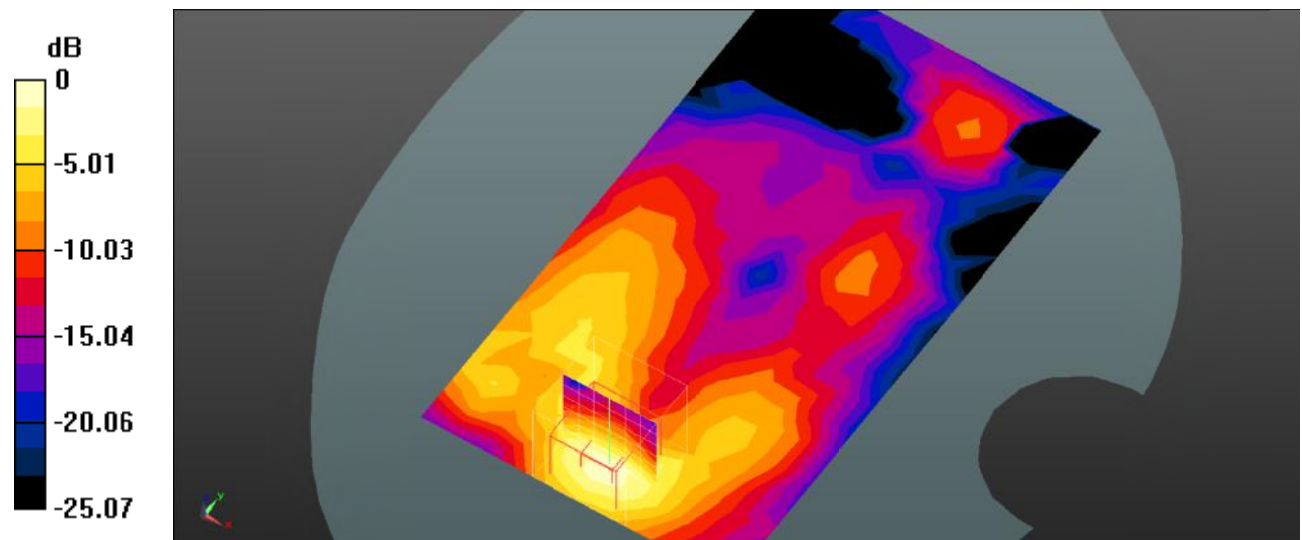

0 dB = 0.126 W/kg = -9.00 dB dBW/kg

Test Plot 95#: LTE Band 7_Body Back_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.363 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.636 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.687 W/kg

SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.162 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

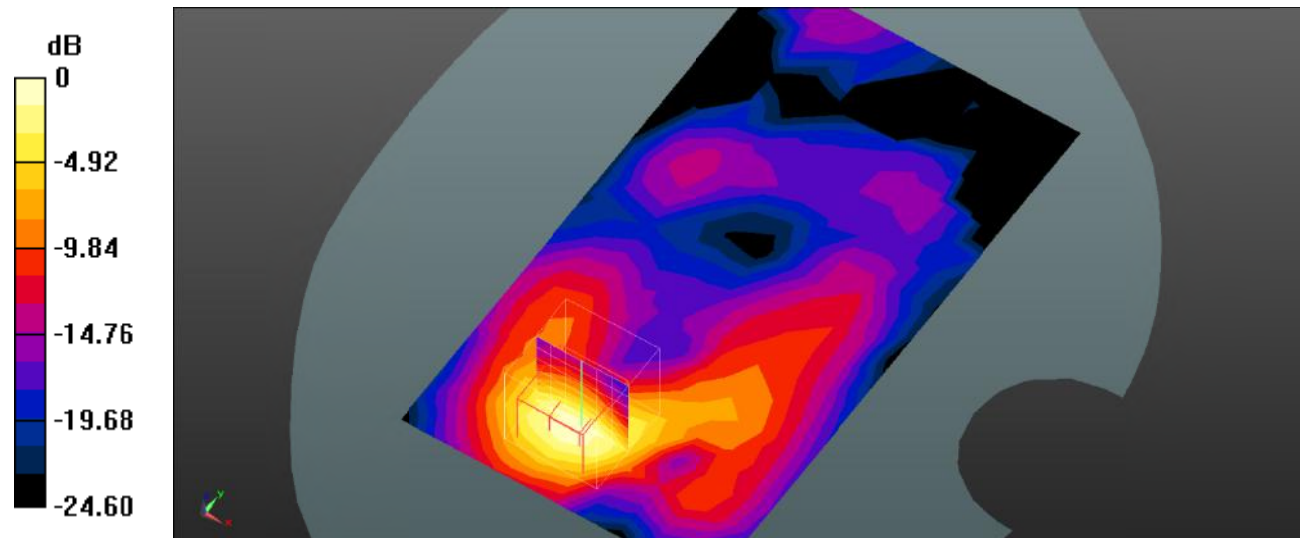

Test Plot 96#: LTE Band 7_Body Back_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.310 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.417 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.349 W/kg

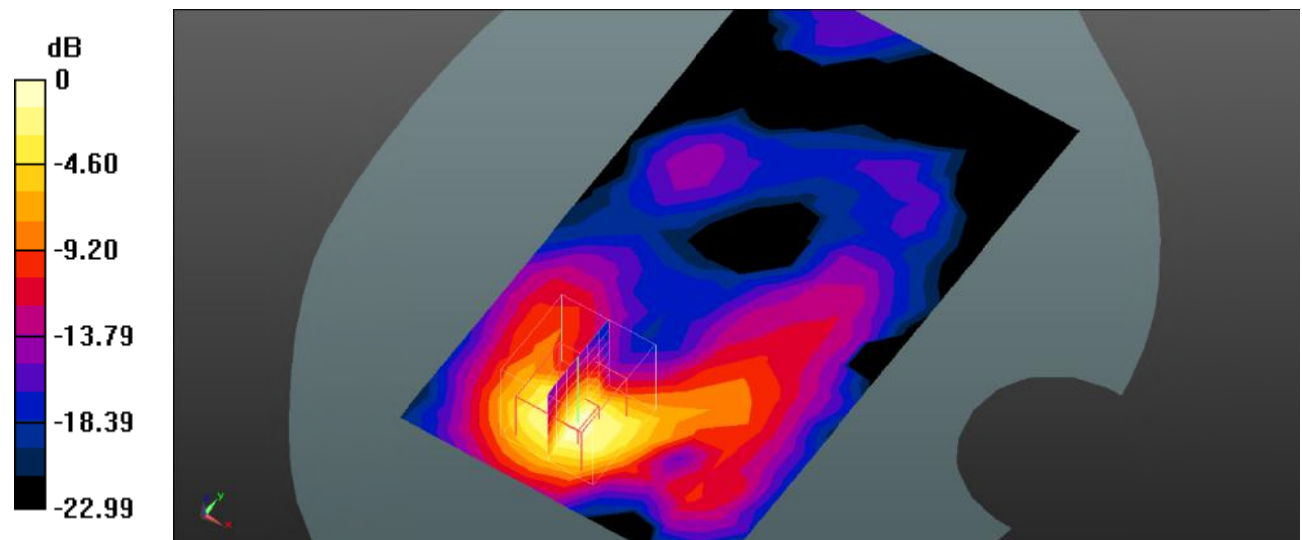

Test Plot 97#: LTE Band 7_Body Left_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0968 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.458 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

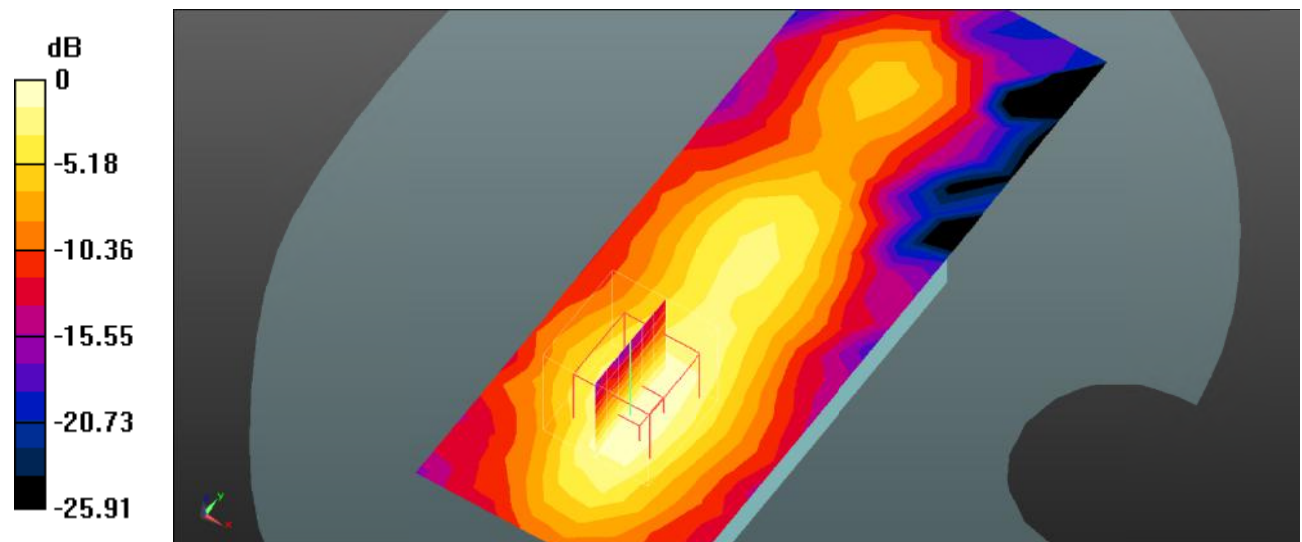

Test Plot 98#: LTE Band 7_Body Left_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0803 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.919 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0849 W/kg

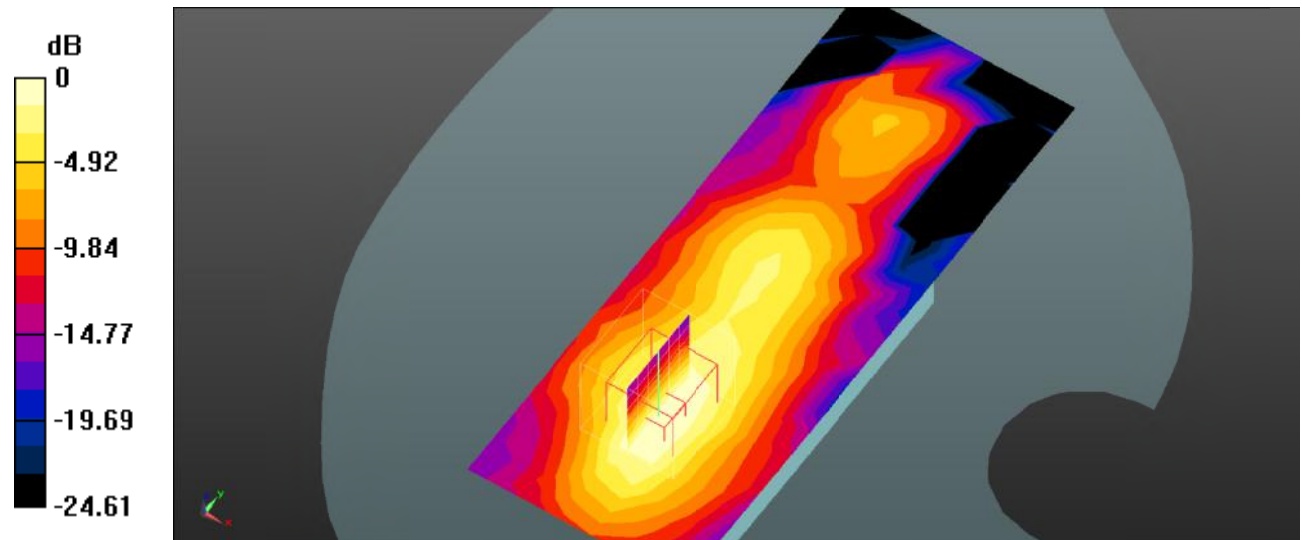

0 dB = 0.0849 W/kg = -10.71 dB dBW/kg

Test Plot 99#: LTE Band 7_Body Right_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0307 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.328 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00854 W/kg

Maximum value of SAR (measured) = 0.0195 W/kg

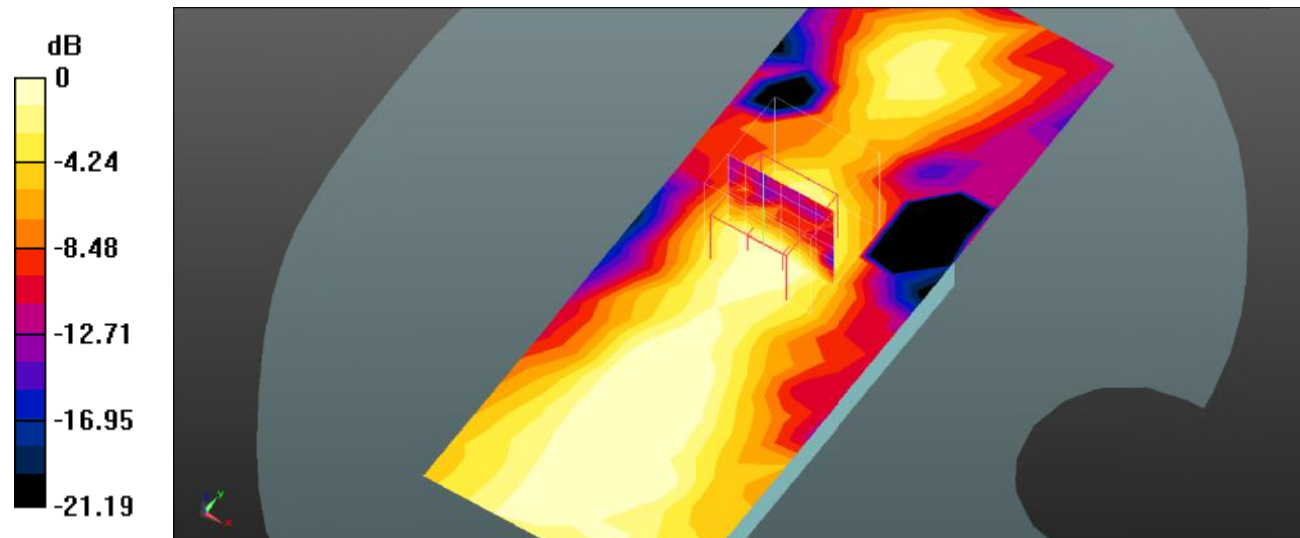

0 dB = 0.0195 W/kg = -17.10 dB dBW/kg

Test Plot 100#: LTE Band 7_Body Right_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.0252 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.703 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.007 W/kg

Maximum value of SAR (measured) = 0.0163 W/kg

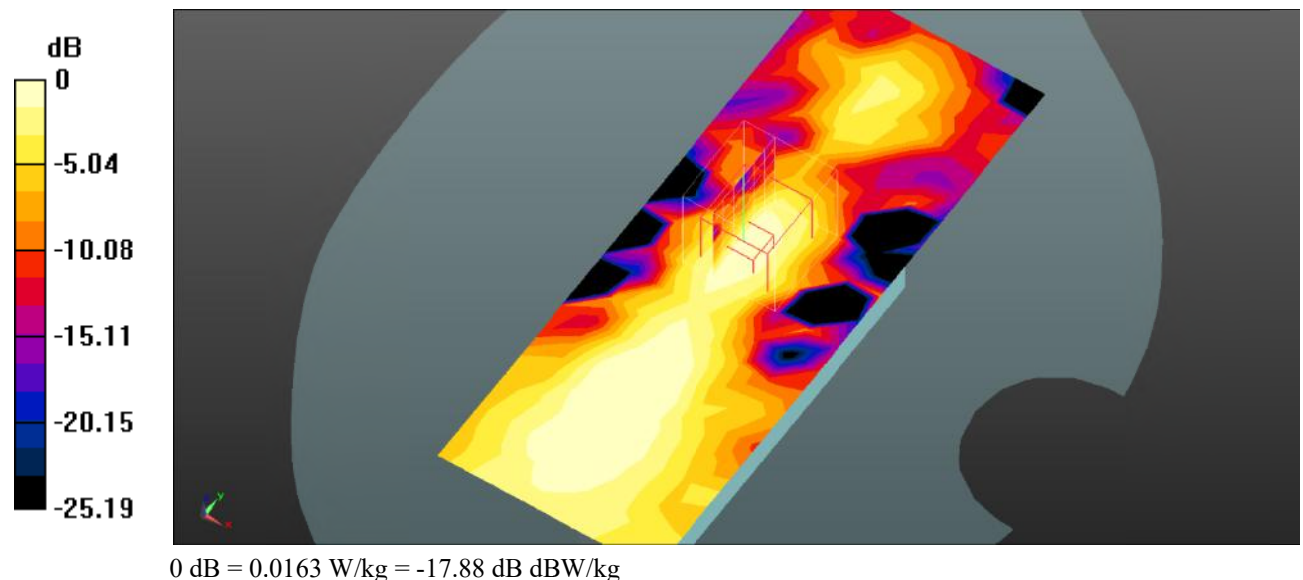

Test Plot 101#: LTE Band 7_Body Bottom_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.550 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.40 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.206 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

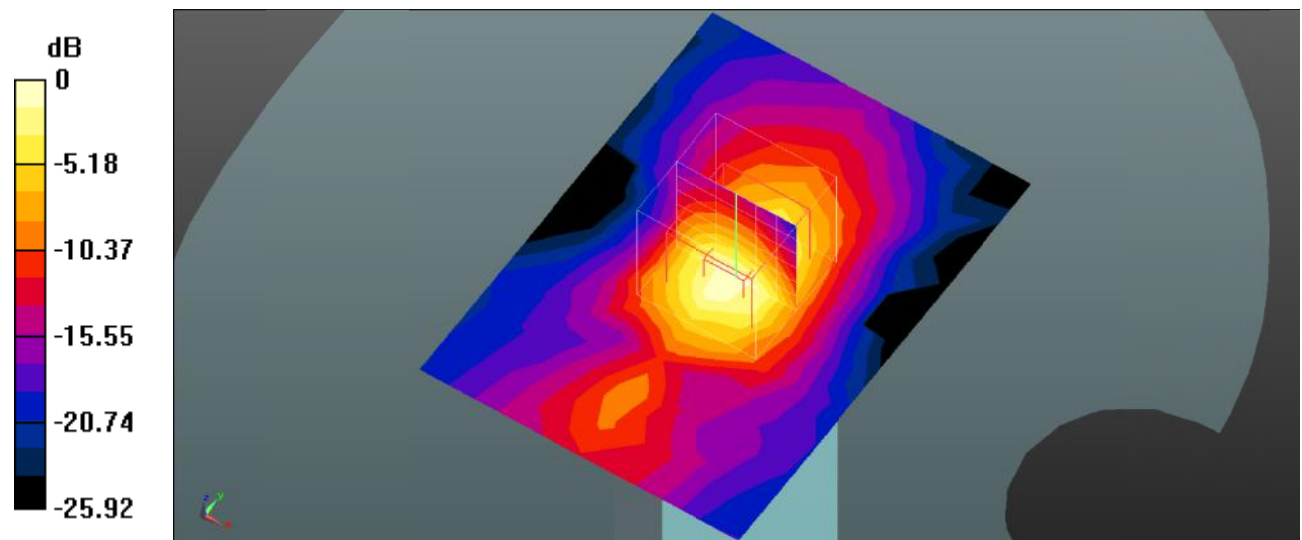

0 dB = 0.540 W/kg = -2.68 dB dBW/kg

Test Plot 102#: LTE Band 7_Body Bottom_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.896$ S/m; $\epsilon_r = 38.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (9x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.457 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.63 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.474 W/kg

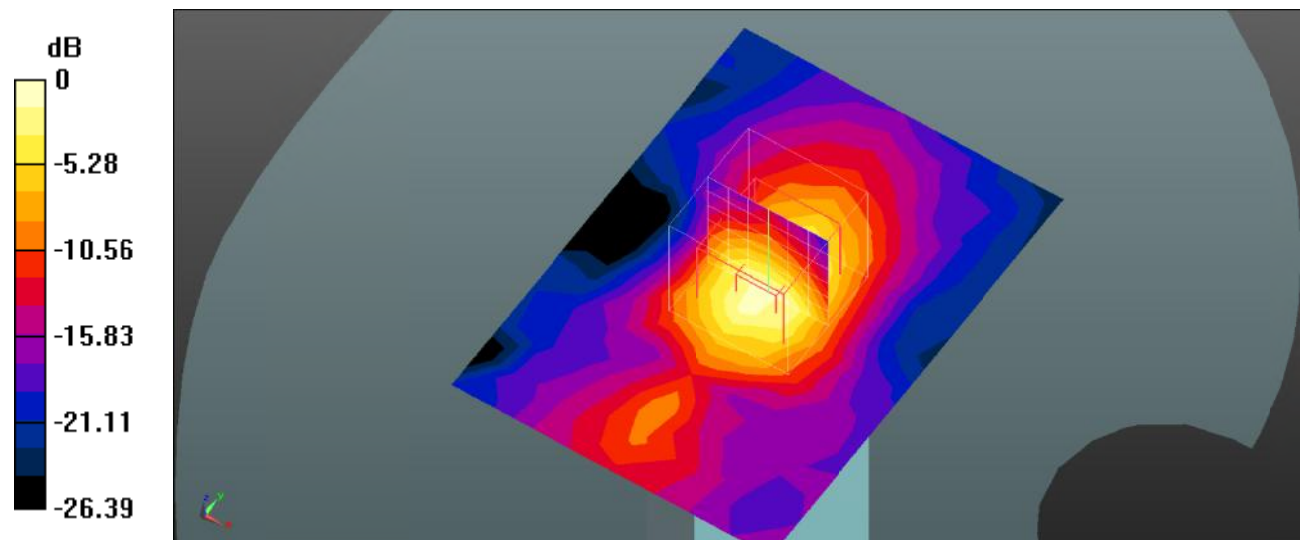

0 dB = 0.474 W/kg = -3.24 dB dBW/kg

Test Plot 103#: LTE Band 12_Head Left Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0457 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.184 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0458 W/kg

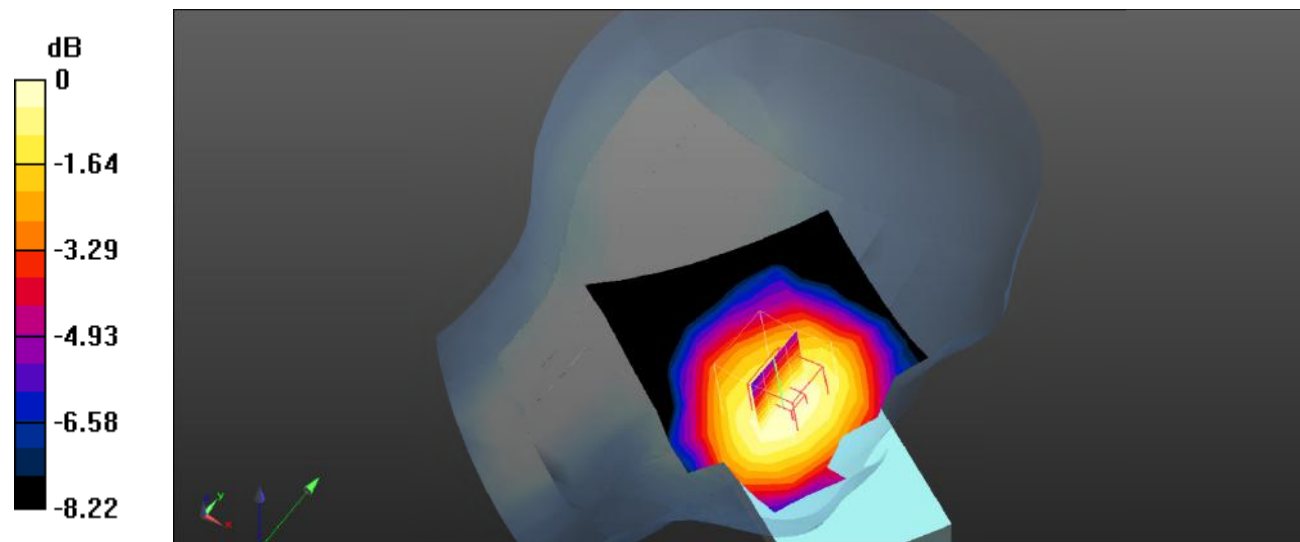

0 dB = 0.0458 W/kg = -13.39 dB dBW/kg

Test Plot 104#: LTE Band 12_Head Left Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0357 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.458 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0369 W/kg

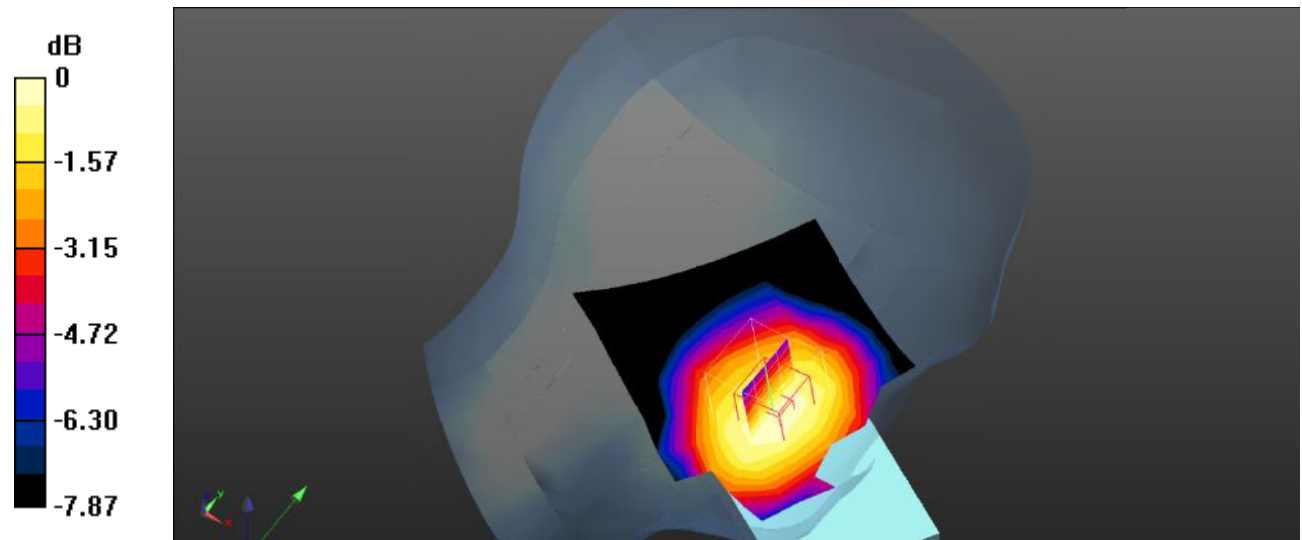

0 dB = 0.0369 W/kg = -14.33 dB dBW/kg

Test Plot 105#: LTE Band 12_Head Left Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0364 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.893 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0410 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

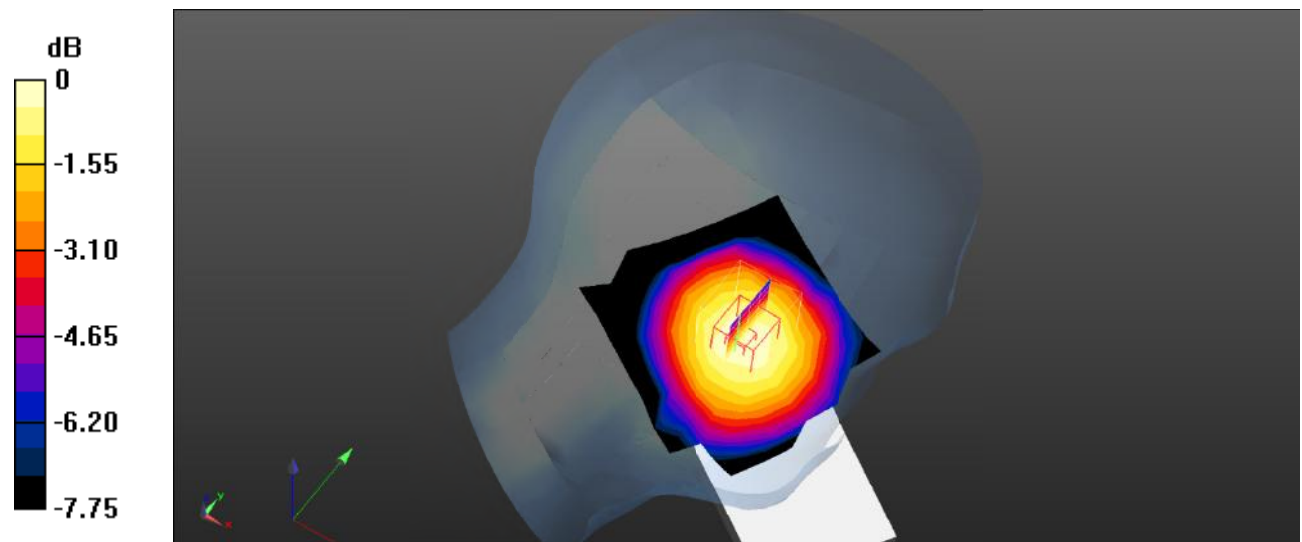

0 dB = 0.0359 W/kg = -14.45 dB dBW/kg

Test Plot 106#: LTE Band 12_Head Left Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0296 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.414 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0292 W/kg

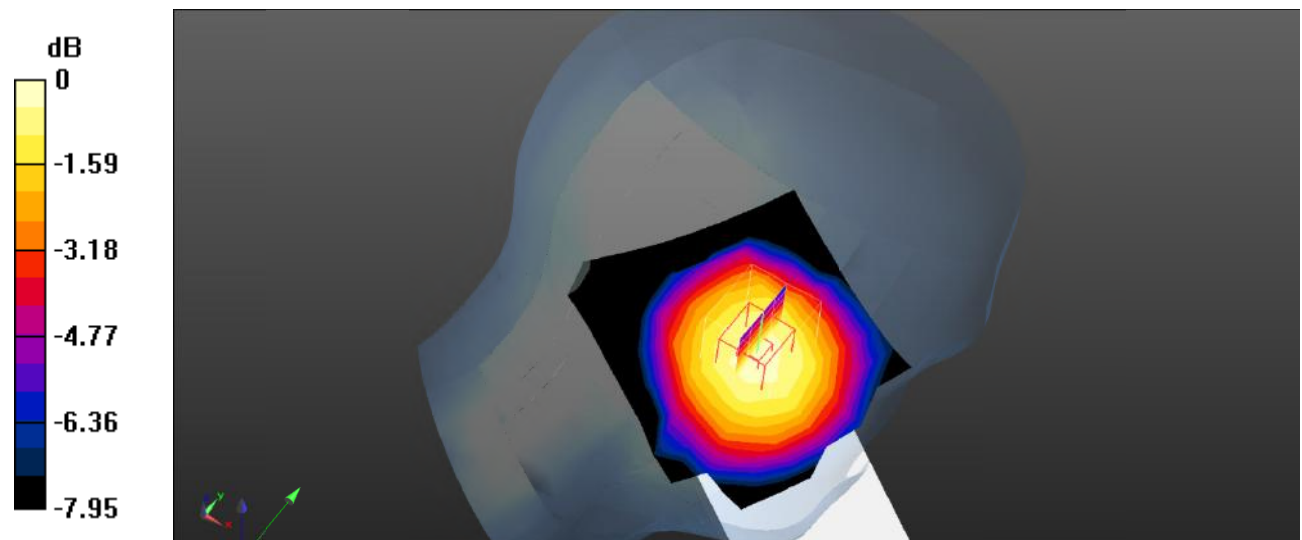

0 dB = 0.0292 W/kg = -15.35 dB dBW/kg

Test Plot 107#: LTE Band 12_Head Right Cheek_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0459 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.760 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0447 W/kg

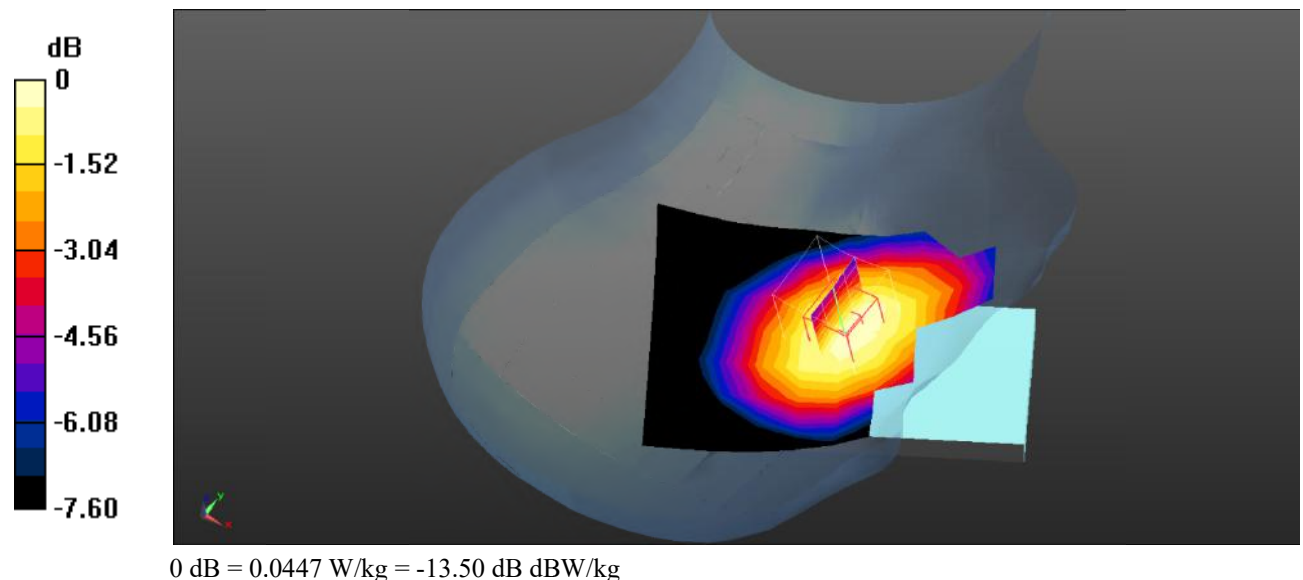

Test Plot 108#: LTE Band 12_Head Right Cheek_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0383 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.311 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.0359 W/kg

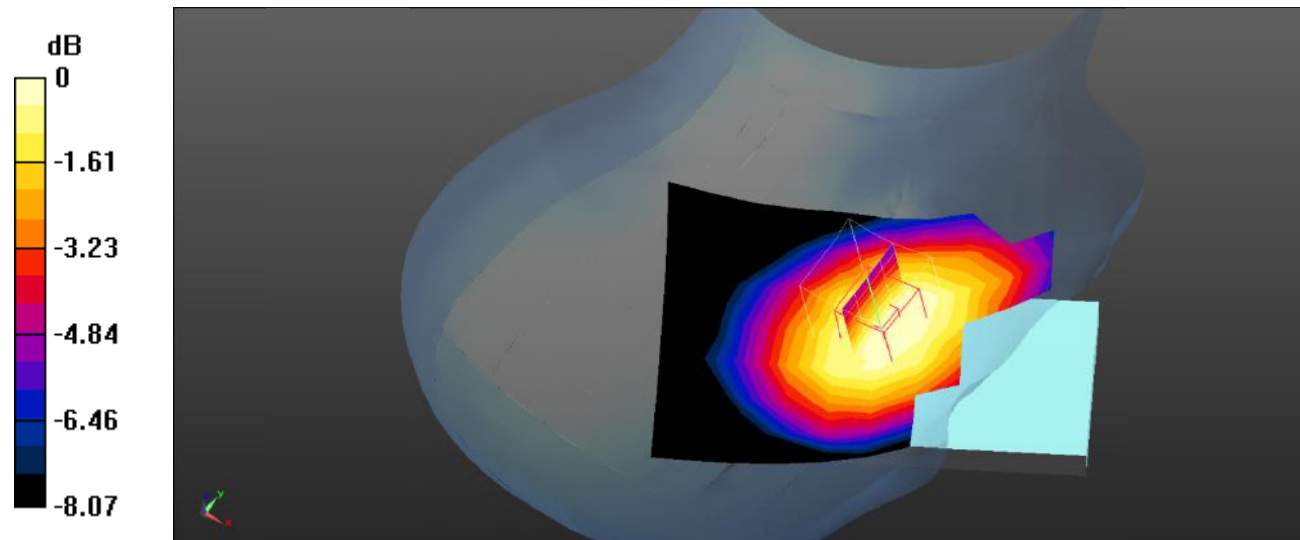

0 dB = 0.0359 W/kg = -14.45 dB dBW/kg

Test Plot 109#: LTE Band 12_Head Right Tilt_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0261 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.252 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0255 W/kg

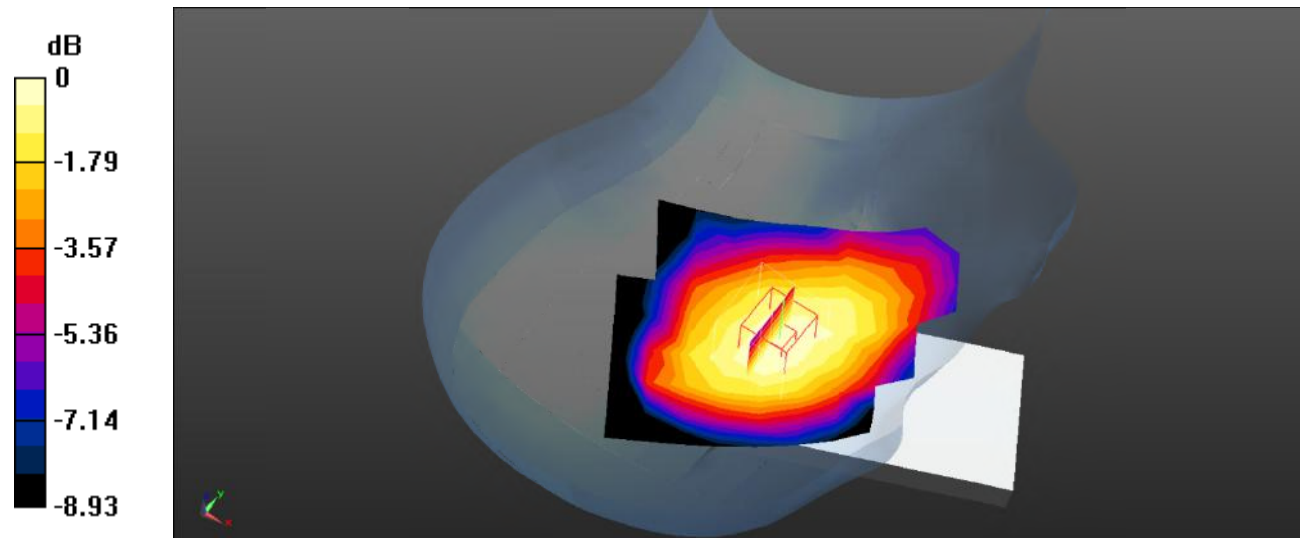

0 dB = 0.0255 W/kg = -15.93 dB dBW/kg

Test Plot 110#: LTE Band 12_Head Right Tilt_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0203 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.655 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0196 W/kg

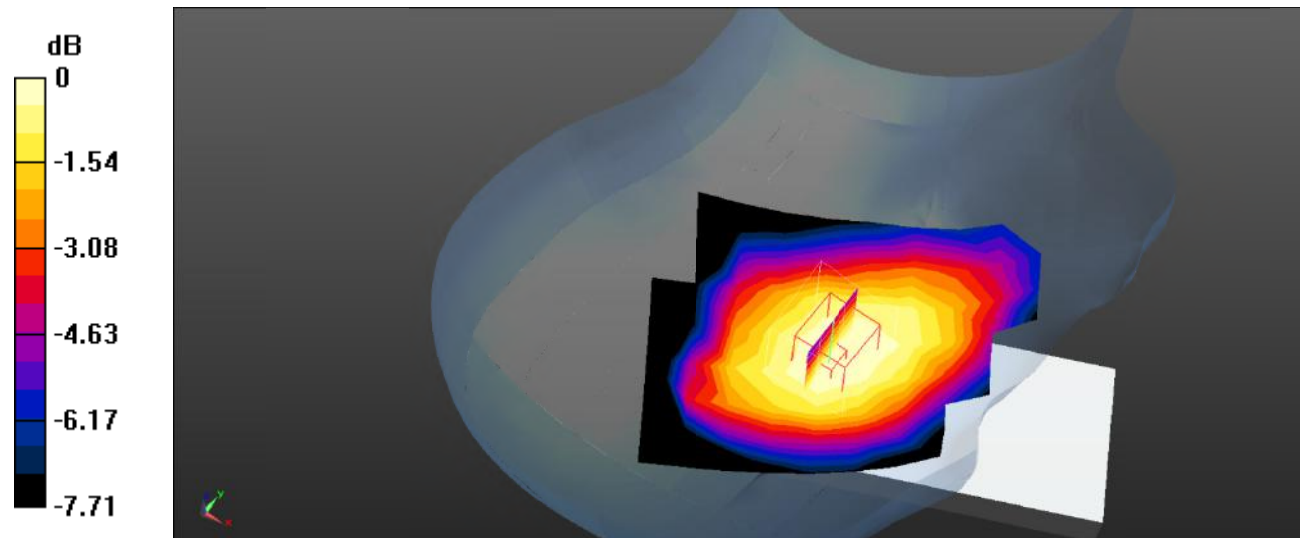

0 dB = 0.0196 W/kg = -17.08 dB dBW/kg

Test Plot 111#: LTE Band 12_Body Front_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0178 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.088 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0178 W/kg

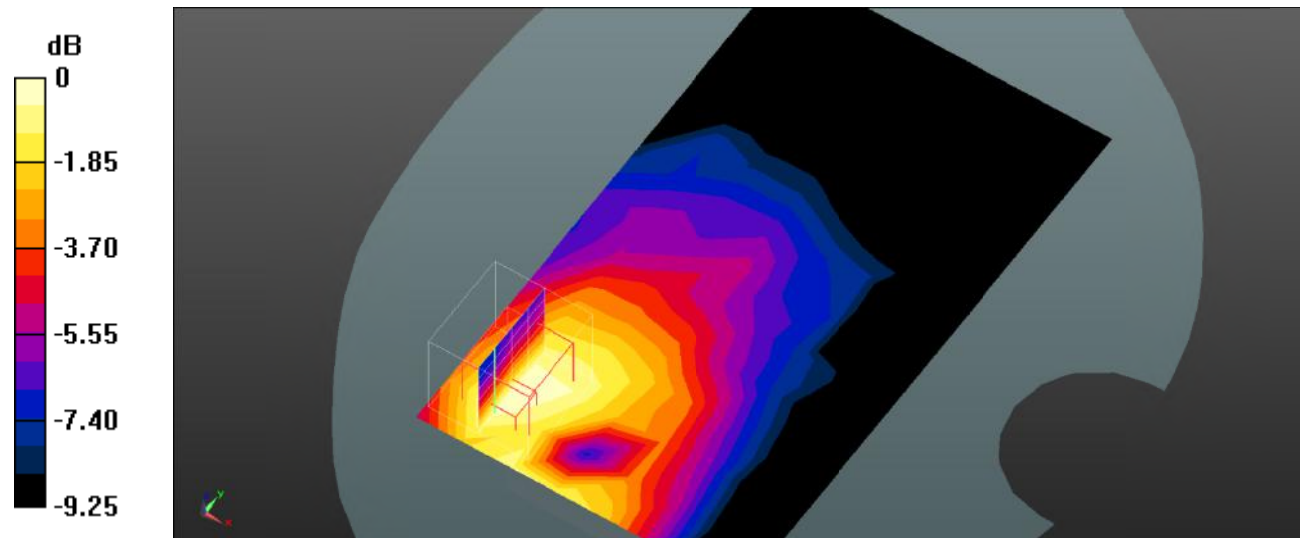

Test Plot 112#: LTE Band 12_Body Front_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0159 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.077 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0161 W/kg

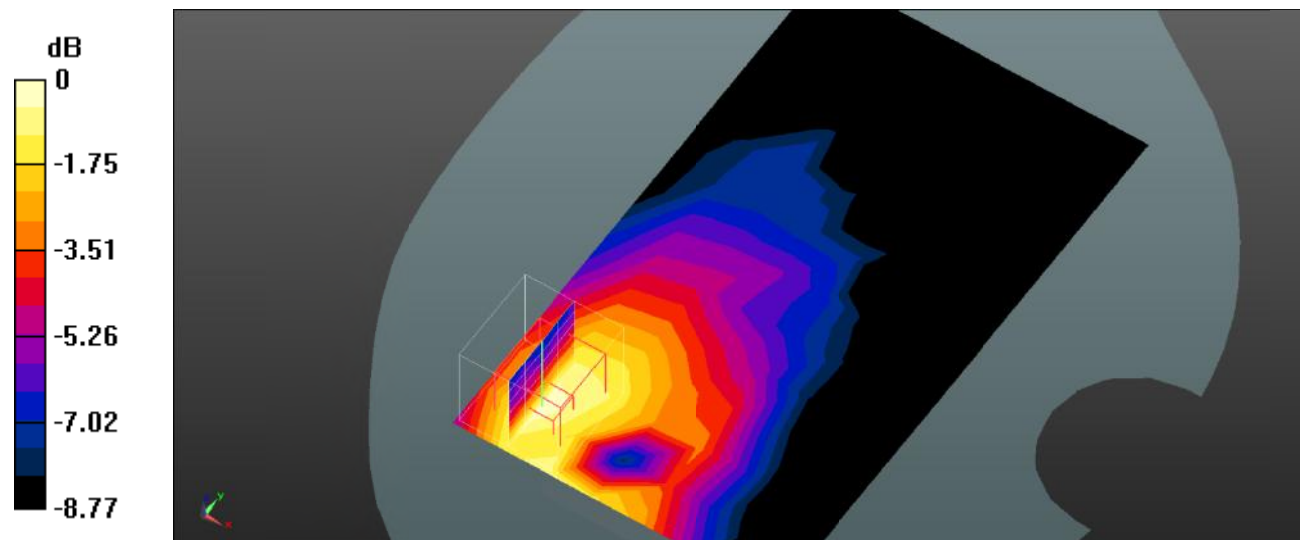

Test Plot 113#: LTE Band 12_Body Back_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0404 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.027 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0435 W/kg

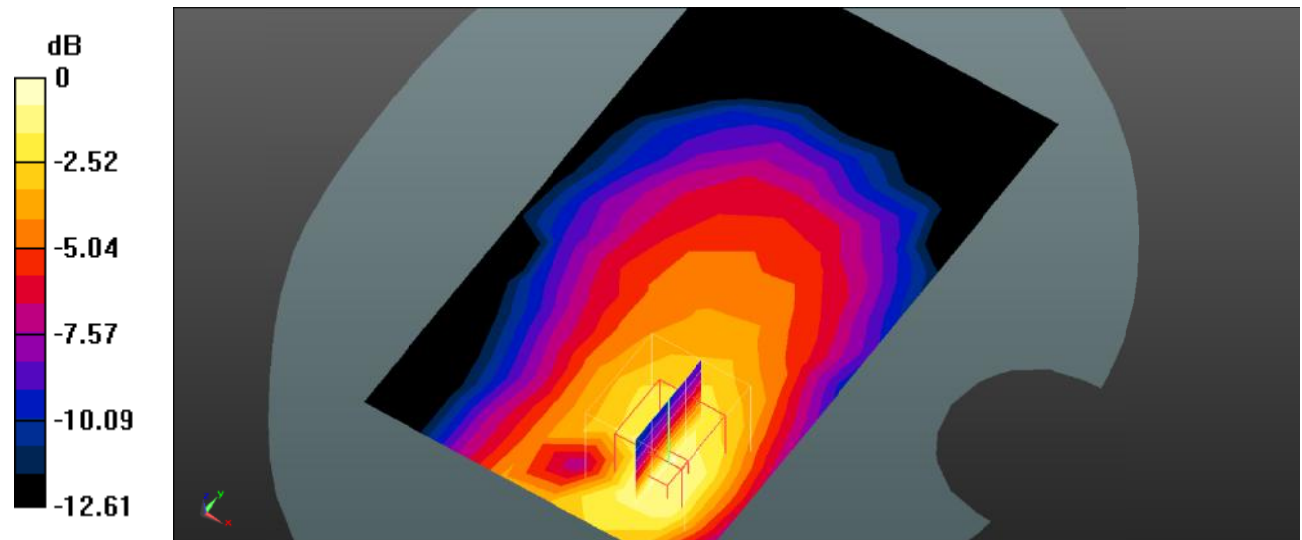

0 dB = 0.0435 W/kg = -13.62 dB dBW/kg

Test Plot 114#: LTE Band 12_Body Back_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0333 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.709 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0350 W/kg

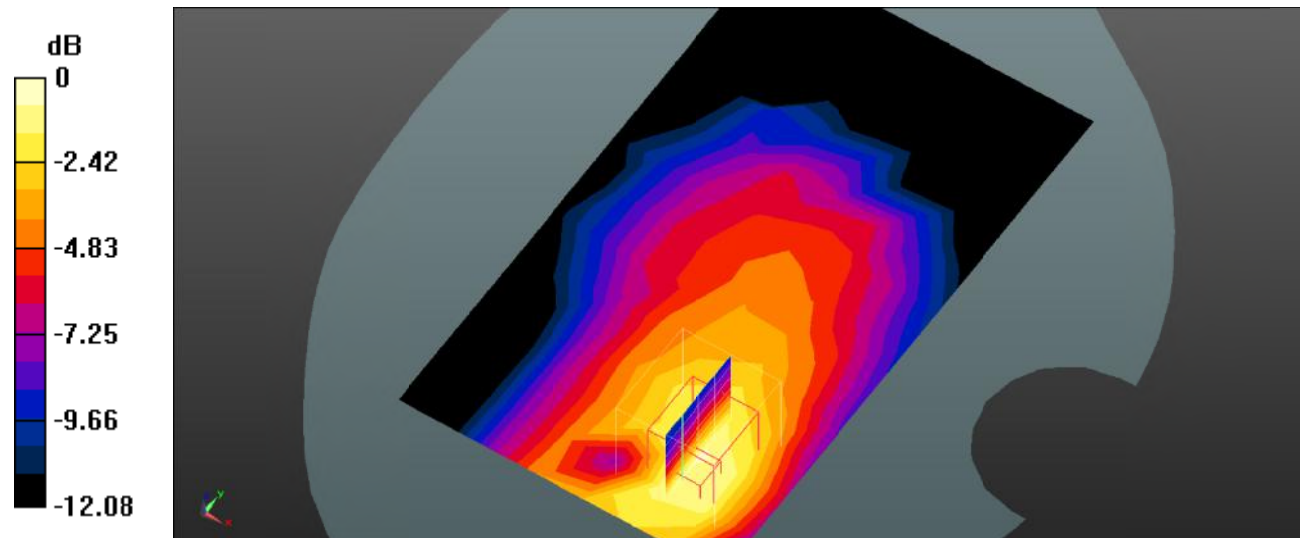

Test Plot 115#: LTE Band 12_Body Left_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00995 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.414 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00936 W/kg; SAR(10 g) = 0.0066 W/kg

Maximum value of SAR (measured) = 0.00977 W/kg

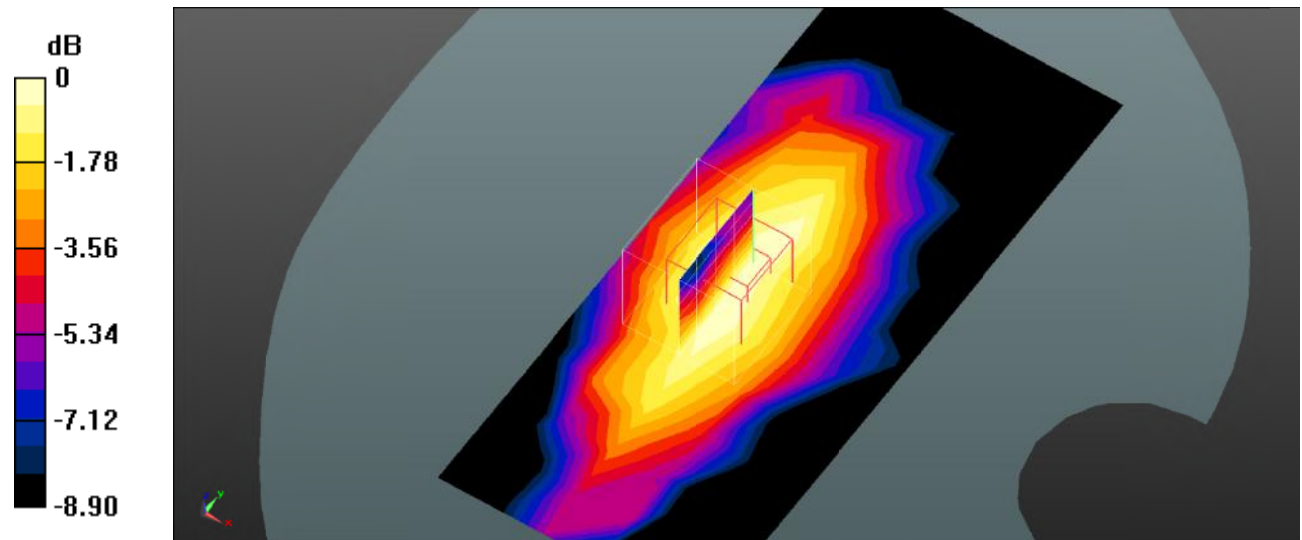

0 dB = 0.00977 W/kg = -20.10 dB dBW/kg

Test Plot 116#: LTE Band 12_Body Left_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.00748 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.618 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.00985 W/kg

SAR(1 g) = 0.00692 W/kg; SAR(10 g) = 0.00471 W/kg

Maximum value of SAR (measured) = 0.00735 W/kg

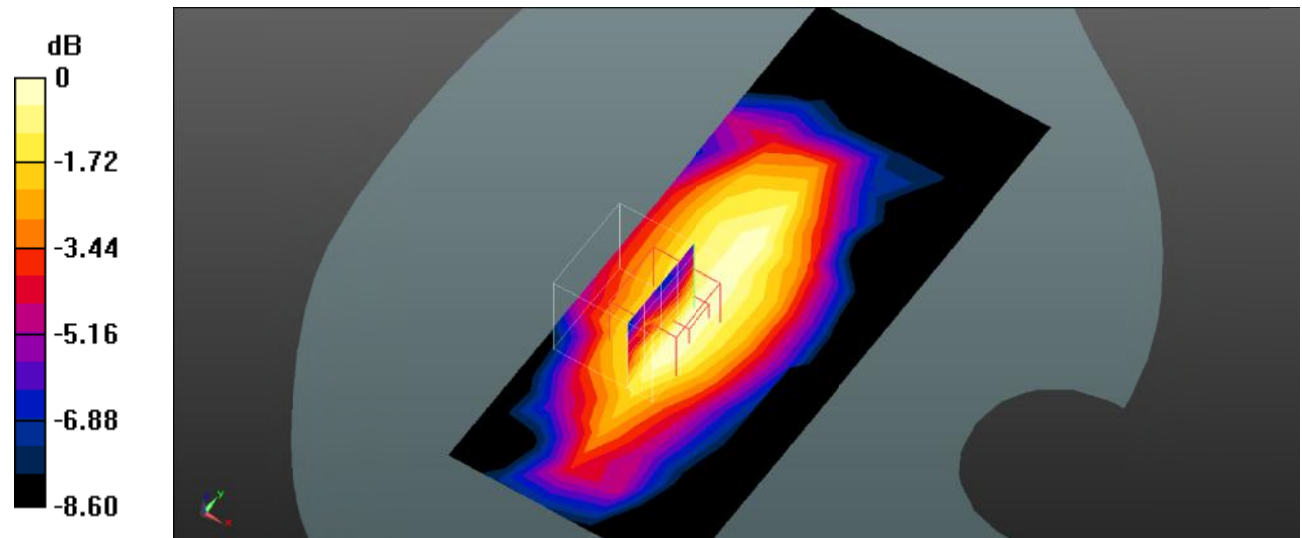

Test Plot 117#: LTE Band 12_Body Right_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0721 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.571 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0930 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.0739 W/kg

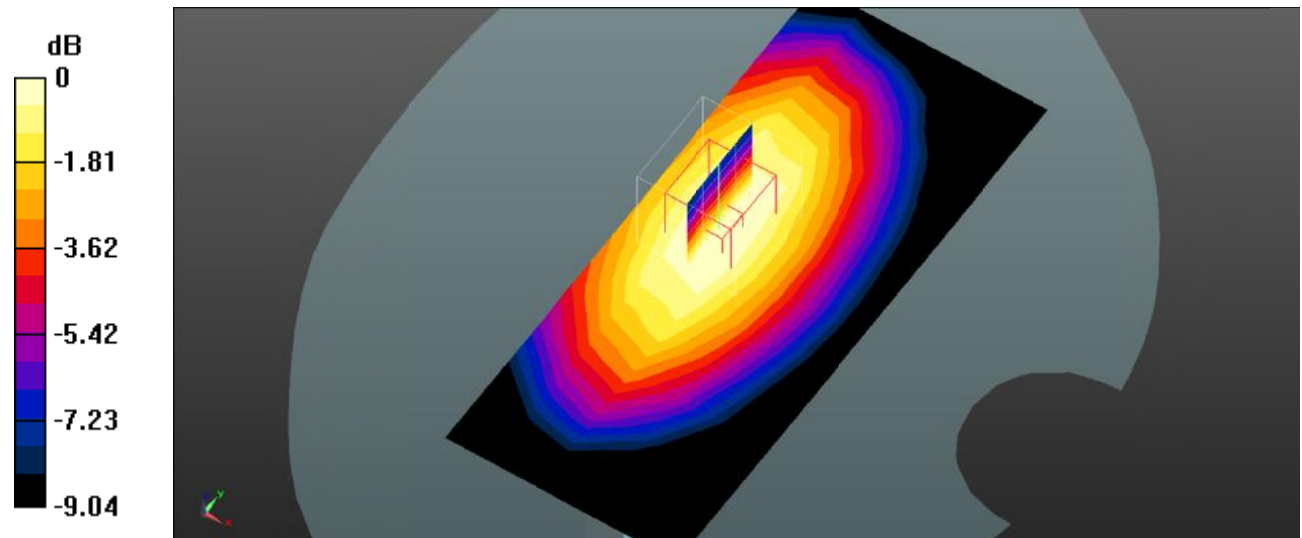

Test Plot 118#: LTE Band 12_Body Right_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0521 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.314 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0541 W/kg

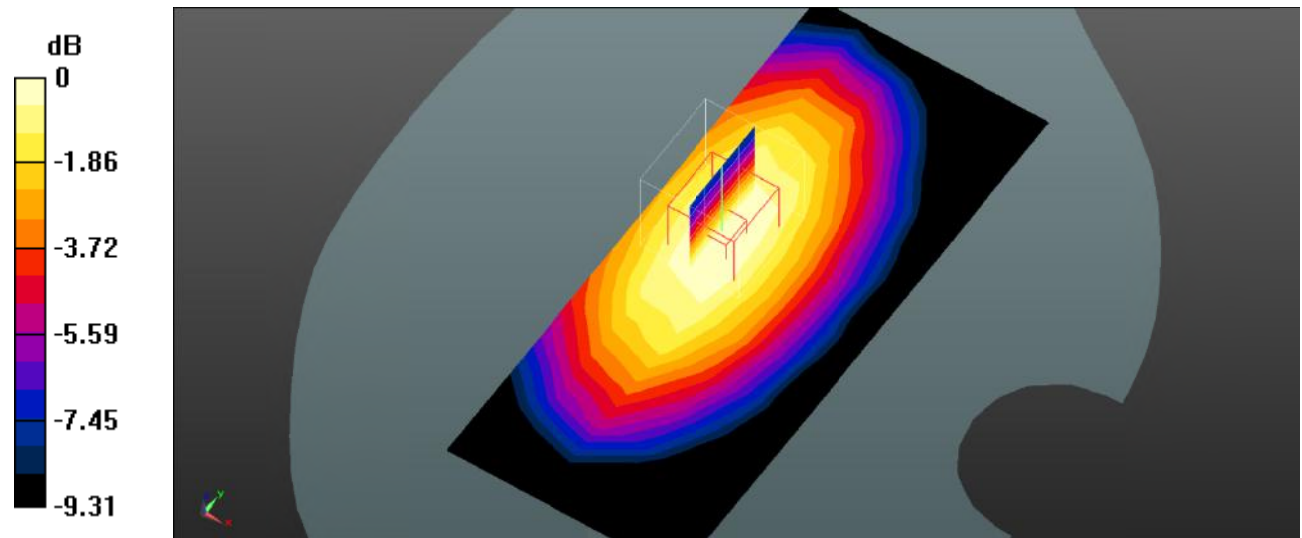

0 dB = 0.0541 W/kg = -12.67 dB dBW/kg

Test Plot 119#: LTE Band 12_Body Bottom_1RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0339 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.676 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0406 W/kg

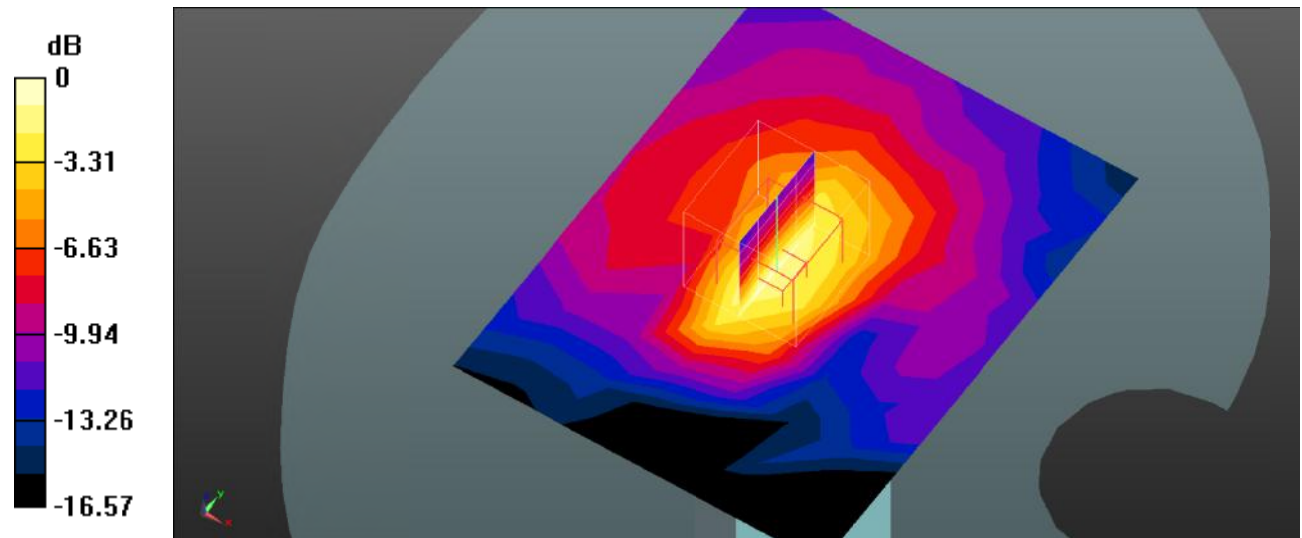

0 dB = 0.0406 W/kg = -13.91 dB dBW/kg

Test Plot 120#: LTE Band 12_Body Bottom_50%RB_Middle**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(10.04, 10.04, 10.04); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0255 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.976 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0309 W/kg

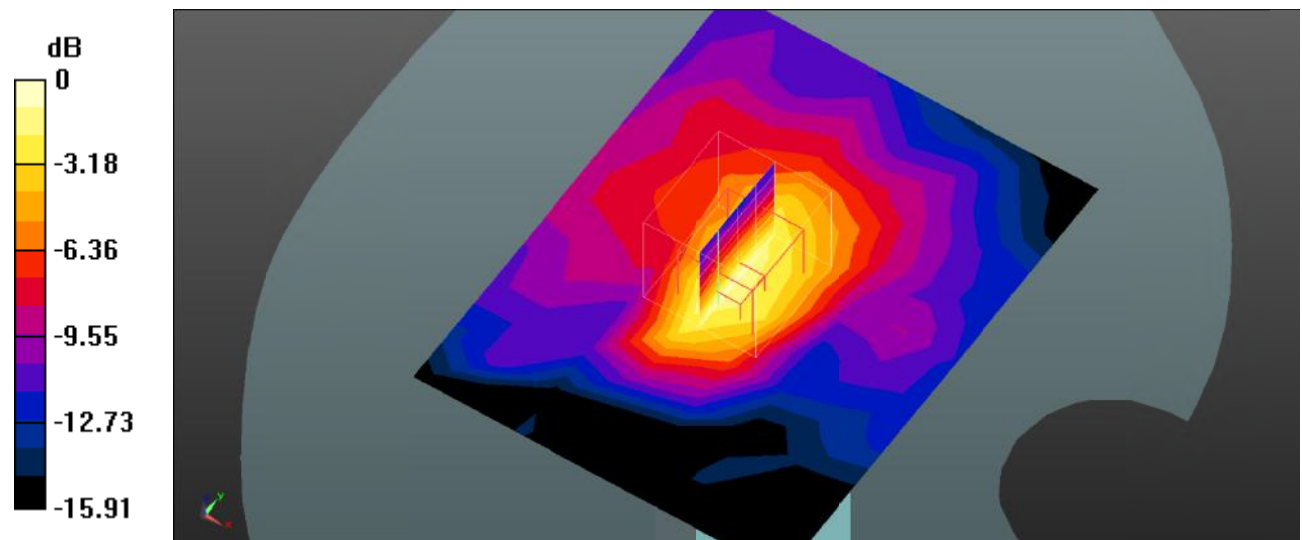

0 dB = 0.0309 W/kg = -15.10 dB dBW/kg

Test Plot 121#: 2.4GWIFI_Head Left Cheek_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.437 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.134 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 0.442 W/kg

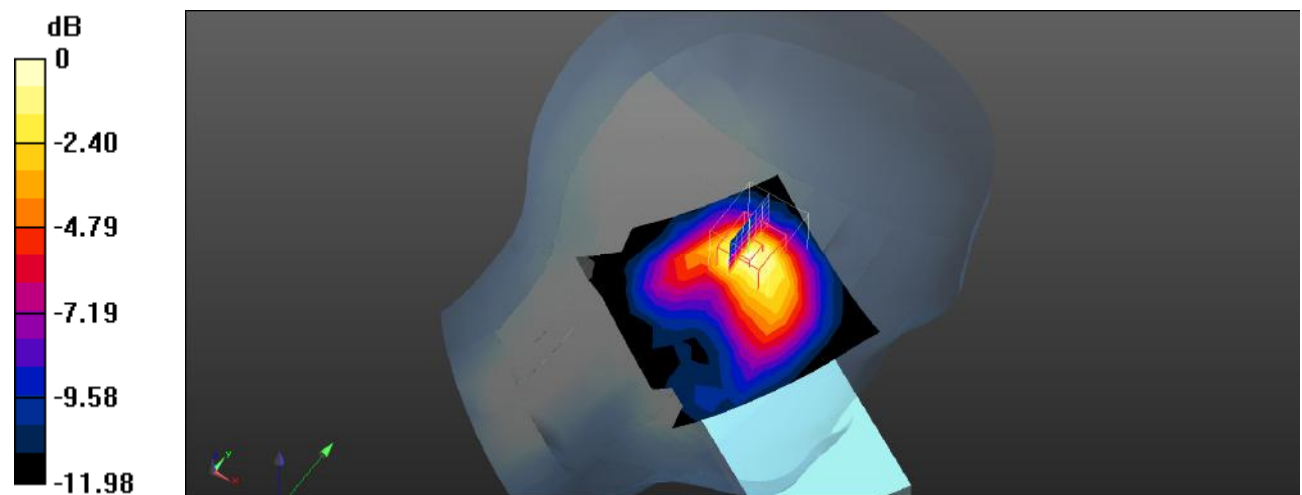

0 dB = 0.442 W/kg = -3.55 dBW/kg

Test Plot 122#: 2.4GWIFI_Head Left Tilt_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.424 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.028 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.430 W/kg

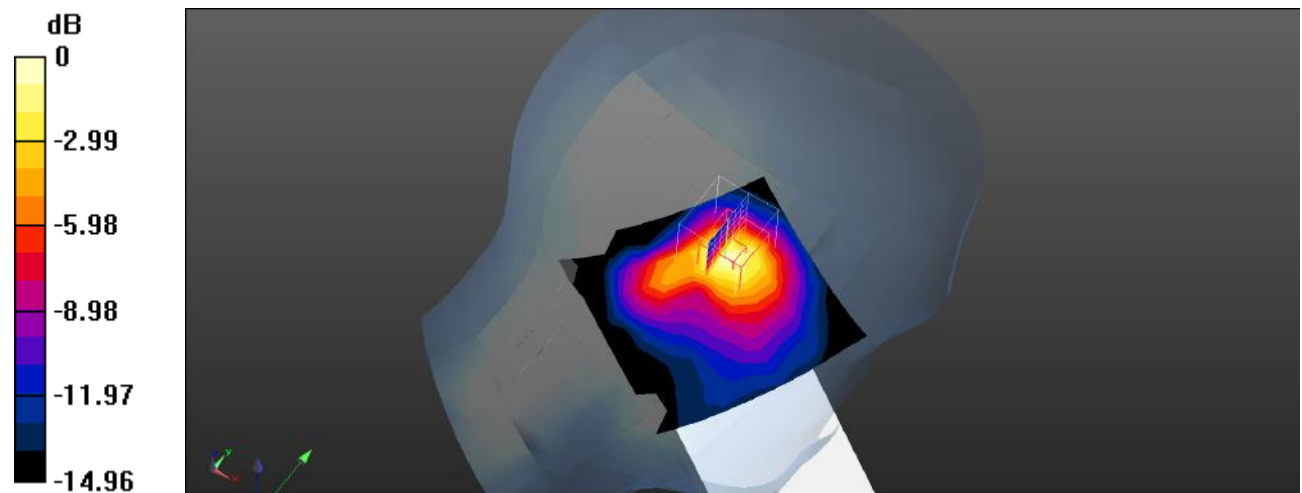

0 dB = 0.430 W/kg = -3.67 dBW/kg

Test Plot 123#: 2.4GWIFI_Head Right Cheek_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.219 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.603 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

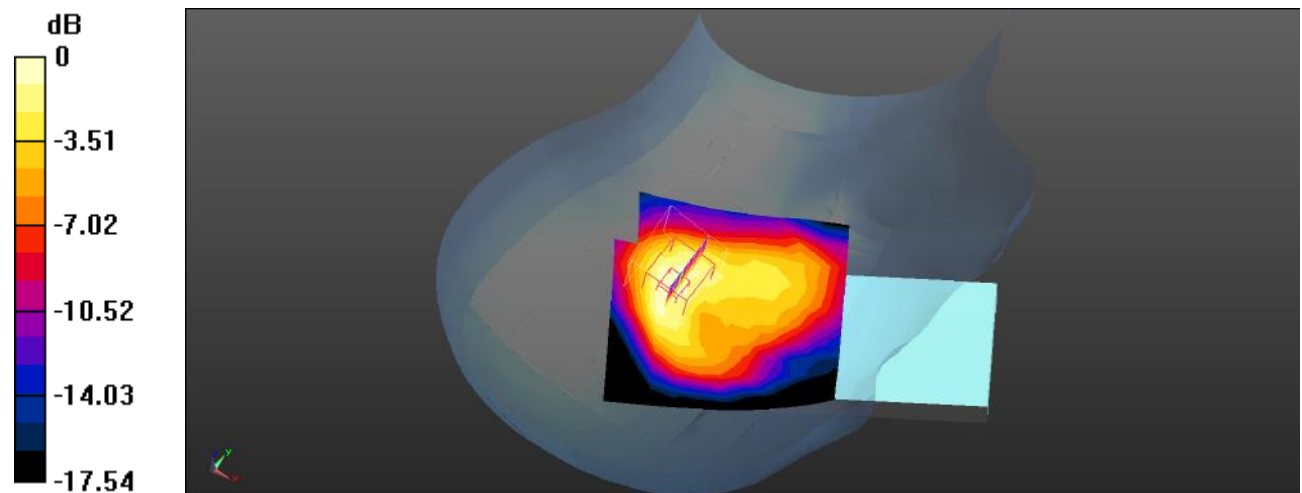

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Plot 124#: 2.4GWIFI_Head Right Tilt_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.260 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.014 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.123 W/kg

Maximum value of SAR (measured) = 0.263 W/kg

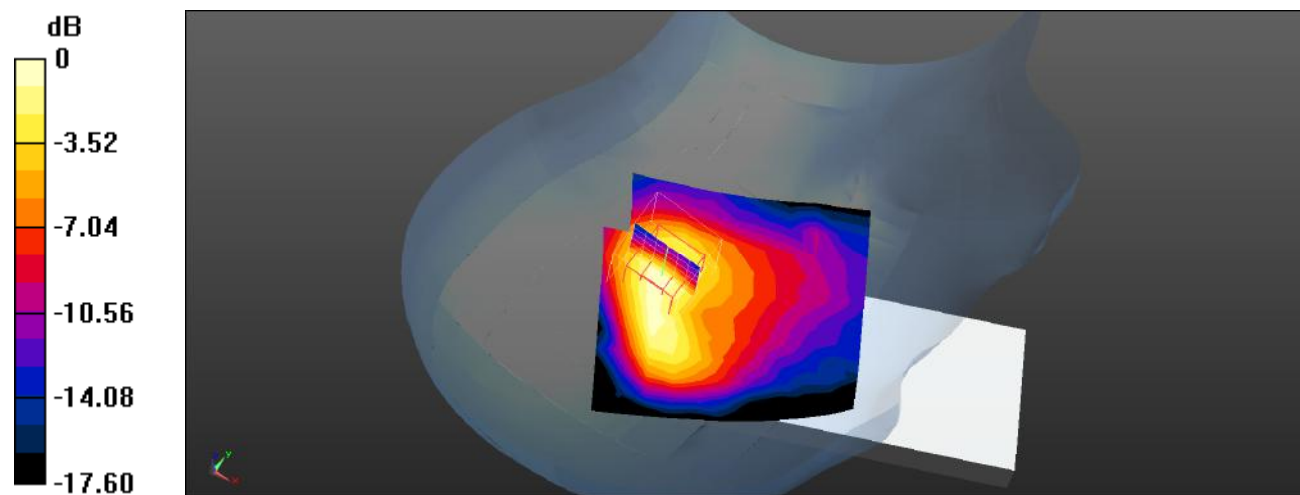

0 dB = 0.263 W/kg = -5.80 dBW/kg

Test Plot 125#: 2.4GWIFI_Body Front_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0902 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.740 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0941 W/kg

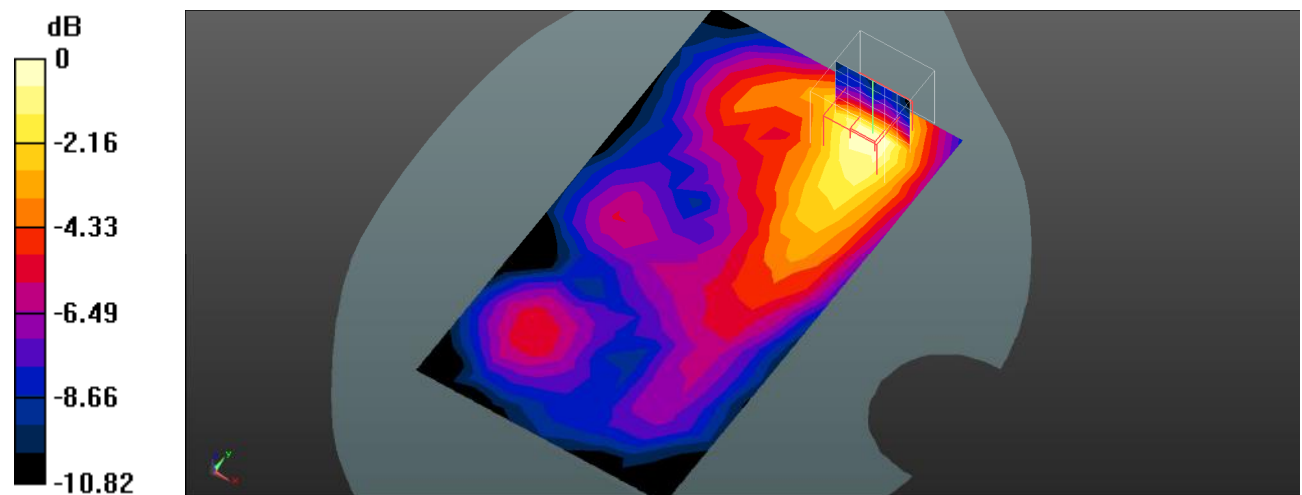

0 dB = 0.0941 W/kg = -10.26 dBW/kg

Test Plot 126#: 2.4GWIFI_Body Back_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.177 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.864 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.197 W/kg

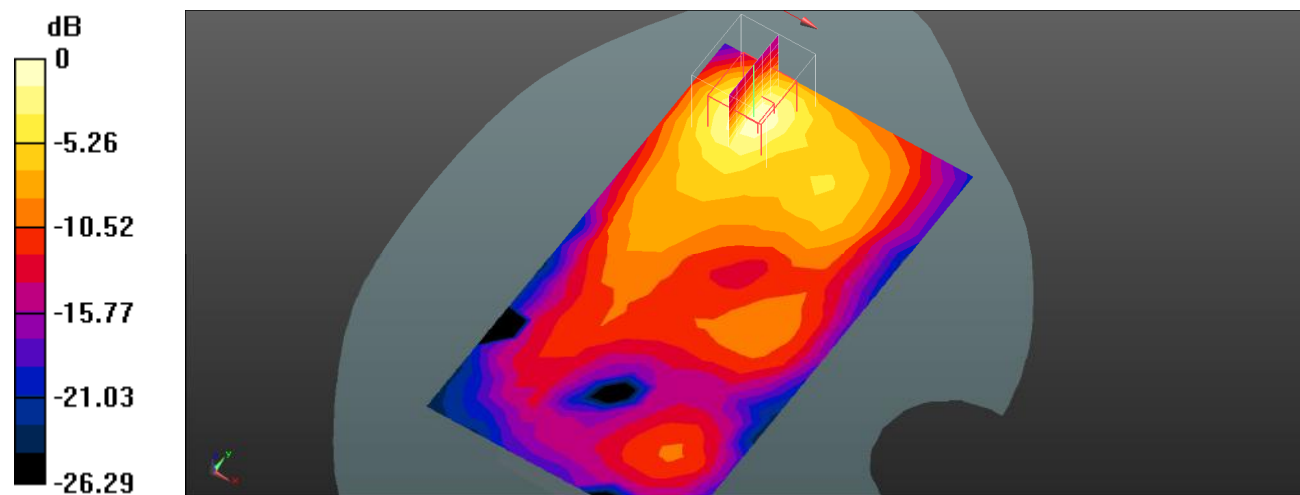

Test Plot 127#: 2.4GWIFI_Body Right_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0453 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.654 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0448 W/kg

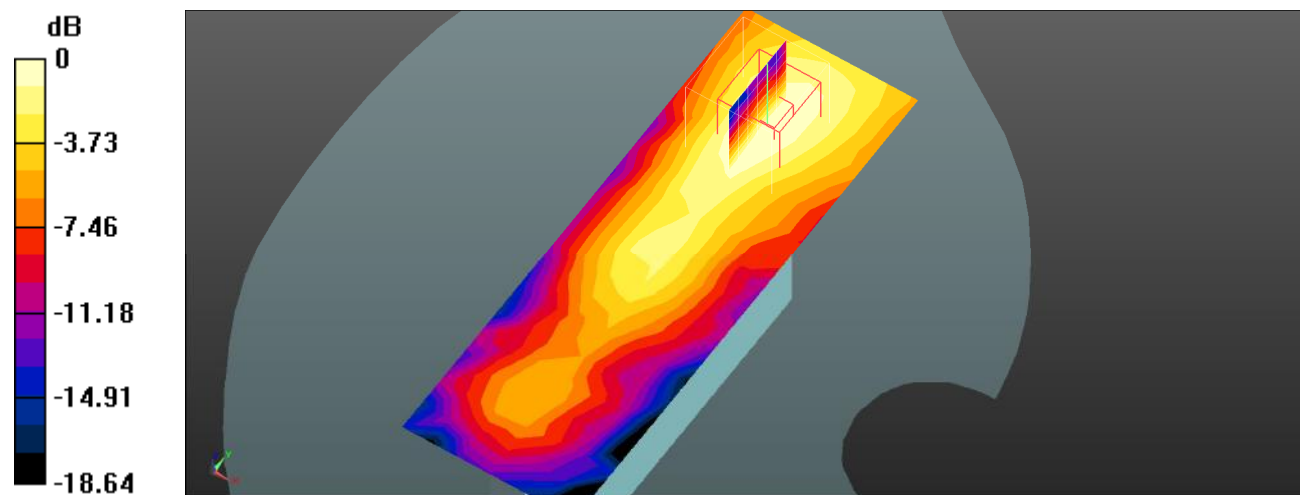

Test Plot 128#: 2.4GWIFI_Body Top_Low**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.00472

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.813$ S/m; $\epsilon_r = 38.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0990 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.747 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0979 W/kg

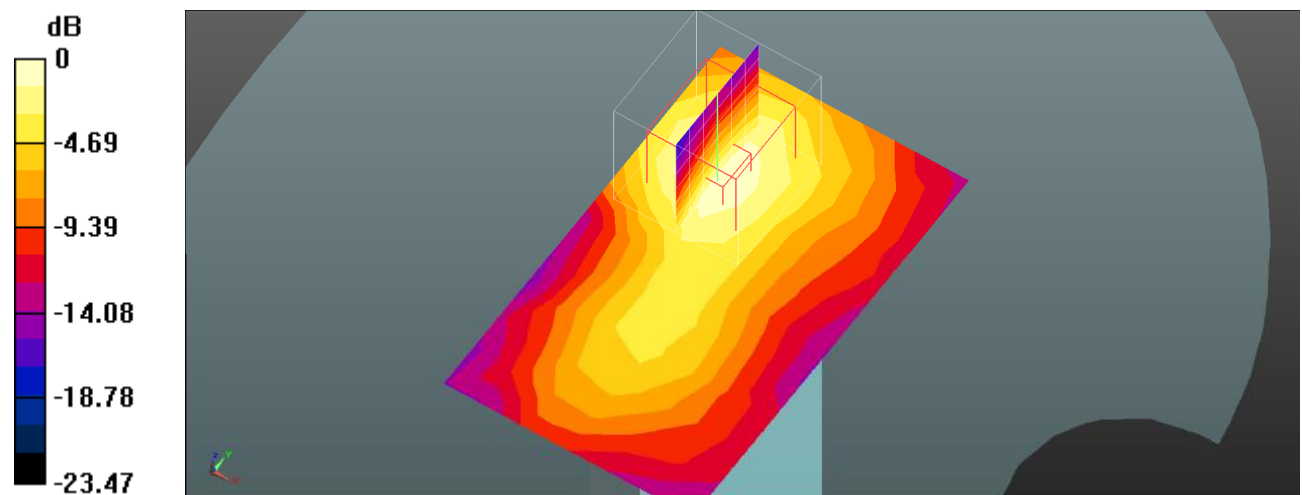

0 dB = 0.0979 W/kg = -10.09 dBW/kg

Test Plot 129#: Bluetooth_Head Left Check_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0108 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.212 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.00912 W/kg; SAR(10 g) = 0.00371 W/kg

Maximum value of SAR (measured) = 0.0105 W/kg

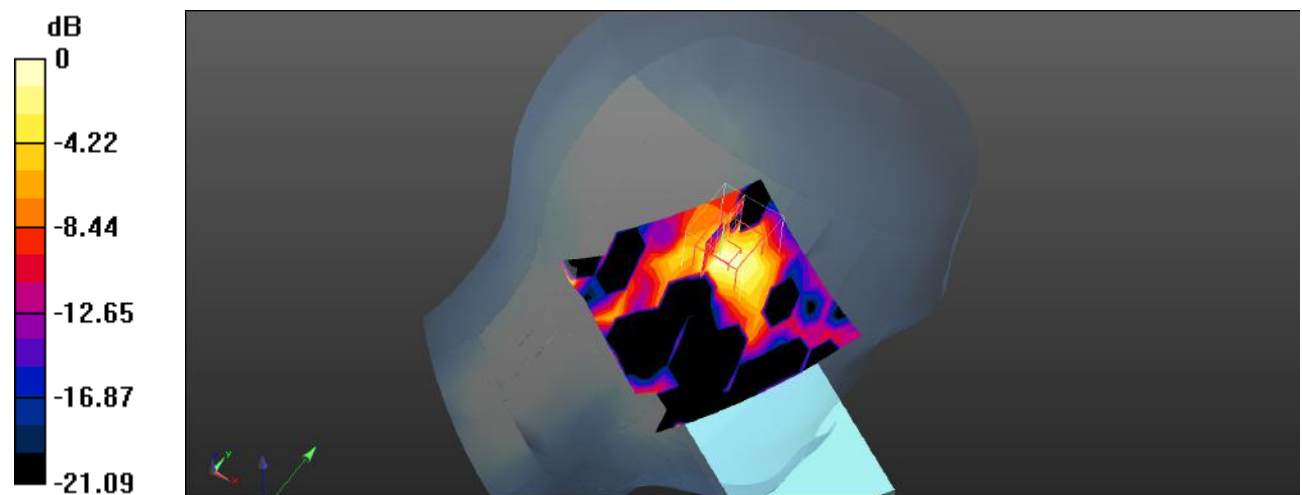

0 dB = 0.0105 W/kg = -19.79 dBW/kg

Test Plot 130#: Bluetooth_Head Left Tilt_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0110 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3990 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.00866 W/kg; SAR(10 g) = 0.00367 W/kg

Maximum value of SAR (measured) = 0.0103 W/kg

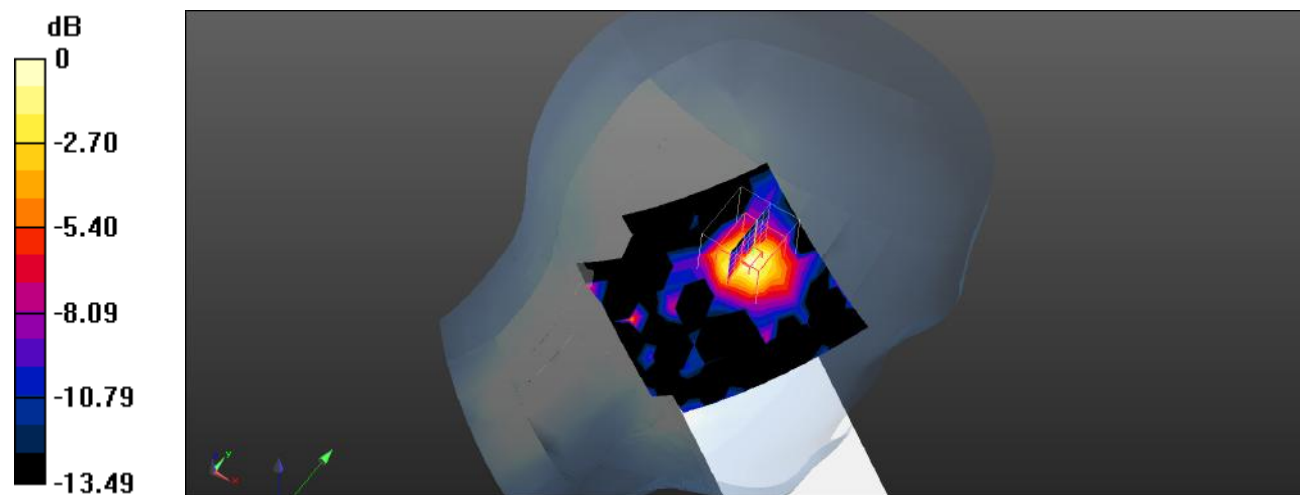

0 dB = 0.0103 W/kg = -19.87 dBW/kg

Test Plot 131#: Bluetooth_Head Right Check_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00642 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.035 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00474 W/kg; SAR(10 g) = 0.00268 W/kg

Maximum value of SAR (measured) = 0.00612 W/kg

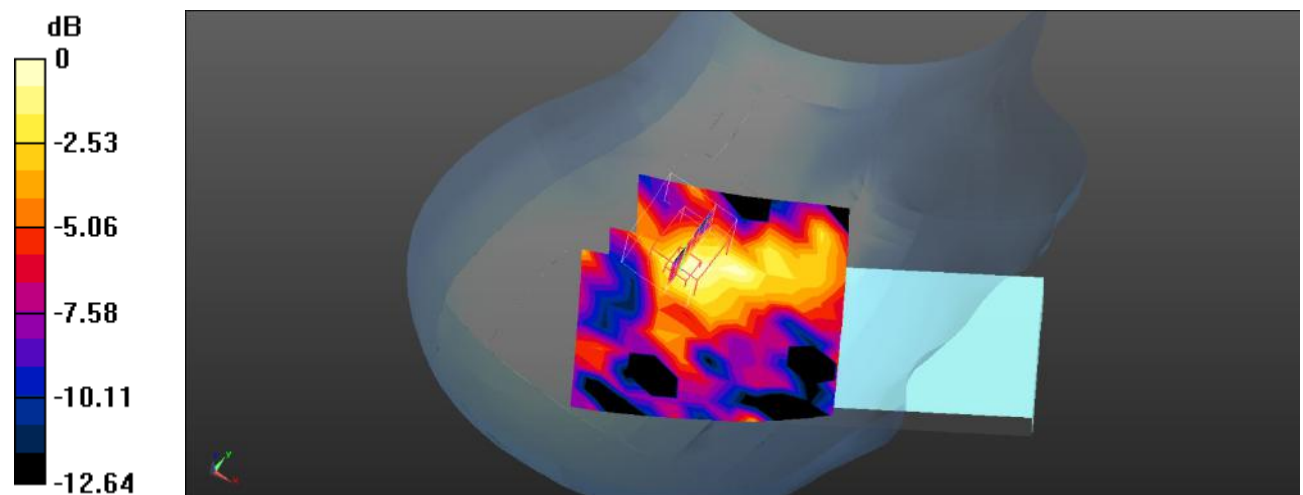

0 dB = 0.00612 W/kg = -22.13 dBW/kg

Test Plot 132#: Bluetooth_Head Right Tilt_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00555 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.151 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00488 W/kg; SAR(10 g) = 0.00238 W/kg

Maximum value of SAR (measured) = 0.00540 W/kg

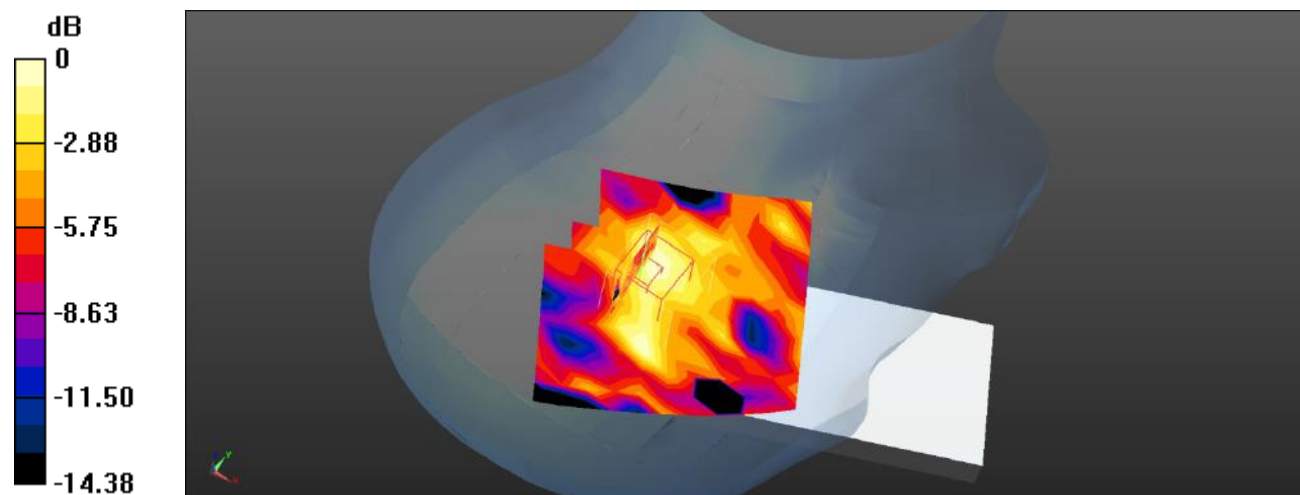

0 dB = 0.00540 W/kg = -22.68 dBW/kg

Test Plot 133#: Bluetooth_Body Front_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00334 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.147 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.00962 W/kg

SAR(1 g) = 0.000924 W/kg; SAR(10 g) = 0.000281 W/kg

Maximum value of SAR (measured) = 0.00308 W/kg

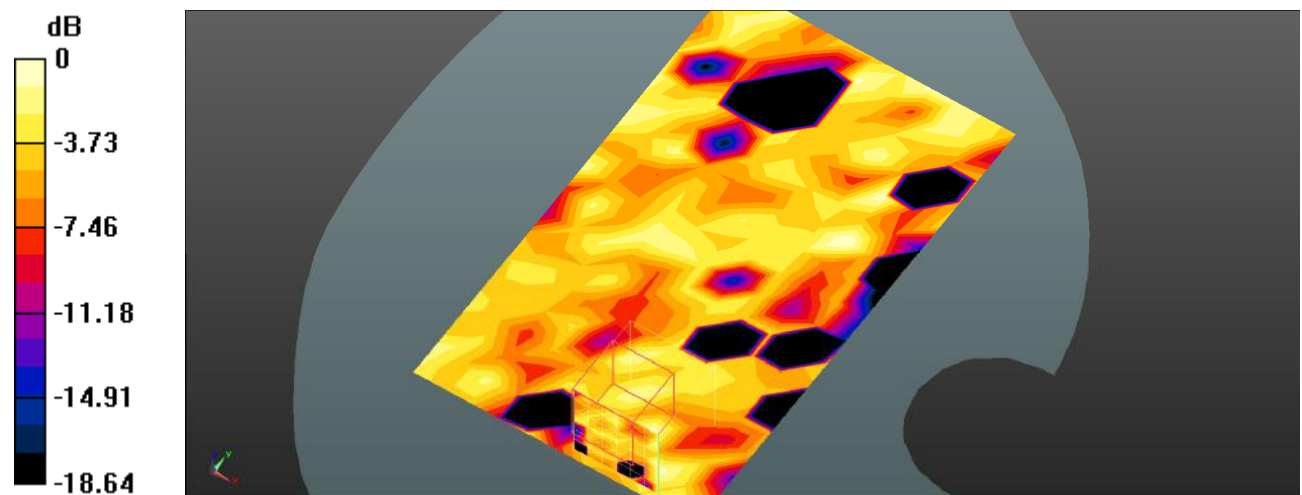

Test Plot 134#: Bluetooth_Body Back_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00428 W/kg


BZoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.154 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.00751 W/kg

SAR(1 g) = 0.00396 W/kg; SAR(10 g) = 0.0017 W/kg

Maximum value of SAR (measured) = 0.00499 W/kg

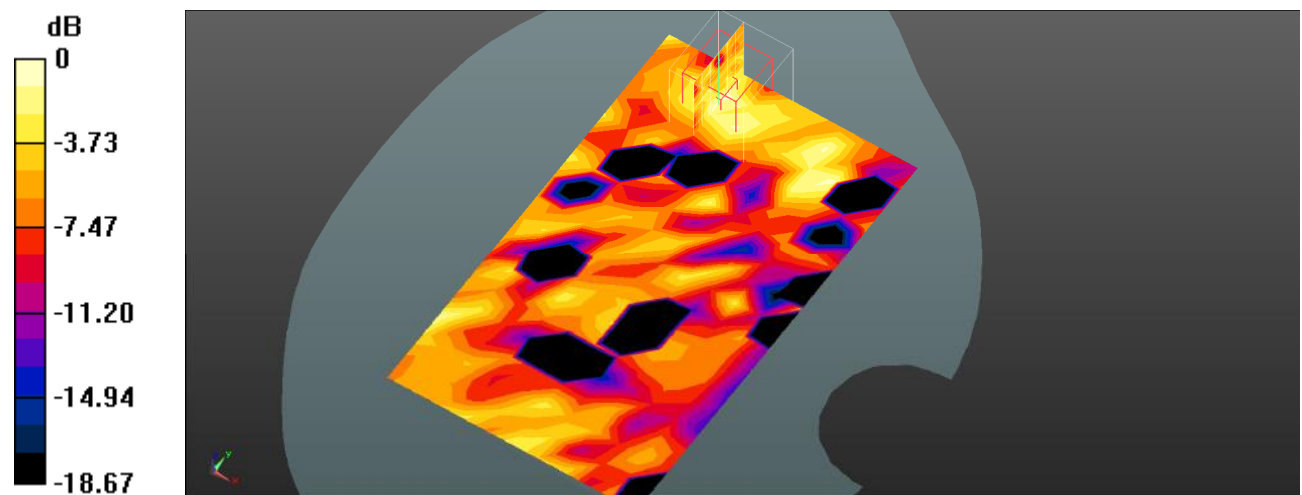

0 dB = 0.00499 W/kg = -23.02 dBW/kg

Test Plot 135#: Bluetooth_Body Right_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (8x18x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00230 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.044 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.00265 W/kg

SAR(1 g) = 0.000519 W/kg; SAR(10 g) = 0.000205 W/kg

Maximum value of SAR (measured) = 0.00250 W/kg

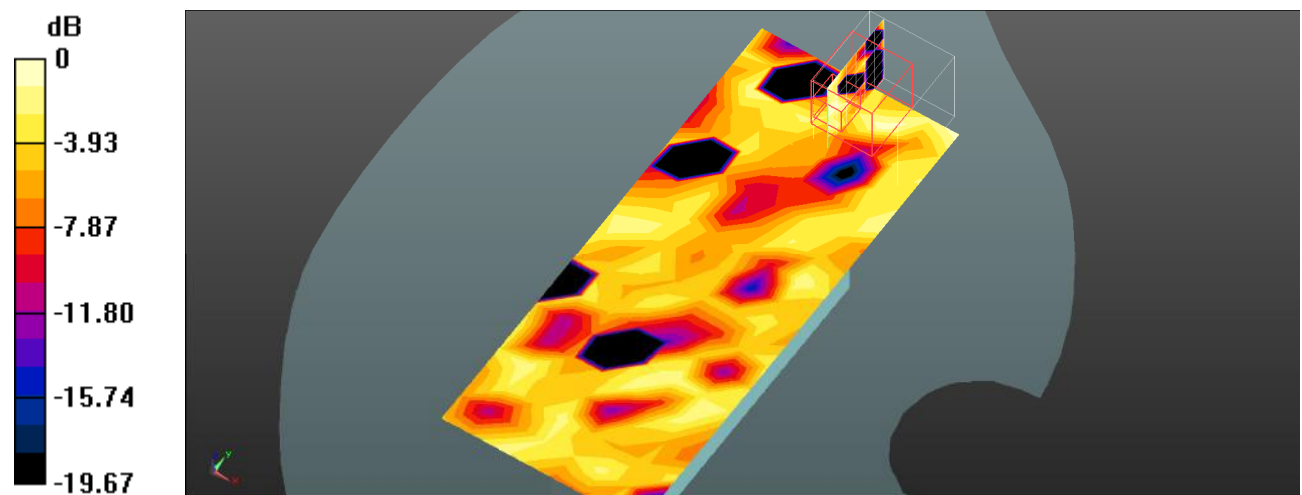

0 dB = 0.00250 W/kg = -26.02 dBW/kg

Test Plot 136#: Bluetooth_Body Top_High**DUT: ART3S; Type: 4G Smart Phone; Serial: SZNS221019-48008E-SA-S1;**

Communication System: UID 0, Bluetooth(8DPSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30310

Medium parameters used (interpolated): $f = 2480$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4- SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1211; Calibrated: 2022/03/01
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00282 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.245 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.00389 W/kg

SAR(1 g) = 0.00083 W/kg; SAR(10 g) = 0.000283 W/kg

Maximum value of SAR (measured) = 0.00452 W/kg

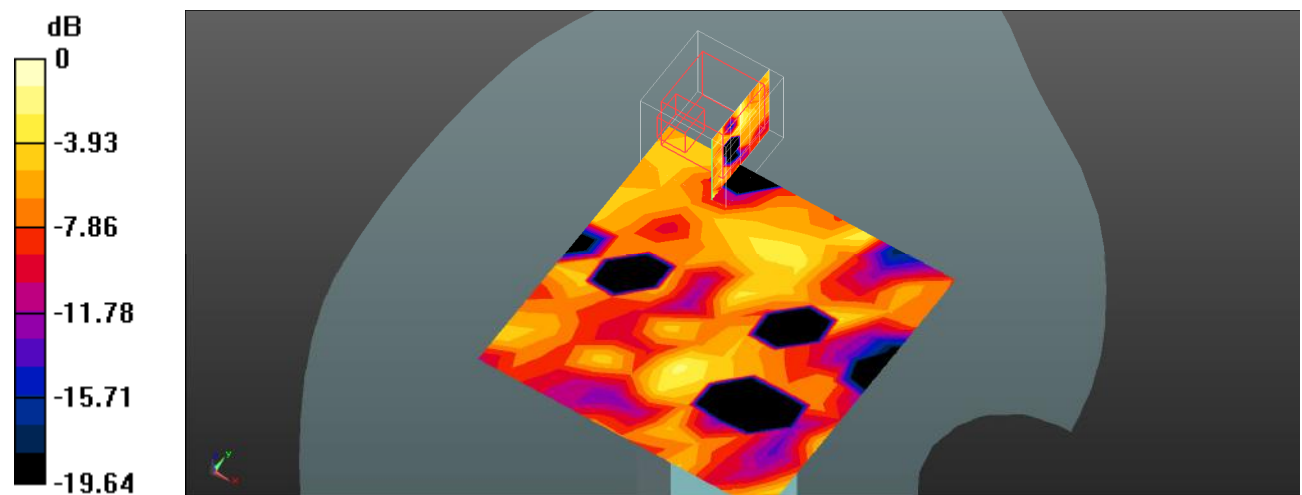

0 dB = 0.00452 W/kg = -23.45 dBW/kg