

Appendix Test Data for BT(BLE) (Conducted Measurement)

Product Name: Smartphone

Trade Mark: YEZZ

Test Model: LIV 3S LTE

FCC ID: 2APW4LIV3SL

Environmental Conditions


Temperature:	23.8℃
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.656	2401.664	2402.320	0.5	PASS
		2440	0.636	2439.668	2440.304	0.5	PASS
		2480	0.664	2479.656	2480.320	0.5	PASS

Test Graphs

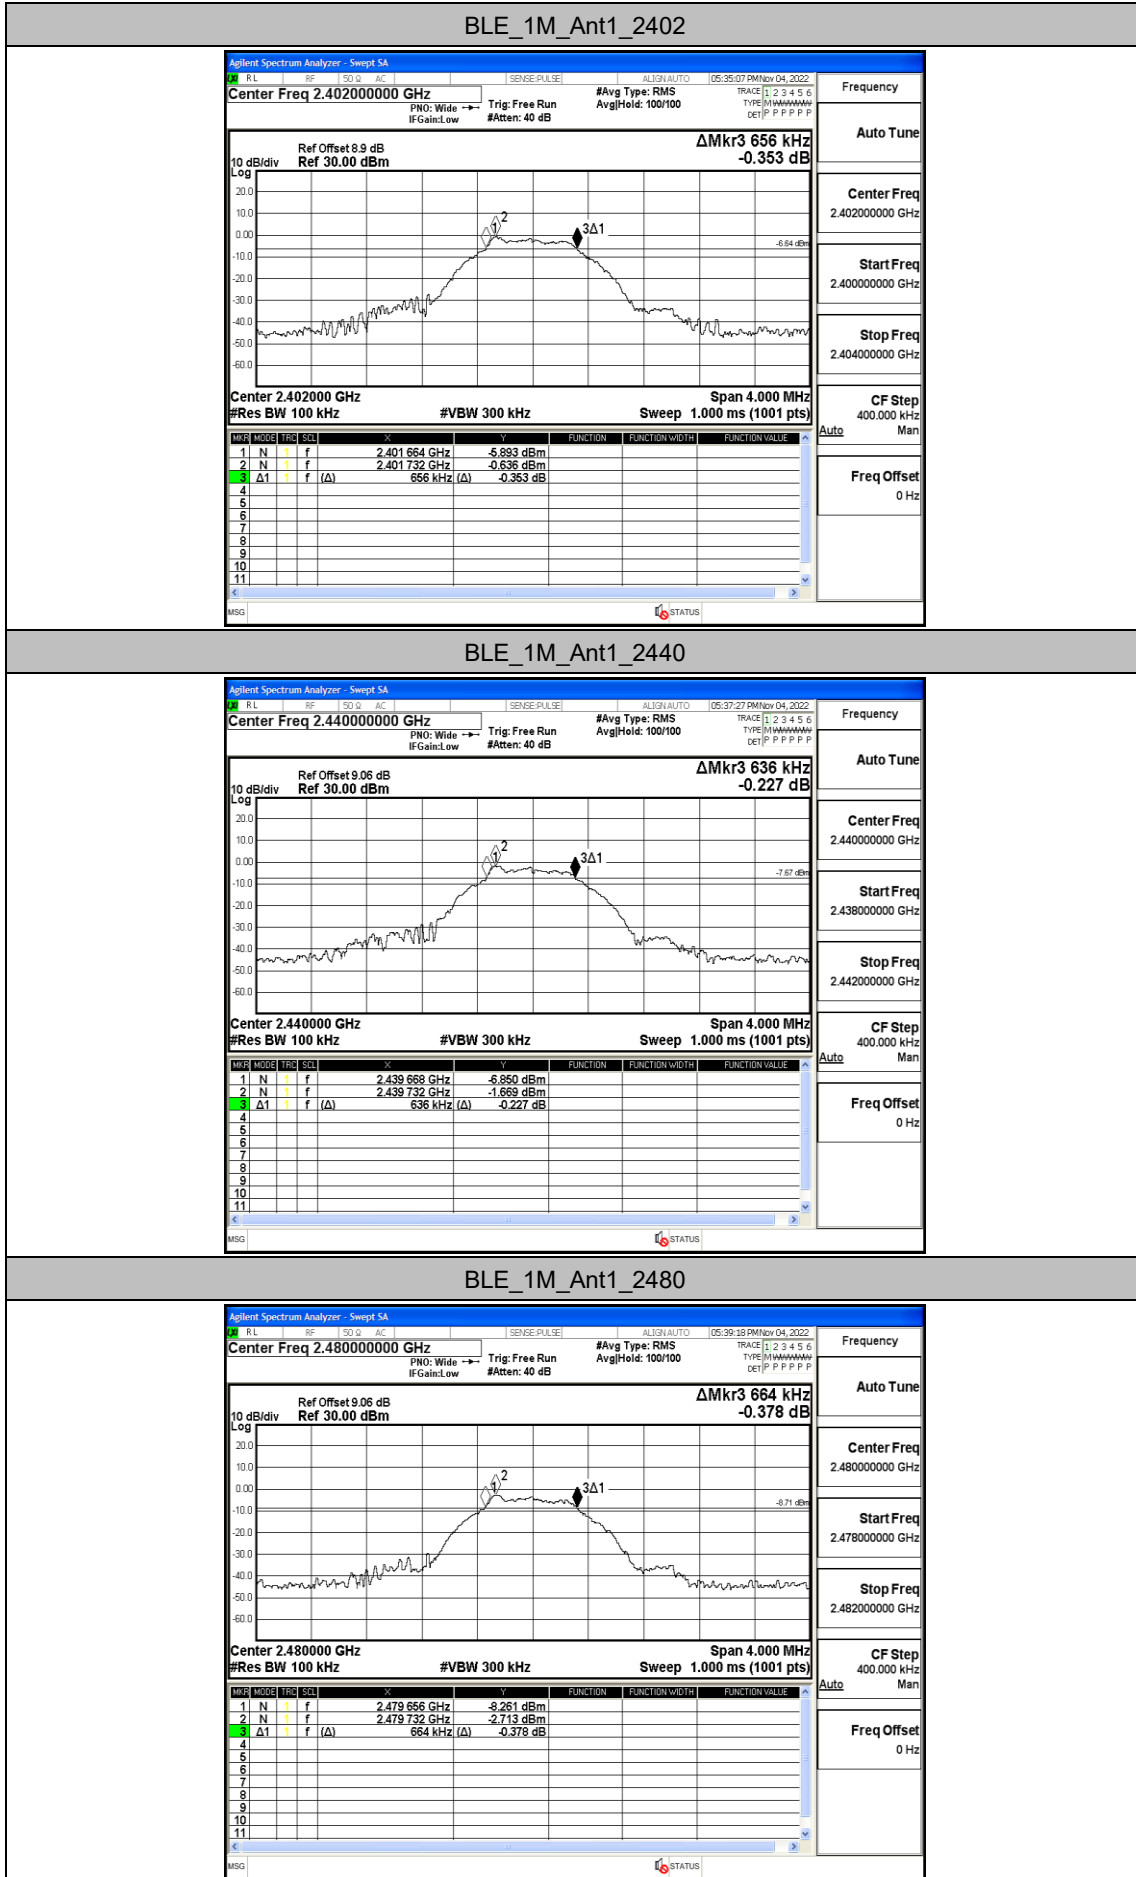


Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0262	2401.4811	2402.5073	---	---
		2440	1.0295	2439.4807	2440.5102	---	---
		2480	1.0369	2479.4767	2480.5136	---	---

Test Graphs

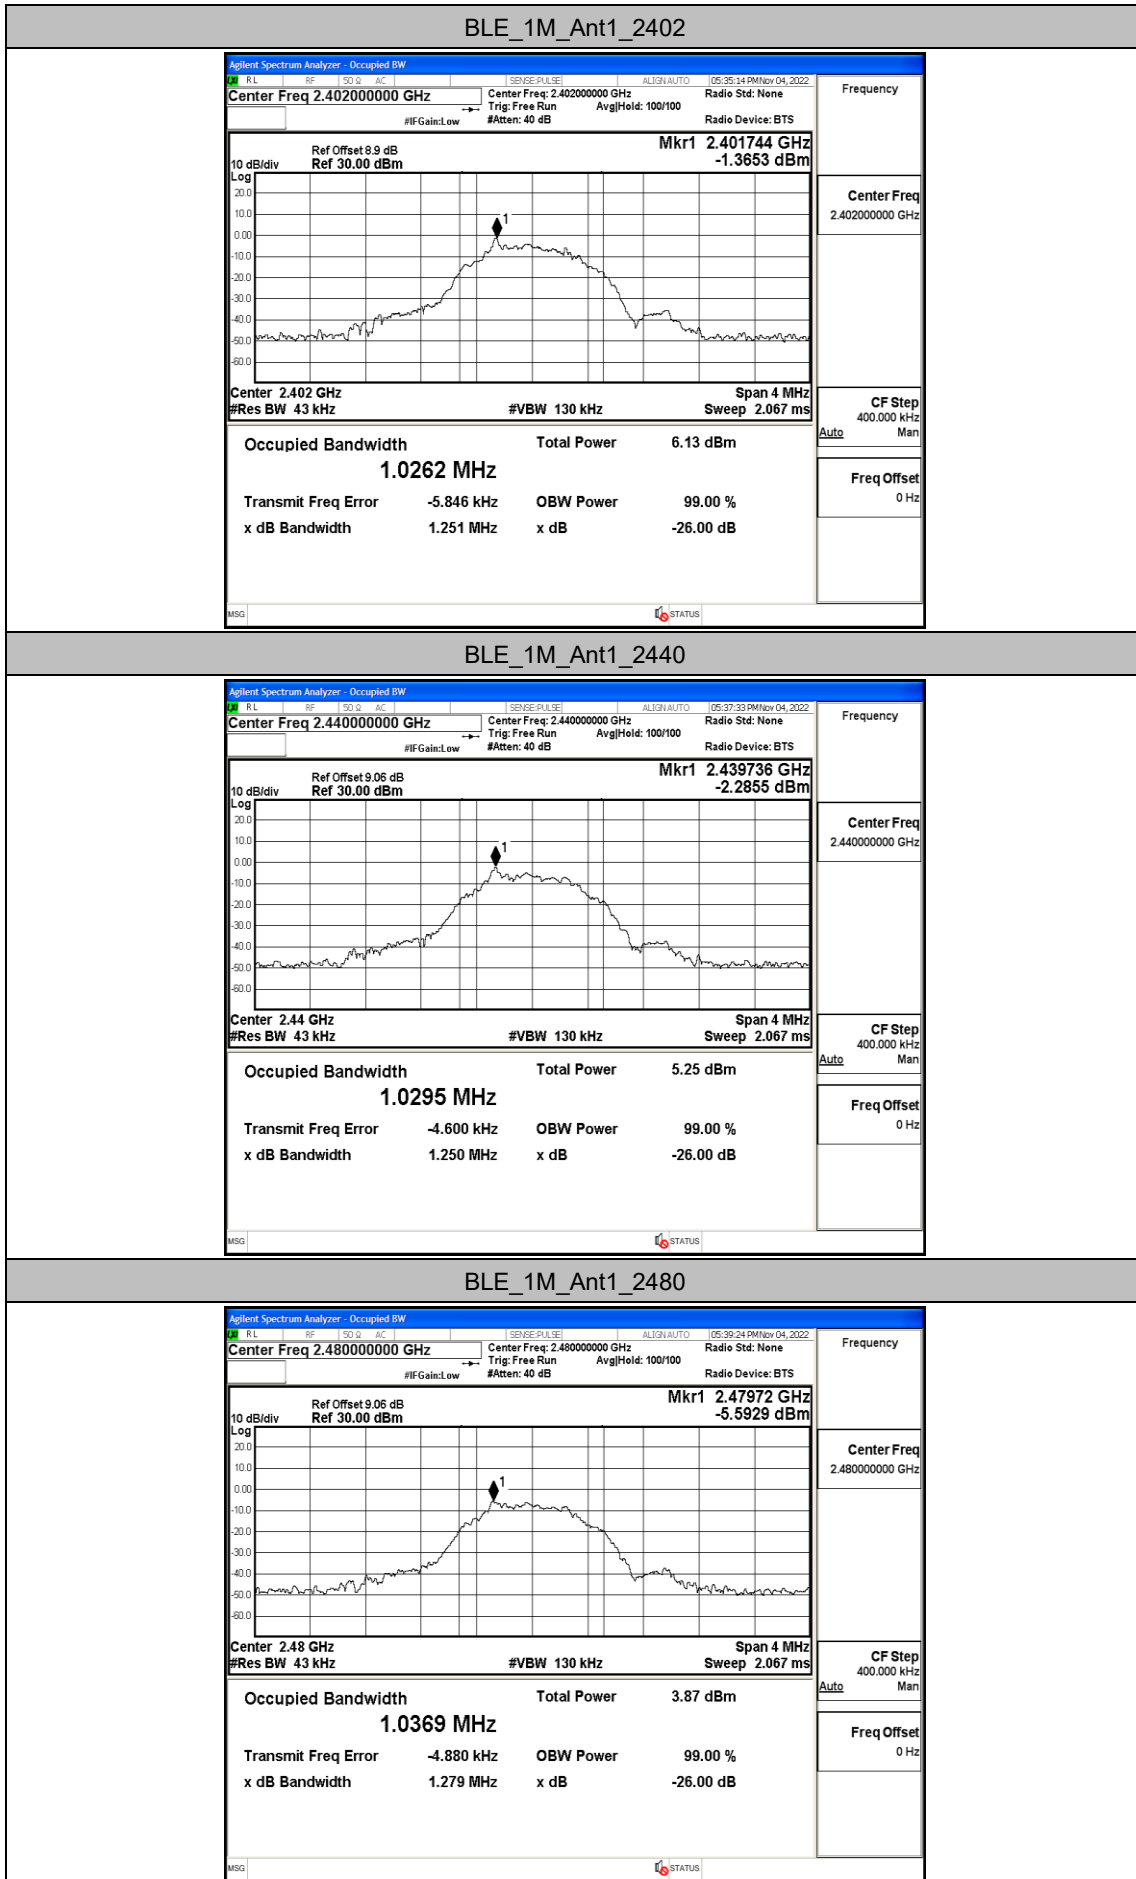


Appendix C: Maximum Peak conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-0.12	≤30	PASS
		2440	-1.05	≤30	PASS
		2480	-2.13	≤30	PASS

Test Graphs

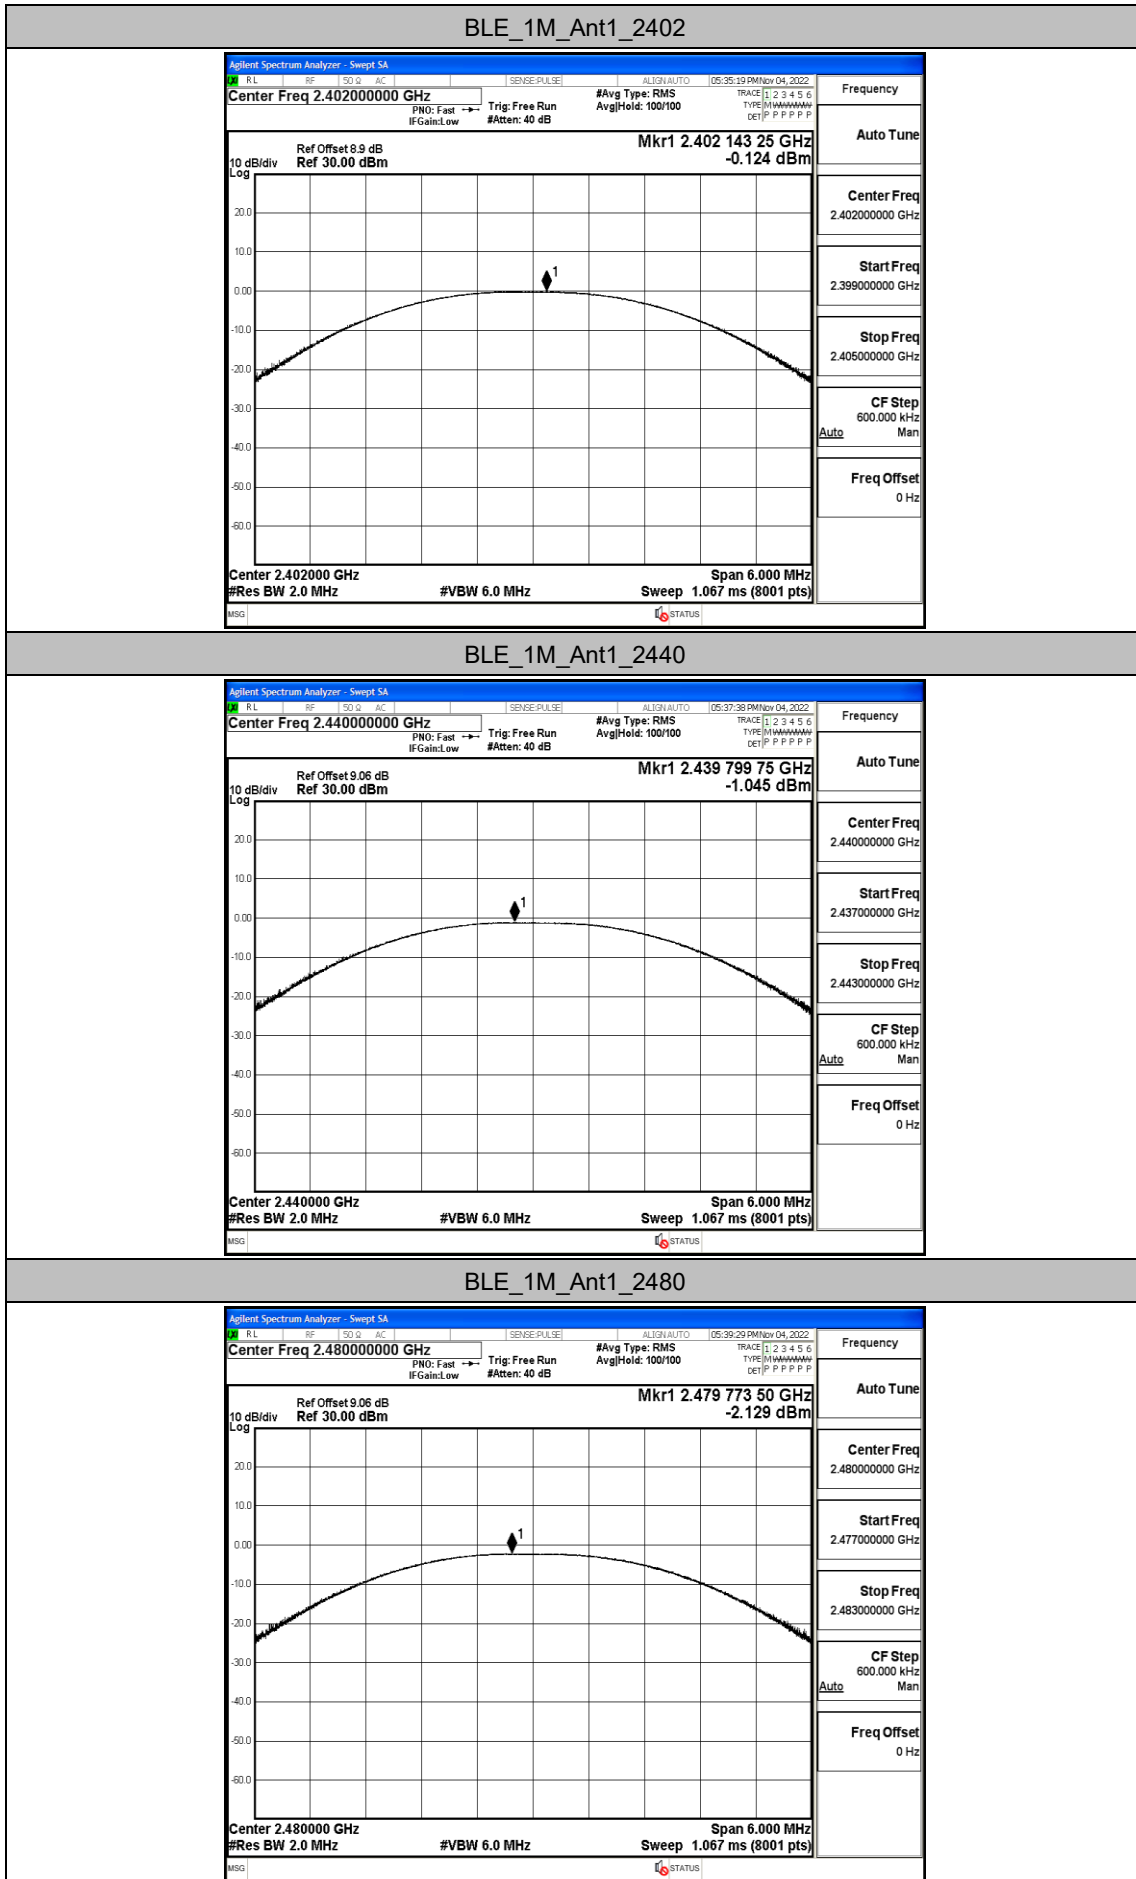


Appendix D: Maximum power spectral density

Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.47	≤8.00	PASS
		2440	-16.49	≤8.00	PASS
		2480	-17.62	≤8.00	PASS

Test Graphs

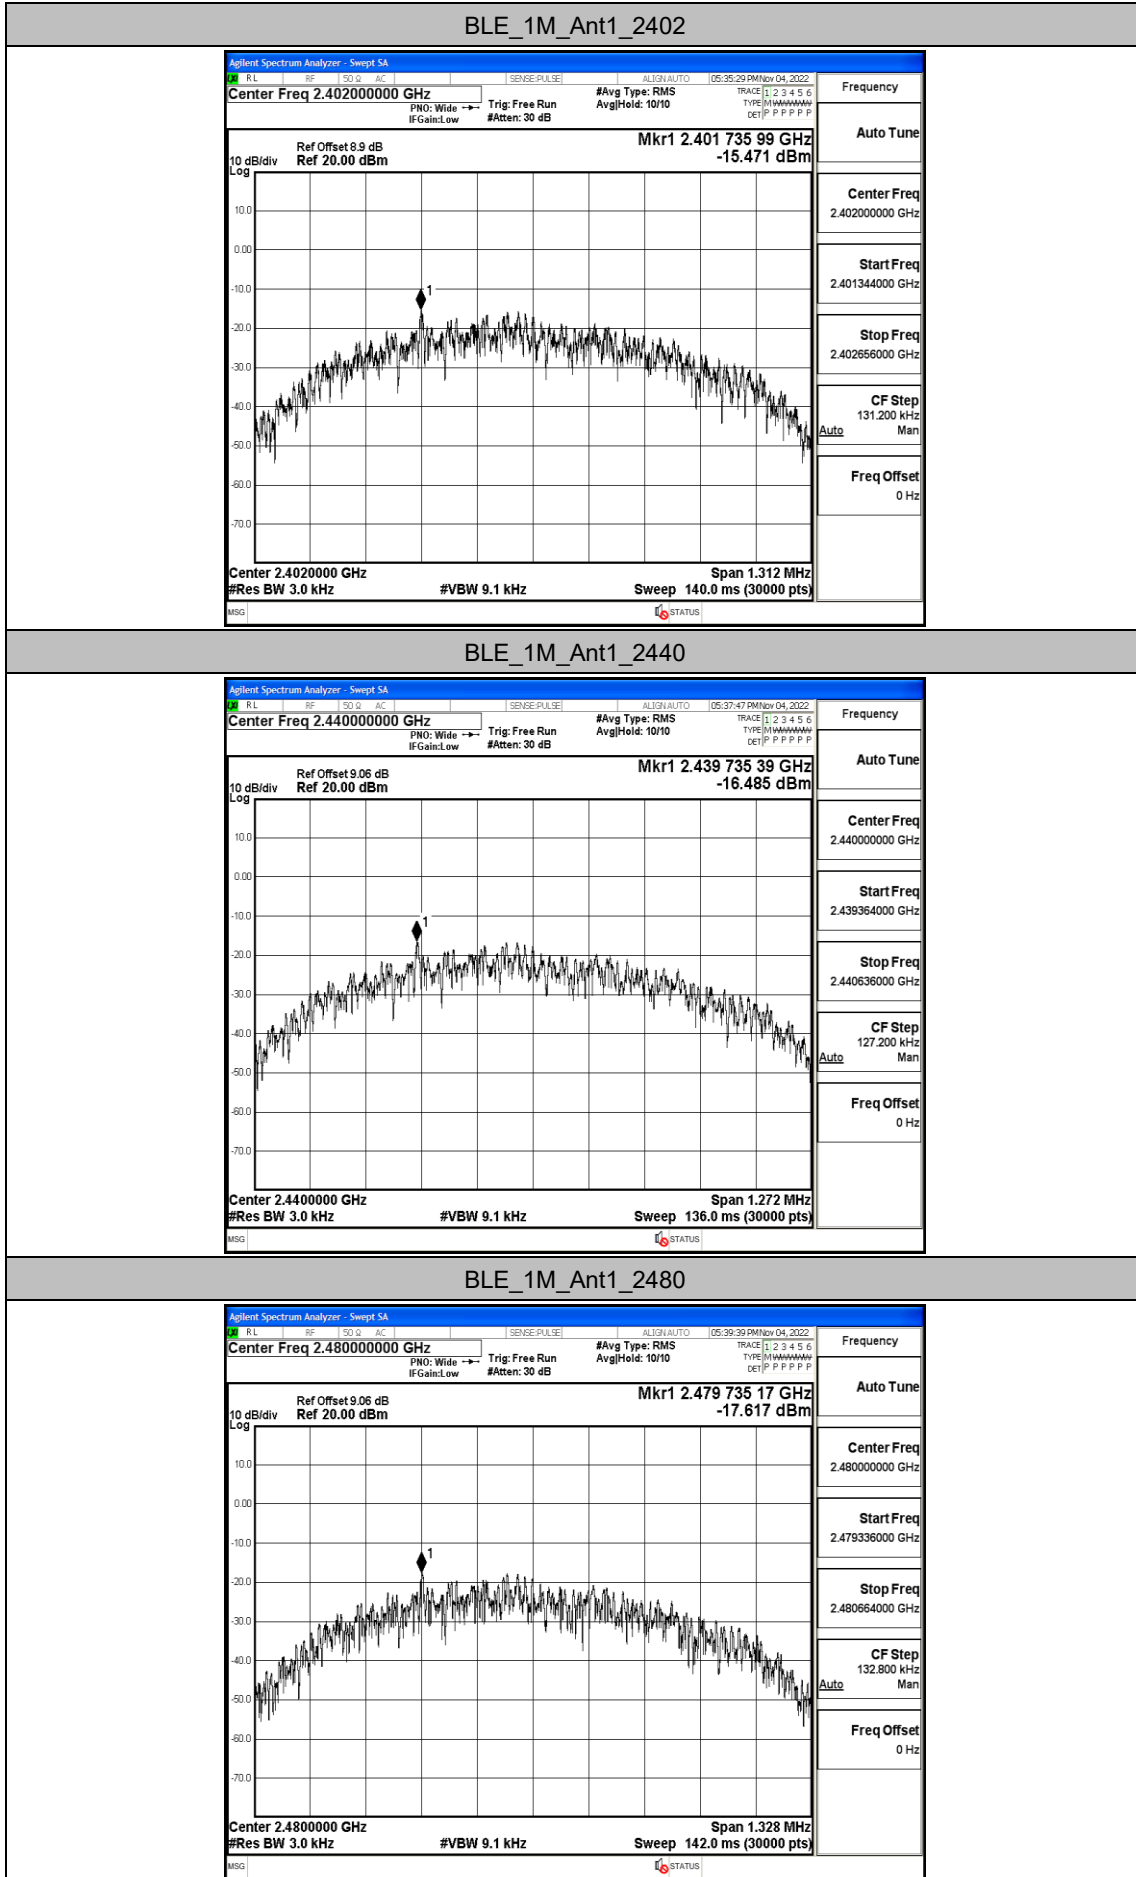


Appendix E: Band edge measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.42	-50.14	≤-20.42	PASS
		High	2480	-2.53	-49	≤-22.53	PASS

Test Graphs

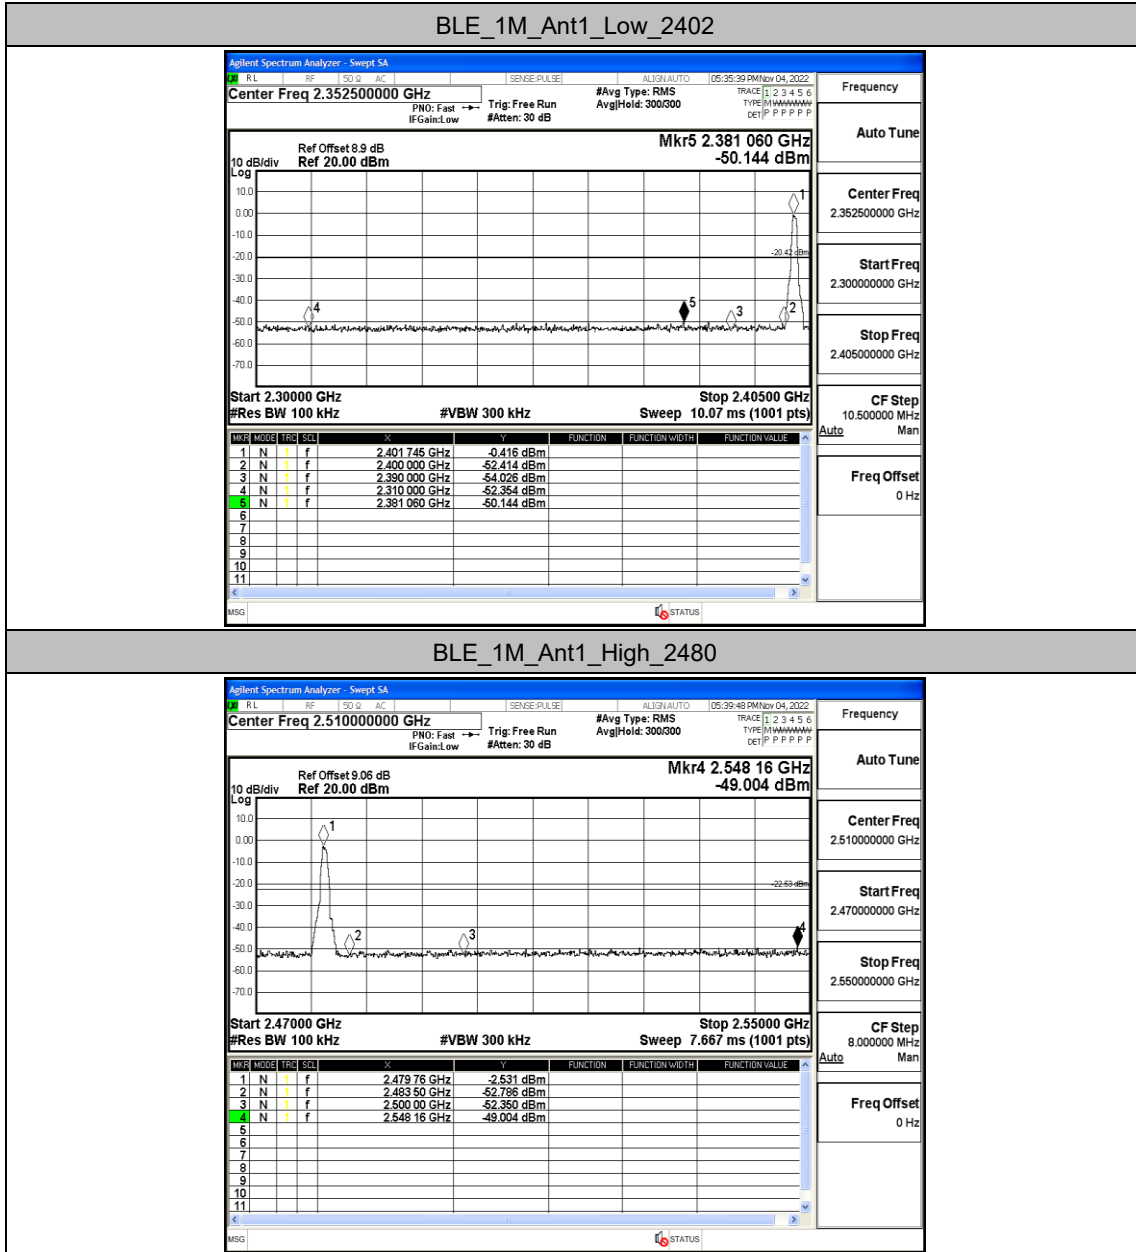

BLE_1M_Ant1_High_2480


Appendix F: Conducted Spurious Emission

Test Result


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-0.46	-0.46	---	PASS
			30~1000	-0.46	-60.99	≤-20.46	PASS
			1000~26500	-0.46	-50.38	≤-20.46	PASS
		2440	Reference	-1.56	-1.56	---	PASS
			30~1000	-1.56	-60.46	≤-21.56	PASS
			1000~26500	-1.56	-50.26	≤-21.56	PASS
		2480	Reference	-2.51	-2.51	---	PASS
			30~1000	-2.51	-60.66	≤-22.51	PASS
			1000~26500	-2.51	-50.05	≤-22.51	PASS

Test Graphs

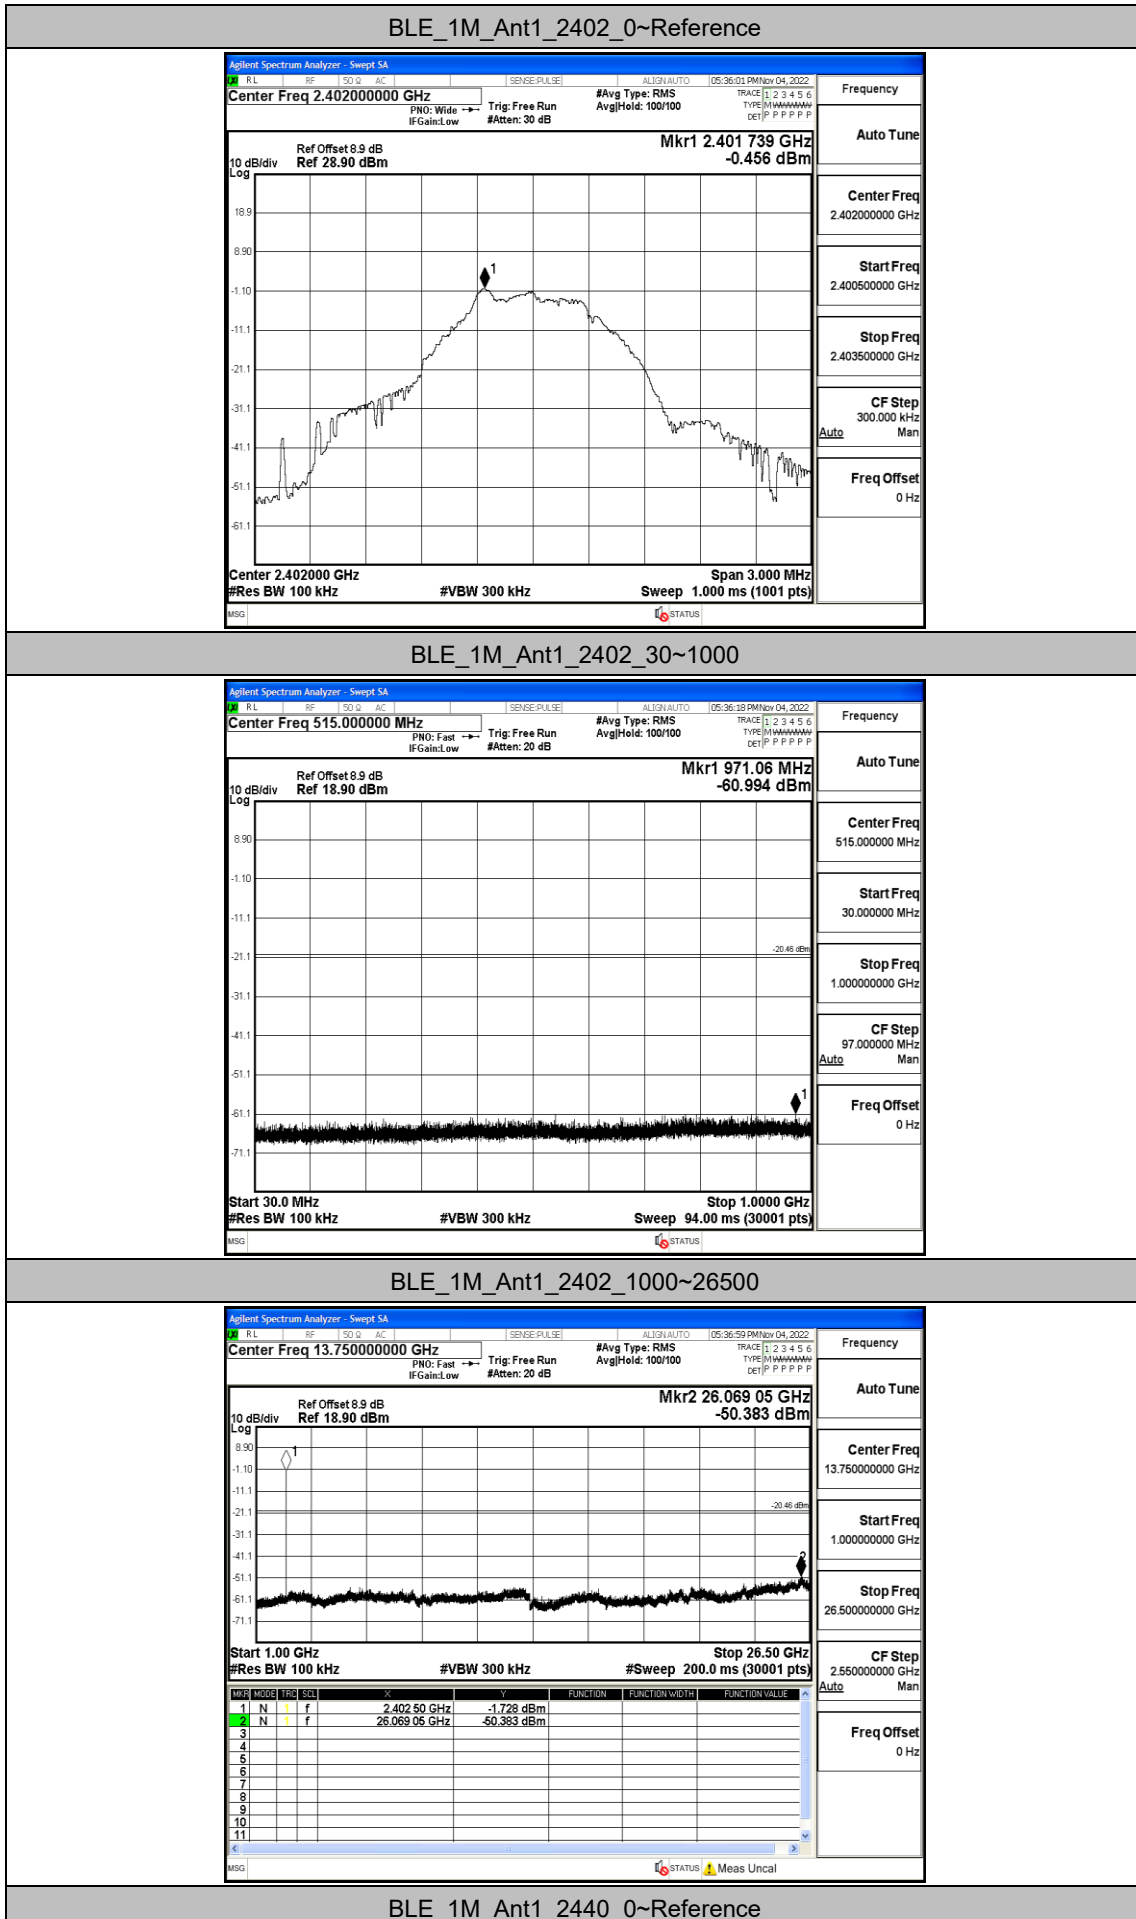


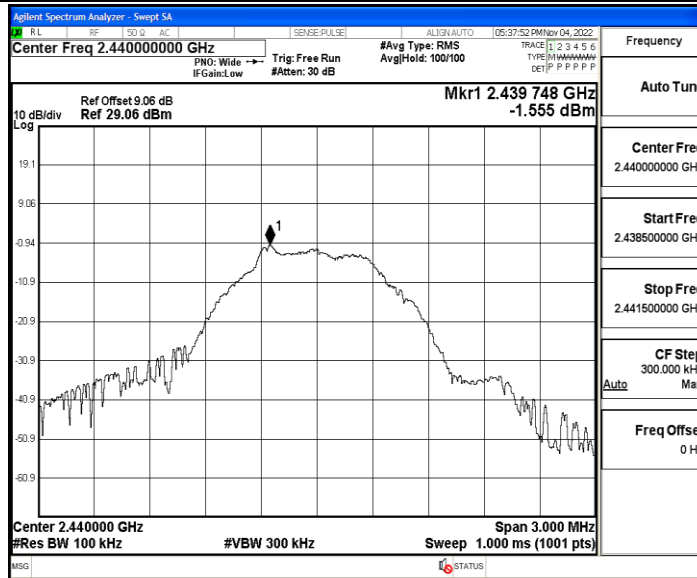


BLE_1M_Ant1_2440_30~1000

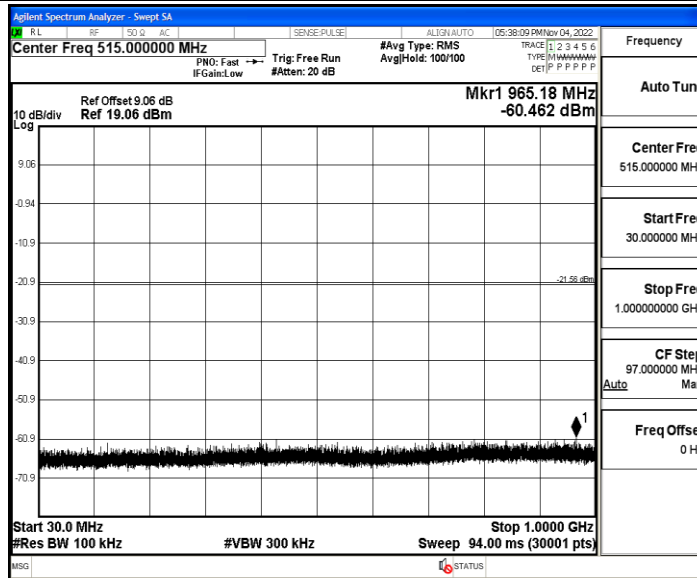


BLE_1M_Ant1_2440_1000~26500

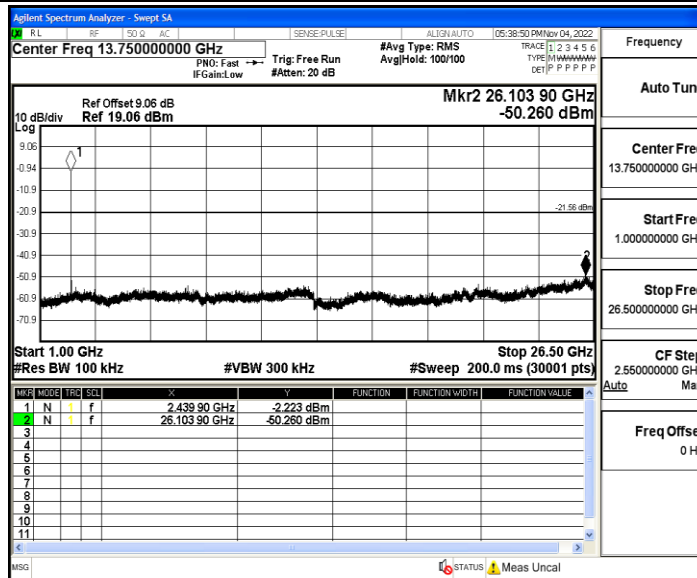


BLE_1M_Ant1_2480_0~Reference

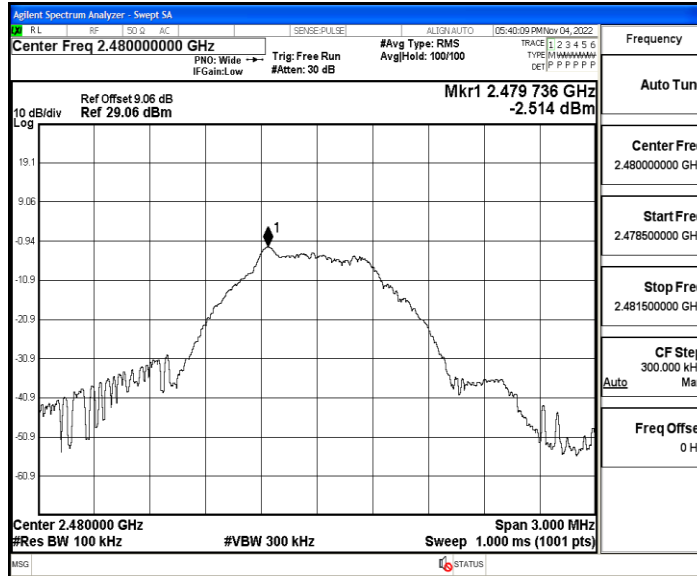

BLE_1M_Ant1_2480_30~1000

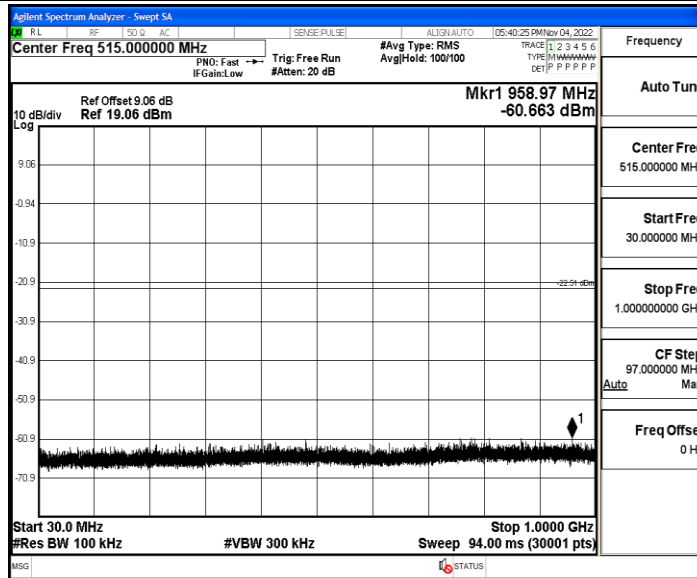

BLE_1M_Ant1_2480_1000~26500

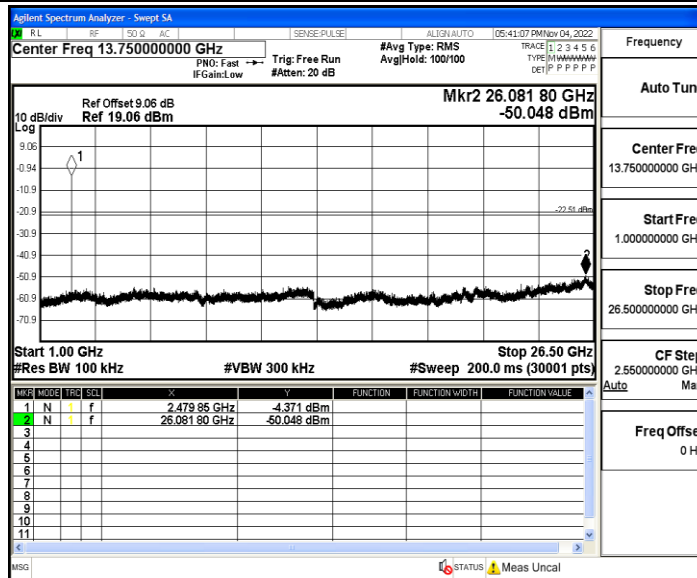


Appendix G: Duty Cycle

Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.56
		2440	0.39	0.62	62.90	2.56
		2480	0.39	0.62	62.90	2.56

Test Graphs

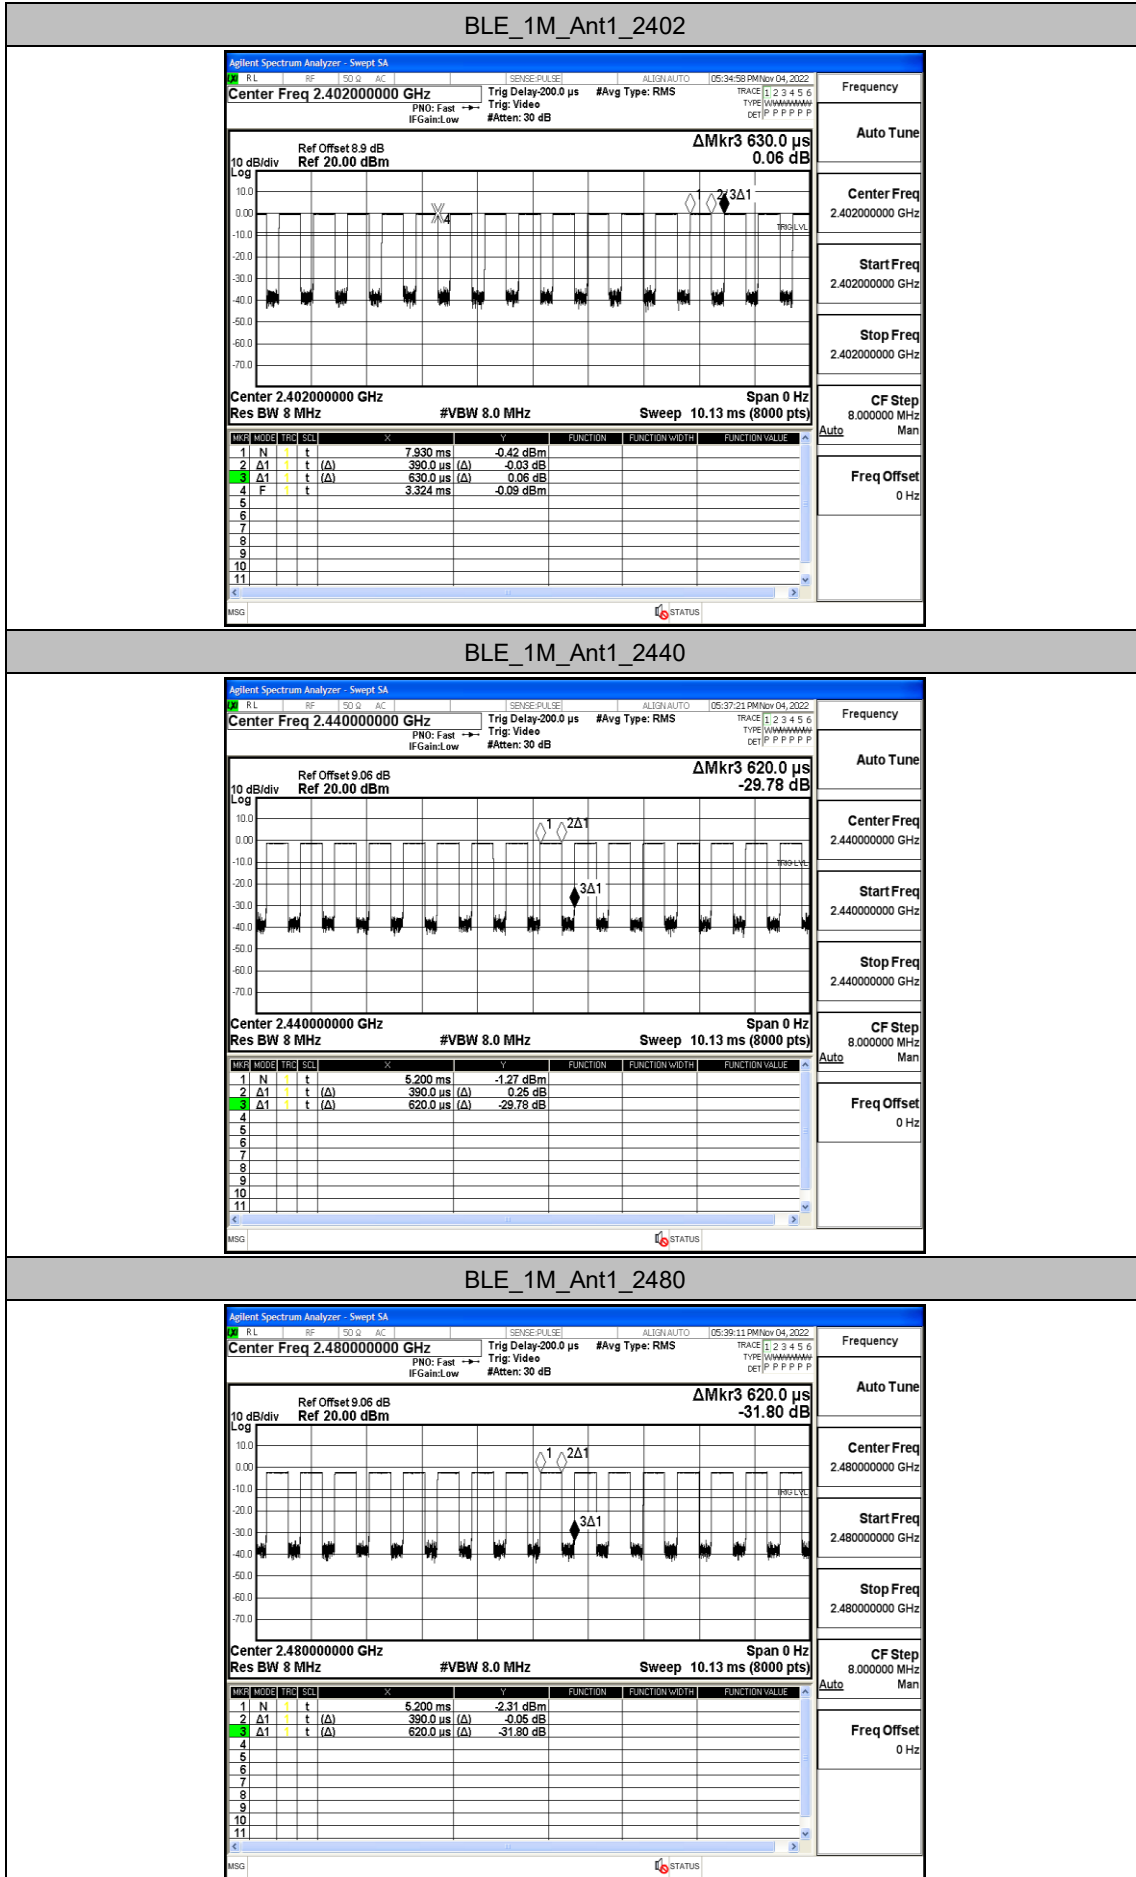

Appendix H: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-48.95	≤-41.20	PASS
				AV	2375.180	-48.19	≤-41.20	PASS
				AV	2390.000	-48.57	≤-41.20	PASS
				Peak	2310.000	-42.86	≤-21.20	PASS
				Peak	2348.405	-39.24	≤-21.20	PASS
				Peak	2390.000	-41.19	≤-21.20	PASS
		High	2480	AV	2483.500	-47.95	≤-41.20	PASS
				AV	2494.800	-47.62	≤-41.20	PASS
				AV	2500.000	-47.85	≤-41.20	PASS
				Peak	2483.500	-42.66	≤-21.20	PASS
				Peak	2495.120	-38.56	≤-21.20	PASS
				Peak	2500.000	-42.16	≤-21.20	PASS

Note:


1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


BLE_1M_Ant1_Low_2402_AV

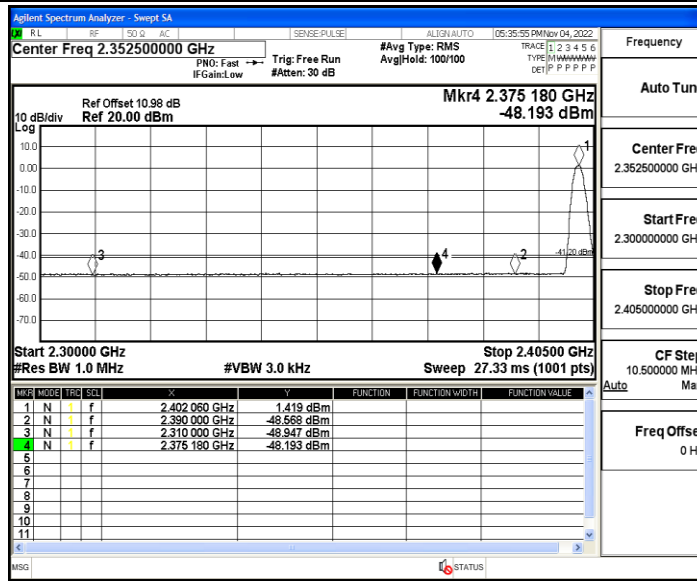

BLE_1M_Ant1_Low_2402_Peak

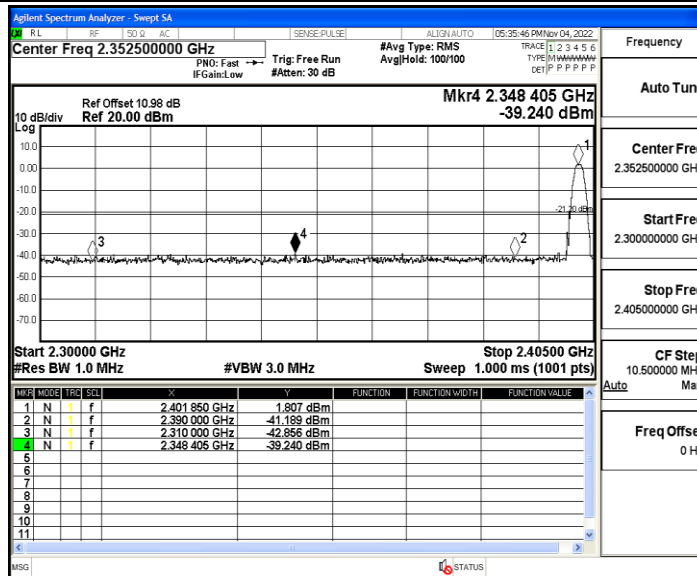

BLE_1M_Ant1_High_2480_AV

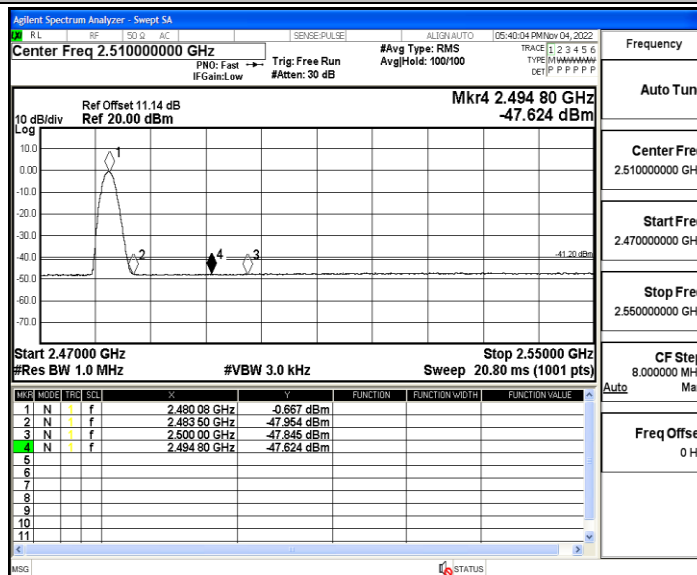

BLE_1M_Ant1_High_2480_Peak

