

CTC Laboratories, Inc.

Page 62 of 89 Report No.: CTC20210202E08




3.4. Occupied Channel Bandwidth and 20DB Bandwidth

Limit

N/A

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting: 2.
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.


Test Mode

Please refer to the clause 2.3.

Test Results


Modulation type	Channel	99% Bandwidth (MHz)	20dB Bandwidth (MHz)	20dB Bandwidth *2/3 (MHz)
	00	0.875	0.948	0.632
GFSK	39	0.878	0.948	0.632
	78	0.878	0.948	0.632
	00	1.067	1.176	0.784
π/4-DQPSK	39	1.064	1.131	0.754
	78	1.07	1.176	0.784
	00	1.061	1.167	0.778
8-DPSK	39	1.064	1.170	0.780
	78	1.067	1.170	0.780



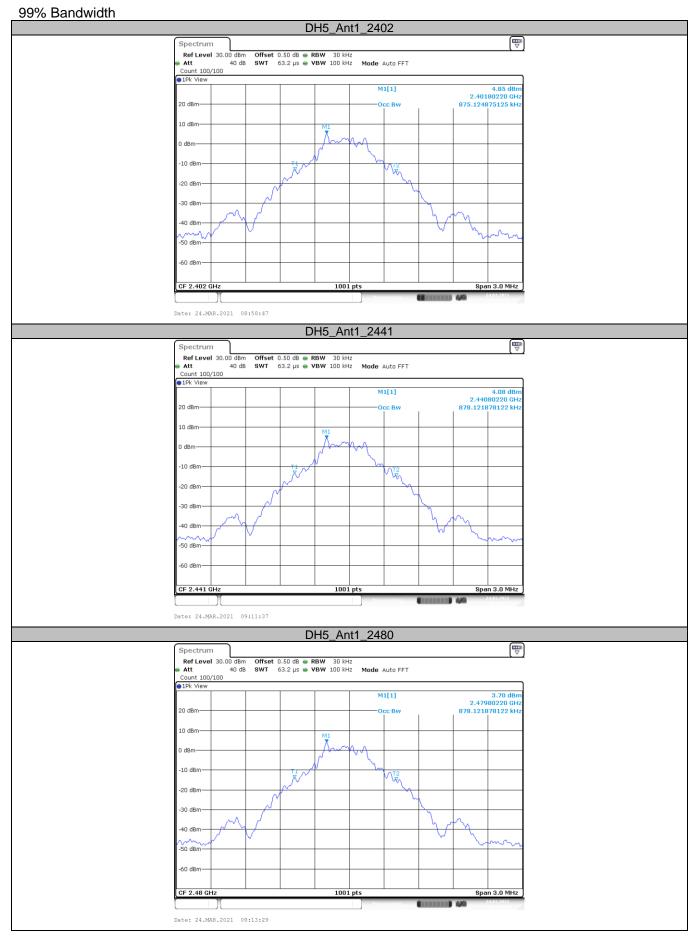







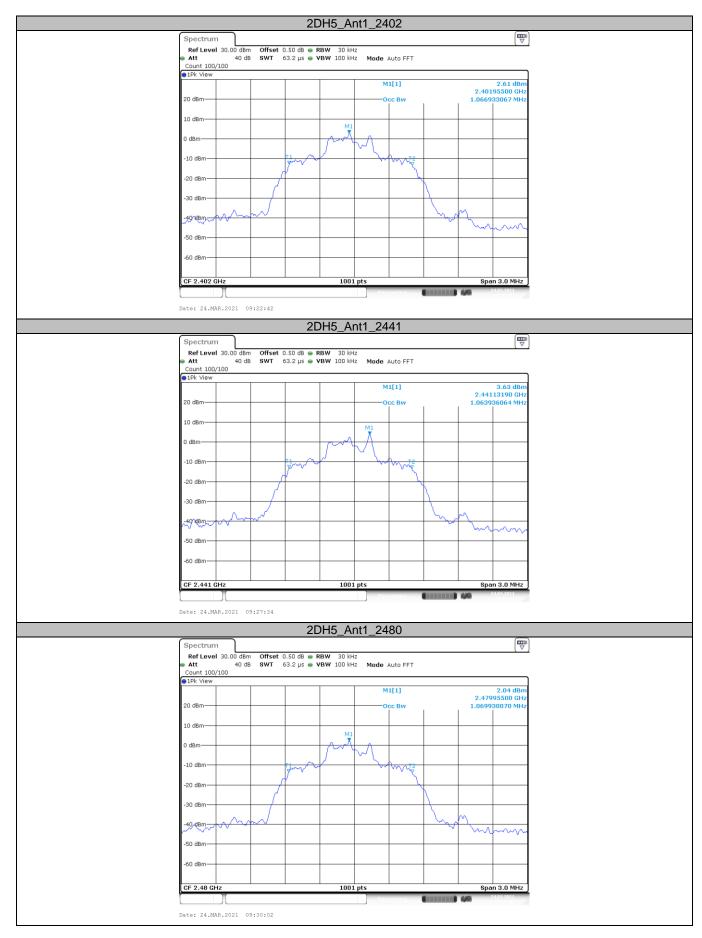



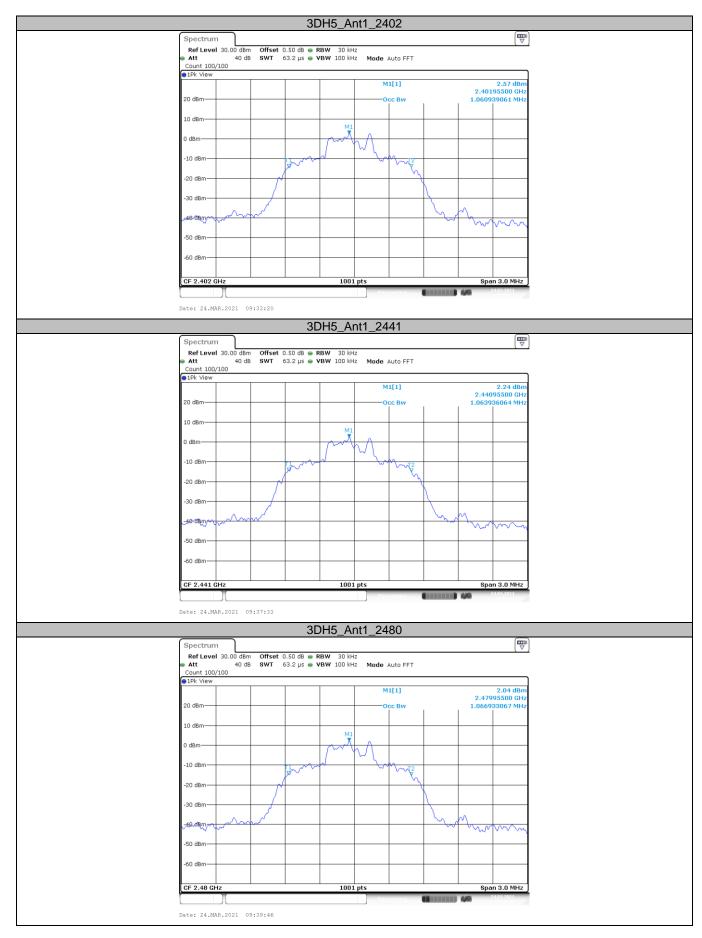




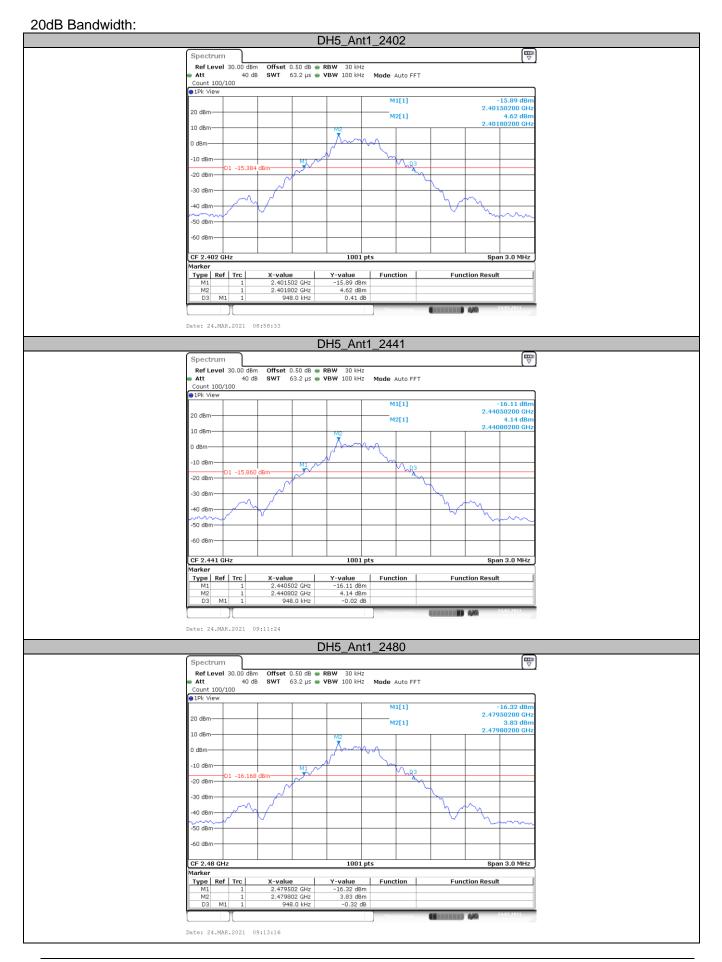


CTC Laboratories, Inc.



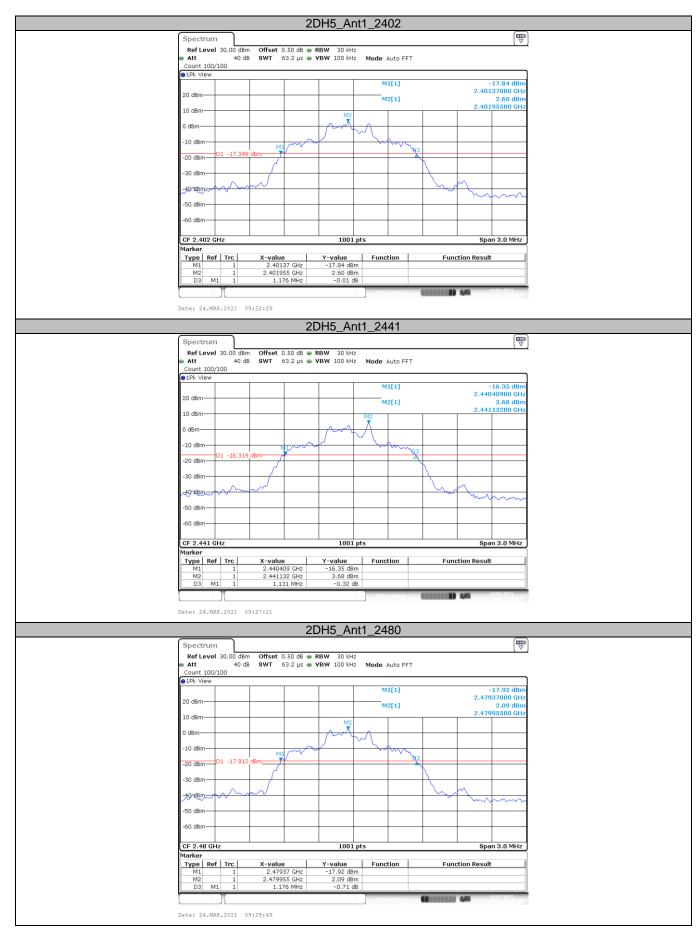

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: <u>vz.cnca.cn</u>



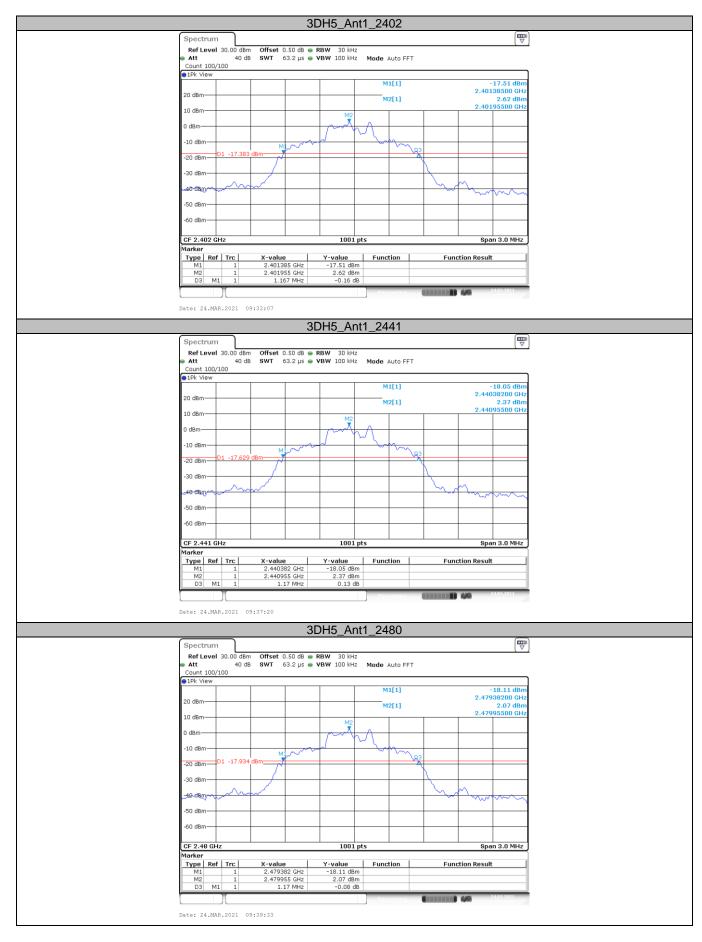

CTC Laboratories, Inc.

Accreditation Administration of the People's Republic of China: yz.cnca.cn

Page 70 of 89

Report No.: CTC20210202E08




3.5. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b:

Test Item	Limit	Frequency Range(MHz)	
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5	

Test Configuration




Test Procedure

- 3. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 4. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

Test Mode

Please refer to the clause 2.3.









Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result	
	00	1.004	0.948		
GFSK	39	1.000	0.948	Pass	
	78	1.000	0.948		
	00	1.000	0.784		
π/4-DQPSK	39	1.000	0.784	Pass	
	78	1.000	0.784		
	00	1.004	0.780		
8-DPSK	39	1.000	0.780	Pass	
	78	1.000	0.780		

Accreditation Administration of the People's Republic of China: yz.cnca.cn



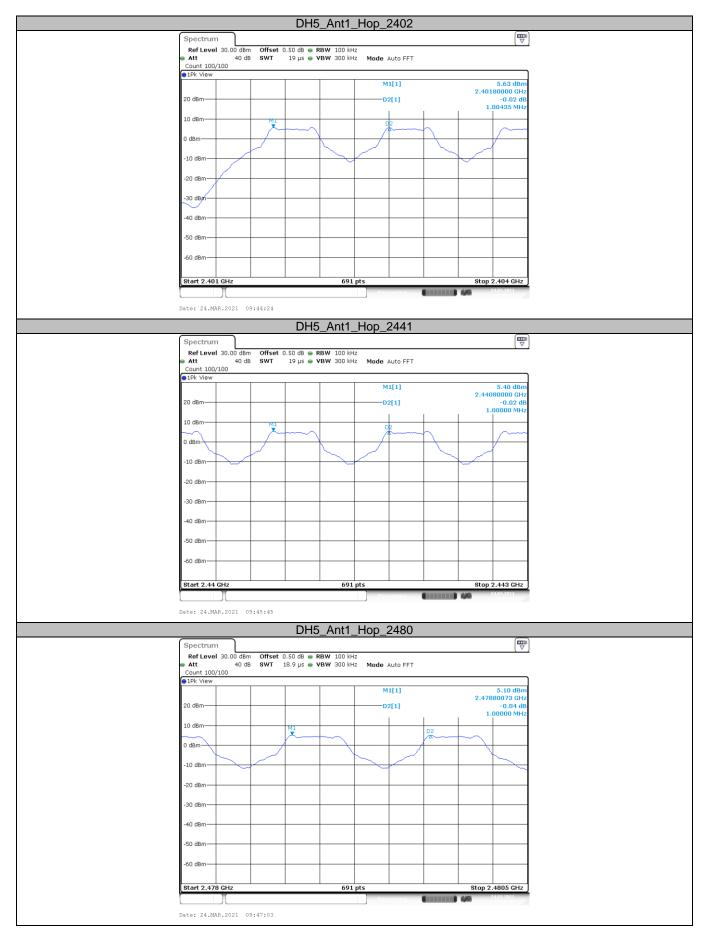




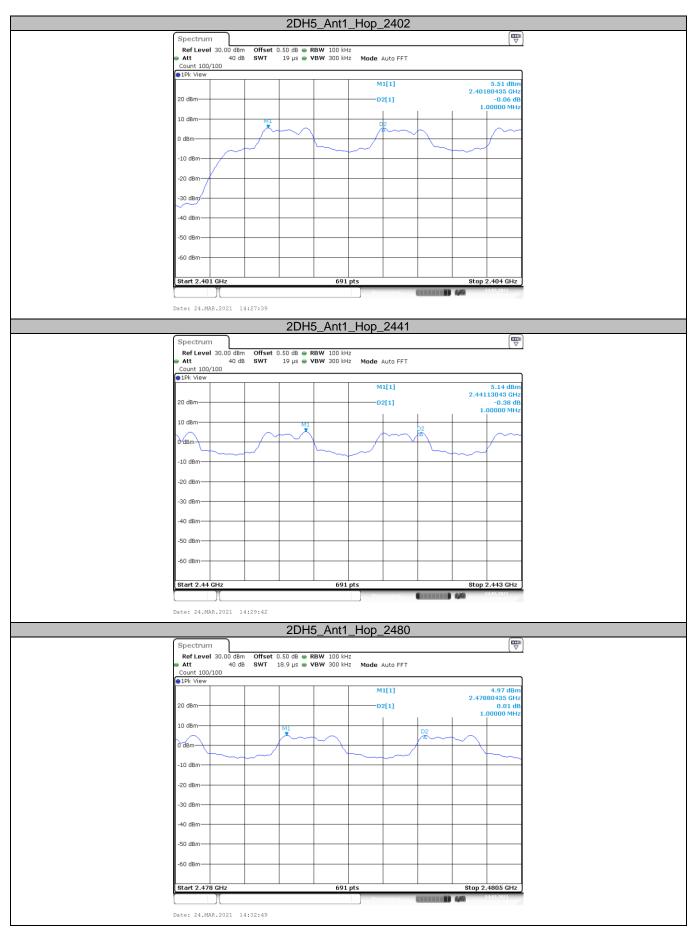

中国国家认证认可监督管理委员会 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: <u>vz.cnca.cn</u>



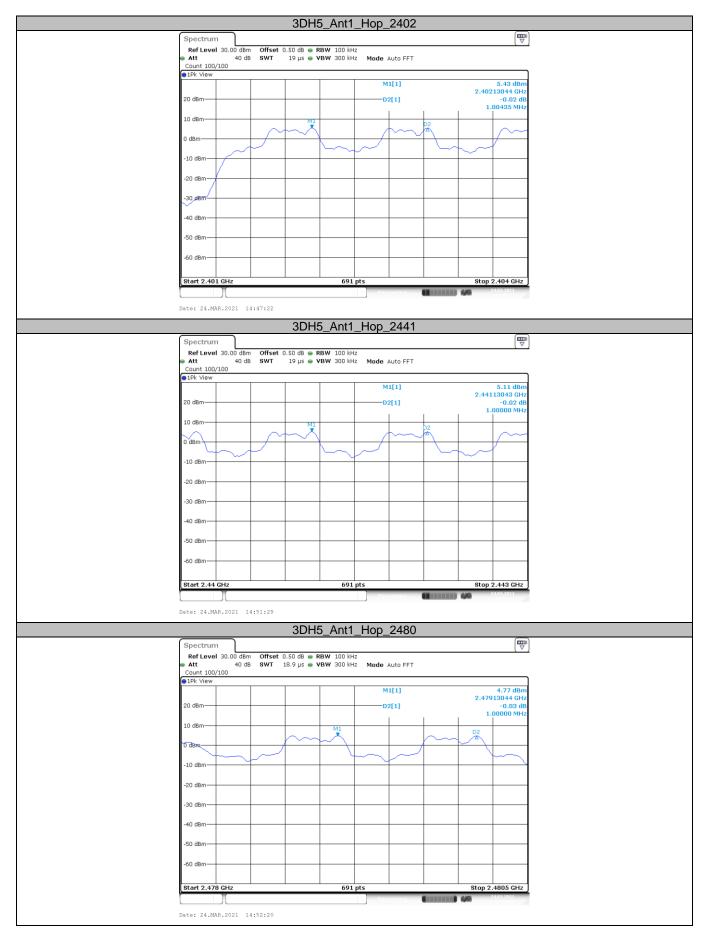

Page 75 of 89

Report No.: CTC20210202E08




3.6. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit	
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15	

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.


Test Mode

Please refer to the clause 2.3.

Test Result

Modulation type	Channel number	Limit	Result
GFSK	79		
π/4-DQPSK	79	≥15.00	Pass
8DPSK	79		



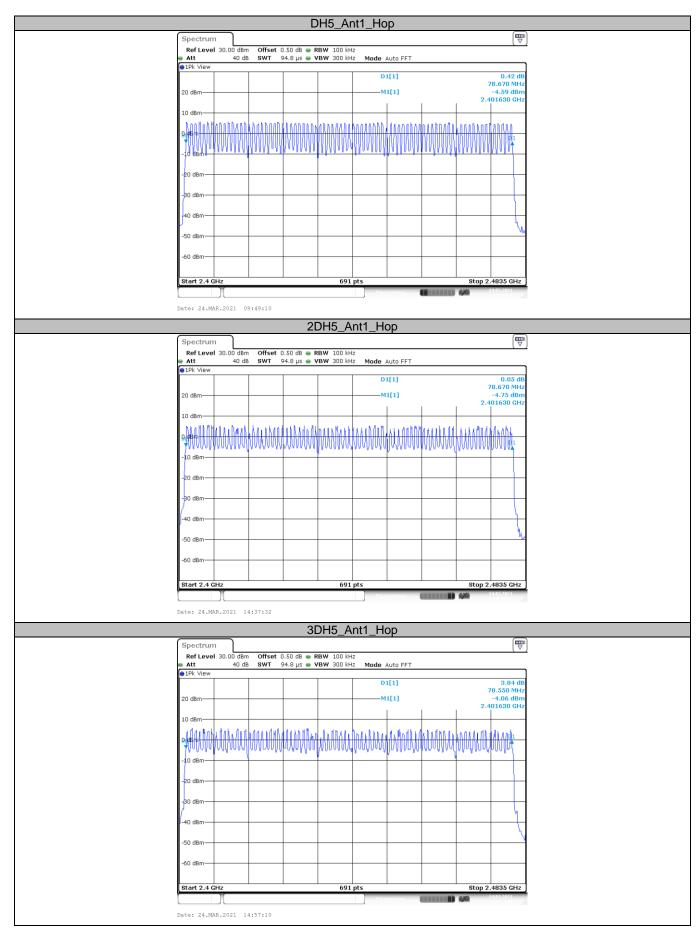



Page 77 of 89

Report No.: CTC20210202E08



3.7. Dwell Time

Limit

Section	Test Item	Limit	
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec	

Test Configuration




Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.3.








Test Result

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
	DH1	2441	0.41	131.20	31.60		
GFSK	DH3	2441	1.65	264.00	31.60	≤ 0.40	Pass
	DH5	2441	2.90	309.33	31.60		
	2DH1	2441	0.41	131.20	31.60		
π/4-DQPSK	2DH3	2441	1.65	264.00	31.60	≤ 0.40	Pass
	2DH5	2441	2.90	309.33	31.60		
	3DH1	2441	0.41	131.20	31.60		
8-DPSK	3DH3	2441	1.65	264.00	31.60	≤ 0.40	Pass
	3DH5	2441	2.90	309.33	31.60		

Note: 1DH1/2DH1/3DH1Total of Dwell= Pulse Time*(1600/2)*31.6/79 1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79 1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



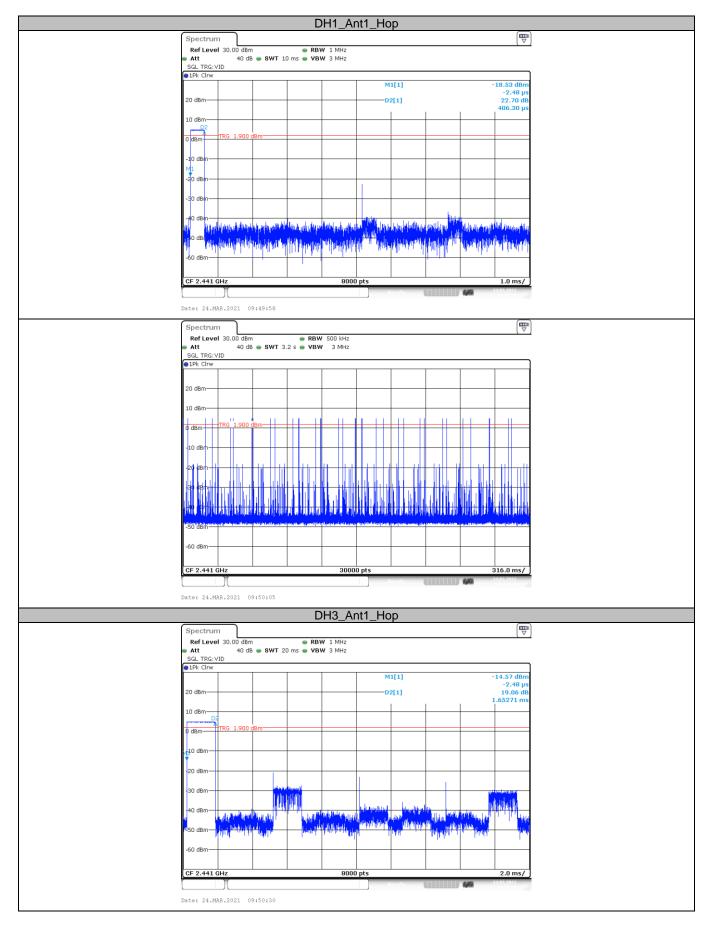






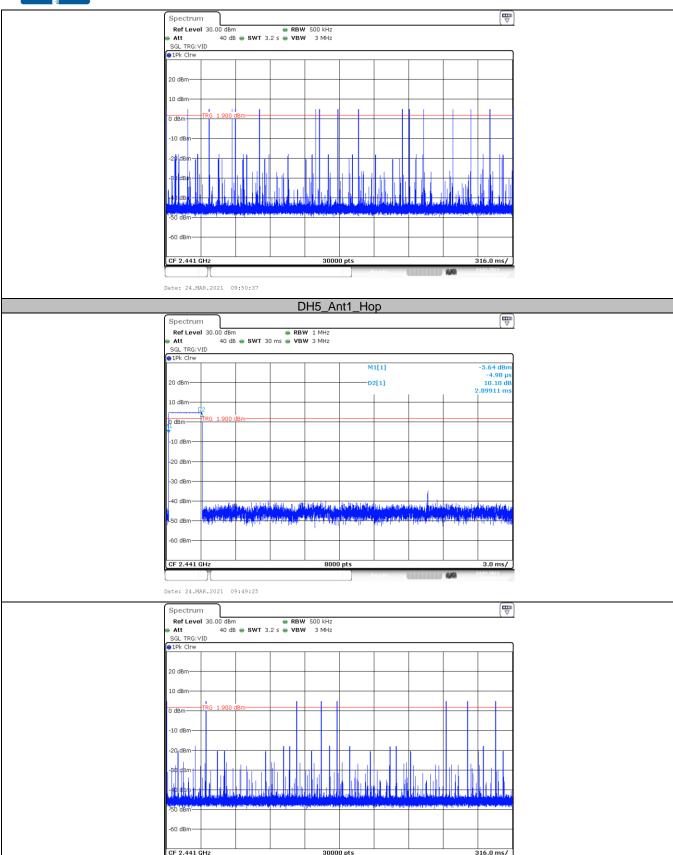


Date: 24.MAR.2021 09:49:32



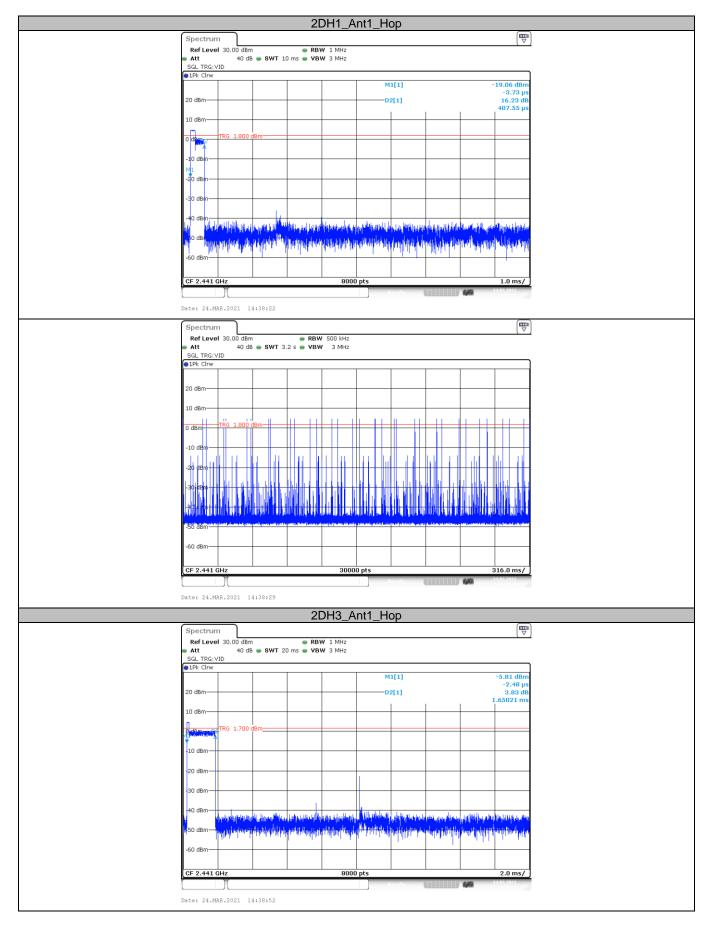



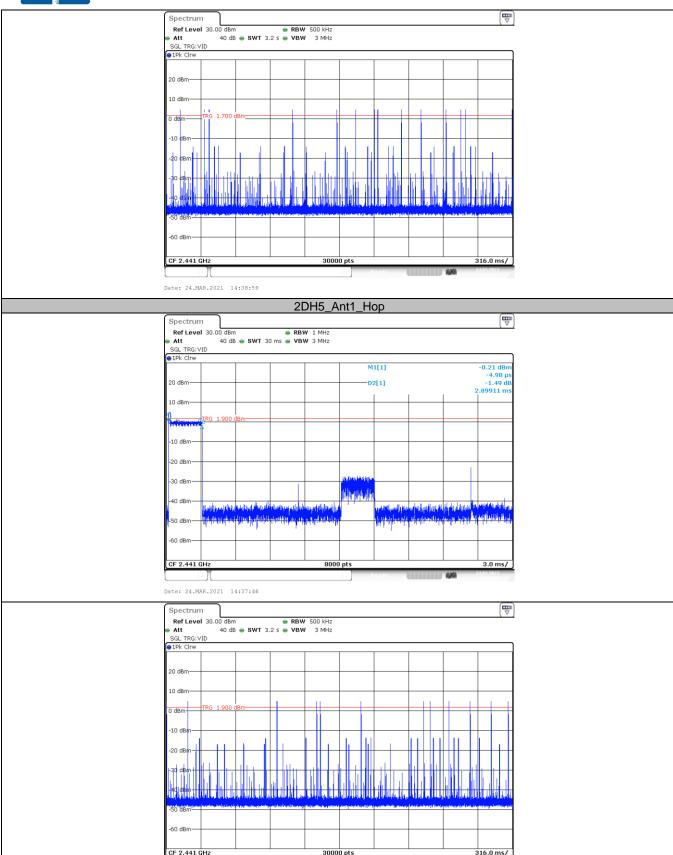


Accreditation Administration of the People's Republic of China: yz.cnca.cn


Date: 24.MAR.2021 14:37:53

中国国家认证认可监督管理委员会



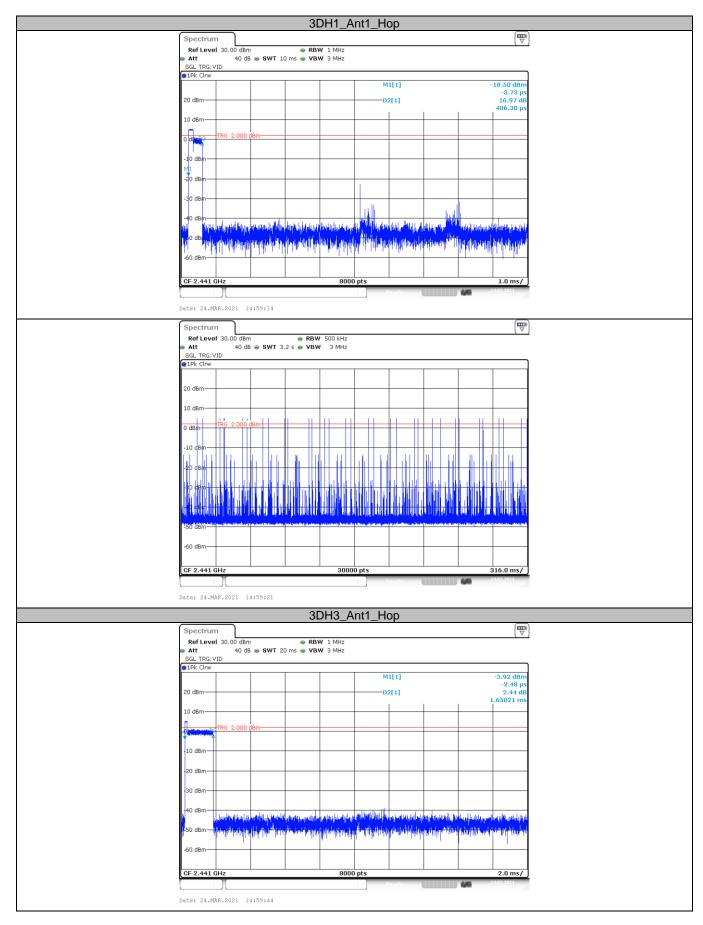



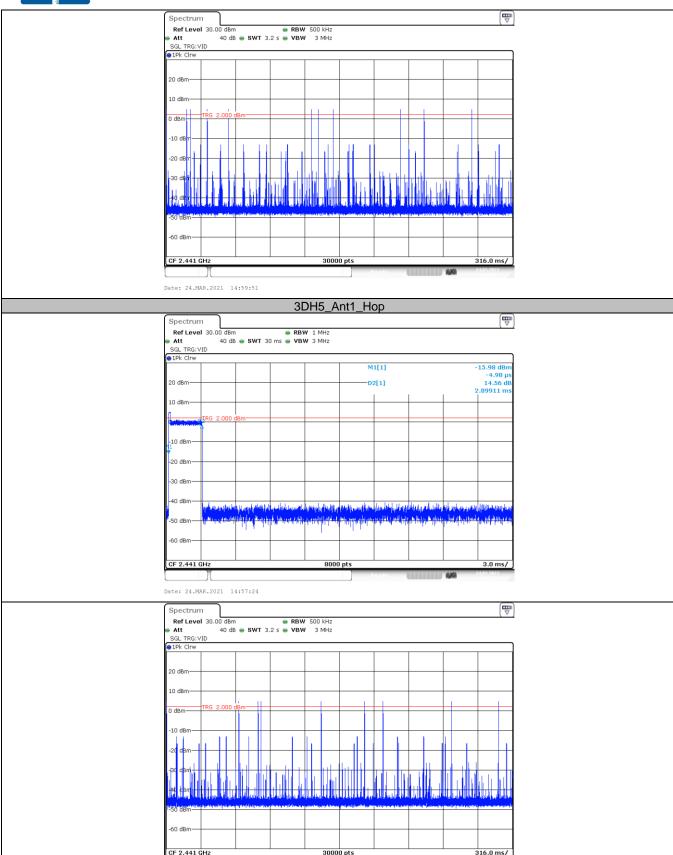

Date: 24.MAR.2021 14:57:31

Page 85 of 89

Report No.: CTC20210202E08




3.8. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)	
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5	

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. Spectrum Setting:

Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.

RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

Test Mode


Please refer to the clause 2.3.

Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
	00	5.93		
GFSK	39	5.54	≤ 30.00	Pass
	78	5.22		
	00	5.71		
π/4-DQPSK	39	5.48	≤ 21.00	Pass
	78	5.17		
	00	5.7		
8-DPSK	39	5.46	≤ 21.00	Pass
	78	5.14		


Accreditation Administration of the People's Republic of China : <u>yz.cnca.cn</u>



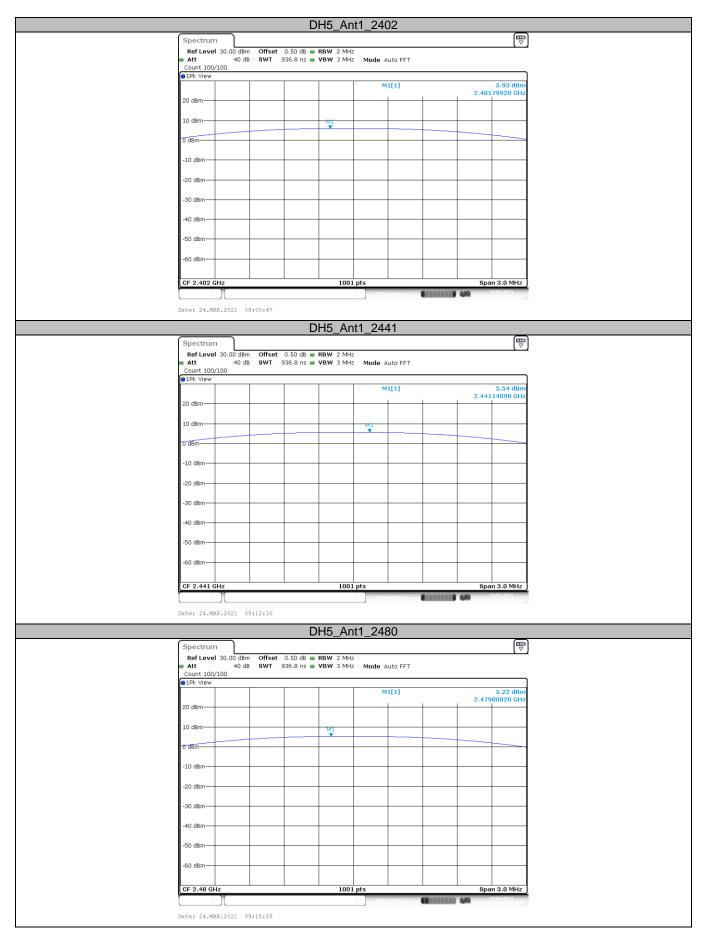


中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: <u>vz.cnca.cn</u>



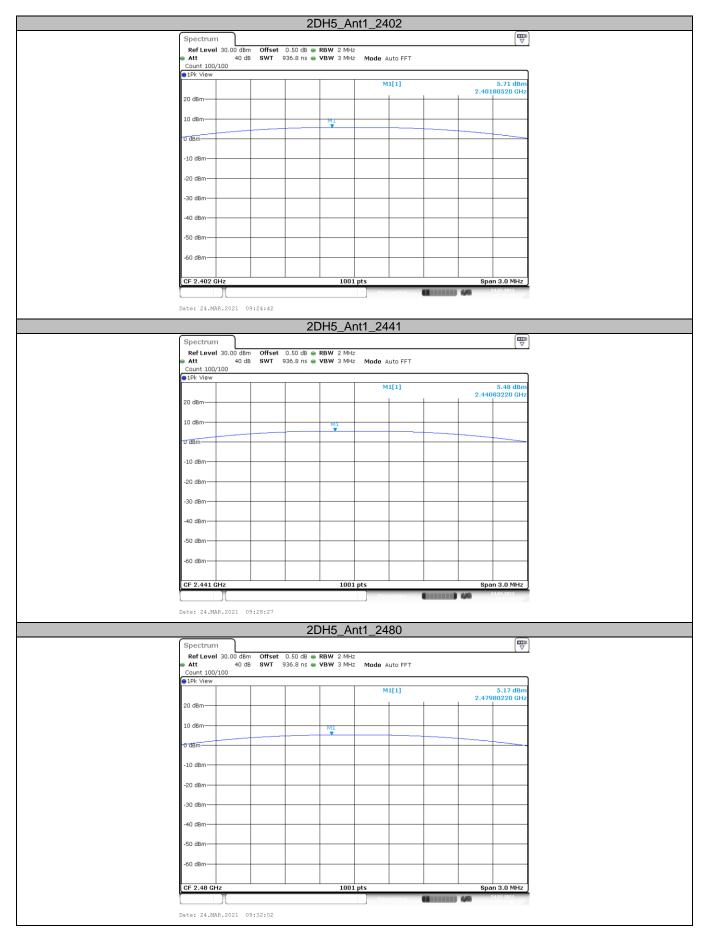

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



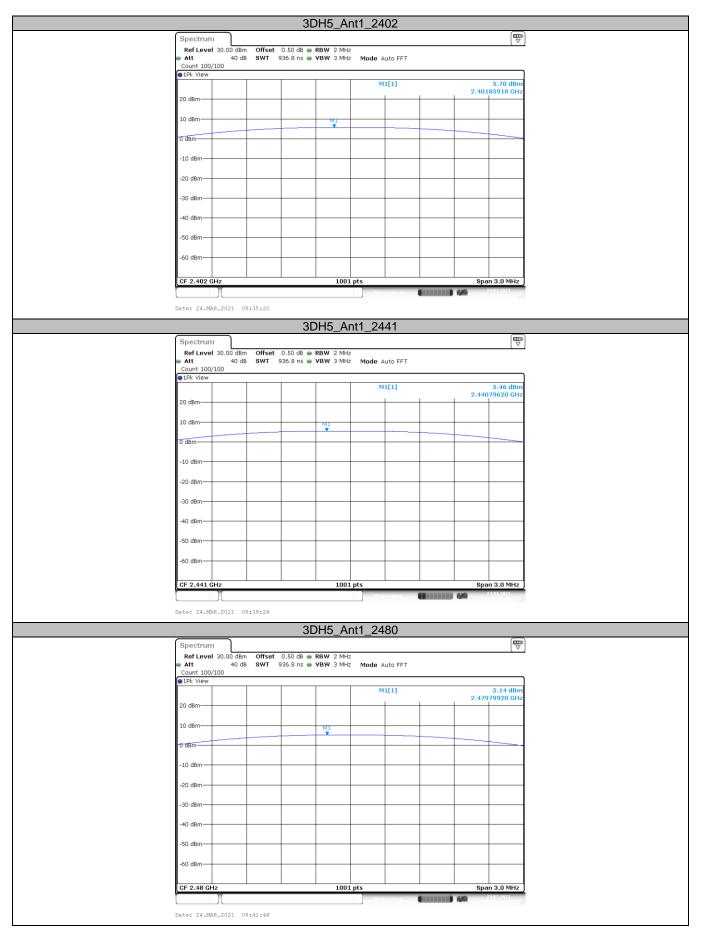

中国国家认证认可监督管理委员会 For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: <u>vz.cnca.cn</u>

Page 89 of 89 Report No.: CTC20210202E08



3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

