



FCC Part 15C Test Report

FCC ID:2APWH-D31672

Product Name:	Wireless Karaoke Microphone
Trademark:	DICOTA
Model Name :	D31672 E103
Prepared For : Address :	DICOTA APAC Limited 4/F Tern Centre Tower II, 251 Queen's Road Central, Sheung Wan, Hong Kong, 999077 China
Prepared By : Address :	Shenzhen BCTC Testing Co., Ltd. BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Jul. 13, 2018 - Jul. 23, 2018
Date of Report :	Jul. 23, 2018
Report No.:	BCTC-FY180703843E



TEST RESULT CERTIFICATION

Applicant's name : DICOTA APAC Limited

Address : 4/F Tern Centre Tower II, 251 Queen's Road Central,
Sheung Wan, Hong Kong, 999077 China

Manufacture's Name..... : Shenzhen Eshishang Technology Co.,Ltd

Address : 2F, No. 2 Bldg., Debao Industrial Park, Jihua Rd., Bantian,
Longgang, District, Shenzhen, China

Product description

Product name : Wireless Karaoke Microphone

Trademark : N/A

Model and/or type reference D31672

..... : E103

Standards : FCC Part15.247

ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Lake Xie

Lake Xie

Rita Xiao

Carson Zhang

Reviewer(Supervisor): Rita Xiao

Approved(Manager): Carson Zhang





Table of Contents

Test Report Declaration	Page
1. VERSION	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION AND TEST SETUP	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. CONDUCTED EMISSIONS	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	13
7. RADIATED EMISSIONS	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test procedure	16
7.4 Test Result	19
8. CONDUCTED EMISSION	25
8.1 Block Diagram Of Test Setup	25
8.2 Limit	25
8.3 Test procedure	25
8.4 Test Result	26
9. 20 DB BANDWIDTH	33
9.1 Block Diagram Of Test Setup	33
9.2 Limit	33
9.3 Test procedure	33
9.4 Test Result	34
10. MAXIMUM PEAK OUTPUT POWER	38
10.1 Block Diagram Of Test Setup	38
10.2 Limit	38
10.3 Test procedure	38
10.4 Test Result	39
11. HOPPING CHANNEL SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43



11.4	Test Result	44
12.	NUMBER OF HOPPING FREQUENCY	48
12.1	Block Diagram Of Test Setup	48
12.2	Limit	48
12.3	Test procedure	48
12.4	Test Result	49
13.	DWELL TIME	50
13.1	Block Diagram Of Test Setup	50
13.2	Limit	50
13.3	Test procedure	50
13.4	Test Result	51
14.	ANTENNA REQUIREMENT	55
15.	EUT PHOTOGRAPHS	56
16.	EUT TEST SETUP PHOTOGRAPHS	57

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
BCTC-FY180703843E	Jul. 23, 2018	Original	Valid



2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
2	Conducted Spurious emissions	15.247(d)	PASS
3	Band edge	15.247(d) 15.205(a)	PASS
4	Conducted Emission	15.207	PASS
5	20dB Bandwidth	15.247(a)	PASS
6	Maximum Peak Output Power	15.247(b)	PASS
7	Frequency Separation	15.247(a)	PASS
8	Number of Hopping Frequency	15.247(a)	PASS
9	Dwell time	15.247(a)	PASS
10	Antenna Requirement	15.203	PASS

Note: N/A is an abbreviation for Not Applicable and means this test item is not applicable for this device according to the technology characteristic of device.



3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

RF frequency	1×10^{-7}
RF power, conducted	1.38dB
Conducted spurious emission (30MHz-1GHz)	1.28dB
Conducted spurious emission (1GHz-18GHz)	1.576dB
Radiated Spurious emission (30MHz-1GHz)	4.3dB
Radiated Spurious emission (1GHz-18GHz)	4.5dB
Temperature	0.59°C
Humidity	5.3%


4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	D31672 E103
Model Description:	Only for different Model name.
Bluetooth Version:	Bluetooth 4.2+EDR
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth : -0.817dBm
Type of Modulation:	Bluetooth : GFSK, Pi/4 DQPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 1dBi
Ratings:	Battery DC 3.7V 2200mAh DC 5.0V USB charging from adapter
Adapter:	N/A

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

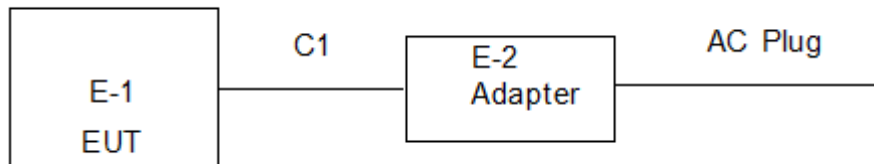

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	Adaptor	N/A	XHY050150 UCC	N/A	1.0	5V,1.0A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during

the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

The EUT is Continue Transmitting.

The software is installed in operation system, named "RFTestTool.apk", Version 1.0.

Test Mode	Test mode	Low channel	Middle channel	High channel
1	Transmitting(GFSK)	2402MHz	2441MHz	2480MHz
2	Transmitting(Pi/4DQPSK)	2402MHz	2441MHz	2480MHz
3	Link mode (conducted emission and Radiated emission)			

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Radiation Test						
Item	Equipment	Manufacturer	Type No.	Serial No.	Cal.Date	Cal.Due date
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	Aug. 27, 2017	Aug.26, 2018
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	Aug. 27, 2017	Aug.26, 2018
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	Aug. 27, 2017	Aug.26, 2018
4	Horn Antenna (1GHz-18GHz)	SCHWARZB ECK	BBHA9120D	1201	Sep.03, 2017	Sep.02,2018
5	Horn Antenna (14GHz-40GHz)	SCHWARZB ECK	BBHA 9170	9170-181	Sep.03, 2017	Sep.02,2018
6	Amplifier (9KHz-6GHz)	SCHWARZB ECK	BBV9744	9744-0037	Aug. 27, 2017	Aug.26, 2018
7	Amplifier (1GHz-18GHz)	SCHWARZB ECK	BBV9718	9718-309	Aug. 27, 2017	Aug.26, 2018
8	Amplifier (18GHz-40GHz)	SCHWARZB ECK	BBV 9721	9721-205	Aug. 27, 2017	Aug.26, 2018
9	Loop Antenna (9KHz-30MHz)	SCHWARZB ECK	FMZB1519B	00014	Sep.03, 2017	Sep.02,2018
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	Aug. 27, 2017	Aug.26, 2018
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	Aug. 27, 2017	Aug.26, 2018
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Aug. 27, 2017	Aug.26, 2018
13	Power Metter	ANRITSU	ML2487A	6K00001568	Aug. 27, 2017	Aug.26, 2018
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	Aug. 27, 2017	Aug.26, 2018
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	Aug. 27, 2017	Aug.26, 2018
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Aug. 27, 2017	Aug.26, 2018
17	D.C. Power Supply	LongWei	PS-305D	010964729	Aug. 27, 2017	Aug.26, 2018



Conduction Test						
Item	Equipment	Manufacturer	Type No.	Serial No.	Cal.Date	Cal.Due date
1	Test Receiver	R&S	ESCI	1166.5950K0 3-101165-ha	Aug. 27, 2017	Aug.26, 2018
2	LISN	SCHWARZB ECK	NSLK8127	8127739	Aug. 27, 2017	Aug.26, 2018
3	LISN	R&S	NSLK8126	8126487	Aug. 27, 2017	Aug.26, 2018
4	RF cables	R&S	R204	R20X	Sep.03, 2017	Sep.02,2018
5	Attenuator	R&S	ESH3-Z2	143206	Sep.03, 2017	Sep.02,2018

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

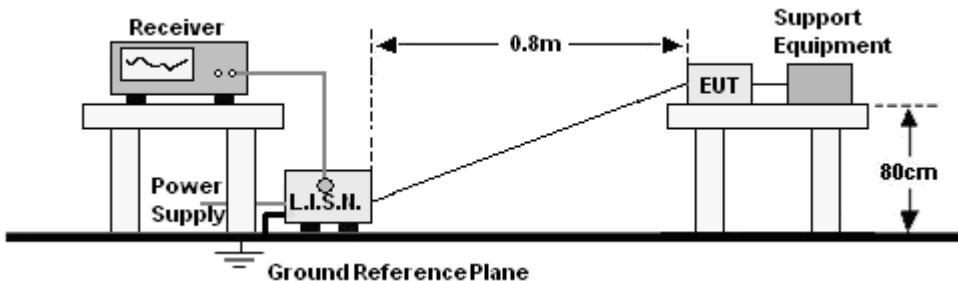

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.



6.4 Test Result

Temperature :	26°C	Relative Humidity :	55%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

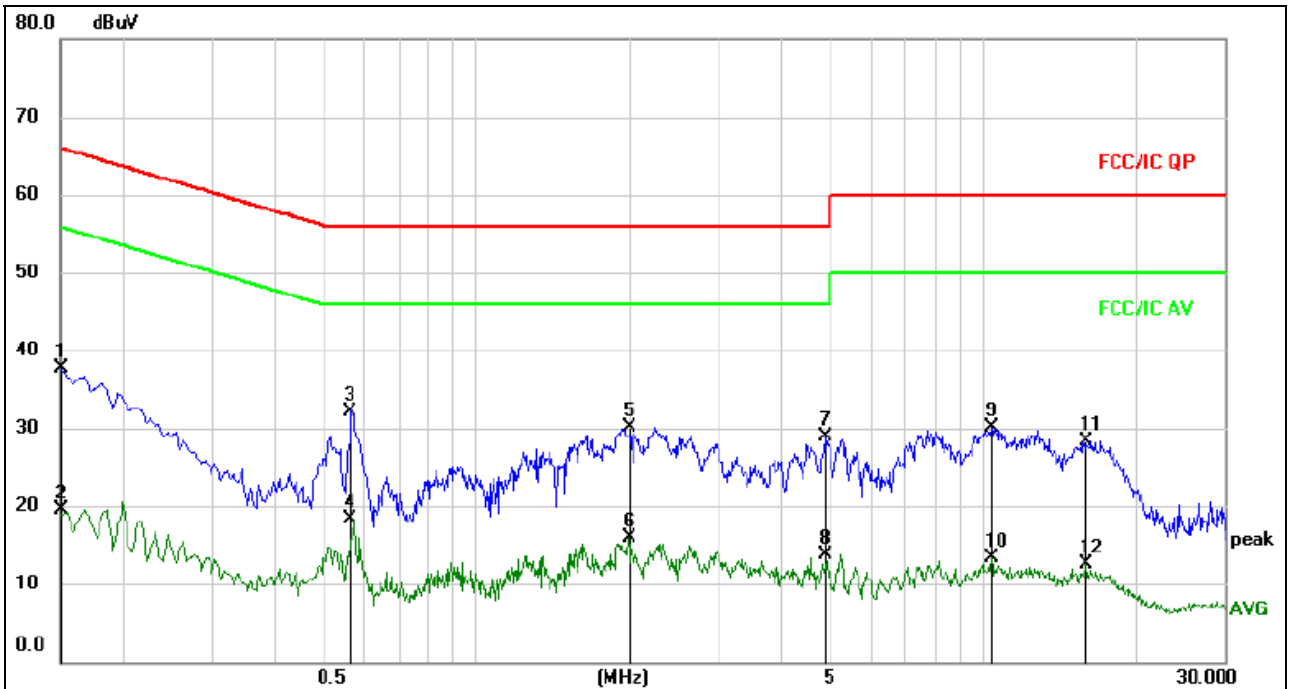


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	27.99	9.77	37.76	66.00	-28.24	QP	
2		0.1500	9.75	9.77	19.52	56.00	-36.48	AVG	
3	*	0.5639	22.15	10.05	32.20	56.00	-23.80	QP	
4		0.5639	8.17	10.05	18.22	46.00	-27.78	AVG	
5		1.9815	20.37	9.79	30.16	56.00	-25.84	QP	
6		1.9815	6.02	9.79	15.81	46.00	-30.19	AVG	
7		4.8615	18.92	9.89	28.81	56.00	-27.19	QP	
8		4.8615	3.74	9.89	13.63	46.00	-32.37	AVG	
9		10.3740	20.18	9.90	30.08	60.00	-29.92	QP	
10		10.3740	3.33	9.90	13.23	50.00	-36.77	AVG	
11		16.0350	18.36	10.02	28.38	60.00	-31.62	QP	
12		16.0350	2.56	10.02	12.58	50.00	-37.42	AVG	



Temperature :	26°C	Relative Humidity :	55%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 3

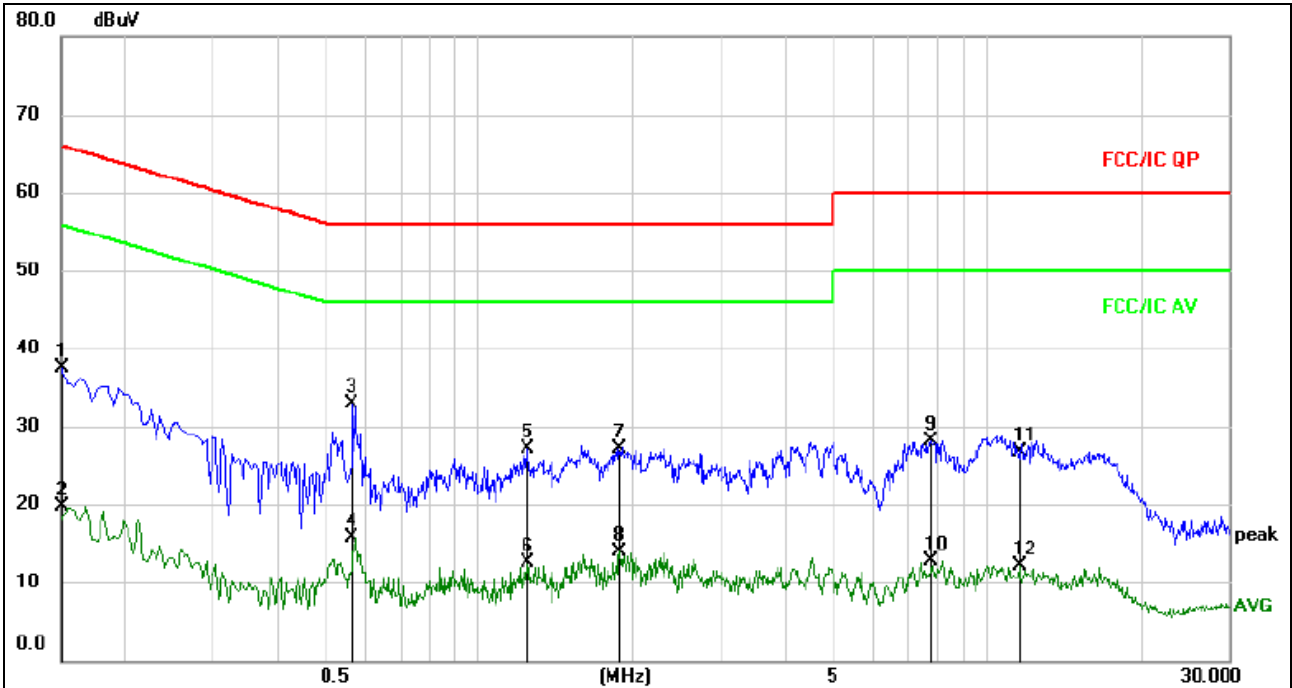

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	27.70	9.77	37.47	66.00	-28.53	QP	
2		0.1500	9.92	9.77	19.69	56.00	-36.31	AVG	
3	*	0.5639	22.92	10.05	32.97	56.00	-23.03	QP	
4		0.5639	5.58	10.05	15.63	46.00	-30.37	AVG	
5		1.2480	17.37	9.77	27.14	56.00	-28.86	QP	
6		1.2480	2.76	9.77	12.53	46.00	-33.47	AVG	
7		1.8915	17.26	9.79	27.05	56.00	-28.95	QP	
8		1.8915	4.02	9.79	13.81	46.00	-32.19	AVG	
9		7.7730	18.16	9.91	28.07	60.00	-31.93	QP	
10		7.7730	2.84	9.91	12.75	50.00	-37.25	AVG	
11		11.5665	16.80	9.92	26.72	60.00	-33.28	QP	
12		11.5665	2.28	9.92	12.20	50.00	-37.80	AVG	


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

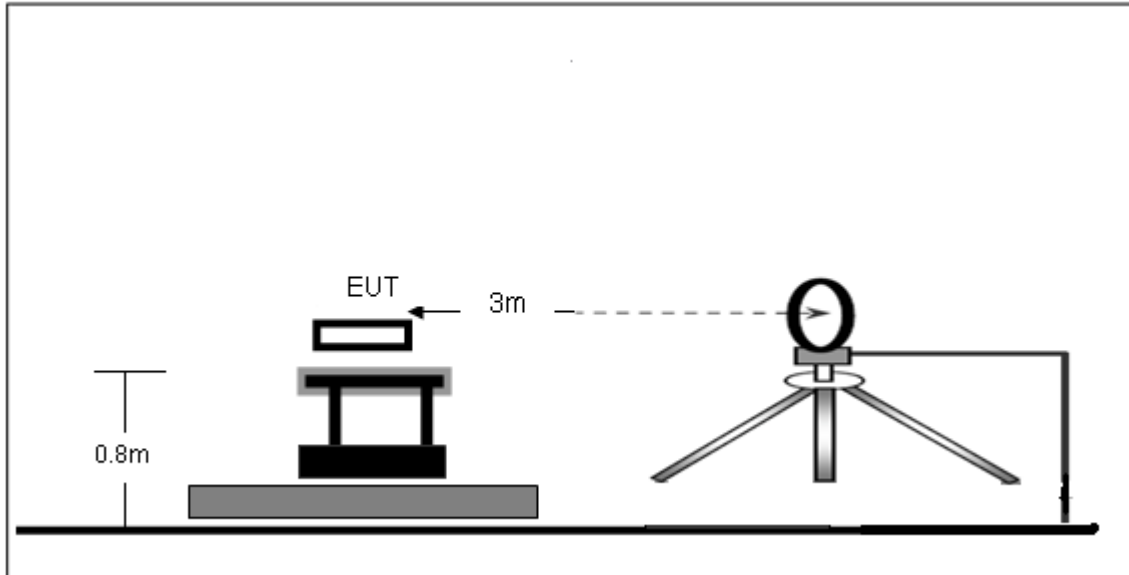

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

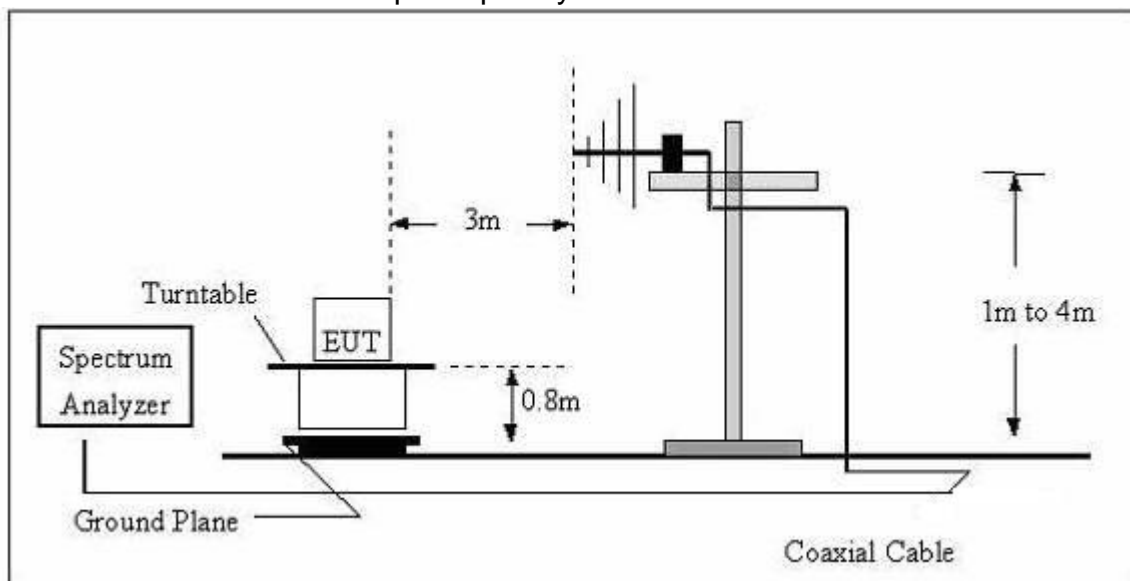

(C) Radiated Emission Test-Up Frequency Above 1GHz

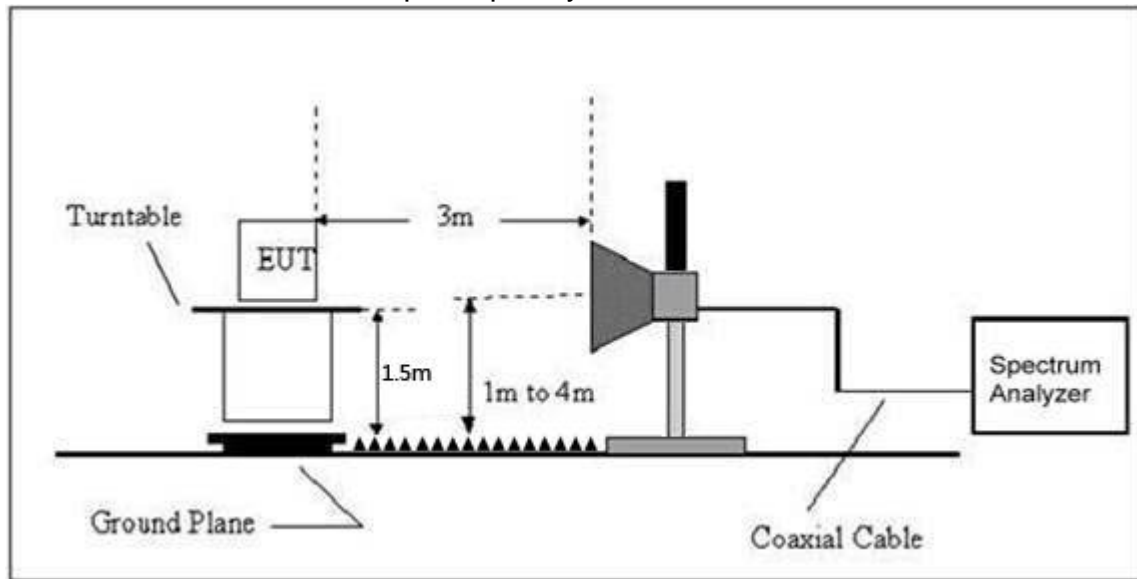

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average



Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.



7.4 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization :	Horizontal

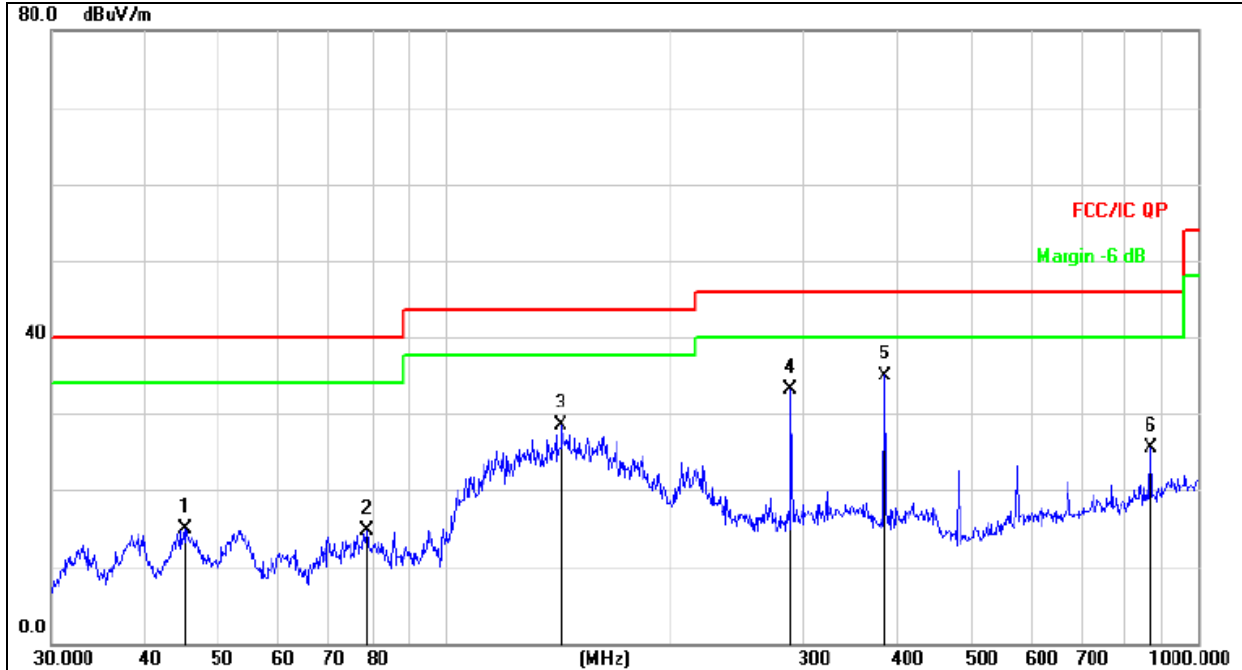


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.0583	28.93	-14.04	14.89	40.00	-25.11	QP
2		78.6888	33.98	-19.36	14.62	40.00	-25.38	QP
3		142.8243	47.75	-19.32	28.43	43.50	-15.07	QP
4		287.9904	47.30	-14.13	33.17	46.00	-12.83	QP
5	*	383.9318	47.11	-12.11	35.00	46.00	-11.00	QP
6		866.0879	28.94	-3.41	25.53	46.00	-20.47	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 3	Polarization :	Vertical

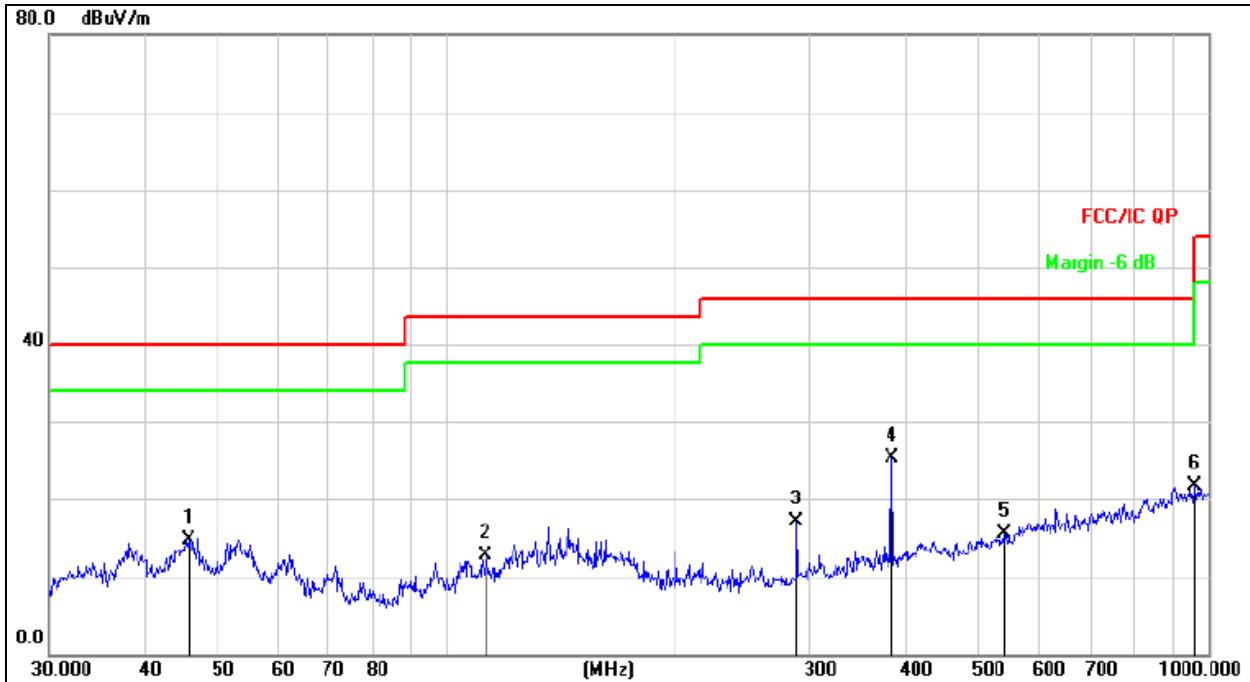

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.6948	28.81	-14.03	14.78	40.00	-25.22	QP
2		112.5244	28.80	-16.17	12.63	43.50	-30.87	QP
3		287.9904	31.20	-14.13	17.07	46.00	-28.93	QP
4	*	383.9318	37.44	-12.11	25.33	46.00	-20.67	QP
5		541.3725	24.05	-8.61	15.44	46.00	-30.56	QP
6		962.1623	23.59	-1.96	21.63	54.00	-32.37	QP



Between 1-25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
GFSK Low Channel:2402MHz									
V	4804.00	64.48	39.55	7.57	25.45	57.95	74.00	-16.05	PK
V	4804.00	43.41	39.55	7.57	25.45	36.88	54.00	-17.12	AV
V	7206.00	64.96	38.33	7.35	24.78	58.76	74.00	-15.24	PK
V	7206.00	43.74	38.33	7.35	24.78	37.54	54.00	-16.46	AV
V	15450.00	63.89	35.23	6.42	26.47	61.55	74.00	-12.45	PK
H	4804.00	61.16	35.23	6.42	26.47	58.82	74.00	-15.18	PK
H	4804.00	43.38	39.55	7.57	25.45	36.85	54.00	-17.15	AV
H	7206.00	60.98	39.55	7.57	25.45	54.45	74.00	-19.55	PK
H	7206.00	43.15	38.33	7.35	24.78	36.95	54.00	-17.05	AV
H	15450.00	61.68	35.23	6.42	26.47	59.34	74.00	-14.66	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
GFSK Middle Channel:2441MHz									
V	4882.00	63.96	38.89	7.57	25.45	58.09	74.00	-15.91	PK
V	4882.00	43.53	38.89	7.57	25.45	37.66	54.00	-16.34	AV
V	7323.00	61.87	38.78	7.35	24.78	55.22	74.00	-18.78	PK
V	7323.00	43.77	38.78	7.35	24.78	37.12	54.00	-16.88	AV
V	15450.00	64.61	38.89	7.57	25.45	58.74	74.00	-15.26	PK
H	4882.00	62.58	35.89	6.42	26.47	59.58	74.00	-14.42	PK
H	4882.00	43.05	38.89	7.57	25.45	37.18	54.00	-16.82	AV
H	7323.00	63.58	38.89	7.57	25.45	57.71	74.00	-16.29	PK
H	7323.00	43.29	38.78	7.35	24.78	36.64	54.00	-17.36	AV
H	15450.00	60.41	38.89	7.57	25.45	54.54	74.00	-19.46	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
GFSK High Channel:2480MHz									
V	4960.00	60.16	38.75	7.46	25.45	54.32	74.00	-19.68	PK
V	4960.00	43.58	38.75	7.46	25.45	37.74	54.00	-16.26	AV
V	7440.00	60.64	38.65	7.22	24.78	53.99	74.00	-20.01	PK
V	7440.00	43.88	38.65	7.22	24.78	37.23	54.00	-16.77	AV
V	15450.00	61.23	38.89	7.57	25.45	55.36	74.00	-18.64	PK
H	4960.00	61.17	35.58	6.35	26.47	58.41	74.00	-15.59	PK
H	4960.00	43.66	38.75	7.46	25.45	37.82	54.00	-16.18	AV
H	7440.00	62.78	38.75	7.46	25.45	56.94	74.00	-17.06	PK
H	7440.00	43.82	38.65	7.22	24.78	37.17	54.00	-16.83	AV
H	15450.00	60.29	38.89	7.57	25.45	54.42	74.00	-19.58	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Between 1-25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Pi/4 DQPSK Low Channel:2402MHz									
V	4804.00	62.06	39.55	7.57	25.45	55.53	74.00	-18.47	PK
V	4804.00	43.13	39.55	7.57	25.45	36.60	54.00	-17.40	AV
V	7206.00	61.31	38.33	7.35	24.78	55.11	74.00	-18.89	PK
V	7206.00	43.91	38.33	7.35	24.78	37.71	54.00	-16.29	AV
V	15450.00	60.00	35.23	6.42	26.47	57.66	74.00	-16.34	PK
H	4804.00	63.72	35.23	6.42	26.47	61.38	74.00	-12.62	PK
H	4804.00	43.86	39.55	7.57	25.45	37.33	54.00	-16.67	AV
H	7206.00	64.52	39.55	7.57	25.45	57.99	74.00	-16.01	PK
H	7206.00	43.20	38.33	7.35	24.78	37.00	54.00	-17.00	AV
H	15450.00	64.72	35.23	6.42	26.47	62.38	74.00	-11.62	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Pi/4 DQPSK Middle Channel:2441MHz									
V	4882.00	63.84	38.89	7.57	25.45	57.97	74.00	-16.03	PK
V	4882.00	43.25	38.89	7.57	25.45	37.38	54.00	-16.62	AV
V	7323.00	63.91	38.78	7.35	24.78	57.26	74.00	-16.74	PK
V	7323.00	43.87	38.78	7.35	24.78	37.22	54.00	-16.78	AV
V	15450.00	62.39	38.89	7.57	25.45	56.52	74.00	-17.48	PK
H	4882.00	64.95	35.89	6.42	26.47	61.95	74.00	-12.05	PK
H	4882.00	43.67	38.89	7.57	25.45	37.80	54.00	-16.20	AV
H	7323.00	63.33	38.89	7.57	25.45	57.46	74.00	-16.54	PK
H	7323.00	43.41	38.78	7.35	24.78	36.76	54.00	-17.24	AV
H	15450.00	64.40	38.89	7.57	25.45	58.53	74.00	-15.47	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Pi/4 DQPSK High Channel:2480MHz									
V	4960.00	62.74	38.75	7.46	25.45	56.90	74.00	-17.10	PK
V	4960.00	43.02	38.75	7.46	25.45	37.18	54.00	-16.82	AV
V	7440.00	62.15	38.65	7.22	24.78	55.50	74.00	-18.50	PK
V	7440.00	43.52	38.65	7.22	24.78	36.87	54.00	-17.13	AV
V	15450.00	64.57	38.89	7.57	25.45	58.70	74.00	-15.30	PK
H	4960.00	63.77	35.58	6.35	26.47	61.01	74.00	-12.99	PK
H	4960.00	43.18	38.75	7.46	25.45	37.34	54.00	-16.66	AV
H	7440.00	61.94	38.75	7.46	25.45	56.10	74.00	-17.90	PK
H	7440.00	43.58	38.65	7.22	24.78	36.93	54.00	-17.07	AV
H	15450.00	60.08	38.89	7.57	25.45	54.21	74.00	-19.79	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



Radiated Band edge Emission

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 1	Polarization :	

Radiated Bandedge Emission

Modulation	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result	
							PK	PK	AV		
Low Channel 2402MHz											
GFSK	H	2390.00	58.18	38.06	7.42	20.15	47.69	74.00	54.00	PASS	
	H	2400.00	56.16	38.06	7.42	20.15	45.67	74.00	54.00	PASS	
	V	2390.00	59.38	38.06	7.42	20.15	48.89	74.00	54.00	PASS	
	V	2400.00	58.61	38.06	7.42	20.15	48.12	74.00	54.00	PASS	
	High Channel 2480MHz										
	H	2483.50	56.93	38.17	7.45	20.54	46.75	74.00	54.00	PASS	
	H	2485.50	57.67	38.17	7.45	20.54	47.49	74.00	54.00	PASS	
	V	2483.50	56.62	38.2	7.45	20.54	46.41	74.00	54.00	PASS	
V	2485.50	57.77	38.2	7.45	20.54	47.56	74.00	54.00	PASS		

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Radiated Bandedge Emission

Modulation	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result	
							PK	PK	AV		
Low Channel 2402MHz											
Pi/4 DQPSK	H	2390.00	60.13	38.06	7.42	20.15	49.64	74.00	54.00	PASS	
	H	2400.00	56.53	38.06	7.42	20.15	46.04	74.00	54.00	PASS	
	V	2390.00	58.94	38.06	7.42	20.15	48.45	74.00	54.00	PASS	
	V	2400.00	58.81	38.06	7.42	20.15	48.32	74.00	54.00	PASS	
	High Channel 2480MHz										
	H	2483.50	58.14	38.17	7.45	20.54	47.96	74.00	54.00	PASS	
	H	2485.50	59.58	38.17	7.45	20.54	49.40	74.00	54.00	PASS	
	V	2483.50	57.54	38.2	7.45	20.54	47.33	74.00	54.00	PASS	
V	2485.50	59.47	38.2	7.45	20.54	49.26	74.00	54.00	PASS		


Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Note: (1) All other emissions more than 20dB below the limit.

8. CONDUCTED EMISSION

8.1 Block Diagram Of Test Setup

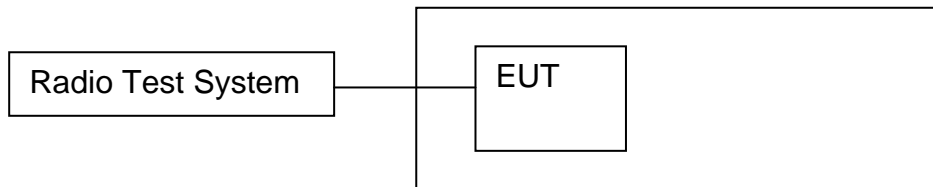

8.2 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Blow 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:



RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold





8.4 Test Result

30MHz – 25GHz GFSK Low Channel

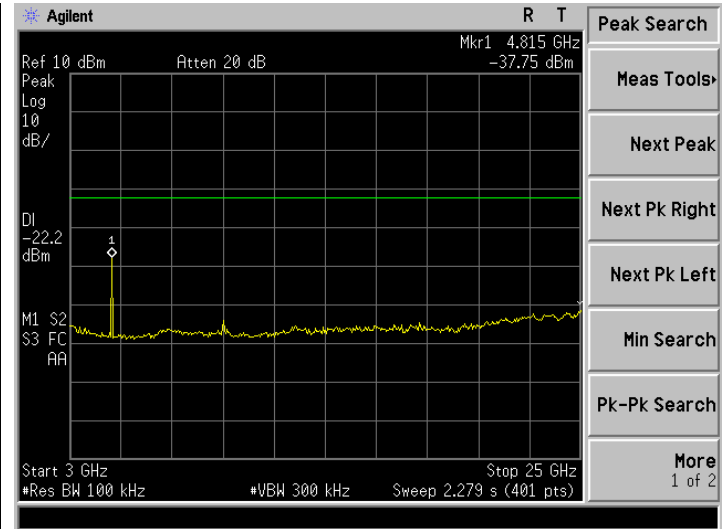
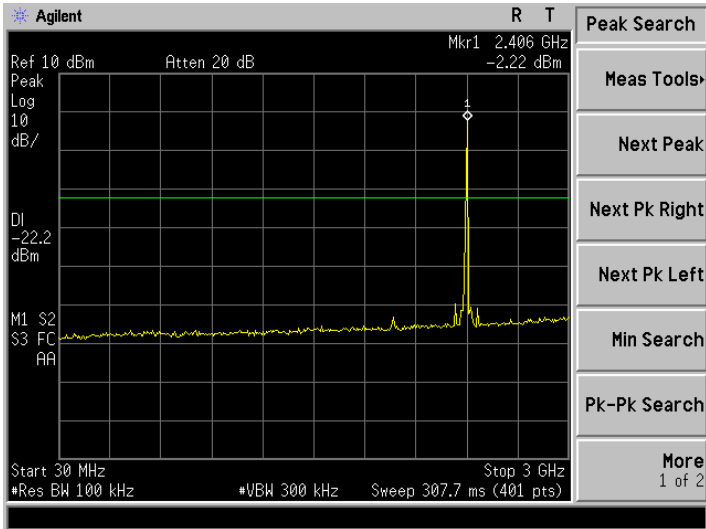


GFSK Middle Channel

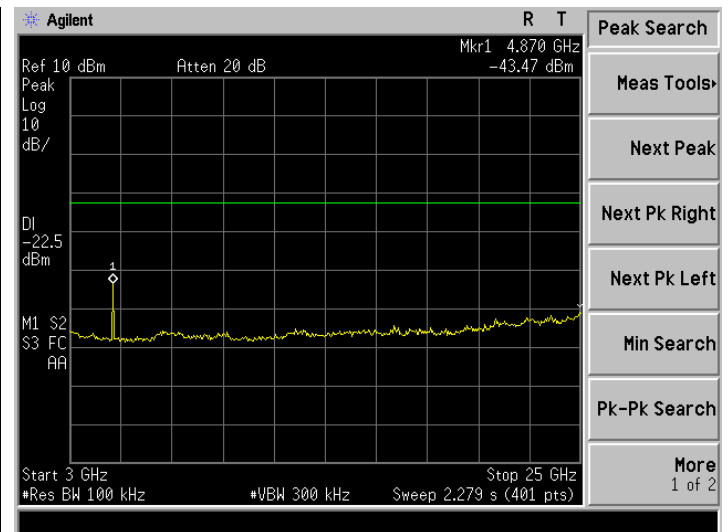
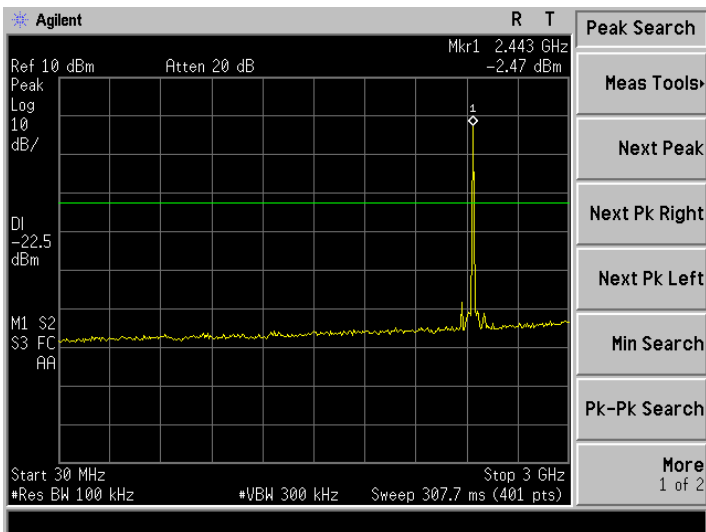




GFSK High Channel

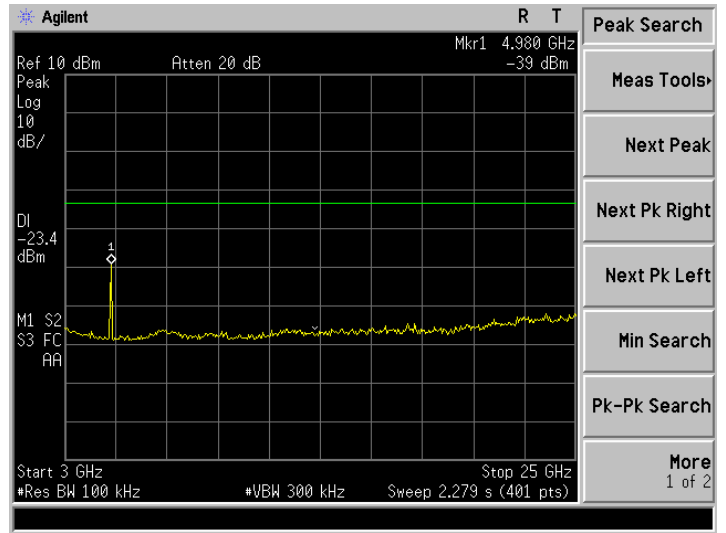
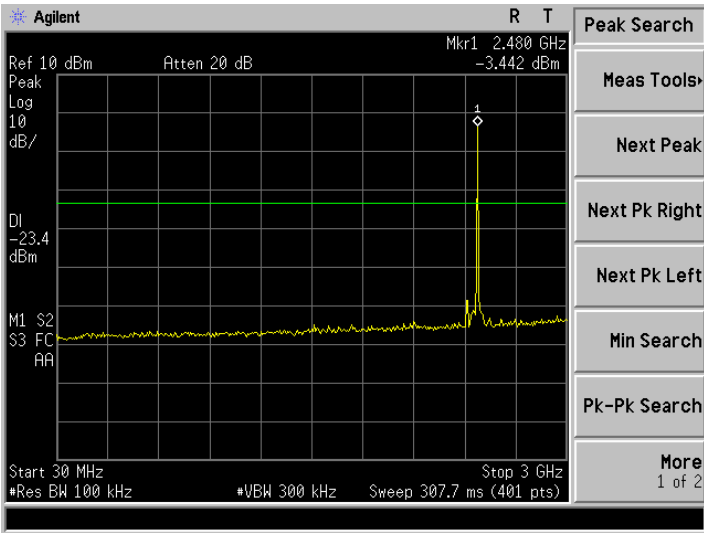


Pi/4 DQPSK Low Channel

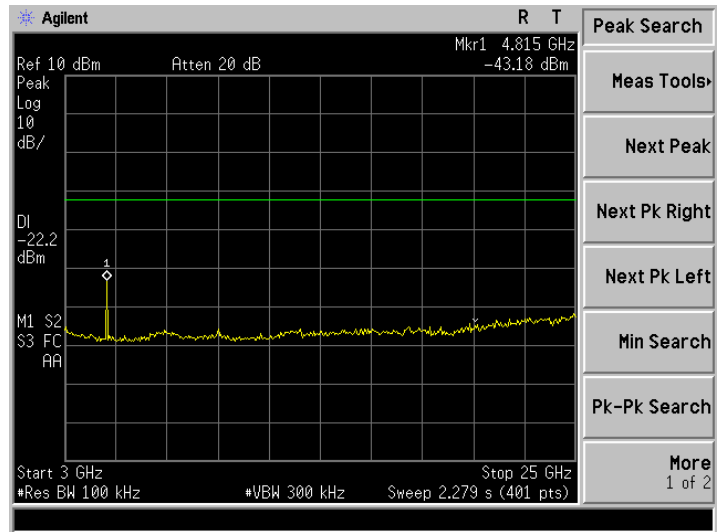
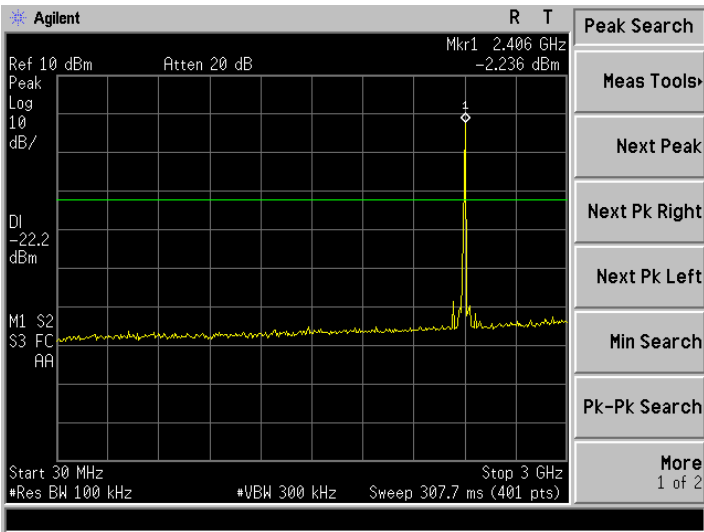




Pi/4 DQPSK Middle Channel

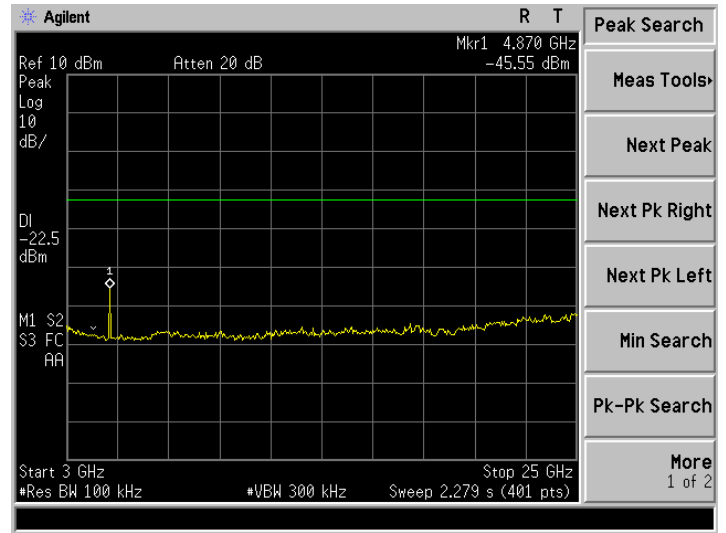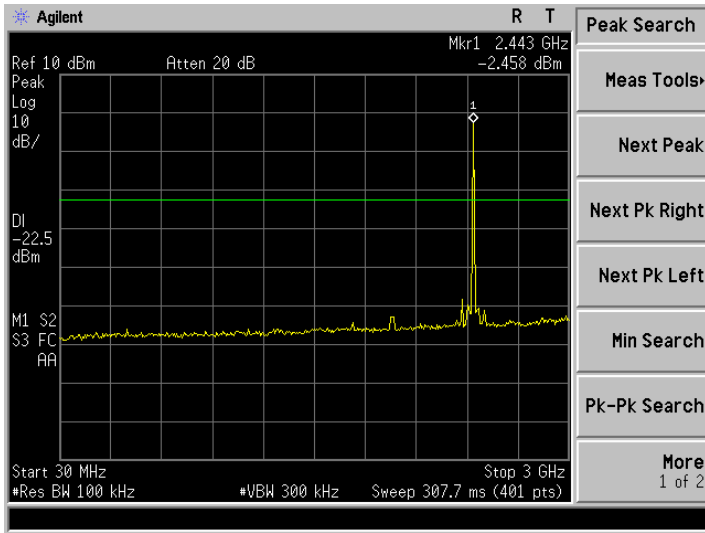


Pi/4 DQPSK High Channel

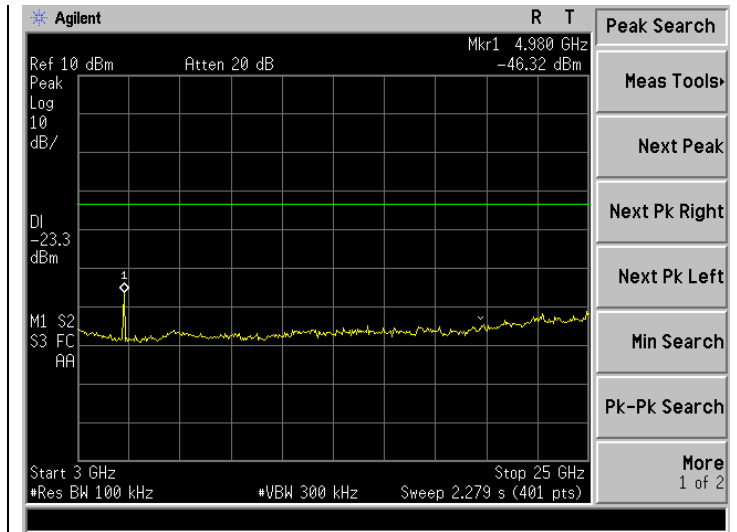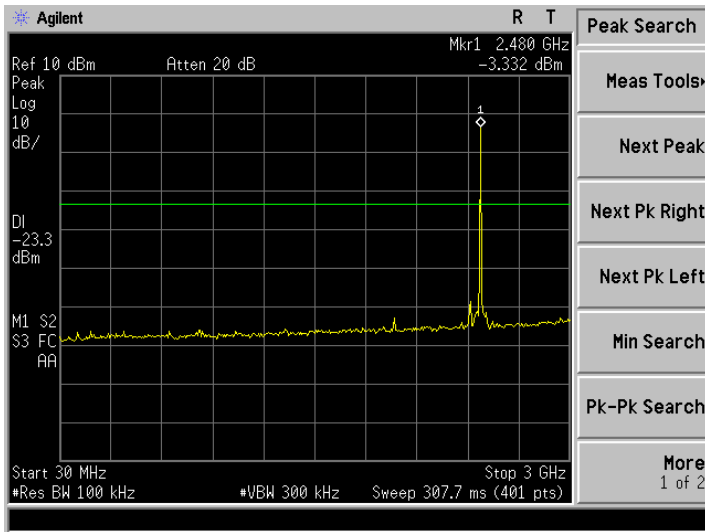




GFSK Transmitting Band edge-left side

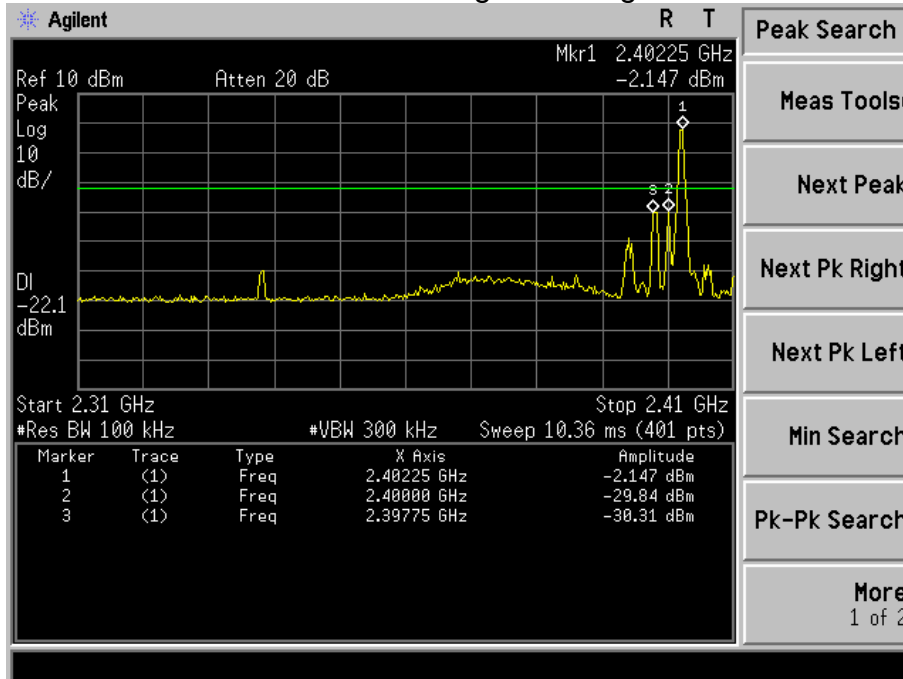


GFSK Hopping Band edge-left side

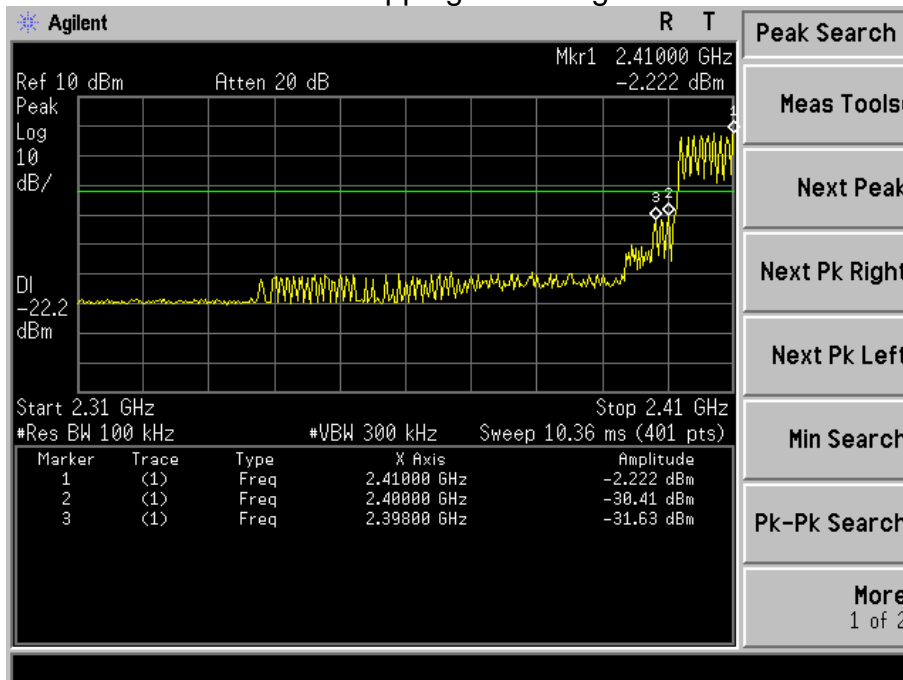




GFSK Transmitting Band edge-right side

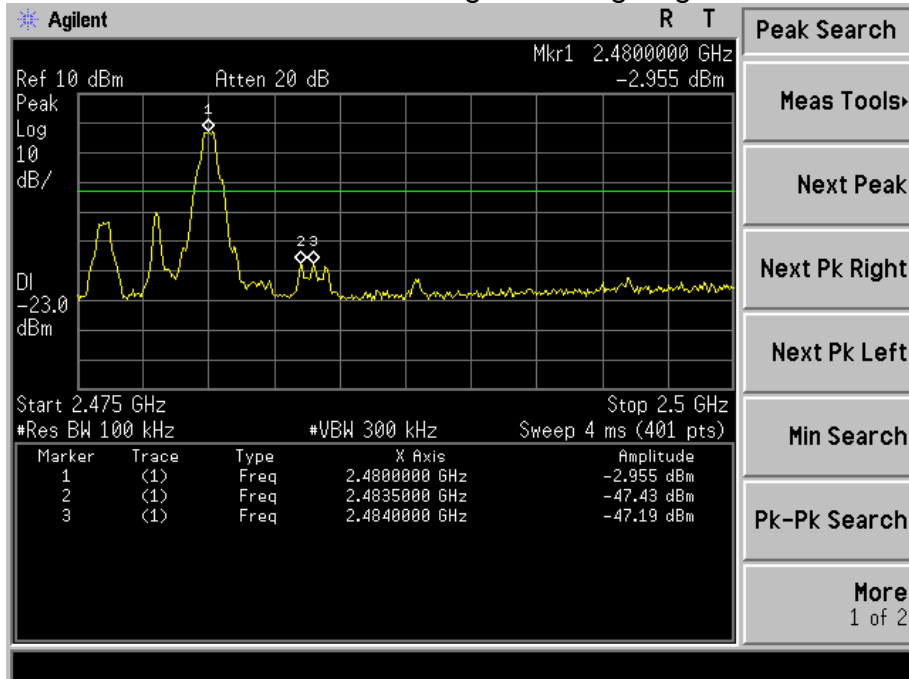


GFSK Hopping Band edge-right side

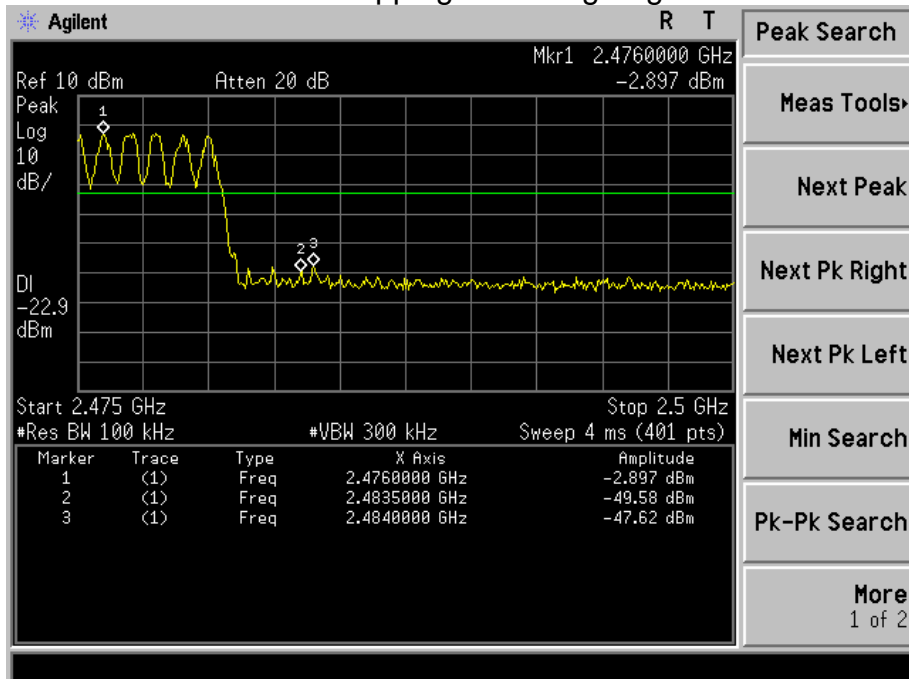




Pi/4 DQPSK Transmitting Band edge-left side

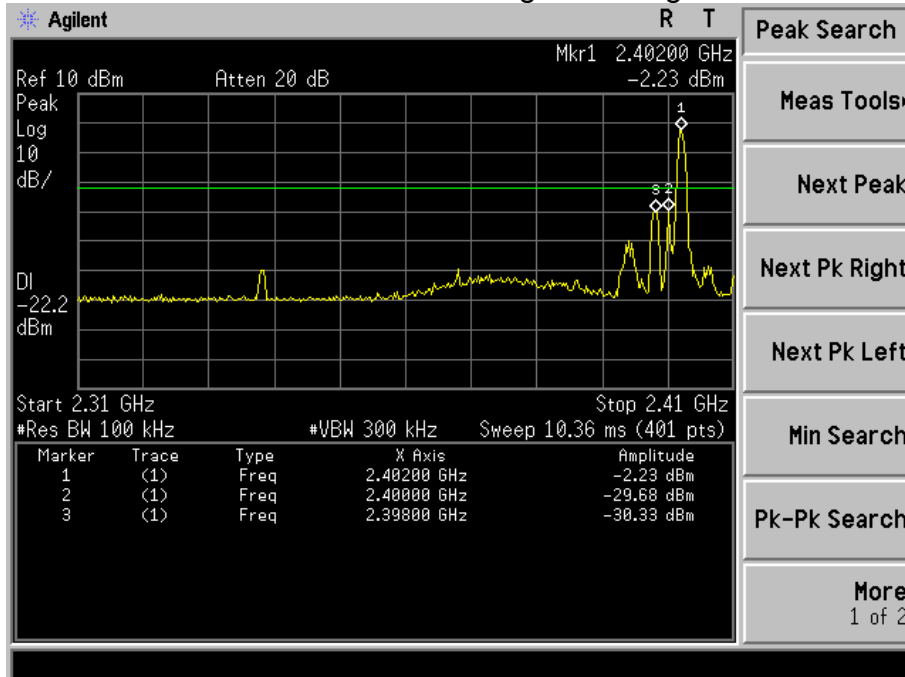


Pi/4 DQPSK Hopping Band edge-left side

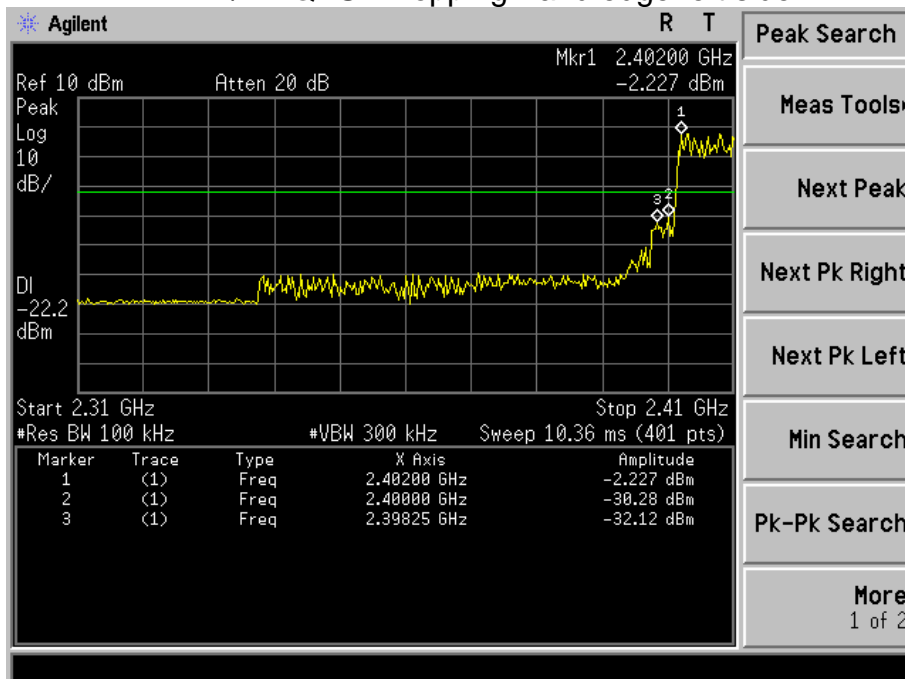




Pi/4 DQPSK Transmitting Band edge-right side

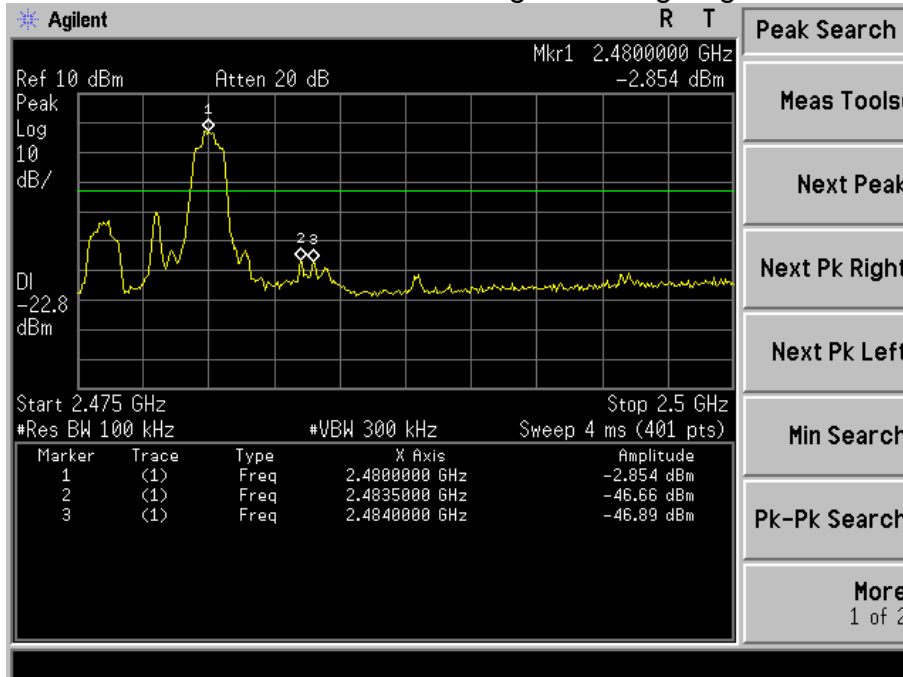


Pi/4 DQPSK Hopping Band edge-right side

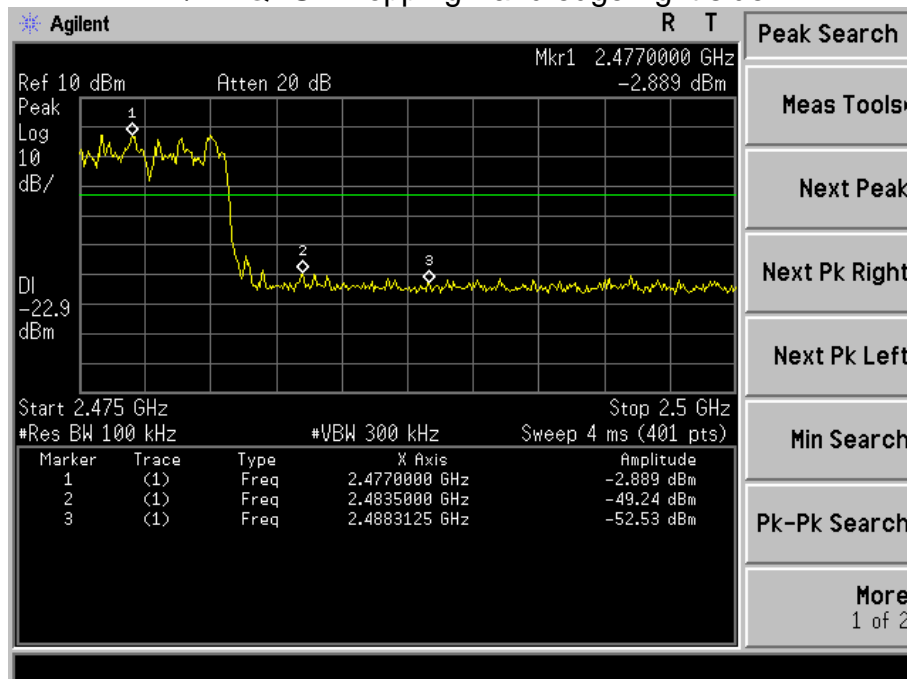

9. 20 DB BANDWIDTH

9.1 Block Diagram Of Test Setup

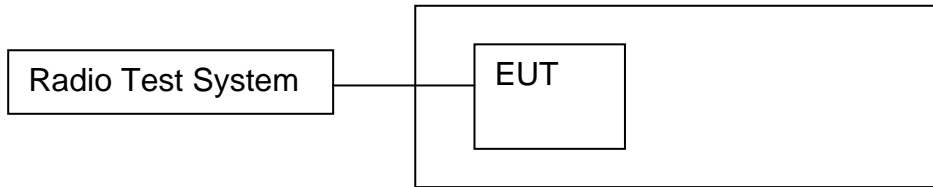

9.2 Limit

N/A

9.3 Test procedure


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



9.4 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.089
GFSK	Middle	1.090
GFSK	High	1.107
Pi/4 DQPSK	Low	1.382
Pi/4 DQPSK	Middle	1.385
Pi/4 DQPSK	High	1.375

Test plots
GFSK Low Channel

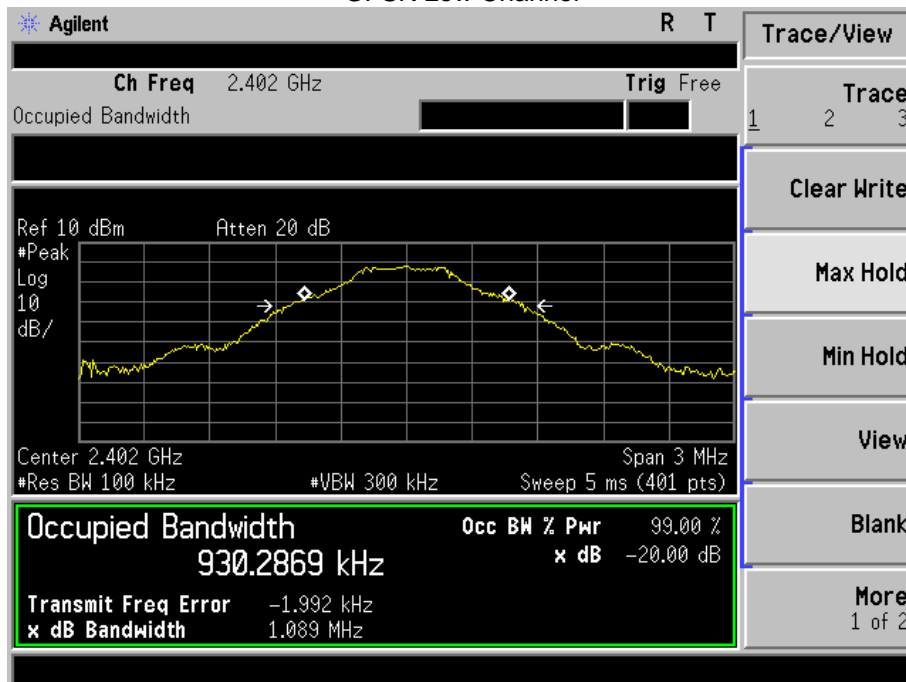




GFSK Middle Channel

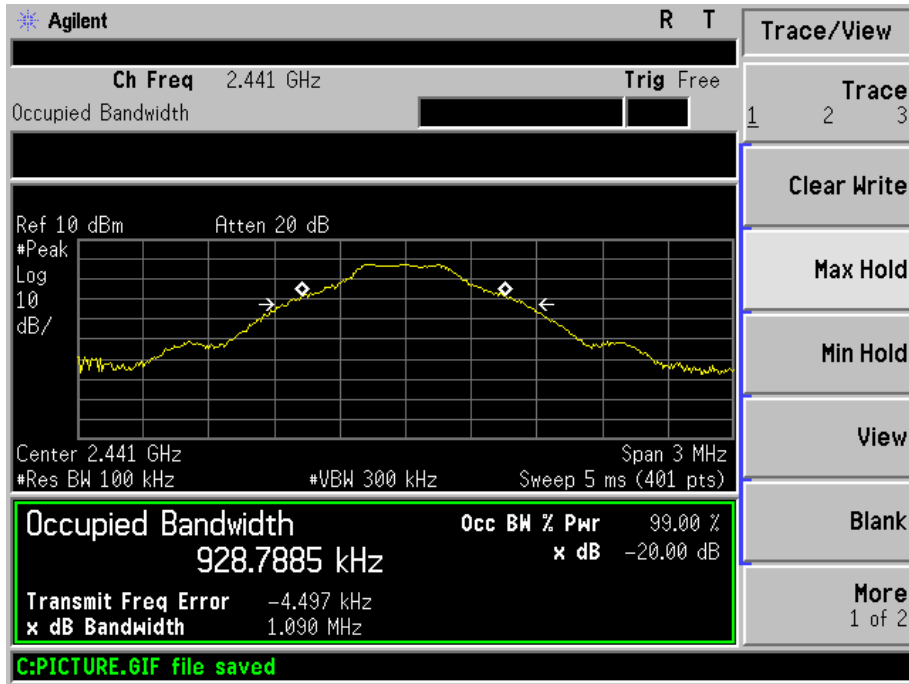


GFSK High Channel

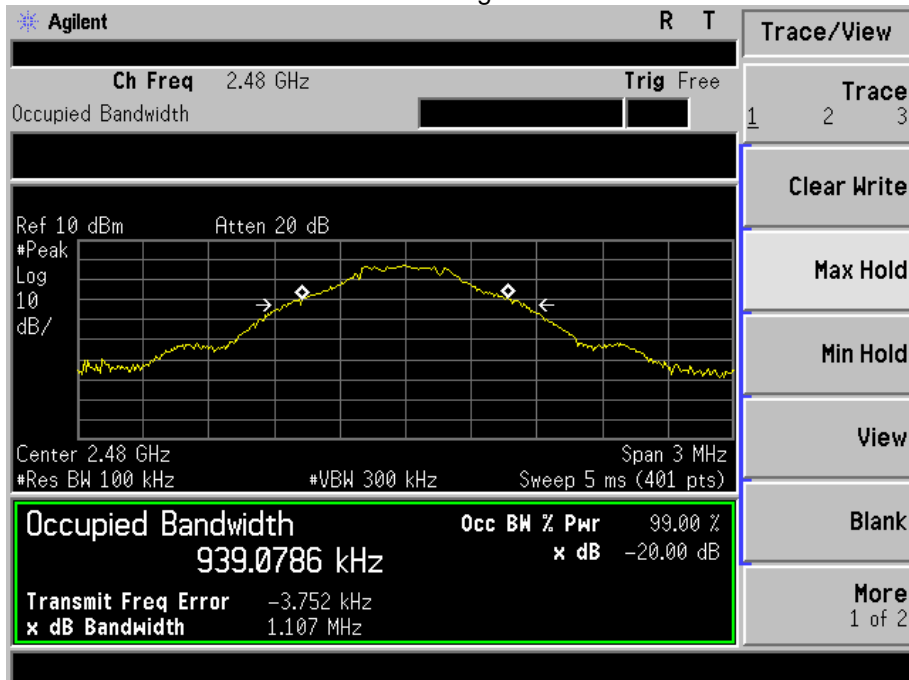




Pi/4 DQPSK Low Channel

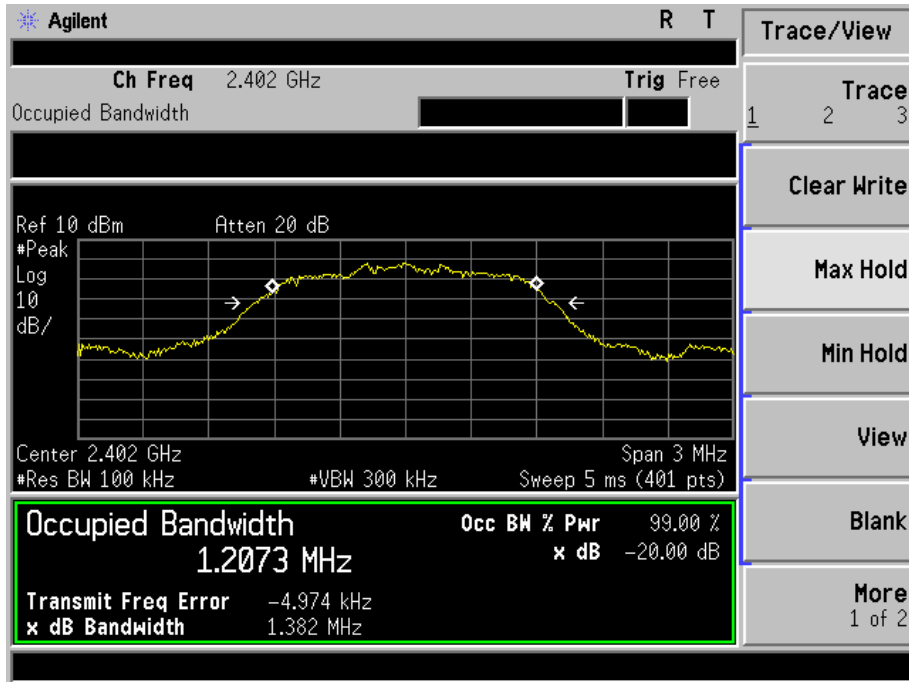


Pi/4 DQPSK Middle Channel

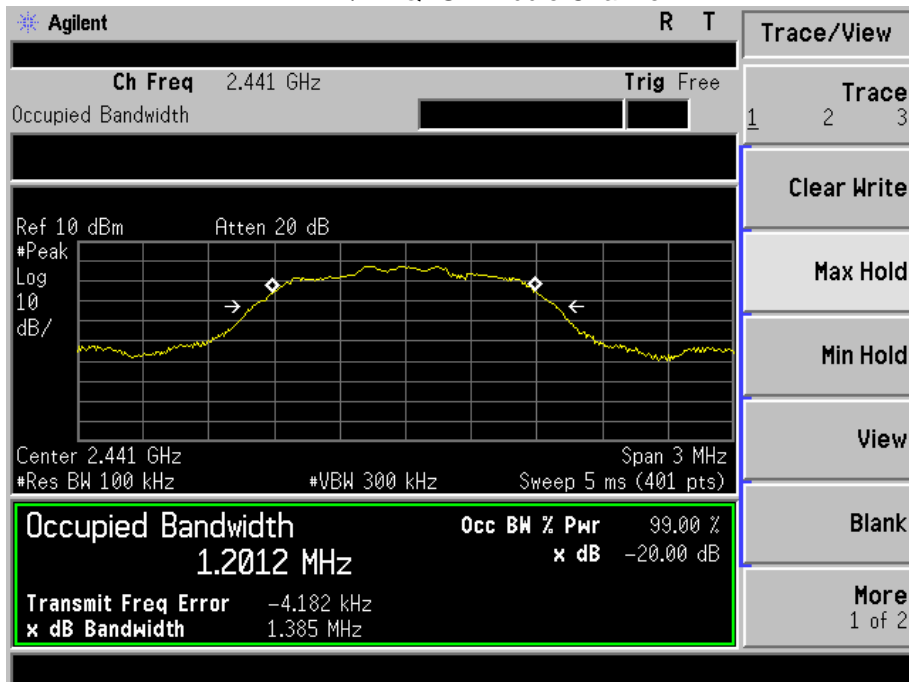




Pi/4 DQPSK High Channel

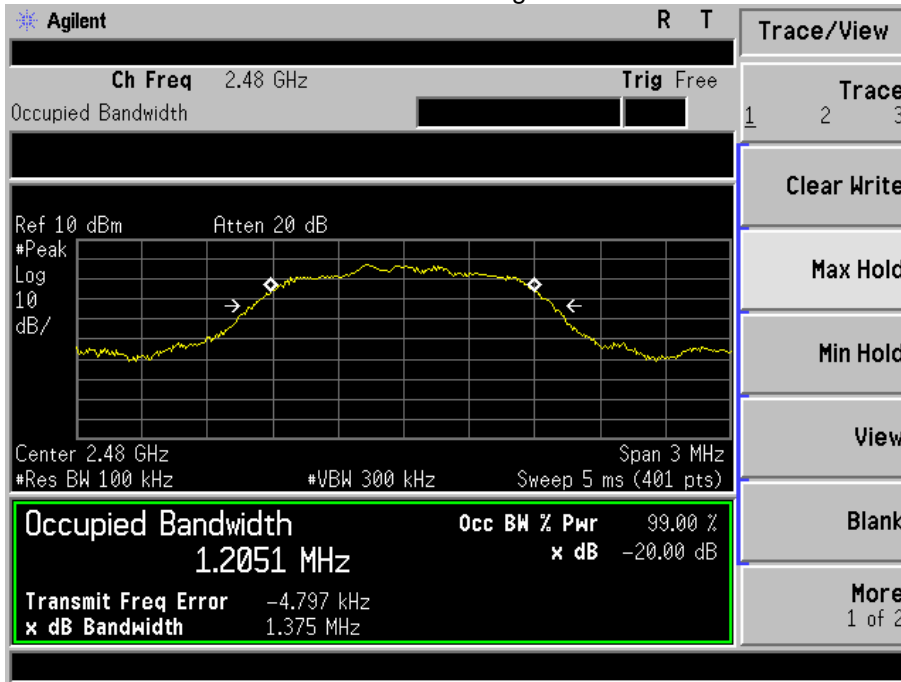

10. MAXIMUM PEAK OUTPUT POWER

10.1 Block Diagram Of Test Setup

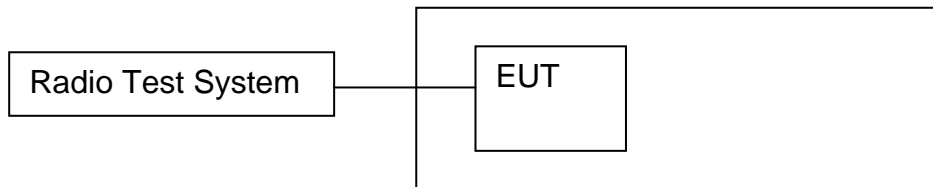

10.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.4 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-1.98	21
GFSK	Middle	-2.183	21
GFSK	High	-2.732	21
Pi/4 DQPSK	Low	-0.817	21
Pi/4 DQPSK	Middle	-0.998	21
Pi/4 DQPSK	High	-1.591	21

Test plots
GFSK Low Channel

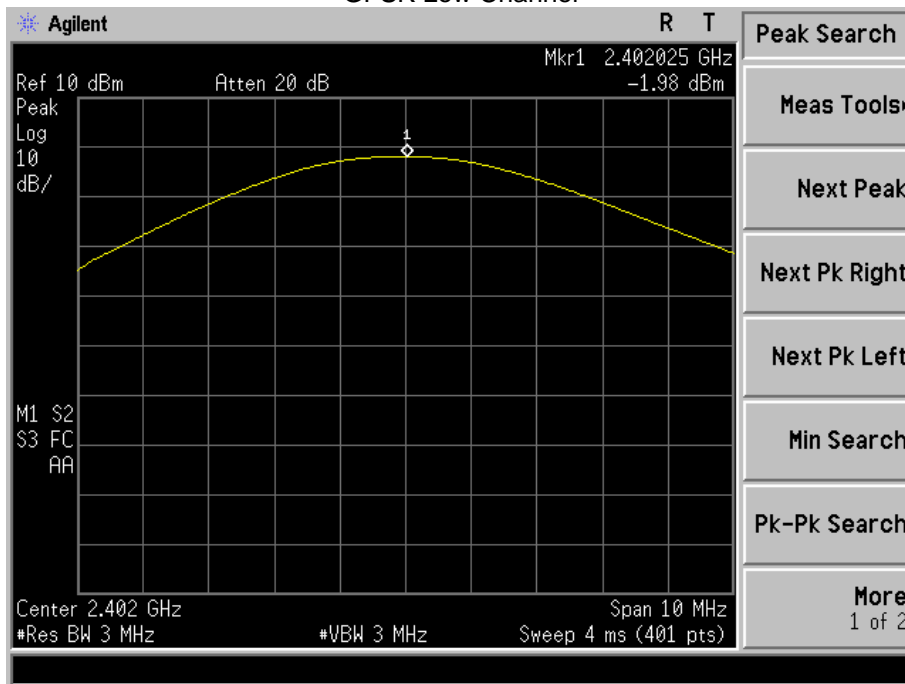




GFSK Middle Channel

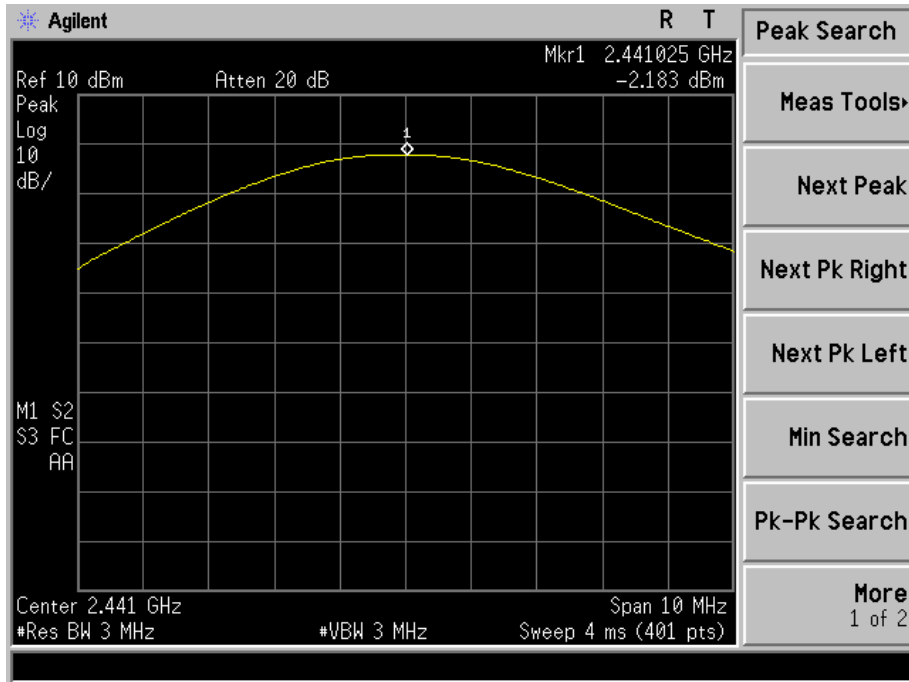


GFSK High Channel

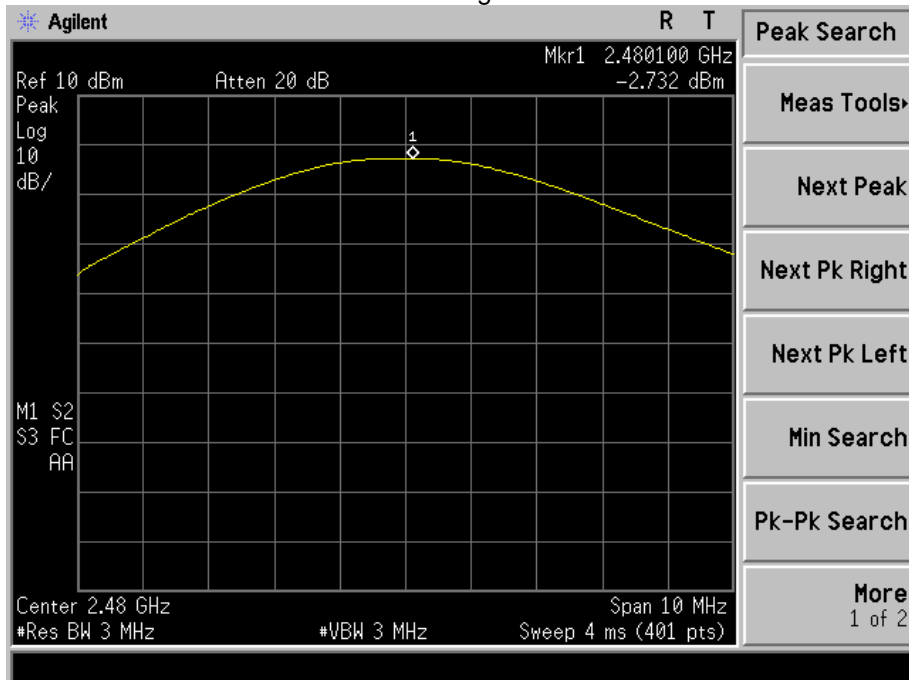




Pi/4 DQPSK Low Channel

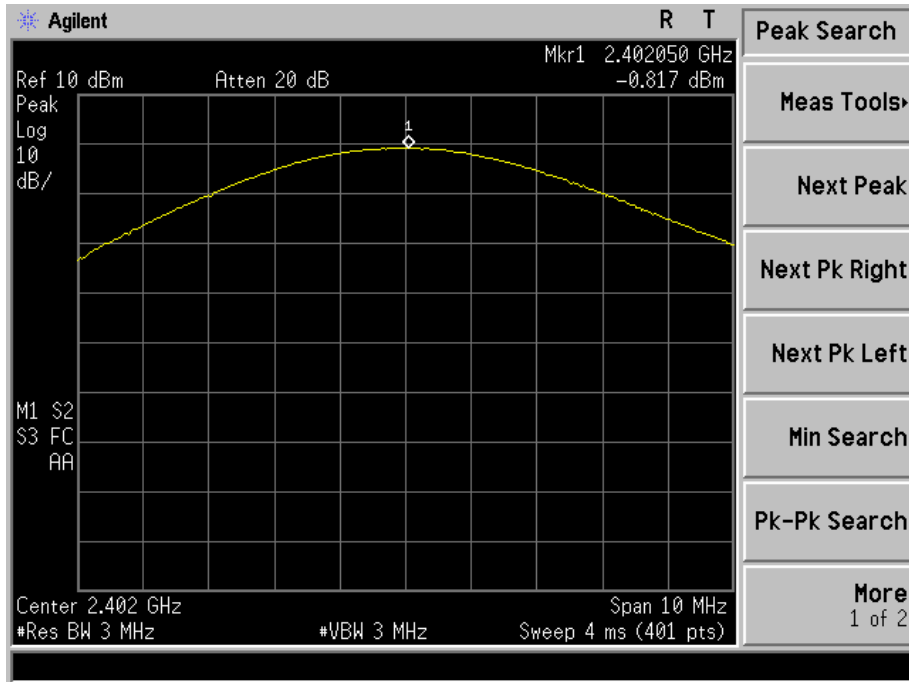


Pi/4 DQPSK Middle Channel

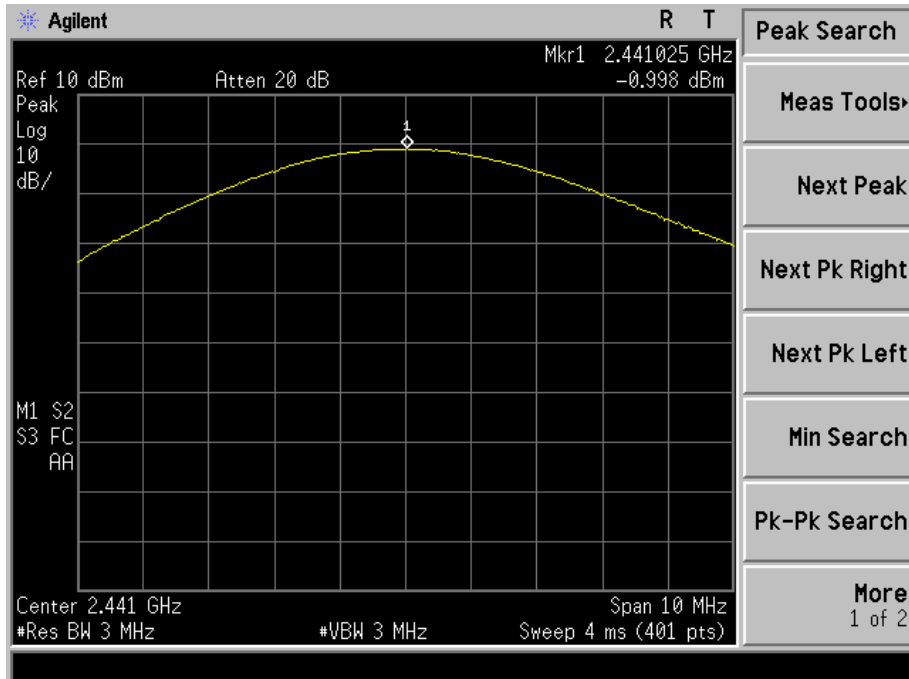




Pi/4 DQPSK High Channel

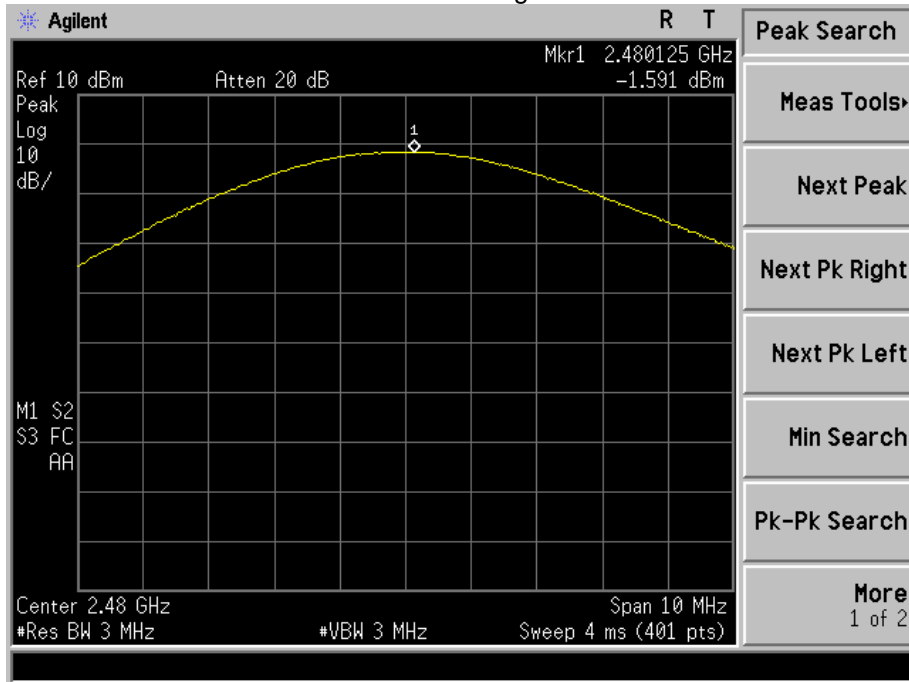

11. HOPPING CHANNEL SEPARATION

11.1 Block Diagram Of Test Setup

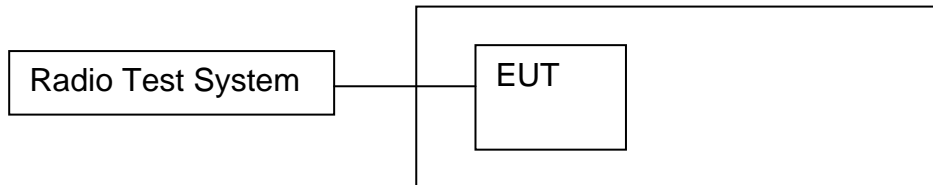

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



11.4 Test Result


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.005	0.726	PASS
GFSK	Middle	1.000	0.727	PASS
GFSK	High	1.000	0.738	PASS
Pi/4 DQPSK	Low	0.985	0.921	PASS
Pi/4 DQPSK	Middle	1.145	0.923	PASS
Pi/4 DQPSK	High	1.000	0.917	PASS

Test plots
GFSK Low Channel

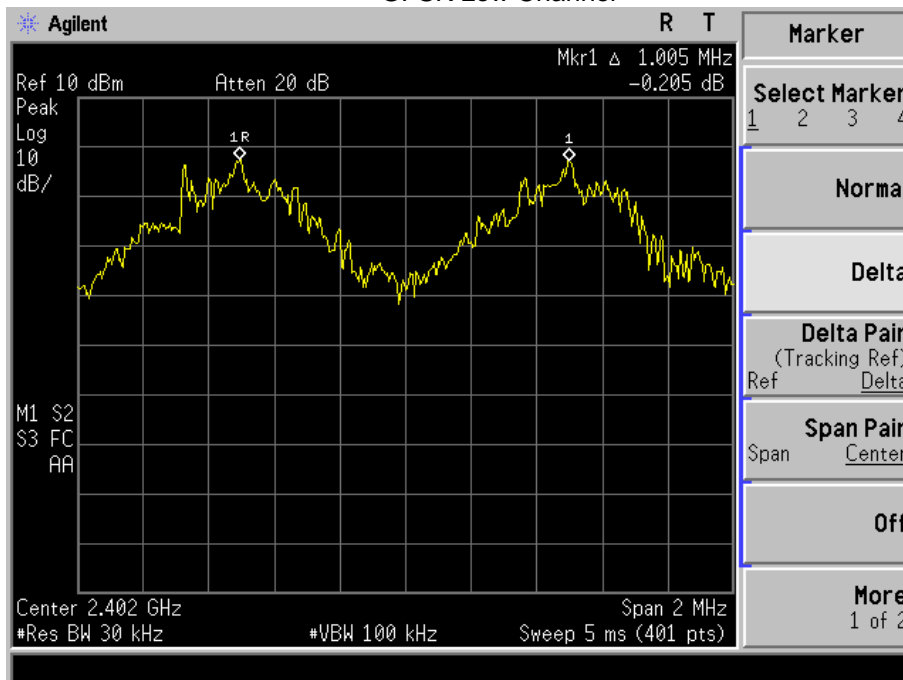




GFSK Middle Channel

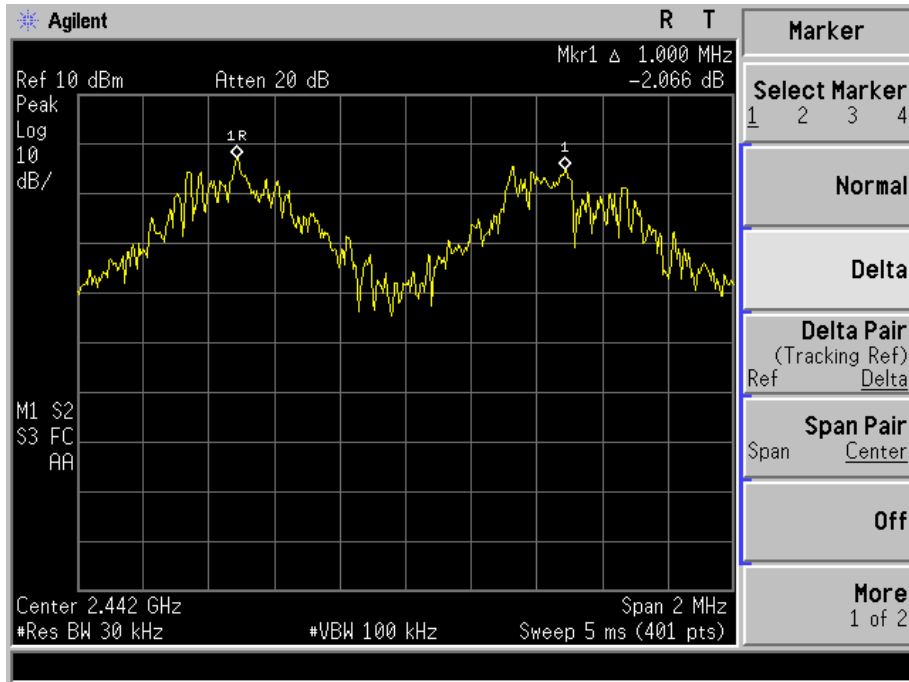


GFSK High Channel

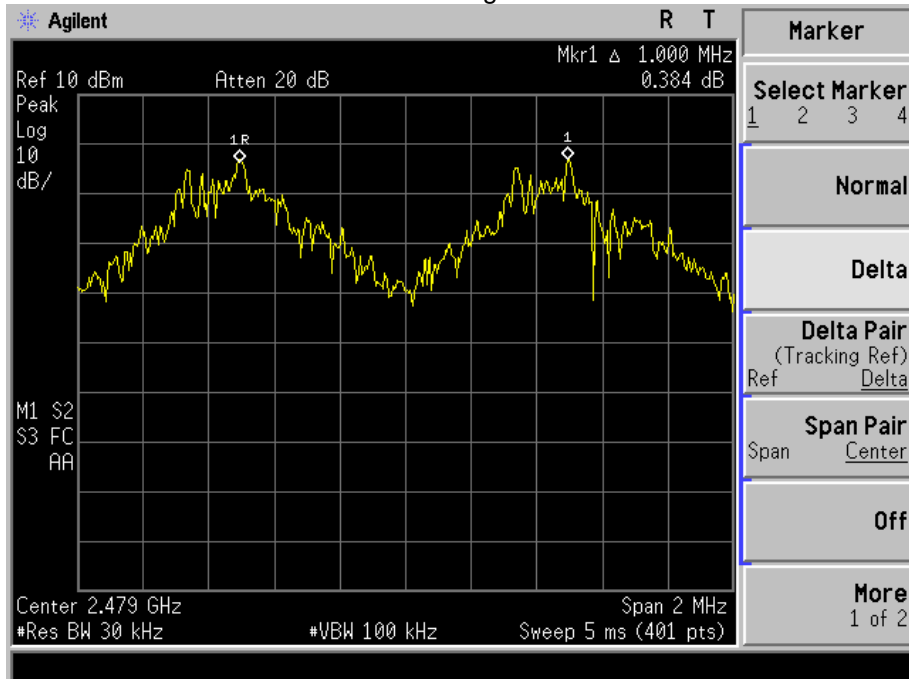




Pi/4 DQPSK Low Channel

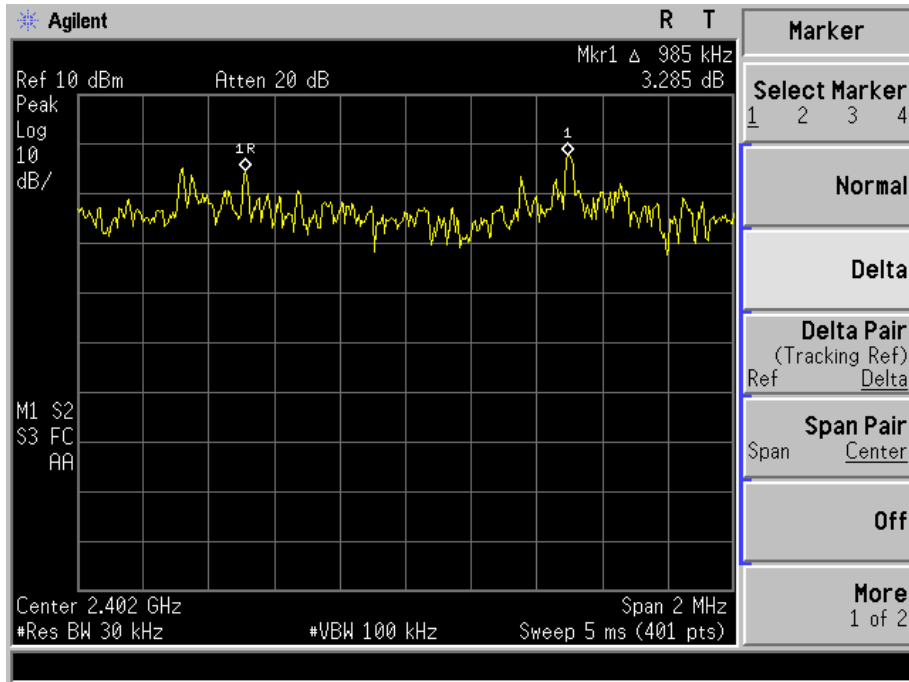


Pi/4 DQPSK Middle Channel

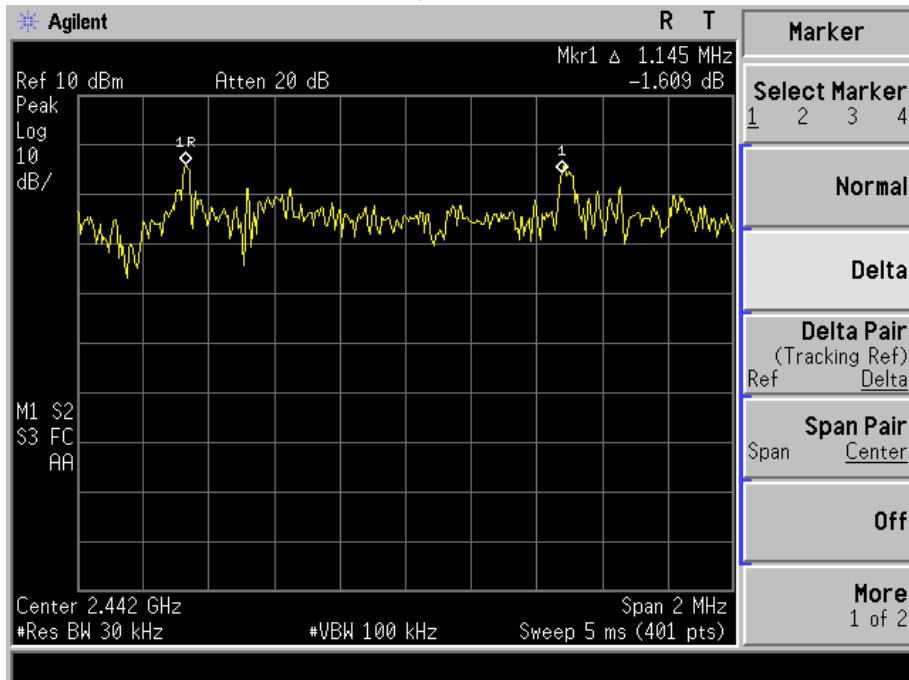




Pi/4 DQPSK High Channel

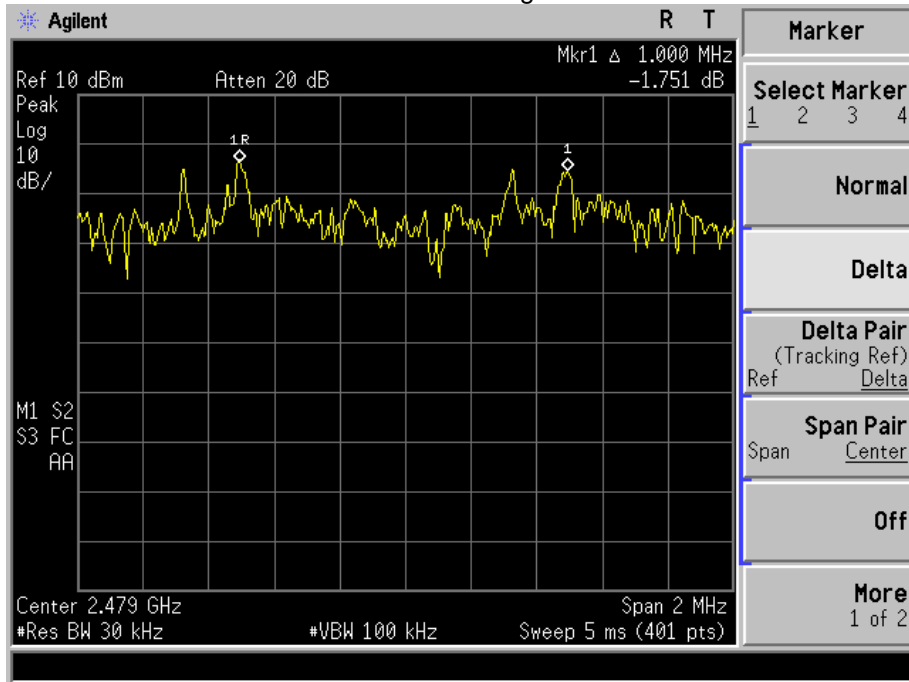

12. NUMBER OF HOPPING FREQUENCY

12.1 Block Diagram Of Test Setup

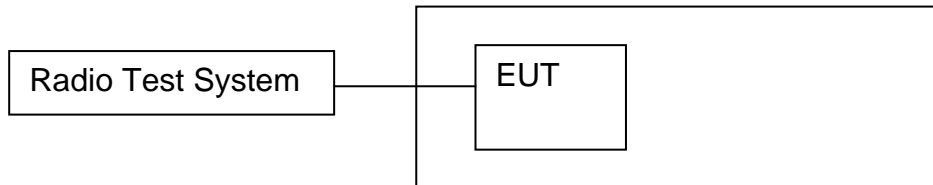

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;




12.4 Test Result

Test Plots:
79 Channels in total
GFSK

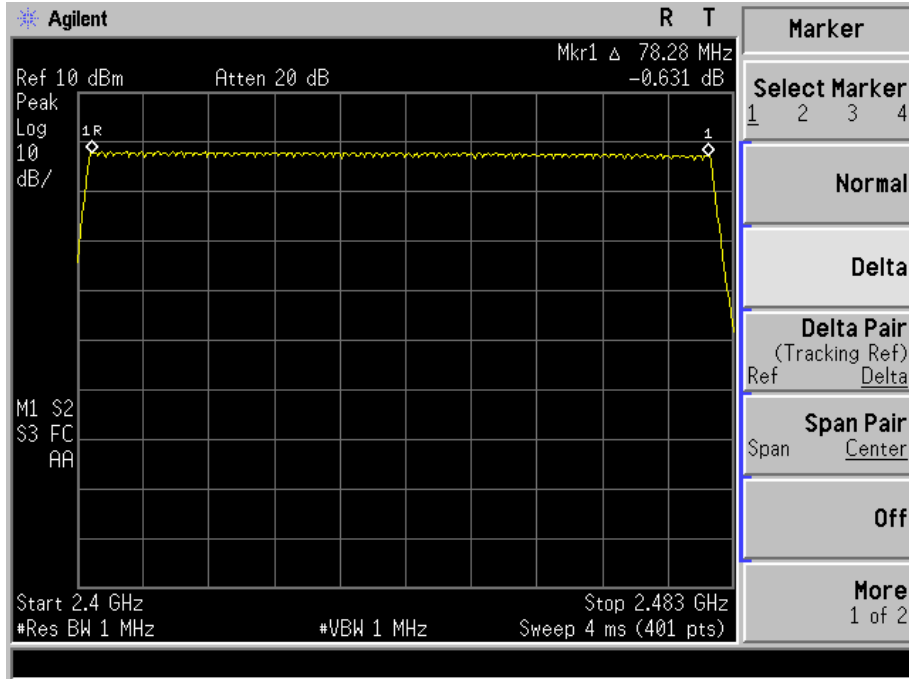


Pi/4 DQPSK

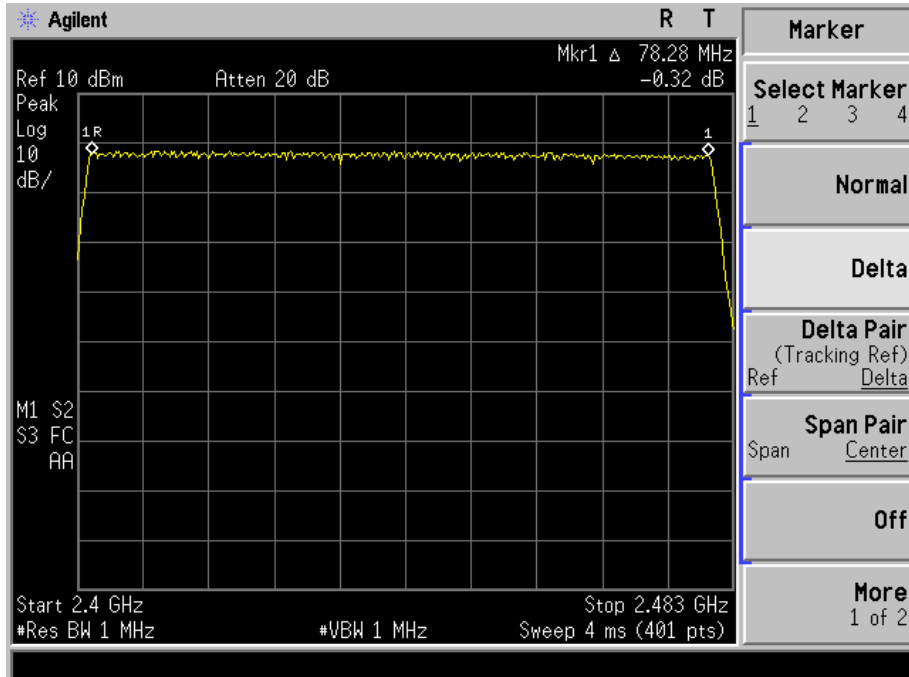

13. DWELL TIME

13.1 Block Diagram Of Test Setup

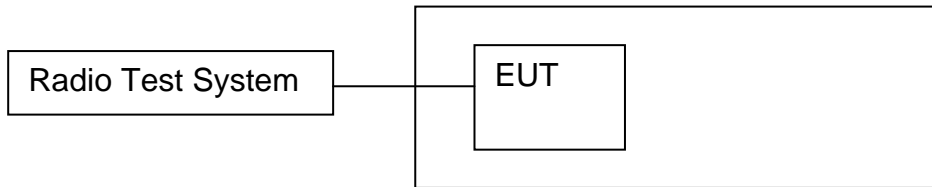

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



13.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

$$DH5: 1600/79/6 * 0.4 * 79 * (MkrDelta) / 1000$$

$$DH3: 1600/79/4 * 0.4 * 79 * (MkrDelta) / 1000$$


$$DH1: 1600/79/2 * 0.4 * 79 * (MkrDelta) / 1000$$

Remark: Mkr Delta is once pulse time.


Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.400	0.128	0.4
		DH3	1.660	0.266	0.4
		DH5	2.910	0.310	0.4
Pi/4DQPSK	Middle	DH1	0.410	0.131	0.4
		DH3	1.680	0.269	0.4
		DH5	2.910	0.310	0.4



Test Plots
GFSK DH1 Middle Channel

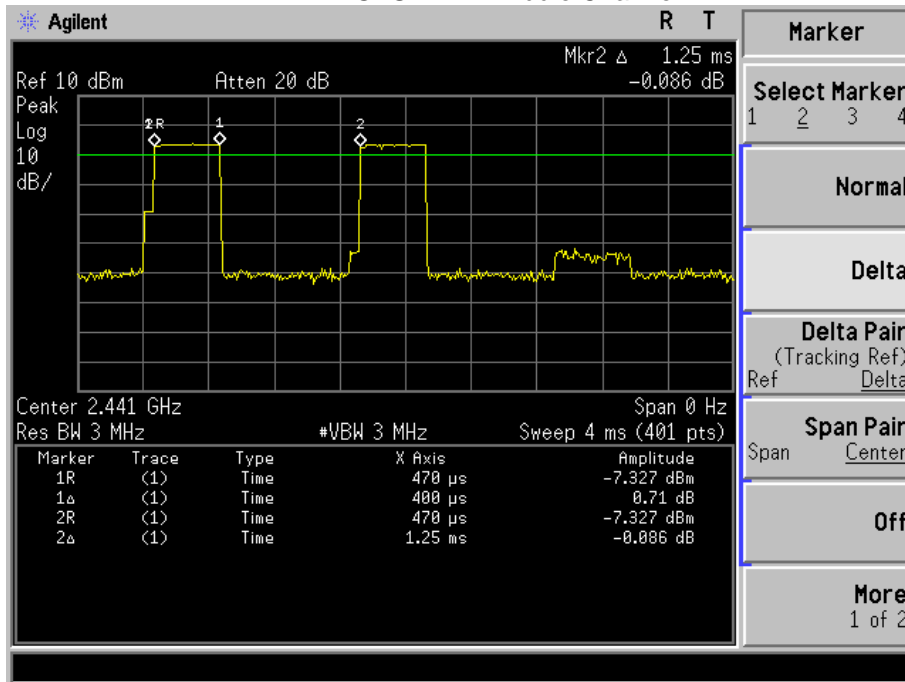


GFSK DH3 Middle Channel

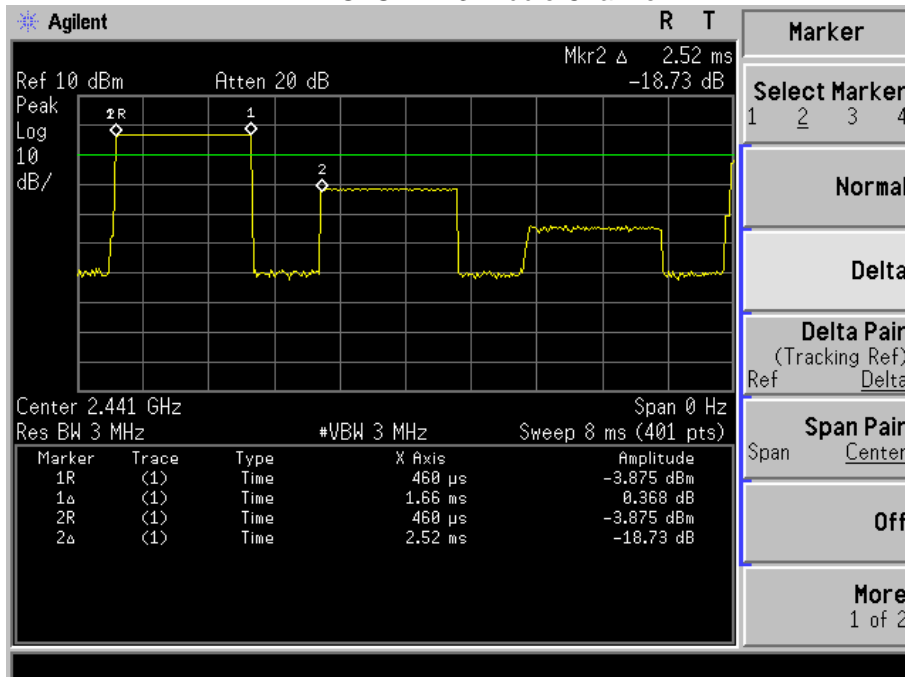




GFSK DH5 High Middle Channel

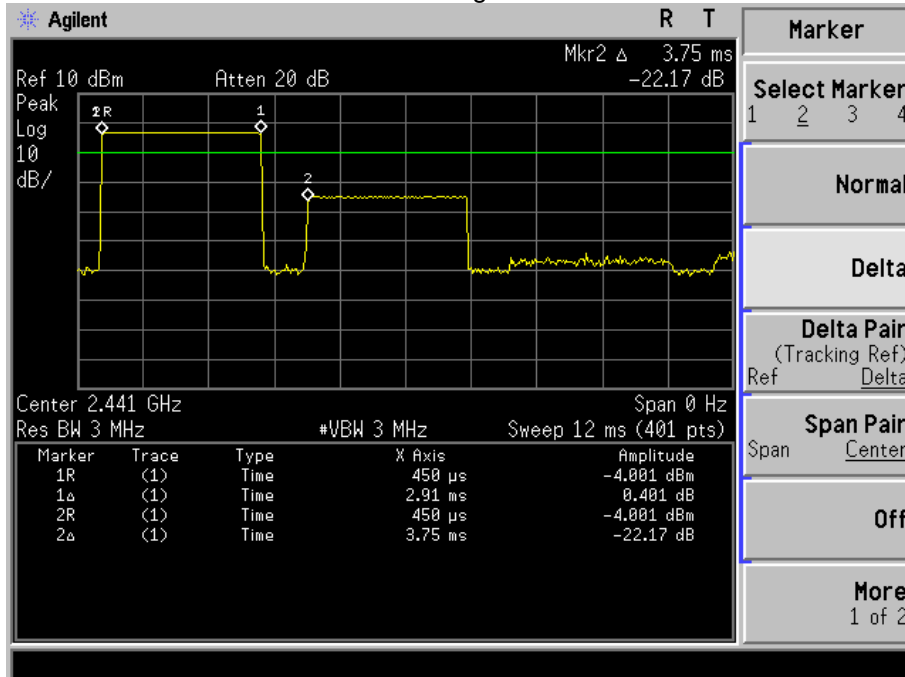


Pi/4QPSK DH1 Middle Channel

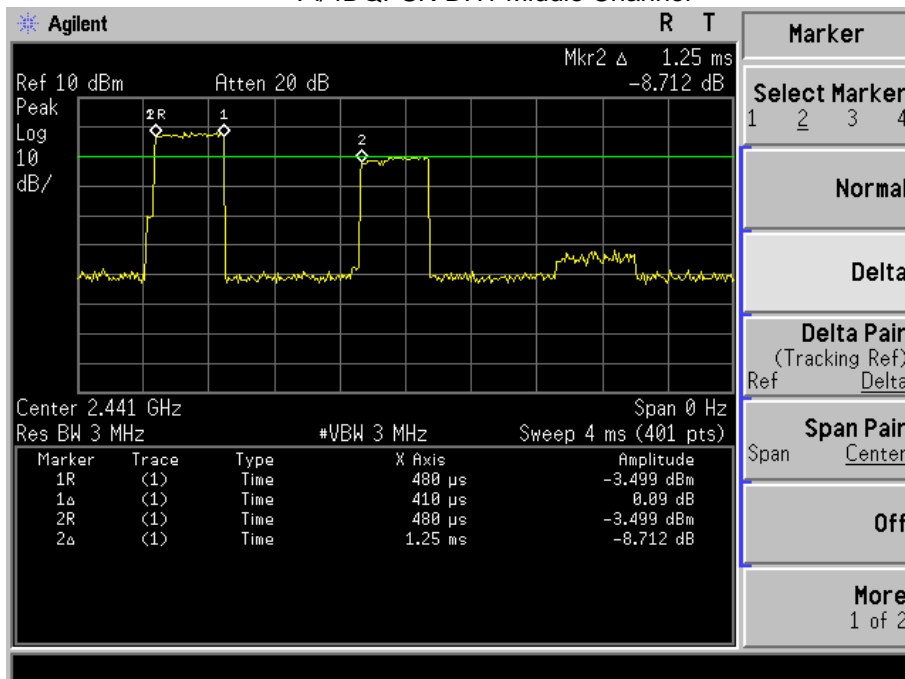




Pi/4DQPSK DH3 Middle Channel

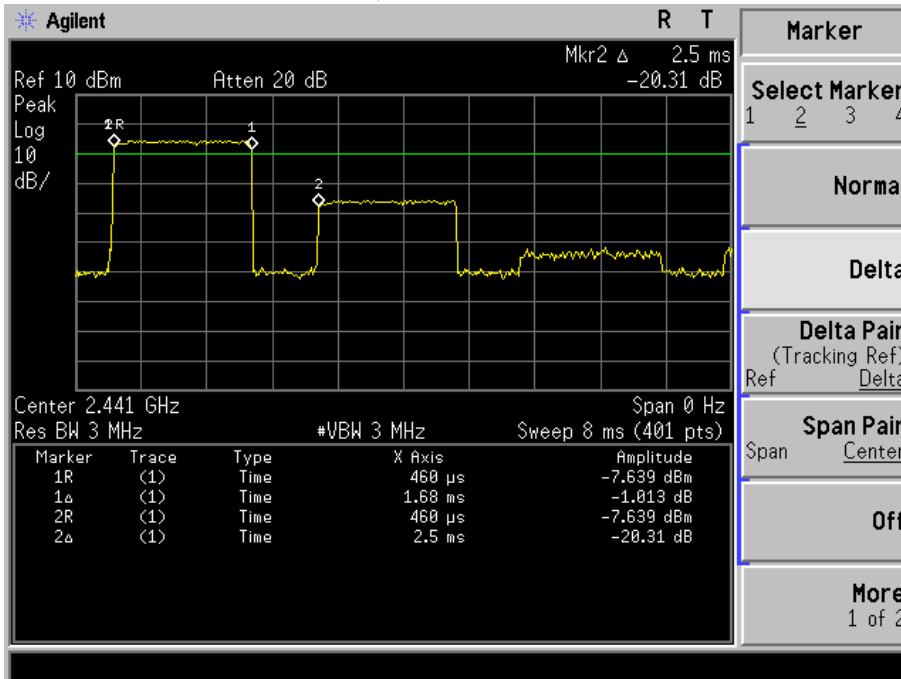

Pi/4DQPSK DH5 Middle Channel

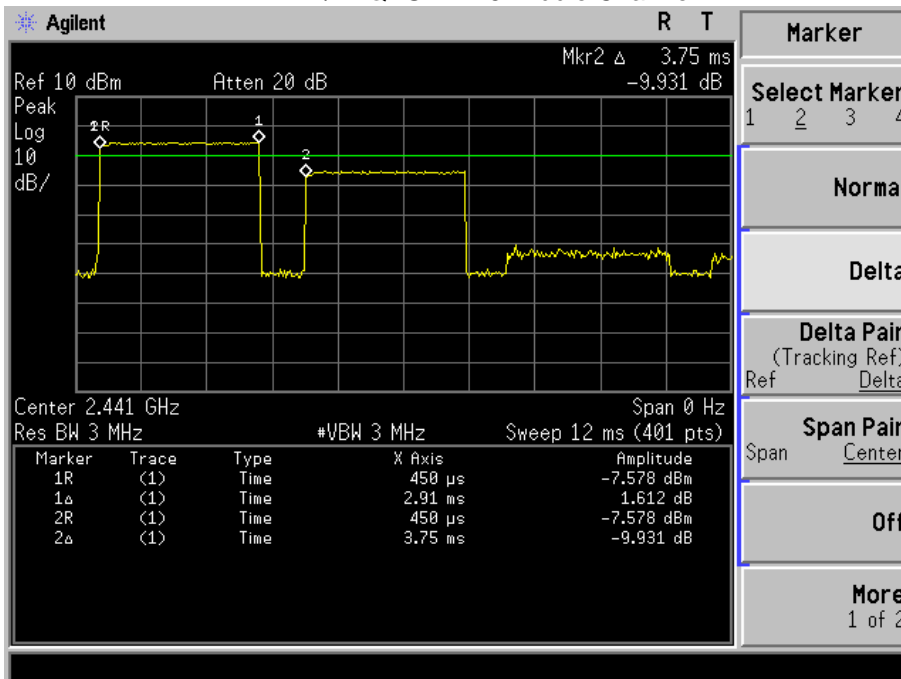



14. ANTENNA REQUIREMENT

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a PCB antenna, meets the requirements of FCC 15.203.


15. EUT PHOTOGRAPHS

EUT Photo 1



16. EUT TEST SETUP PHOTOGRAPHS

Spurious emissions

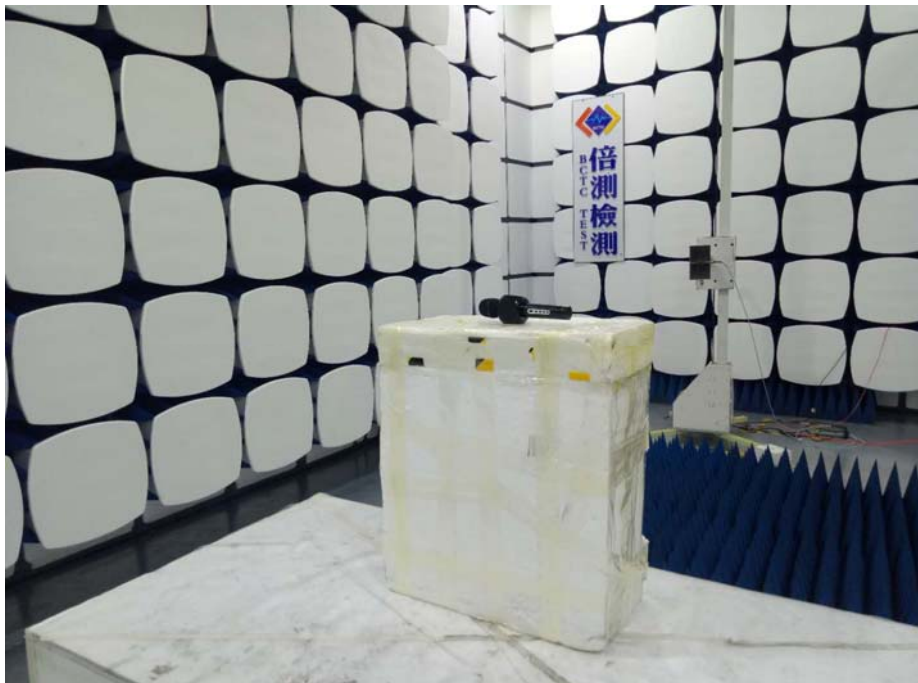



Conducted emissions



※※※※※ END OF REPORT ※※※※※