



# SAR TEST REPORT

Product Name: Smart phone

Model Name: K60

FCC ID: 2APX7K60

Issued For : KRIPTO MOBILE CORPORATION

7640 NW 25TH ST STE 101, MIAMI, FL 33122

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,  
No.177 Renmin West Road, Jinsha Community, Kengzi  
Street, Pingshan New District, Shenzhen, China

Report Number: LGT23C021HA01

Sample Received Date: Mar. 14, 2023

Date of Test: Mar. 16, 2023~ Mar. 28, 2023

Date of Issue: Apr. 04, 2023

Head:0.718 W/kg

Max. SAR (1g):

Body: 0.851 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## Table of Contents

<b>1. General Information</b>	<b>5</b>
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
<b>2. Test Standards and Limits</b>	<b>8</b>
<b>3. SAR Measurement System</b>	<b>9</b>
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
<b>4. Tissue Simulating Liquids</b>	<b>12</b>
4.1 Simulating Liquids Parameter Check	12
<b>5. SAR System Validation</b>	<b>14</b>
5.1 Validation System	14
5.2 Validation Result	15
<b>6. SAR Evaluation Procedures</b>	<b>16</b>
<b>7. EUT Antenna Location Sketch</b>	<b>17</b>
7.1 SAR test exclusion consider table	18
<b>8. EUT Test Position</b>	<b>23</b>
8.1 Define Two Imaginary Lines on the Handset	23
8.2 Hotspot mode exposure position condition	24
<b>9. Uncertainty</b>	<b>25</b>
9.1 Measurement Uncertainty	25
9.2 System validation uncertainty	26
<b>10. Conducted Power Measurement</b>	<b>27</b>
10.1 Test Result:	27
<b>11. EUT and Test Setup Photo</b>	<b>57</b>
11.1 EUT Photos	57
11.2 Setup Photos	60
<b>12. SAR Result Summary</b>	<b>66</b>
12.1 Head SAR	66
12.2 Body-worn and Hotspot SAR	69
<b>13. Equipment List</b>	<b>75</b>
<b>Appendix A. System Validation Plots</b>	<b>76</b>
<b>Appendix B. SAR Test Plots</b>	<b>88</b>
<b>Appendix C. Probe Calibration and Dipole Calibration Report</b>	<b>112</b>



### Revision History

Rev.	Issue Date	Contents
00	Apr. 04, 2023	Initial Issue



## TEST REPORT CERTIFICATION

**Applicant** KRIPTO MOBILE CORPORATION  
**Address** 7640 NW 25TH ST STE 101, MIAMI, FL 33122  
**Manufacture** HuaYueShiTong Software Technology Co.,Ltd  
**Address** Room 703-704, Building B, Phase 1, WankeYuncheng  
Innovation Valley, Xili Street, Nanshan District, Shenzhen  
**Product Name** Smart phone  
**Trademark** KRIP  
**Model Name** K60  
**Sample number** LGT2303019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

*Zane Shan*

Zane Shan  
Engineer

Approved by:

*Vita Li*

Vita Li  
Manager





## 1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

### 1.1 EUT Description

Product Name	Smart phone		
Trademark	KRIP		
Model Name	K60		
Series Model	N/A		
Model Difference	N/A		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
IMEI	IMEI 1: 359058075452164 IMEI 2: 359058075452172		
Hardware Version	TH106S V1.0		
Software Version	KRIP_K60_EN_13_HW1_V001_20230307		
Frequency Range	GSM 850: 824 MHz ~ 849 MHz PCS 1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz		
Max. Reported SAR(1g): (Limit: 1.6W/kg) Test distance: Head: 0mm Body Worn and Hotspot: 10mm	Mode	Head (W/ kg)	Body Worn and Hotspot (W/ kg)
	GSM 850	0.168	0.280
	PCS 1900	0.188	0.272
	WCDMA Band II	0.616	0.652
	WCDMA Band V	0.174	0.221



	LTE Band 2	0.718	0.405
	LTE Band 4	0.420	0.447
	LTE Band 5	0.139	0.215
	LTE Band 7	0.365	0.851
	LTE Band 12	0.066	0.122
	LTE Band 17	0.107	0.148
	2.4G WLAN	0.161	0.090
	Bluetooth	0.068	0.047
1-g Sum SAR		0.879	0.941
Battery	Rated Voltage:3.85V Capacity:4800mAh		
Description test modes	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested		
Operating Mode:	GSM: GSM Voice; GPRS/EGPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM 2.4G WLAN: 802.11b(DSSS): CCK, DQPSK, DBPSK 802.11g(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM Bluetooth: GFSK + $\pi$ /4DQPSK+8DPSK BLE: GFSK		
Antenna Specification	GSM/WCDMA/LTE: Internal Antenna Bluetooth: Internal Antenna		
Operating Mode	Maximum continuous output		
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot trans mitting at the same time		
Hotspot Mode	Support		
DTM Mode	Not Support		



## 1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

## 1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



## 2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D04 v01	RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body    Partial-Body    Hands, Wrists, Feet and Ankles

0.4                      8.0                      20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body    Partial-Body    Hands, Wrists, Feet and Ankles

0.08                      1.6                      4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments:**

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments:**

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p><b>NOTE</b></p> <p><b>GENERAL POPULATION/UNCONTROLLED EXPOSURE</b></p> <p><b>PARTIAL BODY LIMIT</b></p> <p><b>1.6 W/kg</b></p>
---



### 3. SAR Measurement System

#### 3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$SAR = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue;

$\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SAR System

MVG SAR System Diagram:

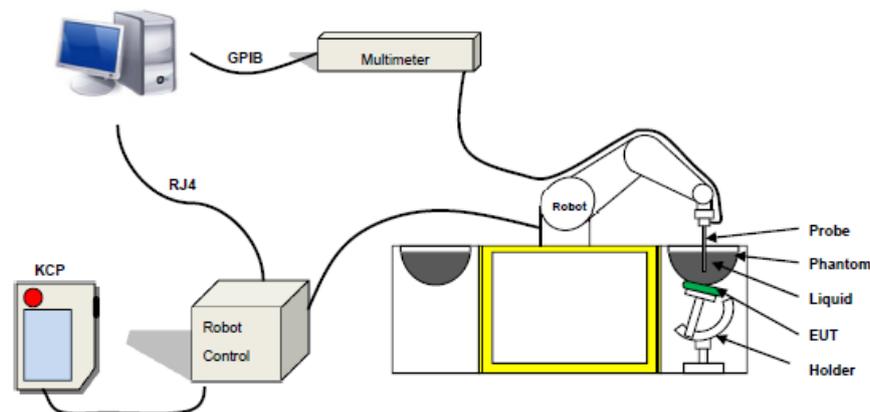

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

### 3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPGO364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



### 3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.




Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

### 3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



## 4. Tissue Simulating Liquids

### 4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max \_ 5 %) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability For 1 g averaging, the maximum weighting coefficient for SAR is 0,5.

#### IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	$\epsilon_r$		$\sigma$ 1g S/m	
	Head	Body	Head	Body
300	45.3	45.3	0.87	0.87
450	43.5	43.5	0.87	0.87
900	41.5	41.5	0.97	0.97
1450	40.5	40.5	1.20	1.20
1800	40.0	40.0	1.40	1.40
2450	39.2	39.2	1.80	1.80
3000	38.5	38.5	2.40	2.40
5200	36.0	36.0	4.70	4.70



## LIQUID MEASUREMENT RESULTS

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2023-03-27	20.1	60	750	19.8	Permittivity	41.90	41.80	-0.24	±5
					Conductivity	0.89	0.84	-5.62	±5
2023-03-26	21.7	48	835	21.4	Permittivity	41.50	41.81	0.75	±5
					Conductivity	0.90	0.88	-2.22	±5
2023-03-24	22.2	44	1800	21.9	Permittivity	40.00	40.68	1.70	±5
					Conductivity	1.40	1.38	-1.43	±5
2023-03-28	20.1	53	1900	19.8	Permittivity	40.00	40.90	2.25	±5
					Conductivity	1.40	1.45	3.57	±5
2023-03-16	21.1	50	2450	20.7	Permittivity	39.20	40.54	3.42	±5
					Conductivity	1.80	1.81	0.56	±5
2023-03-25	21.1	57	2600	20.8	Permittivity	39.00	39.50	1.28	±5
					Conductivity	1.96	2.01	2.55	±5




## 5. SAR System Validation

### 5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

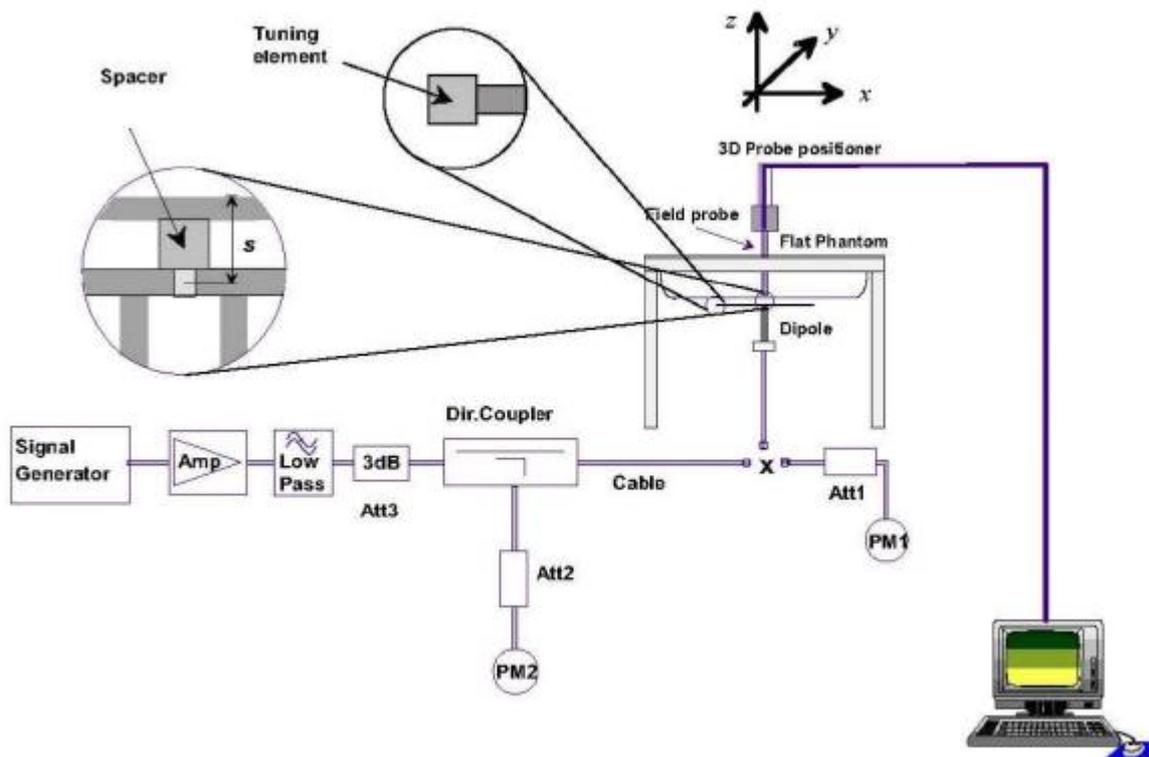



## 5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of  $\pm 10\%$ .

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2023-03-27	750	100	0.780	7.80	8.27	-5.68	10
2023-03-26	835	100	0.999	9.99	9.75	2.46	10
2023-03-24	1800	100	3.610	36.10	39.06	-7.58	10
2023-03-28	1900	100	3.803	38.03	40.85	-6.90	10
2023-03-16	2450	100	5.104	51.04	54.28	-5.97	10
2023-03-25	2600	100	5.675	56.75	56.58	0.30	10

**Note:**

1. The tolerance limit of System validation  $\pm 10\%$ .
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



## 6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### ➤ Area Scan & Zoom Scan


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



## 7. EUT Antenna Location Sketch

It is a Smart phone, support GSM/WCDMA/LTE/WLAN/BT mode.

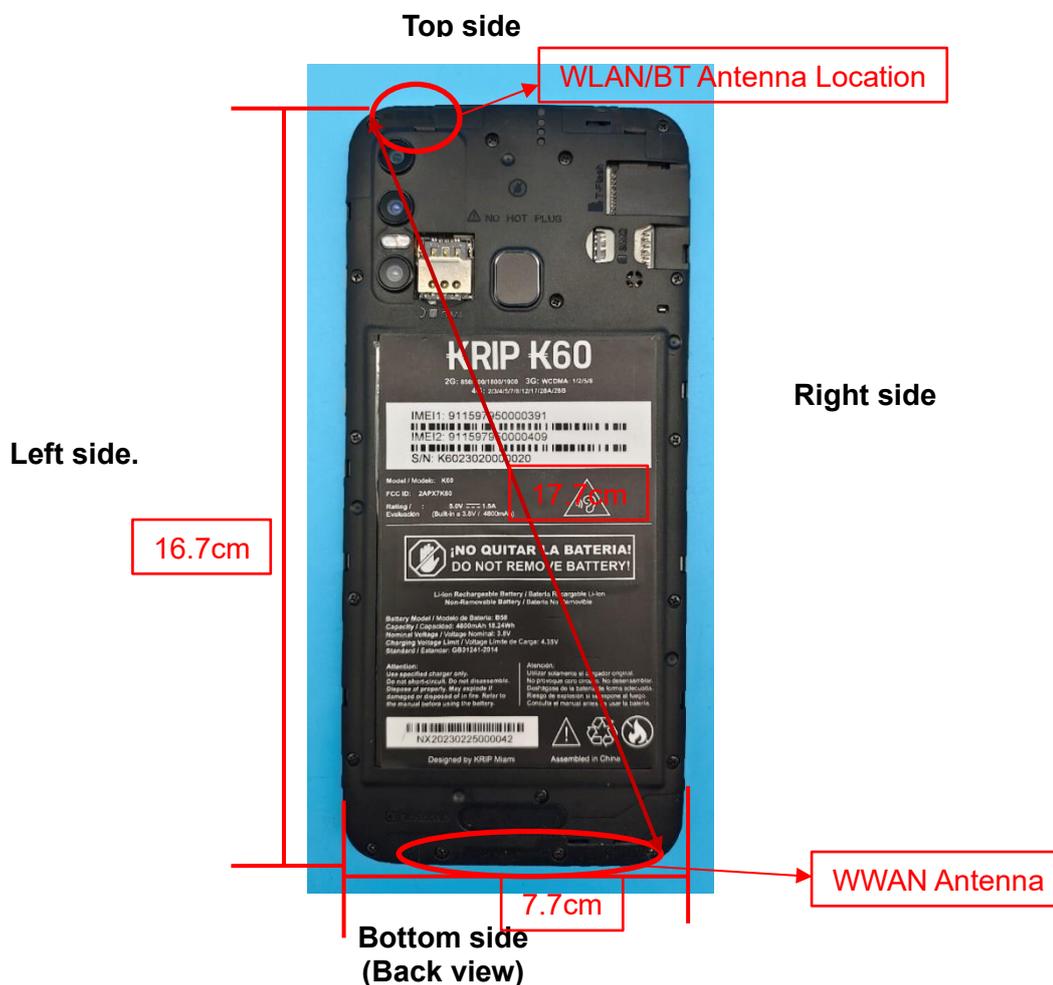

Antenna Separation Distance(cm)						
ANT	Back Side	Front Side	Left Side	Right Side	Top Side	Bottom Side
WLAN/BT	≤0.5	≤0.5	0.9	5.8	≤0.5	16
WWAN	≤0.5	≤0.5	2	1.1	15.8	≤0.5

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



## 7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	GSM850	PCS1900	WCDMA II	WCDMA V	LTE Band 2
	Calculated Frequency (GHz)	0.8242	1.8502	1.9076	0.8264	1.86
	Maximum Turn-up power (dBm)	33.5	29	22	22	22.5
	Maximum rated power(mW)	2238.72	794.33	158.49	158.49	177.83
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.42	3.44	3.35	9.38	3.42
	Testing required?	YES	YES	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.42	3.44	3.35	9.38	3.42
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (cm)	1.1	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	28.52	14.67	14.39	28.46	14.62
	Testing required?	YES	YES	YES	YES	YES
Right Edge	Separation distance (cm)	2	2	2	2	2
	exclusion threshold(mW)	66.09	44.11	43.44	66.00	43.99
	Testing required?	YES	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.8	15.8	15.8	15.8	15.8
	exclusion threshold(mW)	1207.19	1982.60	1979.50	1209.91	1982.06
	Testing required?	YES	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	0.5	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	9.42	3.44	3.35	9.38	3.42
	Testing required?	YES	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12
	Calculated Frequency (GHz)	1.745	0.8365	2.535	0.711
	Maximum Turn-up power (dBm)	23	24	24	23.5
	Maximum rated power(mW)	199.53	251.19	251.19	223.87
Back Side	Separation distance (cm)	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.60	9.22	2.67	11.59
	Testing required?	YES	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.60	9.22	2.67	11.59
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (cm)	1.1	1.1	1.1	1.1
	exclusion threshold(mW)	15.22	28.15	12.03	32.53
	Testing required?	YES	YES	YES	YES
Right Edge	Separation distance (cm)	2	2	2	2
	exclusion threshold(mW)	45.42	65.60	37.68	71.16
	Testing required?	YES	YES	YES	YES
Top Edge	Separation distance (cm)	15.8	15.8	15.8	15.8
	exclusion threshold(mW)	1988.55	1222.42	1950.90	1065.28
	Testing required?	NO	NO	NO	NO
Bottom Edge	Separation distance (cm)	0.5	0.5	0.5	0.5
	exclusion threshold(mW)	3.60	9.22	2.67	11.59
	Testing required?	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 17	BT	2.4G WLAN
	Calculated Frequency (GHz)	0.71	2.441	2.412
	Maximum Turn-up power (dBm)	23.5	9	18
	Maximum rated power(mW)	223.87	7.94	63.10
Back Side	Separation distance (cm)	0.5	0.5	0.5
	exclusion threshold(mW)	11.61	2.75	2.78
	Testing required?	YES	YES	YES
Front Side	Separation distance (cm)	0.5	0.5	0.5
	exclusion threshold(mW)	11.61	2.75	2.78
	Testing required?	YES	YES	YES
Left Edge	Separation distance (cm)	1.1	5.8	5.8
	exclusion threshold(mW)	32.57	290.77	291.71
	Testing required?	YES	NO	NO
Right Edge	Separation distance (cm)	2	0.9	0.9
	exclusion threshold(mW)	71.21	8.41	8.48
	Testing required?	YES	NO	YES
Top Edge	Separation distance (cm)	15.8	0.5	0.5
	exclusion threshold(mW)	1064.01	2.75	2.78
	Testing required?	NO	YES	YES
Bottom Edge	Separation distance (cm)	0.5	16	16
	exclusion threshold(mW)	11.61	2001.99	2003.15
	Testing required?	YES	NO	NO

**Note:**

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, if the maximum time-averaged power available does not exceed 1 mW. This stand-alone SAR exemption test.



4. Per KDB 447498 D04, the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold  $P_{th}$  (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).  $P_{th}$  is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

$d$  = the separation distance (cm);

5. Per KDB 447498 D04, An alternative to the SAR-based exemption is using below table and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in below table to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .



6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.
8. Per KDB 248227, as maximum rated power for U-NII-2A > U-NII-1, U-NII-2A was chosen for SAR evaluation. Based on the measurements obtained, SAR measurements on U-NII-1 are not required as highest reported SAR from U-NII-2A band is  $\leq 1.2\text{W/Kg}$ .




## 8. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.


### 8.1 Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

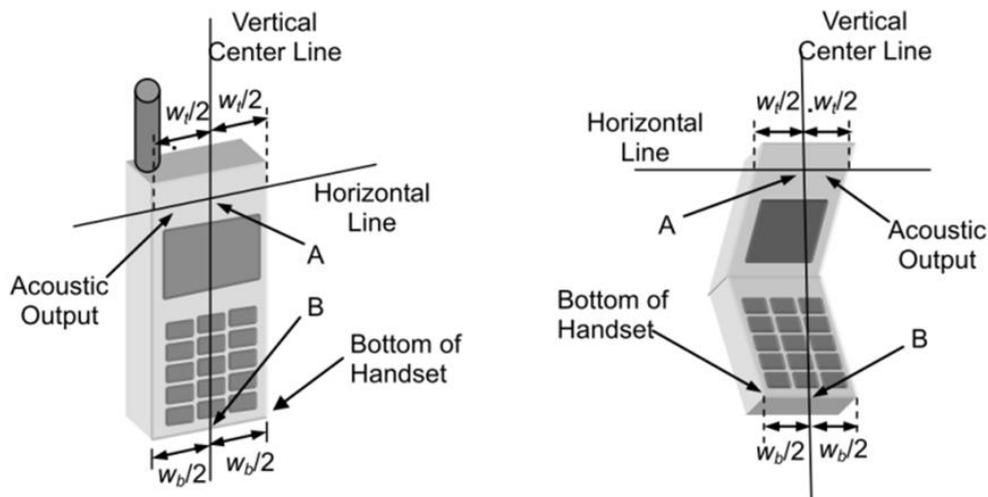

### Cheek Position


- 1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- 2) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

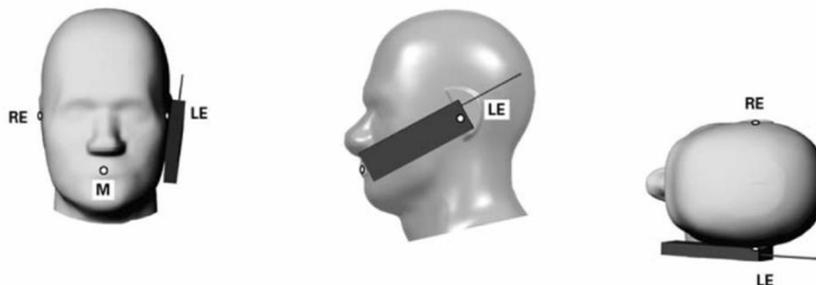




### Title Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

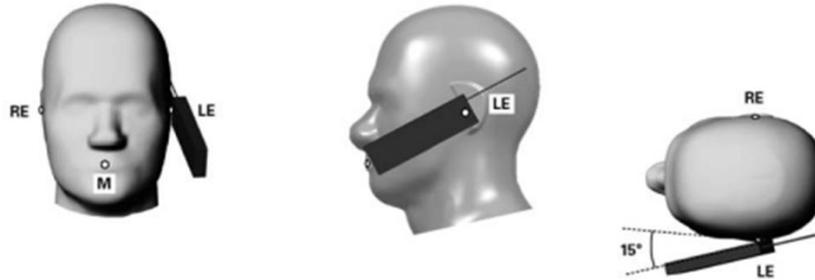


### Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

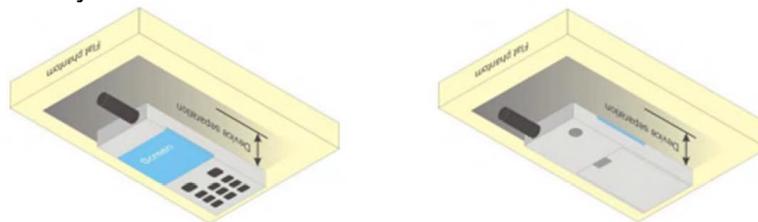

## 8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

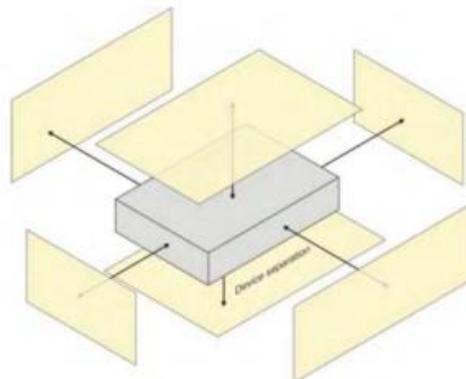



## 9. Uncertainty

### 9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.8	5.8	$\infty$
Axial Isotropy	3.5	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	1.43	1.43	$\infty$
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	2.41	2.41	$\infty$
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	$\infty$
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Modulation response	3	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Readout Electronics	0.5	N	1	1	1	0.50	0.50	$\infty$
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	$\infty$
Integration Time	1.4	R	$\sqrt{3}$	1	1	1.81	1.81	$\infty$
RF ambient conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient conditions-reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
Extrapolation, Interpolation and Integration Algorithms for Max, SAR	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	$\infty$
<b>Test sample Related</b>								
Test sample positioning	2.6	N	1	1	1	2.60	2.60	11
Device holder uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation - SAR Drift Measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	$\infty$
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
<b>Phantom and tissue parameters</b>								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	$\infty$
Liquid Conductivity - Measurement Uncertainty)	4	N	1	0.78	0.71	3.12	2.84	5
Liquid Permittivity - Measurement Uncertainty	5	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	$\infty$
Liquid Permittivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	$\infty$
<b>Combined Standard Uncertainty</b>		RSS				10.47	10.34	
<b>Expanded Uncertainty (95% Confidence interval)</b>		K				20.95	20.69	



## 9.2 System validation uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
<b>Measurement System</b>								
Probe calibration	5.8	N	1	1	1	5.8	5.8	$\infty$
Axial Isotropy	3.5	R	$\sqrt{3}$	1	1	2.02	2.02	$\infty$
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	0	0	0.00	0.00	$\infty$
Boundary effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Linearity	4.7	R	$\sqrt{3}$	1	1	0.71	0.71	$\infty$
System detection limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	$\infty$
Modulation response	0	N	$\sqrt{3}$	0	0	0.00	0.00	$\infty$
Readout Electronics	0.5	N	1	1	1	0.50	0.50	$\infty$
Response Time	0	R	$\sqrt{3}$	0	0	0.00	0.00	$\infty$
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	$\infty$
RF ambient conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
RF ambient conditions-reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	$\infty$
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	$\infty$
Extrapolation, Interpolation and Integration Algorithms for Max, SAR	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	$\infty$
<b>Dipole</b>								
Deviation of Experimental Source from Numerical Source	5	N	1	1	1	5.00	5.00	$\infty$
Input Power and SAR Drift Measurement	0.5	R	$\sqrt{3}$	1	1	0.29	0.29	$\infty$
Dipole Axis to Liquid Distance	2	R	$\sqrt{3}$	1	1	1.15	1.15	$\infty$
<b>Phantom and Tissue Parameters</b>								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	$\infty$
Uncertainty in SAR correction for deviations in permittivity and conductivity	2	N	1	1	0.84	2.00	1.68	$\infty$
Liquid Conductivity - Measurement Uncertainty)	4	N	1	0.78	0.71	3.12	2.84	5
Liquid Permittivity - Measurement Uncertainty	5	N	1	0.23	0.26	1.15	1.30	5
Liquid Conductivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	$\infty$
Liquid Permittivity (Temperature Uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	$\infty$
<b>Combined Standard Uncertainty</b>		RSS				10.16	10.03	
<b>Expanded Uncertainty (95% Confidence interval)</b>		K				20.32	20.06	



## 10. Conducted Power Measurement

### 10.1 Test Result:

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	33.45	33.32	33.44	28.80	28.26	28.04
GPRS (GMSK, 1-Slot)	32.41	32.21	32.15	28.80	28.41	28.11
GPRS (GMSK, 2-Slot)	31.74	31.66	31.55	28.11	27.71	27.37
GPRS (GMSK, 3-Slot)	30.12	29.99	29.77	26.37	25.93	25.57
GPRS (GMSK, 4-Slot)	28.99	28.76	28.62	25.22	24.41	24.27
EGPRS (8PSK, 1-Slot)	27.78	27.75	27.00	26.00	25.92	25.46
EGPRS (8PSK, 2-Slot)	23.02	23.44	23.55	24.55	24.41	24.37
EGPRS (8PSK, 3-Slot)	21.89	20.97	21.13	23.52	22.50	22.30
EGPRS (8PSK, 4-Slot)	23.82	22.78	22.78	21.77	21.05	21.00

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.  
 Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link  
 Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link  
 Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link

Frame- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1-Slot)	24.42	24.29	24.41	19.77	19.23	19.01
GPRS (GMSK, 1-Slot)	23.38	23.18	23.12	19.77	19.38	19.08
GPRS (GMSK, 2-Slot)	25.72	25.64	25.53	22.09	21.69	21.35
GPRS (GMSK, 3-Slot)	25.86	25.73	25.51	22.11	21.67	21.31
GPRS (GMSK, 4-Slot)	25.98	25.75	25.61	22.21	21.40	21.26
EGPRS (8PSK, 1-Slot)	18.75	18.72	17.97	16.97	16.89	16.43
EGPRS (8PSK, 2-Slot)	17.00	17.42	17.53	18.53	18.39	18.35
EGPRS (8PSK, 3-Slot)	17.63	16.71	16.87	19.26	18.24	18.04
EGPRS (8PSK, 4-Slot)	20.81	19.77	19.77	18.76	18.04	17.99

Remark:  
 1. SAR testing was performed on the maximum frame-averaged power mode.  
 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum  
 Burst - averaged power based on time slots. The calculated method is shown as below:  
 Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB  
 Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB  
 Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB  
 Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB



## WCDMA

Band	WCDMA Band 2			WCDMA Band 5		
Channel	9262	9400	9538	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6	1852.4	1880	1907.6
RMC 12.2Kbps	21.51	21.54	21.58	21.75	21.73	21.68
HSDPA Subtest-1	21.10	21.20	21.43	21.36	21.43	21.42
HSDPA Subtest-2	21.13	21.21	21.42	21.34	21.42	21.42
HSDPA Subtest-3	21.13	21.21	21.41	21.37	21.42	21.41
HSDPA Subtest-4	21.13	21.21	21.41	21.37	21.41	21.42
HSUPA Subtest-1	21.10	21.14	21.38	21.30	21.35	21.30
HSUPA Subtest-2	21.11	21.14	21.38	21.27	21.35	21.30
HSUPA Subtest-3	21.09	21.15	21.37	21.30	21.35	21.29
HSUPA Subtest-4	21.08	21.16	21.39	21.30	21.35	21.30
HSUPA Subtest-5	21.08	21.16	21.37	21.25	21.34	21.29

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM (db)	MPR (db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



## 2.4G WLAN

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11b	1	2412	7.47	5.58
	6	2437	7.25	5.31
	11	2462	4.85	3.05
802.11g	1	2412	7.63	5.79
	6	2437	8.48	7.05
	11	2462	5.90	3.89
802.11 n-HT20	1	2412	7.82	6.05
	6	2437	8.79	7.57
	11	2462	6.16	4.13

## Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	17.58	57.28
	39	2441	16.25	42.17
	78	2480	17.38	54.70
$\pi/4$ -QPSK(2Mbps)	0	2402	14.44	27.80
	39	2441	13.03	20.09
	78	2480	13.88	24.43
8DPSK(3Mbps)	0	2402	13.13	20.56
	39	2441	11.73	14.89
	78	2480	12.67	18.49

## BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	1.18	1.31
	19	2440	3.54	2.26
	39	2480	1.35	1.36



## LTE Conducted Power

### General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band2	1.4	1850.7	QPSK	6	20.75	Pass
Band2	1.4	1850.7	QPSK	3	21.93	Pass
Band2	1.4	1850.7	QPSK	3	21.91	Pass
Band2	1.4	1850.7	QPSK	3	21.88	Pass
Band2	1.4	1850.7	QPSK	1	21.88	Pass
Band2	1.4	1850.7	QPSK	1	21.81	Pass
Band2	1.4	1850.7	QPSK	1	21.84	Pass
Band2	1.4	1850.7	16QAM	6	21.97	Pass
Band2	1.4	1850.7	16QAM	3	21.15	Pass
Band2	1.4	1850.7	16QAM	3	21.15	Pass
Band2	1.4	1850.7	16QAM	3	21.25	Pass
Band2	1.4	1850.7	16QAM	1	22	Pass
Band2	1.4	1850.7	16QAM	1	21.96	Pass
Band2	1.4	1850.7	16QAM	1	21.89	Pass
Band2	1.4	1880	QPSK	6	20.74	Pass
Band2	1.4	1880	QPSK	3	21.76	Pass
Band2	1.4	1880	QPSK	3	21.85	Pass
Band2	1.4	1880	QPSK	3	21.74	Pass
Band2	1.4	1880	QPSK	1	21.74	Pass
Band2	1.4	1880	QPSK	1	21.7	Pass
Band2	1.4	1880	QPSK	1	21.71	Pass
Band2	1.4	1880	16QAM	6	20.52	Pass
Band2	1.4	1880	16QAM	3	21.08	Pass
Band2	1.4	1880	16QAM	3	21.07	Pass
Band2	1.4	1880	16QAM	3	21.08	Pass
Band2	1.4	1880	16QAM	1	20.91	Pass
Band2	1.4	1880	16QAM	1	20.87	Pass
Band2	1.4	1880	16QAM	1	21	Pass
Band2	1.4	1909.3	QPSK	6	20.53	Pass
Band2	1.4	1909.3	QPSK	3	21.68	Pass
Band2	1.4	1909.3	QPSK	3	21.67	Pass
Band2	1.4	1909.3	QPSK	3	21.7	Pass
Band2	1.4	1909.3	QPSK	1	21.67	Pass
Band2	1.4	1909.3	QPSK	1	21.67	Pass
Band2	1.4	1909.3	QPSK	1	21.6	Pass
Band2	1.4	1909.3	16QAM	6	21.6	Pass
Band2	1.4	1909.3	16QAM	3	20.61	Pass
Band2	1.4	1909.3	16QAM	3	20.6	Pass
Band2	1.4	1909.3	16QAM	3	20.68	Pass
Band2	1.4	1909.3	16QAM	1	21.41	Pass
Band2	1.4	1909.3	16QAM	1	21.41	Pass
Band2	1.4	1909.3	16QAM	1	21.41	Pass
Band2	3	1851.5	QPSK	15	20.84	Pass



Band2	3	1851.5	QPSK	8	20.9	Pass
Band2	3	1851.5	QPSK	8	20.9	Pass
Band2	3	1851.5	QPSK	8	20.8	Pass
Band2	3	1851.5	QPSK	1	21.94	Pass
Band2	3	1851.5	QPSK	1	21.69	Pass
Band2	3	1851.5	QPSK	1	21.7	Pass
Band2	3	1851.5	16QAM	15	20.16	Pass
Band2	3	1851.5	16QAM	8	20.32	Pass
Band2	3	1851.5	16QAM	8	20.32	Pass
Band2	3	1851.5	16QAM	8	20.19	Pass
Band2	3	1851.5	16QAM	1	20.92	Pass
Band2	3	1851.5	16QAM	1	20.91	Pass
Band2	3	1851.5	16QAM	1	21.02	Pass
Band2	3	1880	QPSK	15	20.8	Pass
Band2	3	1880	QPSK	8	20.75	Pass
Band2	3	1880	QPSK	8	20.75	Pass
Band2	3	1880	QPSK	8	20.77	Pass
Band2	3	1880	QPSK	1	21.65	Pass
Band2	3	1880	QPSK	1	21.71	Pass
Band2	3	1880	QPSK	1	21.6	Pass
Band2	3	1880	16QAM	15	20.34	Pass
Band2	3	1880	16QAM	8	20.55	Pass
Band2	3	1880	16QAM	8	20.56	Pass
Band2	3	1880	16QAM	8	20.07	Pass
Band2	3	1880	16QAM	1	20.91	Pass
Band2	3	1880	16QAM	1	21.03	Pass
Band2	3	1880	16QAM	1	20.87	Pass
Band2	3	1908.5	QPSK	15	20.64	Pass
Band2	3	1908.5	QPSK	8	20.59	Pass
Band2	3	1908.5	QPSK	8	20.6	Pass
Band2	3	1908.5	QPSK	8	20.58	Pass
Band2	3	1908.5	QPSK	1	21.71	Pass
Band2	3	1908.5	QPSK	1	21.72	Pass
Band2	3	1908.5	QPSK	1	21.69	Pass
Band2	3	1908.5	16QAM	15	19.97	Pass
Band2	3	1908.5	16QAM	8	19.96	Pass
Band2	3	1908.5	16QAM	8	19.96	Pass
Band2	3	1908.5	16QAM	8	20.03	Pass
Band2	3	1908.5	16QAM	1	20.99	Pass
Band2	3	1908.5	16QAM	1	21.02	Pass
Band2	3	1908.5	16QAM	1	21.01	Pass
Band2	5	1852.5	QPSK	25	20.82	Pass
Band2	5	1852.5	QPSK	12	20.99	Pass
Band2	5	1852.5	QPSK	12	20.99	Pass
Band2	5	1852.5	QPSK	12	21.01	Pass
Band2	5	1852.5	QPSK	1	22.09	Pass



Band2	5	1852.5	QPSK	1	21.89	Pass
Band2	5	1852.5	QPSK	1	21.79	Pass
Band2	5	1852.5	16QAM	25	20.7	Pass
Band2	5	1852.5	16QAM	12	20.17	Pass
Band2	5	1852.5	16QAM	12	20.18	Pass
Band2	5	1852.5	16QAM	12	19.97	Pass
Band2	5	1852.5	16QAM	1	20.31	Pass
Band2	5	1852.5	16QAM	1	20.24	Pass
Band2	5	1852.5	16QAM	1	20.14	Pass
Band2	5	1880	QPSK	25	20.78	Pass
Band2	5	1880	QPSK	12	20.85	Pass
Band2	5	1880	QPSK	12	20.85	Pass
Band2	5	1880	QPSK	12	20.73	Pass
Band2	5	1880	QPSK	1	21.98	Pass
Band2	5	1880	QPSK	1	22.02	Pass
Band2	5	1880	QPSK	1	22	Pass
Band2	5	1880	16QAM	25	20.39	Pass
Band2	5	1880	16QAM	12	20.23	Pass
Band2	5	1880	16QAM	12	20.24	Pass
Band2	5	1880	16QAM	12	19.87	Pass
Band2	5	1880	16QAM	1	20.95	Pass
Band2	5	1880	16QAM	1	20.91	Pass
Band2	5	1880	16QAM	1	20.97	Pass
Band2	5	1907.5	QPSK	25	20.66	Pass
Band2	5	1907.5	QPSK	12	20.63	Pass
Band2	5	1907.5	QPSK	12	20.64	Pass
Band2	5	1907.5	QPSK	12	20.65	Pass
Band2	5	1907.5	QPSK	1	21.61	Pass
Band2	5	1907.5	QPSK	1	21.64	Pass
Band2	5	1907.5	QPSK	1	21.66	Pass
Band2	5	1907.5	16QAM	25	19.72	Pass
Band2	5	1907.5	16QAM	12	19.74	Pass
Band2	5	1907.5	16QAM	12	19.76	Pass
Band2	5	1907.5	16QAM	12	19.84	Pass
Band2	5	1907.5	16QAM	1	20.86	Pass
Band2	5	1907.5	16QAM	1	20.77	Pass
Band2	5	1907.5	16QAM	1	20.74	Pass
Band2	10	1855	QPSK	50	21.89	Pass
Band2	10	1855	QPSK	25	20.91	Pass
Band2	10	1855	QPSK	25	20.92	Pass
Band2	10	1855	QPSK	25	20.83	Pass
Band2	10	1855	QPSK	1	21.78	Pass
Band2	10	1855	QPSK	1	21.72	Pass
Band2	10	1855	QPSK	1	21.7	Pass
Band2	10	1855	16QAM	50	21.29	Pass
Band2	10	1855	16QAM	25	19.89	Pass



Band2	10	1855	16QAM	25	19.9	Pass
Band2	10	1855	16QAM	25	19.91	Pass
Band2	10	1855	16QAM	1	21.3	Pass
Band2	10	1855	16QAM	1	21.26	Pass
Band2	10	1855	16QAM	1	21.17	Pass
Band2	10	1880	QPSK	50	20.72	Pass
Band2	10	1880	QPSK	25	20.83	Pass
Band2	10	1880	QPSK	25	20.83	Pass
Band2	10	1880	QPSK	25	20.84	Pass
Band2	10	1880	QPSK	1	22.21	Pass
Band2	10	1880	QPSK	1	22.07	Pass
Band2	10	1880	QPSK	1	22.05	Pass
Band2	10	1880	16QAM	50	20.4	Pass
Band2	10	1880	16QAM	25	20.06	Pass
Band2	10	1880	16QAM	25	20.07	Pass
Band2	10	1880	16QAM	25	20.06	Pass
Band2	10	1880	16QAM	1	21.78	Pass
Band2	10	1880	16QAM	1	21.69	Pass
Band2	10	1880	16QAM	1	21.56	Pass
Band2	10	1905	QPSK	50	20.59	Pass
Band2	10	1905	QPSK	25	20.67	Pass
Band2	10	1905	QPSK	25	20.67	Pass
Band2	10	1905	QPSK	25	20.67	Pass
Band2	10	1905	QPSK	1	21.73	Pass
Band2	10	1905	QPSK	1	21.68	Pass
Band2	10	1905	QPSK	1	21.67	Pass
Band2	10	1905	16QAM	50	19.95	Pass
Band2	10	1905	16QAM	25	19.95	Pass
Band2	10	1905	16QAM	25	19.95	Pass
Band2	10	1905	16QAM	25	20	Pass
Band2	10	1905	16QAM	1	20.75	Pass
Band2	10	1905	16QAM	1	20.71	Pass
Band2	10	1905	16QAM	1	20.74	Pass
Band2	15	1857.5	QPSK	75	20.74	Pass
Band2	15	1857.5	QPSK	38	20.8	Pass
Band2	15	1857.5	QPSK	38	20.8	Pass
Band2	15	1857.5	QPSK	38	20.79	Pass
Band2	15	1857.5	QPSK	1	22	Pass
Band2	15	1857.5	QPSK	1	21.91	Pass
Band2	15	1857.5	QPSK	1	21.96	Pass
Band2	15	1857.5	16QAM	75	20.09	Pass
Band2	15	1857.5	16QAM	38	19.99	Pass
Band2	15	1857.5	16QAM	38	19.99	Pass
Band2	15	1857.5	16QAM	38	19.99	Pass
Band2	15	1857.5	16QAM	1	21.28	Pass
Band2	15	1857.5	16QAM	1	21.69	Pass



Band2	15	1857.5	16QAM	1	21.08	Pass
Band2	15	1880	QPSK	75	20.77	Pass
Band2	15	1880	QPSK	38	20.78	Pass
Band2	15	1880	QPSK	38	20.78	Pass
Band2	15	1880	QPSK	38	20.78	Pass
Band2	15	1880	QPSK	1	21.87	Pass
Band2	15	1880	QPSK	1	21.69	Pass
Band2	15	1880	QPSK	1	21.67	Pass
Band2	15	1880	16QAM	75	20.43	Pass
Band2	15	1880	16QAM	38	20.36	Pass
Band2	15	1880	16QAM	38	20.48	Pass
Band2	15	1880	16QAM	38	20.38	Pass
Band2	15	1880	16QAM	1	21.35	Pass
Band2	15	1880	16QAM	1	21.41	Pass
Band2	15	1880	16QAM	1	21.12	Pass
Band2	15	1902.5	QPSK	75	20.6	Pass
Band2	15	1902.5	QPSK	38	20.7	Pass
Band2	15	1902.5	QPSK	38	20.71	Pass
Band2	15	1902.5	QPSK	38	20.71	Pass
Band2	15	1902.5	QPSK	1	21.72	Pass
Band2	15	1902.5	QPSK	1	21.54	Pass
Band2	15	1902.5	QPSK	1	21.59	Pass
Band2	15	1902.5	16QAM	75	19.76	Pass
Band2	15	1902.5	16QAM	38	19.8	Pass
Band2	15	1902.5	16QAM	38	19.81	Pass
Band2	15	1902.5	16QAM	38	19.81	Pass
Band2	15	1902.5	16QAM	1	21.43	Pass
Band2	15	1902.5	16QAM	1	21.47	Pass
Band2	15	1902.5	16QAM	1	21.17	Pass
Band2	20	1860	QPSK	100	20.77	Pass
Band2	20	1860	QPSK	50	20.87	Pass
Band2	20	1860	QPSK	50	20.85	Pass
Band2	20	1860	QPSK	50	20.83	Pass
Band2	20	1860	QPSK	1	22.33	Pass
Band2	20	1860	QPSK	1	22.05	Pass
Band2	20	1860	QPSK	1	21.94	Pass
Band2	20	1860	16QAM	100	20.02	Pass
Band2	20	1860	16QAM	50	20.07	Pass
Band2	20	1860	16QAM	50	20.06	Pass
Band2	20	1860	16QAM	50	20.19	Pass
Band2	20	1860	16QAM	1	21.27	Pass
Band2	20	1860	16QAM	1	21.05	Pass
Band2	20	1860	16QAM	1	21.14	Pass
Band2	20	1880	QPSK	100	20.73	Pass
Band2	20	1880	QPSK	50	20.94	Pass
Band2	20	1880	QPSK	50	20.94	Pass



Band2	20	1880	QPSK	50	20.85	Pass
Band2	20	1880	QPSK	1	22.06	Pass
Band2	20	1880	QPSK	1	21.92	Pass
Band2	20	1880	QPSK	1	21.8	Pass
Band2	20	1880	16QAM	100	20.63	Pass
Band2	20	1880	16QAM	50	20.54	Pass
Band2	20	1880	16QAM	50	20.47	Pass
Band2	20	1880	16QAM	50	19.87	Pass
Band2	20	1880	16QAM	1	22	Pass
Band2	20	1880	16QAM	1	21.73	Pass
Band2	20	1880	16QAM	1	21.65	Pass
Band2	20	1900	QPSK	100	20.63	Pass
Band2	20	1900	QPSK	50	20.68	Pass
Band2	20	1900	QPSK	50	20.68	Pass
Band2	20	1900	QPSK	50	20.6	Pass
Band2	20	1900	QPSK	1	21.89	Pass
Band2	20	1900	QPSK	1	21.71	Pass
Band2	20	1900	QPSK	1	21.64	Pass
Band2	20	1900	16QAM	100	19.79	Pass
Band2	20	1900	16QAM	50	19.88	Pass
Band2	20	1900	16QAM	50	19.88	Pass
Band2	20	1900	16QAM	50	19.7	Pass
Band2	20	1900	16QAM	1	20.89	Pass
Band2	20	1900	16QAM	1	20.66	Pass
Band2	20	1900	16QAM	1	20.7	Pass



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band4	1.4	1710.7	QPSK	6	21.65	Pass
Band4	1.4	1710.7	QPSK	3	22.79	Pass
Band4	1.4	1710.7	QPSK	3	22.78	Pass
Band4	1.4	1710.7	QPSK	3	22.73	Pass
Band4	1.4	1710.7	QPSK	1	22.77	Pass
Band4	1.4	1710.7	QPSK	1	22.85	Pass
Band4	1.4	1710.7	QPSK	1	22.84	Pass
Band4	1.4	1710.7	16QAM	6	22.66	Pass
Band4	1.4	1710.7	16QAM	3	21.86	Pass
Band4	1.4	1710.7	16QAM	3	21.85	Pass
Band4	1.4	1710.7	16QAM	3	21.96	Pass
Band4	1.4	1710.7	16QAM	1	22.76	Pass
Band4	1.4	1710.7	16QAM	1	22.7	Pass
Band4	1.4	1710.7	16QAM	1	22.7	Pass
Band4	1.4	1732.5	QPSK	6	21.66	Pass
Band4	1.4	1732.5	QPSK	3	22.56	Pass
Band4	1.4	1732.5	QPSK	3	22.74	Pass
Band4	1.4	1732.5	QPSK	3	22.75	Pass
Band4	1.4	1732.5	QPSK	1	22.69	Pass
Band4	1.4	1732.5	QPSK	1	22.68	Pass
Band4	1.4	1732.5	QPSK	1	22.86	Pass
Band4	1.4	1732.5	16QAM	6	21.2	Pass
Band4	1.4	1732.5	16QAM	3	21.58	Pass
Band4	1.4	1732.5	16QAM	3	21.58	Pass
Band4	1.4	1732.5	16QAM	3	21.61	Pass
Band4	1.4	1732.5	16QAM	1	22.54	Pass
Band4	1.4	1732.5	16QAM	1	22.4	Pass
Band4	1.4	1732.5	16QAM	1	22.56	Pass
Band4	1.4	1754.3	QPSK	6	21.44	Pass
Band4	1.4	1754.3	QPSK	3	22.58	Pass
Band4	1.4	1754.3	QPSK	3	22.56	Pass
Band4	1.4	1754.3	QPSK	3	22.57	Pass
Band4	1.4	1754.3	QPSK	1	22.6	Pass
Band4	1.4	1754.3	QPSK	1	22.54	Pass
Band4	1.4	1754.3	QPSK	1	22.6	Pass
Band4	1.4	1754.3	16QAM	6	21.44	Pass
Band4	1.4	1754.3	16QAM	3	21.31	Pass
Band4	1.4	1754.3	16QAM	3	21.3	Pass
Band4	1.4	1754.3	16QAM	3	21.3	Pass
Band4	1.4	1754.3	16QAM	1	21.73	Pass
Band4	1.4	1754.3	16QAM	1	21.78	Pass
Band4	1.4	1754.3	16QAM	1	21.71	Pass
Band4	3	1711.5	QPSK	15	20.77	Pass
Band4	3	1711.5	QPSK	8	21.59	Pass



Band4	3	1711.5	QPSK	8	21.68	Pass
Band4	3	1711.5	QPSK	8	21.61	Pass
Band4	3	1711.5	QPSK	1	22.66	Pass
Band4	3	1711.5	QPSK	1	22.63	Pass
Band4	3	1711.5	QPSK	1	22.52	Pass
Band4	3	1711.5	16QAM	15	21.22	Pass
Band4	3	1711.5	16QAM	8	20.97	Pass
Band4	3	1711.5	16QAM	8	20.97	Pass
Band4	3	1711.5	16QAM	8	21.06	Pass
Band4	3	1711.5	16QAM	1	22.11	Pass
Band4	3	1711.5	16QAM	1	22.13	Pass
Band4	3	1711.5	16QAM	1	21.98	Pass
Band4	3	1732.5	QPSK	15	21.56	Pass
Band4	3	1732.5	QPSK	8	21.65	Pass
Band4	3	1732.5	QPSK	8	21.65	Pass
Band4	3	1732.5	QPSK	8	21.7	Pass
Band4	3	1732.5	QPSK	1	22.9	Pass
Band4	3	1732.5	QPSK	1	22.97	Pass
Band4	3	1732.5	QPSK	1	22.92	Pass
Band4	3	1732.5	16QAM	15	21.53	Pass
Band4	3	1732.5	16QAM	8	20.91	Pass
Band4	3	1732.5	16QAM	8	20.91	Pass
Band4	3	1732.5	16QAM	8	20.79	Pass
Band4	3	1732.5	16QAM	1	21.89	Pass
Band4	3	1732.5	16QAM	1	21.89	Pass
Band4	3	1732.5	16QAM	1	21.85	Pass
Band4	3	1753.5	QPSK	15	21.53	Pass
Band4	3	1753.5	QPSK	8	21.52	Pass
Band4	3	1753.5	QPSK	8	21.53	Pass
Band4	3	1753.5	QPSK	8	21.47	Pass
Band4	3	1753.5	QPSK	1	22.6	Pass
Band4	3	1753.5	QPSK	1	22.63	Pass
Band4	3	1753.5	QPSK	1	22.64	Pass
Band4	3	1753.5	16QAM	15	20.57	Pass
Band4	3	1753.5	16QAM	8	20.91	Pass
Band4	3	1753.5	16QAM	8	20.82	Pass
Band4	3	1753.5	16QAM	8	20.98	Pass
Band4	3	1753.5	16QAM	1	21.87	Pass
Band4	3	1753.5	16QAM	1	21.79	Pass
Band4	3	1753.5	16QAM	1	21.63	Pass
Band4	5	1712.5	QPSK	25	20.83	Pass
Band4	5	1712.5	QPSK	12	21.69	Pass
Band4	5	1712.5	QPSK	12	21.68	Pass
Band4	5	1712.5	QPSK	12	21.7	Pass
Band4	5	1712.5	QPSK	1	22.69	Pass
Band4	5	1712.5	QPSK	1	22.66	Pass



Band4	5	1712.5	QPSK	1	22.62	Pass
Band4	5	1712.5	16QAM	25	20.95	Pass
Band4	5	1712.5	16QAM	12	20.62	Pass
Band4	5	1712.5	16QAM	12	20.62	Pass
Band4	5	1712.5	16QAM	12	20.8	Pass
Band4	5	1712.5	16QAM	1	21.34	Pass
Band4	5	1712.5	16QAM	1	21.33	Pass
Band4	5	1712.5	16QAM	1	21.41	Pass
Band4	5	1732.5	QPSK	25	21.63	Pass
Band4	5	1732.5	QPSK	12	21.62	Pass
Band4	5	1732.5	QPSK	12	21.61	Pass
Band4	5	1732.5	QPSK	12	21.7	Pass
Band4	5	1732.5	QPSK	1	22.8	Pass
Band4	5	1732.5	QPSK	1	22.7	Pass
Band4	5	1732.5	QPSK	1	22.77	Pass
Band4	5	1732.5	16QAM	25	21	Pass
Band4	5	1732.5	16QAM	12	20.95	Pass
Band4	5	1732.5	16QAM	12	20.96	Pass
Band4	5	1732.5	16QAM	12	20.79	Pass
Band4	5	1732.5	16QAM	1	21.89	Pass
Band4	5	1732.5	16QAM	1	21.84	Pass
Band4	5	1732.5	16QAM	1	21.97	Pass
Band4	5	1752.5	QPSK	25	21.43	Pass
Band4	5	1752.5	QPSK	12	21.58	Pass
Band4	5	1752.5	QPSK	12	21.57	Pass
Band4	5	1752.5	QPSK	12	21.46	Pass
Band4	5	1752.5	QPSK	1	22.27	Pass
Band4	5	1752.5	QPSK	1	22.44	Pass
Band4	5	1752.5	QPSK	1	22.38	Pass
Band4	5	1752.5	16QAM	25	20.35	Pass
Band4	5	1752.5	16QAM	12	20.47	Pass
Band4	5	1752.5	16QAM	12	20.61	Pass
Band4	5	1752.5	16QAM	12	20.36	Pass
Band4	5	1752.5	16QAM	1	21.08	Pass
Band4	5	1752.5	16QAM	1	21.03	Pass
Band4	5	1752.5	16QAM	1	21.07	Pass



Band4	10	1715	QPSK	50	21.16	Pass
Band4	10	1715	QPSK	25	21.61	Pass
Band4	10	1715	QPSK	25	21.59	Pass
Band4	10	1715	QPSK	25	21.64	Pass
Band4	10	1715	QPSK	1	22.93	Pass
Band4	10	1715	QPSK	1	22.87	Pass
Band4	10	1715	QPSK	1	22.87	Pass
Band4	10	1715	16QAM	50	21.16	Pass
Band4	10	1715	16QAM	25	20.9	Pass
Band4	10	1715	16QAM	25	20.91	Pass
Band4	10	1715	16QAM	25	21.06	Pass
Band4	10	1715	16QAM	1	22.03	Pass
Band4	10	1715	16QAM	1	22.64	Pass
Band4	10	1715	16QAM	1	22.6	Pass
Band4	10	1732.5	QPSK	50	21.57	Pass
Band4	10	1732.5	QPSK	25	21.6	Pass
Band4	10	1732.5	QPSK	25	21.6	Pass
Band4	10	1732.5	QPSK	25	21.77	Pass
Band4	10	1732.5	QPSK	1	22.93	Pass
Band4	10	1732.5	QPSK	1	22.98	Pass
Band4	10	1732.5	QPSK	1	22.9	Pass
Band4	10	1732.5	16QAM	50	20.91	Pass
Band4	10	1732.5	16QAM	25	20.93	Pass
Band4	10	1732.5	16QAM	25	20.94	Pass
Band4	10	1732.5	16QAM	25	20.78	Pass
Band4	10	1732.5	16QAM	1	22.11	Pass
Band4	10	1732.5	16QAM	1	21.91	Pass
Band4	10	1732.5	16QAM	1	21.94	Pass
Band4	10	1750	QPSK	50	21.5	Pass
Band4	10	1750	QPSK	25	21.59	Pass
Band4	10	1750	QPSK	25	21.58	Pass
Band4	10	1750	QPSK	25	21.54	Pass
Band4	10	1750	QPSK	1	22.78	Pass
Band4	10	1750	QPSK	1	22.59	Pass
Band4	10	1750	QPSK	1	22.56	Pass
Band4	10	1750	16QAM	50	20.54	Pass
Band4	10	1750	16QAM	25	20.7	Pass
Band4	10	1750	16QAM	25	20.71	Pass
Band4	10	1750	16QAM	25	20.6	Pass
Band4	10	1750	16QAM	1	22.66	Pass
Band4	10	1750	16QAM	1	22.75	Pass
Band4	10	1750	16QAM	1	22.61	Pass



Band4	15	1717.5	QPSK	75	20.97	Pass
Band4	15	1717.5	QPSK	38	20.89	Pass
Band4	15	1717.5	QPSK	38	20.88	Pass
Band4	15	1717.5	QPSK	38	20.87	Pass
Band4	15	1717.5	QPSK	1	22.64	Pass
Band4	15	1717.5	QPSK	1	22.53	Pass
Band4	15	1717.5	QPSK	1	22.62	Pass
Band4	15	1717.5	16QAM	75	21.9	Pass
Band4	15	1717.5	16QAM	38	20.82	Pass
Band4	15	1717.5	16QAM	38	20.81	Pass
Band4	15	1717.5	16QAM	38	20.81	Pass
Band4	15	1717.5	16QAM	1	22.37	Pass
Band4	15	1717.5	16QAM	1	22.35	Pass
Band4	15	1717.5	16QAM	1	22.41	Pass
Band4	15	1732.5	QPSK	75	21.81	Pass
Band4	15	1732.5	QPSK	38	21.81	Pass
Band4	15	1732.5	QPSK	38	21.81	Pass
Band4	15	1732.5	QPSK	38	21.81	Pass
Band4	15	1732.5	QPSK	1	22.66	Pass
Band4	15	1732.5	QPSK	1	22.53	Pass
Band4	15	1732.5	QPSK	1	22.44	Pass
Band4	15	1732.5	16QAM	75	21	Pass
Band4	15	1732.5	16QAM	38	21.33	Pass
Band4	15	1732.5	16QAM	38	21.16	Pass
Band4	15	1732.5	16QAM	38	21.17	Pass
Band4	15	1732.5	16QAM	1	22.18	Pass
Band4	15	1732.5	16QAM	1	22.21	Pass
Band4	15	1732.5	16QAM	1	22.14	Pass
Band4	15	1747.5	QPSK	75	21.6	Pass
Band4	15	1747.5	QPSK	38	21.7	Pass
Band4	15	1747.5	QPSK	38	21.7	Pass
Band4	15	1747.5	QPSK	38	21.69	Pass
Band4	15	1747.5	QPSK	1	22.66	Pass
Band4	15	1747.5	QPSK	1	22.6	Pass
Band4	15	1747.5	QPSK	1	22.52	Pass
Band4	15	1747.5	16QAM	75	20.53	Pass
Band4	15	1747.5	16QAM	38	20.76	Pass
Band4	15	1747.5	16QAM	38	20.77	Pass
Band4	15	1747.5	16QAM	38	20.84	Pass
Band4	15	1747.5	16QAM	1	22.28	Pass
Band4	15	1747.5	16QAM	1	22.18	Pass
Band4	15	1747.5	16QAM	1	22.03	Pass



Band4	20	1720	QPSK	100	21.51	Pass
Band4	20	1720	QPSK	50	21.53	Pass
Band4	20	1720	QPSK	50	21.52	Pass
Band4	20	1720	QPSK	50	21.53	Pass
Band4	20	1720	QPSK	1	22.75	Pass
Band4	20	1720	QPSK	1	22.77	Pass
Band4	20	1720	QPSK	1	22.64	Pass
Band4	20	1720	16QAM	100	20.68	Pass
Band4	20	1720	16QAM	50	20.72	Pass
Band4	20	1720	16QAM	50	20.72	Pass
Band4	20	1720	16QAM	50	20.7	Pass
Band4	20	1720	16QAM	1	21.64	Pass
Band4	20	1720	16QAM	1	21.72	Pass
Band4	20	1720	16QAM	1	21.59	Pass
Band4	20	1732.5	QPSK	100	21.55	Pass
Band4	20	1732.5	QPSK	50	21.59	Pass
Band4	20	1732.5	QPSK	50	21.58	Pass
Band4	20	1732.5	QPSK	50	21.53	Pass
Band4	20	1732.5	QPSK	1	22.58	Pass
Band4	20	1732.5	QPSK	1	22.64	Pass
Band4	20	1732.5	QPSK	1	22.59	Pass
Band4	20	1732.5	16QAM	100	21.08	Pass
Band4	20	1732.5	16QAM	50	20.67	Pass
Band4	20	1732.5	16QAM	50	20.67	Pass
Band4	20	1732.5	16QAM	50	20.96	Pass
Band4	20	1732.5	16QAM	1	22.41	Pass
Band4	20	1732.5	16QAM	1	22.36	Pass
Band4	20	1732.5	16QAM	1	22.29	Pass
Band4	20	1745	QPSK	100	21.38	Pass
Band4	20	1745	QPSK	50	21.48	Pass
Band4	20	1745	QPSK	50	21.48	Pass
Band4	20	1745	QPSK	50	21.38	Pass
Band4	20	1745	QPSK	1	22.84	Pass
Band4	20	1745	QPSK	1	22.77	Pass
Band4	20	1745	QPSK	1	22.65	Pass
Band4	20	1745	16QAM	100	20.62	Pass
Band4	20	1745	16QAM	50	20.96	Pass
Band4	20	1745	16QAM	50	21.16	Pass
Band4	20	1745	16QAM	50	20.86	Pass
Band4	20	1745	16QAM	1	22.19	Pass
Band4	20	1745	16QAM	1	22.14	Pass
Band4	20	1745	16QAM	1	21.89	Pass



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band5	1.4	824.7	QPSK	6	22.31	Pass
Band5	1.4	824.7	QPSK	3	23.59	Pass
Band5	1.4	824.7	QPSK	3	23.54	Pass
Band5	1.4	824.7	QPSK	3	23.52	Pass
Band5	1.4	824.7	QPSK	1	23.42	Pass
Band5	1.4	824.7	QPSK	1	23.46	Pass
Band5	1.4	824.7	QPSK	1	23.41	Pass
Band5	1.4	824.7	16QAM	6	21.55	Pass
Band5	1.4	824.7	16QAM	3	22.62	Pass
Band5	1.4	824.7	16QAM	3	22.62	Pass
Band5	1.4	824.7	16QAM	3	22.76	Pass
Band5	1.4	824.7	16QAM	1	23.18	Pass
Band5	1.4	824.7	16QAM	1	23.05	Pass
Band5	1.4	824.7	16QAM	1	23.19	Pass
Band5	1.4	836.5	QPSK	6	22.43	Pass
Band5	1.4	836.5	QPSK	3	23.41	Pass
Band5	1.4	836.5	QPSK	3	23.4	Pass
Band5	1.4	836.5	QPSK	3	23.52	Pass
Band5	1.4	836.5	QPSK	1	23.5	Pass
Band5	1.4	836.5	QPSK	1	23.39	Pass
Band5	1.4	836.5	QPSK	1	23.57	Pass
Band5	1.4	836.5	16QAM	6	21.87	Pass
Band5	1.4	836.5	16QAM	3	22.36	Pass
Band5	1.4	836.5	16QAM	3	22.35	Pass
Band5	1.4	836.5	16QAM	3	22.49	Pass
Band5	1.4	836.5	16QAM	1	23.13	Pass
Band5	1.4	836.5	16QAM	1	23.26	Pass
Band5	1.4	836.5	16QAM	1	23.19	Pass
Band5	1.4	848.3	QPSK	6	22.22	Pass
Band5	1.4	848.3	QPSK	3	23.25	Pass
Band5	1.4	848.3	QPSK	3	23.28	Pass
Band5	1.4	848.3	QPSK	3	23.2	Pass
Band5	1.4	848.3	QPSK	1	23.36	Pass
Band5	1.4	848.3	QPSK	1	23.26	Pass
Band5	1.4	848.3	QPSK	1	23.33	Pass
Band5	1.4	848.3	16QAM	6	21.41	Pass
Band5	1.4	848.3	16QAM	3	21.78	Pass
Band5	1.4	848.3	16QAM	3	21.89	Pass
Band5	1.4	848.3	16QAM	3	22.14	Pass
Band5	1.4	848.3	16QAM	1	22.08	Pass
Band5	1.4	848.3	16QAM	1	22.41	Pass
Band5	1.4	848.3	16QAM	1	22.4	Pass



Band5	3	825.5	QPSK	15	22.48	Pass
Band5	3	825.5	QPSK	8	22.51	Pass
Band5	3	825.5	QPSK	8	22.51	Pass
Band5	3	825.5	QPSK	8	22.53	Pass
Band5	3	825.5	QPSK	1	23.46	Pass
Band5	3	825.5	QPSK	1	23.36	Pass
Band5	3	825.5	QPSK	1	23.25	Pass
Band5	3	825.5	16QAM	15	21.47	Pass
Band5	3	825.5	16QAM	8	21.74	Pass
Band5	3	825.5	16QAM	8	21.6	Pass
Band5	3	825.5	16QAM	8	21.93	Pass
Band5	3	825.5	16QAM	1	22.59	Pass
Band5	3	825.5	16QAM	1	22.76	Pass
Band5	3	825.5	16QAM	1	22.78	Pass
Band5	3	836.5	QPSK	15	22.38	Pass
Band5	3	836.5	QPSK	8	22.37	Pass
Band5	3	836.5	QPSK	8	22.37	Pass
Band5	3	836.5	QPSK	8	22.33	Pass
Band5	3	836.5	QPSK	1	23.33	Pass
Band5	3	836.5	QPSK	1	23.39	Pass
Band5	3	836.5	QPSK	1	23.41	Pass
Band5	3	836.5	16QAM	15	21.83	Pass
Band5	3	836.5	16QAM	8	21.83	Pass
Band5	3	836.5	16QAM	8	21.84	Pass
Band5	3	836.5	16QAM	8	21.81	Pass
Band5	3	836.5	16QAM	1	23.1	Pass
Band5	3	836.5	16QAM	1	23.15	Pass
Band5	3	836.5	16QAM	1	23.06	Pass
Band5	3	847.5	QPSK	15	22.03	Pass
Band5	3	847.5	QPSK	8	22.14	Pass
Band5	3	847.5	QPSK	8	22.13	Pass
Band5	3	847.5	QPSK	8	22.36	Pass
Band5	3	847.5	QPSK	1	23.28	Pass
Band5	3	847.5	QPSK	1	23.28	Pass
Band5	3	847.5	QPSK	1	23.31	Pass
Band5	3	847.5	16QAM	15	21.16	Pass
Band5	3	847.5	16QAM	8	21.39	Pass
Band5	3	847.5	16QAM	8	21.28	Pass
Band5	3	847.5	16QAM	8	21.38	Pass
Band5	3	847.5	16QAM	1	22.03	Pass
Band5	3	847.5	16QAM	1	21.97	Pass
Band5	3	847.5	16QAM	1	22.35	Pass



Band5	5	826.5	QPSK	25	22.44	Pass
Band5	5	826.5	QPSK	12	22.53	Pass
Band5	5	826.5	QPSK	12	22.53	Pass
Band5	5	826.5	QPSK	12	22.38	Pass
Band5	5	826.5	QPSK	1	23.38	Pass
Band5	5	826.5	QPSK	1	23.29	Pass
Band5	5	826.5	QPSK	1	23.24	Pass
Band5	5	826.5	16QAM	25	21.82	Pass
Band5	5	826.5	16QAM	12	21.45	Pass
Band5	5	826.5	16QAM	12	21.31	Pass
Band5	5	826.5	16QAM	12	21.74	Pass
Band5	5	826.5	16QAM	1	21.87	Pass
Band5	5	826.5	16QAM	1	21.84	Pass
Band5	5	826.5	16QAM	1	21.58	Pass
Band5	5	836.5	QPSK	25	22.4	Pass
Band5	5	836.5	QPSK	12	22.52	Pass
Band5	5	836.5	QPSK	12	22.52	Pass
Band5	5	836.5	QPSK	12	22.39	Pass
Band5	5	836.5	QPSK	1	23.42	Pass
Band5	5	836.5	QPSK	1	23.57	Pass
Band5	5	836.5	QPSK	1	23.52	Pass
Band5	5	836.5	16QAM	25	21.75	Pass
Band5	5	836.5	16QAM	12	21.83	Pass
Band5	5	836.5	16QAM	12	21.84	Pass
Band5	5	836.5	16QAM	12	21.84	Pass
Band5	5	836.5	16QAM	1	22.49	Pass
Band5	5	836.5	16QAM	1	22.52	Pass
Band5	5	836.5	16QAM	1	22.63	Pass
Band5	5	846.5	QPSK	25	22.11	Pass
Band5	5	846.5	QPSK	12	22.36	Pass
Band5	5	846.5	QPSK	12	22.36	Pass
Band5	5	846.5	QPSK	12	22.2	Pass
Band5	5	846.5	QPSK	1	23.43	Pass
Band5	5	846.5	QPSK	1	23.2	Pass
Band5	5	846.5	QPSK	1	23.41	Pass
Band5	5	846.5	16QAM	25	21.26	Pass
Band5	5	846.5	16QAM	12	21.14	Pass
Band5	5	846.5	16QAM	12	21.14	Pass
Band5	5	846.5	16QAM	12	21.03	Pass
Band5	5	846.5	16QAM	1	22.07	Pass
Band5	5	846.5	16QAM	1	21.83	Pass
Band5	5	846.5	16QAM	1	22.11	Pass



Band5	10	829	QPSK	50	22.17	Pass
Band5	10	829	QPSK	25	22.47	Pass
Band5	10	829	QPSK	25	22.46	Pass
Band5	10	829	QPSK	25	22.38	Pass
Band5	10	829	QPSK	1	23.39	Pass
Band5	10	829	QPSK	1	23.19	Pass
Band5	10	829	QPSK	1	23.08	Pass
Band5	10	829	16QAM	50	21.93	Pass
Band5	10	829	16QAM	25	21.81	Pass
Band5	10	829	16QAM	25	21.81	Pass
Band5	10	829	16QAM	25	21.57	Pass
Band5	10	829	16QAM	1	22.79	Pass
Band5	10	829	16QAM	1	22.71	Pass
Band5	10	829	16QAM	1	23.16	Pass
Band5	10	836.5	QPSK	50	22.5	Pass
Band5	10	836.5	QPSK	25	22.37	Pass
Band5	10	836.5	QPSK	25	22.37	Pass
Band5	10	836.5	QPSK	25	22.46	Pass
Band5	10	836.5	QPSK	1	23.53	Pass
Band5	10	836.5	QPSK	1	23.58	Pass
Band5	10	836.5	QPSK	1	23.45	Pass
Band5	10	836.5	16QAM	50	21.87	Pass
Band5	10	836.5	16QAM	25	21.99	Pass
Band5	10	836.5	16QAM	25	21.99	Pass
Band5	10	836.5	16QAM	25	21.4	Pass
Band5	10	836.5	16QAM	1	22.65	Pass
Band5	10	836.5	16QAM	1	22.63	Pass
Band5	10	836.5	16QAM	1	22.34	Pass
Band5	10	844	QPSK	50	22.2	Pass
Band5	10	844	QPSK	25	22.25	Pass
Band5	10	844	QPSK	25	22.37	Pass
Band5	10	844	QPSK	25	22.22	Pass
Band5	10	844	QPSK	1	23.37	Pass
Band5	10	844	QPSK	1	23.25	Pass
Band5	10	844	QPSK	1	23.34	Pass
Band5	10	844	16QAM	50	21.36	Pass
Band5	10	844	16QAM	25	21.41	Pass
Band5	10	844	16QAM	25	21.42	Pass
Band5	10	844	16QAM	25	21.37	Pass
Band5	10	844	16QAM	1	22.56	Pass
Band5	10	844	16QAM	1	22.27	Pass
Band5	10	844	16QAM	1	22.31	Pass



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band7	5	2502.5	QPSK	25	22.42	Pass
Band7	5	2502.5	QPSK	12	22.38	Pass
Band7	5	2502.5	QPSK	12	22.37	Pass
Band7	5	2502.5	QPSK	12	22.35	Pass
Band7	5	2502.5	QPSK	1	23.62	Pass
Band7	5	2502.5	QPSK	1	23.38	Pass
Band7	5	2502.5	QPSK	1	23.5	Pass
Band7	5	2502.5	16QAM	25	21.66	Pass
Band7	5	2502.5	16QAM	12	21.44	Pass
Band7	5	2502.5	16QAM	12	21.45	Pass
Band7	5	2502.5	16QAM	12	21.44	Pass
Band7	5	2502.5	16QAM	1	21.79	Pass
Band7	5	2502.5	16QAM	1	21.81	Pass
Band7	5	2502.5	16QAM	1	21.91	Pass
Band7	5	2535	QPSK	25	22.31	Pass
Band7	5	2535	QPSK	12	22.37	Pass
Band7	5	2535	QPSK	12	22.58	Pass
Band7	5	2535	QPSK	12	22.44	Pass
Band7	5	2535	QPSK	1	23.57	Pass
Band7	5	2535	QPSK	1	23.7	Pass
Band7	5	2535	QPSK	1	23.55	Pass
Band7	5	2535	16QAM	25	21.48	Pass
Band7	5	2535	16QAM	12	21.45	Pass
Band7	5	2535	16QAM	12	21.43	Pass
Band7	5	2535	16QAM	12	21.51	Pass
Band7	5	2535	16QAM	1	22.28	Pass
Band7	5	2535	16QAM	1	22.29	Pass
Band7	5	2535	16QAM	1	22.5	Pass
Band7	5	2567.5	QPSK	25	22.55	Pass
Band7	5	2567.5	QPSK	12	22.67	Pass
Band7	5	2567.5	QPSK	12	22.67	Pass
Band7	5	2567.5	QPSK	12	22.73	Pass
Band7	5	2567.5	QPSK	1	23.4	Pass
Band7	5	2567.5	QPSK	1	23.48	Pass
Band7	5	2567.5	QPSK	1	23.49	Pass
Band7	5	2567.5	16QAM	25	21.82	Pass
Band7	5	2567.5	16QAM	12	21.7	Pass
Band7	5	2567.5	16QAM	12	21.7	Pass
Band7	5	2567.5	16QAM	12	22.11	Pass
Band7	5	2567.5	16QAM	1	22.82	Pass
Band7	5	2567.5	16QAM	1	22.89	Pass
Band7	5	2567.5	16QAM	1	22.83	Pass



Band7	10	2505	QPSK	50	22.36	Pass
Band7	10	2505	QPSK	25	22.33	Pass
Band7	10	2505	QPSK	25	22.34	Pass
Band7	10	2505	QPSK	25	22.38	Pass
Band7	10	2505	QPSK	1	23.28	Pass
Band7	10	2505	QPSK	1	23.3	Pass
Band7	10	2505	QPSK	1	23.41	Pass
Band7	10	2505	16QAM	50	21.43	Pass
Band7	10	2505	16QAM	25	21.46	Pass
Band7	10	2505	16QAM	25	21.49	Pass
Band7	10	2505	16QAM	25	21.45	Pass
Band7	10	2505	16QAM	1	22.62	Pass
Band7	10	2505	16QAM	1	22.97	Pass
Band7	10	2505	16QAM	1	22.82	Pass
Band7	10	2535	QPSK	50	22.42	Pass
Band7	10	2535	QPSK	25	22.64	Pass
Band7	10	2535	QPSK	25	22.65	Pass
Band7	10	2535	QPSK	25	22.51	Pass
Band7	10	2535	QPSK	1	23.6	Pass
Band7	10	2535	QPSK	1	23.5	Pass
Band7	10	2535	QPSK	1	23.48	Pass
Band7	10	2535	16QAM	50	21.69	Pass
Band7	10	2535	16QAM	25	21.55	Pass
Band7	10	2535	16QAM	25	21.56	Pass
Band7	10	2535	16QAM	25	21.61	Pass
Band7	10	2535	16QAM	1	23.2	Pass
Band7	10	2535	16QAM	1	23.3	Pass
Band7	10	2535	16QAM	1	23.47	Pass
Band7	10	2565	QPSK	50	22.63	Pass
Band7	10	2565	QPSK	25	22.68	Pass
Band7	10	2565	QPSK	25	22.55	Pass
Band7	10	2565	QPSK	25	22.68	Pass
Band7	10	2565	QPSK	1	23.57	Pass
Band7	10	2565	QPSK	1	23.54	Pass
Band7	10	2565	QPSK	1	23.67	Pass
Band7	10	2565	16QAM	50	21.73	Pass
Band7	10	2565	16QAM	25	21.92	Pass
Band7	10	2565	16QAM	25	22.09	Pass
Band7	10	2565	16QAM	25	22	Pass
Band7	10	2565	16QAM	1	22.68	Pass
Band7	10	2565	16QAM	1	22.75	Pass
Band7	10	2565	16QAM	1	22.76	Pass



Band7	15	2507.5	QPSK	75	22.27	Pass
Band7	15	2507.5	QPSK	38	22.28	Pass
Band7	15	2507.5	QPSK	38	22.28	Pass
Band7	15	2507.5	QPSK	38	22.29	Pass
Band7	15	2507.5	QPSK	1	23.22	Pass
Band7	15	2507.5	QPSK	1	23.34	Pass
Band7	15	2507.5	QPSK	1	23.22	Pass
Band7	15	2507.5	16QAM	75	21.5	Pass
Band7	15	2507.5	16QAM	38	21.55	Pass
Band7	15	2507.5	16QAM	38	21.41	Pass
Band7	15	2507.5	16QAM	38	21.42	Pass
Band7	15	2507.5	16QAM	1	22.93	Pass
Band7	15	2507.5	16QAM	1	22.87	Pass
Band7	15	2507.5	16QAM	1	23.07	Pass
Band7	15	2535	QPSK	75	22.64	Pass
Band7	15	2535	QPSK	38	22.53	Pass
Band7	15	2535	QPSK	38	22.33	Pass
Band7	15	2535	QPSK	38	22.34	Pass
Band7	15	2535	QPSK	1	23.41	Pass
Band7	15	2535	QPSK	1	23.59	Pass
Band7	15	2535	QPSK	1	23.52	Pass
Band7	15	2535	16QAM	75	21.72	Pass
Band7	15	2535	16QAM	38	21.72	Pass
Band7	15	2535	16QAM	38	21.73	Pass
Band7	15	2535	16QAM	38	21.53	Pass
Band7	15	2535	16QAM	1	22.97	Pass
Band7	15	2535	16QAM	1	22.67	Pass
Band7	15	2535	16QAM	1	22.96	Pass
Band7	15	2562.5	QPSK	75	22.57	Pass
Band7	15	2562.5	QPSK	38	22.58	Pass
Band7	15	2562.5	QPSK	38	22.57	Pass
Band7	15	2562.5	QPSK	38	22.58	Pass
Band7	15	2562.5	QPSK	1	23.4	Pass
Band7	15	2562.5	QPSK	1	23.57	Pass
Band7	15	2562.5	QPSK	1	23.5	Pass
Band7	15	2562.5	16QAM	75	21.8	Pass
Band7	15	2562.5	16QAM	38	21.79	Pass
Band7	15	2562.5	16QAM	38	21.79	Pass
Band7	15	2562.5	16QAM	38	21.79	Pass
Band7	15	2562.5	16QAM	1	23.23	Pass
Band7	15	2562.5	16QAM	1	23.34	Pass
Band7	15	2562.5	16QAM	1	23.4	Pass



Band7	20	2510	QPSK	100	22.31	Pass
Band7	20	2510	QPSK	50	22.43	Pass
Band7	20	2510	QPSK	50	22.44	Pass
Band7	20	2510	QPSK	50	22.51	Pass
Band7	20	2510	QPSK	1	23.73	Pass
Band7	20	2510	QPSK	1	23.53	Pass
Band7	20	2510	QPSK	1	23.4	Pass
Band7	20	2510	16QAM	100	21.56	Pass
Band7	20	2510	16QAM	50	21.51	Pass
Band7	20	2510	16QAM	50	21.52	Pass
Band7	20	2510	16QAM	50	21.71	Pass
Band7	20	2510	16QAM	1	22.29	Pass
Band7	20	2510	16QAM	1	22.22	Pass
Band7	20	2510	16QAM	1	22.3	Pass
Band7	20	2535	QPSK	100	22.71	Pass
Band7	20	2535	QPSK	50	22.62	Pass
Band7	20	2535	QPSK	50	22.62	Pass
Band7	20	2535	QPSK	50	22.69	Pass
Band7	20	2535	QPSK	1	23.8	Pass
Band7	20	2535	QPSK	1	23.84	Pass
Band7	20	2535	QPSK	1	23.79	Pass
Band7	20	2535	16QAM	100	21.54	Pass
Band7	20	2535	16QAM	50	21.6	Pass
Band7	20	2535	16QAM	50	21.61	Pass
Band7	20	2535	16QAM	50	21.76	Pass
Band7	20	2535	16QAM	1	23.26	Pass
Band7	20	2535	16QAM	1	23.08	Pass
Band7	20	2535	16QAM	1	23.13	Pass
Band7	20	2560	QPSK	100	22.66	Pass
Band7	20	2560	QPSK	50	22.51	Pass
Band7	20	2560	QPSK	50	22.51	Pass
Band7	20	2560	QPSK	50	22.71	Pass
Band7	20	2560	QPSK	1	23.63	Pass
Band7	20	2560	QPSK	1	23.7	Pass
Band7	20	2560	QPSK	1	23.73	Pass
Band7	20	2560	16QAM	100	21.85	Pass
Band7	20	2560	16QAM	50	21.75	Pass
Band7	20	2560	16QAM	50	21.61	Pass
Band7	20	2560	16QAM	50	21.84	Pass
Band7	20	2560	16QAM	1	23.35	Pass
Band7	20	2560	16QAM	1	23.55	Pass
Band7	20	2560	16QAM	1	23.56	Pass



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band12	1.4	699.7	QPSK	6	21.94	Pass
Band12	1.4	699.7	QPSK	3	23.06	Pass
Band12	1.4	699.7	QPSK	3	23.03	Pass
Band12	1.4	699.7	QPSK	3	23.07	Pass
Band12	1.4	699.7	QPSK	1	23.12	Pass
Band12	1.4	699.7	QPSK	1	23.07	Pass
Band12	1.4	699.7	QPSK	1	23.06	Pass
Band12	1.4	699.7	16QAM	6	21.15	Pass
Band12	1.4	699.7	16QAM	3	22.17	Pass
Band12	1.4	699.7	16QAM	3	22.16	Pass
Band12	1.4	699.7	16QAM	3	22.13	Pass
Band12	1.4	699.7	16QAM	1	22.47	Pass
Band12	1.4	699.7	16QAM	1	22.55	Pass
Band12	1.4	699.7	16QAM	1	22.59	Pass
Band12	1.4	707.5	QPSK	6	22.16	Pass
Band12	1.4	707.5	QPSK	3	23.14	Pass
Band12	1.4	707.5	QPSK	3	23.12	Pass
Band12	1.4	707.5	QPSK	3	23.12	Pass
Band12	1.4	707.5	QPSK	1	23.29	Pass
Band12	1.4	707.5	QPSK	1	23.39	Pass
Band12	1.4	707.5	QPSK	1	23.26	Pass
Band12	1.4	707.5	16QAM	6	21.79	Pass
Band12	1.4	707.5	16QAM	3	22.38	Pass
Band12	1.4	707.5	16QAM	3	22.22	Pass
Band12	1.4	707.5	16QAM	3	22.25	Pass
Band12	1.4	707.5	16QAM	1	23.16	Pass
Band12	1.4	707.5	16QAM	1	23.09	Pass
Band12	1.4	707.5	16QAM	1	23.08	Pass
Band12	1.4	715.3	QPSK	6	21.96	Pass
Band12	1.4	715.3	QPSK	3	23.1	Pass
Band12	1.4	715.3	QPSK	3	23.09	Pass
Band12	1.4	715.3	QPSK	3	23.17	Pass
Band12	1.4	715.3	QPSK	1	23.13	Pass
Band12	1.4	715.3	QPSK	1	23.27	Pass
Band12	1.4	715.3	QPSK	1	23.15	Pass
Band12	1.4	715.3	16QAM	6	23.31	Pass
Band12	1.4	715.3	16QAM	3	22	Pass
Band12	1.4	715.3	16QAM	3	22	Pass
Band12	1.4	715.3	16QAM	3	22.1	Pass
Band12	1.4	715.3	16QAM	1	22.06	Pass
Band12	1.4	715.3	16QAM	1	21.86	Pass
Band12	1.4	715.3	16QAM	1	21.96	Pass



Band12	3	700.5	QPSK	15	20.45	Pass
Band12	3	700.5	QPSK	8	21.77	Pass
Band12	3	700.5	QPSK	8	21.76	Pass
Band12	3	700.5	QPSK	8	21.96	Pass
Band12	3	700.5	QPSK	1	23.02	Pass
Band12	3	700.5	QPSK	1	23.06	Pass
Band12	3	700.5	QPSK	1	23.03	Pass
Band12	3	700.5	16QAM	15	20.89	Pass
Band12	3	700.5	16QAM	8	21.21	Pass
Band12	3	700.5	16QAM	8	21.21	Pass
Band12	3	700.5	16QAM	8	21.05	Pass
Band12	3	700.5	16QAM	1	22.26	Pass
Band12	3	700.5	16QAM	1	22.29	Pass
Band12	3	700.5	16QAM	1	22.24	Pass
Band12	3	707.5	QPSK	15	22.06	Pass
Band12	3	707.5	QPSK	8	22.09	Pass
Band12	3	707.5	QPSK	8	22.09	Pass
Band12	3	707.5	QPSK	8	22.03	Pass
Band12	3	707.5	QPSK	1	23.03	Pass
Band12	3	707.5	QPSK	1	23.24	Pass
Band12	3	707.5	QPSK	1	23.05	Pass
Band12	3	707.5	16QAM	15	21.68	Pass
Band12	3	707.5	16QAM	8	20.98	Pass
Band12	3	707.5	16QAM	8	20.99	Pass
Band12	3	707.5	16QAM	8	21.7	Pass
Band12	3	707.5	16QAM	1	22.95	Pass
Band12	3	707.5	16QAM	1	22.81	Pass
Band12	3	707.5	16QAM	1	22.99	Pass
Band12	3	714.5	QPSK	15	21.84	Pass
Band12	3	714.5	QPSK	8	21.93	Pass
Band12	3	714.5	QPSK	8	21.94	Pass
Band12	3	714.5	QPSK	8	21.93	Pass
Band12	3	714.5	QPSK	1	22.92	Pass
Band12	3	714.5	QPSK	1	23.14	Pass
Band12	3	714.5	QPSK	1	23.1	Pass
Band12	3	714.5	16QAM	15	21.64	Pass
Band12	3	714.5	16QAM	8	21.9	Pass
Band12	3	714.5	16QAM	8	22.06	Pass
Band12	3	714.5	16QAM	8	21.4	Pass
Band12	3	714.5	16QAM	1	21.65	Pass
Band12	3	714.5	16QAM	1	21.89	Pass
Band12	3	714.5	16QAM	1	21.81	Pass



Band12	5	701.5	QPSK	25	21.9	Pass
Band12	5	701.5	QPSK	12	21.84	Pass
Band12	5	701.5	QPSK	12	21.85	Pass
Band12	5	701.5	QPSK	12	21.93	Pass
Band12	5	701.5	QPSK	1	22.91	Pass
Band12	5	701.5	QPSK	1	23.19	Pass
Band12	5	701.5	QPSK	1	22.91	Pass
Band12	5	701.5	16QAM	25	21.14	Pass
Band12	5	701.5	16QAM	12	20.91	Pass
Band12	5	701.5	16QAM	12	20.8	Pass
Band12	5	701.5	16QAM	12	20.92	Pass
Band12	5	701.5	16QAM	1	21.21	Pass
Band12	5	701.5	16QAM	1	21.29	Pass
Band12	5	701.5	16QAM	1	21.23	Pass
Band12	5	707.5	QPSK	25	22.24	Pass
Band12	5	707.5	QPSK	12	22.07	Pass
Band12	5	707.5	QPSK	12	22.07	Pass
Band12	5	707.5	QPSK	12	22.28	Pass
Band12	5	707.5	QPSK	1	23.06	Pass
Band12	5	707.5	QPSK	1	23.24	Pass
Band12	5	707.5	QPSK	1	23.19	Pass
Band12	5	707.5	16QAM	25	21.48	Pass
Band12	5	707.5	16QAM	12	20.97	Pass
Band12	5	707.5	16QAM	12	20.84	Pass
Band12	5	707.5	16QAM	12	21.49	Pass
Band12	5	707.5	16QAM	1	21.83	Pass
Band12	5	707.5	16QAM	1	21.93	Pass
Band12	5	707.5	16QAM	1	22.05	Pass
Band12	5	713.5	QPSK	25	21.94	Pass
Band12	5	713.5	QPSK	12	21.79	Pass
Band12	5	713.5	QPSK	12	21.79	Pass
Band12	5	713.5	QPSK	12	21.95	Pass
Band12	5	713.5	QPSK	1	23.02	Pass
Band12	5	713.5	QPSK	1	23	Pass
Band12	5	713.5	QPSK	1	23.11	Pass
Band12	5	713.5	16QAM	25	21.63	Pass
Band12	5	713.5	16QAM	12	21.02	Pass
Band12	5	713.5	16QAM	12	21.03	Pass
Band12	5	713.5	16QAM	12	21.58	Pass
Band12	5	713.5	16QAM	1	21.55	Pass
Band12	5	713.5	16QAM	1	21.6	Pass
Band12	5	713.5	16QAM	1	22.02	Pass



Band12	10	704	QPSK	50	21.97	Pass
Band12	10	704	QPSK	25	22.13	Pass
Band12	10	704	QPSK	25	21.99	Pass
Band12	10	704	QPSK	25	22.04	Pass
Band12	10	704	QPSK	1	22.98	Pass
Band12	10	704	QPSK	1	22.93	Pass
Band12	10	704	QPSK	1	23.05	Pass
Band12	10	704	16QAM	50	21.26	Pass
Band12	10	704	16QAM	25	20.83	Pass
Band12	10	704	16QAM	25	20.87	Pass
Band12	10	704	16QAM	25	20.98	Pass
Band12	10	704	16QAM	1	21.99	Pass
Band12	10	704	16QAM	1	22.28	Pass
Band12	10	704	16QAM	1	22.73	Pass
Band12	10	707.5	QPSK	50	22.12	Pass
Band12	10	707.5	QPSK	25	22.15	Pass
Band12	10	707.5	QPSK	25	22.13	Pass
Band12	10	707.5	QPSK	25	22.24	Pass
Band12	10	707.5	QPSK	1	23.05	Pass
Band12	10	707.5	QPSK	1	23.06	Pass
Band12	10	707.5	QPSK	1	23.2	Pass
Band12	10	707.5	16QAM	50	21.6	Pass
Band12	10	707.5	16QAM	25	21.13	Pass
Band12	10	707.5	16QAM	25	20.96	Pass
Band12	10	707.5	16QAM	25	21.35	Pass
Band12	10	707.5	16QAM	1	22.67	Pass
Band12	10	707.5	16QAM	1	23	Pass
Band12	10	707.5	16QAM	1	22.6	Pass
Band12	10	711	QPSK	50	22.14	Pass
Band12	10	711	QPSK	25	22.05	Pass
Band12	10	711	QPSK	25	22.03	Pass
Band12	10	711	QPSK	25	21.96	Pass
Band12	10	711	QPSK	1	22.99	Pass
Band12	10	711	QPSK	1	23.11	Pass
Band12	10	711	QPSK	1	23.25	Pass
Band12	10	711	16QAM	50	21.17	Pass
Band12	10	711	16QAM	25	21.65	Pass
Band12	10	711	16QAM	25	21.92	Pass
Band12	10	711	16QAM	25	21.76	Pass
Band12	10	711	16QAM	1	21.87	Pass
Band12	10	711	16QAM	1	22.04	Pass
Band12	10	711	16QAM	1	21.8	Pass



Band	Bandwidth (MHz)	UL Frequency (MHz)	Modulation	RB Size	Average Power	Conclusion
Band17	5	706.5	QPSK	25	22.21	Pass
Band17	5	706.5	QPSK	12	22.26	Pass
Band17	5	706.5	QPSK	12	22.09	Pass
Band17	5	706.5	QPSK	12	22.13	Pass
Band17	5	706.5	QPSK	1	22.87	Pass
Band17	5	706.5	QPSK	1	22.94	Pass
Band17	5	706.5	QPSK	1	22.95	Pass
Band17	5	706.5	16QAM	25	20.91	Pass
Band17	5	706.5	16QAM	12	20.83	Pass
Band17	5	706.5	16QAM	12	20.98	Pass
Band17	5	706.5	16QAM	12	21.63	Pass
Band17	5	706.5	16QAM	1	22.06	Pass
Band17	5	706.5	16QAM	1	22.02	Pass
Band17	5	706.5	16QAM	1	21.99	Pass
Band17	5	710	QPSK	25	22.15	Pass
Band17	5	710	QPSK	12	22.06	Pass
Band17	5	710	QPSK	12	22.06	Pass
Band17	5	710	QPSK	12	21.84	Pass
Band17	5	710	QPSK	1	23.33	Pass
Band17	5	710	QPSK	1	23.29	Pass
Band17	5	710	QPSK	1	23.12	Pass
Band17	5	710	16QAM	25	21.03	Pass
Band17	5	710	16QAM	12	21.63	Pass
Band17	5	710	16QAM	12	21.64	Pass
Band17	5	710	16QAM	12	20.99	Pass
Band17	5	710	16QAM	1	21.46	Pass
Band17	5	710	16QAM	1	21.47	Pass
Band17	5	710	16QAM	1	21.15	Pass
Band17	5	713.5	QPSK	25	21.92	Pass
Band17	5	713.5	QPSK	12	21.78	Pass
Band17	5	713.5	QPSK	12	21.77	Pass
Band17	5	713.5	QPSK	12	22.03	Pass
Band17	5	713.5	QPSK	1	23.1	Pass
Band17	5	713.5	QPSK	1	23.15	Pass
Band17	5	713.5	QPSK	1	23.32	Pass
Band17	5	713.5	16QAM	25	21.62	Pass
Band17	5	713.5	16QAM	12	20.89	Pass
Band17	5	713.5	16QAM	12	20.89	Pass
Band17	5	713.5	16QAM	12	21.56	Pass
Band17	5	713.5	16QAM	1	21.84	Pass
Band17	5	713.5	16QAM	1	22.03	Pass
Band17	5	713.5	16QAM	1	22.05	Pass



Band17	10	709	QPSK	50	22.14	Pass
Band17	10	709	QPSK	25	22.12	Pass
Band17	10	709	QPSK	25	22.1	Pass
Band17	10	709	QPSK	25	21.83	Pass
Band17	10	709	QPSK	1	22.94	Pass
Band17	10	709	QPSK	1	23.09	Pass
Band17	10	709	QPSK	1	23	Pass
Band17	10	709	16QAM	50	21.54	Pass
Band17	10	709	16QAM	25	20.91	Pass
Band17	10	709	16QAM	25	20.91	Pass
Band17	10	709	16QAM	25	21.39	Pass
Band17	10	709	16QAM	1	22.35	Pass
Band17	10	709	16QAM	1	22.56	Pass
Band17	10	709	16QAM	1	22.38	Pass
Band17	10	710	QPSK	50	22.17	Pass
Band17	10	710	QPSK	25	22.13	Pass
Band17	10	710	QPSK	25	22.11	Pass
Band17	10	710	QPSK	25	21.83	Pass
Band17	10	710	QPSK	1	23.03	Pass
Band17	10	710	QPSK	1	23.37	Pass
Band17	10	710	QPSK	1	23.11	Pass
Band17	10	710	16QAM	50	21.34	Pass
Band17	10	710	16QAM	25	21.71	Pass
Band17	10	710	16QAM	25	21.7	Pass
Band17	10	710	16QAM	25	21.07	Pass
Band17	10	710	16QAM	1	22.88	Pass
Band17	10	710	16QAM	1	23.03	Pass
Band17	10	710	16QAM	1	22.72	Pass
Band17	10	711	QPSK	50	22.17	Pass
Band17	10	711	QPSK	25	22.02	Pass
Band17	10	711	QPSK	25	22.01	Pass
Band17	10	711	QPSK	25	22	Pass
Band17	10	711	QPSK	1	23	Pass
Band17	10	711	QPSK	1	23.11	Pass
Band17	10	711	QPSK	1	23.35	Pass
Band17	10	711	16QAM	50	21.23	Pass
Band17	10	711	16QAM	25	21.78	Pass
Band17	10	711	16QAM	25	21.77	Pass
Band17	10	711	16QAM	25	21.81	Pass
Band17	10	711	16QAM	1	21.91	Pass
Band17	10	711	16QAM	1	21.9	Pass
Band17	10	711	16QAM	1	21.87	Pass

## 11. EUT and Test Setup Photo

### 11.1 EUT Photos

Front side



Back side






Right Edge



Left Edge

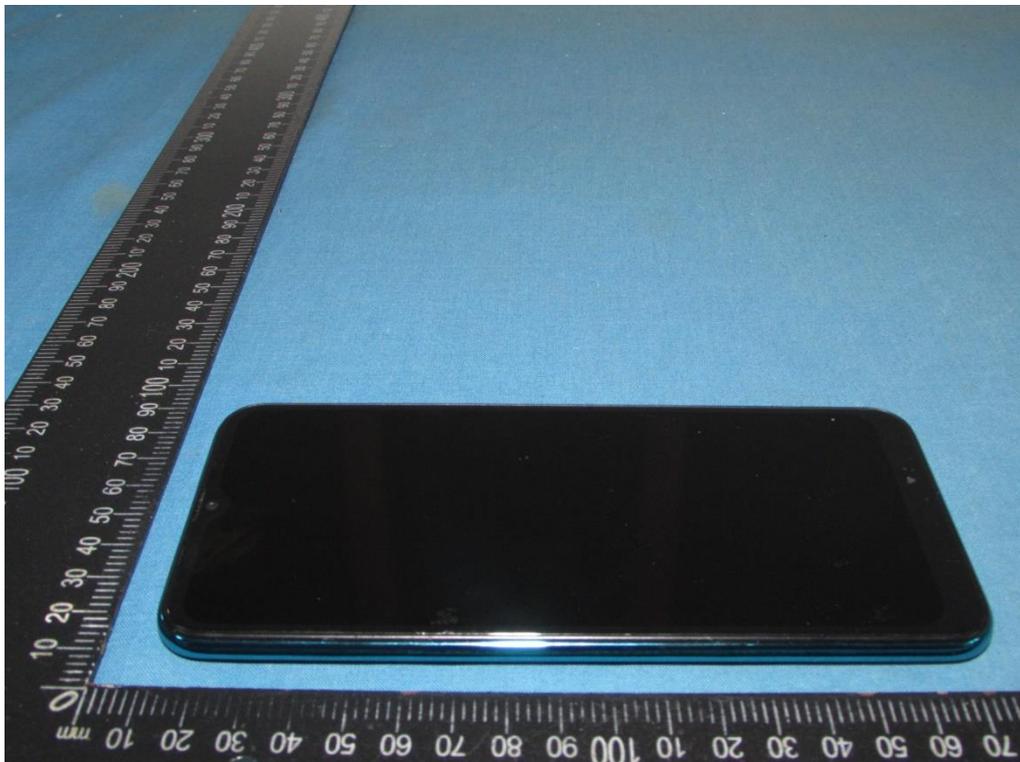



Top Edge




Bottom Edge




## 11.2 Setup Photos

Right Touch

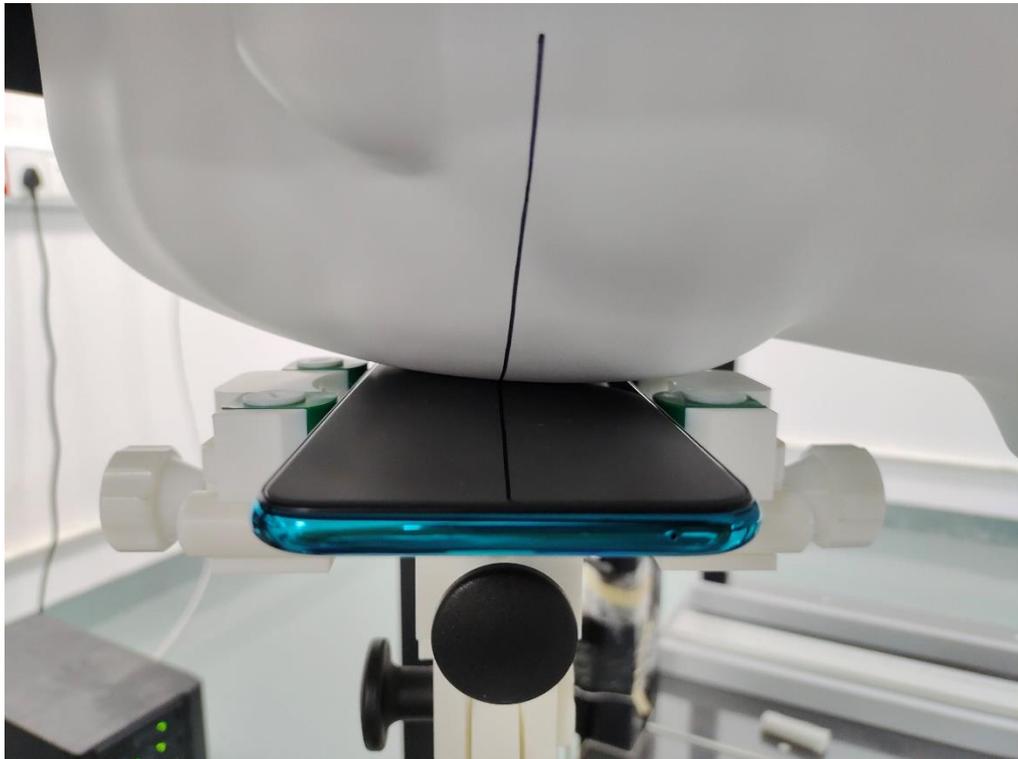


Right Tilt

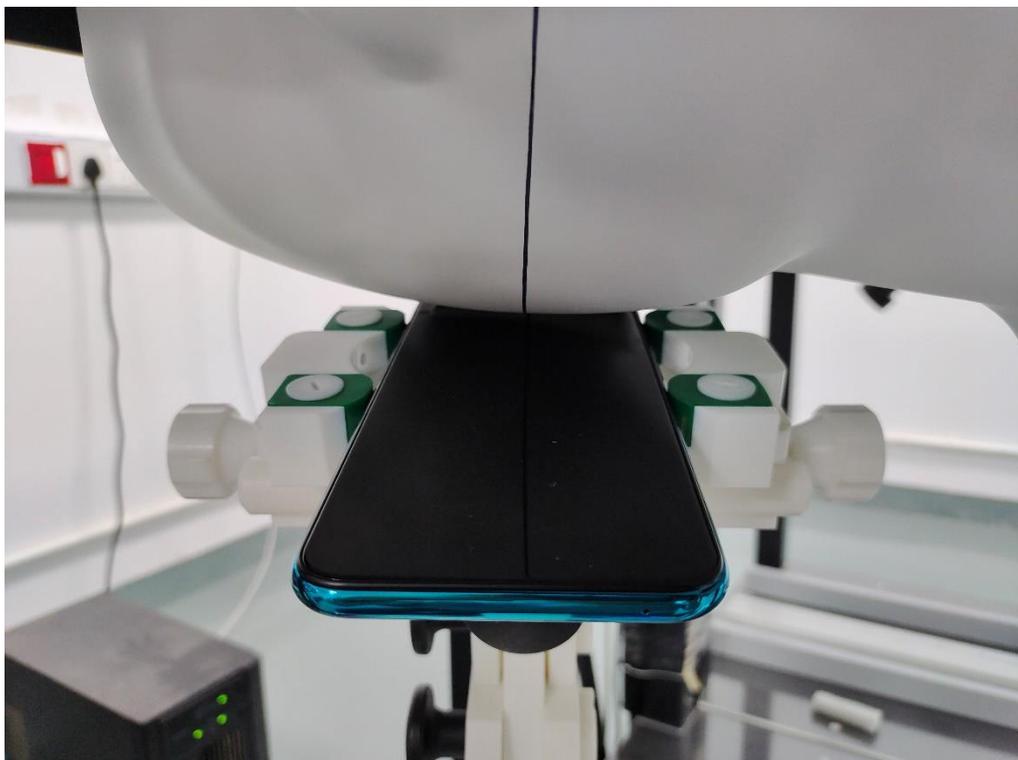





Left Touch

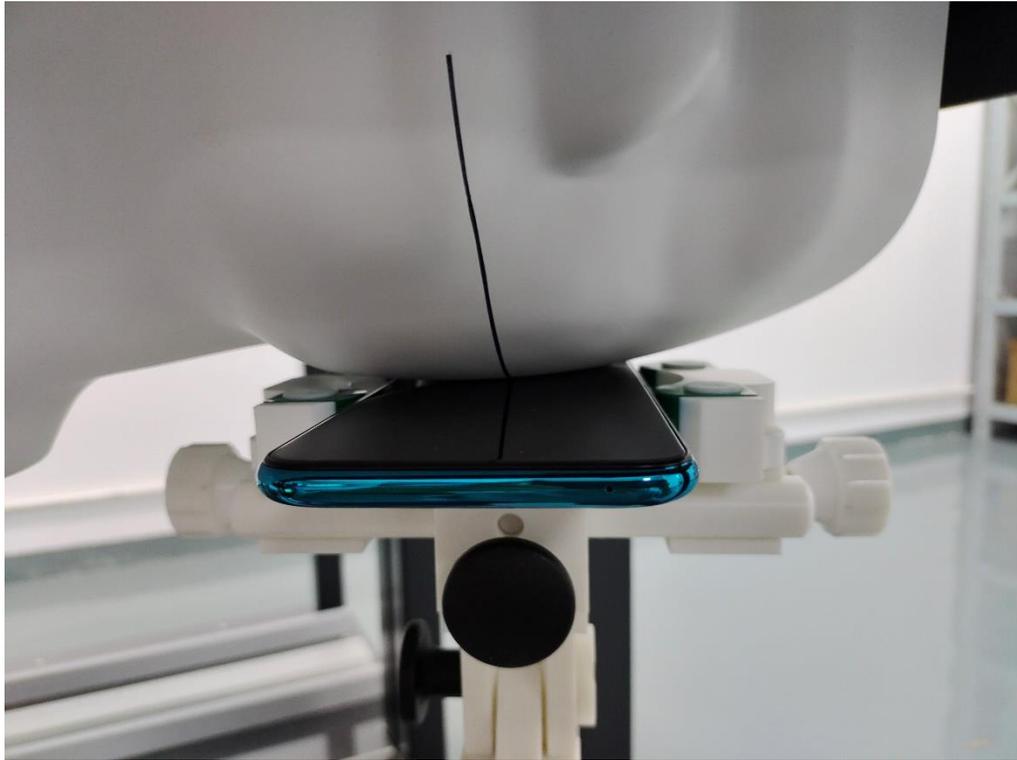


Left Tilt

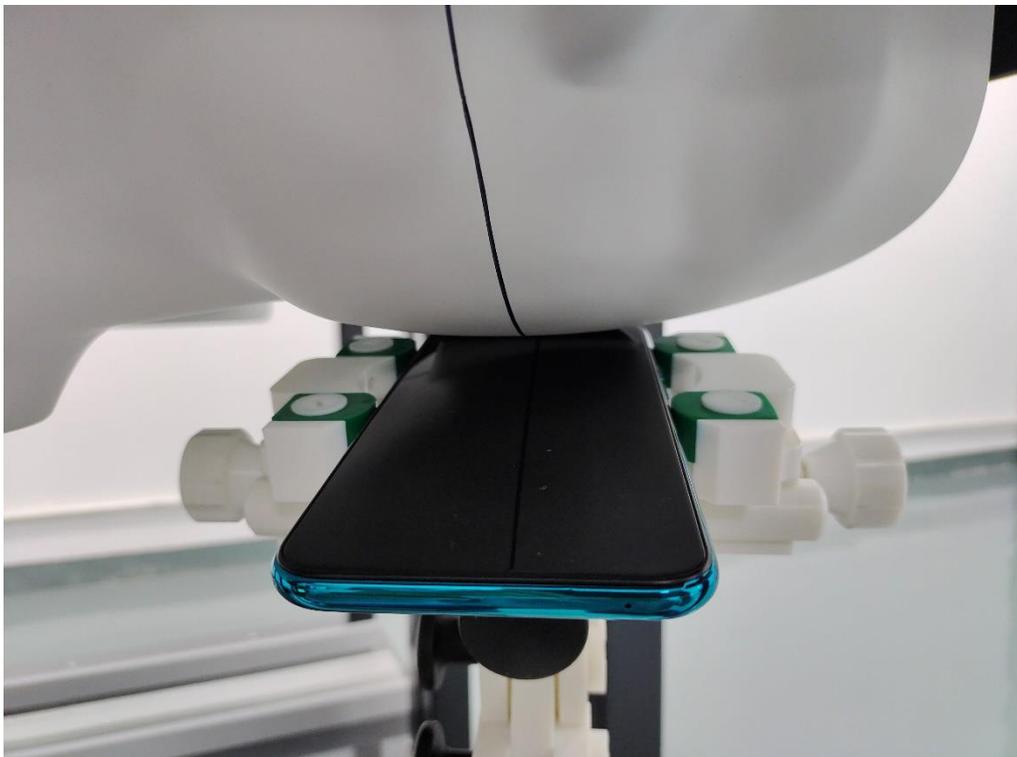


Body Front side (separation distance is 10mm)

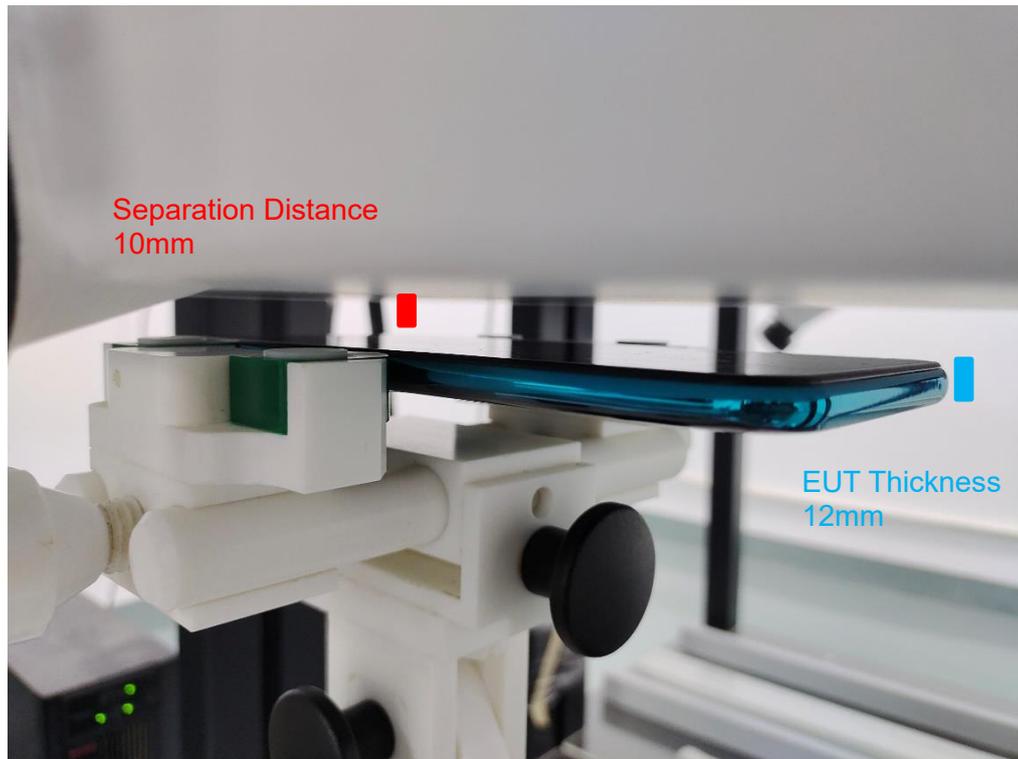


Body Back side (separation distance 10mm)

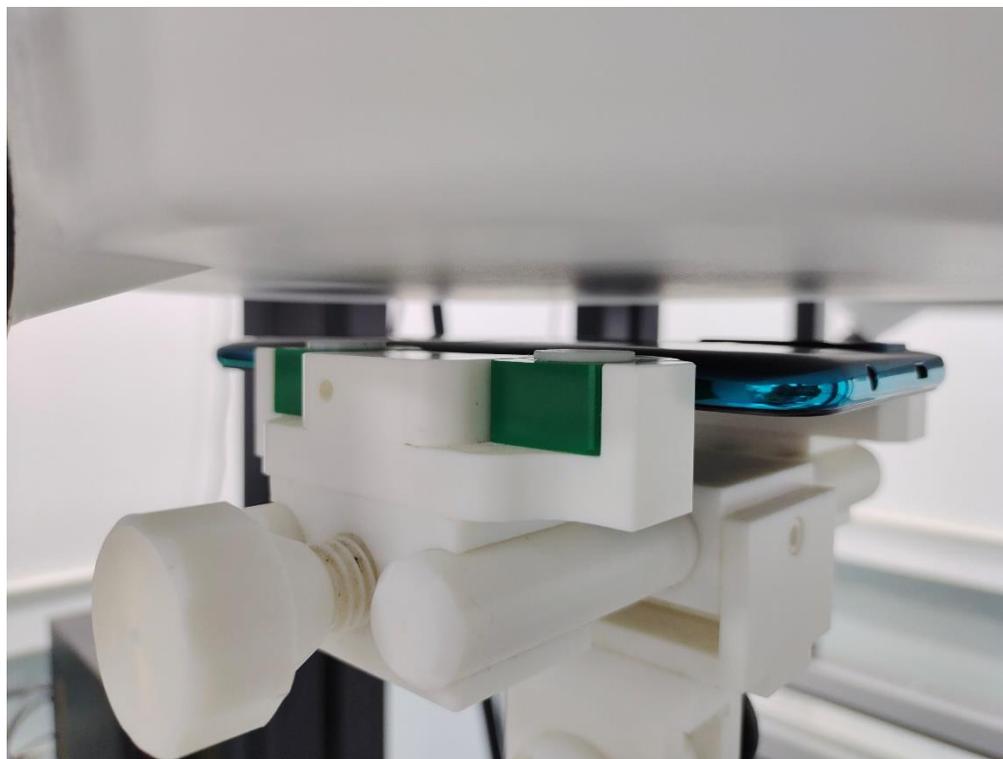

Body Left side (separation distance is 10mm)

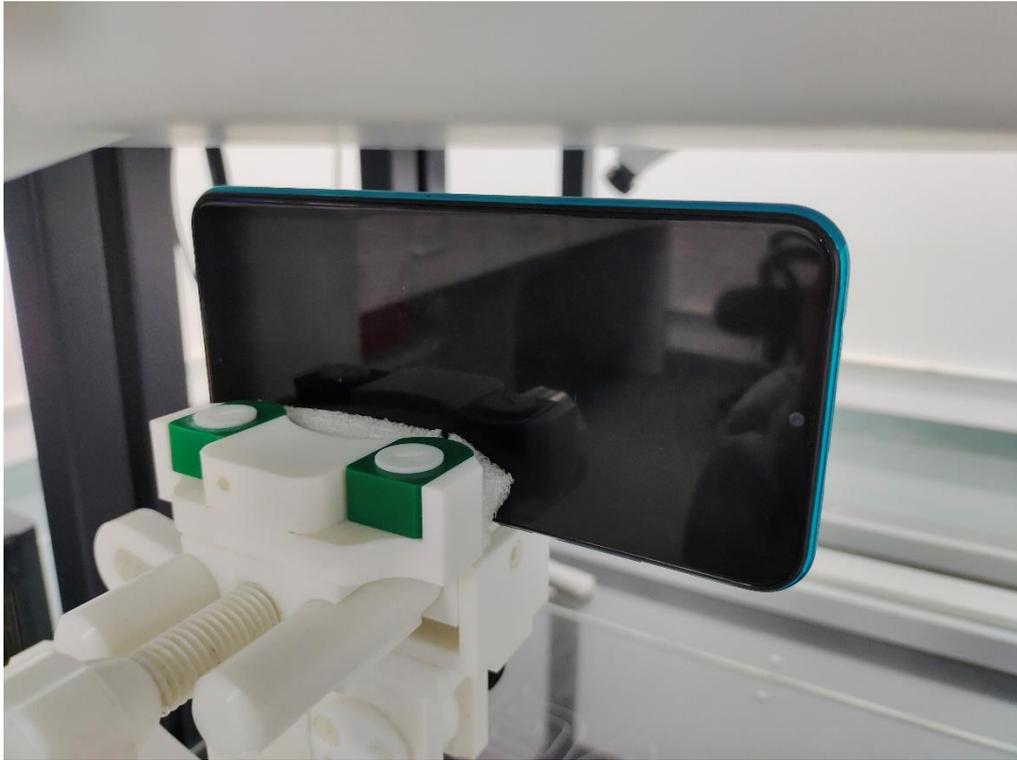

Body Right side (separation distance is 10mm)

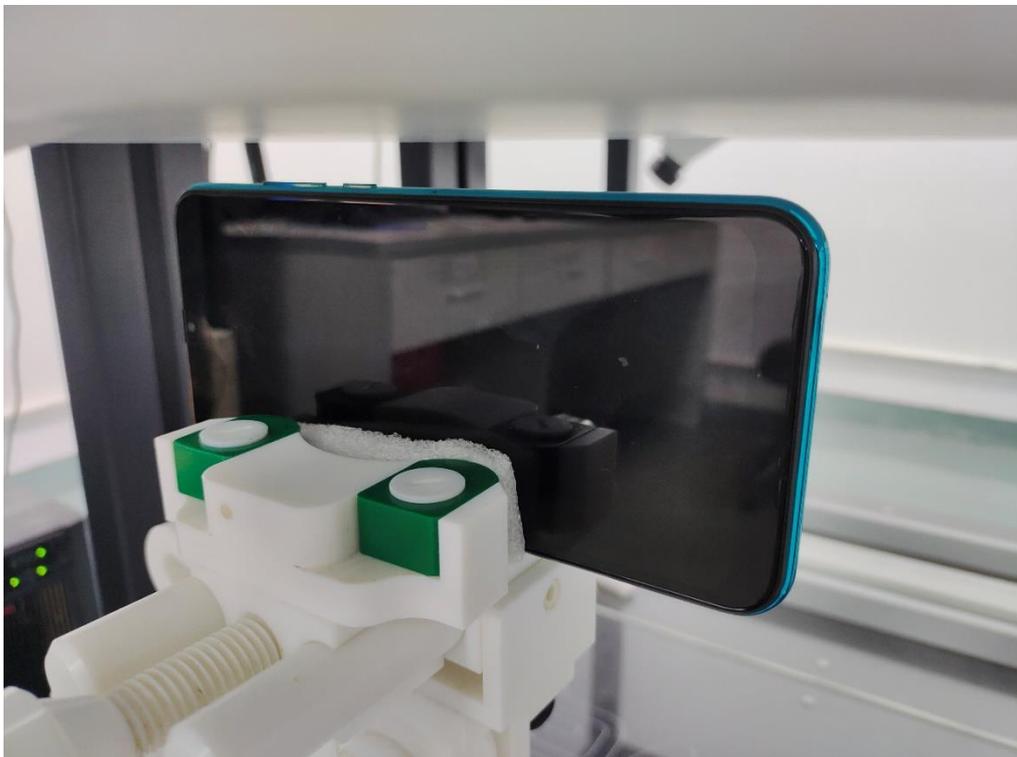


Body Top side (separation distance is 10mm)




Body Bottom side (separation distance is 10mm)



Liquid depth (15 cm)

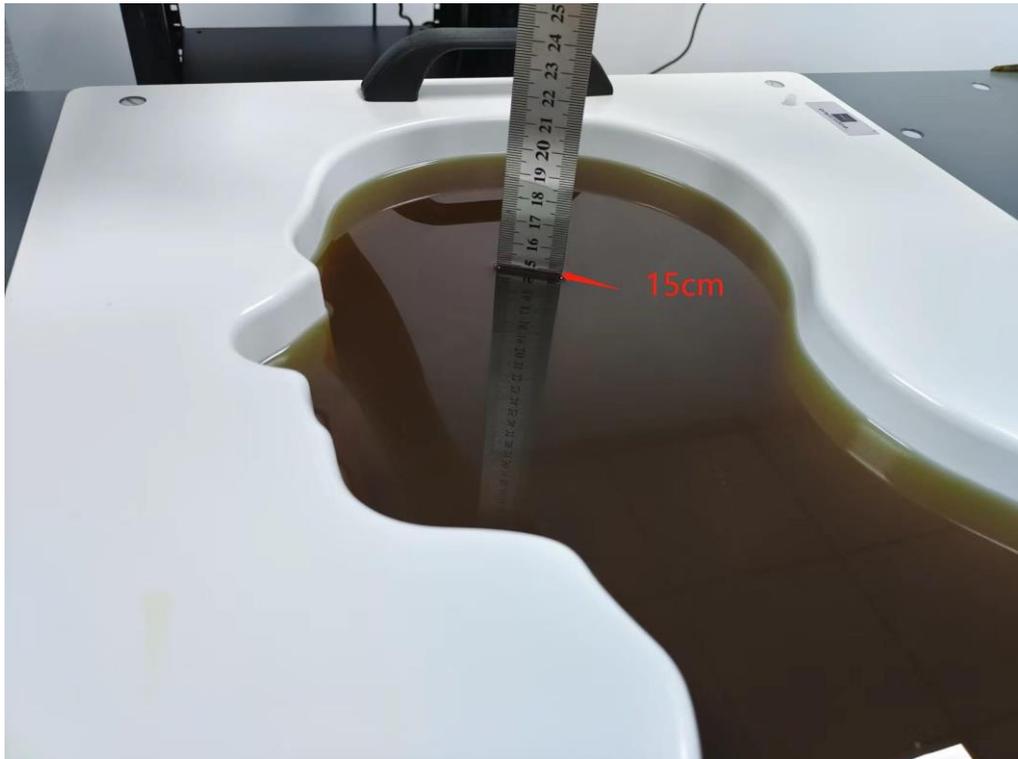

Liquid depth (15 cm)

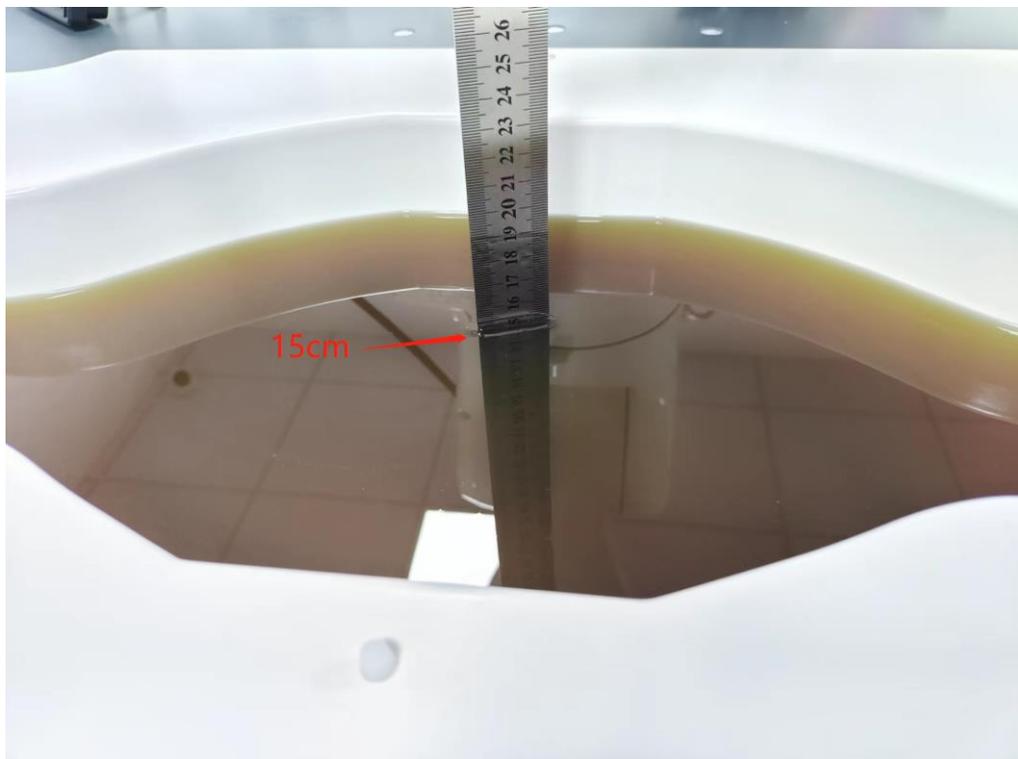



## 12. SAR Result Summary

### 12.1 Head SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM850	GSM	Right Cheek	824.2	0.081	-0.20	33.50	33.45	0.082	/
		Right Tilt	824.2	0.077	-1.87	33.50	33.45	0.078	/
		Left Cheek	824.2	0.166	3.26	33.50	33.45	<b>0.168</b>	<b>1</b>
		Left Tilt	824.2	0.132	0.84	33.50	33.45	0.134	/
PCS 1900	GSM	Right Cheek	1850.2	0.146	0.41	29.00	28.80	0.153	/
		Right Tilt	1850.2	0.127	-3.18	29.00	28.80	0.133	/
		Left Cheek	1850.2	0.180	-0.66	29.00	28.80	<b>0.188</b>	<b>3</b>
		Left Tilt	1850.2	0.153	2.08	29.00	28.80	0.160	/
WCDMA Band II	RMC	Right Cheek	1907.6	0.559	2.89	22.00	21.58	<b>0.616</b>	<b>5</b>
		Right Tilt	1907.6	0.401	1.67	22.00	21.58	0.442	/
		Left Cheek	1907.6	0.386	3.67	22.00	21.58	0.425	/
		Left Tilt	1907.6	0.322	3.73	22.00	21.58	0.355	/
WCDMA Band V	RMC	Right Cheek	826.4	0.164	0.44	22.00	21.75	<b>0.174</b>	<b>7</b>
		Right Tilt	826.4	0.139	-3.10	22.00	21.75	0.147	/
		Left Cheek	826.4	0.115	1.72	22.00	21.75	0.122	/
		Left Tilt	826.4	0.102	-1.74	22.00	21.75	0.108	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	1860	0.690	3.18	22.5	22.33	<b>0.718</b>	<b>9</b>
			1	0	Right Cheek	1880	0.583	-1.42	22.5	22.06	0.645	/
			1	0	Right Cheek	1900	0.526	-0.13	22.5	21.89	0.605	/
			50	0	Right Cheek	1880	0.452	-3.90	21	20.94	0.458	/
			1	0	Right Tilt	1860	0.473	-2.97	22.5	22.33	0.492	/
			50	0	Right Tilt	1880	0.377	2.54	21	20.94	0.382	/
			1	0	Left Cheek	1860	0.534	3.48	22.5	22.33	0.555	/
			50	0	Left Cheek	1880	0.400	2.84	21	20.94	0.406	/
			1	0	Left Tilt	1860	0.428	-3.93	22.5	22.33	0.445	/
			50	0	Left Tilt	1880	0.323	1.07	21	20.94	0.327	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	1745	0.405	2.02	23	22.84	<b>0.420</b>	<b>11</b>
			50	0	Right Cheek	1732.5	0.362	0.15	22	21.59	0.398	/
			1	0	Right Tilt	1745	0.340	3.06	23	22.84	0.353	/
			50	0	Right Tilt	1732.5	0.336	3.65	22	21.59	0.369	/
			1	0	Left Cheek	1745	0.372	2.28	23	22.84	0.386	/
			50	0	Left Cheek	1732.5	0.315	3.06	22	21.59	0.346	/
			1	0	Left Tilt	1745	0.321	-3.98	23	22.84	0.333	/
			50	0	Left Tilt	1732.5	0.296	3.79	22	21.59	0.325	/



LTE Band 5	10M	QPSK	1	0	Right Cheek	836.5	0.126	0.19	24	23.58	<b>0.139</b>	<b>13</b>
			25	0	Right Cheek	829	0.088	-2.57	22.5	22.47	0.089	/
			1	0	Right Tilt	836.5	0.103	1.62	24	23.58	0.113	/
			25	0	Right Tilt	829	0.085	3.74	22.5	22.47	0.086	/
			1	0	Left Cheek	836.5	0.117	-0.50	24	23.58	0.129	/
			25	0	Left Cheek	829	0.082	-1.37	22.5	22.47	0.083	/
			1	0	Left Tilt	836.5	0.095	-1.51	24	23.58	0.105	/
			25	0	Left Tilt	829	0.079	-0.93	22.5	22.47	0.080	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	2535	0.292	-3.55	24	23.84	0.303	/
			50	0	Right Cheek	2560	0.227	-0.35	23	22.71	0.243	/
			1	0	Right Tilt	2535	0.257	3.31	24	23.84	0.267	/
			50	0	Right Tilt	2560	0.200	-2.57	23	22.71	0.214	/
			1	0	Left Cheek	2535	0.352	0.78	24	23.84	<b>0.365</b>	<b>15</b>
			50	0	Left Cheek	2560	0.268	-0.18	23	22.71	0.287	/
			1	0	Left Tilt	2535	0.311	2.66	24	23.84	0.323	/
			50	0	Left Tilt	2560	0.212	-0.21	23	22.71	0.227	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	711	0.062	-0.44	23.5	23.25	<b>0.066</b>	<b>17</b>
			25	0	Right Cheek	707.5	0.053	-1.55	22.5	22.24	0.056	/
			1	0	Right Tilt	711	0.058	1.41	23.5	23.25	0.061	/
			25	0	Right Tilt	707.5	0.050	3.23	22.5	22.24	0.053	/
			1	0	Left Cheek	711	0.057	0.48	23.5	23.25	0.060	/
			25	0	Left Cheek	707.5	0.048	-3.74	22.5	22.24	0.051	/
			1	0	Left Tilt	711	0.055	2.52	23.5	23.25	0.058	/
			25	0	Left Tilt	707.5	0.044	1.21	22.5	22.24	0.047	/
LTE Band 17	10M	QPSK	1	0	Right Cheek	710	0.104	3.04	23.5	23.37	<b>0.107</b>	<b>19</b>
			25	0	Right Cheek	710	0.086	2.42	22.5	22.13	0.094	/
			1	0	Right Tilt	710	0.097	-3.18	23.5	23.37	0.100	/
			25	0	Right Tilt	710	0.082	-0.01	22.5	22.13	0.089	/
			1	0	Left Cheek	710	0.093	-0.41	23.5	23.37	0.096	/
			25	0	Left Cheek	710	0.085	-0.16	22.5	22.13	0.093	/
			1	0	Left Tilt	710	0.088	-2.34	23.5	23.37	0.091	/
			25	0	Left Tilt	710	0.080	3.17	22.5	22.13	0.087	/

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Right Cheek	2412	0.128	-1.21	18.00	17.58	0.141	/
		Right Tilt	2412	0.146	0.62	18.00	17.58	<b>0.161</b>	<b>21</b>
		Left Cheek	2412	0.115	1.04	18.00	17.58	0.127	/
		Left Tilt	2412	0.131	-0.67	18.00	17.58	0.144	/
BT	8DPSK	Right Cheek	2441	0.062	-0.68	9.00	8.79	0.065	/
		Right Tilt	2441	0.065	3.83	9.00	8.79	<b>0.068</b>	<b>23</b>
		Left Cheek	2441	0.059	-0.76	9.00	8.79	0.062	/
		Left Tilt	2441	0.055	3.77	9.00	8.79	0.058	/



Note:

1. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Scaled SAR(W/kg) = Measured SAR(W/kg) \*Tune-up Scaling Factor
2. Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



## 12.2 Body-worn and Hotspot SAR

Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM850	GPRS (GMSK, 4-Slot)	Front Side	824.2	0.168	3.35	29.50	28.99	0.189	/
		Back Side	824.2	0.249	-3.99	29.50	28.99	<b>0.280</b>	<b>2</b>
		Left Side	824.2	0.083	1.58	29.50	28.99	0.093	/
		Right Side	824.2	0.045	2.04	29.50	28.99	0.051	/
		Top Side	824.2	0.020	-0.35	29.50	28.99	0.022	/
		Bottom Side	824.2	0.038	4.00	29.50	28.99	0.043	/
PCS 1900	GPRS (GMSK, 4-Slot)	Front Side	1850.2	0.255	-3.03	25.50	25.22	<b>0.272</b>	<b>4</b>
		Back Side	1850.2	0.179	-1.41	25.50	25.22	0.191	/
		Left Side	1850.2	0.133	1.27	25.50	25.22	0.142	/
		Right Side	1850.2	0.094	3.03	25.50	25.22	0.100	/
		Bottom Side	1850.2	0.168	1.25	25.50	25.22	0.179	/
WCDMA Band II	RMC	Front Side	1907.6	0.592	-2.34	22.00	21.58	<b>0.652</b>	<b>6</b>
		Back Side	1907.6	0.468	2.34	22.00	21.58	0.516	/
		Left Side	1907.6	0.270	3.26	22.00	21.58	0.297	/
		Right Side	1907.6	0.132	2.93	22.00	21.58	0.145	/
		Bottom Side	1907.6	0.213	-0.80	22.00	21.58	0.235	/
WCDMA Band V	RMC	Front Side	826.4	0.187	-1.52	22.00	21.75	0.198	/
		Back Side	826.4	0.209	1.19	22.00	21.75	<b>0.221</b>	<b>8</b>
		Left Side	826.4	0.143	0.97	22.00	21.75	0.151	/
		Right Side	826.4	0.118	1.80	22.00	21.75	0.125	/
		Bottom Side	826.4	0.155	-2.11	22.00	21.75	0.164	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	1860	0.389	-1.68	22.5	22.33	<b>0.405</b>	<b>10</b>
			50	0	Front side	1880	0.243	1.33	21	20.94	0.246	/
			1	0	Back Side	1860	0.217	-1.51	22.5	22.33	0.226	/
			50	0	Back Side	1880	0.191	-1.17	21	20.94	0.194	/
			1	0	Left Side	1860	0.146	0.40	22.5	22.33	0.152	/
			50	0	Left Side	1880	0.102	3.21	21	20.94	0.103	/
			1	0	Right Side	1860	0.087	-3.82	22.5	22.33	0.090	/
			50	0	Right Side	1880	0.071	3.01	21	20.94	0.072	/
			1	0	Bottom Side	1860	0.275	1.67	22.5	22.33	0.286	/
			50	0	Bottom Side	1880	0.213	-3.68	21	20.94	0.216	/
LTE Band 4	20M	QPSK	1	0	Front side	1745	0.431	1.09	23	22.84	<b>0.447</b>	<b>12</b>
			50	0	Front side	1732.5	0.376	0.82	22	21.59	0.413	/
			1	0	Back Side	1745	0.208	1.41	23	22.84	0.216	/
			50	0	Back Side	1732.5	0.176	0.08	22	21.59	0.193	/
			1	0	Left Side	1745	0.139	1.31	23	22.84	0.144	/
			50	0	Left Side	1732.5	0.105	1.99	22	21.59	0.115	/
			1	0	Right Side	1745	0.100	-3.62	23	22.84	0.104	/
			50	0	Right Side	1732.5	0.089	-2.73	22	21.59	0.098	/
			1	0	Bottom Side	1745	0.205	3.24	23	22.84	0.213	/
			50	0	Bottom Side	1732.5	0.180	-1.66	22	21.59	0.198	/



LTE Band 5	10M	QPSK	1	0	Front side	836.5	0.156	2.04	24	23.58	0.172	/
			25	0	Front side	829	0.122	-0.10	22.5	22.47	0.123	/
			1	0	Back Side	836.5	0.195	0.62	24	23.58	<b>0.215</b>	<b>14</b>
			25	0	Back Side	829	0.165	-3.16	22.5	22.47	0.166	/
			1	0	Left Side	836.5	0.086	2.58	24	23.58	0.095	/
			25	0	Left Side	829	0.072	3.75	22.5	22.47	0.072	/
			1	0	Right Side	836.5	0.045	3.47	24	23.58	0.050	/
			25	0	Right Side	829	0.036	-0.06	22.5	22.47	0.036	/
			1	0	Bottom Side	836.5	0.100	-2.02	24	23.58	0.110	/
			25	0	Bottom Side	829	0.082	3.83	22.5	22.47	0.083	/
LTE Band 7	20M	QPSK	1	0	Front side	2535	0.481	-2.46	24	23.84	0.499	/
			50	0	Front side	2560	0.369	-1.76	23	22.71	0.394	/
			1	0	Back Side	2510	0.732	2.04	24	23.73	0.779	/
			1	0	Back Side	2535	0.820	0.83	24	23.84	<b>0.851</b>	<b>16</b>
			1	0	Back Side	2560	0.710	2.77	24	23.73	0.756	/
			50	0	Back Side	2560	0.706	-1.60	23	22.71	0.755	/
			1	0	Left Side	2535	0.425	2.14	24	23.84	0.441	/
			50	0	Left Side	2560	0.337	2.08	23	22.71	0.360	/
			1	0	Right Side	2535	0.284	-1.60	24	23.84	0.295	/
			50	0	Right Side	2560	0.252	-3.86	23	22.71	0.269	/
			1	0	Bottom Side	2535	0.622	2.35	24	23.84	0.645	/
			50	0	Bottom Side	2560	0.548	-1.54	23	22.71	0.586	/
LTE Band 12	10M	QPSK	1	0	Front side	711	0.097	1.88	23.5	23.25	0.103	/
			25	0	Front side	707.5	0.070	1.58	22.5	22.24	0.074	/
			1	0	Back Side	711	0.115	3.43	23.5	23.25	<b>0.122</b>	<b>18</b>
			25	0	Back Side	707.5	0.086	-0.29	22.5	22.24	0.091	/
			1	0	Left Side	711	0.052	-0.22	23.5	23.25	0.055	/
			25	0	Left Side	707.5	0.057	-3.61	22.5	22.24	0.061	/
			1	0	Right Side	711	0.035	0.93	23.5	23.25	0.037	/
			25	0	Right Side	707.5	0.030	2.31	22.5	22.24	0.032	/
			1	0	Bottom Side	711	0.076	2.90	23.5	23.25	0.081	/
25	0	Bottom Side	707.5	0.064	-3.88	22.5	22.24	0.068	/			
LTE Band 17	10M	QPSK	1	0	Front side	710	0.104	1.85	23.5	23.37	0.107	/
			25	0	Front side	710	0.087	2.57	22.5	22.13	0.095	/
			1	0	Back Side	710	0.144	-1.03	23.5	23.37	<b>0.148</b>	<b>20</b>
			25	0	Back Side	710	0.113	2.69	22.5	22.13	0.123	/
			1	0	Left Side	710	0.076	3.82	23.5	23.37	0.078	/
			25	0	Left Side	710	0.064	-2.35	22.5	22.13	0.070	/
			1	0	Right Side	710	0.059	2.53	23.5	23.37	0.061	/
			25	0	Right Side	710	0.050	-0.04	22.5	22.13	0.054	/
			1	0	Bottom Side	710	0.061	0.94	23.5	23.37	0.063	/
			25	0	Bottom Side	710	0.053	0.85	22.5	22.13	0.058	/



Band	Model	Test Position	Freq.	SAR (1g) (W/kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
2.4GHz WLAN	802.11b	Front Side	2412	0.065	1.15	18.00	17.58	0.072	/
		Back Side	2412	0.082	2.70	18.00	17.58	<b>0.090</b>	<b>22</b>
		Right Side	2412	0.043	3.29	18.00	17.58	0.047	/
		Top Side	2412	0.037	-1.35	18.00	17.58	0.041	/
BT	8DPSK	Front Side	2441	0.032	-2.33	9.00	8.79	0.034	/
		Back Side	2441	0.045	0.14	9.00	8.79	<b>0.047</b>	<b>24</b>
		Top Side	2441	0.025	3.63	9.00	8.79	0.026	/

Note:

1. The test separation of all above table is 5mm.
2. Per KDB 447498 D04, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. Scaled SAR(W/kg) = Measured SAR(W/kg) \*Tune-up Scaling Factor
3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



## Repeated SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)
LTE Band 7	20M	QPSK	1	0	Back Side	2535	0.795	-2.11	24	23.84	0.825

## Repeated SAR measurement

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg)	1 st Repeated SAR 1g	Ratio
LTE Band 7	20M	QPSK	1	0	Back Side	2535	0.82	0.795	1.032

### Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/Kg.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$ W/Kg.
4. The ratio is the difference in percentage between original and repeated measured SAR.



**Simultaneous Multi-band Transmission Evaluation:**  
 Application Simultaneous Transmission information:

Position	Simultaneous State
Head	1. GSM + 2.4GHz WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN
	6. LTE + Bluetooth
Body	1. GSM + 2.4GHz WLAN
	2. GSM + Bluetooth
	3. WCDMA + 2.4GHz WLAN
	4. WCDMA + Bluetooth
	5. LTE + 2.4GHz WLAN
	6. LTE + Bluetooth

**NOTE:**

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 Appendix E, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:  
 $SAR_{est} = 1.6 \cdot P_{ant} / P_{th}$  [W/kg].  
 $P_{ant}$  is maximum time-averaged power or effective radiated power (ERP), whichever is greater, and  $P_{th}$  is defined in Formula KDB 447498 (B.2). When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
GSM + 2.4G WLAN	Head	GSM	0.188	0.349
		2.4G WLAN	0.161	
	Body	GSM	0.280	0.370
		2.4G WLAN	0.090	
GSM + Bluetooth	Head	GSM	0.188	0.256
		Bluetooth	0.068	
	Body	GSM	0.280	0.327
		Bluetooth	0.047	
WCDMA + 2.4G WLAN	Head	WCDMA	0.616	0.777
		2.4G WLAN	0.161	
	Body	WCDMA	0.652	0.742
		2.4G WLAN	0.090	
WCDMA + Bluetooth	Head	WCDMA	0.616	0.684
		Bluetooth	0.068	
	Body	WCDMA	0.652	0.699
		Bluetooth	0.047	
LTE + 2.4G WLAN	Head	LTE	0.718	0.879
		2.4G WLAN	0.161	
	Body	LTE	0.851	0.941
		2.4G WLAN	0.090	
LTE + Bluetooth	Head	LTE	0.718	0.786
		Bluetooth	0.068	
	Body	LTE	0.851	0.898
		Bluetooth	0.047	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



### 13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	DIP0G750	SN 06/22 DIP0G750-638	2022.02.11	2025.02.10
835MHz Dipole	MVG	DIP0G835	SN 06/22 DIP0G835-639	2022.02.11	2025.02.10
1800MHz Dipole	MVG	DIP1G800	SN 06/22 DIP1G800-640	2022.02.11	2025.02.10
1900MHz Dipole	MVG	DIP1G900	SN 06/22 DIP1G900-641	2022.02.11	2025.02.10
2450MHz Dipole	MVG	DIP2G450	SN 06/22 DIP2G450-645	2022.02.11	2025.02.10
2600MHz Dipole	MVG	DIP2G600	SN 06/22 DIP2G600-646	2022.02.11	2025.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2023.02.10	2024.02.09
Liquid Calibration Kit	MVG	OCPG 87	SN 06/22 OCPG87	2023.02.10	2024.02.09
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDCP	202203280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2023.03.22	2024.03.21
Multi Meter	Keithley	DMM6500	DMM6500	2022.05.05	2023.05.04
Signal Generator	Keithley	N5182B	MY59100717	2022.04.29	2023.04.28
Wireless Communication Test Set	R&S	CMW500	137737	2022.04.29	2023.04.28
Power Sensor	R&S	Z11	116184	2023.03.22	2024.03.21
Temperature hygrometer	N/A	ST-W2318	N/A	2022.05.05	2023.05.04
Thermograph	N/A	TP101	N/A	2022.05.05	2023.05.04



## Appendix A. System Validation Plots

### System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-27

#### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW
Frequency (MHz)	750.000
Relative permittivity	41.80
Conductivity (S/m)	0.84
Probe	SN 04/22 EPGO364
ConvF	1.69
Crest factor:	1:1

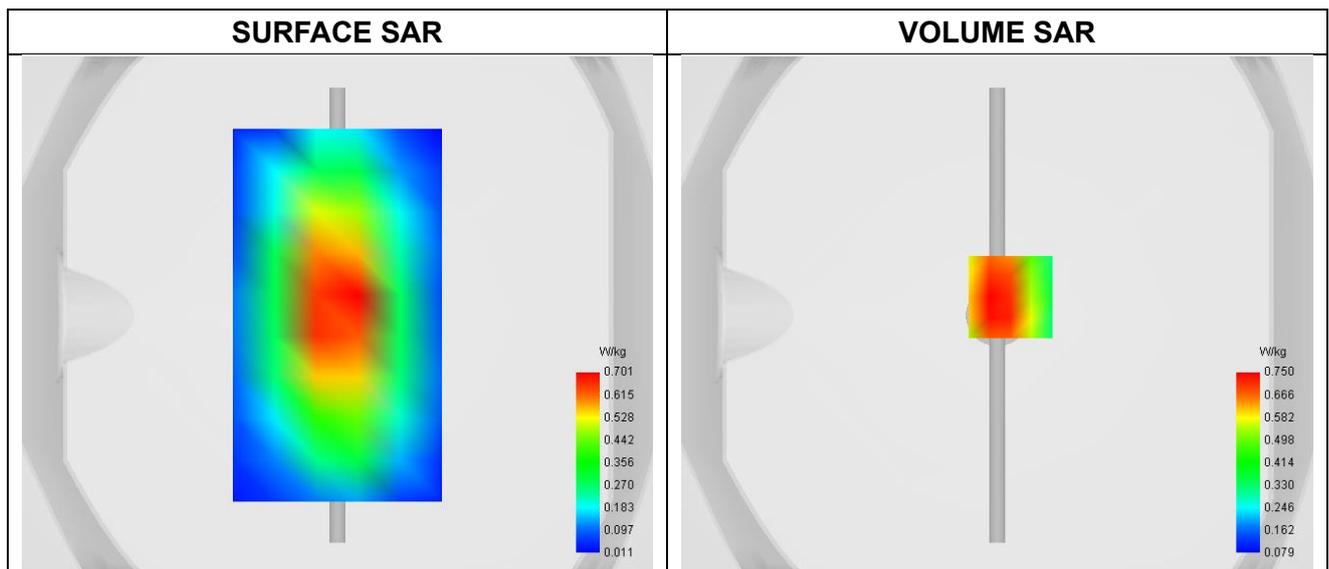


**Maximum location: X=5.00, Y=7.00 ; SAR Peak: 1.10 W/kg**

SAR 10g (W/Kg)	0.506
SAR 1g (W/Kg)	0.780



## Z Axis Scan

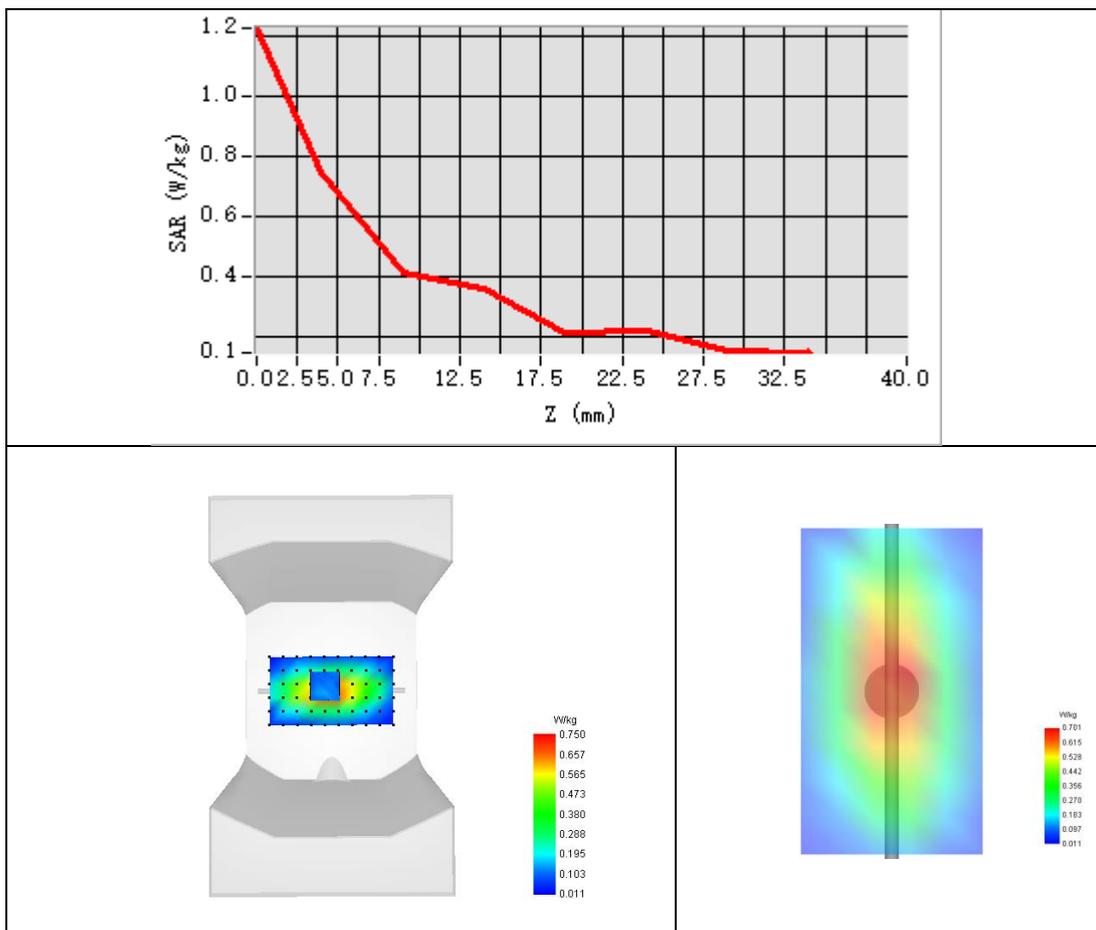



## System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-26

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	41.81
Conductivity (S/m)	0.88
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

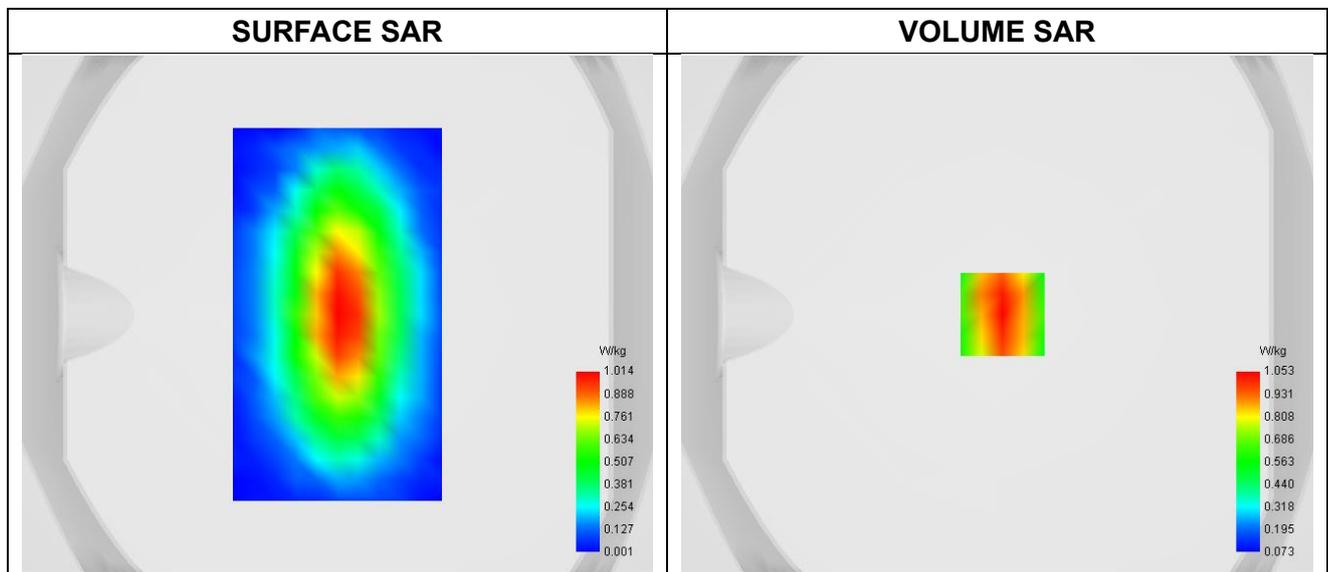


**Maximum location: X=2.00, Y=0.00 ; SAR Peak: 1.47 W/kg**

SAR 10g (W/Kg)	0.632
SAR 1g (W/Kg)	0.999



## Z Axis Scan

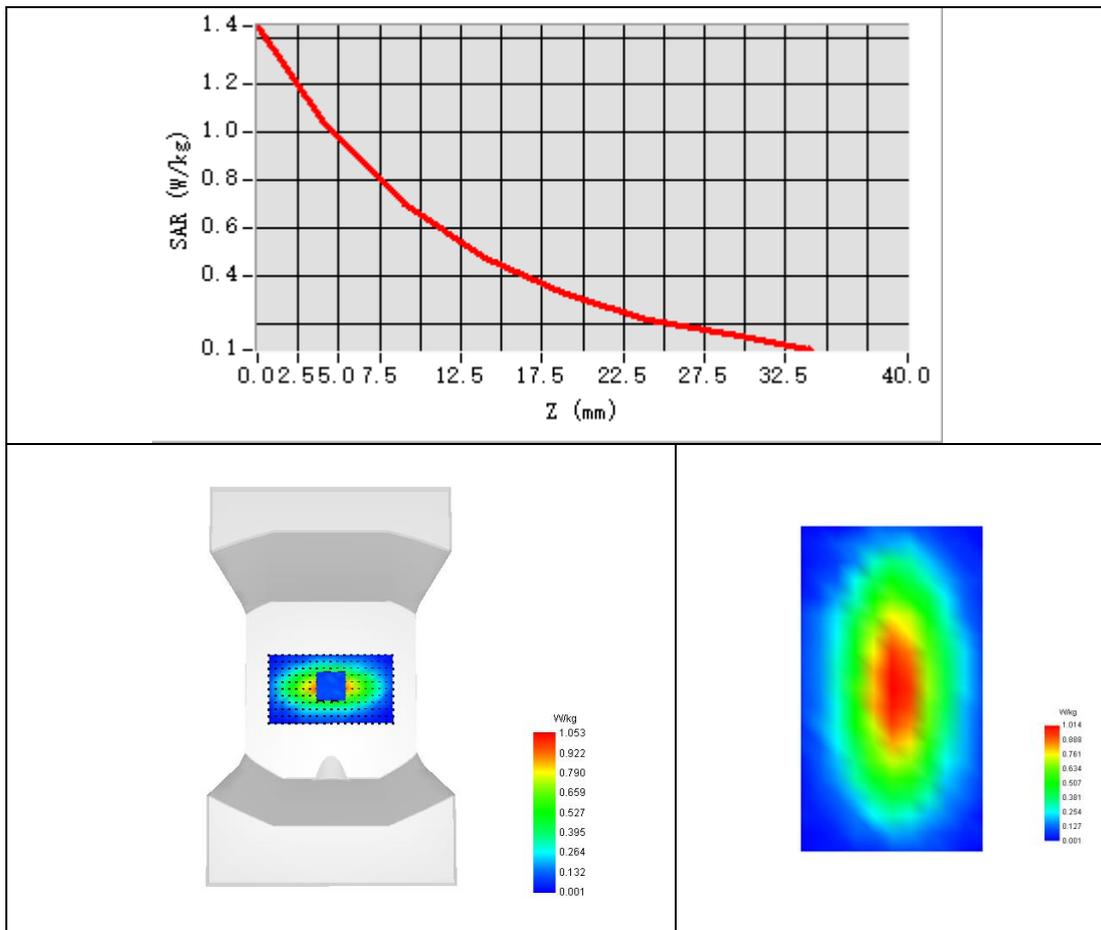



## System Performance Check Data (1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-24

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1800
Channels	Middle
Signal	CW
Frequency (MHz)	1800.000
Relative permittivity	40.68
Conductivity (S/m)	1.38
Probe	SN 04/22 EPGO364
ConvF	1.95
Crest factor:	1:1

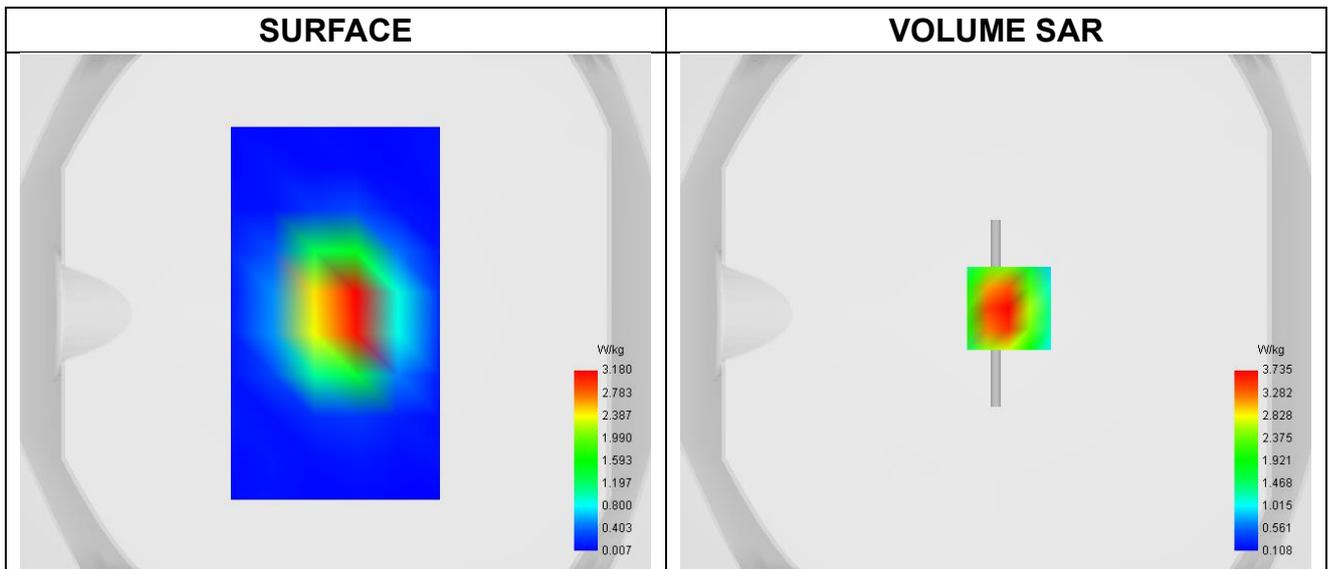


**Maximum location: X=5.00, Y=2.00 ; SAR Peak: 5.68 W/kg**

SAR 10g (W/Kg)	1.997
SAR 1g (W/Kg)	3.610



### Z Axis Scan

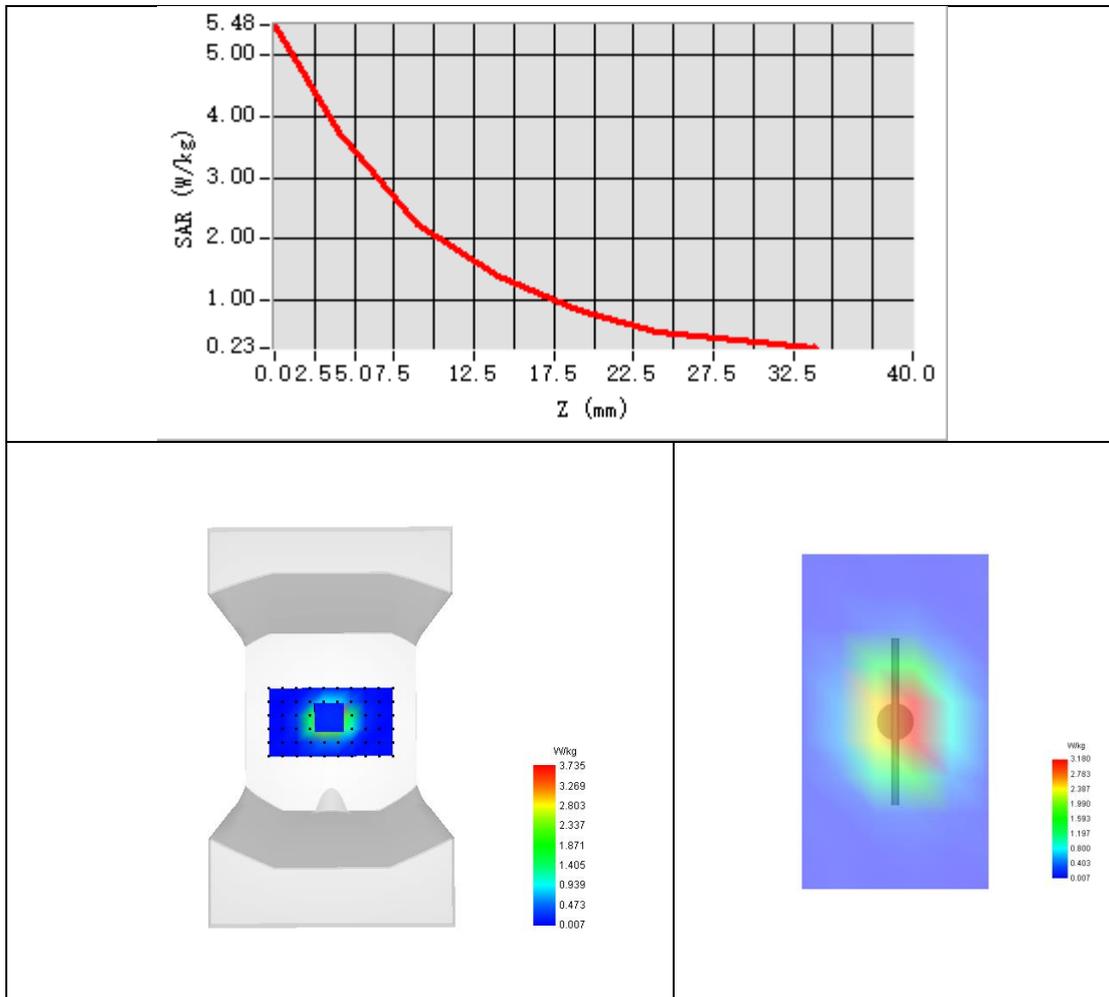



## System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-28

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW
Frequency (MHz)	1900.000
Relative permittivity	40.90
Conductivity (S/m)	1.45
Probe	SN 04/22 EPGO364
ConvF	2.25
Crest factor:	1:1

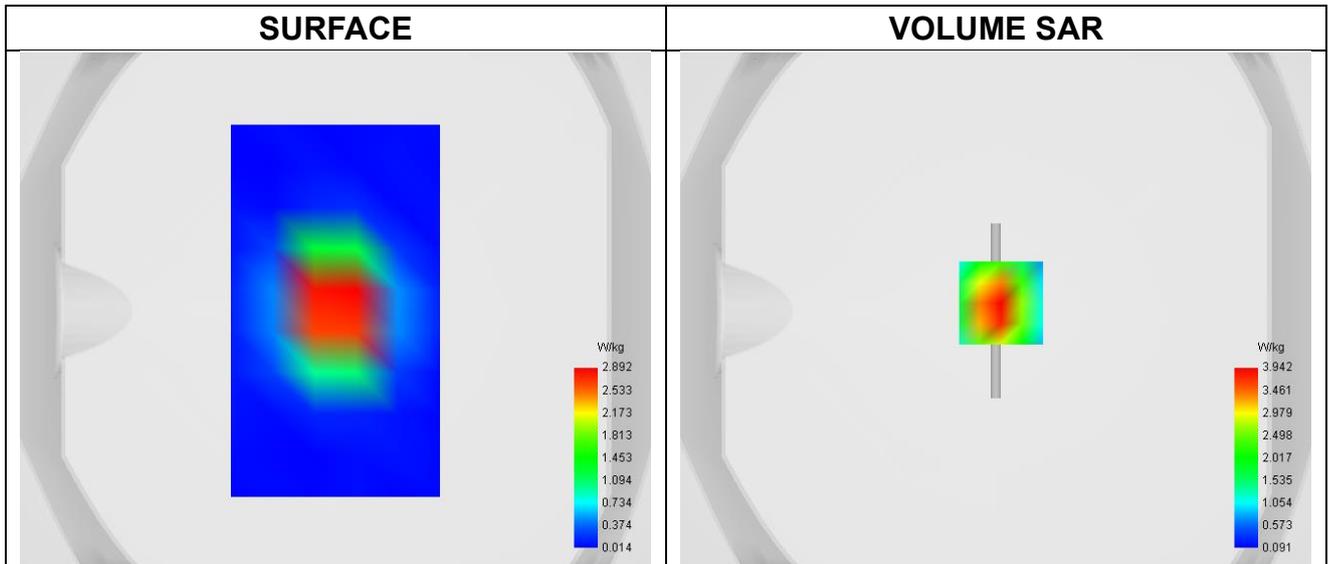


**Maximum location: X=2.00, Y=3.00 ; SAR Peak: 6.33 W/kg**

SAR 10g (W/Kg)	1.994
SAR 1g (W/Kg)	3.803



### Z Axis Scan

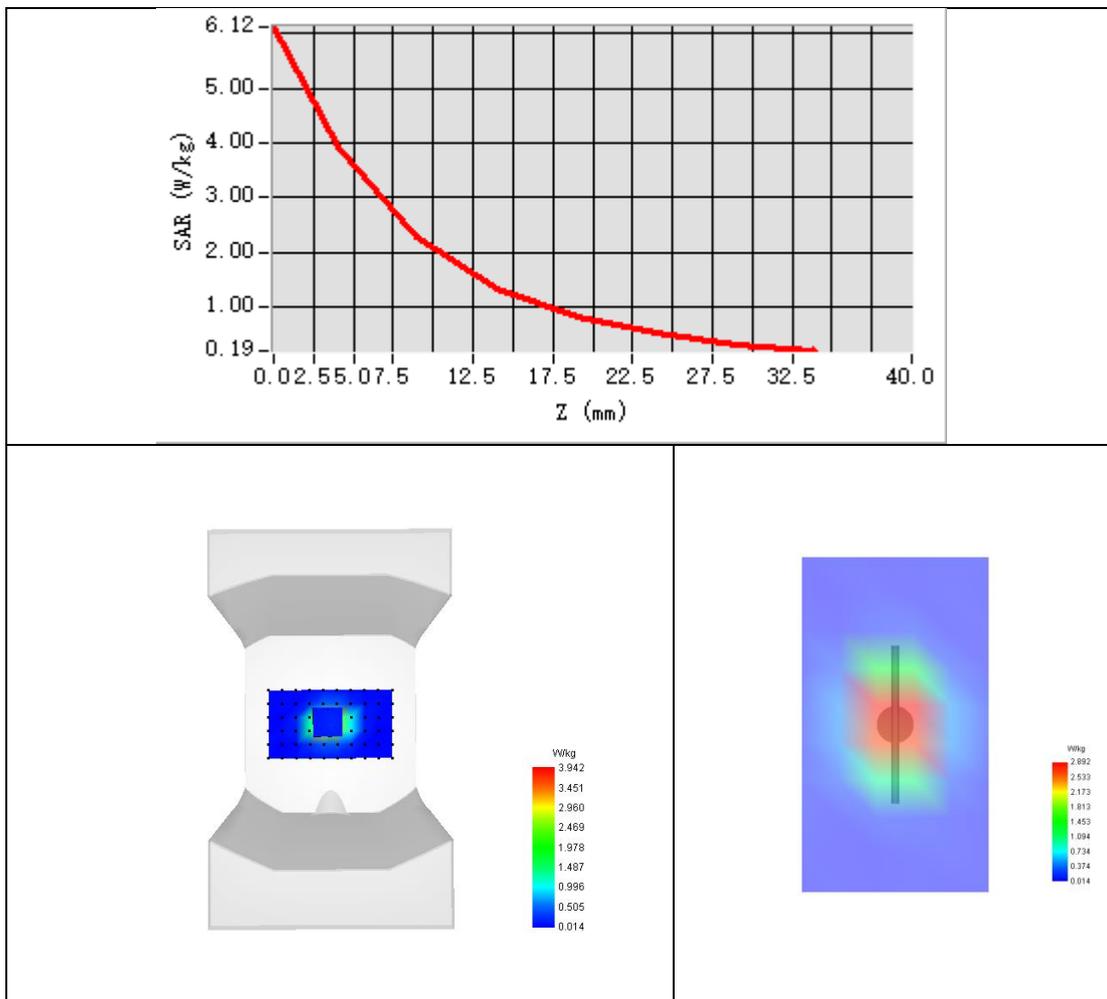



## System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-16

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	40.54
Conductivity (S/m)	1.81
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

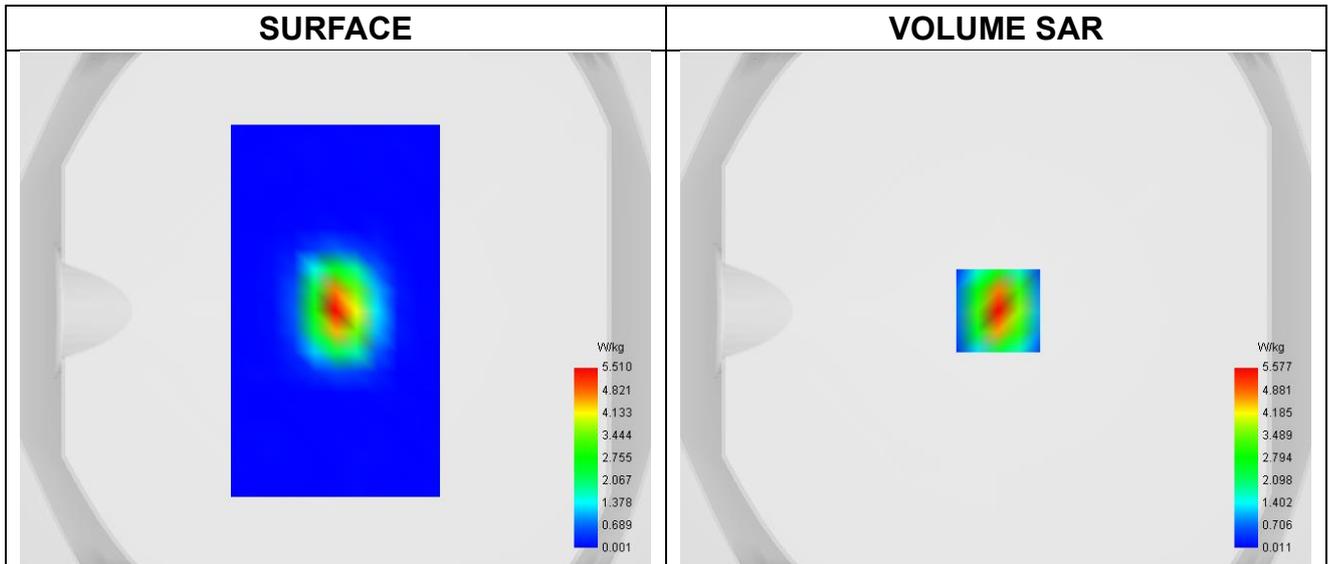


**Maximum location: X=5.00, Y=3.00 ; SAR Peak: 8.39 W/kg**

SAR 10g (W/Kg)	2.204
SAR 1g (W/Kg)	5.104



### Z Axis Scan

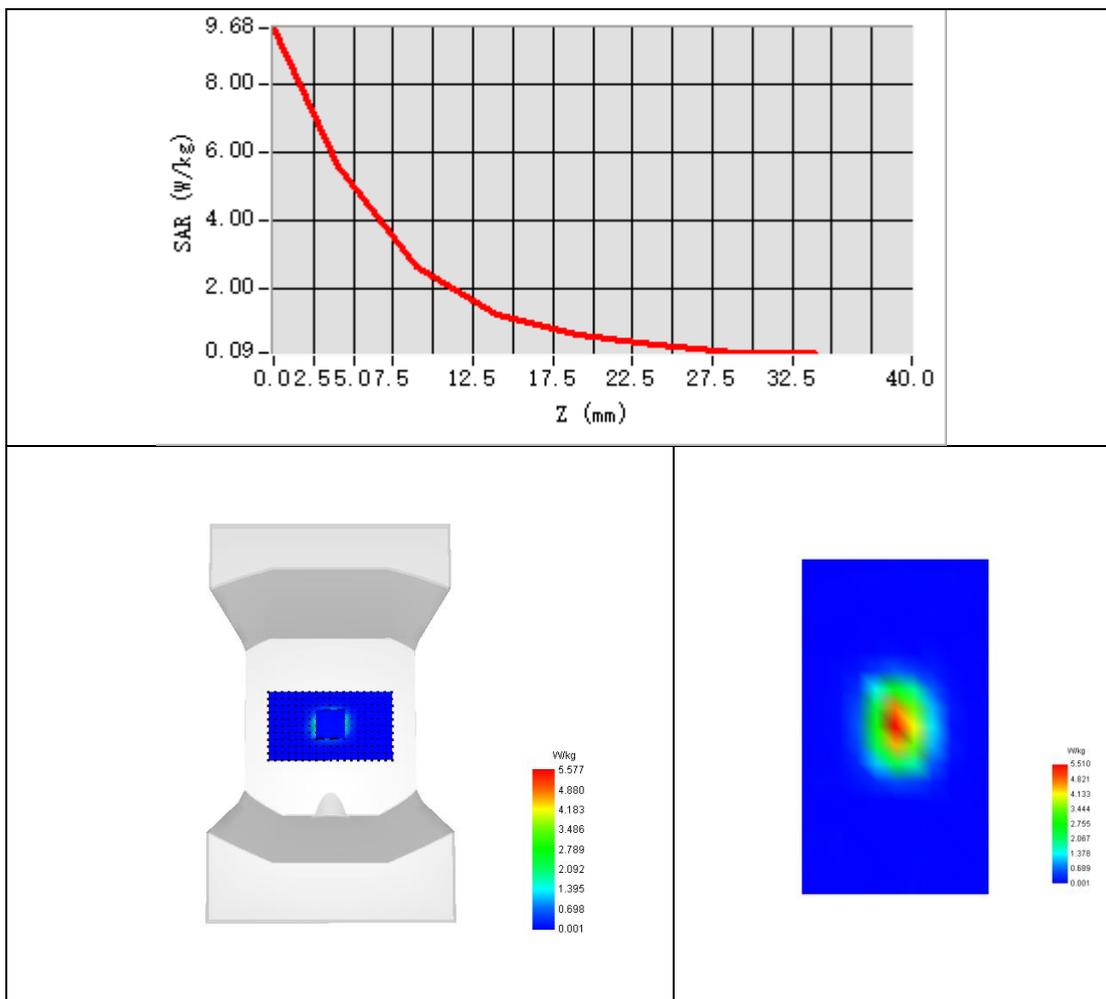



## System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-03-25

### Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.50
Conductivity (S/m)	2.01
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

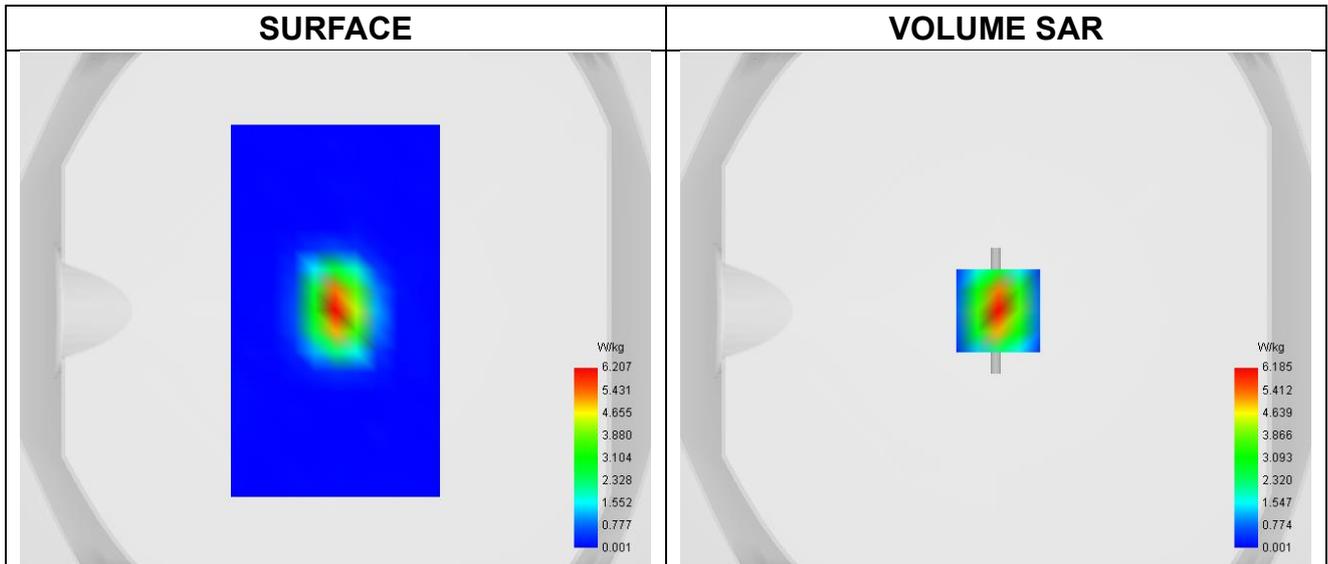


**Maximum location: X=1.00, Y=0.00 ; SAR Peak: 10.99 W/kg**

SAR 10g (W/Kg)	2.364
SAR 1g (W/Kg)	5.675



### Z Axis Scan

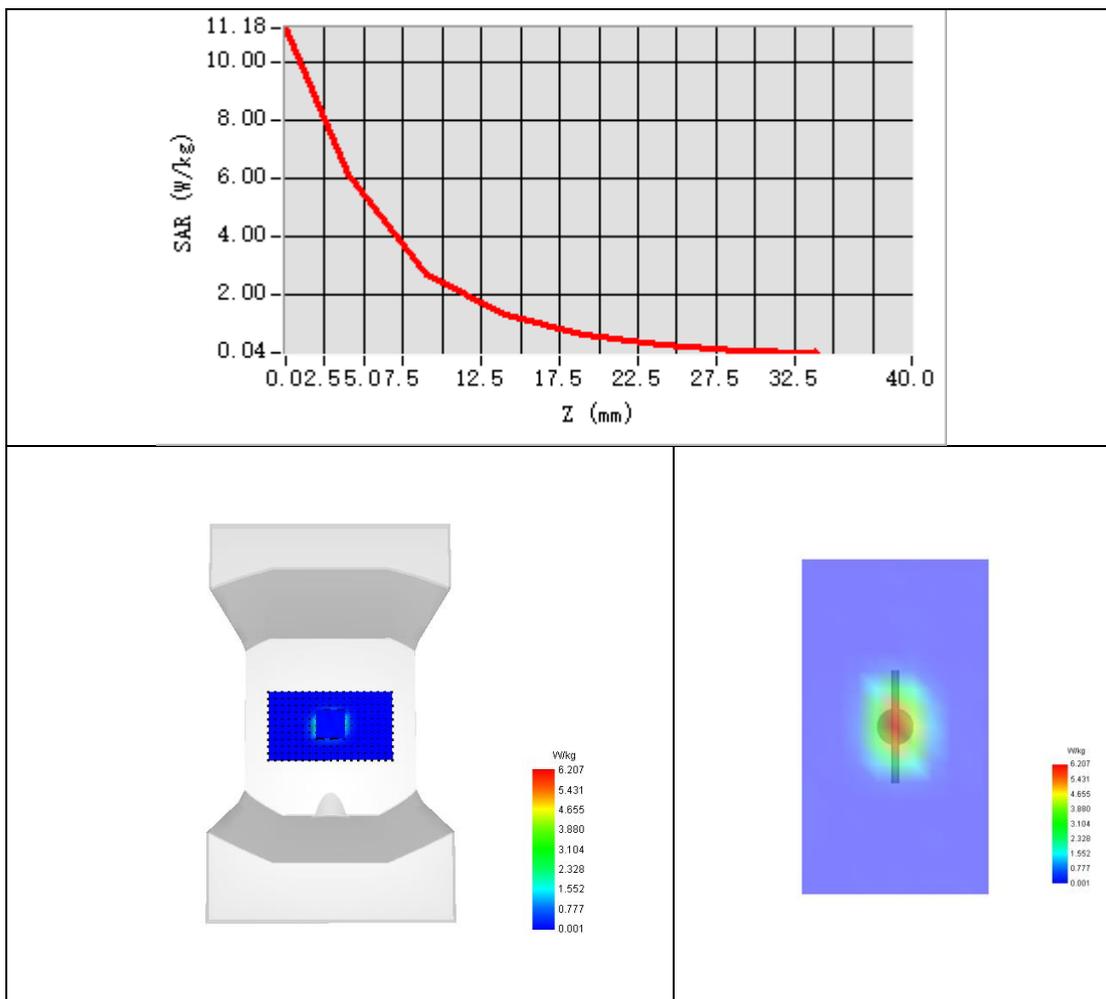




## Appendix B. SAR Test Plots

### Plot 1:

Test Date	2023-03-26
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Signal	TDMA (GSM)
Frequency	824.2
ConvF	1.72
SAR 10g (W/Kg)	0.102
SAR 1g (W/Kg)	0.166

Maximum location: X=-54.00, Y=-26.00 ; SAR Peak: 0.27 W/kg

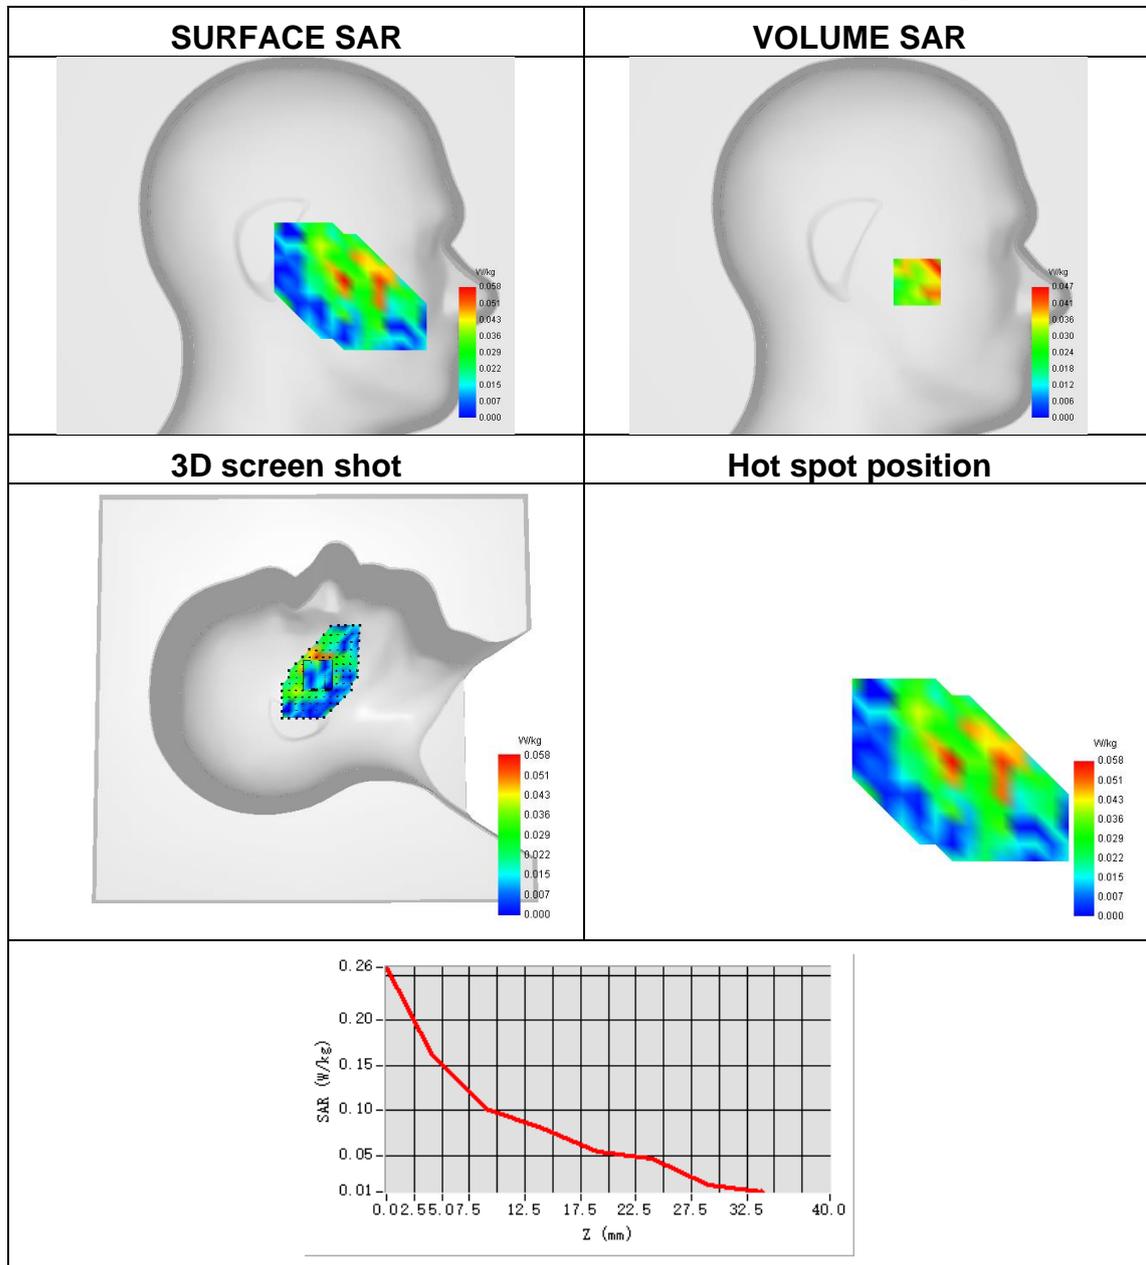




**Plot 2:**

Test Date	2023-03-26
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	824.2
ConvF	1.75
SAR 10g (W/Kg)	0.167
SAR 1g (W/Kg)	0.249

Maximum location: X=-13.00, Y=61.00 ; SAR Peak: 0.37 W/kg

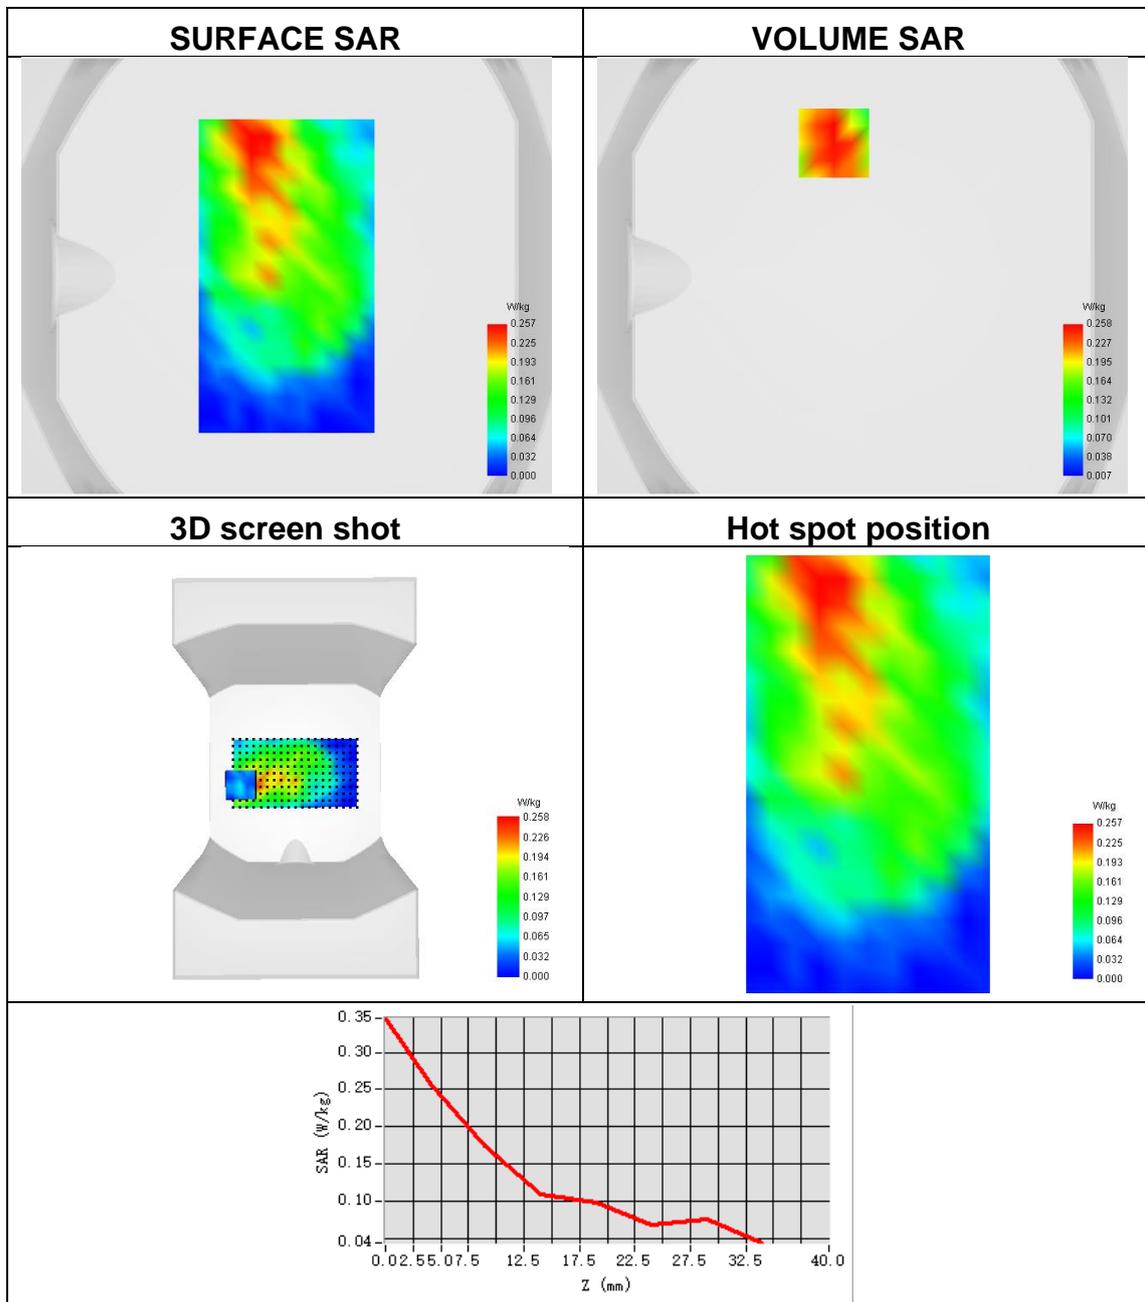




**Plot 3:**

Test Date	2023-03-28
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Signal	TDMA (GSM)
Frequency	1850.2
ConvF	1.95
SAR 10g (W/Kg)	0.112
SAR 1g (W/Kg)	0.180

Maximum location: X=-48.00, Y=-47.00 ; SAR Peak: 0.30 W/kg

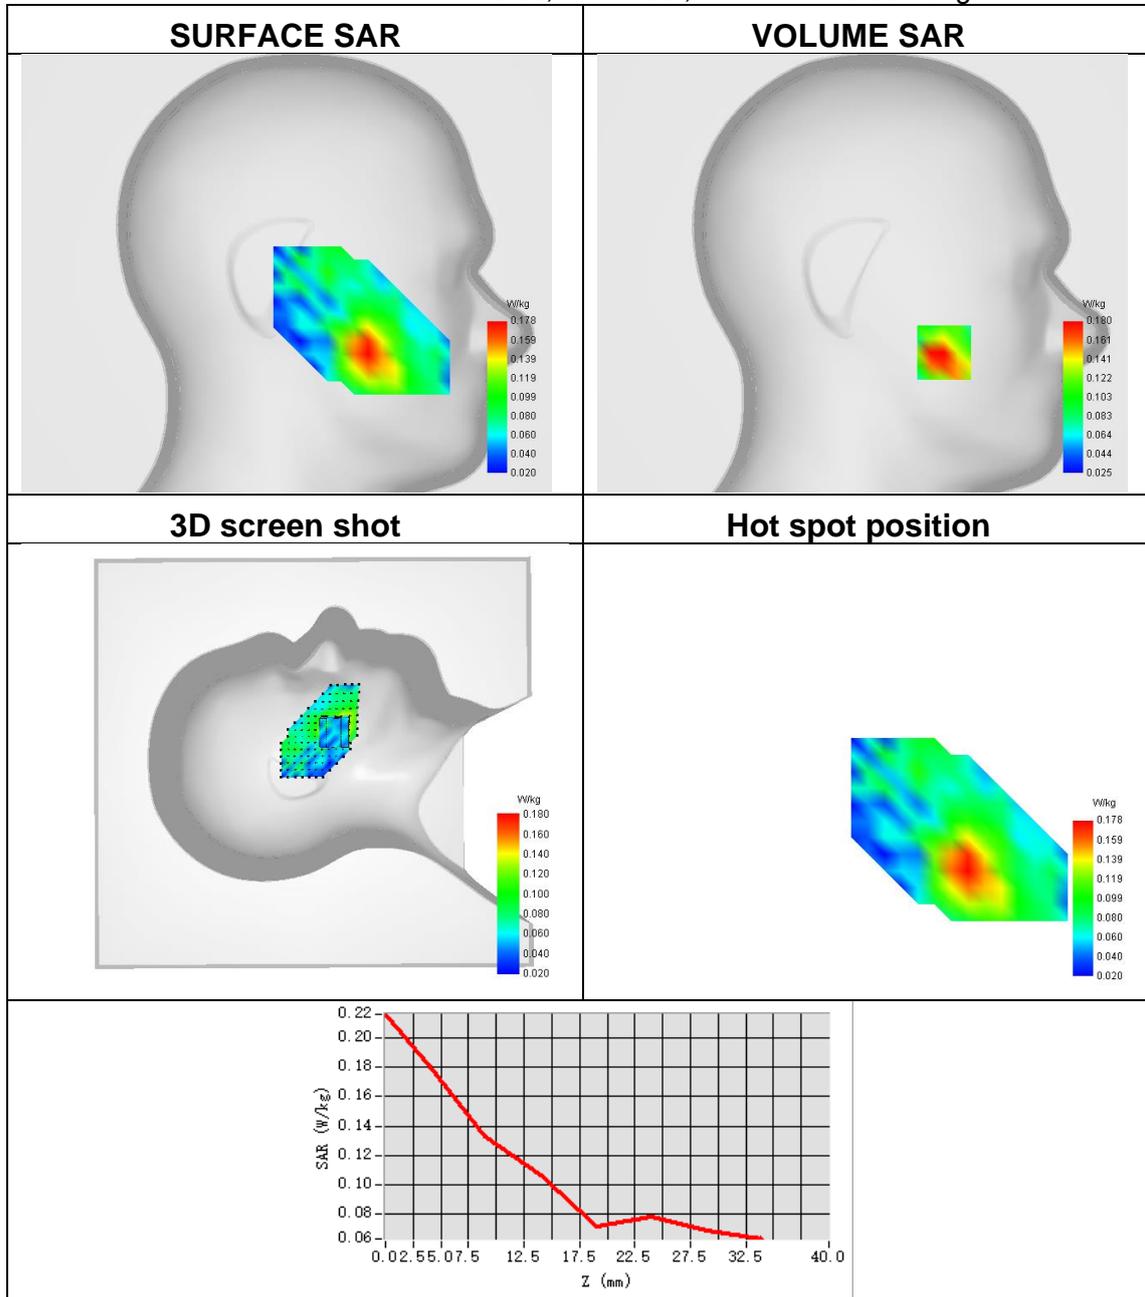




**Plot 4:**

Test Date	2023-03-28
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
ConvF	1.75
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.255

Maximum location: X=6.00, Y=24.00 ; SAR Peak: 0.49 W/kg

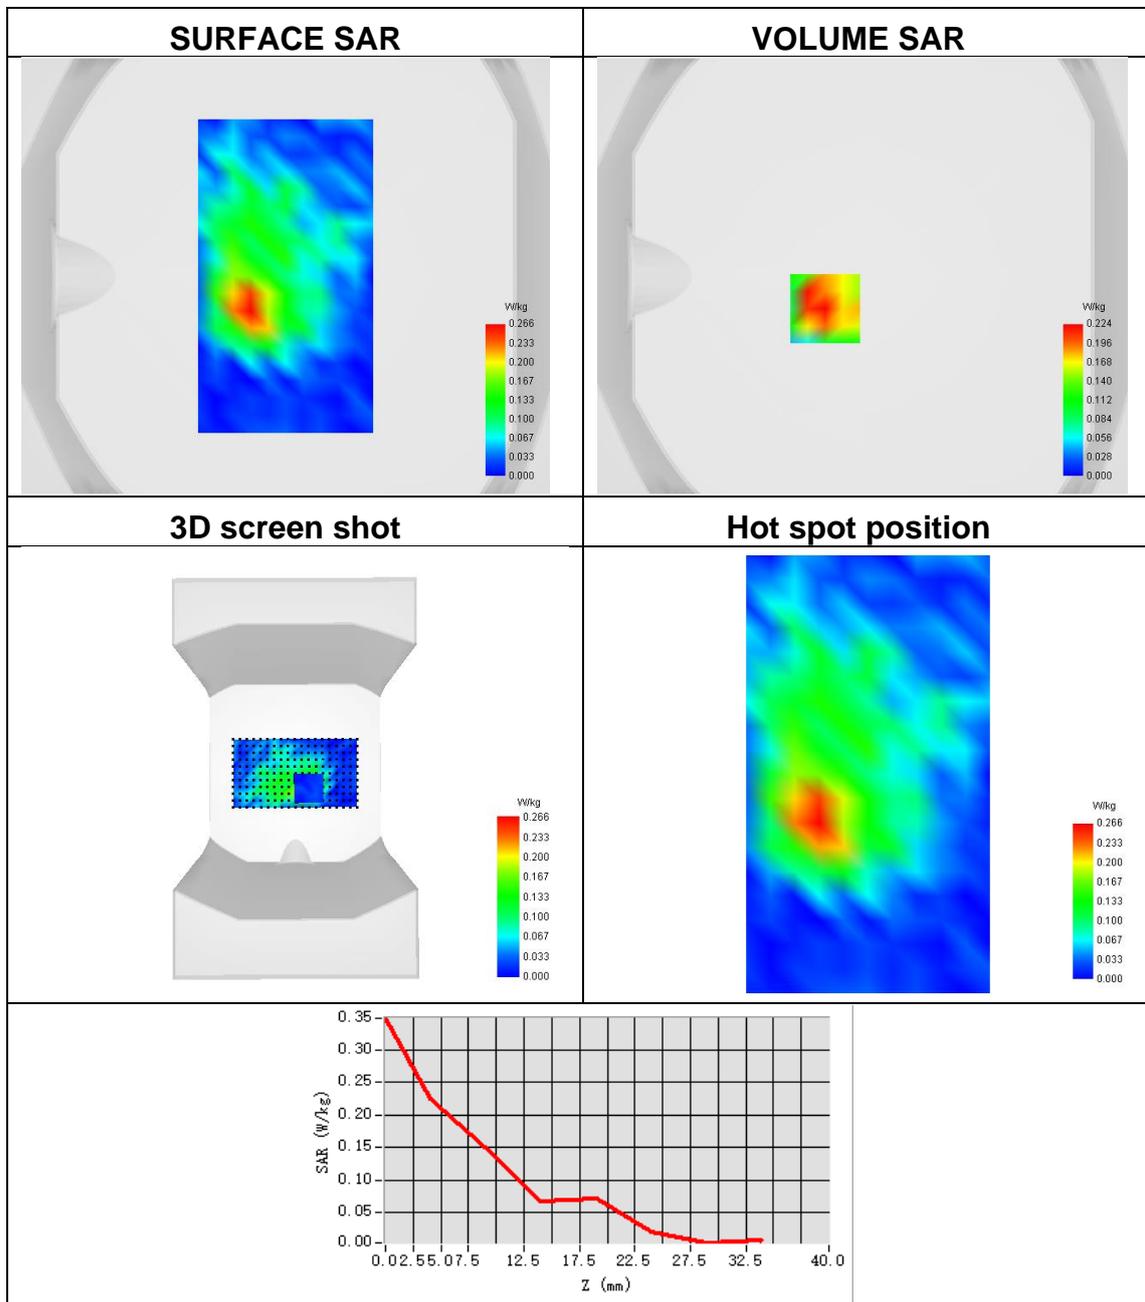




**Plot 5:**

Test Date	2023-03-28
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
ConvF	2.25
SAR 10g (W/Kg)	0.281
SAR 1g (W/Kg)	0.559

Maximum location: X=-58.00, Y=-25.00 ; SAR Peak: 0.94 W/kg

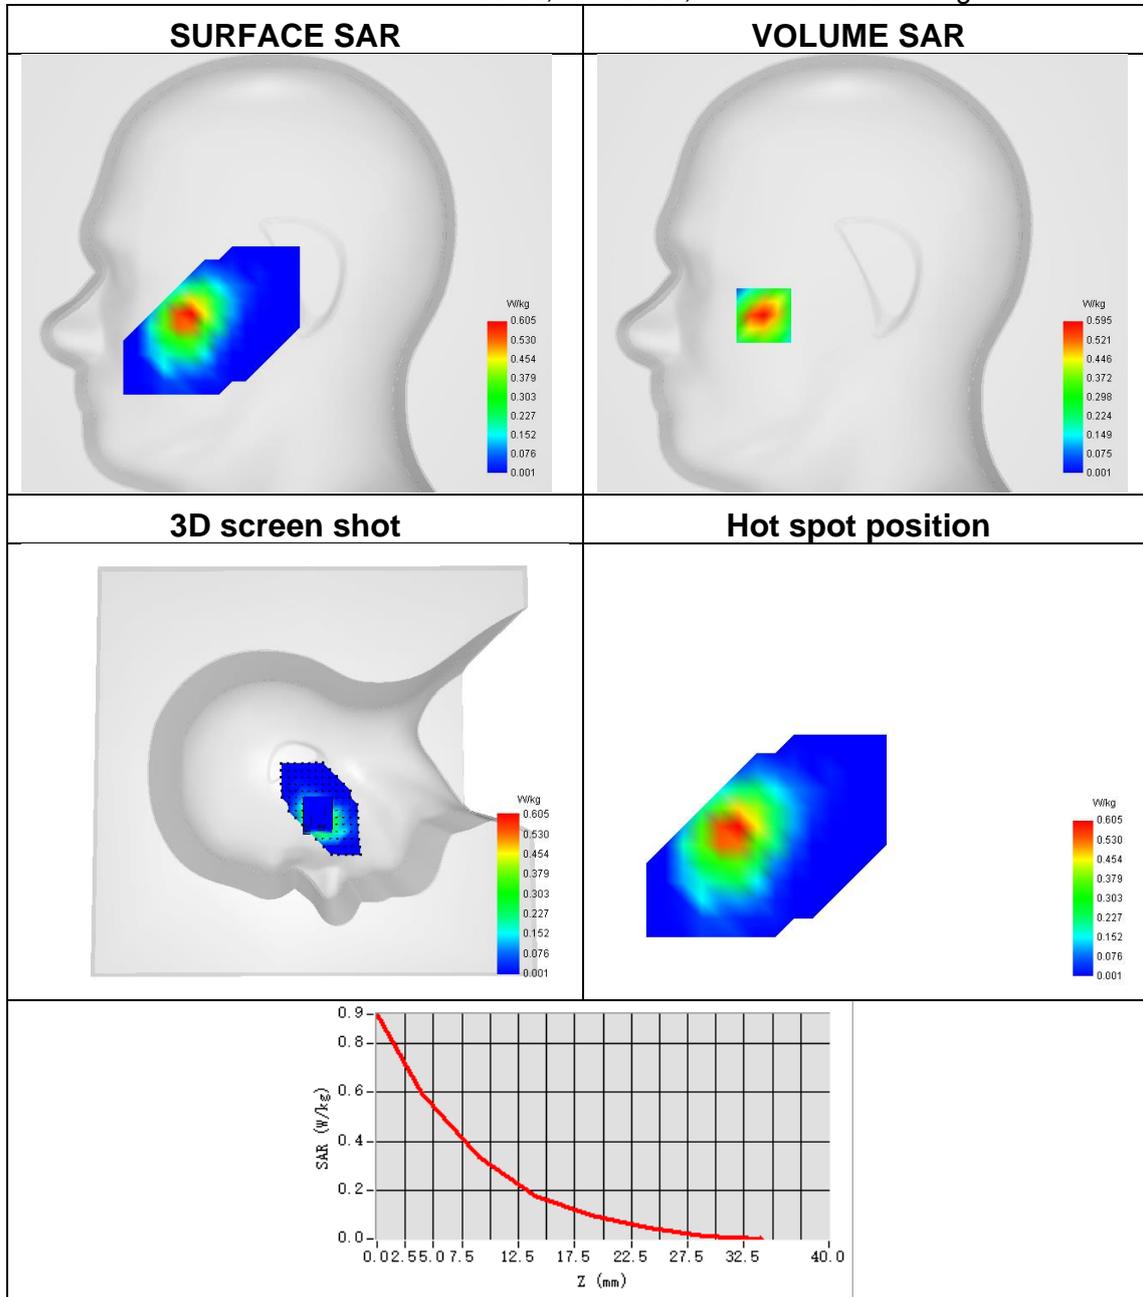




**Plot 6:**

Test Date	2023-03-28
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
ConvF	2.21
SAR 10g (W/Kg)	0.267
SAR 1g (W/Kg)	0.592

Maximum location: X=-16.00, Y=18.00 ; SAR Peak: 1.15 W/kg

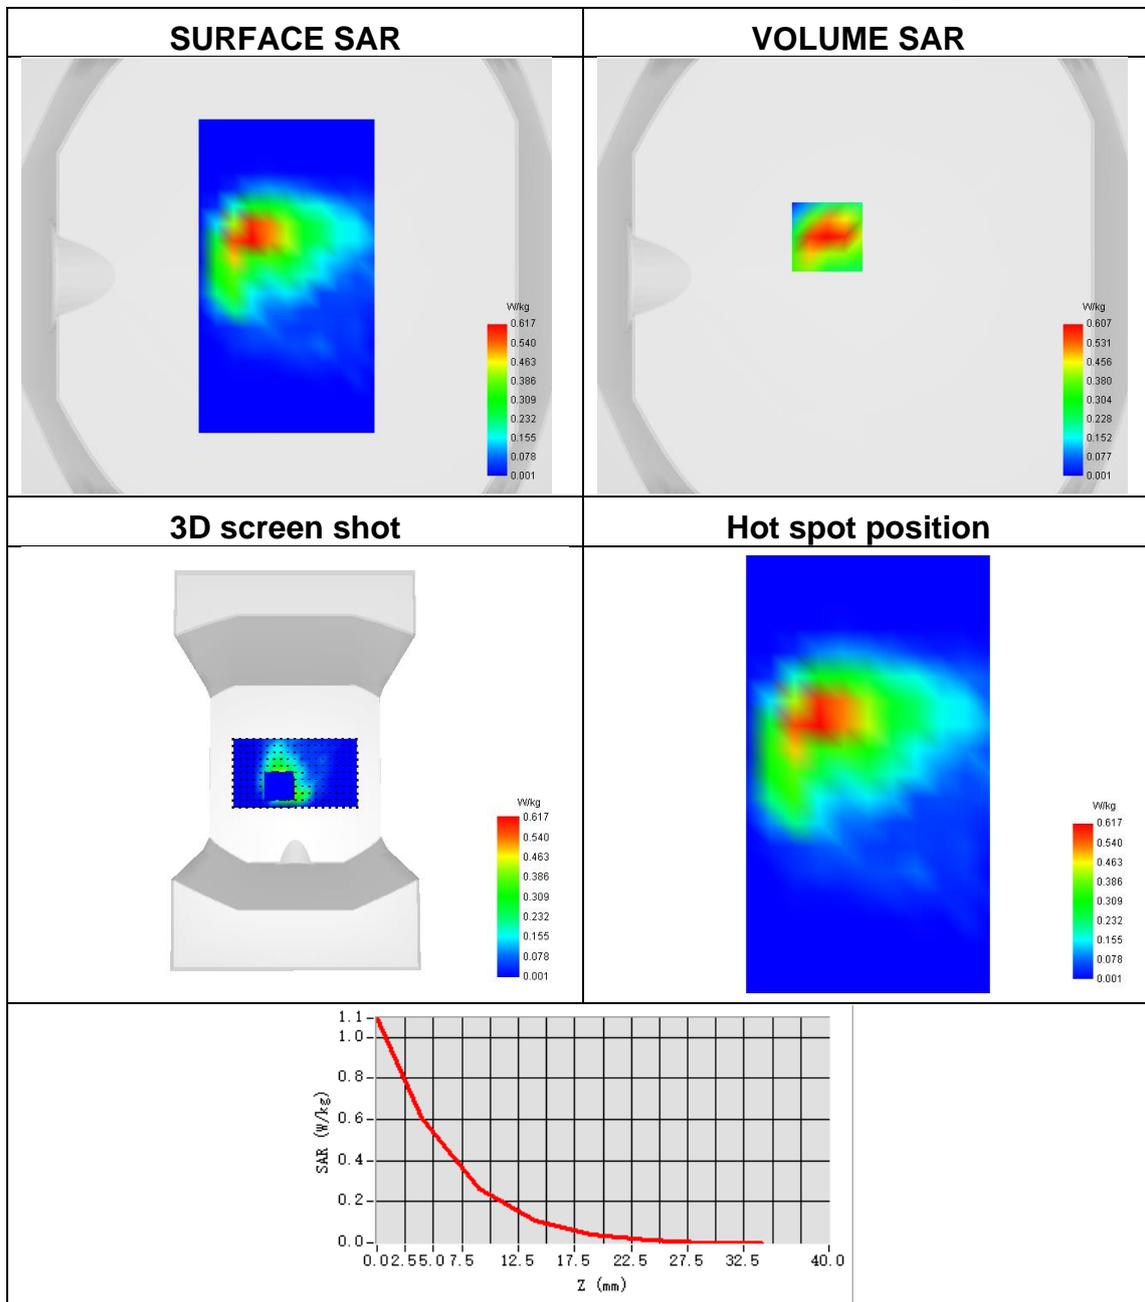




**Plot 7:**

Test Date	2023-03-26
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
ConvF	1.72
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.146

Maximum location: X=-24.00, Y=-7.00 ; SAR Peak: 0.37 W/kg

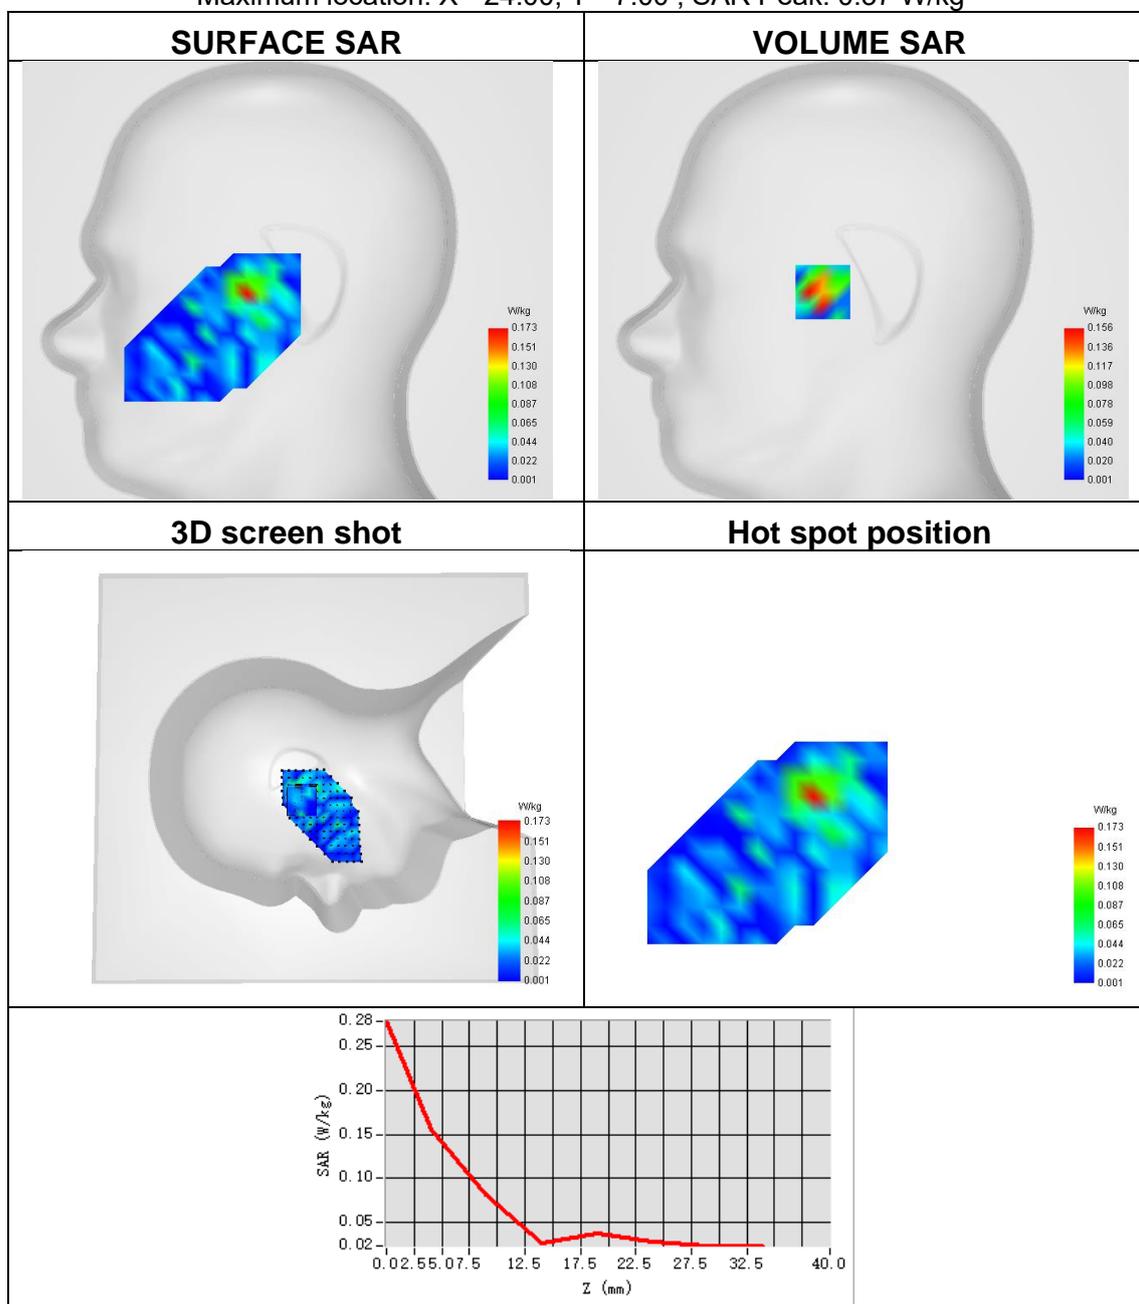




**Plot 8:**

Test Date	2023-03-26
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	826.4
ConvF	1.75
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.209

Maximum location: X=-16.00, Y=48.00 ; SAR Peak: 0.31 W/kg

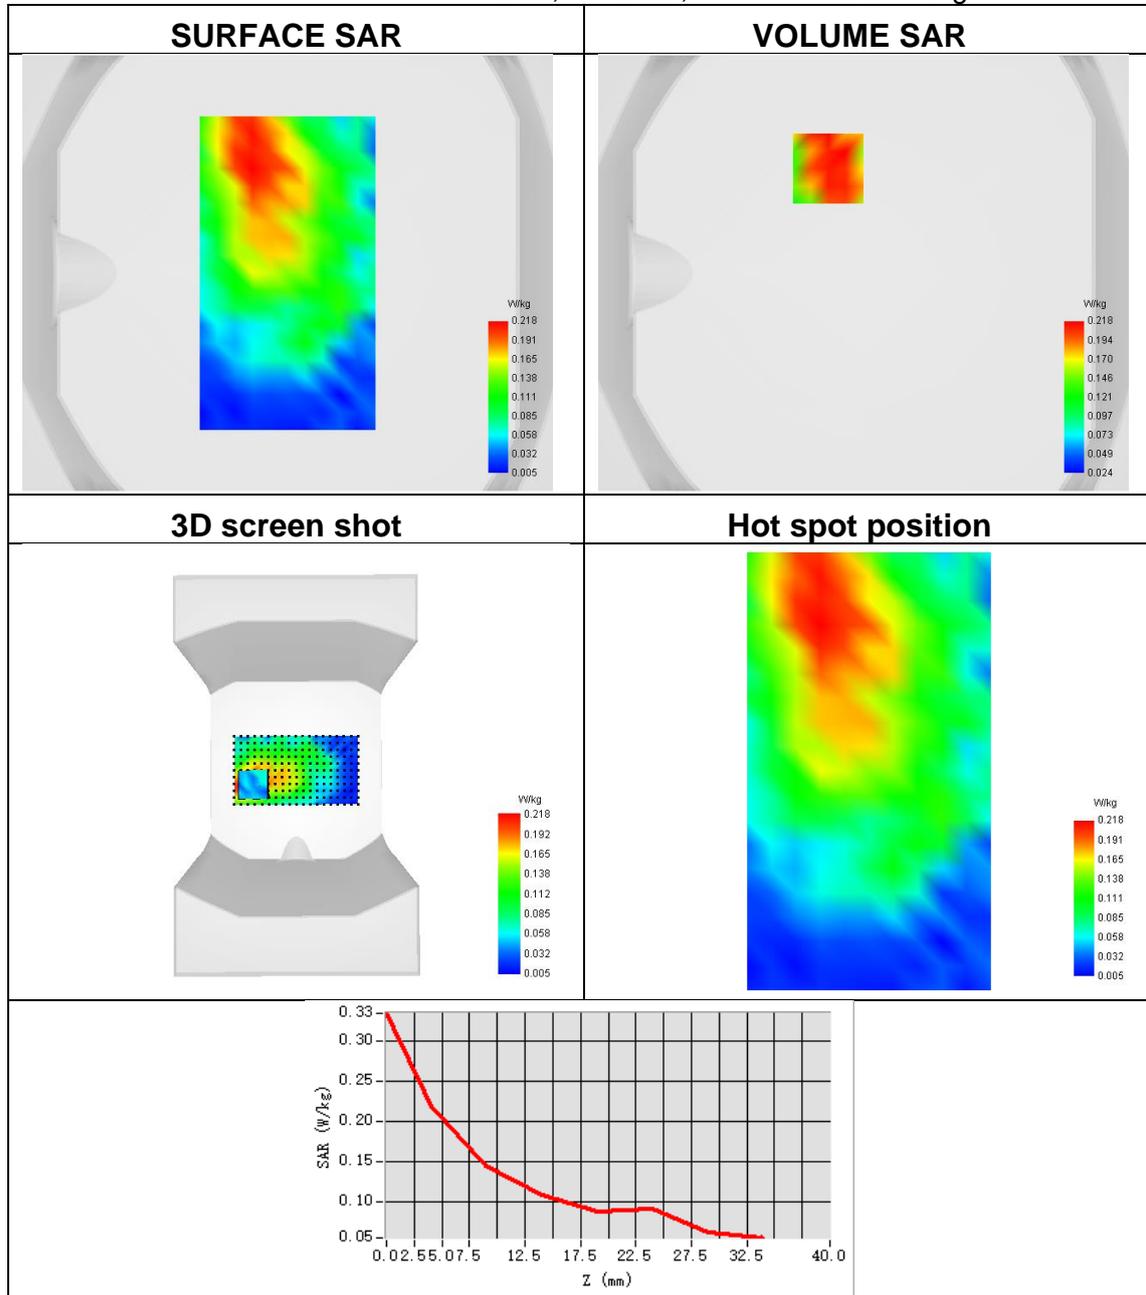




**Plot 9:**

Test Date	2023-03-28
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
ConvF	1.95
SAR 10g (W/Kg)	0.338
SAR 1g (W/Kg)	0.690

Maximum location: X=-61.00, Y=-24.00 ; SAR Peak: 1.20 W/kg

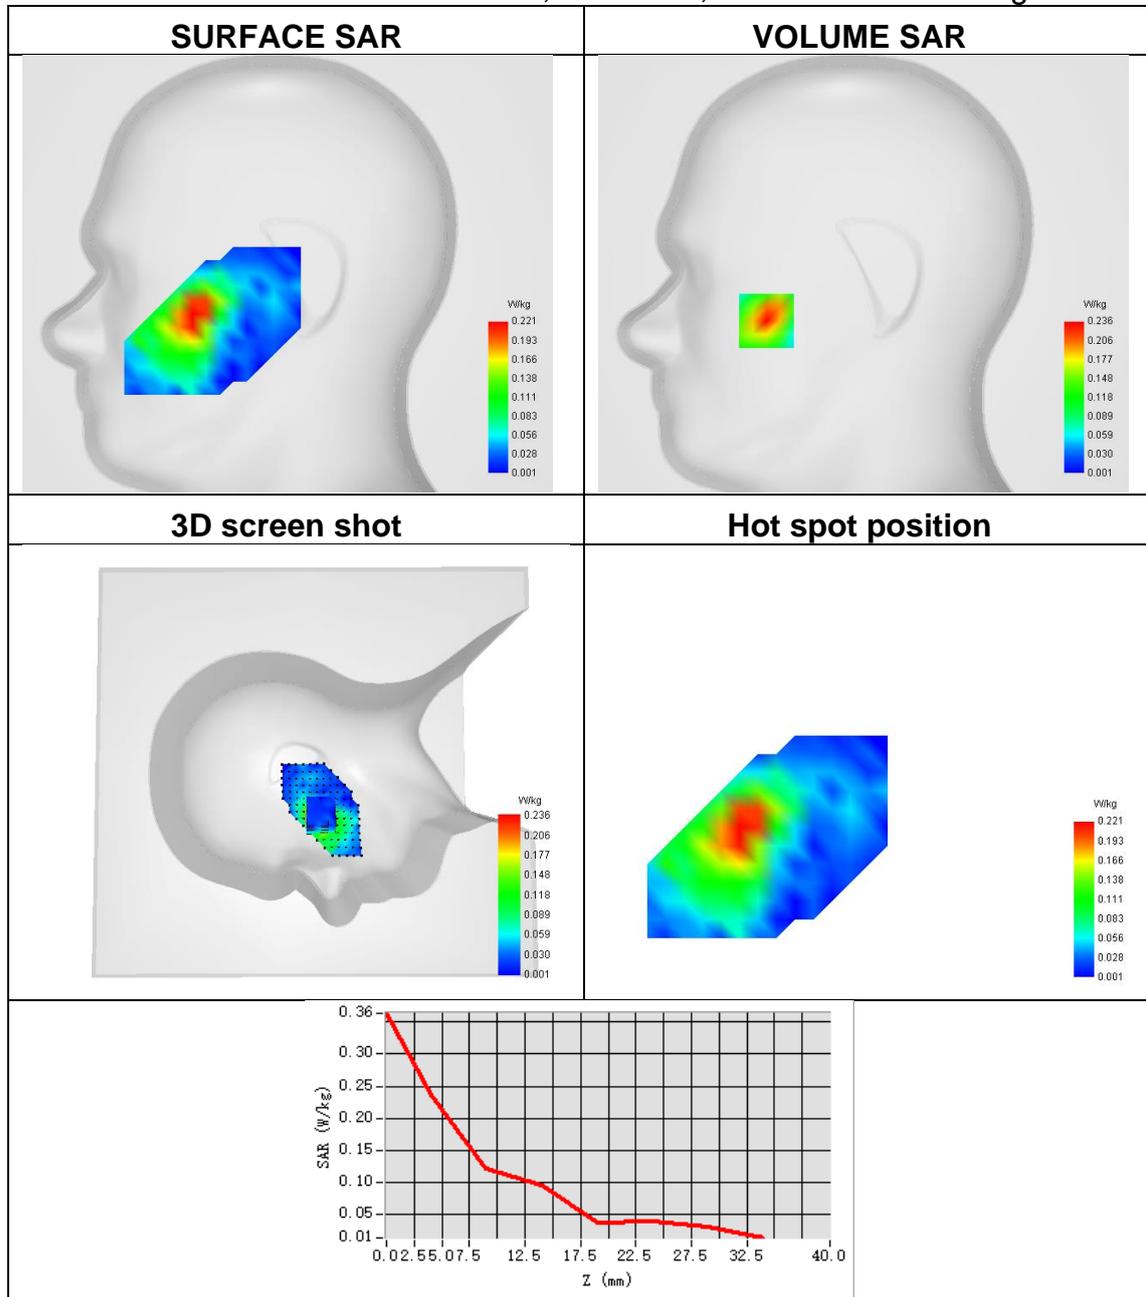




**Plot 10:**

Test Date	2023-03-28
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
ConvF	2.00
SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.389

Maximum location: X=-17.00, Y=-40.00 ; SAR Peak: 0.67 W/kg

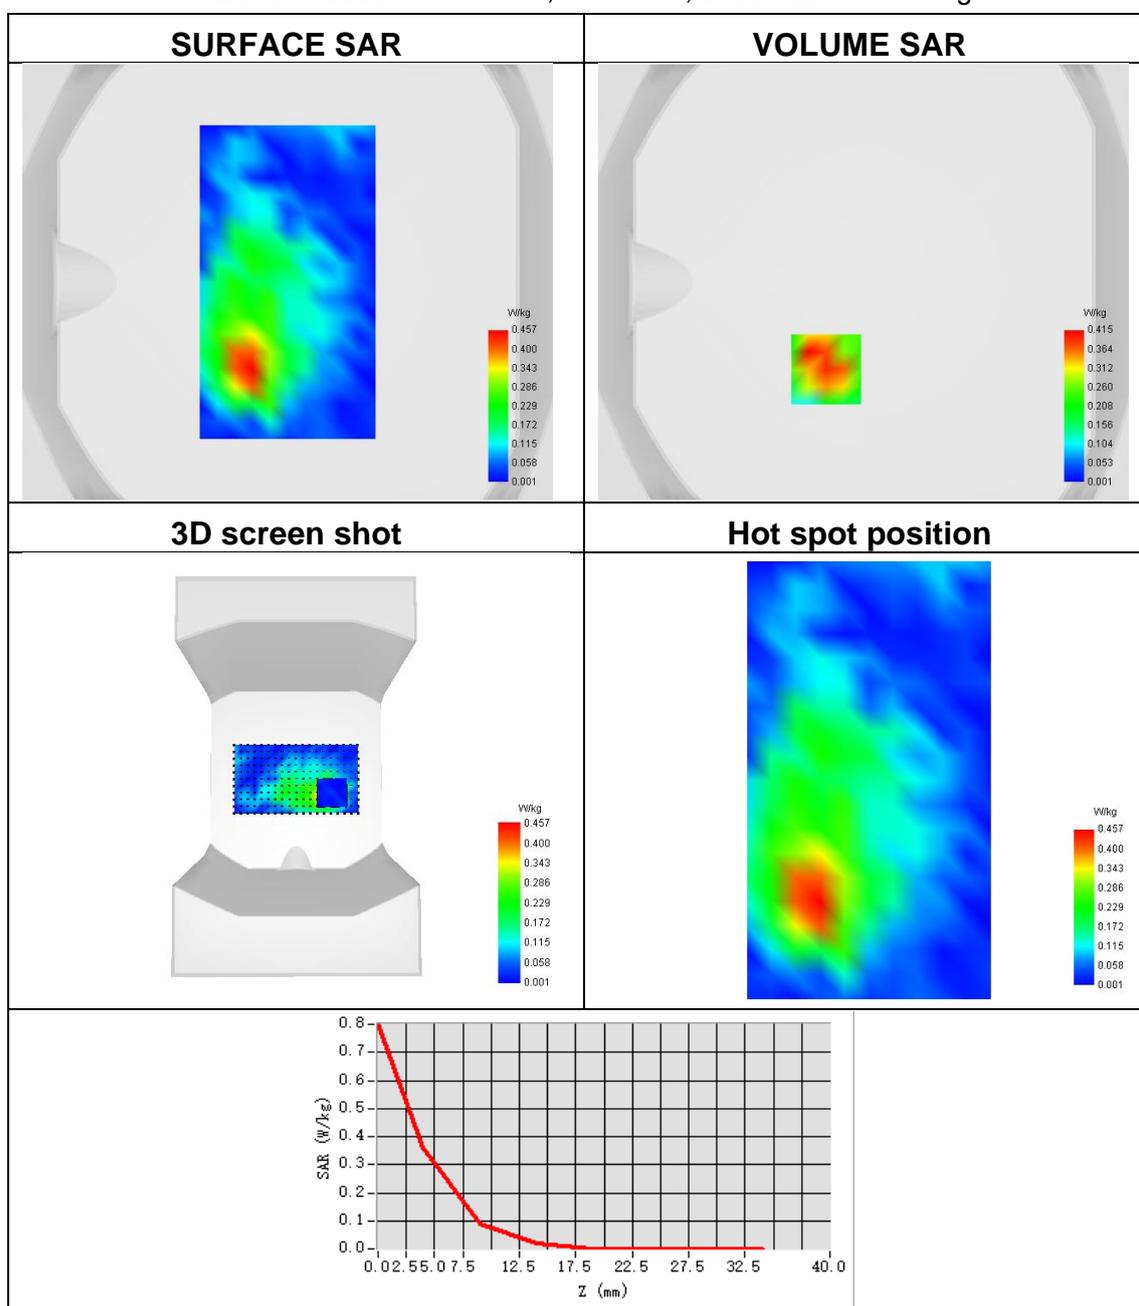




**Plot 11:**

Test Date	2023-03-24
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
ConvF	1.95
SAR 10g (W/Kg)	0.244
SAR 1g (W/Kg)	0.405

Maximum location: X=-64.00, Y=-31.00 ; SAR Peak: 0.57 W/kg

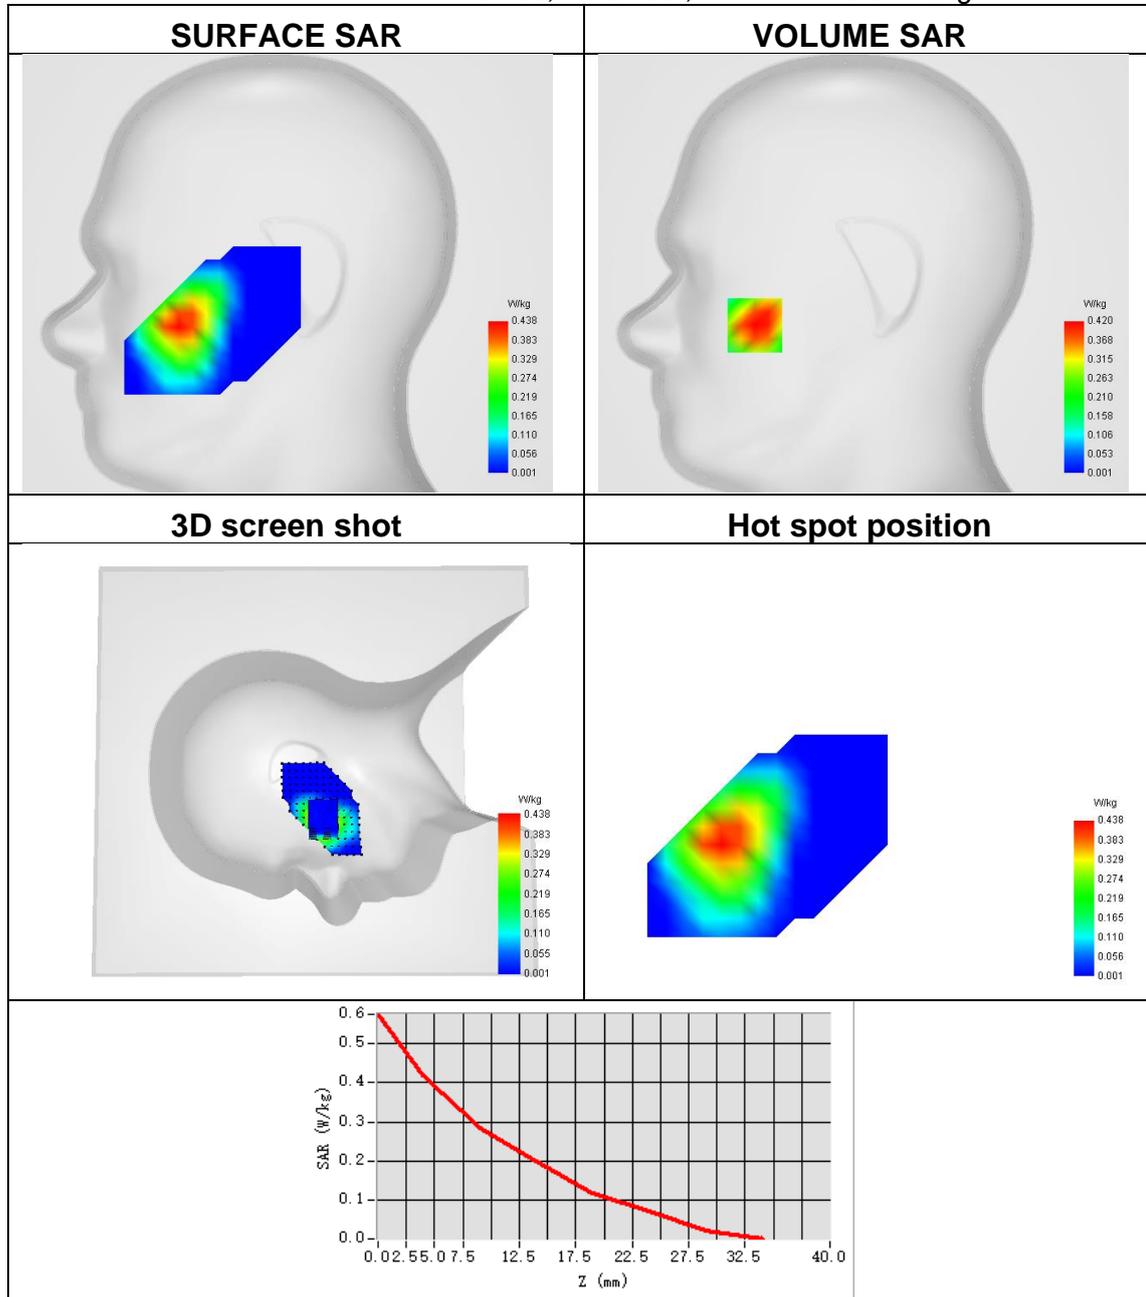




**Plot 12:**

Test Date	2023-03-24
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
ConvF	2.00
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.431

Maximum location: X=15.00, Y=23.00 ; SAR Peak: 0.92 W/kg

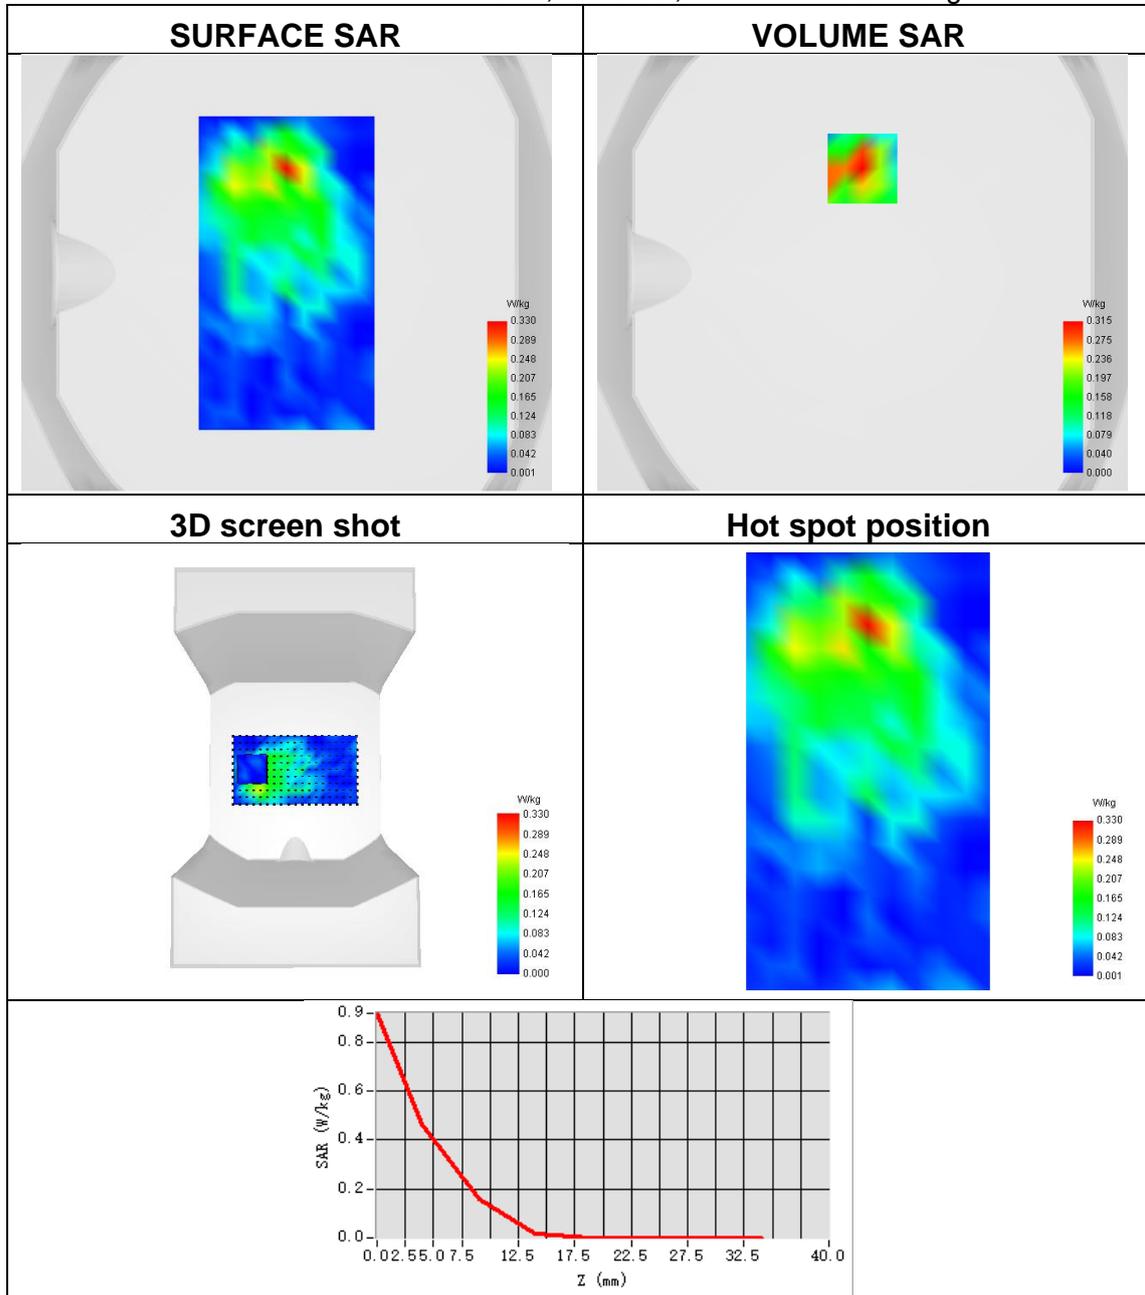




**Plot 13:**

Test Date	2023-03-26
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
ConvF	1.72
SAR 10g (W/Kg)	0.071
SAR 1g (W/Kg)	0.126

Maximum location: X=-71.00, Y=-32.00 ; SAR Peak: 0.19 W/kg

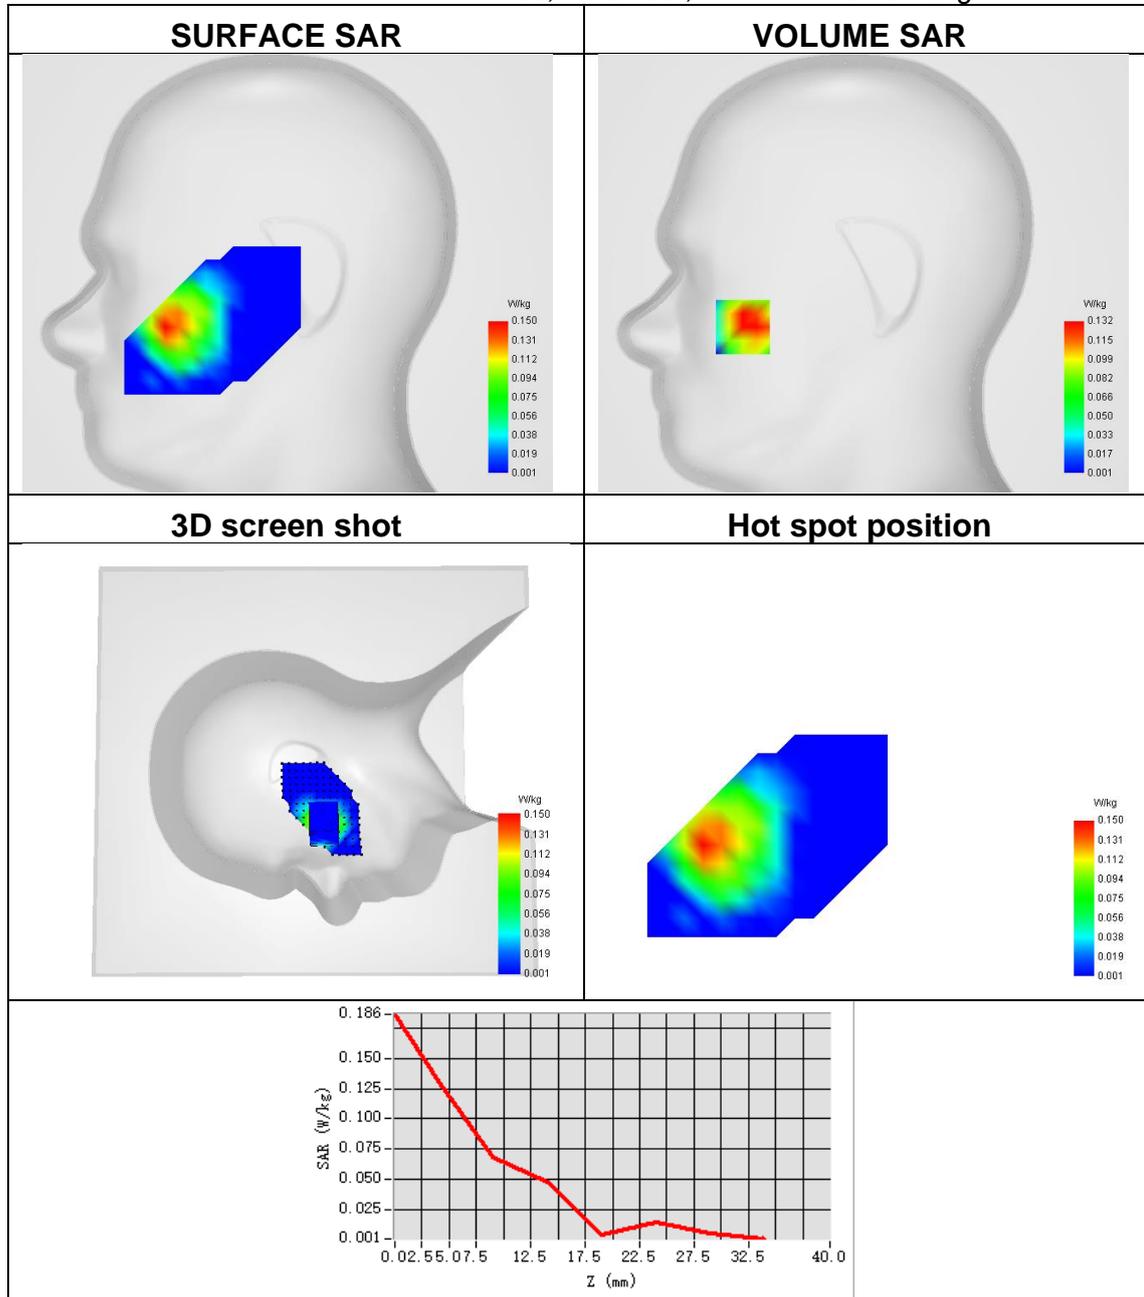




**Plot 14:**

Test Date	2023-03-26
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
ConvF	1.75
SAR 10g (W/Kg)	0.085
SAR 1g (W/Kg)	0.195


Maximum location: X=5.00, Y=-13.00 ; SAR Peak: 0.45 W/kg

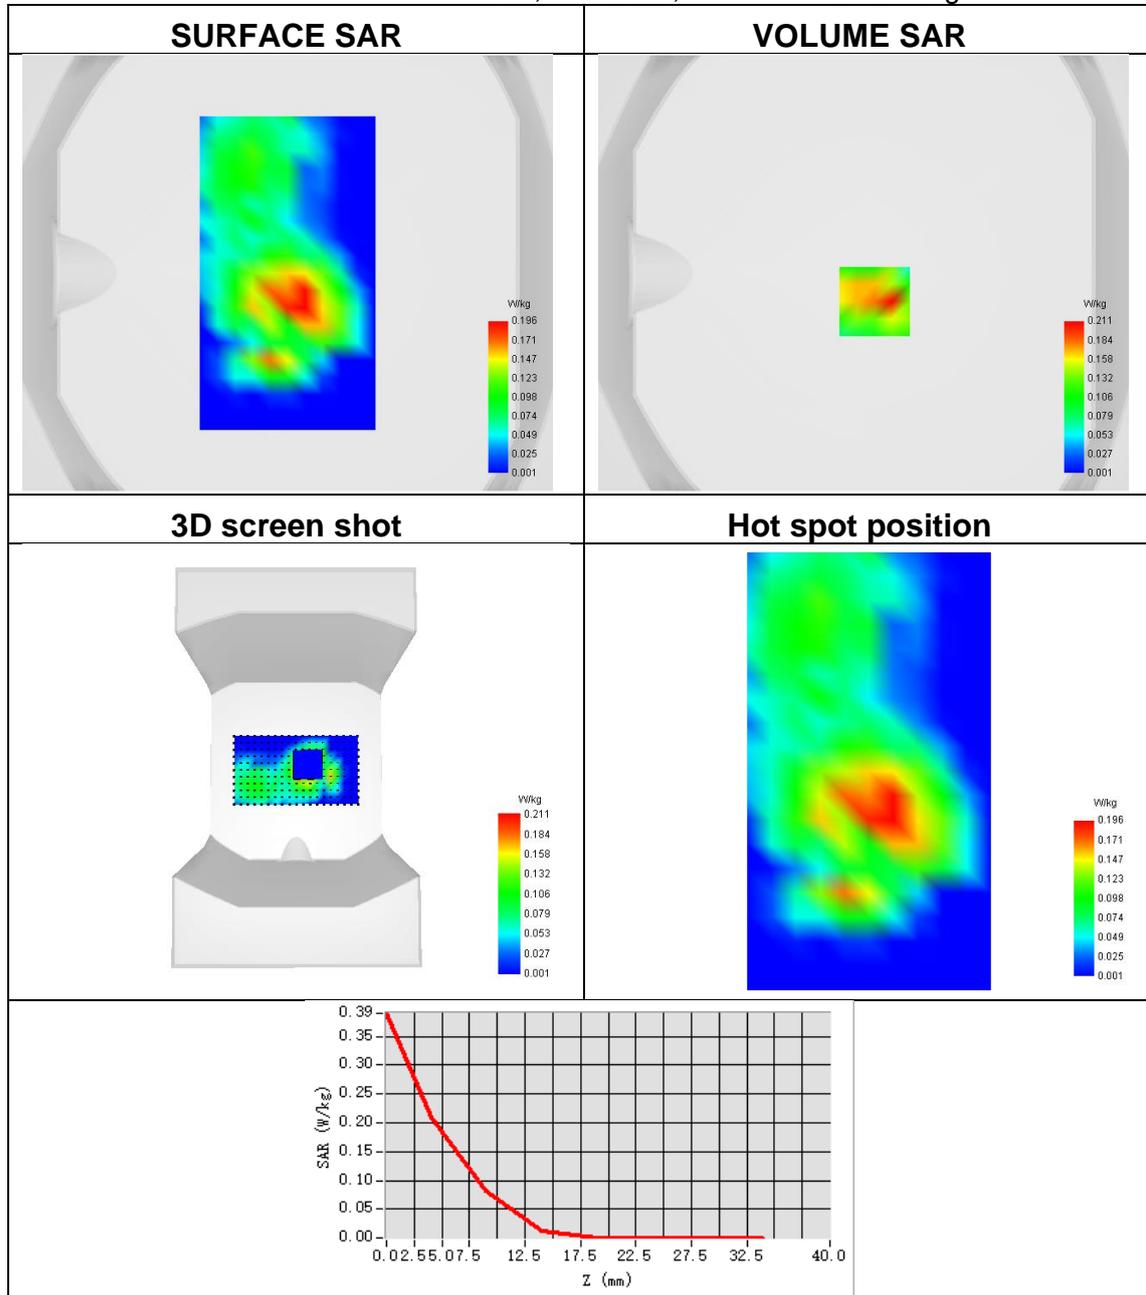

**Plot 15:**

Test Date	2023-03-25
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2535
ConvF	2.36
SAR 10g (W/Kg)	0.202
SAR 1g (W/Kg)	0.352

Maximum location: X=-50.00, Y=-55.00 ; SAR Peak: 0.60 W/kg

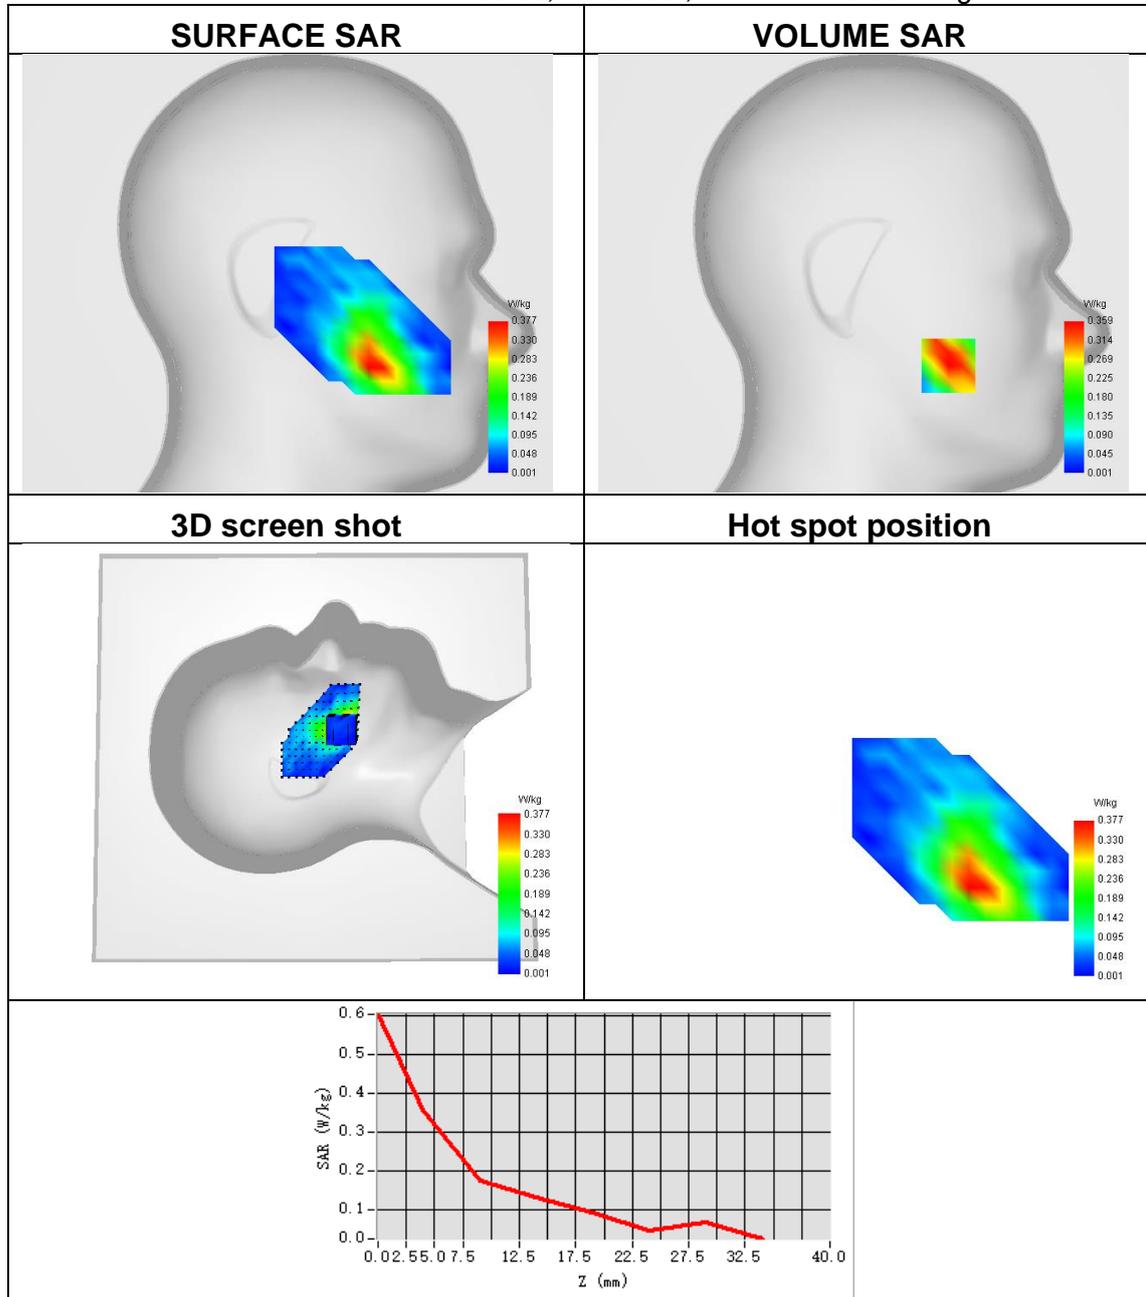




**Plot 16:**

Test Date	2023-03-25
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2535
ConvF	2.14
SAR 10g (W/Kg)	0.296
SAR 1g (W/Kg)	0.820


Maximum location: X=-15.00, Y=42.00 ; SAR Peak: 1.73 W/kg

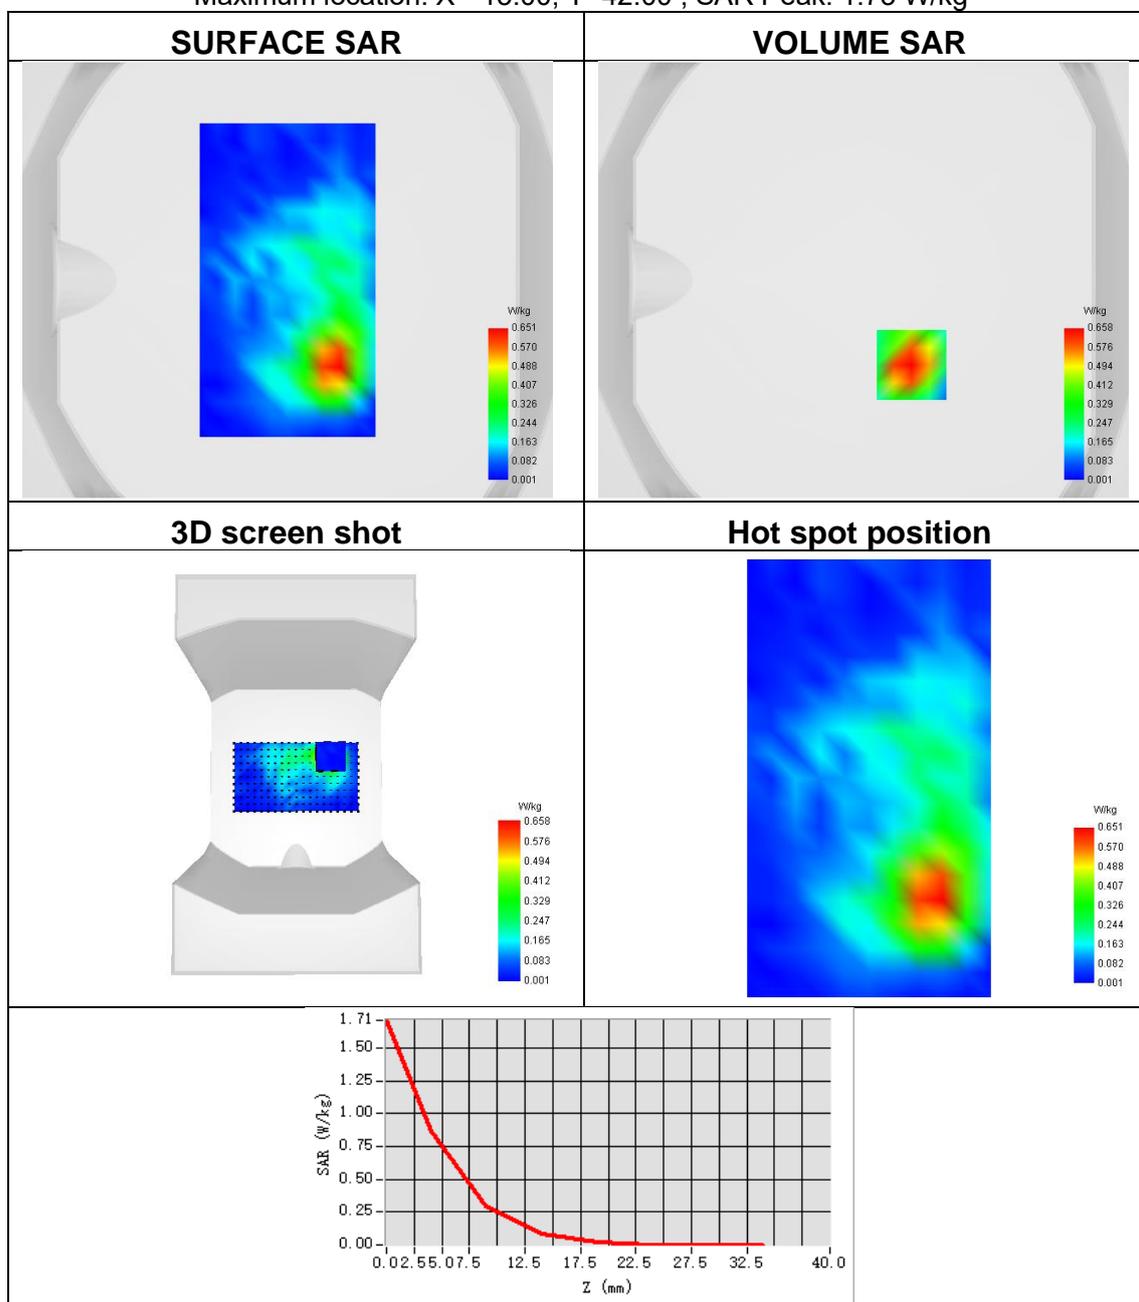

**Plot 17:**

Test Date	2023-03-27
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	711
ConvF	1.69
SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.062

Maximum location: X=-57.00, Y=-30.00 ; SAR Peak: 0.16 W/kg

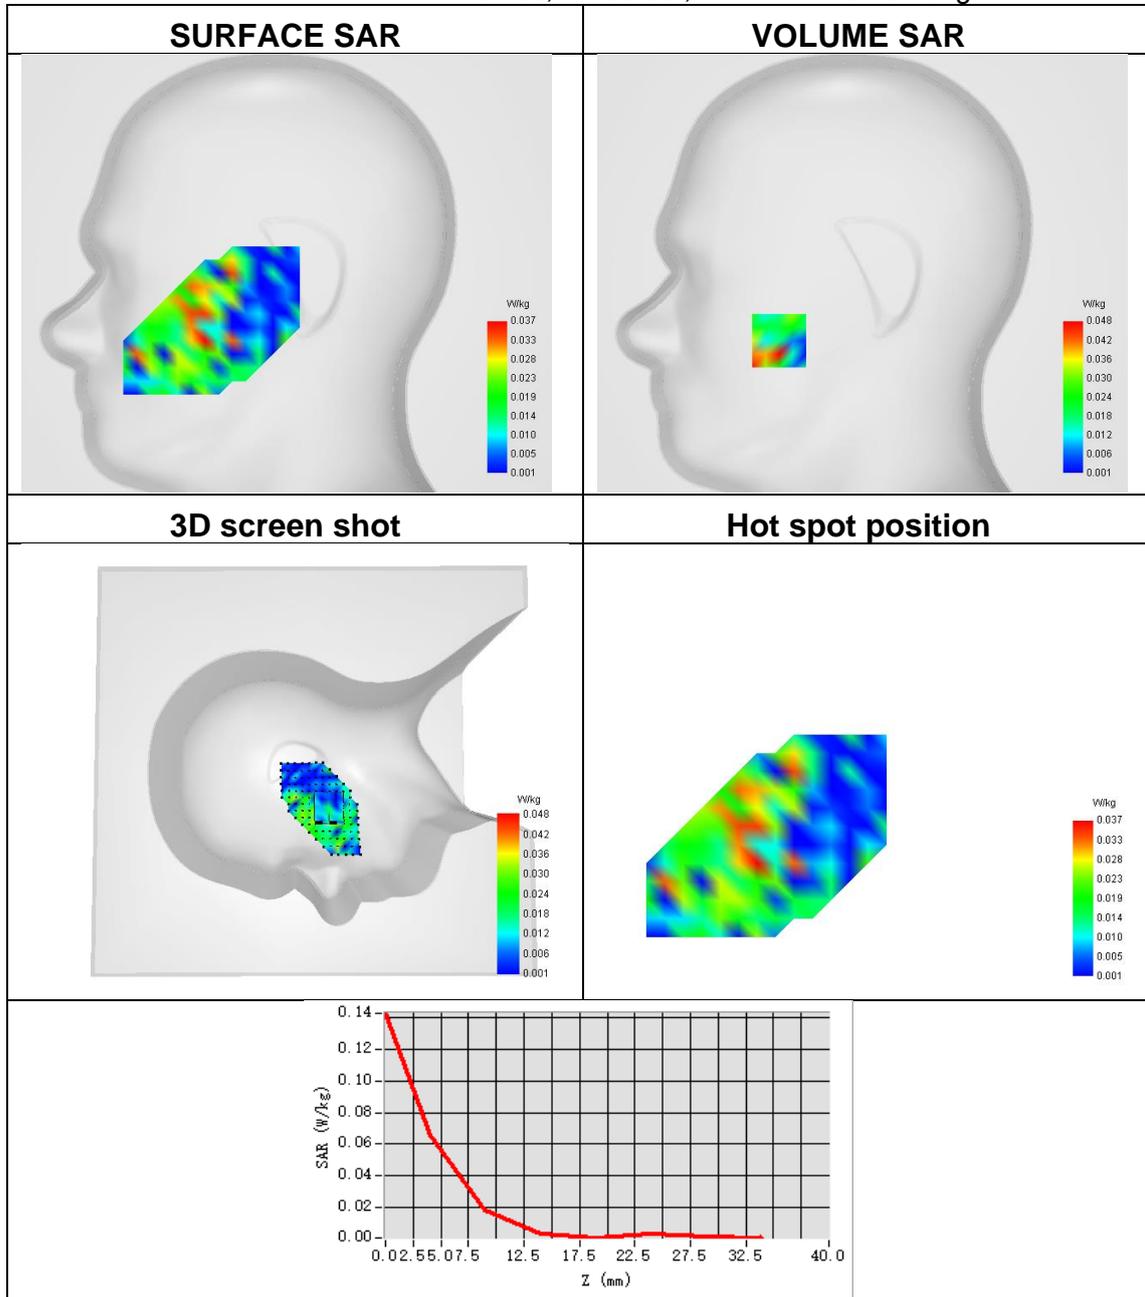




**Plot 18:**

Test Date	2023-03-27
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
ConvF	1.72
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.115


Maximum location: X=29.00, Y=18.00 ; SAR Peak: 0.24 W/kg

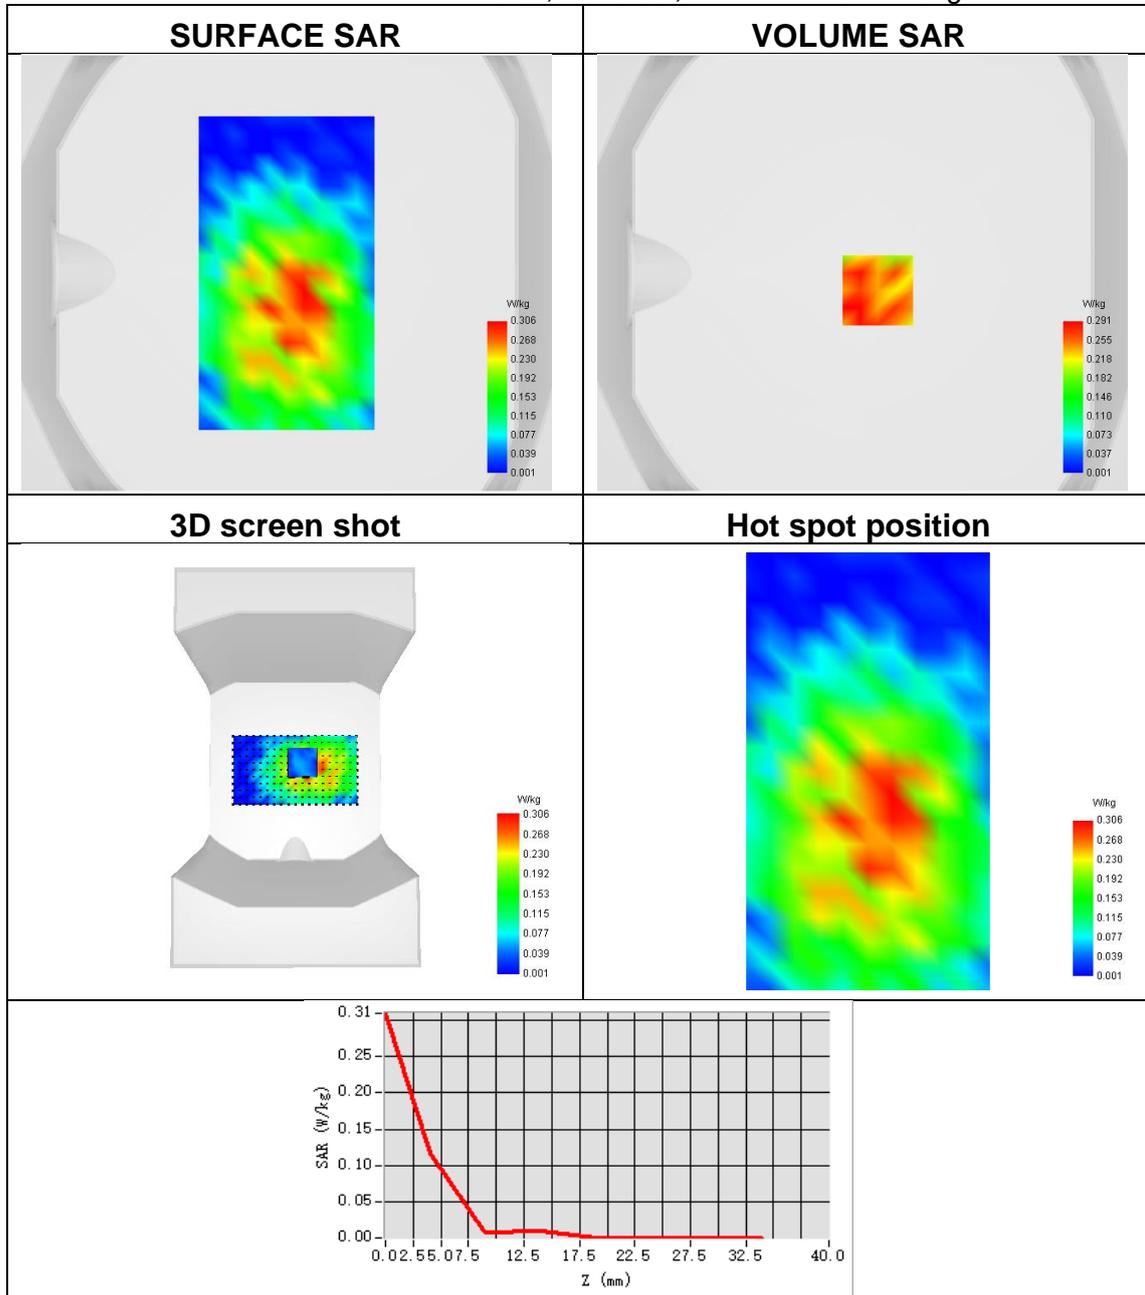

**Plot 19:**

Test Date	2023-03-27
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	710
ConvF	1.69
SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.104

Maximum location: X=-55.00, Y=-30.00 ; SAR Peak: 0.20 W/kg

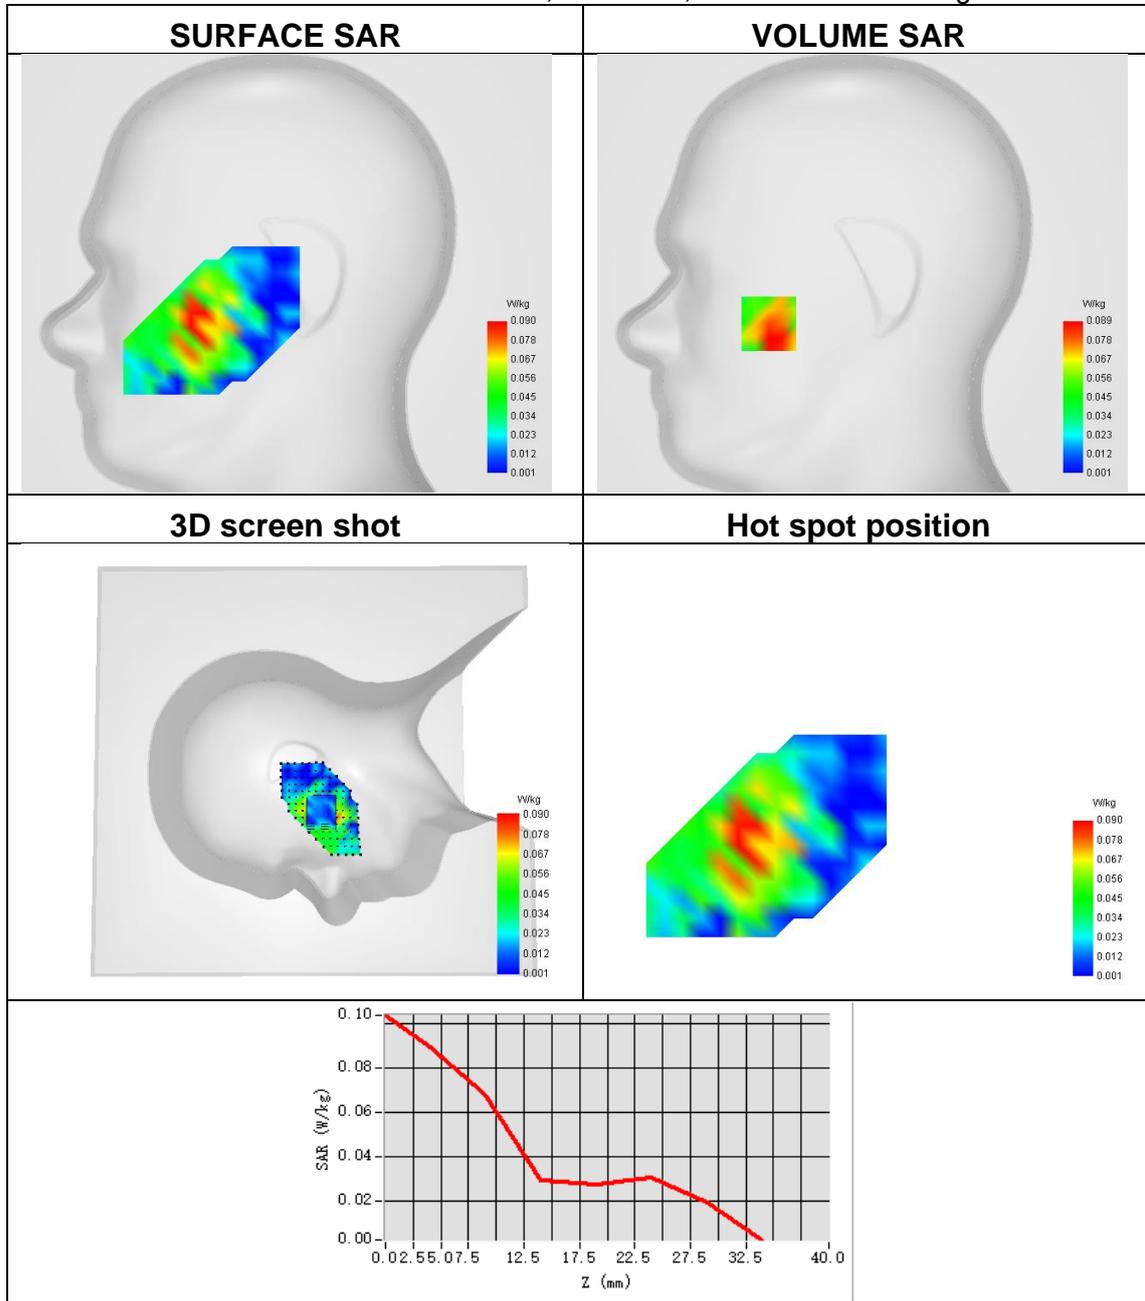




**Plot 20:**

Test Date	2023-03-27
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	710
ConvF	1.72
SAR 10g (W/Kg)	0.061
SAR 1g (W/Kg)	0.144

Maximum location: X=25.00, Y=8.00 ; SAR Peak: 0.28 W/kg

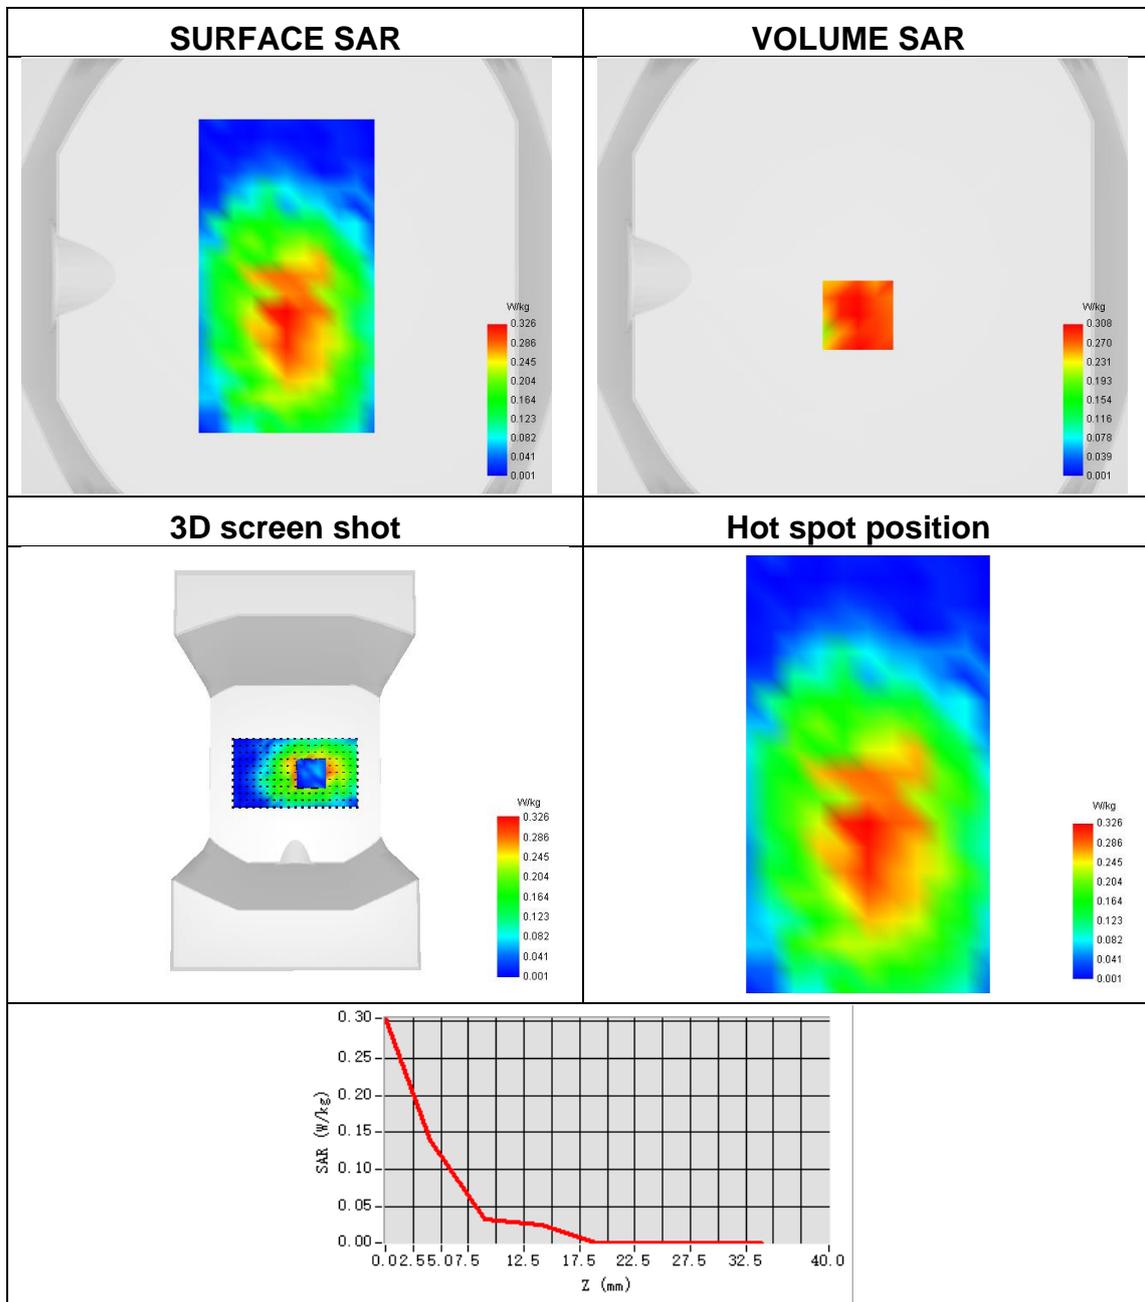




**Plot 21:**

Test Date	2023-03-16
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11b ISM
Signal	IEEE 802.11b
Frequency	2412
ConvF	2.33
SAR 10g (W/Kg)	0.063
SAR 1g (W/Kg)	0.146

Maximum location: X=-24.00, Y=-7.00 ; SAR Peak: 0.37 W/kg

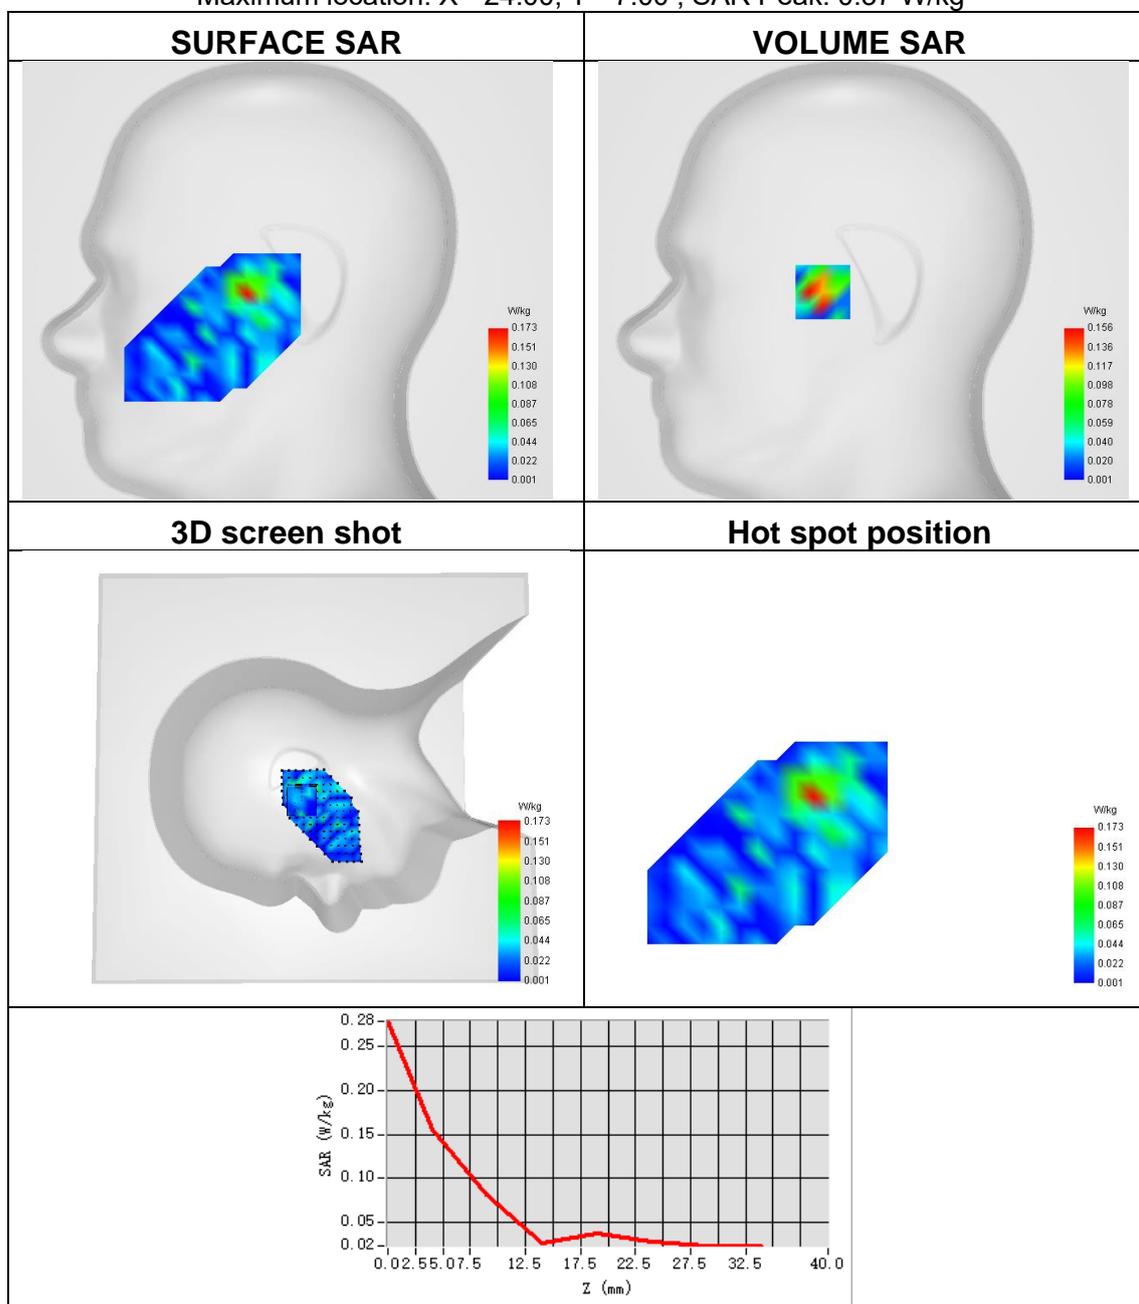




**Plot 22:**

Test Date	2023-03-16
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Signal	IEEE 802.11b
Frequency	2412
ConvF	2.24
SAR 10g (W/Kg)	0.043
SAR 1g (W/Kg)	0.082

Maximum location: X=0.00, Y=40.00 ; SAR Peak: 0.21 W/kg

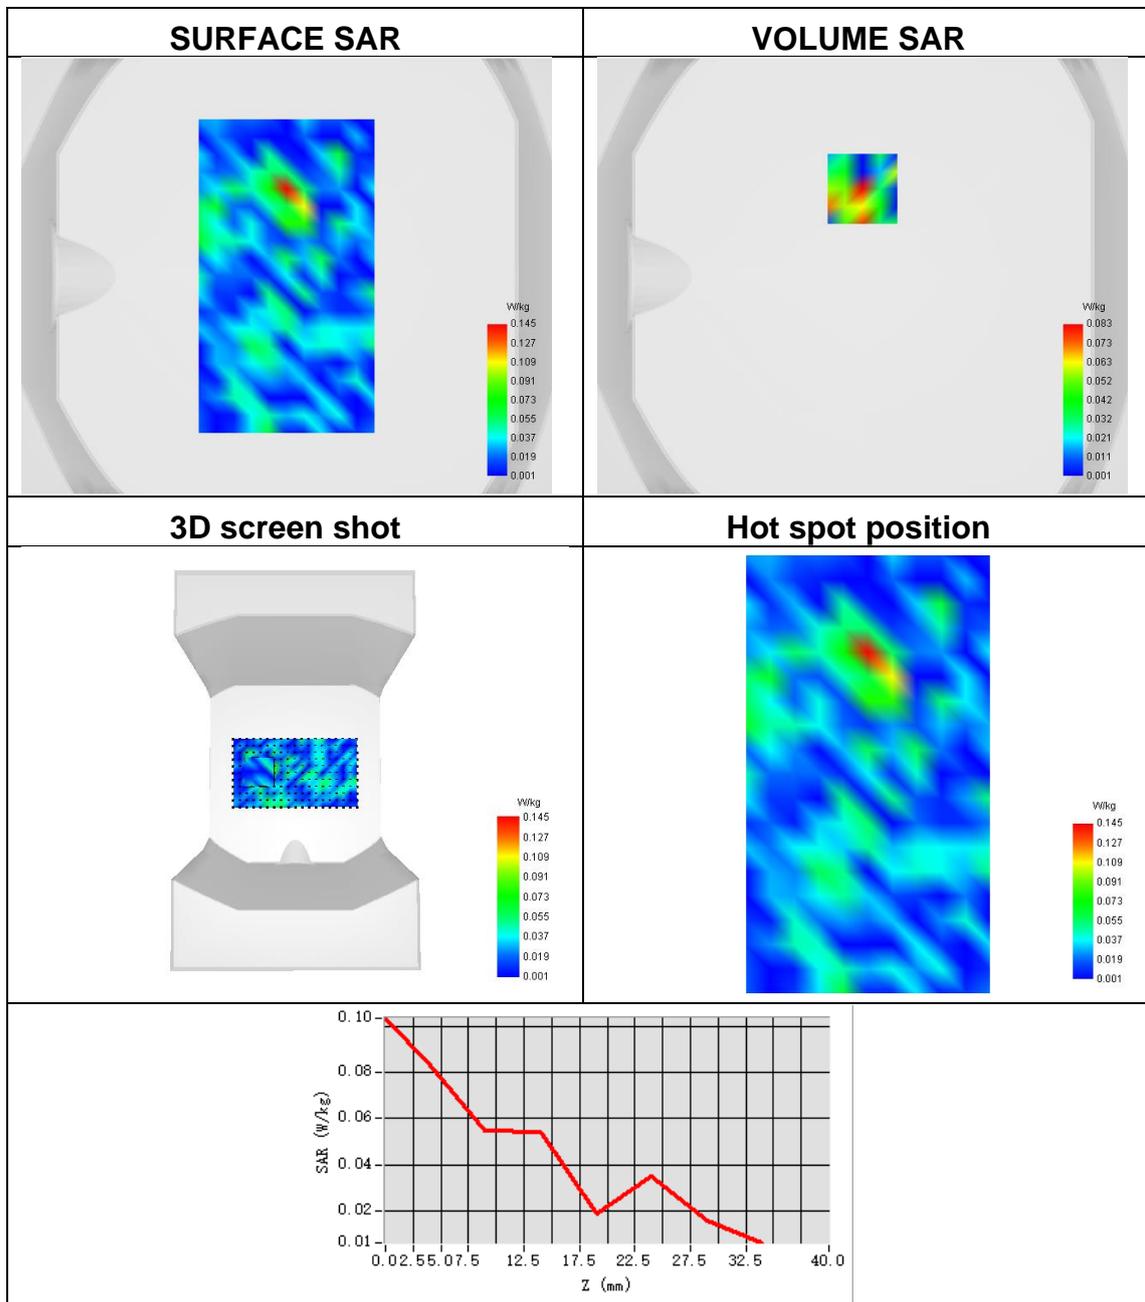




**Plot 23:**

Test Date	2023-03-16
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	Bluetooth
Signal	Bluetooth
Frequency	2441
ConvF	2.33
SAR 10g (W/Kg)	0.024
SAR 1g (W/Kg)	0.065

Maximum location: X=-32.00, Y=-16.00 ; SAR Peak: 0.23 W/kg

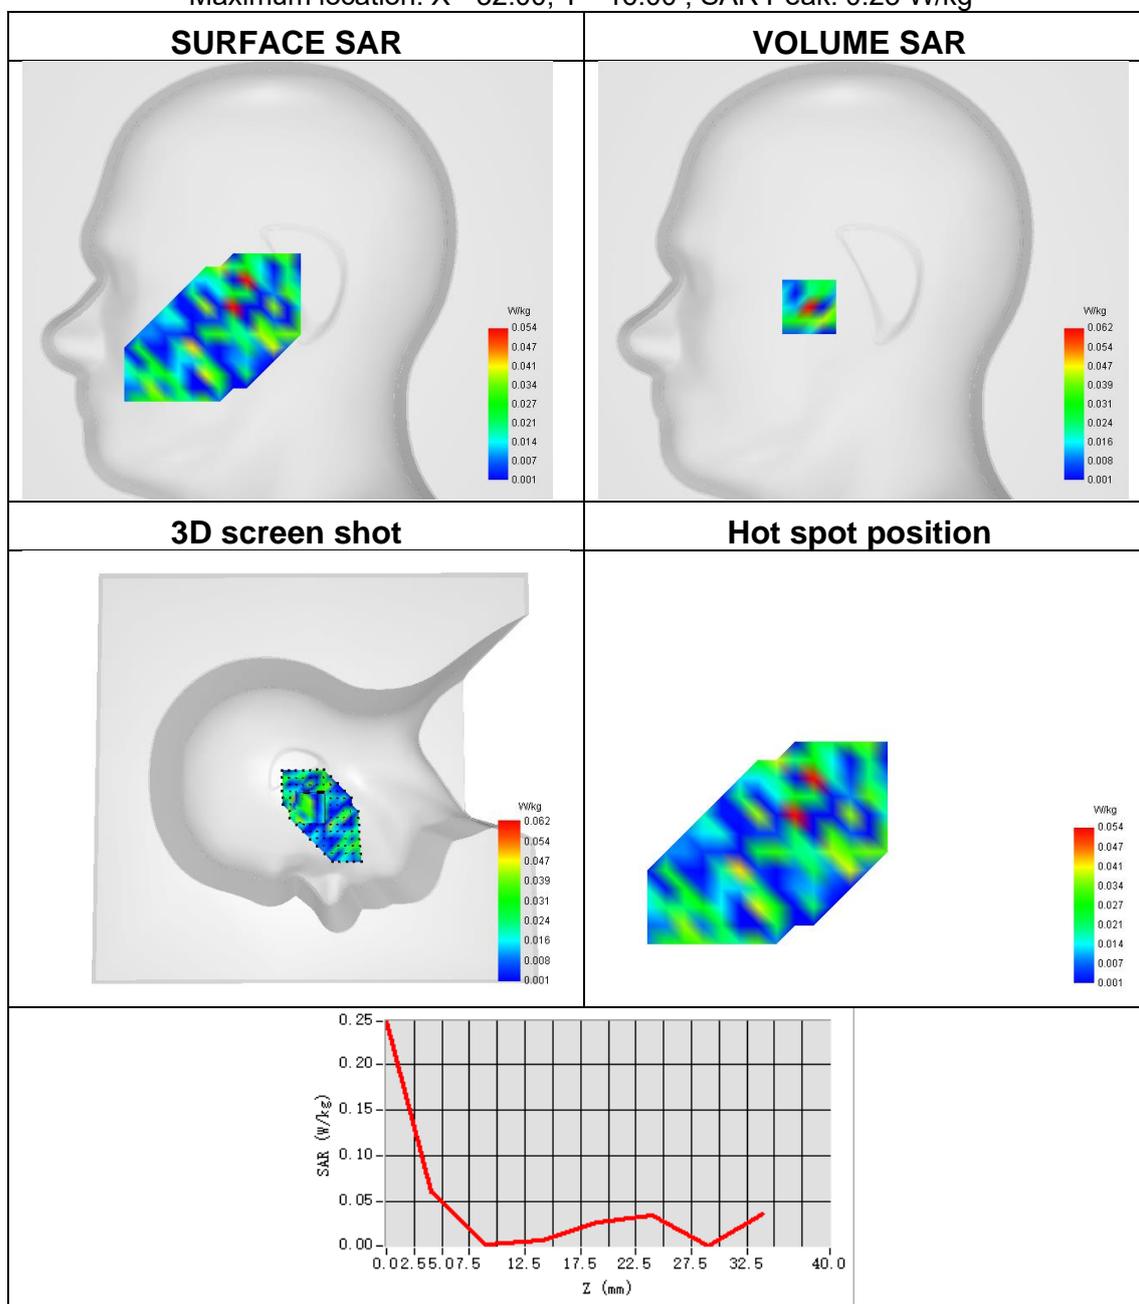




**Plot 24:**

Test Date	2023-03-16
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Bluetooth
Signal	Bluetooth
Frequency	2441
ConvF	2.24
SAR 10g (W/Kg)	0.019
SAR 1g (W/Kg)	0.045

Maximum location: X=-23.00, Y=56.00 ; SAR Peak: 0.12 W/kg

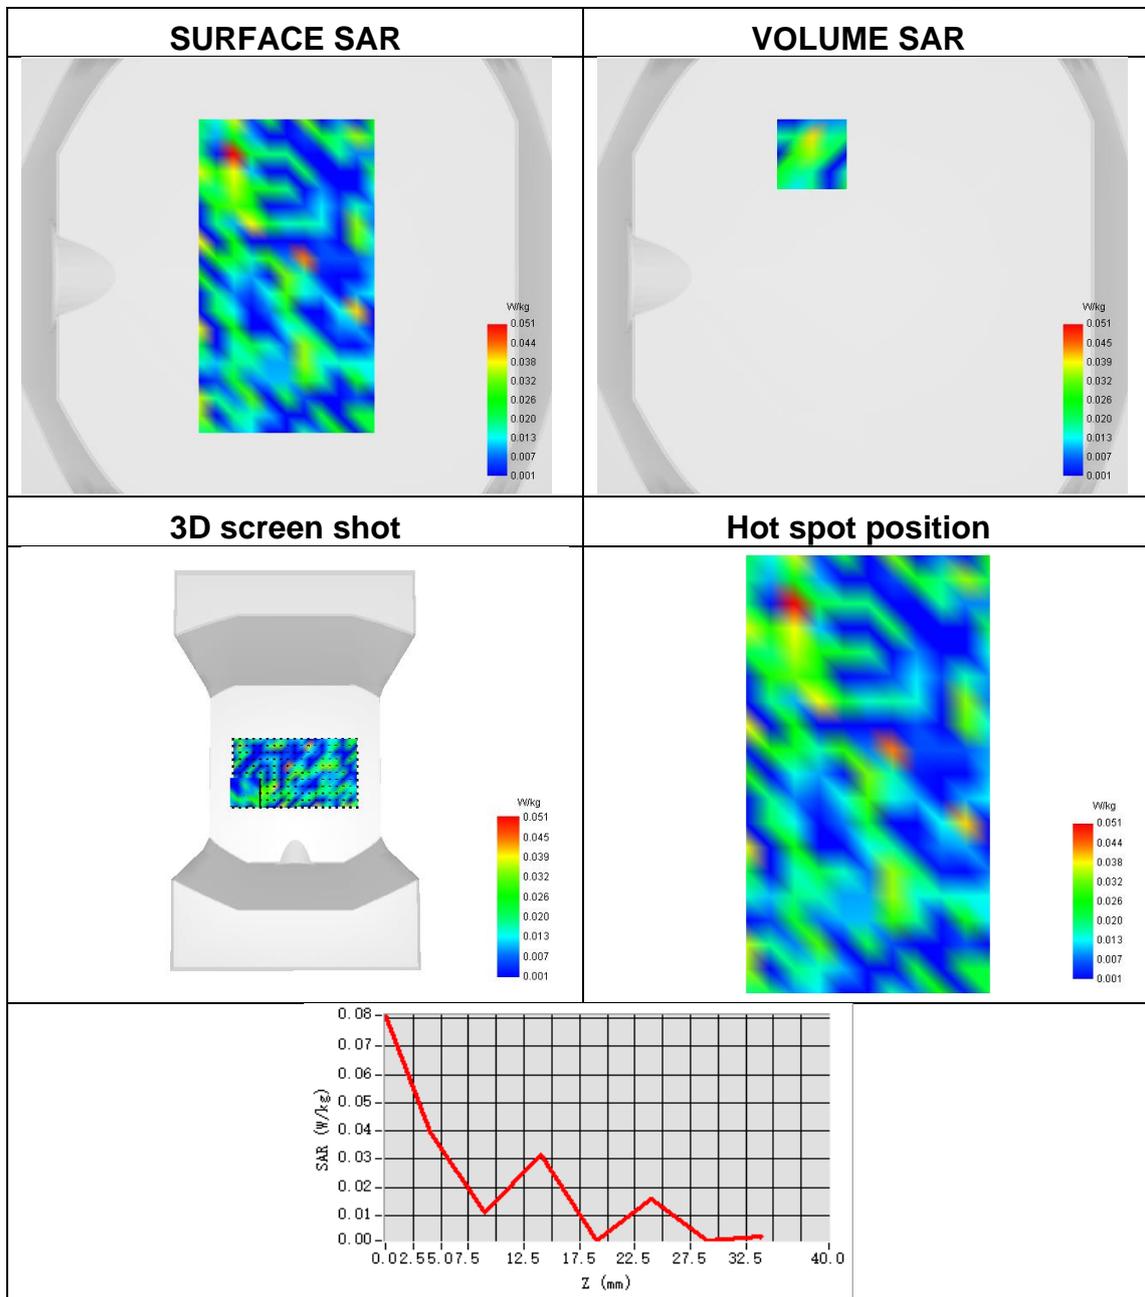



## Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※