

Customer: BS232

SPECIFICATION FOR APPROVAL

Customer P/N	13705-L0X0001R-00		
Description	Coil Wireless Charging		
Drawing No.			
3L P/N	WPT4203-6R5UH		
Date	20210515	Rev.	XC
Customer	Approved For Customer		
Seller	Drawn	Checked	Approved
	LIUYAN	BAKER	HE HONG

Please Return After Approving



**3L ELECTRONIC
CORPORATION**



Headquarters : 3L Electronic (Wuhan) Co., Ltd.

Sales: Mr. Wu Tel: (+86) 18802590808

ADD : No.8, Floor 15,Building 1, No.697, Hanyang Road, Hanyang District, Wuhan Province,P.R. China



3L ELECTRONIC
CORPORATION



Customer:	BS232	Customer P/N:	13705-LOX0001R-00
------------------	-------	----------------------	-------------------

Revision	Date	Revision description	Design	Approved
XA	2021/01/28	Initial release.	Baker	He Hong
XB	2021/02/24	Modify the pin size	Baker	He Hong
XC	2021/05/15	Add glues to PIN Position	Baker	He Hong




3L P/N:	WPT4203-6R5UH	Rev.	XC	Date:	20210515
----------------	---------------	-------------	----	--------------	----------

Customer: BS232

Customer P/N: 13705-L0X0001R-00

1. Mechanical Dimension(mm) :

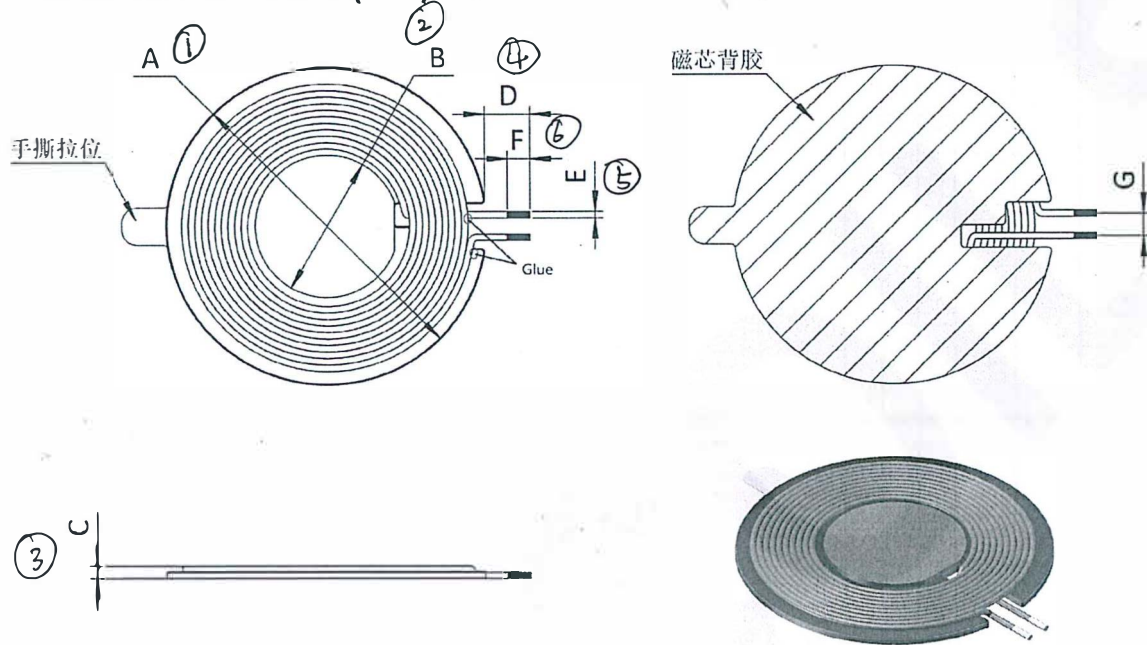

ITEM	SPEC(mm)	TYP(mm)	ITEM	SPEC(mm)	TYP(mm)
A	42.5+0.6	42.4	F	1.2-2.8	1.8
B	20.5+0.5	20.3	G	3.5REF	
C	2.65MAX	2.25	H		
D	5.5+1.0	5.82	I		
E	2.0MAX	1.35	J		

Note:

1. Core peeling & breakage: Breakage is acceptable when it meets: length $\leq 5\text{mm}$, width $\leq 1\text{mm}$, depth $\leq 0.5\text{mm}$. Every two breakages within 1mm interval would be regarded as one breakage and three breakages under this standard shall be acceptable on each product.

2. Crack on core: No more than two unobvious cracks which is less than 5mm long and 0.5mm wide are allowable to be on the core. Any crack or coating detachment affecting electromagnetic performance of core or mechanical strength is not acceptable.

3. Core fatness of product surface: The acceptable height difference of uneven surface shall be $\leq 0.03\text{mm}$.

4. Eva double sided adhesive: 1) No folding on the tape. 2) No more than 3 bubbles on single side of tape while the area of single bubble shall not be more than 5mm. No breakage or hurt on tape. 3) The thickness might shrink to a certain extent, which would be controlled to be within the spec based on the dimension of finished product dimension.

3L P/N: WPT4203-6R5UH

Rev.

XC

Date:

20210515