

ASAP Technology(Jiangxi) Co., Ltd.

# TEST REPORT

**SCOPE OF WORK**

SAR ASSESSMENT-BWB18WI704

**REPORT NUMBER**

180806027SZN-002

**ISSUE DATE**

30 AUGUST 2018

**[REVISED DATE]**

[-----]

**PAGES**

5

**DOCUMENT CONTROL NUMBER**

RF Exposure

© 2017 INTERTEK



## Test Report

Applicant: ASAP Technology(Jiangxi) Co., Ltd.

Number: 180806027SZN-002

Date: 30 August 2018

**Sample Description**Product : Wireless Charger  
Model No. : BWB18WI704Brand Name : Blackweb  
Electrical Rating : Input: DC 5V/2A or 9V/1.67A; Output: 10W Max.

Date Received : 6 August 2018

Date Test Conducted : 6 August 2018 to 28 August 2018

Test Requested : Test for compliance with CFR 47 part 1

Test Method : Environmental evaluation and exposure limit according to FCC  
CFR 47 part 1, 1.1307(c) and (d), 1.1310

Test Result : Pass

Conclusion : When determining of test conclusion, measurement uncertainty of tests have  
been considered.

\*\*\*\*\* End of Page \*\*\*\*\*

**Prepared and Checked By:****Approved By:**

---

**Leo Li**  
**Engineer**

---

**Kidd Yang**  
**Technical Supervisor**  
**Date: 30 August 2018**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.


**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

1F/2F, Building B, QiaoAn Scientific Technology Park, ShangKeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## Test Report

### Test Setup Configuration

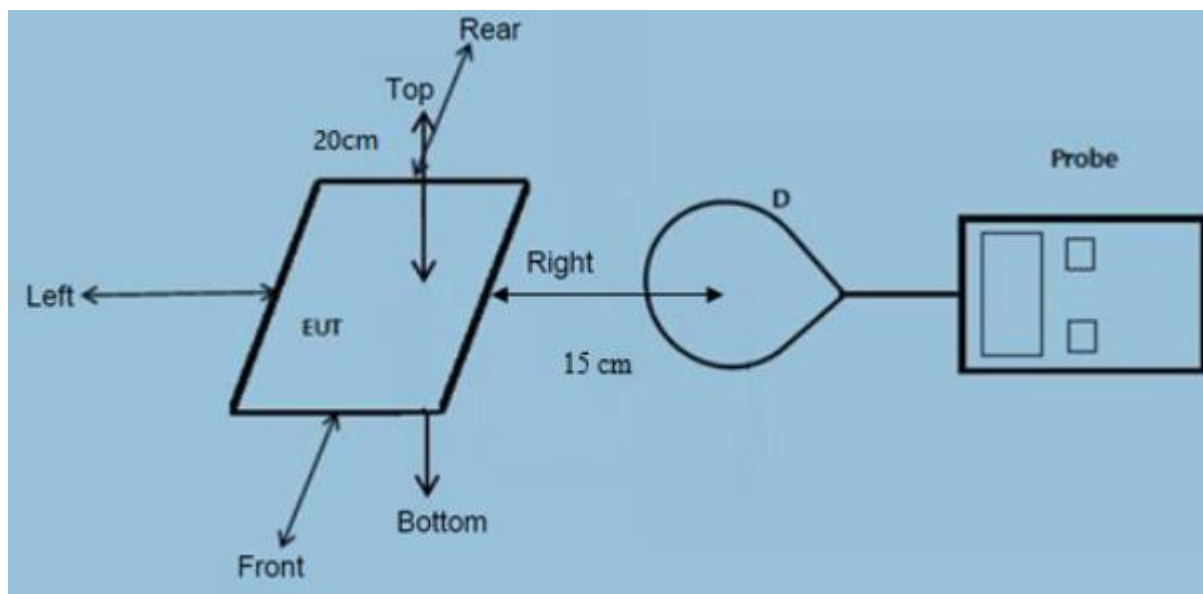

#### Note

- The RF exposure test is performed in the shield room.
- The test distance is between the edge of the charger and the geometric centre of probe.

### Test Equipment List

Name of instrument	Model	Manufacturer	Cal. Date	Due Date
Exposure Level Tester	ELT-4002304/03	Narda	21-Mar-18	21-Mar-19
Field Probe	HI-6105	ETS	21-Mar-18	21-Mar-19
Laser Data Interface	HI-6113	ETS	21-Mar-18	21-Mar-19

# TEST REPORT

## Reference Limit:

**Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(c) and (d), 1.1310**

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation.

## LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric field strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100)*	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3 – 1.34	614	1.63	(100)*	30

Note: \* = Plane wave equivalent power density

## Test Result:

**H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT**

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (A/m)	Probe Position Rear (A/m)	Probe Position Left (A/m)	Probe Position Right (A/m)	Probe Position Top (A/m)	Limits (A/m)
0.110-0.205	1% battery level	0.071	0.066	0.077	0.073	0.067	1.63
0.110-0.205	50% battery level	0.068	0.065	0.072	0.069	0.063	1.63
0.110-0.205	99% battery level	0.065	0.060	0.067	0.070	0.063	1.63


**E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT**

Frequency Range (MHz)	EUT Operation mode	Probe Position Front (V/m)	Probe Position Rear (V/m)	Probe Position Left (V/m)	Probe Position Right (V/m)	Probe Position Top (V/m)	Limits (V/m)
0.110-0.205	1% battery level	0.721	0.724	0.744	0.743	0.721	614
0.110-0.205	50% battery level	0.703	0.707	0.746	0.739	0.730	614
0.110-0.205	99% battery level	0.693	0.696	0.723	0.712	0.718	614

## Configuration photo of the test:

### H-Field Strength


Probe Position Front

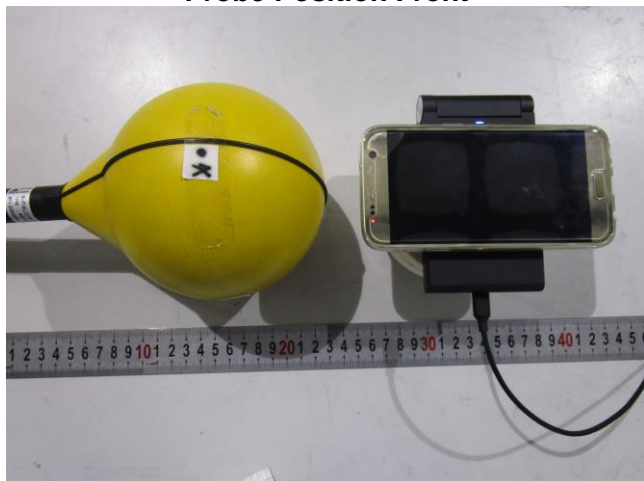


Probe Position Rear




Probe Position Left

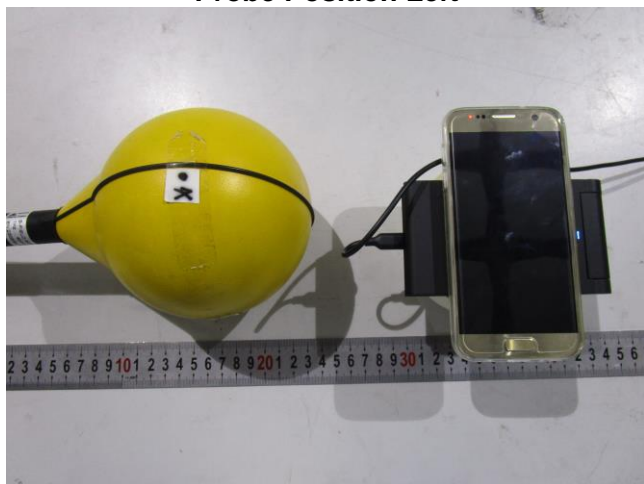

Probe Position Right

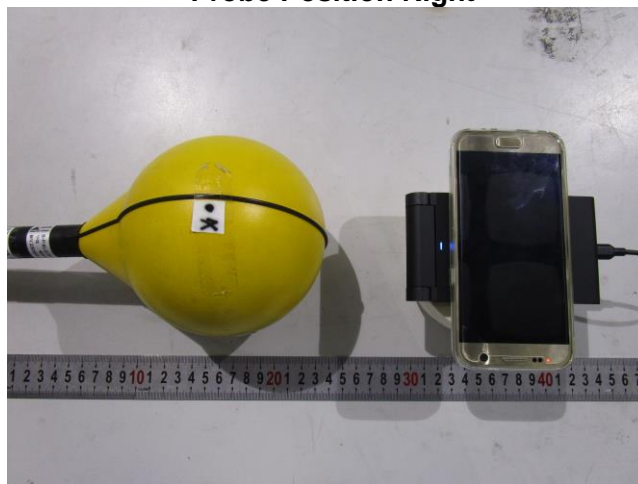


Probe Position Top

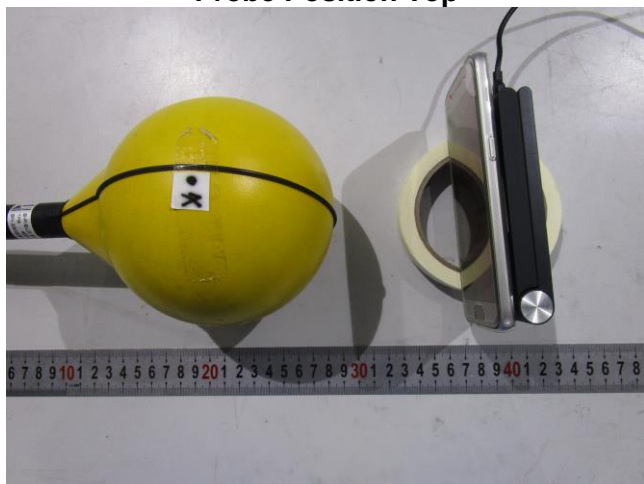

## E-Field Strength

**Probe Position Front**

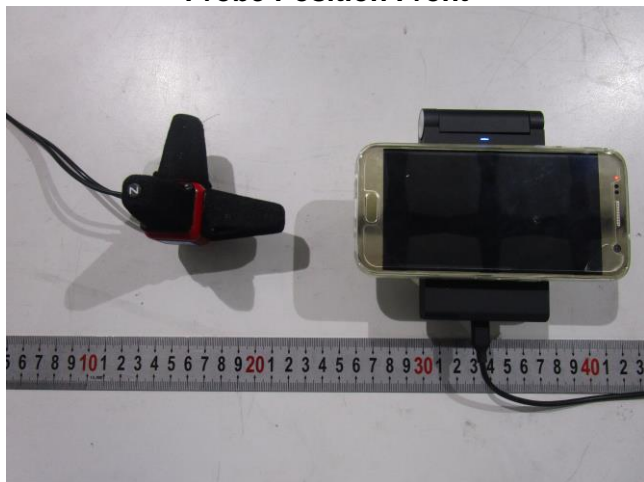

**Probe Position Rear**



**Probe Position Left**



**Probe Position Right**



**Probe Position Top**



\*\*\*\*\* End of Report \*\*\*\*\*